

尺寸: 55x76mm

Activate The Phone's Voice Assistant

- Long press the multifunction button for 2 seconds to activate The Phone's Voice Assistant.
(Note: The device which connect the headphones should support voice assistant functionality.)

Reset Factory Settings

- Simultaneously long-press the multifunction button and the volume+ button for 4 seconds to reset the headphones to factory settings.

Charging

- Inserting a Type-C charging cable can be used to charge the headphones. During charging, the headphones indicator light will be red, When the headphones are fully charged, the indicator light will turn blue.

Storage and maintenance

- Store your Bluetooth headset in a cool and dry place. Working temperature: 0~45°C. Working in cold/dry environment or high humidity will reduce the battery life.
- Do not put the headset into the water.
- Please use a clean soft cloth to clean the headset.
- Do not touch the headset with any sharp object.

Dual Device Connection

- First device connection: Open the BT list on the first device, and click on "Z18" to establish the connection;
- Enter pairing mode again: Turn off the headphones, then press and hold the VOL+ button for 5 seconds to turn on headphones and enter pairing mode;
- Second device connection: Open the BT list on the second device, and click on "Z18" to establish the connection
- In the BT list of the first device, click on "Z18" to establish the connection. Both devices are now successfully connected simultaneously.

Wearing Instructions

As shown in the diagram, wear the headphones behind the head with the sound-emitting part placed on the front side of the ear. If you are on a plane or a train, you can use earplugs together to isolate external noise and have a better bone conduction audio experience.



Basic Specifications of the Headphones

Battery Capacity:	180mAh
Battery Type:	Lithium Polymer Battery
Input Parameters:	5V---180mA
Charging Time:	≤ 2 hours
Playback Time:	Up to 6-7 hours (tested at medium volume, playback time will be shorter at higher volume)
BT Version:	5.2
Effective Range:	10m (33 feet)
Operating Temperature:	0~45°C
Safety Protection Level:	IP67

Fault diagnosis and solutions

Fault	Fault cause	Solution
Fail to start up	Check whether the battery is fully charged	Charge the battery
Fail to connect automatically	Check whether the Bluetooth headphones is in standby mode	Double press Multifunction Button or restart
Fail to pair	Not in the pairing mode	Restart

Product warranty

Model	Z18	User name	
Purchasing date		Contact number	
Purchasing channel		Contact address	


Warranty

- Since the date of purchase, if the headset goes wrong under normal use within one year, cardholders can enjoy free warranty services.
- The following is not covered by the warranty:
 - Warranty card without signature or seal by sales unit;
 - Damaged by human or force majeure;
 - Normal wear and tear of machine;
- If the fault is caused by human reasons, expiration of warranty period or by force majeure, we will charge the maintenance cost.
- When there's a product failure and it needs to return to the factory for warranty, please contact our company and fill in the specific name, address, telephone number and fault phenomenon.

WARRANTY
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in residential installations. This equipment generates and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If the equipment does cause harmful interference, which can be determined by turning the equipment off and on, the user is encouraged to take one of the following measures:
- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
This device complies with part 15 of the FCC Rules. Operation is subject to the following conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
The device has been evaluated to meet general CE equipment requirements. The device can be used in generally applicable conditions without restriction.

User Manual

BONE CONDUCTION HEADPHONES

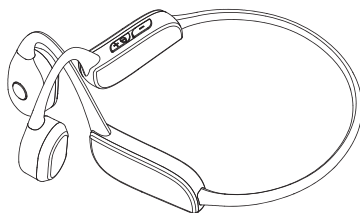

OPEN EAR Z18

Package List



Headphones



Type-C
charging Cable




User Manual



Earplug

Product Introduction

- LED Indicator
- Type-c Charging Port
- Multifunction Button (MFB)
- Microphone 1
- Microphone 2
- Vol+ Button
- Vol- Button

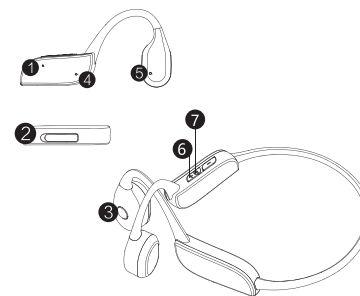

Key features of the button

Answer/Ending call	Short press MFB button
Reject Call	Long press MFB button 2s
Play/Pause Music	Short Press MFB button
Next Music	Double Press MFB button
Previous Music	Triple Press MFB button
Power On /Power Off	Pressing and holding the Vol+ button for 2 seconds turn the device on/off.
BT Pairing	When the device is powered off, press and hold the VOL+ key for 5 seconds to turn it on and enter pairing mode. In pairing mode, the red and blue lights will flash alternately.
Volume Up	Short press the VOL+ button
Volume Down	Short press the VOL- button