



TEST REPORT

Report Number: 100687320MIN-001B
Project Number: G100687320

Testing performed on the
OneproX GS3-LF Standard

FCC ID: OQLGS3LFS
Industry Canada ID: 7309A-OQLGS3LFS

to
47 CFR Part 15.209; Part 15.215:2010
RSS- Gen, Issue 3, 2010

For
Stanley Convergent Security Solutions, Inc.

Test Performed by:
Intertek Testing Services NA, Inc.
7250 Hudson Blvd., Suite 100
Oakdale, MN 55128 USA

Test Authorized by:
Stanley Convergent Security Solutions, Inc.
1707 Orlando Central Parkway, Suite 500
Orlando, FL 32809, USA

Prepared by: U. Spector
Uri Spector

Date: June 28, 2013

Reviewed by: S. Khazon
Simon Khazon

Date: June 28, 2013

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.



TABLE OF CONTENTS

1.0	GENERAL DESCRIPTION	3
1.1	Product Description; Test Facility	4
1.3	Environmental conditions	5
1.4	Measurement uncertainty	6
1.5	Field Strength Calculation	6
2.0	TEST SUMMARY	7
3.0	TEST CONDITIONS AND RESULTS	8
3.1	Field Strength of Fundamental and Spurious Emissions	8
3.2	Bandwidth of Emissions	12
3.3	Transmitter power line conducted emissions	15
3.4	Receiver/digital device radiated emissions.....	18
3.5	Digital device conducted emissions.....	19
4.0	TEST EQUIPMENT	20



1.0 GENERAL DESCRIPTION

Model:	Oneprox GS3-LF Standard
Type of EUT:	Standard LF Card Reader
Intertek Sample ID:	MIN1306100958-004
FCC ID:	OQLGS3LFS
Industry Canada ID:	7309A-OQLGS3LFS
Related Submittal(s) Grants:	None
Company:	Stanley Convergent Security Solutions, Inc.
Customer:	Mr. Christopher Harris
Address:	1707 Orlando Central Parkway, Suite 500 Orlando, FL 32809
Phone:	(407) 206-7415
Fax:	(866) 716-9006
e-mail:	Christopher.Harris@sbdinc.com
Test Standards:	<input checked="" type="checkbox"/> 47 CFR, Part 15:2010, §15.209, §15.215 <input checked="" type="checkbox"/> RSS-210, Issue 8, 2010 <input checked="" type="checkbox"/> RSS-Gen, Issue 3, 2010 <input type="checkbox"/> 47 CFR, Part 15:2010, §15.107 and §15.109, Class <input type="checkbox"/> ICES-003, Issue 4:2004 <input type="checkbox"/> Other [REDACTED]
Type of radio:	<input checked="" type="checkbox"/> Stand -alone <input type="checkbox"/> Module <input type="checkbox"/> Hybrid
Date Sample Submitted:	June 10, 2013
Test Work Started:	June 10, 2013
Test Work Completed:	June 28, 2013
Test Sample Conditions:	<input type="checkbox"/> Damaged <input type="checkbox"/> Poor (Usable) <input checked="" type="checkbox"/> Good



1.1 Product Description; Test Facility

Product Description:	SGR Standard LF Reader
Operating Frequency	123.81kHz
Modulation:	ASK
Emission Designator:	2K7A1D
Antenna(s) Info:	Integral antenna
Antenna Installation:	<input type="checkbox"/> User <input type="checkbox"/> Professional <input checked="" type="checkbox"/> Factory
Transmitter power configuration:	<input type="checkbox"/> Internal battery <input checked="" type="checkbox"/> External power source <input checked="" type="checkbox"/> 120VAC <input type="checkbox"/> 230VAC <input type="checkbox"/> 400VAC <input type="checkbox"/> █ VDC <input type="checkbox"/> Other: █ █ Amp. <input type="checkbox"/> 50Hz <input checked="" type="checkbox"/> 60Hz
Special Test Arrangement:	The transmitter was tested while connected to the SGR 512 Controller and was powered SGR 512 Controller. Conducted Emissions testing was performed at the SGR 512 Controller AC port.
Test Facility Accreditation:	A2LA (Certificate No. 1427.01)
Test Methodology:	Measurements performed according to the procedures in ANSI C63.10-2009



1.2 EUT Configuration

The equipment under test was operated during the measurement under the following conditions:

- Standby
- Continuous
- Continuous un-modulated
- Test program (customer specific)
- Below

Operating modes of the EUT:

No.	Description
1	The transmitter was set to transmit continuously.

Cables:

No.	Type	Length	Designation	Note
1	Communication cable	1m	Reader cable, not shielded	

Support equipment/Services:

No.	Item	Description
1	512 Controller	

General notes: Standard LF card reader is transmitter only, and has no receiver portion.

1.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

1.4 Measurement uncertainty

The expanded uncertainty ($k = 2$) for radiated emissions from 30 to 1000 MHz has been determined to be: ± 4 dB at 10m and ± 5.4 dB at 3m

The expanded uncertainty ($k = 2$) for conducted emissions from 150 kHz to 30 MHz has been determined to be:
 ± 2.6 dB

1.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured emissions reading on the EMI Receiver.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where: FS = Field Strength in dB(μ V/m)

RA = Receiver Amplitude in dB(μ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB(m^{-1})

AG = Amplifier Gain in dB

Assume a receiver reading of 48.1 dB(μ V) is obtained. The antenna factor of 7.4 dB(m^{-1}) and cable factor of 1.6 dB is added and amplifier gain of 16.0 dB is subtracted giving field strength of 41.1 dB(μ V/m).

$$RA = 48.1 \text{ dB}(\mu\text{V})$$

$$AF = 7.4 \text{ dB}(m^{-1})$$

$$CF = 1.6 \text{ dB}$$

$$AG = 16.0 \text{ dB}$$

$$FS = RA + AF + CF - AG$$

$$FS = 48.1 + 7.4 + 1.6 - 16.0$$

$$FS = 41.1 \text{ dB}(\mu\text{V}/\text{m})$$



2.0 TEST SUMMARY

Referring to the performance criteria and the operating mode during the tests specified in this report, the equipment complies with the requirements according to the following standards.

TEST SPECIFICATION	TEST PARAMETERS	RESULT
15.209, 15.215(b) / RSS-Gen 4.11	Field Strength of Fundamental and Spurious Emissions	Pass
15.215(c) / RSS-Gen 4.6.3	Bandwidth of the emission	Pass
15.207/RSS-Gen 7.2.4	Transmitter Power Line conducted emissions	Pass
15.109/ICES-003/ RSS-Gen 4.10	Receiver/digital device radiated emissions	N/A
15.107/ ICES-003	Digital device conducted emissions	N/A



3.0 TEST CONDITIONS AND RESULTS

3.1 Field Strength of Fundamental and Spurious Emissions

Test location: OATS Anechoic Chamber Other

Test distance: 10 meters 3 meters

Test result: **Pass**

Max. Emissions margin at fundamental: 18.4dB below the limits

Max. margin of harmonics and spurious emissions: 10.6dB below the limits

- Notes:**
1. The Emissions pre-scan was performed in the Anechoic chamber at 3m measurement distance (Graphs 3.1.1, 3.1.2); final measurements were performed in the Open Area Test Site at 10m measurement distance (see Tables 3.1.1, 3.1.2).
 2. Field Strength of Fundamental and Spurious Emissions measurements were made at Fundamental frequency of 123kHz; Spurious Emissions were tested up to 10th harmonic.
 3. Measurements were taken using Peak detector with RBW=200kHz (below 150kHz), RBW=9kHz (above 150kHz) and RBW=120kHz (above 30MHz).
-



Date:	June 10-25, 2013	Result: Pass
Standard:	FCC 15.209 / RSS-210 A1.1.2	
Tested by:	Uri Spector	
Test Point:	Enclosure with antenna	
Operation mode:	See Page 5	
Note:	None	

Table 3.1.1

Frequency MHz	Antenna Orient.	Ant. CF dB1/m	Cable loss dB	Pre-amp Gain (dB)	Peak Reading dBμV	Total @ 10m dBμV/m	15.209 Limit dBμV/m	Distance Factor (dB)	Margin dB	Comments
0.123	Front	63.6	0.1	28.8	31.6	66.5	25.8	59.1	-18.4	Fund
0.123	Side	63.6	0.1	28.8	26.4	61.4	25.8	59.1	-23.5	Fund
0.247	Front	57.9	0.1	28.7	20.4	49.6	19.8	59.1	-29.2	
0.247	Side	57.9	0.1	28.7	10.1	39.3	19.8	59.1	-39.5	
0.371	Front	54.2	0.1	28.7	16.8	42.4	16.2	59.1	-32.9	
0.371	Side	54.2	0.1	28.7	13.3	38.9	16.2	59.1	-36.4	
0.495	Front	51.9	0.1	28.7	18.9	42.2	33.7	19.1	-10.6	
0.495	Side	51.9	0.1	28.7	15.3	38.6	33.7	19.1	-14.2	
0.618	Front	49.9	0.1	28.7	14.8	36.1	31.8	19.1	-14.8	
0.618	Side	49.9	0.1	28.7	9.8	31.1	31.8	19.1	-19.8	
1.113	Front	45.7	0.1	28.7	17.4	34.5	26.7	19.1	-11.2	
1.113	Side	45.7	0.1	28.7	12.2	29.3	26.7	19.1	-16.4	


Table 3.1.2

Frequency	Ant. Polarity	Peak Reading dBμV	Total C.F. dB1/m	Total at 3m dBμV/m	Limit dBμV/m	Margin dB
128.89 MHz	V	14.9	14.0	28.9	43.5	-14.7
152.89 MHz	V	17.3	12.4	29.7	43.5	-13.8
372.32 MHz	V	11.9	17.9	29.7	46.0	-16.3
400.85 MHz	V	12.2	18.9	31.1	46.0	-14.9
32.183 MHz	H	9.0	18.9	27.8	40.0	-12.2
56.743 MHz	H	17.2	7.6	24.8	40.0	-15.2
62.26 MHz	H	20.8	7.0	27.8	40.0	-12.2
97.226 MHz	H	15.5	12.0	27.5	43.5	-16.0
122.65 MHz	H	11.7	14.0	25.7	43.5	-17.9
149.24 MHz	H	12.9	12.7	25.6	43.5	-18.0




Graph 3.1.1

Front of antenna


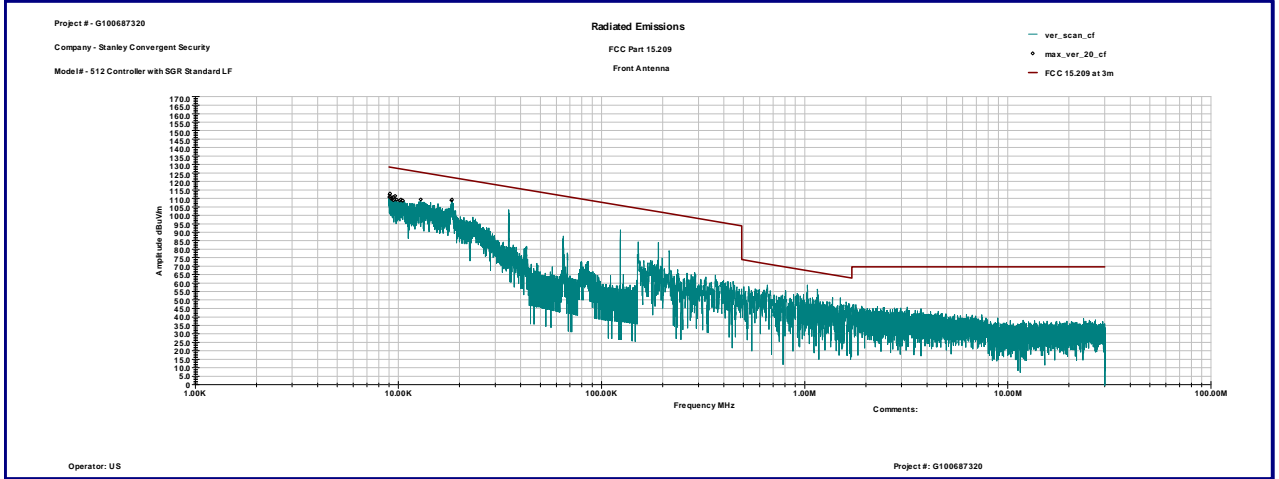


Side of antenna

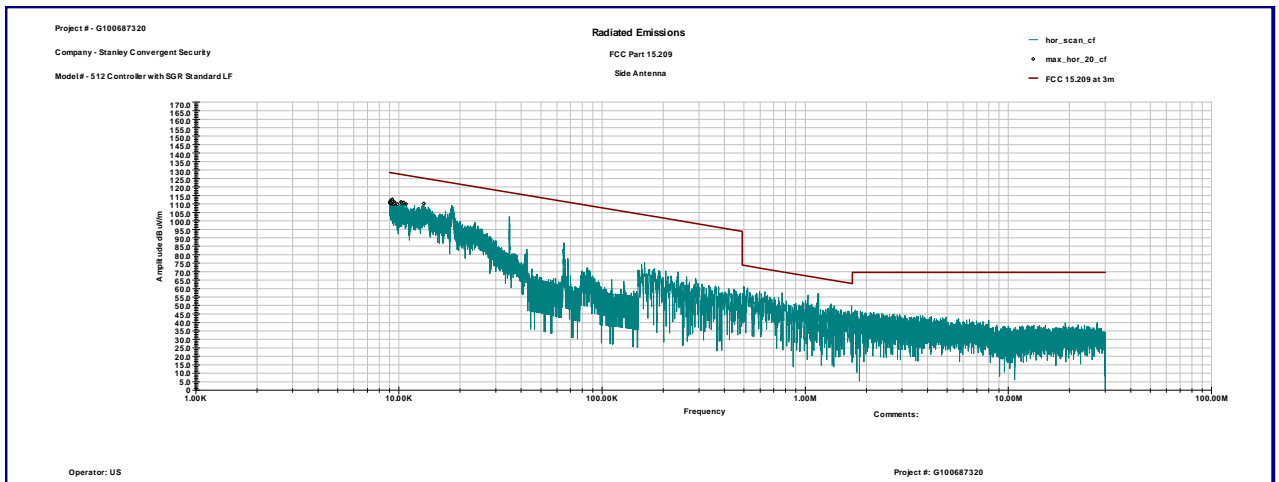



Graph 3.1.2

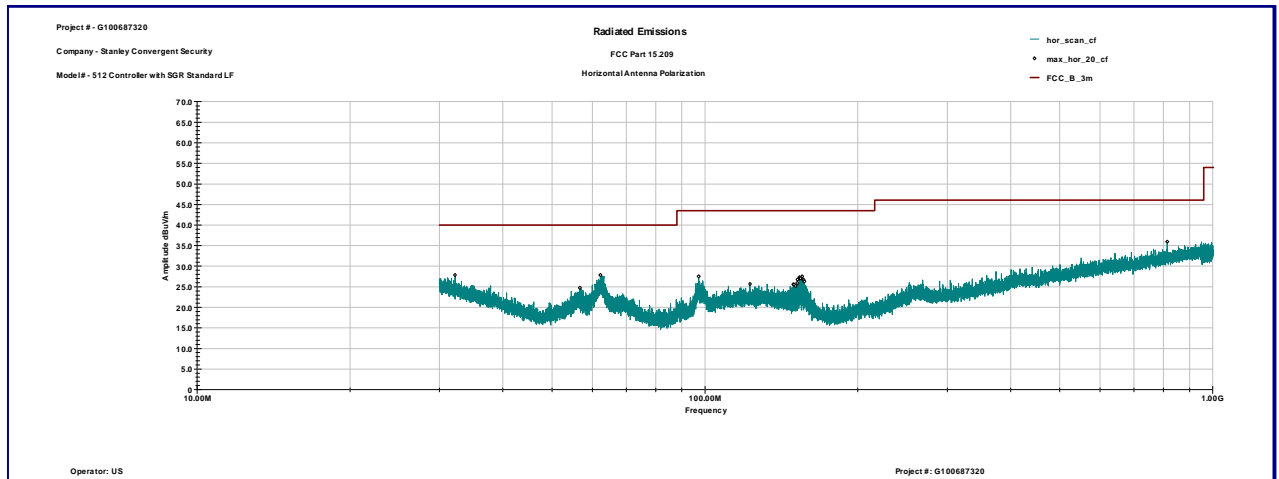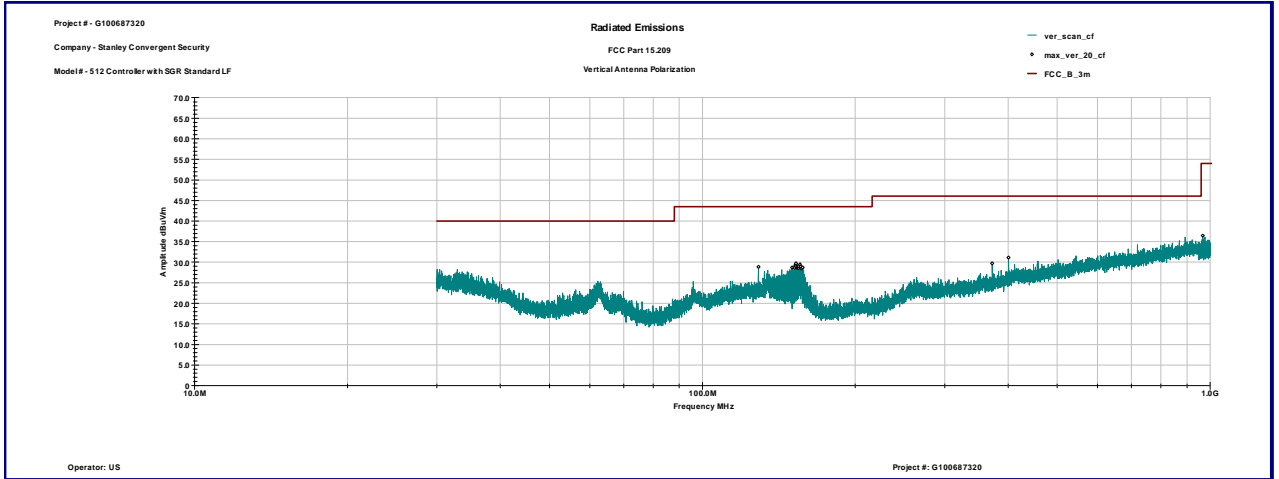



3.2 Bandwidth of Emissions


Center Frequency of operation MHz	Measured 20dB bandwidth kHz	Measured 99% bandwidth kHz	Result
0.123	2.72	2.34	Pass
RBW: VBW:	<input type="checkbox"/> 10kHz <input type="checkbox"/> 30kHz	<input type="checkbox"/> 100kHz <input type="checkbox"/> 300kHz	<input checked="" type="checkbox"/> other 1kHz <input checked="" type="checkbox"/> other 1kHz

Graphs 3-2-1 and 3-2-2 are show bandwidth of emissions

Notes: None




Graph 3.1.1

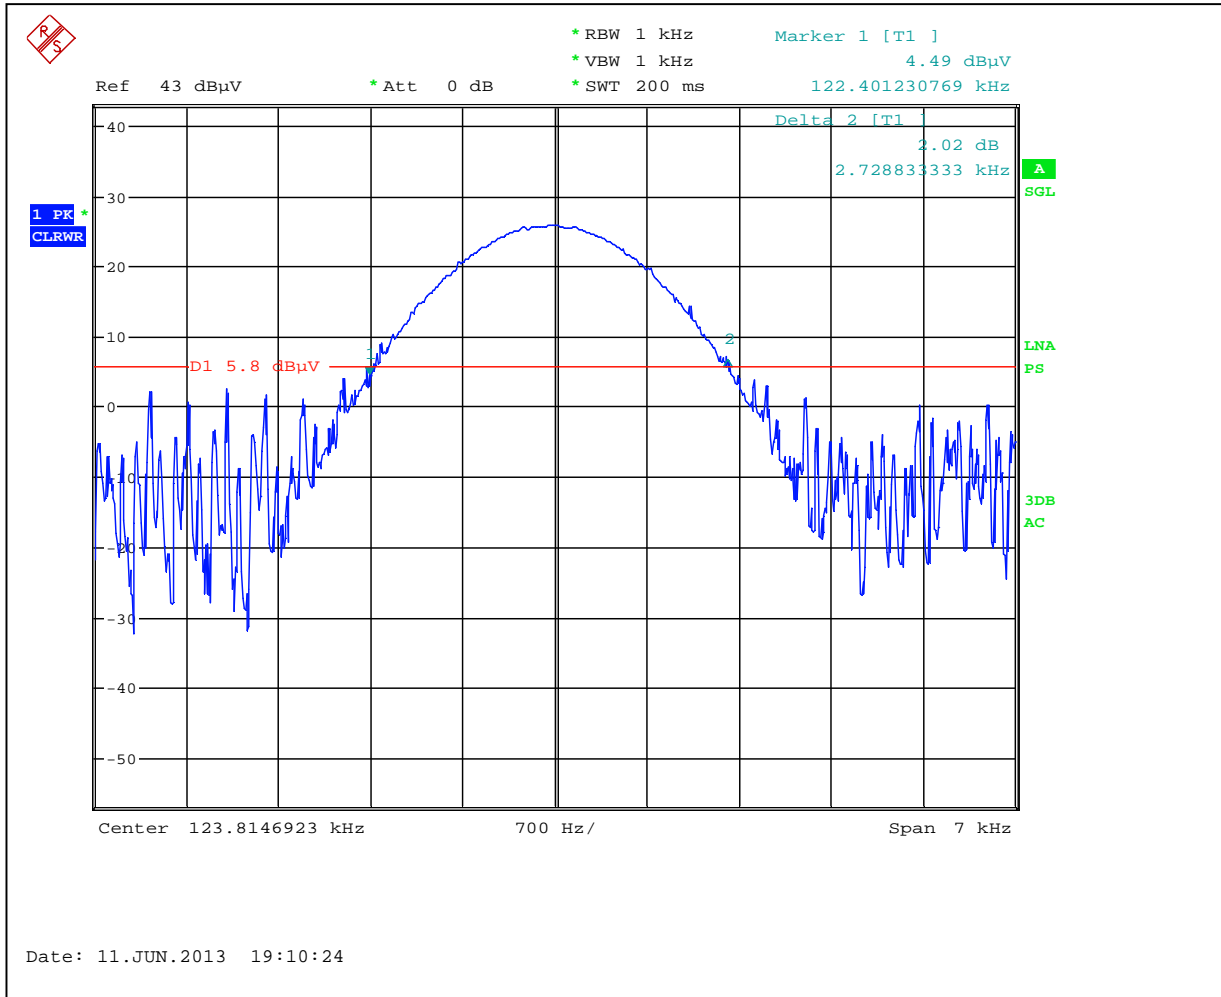



Graph 3.1.2

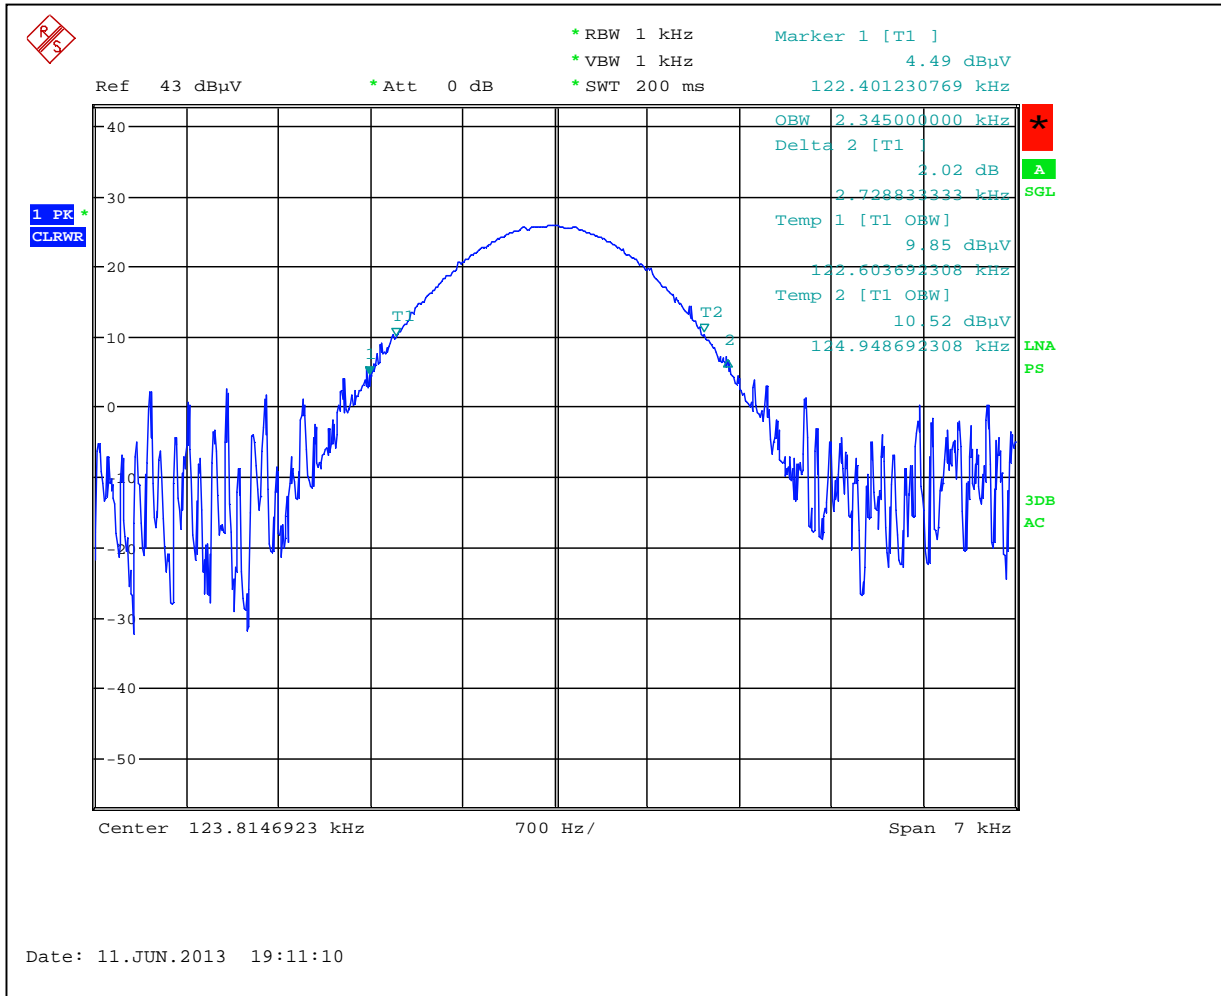



3.3 Transmitter power line conducted emissions

Test location: OATS Anechoic Chamber Other

Test result: **Pass**

Frequency range: 0.15MHz-30MHz

Max. Emissions margin: 3.6dB below the limits

Notes: None



Date:	June 21, 2013	Result: Pass
Standard:	FCC 15.207	
Tested by:	Uri Spector	
Test Point:	Power Line	
Operation mode:	See Page 5	
Note:	None	

Table 3.3.1

Line 1

Frequency	Peak dB μ V	QP Limit dB μ V	AVG Limit dB μ V	QP Margin dB	AVG Margin dB
155.75 KHz	43.9	65.7	55.7	-21.8	-11.8
157.03 KHz	45.4	65.6	55.6	-20.2	-10.2
158.86 KHz	45.8	65.5	55.5	-19.7	-9.7
159.63 KHz	45.3	65.5	55.5	-20.2	-10.2
160.18 KHz	44.7	65.5	55.5	-20.7	-10.7
22.712 MHz	46.4	60.0	50.0	-13.6	-3.6
23.343 MHz	44.5	60.0	50.0	-15.5	-5.5


Line 2

Frequency	Peak dB μ V	QP Limit dBmV	AVG Limit dBmV	QP Margin dB	AVG Margin dB
157.57 KHz	45.0	65.6	55.6	-20.6	-10.6
158.39 KHz	45.4	65.6	55.6	-20.1	-10.1
159.13 KHz	45.4	65.5	55.5	-20.1	-10.1
160.41 KHz	45.0	65.4	55.4	-20.4	-10.4
22.703 MHz	45.8	60.0	50.0	-14.2	-4.2
23.333 MHz	44.0	60.0	50.0	-16.0	-6.0




Graph 3.4.1

Line 1

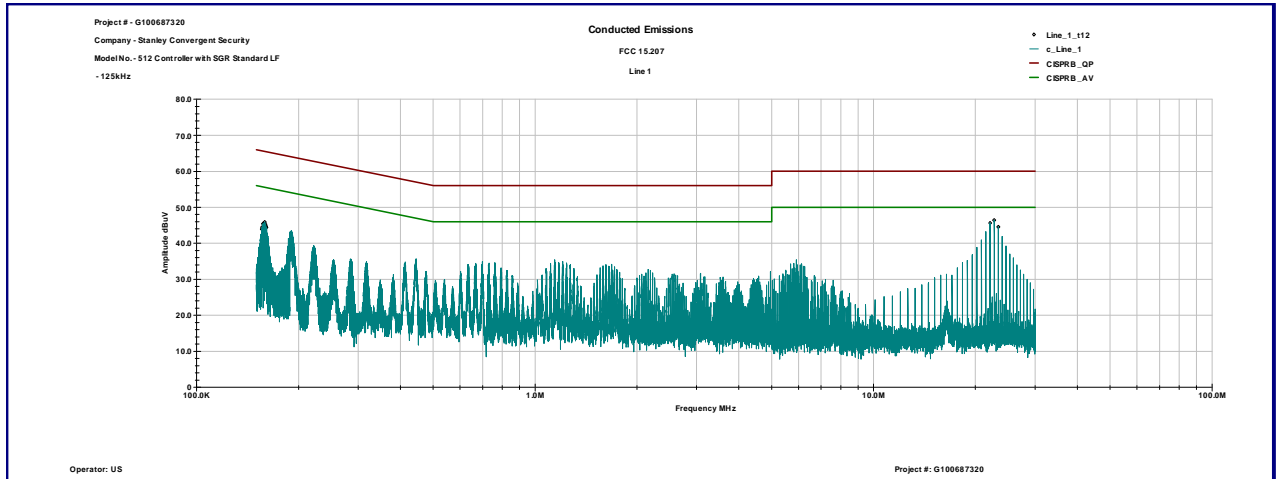

Line 2

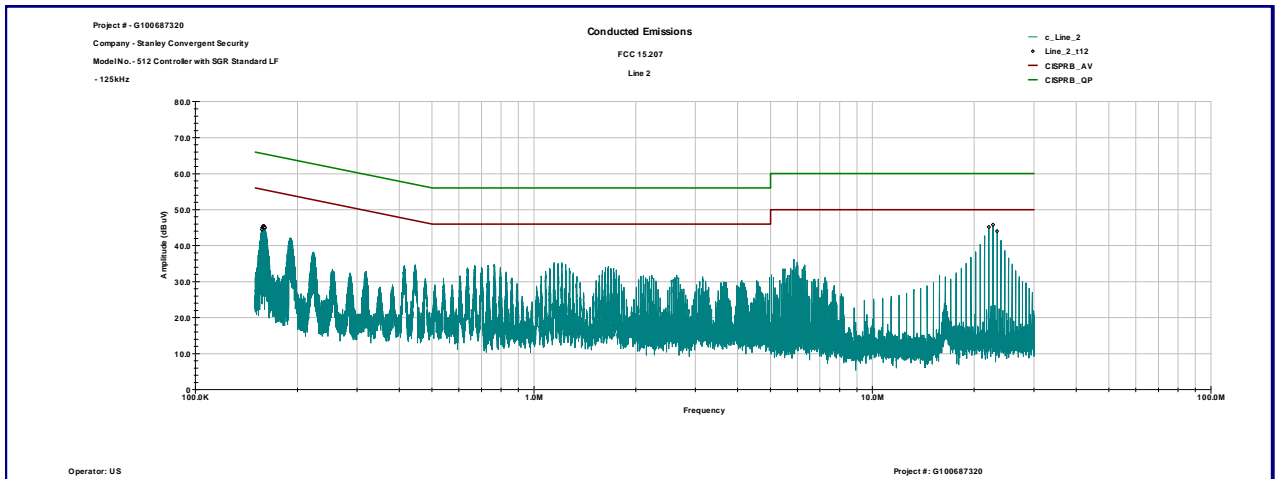



3.4 Receiver/digital device radiated emissions

Test location: OATS Anechoic Chamber

Test distance: 10 meters 3 meters

Test result: N/A

Frequency range: 30MHz-1000MHz

Max. Emissions margin: dB below the limits

Notes: Standard LF reader is transmitter only, and has no receiver portion.



3.5 Digital device conducted emissions

Test location: OATS Anechoic Chamber Other

Test result: N/A

Frequency range: 0.15MHz-30MHz

Max. Emissions margin: dB below the limits

Notes: Standard LF reader is transmitter only, and has no receiver portion.



4.0 TEST EQUIPMENT

DESCRIPTION	MANUFACTURER	MODEL	SERIAL NO.	INTERTEK ID	CAL DUE	USED
Spectrum Analyzer	R & S	ESU	100398	25283	12/19/2013	<input checked="" type="checkbox"/>
Spectrum Analyzer	R & S	ESCI	100358	12909	07/02/2013	<input checked="" type="checkbox"/>
Bicono-Log Antenna	Teseq	CBL6112D	32859	25289	08/09/2013	<input checked="" type="checkbox"/>
Loop Antenna	ETS	6512	00060486	19942	12/10/2013	<input checked="" type="checkbox"/>
LISN	Solar Electronics	9252-50-R-24-BNC	068545	MIN-0060	02/07/2014	<input checked="" type="checkbox"/>
Pre-Amplifier	HP	8447F OPT H64	3113A04974	9934	08/16/2013	<input checked="" type="checkbox"/>
System	Quantum Change	TILE! Instrument Control	Ver. 3.4.K.29	15259	VBU	<input checked="" type="checkbox"/>