

**Wonderful Communication
Mobile Life**

Welcome to U1000 Mobile Phone from Hua-
wei Technologies Co., Ltd.

HUAWEI U1000 Mobile Phone
User Guide

Notice

Copyright © 2008 Huawei Technologies Co., Ltd.

All Rights Reserved

No part of this manual may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Technologies Co., Ltd.

Trademarks



and HUAWEI are trademarks of Huawei Technologies Co., Ltd. All other trademarks mentioned in this manual are the properties of their respective holders.

Notice

The information in this manual is subject to change without notice. Every effort has been made in the preparation of this manual to ensure accuracy of the contents, but all statements, information, and recommendations in this manual do not constitute a warranty of any kind, expressed or implied.

Please read the safety precautions carefully to ensure the correct and safe use of your wireless device. For detailed information, refer to the section “Warnings and Precautions”.

Huawei Technologies Co., Ltd.

Adresă:

Administration Building, Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, P. R. China

Cod poștal: 518129

Site web: <http://www.huawei.com>

Safety Precautions

Please read the safety precautions carefully to ensure the correct and safe use of your wireless device. For detailed information, refer to the “Warnings and Precautions”.

	<p>Do not switch on your phone when it is prohibited to use mobile phones or when the phone may cause interference or danger.</p>
	<p>Do not use your phone while driving.</p>
	<p>Follow any rules or regulations in hospitals and health care facilities. Switch off your phone near medical apparatus.</p>
	<p>Switch off your phone in aircraft. The phone may cause interference to control signals of the aircraft.</p>



Switch off your phone near high-precision electronic devices. The phone may affect the performance of these devices.



Do not attempt to disassemble your phone or its accessories. Only qualified personnel are allowed to service or repair the phone..



Do not place your phone or its accessories in containers with strong electromagnetic field.



Do not place magnetic storage media near your phone. Radiation from the phone may erase the information stored on them.



Do not put your phone in a high-temperature place or use it in a place with flammable gas such as a gas station.



Keep your phone and its accessories away from children. Do not allow children to use your phone without guidance.



Use only approved batteries and chargers to avoid the risk of explosions.



Observe any laws or regulations on the use of wireless device. Respect others' privacy and legal rights when using your wireless device.



Strictly follow the relevant instructions on 47 of this manual while using the USB cable. Otherwise your phone or PC may be damaged.

Table of Contents

Table of Contents 1

Getting to Know Your Phone 1

Packing List.....	1
Your Phone	2

Getting Started 7

Loading/Removing the SIM Card	7
Charging the Battery	8
Powering On/Off.....	10

Call Service 13

Making or Answering Calls.....	13
Operations During a Voice Call.....	14
Call Log	15

Text Input 17

T9 Input Method	17
Traditional Input Method	18
"123" Numeric Input Method	19
Symbol Input Method	20
Input Different Languages.....	20

Contacts 21

Making Calls from the Contacts	21
Searching for a Contact	21
Other Operations.....	22
Groups	23

Messaging 25

Text Messages.....	25
Voice Mail Number.....	30
Common Phrases	30

Organiser & Tools 31

Calculator	31
World Time	31
Alarms	32
Calendar.....	33

Settings 34

Phone settings	34
Display Settings	41
Profiles	42

Warnings and Precautions 43

Electronic Device	43
Hospital	43
Storage Environment	45
Children Safety.....	46
Operating Environment	46
Cleaning and Maintenance	47
Environmental Protection	48
Emergency Calls	49
Battery	49
Charger	51
Using the USB Cable	52
Certification Information (SAR)	53

Acronyms and Abbreviations 57

1 Getting to Know Your Phone

Your U1000 phone can operate in virtually all countries, automatically switching between WCDMA 2100 networks and GSM 900/1800/1900. This allows you to enjoy communication wherever you use your mobile phone.

Note

The services supported by your phone should be also supported by the network from where you use the phone. For details, please contact your service provider.

Packing List

Your phone package box contains the following articles:

- 1 One U1000 mobile phone
- 2 One travel charger
- 3 One Li-ion battery
- 4 One user Guide

Your Phone




Keys

key	Description
Left function key	To activate the function indicated at the left of the prompt bar on the screen. To access the main menu in standby mode.
Messages key	To access the SMS screen in the standby mode.

key	Description
Send key	<p>To make or answer a call.</p> <p>To access the Call log screen in the standby mode.</p>
Scroll key	<p>Press this key to scroll through a menu.</p>
* key	<p>Press and hold it to lock the keyboard in the standby mode. Then press it and OK to unlock the keyboard.</p>
OK key	<p>To start the selected function in the menu.</p> <p>To access the main menu in standby mode.</p>
Right function key	<p>To activate the function indicated at the right of the prompt bar on the screen.</p>
Clear key	<p>To delete a character before the cursor in the editing mode.</p> <p>To delete a item recorder in call logs, message or contact.</p>

key	Description
Power/End key	To end an ongoing call or reject an incoming call. To return to the Home screen. Press and hold it to power on or power off the phone.
# key	Press and hold it to switch to the meeting profile from the current profile. To select the check box of the option item.

Home Screen

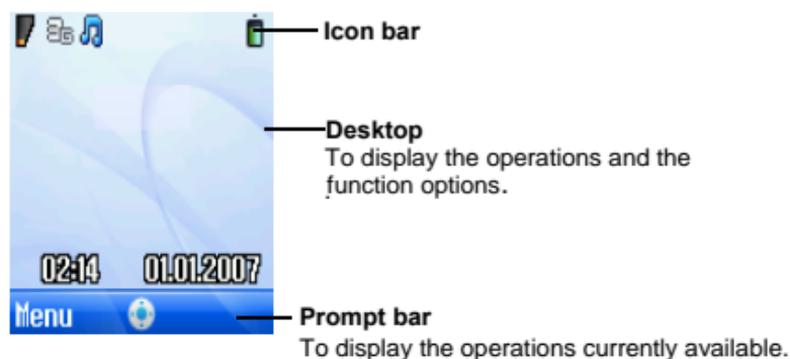

◆ Icon bar

This area displays the phone status. The following table illustrates all the icons that may appear on this bar.

Icon	Description
	Indicates signal strength. The more bars that appear, the stronger the signal.
	The phone is currently in a WCDMA network.
	You are using the roaming service.
	The phone is in a call.
	The keypad is locked.
	Alarm clock is enabled.
	You have new text messages.
	The phone is in mute mode.
	The normal profile is activated.
	The headset is plugged in.
	You have new voice mail.
	Call line 2 is enabled currently.
	Forwarding all incoming voice calls to line 2.

Icon	Description
	Indicates power level of the battery.

Introduction to the Menu

Your phone provides an extensive range of functions. You can use these functions by navigating the following menus: Alarms, Calendar, Call Log, Profiles, Messaging, Display settings, Organiser & Tools, Contacts and Settings.

- 1** In the standby mode, press  to display the main menu.
- 2** Press the scroll key to scroll through the menu, and then press  to select.
- 3** If the menu contains further submenus, repeat step 2.
- 4** Use the selected function according to the prompts on the screen.
- 5** Select **Back** to return to the previous menu.
Press  to return to the standby mode.

2 Getting Started

Loading/Removing the SIM Card

Load your SIM card before using your phone. To use the SIM card properly, please read the following instructions carefully

Note

- Keep the SIM card out of the reach of children.
- The SIM card and its metal contacts can be easily damaged by scratching or bending. Ensure care when you carry, load or remove it.
- Always disconnect the charger from the phone before loading or removing the SIM card.


To load or remove the SIM card, do as follows:

- 1** Power off the phone and remove the battery.
- 2** Position the card at the card slot entrance, making sure it is facing the same way as shown in the diagram below, with the notched corner at the top right. Then slide in as shown.



- 3** Fit the battery into the battery slot on back of the

phone. Press the battery down until it clicks into place.

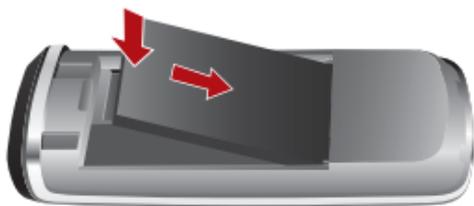

- 4** Slide the back cover to the phone.



- 5** To remove the SIM card, power off your phone and take out the battery. Then press the SIM card with one finger and slide it out of the slot.

Charging the Battery

Before charging the battery, please read the following precautions carefully.

Note

- When you charge the battery for the first time, please charge it for a minimum of 12 hours.

- The battery discharges even while not being used. If you have not used it for a long time, please recharge it first.
- The charging time depends on the environmental temperature and the age of the battery.
- The battery can be recharged but eventually wears out. If the battery lasts for a shorter time period than usual after being charged normally, replace it with a battery of the same type.
- Do not strike, throw or cause any kind of violent shock to the battery, otherwise liquid leakage, body damage, overheating, explosion or fire may occur.
- Charge the battery by using the charger supplied with your phone.

Charging with a Cable Charger

Before charging the battery with a cable charger, ensure that the battery has been properly loaded into your phone.

To charge the battery, do as follows:

- 1** Insert the plug of the charger into the connector

of the phone as shown in the following figure.

- 2 Plug in the connector of the charger to a power socket.



Note

- When the battery power level is very low, the phone makes alert sounds and displays a prompt. When the battery power level is too low, the phone will power off automatically.
- When the battery is being charged, the charging indicator blinks continuously. When the charging indicator stops blinking, it indicates that the battery is full.

Powering On/Off

Powering On

Ensure that the SIM card is in your phone and that the battery has been charged.

Press and hold  to power on your phone.

Powering Off

Press and hold  to power off your phone.

Access Codes

If you have set the phone password and the PIN is ON, you have to enter the corresponding access codes when you power on your phone. For setting and changing the access codes, please refer to "Settings/Security Setup".

◆ Phone Password

The phone password is used to protect your phone from unauthorized use. The phone password is preset as 0000 for your phone.

◆ PIN

The personal identification number (PIN) code is used to protect your SIM card from unauthorized use.

The PIN code is usually provided when you get the SIM card from your service provider. If you have not received a PIN code or if you have forgotten it, contact your service provider.

◆ PIN2

Some SIM cards provide a PIN2 code. Some special functions such as the "Fixed Dialer Number" are not

available until you enter the PIN2 code. At the same time, your SIM card should support these functions.

◆ **PUK**

To unlock a locked SIM card, you need to enter the PIN Unblocking Key (PUK) code. The PUK code is usually provided when you get the SIM card from your service provider. If you have not received a PUK code or if you have forgotten it, contact your service provider.

◆ **PUK2**

Some SIM cards provide a PUK2 code that is used to unlock a locked PIN2 code. The PUK2 code is usually provided when you get the SIM card from service provider. If you have not received a PUK2 code or if you have forgotten it, contact your service provider.

3 Call Service

Making or Answering Calls

Making a Voice Call

- 1 Enter or edit a phone number in one of the following ways:
 - Enter a phone number through the keypad.
 - Select a number from the **Call Log** screen.
 - Select a number from the **Contacts** screen.
- 2 Press  to dial.
- 3 Press  to end the call.

Answering or Rejecting Calls

The following describes how to answer or reject a call in different answer modes:

Answer a call:

- If the answer mode is **Any key**, press any key except  and .
- If the answer mode is **Send key**, press .
- If the headset is in use, press the control key on the headset.

Reject a call:

Press  or select **Options > Reject**.

End a call:

- If the headset is not in use, you can press .
- If the headset is in use, press the control key of the headset.

Reply by message:

Select **Options > Reply SMS** to send a predefined message to the caller.

Operations During a Voice Call

Icon Description



: A call is ongoing.



: The call is on hold.



: There is a new incoming call during a call.

Operations

During a voice call, you can select **Options** to perform the following operations.

- Hold/Resume: To hold or resume the call during a call.

- End: To end all calls, the active call, the current call or the on hold call.
- New Call: To make a 3-party call during a call.
- Handsfree/Earpiece: To switch between the Handsfree and the Earpiece modes during a call.
- Answer/Reject: Your phone allows you to handle two calls simultaneously. During a call, if there is a new incoming call, select **Options > Answer** to answer it or select **Options > Reject** to reject it.
- Swap: To swap between calls during a 3-party call.
- Conference call/Private call: To switch to the conference call during a 3-party call or to talk with a party privately during a conference call.
- Mute/Unmute: To mute or unmute your voice during a call.

Call Log

The recently dialed calls, received calls and missed calls are saved automatically.

Making Calls from Call Log

- 1 Select Call Log in the main menu and then

press the left/right scroll key to switch between All calls , **Missed** , **Received**  and **Dialed** .

2 Press the up/down scroll key to select a record.

Press  to make a voice call.

Other Operations

Select Options for the following options.

- **Edit before call:** To edit the number before making a call.
- **Create Message:** To send a SMS.
- **Save number:** To save the numbers of the selected record to the phone, the SIM card, or an existing contact.
- **Voice Call:** To make a voice call.
- **Display mode:** You can select Normal to display all records or select Simple to ignore the repeated records.
- **Delete:** To delete the selected record.
- **Mark/Unmark:** To mark/unmark a record or all records.
- **Calls status:** To display the information on voice calls, and data services. In the voice call, and data page, you can select Reset to clear all records.

4 Text Input

You can use the keypad to enter alphanumeric characters and symbols.

Note

While entering text:

- Press  to switch between input methods, including "abc", "Abc", "ABC", and numbers.
- Press  to enable or disable T9 input method.
- Press  to display the commonly-used symbols list. You can use the scroll keys to select.
- Press  to delete the letter before the cursor.

T9 Input Method

With the T9 input method, you can easily and quickly enter words. T9 is a predictive text entry mode. It allows you to easily and quickly enter words. Press the relevant key that corresponds to the desired letter and T9 will offer you candidate words.

Press each key carrying the desired letter once, and

then the predictive text scheme will present the candidate words composed by the letters you have entered in the drop-down menu.

For example, to enter the word "good" with the T9 input method, follow these steps.

- 1** Press successively the keys , , , and  which "g", "o", "o", and "d" belong to, and the candidate words composed by these letters will be shown in the drop-down menu.
- 2** Use the up/down scroll key to select "good".

Note

Press  repeatedly and you will see "T9 abc", "T9 Abc" and "T9 ABC" on the upper left corner of the screen successively. It indicates the words to be entered will be in lower case, first letter capitalized or in upper case.

Traditional Input Method

When T9 input method is off, you can use the traditional input method for entering alphabetic characters. Repeatedly press the key that carries the letter to be entered when it appears on the screen.

For example, to enter the word "Hello" with the traditional input method, follow these steps.

- 1 Press  that carries "h" repeatedly and all letters carried by this key will be displayed successively on the screen. Stop when you see an "h" on the screen.
- 2 After entering the first letter, you can directly press another key (except ) to enter the next letter. If the next desired letter is on the same key as the current one, wait until the cursor appears to the right of the current letter and then you can enter the next one.
- 3 Enter "e", "l", "l" and "o" in the same way.

"123" Numeric Input Method

In a text editing screen, press and hold the character/number keys to enter corresponding numeric characters.

You can also press successively the  key to switch to the "123" numeric input method, and enter corresponding numeric characters by pressing the character/number keys.

Symbol Input Method

Your mobile phone provides an independent symbol input method.

For example, to enter ":" with the symbol input method, you can just press the scroll keys to select ":" in the symbol list and then press .

Input Different Languages

In a text editing screen, select **Options>Input language** to set the language for the text. The indicator of the selected language will be displayed on the upper left corner of the editing screen.

5 Contacts

Contacts enables you to save and manage such information as phone numbers and addresses of your contacts.

Making Calls from the Contacts

- 1 In the **Contacts** screen, press the left/right scroll key to select **Phone**  or **SIM**  .
- 2 Select a contact and select **Options > Voice call**. Alternatively, you can select **Edit before call** to edit the number before making the call.

Searching for a Contact

- 1 In the **Contacts** screen, press the left/right scroll key to select **Phone**  or **SIM**  .
- 2 Select **Options > Search**.
- 3 Select **Options > Search**, and then enter the contact name you are searching for. The contact will be displayed.

You can use quick search in the **Phone** or **SIM** screen. Enter a string (one or more letters or numbers) contained

in the contact name you are searching for. Then the contacts whose names contain this string are displayed. You can also find a contact by entering the initials of the first name and the last name of the contact. For example, to find a contact named "Alice Green", enter the initials "ag". This contact is displayed in the candidate list.

Other Operations

In the Contacts screen, press the left/right scroll key to select **Phone**  or **SIM** . Then select Options for the following options.

- **Details:** To view the details of contact.
- **Edit before call:** To edit the number before making a call.
- **Create message:** To send a message to the selected contact.
- **New:** To create a new contact.
- **Voice call:** To make a voice call.
- **Search:** Enter the contact name you are searching for.
- **Copy to SIM/Copy to phone:** To Copy one or more contacts from your phone to the SIM card or from your SIM card to the phone.

- **Copy Marked To Phone:** To copy your marked to the phone.
- **Speed Dial Number:** To assign often-used numbers to speed dialing keys "2" to "9".
- **Delete:** To delete the selected contact.
- **Mark/Unmark:** To mark/unmark a record or all records in your phone and SIM card.
- **Memory status:** To view the memory status of both your phone and SIM card.
- **Settings:** To sort the contacts in the phone and the SIM card or to set an alert before saving.

Groups

Adding/Deleting Group Members

You can add a member to a group in your phone or delete a member from it.

- 1** In the **Contacts** screen, press the left/right scroll key to select **Groups**.
- 2** Select a group and press  to view the details.
- 3** Select **Option > Add**. Select a contact and press . The member you added will be displayed in the group member list.

To delete a group member, select a member from the group member list, and then select **Options > Delete**.

Managing a Group

- 1** In the Contacts screen, press the left/right scroll key to select Groups.
- 2** Select a group and select Options for the following options.
 - Detail: to view the details of a group.
 - Rename: to change the name of a group.
 - Create message: to send a text message to all members of a group.
 - Delete: to delete a group and all members of the group.

Note

You cannot rename or delete any group preset in your phone.

6 Messaging

Text Messages

The maximum content for a single text message is 160 English letters. If the characters you entered exceed this limit, the text is divided into two or more continuous messages when it is sent.

Creating a text Message

- 1 Select **Messaging > Write SMS** from the main menu.
- 2 In the message editing screen, select **Options:**
 - Send: To send the message.
 - Insert number: You can insert a phone number saved on the phone or the SIM card.
 - Common phrases: You can use this option to speed up the text entry.
 - T9 Switch: enable or disable T9 input method.
 - Input mode: You may select one of the input methods to enter the message contents.
 - Input language: You can select an input language for this message.

- 3** After editing the message, press  to access the "Edit numbers" screen.
- Enter the phone number, and then select **Options > Send** or press  to send the message.
 - Select **Options > Group** or **Contacts** to choose a number and send the message.
 - Select **Options > Save to drafts** to save the message.

SMS Mailboxes

The phone provides three mailboxes for SMS, namely Inbox , Drafts and Sent .

◆ Inbox

You can save the received messages in **Inbox**.

Icons in Inbox

Icon	Description
	a read message in the phone memory
	an unread message in the phone memory
	a read message on the SIM card memory
	an unread message on the SIM card memory

Icon	Description
	a read message report
	an unread message report

Viewing Messages in Inbox

- 1 Select **Messaging > SMS > Inbox**.
- 2 Press the up/down scroll key to view the messages and then press  to view the details.
- 3 Reply or call back.
 - Press  to reply with a text message.
 - Press  to call back by a voice call.

You can select **Options** for the following operations.

- Reply: To reply the message.
- Forward: To forward the message.
- Edit before call: To edit the number.
- Save number: To save the numbers retrieved from an SMS to phone or SIM memory or an existing entry in the contacts.
- Copy to SIM: To back up the SMS to SIM memory.
- Voice call: To make a voice call.
- Delete: To delete the message.

◆ Drafts

The **Draft box** is used to save the messages you created and saved and those which failed to send.

Icons in Drafts



: A text message saved to the phone.



: A text message saved to the SIM card.

Viewing and Editing Messages in the Drafts

- 1 Select **Messaging > SMS > Drafts**.
- 2 Press the up/down scroll key to select a message and press  to edit it.

◆ Sent

Sent is used to save the messages that have been sent.

Icons in Sent



: A text message that has been sent and saved to the phone.



: A text message that has been sent and saved to the SIM card.

Viewing Messages in the Sent

- 1 Select **Messaging > SMS > Sent**.
- 2 Press the up/down scroll key to select a message and press  to view the details.

3 Forward or make a call.

- Press  to forward a text message.
- Press  to make a voice call.

You may select Options to do the same operations as those of SMS Inbox.

SMS Settings

1 Select **Messaging > Settings > SMS** from the main menu.

2 Set the parameters related to messages:

- Message center: You can set your mobile phone to retrieve the message center number from the SIM card or the phone. If you have deleted the information by accident, contact your service provider.
- Valid period: The time a message is kept in the message center after it is sent.
- Auto save: You can set whether a message will be saved automatically to **Sent** when it is sent.
- Save to: To set the position for saving newly created messages, received messages, and sent messages.

- **Signature:** To set whether your signature will be sent along with the message. You can edit the signature while creating a new message.
- **Status report:** You can set it to **On** or **Off**. If you set it to **On**, the network will send you the information on whether the message has reached the recipient.
- **Concatenated SMS:** You can set it to **On** or **Off**. If you set it to **Off**, you cannot edit and send messages longer than the limits of a single SMS.

Voice Mail Number

To use the voice mail services, you need to apply to your network operator. After setting the correct number provided by your network operator, if you press and hold  in standby mode, the phone will dial out the voice mail number automatically.

Common Phrases

Your mobile phone has been preset with some commonly used phrases, sending messages while answering a call and auto replying. You can select **Messaging > Settings > Common phrases** to edit them if you want.

7 Organiser & Tools

Calculator

You can select **Organiser & Tools > Calculator** from main menu.

- Press the number keys to enter the figures.
- Press the scroll key to enter the operators.
- Press the left function key to clear.
- Press the right function key to exit Calculator.
- Press input method switch key to enter a radix point.
- Press clear key to delete the character to the left of the cursor.
- Press ok key to enter an equal mark.

World Time

You can select **Organiser & Tools > World Time** from main menu.

You can view the time of important cities around the world. To switch among the time zones, press the left/right scroll key.

If the daylight saving time (DST) is used in your city, you need to set the phone to DST. Then, you can get the right

local time. To set the phone to DST, switch to the desired time zone and then select **Options > Set to DST**.

Alarms

Alarm Clock

◆ Setting Alarm Clocks

Enter alarm function, you can select one alarm from the list, and then press  to set an alarm clock.

◆ Prompt Interface for an Alarm

When it is time for an alarm clock to ring, the selected alarm tone is played and a prompt interface is displayed. You can stop the ringing by pressing any key. On the prompt interface, you can select to snooze or stop the alarm prompt.

If your phone is powered off, the alarm clock can still ring. When the alarm rings, you can choose to power on the phone.

◆ Stopping the Alarm Clock

Select an alarm clock from the list, and press the left function key to deactivate it.

Calendar

Calendar Functions

Enter calendar function and select **Options**. You can perform the following operations.

- **Go to:** To go to a certain date directly from the Month view screen.
- **Settings:** To set week begin day.

8 Settings

Phone settings

Phone settings

You can access the Phone settings screen by selecting from the Settings menu.

- **Phone Language:** Your mobile phone supports several languages. Select Settings > Phone settings > Phone language to select a language. Besides these languages, you can also select Auto. This option is used to set the phone language to be the same as that used in your SIM card
- **Input Language:** The option is used to set the language used to enter text.
- **Date and Time:** This option is used to change the system time for the phone.
- **Date Format:** This option is used to change the display format of the date of the phone.
- **Shortcuts:** This option is used to assign the mostly used functions to the scroll keys as shortcut keys.
- **Auto ON and OFF:** This option is used to set your phone to power on or off automatically.

- **Auto keypad lock:** The auto keypad lock function can prevent the phone from reacting to the accidentally key-pressing.
- **Keypad lock period:** After enabling the auto keypad lock function, you can set the keypad lock period. If there is no operation on the phone within a preset period of time, the keypad is locked automatically. You can press  and  to unlock the keypad.

Note

If you have removed the battery from the mobile phone, you may need set the time after switching on the mobile phone.

Message Settings

You can change the message settings including SMS, Voice Mail number and Common phrases.

Call Settings

You can change the settings for making calls.

◆ Call Forwarding

This option is used to forward incoming calls.

- 1 In the **Settings** screen, select **Settings > Call settings > Call forwarding**.

- 2 Select the forwarding condition from All calls, If out of reach, If busy, and If not answer.
- 3 Select Activate or Deactivate to enable or disable the service. You can also select Check status to check the status of call forwarding service.

Alternatively, you can select Disable all and then select one from the four items: Voice call, Fax call, and All services. Then press  to disable all call forwarding services of this type.

◆ Call barring

This option is used to set the call barring mode for the phone.

Select **Call settings > Call barring** for the following options.

Calls Barring:

- 1 Select the barring condition from All outgoing calls, International calls, International calls except home, All incoming calls and Incoming calls when abroad.
- 2 Select Activate or Deactivate to enable or disable the service. You can also select Check status to check the status of call barring service.

Disable All

Select one, and then enter the call barring password.
press  to cancel all call barring services of each type.

◆ Call Waiting

This option is used to enable or disable the call waiting function. You can also view whether the call waiting function is enabled by checking the status.

The call waiting function is network-dependent. For more information, please consult your service provider.

◆ Auto Redial

This function is used to auto redial the dialed number if the dialing failed.

◆ Answer Mode

It is used to set the mode for answering an incoming call. Two options are available: **Any key** and **Send key**.

◆ Auto Answer

It is used to select auto answering for incoming calls. Select **Call settings > Auto answer** for the following options.

- Immediate answer: To answer an incoming call immediately.

- **Message:** To auto send a text message that is preset and chosen from the Common phrases to the current caller.
- **Disable:** To disable the auto answer function.

◆ **Calling ID**

This options allows you to select whether to display your phone number on the phone of the party who called you. Select **Call settings > Calling ID** for the following options.

- **Auto:** Whether your phone number will be shown on the called phone depends on the network.
- **Send:** Your phone number will be shown (if the network supports this service).
- **Hide:** Your phone number will not be shown (if the network supports this service).

◆ **Select Line**

It is used to set the call line for your phone. Two options are available: Line 1 and Line 2.

◆ **My Number**

With this function, you can save your own phone numbers on the SIM card. You can select Options to edit or delete the records.

◆ Call Barring Password

This function is used to change the password for call barring.

Select Call barring password from the Call settings screen. Now you can change the call barring password.

Note

The old call barring password is provided by your network operator if it is the first time for you to change the password.

◆ Prompt to save

This function is used to prompt whether to save the number when there is an incoming call. You can enable or disable this function.

Network

You can change the settings for the network. Select **Settings > Network** for following options: Mode, Select network, Cell information, My public land mobile network (PLMN) list.

Security

You can change settings related to the phone security. Select Security from Settings, and then enter the correct phone password if you have set the phone lock to On (the initial password is 0000). Then press to display the following security setting items:

◆ **Reset**

This option is used to reset your phone to the factory settings.

◆ **Password lock**

This option is used to enable or disable the "Phone lock" and "PIN lock".

- 1 Select Phone lock/PIN lock.
- 2 Press the up/down scroll key to select On or Off.
- 3 Set password:
 - Phone password: Enter the phone password.
 - PIN password: If the desired status is the same as the current status, just press . Conversely, you need to select the desired status and then enter the PIN code.

◆ **Change password**

You can modify the phone password and PIN code.

- 1 Select Security > Change password.
- 2 Select one item from phone password, PIN code, and PIN2 code.
- 3 Enter the old password (The initial phone password of the U1000 is 0000).

4 Enter a new password.

5 Enter the new password again to confirm.

Note

- To modify the PIN code, you must set the "PIN lock" to "On" first.
- If you enter the wrong PIN or PIN2 three times, the SIM card is locked. You need the PUK or PUK2 code to unlock the SIM card. If you enter the wrong PUK or PUK2 code 10 times in total, the SIM card is locked permanently.
- PUK or PUK2 code are delivered with the SIM card. If you have not received one or have forgotten it, contact your service provider.

◆ Fixed dialer number

If your SIM card supports the Fixed Dialer Number (FDN) function, you can set the limit for phone numbers.

Display Settings

You can select Display Settings from main menu.

- Wallpaper: To set the wallpaper layout for the home screen.
- Brightness: To set the brightness of the screen.
- Keypad backlight: To turn the keypad backlight Auto, on or off.

- **Backlight time:** To set the backlight delay time for the screen.
- **LCD sleep delay:** To set the duration between backlight off and LCD off.
- **Greeting message:** To enter a greeting message that appears on the screen when you power on your phone.

Profiles

You can select Profiles from main menu.

Your mobile phone provides various profiles, including Normal, Meeting, Silent, Activity, Headset, Offline, My profile 1 and My profile 2.

You can select a profile and then press  or select **Options > On** to activate this profile. You can also select **Options > Edit** to edit the following settings for this profile.

Note

In the standby mode, you can press  and hold to switch the current profile to the meeting profile. If the current profile is offline, you cannot execute this function.

9 Warnings and Precautions

Electronic Device

- Turn off your phone near high-precision electronic devices. The phone may affect the performance of these devices.
- Such devices include hearing aids, pacemakers, fire alarm systems, automatic gates, and other automatic-control devices. If you are using an electronic medical device, consult the device manufacturer to confirm whether the radio wave affects the operation of this device.
- Pacemaker manufacturers recommend that a minimum separation of 15cm be maintained between mobile phone and a pace-maker to avoid potential interference with the pace-maker. To achieve this use the phone on the opposite ear to your pacemaker and do not carry it in a breast pocket.

Hospital

Pay attention to the following points in hospitals or health care facilities:

- Do not take your phone into the operating room (OR), intensive care unit (ICU), or coronary care unit (CCU).
- Do not use your phone at places for medical treatment where phone use is prohibited.
- When using your phone near someone who is suffering from a heart disease, turn down the ring tone volume or vibration properly so that it does not affect the person.

Area with Inflammables and Explosives

In any area with inflammables and explosives, turn off your phone and do not take out, install or charge the battery, to avoid explosion and fire. Areas with inflammables and explosives include, but are not limited to:

- Gas station
- Area for storing fuels (such as the bunk under the deck of a ship)
- Device/Vehicle for transporting and storing fuels or chemical products
- Area with chemical substances and particles (such as: granule, dust, metal powder) in the air
- Area with the sign of "Explosives"

- Area with the sign of "Turn off bi-direction wireless equipment"
- Area where it is generally suggested to stop the engine or a vehicle

Storage Environment

- Do not place magnetic storage media such as magnetic cards and floppy disks near the phone. Radiation from the phone may erase the information stored on them.
- Do not put your phone, battery, or other accessories in containers with strong magnetic field, such as an induction cooker and a microwave oven. Otherwise, circuit failure, fire, or explosion may occur.
- Do not leave your phone, battery, or charger in a
- very hot or cold place. Otherwise, malfunction of the products, fire, or explosion may occur.
- Do not place sharp metal objects such as pins near the earpiece. The earpiece may attract these objects and hurt you when you are using the phone.
- Do not subject your phone, battery, and charger to serious collision or shock. Otherwise, battery leakage, phone malfunction, overheat, fire, or explosion may occur.

- Do not put your phone in the back pocket of your trousers or skirt, to avoid phone damage while seated.

Children Safety

- Put your phone, battery, and charger in places beyond the reach of children. Do not allow children to use the phone, battery, or charger without guidance.
- Do not allow children to put the battery in mouth, for electrolyte in the battery is poisonous.
- Do not allow children to touch the small fittings. Otherwise, suffocation or gullet jam can be caused if children swallow the small fittings.

Operating Environment

- The phone, battery, and charger are not waterresistant. Keep them dry. Protect the phone, battery and charge from water or vapor. Do not touch the phone with a wet hand. Otherwise, short-circuit and malfunction of the product or electric shock may occur.
- Do not use the phone in dusty, damp and dirty places or places with magnetic field. Otherwise, malfunction of the circuit may occur.
- Do not turn on or off the phone when it is near your ears to avoid negative impact on your health.

- When carrying or using the phone, keep the antenna at least one inch (2.5 centimeters) away from your body, to avoid negative impact on your health caused by radio frequency leakage.
- If you feel uncomfortable (such as falling sick or qualm) after playing games on your phone for a long time, please go to see a doctor immediately.
- On a thunder stormy day, do not use your phone outdoors or when it is being charged.
- Do not touch the antenna when a call is going on.
- Touching the antenna may affect call quality and cause the phone to operate with more power. As a result, the talk time and standby time are shortened.
- The phone may interfere with nearby TV sets, radios and PCs.
- In accordance with international standards for radio frequency and radiation, use phone accessories approved by the manufacturer only.

Cleaning and Maintenance

- Before you clean or maintain the phone, turn off the phone and disconnect it from the charger. Otherwise, electric shock or short-circuit of the battery or charger may occur.

- Do not use any chemical detergent, powder, or other chemical agent (such as alcohol and benzene) to clean the phone and the charge. Otherwise, part damage or a fire can be caused. You can clean the phone and the charger with a piece of soft antistatic cloth that is a little wet.
- Keep the plug dry when you clean it, to prevent fire.
- If the phone or any of its fittings does not work, turn to the local authorized service center for help.

Environmental Protection

- Please observe the local regulations regarding the disposal of your packaging materials, exhausted battery and old phone and please promote their recycling. Do not dispose of exhausted battery or old phone in municipal waste.
- This HUAWEI device complies with Directive 2002/ 95/ EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment.



: This symbol indicates that the equipment carrying this mark must NOT be thrown into general waste but should be collected separately and properly recycled under local regulations.

Emergency Calls

You can use your phone for emergency calls. However, connections in all conditions cannot be guaranteed. You should never rely solely on the phone for essential communications.

Battery

- Use the battery approved by the manufacturer only. Otherwise, explosion may occur.
- Do not dispose of the battery in fire. Otherwise, the battery may ignite or explode.
- Do not connect two poles of the battery with conductors such as cables, jewelries or any other metal material. Otherwise, the battery is short-circuited and it may burn your body.
- Do not disassemble the battery or solder the battery poles. Otherwise fluid leakage, overheat, fire, or explosion may occur.
- If there is battery leakage, smoke, or strange smell, stop using the battery and keep it away from open flame to avoid fire or explosion. Then turn to an authorized maintenance engineer for help.

- The battery is not fully charged when delivered. Plug the charger cable into the bottom of the phone, plug the power supply unit into a mains power socket and charge for at least two hours.
- If the battery fluid contacts your skin or cloth, wash with clean water immediately to avoid irritation to the skin.
- If the battery fluid gets into eyes, do not rub your eyes. Otherwise, your eyes can be hurt. Wash with clean water and go to see a doctor immediately.
- If there is battery deformation, color change or abnormal heating while you charge or store the battery, take it out immediately and stop using it. Otherwise, battery leakage, overheat, explosion, or fire may occur.
- When installing the battery, do not push the battery by force lest battery fluid leak out or the battery crack.
- Do not take out the battery when the phone is turned on.
- If you do not use the battery for a long time, store it in normal temperature after charging.

Charger

- Use the charger approved by the phone manufacturer only. Any violation of this rule may result in fire or malfunction of the charger.
- Do not short-circuit the charger. Short-circuiting the charger may cause fire or malfunction of the charger.
- If the power cord is damaged (for example, the lead is exposed or broken), or the plug becomes loose, stop using the power cord at once. Otherwise, electric shock, short-circuit of the charger, or fire may occur.
- Keep the charger dry. Once water or other liquid leaks into the charger, electrical leakage or other faults may occur.
- Do not use the charger in a dusty and damp environment.
- Keep the power cord away from any heating appliance.
- Ensure the charger is properly plugged into the power socket properly when charging the battery. Improper insertion may result in electric shock, fire, or explosion. To unplug the charger, pull the plug off rather than tear off the power cord.

- Do not place any heavy object on the power cord of the charger. Do not damage, change, or pluck the power cord. Otherwise electric shock or fire may occur.
- When you are charging the battery with the charger, do not touch the plug, power cord or the charger with a wet hand. Otherwise, electric shock can be caused.
- Once the liquid such as water leaks into the charger, remove the plug of the charger from the socket immediately. Otherwise, overheating, fire and other malfunction may occur.

Using the USB Cable

To use the USB cable, please strictly obey the following rules. Otherwise, your phone or PC may be damaged:

- To connect your phone and PC with the USB cable, connect to the phone at first, and then connect to the PC.
- In the process of communication between your phone and PC, it is strictly forbidden to plug or pull out the USB cable.
- To disconnect your phone and PC from the USB cable, disconnect from the PC at first, and then disconnect from the phone.

Certification Information (SAR)

THIS DEVICE MEETS THE GOVERNMENT'S REQUIREMENTS FOR EXPOSURE TO RADIO FREQUENCY ELECTROMAGNETIC FIELD.

Governments around the world have adopted comprehensive international safety guidelines, developed by scientific organizations, e.g. ICNIRP (International Commission on Non-Ionizing Radiation Protection) and IEEE (Institute of Electrical and Electronics Engineers Inc.), through periodic and thorough evaluation of scientific studies. These guidelines establish permitted levels of radio wave exposure for the public. The levels include a safety margin designed to assure the safety of all persons, regardless of age and health, and to account for any variations in measurements.

Specific Absorption Rate (SAR) is the unit of measurement for the amount of radio frequency energy absorbed by the body when using a mobile phone. The SAR value is determined at the highest certified power level in laboratory conditions, but the actual SAR level of the mobile phone while operating can be well below the value. This

is because the mobile phone is designed to use the minimum power required to reach the network.

All models of Huawei's mobile phone are designed to meet radio frequency exposure guidelines. Before a phone model is available for sale to the public, it must be tested according to the technical standard-EN 50361 and does not exceed the limit established by the European Council Recommendation: 1999/519/EC for safe exposure. The tests are performed in using positions (that is, at the ear) as required by the EN50361 for each model.

The SAR limit adopted by the 1999/519/EC is 2.0 watts/kilogram (W/kg) averaged over ten gram of tissue. The highest SAR value for this device type when tested at the ear is 0.689 W/kg, and when properly worn on the body is 1.01 W/kg.

All models of Huawei's mobile phone are designed to meet radio frequency exposure guidelines. Before a phone model is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the limit established by the government-adopted requirement for safe exposure. The tests are performed in positions and locations (that is, at the ear and worn on the body) as required by the FCC for each model. For body

worn operation, this phone has been tested and meets FCC RF exposure guidelines when the handset is positioned a minimum of 15 mm from the body with an accessory that contains no metal part. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The SAR limit adopted by the USA and Canada is 1.6 watts/kilogram (W/kg) averaged over one gram of tissue. The highest SAR value reported to the FCC and IC for this device type when tested for use at the ear is 0.427 W/kg, and when properly worn on the body is 0.626 W/kg.

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

EU Declaration of Conformity

according to the Radio Equipment and
Telecommunications

Terminal Equipment Directive 1999/5/EC

For the following equipment

Product: WCDMA/GPRS/GSM Mobile Phone

Type Designation/Trademark: HUAWEI/U1000

Manufacturer's Name: Huawei Technologies Co.,Ltd.

Manufacturer's Address: Bantian, Longgang District, Shenzhen, 518129, Guangdong, P. R. China.

is here with confirmed to comply with the requirements set out in the Council Directive 1999/5/EC for radio equipment and telecommunications terminal equipment. For the evaluation of the compliance with this Directive, the following standards were applied:

Safety: EN 60950-1:2001 First Edition+A11:2004;

Health: EN 50360:2001; EN 50361:2001;

EMC: EN 301 489-1 V1.6.1; EN 301 489-24 V1.3.1;

Radio: EN 301 908-1 V2.2.1; EN 301 908-2 V2.2.1;

Responsible for making this declaration is the:
Manufacturer.

10 Acronyms and

Abbreviations

FDN	Fixed Dial Number
PIN	Personal Identification Number
PLMN	Public Land Mobile Network
PUK	PIN Unblocking Key
SAR	Specific Absorption Rate
USB	Universal Serial Bus
WCDMA	Wideband code division multiple access