

User Manual

Table of Contents

1. Introduction 3
2. Wearing your headset 3
3. Charging your headset 4
4. Pairing (connecting) your headset 5
5. Using your headset 6
 - a. Turning your headset on and off
 - b. Placing and receiving calls
 - c. Adjusting the volume
6. Indicators 8
7. Troubleshooting 9
8. Specifications 10
9. Safety and general information 10
10. Warranty 13

Skandinavisk
Español

15-27
29-41

Deutsch
Français

43-55
57-69

中文
العربية

71-83
85-97

flamingo

Figure 1 Flamingo Headset

- 1 EarClick™
- 2 Speaker
- 3 Indicator light
- 4 Volume up
- 5 Volume down
- 6 Microphone
- 7 Attachment loop
- 8 Charging pads
- 9 Control button

Figure 2 Desktop Charger

- 1 Charged (green light)
- 2 Charging (red light)
- 3 Charging pins

Figure 3 Charging the Headset

- 1 Insert the headset
- 2 Push back

flamingo

1) Introduction

Your Flamingo Bluetooth® Headset is comfortable, stylish and lightweight and provides excellent sound quality and handsfree communication with other Bluetooth devices such as mobile phones and computers. EarClick™ offers a high level of comfort, allowing continuous use of your headset.

2) Wearing your headset

Fitting the headset in your ear:

Gently press your headset in place in your right ear, positioning EarClick™ as shown below (4 & 5).

You may find it easier to attach the headset to your ear by angling the bottom of the headset backwards and then pointing it down while gently pressing it against your ear.



Figure 4



Figure 5

EarClick™

Your headset comes with 6 EarClick™ sizes. Try several sizes to find the one that provides the best fit. To remove EarClick™ from your headset, gently pull the upper EarClick™ pad away from the headset. To attach it, gently press the EarClick™ holes against the pins on the headset.

flamingo

3) Charging your headset

Charge your headset before using it the first time.

How to charge:

1. Plug the AC adapter into an electrical outlet.
2. Plug the AC adapter into the Desktop Charger as shown in Figure 2.
3. Insert your headset into the Desktop Charger cradle and gently push it back until the charging indicator on the Desktop Charger lights up. A magnet in the Desktop Charger keeps the headset in place during charging. (Figure 2)

Recharging

1. Your headset battery needs recharging when the headset indicator light flashes red.
2. It takes up to 4 hours to fully recharge your headset. The left-hand charging indicator emits a steady red light while charging. The right-hand indicator light emits a steady green when the headset is fully charged.

Note: You can also use a Flamingo Bluetooth® Headset original 12V Vehicle Power Adapter or a USB adapter to charge your headset.

flamingo

4) Pairing your headset

Before using your headset, you must pair it with another Bluetooth® device (e.g., a mobile phone or computer).

How to pair your headset:

1. Ensure your headset is turned off.
2. Make sure that Bluetooth® is enabled on the device you are pairing with the headset.
3. Press and hold the Control button until the headset indicator alternately flashes red and blue (pairing mode).
4. Initiate pairing on the mobile phone by following the instructions in your mobile phone manual.
5. The device searches for Bluetooth® devices including the headset. When the search is complete, the headset's name Flamingo appears in the device's display. Scroll to Flamingo and select it.
6. If requested by the device, enter the Flamingo headset passkey: 0000.
7. The headset indicator flashes blue when pairing is successful.

Note: You can pair up to 8 devices to the headset. If your headset is paired to more than one device, it will always be active with the last connected device when turned on.

flamingo

5) Using your headset

Turning your headset on and off

On: Press the Control button for more than 2 seconds until you hear two tones and the headset indicator flashes blue. The indicator flashes red if the battery is low.

Off: Press the Control button for more than 2 seconds until you hear two tones and the headset indicator flashes red and then turns off.

Placing and receiving Calls

Place a call: When your headset is paired to a mobile phone, place a call as usual. The audio will be automatically transferred to the headset.

Receive a call: Accept incoming calls with a short press (less than 2 seconds) on the Control button. Incoming calls will be indicated on your mobile phone (e.g., ringing) and on the headset (you will hear ring tones).

Reject a call: Reject incoming calls with a long press (between 2-4 seconds) on the Control button.

Initiate a voice dialing call: A short press on the Control button will initiate a voice-dialing call on your mobile phone. A beep on your headset indicates that your phone is ready for you to say a name. The phone will dial the number and place the call.

Note: Voice dialing must be enabled on your mobile phone.

Mute microphone on/off: A long press on Volume Up and Volume Down simultaneously will mute the microphone or turn it on again. You will hear a tone repeated every 20 seconds as long as mute is active.

Transfer call: A long press on Volume Up will transfer the call to the mobile phone or transfer it back to the headset.

Last number redial: A long press on Volume Down will redial last number called.

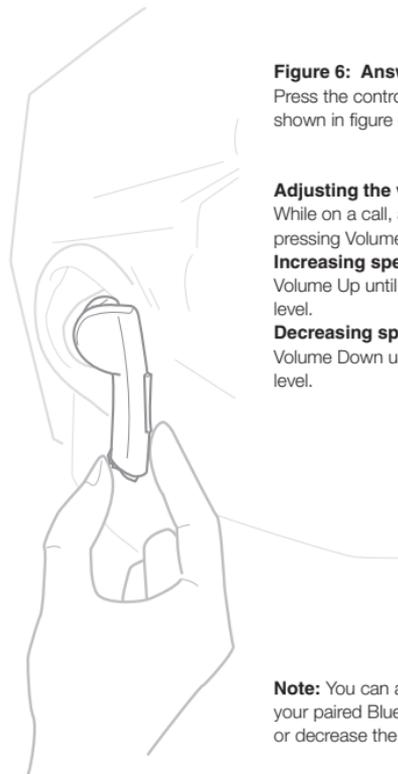


Figure 6: Answering a call

Press the control button using two fingers as shown in figure 6.

Adjusting the volume

While on a call, adjust the speaker volume by pressing Volume Up or Volume Down.

Increasing speaker volume: Repeatedly press Volume Up until you reach the desired volume level.

Decreasing speaker volume: Repeatedly press Volume Down until you reach the desired volume level.

Note: You can also adjust the speaker volume on your paired Bluetooth[®] device to further increase or decrease the volume.

6) Indicators

HEADSET	
Headset operation	Light and audio indicators
Headset off	Light off
Power on	5 blue flashes, brief low-to-high tone
Standby	1 blue flash every 3rd second
Active	3 blue flashes every 3rd second
Receiving incoming call	3 blue flashes every 3rd second, ringing tones increasing in volume
Answering a call	3 blue flashes every 3rd second, single beep when answered
During call	4 blue flashes every 3rd second
Mute during a call	4 blue flashes every 3rd second, double beep every 20 seconds
Ending mute during a call	4 blue flashes every 3rd second, single beep
Ending a call	3 blue flashes every 3rd second, single beep
Pairing	Alternating red and blue flashes, single high-to-low beep.
Voice dialing	4 blue flashes every 3rd second, single beep
Power off	5 red flashes, brief high-to-low tone

Note: Headset indicator will flash red instead of blue when the battery is low.

DESKTOP CHARGER		
Operation	Left indicator	Right Indicator
Charging headset	Steady red light	Off
Fully charged headset	Off	Steady green light
headset in Desktop Charger or charging suspended	Off	Off

flamingo

7) Troubleshooting

- The headset indicator flashes red and the speaker beeps.**
Indicates that your headset's battery is low. Charge the headset.
- No charging indicator light**
Make sure that your headset fits properly in the Desktop Charger and that the AC adapter is properly attached to the Desktop Charger and connected to an electrical outlet.
Note: If your headset battery is empty or has not been used for a long time, it may take a couple of minutes for the charging indicator to emit a steady red light.
- No audio contact between your headset and other devices (e.g., a mobile phone)**
 - Make sure that your headset has been paired with the other device.
 - Make sure that your headset is turned on.
 - Make sure that your headset is within working range (less than 10 meters/30 feet) of the other device.
 - When using your headset with a mobile phone, make sure the phone has a mobile phone signal.
 - You may have to manually select your headset from your mobile phone's Bluetooth[®] menu.
 - Some devices can support only one headset. The connection may be broken if there is more than one headset paired with your device.
 - If audio remains on the mobile phone when you are in a call, go to the main menu on the phone, and select the option to transfer the audio to the headset.

flamingo

8) Specifications

Talk time:	Up to 8 hours
Standby time:	Minimum 180 hours
Typical re-charge time:	Up to 4 hours
Range:	Up to 10 meters/30 feet
Weight:	11 grams/0.39 oz.
Profiles supported:	Headset and Handsfree
Compatibility:	Any Bluetooth®-enabled mobile phone or other Bluetooth device.

9) Safety & General Information

Read this information before using your Flamingo Bluetooth® headset.

Users are not permitted to make changes or modify the device in any way. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Battery

Your headset is equipped with a rechargeable Lithium Ion Battery providing long service life if treated with care:

1. The Battery should only be charged in a temperature range of 0° to 45°C/32° to 113°F.
2. Use the battery in room temperature for maximum battery capacity.

3. Battery capacity may be reduced if operating in a cold environment.
4. The headset needs to be recharged every two months, if it has not been in use.
5. The rechargeable battery that powers this product must be disposed of properly. Contact your local recycling center for proper disposal methods. Never dispose of batteries in a fire, as they may explode.

Product care:

1. Do not expose your headset to liquid, moisture or humidity.
2. Do not expose your headset to extreme high or low temperatures.
3. Do not expose your headset to open flames.
4. Do not drop, throw, or try to bend the headset, as rough treatment may damage it.
5. Do not attempt to disassemble your headset. With the exception of EarClick™ and the neck strap, the headset does not contain consumer serviceable or replaceable components.
6. Do not keep your headset in an area prone to dust and dirt. Use only a soft water-dampened cloth to clean your headset.
7. Connect the AC power adapter only to designated power sources as marked on the product.
8. To reduce risk of electric shock, unplug the AC adapter from any power source before attempting to clean it.

Cellpoint Connect ApS reserves the right to make changes to the specifications and the functionality of the Flamingo Bluetooth® headset without notice. Such changes may not be reflected in this manual.

9. The AC power adapter must not be used outdoors or in damp areas.
10. Do not place, carry, or store the headset charging pads with wires or any metal (like a metal necklace or hairpins), as this may cause a short-circuit.
11. The Flamingo headset should only be charged with the Flamingo Desktop Charger, in compliance with the correct operating instructions.
12. Do not leave your headset in the charger if it generates an odour and/or heat, changes color and/or shape, or causes any other abnormality. Contact your service center.
13. Avoid exposing your headset to salty or chloride environments (e.g., the ocean, beach, indoor swimming pool, etc.).

Important safety information for your Desktop Charger and AC Adapter

CAUTION: ELECTRIC SHOCK HAZARD

1. Please read these instructions and keep them handy. Follow all instructions and obey all warnings contained herein.
2. Warning: To reduce the risk of electric shock, do not expose these devices to water, rain, or other moisture.
3. Warning: To avoid the risk of electric shock, do not open the Desktop Charger or AC Adapter.
4. Install according to the manufacturer's instructions.
5. Do not use the devices near water. Clean only with a dry cloth after first unplugging the devices.
6. Do not install near heat sources such as electric or gas heaters, radiators, stoves, amplifiers, or other equipment that produces heat.
7. Protect the power cord and plugs from being stepped upon, cut, pinched or otherwise damaged.
8. Use only the power adapter provided by Cellpoint Connect.
9. When not in use for extended periods or during electrical storms, unplug these devices.
10. Use only accessories specified by the manufacturer.
11. Disconnect the devices from the mains by pulling the power plug. The wall outlet should be easily accessible and in proximity to the devices.
12. Return these devices to an authorized service center if they have been damaged in any way or do not operate properly.

CE Declaration of Conformity

Cellpoint Connect ApS located at Billedvej 4, DK-2100 Copenhagen, Denmark, Hereby, declares that this Flamingo headset type FLA-01 is in compliance with the essential requirements and other relevant provisions of EU Directive 1999/5/EC (CE 0581).

FCC statement

This device complies with Part 15 of the FCC Rules:

Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

10) Limited Warranty

Cellpoint Connect ApS warrants that the enclosed product is free from substantial defects in material and workmanship for a period of one year from the date of original purchase. This warranty is restricted to the original purchaser.

Cellpoint Connect's liability is limited to either repairing or replacing the product, or refunding the purchase price. You must submit the original dated sales receipt for the product for a refund or replacement to take place. Products that become defective due to abuse, misuse, accident or unauthorized changes, repairs or disassembly are not qualified for a refund or replacement.

Cellpoint Connect is not liable for the costs of obtaining or supplying substitute products or for the loss of profits, information, or data, or any direct or indirect damages from the use of or the inability to use your Cellpoint Connect product, including in the event that Cellpoint Connect has been made aware of the possibility of such damages.

Cellpoint Connect's liability shall never exceed the amount paid for your Cellpoint Connect product. Applicable law in the jurisdiction in question may supersede aspects of this Limited Warranty.