


MF915 Guide

GETTING TO KNOW YOUR MOBILE HOTSPOT

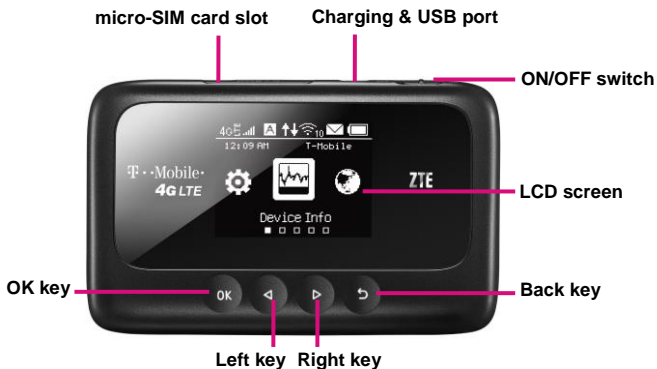


Part	Description
micro-SIM card slot	Install the micro-SIM card.
Charging/USB port	<ul style="list-style-type: none">• Charge your device.• Connect the client to your MF915 via USB cable.
ON/OFF switch	Slide it to turn on or off your MF915.
LCD screen	It shows the signal type, signal strength, battery, Wi-Fi, etc.
OK key	<ul style="list-style-type: none">• Press to enter or select an item.

	<ul style="list-style-type: none"> ● Press and hold to unlock or lock the LCD screen.
Left key	Check the on-screen menu from right to left.
Right key	Check the on-screen menu from left to right.
Back key	Go back to the previous screen.

Reset point













Insert a pin and hold it for 3 seconds to reset your device.










Coverage not available in some areas. Please see coverage details at T-Mobile.com. Device and screen images are simulated. Capable device is required to achieve 4G speeds.

INDICATORS




	Indicates that your Mobile HotSpot is on T-Mobile's 2G network.		Indicates that your Mobile HotSpot is connected to the Internet.
	Indicates that your Mobile HotSpot is on T-Mobile's 3G network.		Wi-Fi status and number of the connected users.
	Indicates that your Mobile HotSpot is on T-Mobile's 4G network.		Battery power indication.
	Indicates that your Mobile HotSpot is on T-Mobile's 4G LTE network.		Indicates that the battery power is full.
	Connected to the Internet automatically.		Shows and checks the device information.
	Connected to the Internet manually.		Shows and checks the data connection information.

	There is no signal.		Shows and checks the clients connected to your device.
	Network signal strength.		Set the WPS function.
	There are new messages or unread messages.		Set your device.
	The message inbox is full.		

SET UP YOUR MOBILE HOTSPOT

1. Lift SIM cover and Install SIM card.

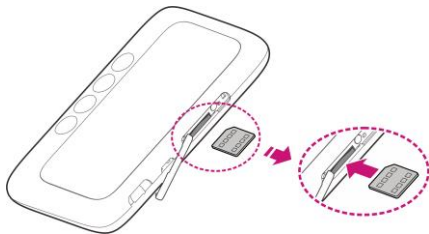


2. Power on.

Slide to turn on



Charge your Mobile HotSpot

You can charge your Mobile HotSpot using the charger included in the box or by plugging it into your computer using the USB cable.

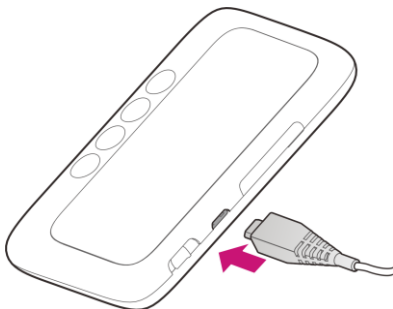

CONNECT & GO

Connect your Wi-Fi device to your Mobile HotSpot

1. Power on your Mobile HotSpot.
2. On your computer or other Wi-Fi enabled device, search for available Wi-Fi Networks and select the default Network Name (SSID) for your Mobile HotSpot.

3. Enter the default password and click **OK**.

Note:

- It may take up to a minute to establish a connection
- The default Network Name (SSID) and password will appear in the screen on your Mobile HotSpot

4. Open a web browser and go to www.T-Mobile.com/ConnectMe

- Simply follow the on-screen instructions to set up your No Annual Contract data service.

Note: Service or use is your agreement to T-Mobile's Terms and Conditions.

T-Mobile requires ARBITRATION of disputes UNLESS YOU OPT-OUT WITHIN 30 DAYS OF ACTIVATION. See T-Mobile's Terms and Conditions for details at

www.T-Mobile.com/terms-conditions.

MANAGING YOUR MOBILE HOTSPOT

[illegible]

Access T-Mobile 4G Mobile Hotspot


You can access your 4G Mobile Hotspot device information, using an Internet browser.

To access using a browser, do the following:

1. Connect to your hotspot device via Wi-Fi using the network connection software on your computer. Provide the Wi-Fi network password, if requested.
2. Open a browser and enter <http://mobile.hotspot> in the address bar. The T-Mobile 4G Mobile Hotspot login screen appears.
3. Enter your **Password** in the field provided. The default password is **admin**.

4. Select the **Save Password** checkbox if you wish to bypass the login screen in the future.
5. Click **Login**. If you entered the correct password, the Dashboard screen appears.

To access via USB cable, do the following:

1. Connect your hotspot device to the PC with the USB cable.
2. Power on your device.
3. The OS detects and recognizes new hardware and finishes the installation automatically. After successful installation, the icon  will appear on your desktop.

NOTE: If the system does not launch installation automatically, you can run the installation program in path of **My Computer > Mobile Hotspot**.

4. Double-click the icon to open the login screen.
5. Enter your **Password** in the field provided. The default password is **admin**.
6. Select the **Save Password** checkbox if you wish to bypass the login screen in the future.
7. Click **Login**. If you entered the correct password, the Dashboard screen appears.

Change Mobile Hotspot Admin Password

1. Access <http://mobile.hotspot>.
2. Click **Settings** in the navigation area.

3. Select the **Device Settings** tab.
4. Follow the steps under Account Management to update your **Password**.
5. Click **Apply**. If everything is entered correctly, the Admin Password Changed dialog appears indicating the password was successfully changed.

Change Mobile Hotspot Network Name (SSID)

1. Access <http://mobile.hotspot>.
2. Click **Settings** in the navigation.
3. Select the **Wi-Fi Settings** tab.
4. Change the name that appears in the **Network Name (SSID)** field in the Wi-Fi Settings area.
5. Select or deselect the **Broadcast Network Name (SSID)** checkbox to enable or disable broadcasting the hotspot's Network Name (SSID).
6. Click **Apply** to save your changes on the Wi-Fi Settings tab of the Settings screen.

Change Mobile Hotspot Wi-Fi Password

1. Access <http://mobile.hotspot>.
2. Click **Settings** in the navigation area.
3. Select the **Wi-Fi Settings** tab.

4. Change the value that appears in the **Password** field in the Wi-Fi Settings area.
5. Click **Apply** to save your changes on the Wi-Fi Settings tab of the Settings screen.

ADDITIONAL INFORMATION

Capable device(s) required to achieve 4G speeds.

Wi-Fi: Capable devices required. Devices using wireless connections may be vulnerable to unauthorized attempts to access data and software stored on the device. Plan data allotment applies to use by connected devices sharing Wi-Fi. Use of connected devices subject to T-Mobile Terms and Conditions.

Mobile Internet Postpaid Data Passes: Qualifying postpaid plan and qualifying credit required. SIM Starter Kit may be required. Passes do not include voice or messaging. Pass charges will appear on bill statement for effective date of the pass. May purchase one add'l pass in same category prior to expiration of active pass. Partial megabytes rounded up. Full speeds available up to specified data allotment then slowed to up to 2G speeds. No domestic or international roaming, unless Pass is specifically for roaming. Service available for time/usage amount provided by pass. For time period, a day is 12 am to 11:59 pm Pacific Time. Usage applied first to passes, next to any applicable promotional data, then monthly plan allotment.


Mobile Internet Pay In Advance Data Passes: Limited time offer; subject to change. Not all features available on all devices. SIM starter kit may be required. Service available for time period and/or usage amount provided by Pass. For time period, a day is 12:00 am to 11:59 pm, Pacific Time. Usage rounded up to the nearest MB each session. Only one Pass may be active at a time. Account suspended after 365 days of inactivity. Data only; does not include voice, messaging or Wi-Fi services. Domestic only; no roaming. Usage applied first to on demand passes, next to free data, then monthly Mobile Internet allotment.

Device and screen images simulated. **Coverage:** Service not available in some areas. See brochures and **Terms and Conditions (including arbitration provision)** at www.T-Mobile.com, for additional information, coverage maps, and restrictions and details. T-Mobile and the magenta color are registered trademarks of Deutsche Telekom AG. © 2014 T-Mobile USA, Inc.

ADDITIONAL HELP

- T-Mobile Mobile HotSpot URL: <http://mobile.hotspot/>

or IP address: 192.168.0.1.

- From <http://mobile.hotspot>, click  for help.
- Get in touch, free of charge: Just dial 611 from your T-Mobile phone or call 1-877-453-1304. Customer Care representatives are available from 3 a.m. to 10 p.m. Pacific time, daily. Automated account help is available 24 hours a day, 7 days a week.