

maxfun®

Wireless Stereo Headset Portable Stereo Transmitter

Operating Instructions



MX-BT30 / MX-TM3

©2007 TOHO SUPPLY CO., LTD.

WARNING

These operating instructions include the important operating and handling precautions. Read these instructions carefully to ensure that you will operate the unit correctly.

To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.

To reduce the risk of electrical shock, do not open the cabinet. Refer servicing to qualified personnel only.

Do not install the appliance in a confined space, such as a bookcase or built-in cabinet.

To reduce the risk of fire, do not cover the ventilation of the apparatus with newspapers, tablecloths, curtains, etc. And do not place lighted candles on the apparatus.

To reduce the risk of fire or electric shock, do not place objects filled with liquids, such as vases, on the apparatus and use only the supplied USB cable when you charge apparatus.

To reduce the risk of fire, electric shock or injury, stop using this unit if you experience abnormal odor, heat generation, change in color, or change in shape while using or charging the unit.

Use with caution near the electric devices such as hearing aids, implantable cardioverter pacemaker, implantable cardioverter defibrillator, other medical electric devices, fire alarm, automatic door, and other automatic control devices. It may cause errors by the signal.

CAUTION

The user is cautioned that changes and modifications made to the equipment without the approval of manufacturer could void the user's authority to operate this equipment.

Notes: This equipment has been tested and found to comply with the limits for a Class B Digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or on experienced radio/TV technician for help

FCC Warning

- This device complies with part 15 of the FCC Rules, Operation is subject to the
- Following two conditions:
 - (1) This device may not cause harmful interference,
 - And (2) this device must accept any interference received, including interference
- Received, including interference that may cause undesired operation.

Must add FCC NOTE:

THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

Welcome!

Thank you for purchasing MAXFUN wireless stereo headset and transmitter.
This unit uses BLUETOOTH wireless technology.

Key Features

- **Universal compatibility with all BLUETOOTH enabled phones and music player**
- **Faster Bluetooth version 2.0 for pairing and connection**
Improved call quality and lower power consumption.
- **Supports Bluetooth Hands-free profiles**
- **Enjoy BLUETOOTH technology using MAXFUN transmitter for audio device**
- **30mm diameter speaker for the highest quality sound in its class**
- **Integrated track forward/backward and volume up/down buttons**
- **Multi-function button controls your phone calls**
- **Ergonomic design combines light-weight and comfort**
- **Runs on rechargeable Lithium Ion Polymer battery (included)**
A Lithium Ion Polymer battery is recyclable, visit www.rbrc.org for information.

What is BLUETOOTH technology?

BLUETOOTH wireless technology is a short-range wireless technology that enables wireless data communication between digital devices, such as a mobile phone, computer, printer or digital camera. BLUETOOTH wireless technology operates within a range of about 10 meters (about 30 feet). Connecting two devices as necessary is common, but some devices can be connected to multiple devices at the same time. You do not need to use a cable for connection since BLUETOOTH technology is a wireless technology, nor is it necessary for the devices to face one another, such is the case with infrared technology. For example, you can use such a device in a bag or pocket. BLUETOOTH technology is an international standard supported by millions of companies all over the world, and employed by various companies worldwide.

Communication System and Compatible BLUETOOTH Profiles of this unit

Profile is standardization of the function for each BLUETOOTH device specification.
This unit supports the following BLUETOOTH version and profiles:

Compatible BLUETOOTH Profiles:

- A2DP (Advanced Audio Distribution Profile): Transmitting or receiving audio content of high-quality.
 - AVRCP (Audio Video Remote Control Profile): Controlling A/V equipment; pausing, stopping, playback, volume control, etc.
 - HSP (Headset Profile)*: Talking on the phone/Operating the phone.
 - HFP (Hands-free Profile)*: Talking on the phone/Operating the phone by hands-free.
- * When you use a BLUETOOTH mobile phone supported by both HFP (Hands-free Profile) and HSP (Headset Profile), set to HFP.

Note

In order to use the BLUETOOTH function, the BLUETOOTH device to be connected requires the same profile as the unit's.
Devices may vary in function depending on their specifications even if the same profile exists.

BLUETOOTH function


Pairing

BLUETOOTH devices need to be registered with each other beforehand. This registration is called "Pairing." Once BLUETOOTH devices are paired, there is no need for pairing again.

BLUETOOTH mobile phone, etc.



Wireless Stereo Headset




→ SEE PAGE 7

Listening to music

Talking on the phone

BLUETOOTH connection

Operate the BLUETOOTH device to make the BLUETOOTH connection.



A2DP
Connection

→ SEE PAGE 9

BLUETOOTH connection

When the unit is turned on, BLUETOOTH connection will be made automatically.




HFP HSP
Connection

→ SEE PAGE 10

Listening to music

You can listen to music played on the BLUETOOTH device.

You can control play, pause, fast forward and rewind from the unit.




Music

→ SEE PAGE 9

Talking on the phone


You can make and receive a call by operating this unit.



Voice

→ SEE PAGE 10-11

Location and Function of Parts

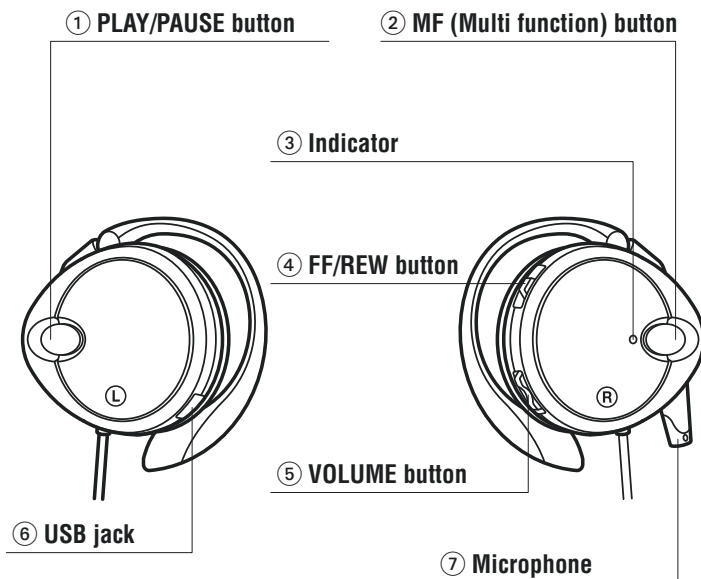


- ① **PLAY/PAUSE button**
Switches between playing music and pause.
- ② **MF (Multi function) button**
Controls various call functions.
Power ON/OFF
- ③ **Indicator**
Indicates the power status of the unit.
- ④ **FF/REW Button**
Use for fast forwarding and rewinding music.
- ⑤ **Volume Button**
Controls the volume.
- ⑥ **USB jack**
Use for USB cable for charging.
- ⑦ **Microphone**

Charging the Unit


This unit contains a rechargeable Lithium-Ion battery which should be charged before using for the first time.

1. Connect the supplied USB cable to the unit and computer.

Rechargeable battery lasts longer if it is charged about 4 hours the first time.

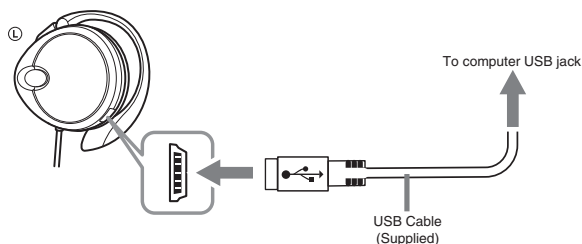

2. Charging starts. Make sure the indicator (orange) lights up when charging.



Charging is completed in about 150 minutes and the indicator (green) lights up.
Time required for empty battery to recharge.

Charging while the unit is turned on, the unit will be turned off automatically.

Usage hours

Communication time (including music playback time) up to 10 hours.
Standby time up to 100 hours.

When the battery is almost empty

The indicator (orange) flashes at 4 seconds interval, and a beep sounds 3 times at 30 seconds interval.

The unit will turn off automatically when the battery becomes empty.

Caution

Charging may not complete if ambient temperature exceeds the range of 0°C ~ 40°C (32°F ~ 104°F).

In this case, charge again within the above-mentioned temperature range. If the problem persists, consult the store you purchased this unit or contact the "Customer Service Center".

Note

If the battery is not used for a long time, battery may be quickly depleted. However, after a few recharges, battery life will improve.

Pairing


What is pairing?

BLUETOOTH devices need to be registered with each other beforehand. This registration is called "Pairing." Once BLUETOOTH devices are paired, there is no need for pairing again, except in the following cases.

- When pairing information is deleted after repair, etc.
- This unit can be paired with up to 8 devices; if a new device is paired after 8 devices have been paired, the device whose latest connection time is the oldest among the 8 paired devices is replaced by the new one.
- When all pairing information of the unit was deleted by another pairing device.

Procedures of pairing?

1. Place the connecting device within 1 m (3 ft.) of this unit.
2. Press and hold the MF button for 6 seconds or more to standby for pairing while the unit is turned off.



After about 3 seconds, power is turned on and the indicator (orange) and the indicator (green) flash alternately. Release the MF button when the indicator flashed. If the pairing is not established within about 5 minutes, pairing mode will be cancelled and this unit will turn off. In this case, start over from step 1.

3. Perform pairing procedure on the connecting device to detect this unit. The list of detected devices appears on the display of the connecting device. This unit is displayed as "MX-BT30." If "MX-BT30" is not displayed, repeat from step 1.

4. Select "MX-BT30" on the display of the connecting device.

5. If Passcode input is required on the display of a connecting device, input [0000].

6. Start the BLUETOOTH connection from the BLUETOOTH device. This unit memorizes the device as the latest connected device. Some BLUETOOTH devices may connect with the unit automatically when pairing is complete.


PAIRING WITH MULTIPLE DEVICES

To pair with other BLUETOOTH devices, repeat step 1 to 5 for each device.

If this unit was paired with more than two BLUETOOTH mobile phones, the mobile phone whose latest connection time will be paired. If the BLUETOOTH mobile phone in-use needs to be replaced, follow the pairing step 3 to 5 with the BLUETOOTH mobile phone in-use.

Refer to the operating instructions supplied with the BLUETOOTH mobile phone on how to operate it.

Wearing the headset

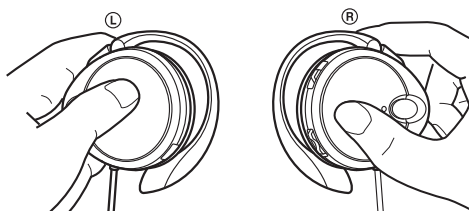


Note

Do not pull out the neck cord forcibly.

Hook the hanger section around the top of ear and ensure that it is covered by the ear pad.

Wear the housing marked R in your right ear and the one marked L in your left ear.

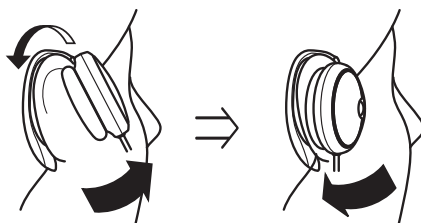

Make sure that you wear the headset firmly.

Listening to music


Check the following before operating the unit.

1. The BLUETOOTH device is turned on.
2. Pairing of this unit and the BLUETOOTH device is complete.
3. The BLUETOOTH device supports the A2DP.

1. Press and hold the MF button for about 3 seconds while the unit is turned off.

The indicator (green) lights for 3 seconds and the unit is turned on.

If you press and hold the MF button for more than 6 seconds, pairing mode is initiated.



2. Make the BLUETOOTH connection (A2DP) from a BLUETOOTH device to this unit.

Refer to the operating instructions supplied with the BLUETOOTH device on how to operate it.

3. Start playback on the BLUETOOTH device.

BLUETOOTH connection of A2DP can also be operated by pressing the MF button from this unit to the BLUETOOTH device, but it cannot be done when making a call on this unit, even if you press the FF/REW, PLAY/PAUSE button.

Note

When you play music by connecting the unit to a BLUETOOTH device using HSP, sound quality will not be the best. For better sound, change the BLUETOOTH connection to A2DP on BLUETOOTH device.

TO ADJUST THE VOLUME

Press the Volume +/- button while listening to the music.

Volume level for calling and listening to music can be set independently.

TO STOP USE

1. Terminate BLUETOOTH connection by operating the BLUETOOTH device.

2. Press and hold the MF button of this unit for about 3 seconds to turn off.

The indicator (orange) lights up about 3 seconds, and the unit turns off.

Controlling the AVRCP

If the BLUETOOTH audio device supports AVRCP connected with this unit, you maybe able to control by using MF buttons.


Notes

Refer to the operating instructions supplied with the connecting device on how to operate it.

Calling

Check the following before operating the unit.

1. The BLUETOOTH function is active on the mobile phone.
2. Pairing of this unit and the BLUETOOTH mobile phone is complete.

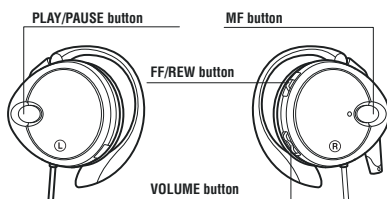

1. Press and hold the MF button for about 3 seconds while the unit is turned off.

The indicator (green) lights for 3 seconds, the unit turns on. The unit automatically connects to the last BLUETOOTH mobile phone that was used.

This unit will stop trying to connect to the BLUETOOTH mobile phone after one minute. In such case, press the MF button to try to connect again.

If you press and hold the MF button for more than 6 seconds, the pairing mode is entered.

When this unit does not connect to a BLUETOOTH mobile phone automatically.

Follow the procedure in "Pairing with multiple devices (page 7)" when you want to connect the unit to a different BLUETOOTH mobile phone used the last time.

Notes

When listening to music by operating this unit connected using A2DP to a BLUETOOTH mobile phone, change the connection to HFP or HSP by operating the BLUETOOTH mobile phone. This cannot be done with the MF button of this unit.

TO CALL

1. Use the buttons on your mobile phone when making a call.

If no sound is heard through this unit, press the MF button.

You can call in the following way, depending on the BLUETOOTH mobile phone. Refer to the manual supplied with your mobile phone for operating details.

- You can use re-dial feature pressing MF button twice to call a last number you dialed.

TO RECEIVE A CALL

1. Press the MF button on the unit.

The ring tone differs in the following ways, depending on your mobile phone.

- Ring tone set on the unit.
- Ring tone set on the mobile phone.
- Ring tone set on the mobile phone only for BLUETOOTH connection.

Note

If you pressed the call button on the BLUETOOTH mobile phone, some BLUETOOTH mobile phones may have handset use priority. In this case, to talk with the unit press the MF button once, or by operating the BLUETOOTH mobile phone. For details, refer to the manual supplied with your BLUETOOTH mobile phone.



TO ADJUST THE VOLUME

1. Press the Volume +/- button while calling.

You cannot adjust the volume when not communicating.

Volume level for calling and listening to music can be set independently.

TO STOP USE

1. Terminate BLUETOOTH connection by the BLUETOOTH mobile phone.

2. Press and hold the MF button for about 3 seconds to turn off the power.

The indicator (orange) lights up for 3 seconds, and the unit turns off.

CONTROLLING THE BLUETOOTH MOBILE PHONE – HFP, HSP

HFP or HSP is used for a BLUETOOTH mobile phone. Supported BLUETOOTH profiles and functions vary depending on the BLUETOOTH mobile phone. Refer to the operating instructions supplied with your BLUETOOTH mobile phone.

Calling while playing back music

If the BLUETOOTH connection is active with the mobile phone, you can switch the unit to call even when listening to music.

TO CALL WHILE PLAYING BACK MUSIC

1. Press the MF button while playing back music, or operate your BLUETOOTH mobile phone.

If no sound is heard through this unit, press the MF button once.

TO RECEIVE A CALL WHILE PLAYING BACK MUSIC

The sound through the unit changes to a ring tone automatically.

1. Press the MF button and talk.

2. After finishing the call, this unit is switched back to music playback.

IF THE SOUND DOES NOT CHANGE TO A RING TONE AUTOMATICALLY

1. Stop music playback.

2. When ringing, press the MF button and talk.



Troubleshooting

If you run into any problems using this unit, use the following checklist. Should any problem persist, Contact the place of purchase or “Customer Support Center.”

The unit is not turned on

- ➡ Battery of the unit might be low. Charge the battery of the unit.

Cannot charge the battery

- ➡ Ensure the computer is turned on. You cannot charge the battery if the computer is turned off.
- ➡ Ensure that the USB cable is plugged in correctly.

Pairing cannot be done

- ➡ Bring this unit and the BLUETOOTH device closer together.

Cannot make the BLUETOOTH connection

- ➡ Check that this unit is turned on.
- ➡ Check that the BLUETOOTH device is turned on and the BLUETOOTH function is on.
- ➡ Connection with the BLUETOOTH device may not be memorized on this unit. Perform pairing procedure again.
- ➡ The BLUETOOTH connection may be terminated. Make the BLUETOOTH connection again.

Distorted sound

- ➡ Ensure that this unit is not receiving interference from a 2.4 GHz wireless device such as radio wave, or microwave oven.

Echo sound


- ➡ Lower the volume.
- ➡ Ensure that this unit is not receiving interference from a 2.4 GHz wireless device such as radio wave, or microwave oven.

Welcome!


Thank you for purchasing MAXFUN Portable Stereo Transmitter.
This unit uses BLUETOOTH wireless technology.

- You can enjoy wireless music from your BLUETOOTH device (i.e., headset) capable of transmitting audio signal by connecting this unit to any portable music player, audio equipment or computer with a 3.5 mm plug.
- You can charge the unit using the USB cable.
- For details on BLUETOOTH technology, see page 3.

Listening to music

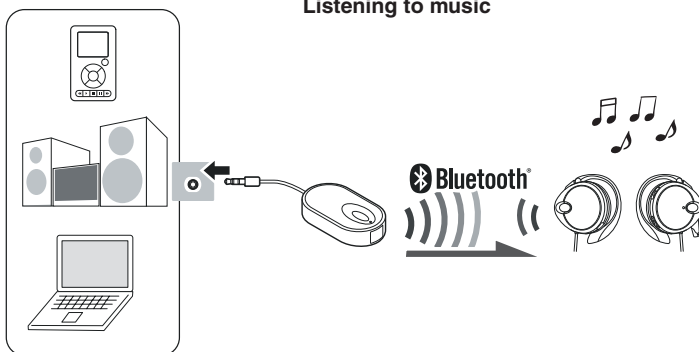

Location and Function of Parts

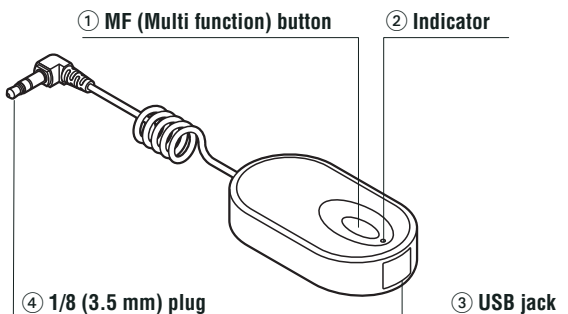


- ① **MF (Multi function) button**
Controls various functions.
- ② **Indicator**
Indicates the power status of the unit.
- ③ **USB jack**
Use for USB cable for charging.
- ④ **1/8 (3.5 mm) plug**
Use for connecting to audio device.

Charging the Unit

This unit contains a rechargeable Lithium-Ion battery which should be charged before using for the first time.

1. Connect the supplied USB cable to the unit and computer.

Rechargeable battery lasts longer if it is charged about 4 hours the first time.

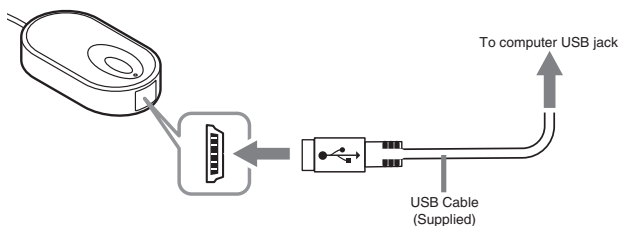

2. Charging starts. Make sure the indicator (orange) lights up when charging.



Charging is completed in about 150 minutes and the indicator (green) lights up.
Time required for empty battery to recharge.

Charging while the unit is turned on, the unit will be turned off automatically.

Usage hours

Communication time (including music playback time) up to 10 hours
Standby time up to 100 hours.

When the battery is almost empty

The indicator (orange) flashes at 4 seconds interval when standby mode.
The indicator (orange) flashes at 2 seconds interval when communication mode.
The unit will turn off automatically when the battery becomes empty.

Caution

Charging may not complete if ambient temperature exceeds the range of 0°C ~ 40°C (32°F ~ 104°F).

In this case, charge again within the above-mentioned temperature range. If the problem persists, consult the store you purchased this unit or contact the "Customer Service Center".

Note

If the battery is not used for a long time, battery may be quickly depleted. However, after a few recharges, battery life will improve.

Pairing

What is pairing?

BLUETOOTH devices need to be registered with each other beforehand. This registration is called "Pairing." Once BLUETOOTH devices are paired, there is no need for pairing again, except in the following cases.


- When pairing information is deleted after repair, etc.
- This unit can be paired with up to 8 devices; if a new device is paired after 8 devices have been paired, the device whose latest connection time is the oldest among the 8 paired devices is replaced by the new one.
- When all pairing information of the unit was deleted by another pairing device.

Procedures of pairing?

1. Place the BLUETOOTH device and BLUETOOTH transmitter within 1 m (3 ft.).

2. Make sure BLUETOOTH transmitter and BLUETOOTH device are off.

3. Press and hold MF button for 6 seconds until the BLUETOOTH transmitter indicator alternately flash green & orange. Release the MF button when the indicator flashed.



4. BLUETOOTH transmitter will search BLUETOOTH device and perform pairing automatically.

BLUETOOTH transmitter orange indicator will flash 3 times and turn off if pairing is not established for 2 minutes. In this case, start over from step 1.

PAIRING WITH MULTIPLE DEVICES

To pair with other BLUETOOTH devices, repeat step 1 to 4 for each device.

When pairing with a BLUETOOTH device that cannot display a list of detected devices or has no display.

You may pair the device by setting both this unit and the connecting device to pairing mode. For details, refer to the operating instructions supplied with the connecting device.


Listening to music

Check the following before operating the unit.

1. The BLUETOOTH device is turned on.
2. Pairing of this unit and the BLUETOOTH device is complete.
3. The BLUETOOTH device supports the A2DP.

1. Connect the audio plug of this unit to the headset terminal of the audio equipment.

Make sure you connect to the headset terminal and not the LINE OUT terminal otherwise the sound will be distorted.



2. Turn on the audio equipment.

3. Press and hold the MF button for about 3 seconds while the unit is turned off.

The indicator (green) lights for 3 second and the unit is turned on.

If you press and hold the MF button for more than 6 seconds, pairing mode will be initiated. Do not place any other BLUETOOTH device near this unit when you connect the unit to the receiving BLUETOOTH device, otherwise the connection may not be successful. Do not place any other BLUETOOTH device near this unit when you connect the unit to the receiving BLUETOOTH device, otherwise the connection may not be successful.

4. Start playback the audio equipment.

TO STOP USE

1. Terminate BLUETOOTH connection by turning off the receiving BLUETOOTH device.

2. Press and hold the MF button of this unit for about 3 seconds to turn off.

The indicator (orange) lights up about 3 seconds, and the unit turns off.

When you finish playing music, the BLUETOOTH connection may terminate automatically, depending on the BLUETOOTH device.

Notes

Refer to the operating instructions supplied with the connecting device on how to operate it.

Troubleshooting

If you run into any problems using this unit, use the following checklist. Should any problem persist, contact the place of purchase or “Customer Support Center.”

The unit is not turned on

- ➡ Battery of the unit might be low. Charge the battery of the unit.

Cannot charge the battery

- ➡ Ensure the computer is turned on. You cannot charge the battery if the computer is turned off.
- ➡ Ensure that USB cable is plugged in correctly.

The power to the headset turns off

- ➡ Ensure that the orange indicator is flashing. Battery of the unit might be low. Charge the battery of the unit.

Pairing cannot be done

- ➡ Bring this unit and the BLUETOOTH device closer together.

Cannot make the BLUETOOTH connection

- ➡ Check that this unit is turned on.
- ➡ Check that the BLUETOOTH device is turned on and the BLUETOOTH function is on.
- ➡ Connection with the BLUETOOTH device may not be memorized on this unit. Perform pairing procedure again.
- ➡ The BLUETOOTH connection may be terminated. Make the BLUETOOTH connection again.

Distorted sound

- ➡ The distance between this unit and the BLUETOOTH device is beyond the communication range, or there is an obstacle between them. Bring this unit and the BLUETOOTH device closer together.
- ➡ Ensure that this unit is not receiving interference from a 2.4 GHz wireless device such as radio wave, or microwave oven.

Echo sound

- ➡ Lower the volume.
- ➡ Ensure that this unit is not receiving interference from a 2.4 GHz wireless device such as radio wave, or microwave oven.



Precautions

On BLUETOOTH communication

- BLUETOOTH wireless technology operates within a range of about 10 meters (about 30 feet). Maximum communication range may vary depending on obstacles (metal, wall, etc.) or electromagnetic environment.
- The antenna of this unit is built into the housing for the right ear. The sensitivity of BLUETOOTH communication will improve by placing a connected BLUETOOTH device on your right side.
- The following conditions may affect the sensitivity of BLUETOOTH communication.
 - There is an obstacle such as metal, or wall between this unit and BLUETOOTH device.
 - A device using 2.4 GHz frequency, such as a wireless LAN device, cordless telephone, or microwave oven, is in use near this unit.
- BLUETOOTH devices and wireless LAN (IEEE802.11b/g) use the same frequency, microwave interference may occur and resulting in communication speed deterioration, noise, or invalid connection if this unit is used near a wireless LAN device. In such as case, perform the following.
 - Use this unit at least 10 m (about 30 ft) away from the wireless LAN device.
 - If this unit is used within 10 m (about 30 ft) of a wireless LAN device, turn off the wireless LAN device.
 - Install this unit and BLUETOOTH device as near to each other as possible.
- Microwaves emitting from a BLUETOOTH device may affect the operation of electronic medical devices. Turn off this unit and other BLUETOOTH devices in the following locations, as it may cause an accident.
 - where inflammable gas is present, in a hospital, train, airplane, or a gas station.
 - near automatic doors or a fire alarm.
- This unit supports security capabilities that comply with the BLUETOOTH standard to provide a secure connection when the BLUETOOTH wireless technology is used, but security may not be enough depending on the setting. Use with caution when communicating using BLUETOOTH wireless technology.
- We do not take any responsibility for the leakage of information during BLUETOOTH communication.
- Connection with all BLUETOOTH devices cannot be guaranteed.
 - A device featuring BLUETOOTH function is required to conform to the BLUETOOTH standard specified by BLUETOOTH SIG authenticated.
 - Even if the connected device conforms to the above mentioned BLUETOOTH standard, some devices may not be connected or work properly, depending on the features or specifications of the device.
 - While talking on the phone hands-free, noise may occur, depending on the device or communication environment.
- Depending on the device to be connected, it may require some time to start communication.

On the supplied USB cable for charging

- Use the USB cable supplied with this unit. Do not use any other USB cable, it may damage the unit.
- If you are not going to use this unit for a long time, unplug USB cable from unit.

Others

- Do not place this unit in a place exposed to humidity, dust, soot or steam, subject to direct sunlight, or in a car waiting at a traffic signal. It may cause a malfunction.
- Using the BLUETOOTH device may not function on mobile phones, depending on radio wave conditions and location where the equipment is being used.
- If you experience discomfort after using the BLUETOOTH device, stop using the BLUETOOTH device immediately. Should any problem persist, consult your nearest dealer or customer support center.
- Listening with this unit at high volume may affect your hearing. For traffic safety, do not use this unit while driving or cycling.
- Do not put weight or pressure on this unit as it may cause the unit to deform during long storage.
- If you have any questions or problems concerning this unit that are not covered in this manual, please consult your nearest dealer customer support center.



Specification

Wireless Stereo Headset MX-BT30

General

Communication System

BLUETOOTH Specification version 2.0

Output

BLUETOOTH Specification Power Class 2

Maximum communication range

10 meters (30 ft)

Frequency band

2.4GHz band (2.402GHz~2.480GHz)

Modulation method

FHSS

Compatible BLUETOOTH Profiles

A2DP/AVRCP/HSP/HFP

A2DP (Advanced Audio Distribution Profile): Transmitting or receiving high-quality audio contents.

AVRCP (Audio Video Remote Control Profile): Controlling A/V equipment including playback, pause, stop, volume control, and etc.

HSP (Headset Profile): Talking on the phone/ Operating the mobile phone.

HFP(Hands-free Profile): Hands-free Calling/

Operating the mobile phone.

Supplied accessory

2 x USB cable, Pouch

Headset

Power source

DC3.7V Built-in lithium-ion rechargeable battery

Mass

60g

Receiver

Type

Open air, dynamic

Driver unit

30 mm dome type

Reproduction frequency range

20-20,000Hz

Microphone

Type

Electret-Condenser

Effective frequency range

250Hz~3500Hz

Portable Stereo Transmitter MX-TM3

General

Communication System

BLUETOOTH Specification version 2.0

Output

BLUETOOTH Specification Power Class 2

Maximum communication range

10 meters (30 ft)

Frequency band

2.4GHz band (2.402GHz~2.480GHz)

Modulation method

FHSS

Compatible BLUETOOTH Profiles

A2DP

A2DP (Advanced Audio Distribution Profile): Transmitting or receiving high-quality audio contents.

Voice encoder

Standard 3.5mm rolled gold stereo mini plug

Input impedance

1K Ω

Power source

DC3.7V Built-in lithium-ion rechargeable battery

Mass

20g



maxfun[®]

MX-BT30 / MX-TM3

MAXFUN PRODUCT, LIMITED WARRANTY

What does this warranty cover?

This warranty covers any defects or malfunctions in your new MX-BT30 / MX-TM3.

How long does the coverage last?

This warranty lasts for one year from the date you purchase your MX-BT30 / MX-TM3.
(Coverage terminates if you sell or otherwise transfer the MX-BT30 / MX-TM3)

What will MAXFUN do?

MAXFUN will repair or replace any defective or malfunctioning part at no charge.
You must pay any shipping and packaging.

What does this warranty not cover?

Any problem that is caused by abuse, misuse, or natural disasters (such as a flood) are not covered. Also, consequential and incidental damages are not recoverable under this warranty. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

How do you get services?

In order to be eligible for service under this warranty you **MUST** get a warranty-registration code by putting required information on our website at www.maxfunusa.com and send MX-BT30 / MX-TM3 with a \$5.00 check or money order for return shipping and handling in a durable postage paid package with the warranty-registration code clearly written to:

MAXFUN Service Center
1590 Touhy Ave.,
Elk Grove Village, IL 60007
877 629-3862 (877MAXFUN2)

How does state law apply?

This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

