




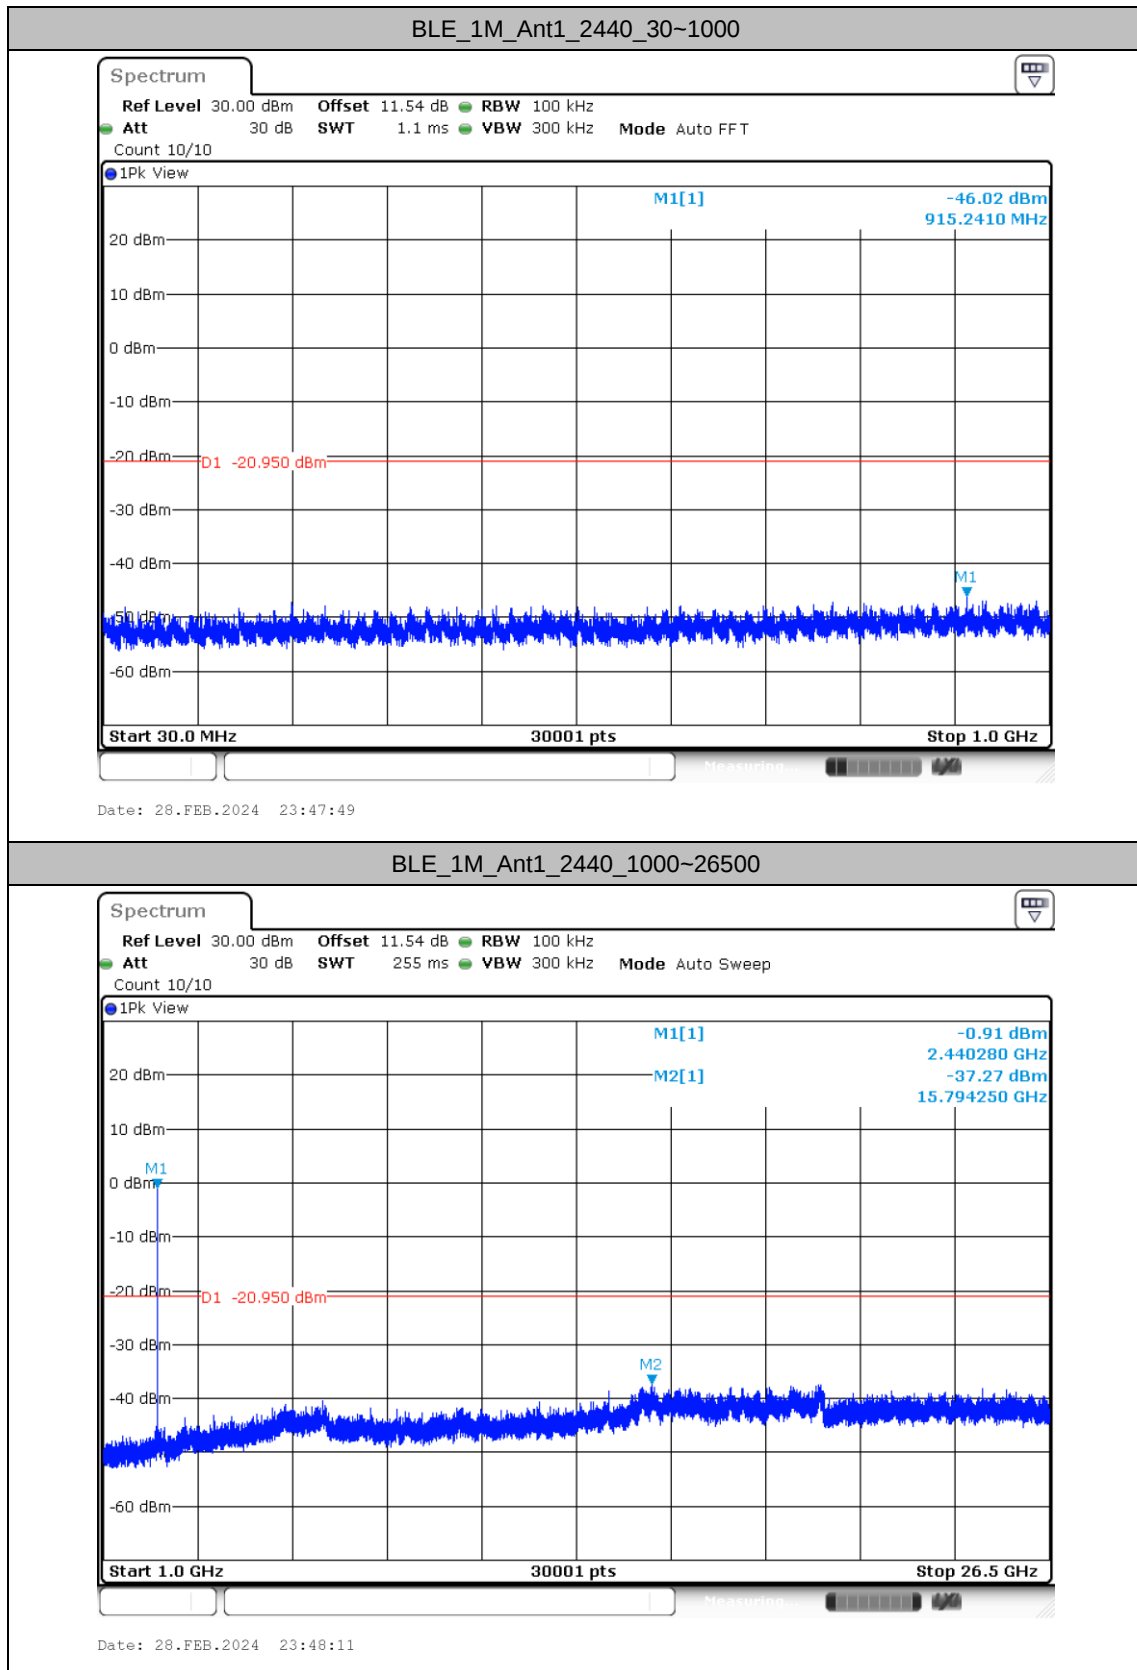


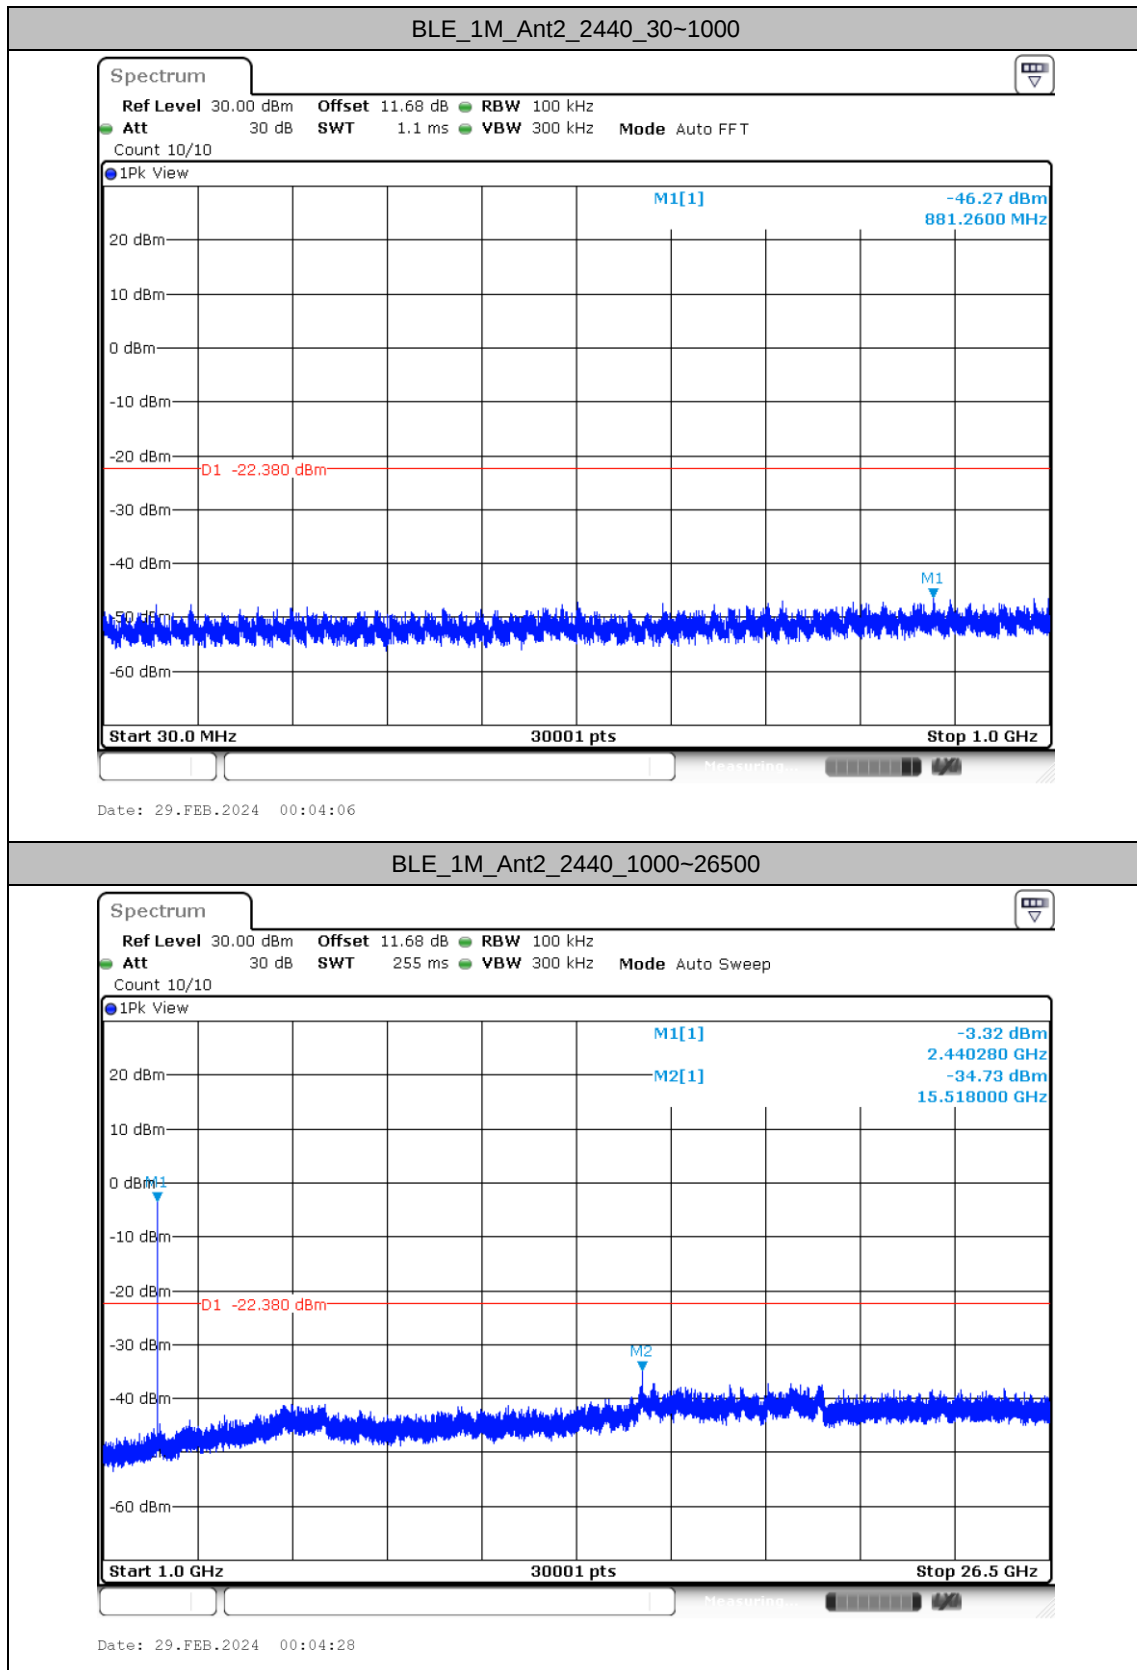


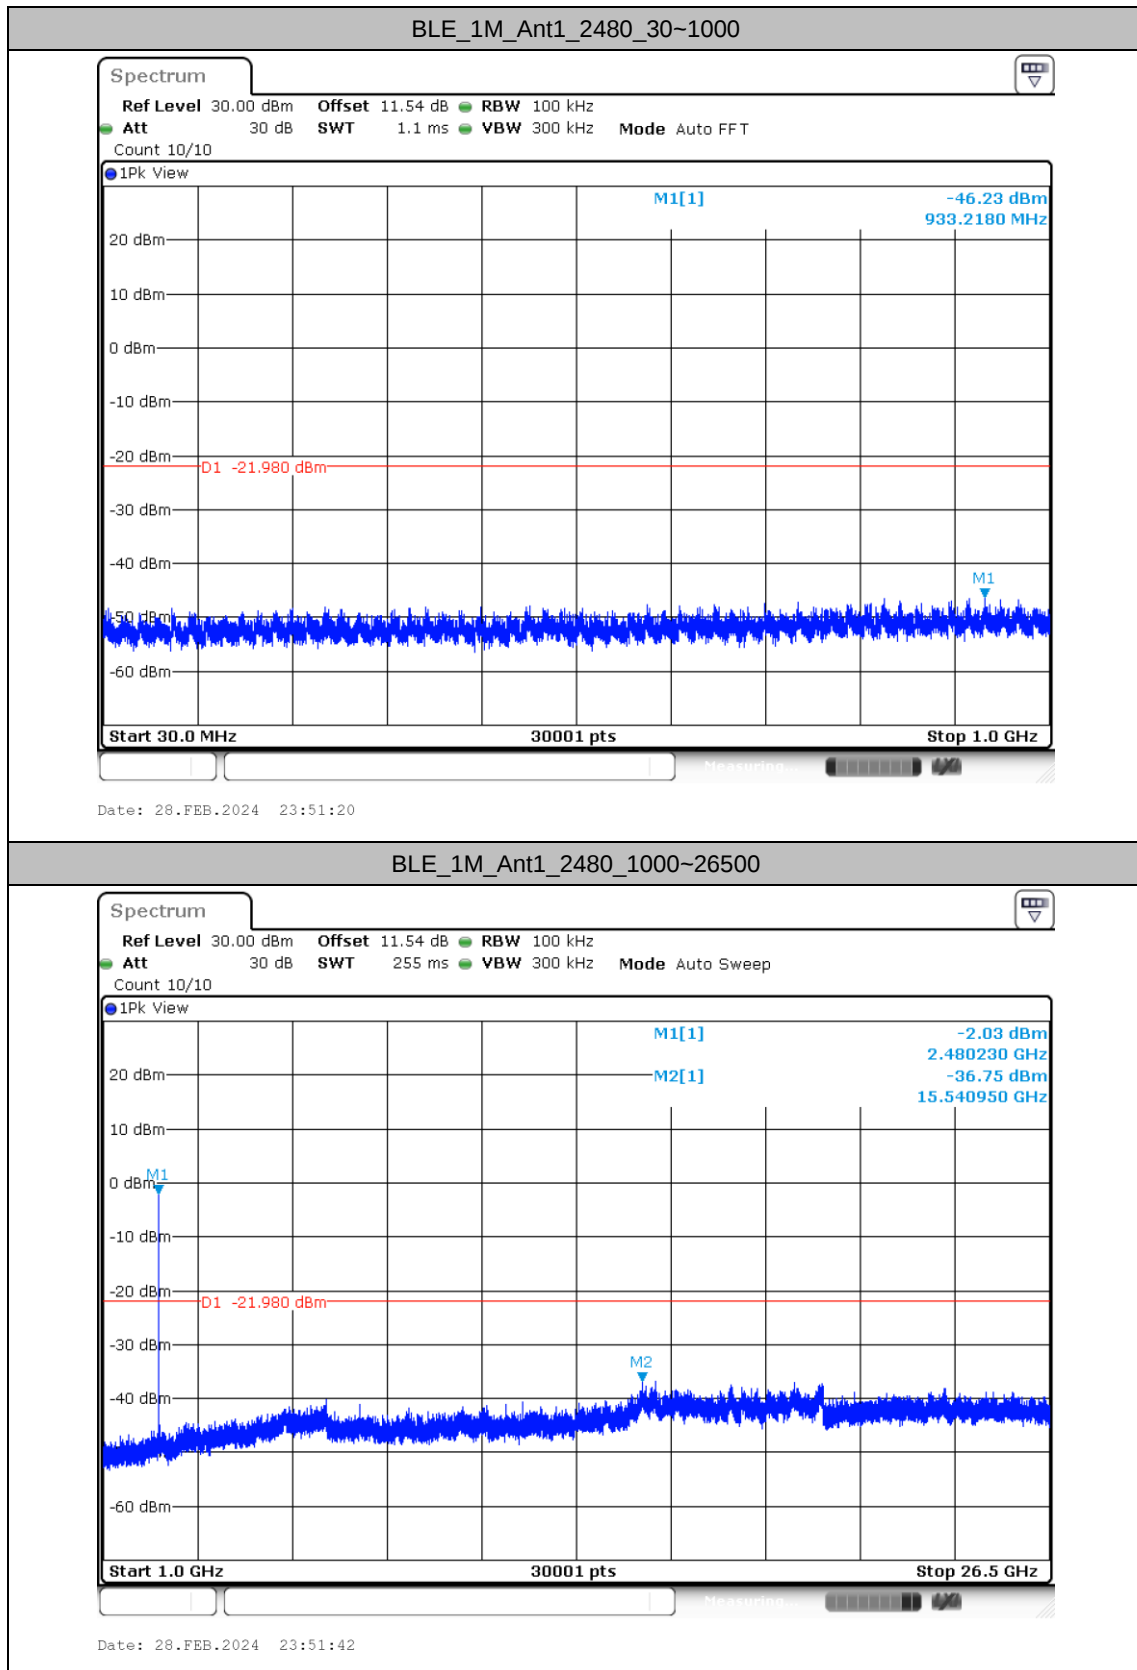


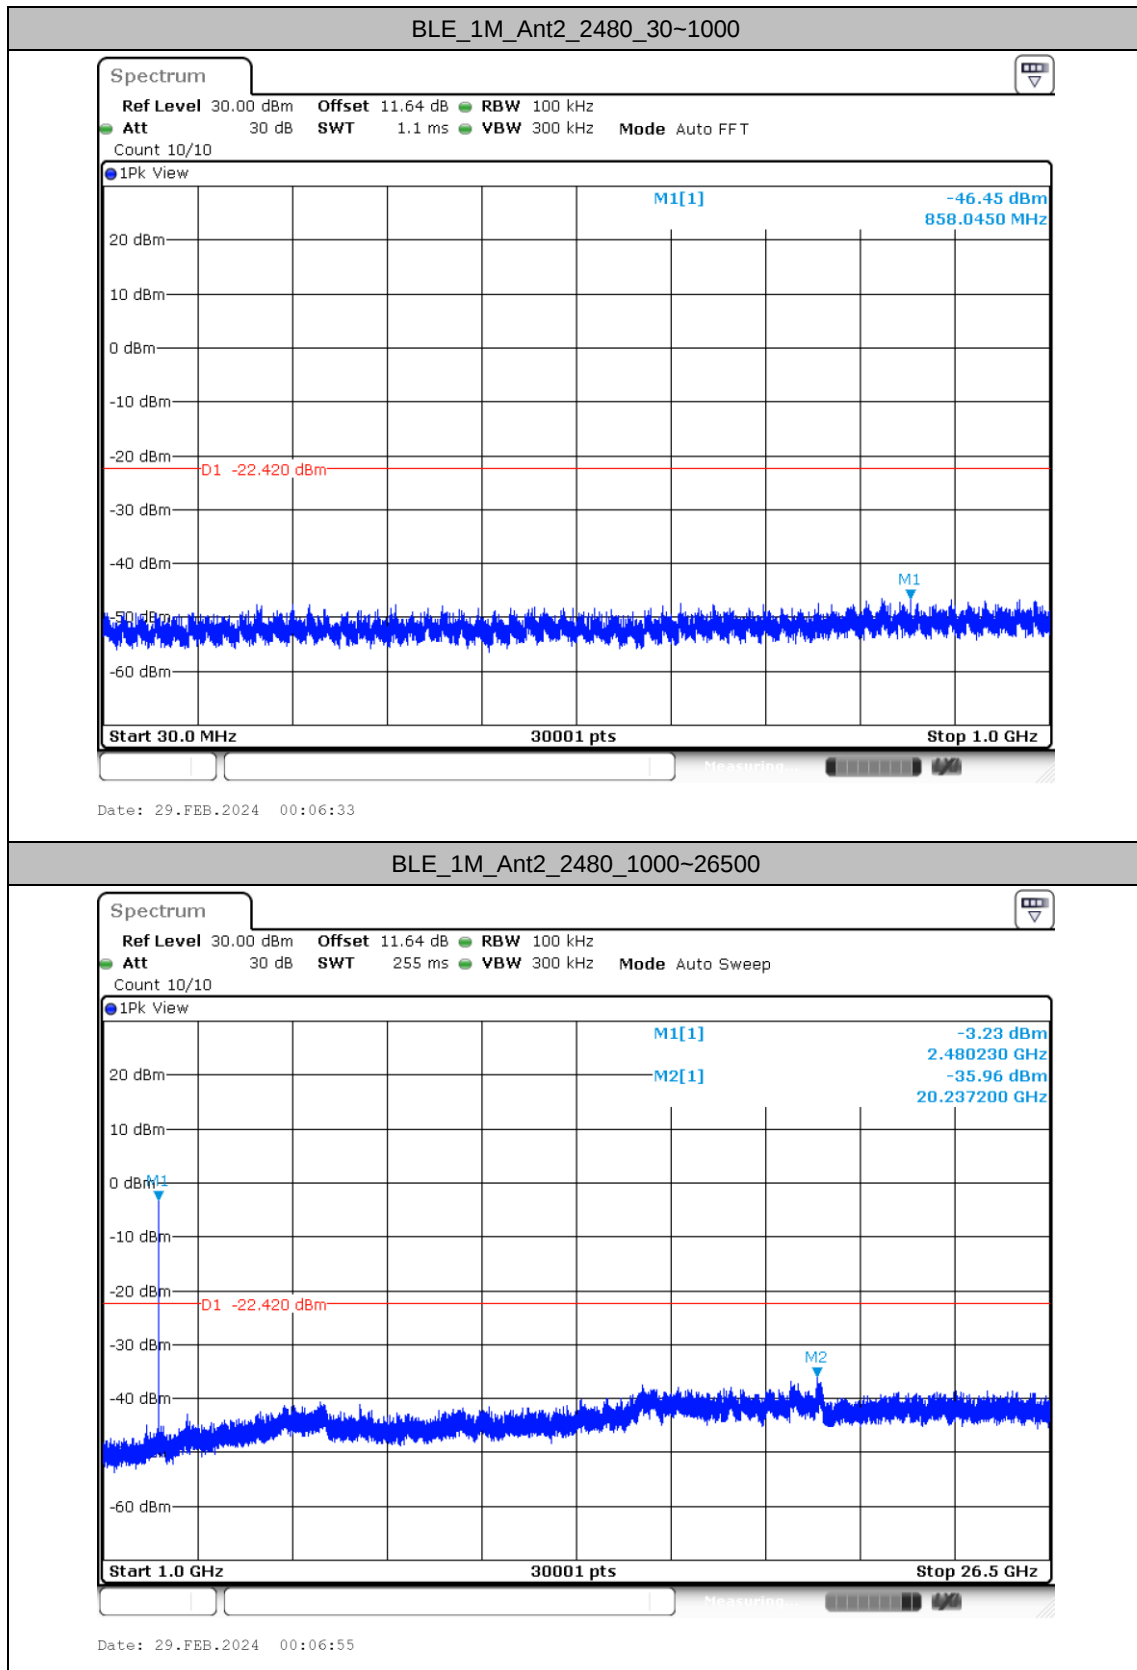


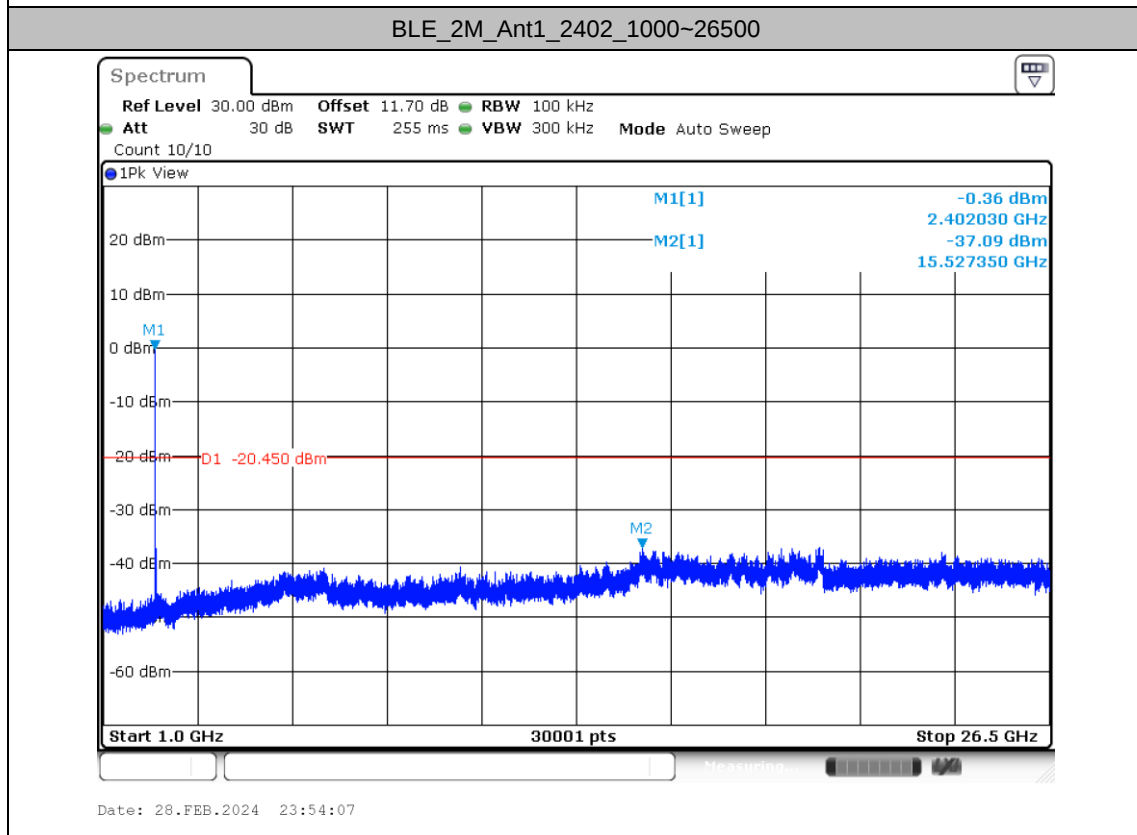


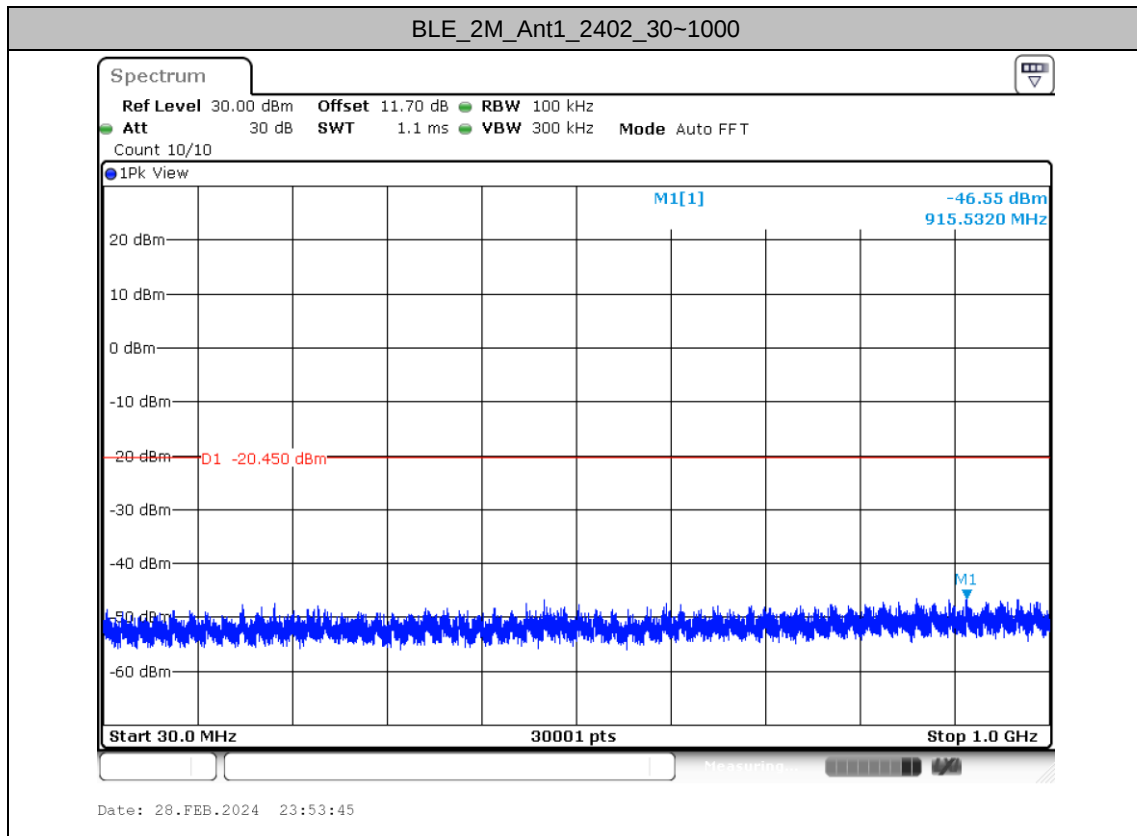


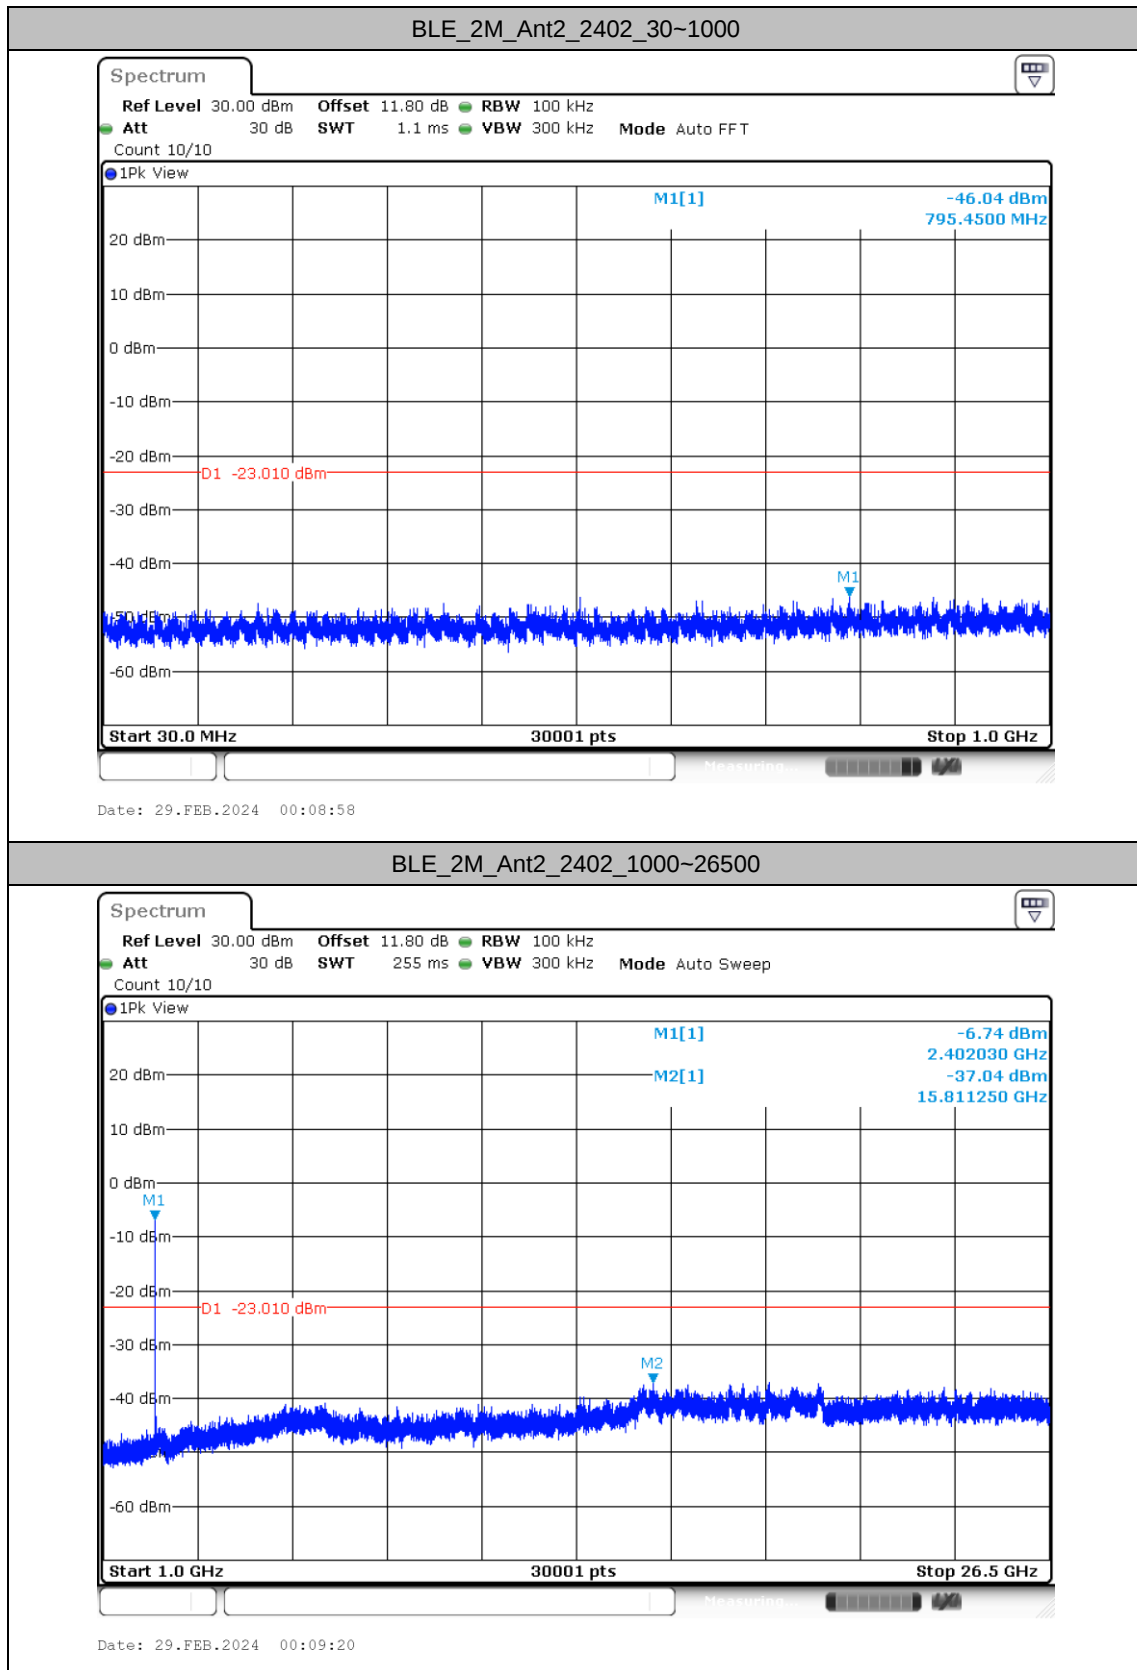

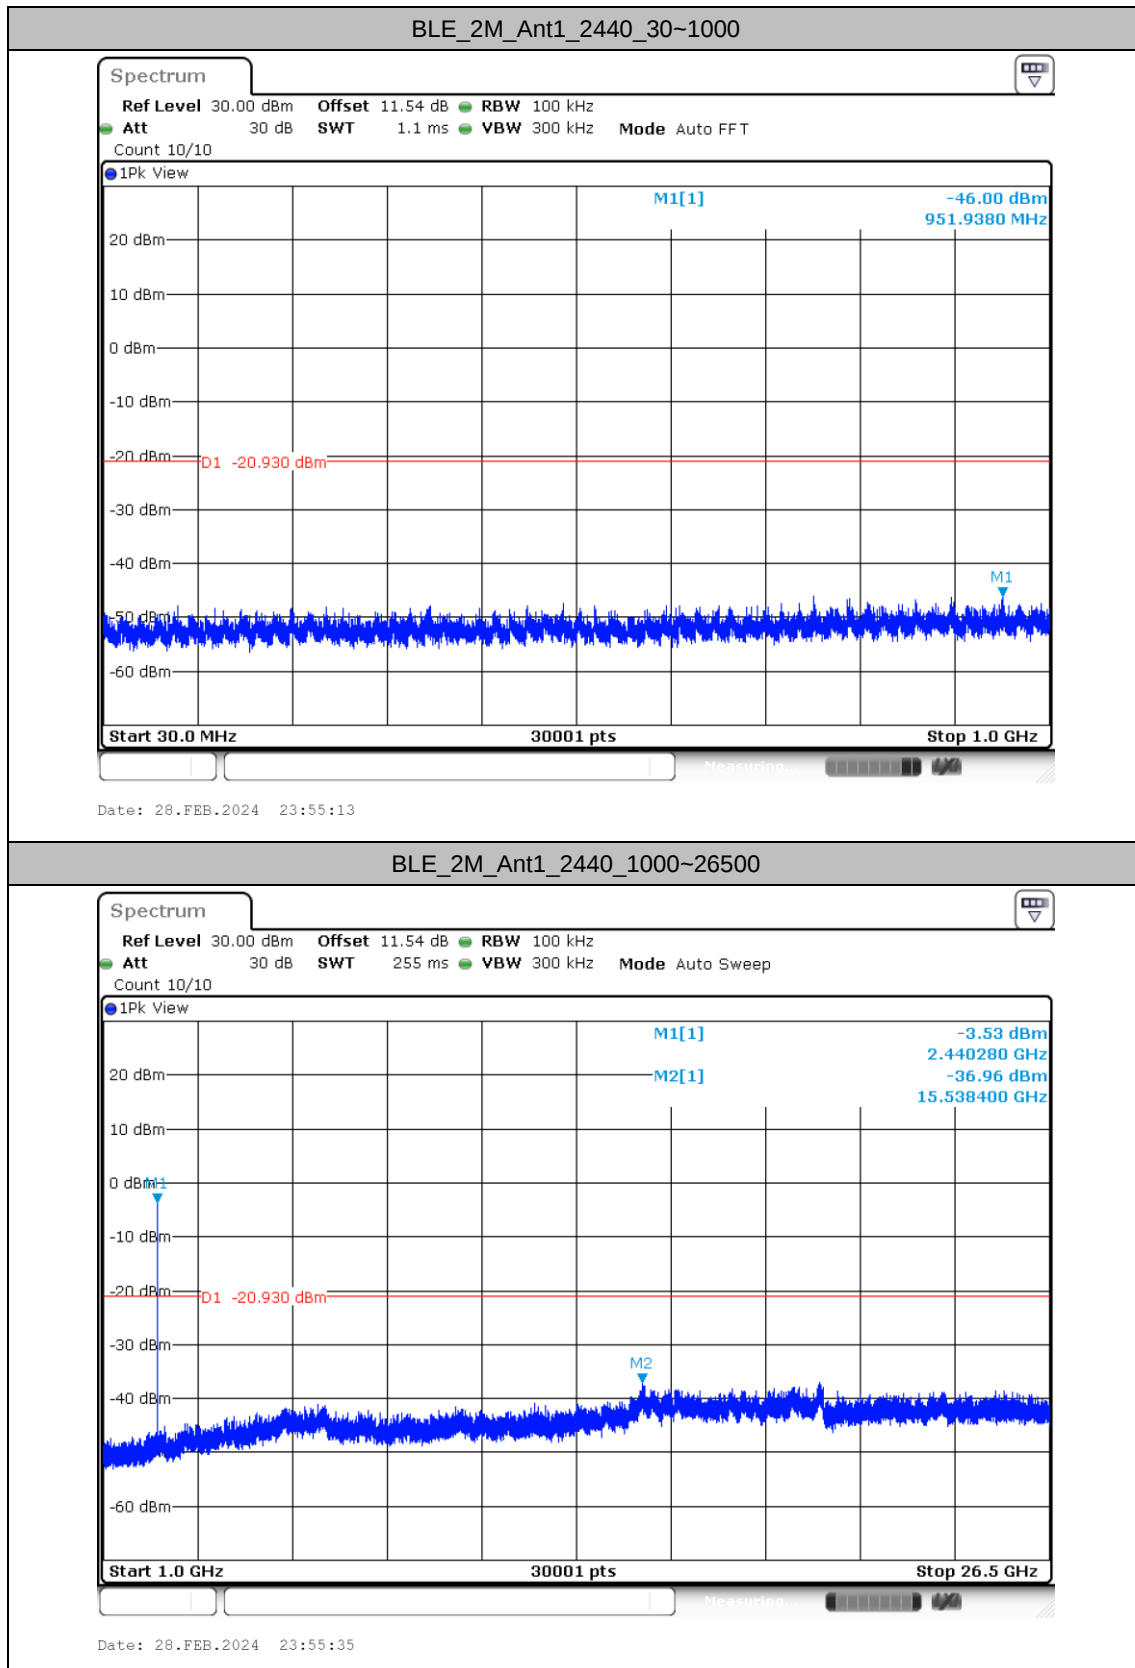

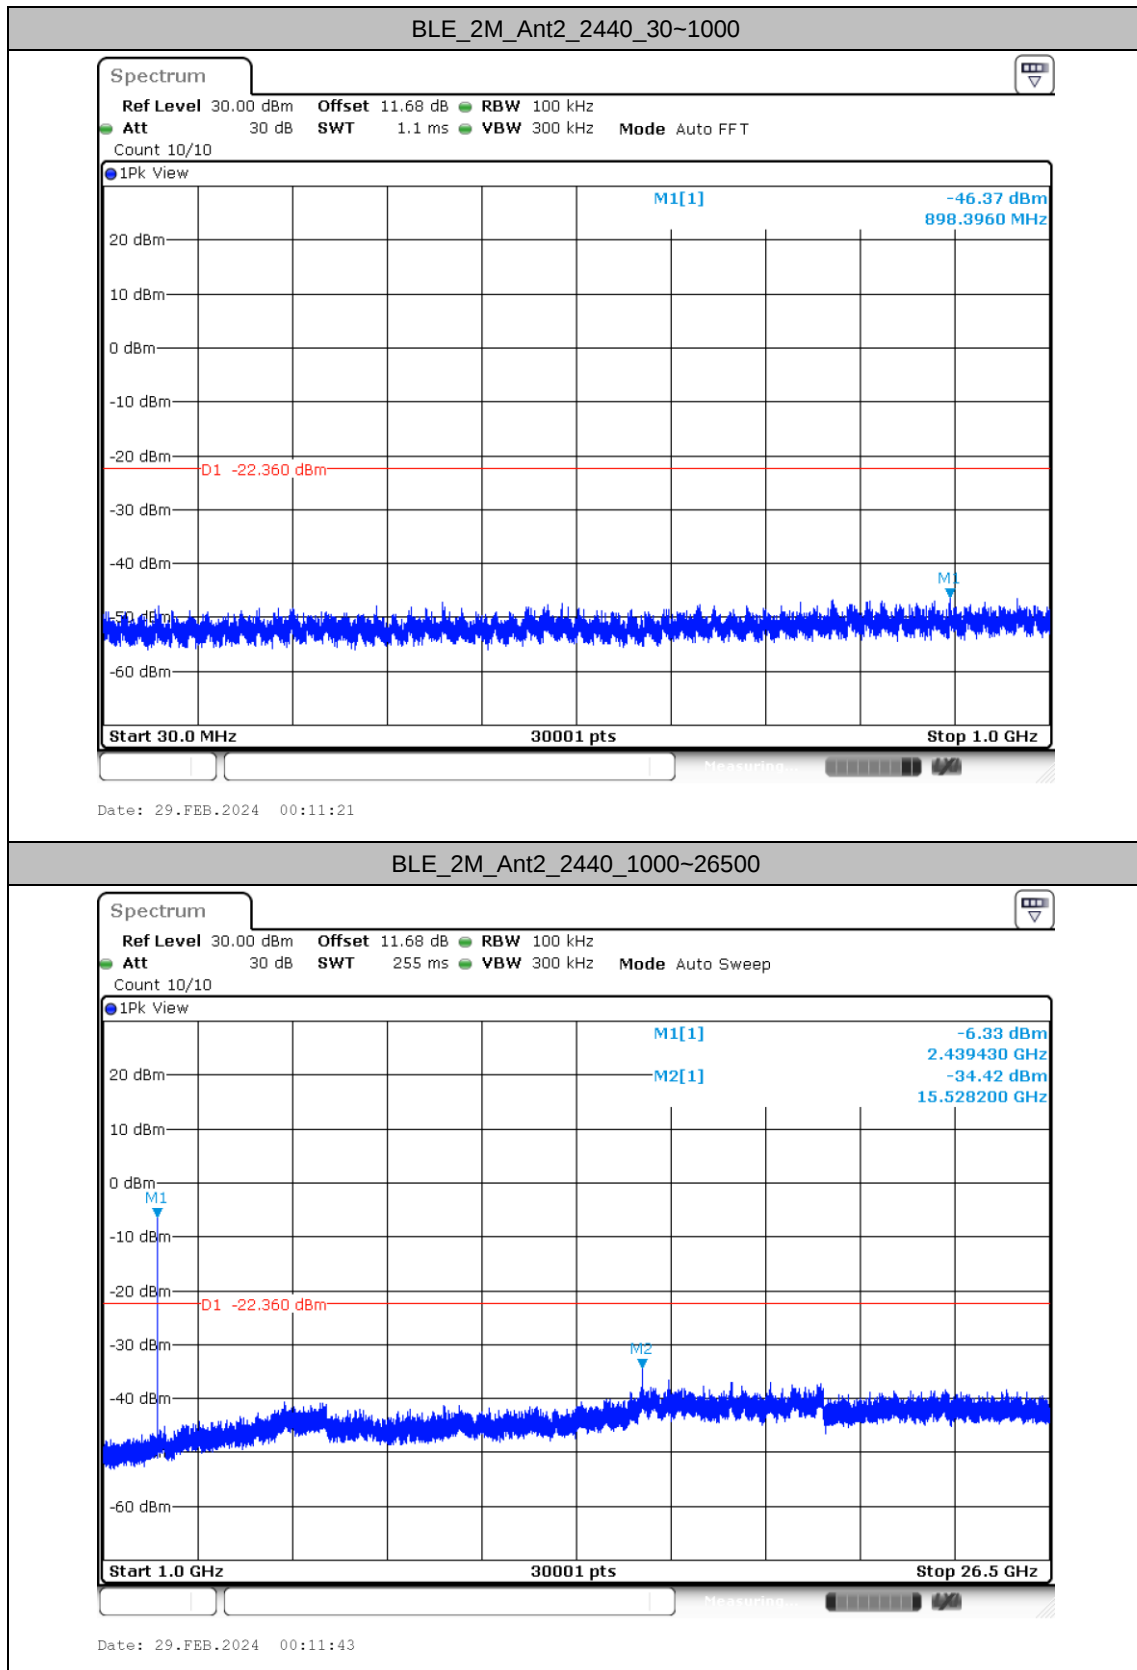


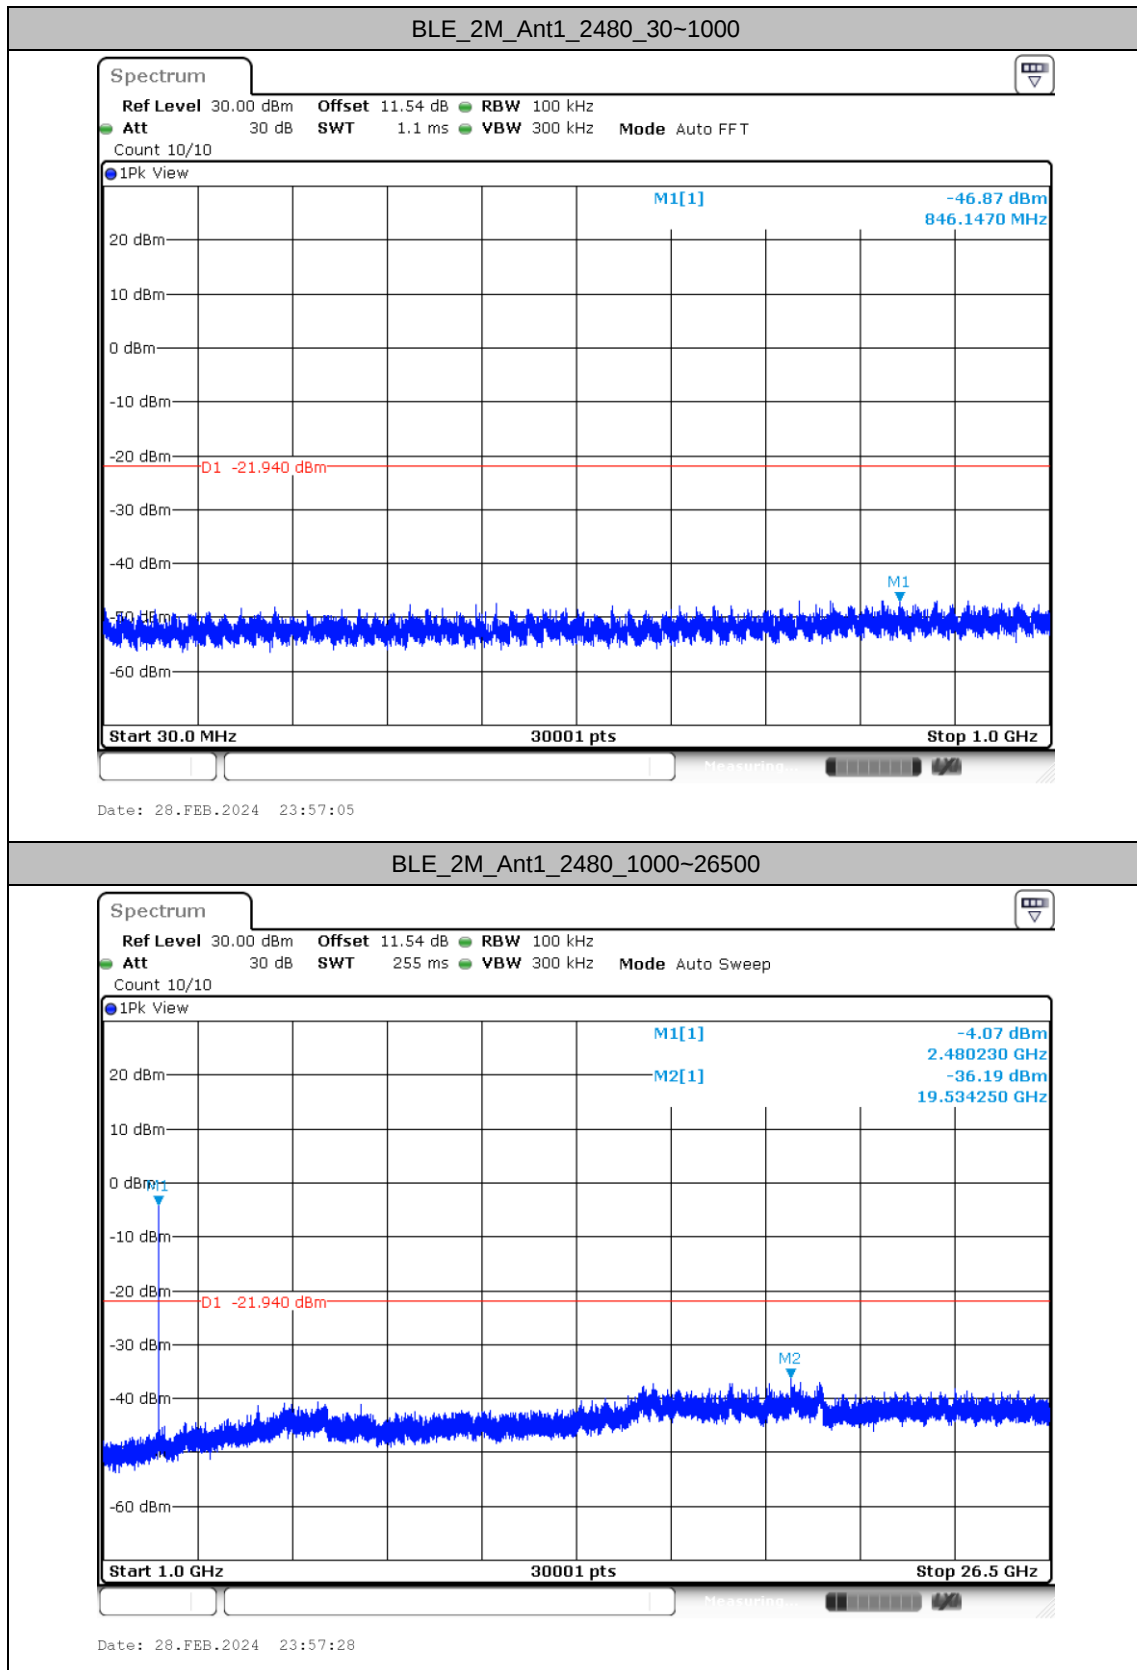

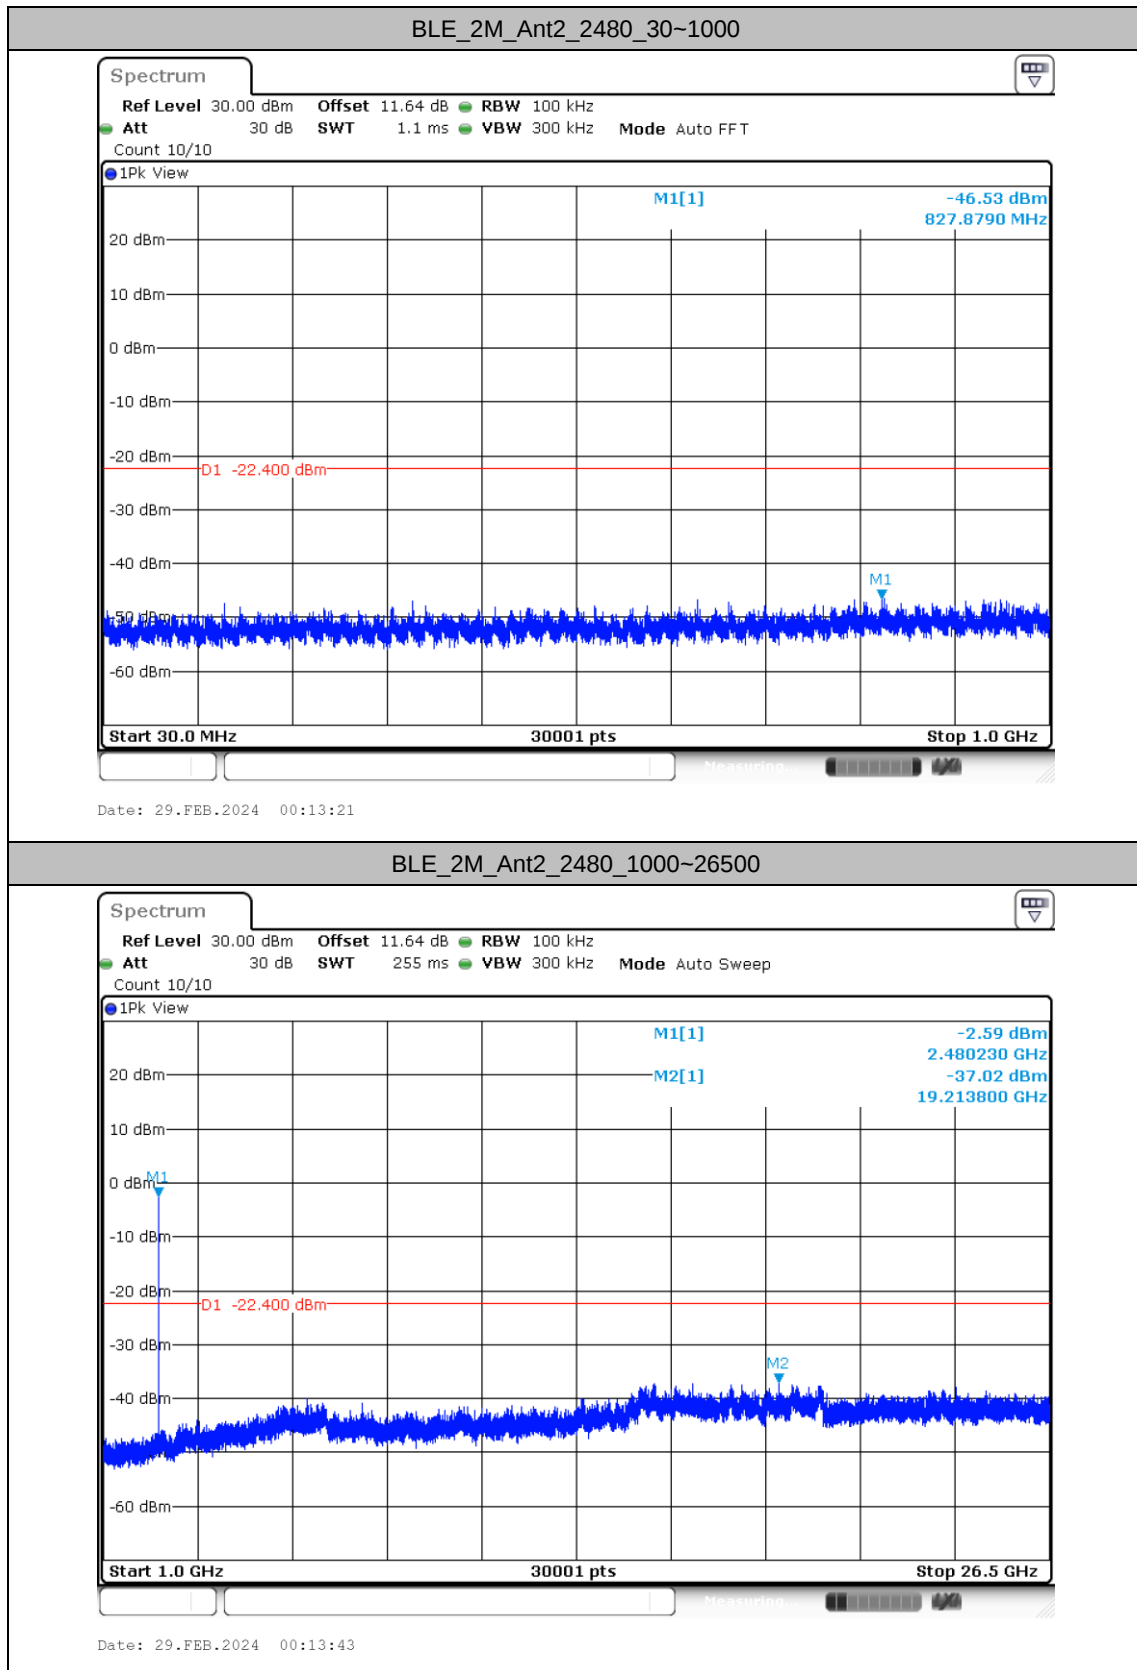




Appendix B. AC Conducted Emission Test Results

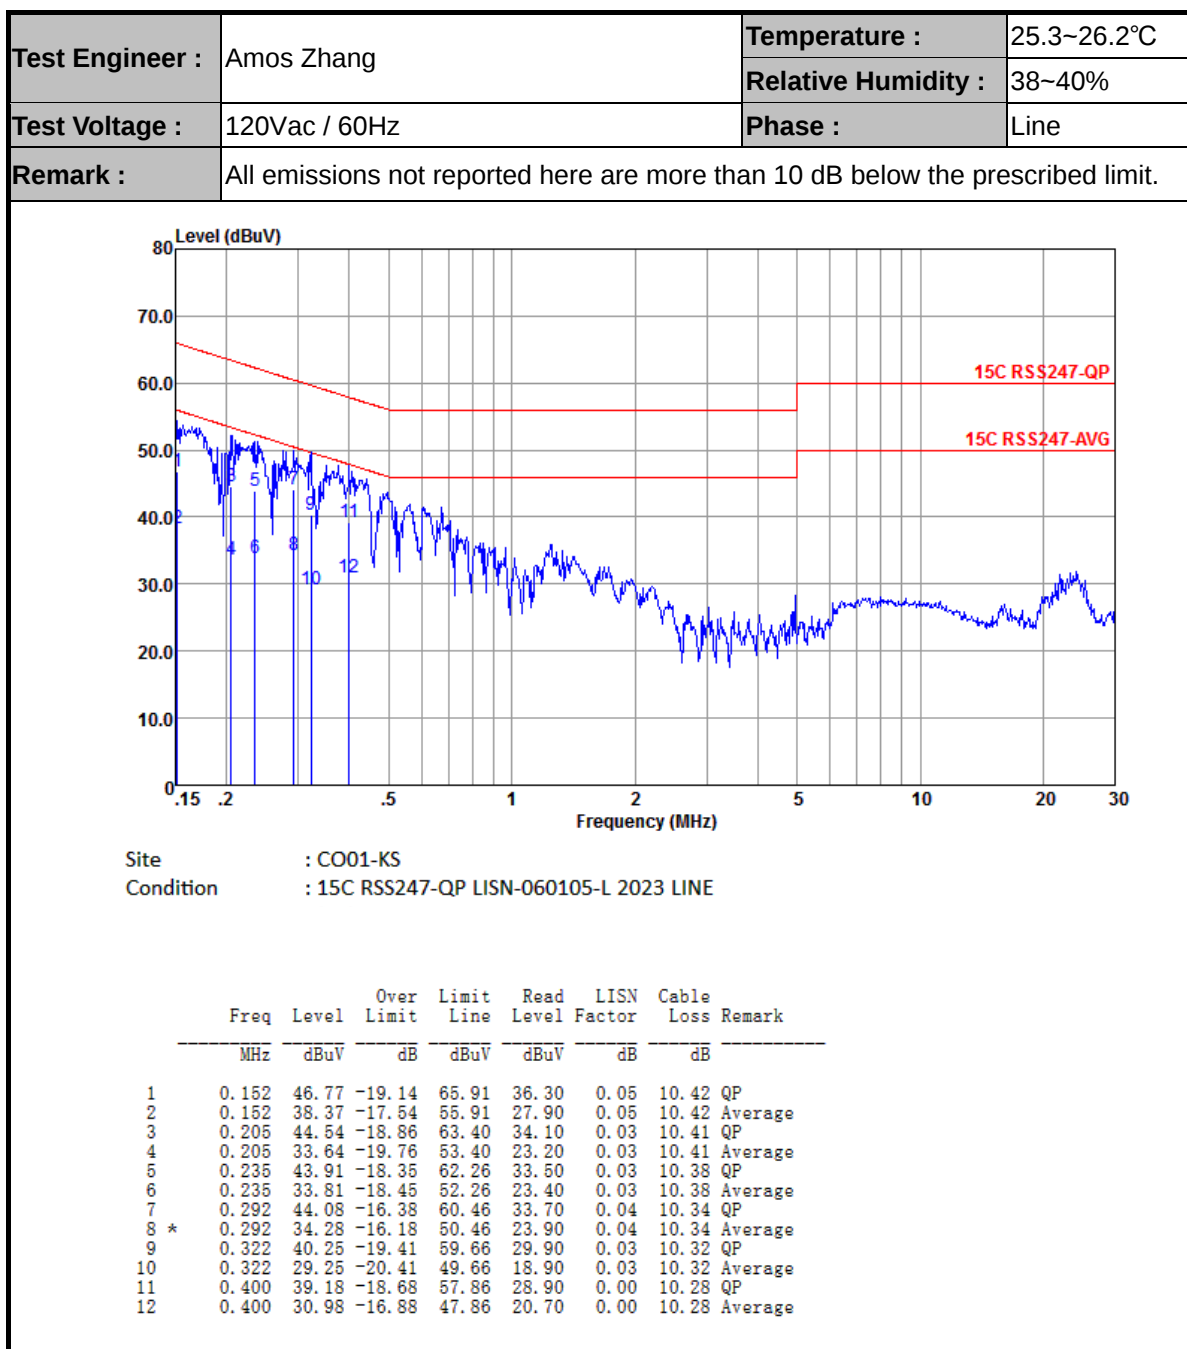



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

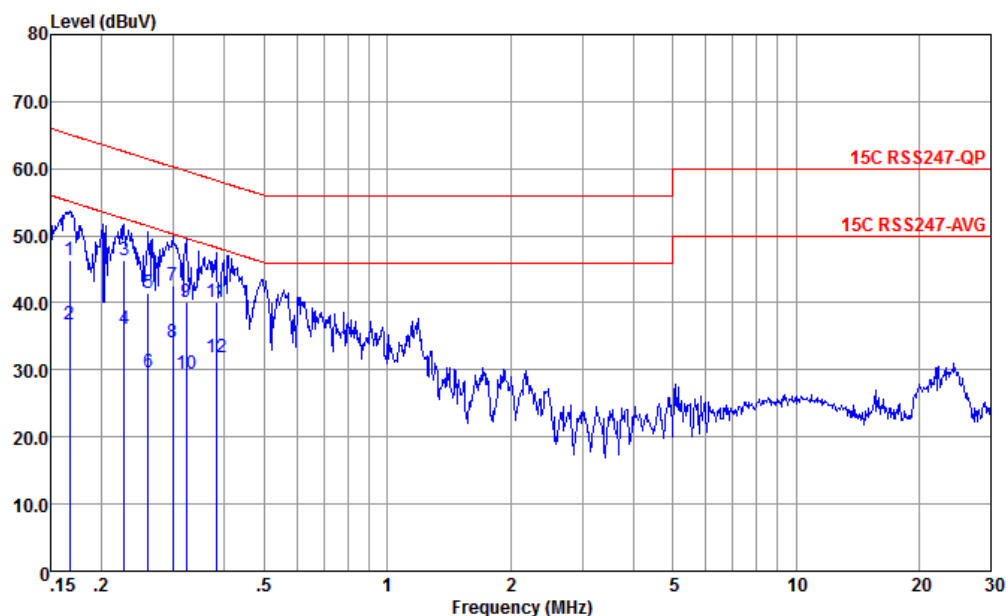

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.167	46.36	-18.76	65.12	35.90	0.04	10.42	QP
2	0.167	36.76	-18.36	55.12	26.30	0.04	10.42	Average
3 *	0.227	46.31	-16.26	62.57	35.90	0.02	10.39	QP
4	0.227	36.21	-16.36	52.57	25.80	0.02	10.39	Average
5	0.260	41.55	-19.87	61.42	31.20	-0.01	10.36	QP
6	0.260	29.65	-21.77	51.42	19.30	-0.01	10.36	Average
7	0.299	42.49	-17.79	60.28	32.20	-0.04	10.33	QP
8	0.299	33.99	-16.29	50.28	23.70	-0.04	10.33	Average
9	0.322	40.18	-19.48	59.66	29.90	-0.04	10.32	QP
10	0.322	29.48	-20.18	49.66	19.20	-0.04	10.32	Average
11	0.381	40.13	-18.12	58.25	29.89	-0.05	10.29	QP
12	0.381	31.83	-16.42	48.25	21.59	-0.05	10.29	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Shiwei Wen	Relative Humidity :	48~49%
		Temperature :	24~25℃

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	2400-2483.5	1	Bluetooth-LE	00	2402	1Mbps	-
Mode 2	2400-2483.5	1	Bluetooth-LE	19	2440	1Mbps	-
Mode 3	2400-2483.5	1	Bluetooth-LE	39	2480	1Mbps	-
Mode 4	2400-2483.5	1	Bluetooth-LE	00	2402	2Mbps	-
Mode 5	2400-2483.5	1	Bluetooth-LE	19	2440	2Mbps	-
Mode 6	2400-2483.5	1	Bluetooth-LE	39	2480	2Mbps	-
Mode 7	2400-2483.5	2	Bluetooth-LE	00	2402	1Mbps	-
Mode 8	2400-2483.5	2	Bluetooth-LE	19	2440	1Mbps	-
Mode 9	2400-2483.5	2	Bluetooth-LE	39	2480	1Mbps	-
Mode 10	2400-2483.5	2	Bluetooth-LE	00	2402	2Mbps	-
Mode 11	2400-2483.5	2	Bluetooth-LE	19	2440	2Mbps	-
Mode 12	2400-2483.5	2	Bluetooth-LE	39	2480	2Mbps	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE	00	2343.39	40.52	54.00	-13.48	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	00	4804.00	45.14	74.00	-28.86	V	Peak	Pass	Harmonic
2	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	47.94	74.00	-26.06	V	Peak	Pass	Harmonic
3	Bluetooth-LE	39	2496.58	39.89	54.00	-14.11	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	47.05	74.00	-26.95	V	Peak	Pass	Harmonic
4	Bluetooth-LE	00	2341.40	41.77	54.00	-12.23	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	00	4804.00	46.11	74.00	-27.89	V	Peak	Pass	Harmonic
5	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	47.47	74.00	-26.53	V	Peak	Pass	Harmonic
6	Bluetooth-LE	39	2483.54	48.19	54.00	-5.81	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	47.19	74.00	-26.81	V	Peak	Pass	Harmonic
	Bluetooth-LE	39	30	26.25	40	-13.75	V	Peak	Pass	LF
7	Bluetooth-LE	0	2379.62	41.79	54.00	-12.21	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	0	4804.00	46.64	74.00	-27.36	V	Peak	Pass	Harmonic
8	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	49.17	74.00	-24.83	H	Peak	Pass	Harmonic
9	Bluetooth-LE	39	2484.24	39.32	54.00	-14.68	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	48.85	74.00	-25.15	V	Peak	Pass	Harmonic
10	Bluetooth-LE	0	2389.80	41.37	54.00	-12.63	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	0	4804.00	46.91	74.00	-27.09	V	Peak	Pass	Harmonic
11	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	49.53	74.00	-24.47	V	Peak	Pass	Harmonic
12	Bluetooth-LE	39	2483.58	43.87	54.00	-10.13	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	49.19	74.00	-24.81	H	Peak	Pass	Harmonic
	Bluetooth-LE	39	863.23	30.43	46.00	-15.57	V	Peak	Pass	LF



Mode	1																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2344.34</td><td>49.61</td><td>74.00</td><td>-24.39</td><td>41.89</td><td>32.16</td><td>7.63</td><td>32.07</td><td>361</td><td>253 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2344.34	49.61	74.00	-24.39	41.89	32.16	7.63	32.07	361	253 PEAK	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>84.51</td><td>-----</td><td>-----</td><td>76.52</td><td>32.28</td><td>7.79</td><td>32.08</td><td>361</td><td>253 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	84.51	-----	-----	76.52	32.28	7.79	32.08	361	253 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2344.34	49.61	74.00	-24.39	41.89	32.16	7.63	32.07	361	253 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	84.51	-----	-----	76.52	32.28	7.79	32.08	361	253 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2343.39</td><td>40.52</td><td>54.00</td><td>-13.48</td><td>32.80</td><td>32.16</td><td>7.63</td><td>32.07</td><td>361</td><td>253 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2343.39	40.52	54.00	-13.48	32.80	32.16	7.63	32.07	361	253 AVERAGE	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>82.71</td><td>-----</td><td>-----</td><td>74.72</td><td>32.28</td><td>7.79</td><td>32.08</td><td>361</td><td>253 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	82.71	-----	-----	74.72	32.28	7.79	32.08	361	253 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2343.39	40.52	54.00	-13.48	32.80	32.16	7.63	32.07	361	253 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	82.71	-----	-----	74.72	32.28	7.79	32.08	361	253 AVERAGE																																																																										





Mode	1																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-01-10 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2381.93</td><td>48.93</td><td>74.00</td><td>-25.07</td><td>41.03</td><td>32.24</td><td>7.74</td><td>32.08</td><td>100</td><td>343 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2381.93	48.93	74.00	-25.07	41.03	32.24	7.74	32.08	100	343 PEAK	Level (dBuV/m) Date: 2024-01-10 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>92.51</td><td>-----</td><td>-----</td><td>84.52</td><td>32.28</td><td>7.79</td><td>32.08</td><td>100</td><td>343 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.51	-----	-----	84.52	32.28	7.79	32.08	100	343 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2381.93	48.93	74.00	-25.07	41.03	32.24	7.74	32.08	100	343 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	92.51	-----	-----	84.52	32.28	7.79	32.08	100	343 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2024-01-10 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2366.60</td><td>39.70</td><td>54.00</td><td>-14.30</td><td>31.87</td><td>32.21</td><td>7.69</td><td>32.07</td><td>100</td><td>343 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2366.60	39.70	54.00	-14.30	31.87	32.21	7.69	32.07	100	343 AVERAGE	Level (dBuV/m) Date: 2024-01-10 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>91.63</td><td>-----</td><td>-----</td><td>83.64</td><td>32.28</td><td>7.79</td><td>32.08</td><td>100</td><td>343 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	91.63	-----	-----	83.64	32.28	7.79	32.08	100	343 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2366.60	39.70	54.00	-14.30	31.87	32.21	7.69	32.07	100	343 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	91.63	-----	-----	83.64	32.28	7.79	32.08	100	343 AVERAGE																																																																										



Mode	1																																																																																										
	Harmonic																																																																																										
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal						Vertical																																																																																				
Peak Avg	Level (dBuV/m) Date: 2024-01-11 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>44.32</td><td>74.00</td><td>-29.68</td><td>50.01</td><td>34.82</td><td>11.07</td><td>51.58</td><td>--</td><td>-- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	44.32	74.00	-29.68	50.01	34.82	11.07	51.58	--	-- Peak	Level (dBuV/m) Date: 2024-01-11 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>45.14</td><td>74.00</td><td>-28.86</td><td>50.83</td><td>34.82</td><td>11.07</td><td>51.58</td><td>--</td><td>-- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	45.14	74.00	-28.86	50.83	34.82	11.07	51.58	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	4804.00	44.32	74.00	-29.68	50.01	34.82	11.07	51.58	--	-- Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	4804.00	45.14	74.00	-28.86	50.83	34.82	11.07	51.58	--	-- Peak																																																																																	

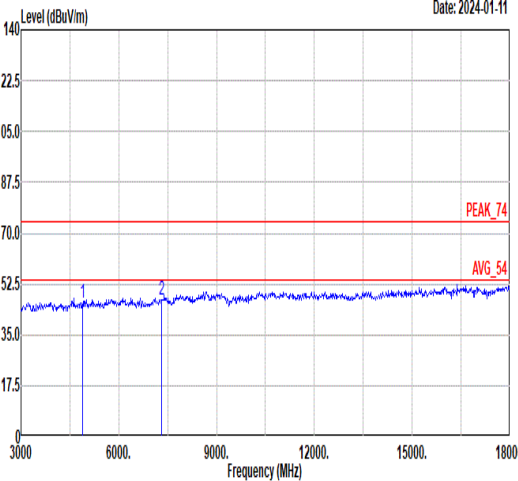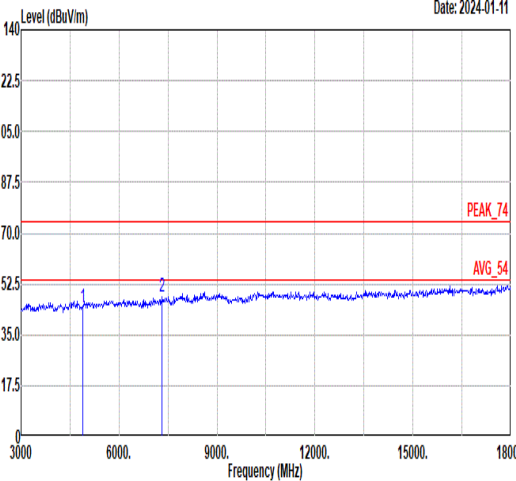

Mode	2																																																																																																																	
	Harmonic																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																	
ANT	1																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																											
Peak Avg	 Level (dBuV/m) Date: 2024-01-11 PEAK_74 AVG_54 Frequency (MHz)						 Level (dBuV/m) Date: 2024-01-11 PEAK_74 AVG_54 Frequency (MHz)																																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>45.88</td><td>74.00</td><td>-28.12</td><td>51.48</td><td>34.85</td><td>11.10</td><td>51.55</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>46.94</td><td>74.00</td><td>-27.06</td><td>48.68</td><td>36.33</td><td>13.09</td><td>51.16</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4880.00	45.88	74.00	-28.12	51.48	34.85	11.10	51.55	--	--	Peak	2	7320.00	46.94	74.00	-27.06	48.68	36.33	13.09	51.16	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4880.00</td><td>44.53</td><td>74.00</td><td>-29.47</td><td>50.13</td><td>34.85</td><td>11.10</td><td>51.55</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>47.94</td><td>74.00</td><td>-26.06</td><td>49.68</td><td>36.33</td><td>13.09</td><td>51.16</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4880.00	44.53	74.00	-29.47	50.13	34.85	11.10	51.55	--	--	Peak	2	7320.00	47.94	74.00	-26.06	49.68	36.33	13.09	51.16	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																									
1	4880.00	45.88	74.00	-28.12	51.48	34.85	11.10	51.55	--	--	Peak																																																																																																							
2	7320.00	46.94	74.00	-27.06	48.68	36.33	13.09	51.16	--	--	Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																									
1	4880.00	44.53	74.00	-29.47	50.13	34.85	11.10	51.55	--	--	Peak																																																																																																							
2	7320.00	47.94	74.00	-26.06	49.68	36.33	13.09	51.16	--	--	Peak																																																																																																							



Mode	3																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																									
ANT	1																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2499.78</td><td>49.52</td><td>74.00</td><td>-24.48</td><td>41.23</td><td>32.50</td><td>7.89</td><td>32.10</td><td>391 228 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2499.78	49.52	74.00	-24.48	41.23	32.50	7.89	32.10	391 228 PEAK	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>86.27</td><td>-----</td><td>-----</td><td>78.04</td><td>32.46</td><td>7.87</td><td>32.10</td><td>391 228 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	86.27	-----	-----	78.04	32.46	7.87	32.10	391 228 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 2499.78	49.52	74.00	-24.48	41.23	32.50	7.89	32.10	391 228 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 2480.00	86.27	-----	-----	78.04	32.46	7.87	32.10	391 228 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2496.58</td><td>39.89</td><td>54.00</td><td>-14.11</td><td>31.61</td><td>32.49</td><td>7.89</td><td>32.10</td><td>391 228 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2496.58	39.89	54.00	-14.11	31.61	32.49	7.89	32.10	391 228 AVERAGE	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>86.27</td><td>-----</td><td>-----</td><td>78.04</td><td>32.46</td><td>7.87</td><td>32.10</td><td>391 228 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 2480.00	86.27	-----	-----	78.04	32.46	7.87	32.10	391 228 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 2496.58	39.89	54.00	-14.11	31.61	32.49	7.89	32.10	391 228 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 2480.00	86.27	-----	-----	78.04	32.46	7.87	32.10	391 228 AVERAGE																																																																		



Mode	3																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-01-10 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2499.70</td><td>49.51</td><td>74.00</td><td>-24.49</td><td>41.22</td><td>32.50</td><td>7.89</td><td>32.10</td><td>100</td><td>341 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2499.70	49.51	74.00	-24.49	41.22	32.50	7.89	32.10	100	341 PEAK	Level (dBuV/m) Date: 2024-01-10 PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>93.13</td><td>-----</td><td>-----</td><td>84.90</td><td>32.46</td><td>7.87</td><td>32.10</td><td>100</td><td>341 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	93.13	-----	-----	84.90	32.46	7.87	32.10	100	341 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2499.70	49.51	74.00	-24.49	41.22	32.50	7.89	32.10	100	341 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	93.13	-----	-----	84.90	32.46	7.87	32.10	100	341 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2024-01-10 AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2498.60</td><td>39.54</td><td>54.00</td><td>-14.46</td><td>31.25</td><td>32.50</td><td>7.89</td><td>32.10</td><td>100</td><td>341 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2498.60	39.54	54.00	-14.46	31.25	32.50	7.89	32.10	100	341 AVERAGE	Level (dBuV/m) Date: 2024-01-10 AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>90.63</td><td>-----</td><td>-----</td><td>82.40</td><td>32.46</td><td>7.87</td><td>32.10</td><td>100</td><td>341 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	90.63	-----	-----	82.40	32.46	7.87	32.10	100	341 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2498.60	39.54	54.00	-14.46	31.25	32.50	7.89	32.10	100	341 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2480.00	90.63	-----	-----	82.40	32.46	7.87	32.10	100	341 AVERAGE																																																																										



Mode	3																																																																																															
	Harmonic																																																																																															
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg	Level (dBuV/m) Date: 2024-01-11 Frequency (MHz)								Level (dBuV/m) Date: 2024-01-11 Frequency (MHz)																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>45.62</td><td>74.00</td><td>-28.38</td><td>51.11</td><td>34.88</td><td>11.14</td></tr><tr><td>2</td><td>7440.00</td><td>46.96</td><td>74.00</td><td>-27.04</td><td>48.80</td><td>36.38</td><td>12.97</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4960.00	45.62	74.00	-28.38	51.11	34.88	11.14	2	7440.00	46.96	74.00	-27.04	48.80	36.38	12.97	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>46.12</td><td>74.00</td><td>-27.88</td><td>51.61</td><td>34.88</td><td>11.14</td></tr><tr><td>2</td><td>7440.00</td><td>47.05</td><td>74.00</td><td>-26.95</td><td>48.89</td><td>36.38</td><td>12.97</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4960.00	46.12	74.00	-27.88	51.61	34.88	11.14	2	7440.00	47.05	74.00	-26.95	48.89	36.38	12.97
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	4960.00	45.62	74.00	-28.38	51.11	34.88	11.14																																																																																									
2	7440.00	46.96	74.00	-27.04	48.80	36.38	12.97																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	4960.00	46.12	74.00	-27.88	51.61	34.88	11.14																																																																																									
2	7440.00	47.05	74.00	-26.95	48.89	36.38	12.97																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>45.62</td><td>74.00</td><td>-28.38</td><td>51.11</td><td>34.88</td><td>11.14</td></tr><tr><td>2</td><td>7440.00</td><td>46.96</td><td>74.00</td><td>-27.04</td><td>48.80</td><td>36.38</td><td>12.97</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4960.00	45.62	74.00	-28.38	51.11	34.88	11.14	2	7440.00	46.96	74.00	-27.04	48.80	36.38	12.97	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>46.12</td><td>74.00</td><td>-27.88</td><td>51.61</td><td>34.88</td><td>11.14</td></tr><tr><td>2</td><td>7440.00</td><td>47.05</td><td>74.00</td><td>-26.95</td><td>48.89</td><td>36.38</td><td>12.97</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4960.00	46.12	74.00	-27.88	51.61	34.88	11.14	2	7440.00	47.05	74.00	-26.95	48.89	36.38	12.97	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	4960.00	45.62	74.00	-28.38	51.11	34.88	11.14																																																																																									
2	7440.00	46.96	74.00	-27.04	48.80	36.38	12.97																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	4960.00	46.12	74.00	-27.88	51.61	34.88	11.14																																																																																									
2	7440.00	47.05	74.00	-26.95	48.89	36.38	12.97																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>45.62</td><td>74.00</td><td>-28.38</td><td>51.11</td><td>34.88</td><td>11.14</td></tr><tr><td>2</td><td>7440.00</td><td>46.96</td><td>74.00</td><td>-27.04</td><td>48.80</td><td>36.38</td><td>12.97</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4960.00	45.62	74.00	-28.38	51.11	34.88	11.14	2	7440.00	46.96	74.00	-27.04	48.80	36.38	12.97	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>46.12</td><td>74.00</td><td>-27.88</td><td>51.61</td><td>34.88</td><td>11.14</td></tr><tr><td>2</td><td>7440.00</td><td>47.05</td><td>74.00</td><td>-26.95</td><td>48.89</td><td>36.38</td><td>12.97</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4960.00	46.12	74.00	-27.88	51.61	34.88	11.14	2	7440.00	47.05	74.00	-26.95	48.89	36.38	12.97	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	4960.00	45.62	74.00	-28.38	51.11	34.88	11.14																																																																																									
2	7440.00	46.96	74.00	-27.04	48.80	36.38	12.97																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	4960.00	46.12	74.00	-27.88	51.61	34.88	11.14																																																																																									
2	7440.00	47.05	74.00	-26.95	48.89	36.38	12.97																																																																																									



Mode	4																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																			
ANT	1																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-01-10 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2310 2331. 2352. 2373. 2394. 2415 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2328.17</td><td>49.59</td><td>74.00</td><td>-24.41</td><td>41.95</td><td>32.12</td><td>7.59</td><td>32.07</td><td>362</td><td>253 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2328.17	49.59	74.00	-24.41	41.95	32.12	7.59	32.07	362	253 PEAK	Level (dBuV/m) Date: 2024-01-10 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400. 1800. 2200. 2600. 3000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>92.99</td><td>-----</td><td>-----</td><td>85.00</td><td>32.28</td><td>7.79</td><td>32.08</td><td>362</td><td>253 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.99	-----	-----	85.00	32.28	7.79	32.08	362	253 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2328.17	49.59	74.00	-24.41	41.95	32.12	7.59	32.07	362	253 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	92.99	-----	-----	85.00	32.28	7.79	32.08	362	253 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2024-01-10 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2310 2331. 2352. 2373. 2394. 2415 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2341.40</td><td>41.77</td><td>54.00</td><td>-12.23</td><td>34.07</td><td>32.15</td><td>7.62</td><td>32.07</td><td>362</td><td>253 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2341.40	41.77	54.00	-12.23	34.07	32.15	7.62	32.07	362	253 AVERAGE	Level (dBuV/m) Date: 2024-01-10 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400. 1800. 2200. 2600. 3000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>92.20</td><td>-----</td><td>-----</td><td>84.21</td><td>32.28</td><td>7.79</td><td>32.08</td><td>362</td><td>253 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.20	-----	-----	84.21	32.28	7.79	32.08	362	253 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2341.40	41.77	54.00	-12.23	34.07	32.15	7.62	32.07	362	253 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	92.20	-----	-----	84.21	32.28	7.79	32.08	362	253 AVERAGE																																																																										



Mode	4																																																																																			
	Band Edge																																																																																			
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																			
ANT	1																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2371.22</td><td>48.96</td><td>74.00</td><td>-25.04</td><td>41.10</td><td>32.22</td><td>7.71</td><td>32.07</td><td>100</td><td>341 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2371.22	48.96	74.00	-25.04	41.10	32.22	7.71	32.07	100	341 PEAK	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>102.04</td><td>-----</td><td>-----</td><td>94.05</td><td>32.28</td><td>7.79</td><td>32.08</td><td>100</td><td>341 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	102.04	-----	-----	94.05	32.28	7.79	32.08	100	341 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2371.22	48.96	74.00	-25.04	41.10	32.22	7.71	32.07	100	341 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	102.04	-----	-----	94.05	32.28	7.79	32.08	100	341 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2377.52</td><td>40.69</td><td>54.00</td><td>-13.31</td><td>32.81</td><td>32.23</td><td>7.73</td><td>32.08</td><td>100</td><td>341 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2377.52	40.69	54.00	-13.31	32.81	32.23	7.73	32.08	100	341 AVERAGE	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>101.21</td><td>-----</td><td>-----</td><td>93.22</td><td>32.28</td><td>7.79</td><td>32.08</td><td>100</td><td>341 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	101.21	-----	-----	93.22	32.28	7.79	32.08	100	341 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2377.52	40.69	54.00	-13.31	32.81	32.23	7.73	32.08	100	341 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2402.00	101.21	-----	-----	93.22	32.28	7.79	32.08	100	341 AVERAGE																																																																										



Mode	4																																																																																													
	Harmonic																																																																																													
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																													
ANT	1																																																																																													
Pol.	Horizontal						Vertical																																																																																							
Peak Avg	Level (dBuV/m) Date: 2024-01-11 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>44.96</td><td>74.00</td><td>-29.04</td><td>50.65</td><td>34.82</td><td>11.07</td><td>51.58</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	44.96	74.00	-29.04	50.65	34.82	11.07	51.58	--	--	Peak	Level (dBuV/m) Date: 2024-01-11 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>46.11</td><td>74.00</td><td>-27.89</td><td>51.80</td><td>34.82</td><td>11.07</td><td>51.58</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	46.11	74.00	-27.89	51.80	34.82	11.07	51.58	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	4804.00	44.96	74.00	-29.04	50.65	34.82	11.07	51.58	--	--	Peak																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	4804.00	46.11	74.00	-27.89	51.80	34.82	11.07	51.58	--	--	Peak																																																																																			



Mode	5																																																																																															
	Harmonic																																																																																															
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg	Level (dBuV/m) Date: 2024-01-11 PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4880.00</td><td>45.45</td><td>74.00</td><td>-28.55</td><td>51.05</td><td>34.85</td><td>11.10</td></tr><tr><td>2</td><td>7320.00</td><td>46.79</td><td>74.00</td><td>-27.21</td><td>48.53</td><td>36.33</td><td>13.09</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4880.00	45.45	74.00	-28.55	51.05	34.85	11.10	2	7320.00	46.79	74.00	-27.21	48.53	36.33	13.09	Level (dBuV/m) Date: 2024-01-11 PEAK_74 AVG_54 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4880.00</td><td>45.26</td><td>74.00</td><td>-28.74</td><td>50.86</td><td>34.85</td><td>11.10</td></tr><tr><td>2</td><td>7320.00</td><td>47.47</td><td>74.00</td><td>-26.53</td><td>49.21</td><td>36.33</td><td>13.09</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4880.00	45.26	74.00	-28.74	50.86	34.85	11.10	2	7320.00	47.47	74.00	-26.53	49.21	36.33	13.09
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																								
1	4880.00	45.45	74.00	-28.55	51.05	34.85	11.10																																																																																									
2	7320.00	46.79	74.00	-27.21	48.53	36.33	13.09																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	4880.00	45.26	74.00	-28.74	50.86	34.85	11.10																																																																																									
2	7320.00	47.47	74.00	-26.53	49.21	36.33	13.09																																																																																									





Mode	6																																																																											
	Band Edge																																																																											
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																											
ANT	1																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.52</td><td>52.14</td><td>74.00</td><td>-21.86</td><td>43.90</td><td>32.46</td><td>7.88</td><td>32.10</td><td>391 232 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.52	52.14	74.00	-21.86	43.90	32.46	7.88	32.10	391 232 PEAK	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>94.26</td><td>-----</td><td>-----</td><td>86.03</td><td>32.46</td><td>7.87</td><td>32.10</td><td>391 232 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	94.26	-----	-----	86.03	32.46	7.87	32.10	391 232 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	2483.52	52.14	74.00	-21.86	43.90	32.46	7.88	32.10	391 232 PEAK																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	2480.00	94.26	-----	-----	86.03	32.46	7.87	32.10	391 232 PEAK																																																																			
Avg	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>41.91</td><td>54.00</td><td>-12.09</td><td>33.67</td><td>32.46</td><td>7.88</td><td>32.10</td><td>391 232 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	41.91	54.00	-12.09	33.67	32.46	7.88	32.10	391 232 AVERAGE	Level (dBuV/m) Date: 2024-01-10 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>92.62</td><td>-----</td><td>-----</td><td>84.39</td><td>32.46</td><td>7.87</td><td>32.10</td><td>391 232 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	92.62	-----	-----	84.39	32.46	7.87	32.10	391 232 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	2483.62	41.91	54.00	-12.09	33.67	32.46	7.88	32.10	391 232 AVERAGE																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	2480.00	92.62	-----	-----	84.39	32.46	7.87	32.10	391 232 AVERAGE																																																																			



Mode	6																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																								
ANT	1																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2024-01-10 PEAK_BE_74					Level (dBuV/m) Date: 2024-01-10 PEAK_74																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>60.13</td><td>74.00</td><td>-13.87</td><td>51.89</td><td>32.46</td><td>7.88</td><td>32.10</td><td>100 342 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	60.13	74.00	-13.87	51.89	32.46	7.88	32.10	100 342 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>102.28</td><td>-----</td><td>-----</td><td>94.05</td><td>32.46</td><td>7.87</td><td>32.10</td><td>100 342 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	102.28	-----	-----	94.05	32.46	7.87	32.10
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2483.54	60.13	74.00	-13.87	51.89	32.46	7.88	32.10	100 342 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2480.00	102.28	-----	-----	94.05	32.46	7.87	32.10	100 342 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2024-01-10 AVG_BE_54					Level (dBuV/m) Date: 2024-01-10 AVG_54																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>48.19</td><td>54.00</td><td>-5.81</td><td>39.95</td><td>32.46</td><td>7.88</td><td>32.10</td><td>100 342 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	48.19	54.00	-5.81	39.95	32.46	7.88	32.10	100 342 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>101.35</td><td>-----</td><td>-----</td><td>93.12</td><td>32.46</td><td>7.87</td><td>32.10</td><td>100 342 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	101.35	-----	-----	93.12	32.46	7.87	32.10
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2483.54	48.19	54.00	-5.81	39.95	32.46	7.88	32.10	100 342 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2480.00	101.35	-----	-----	93.12	32.46	7.87	32.10	100 342 AVERAGE																																																																																

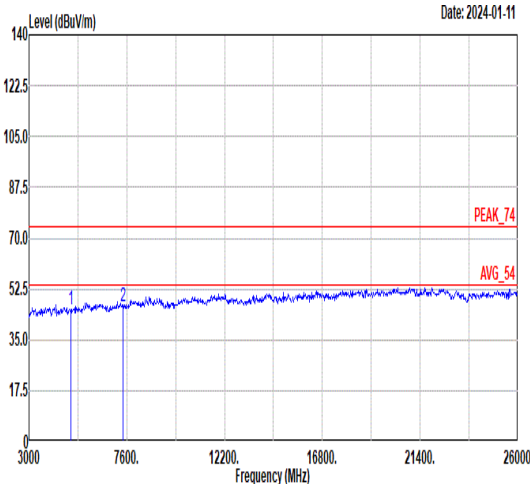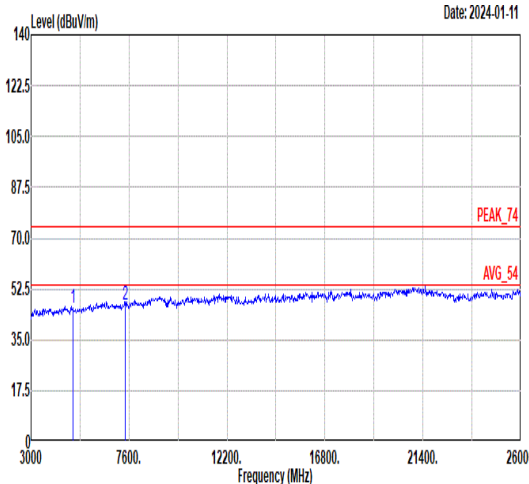





Mode	6																																																																																																																	
	Harmonic																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																	
ANT	1																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																											
Peak Avg																																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>45.32</td><td>74.00</td><td>-28.68</td><td>50.81</td><td>34.88</td><td>11.14</td><td>51.51</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>46.66</td><td>74.00</td><td>-27.34</td><td>48.50</td><td>36.38</td><td>12.97</td><td>51.19</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4960.00	45.32	74.00	-28.68	50.81	34.88	11.14	51.51	--	--	Peak	2	7440.00	46.66	74.00	-27.34	48.50	36.38	12.97	51.19	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>45.79</td><td>74.00</td><td>-28.21</td><td>51.28</td><td>34.88</td><td>11.14</td><td>51.51</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>47.19</td><td>74.00</td><td>-26.81</td><td>49.03</td><td>36.38</td><td>12.97</td><td>51.19</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4960.00	45.79	74.00	-28.21	51.28	34.88	11.14	51.51	--	--	Peak	2	7440.00	47.19	74.00	-26.81	49.03	36.38	12.97	51.19	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																									
1	4960.00	45.32	74.00	-28.68	50.81	34.88	11.14	51.51	--	--	Peak																																																																																																							
2	7440.00	46.66	74.00	-27.34	48.50	36.38	12.97	51.19	--	--	Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																									
1	4960.00	45.79	74.00	-28.21	51.28	34.88	11.14	51.51	--	--	Peak																																																																																																							
2	7440.00	47.19	74.00	-26.81	49.03	36.38	12.97	51.19	--	--	Peak																																																																																																							

Note: Only the worst case has assessed 18G ~26GHz to test.



Mode	6																																																																																																																																																																																			
	LF																																																																																																																																																																																			
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																																																																			
ANT	1																																																																																																																																																																																			
Pol.	Horizontal					Vertical																																																																																																																																																																														
QP/ Peak	Data: 1 Frequency (MHz) <table><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level Factor</th><th>Cable Preamp Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>46.490</td><td>18.93</td><td>-21.07</td><td>40.00</td><td>32.66</td><td>19.62</td><td>1.61</td><td>34.96</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>154.160</td><td>18.28</td><td>-25.22</td><td>43.50</td><td>31.88</td><td>18.75</td><td>2.35</td><td>34.70</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>257.950</td><td>23.05</td><td>-22.95</td><td>46.00</td><td>36.88</td><td>17.81</td><td>3.04</td><td>34.68</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>448.070</td><td>22.72</td><td>-23.28</td><td>46.00</td><td>31.06</td><td>22.70</td><td>3.46</td><td>34.50</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>635.280</td><td>26.12</td><td>-19.88</td><td>46.00</td><td>30.80</td><td>26.20</td><td>3.65</td><td>34.53</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>850.620</td><td>30.60</td><td>-15.40</td><td>46.00</td><td>31.72</td><td>28.80</td><td>4.38</td><td>34.30</td><td>---</td><td>Peak</td></tr></table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	46.490	18.93	-21.07	40.00	32.66	19.62	1.61	34.96	---	Peak	2	154.160	18.28	-25.22	43.50	31.88	18.75	2.35	34.70	---	Peak	3	257.950	23.05	-22.95	46.00	36.88	17.81	3.04	34.68	---	Peak	4	448.070	22.72	-23.28	46.00	31.06	22.70	3.46	34.50	---	Peak	5	635.280	26.12	-19.88	46.00	30.80	26.20	3.65	34.53	---	Peak	6	850.620	30.60	-15.40	46.00	31.72	28.80	4.38	34.30	---	Peak	Data: 2 Frequency (MHz) <table><tr><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level Factor</th><th>Cable Preamp Loss Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.000</td><td>26.25</td><td>-13.75</td><td>40.00</td><td>42.18</td><td>17.56</td><td>1.21</td><td>34.70</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>45.520</td><td>18.20</td><td>-21.80</td><td>40.00</td><td>31.94</td><td>19.61</td><td>1.61</td><td>34.96</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>170.650</td><td>17.96</td><td>-25.54</td><td>43.50</td><td>32.47</td><td>17.75</td><td>2.44</td><td>34.70</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>237.580</td><td>19.14</td><td>-26.86</td><td>46.00</td><td>33.73</td><td>17.17</td><td>2.94</td><td>34.70</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>548.950</td><td>25.16</td><td>-20.84</td><td>46.00</td><td>31.99</td><td>24.17</td><td>3.50</td><td>34.50</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>725.490</td><td>28.01</td><td>-17.99</td><td>46.00</td><td>31.33</td><td>27.35</td><td>3.73</td><td>34.40</td><td>---</td><td>Peak</td></tr></table>					Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	30.000	26.25	-13.75	40.00	42.18	17.56	1.21	34.70	---	Peak	2	45.520	18.20	-21.80	40.00	31.94	19.61	1.61	34.96	---	Peak	3	170.650	17.96	-25.54	43.50	32.47	17.75	2.44	34.70	---	Peak	4	237.580	19.14	-26.86	46.00	33.73	17.17	2.94	34.70	---	Peak	5	548.950	25.16	-20.84	46.00	31.99	24.17	3.50	34.50	---	Peak	6	725.490	28.01	-17.99	46.00	31.33	27.35	3.73	34.40	---	Peak
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark																																																																																																																																																																											
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																										
	1	46.490	18.93	-21.07	40.00	32.66	19.62	1.61	34.96	---	Peak																																																																																																																																																																									
	2	154.160	18.28	-25.22	43.50	31.88	18.75	2.35	34.70	---	Peak																																																																																																																																																																									
	3	257.950	23.05	-22.95	46.00	36.88	17.81	3.04	34.68	---	Peak																																																																																																																																																																									
	4	448.070	22.72	-23.28	46.00	31.06	22.70	3.46	34.50	---	Peak																																																																																																																																																																									
	5	635.280	26.12	-19.88	46.00	30.80	26.20	3.65	34.53	---	Peak																																																																																																																																																																									
	6	850.620	30.60	-15.40	46.00	31.72	28.80	4.38	34.30	---	Peak																																																																																																																																																																									
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level Factor	Cable Preamp Loss Factor	A/Pos	T/Pos	Remark																																																																																																																																																																											
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																											
1	30.000	26.25	-13.75	40.00	42.18	17.56	1.21	34.70	---	Peak																																																																																																																																																																										
2	45.520	18.20	-21.80	40.00	31.94	19.61	1.61	34.96	---	Peak																																																																																																																																																																										
3	170.650	17.96	-25.54	43.50	32.47	17.75	2.44	34.70	---	Peak																																																																																																																																																																										
4	237.580	19.14	-26.86	46.00	33.73	17.17	2.94	34.70	---	Peak																																																																																																																																																																										
5	548.950	25.16	-20.84	46.00	31.99	24.17	3.50	34.50	---	Peak																																																																																																																																																																										
6	725.490	28.01	-17.99	46.00	31.33	27.35	3.73	34.40	---	Peak																																																																																																																																																																										

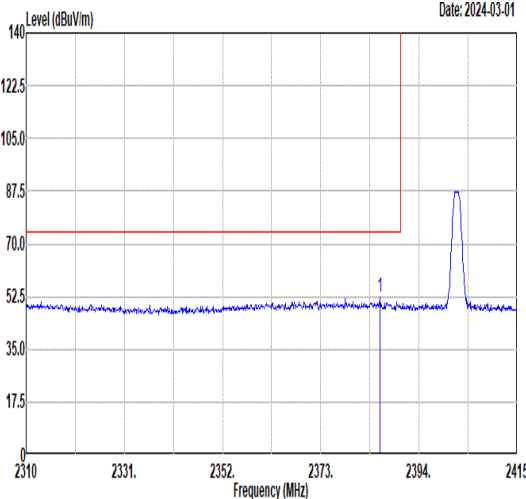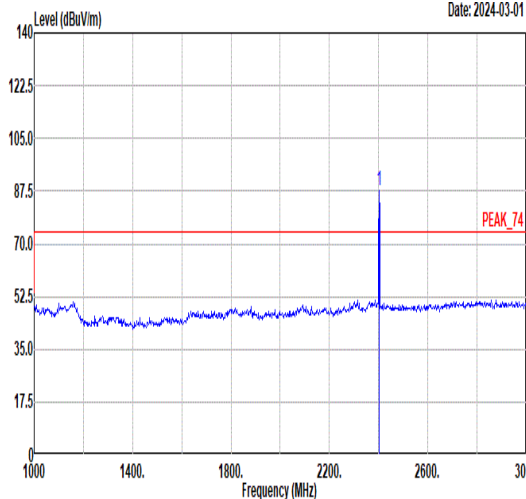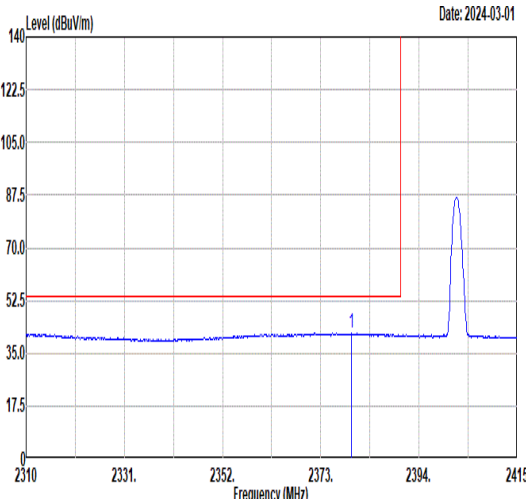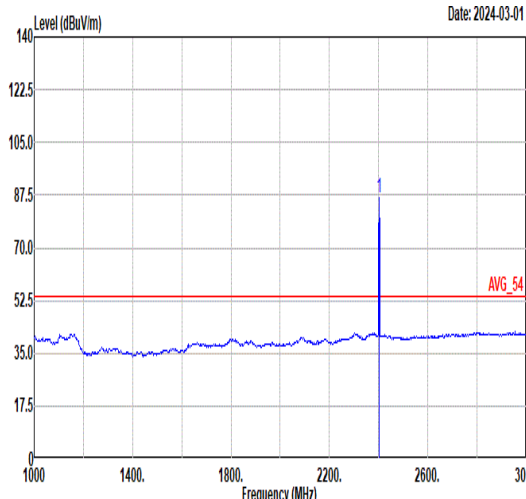

Mode	7																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																								
ANT	2																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2385.71</td><td>52.50</td><td>74.00</td><td>-21.50</td><td>44.58</td><td>32.25</td><td>7.75</td><td>32.08</td><td>336</td><td>290 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2385.71	52.50	74.00	-21.50	44.58	32.25	7.75	32.08	336	290 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2402.00</td><td>87.70</td><td>-----</td><td>-----</td><td>79.71</td><td>32.28</td><td>7.79</td><td>32.08</td><td>336</td><td>290 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2402.00	87.70	-----	-----	79.71	32.28	7.79	32.08	336
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2385.71	52.50	74.00	-21.50	44.58	32.25	7.75	32.08	336	290 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2402.00	87.70	-----	-----	79.71	32.28	7.79	32.08	336	290 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2379.62</td><td>41.79</td><td>54.00</td><td>-12.21</td><td>33.90</td><td>32.24</td><td>7.73</td><td>32.08</td><td>336</td><td>290 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2379.62	41.79	54.00	-12.21	33.90	32.24	7.73	32.08	336	290 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2402.00</td><td>86.80</td><td>-----</td><td>-----</td><td>78.81</td><td>32.28</td><td>7.79</td><td>32.08</td><td>336</td><td>290 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2402.00	86.80	-----	-----	78.81	32.28	7.79	32.08	336
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2379.62	41.79	54.00	-12.21	33.90	32.24	7.73	32.08	336	290 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2402.00	86.80	-----	-----	78.81	32.28	7.79	32.08	336	290 AVERAGE																																																																																





Mode	7	
	Band Edge	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz	
ANT	2	
Pol.	Vertical	Fundamental
Peak		







Mode	7																																																																																							
	Harmonic																																																																																							
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																							
ANT	2																																																																																							
Pol.	Horizontal					Vertical																																																																																		
Peak Avg	Level (dBuV/m) Date: 2024-03-05 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>45.93</td><td>74.00</td><td>-28.07</td><td>51.62</td><td>34.82</td><td>11.07</td><td>51.58</td><td>--</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	45.93	74.00	-28.07	51.62	34.82	11.07	51.58	--	Peak	Level (dBuV/m) Date: 2024-03-05 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4804.00</td><td>46.64</td><td>74.00</td><td>-27.36</td><td>52.33</td><td>34.82</td><td>11.07</td><td>51.58</td><td>--</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	46.64	74.00	-27.36	52.33	34.82	11.07	51.58	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	4804.00	45.93	74.00	-28.07	51.62	34.82	11.07	51.58	--	Peak																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																															
1	4804.00	46.64	74.00	-27.36	52.33	34.82	11.07	51.58	--	Peak																																																																														

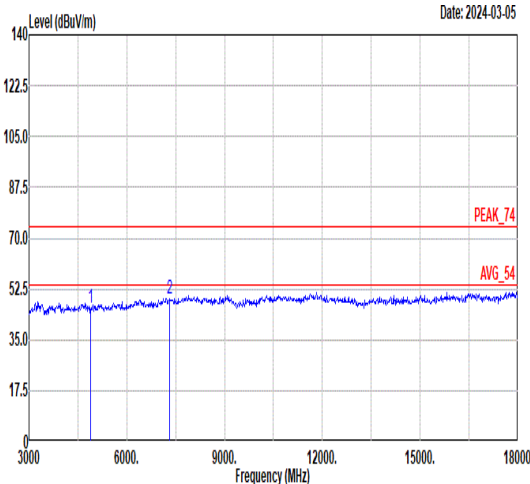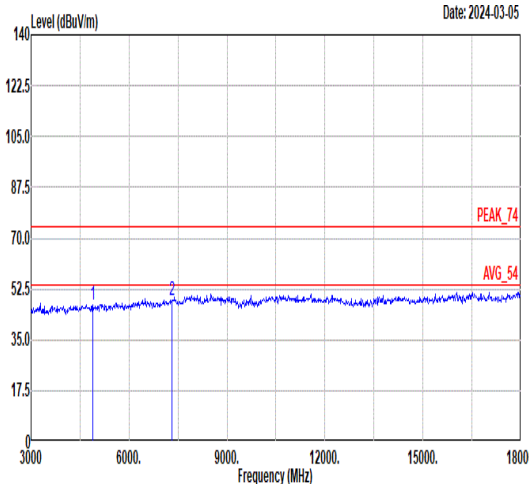

Mode	8																																																																																																											
	Harmonic																																																																																																											
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																											
ANT	2																																																																																																											
Pol.	Horizontal						Vertical																																																																																																					
Peak Avg																																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>45.89</td><td>74.00</td><td>-28.11</td><td>51.49</td><td>34.85</td><td>11.10</td><td>51.55</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>49.17</td><td>74.00</td><td>-24.83</td><td>50.91</td><td>36.33</td><td>13.09</td><td>51.16</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4880.00	45.89	74.00	-28.11	51.49	34.85	11.10	51.55	--	--	Peak	2	7320.00	49.17	74.00	-24.83	50.91	36.33	13.09	51.16	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1</td><td>4880.00</td><td>47.20</td><td>74.00</td><td>-26.80</td><td>52.80</td><td>34.85</td><td>11.10</td><td>51.55</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>48.83</td><td>74.00</td><td>-25.17</td><td>50.57</td><td>36.33</td><td>13.09</td><td>51.16</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4880.00	47.20	74.00	-26.80	52.80	34.85	11.10	51.55	--	--	Peak	2	7320.00	48.83	74.00	-25.17	50.57	36.33	13.09	51.16	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																					
1	4880.00	45.89	74.00	-28.11	51.49	34.85	11.10	51.55	--	--	Peak																																																																																																	
2	7320.00	49.17	74.00	-24.83	50.91	36.33	13.09	51.16	--	--	Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																					
1	4880.00	47.20	74.00	-26.80	52.80	34.85	11.10	51.55	--	--	Peak																																																																																																	
2	7320.00	48.83	74.00	-25.17	50.57	36.33	13.09	51.16	--	--	Peak																																																																																																	

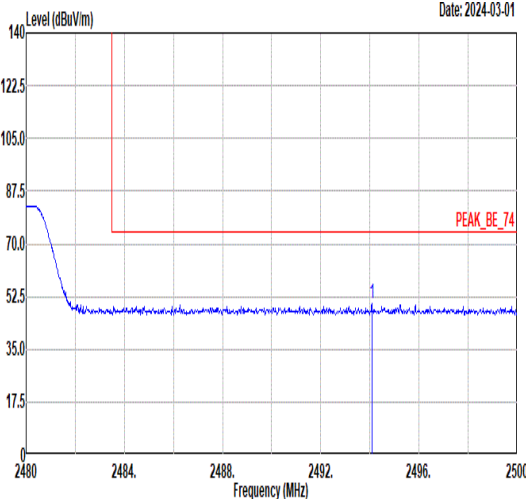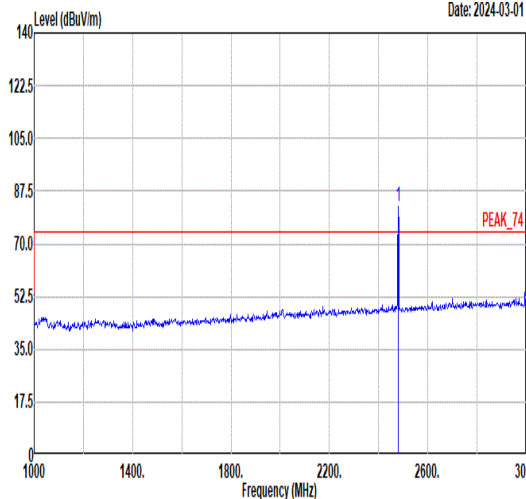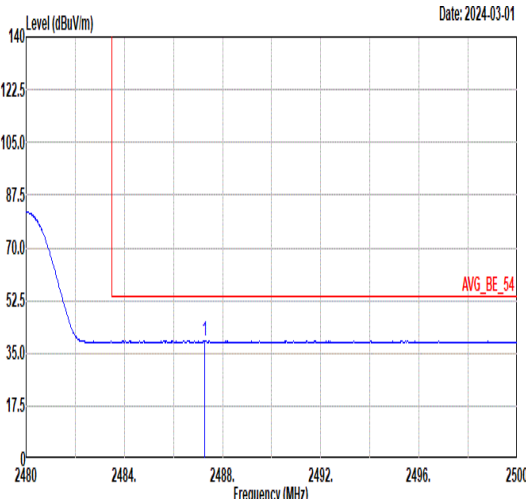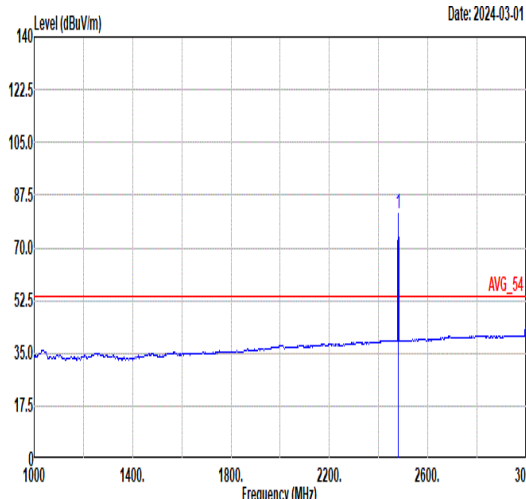

Mode	9																																																																																								
	Band Edge																																																																																								
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																								
ANT	2																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2494.08</td><td>50.02</td><td>74.00</td><td>-23.98</td><td>41.74</td><td>32.49</td><td>7.89</td><td>32.10</td><td>100</td><td>346 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2494.08	50.02	74.00	-23.98	41.74	32.49	7.89	32.10	100	346 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>82.55</td><td>-----</td><td>-----</td><td>74.32</td><td>32.46</td><td>7.87</td><td>32.10</td><td>100</td><td>346 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2480.00	82.55	-----	-----	74.32	32.46	7.87	32.10	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2494.08	50.02	74.00	-23.98	41.74	32.49	7.89	32.10	100	346 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2480.00	82.55	-----	-----	74.32	32.46	7.87	32.10	100	346 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2487.28</td><td>39.14</td><td>54.00</td><td>-14.86</td><td>30.89</td><td>32.47</td><td>7.88</td><td>32.10</td><td>100</td><td>346 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2487.28	39.14	54.00	-14.86	30.89	32.47	7.88	32.10	100	346 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>81.40</td><td>-----</td><td>-----</td><td>73.17</td><td>32.46</td><td>7.87</td><td>32.10</td><td>100</td><td>346 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2480.00	81.40	-----	-----	73.17	32.46	7.87	32.10	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2487.28	39.14	54.00	-14.86	30.89	32.47	7.88	32.10	100	346 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2480.00	81.40	-----	-----	73.17	32.46	7.87	32.10	100	346 AVERAGE																																																																																



Mode	9																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																	
ANT	2																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-03-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2480 2484 2488 2492 2496 2500 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2490.20</td><td>49.62</td><td>74.00</td><td>-24.38</td><td>41.36</td><td>32.48</td><td>7.88</td><td>32.10</td><td>100</td><td>65 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2490.20	49.62	74.00	-24.38	41.36	32.48	7.88	32.10	100	65 PEAK	Level (dBuV/m) Date: 2024-03-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>94.92</td><td>-----</td><td>-----</td><td>86.69</td><td>32.46</td><td>7.87</td><td>32.10</td><td>100</td><td>65 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2480.00	94.92	-----	-----	86.69	32.46	7.87	32.10	100	65 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2490.20	49.62	74.00	-24.38	41.36	32.48	7.88	32.10	100	65 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2480.00	94.92	-----	-----	86.69	32.46	7.87	32.10	100	65 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-03-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2480 2484 2488 2492 2496 2500 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2484.24</td><td>39.32</td><td>54.00</td><td>-14.68</td><td>31.07</td><td>32.47</td><td>7.88</td><td>32.10</td><td>100</td><td>65 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2484.24	39.32	54.00	-14.68	31.07	32.47	7.88	32.10	100	65 AVERAGE	Level (dBuV/m) Date: 2024-03-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>93.62</td><td>-----</td><td>-----</td><td>85.39</td><td>32.46</td><td>7.87</td><td>32.10</td><td>100</td><td>65 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2480.00	93.62	-----	-----	85.39	32.46	7.87	32.10	100	65 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2484.24	39.32	54.00	-14.68	31.07	32.47	7.88	32.10	100	65 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2480.00	93.62	-----	-----	85.39	32.46	7.87	32.10	100	65 AVERAGE																																																																									



Mode	9																																																																																	
	Harmonic																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																	
ANT	2																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	Level (dBuV/m) Date: 2024-03-05 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>46.99</td><td>74.00</td><td>-27.01</td><td>52.48</td><td>34.88</td><td>11.14</td></tr><tr><td>2</td><td>7440.00</td><td>48.57</td><td>74.00</td><td>-25.43</td><td>50.41</td><td>36.38</td><td>12.97</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	46.99	74.00	-27.01	52.48	34.88	11.14	2	7440.00	48.57	74.00	-25.43	50.41	36.38	12.97	Level (dBuV/m) Date: 2024-03-05 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4960.00</td><td>46.69</td><td>74.00</td><td>-27.31</td><td>52.18</td><td>34.88</td><td>11.14</td></tr><tr><td>2</td><td>7440.00</td><td>48.85</td><td>74.00</td><td>-25.15</td><td>50.69</td><td>36.38</td><td>12.97</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	46.69	74.00	-27.31	52.18	34.88	11.14	2	7440.00	48.85	74.00	-25.15	50.69	36.38	12.97
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1	4960.00	46.99	74.00	-27.01	52.48	34.88	11.14																																																																											
2	7440.00	48.57	74.00	-25.43	50.41	36.38	12.97																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1	4960.00	46.69	74.00	-27.31	52.18	34.88	11.14																																																																											
2	7440.00	48.85	74.00	-25.15	50.69	36.38	12.97																																																																											



		10																																																																																									
Mode		Band Edge																																																																																									
		2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																									
ANT		2																																																																																									
Pol.		Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-03-01 Frequency (MHz)					Level (dBuV/m) Date: 2024-03-01 Frequency (MHz)																																																																																					
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2328.80</td><td>49.95</td><td>74.00</td><td>-24.05</td><td>42.31</td><td>32.12</td><td>7.59</td><td>32.07</td><td>100</td><td>132 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2328.80	49.95	74.00	-24.05	42.31	32.12	7.59	32.07	100	132 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>81.67</td><td>-----</td><td>-----</td><td>73.68</td><td>32.28</td><td>7.79</td><td>32.08</td><td>100</td><td>132 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	81.67	-----	-----	73.68	32.28	7.79	32.08	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2328.80	49.95	74.00	-24.05	42.31	32.12	7.59	32.07	100	132 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2402.00	81.67	-----	-----	73.68	32.28	7.79	32.08	100	132 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-03-01 Frequency (MHz)					Level (dBuV/m) Date: 2024-03-01 Frequency (MHz)																																																																																					
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2310.21</td><td>39.93</td><td>54.00</td><td>-14.07</td><td>32.37</td><td>32.08</td><td>7.54</td><td>32.06</td><td>100</td><td>132 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2310.21	39.93	54.00	-14.07	32.37	32.08	7.54	32.06	100	132 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>78.35</td><td>-----</td><td>-----</td><td>70.36</td><td>32.28</td><td>7.79</td><td>32.08</td><td>100</td><td>132 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2402.00	78.35	-----	-----	70.36	32.28	7.79	32.08	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2310.21	39.93	54.00	-14.07	32.37	32.08	7.54	32.06	100	132 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																					
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2402.00	78.35	-----	-----	70.36	32.28	7.79	32.08	100	132 AVERAGE																																																																																	



		10																																																																																							
Mode		Band Edge																																																																																							
		2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																							
ANT		2																																																																																							
Pol.		Vertical					Fundamental																																																																																		
Peak	Date: 2024-03-01					Date: 2024-03-01																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2364.71</td><td>49.19</td><td>74.00</td><td>-24.81</td><td>41.37</td><td>32.20</td><td>7.69</td><td>32.07</td><td>100</td><td>64 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2364.71	49.19	74.00	-24.81	41.37	32.20	7.69	32.07	100	64 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2402.00</td><td>96.26</td><td>-----</td><td>-----</td><td>88.27</td><td>32.28</td><td>7.79</td><td>32.08</td><td>100</td><td>64 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2402.00	96.26	-----	-----	88.27	32.28	7.79	32.08	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2364.71	49.19	74.00	-24.81	41.37	32.20	7.69	32.07	100	64 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2402.00	96.26	-----	-----	88.27	32.28	7.79	32.08	100	64 PEAK																																																																																
Avg	Date: 2024-03-01					Date: 2024-03-01																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.80</td><td>41.37</td><td>54.00</td><td>-12.63</td><td>33.43</td><td>32.26</td><td>7.76</td><td>32.08</td><td>100</td><td>64 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.80	41.37	54.00	-12.63	33.43	32.26	7.76	32.08	100	64 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2402.00</td><td>94.40</td><td>-----</td><td>-----</td><td>86.41</td><td>32.28</td><td>7.79</td><td>32.08</td><td>100</td><td>64 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2402.00	94.40	-----	-----	86.41	32.28	7.79	32.08	100
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2389.80	41.37	54.00	-12.63	33.43	32.26	7.76	32.08	100	64 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2402.00	94.40	-----	-----	86.41	32.28	7.79	32.08	100	64 AVERAGE																																																																																







Mode	10																																																																																						
	Harmonic																																																																																						
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																						
ANT	2																																																																																						
Pol.	Horizontal					Vertical																																																																																	
Peak Avg	Level (dBuV/m) Date: 2024-03-05 Frequency (MHz)					Level (dBuV/m) Date: 2024-03-05 Frequency (MHz)																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>45.54</td><td>74.00</td><td>-28.46</td><td>51.23</td><td>34.82</td><td>11.07</td><td>51.58</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	45.54	74.00	-28.46	51.23	34.82	11.07	51.58	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>46.91</td><td>74.00</td><td>-27.09</td><td>52.60</td><td>34.82</td><td>11.07</td><td>51.58</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	46.91	74.00	-27.09	52.60	34.82	11.07	51.58	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	4804.00	45.54	74.00	-28.46	51.23	34.82	11.07	51.58	--	Peak																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	4804.00	46.91	74.00	-27.09	52.60	34.82	11.07	51.58	--	Peak																																																																													



Mode	11																																																																																	
	Harmonic																																																																																	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																	
ANT	2																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	Level (dBuV/m) Date: 2024-03-05 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4880.00</td><td>46.51</td><td>74.00</td><td>-27.49</td><td>52.11</td><td>34.85</td><td>11.10</td></tr><tr><td>2</td><td>7320.00</td><td>49.36</td><td>74.00</td><td>-24.64</td><td>51.10</td><td>36.33</td><td>13.09</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4880.00	46.51	74.00	-27.49	52.11	34.85	11.10	2	7320.00	49.36	74.00	-24.64	51.10	36.33	13.09	Level (dBuV/m) Date: 2024-03-05 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4880.00</td><td>45.58</td><td>74.00</td><td>-28.42</td><td>51.18</td><td>34.85</td><td>11.10</td></tr><tr><td>2</td><td>7320.00</td><td>49.53</td><td>74.00</td><td>-24.47</td><td>51.27</td><td>36.33</td><td>13.09</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4880.00	45.58	74.00	-28.42	51.18	34.85	11.10	2	7320.00	49.53	74.00	-24.47	51.27	36.33	13.09
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																											
1	4880.00	46.51	74.00	-27.49	52.11	34.85	11.10																																																																											
2	7320.00	49.36	74.00	-24.64	51.10	36.33	13.09																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																											
1	4880.00	45.58	74.00	-28.42	51.18	34.85	11.10																																																																											
2	7320.00	49.53	74.00	-24.47	51.27	36.33	13.09																																																																											

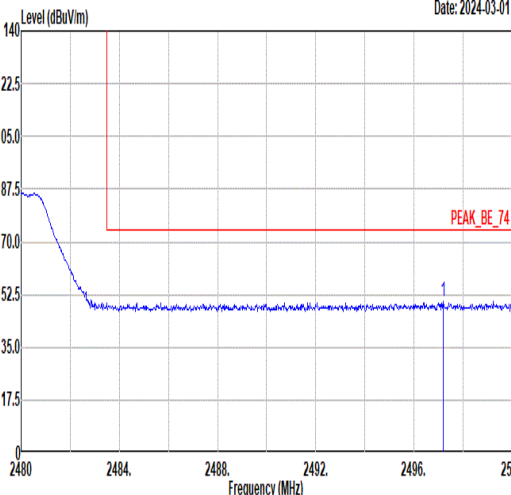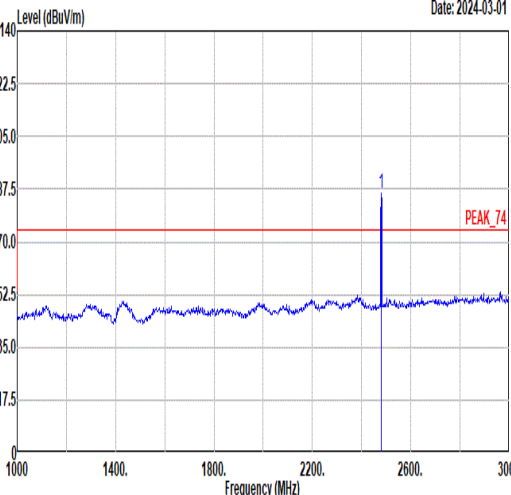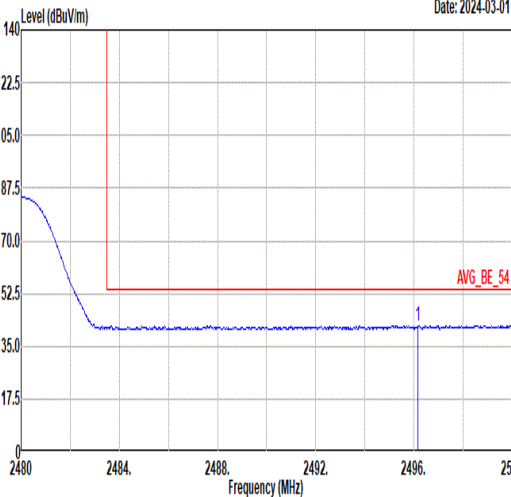
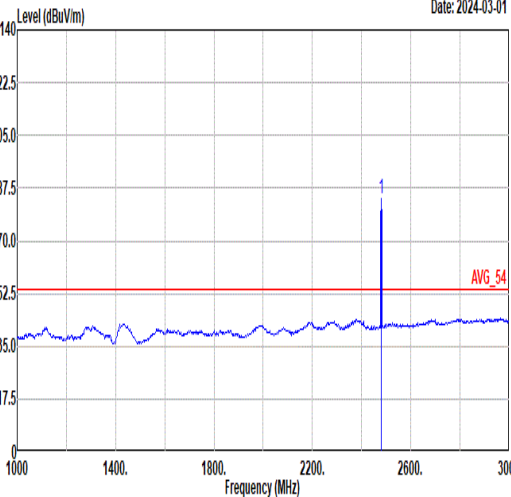


Mode	12																																																																																										
	Band Edge																																																																																										
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																										
ANT	2																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak	 Level (dBuV/m) Date: 2024-03-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2480 2484 2488 2492 2496 2500 Frequency (MHz) PEAK_BE_74						 Level (dBuV/m) Date: 2024-03-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) PEAK_74																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2497.18</td><td>50.40</td><td>74.00</td><td>-23.60</td><td>42.12</td><td>32.49</td><td>7.89</td><td>32.10</td><td>271 260 PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2497.18	50.40	74.00	-23.60	42.12	32.49	7.89	32.10	271 260 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>86.00</td><td>-----</td><td>-----</td><td>77.77</td><td>32.46</td><td>7.87</td><td>32.10</td><td>271 260 PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	86.00	-----	-----	77.77	32.46	7.87	32.10
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2497.18	50.40	74.00	-23.60	42.12	32.49	7.89	32.10	271 260 PEAK																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	86.00	-----	-----	77.77	32.46	7.87	32.10	271 260 PEAK																																																																																		
Avg	 Level (dBuV/m) Date: 2024-03-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2480 2484 2488 2492 2496 2500 Frequency (MHz) AVG_BE_54						 Level (dBuV/m) Date: 2024-03-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) AVG_54																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2496.16</td><td>41.92</td><td>54.00</td><td>-12.08</td><td>33.64</td><td>32.49</td><td>7.89</td><td>32.10</td><td>271 260 AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2496.16	41.92	54.00	-12.08	33.64	32.49	7.89	32.10	271 260 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>84.15</td><td>-----</td><td>-----</td><td>75.92</td><td>32.46</td><td>7.87</td><td>32.10</td><td>271 260 AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	84.15	-----	-----	75.92	32.46	7.87	32.10
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2496.16	41.92	54.00	-12.08	33.64	32.49	7.89	32.10	271 260 AVERAGE																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2480.00	84.15	-----	-----	75.92	32.46	7.87	32.10	271 260 AVERAGE																																																																																		



Mode	12																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																									
ANT	2																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-03-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2480 2484 2488 2492 2496 2500 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.56</td><td>55.40</td><td>74.00</td><td>-18.60</td><td>47.16</td><td>32.46</td><td>7.88</td><td>32.10</td><td>100</td><td>64 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2483.56	55.40	74.00	-18.60	47.16	32.46	7.88	32.10	100	64 PEAK	Level (dBuV/m) Date: 2024-03-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>96.44</td><td>-----</td><td>-----</td><td>88.21</td><td>32.46</td><td>7.87</td><td>32.10</td><td>100</td><td>64 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2480.00	96.44	-----	-----	88.21	32.46	7.87	32.10	100	64 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2483.56	55.40	74.00	-18.60	47.16	32.46	7.88	32.10	100	64 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2480.00	96.44	-----	-----	88.21	32.46	7.87	32.10	100	64 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-03-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2480 2484 2488 2492 2496 2500 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.58</td><td>43.87</td><td>54.00</td><td>-10.13</td><td>35.63</td><td>32.46</td><td>7.88</td><td>32.10</td><td>100</td><td>64 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2483.58	43.87	54.00	-10.13	35.63	32.46	7.88	32.10	100	64 AVERAGE	Level (dBuV/m) Date: 2024-03-01 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2480.00</td><td>94.94</td><td>-----</td><td>-----</td><td>86.71</td><td>32.46</td><td>7.87</td><td>32.10</td><td>100</td><td>64 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2480.00	94.94	-----	-----	86.71	32.46	7.87	32.10	100	64 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2483.58	43.87	54.00	-10.13	35.63	32.46	7.88	32.10	100	64 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2480.00	94.94	-----	-----	86.71	32.46	7.87	32.10	100	64 AVERAGE																																																																																	

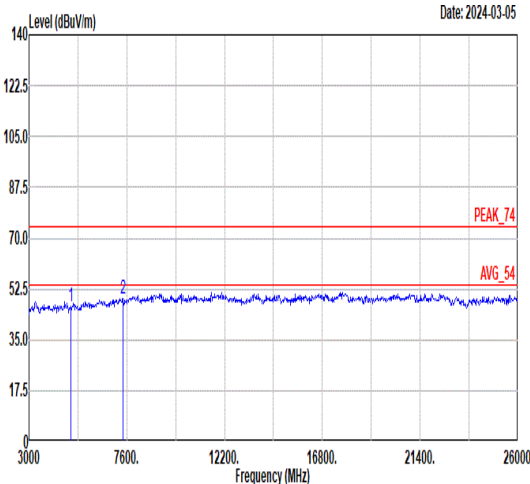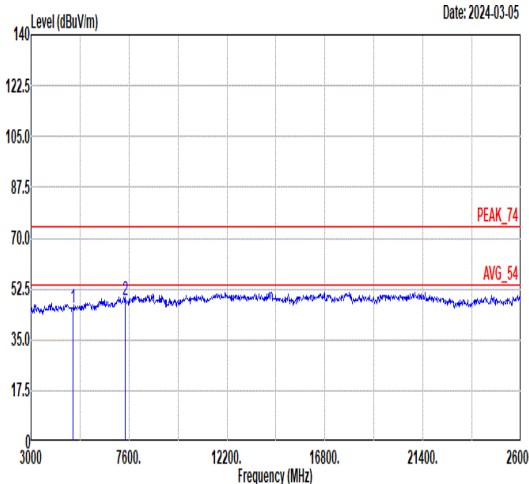

Mode	12																																																																																																											
	Harmonic																																																																																																											
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																											
ANT	2																																																																																																											
Pol.	Horizontal					Vertical																																																																																																						
Peak Avg																																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>46.39</td><td>74.00</td><td>-27.61</td><td>51.88</td><td>34.88</td><td>11.14</td><td>51.51</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>49.19</td><td>74.00</td><td>-24.81</td><td>51.03</td><td>36.38</td><td>12.97</td><td>51.19</td><td>--</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4960.00	46.39	74.00	-27.61	51.88	34.88	11.14	51.51	--	Peak	2	7440.00	49.19	74.00	-24.81	51.03	36.38	12.97	51.19	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4960.00</td><td>46.19</td><td>74.00</td><td>-27.81</td><td>51.68</td><td>34.88</td><td>11.14</td><td>51.51</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>48.86</td><td>74.00</td><td>-25.14</td><td>50.70</td><td>36.38</td><td>12.97</td><td>51.19</td><td>--</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4960.00	46.19	74.00	-27.81	51.68	34.88	11.14	51.51	--	Peak	2	7440.00	48.86	74.00	-25.14	50.70	36.38	12.97	51.19	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																			
1	4960.00	46.39	74.00	-27.61	51.88	34.88	11.14	51.51	--	Peak																																																																																																		
2	7440.00	49.19	74.00	-24.81	51.03	36.38	12.97	51.19	--	Peak																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																			
1	4960.00	46.19	74.00	-27.81	51.68	34.88	11.14	51.51	--	Peak																																																																																																		
2	7440.00	48.86	74.00	-25.14	50.70	36.38	12.97	51.19	--	Peak																																																																																																		

Note: Only the worst case has assessed 18G ~26GHz to test.



Mode	12																																																																																																																																																																																																																																	
	LF																																																																																																																																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																																																																																																																	
ANT	2																																																																																																																																																																																																																																	
Pol.	Horizontal																																																																																																																																																																																																																																	
QPI/ Peak	Level (dBuV/m) Date: 2024-03-01 FCC CLASS-B -6dB Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>62.01</td><td>19.87</td><td>40.00</td><td>-20.13</td><td>37.04</td><td>12.50</td><td>1.61</td><td>31.28</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>201.69</td><td>20.67</td><td>43.50</td><td>-22.83</td><td>33.79</td><td>15.50</td><td>2.28</td><td>30.90</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>284.14</td><td>21.64</td><td>46.00</td><td>-24.36</td><td>30.65</td><td>19.24</td><td>2.65</td><td>30.90</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>475.23</td><td>23.72</td><td>46.00</td><td>-22.28</td><td>27.68</td><td>23.35</td><td>3.39</td><td>30.70</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>712.88</td><td>27.79</td><td>46.00</td><td>-18.21</td><td>29.19</td><td>25.38</td><td>4.06</td><td>30.84</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>848.68</td><td>30.00</td><td>46.00</td><td>-16.00</td><td>30.17</td><td>26.49</td><td>4.39</td><td>31.05</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	62.01	19.87	40.00	-20.13	37.04	12.50	1.61	31.28	--	--	Peak	2	201.69	20.67	43.50	-22.83	33.79	15.50	2.28	30.90	--	--	Peak	3	284.14	21.64	46.00	-24.36	30.65	19.24	2.65	30.90	--	--	Peak	4	475.23	23.72	46.00	-22.28	27.68	23.35	3.39	30.70	--	--	Peak	5	712.88	27.79	46.00	-18.21	29.19	25.38	4.06	30.84	--	--	Peak	6	848.68	30.00	46.00	-16.00	30.17	26.49	4.39	31.05	--	--	Peak	Level (dBuV/m) Date: 2024-03-01 FCC CLASS-B -6dB Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>21.44</td><td>40.00</td><td>-18.56</td><td>26.25</td><td>25.20</td><td>1.19</td><td>31.20</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>149.31</td><td>18.58</td><td>43.50</td><td>-24.92</td><td>30.91</td><td>16.58</td><td>2.19</td><td>31.10</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>381.14</td><td>21.73</td><td>46.00</td><td>-24.27</td><td>28.07</td><td>21.38</td><td>3.02</td><td>30.74</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>555.74</td><td>25.35</td><td>46.00</td><td>-20.65</td><td>27.73</td><td>24.99</td><td>3.63</td><td>31.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>759.44</td><td>29.12</td><td>46.00</td><td>-16.88</td><td>29.96</td><td>25.94</td><td>4.20</td><td>30.98</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>863.23</td><td>30.43</td><td>46.00</td><td>-15.57</td><td>30.47</td><td>26.58</td><td>4.42</td><td>31.04</td><td>--</td><td>--</td><td>Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	30.00	21.44	40.00	-18.56	26.25	25.20	1.19	31.20	--	--	Peak	2	149.31	18.58	43.50	-24.92	30.91	16.58	2.19	31.10	--	--	Peak	3	381.14	21.73	46.00	-24.27	28.07	21.38	3.02	30.74	--	--	Peak	4	555.74	25.35	46.00	-20.65	27.73	24.99	3.63	31.00	--	--	Peak	5	759.44	29.12	46.00	-16.88	29.96	25.94	4.20	30.98	--	--	Peak	6	863.23	30.43	46.00	-15.57	30.47	26.58	4.42	31.04	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																																										
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																							
	1	62.01	19.87	40.00	-20.13	37.04	12.50	1.61	31.28	--	--	Peak																																																																																																																																																																																																																						
	2	201.69	20.67	43.50	-22.83	33.79	15.50	2.28	30.90	--	--	Peak																																																																																																																																																																																																																						
	3	284.14	21.64	46.00	-24.36	30.65	19.24	2.65	30.90	--	--	Peak																																																																																																																																																																																																																						
	4	475.23	23.72	46.00	-22.28	27.68	23.35	3.39	30.70	--	--	Peak																																																																																																																																																																																																																						
	5	712.88	27.79	46.00	-18.21	29.19	25.38	4.06	30.84	--	--	Peak																																																																																																																																																																																																																						
	6	848.68	30.00	46.00	-16.00	30.17	26.49	4.39	31.05	--	--	Peak																																																																																																																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																																								
1	30.00	21.44	40.00	-18.56	26.25	25.20	1.19	31.20	--	--	Peak																																																																																																																																																																																																																							
2	149.31	18.58	43.50	-24.92	30.91	16.58	2.19	31.10	--	--	Peak																																																																																																																																																																																																																							
3	381.14	21.73	46.00	-24.27	28.07	21.38	3.02	30.74	--	--	Peak																																																																																																																																																																																																																							
4	555.74	25.35	46.00	-20.65	27.73	24.99	3.63	31.00	--	--	Peak																																																																																																																																																																																																																							
5	759.44	29.12	46.00	-16.88	29.96	25.94	4.20	30.98	--	--	Peak																																																																																																																																																																																																																							
6	863.23	30.43	46.00	-15.57	30.47	26.58	4.42	31.04	--	--	Peak																																																																																																																																																																																																																							




Appendix D. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
1	Bluetooth LE 1Mbps	62.90	0.39	2.564	3KHz
1	Bluetooth LE 2Mbps	33.33	0.21	4.762	10KHz
2	Bluetooth LE 1Mbps	62.98	0.39	2.545	3KHz
2	Bluetooth LE 2Mbps	33.65	0.21	4.762	10KHz

<Ant.1>

Bluetooth LE 1Mbps

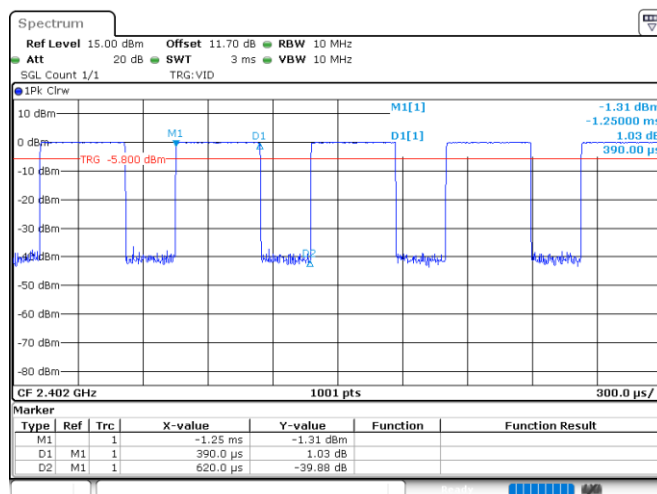


Bluetooth LE 2Mbps

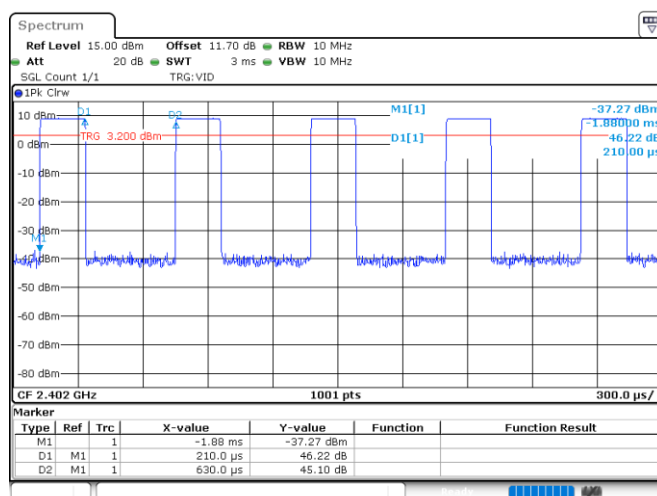



<Ant.2>

Bluetooth LE 1Mbps

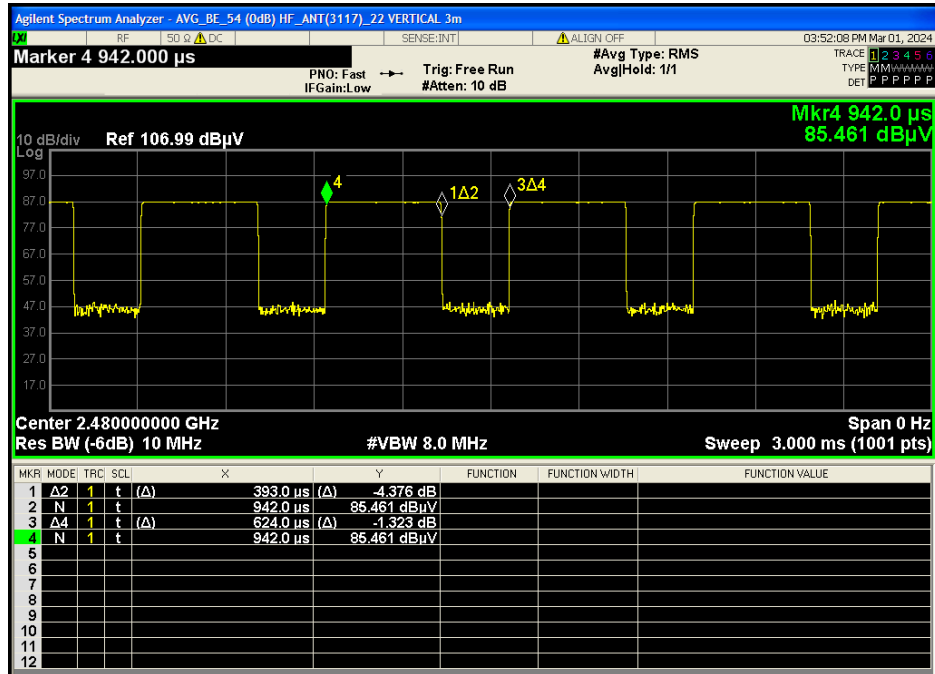

Bluetooth LE 2Mbps

