


VERTIX™

Silencer Handsfree Headset VX2

Precision | Clarity | Distinction

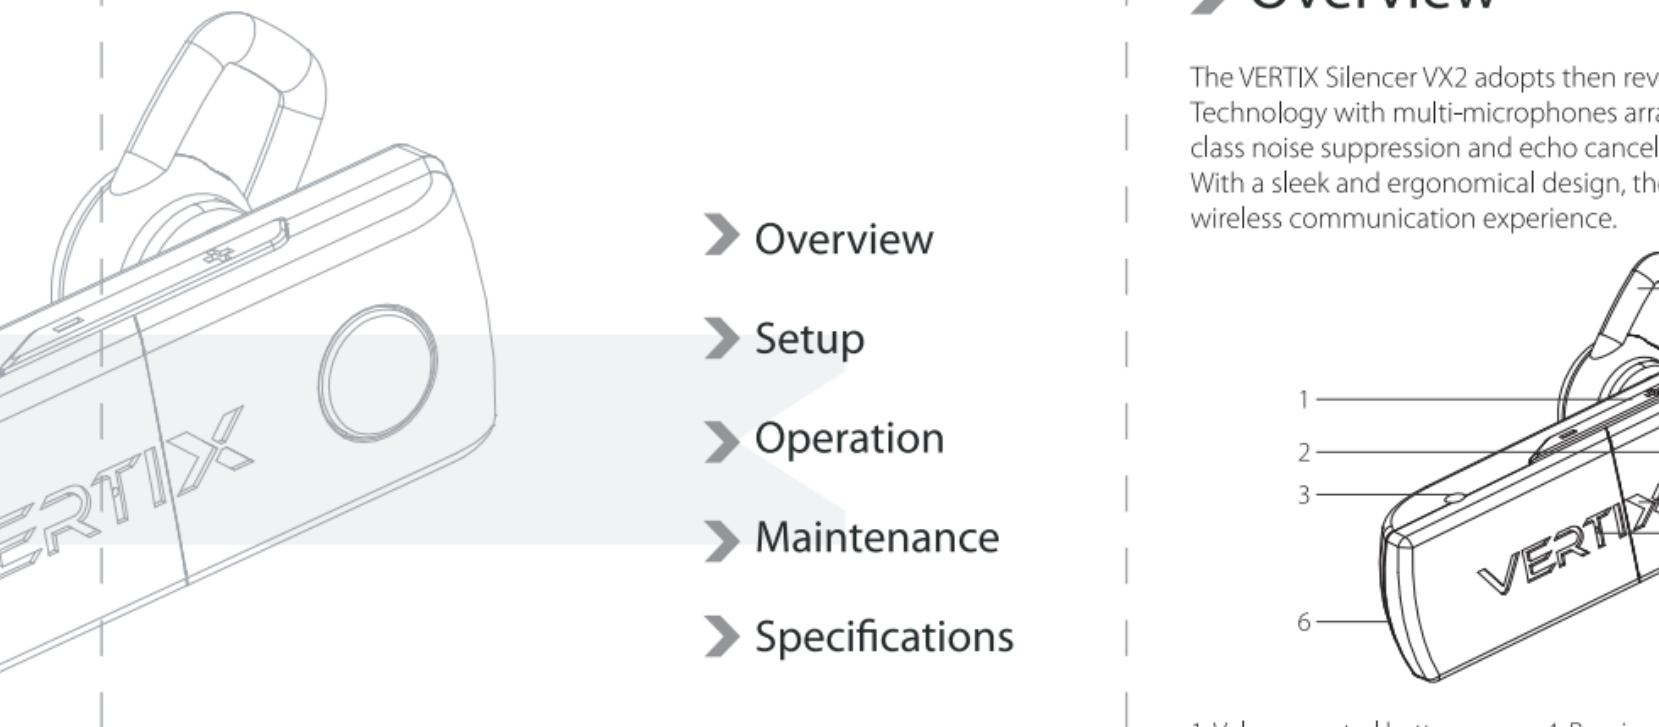

➤ Overview

➤ Setup

➤ Operation

➤ Maintenance

➤ Specifications

The VERTIX Silencer VX2 adopts the revolutionary Cut-the-Noise Technology with multi-microphones array technology to produce world class noise suppression and echo cancellation, with zero voice distortion. With a sleek and ergonomical design, the VX2 delivers an exceptional wireless communication experience.

➤ Overview

Typically, these steps involve going to a 'Setup', 'Connection' or 'Bluetooth' menu on your phone and then select the option to search for Bluetooth® devices.

1. Your phone will indicate that it has found the VERTIX VX2 headset and ask if you want to pair with it. Confirm this by pressing the "Yes" or "OK" key.
2. When prompted, enter the passkey or PIN code "000" (zero), then press the "Yes" or "OK" key, if required. In most cases, you only need to press the "Yes" button on your mobile connection.
3. Once the headset successfully connected with mobile phone, the red and blue light will blink periodically.

Depending on your country, the charger may appear different from the illustration.

WARNING: You can also charge the VX2 from your computer USB port with the charging cable provided if fine. Do not attempt to charge the VX2 with anything other than the travel charger provided. Using unauthorized travel chargers may damage the VX2.

Charging the headset

The VX2 uses a rechargeable battery. You must charge the battery fully before using the headset for the first time.

1. Plug the travel charger, if supplied, into an AC socket.


2. Connect the charger to the VX2 as shown in the picture. The red indicator will light up when charging.

3. When the battery is fully charged, a blue indicator light will be shown.

4. Remove the travel charger from the AC socket.

Note: When the battery is low, the blinking light will turn red. The VX2 will be charged in 1.5-3 hours.

Note: The VX2 cannot be used while charging.

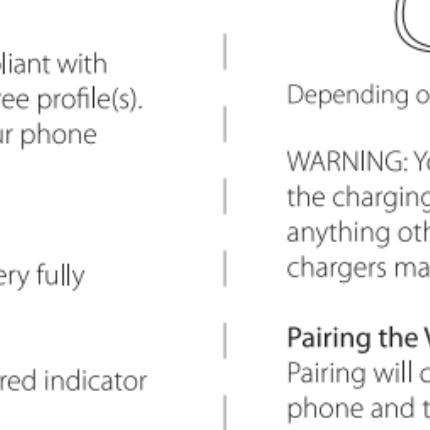

➤ Setup

Driving safety

1. Keeping your eyes on the road, while driving is your foremost responsibility.
2. Obey traffic laws at all times; Make sure that using of a handsfree headset while driving is permitted by your local law before using.

Checking phone compatibility

The VX2 is compatible with most mobile phones that are compliant with Bluetooth® V2.1 + EDR and support the headset and/or hands-free profile(s).

Ensure that your phone has Bluetooth® capability by visiting your phone manufacturer's website.

Pairing the VX2 to two devices (Multipoint connection)

VERTIX VX2 supports Multipoint feature to allow simultaneous pairing with two mobile phones.

1. Follow the pairing procedure as instructed in "Pairing" section to pair the headset with the first mobile phone.

2. Repeat the same pairing procedure on the second mobile phone. The VX2 will be connected with two Bluetooth® enabled mobile phones.

Pairing the VX2


Pairing will create a unique and encrypted wireless link between your phone and the VX2 headset.

3. When the battery is fully charged, a blue indicator light will be shown.

4. Remove the travel charger from the AC socket.

Note: When the battery is low, the blinking light will turn red. The VX2 will be charged in 1.5-3 hours.

Note: The VX2 cannot be used while charging.

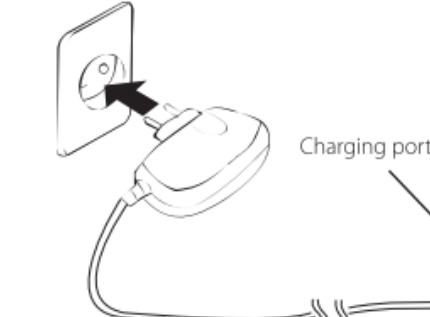

► Operation

Turning the VX2 on/off

To turn the VX2 on, press and hold the MFB Button for about 3 seconds, the blue indicator of the headset will flash 3 times quickly. A blue indicator light will blink every 3 seconds to indicate that the VX2 is on.

To turn the VX2 off, press and hold the MFB Button for about 3 seconds, the blue light will flash quickly for 5 times before going off.

Note: When the battery is low, the blinking light will turn red.

Making a call using the phone's keypad

1. Dial number on the keypad or select the contact name from the contact list from your mobile phone.

2. Press the phone's "send/call" key.

Note: The VX2 has a built-in multi-microphone feature with Cut-the-Noise Technology to deliver superior voice clarity even in loud/noisy environments.

Voice Dialing

Please ensure your mobile phone supports voice dialing function and the voice tag assigned for this feature.

1. Shortly press MFB Button once.

2. You will hear the voice-activation tone. Say the name of the person you wish to call. The call will be made automatically.

3. Shortly press MFB Button again to stop the voice dialing.

Note: If the VX2 is connected to two mobile phones, this feature will be only available on the mobile phone which is connected first.

Note: For mobile phones which do not support voice dialing function, shortly pressing the MFB button once may redial the last number. Actual operation may vary according to the phone type/model.

Ending a call

Press MFB Button once during a call; or end the call from your phone's keypad.

Answering a call

Press the MFB Button, when you receive an incoming call to answer. Alternatively, answer the call via your phone's keypad. You may need to transfer the call to the VX2 by holding the Volume up or down Button for 2 seconds (depending on phone model/type).

Last number redialing

Press MFB Button quickly twice to redial the last number.

Note: If the VX2 is connected to two mobile phones, this feature will be only available on the mobile phone which is connected first.

Rejecting an incoming call

Press and hold the Volume-control Button for 2 seconds to reject a call.

Adjusting the headset volume

Press Volume up Button to increase the volume level

Press Volume down Button to decrease the volume level.

Transferring a call

Headset to phone: Press and hold the Volume control button for 2 seconds

and release it. The call will be transferred from the VX2 to the phone.

Phone to Headset: Press and hold the Volume control button for 2 seconds

and release. The call will be transferred from the phone to the VX2.

Answering a call

Press the MFB Button, when you receive an incoming call to answer.

Alternatively, answer the call via your phone's keypad. You may need to

transfer the call to the VX2 by holding the Volume up or down Button for 2

seconds (depending on phone model/type).

Muting the Microphone

You can put a call on hold by muting the microphone. Press and hold both

the Volume '+' and '-' control button for 3 seconds to toggle between on/off.

You will hear a beep sound when the microphone is activated/de-activated.

► Specifications

Operating range: up to 30 feet (10 meters)

Talking time: 5 hours*

Standby time: 100 hours*

Dimensions (L x W x T): 5.7 x 1.8 x 1.1 mm

Weight: 10g

* May vary according to user's operation mode and mobile phone settings.

Safety information

Correct disposal of this product

Never allow children to play with the VX2 as the small parts may be a

choking hazard.

Disassembling this headset will void the user's warranty. XtremeDSP will not be

responsible for any product failures or injuries as a result of such misuse or abuse.

Charger (if supplied)

The charger can be used for 110Vac – 240Vac output: 5V / 500mA.

Alternatively, answer the call via your phone's keypad. You may need to

transfer the call to the VX2 by holding the Volume up or down Button for 2

seconds (depending on phone model/type).

Bluetooth®

Bluetooth® compatibility: Version 2.1 + EDR, Class II

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

► Maintenance

Headset

Avoid exposing the VX2 to high temperatures (above 60°C) such as in a hot

vehicle or in direct sunlight. (Storage at high temperatures can damage

the performance and reduce battery life).