



802.11a CH64

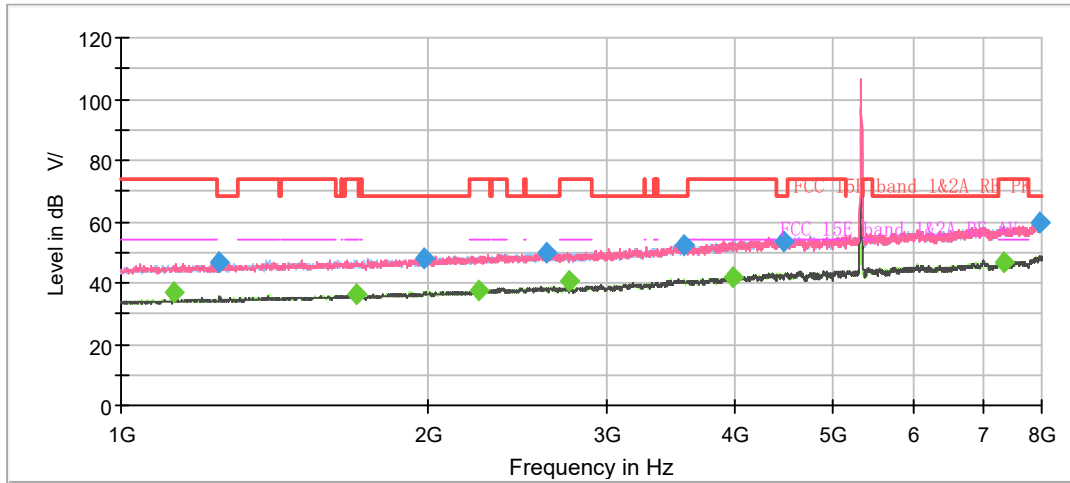

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

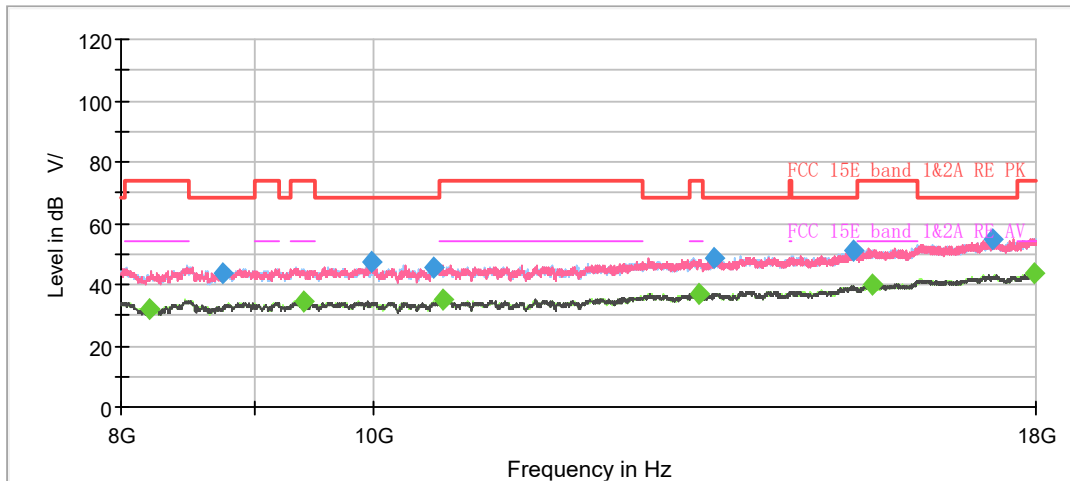


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	36.86	54.00	17.14	500.0	200.0	H	301.0	4.0
1248.500000	46.93	---	68.20	21.27	500.0	200.0	H	56.0	4.8
1702.625000	---	36.05	54.00	17.95	500.0	100.0	H	70.0	7.4
1986.125000	47.81	---	68.20	20.39	500.0	100.0	H	17.0	8.7
2241.625000	---	37.52	54.00	16.48	500.0	100.0	H	214.0	9.6
2610.000000	49.92	---	68.20	18.28	500.0	200.0	H	8.0	10.7
2750.000000	---	40.37	54.00	13.63	500.0	200.0	V	0.0	10.9
3569.875000	52.30	---	68.20	15.90	500.0	200.0	H	47.0	13.8
3975.875000	---	41.87	54.00	12.13	500.0	200.0	H	310.0	14.5
4473.750000	53.50	---	68.20	14.70	500.0	200.0	H	90.0	15.8
7335.875000	---	46.93	54.00	7.07	500.0	100.0	H	80.0	21.2
7963.250000	59.63	---	68.20	8.57	500.0	200.0	H	220.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH100

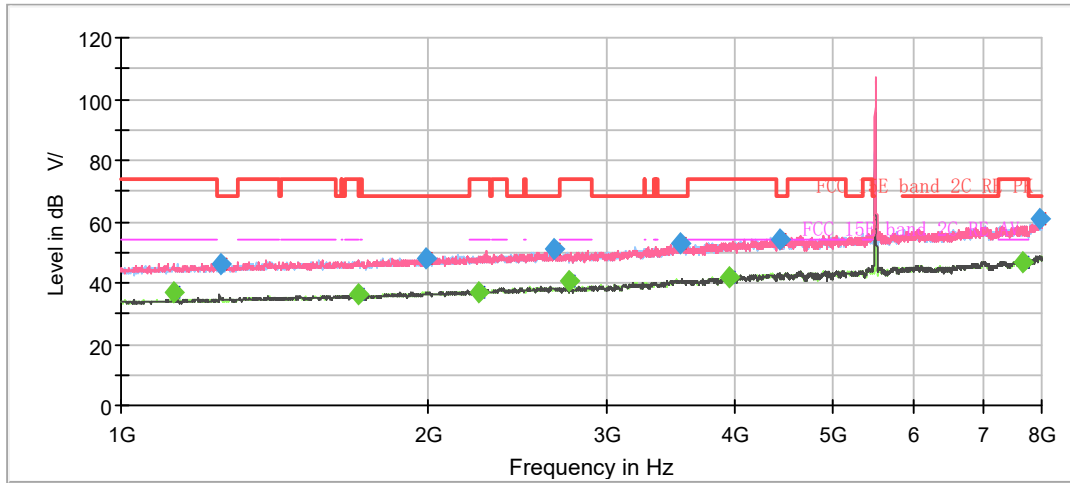

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

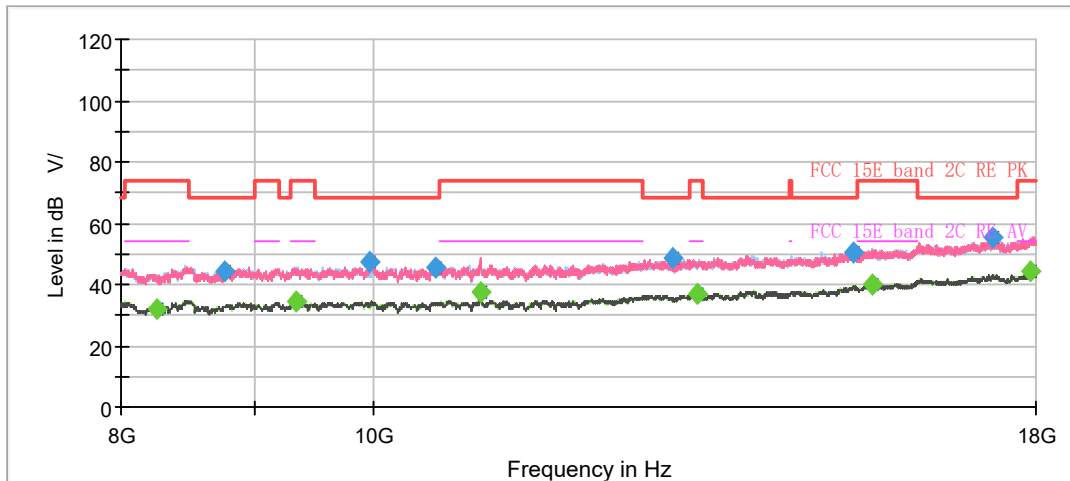


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	36.95	54.00	17.05	500.0	200.0	H	297.0	4.0
1250.250000	46.08	---	68.20	22.12	500.0	100.0	V	146.0	4.8
1706.125000	---	36.03	54.00	17.97	500.0	100.0	V	300.0	7.4
1992.250000	48.24	---	68.20	19.96	500.0	100.0	H	102.0	8.7
2239.000000	---	36.92	54.00	17.08	500.0	200.0	H	306.0	9.6
2659.000000	50.83	---	68.20	17.37	500.0	100.0	H	126.0	10.8
2750.000000	---	40.32	54.00	13.68	500.0	200.0	V	9.0	10.9
3535.750000	53.09	---	68.20	15.11	500.0	200.0	V	196.0	14.1
3954.000000	---	41.96	54.00	12.04	500.0	100.0	V	189.0	14.4
4427.375000	54.00	---	68.20	14.20	500.0	200.0	V	19.0	15.9
7664.875000	---	46.95	54.00	7.05	500.0	200.0	V	5.0	22.0
7975.500000	60.64	---	68.20	7.56	500.0	100.0	V	0.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH116

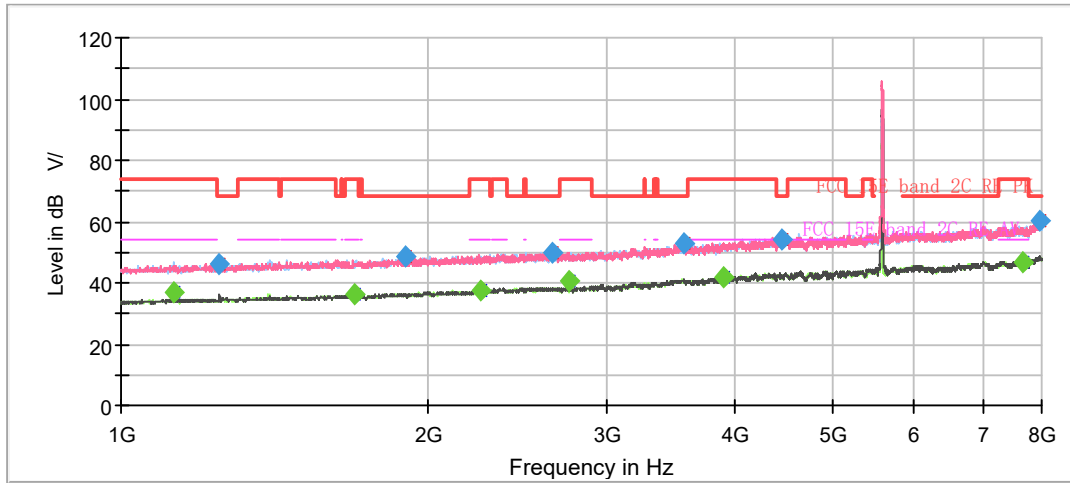

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

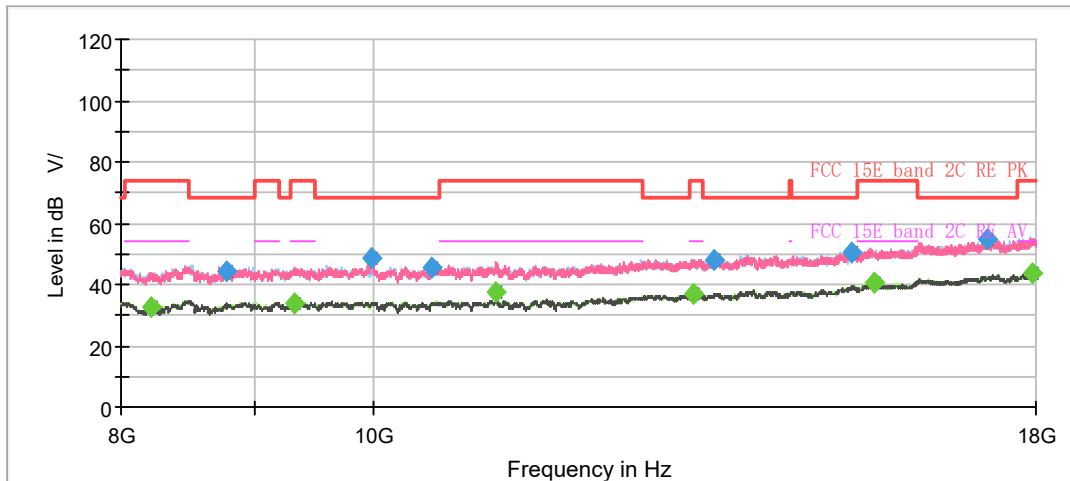


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	36.98	54.00	17.02	500.0	200.0	H	297.0	4.0
1249.375000	46.23	---	68.20	21.97	500.0	200.0	H	81.0	4.8
1695.625000	---	36.04	54.00	17.96	500.0	100.0	V	324.0	7.4
1901.250000	48.38	---	68.20	19.82	500.0	200.0	V	0.0	8.0
2249.500000	---	37.64	54.00	16.36	500.0	200.0	V	46.0	9.5
2649.375000	50.12	---	68.20	18.08	500.0	200.0	H	307.0	10.9
2750.000000	---	40.47	54.00	13.53	500.0	200.0	V	2.0	10.9
3566.375000	52.82	---	68.20	15.38	500.0	100.0	V	0.0	13.8
3901.500000	---	41.90	54.00	12.10	500.0	200.0	H	152.0	14.3
4447.500000	54.28	---	68.20	13.92	500.0	100.0	V	78.0	15.7
7671.000000	---	47.00	54.00	7.00	500.0	100.0	H	72.0	22.1
7965.875000	60.54	---	68.20	7.66	500.0	200.0	V	189.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH140

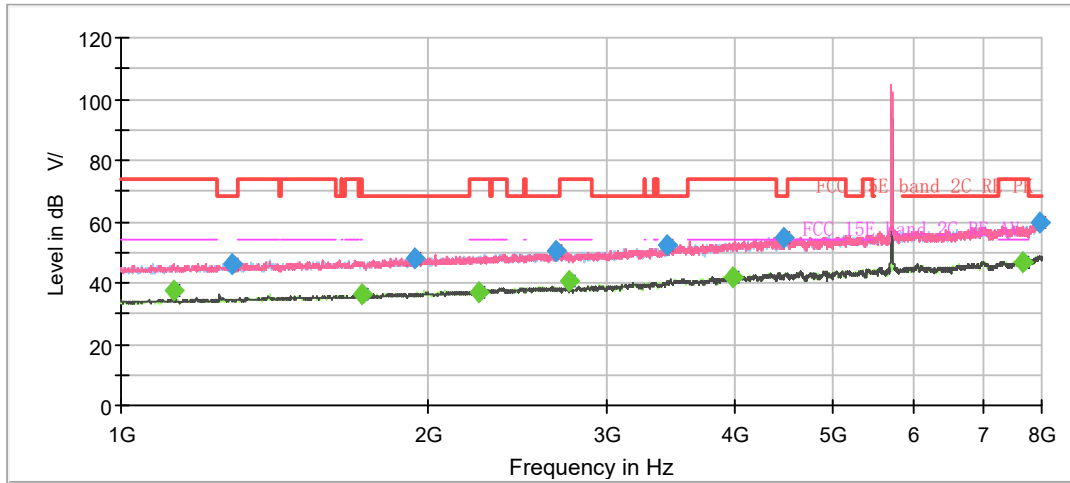

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

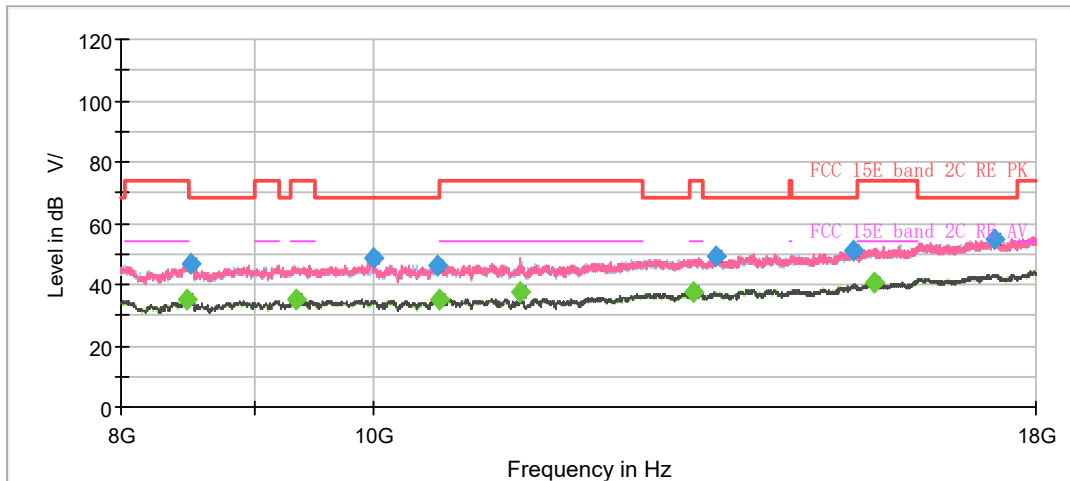


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	37.29	54.00	16.71	500.0	200.0	H	300.0	4.0
1284.375000	46.24	---	68.20	21.96	500.0	100.0	V	331.0	5.0
1721.000000	---	36.06	54.00	17.94	500.0	200.0	H	300.0	7.4
1940.625000	48.27	---	68.20	19.93	500.0	100.0	V	284.0	8.3
2239.000000	---	36.95	54.00	17.05	500.0	100.0	H	227.0	9.6
2666.875000	50.24	---	68.20	17.96	500.0	200.0	H	358.0	10.8
2750.000000	---	40.81	54.00	13.19	500.0	200.0	V	351.0	10.9
3436.000000	52.25	---	68.20	15.95	500.0	200.0	H	275.0	13.1
3978.500000	---	42.04	54.00	11.96	500.0	100.0	V	256.0	14.5
4464.125000	54.52	---	68.20	13.68	500.0	200.0	H	358.0	15.8
7664.875000	---	47.03	54.00	6.97	500.0	200.0	H	164.0	22.0
7951.000000	59.99	---	68.20	8.21	500.0	100.0	H	354.0	23.5


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH144

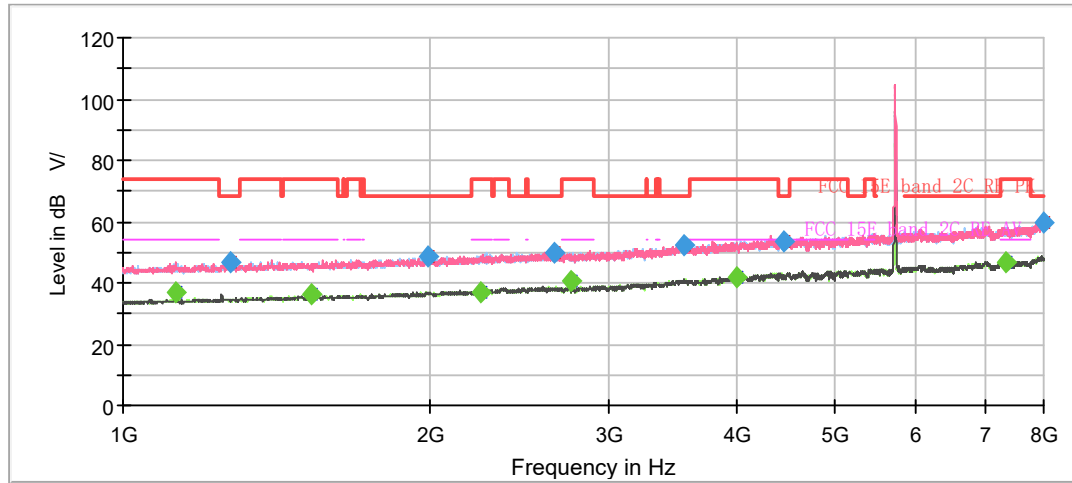

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

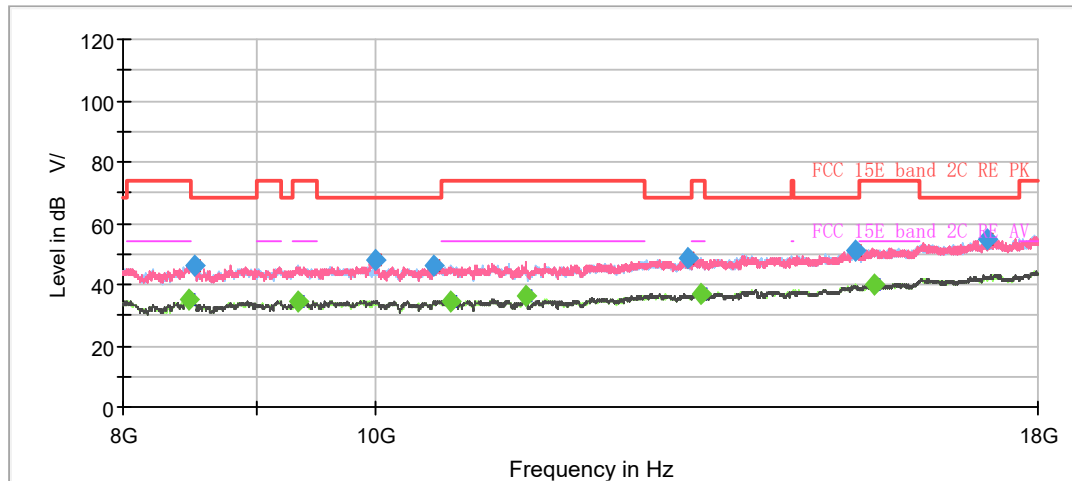


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	37.17	54.00	16.83	500.0	200.0	H	301.0	4.0
1276.500000	46.71	---	68.20	21.49	500.0	200.0	V	301.0	5.0
1532.875000	---	36.07	54.00	17.93	500.0	100.0	V	161.0	6.6
1988.750000	48.63	---	68.20	19.57	500.0	100.0	H	160.0	8.7
2246.875000	---	37.15	54.00	16.85	500.0	200.0	H	277.0	9.5
2651.125000	50.06	---	68.20	18.14	500.0	100.0	H	175.0	10.9
2750.000000	---	40.71	54.00	13.29	500.0	200.0	V	0.0	10.9
3547.125000	52.06	---	68.20	16.14	500.0	200.0	V	336.0	14.0
3999.500000	---	41.92	54.00	12.08	500.0	100.0	V	337.0	14.6
4444.875000	53.85	---	68.20	14.35	500.0	100.0	V	337.0	15.8
7360.375000	---	46.81	54.00	7.19	500.0	100.0	V	171.0	21.1
8000.000000	59.93	---	68.20	8.27	500.0	200.0	H	197.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH149

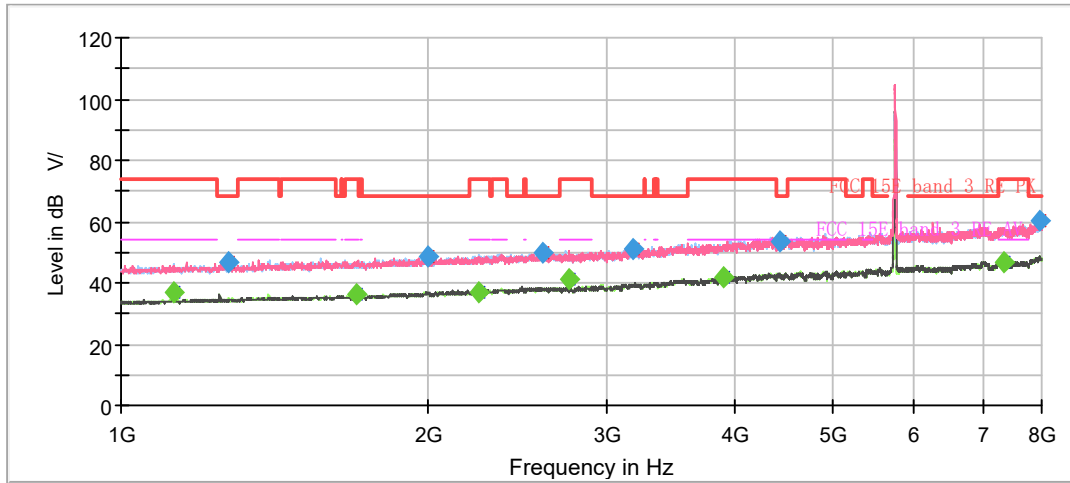

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

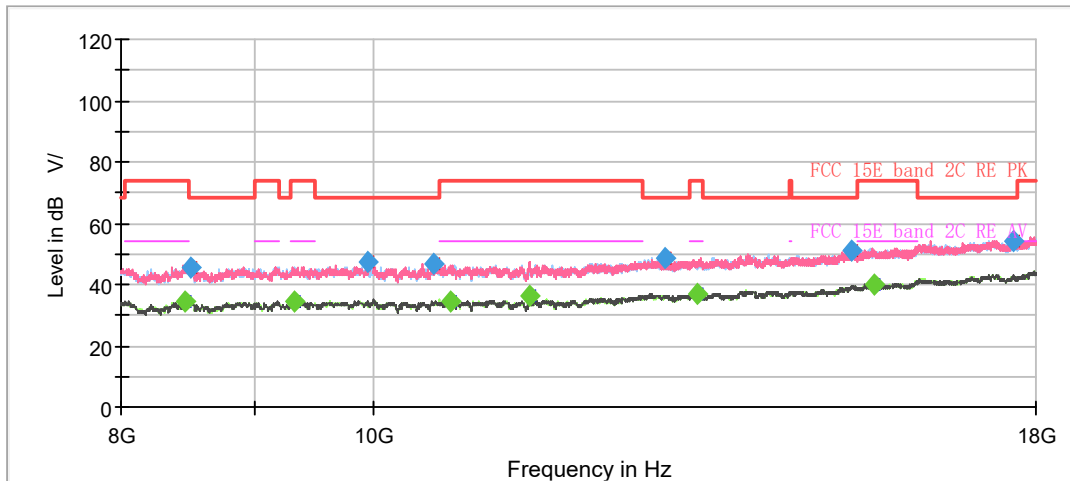


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	37.05	54.00	16.95	500.0	200.0	H	296.0	4.0
1274.750000	46.69	---	68.20	21.51	500.0	200.0	H	296.0	5.0
1699.125000	---	36.13	54.00	17.87	500.0	200.0	V	78.0	7.4
1997.500000	48.64	---	68.20	19.56	500.0	100.0	H	209.0	8.6
2240.750000	---	37.16	54.00	16.84	500.0	100.0	H	52.0	9.6
2594.250000	49.68	---	68.20	18.52	500.0	100.0	V	240.0	10.7
2750.000000	---	41.30	54.00	12.70	500.0	200.0	V	0.0	10.9
3178.750000	50.80	---	68.20	17.40	500.0	200.0	V	2.0	12.5
3899.750000	---	41.83	54.00	12.17	500.0	200.0	V	137.0	14.3
4429.125000	53.82	---	68.20	14.38	500.0	100.0	H	16.0	15.9
7335.000000	---	46.90	54.00	7.10	500.0	100.0	H	81.0	21.2
7955.375000	60.23	---	68.20	7.97	500.0	100.0	H	81.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH157

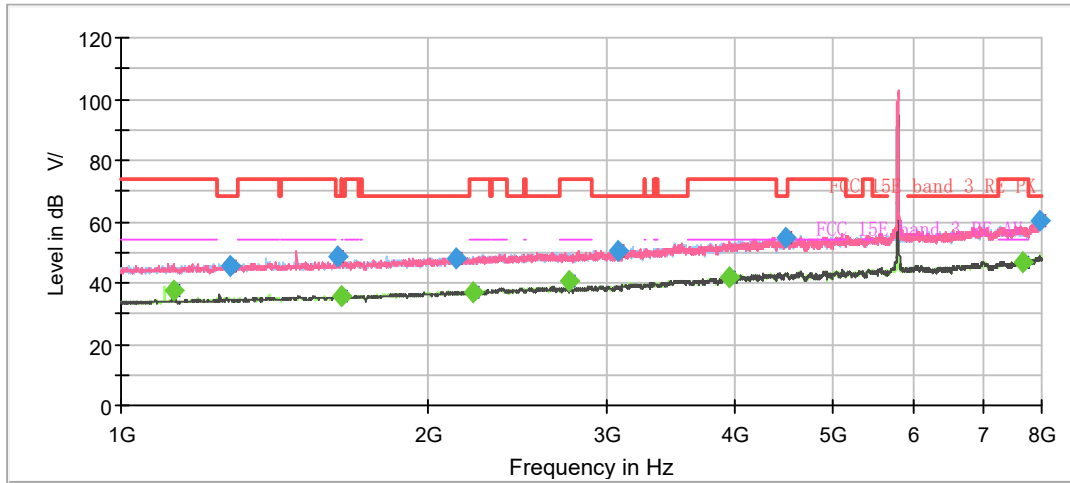

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

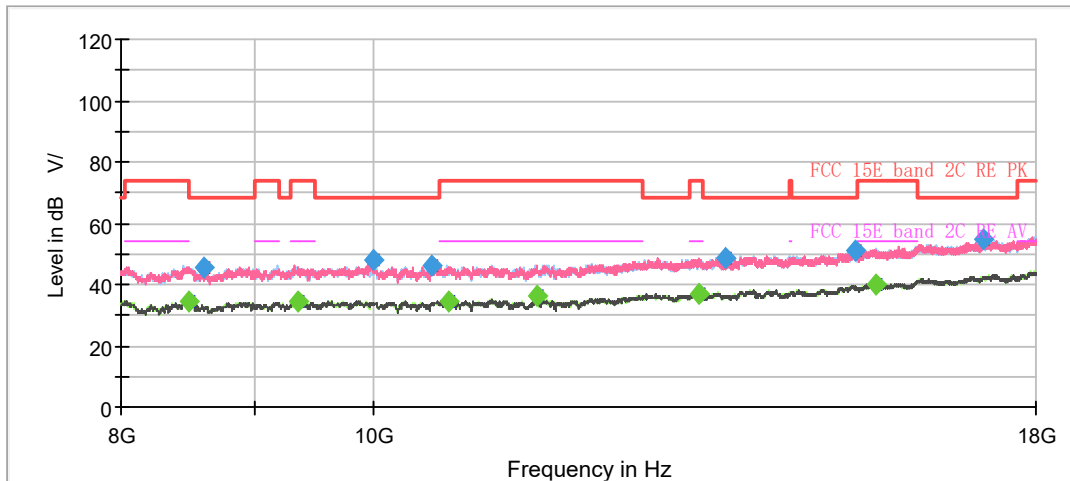


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	37.39	54.00	16.61	500.0	200.0	H	303.0	4.0
1281.750000	45.44	---	68.20	22.76	500.0	200.0	H	0.0	5.0
1630.875000	48.38	---	68.20	19.82	500.0	200.0	H	349.0	7.0
1645.750000	---	35.92	54.00	18.08	500.0	100.0	V	351.0	6.9
2130.500000	47.77	---	68.20	20.43	500.0	100.0	V	0.0	9.1
2211.875000	---	36.92	54.00	17.08	500.0	200.0	H	344.0	9.3
2750.000000	---	40.31	54.00	13.69	500.0	200.0	V	0.0	10.9
3079.000000	50.29	---	68.20	17.91	500.0	100.0	V	260.0	12.0
3954.875000	---	41.70	54.00	12.30	500.0	200.0	V	121.0	14.4
4479.000000	54.47	---	68.20	13.73	500.0	100.0	V	181.0	15.8
7661.375000	---	46.89	54.00	7.11	500.0	200.0	H	151.0	22.0
7973.750000	60.42	---	68.20	7.78	500.0	200.0	H	315.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11a CH165

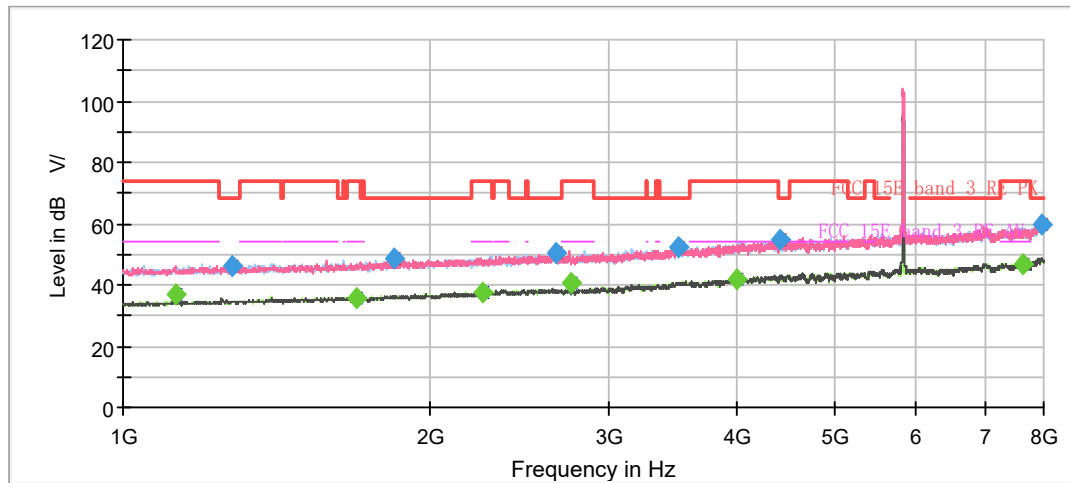

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

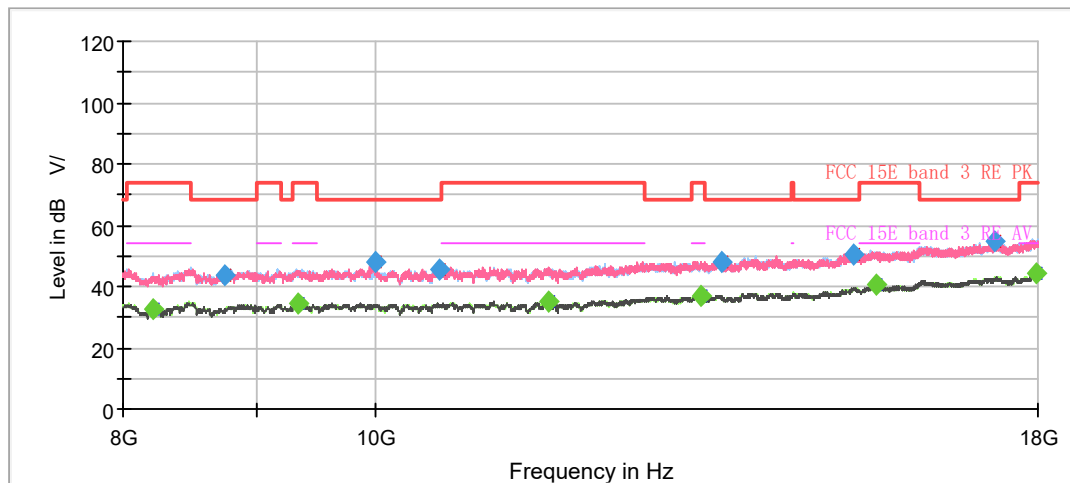


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	37.02	54.00	16.98	500.0	200.0	V	0.0	4.0
1277.375000	46.02	---	68.20	22.18	500.0	100.0	V	194.0	5.0
1697.375000	---	35.90	54.00	18.10	500.0	100.0	H	116.0	7.4
1844.375000	48.61	---	68.20	19.59	500.0	200.0	V	63.0	7.9
2248.625000	---	37.70	54.00	16.30	500.0	100.0	V	92.0	9.5
2657.250000	50.27	---	68.20	17.93	500.0	200.0	H	351.0	10.9
2750.000000	---	40.61	54.00	13.39	500.0	200.0	V	0.0	10.9
3499.875000	52.24	---	68.20	15.96	500.0	100.0	H	69.0	13.8
3998.625000	---	41.86	54.00	12.14	500.0	100.0	V	245.0	14.5
4418.625000	54.54	---	68.20	13.66	500.0	200.0	H	340.0	16.0
7632.500000	---	46.84	54.00	7.16	500.0	100.0	H	181.0	21.8
7959.750000	59.84	---	68.20	8.36	500.0	100.0	H	52.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT20) CH36

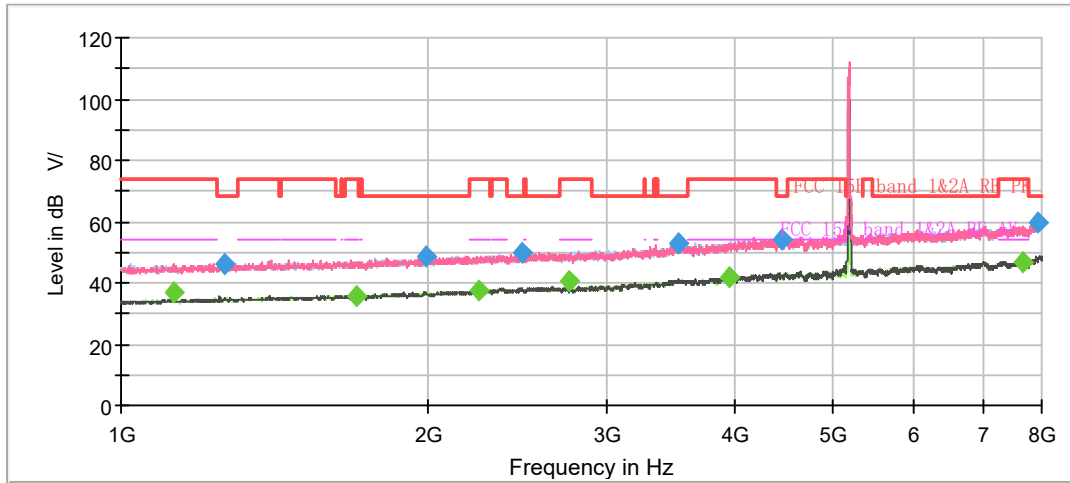

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

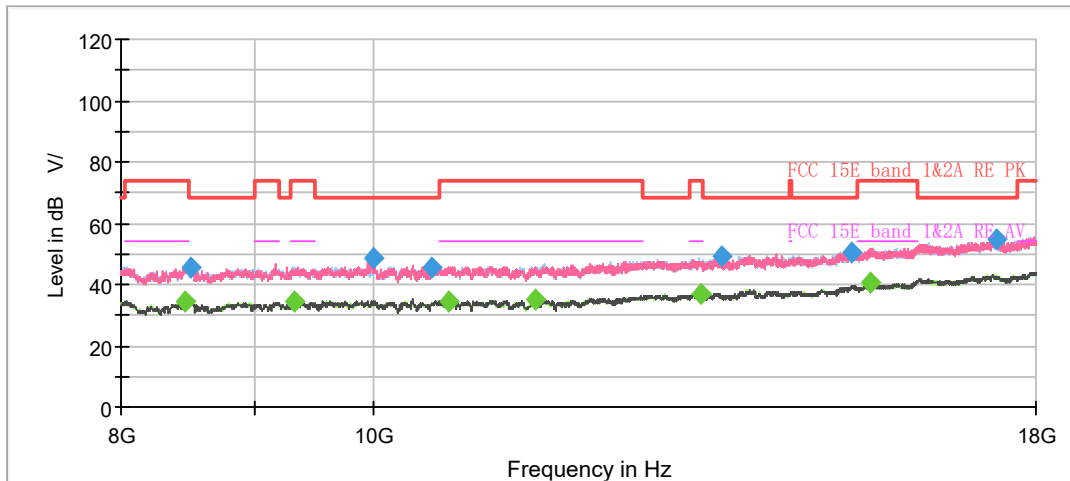


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	37.20	54.00	16.80	500.0	200.0	H	80.0	4.0
1265.125000	46.45	---	68.20	21.75	500.0	200.0	V	218.0	4.9
1698.250000	---	36.00	54.00	18.00	500.0	100.0	V	46.0	7.4
1991.375000	48.56	---	68.20	19.64	500.0	200.0	H	3.0	8.7
2240.750000	---	37.68	54.00	16.32	500.0	100.0	V	359.0	9.6
2477.875000	49.92	---	68.20	18.28	500.0	200.0	V	213.0	10.4
2750.000000	---	40.38	54.00	13.62	500.0	200.0	V	0.0	10.9
3522.625000	52.66	---	68.20	15.54	500.0	200.0	H	129.0	14.0
3944.375000	---	41.80	54.00	12.20	500.0	100.0	H	127.0	14.4
4449.250000	53.95	---	68.20	14.25	500.0	100.0	V	269.0	15.7
7665.750000	---	46.93	54.00	7.07	500.0	200.0	V	355.0	22.0
7947.500000	59.84	---	68.20	8.36	500.0	100.0	H	55.0	23.5


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT20) CH40

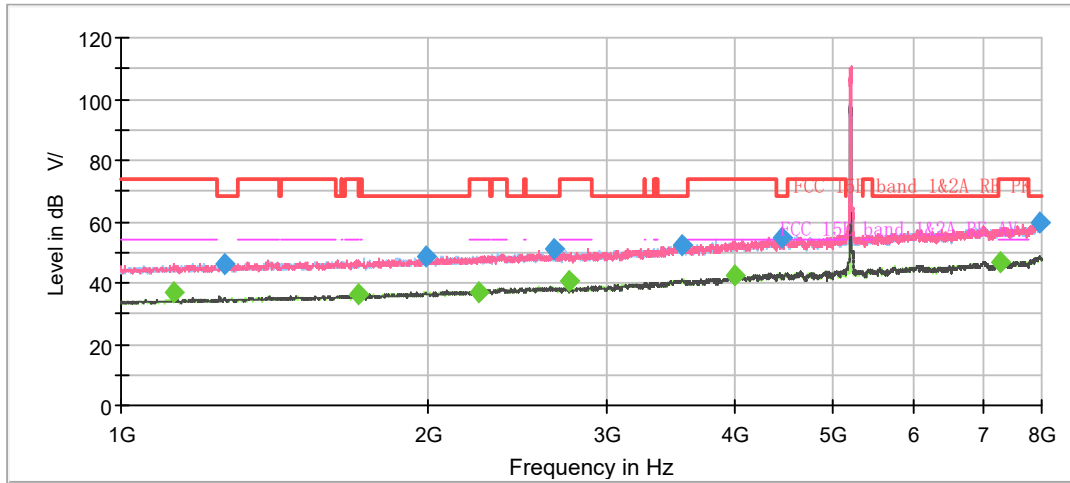

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

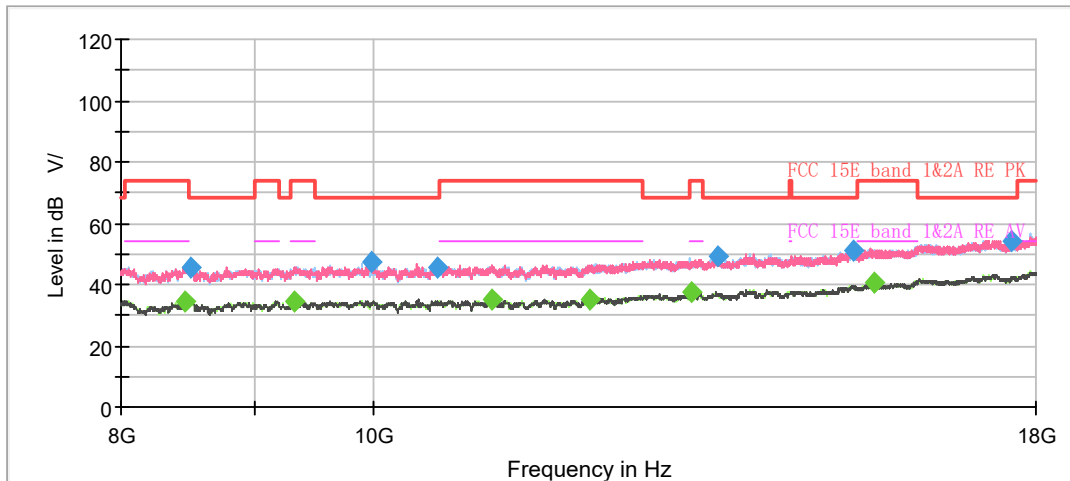


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	37.09	54.00	16.91	500.0	100.0	V	28.0	4.0
1262.500000	46.31	---	68.20	21.89	500.0	200.0	V	78.0	4.9
1707.875000	---	36.27	54.00	17.73	500.0	100.0	H	101.0	7.5
1994.000000	48.33	---	68.20	19.87	500.0	200.0	H	102.0	8.6
2246.875000	---	37.03	54.00	16.97	500.0	100.0	H	142.0	9.5
2659.000000	51.09	---	68.20	17.11	500.0	100.0	H	101.0	10.8
2750.000000	---	40.79	54.00	13.21	500.0	200.0	V	350.0	10.9
3549.750000	52.50	---	68.20	15.70	500.0	100.0	V	48.0	14.0
3999.500000	---	42.19	54.00	11.81	500.0	100.0	V	233.0	14.6
4449.250000	54.50	---	68.20	13.70	500.0	200.0	V	354.0	15.7
7284.250000	---	46.94	54.00	7.06	500.0	200.0	V	78.0	21.2
7958.000000	59.87	---	68.20	8.33	500.0	100.0	H	67.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT20) CH48

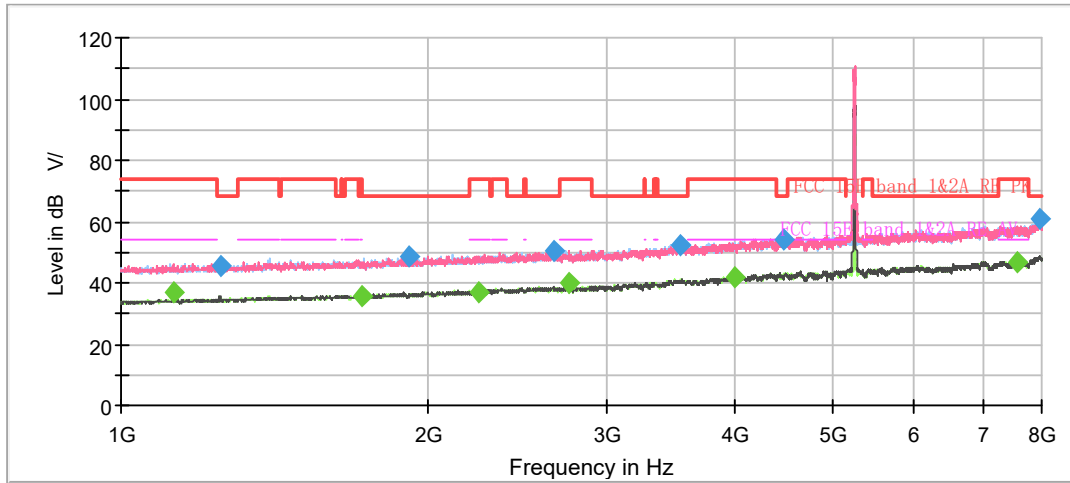

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

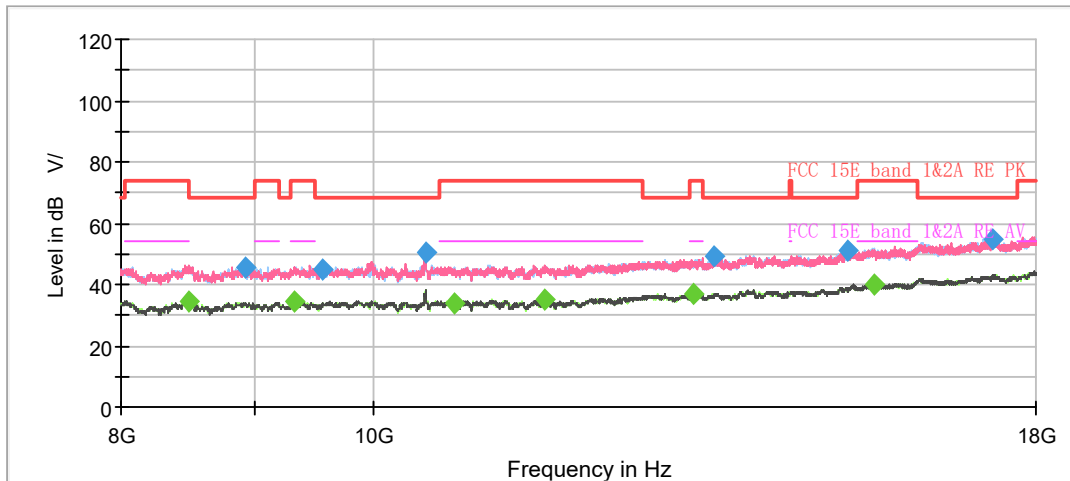


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	37.03	54.00	16.97	500.0	200.0	V	220.0	4.0
1251.125000	45.80	---	68.20	22.40	500.0	100.0	H	61.0	4.8
1720.125000	---	35.99	54.00	18.01	500.0	100.0	H	38.0	7.4
1918.750000	48.67	---	68.20	19.53	500.0	200.0	V	70.0	8.1
2246.875000	---	37.14	54.00	16.86	500.0	100.0	H	61.0	9.5
2659.875000	50.60	---	68.20	17.60	500.0	200.0	V	12.0	10.8
2750.000000	---	40.13	54.00	13.87	500.0	200.0	V	7.0	10.9
3538.375000	52.43	---	68.20	15.77	500.0	100.0	V	231.0	14.1
3998.625000	---	41.74	54.00	12.26	500.0	200.0	H	196.0	14.5
4463.250000	54.05	---	68.20	14.15	500.0	200.0	H	191.0	15.8
7566.875000	---	47.00	54.00	7.00	500.0	100.0	H	269.0	21.6
7962.375000	60.88	---	68.20	7.32	500.0	200.0	V	152.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT20) CH52

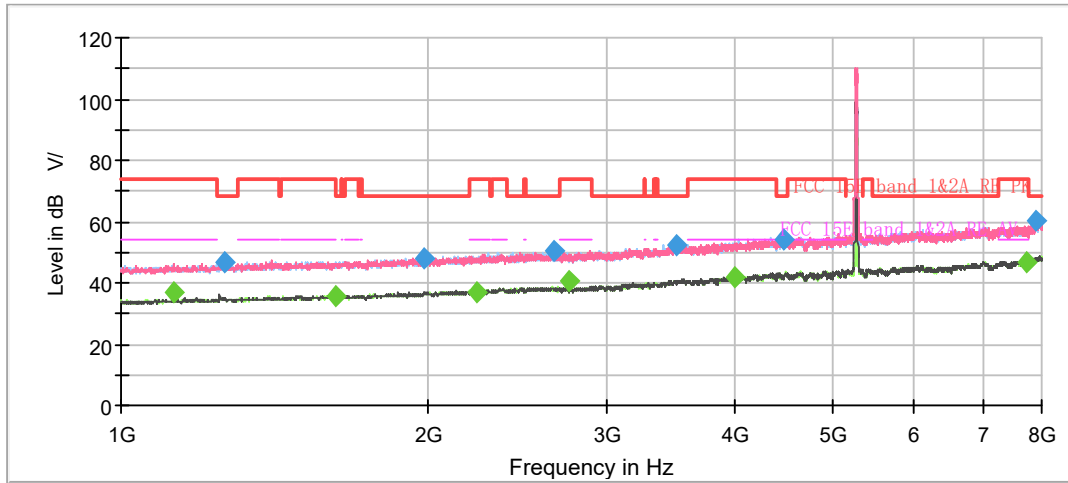

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

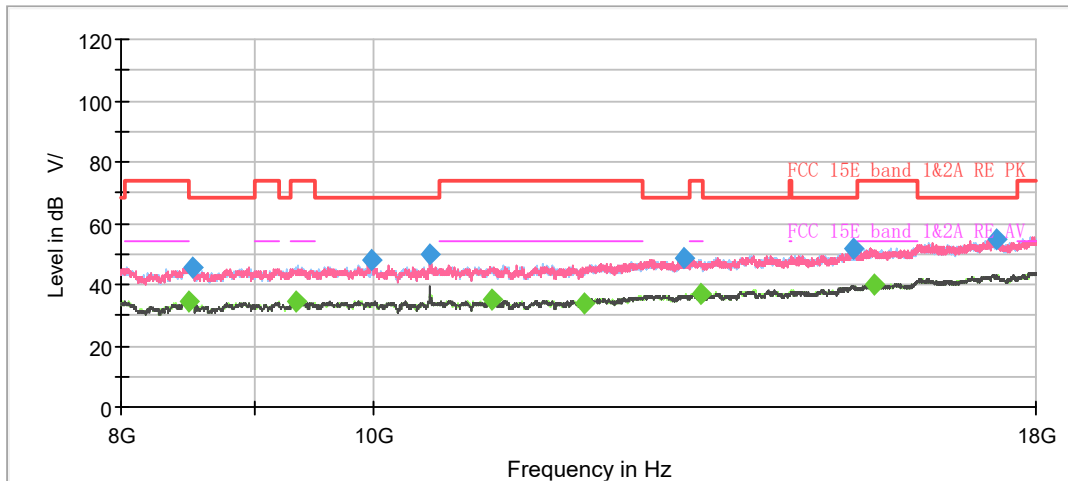


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	37.21	54.00	16.79	500.0	200.0	H	299.0	4.0
1264.250000	46.92	---	68.20	21.28	500.0	100.0	H	0.0	4.9
1620.375000	---	35.94	54.00	18.06	500.0	200.0	V	125.0	6.8
1981.750000	48.20	---	68.20	20.00	500.0	200.0	H	246.0	8.6
2238.125000	---	37.20	54.00	16.80	500.0	200.0	H	170.0	9.6
2664.250000	50.24	---	68.20	17.96	500.0	200.0	H	275.0	10.8
2750.000000	---	40.56	54.00	13.44	500.0	200.0	V	0.0	10.9
3499.000000	52.24	---	68.20	15.96	500.0	200.0	H	294.0	13.8
3996.000000	---	41.86	54.00	12.14	500.0	100.0	V	169.0	14.5
4474.625000	54.42	---	68.20	13.78	500.0	200.0	H	52.0	15.8
7728.750000	---	47.06	54.00	6.94	500.0	200.0	H	222.0	22.3
7900.250000	60.26	---	68.20	7.94	500.0	200.0	V	67.0	23.5


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (HT20) CH60

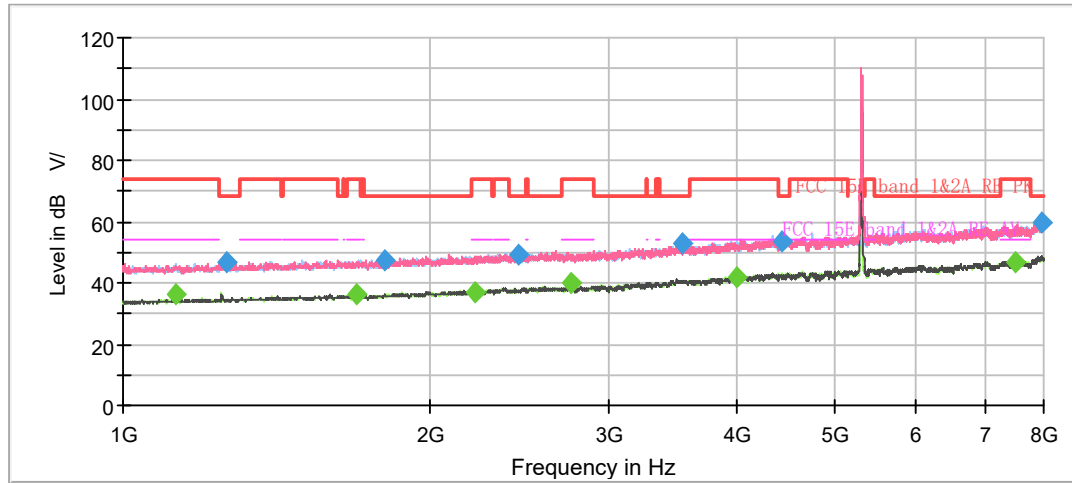

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

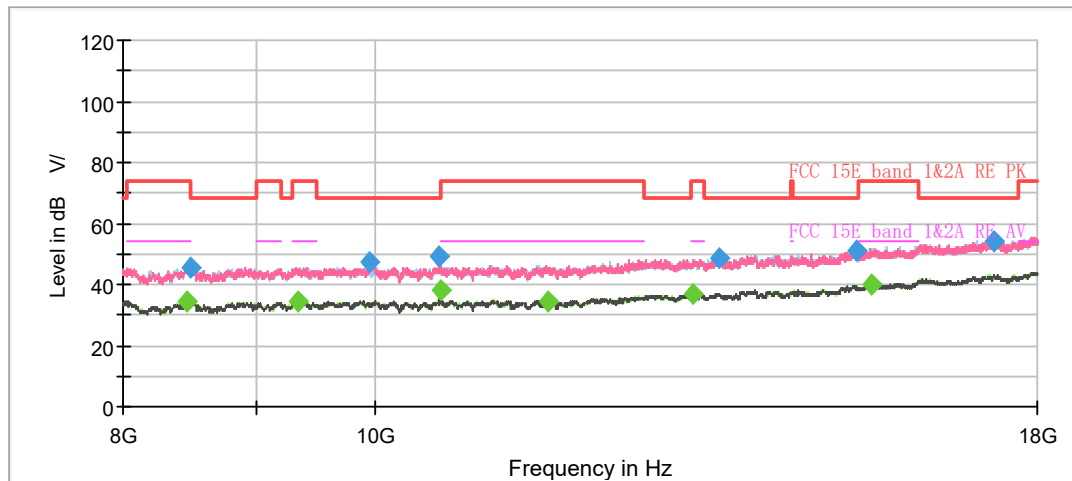


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	36.57	54.00	17.43	500.0	200.0	V	220.0	4.0
1262.500000	46.67	---	68.20	21.53	500.0	100.0	V	117.0	4.9
1692.125000	---	36.03	54.00	17.97	500.0	200.0	H	329.0	7.3
1808.500000	47.20	---	68.20	21.00	500.0	200.0	H	97.0	7.7
2218.000000	---	36.97	54.00	17.03	500.0	100.0	H	44.0	9.3
2446.375000	48.93	---	68.20	19.27	500.0	200.0	H	252.0	10.2
2750.000000	---	40.13	54.00	13.87	500.0	200.0	V	191.0	10.9
3540.125000	53.22	---	68.20	14.98	500.0	200.0	V	158.0	14.1
3996.000000	---	41.96	54.00	12.04	500.0	100.0	V	238.0	14.5
4423.000000	53.84	---	68.20	14.36	500.0	200.0	H	222.0	16.0
7520.500000	---	46.88	54.00	7.12	500.0	200.0	H	325.0	21.4
7969.375000	59.83	---	68.20	8.37	500.0	200.0	H	310.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT20) CH64

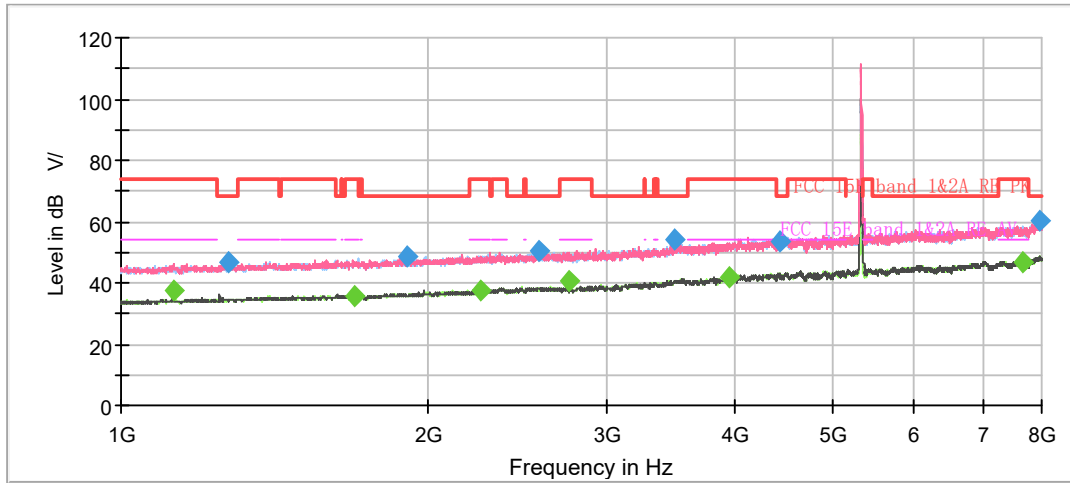

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

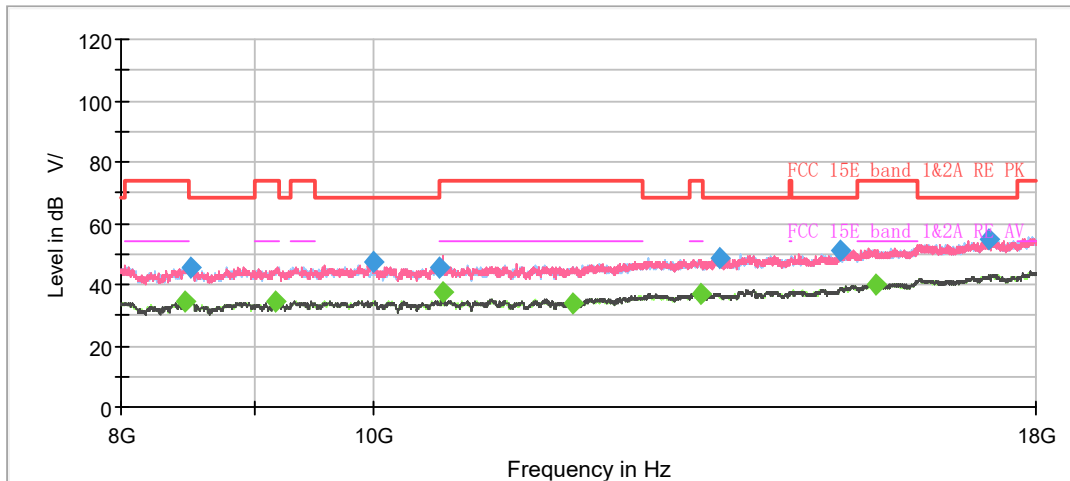


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	37.43	54.00	16.57	500.0	200.0	H	297.0	4.0
1273.000000	46.58	---	68.20	21.62	500.0	100.0	V	131.0	5.0
1696.500000	---	35.94	54.00	18.06	500.0	200.0	H	279.0	7.4
1912.625000	48.54	---	68.20	19.66	500.0	100.0	H	91.0	8.0
2249.500000	---	37.57	54.00	16.43	500.0	200.0	V	135.0	9.5
2568.875000	50.18	---	68.20	18.02	500.0	100.0	H	190.0	10.7
2750.000000	---	40.51	54.00	13.49	500.0	200.0	V	5.0	10.9
3489.375000	54.27	---	68.20	13.93	500.0	100.0	H	0.0	13.8
3955.750000	---	41.93	54.00	12.07	500.0	100.0	V	313.0	14.4
4424.750000	53.77	---	68.20	14.43	500.0	200.0	H	297.0	16.0
7671.000000	---	46.87	54.00	7.13	500.0	200.0	H	249.0	22.1
7972.875000	60.42	---	68.20	7.78	500.0	200.0	V	77.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT20) CH100

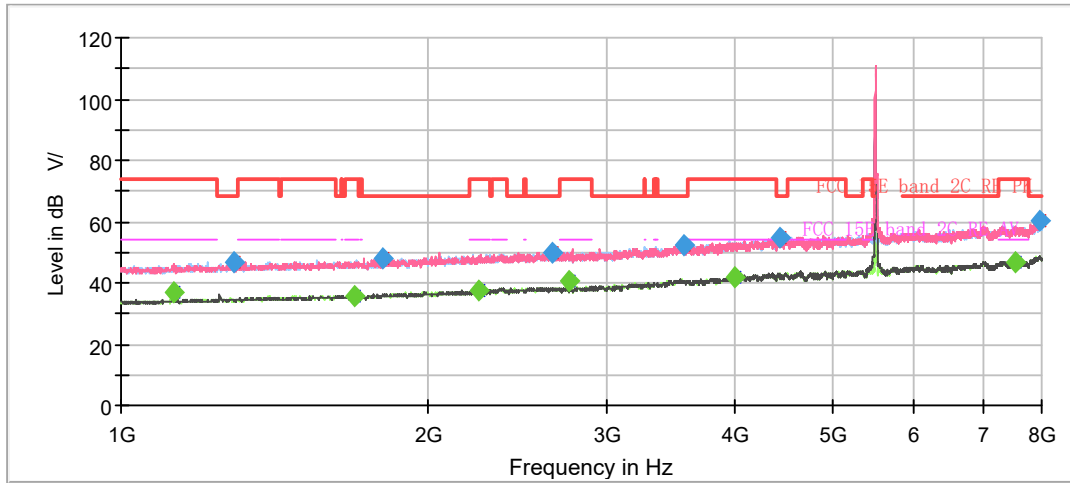

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

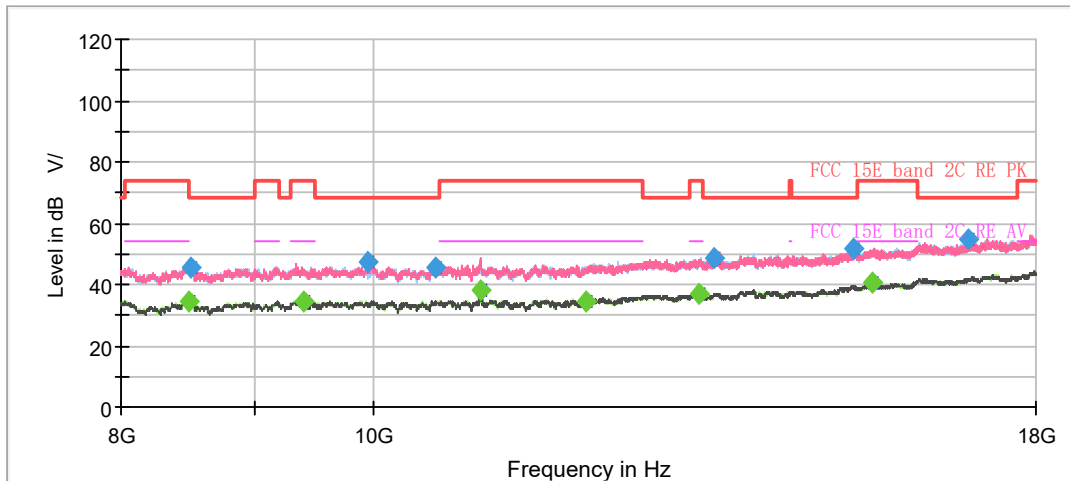


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	36.84	54.00	17.16	500.0	100.0	V	205.0	4.0
1293.125000	46.68	---	68.20	21.52	500.0	200.0	V	1.0	5.0
1696.500000	---	35.90	54.00	18.10	500.0	100.0	V	186.0	7.4
1803.250000	48.19	---	68.20	20.01	500.0	100.0	H	70.0	7.7
2245.125000	---	37.59	54.00	16.41	500.0	200.0	V	283.0	9.5
2651.125000	50.10	---	68.20	18.10	500.0	100.0	V	130.0	10.9
2750.000000	---	40.54	54.00	13.46	500.0	200.0	V	176.0	10.9
3571.625000	52.42	---	68.20	15.78	500.0	200.0	V	255.0	13.8
3998.625000	---	41.92	54.00	12.08	500.0	100.0	H	291.0	14.5
4429.125000	54.72	---	68.20	13.48	500.0	200.0	V	146.0	15.9
7547.625000	---	46.88	54.00	7.12	500.0	200.0	H	228.0	21.5
7964.125000	60.05	---	68.20	8.15	500.0	100.0	H	122.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (HT20) CH116

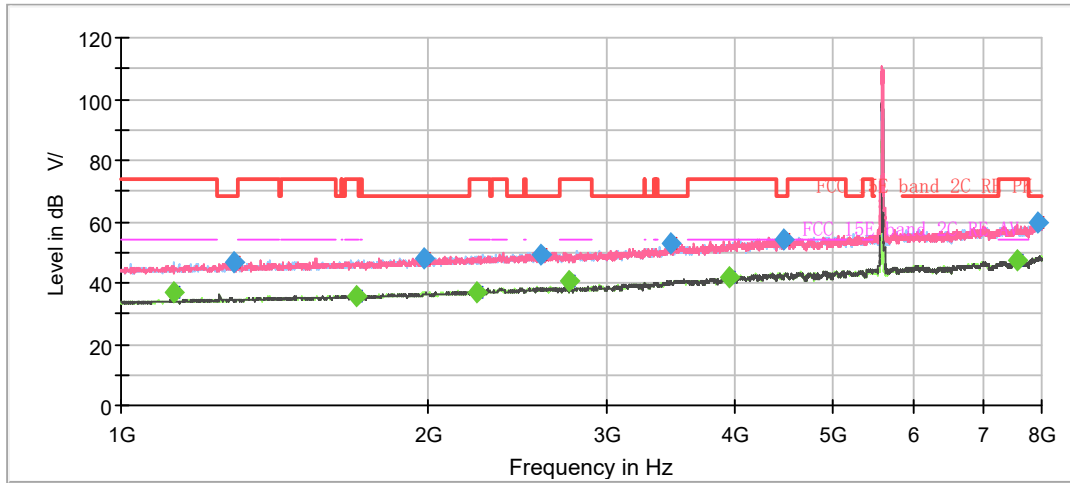

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

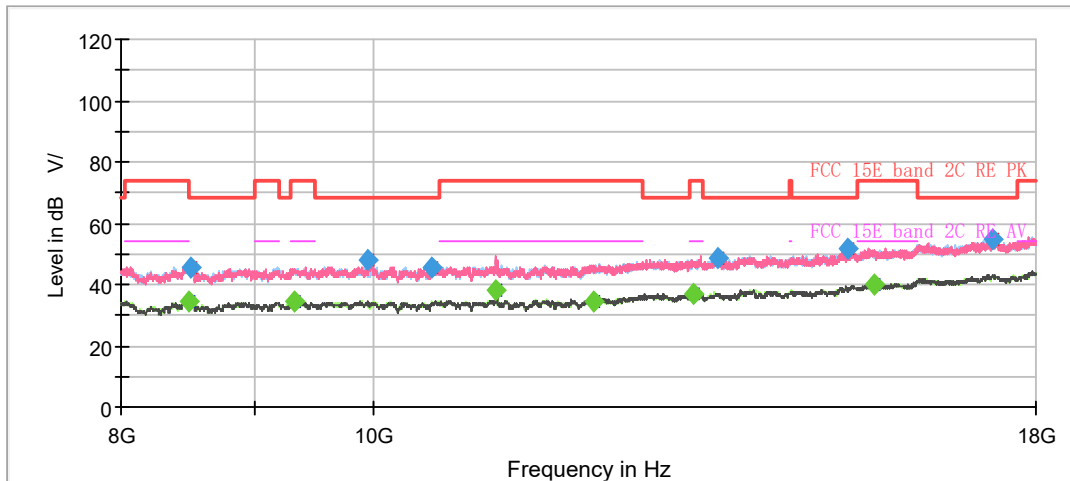


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	36.83	54.00	17.17	500.0	200.0	V	51.0	4.0
1289.625000	46.67	---	68.20	21.53	500.0	100.0	H	28.0	5.0
1703.500000	---	35.95	54.00	18.05	500.0	200.0	H	324.0	7.4
1982.625000	48.27	---	68.20	19.93	500.0	100.0	V	232.0	8.7
2230.250000	---	36.95	54.00	17.05	500.0	100.0	H	4.0	9.5
2585.500000	49.51	---	68.20	18.69	500.0	200.0	H	234.0	10.7
2750.000000	---	40.50	54.00	13.50	500.0	200.0	V	0.0	10.9
3464.000000	52.63	---	68.20	15.57	500.0	200.0	H	299.0	13.6
3947.000000	---	41.90	54.00	12.10	500.0	100.0	V	0.0	14.4
4472.875000	53.96	---	68.20	14.24	500.0	100.0	V	217.0	15.8
7569.500000	---	47.24	54.00	6.76	500.0	200.0	H	158.0	21.6
7948.375000	59.80	---	68.20	8.40	500.0	200.0	V	247.0	23.5


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (HT20) CH140

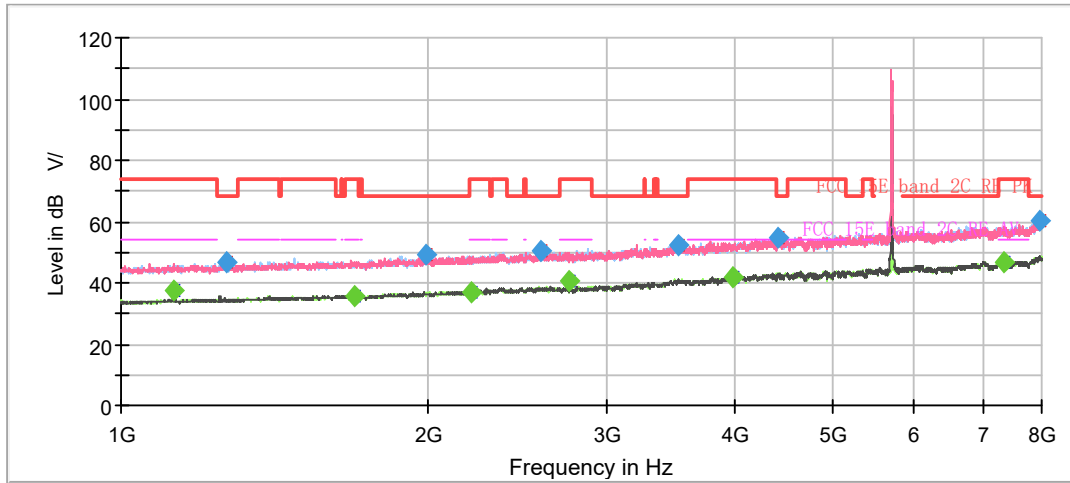

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

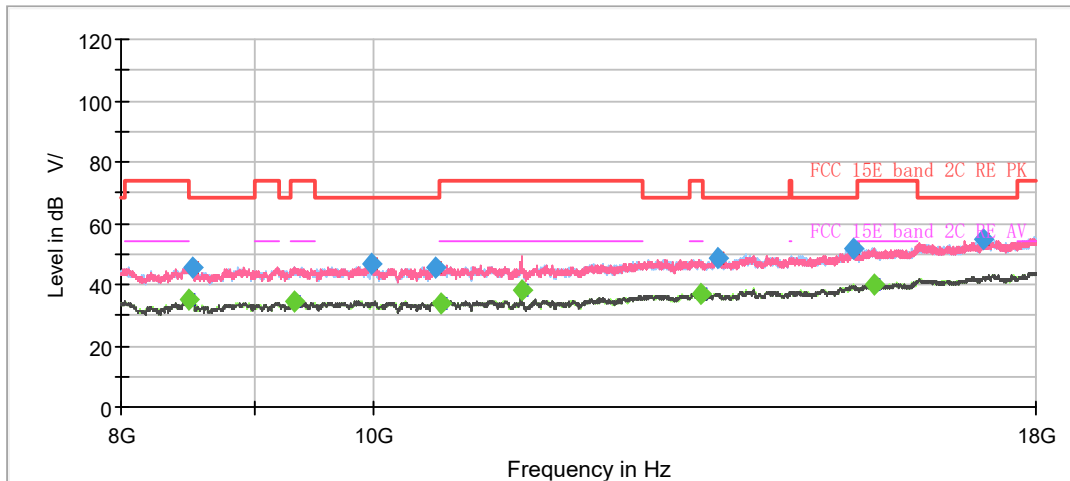


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	37.37	54.00	16.63	500.0	100.0	V	33.0	4.0
1266.875000	46.62	---	68.20	21.58	500.0	100.0	V	80.0	4.9
1694.750000	---	35.85	54.00	18.15	500.0	100.0	H	234.0	7.4
1995.750000	49.40	---	68.20	18.80	500.0	200.0	V	352.0	8.6
2209.250000	---	36.96	54.00	17.04	500.0	200.0	H	1.0	9.3
2584.625000	50.15	---	68.20	18.05	500.0	200.0	H	196.0	10.7
2750.000000	---	40.63	54.00	13.37	500.0	200.0	V	3.0	10.9
3516.500000	52.19	---	68.20	16.01	500.0	100.0	H	325.0	14.0
3975.875000	---	41.80	54.00	12.20	500.0	100.0	V	117.0	14.5
4407.250000	54.65	---	68.20	13.55	500.0	200.0	V	88.0	16.2
7347.250000	---	46.93	54.00	7.07	500.0	100.0	V	0.0	21.2
7981.625000	60.29	---	68.20	7.91	500.0	200.0	V	298.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT20) CH144

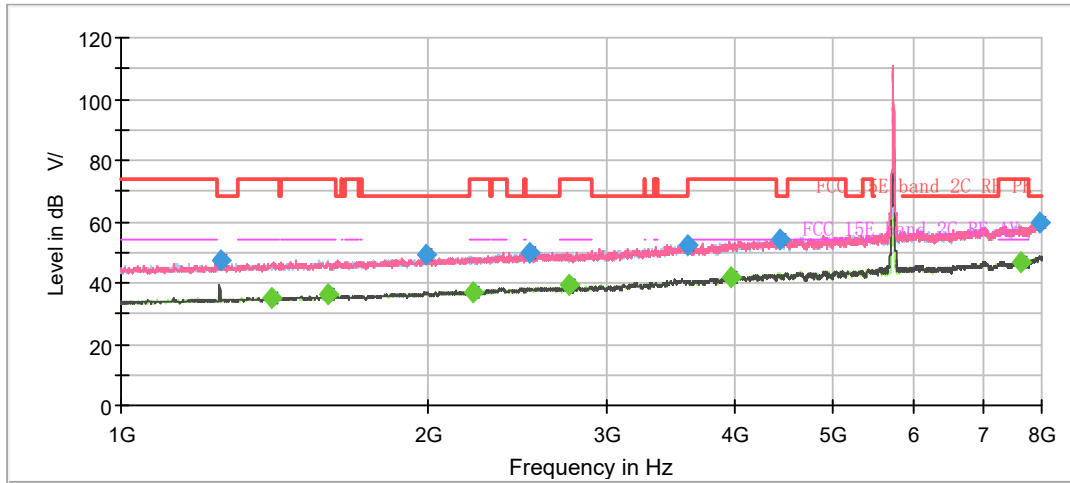

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

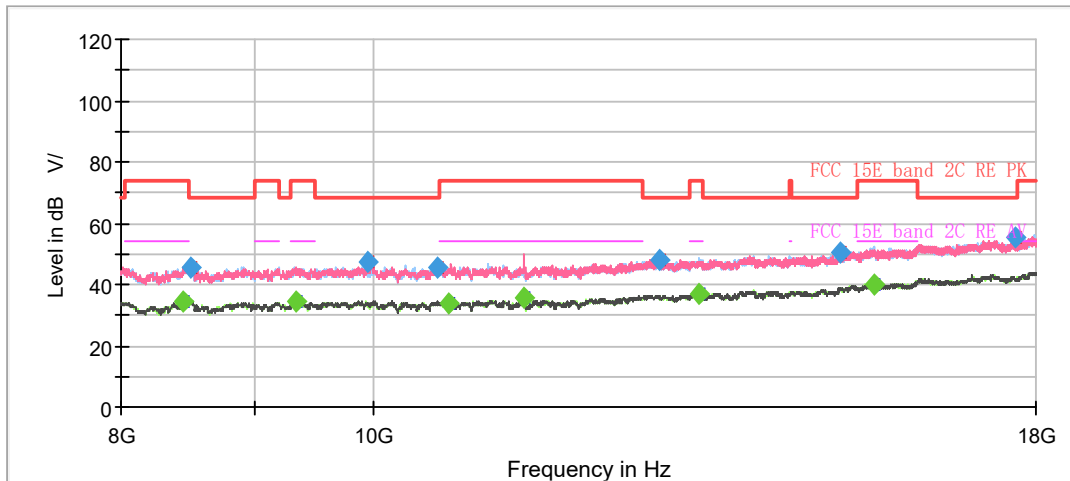


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1250.250000	47.09	---	68.20	21.11	500.0	200.0	V	335.0	4.8
1405.125000	---	35.24	54.00	18.76	500.0	200.0	V	351.0	5.7
1595.875000	---	36.19	54.00	17.81	500.0	200.0	V	340.0	6.8
1989.625000	49.00	---	68.20	19.20	500.0	100.0	V	39.0	8.7
2218.000000	---	36.81	54.00	17.19	500.0	200.0	H	25.0	9.3
2514.625000	50.04	---	68.20	18.16	500.0	100.0	V	213.0	10.4
2750.000000	---	39.68	54.00	14.32	500.0	200.0	V	356.0	10.9
3599.625000	52.43	---	68.20	15.77	500.0	100.0	H	236.0	13.8
3971.500000	---	42.00	54.00	12.00	500.0	200.0	H	214.0	14.5
4431.750000	53.95	---	68.20	14.25	500.0	100.0	H	176.0	15.9
7628.125000	---	46.91	54.00	7.09	500.0	200.0	V	340.0	21.8
7964.125000	59.87	---	68.20	8.33	500.0	100.0	V	213.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT20) CH149

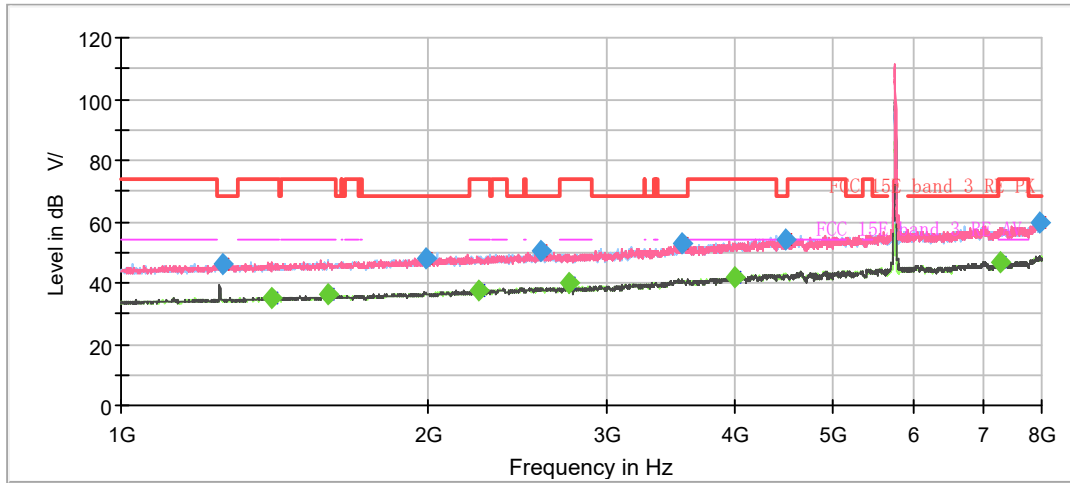

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

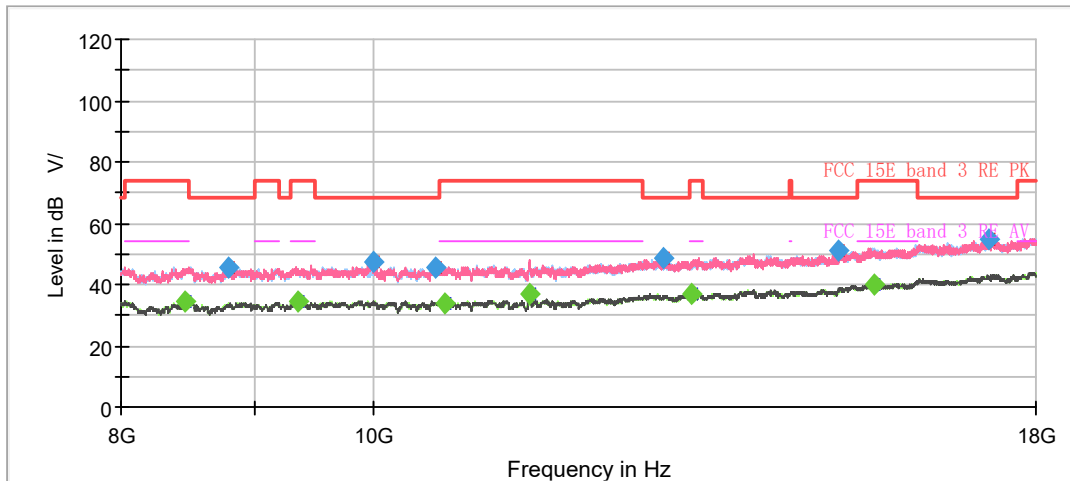


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1259.000000	46.08	---	68.20	22.12	500.0	100.0	V	229.0	4.9
1402.500000	---	35.31	54.00	18.69	500.0	200.0	V	201.0	5.7
1595.000000	---	36.17	54.00	17.83	500.0	200.0	H	305.0	6.8
1994.875000	48.20	---	68.20	20.00	500.0	100.0	H	196.0	8.6
2241.625000	---	37.47	54.00	16.53	500.0	200.0	V	177.0	9.6
2578.500000	50.67	---	68.20	17.53	500.0	200.0	H	280.0	10.8
2750.000000	---	39.92	54.00	14.08	500.0	200.0	V	195.0	10.9
3552.375000	52.63	---	68.20	15.57	500.0	200.0	V	165.0	14.0
3996.000000	---	41.94	54.00	12.06	500.0	200.0	H	92.0	14.5
4482.500000	54.34	---	68.20	13.86	500.0	100.0	H	352.0	15.9
7299.125000	---	46.97	54.00	7.03	500.0	200.0	H	0.0	21.2
7959.750000	59.91	---	68.20	8.29	500.0	200.0	V	0.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT20) CH157

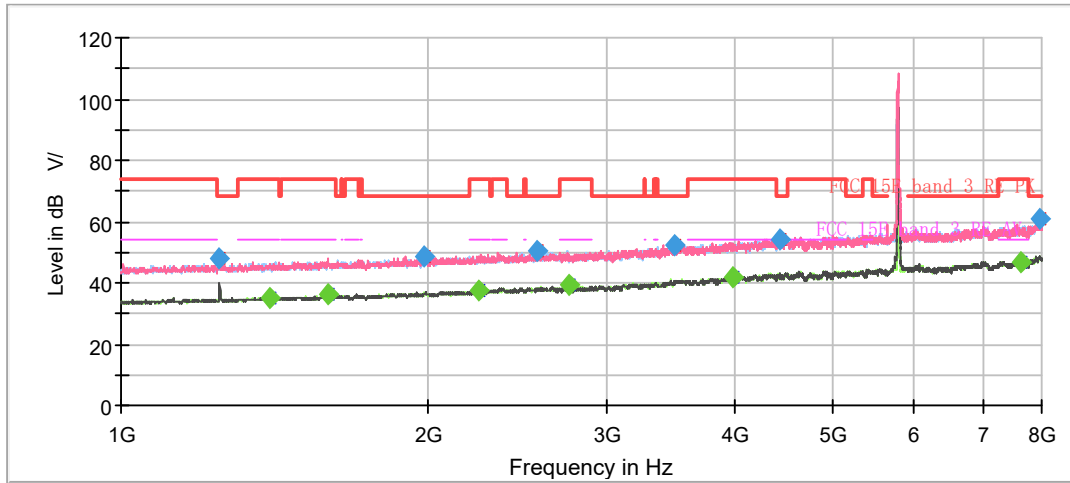

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

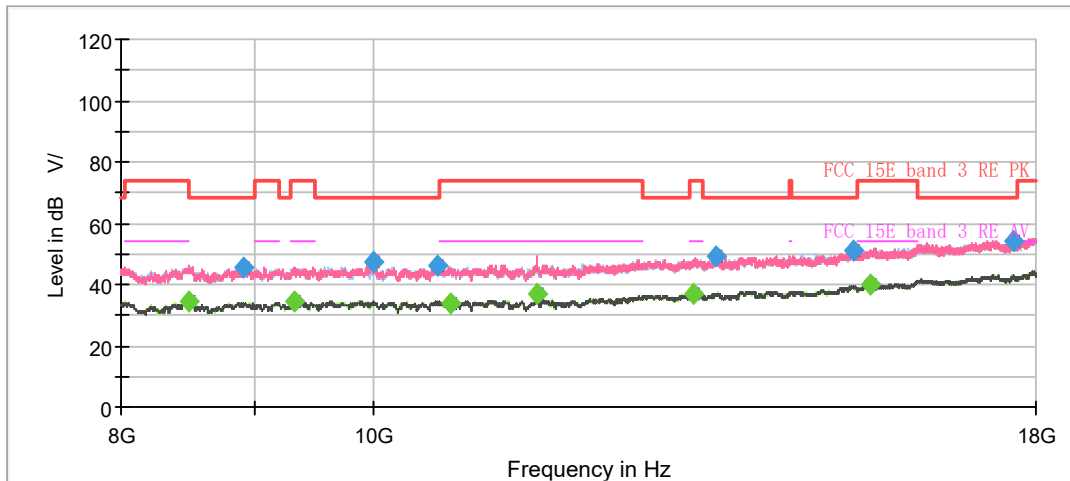


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1249.375000	47.97	---	68.20	20.23	500.0	200.0	V	333.0	4.8
1396.375000	---	35.23	54.00	18.77	500.0	100.0	H	286.0	5.7
1595.875000	---	36.07	54.00	17.93	500.0	200.0	H	328.0	6.8
1981.750000	48.83	---	68.20	19.37	500.0	200.0	H	90.0	8.6
2240.750000	---	37.46	54.00	16.54	500.0	200.0	V	0.0	9.6
2562.750000	50.43	---	68.20	17.77	500.0	200.0	V	0.0	10.6
2750.000000	---	39.62	54.00	14.38	500.0	200.0	V	193.0	10.9
3497.250000	52.37	---	68.20	15.83	500.0	200.0	V	339.0	13.8
3975.875000	---	41.80	54.00	12.20	500.0	200.0	H	27.0	14.5
4429.125000	53.94	---	68.20	14.26	500.0	100.0	V	27.0	15.9
7641.250000	---	47.05	54.00	6.95	500.0	200.0	V	308.0	21.9
7954.500000	60.68	---	68.20	7.52	500.0	200.0	H	165.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT20) CH165

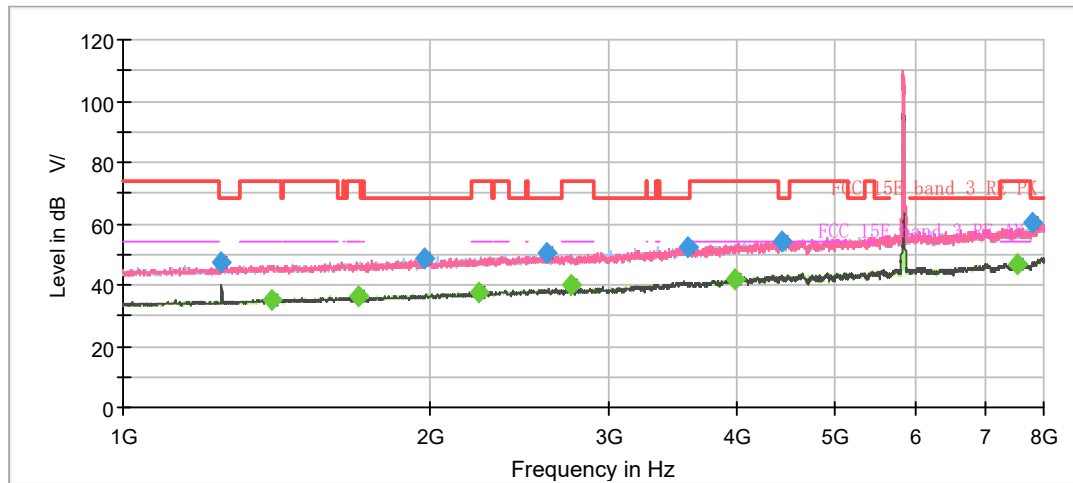

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

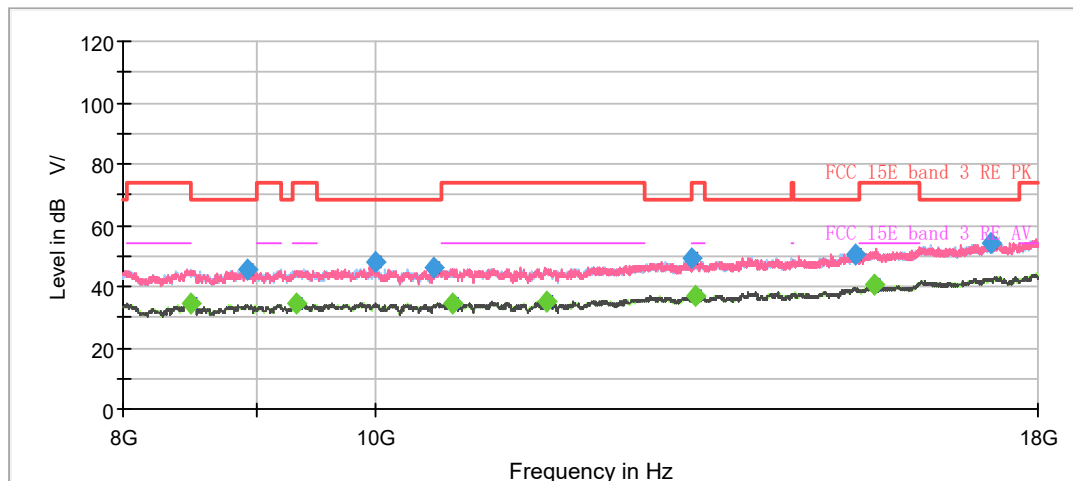


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1249.375000	47.34	---	68.20	20.86	500.0	200.0	V	329.0	4.8
1400.750000	---	35.36	54.00	18.64	500.0	200.0	H	167.0	5.7
1704.375000	---	36.22	54.00	17.78	500.0	200.0	H	60.0	7.4
1978.250000	48.41	---	68.20	19.79	500.0	100.0	V	217.0	8.6
2236.375000	---	37.36	54.00	16.64	500.0	200.0	H	49.0	9.5
2606.500000	50.36	---	68.20	17.84	500.0	200.0	H	103.0	10.7
2750.000000	---	40.07	54.00	13.93	500.0	200.0	V	30.0	10.9
3579.500000	52.08	---	68.20	16.12	500.0	200.0	H	208.0	13.8
3976.750000	---	41.80	54.00	12.20	500.0	200.0	V	168.0	14.5
4428.250000	54.23	---	68.20	13.97	500.0	200.0	V	0.0	15.9
7550.250000	---	46.80	54.00	7.20	500.0	200.0	H	149.0	21.5
7814.500000	60.36	---	68.20	7.84	500.0	200.0	H	246.0	22.9


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT40) CH38

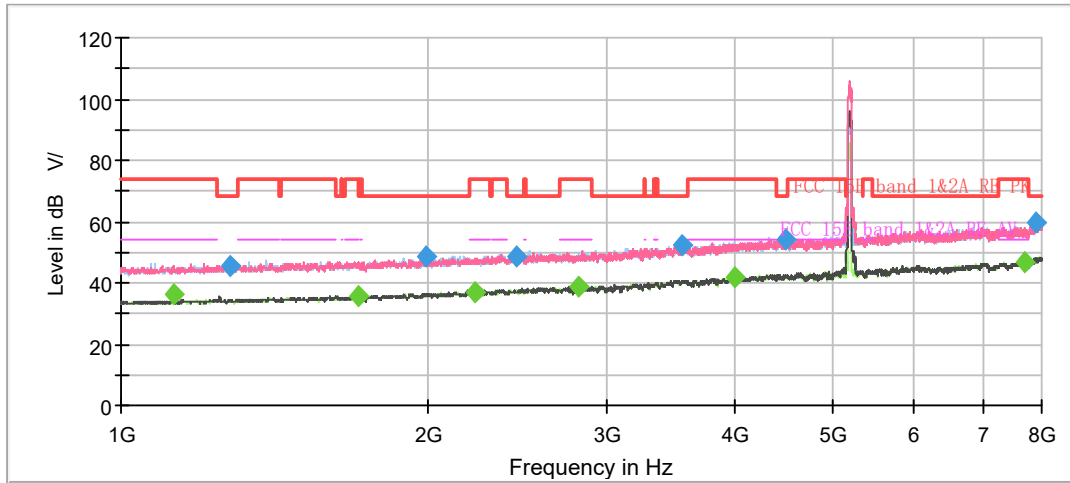

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

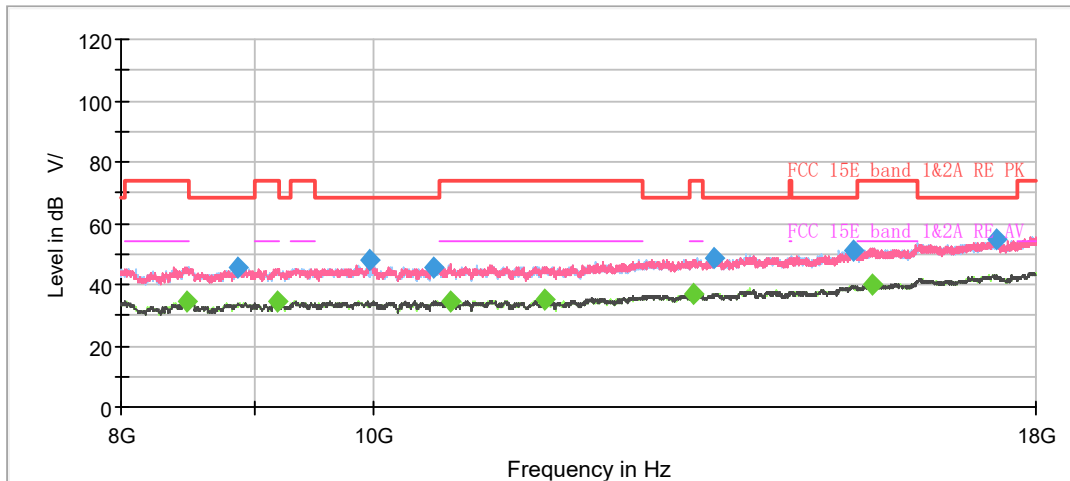


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	36.38	54.00	17.62	500.0	200.0	V	315.0	4.0
1278.250000	45.68	---	68.20	22.52	500.0	100.0	H	352.0	5.0
1707.000000	---	35.76	54.00	18.24	500.0	200.0	V	0.0	7.4
1995.750000	48.50	---	68.20	19.70	500.0	200.0	V	190.0	8.6
2220.625000	---	37.09	54.00	16.91	500.0	200.0	H	57.0	9.3
2441.125000	48.71	---	68.20	19.49	500.0	200.0	H	0.0	10.2
2815.625000	---	38.51	54.00	15.49	500.0	100.0	H	115.0	11.1
3545.375000	52.27	---	68.20	15.93	500.0	200.0	H	17.0	14.1
3999.500000	---	41.64	54.00	12.36	500.0	200.0	V	121.0	14.6
4480.750000	54.34	---	68.20	13.86	500.0	100.0	H	224.0	15.8
7700.750000	---	46.57	54.00	7.43	500.0	200.0	H	3.0	22.2
7904.625000	59.50	---	68.20	8.70	500.0	200.0	H	17.0	23.5


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT40) CH46

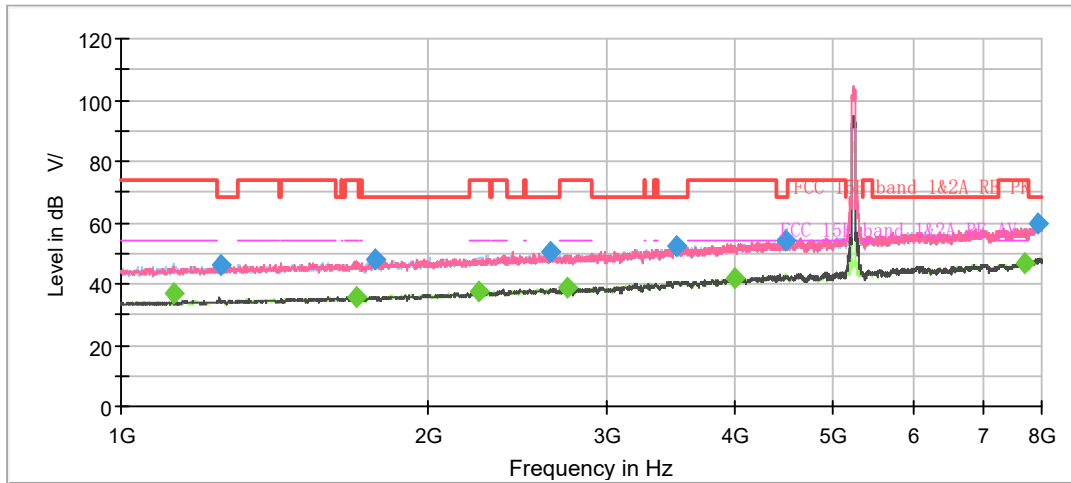

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

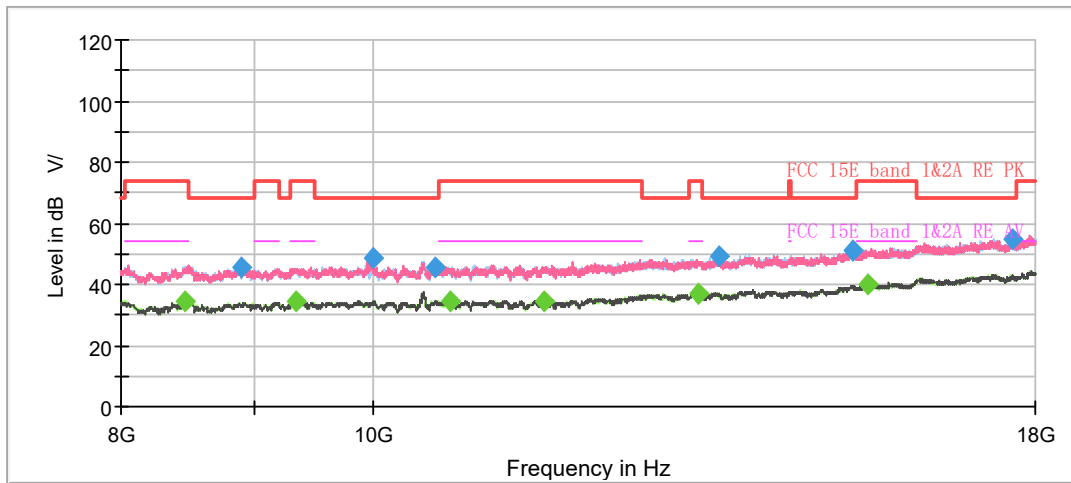


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	36.99	54.00	17.01	500.0	200.0	V	314.0	4.0
1250.250000	45.88	---	68.20	22.32	500.0	100.0	H	173.0	4.8
1701.750000	---	35.58	54.00	18.42	500.0	200.0	V	197.0	7.4
1772.625000	48.19	---	68.20	20.01	500.0	200.0	H	72.0	7.6
2239.875000	---	37.33	54.00	16.67	500.0	200.0	V	269.0	9.6
2638.000000	50.55	---	68.20	17.65	500.0	200.0	H	283.0	10.8
2739.500000	---	38.56	54.00	15.44	500.0	200.0	V	304.0	10.9
3513.000000	52.15	---	68.20	16.05	500.0	200.0	H	22.0	13.9
3997.750000	---	41.68	54.00	12.32	500.0	100.0	V	53.0	14.5
4481.625000	54.03	---	68.20	14.17	500.0	200.0	H	303.0	15.8
7708.625000	---	46.65	54.00	7.35	500.0	200.0	V	358.0	22.2
7944.875000	59.83	---	68.20	8.37	500.0	100.0	V	59.0	23.5


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT40) CH54

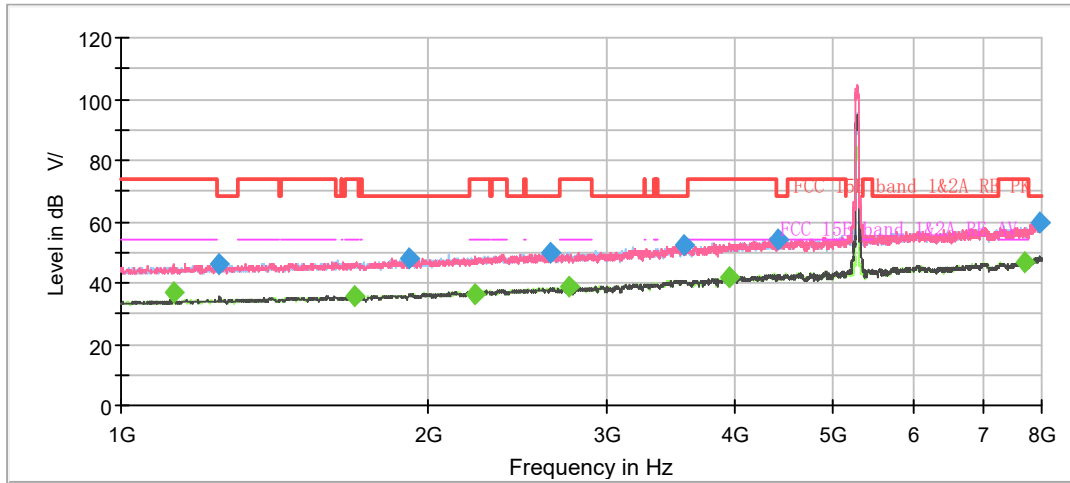

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

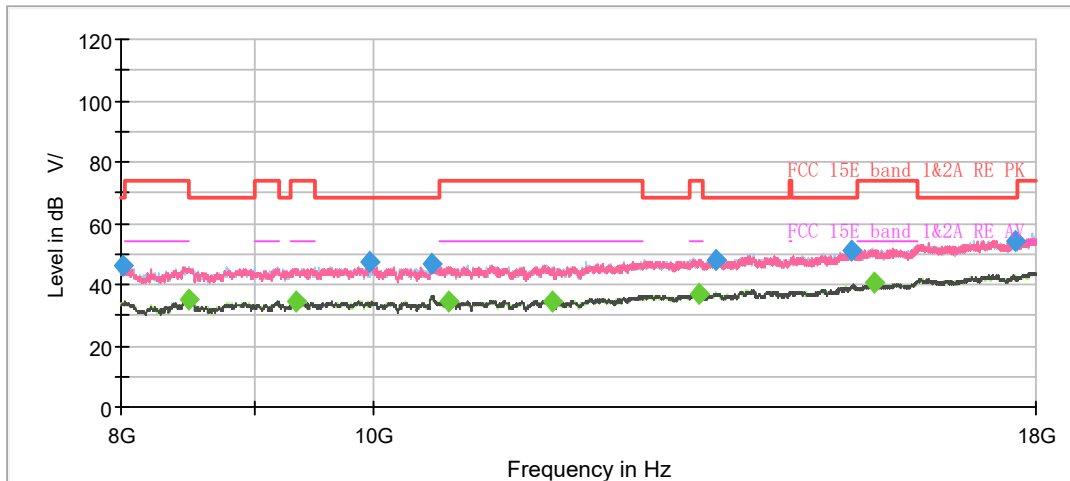


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	36.81	54.00	17.19	500.0	200.0	V	296.0	4.0
1246.750000	46.19	---	68.20	22.01	500.0	100.0	H	172.0	4.8
1697.375000	---	35.79	54.00	18.21	500.0	200.0	V	13.0	7.4
1920.500000	48.03	---	68.20	20.17	500.0	100.0	H	60.0	8.2
2223.250000	---	36.58	54.00	17.42	500.0	100.0	H	218.0	9.4
2638.000000	50.03	---	68.20	18.17	500.0	100.0	H	349.0	10.8
2750.000000	---	38.52	54.00	15.48	500.0	200.0	V	175.0	10.9
3570.750000	52.54	---	68.20	15.66	500.0	100.0	H	105.0	13.8
3956.625000	---	41.55	54.00	12.45	500.0	200.0	V	226.0	14.4
4404.625000	53.98	---	68.20	14.22	500.0	100.0	H	228.0	16.2
7709.500000	---	46.82	54.00	7.18	500.0	200.0	H	298.0	22.2
7973.750000	59.93	---	68.20	8.27	500.0	200.0	H	30.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT40) CH62

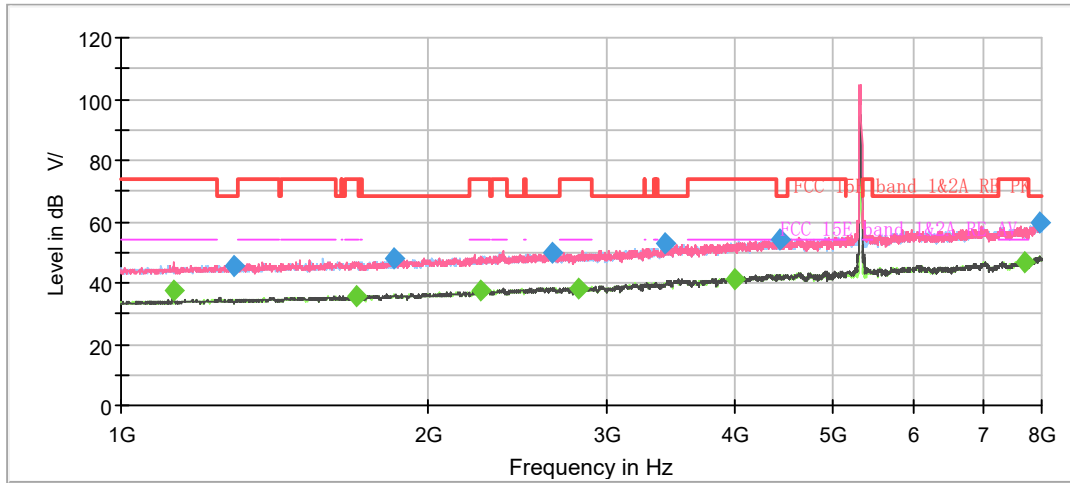

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

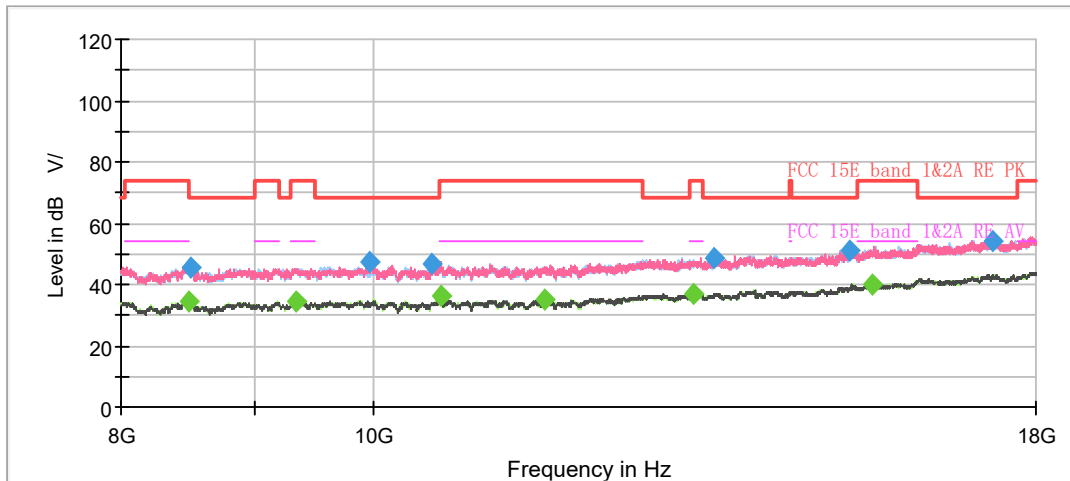


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	37.28	54.00	16.72	500.0	200.0	V	327.0	4.0
1292.250000	45.78	---	68.20	22.42	500.0	200.0	V	201.0	5.0
1704.375000	---	35.62	54.00	18.38	500.0	200.0	H	63.0	7.4
1855.750000	48.07	---	68.20	20.13	500.0	200.0	H	201.0	8.0
2249.500000	---	37.29	54.00	16.71	500.0	100.0	H	321.0	9.5
2650.250000	50.08	---	68.20	18.12	500.0	100.0	H	0.0	10.9
2813.875000	---	38.44	54.00	15.56	500.0	200.0	V	245.0	11.1
3412.375000	52.70	---	68.20	15.50	500.0	200.0	H	149.0	12.9
3997.750000	---	41.53	54.00	12.47	500.0	100.0	V	0.0	14.5
4427.375000	54.19	---	68.20	14.01	500.0	100.0	H	128.0	15.9
7705.125000	---	46.73	54.00	7.27	500.0	100.0	V	80.0	22.2
7973.750000	59.97	---	68.20	8.23	500.0	200.0	H	103.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT40) CH102

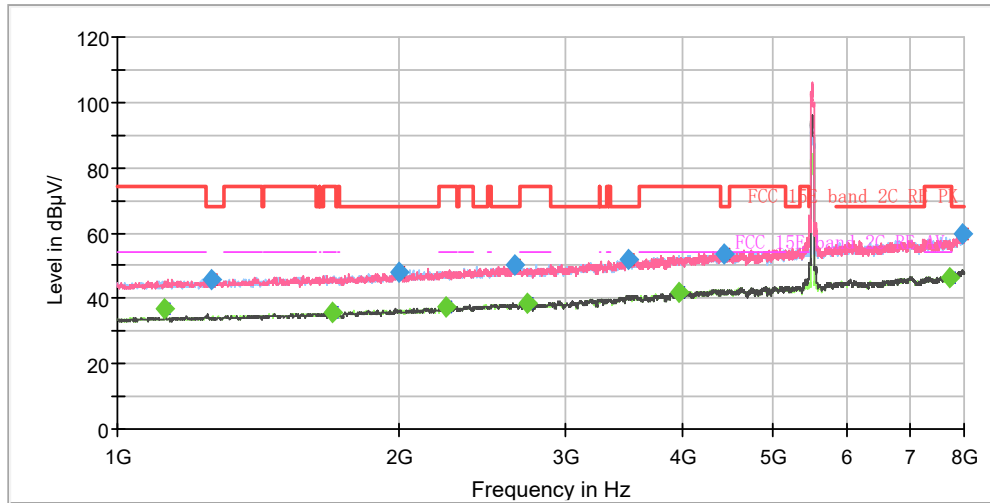

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

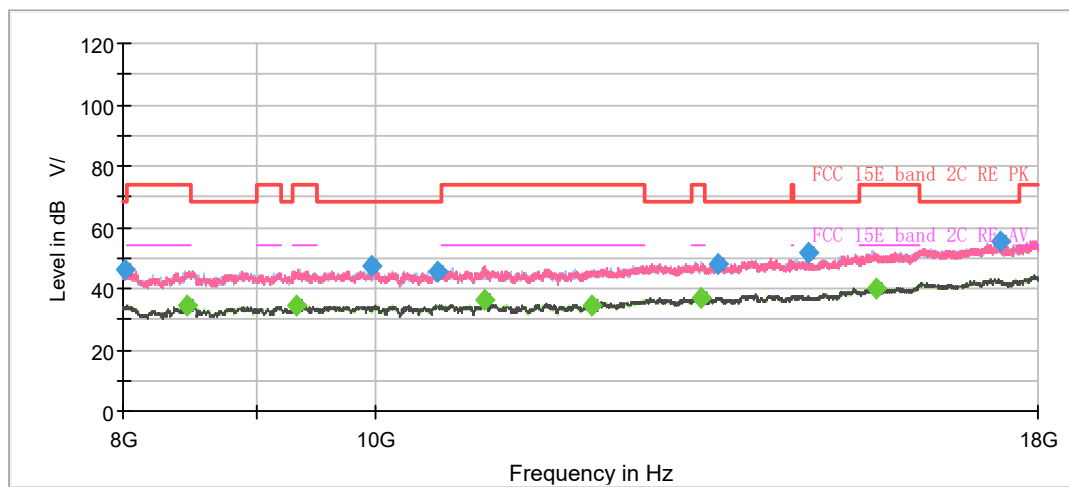


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	36.73	54.00	17.27	500.0	200.0	V	320.0	4.0
1260.750000	45.82	---	68.20	22.38	500.0	100.0	V	84.0	4.9
1696.500000	---	35.77	54.00	18.23	500.0	200.0	H	1.0	7.4
1993.125000	47.74	---	68.20	20.46	500.0	200.0	H	182.0	8.6
2244.250000	---	37.33	54.00	16.67	500.0	100.0	V	43.0	9.6
2652.875000	50.33	---	68.20	17.87	500.0	100.0	H	40.0	10.9
2740.375000	---	38.35	54.00	15.65	500.0	200.0	V	356.0	10.9
3505.125000	51.95	---	68.20	16.25	500.0	100.0	V	17.0	13.9
3969.750000	---	41.71	54.00	12.29	500.0	200.0	V	140.0	14.4
4437.875000	53.31	---	68.20	14.89	500.0	200.0	H	88.0	15.8
7714.750000	---	46.56	54.00	7.44	500.0	100.0	H	0.0	22.2
7965.875000	59.77	---	68.20	8.43	500.0	100.0	H	301.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT40) CH118

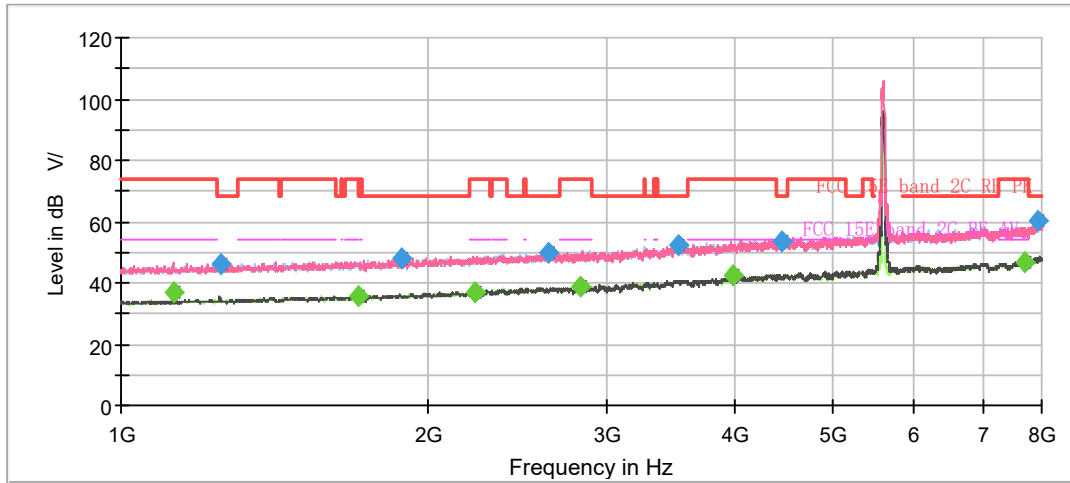

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

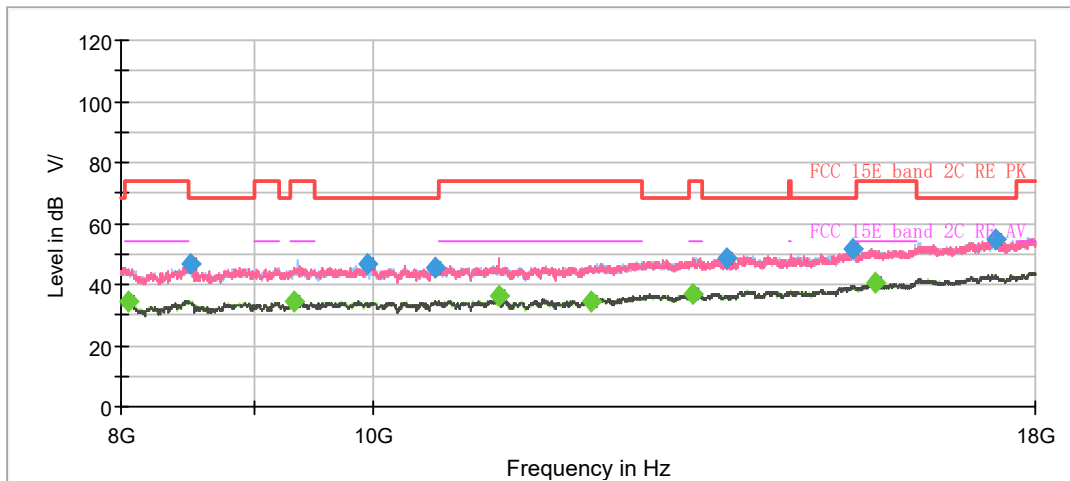


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	36.94	54.00	17.06	500.0	200.0	V	333.0	4.0
1250.250000	46.20	---	68.20	22.00	500.0	200.0	V	323.0	4.8
1707.875000	---	35.85	54.00	18.15	500.0	200.0	V	314.0	7.5
1888.125000	47.97	---	68.20	20.23	500.0	200.0	V	276.0	8.2
2224.125000	---	36.78	54.00	17.22	500.0	200.0	H	71.0	9.4
2625.750000	50.09	---	68.20	18.11	500.0	100.0	H	117.0	10.6
2825.250000	---	38.57	54.00	15.43	500.0	100.0	V	160.0	11.1
3515.625000	52.32	---	68.20	15.88	500.0	100.0	V	144.0	14.0
3977.625000	---	42.23	54.00	11.77	500.0	200.0	H	101.0	14.5
4444.875000	53.39	---	68.20	14.81	500.0	100.0	H	117.0	15.8
7698.125000	---	46.59	54.00	7.41	500.0	100.0	V	110.0	22.2
7934.375000	60.29	---	68.20	7.91	500.0	100.0	H	157.0	23.5


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT40) CH134

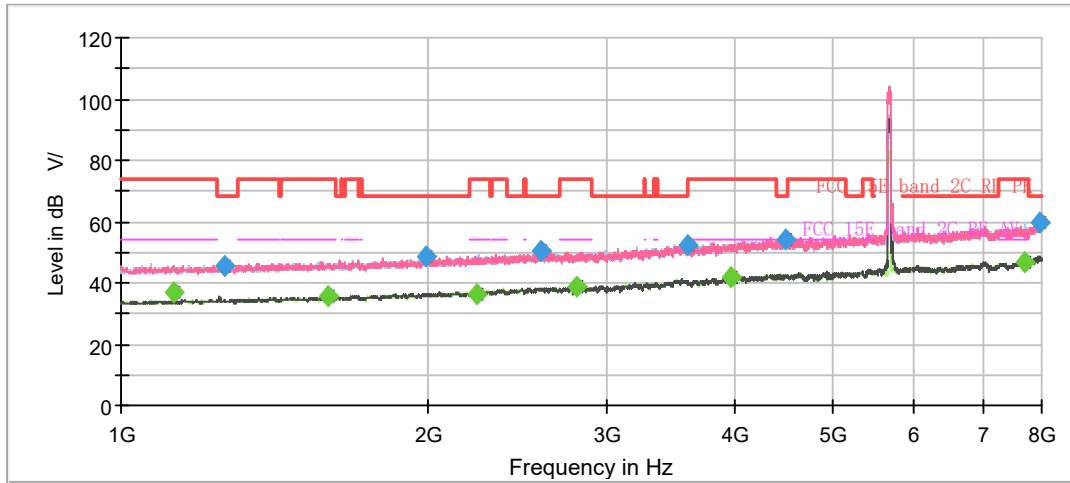

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

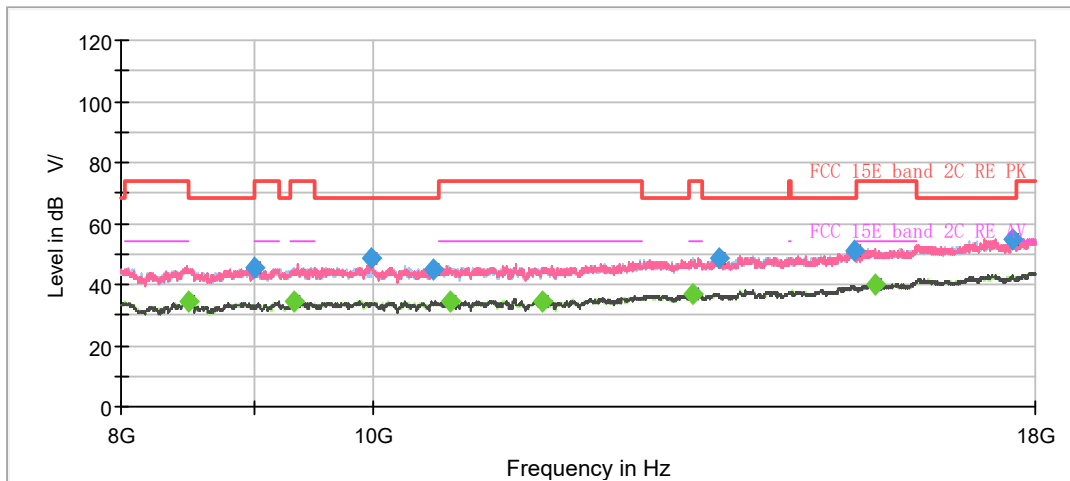


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	36.91	54.00	17.09	500.0	200.0	V	336.0	4.0
1264.250000	45.63	---	68.20	22.57	500.0	100.0	H	97.0	4.9
1597.625000	---	35.78	54.00	18.22	500.0	200.0	V	345.0	6.8
1989.625000	48.81	---	68.20	19.39	500.0	200.0	V	237.0	8.7
2234.625000	---	36.59	54.00	17.41	500.0	200.0	H	71.0	9.5
2586.375000	50.25	---	68.20	17.95	500.0	100.0	V	238.0	10.7
2800.750000	---	38.72	54.00	15.28	500.0	100.0	H	195.0	11.0
3593.500000	52.30	---	68.20	15.90	500.0	200.0	V	61.0	13.8
3970.625000	---	41.87	54.00	12.13	500.0	100.0	V	0.0	14.5
4479.875000	54.22	---	68.20	13.98	500.0	100.0	H	2.0	15.8
7713.000000	---	46.69	54.00	7.31	500.0	100.0	H	0.0	22.2
7952.750000	59.92	---	68.20	8.28	500.0	100.0	V	66.0	23.5


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT40) CH142

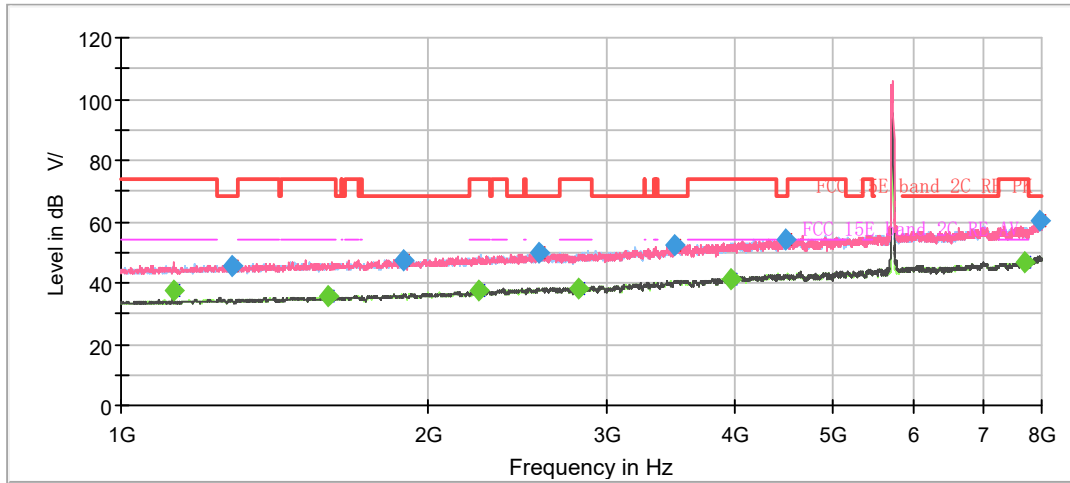

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

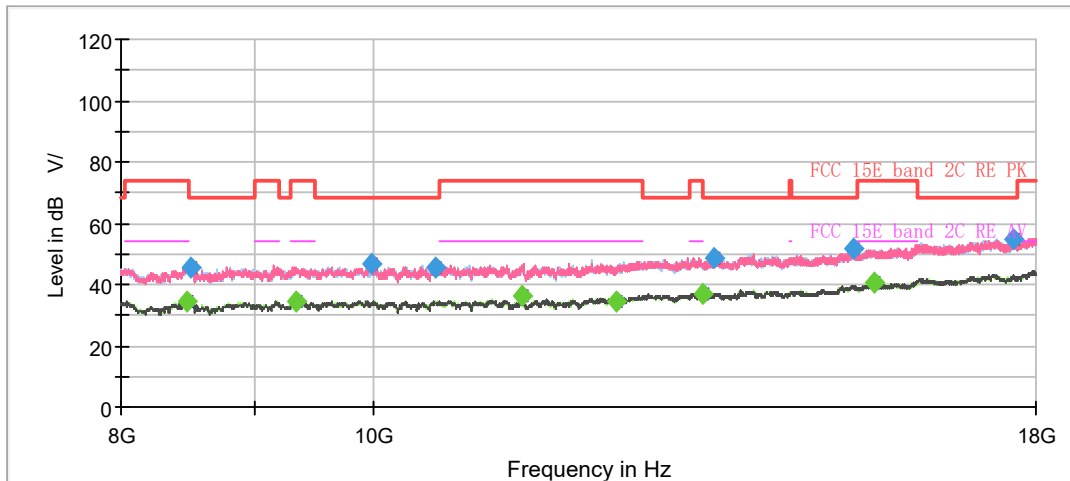


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	37.43	54.00	16.57	500.0	200.0	V	299.0	4.0
1282.625000	45.84	---	68.20	22.36	500.0	100.0	H	277.0	5.0
1596.750000	---	35.81	54.00	18.19	500.0	200.0	V	339.0	6.8
1896.000000	47.58	---	68.20	20.62	500.0	100.0	V	52.0	8.1
2239.000000	---	37.80	54.00	16.20	500.0	100.0	H	287.0	9.6
2568.000000	49.69	---	68.20	18.51	500.0	100.0	H	44.0	10.7
2809.500000	---	38.30	54.00	15.70	500.0	200.0	V	348.0	11.1
3488.500000	52.39	---	68.20	15.81	500.0	200.0	H	174.0	13.8
3971.500000	---	41.52	54.00	12.48	500.0	200.0	H	33.0	14.5
4480.750000	54.19	---	68.20	14.01	500.0	100.0	V	218.0	15.8
7704.250000	---	46.82	54.00	7.18	500.0	100.0	V	83.0	22.2
7952.750000	60.33	---	68.20	7.87	500.0	100.0	V	26.0	23.5


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT40) CH151

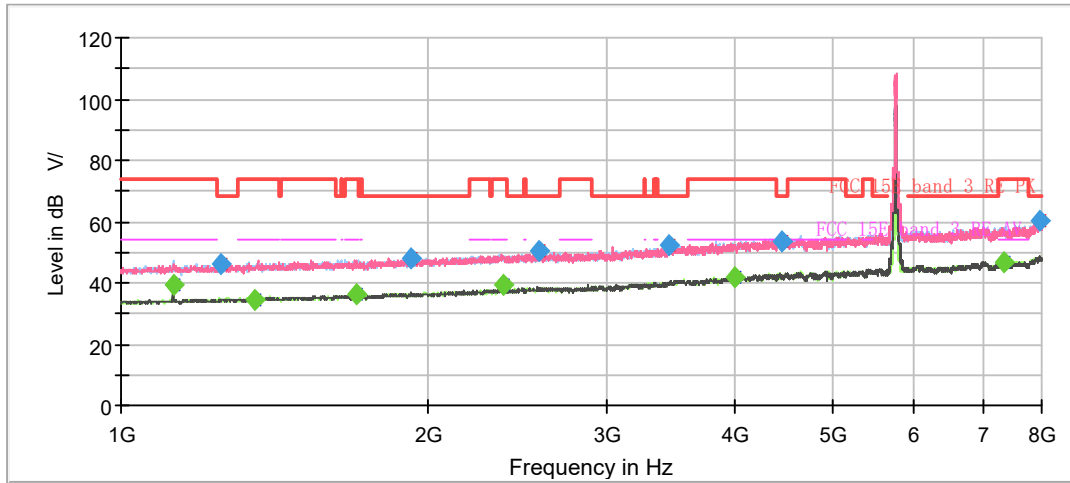

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

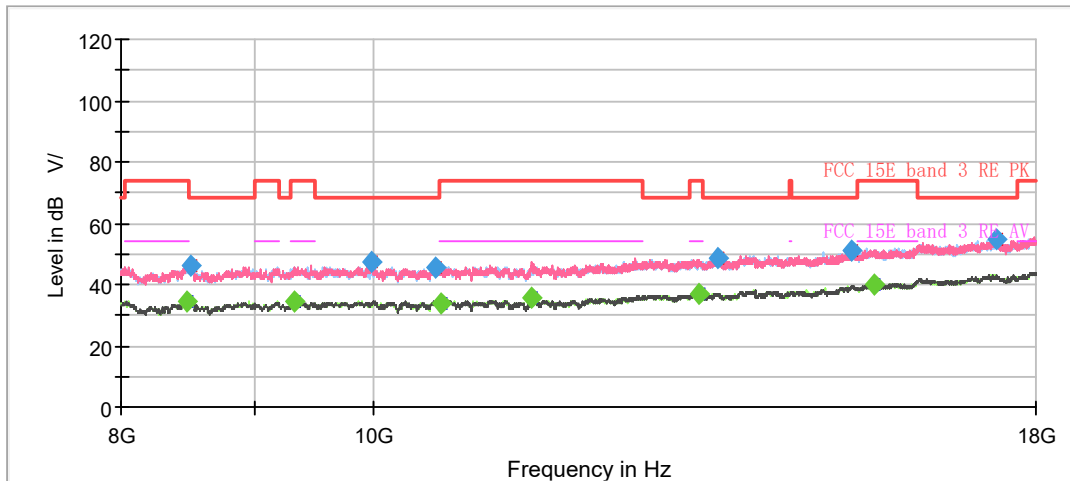


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	39.13	54.00	14.87	500.0	200.0	H	334.0	4.0
1251.125000	46.27	---	68.20	21.93	500.0	100.0	H	260.0	4.8
1354.375000	---	34.63	54.00	19.37	500.0	200.0	H	41.0	5.4
1704.375000	---	36.09	54.00	17.91	500.0	200.0	H	138.0	7.4
1925.750000	48.10	---	68.20	20.10	500.0	200.0	V	292.0	8.3
2374.625000	---	39.28	54.00	14.72	500.0	200.0	V	335.0	10.0
2575.000000	50.36	---	68.20	17.84	500.0	200.0	H	91.0	10.8
3442.125000	52.53	---	68.20	15.67	500.0	200.0	H	180.0	13.2
3999.500000	---	41.84	54.00	12.16	500.0	200.0	V	135.0	14.6
4451.875000	53.59	---	68.20	14.61	500.0	100.0	V	19.0	15.7
7349.000000	---	46.84	54.00	7.16	500.0	200.0	H	355.0	21.2
7958.000000	60.19	---	68.20	8.01	500.0	200.0	H	0.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT40) CH159

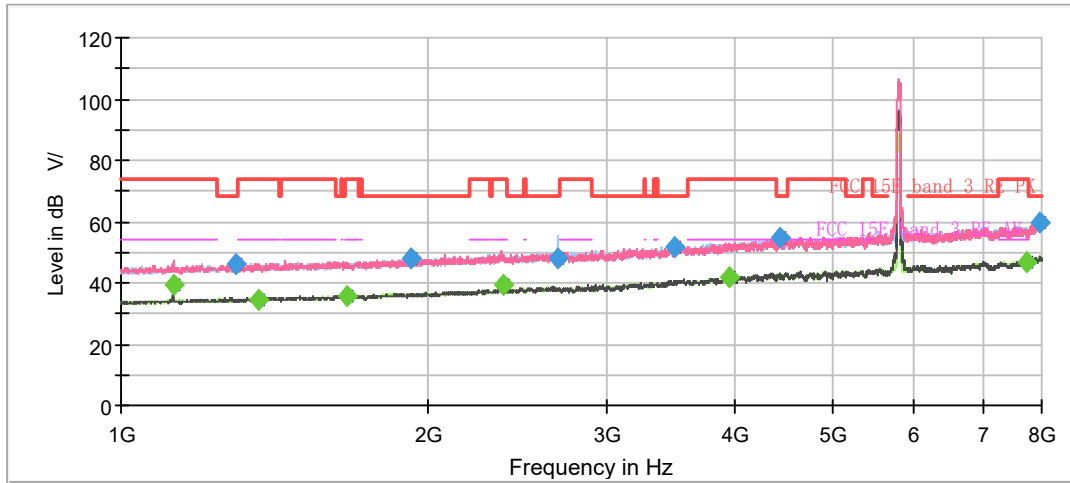

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

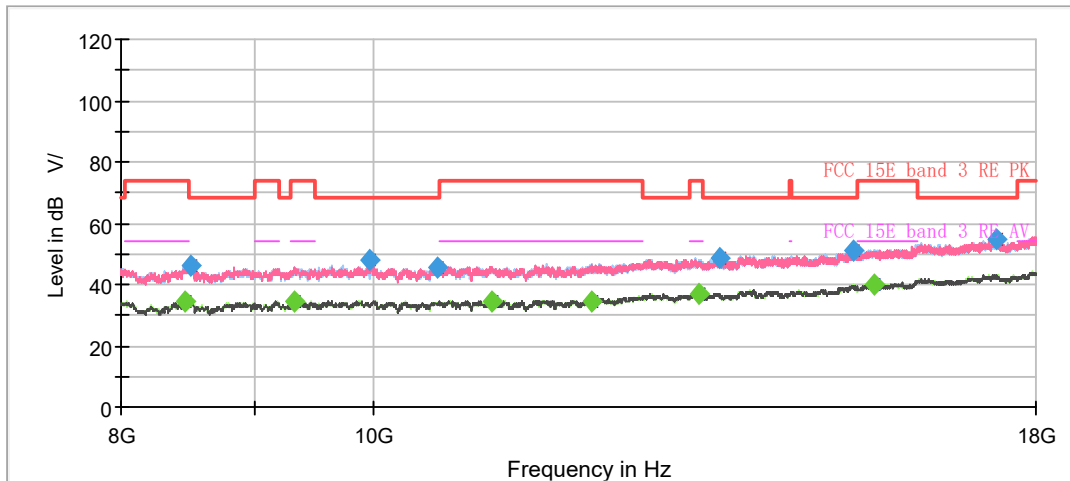


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	39.16	54.00	14.84	500.0	200.0	H	188.0	4.0
1298.375000	46.07	---	68.20	22.13	500.0	100.0	H	41.0	5.0
1366.625000	---	34.46	54.00	19.54	500.0	100.0	H	120.0	5.5
1664.125000	---	35.89	54.00	18.11	500.0	200.0	H	181.0	7.0
1922.250000	48.20	---	68.20	20.00	500.0	100.0	H	77.0	8.2
2374.625000	---	39.47	54.00	14.53	500.0	200.0	V	241.0	10.0
2678.250000	47.78	---	68.20	20.42	500.0	100.0	V	287.0	10.8
3497.250000	51.95	---	68.20	16.25	500.0	200.0	H	37.0	13.8
3954.875000	---	41.98	54.00	12.02	500.0	200.0	V	67.0	14.4
4427.375000	54.74	---	68.20	13.46	500.0	200.0	H	238.0	15.9
7729.625000	---	46.81	54.00	7.19	500.0	200.0	H	181.0	22.3
7982.500000	59.73	---	68.20	8.47	500.0	200.0	H	12.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT80) CH42

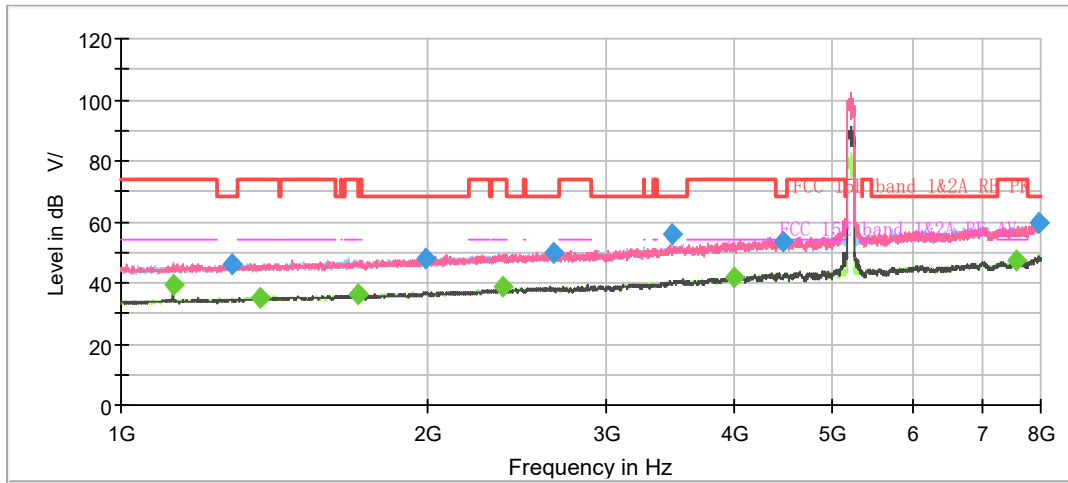

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

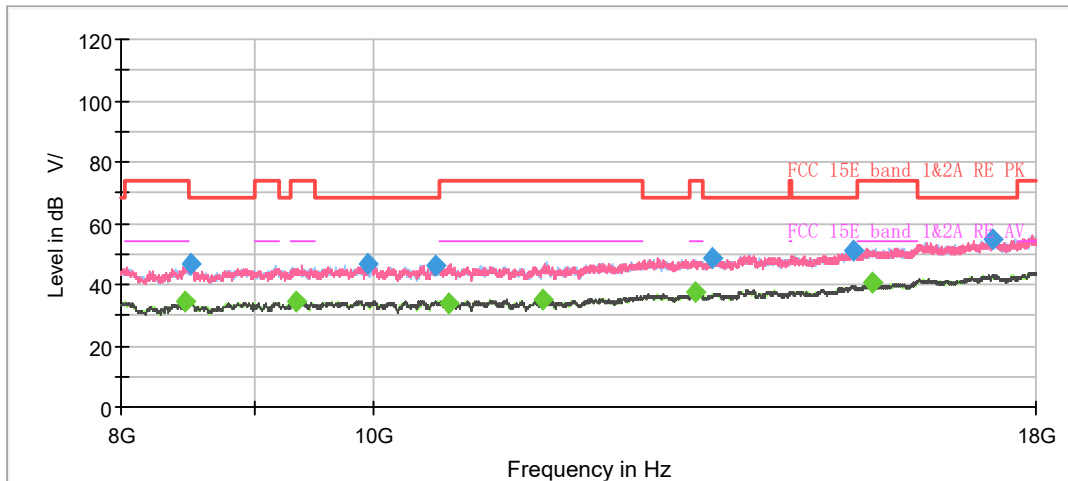


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	39.32	54.00	14.68	500.0	200.0	H	2.0	4.0
1285.250000	46.37	---	68.20	21.83	500.0	200.0	V	0.0	5.0
1367.500000	---	35.16	54.00	18.84	500.0	200.0	V	78.0	5.5
1706.125000	---	36.37	54.00	17.63	500.0	200.0	H	325.0	7.4
1990.500000	48.28	---	68.20	19.92	500.0	200.0	H	42.0	8.7
2374.625000	---	38.88	54.00	15.12	500.0	200.0	V	43.0	10.0
2662.500000	49.89	---	68.20	18.31	500.0	100.0	H	157.0	10.8
3483.250000	56.11	---	68.20	12.09	500.0	100.0	H	162.0	13.8
3997.750000	---	41.80	54.00	12.20	500.0	200.0	H	280.0	14.5
4475.500000	53.75	---	68.20	14.45	500.0	100.0	V	172.0	15.8
7573.000000	---	47.12	54.00	6.88	500.0	100.0	H	77.0	21.6
7965.000000	59.69	---	68.20	8.51	500.0	100.0	V	0.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT80) CH58

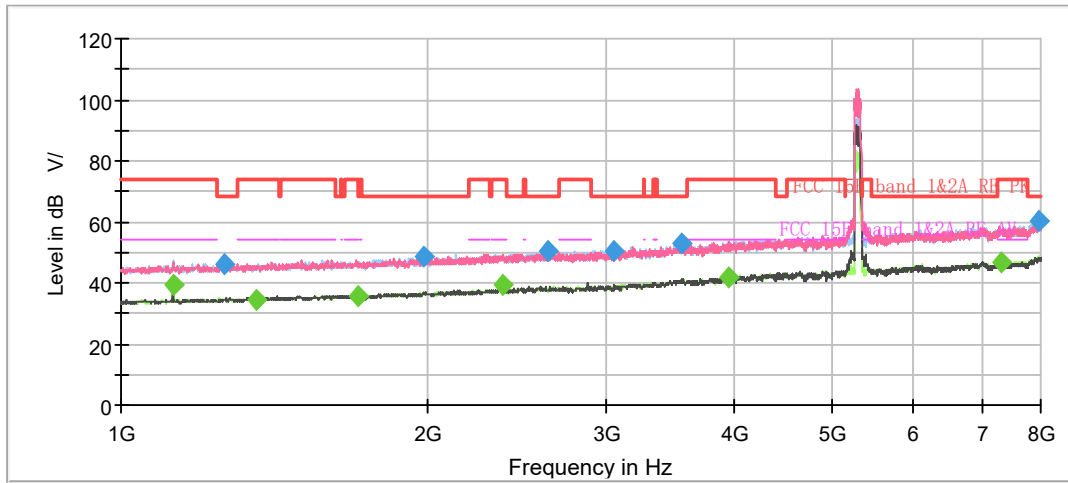

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

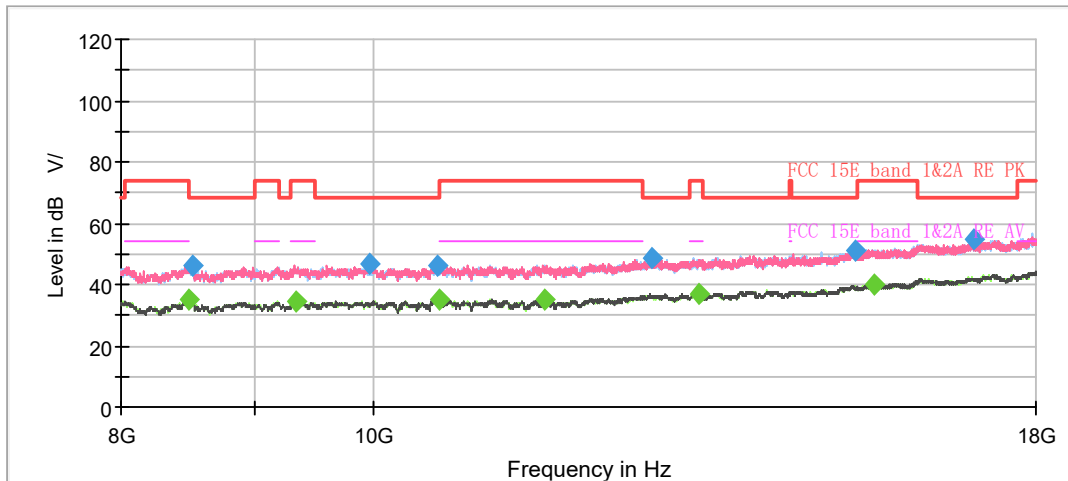


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	39.24	54.00	14.76	500.0	200.0	H	11.0	4.0
1262.500000	45.92	---	68.20	22.28	500.0	100.0	V	264.0	4.9
1359.625000	---	34.54	54.00	19.46	500.0	200.0	H	302.0	5.5
1707.000000	---	35.81	54.00	18.19	500.0	200.0	H	170.0	7.4
1980.875000	48.43	---	68.20	19.77	500.0	200.0	H	332.0	8.6
2374.625000	---	39.29	54.00	14.71	500.0	200.0	V	85.0	10.0
2626.625000	50.38	---	68.20	17.82	500.0	200.0	V	158.0	10.6
3040.500000	50.71	---	68.20	17.49	500.0	100.0	H	166.0	11.8
3555.875000	52.82	---	68.20	15.38	500.0	200.0	H	223.0	14.0
3954.000000	---	41.75	54.00	12.25	500.0	200.0	H	104.0	14.4
7314.875000	---	46.81	54.00	7.19	500.0	200.0	H	302.0	21.3
7966.750000	60.22	---	68.20	7.98	500.0	200.0	V	33.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT80) CH106

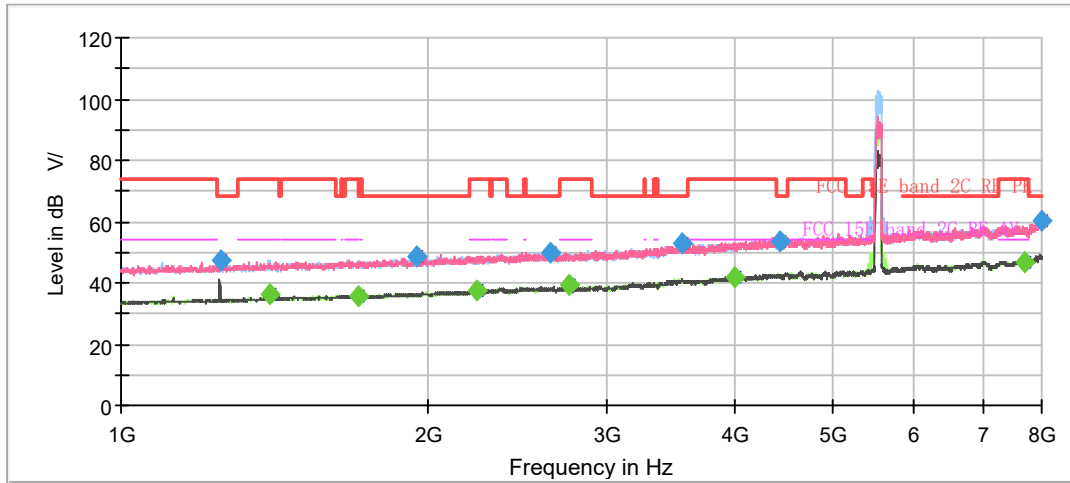

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

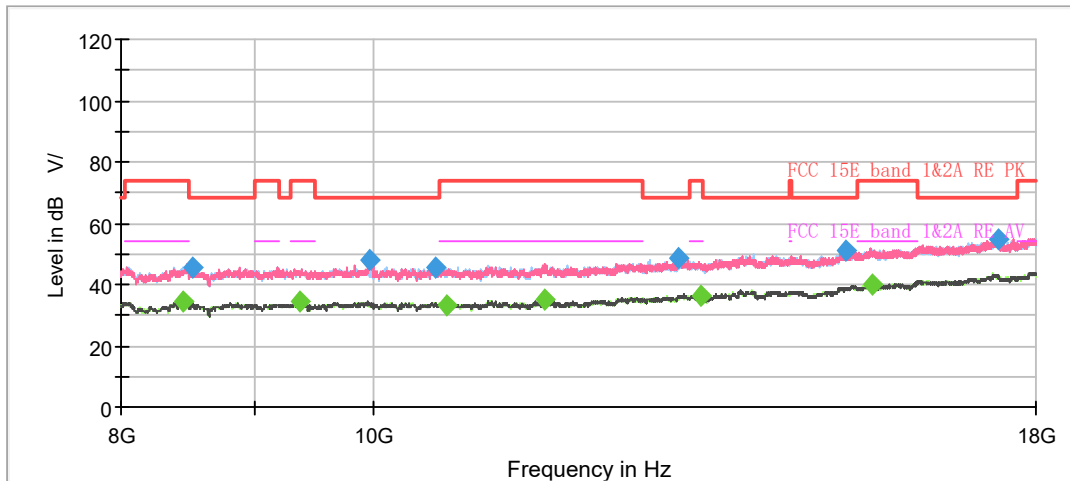


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1250.250000	47.68	---	68.20	20.52	500.0	200.0	V	331.0	4.8
1396.375000	---	36.21	54.00	17.79	500.0	200.0	H	57.0	5.7
1707.875000	---	35.93	54.00	18.07	500.0	200.0	H	265.0	7.5
1948.500000	48.76	---	68.20	19.44	500.0	200.0	H	33.0	8.3
2234.625000	---	37.41	54.00	16.59	500.0	100.0	V	96.0	9.5
2633.625000	49.99	---	68.20	18.21	500.0	200.0	V	19.0	10.7
2750.000000	---	39.24	54.00	14.76	500.0	200.0	V	0.0	10.9
3553.250000	52.83	---	68.20	15.37	500.0	100.0	V	316.0	14.0
3996.875000	---	41.85	54.00	12.15	500.0	100.0	V	244.0	14.5
4421.250000	53.78	---	68.20	14.42	500.0	100.0	H	194.0	16.0
7705.125000	---	47.04	54.00	6.96	500.0	100.0	V	60.0	22.2
7988.625000	60.11	---	68.20	8.09	500.0	100.0	V	259.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT80) CH138

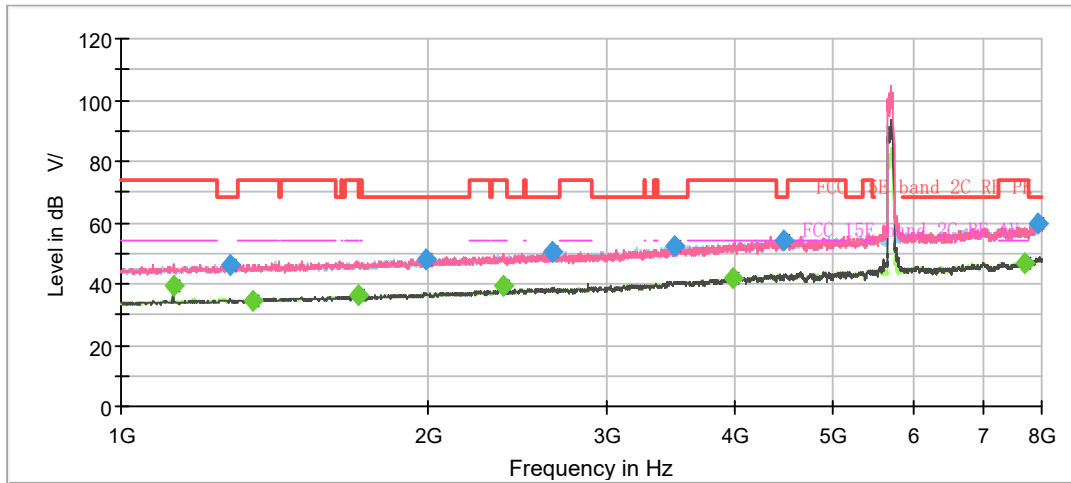

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

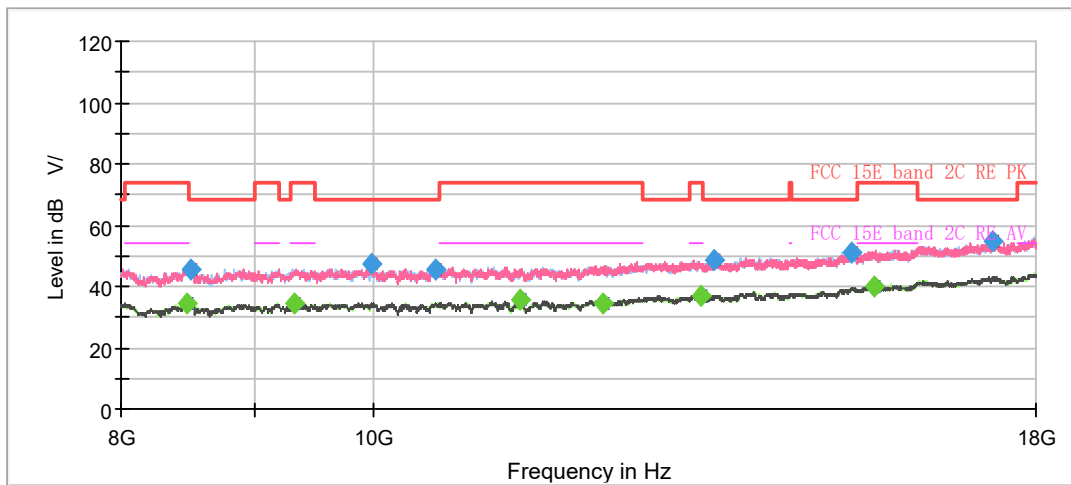


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	39.12	54.00	14.88	500.0	200.0	H	318.0	4.0
1277.375000	46.37	---	68.20	21.83	500.0	200.0	V	84.0	5.0
1345.625000	---	34.51	54.00	19.49	500.0	200.0	H	238.0	5.3
1707.875000	---	36.16	54.00	17.84	500.0	200.0	H	29.0	7.5
1988.750000	48.15	---	68.20	20.05	500.0	100.0	V	248.0	8.7
2374.625000	---	39.64	54.00	14.36	500.0	200.0	V	258.0	10.0
2647.625000	50.32	---	68.20	17.88	500.0	200.0	H	136.0	10.8
3494.625000	52.29	---	68.20	15.91	500.0	200.0	V	262.0	13.8
3977.625000	---	42.02	54.00	11.98	500.0	200.0	V	0.0	14.5
4475.500000	54.39	---	68.20	13.81	500.0	200.0	H	39.0	15.8
7708.625000	---	46.87	54.00	7.13	500.0	200.0	H	126.0	22.2
7945.750000	59.96	---	68.20	8.24	500.0	100.0	V	54.0	23.5


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ac (VHT80) CH155

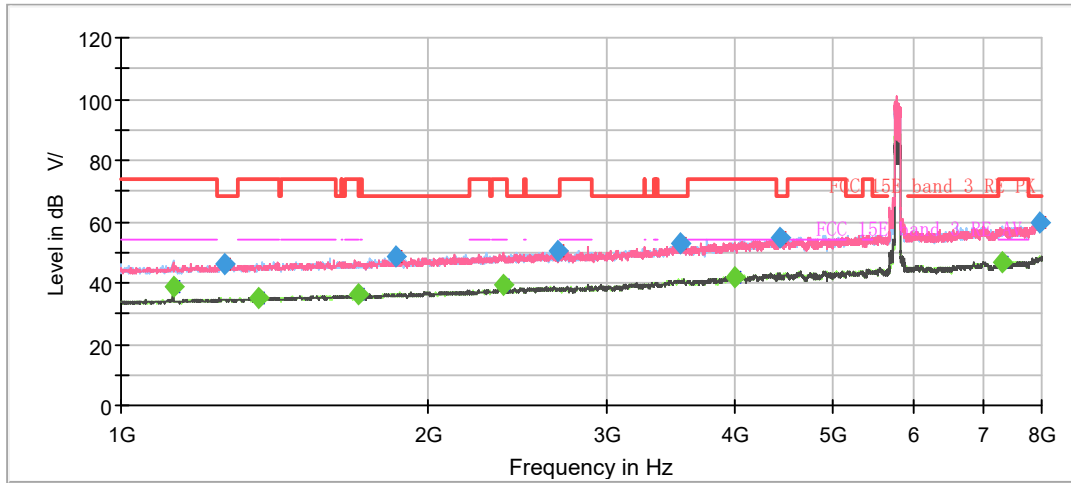

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

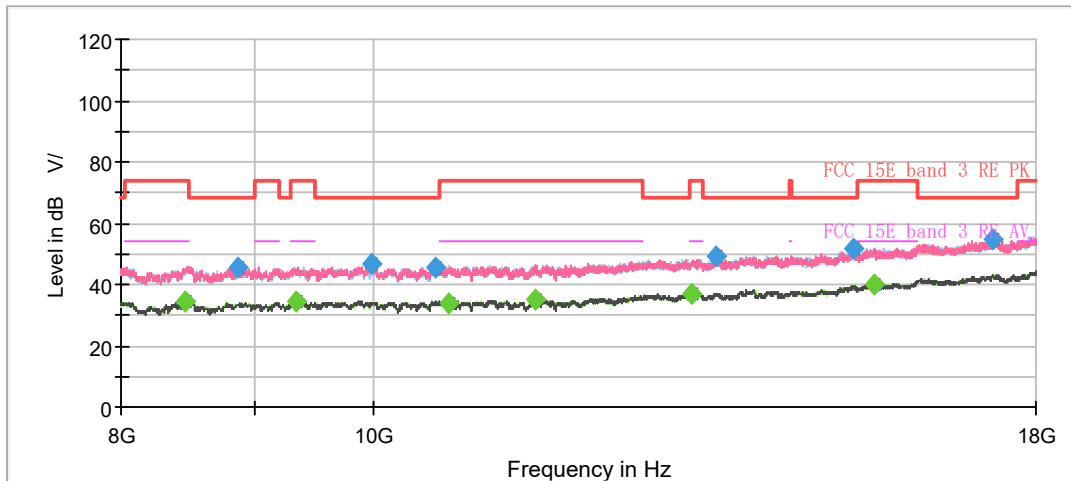


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	38.95	54.00	15.05	500.0	200.0	H	336.0	4.0
1265.125000	46.09	---	68.20	22.11	500.0	200.0	H	27.0	4.9
1366.625000	---	35.01	54.00	18.99	500.0	200.0	H	135.0	5.5
1705.250000	---	36.24	54.00	17.76	500.0	200.0	V	261.0	7.4
1861.875000	48.39	---	68.20	19.81	500.0	100.0	V	39.0	8.0
2374.625000	---	39.28	54.00	14.72	500.0	200.0	V	320.0	10.0
2680.875000	50.48	---	68.20	17.72	500.0	200.0	V	215.0	10.8
3535.750000	52.87	---	68.20	15.33	500.0	200.0	V	23.0	14.1
3997.750000	---	41.98	54.00	12.02	500.0	200.0	H	182.0	14.5
4425.625000	54.49	---	68.20	13.71	500.0	200.0	V	291.0	16.0
7314.000000	---	46.75	54.00	7.25	500.0	200.0	H	27.0	21.3
7970.250000	59.41	---	68.20	8.79	500.0	100.0	H	228.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax (HE20) CH36

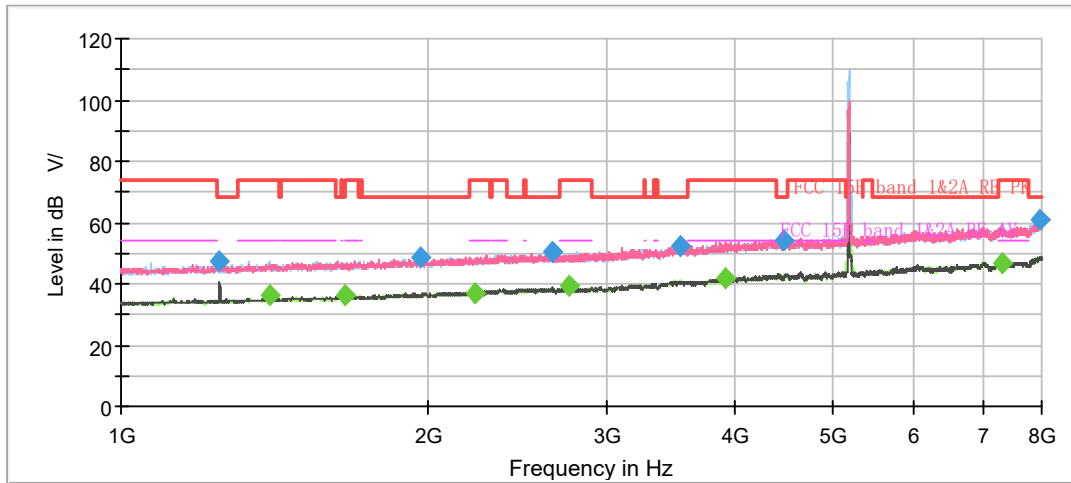

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

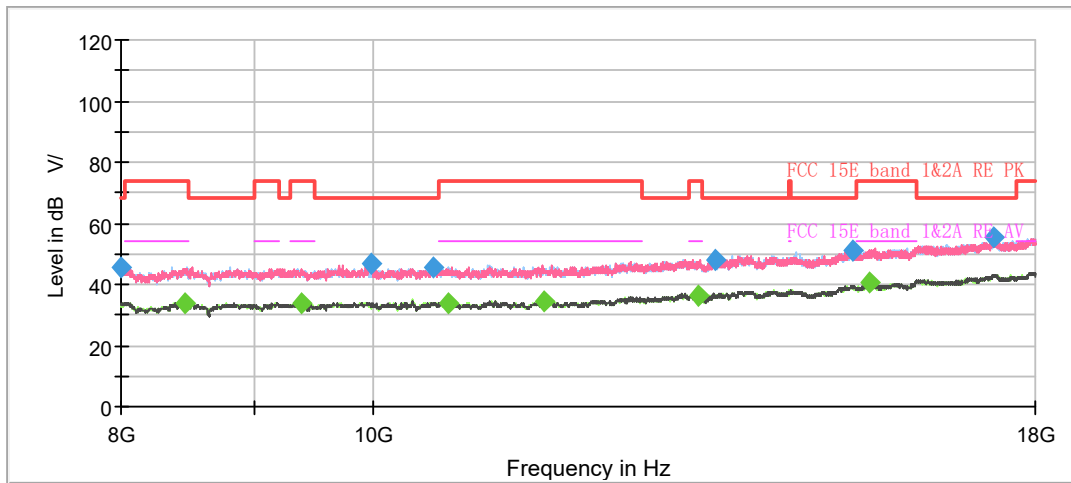


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1249.375000	47.25	---	68.20	20.95	500.0	200.0	V	339.0	4.8
1399.000000	---	36.06	54.00	17.94	500.0	200.0	H	52.0	5.7
1660.625000	---	36.15	54.00	17.85	500.0	200.0	H	63.0	7.0
1964.250000	48.39	---	68.20	19.81	500.0	100.0	V	263.0	8.4
2223.250000	---	36.79	54.00	17.21	500.0	200.0	H	67.0	9.4
2647.625000	50.23	---	68.20	17.97	500.0	200.0	H	293.0	10.8
2750.000000	---	39.16	54.00	14.84	500.0	200.0	V	176.0	10.9
3533.125000	52.36	---	68.20	15.84	500.0	100.0	H	315.0	14.1
3923.375000	---	41.88	54.00	12.12	500.0	200.0	V	28.0	14.3
4471.125000	54.37	---	68.20	13.83	500.0	200.0	H	354.0	15.8
7312.250000	---	47.03	54.00	6.97	500.0	100.0	H	7.0	21.3
7965.000000	61.05	---	68.20	7.15	500.0	100.0	V	188.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax (HE20) CH40

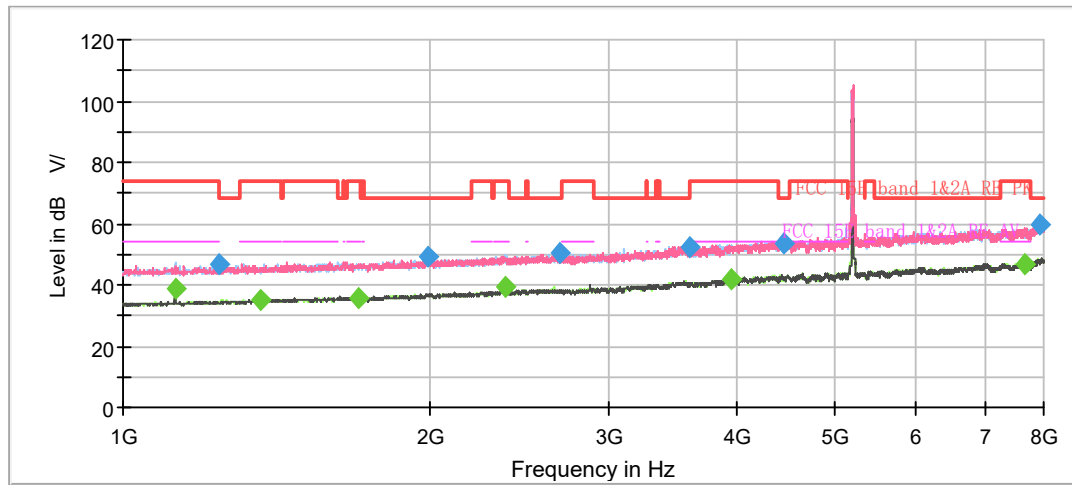

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

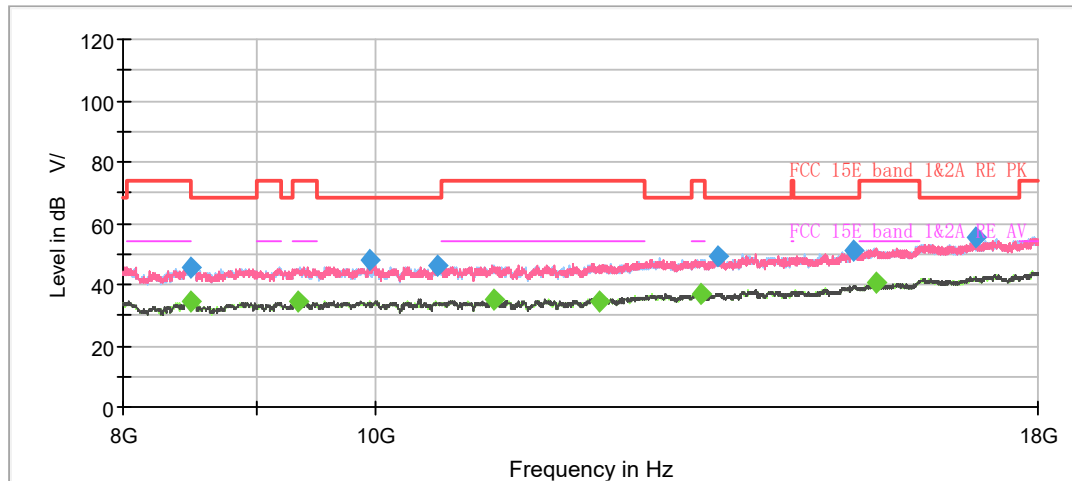


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	38.88	54.00	15.12	500.0	200.0	H	11.0	4.0
1242.375000	46.63	---	68.20	21.57	500.0	200.0	V	201.0	4.8
1362.250000	---	35.01	54.00	18.99	500.0	100.0	H	241.0	5.5
1702.625000	---	35.98	54.00	18.02	500.0	200.0	V	121.0	7.4
1990.500000	49.15	---	68.20	19.05	500.0	100.0	V	130.0	8.7
2374.625000	---	39.22	54.00	14.78	500.0	200.0	V	310.0	10.0
2676.500000	50.37	---	68.20	17.83	500.0	200.0	H	2.0	10.8
3589.125000	52.38	---	68.20	15.82	500.0	100.0	H	217.0	13.8
3954.000000	---	41.74	54.00	12.26	500.0	200.0	H	97.0	14.4
4448.375000	53.58	---	68.20	14.62	500.0	100.0	H	333.0	15.7
7664.875000	---	46.88	54.00	7.12	500.0	200.0	H	54.0	22.0
7939.625000	59.94	---	68.20	8.26	500.0	200.0	V	230.0	23.5


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax (HE20) CH48

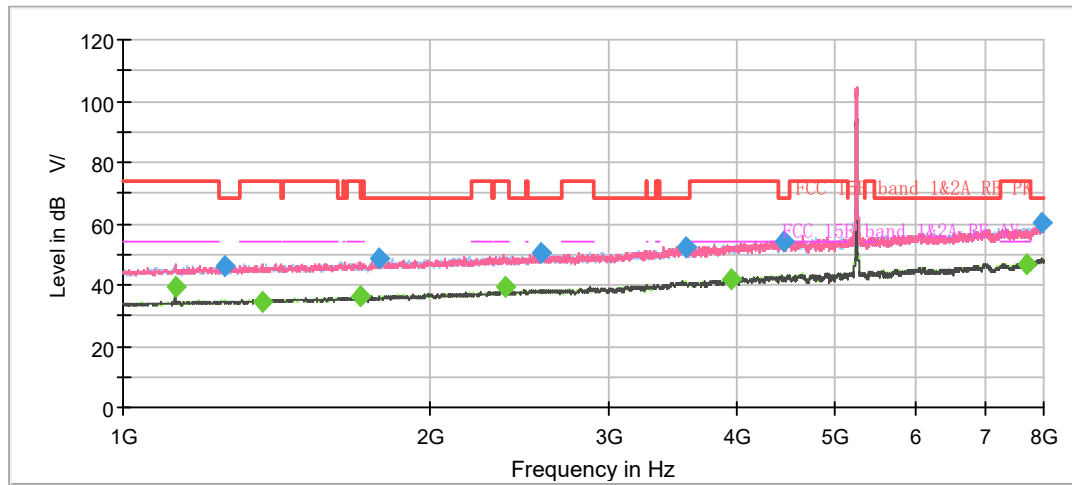

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

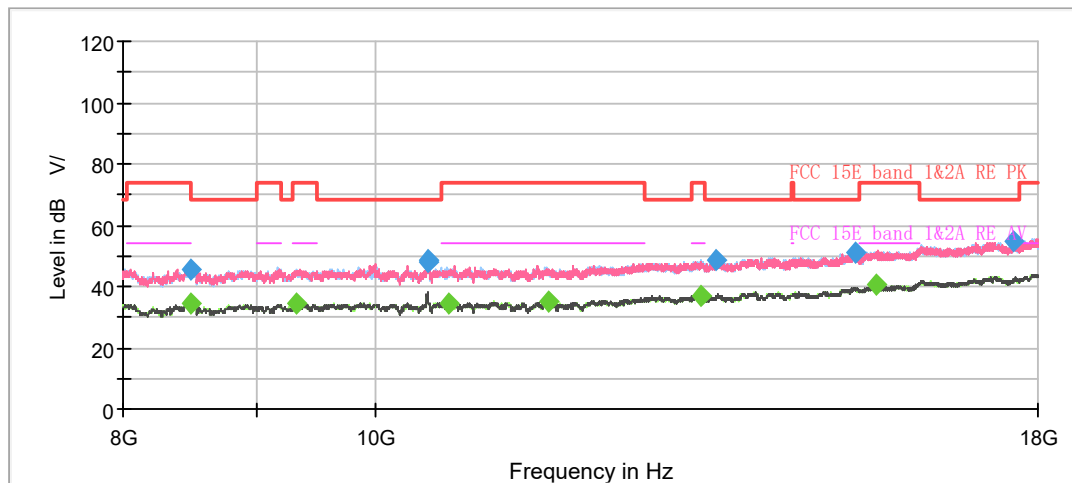


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	39.22	54.00	14.78	500.0	200.0	H	24.0	4.0
1259.000000	46.25	---	68.20	21.95	500.0	100.0	V	68.0	4.9
1367.500000	---	34.29	54.00	19.71	500.0	200.0	H	81.0	5.5
1706.125000	---	36.48	54.00	17.52	500.0	200.0	V	192.0	7.4
1782.250000	48.70	---	68.20	19.50	500.0	200.0	H	224.0	7.5
2374.625000	---	39.09	54.00	14.91	500.0	200.0	V	322.0	10.0
2567.125000	50.23	---	68.20	17.97	500.0	100.0	H	311.0	10.7
3562.875000	52.35	---	68.20	15.85	500.0	200.0	H	63.0	13.9
3944.375000	---	41.82	54.00	12.18	500.0	100.0	V	91.0	14.4
4454.500000	54.10	---	68.20	14.10	500.0	200.0	H	190.0	15.7
7706.875000	---	46.88	54.00	7.12	500.0	100.0	V	14.0	22.2
7963.250000	60.39	---	68.20	7.81	500.0	100.0	H	74.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax (HE20) CH52

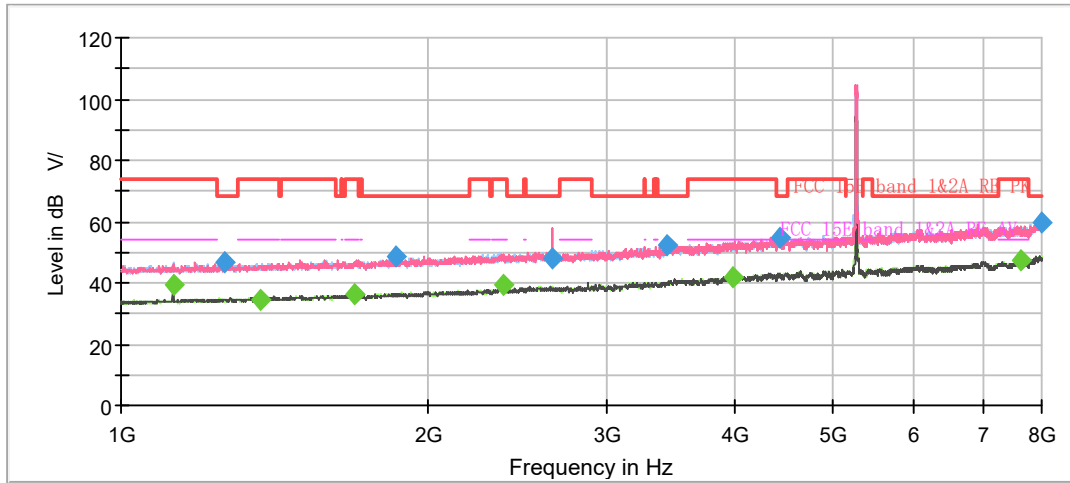

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

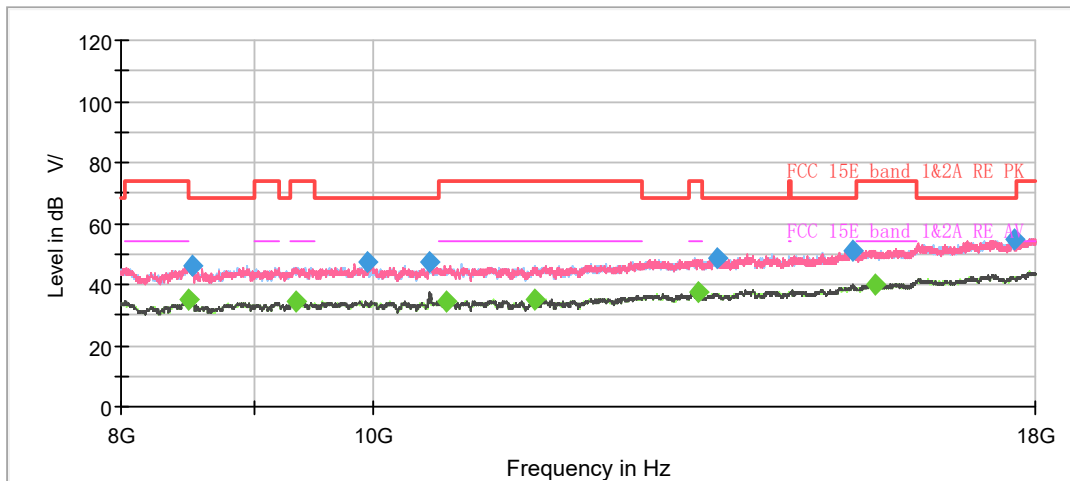


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	39.30	54.00	14.70	500.0	200.0	H	11.0	4.0
1266.000000	46.64	---	68.20	21.56	500.0	200.0	V	359.0	4.9
1371.000000	---	34.60	54.00	19.40	500.0	100.0	H	48.0	5.5
1693.875000	---	36.05	54.00	17.95	500.0	100.0	V	4.0	7.4
1861.000000	48.75	---	68.20	19.45	500.0	200.0	H	214.0	8.0
2374.625000	---	39.42	54.00	14.58	500.0	200.0	V	306.0	10.0
2643.250000	48.24	---	68.20	19.96	500.0	100.0	H	276.0	10.8
3435.125000	52.43	---	68.20	15.77	500.0	100.0	V	198.0	13.1
3975.000000	---	41.85	54.00	12.15	500.0	200.0	V	105.0	14.5
4427.375000	54.72	---	68.20	13.48	500.0	100.0	H	0.0	15.9
7638.625000	---	47.08	54.00	6.92	500.0	200.0	H	311.0	21.9
7995.625000	59.68	---	68.20	8.52	500.0	100.0	V	117.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax (HE20) CH60

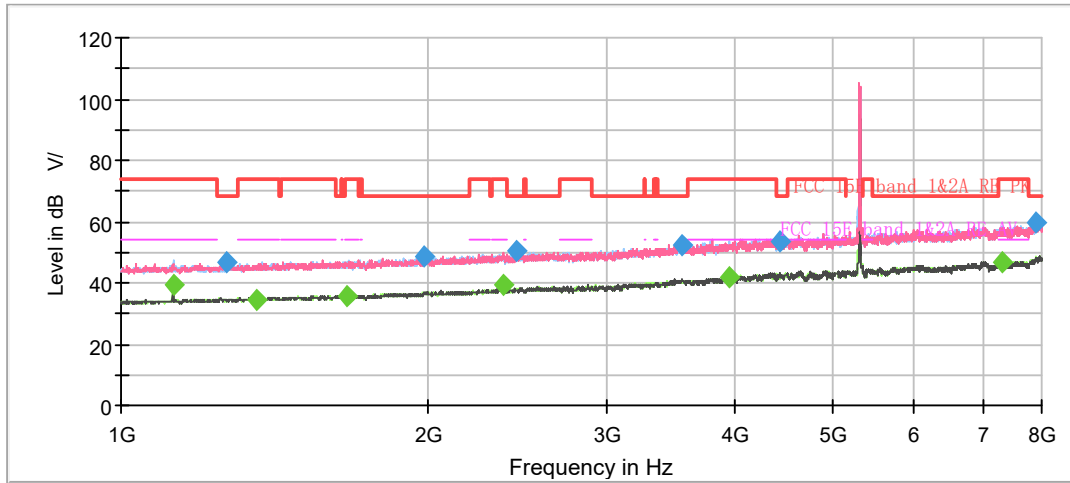

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

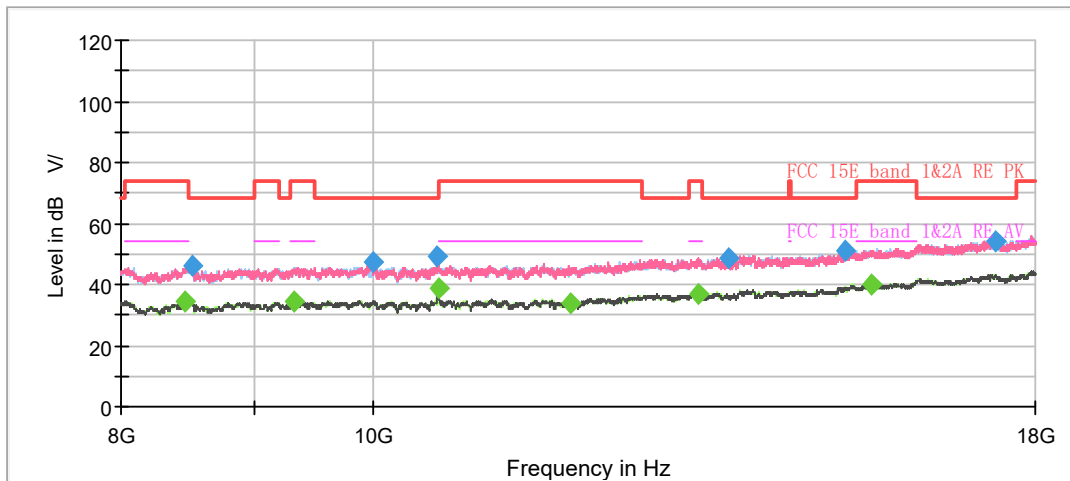


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	39.44	54.00	14.56	500.0	200.0	H	0.0	4.0
1269.500000	46.75	---	68.20	21.45	500.0	100.0	H	150.0	5.0
1359.625000	---	34.74	54.00	19.26	500.0	200.0	H	67.0	5.5
1668.500000	---	35.98	54.00	18.02	500.0	200.0	V	0.0	7.0
1980.875000	48.62	---	68.20	19.58	500.0	200.0	H	110.0	8.6
2374.625000	---	39.11	54.00	14.89	500.0	200.0	V	331.0	10.0
2437.625000	50.18	---	68.20	18.02	500.0	200.0	V	355.0	10.2
3543.625000	52.47	---	68.20	15.73	500.0	200.0	H	38.0	14.1
3955.750000	---	41.89	54.00	12.11	500.0	200.0	V	269.0	14.4
4423.875000	53.78	---	68.20	14.42	500.0	100.0	H	292.0	16.0
7310.500000	---	46.84	54.00	7.16	500.0	200.0	V	114.0	21.3
7907.250000	59.60	---	68.20	8.60	500.0	100.0	V	125.0	23.5


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax (HE20) CH64

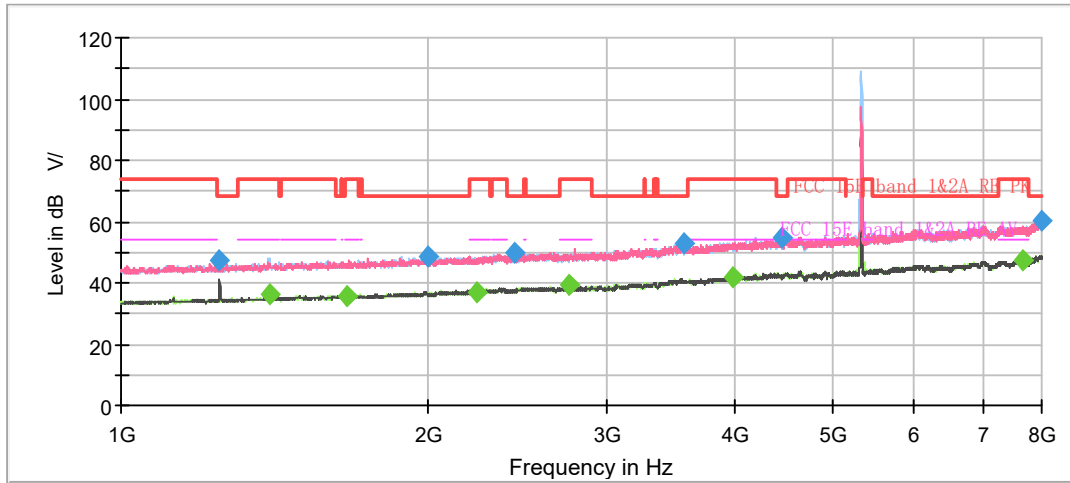

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

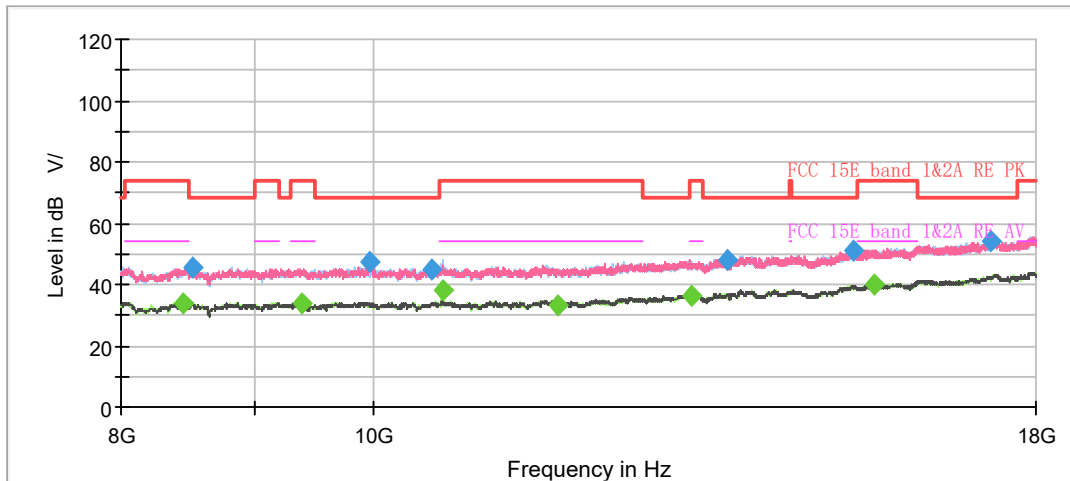


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1249.375000	47.67	---	68.20	20.53	500.0	200.0	V	333.0	4.8
1396.375000	---	36.10	54.00	17.90	500.0	200.0	H	173.0	5.7
1662.375000	---	35.98	54.00	18.02	500.0	100.0	H	79.0	7.0
1996.625000	48.35	---	68.20	19.85	500.0	200.0	H	292.0	8.6
2231.125000	---	37.20	54.00	16.80	500.0	100.0	H	46.0	9.5
2428.000000	50.15	---	68.20	18.05	500.0	200.0	H	263.0	10.2
2750.000000	---	39.27	54.00	14.73	500.0	200.0	V	0.0	10.9
3559.375000	52.64	---	68.20	15.56	500.0	200.0	H	168.0	13.9
3979.375000	---	41.74	54.00	12.26	500.0	200.0	H	336.0	14.5
4444.875000	54.55	---	68.20	13.65	500.0	100.0	H	42.0	15.8
7678.000000	---	47.12	54.00	6.88	500.0	200.0	H	145.0	22.1
7990.375000	60.26	---	68.20	7.94	500.0	100.0	H	37.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax (HE20) CH100

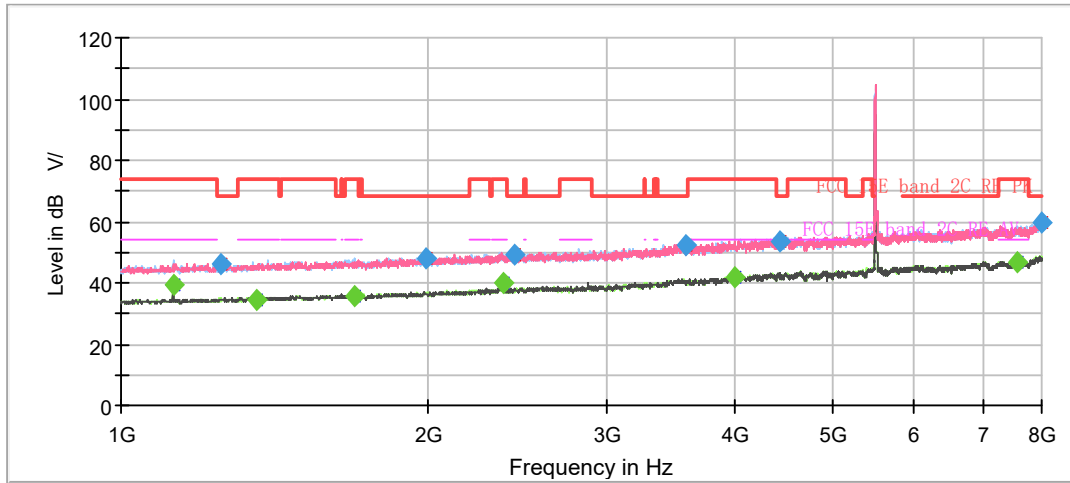

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

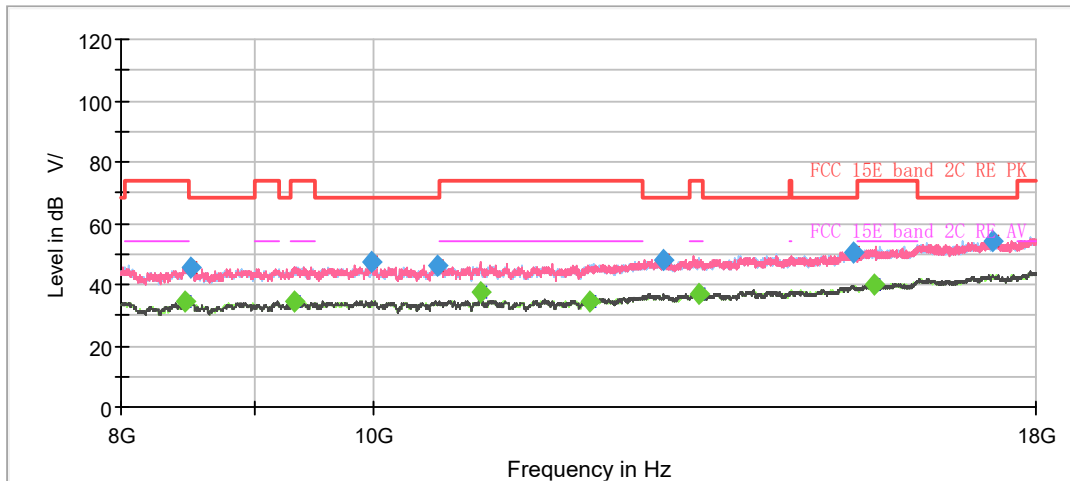


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	39.10	54.00	14.90	500.0	200.0	H	350.0	4.0
1251.125000	46.06	---	68.20	22.14	500.0	200.0	V	244.0	4.8
1357.000000	---	34.76	54.00	19.24	500.0	200.0	H	195.0	5.4
1693.875000	---	35.95	54.00	18.05	500.0	200.0	H	224.0	7.4
1993.125000	48.17	---	68.20	20.03	500.0	200.0	V	328.0	8.6
2374.625000	---	40.06	54.00	13.94	500.0	200.0	V	308.0	10.0
2431.500000	49.43	---	68.20	18.77	500.0	200.0	H	43.0	10.2
3584.750000	52.53	---	68.20	15.67	500.0	100.0	H	347.0	13.8
3999.500000	---	41.92	54.00	12.08	500.0	100.0	V	241.0	14.6
4429.125000	53.74	---	68.20	14.46	500.0	200.0	H	151.0	15.9
7577.375000	---	46.93	54.00	7.07	500.0	200.0	H	53.0	21.6
7998.250000	59.66	---	68.20	8.54	500.0	200.0	H	73.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax (HE20) CH116

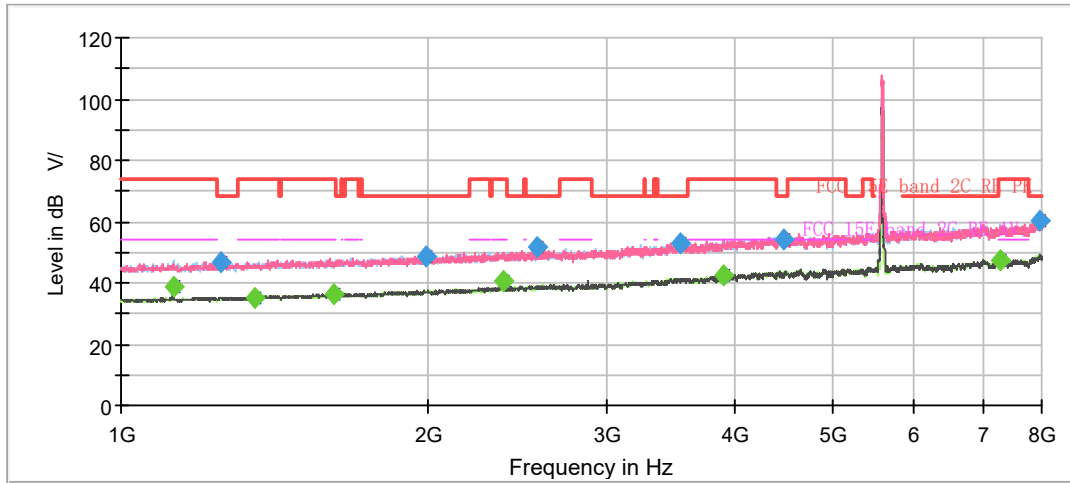

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

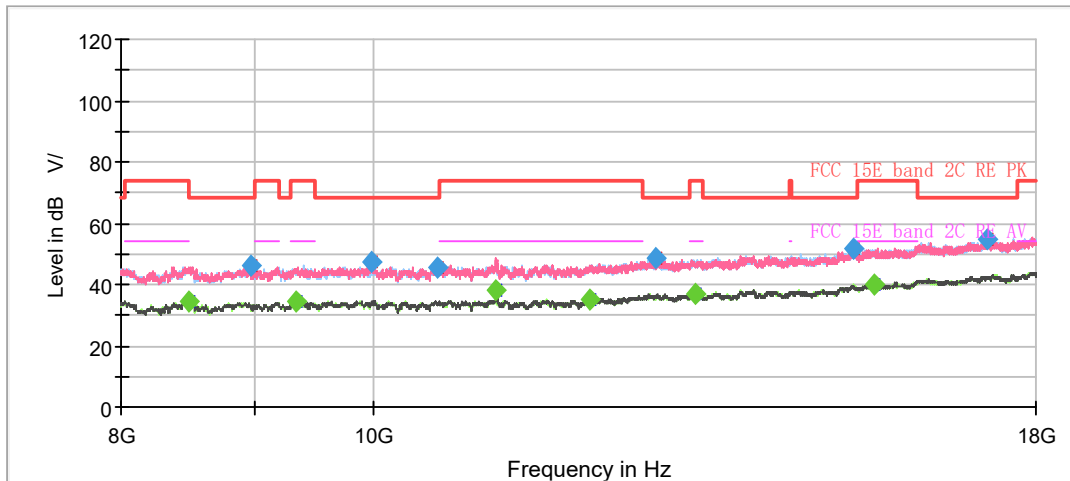


Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1124.250000	---	38.67	54.00	15.33	500.0	200.0	H	292.0	4.0
1251.125000	46.94	---	68.20	21.26	500.0	100.0	V	137.0	4.8
1354.375000	---	35.17	54.00	18.83	500.0	200.0	H	146.0	5.4
1619.500000	---	36.50	54.00	17.50	500.0	100.0	V	0.0	6.8
1988.750000	48.77	---	68.20	19.43	500.0	200.0	H	109.0	8.7
2374.625000	---	40.46	54.00	13.54	500.0	200.0	V	28.0	10.0
2562.750000	51.39	---	68.20	16.81	500.0	100.0	V	311.0	10.6
3541.875000	52.90	---	68.20	15.30	500.0	200.0	V	220.0	14.1
3903.250000	---	42.46	54.00	11.54	500.0	200.0	H	37.0	14.3
4476.375000	54.32	---	68.20	13.88	500.0	200.0	H	97.0	15.8
7294.750000	---	47.36	54.00	6.64	500.0	100.0	V	100.0	21.2
7965.875000	60.13	---	68.20	8.07	500.0	200.0	V	342.0	23.6


Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average

802.11ax (HE20) CH140

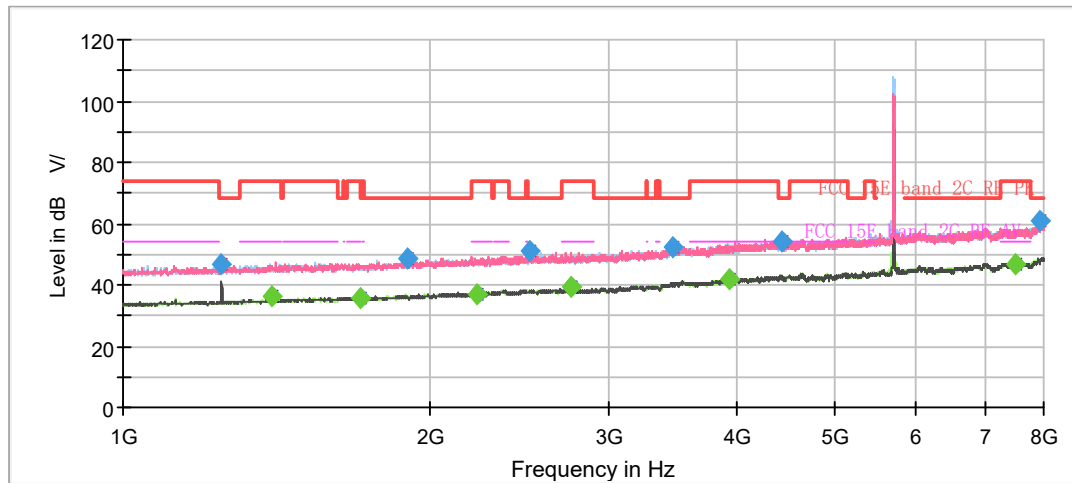

Note: The signal beyond the limit is carrier.
Radiates Emission from 1GHz to 8GHz

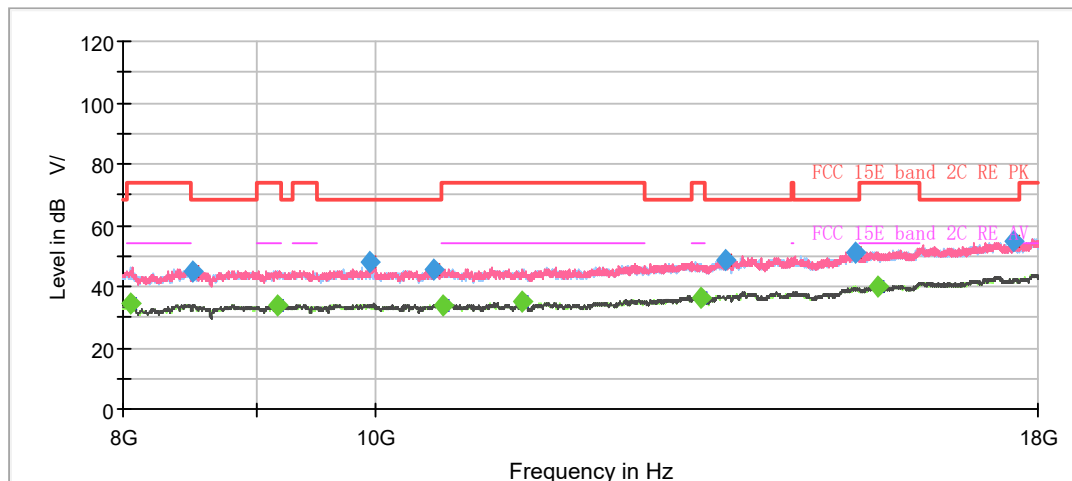

Radiates Emission from 8GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1249.375000	47.05	---	68.20	21.15	500.0	200.0	V	330.0	4.8
1396.375000	---	36.17	54.00	17.83	500.0	200.0	H	51.0	5.7
1705.250000	---	35.89	54.00	18.11	500.0	100.0	H	23.0	7.4
1900.375000	48.65	---	68.20	19.55	500.0	200.0	H	340.0	8.0
2221.500000	---	36.95	54.00	17.05	500.0	100.0	H	220.0	9.3
2502.375000	51.29	---	68.20	16.91	500.0	200.0	H	354.0	10.4
2750.000000	---	39.11	54.00	14.89	500.0	200.0	V	0.0	10.9
3458.750000	52.23	---	68.20	15.97	500.0	100.0	V	133.0	13.5
3940.875000	---	41.81	54.00	12.19	500.0	200.0	H	340.0	14.4
4428.250000	54.05	---	68.20	14.15	500.0	100.0	V	280.0	15.9
7520.500000	---	47.01	54.00	6.99	500.0	200.0	H	194.0	21.4
7948.375000	60.77	---	68.20	7.43	500.0	100.0	H	105.0	23.5

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Margin = Limit –MAX Peak/ Average