




WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

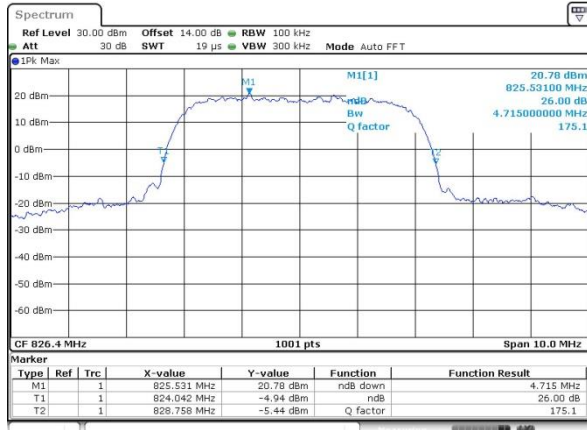

Date: 4.DEC.2020 09:40:01


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

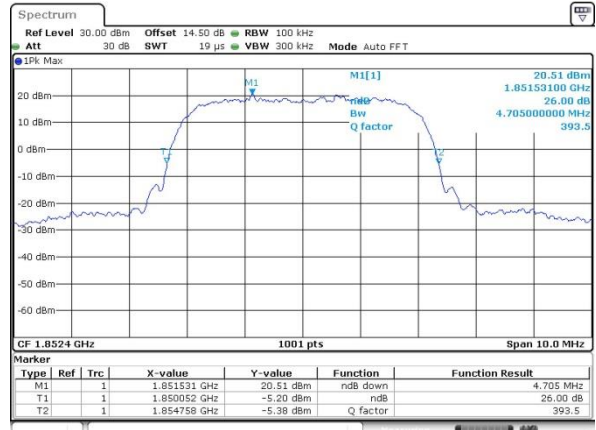


Date: 2.DEC.2020 20:25:15

Middle Channel

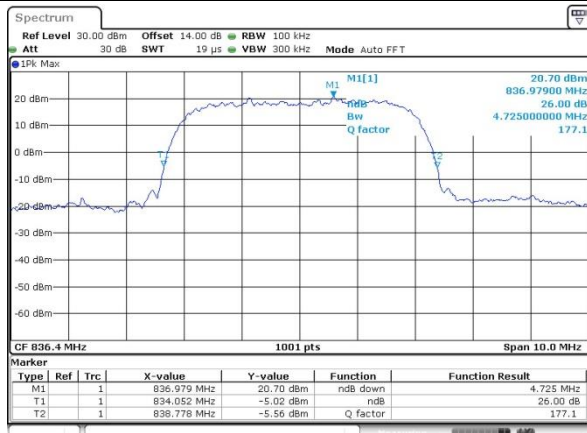


Date: 4.DEC.2020 09:40:28

Middle Channel

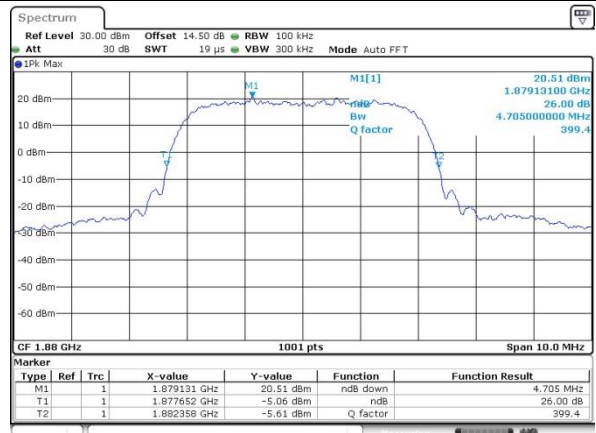


Date: 2.DEC.2020 20:25:40

Highest Channel

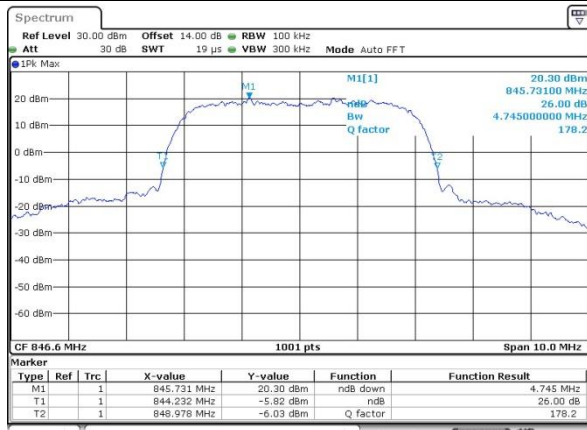

Date: 4.DEC.2020 09:40:51

Highest Channel

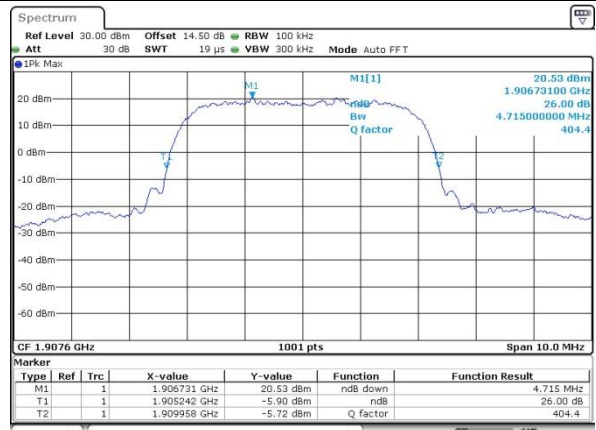


Date: 2.DEC.2020 20:26:07




WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

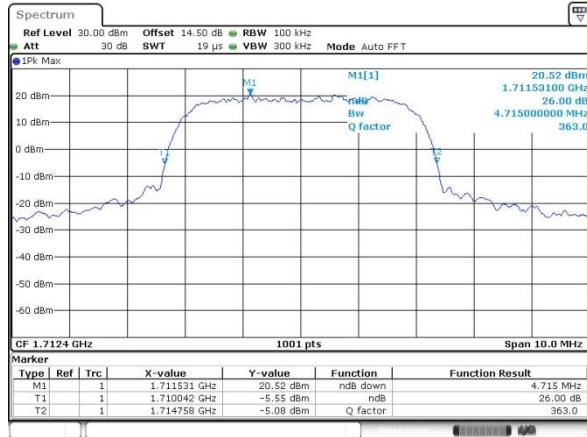

Middle Channel

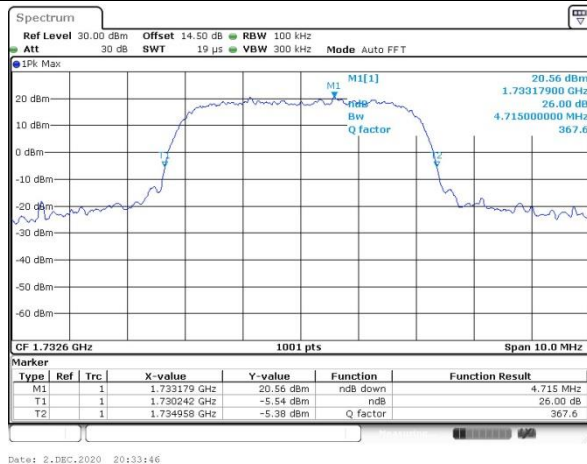

Highest Channel

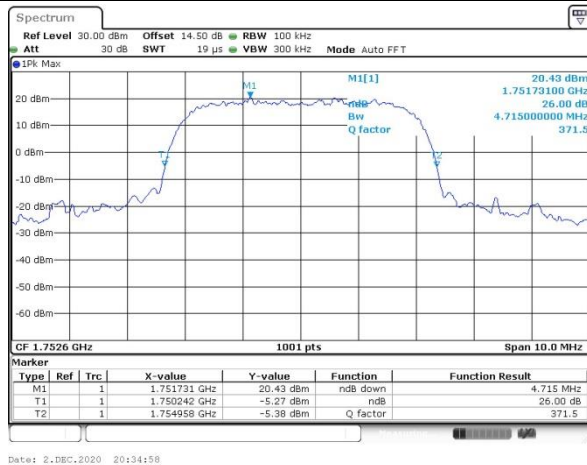


**Occupied Bandwidth**

Mode	WCDMA Band V(MHz)	WCDMA Band II(MHz)	WCDMA Band IV(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.14	4.14	4.14
Middle CH	4.15	4.14	4.14
Highest CH	4.16	4.14	4.14




WCDMA Band V (RMC 12.2Kbps)

Lowest Channel

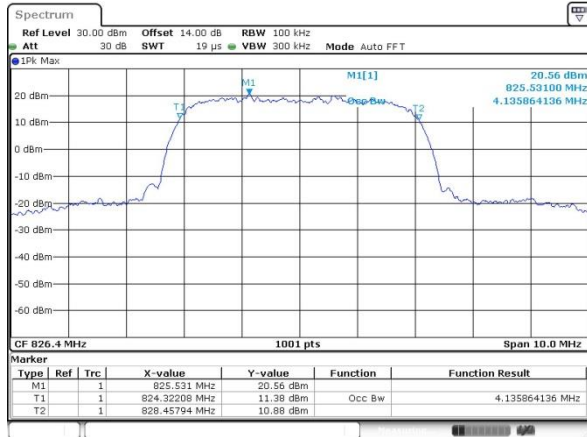


WCDMA Band II (RMC 12.2Kbps)


Lowest Channel

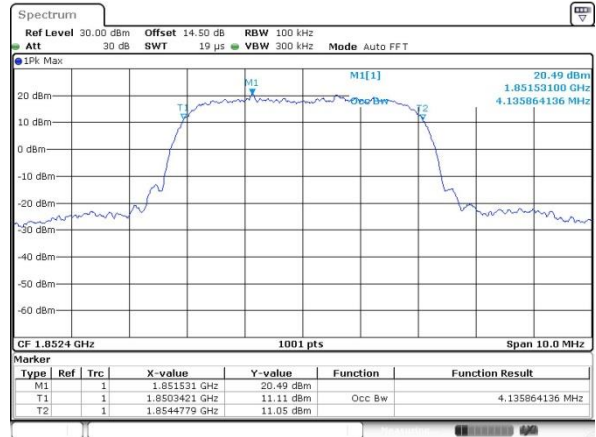


Middle Channel

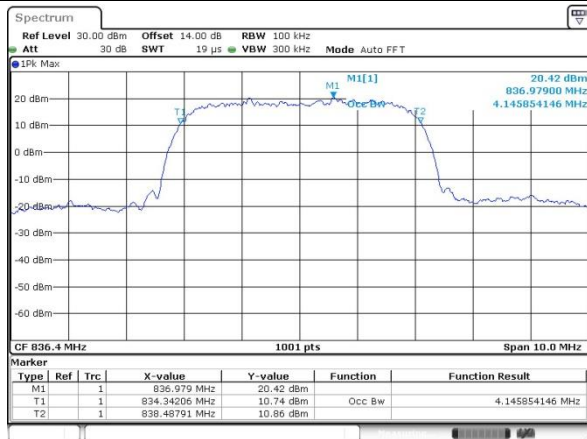


Middle Channel

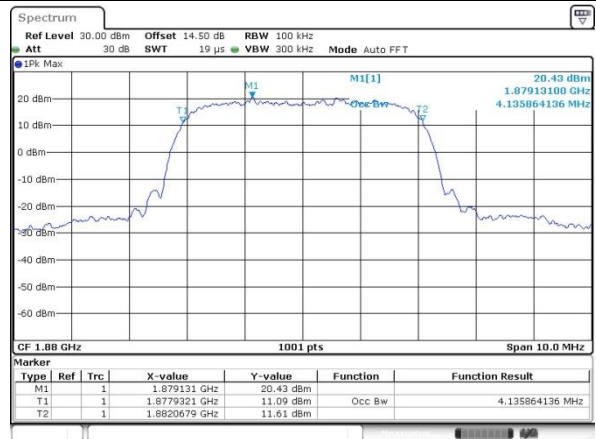

Highest Channel

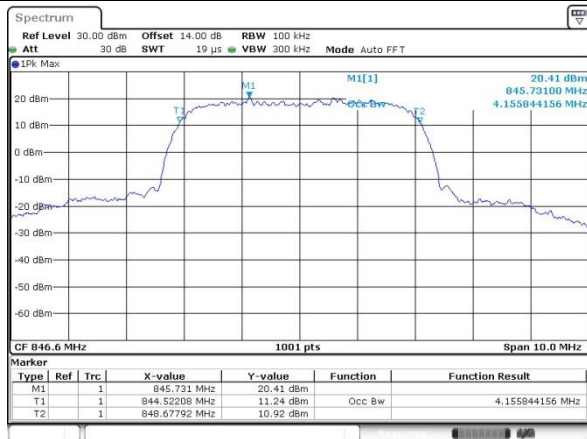


Highest Channel

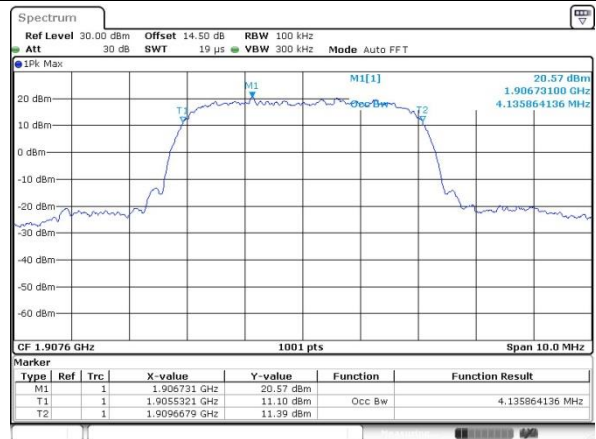




WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

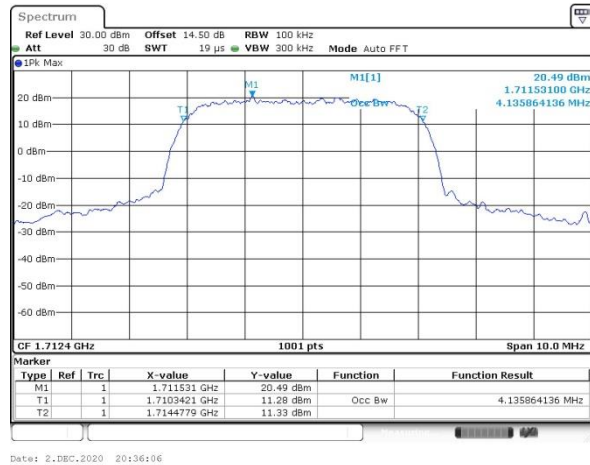

Middle Channel

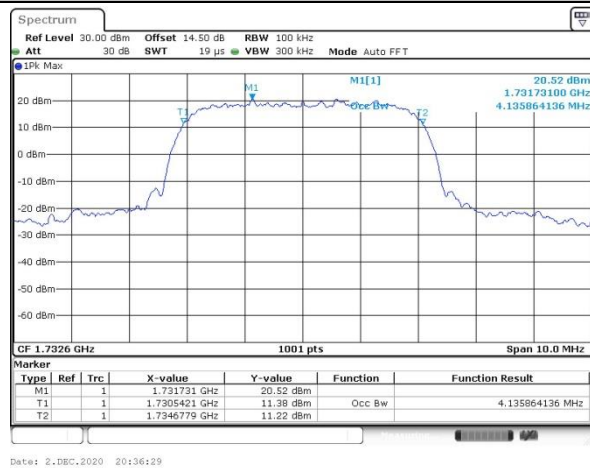


Highest Channel

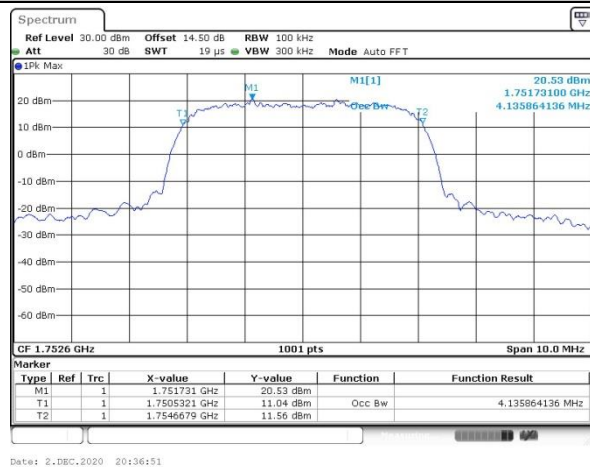




Conducted Band Edge

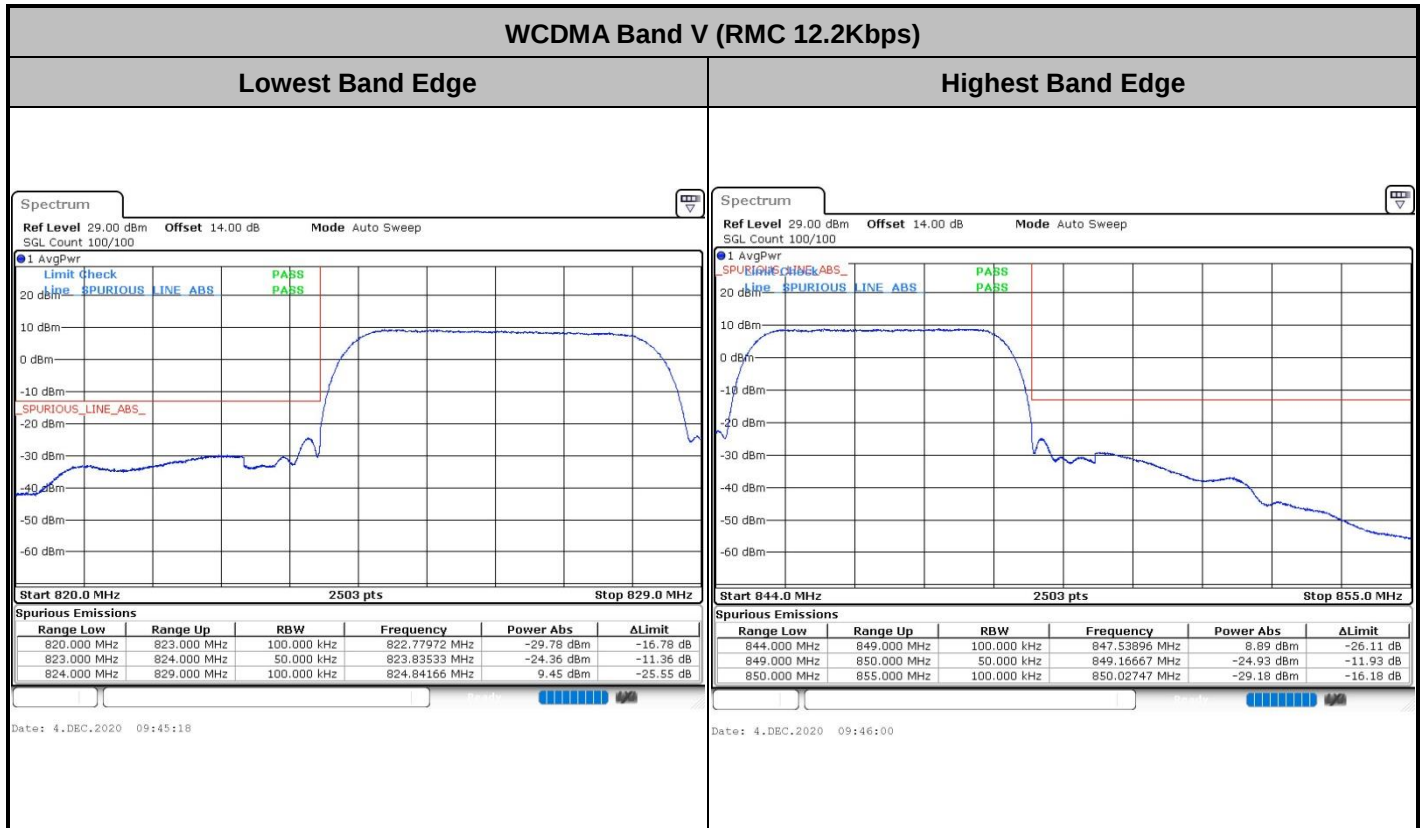



WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

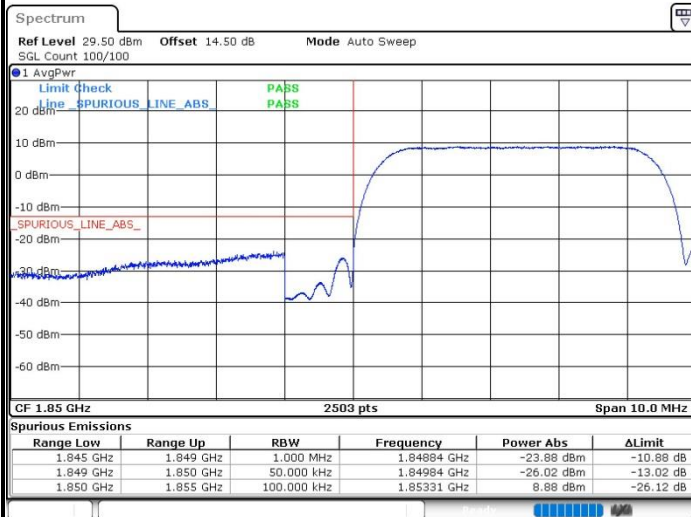

Date: 2.DEC.2020 20:28:54

Highest Band Edge




Date: 2.DEC.2020 20:30:23




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

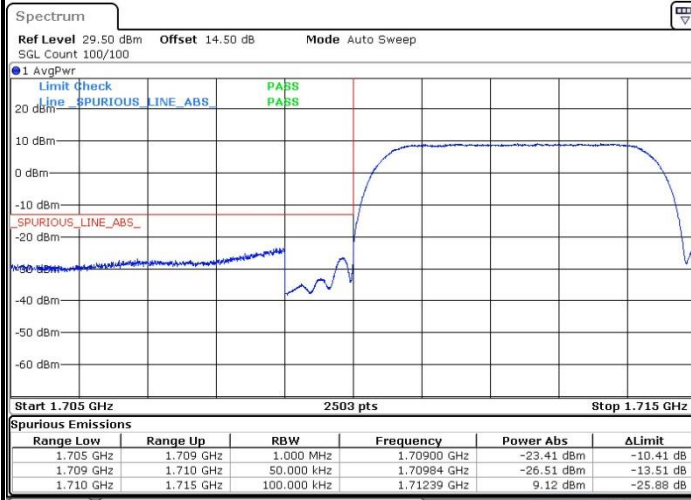

Date: 2.DEC.2020 20:41:44

Highest Band Edge

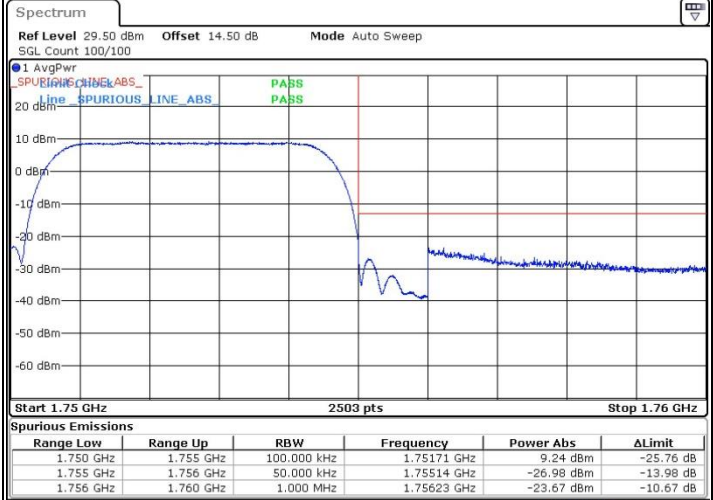


Date: 2.DEC.2020 20:43:19



Conducted Spurious Emission


WCDMA Band V (RMC 12.2Kbps)

Lowest Channel

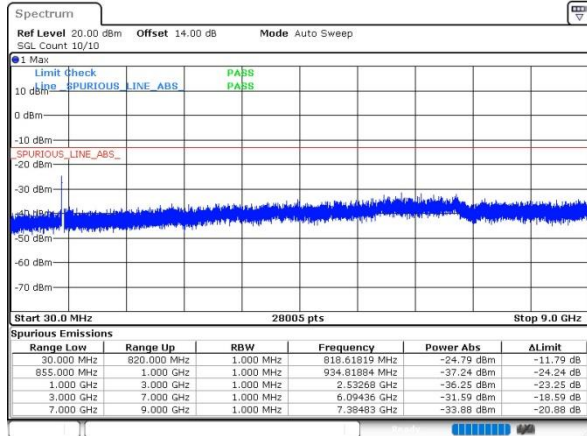


WCDMA Band II (RMC 12.2Kbps)


Lowest Channel

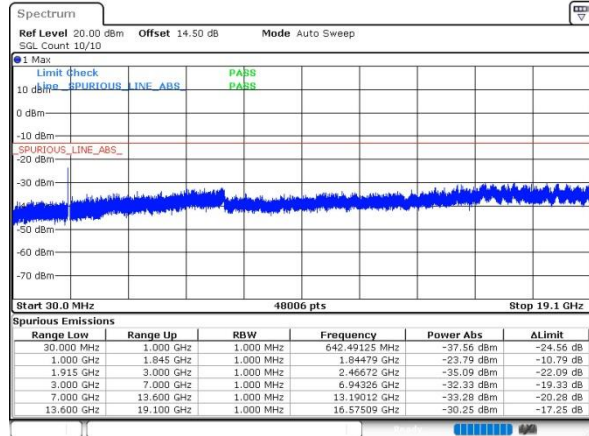


Middle Channel

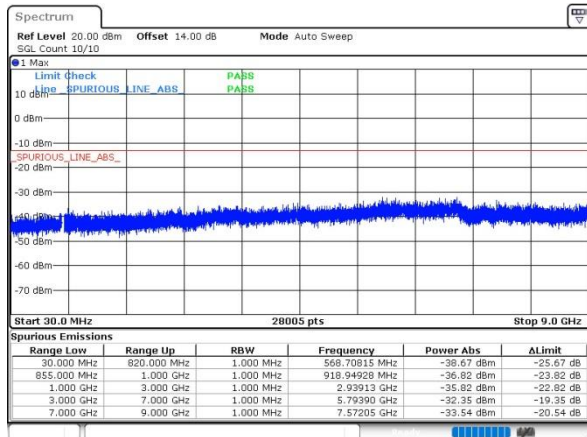


Middle Channel

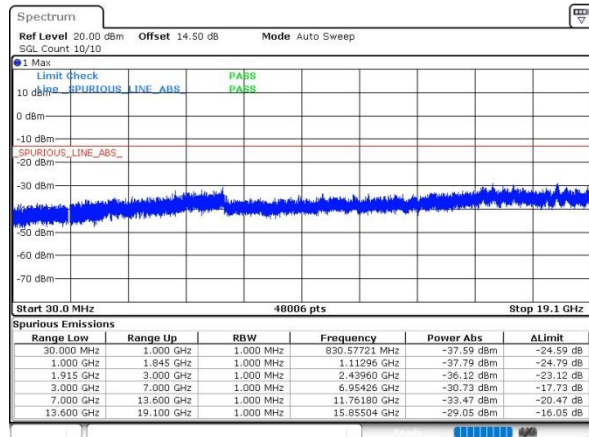

Highest Channel

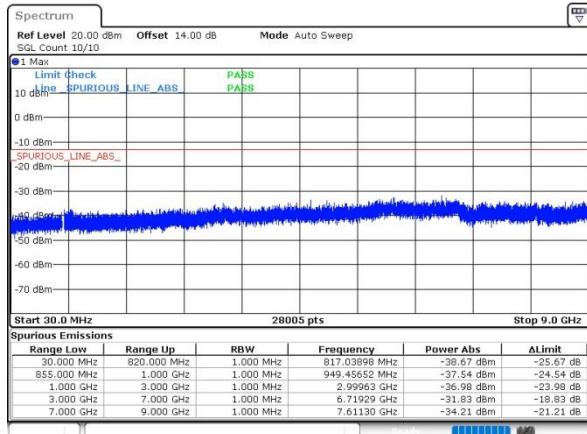


Highest Channel

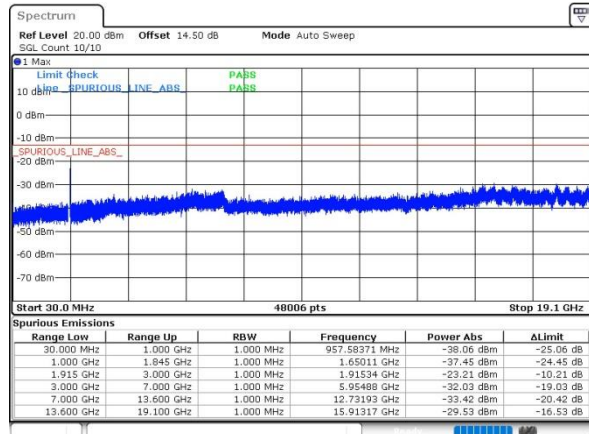




WCDMA Band IV (RMC 12.2Kbps)


Lowest Channel

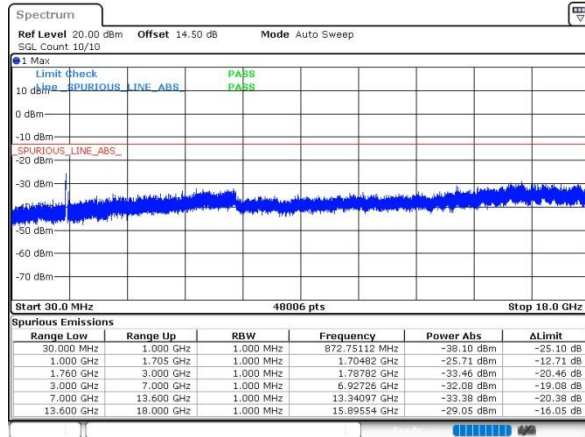

Middle Channel

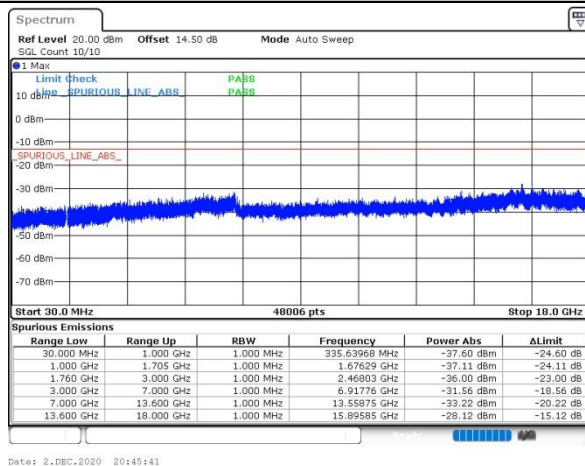

Highest Channel

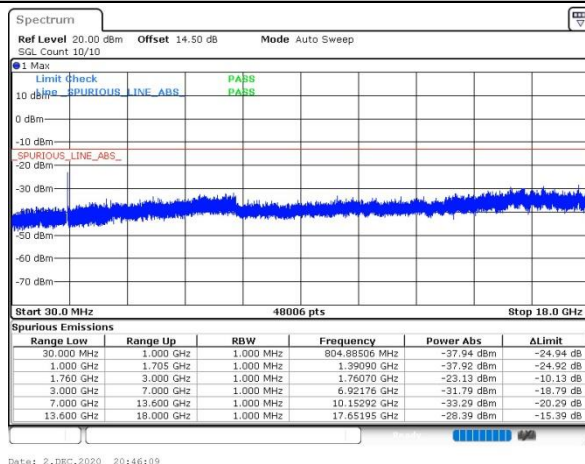

**Frequency Stability**

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0012	PASS
40	Normal Voltage	0.0081	
30	Normal Voltage	0.0007	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0011	
0	Normal Voltage	0.0018	
-10	Normal Voltage	0.0020	
-20	Normal Voltage	0.0099	
-30	Normal Voltage	0.0020	
20	Maximum Voltage	0.0011	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0017	

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0007	PASS
40	Normal Voltage	0.0030	
30	Normal Voltage	0.0040	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0036	
0	Normal Voltage	0.0031	
-10	Normal Voltage	0.0007	
-20	Normal Voltage	0.0000	
-30	Normal Voltage	0.0034	
20	Maximum Voltage	0.0035	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0030	



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0006	PASS
40	Normal Voltage	0.0048	
30	Normal Voltage	0.0044	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0040	
0	Normal Voltage	0.0040	
-10	Normal Voltage	0.0043	
-20	Normal Voltage	0.0046	
-30	Normal Voltage	0.0008	
20	Maximum Voltage	0.0043	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0003	

Note:

1. Normal Voltage = 7.74 V. ; Battery End Point (BEP) = 7.2 V. ; Maximum Voltage =8.9 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



A3. CDMA


Peak-to-Average Ratio

Mode	CDMA BC0(dB)	CDMA BC1(dB)	Limit: 13dB
Mod.	1xRTT	1xRTT	Result
Lowest CH	4.17	3.86	PASS
Middle CH	3.94	3.83	
Highest CH	4.03	3.88	



CDMA BC0 (1xRTT)


Lowest Channel

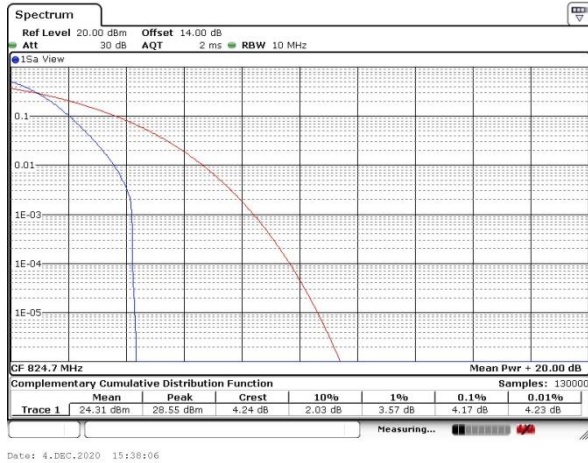

Date: 4.DBC.2020 15:38:06


CDMA BC1 (1xRTT)

Lowest Channel

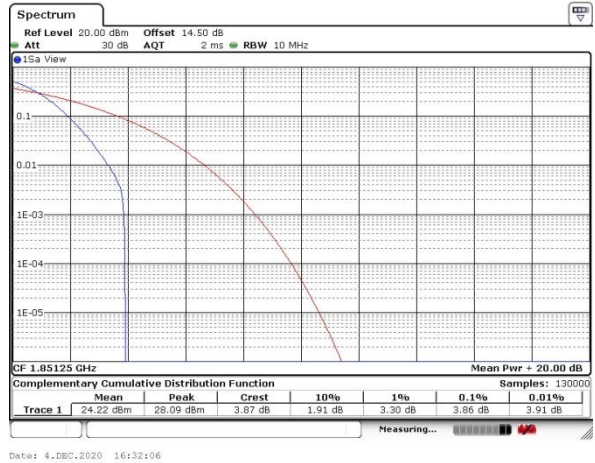


Date: 4.DBC.2020 16:32:06

Middle Channel

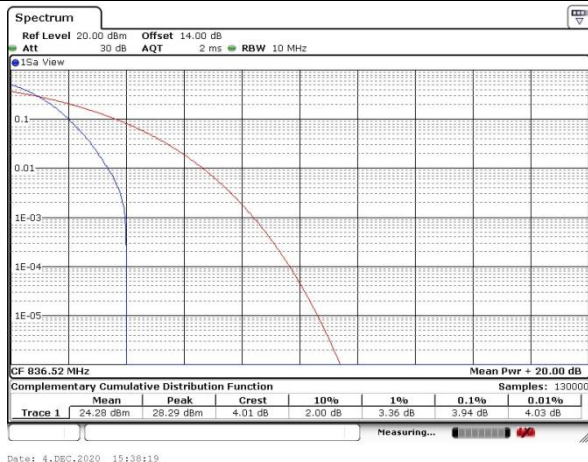


Date: 4.DBC.2020 15:38:19

Middle Channel

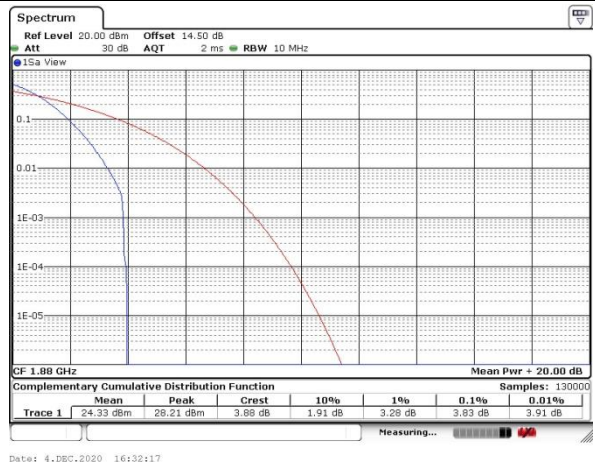


Date: 4.DBC.2020 16:32:17

Highest Channel

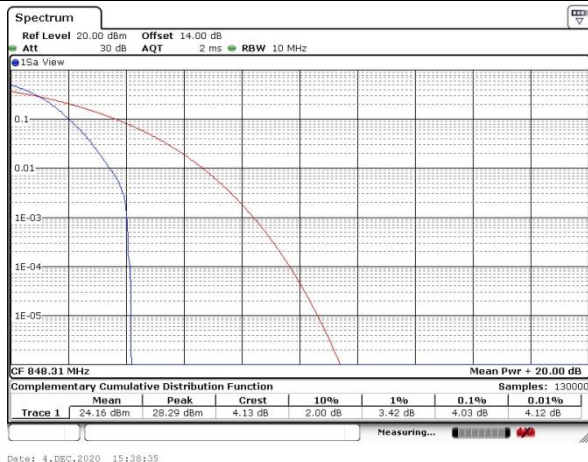

Date: 4.DBC.2020 15:38:35

Highest Channel

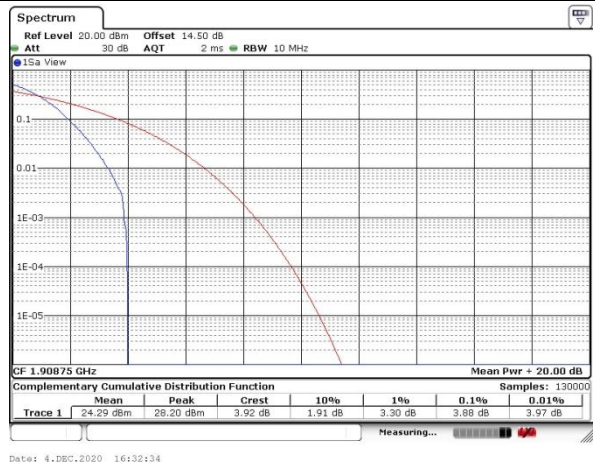

Date: 4.DBC.2020 16:32:34




26dB Bandwidth

Mode	CDMA BC0(MHz)	CDMA BC1(MHz)
Mod.	1xRTT	1xRTT
Lowest CH	1.42	1.42
Middle CH	1.42	1.42
Highest CH	1.42	1.42




CDMA BC0 (1xRTT)

Lowest Channel

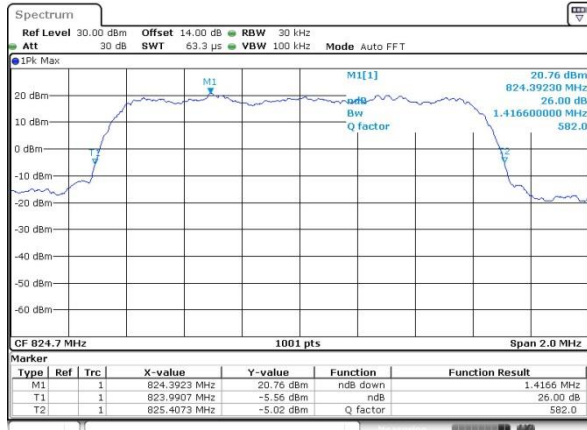


CDMA BC1 (1xRTT)


Lowest Channel

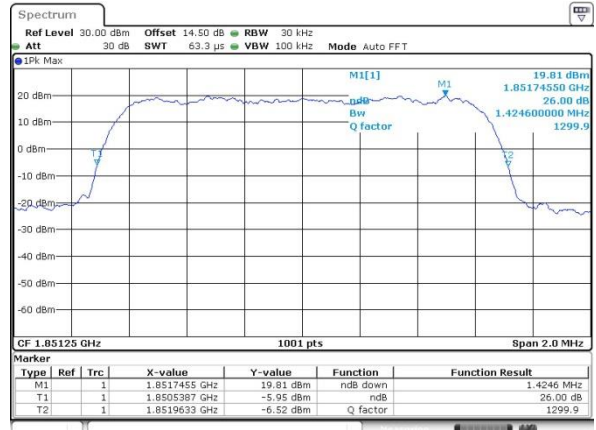


Middle Channel

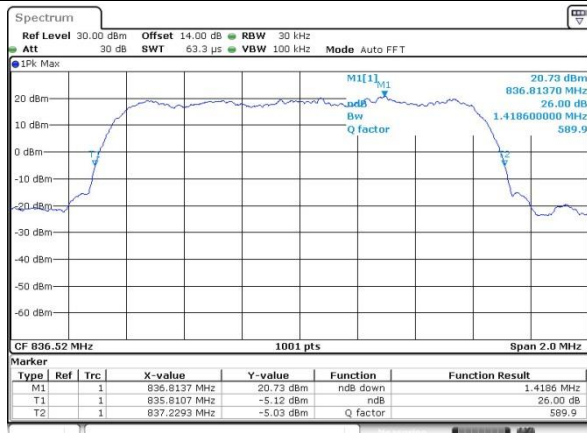


Middle Channel

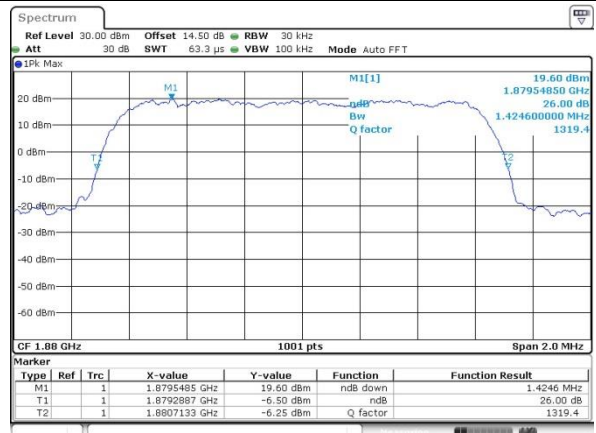

Highest Channel

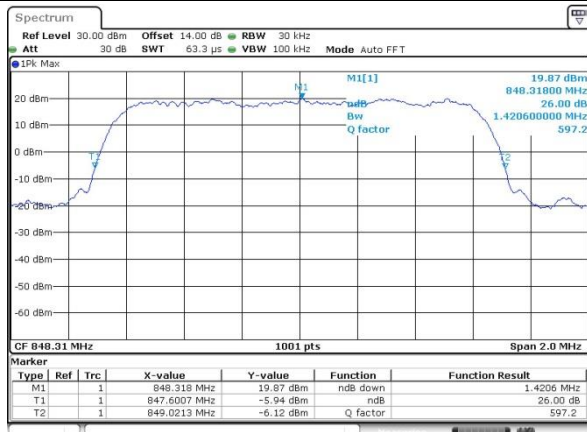

Highest Channel

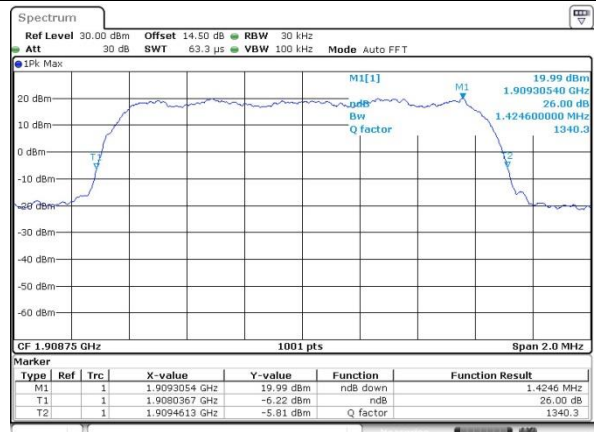




Occupied Bandwidth

Mode	CDMA BC0(MHz)	CDMA BC1(MHz)
Mod.	1xRTT	1xRTT
Lowest CH	1.27	1.27
Middle CH	1.27	1.27
Highest CH	1.27	1.27




CDMA BC0 (1xRTT)

Lowest Channel

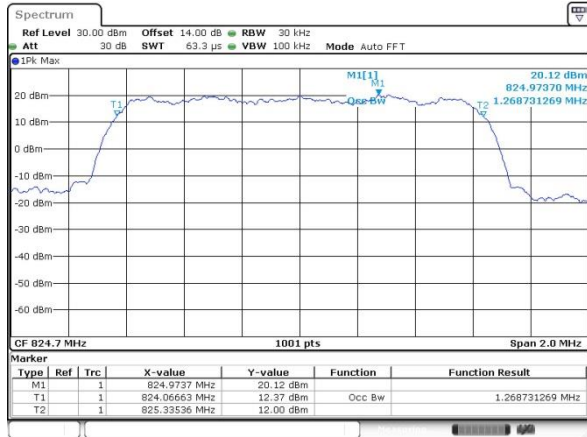


CDMA BC1 (1xRTT)


Lowest Channel

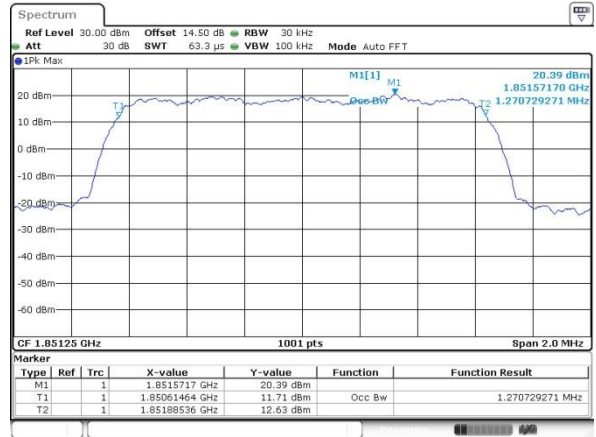


Middle Channel

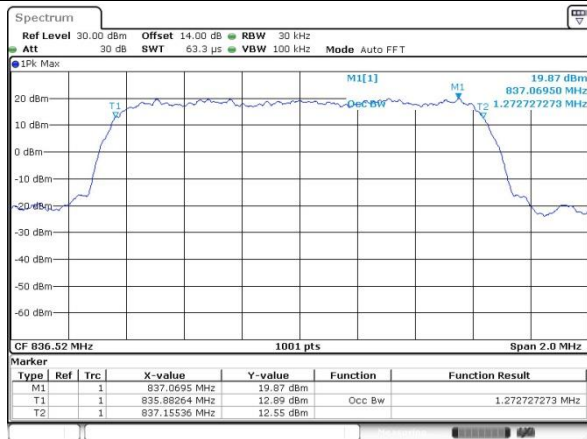


Middle Channel


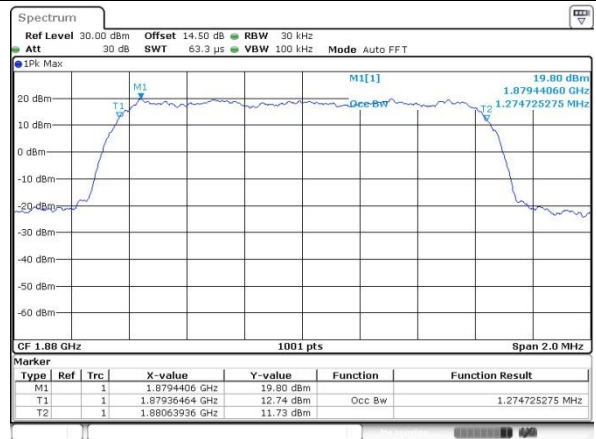


Highest Channel

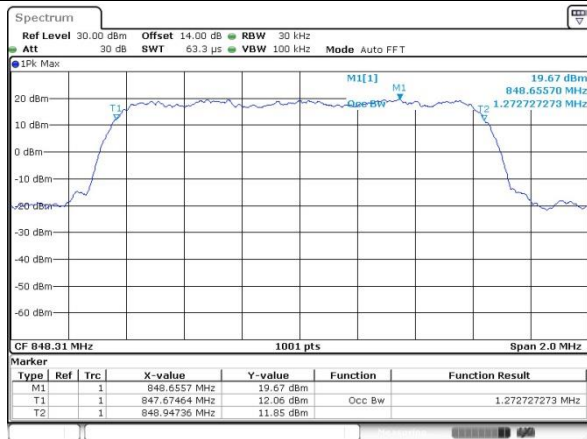

Highest Channel

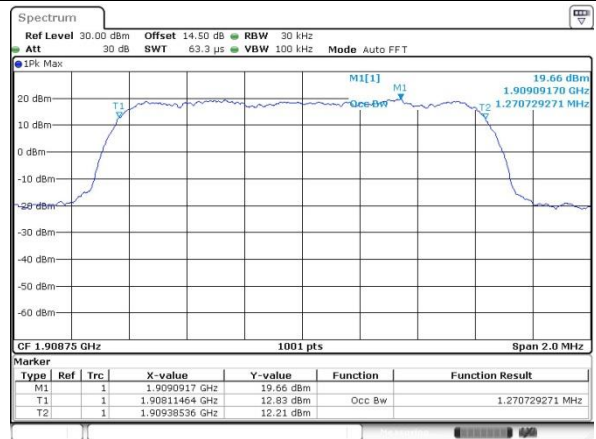

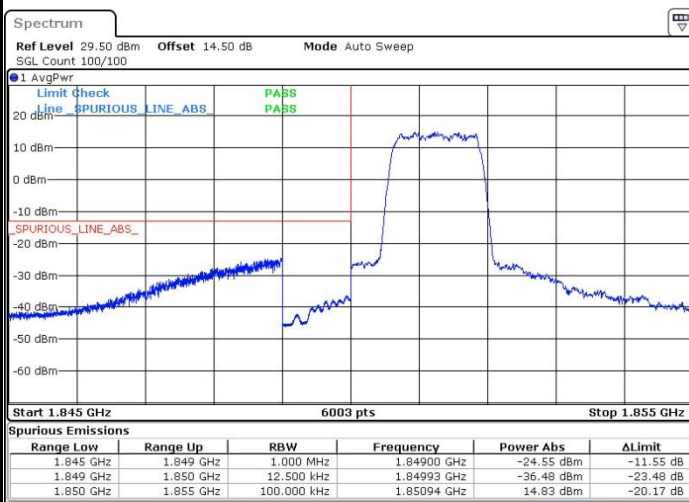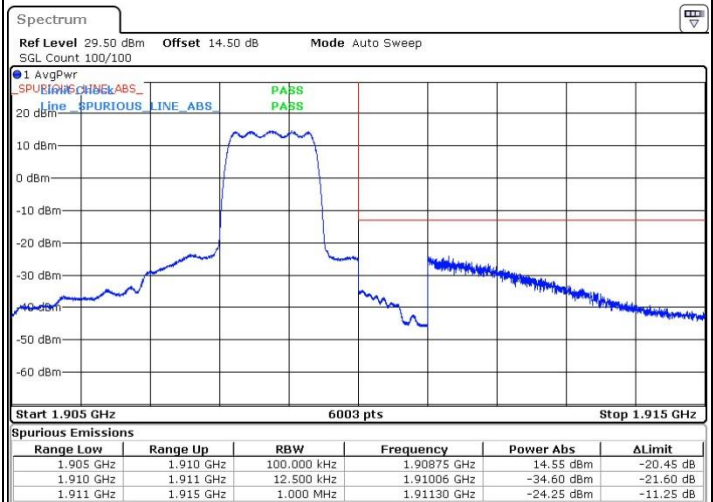
**Conducted Band Edge****CDMA BC0 (1xRTT)****Lowest Band Edge****Highest Band Edge****CDMA BC1 (1xRTT)****Lowest Band Edge****Highest Band Edge**



Conducted Spurious Emission

CDMA BC0 (1xRTT)


Lowest Channel

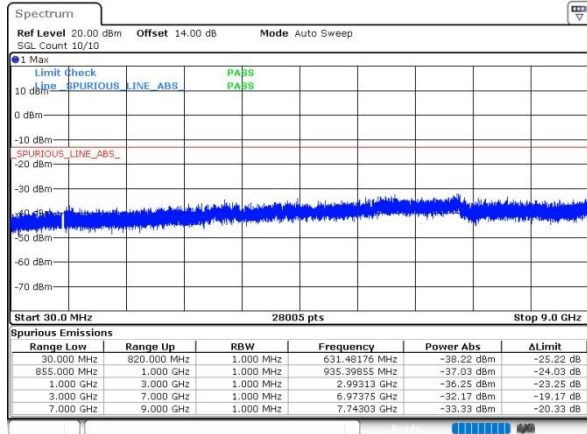

Date: 4.DEC.2020 15:35:29


CDMA BC1 (1xRTT)

Lowest Channel

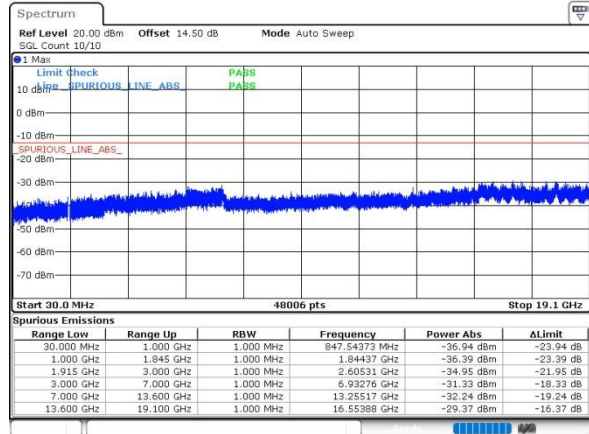


Date: 4.DEC.2020 16:29:48

Middle Channel

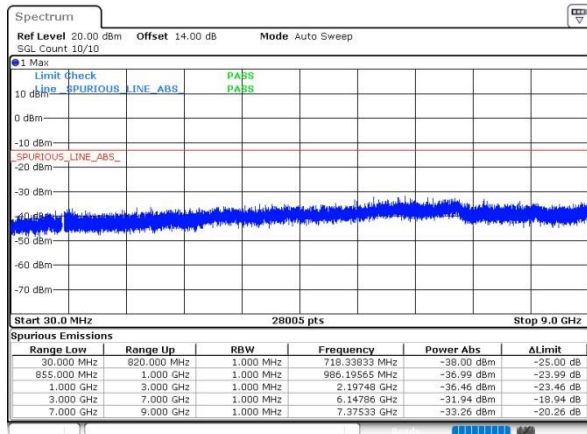


Date: 4.DEC.2020 15:36:25

Middle Channel

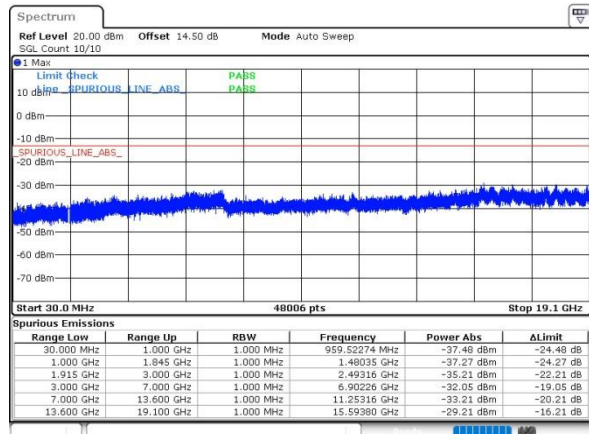


Date: 4.DEC.2020 16:30:54

Highest Channel

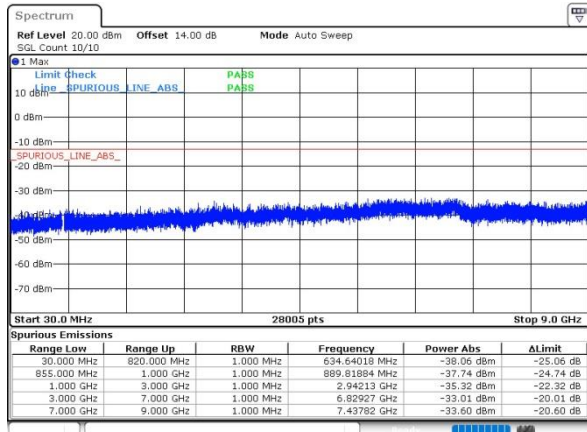

Highest Channel

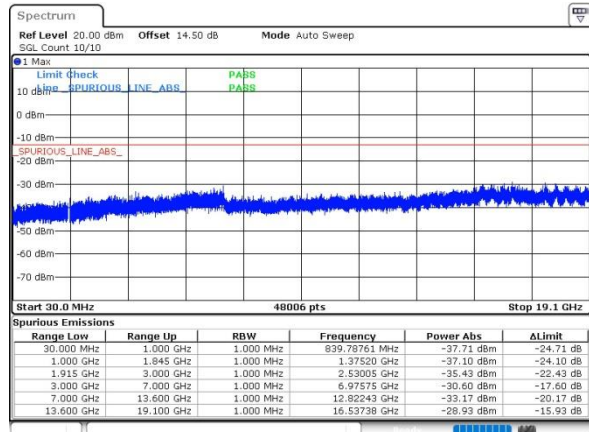

**Frequency Stability**

Test Conditions	Middle Channel	CDMA BC0 (1xRTT)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0055	PASS
40	Normal Voltage	0.0067	
30	Normal Voltage	0.0203	
20(Ref.)	Normal Voltage	0.0038	
10	Normal Voltage	0.0207	
0	Normal Voltage	0.0031	
-10	Normal Voltage	0.0203	
-20	Normal Voltage	0.0050	
-30	Normal Voltage	0.0027	
20	Maximum Voltage	0.0055	
20	Normal Voltage	0.0038	
20	Battery End Point	0.0208	

Test Conditions	Middle Channel	CDMA BC1 (1xRTT)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0050	PASS
40	Normal Voltage	0.0037	
30	Normal Voltage	0.0045	
20(Ref.)	Normal Voltage	0.0048	
10	Normal Voltage	0.0098	
0	Normal Voltage	0.0119	
-10	Normal Voltage	0.0043	
-20	Normal Voltage	0.0046	
-30	Normal Voltage	0.0042	
20	Maximum Voltage	0.0040	
20	Normal Voltage	0.0048	
20	Battery End Point	0.0054	

Note:

1. Normal Voltage =7.74V. ; Battery End Point (BEP) =7.2 V. ; Maximum Voltage =8.9 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

Top antenna:

GSM850 (GSM)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-59.42	-13	-46.42	-68.03	-62.67	4.00	9.40	H
	2509.2	-42.53	-13	-29.53	-55.22	-46.10	4.88	10.60	H
	3345.6	-63.02	-13	-50.02	-77.25	-67.95	5.52	12.60	H
	1672.8	-56.02	-13	-43.02	-64.08	-59.27	4.00	9.40	V
	2509.2	-48.39	-13	-35.39	-61.04	-51.96	4.88	10.60	V
	3345.6	-63.09	-13	-50.09	-77.05	-68.02	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM850 (EDGE 1 Tx slots)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1673.04	-57.65	-13	-44.65	-66.26	-60.90	4.00	9.40	H
	2509.56	-42.24	-13	-29.24	-54.93	-45.81	4.88	10.60	H
	3346.08	-63.05	-13	-50.05	-77.28	-67.98	5.52	12.60	H
	1673.04	-55.78	-13	-42.78	-63.84	-59.03	4.00	9.40	V
	2509.56	-47.19	-13	-34.19	-59.84	-50.76	4.88	10.60	V
	3346.08	-63.03	-13	-50.03	-76.99	-67.96	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band V(RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-65.15	-13	-52.15	-73.76	-68.40	4.00	9.40	H
	2509.2	-61.97	-13	-48.97	-74.66	-65.54	4.88	10.60	H
	3345.6	-62.91	-13	-49.91	-77.14	-67.84	5.52	12.60	H
	1672.8	-65.89	-13	-52.89	-73.95	-69.14	4.00	9.40	V
	2509.2	-60.23	-13	-47.23	-72.88	-63.80	4.88	10.60	V
	3345.6	-63.32	-13	-50.32	-77.28	-68.25	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

CDMA BC0(1xRTT)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1673.04	-64.91	-13	-51.91	-73.52	-68.16	4.00	9.40	H
	2509.56	-60.87	-13	-47.87	-73.56	-64.44	4.88	10.60	H
	3346.08	-63.08	-13	-50.08	-77.31	-68.01	5.52	12.60	H
	1673.04	-65.70	-13	-52.70	-73.76	-68.95	4.00	9.40	V
	2509.56	-58.24	-13	-45.24	-70.89	-61.81	4.88	10.60	V
	3346.08	-63.10	-13	-50.10	-77.06	-68.03	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GSM)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-60.82	-13	-47.82	-77.44	-67.57	5.85	12.60	H
	5640	-57.86	-13	-44.86	-78.73	-63.66	7.30	13.10	H
	7520	-53.83	-13	-40.83	-78.56	-56.98	8.35	11.50	H
	3760	-60.74	-13	-47.74	-77.29	-67.49	5.85	12.60	V
	5640	-58.64	-13	-45.64	-78.76	-64.44	7.30	13.10	V
	7520	-53.66	-13	-40.66	-78.37	-56.81	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (EDGE 1 Tx slots)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-59.68	-13	-46.68	-76.30	-66.43	5.85	12.60	H
	5640	-54.78	-13	-41.78	-75.65	-60.58	7.30	13.10	H
	7520	-53.44	-13	-40.44	-78.17	-56.59	8.35	11.50	H
	3760	-60.03	-13	-47.03	-76.58	-66.78	5.85	12.60	V
	5640	-57.49	-13	-44.49	-77.61	-63.29	7.30	13.10	V
	7520	-53.55	-13	-40.55	-78.26	-56.70	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band II(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-59.78	-13	-46.78	-76.40	-66.53	5.85	12.60	H
	5640	-54.60	-13	-41.60	-75.47	-60.40	7.30	13.10	H
	7520	-53.45	-13	-40.45	-78.18	-56.60	8.35	11.50	H
	3760	-60.22	-13	-47.22	-76.77	-66.97	5.85	12.60	V
	5640	-56.61	-13	-43.61	-76.73	-62.41	7.30	13.10	V
	7520	-53.93	-13	-40.93	-78.64	-57.08	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

CDMA BC1(1xRTT)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-60.09	-13	-47.09	-76.71	-66.84	5.85	12.60	H
	5640	-57.33	-13	-44.33	-78.20	-63.13	7.30	13.10	H
	7520	-54.22	-13	-41.22	-78.95	-57.37	8.35	11.50	H
	3760	-60.31	-13	-47.31	-76.86	-67.06	5.85	12.60	V
	5640	-57.79	-13	-44.79	-77.91	-63.59	7.30	13.10	V
	7520	-54.03	-13	-41.03	-78.74	-57.18	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band IV(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3465.2	-56.10	-13	-43.10	-78.05	-62.95	5.65	12.50	H
	5197.8	-56.44	-13	-43.44	-80.60	-62.11	7.13	12.80	H
	6930.4	-55.47	-13	-42.47	-81.17	-58.87	8.40	11.80	H
	3465.2	-56.18	-13	-43.18	-77.93	-63.03	5.65	12.50	V
	5197.8	-56.59	-13	-43.59	-81.02	-62.26	7.13	12.80	V
	6930.4	-54.85	-13	-41.85	-81.47	-58.25	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



Bottom antenna:

GSM850 (GSM)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-61.30	-13	-48.30	-70.79	-64.55	4.00	9.40	H
	2509.2	-52.89	-13	-39.89	-66.18	-56.46	4.88	10.60	H
	3345.6	-62.44	-13	-49.44	-77.09	-67.37	5.52	12.60	H
	1672.8	-61.37	-13	-48.37	-70.31	-64.62	4.00	9.40	V
	2509.2	-52.74	-13	-39.74	-65.99	-56.31	4.88	10.60	V
	3345.6	-62.76	-13	-49.76	-77.14	-67.69	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM850 (EDGE 1 Tx slots)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1673.04	-61.97	-13	-48.97	-71.46	-65.22	4.00	9.40	H
	2509.56	-49.68	-13	-36.68	-62.97	-53.25	4.88	10.60	H
	3346.08	-62.93	-13	-49.93	-77.58	-67.86	5.52	12.60	H
	1673.04	-62.10	-13	-49.10	-71.04	-65.35	4.00	9.40	V
	2509.56	-50.76	-13	-37.76	-64.01	-54.33	4.88	10.60	V
	3346.08	-63.10	-13	-50.10	-77.48	-68.03	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band V(RMC 12.2Kbps)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672.8	-65.43	-13	-52.43	-74.92	-68.68	4.00	9.40	H
	2509.2	-62.85	-13	-49.85	-76.14	-66.42	4.88	10.60	H
	3345.6	-62.89	-13	-49.89	-77.54	-67.82	5.52	12.60	H
	1672.8	-65.87	-13	-52.87	-74.81	-69.12	4.00	9.40	V
	2509.2	-62.92	-13	-49.92	-76.17	-66.49	4.88	10.60	V
	3345.6	-63.29	-13	-50.29	-77.67	-68.22	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

CDMA BC0(1xRTT)									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1673.04	-65.07	-13	-52.07	-74.56	-68.32	4.00	9.40	H
	2509.56	-62.44	-13	-49.44	-75.73	-66.01	4.88	10.60	H
	3346.08	-62.95	-13	-49.95	-77.60	-67.88	5.52	12.60	H
	1673.04	-66.00	-13	-53.00	-74.94	-69.25	4.00	9.40	V
	2509.56	-62.81	-13	-49.81	-76.06	-66.38	4.88	10.60	V
	3346.08	-63.45	-13	-50.45	-77.83	-68.38	5.52	12.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



GSM1900 (GSM)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-60.80	-13	-47.80	-77.42	-67.55	5.85	12.60	H
	5640	-57.83	-13	-44.83	-78.70	-63.63	7.30	13.10	H
	7520	-53.62	-13	-40.62	-78.35	-56.77	8.35	11.50	H
	3760	-60.78	-13	-47.78	-77.33	-67.53	5.85	12.60	V
	5640	-58.57	-13	-45.57	-78.69	-64.37	7.30	13.10	V
	7520	-53.53	-13	-40.53	-78.24	-56.68	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

GSM1900 (EDGE 1 Tx slots)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-60.75	-13	-47.75	-77.37	-67.50	5.85	12.60	H
	5640	-57.79	-13	-44.79	-78.66	-63.59	7.30	13.10	H
	7520	-53.85	-13	-40.85	-78.58	-57.00	8.35	11.50	H
	3760	-60.55	-13	-47.55	-77.1	-67.30	5.85	12.60	V
	5640	-58.49	-13	-45.49	-78.61	-64.29	7.30	13.10	V
	7520	-53.82	-13	-40.82	-78.53	-56.97	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band II(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-60.60	-13	-47.60	-77.22	-67.35	5.85	12.60	H
	5640	-57.89	-13	-44.89	-78.76	-63.69	7.30	13.10	H
	7520	-53.93	-13	-40.93	-78.66	-57.08	8.35	11.50	H
	3760	-60.66	-13	-47.66	-77.21	-67.41	5.85	12.60	V
	5640	-58.60	-13	-45.60	-78.72	-64.40	7.30	13.10	V
	7520	-53.79	-13	-40.79	-78.5	-56.94	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

CDMA BC1(1xRTT)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-60.81	-13	-47.81	-77.43	-67.56	5.85	12.60	H
	5640	-57.74	-13	-44.74	-78.61	-63.54	7.30	13.10	H
	7520	-53.93	-13	-40.93	-78.66	-57.08	8.35	11.50	H
	3760	-60.86	-13	-47.86	-77.41	-67.61	5.85	12.60	V
	5640	-58.56	-13	-45.56	-78.68	-64.36	7.30	13.10	V
	7520	-53.64	-13	-40.64	-78.35	-56.79	8.35	11.50	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



WCDMA Band IV(RMC 12.2Kbps)									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3465.2	-56.28	-13	-43.28	-78.23	-63.13	5.65	12.50	H
	5197.8	-56.74	-13	-43.74	-80.90	-62.41	7.13	12.80	H
	6930.4	-55.11	-13	-42.11	-80.81	-58.51	8.40	11.80	H
	3465.2	-55.90	-13	-42.90	-77.65	-62.75	5.65	12.50	V
	5197.8	-56.34	-13	-43.34	-80.77	-62.01	7.13	12.80	V
	6930.4	-55.74	-13	-42.74	-82.36	-59.14	8.40	11.80	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.