



Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3V

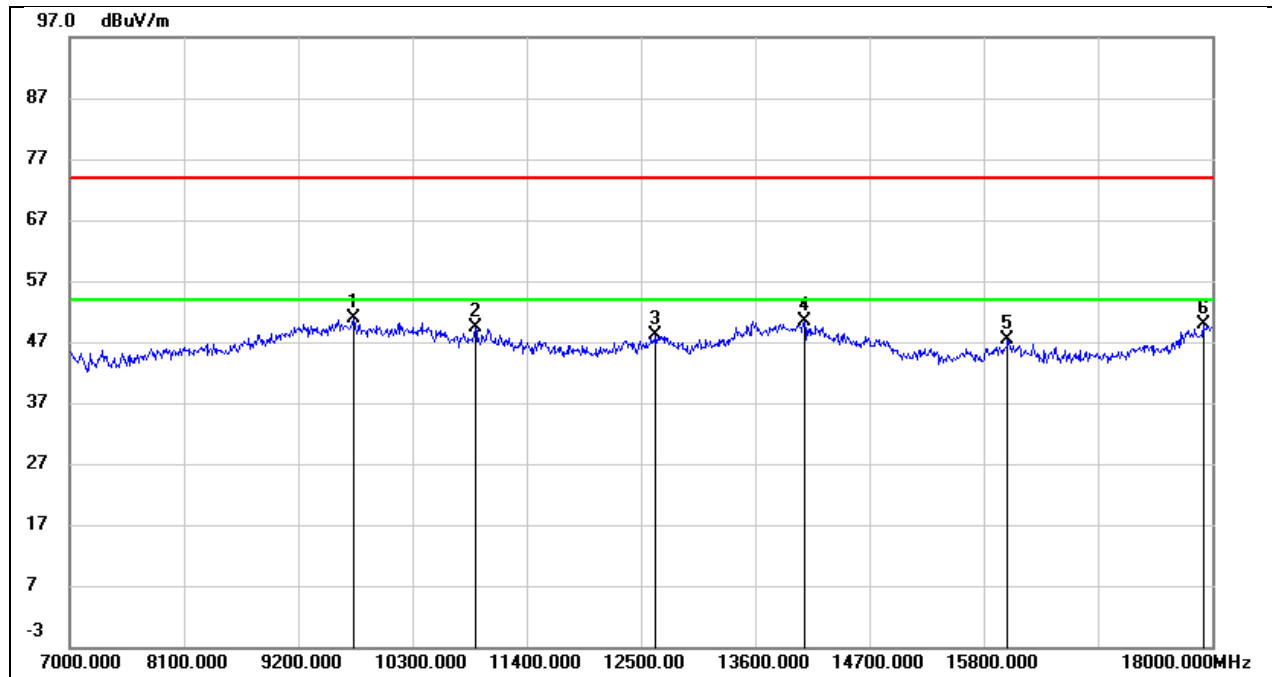


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9739.000	37.16	13.70	50.86	74.00	-23.14	peak
2	10905.000	34.64	14.75	49.39	74.00	-24.61	peak
3	12643.000	28.88	19.34	48.22	74.00	-25.78	peak
4	14073.000	27.17	23.31	50.48	74.00	-23.52	peak
5	16031.000	26.67	20.71	47.38	74.00	-26.62	peak
6	17912.000	21.21	28.68	49.89	74.00	-24.11	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.3V

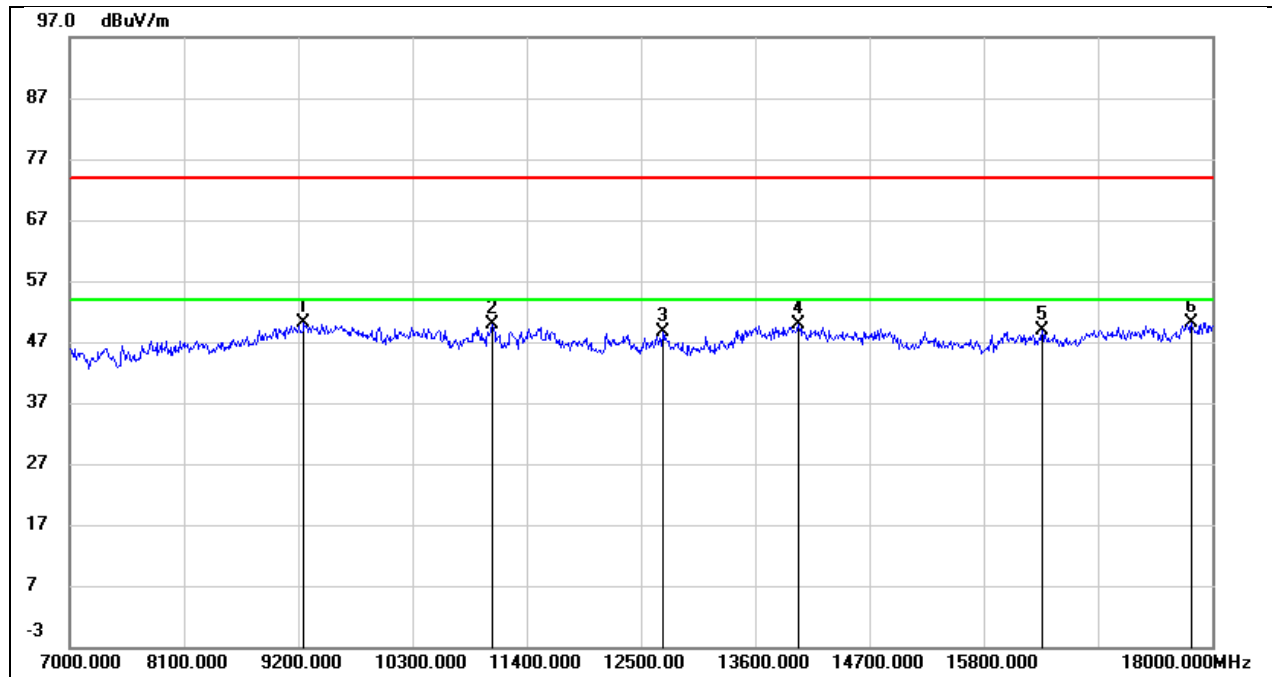


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	38.10	11.93	50.03	74.00	-23.97	peak
2	11070.000	35.31	14.55	49.86	74.00	-24.14	peak
3	12709.000	29.97	18.58	48.55	74.00	-25.45	peak
4	14018.000	27.99	21.99	49.98	74.00	-24.02	peak
5	16361.000	25.15	23.71	48.86	74.00	-25.14	peak
6	17802.000	23.90	26.18	50.08	74.00	-23.92	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3V

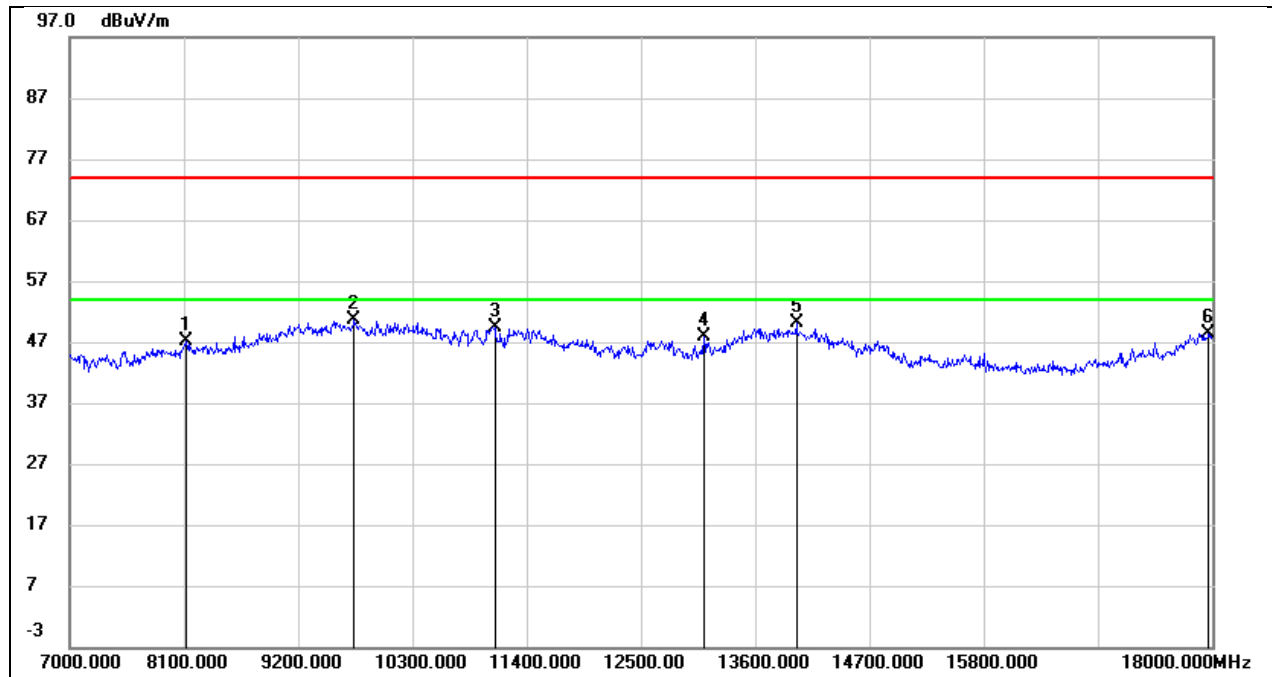


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8122.000	38.79	8.24	47.03	74.00	-26.97	peak
2	9739.000	37.01	13.70	50.71	74.00	-23.29	peak
3	11092.000	33.90	15.56	49.46	74.00	-24.54	peak
4	13105.000	27.32	20.50	47.82	74.00	-26.18	peak
5	13996.000	26.45	23.59	50.04	74.00	-23.96	peak
6	17967.000	19.17	29.26	48.43	74.00	-25.57	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.3V

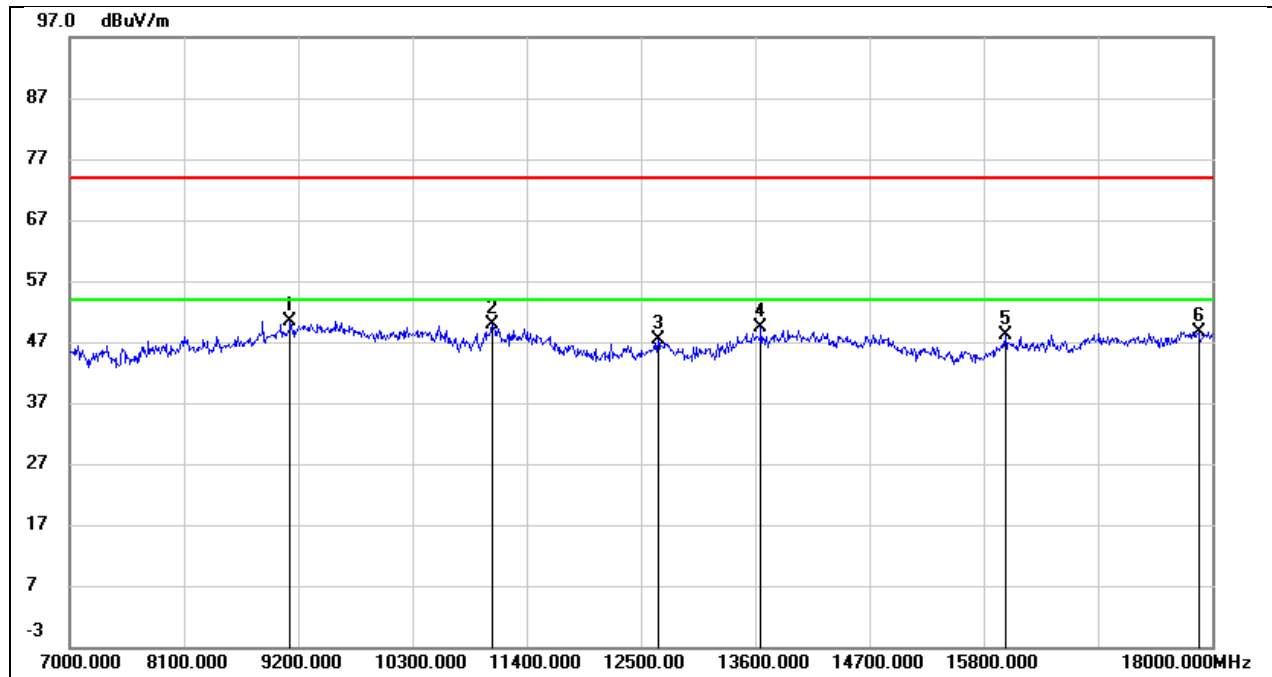


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	38.87	11.52	50.39	74.00	-23.61	peak
2	11070.000	35.23	14.55	49.78	74.00	-24.22	peak
3	12665.000	28.95	18.42	47.37	74.00	-26.63	peak
4	13655.000	28.63	20.71	49.34	74.00	-24.66	peak
5	16009.000	25.09	22.93	48.02	74.00	-25.98	peak
6	17868.000	22.13	26.59	48.72	74.00	-25.28	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.3V

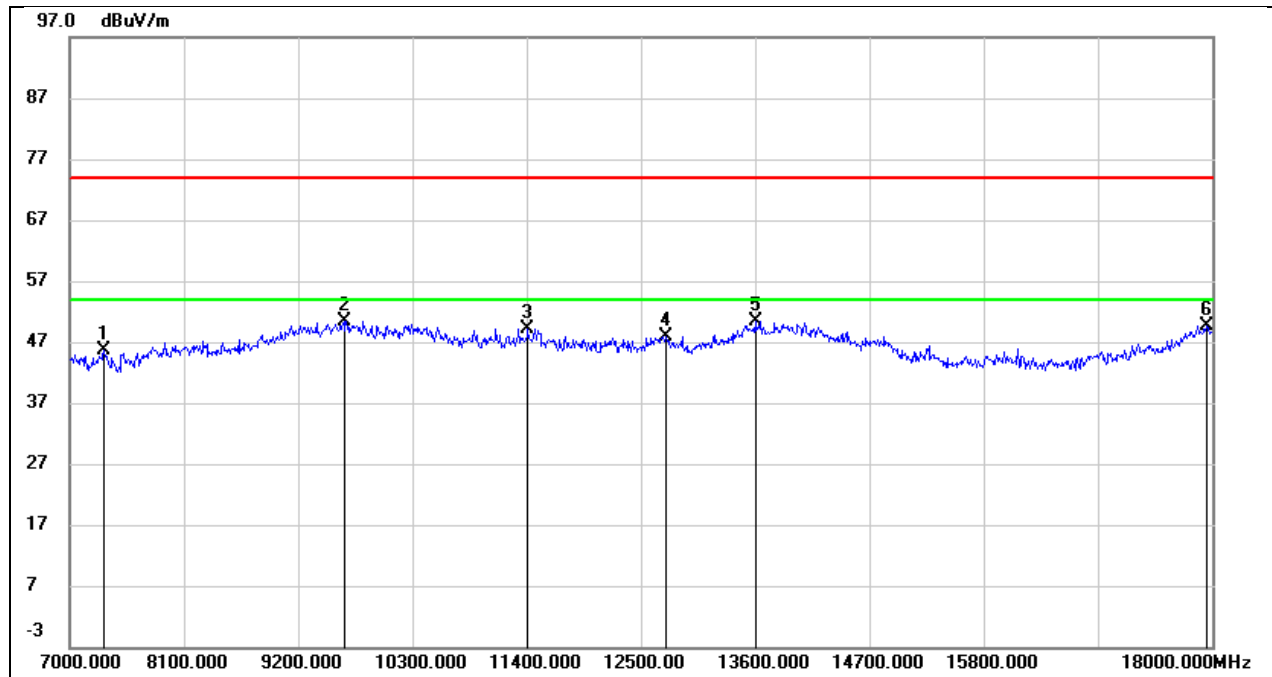


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	37.93	7.66	45.59	74.00	-28.41	peak
2	9640.000	36.88	13.53	50.41	74.00	-23.59	peak
3	11411.000	31.77	17.41	49.18	74.00	-24.82	peak
4	12742.000	28.24	19.75	47.99	74.00	-26.01	peak
5	13600.000	28.23	22.22	50.45	74.00	-23.55	peak
6	17945.000	20.56	29.03	49.59	74.00	-24.41	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.3V

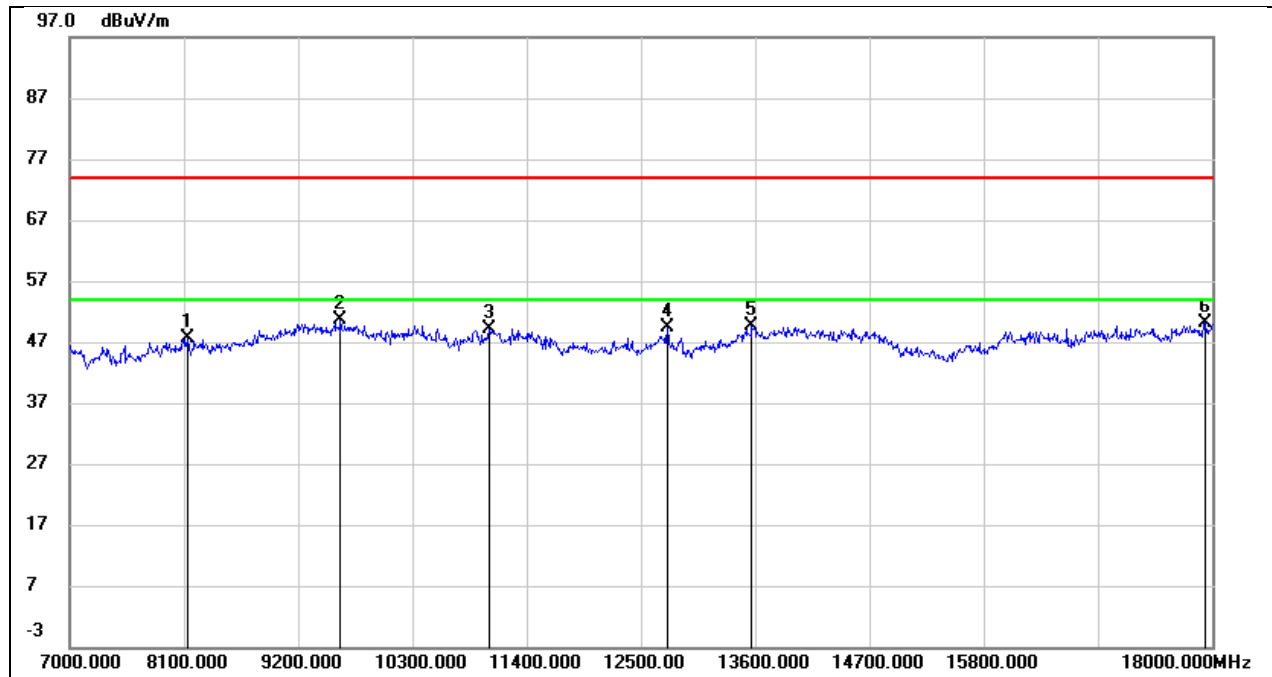


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8133.000	38.91	8.78	47.69	74.00	-26.31	peak
2	9607.000	37.24	13.33	50.57	74.00	-23.43	peak
3	11037.000	34.61	14.42	49.03	74.00	-24.97	peak
4	12753.000	30.68	18.73	49.41	74.00	-24.59	peak
5	13567.000	29.12	20.47	49.59	74.00	-24.41	peak
6	17934.000	23.06	27.00	50.06	74.00	-23.94	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3V

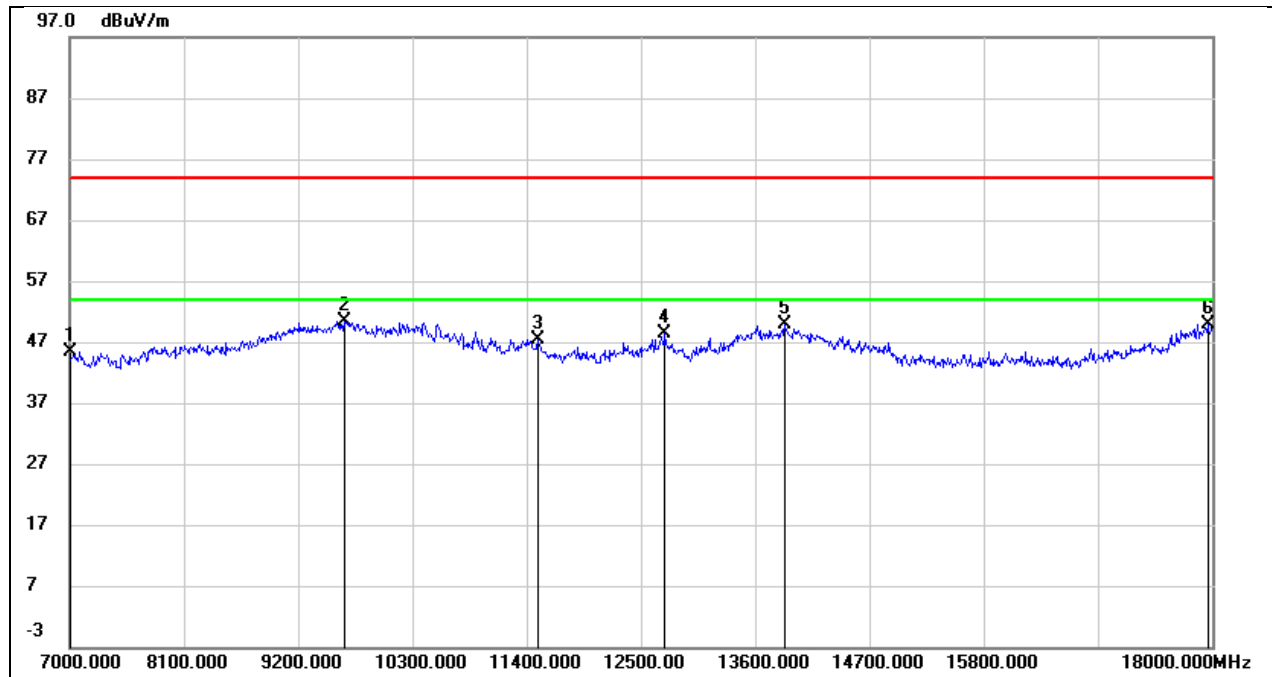


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7000.000	38.26	7.12	45.38	74.00	-28.62	peak
2	9640.000	36.92	13.53	50.45	74.00	-23.55	peak
3	11510.000	29.57	17.86	47.43	74.00	-26.57	peak
4	12731.000	28.76	19.70	48.46	74.00	-25.54	peak
5	13886.000	26.64	23.15	49.79	74.00	-24.21	peak
6	17956.000	20.76	29.14	49.90	74.00	-24.10	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.3V

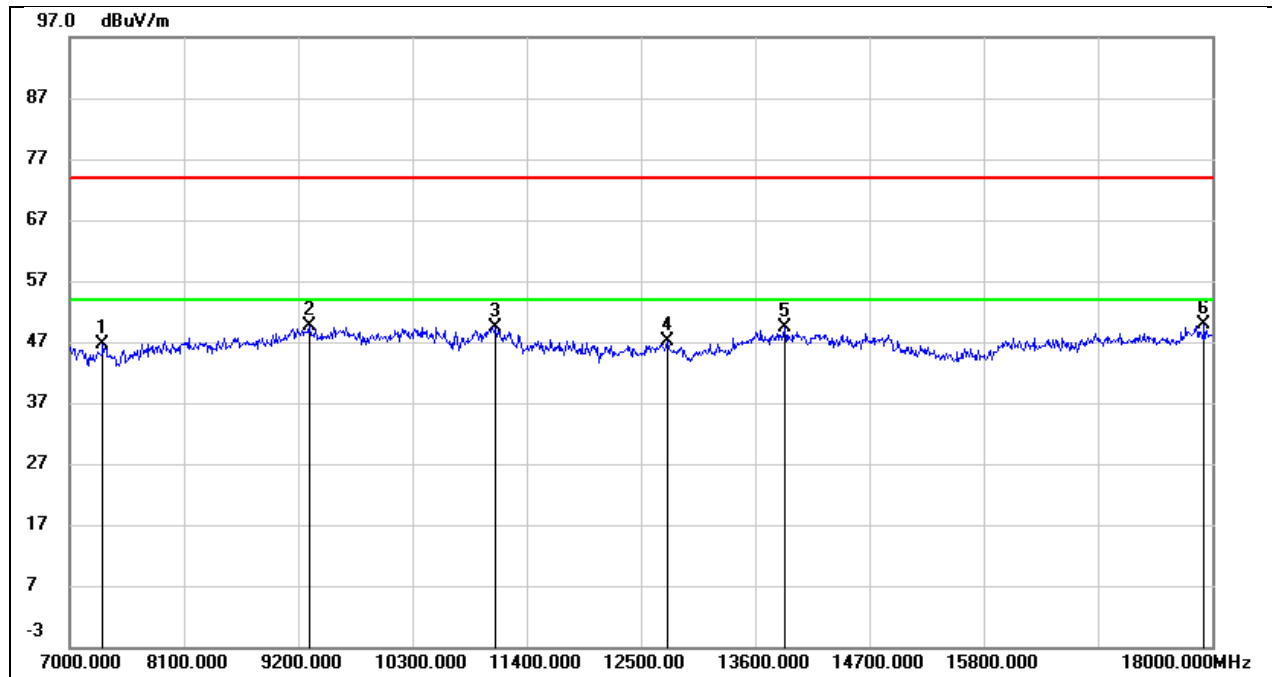


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	38.31	8.30	46.61	74.00	-27.39	peak
2	9310.000	37.46	12.07	49.53	74.00	-24.47	peak
3	11103.000	34.78	14.68	49.46	74.00	-24.54	peak
4	12753.000	28.47	18.73	47.20	74.00	-26.80	peak
5	13886.000	27.82	21.53	49.35	74.00	-24.65	peak
6	17923.000	23.08	26.92	50.00	74.00	-24.00	peak

Test Mode:	802.11ac VHT160	Frequency(MHz):	5250
Polarity:	Horizontal	Test Voltage:	DC 3.3V

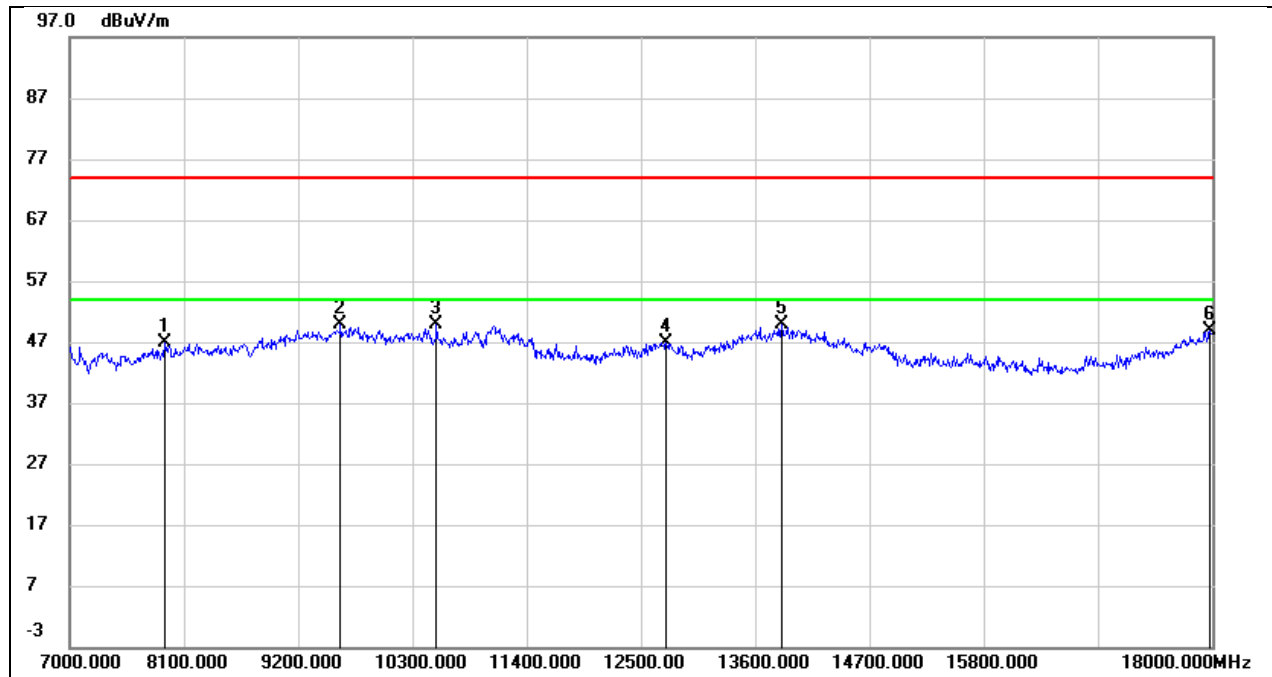


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7913.000	38.87	8.05	46.92	74.00	-27.08	peak
2	9607.000	36.47	13.48	49.95	74.00	-24.05	peak
3	10531.000	36.34	13.63	49.97	74.00	-24.03	peak
4	12742.000	27.14	19.75	46.89	74.00	-27.11	peak
5	13853.000	26.91	23.01	49.92	74.00	-24.08	peak
6	17978.000	19.39	29.38	48.77	74.00	-25.23	peak

Test Mode:	802.11ac VHT160	Frequency(MHz):	5250
Polarity:	Vertical	Test Voltage:	DC 3.3V

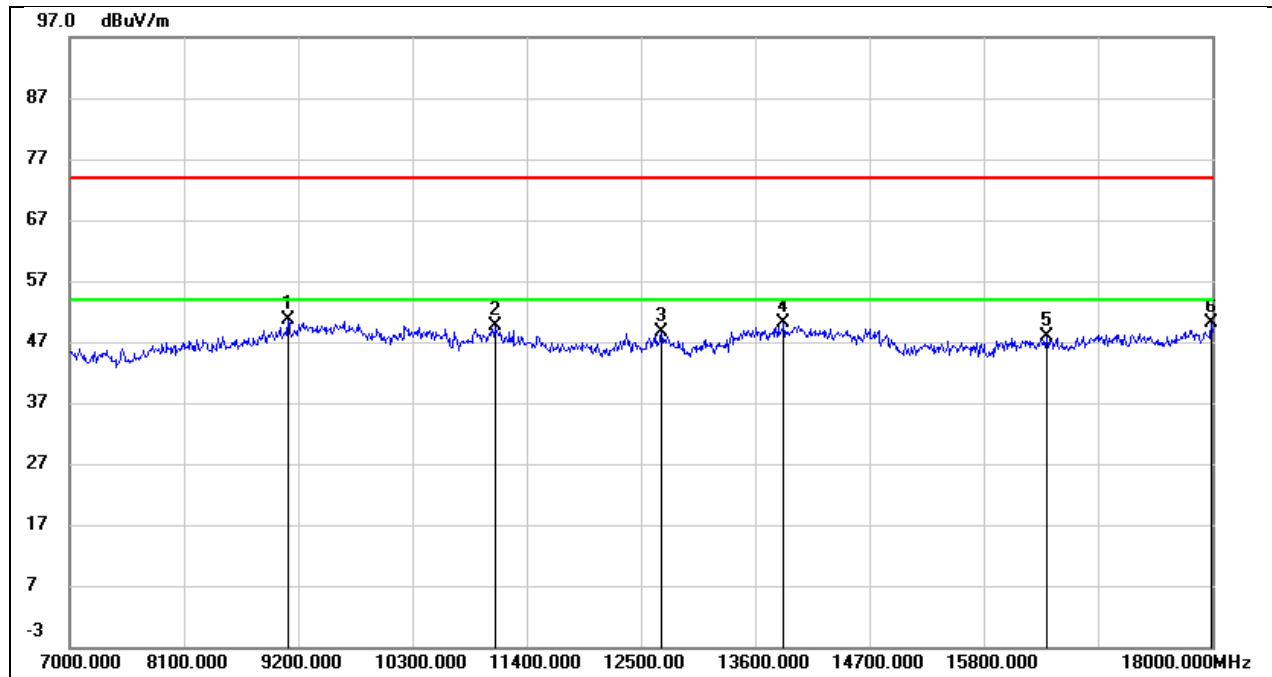


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9101.000	39.10	11.43	50.53	74.00	-23.47	peak
2	11092.000	34.92	14.63	49.55	74.00	-24.45	peak
3	12698.000	30.17	18.54	48.71	74.00	-25.29	peak
4	13875.000	28.56	21.49	50.05	74.00	-23.95	peak
5	16405.000	24.32	23.60	47.92	74.00	-26.08	peak
6	17989.000	22.80	27.33	50.13	74.00	-23.87	peak

Test Mode:	802.11ac VHT160	Frequency(MHz):	5570
Polarity:	Horizontal	Test Voltage:	DC 3.3V

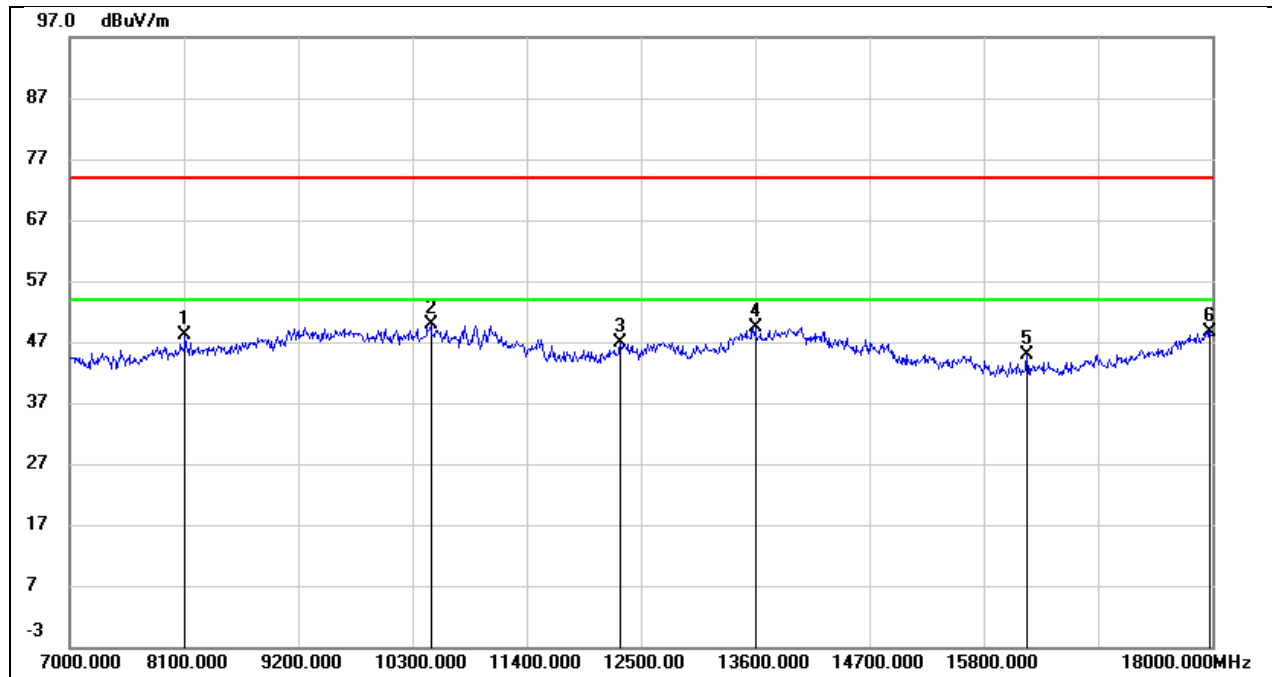


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8111.000	39.81	8.23	48.04	74.00	-25.96	peak
2	10476.000	36.44	13.49	49.93	74.00	-24.07	peak
3	12302.000	28.02	18.85	46.87	74.00	-27.13	peak
4	13600.000	27.12	22.22	49.34	74.00	-24.66	peak
5	16218.000	22.84	22.01	44.85	74.00	-29.15	peak
6	17978.000	19.32	29.38	48.70	74.00	-25.30	peak

Test Mode:	802.11ac VHT160	Frequency(MHz):	5570
Polarity:	Vertical	Test Voltage:	DC 3.3V

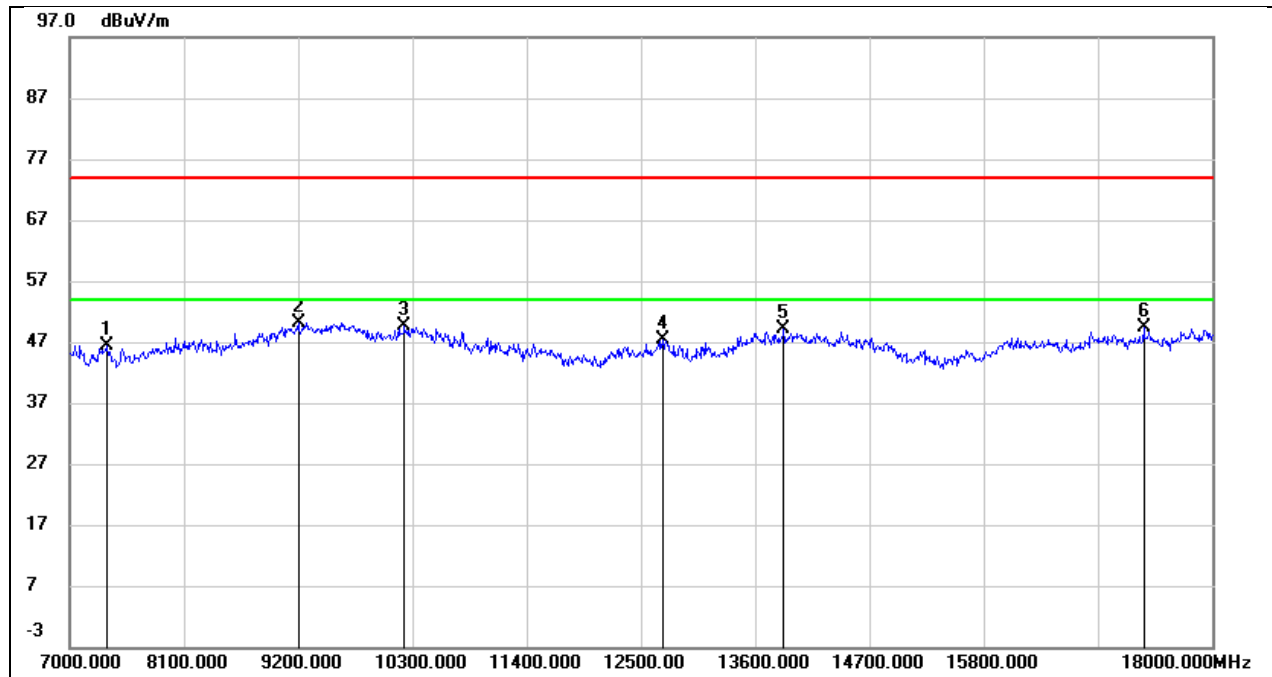


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7363.000	38.02	8.31	46.33	74.00	-27.67	peak
2	9200.000	38.36	11.80	50.16	74.00	-23.84	peak
3	10223.000	36.86	12.72	49.58	74.00	-24.42	peak
4	12709.000	28.79	18.58	47.37	74.00	-26.63	peak
5	13875.000	27.75	21.49	49.24	74.00	-24.76	peak
6	17340.000	24.34	25.01	49.35	74.00	-24.65	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

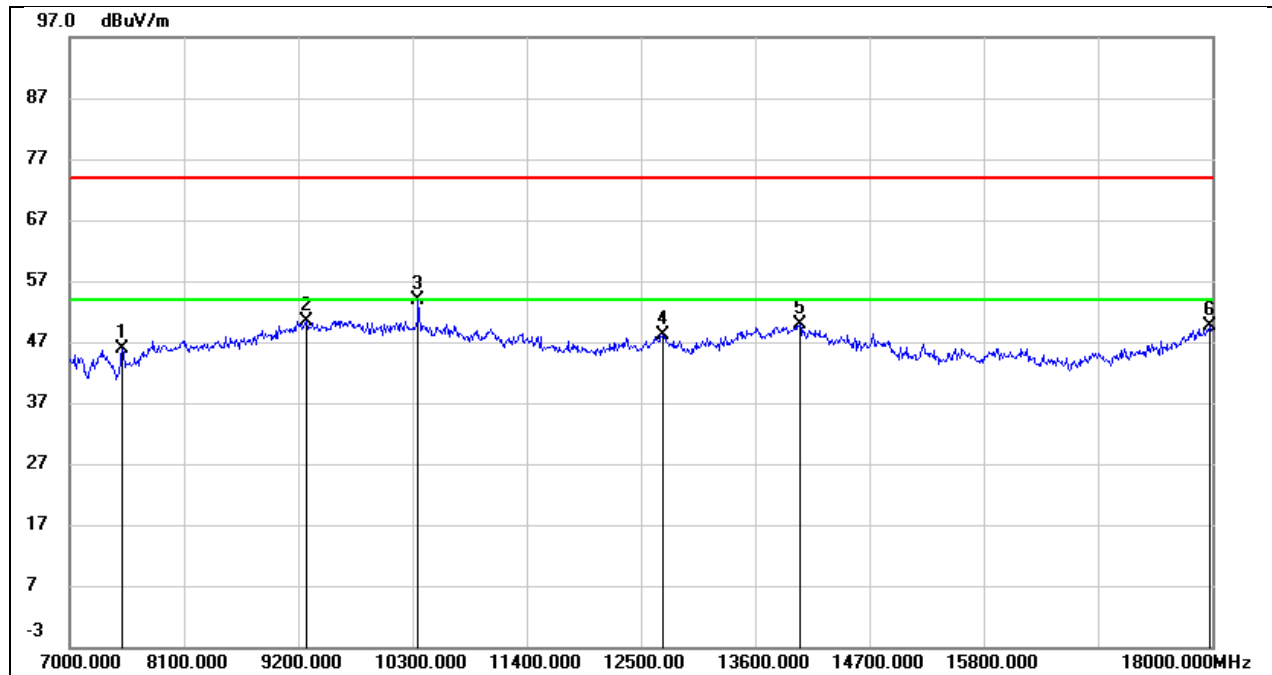


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.96	7.84	45.80	74.00	-28.20	peak
2	9277.000	38.69	11.81	50.50	74.00	-23.50	peak
3	10355.000	40.65	13.31	53.96	74.00	-20.04	peak
4	12709.000	28.45	19.60	48.05	74.00	-25.95	peak
5	14029.000	26.35	23.49	49.84	74.00	-24.16	peak
6	17978.000	20.33	29.38	49.71	74.00	-24.29	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

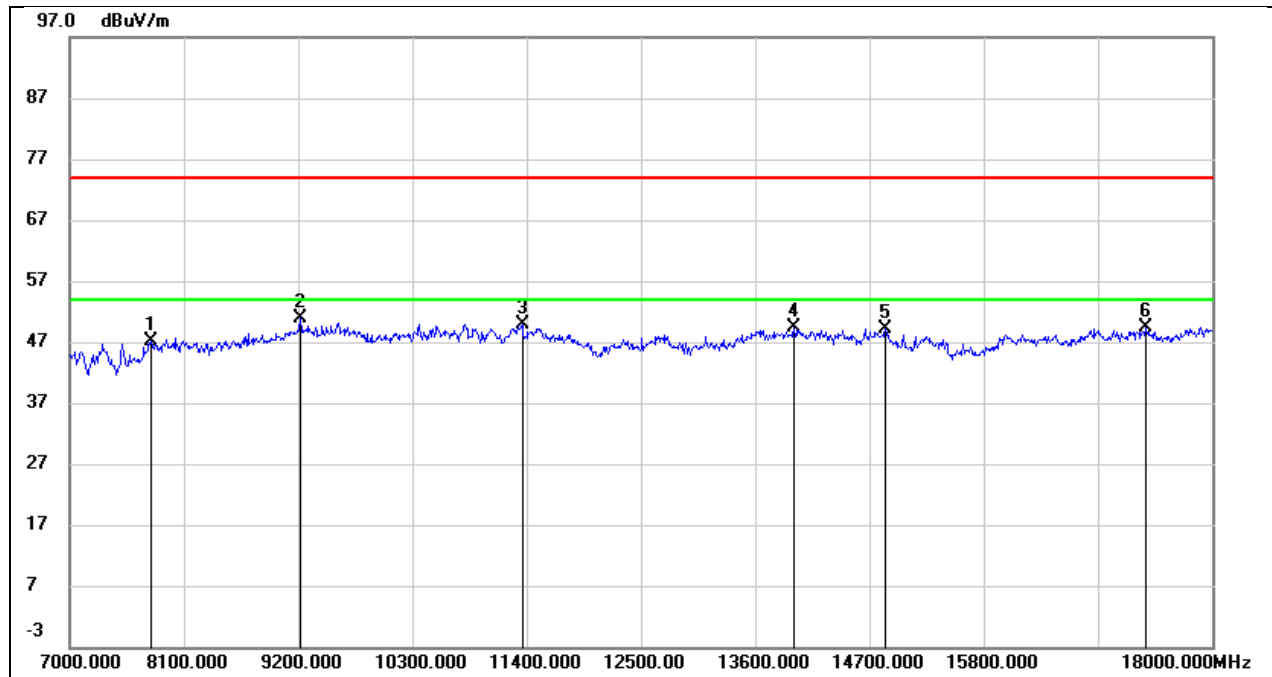


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7781.000	38.61	8.49	47.10	74.00	-26.90	peak
2	9222.000	39.01	11.86	50.87	74.00	-23.13	peak
3	11356.000	34.14	15.80	49.94	74.00	-24.06	peak
4	13974.000	27.45	21.89	49.34	74.00	-24.66	peak
5	14854.000	28.80	20.44	49.24	74.00	-24.76	peak
6	17362.000	24.43	25.03	49.46	74.00	-24.54	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 3.3V

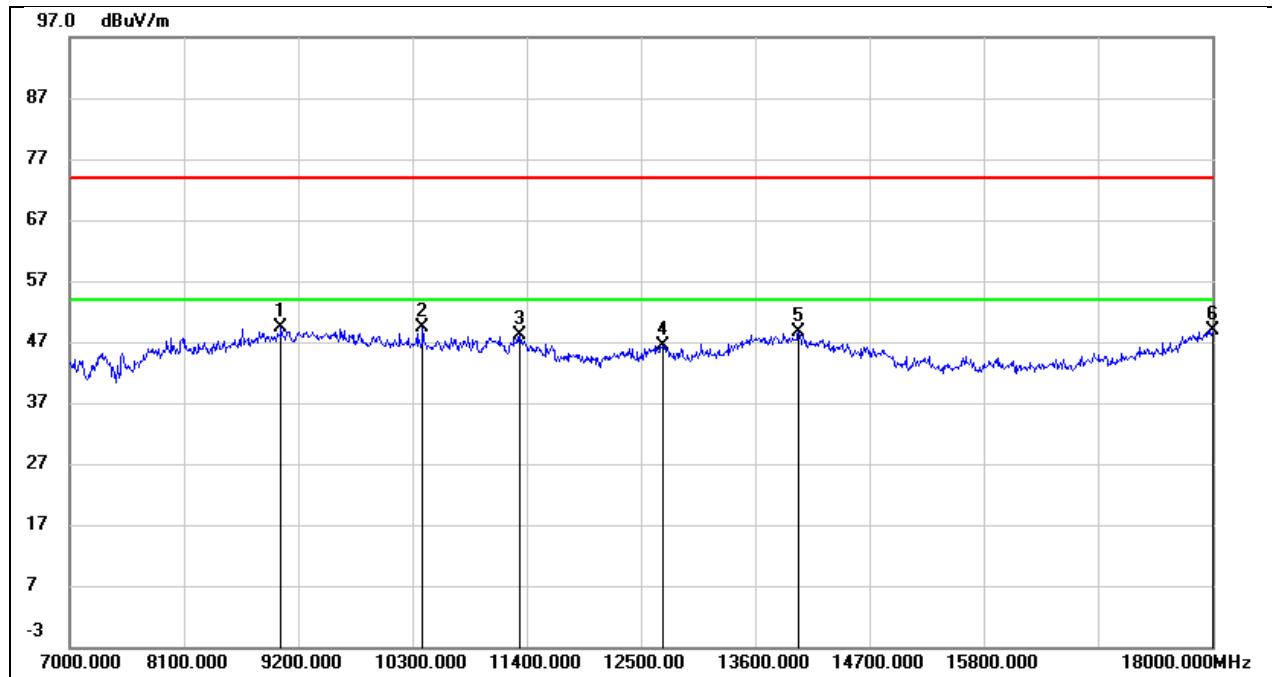


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9035.000	38.62	10.83	49.45	74.00	-24.55	peak
2	10399.000	35.91	13.35	49.26	74.00	-24.74	peak
3	11334.000	31.26	16.96	48.22	74.00	-25.78	peak
4	12709.000	26.82	19.60	46.42	74.00	-27.58	peak
5	14018.000	25.06	23.54	48.60	74.00	-25.40	peak
6	18000.000	19.23	29.61	48.84	74.00	-25.16	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 3.3V

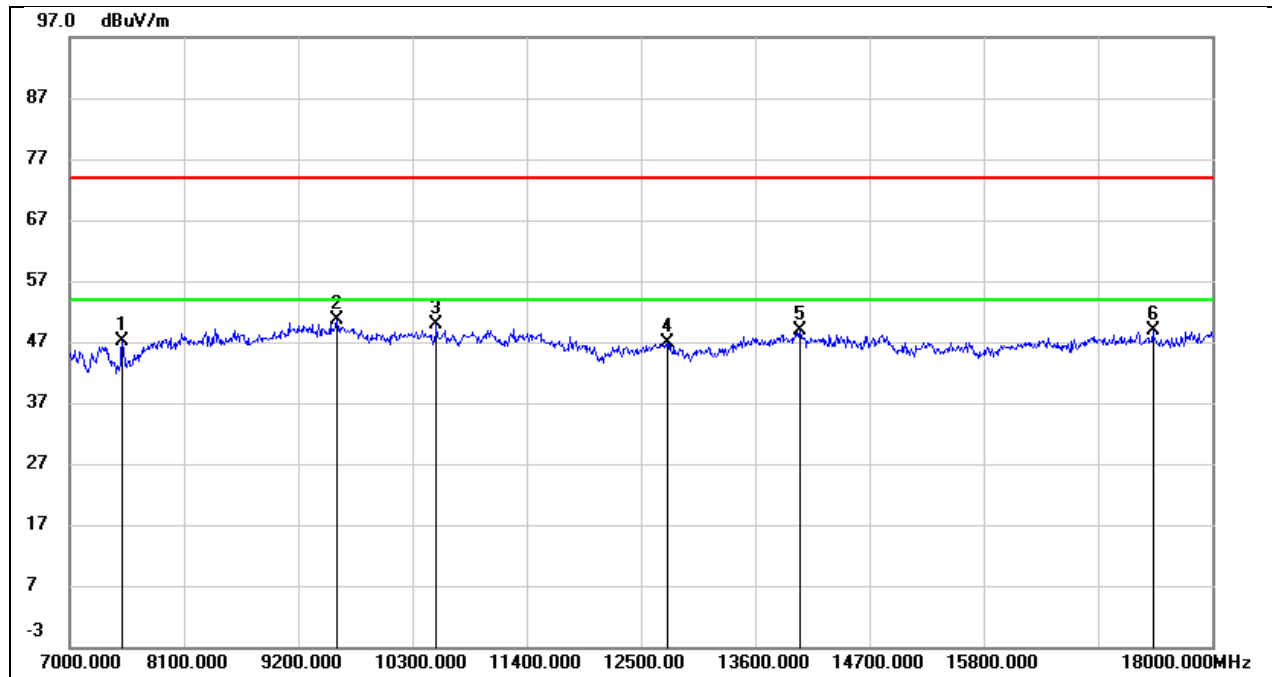


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	38.86	8.34	47.20	74.00	-26.80	peak
2	9574.000	37.34	13.21	50.55	74.00	-23.45	peak
3	10531.000	36.53	13.39	49.92	74.00	-24.08	peak
4	12753.000	28.26	18.73	46.99	74.00	-27.01	peak
5	14029.000	27.00	21.96	48.96	74.00	-25.04	peak
6	17428.000	23.77	25.03	48.80	74.00	-25.20	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

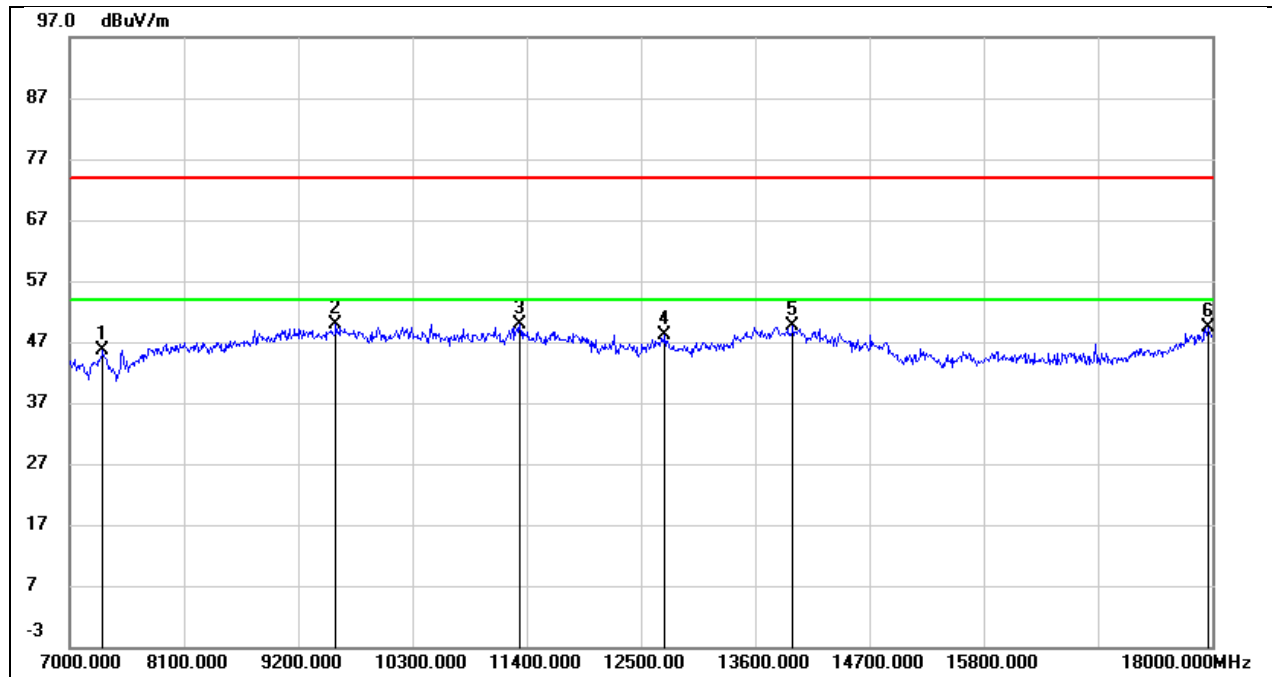


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	38.01	7.66	45.67	74.00	-28.33	peak
2	9563.000	36.72	13.23	49.95	74.00	-24.05	peak
3	11334.000	32.86	16.96	49.82	74.00	-24.18	peak
4	12731.000	28.40	19.70	48.10	74.00	-25.90	peak
5	13963.000	26.06	23.46	49.52	74.00	-24.48	peak
6	17956.000	20.15	29.14	49.29	74.00	-24.71	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 3.3V

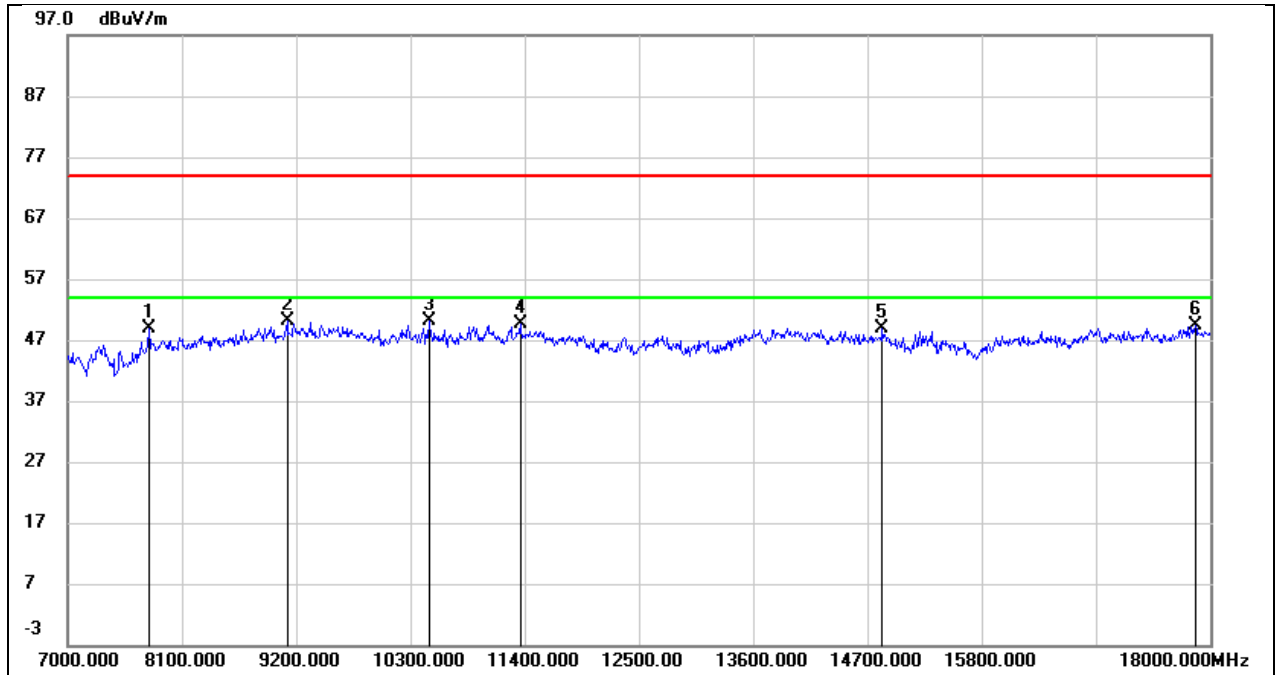


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7781.000	40.42	8.49	48.91	74.00	-25.09	peak
2	9112.000	38.72	11.48	50.20	74.00	-23.80	peak
3	10476.000	36.98	13.26	50.24	74.00	-23.76	peak
4	11356.000	33.74	15.80	49.54	74.00	-24.46	peak
5	14843.000	28.49	20.47	48.96	74.00	-25.04	peak
6	17857.000	22.93	26.51	49.44	74.00	-24.56	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

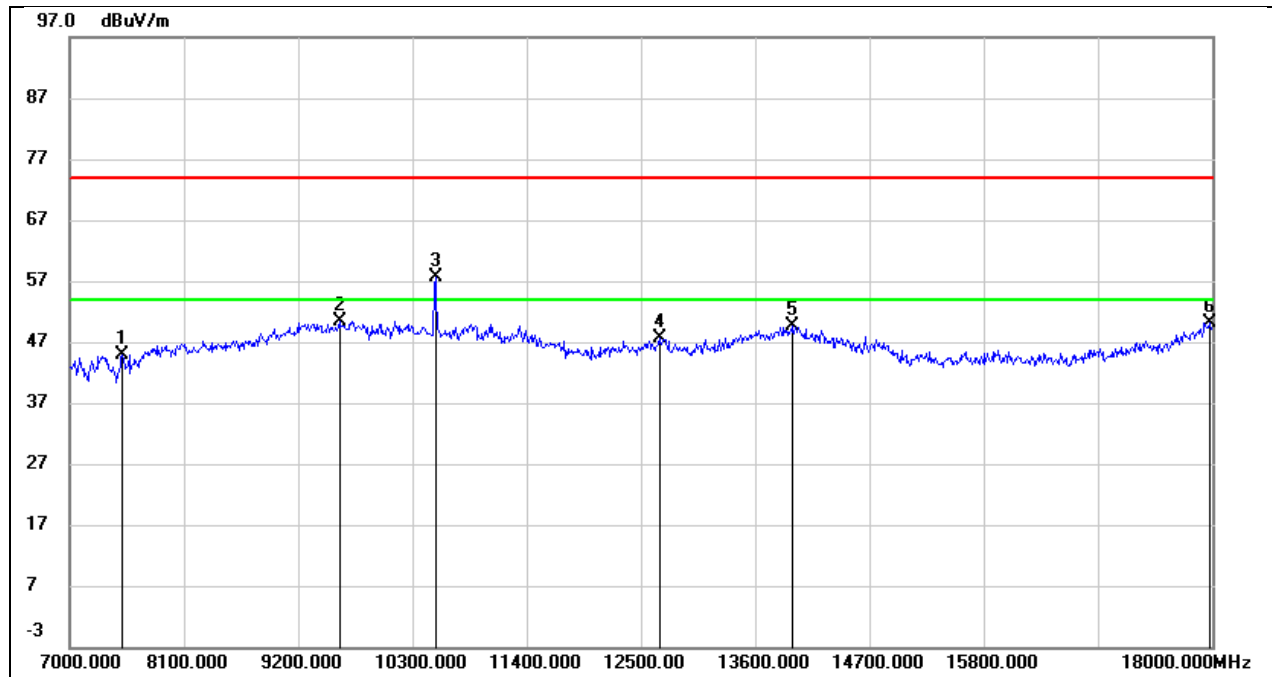


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.02	7.84	44.86	74.00	-29.14	peak
2	9596.000	36.94	13.44	50.38	74.00	-23.62	peak
3	10520.000	43.92	13.59	57.51	74.00	-16.49	peak
4	12676.000	28.15	19.48	47.63	74.00	-26.37	peak
5	13952.000	26.29	23.42	49.71	74.00	-24.29	peak
6	17978.000	20.79	29.38	50.17	74.00	-23.83	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3V

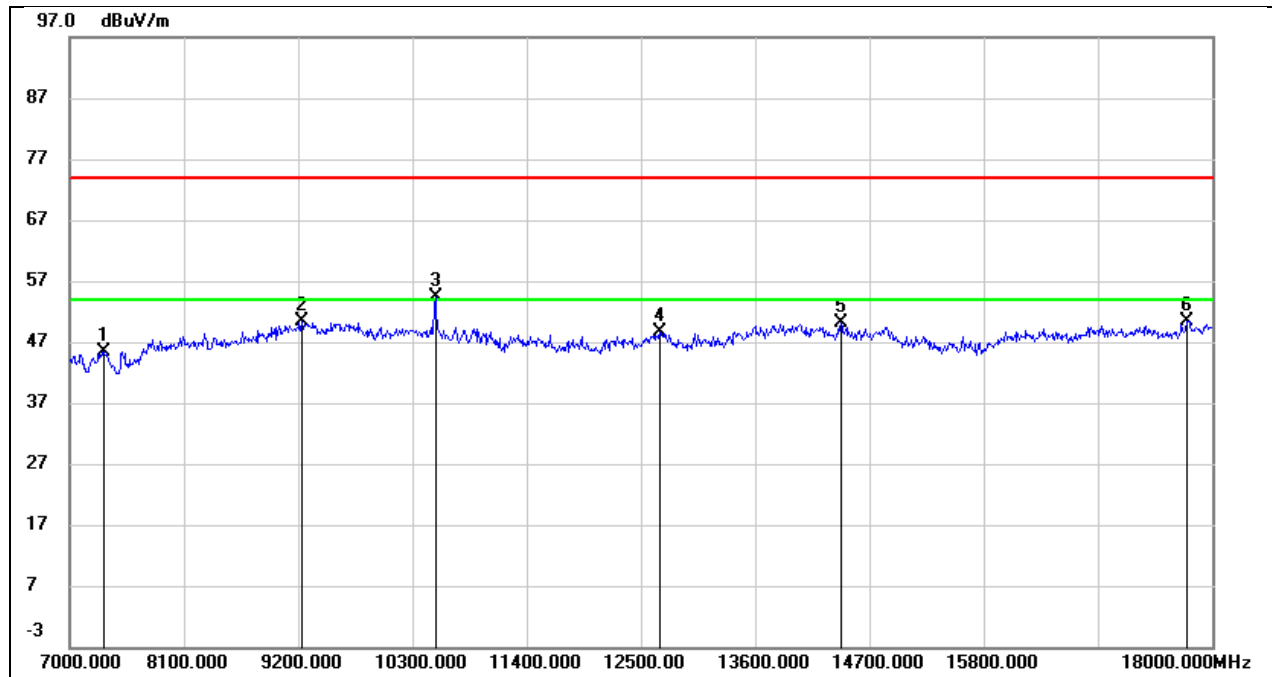


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	37.07	8.30	45.37	74.00	-28.63	peak
2	9233.000	38.45	11.88	50.33	74.00	-23.67	peak
3	10520.000	41.03	13.36	54.39	74.00	-19.61	peak
4	12676.000	30.21	18.47	48.68	74.00	-25.32	peak
5	14425.000	29.14	20.98	50.12	74.00	-23.88	peak
6	17758.000	24.41	25.94	50.35	74.00	-23.65	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3V

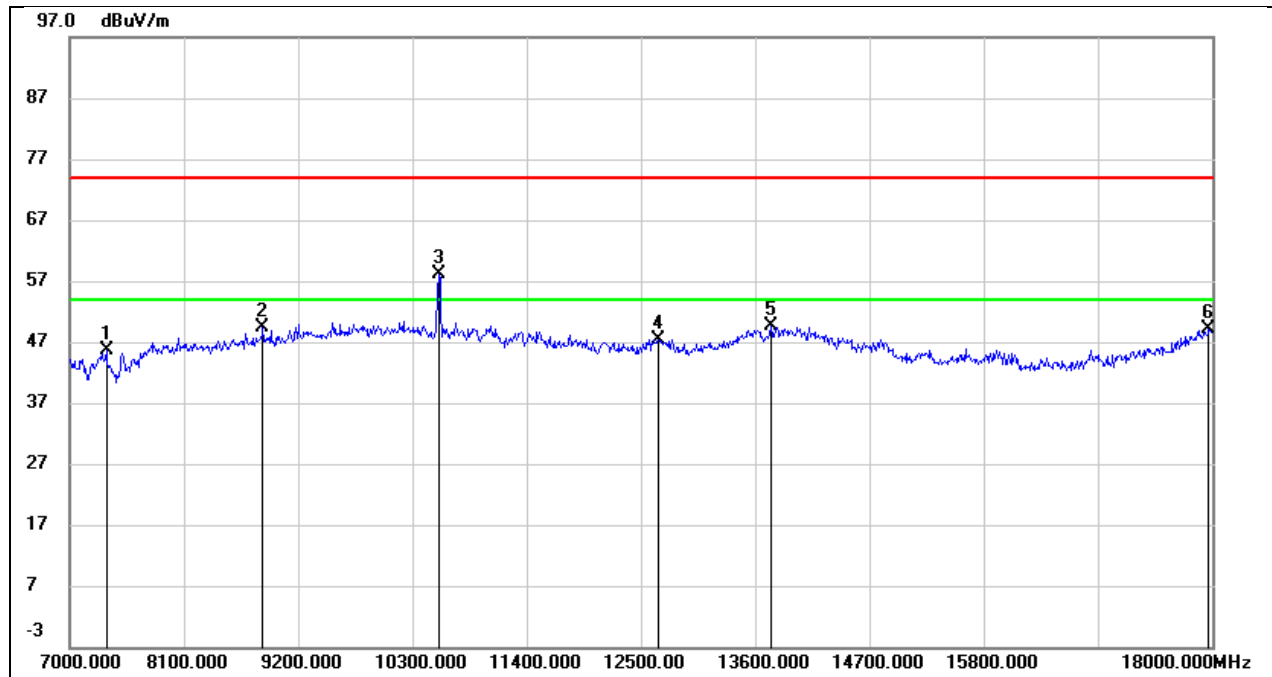


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.85	7.69	45.54	74.00	-28.46	peak
2	8859.000	39.44	9.95	49.39	74.00	-24.61	peak
3	10553.000	44.53	13.70	58.23	74.00	-15.77	peak
4	12665.000	27.99	19.42	47.41	74.00	-26.59	peak
5	13754.000	26.96	22.66	49.62	74.00	-24.38	peak
6	17967.000	19.86	29.26	49.12	74.00	-24.88	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3V

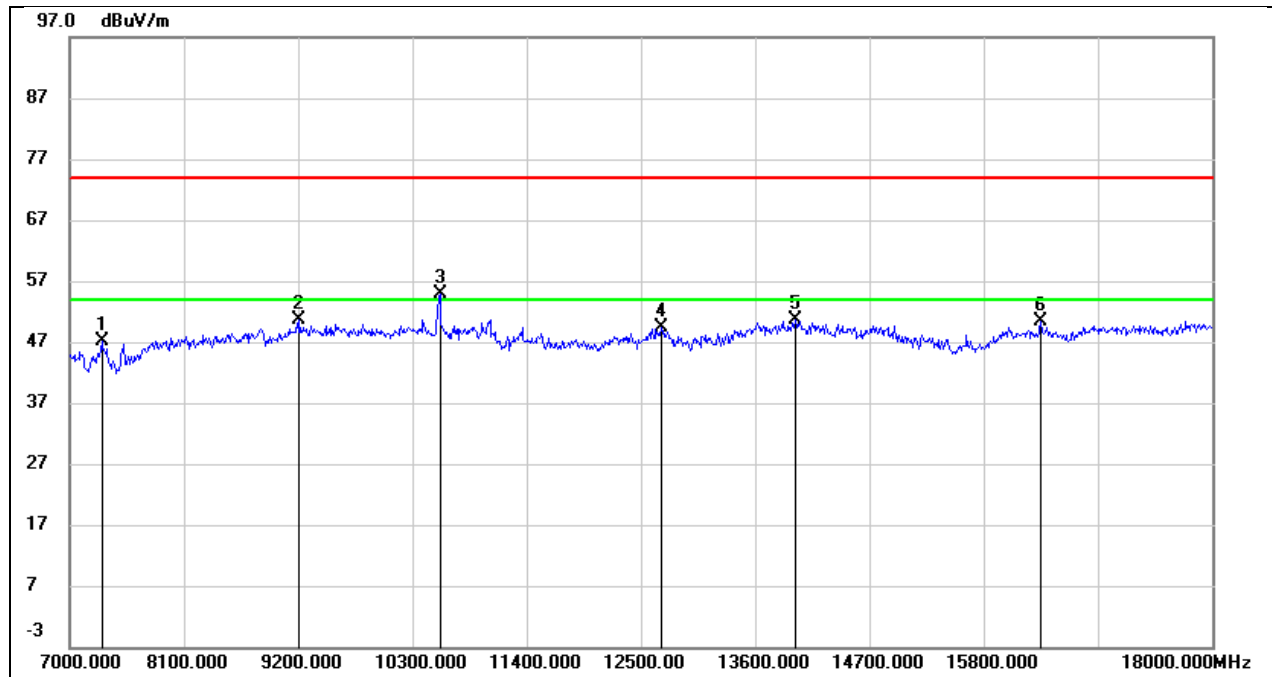


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	38.84	8.29	47.13	74.00	-26.87	peak
2	9211.000	38.83	11.82	50.65	74.00	-23.35	peak
3	10564.000	41.54	13.44	54.98	74.00	-19.02	peak
4	12698.000	30.76	18.54	49.30	74.00	-24.70	peak
5	13985.000	28.59	21.95	50.54	74.00	-23.46	peak
6	16350.000	26.65	23.74	50.39	74.00	-23.61	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

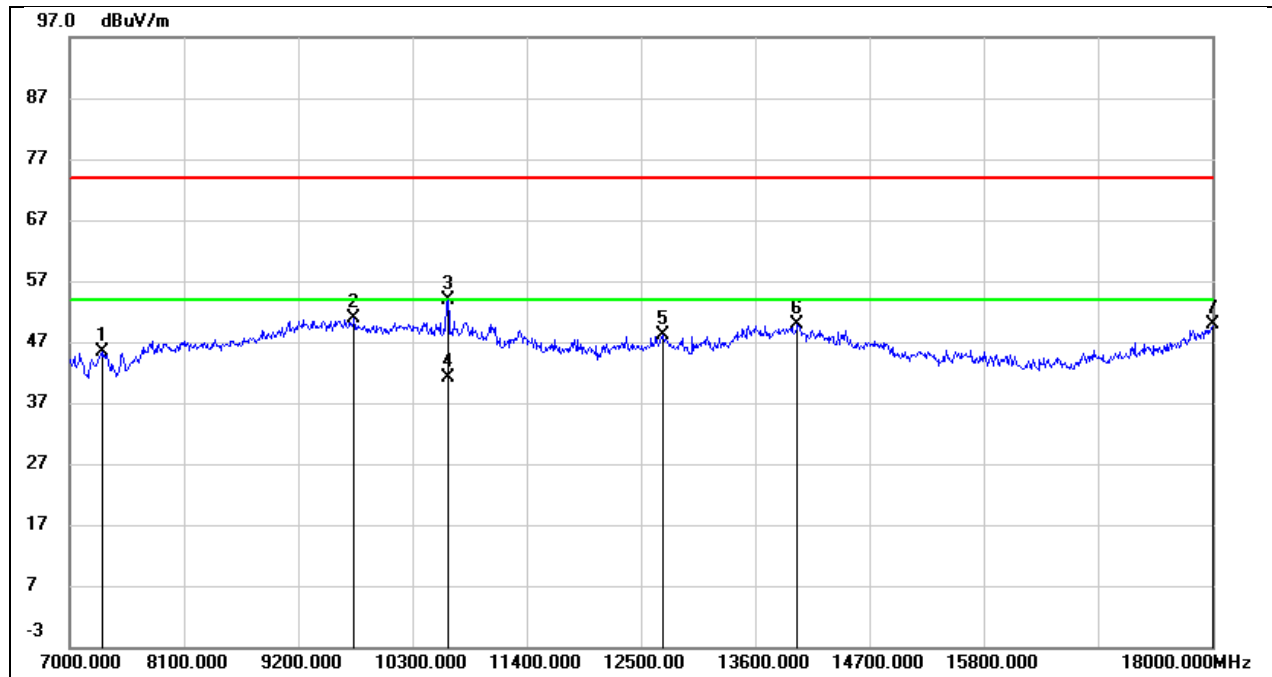


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.66	7.64	45.30	74.00	-28.70	peak
2	9739.000	37.17	13.70	50.87	74.00	-23.13	peak
3	10641.000	40.04	13.95	53.99	74.00	-20.01	peak
4	10641.000	27.26	13.95	41.21	54.00	-12.79	AVG
5	12709.000	28.59	19.60	48.19	74.00	-25.81	peak
6	14007.000	26.21	23.59	49.80	74.00	-24.20	peak
7	18000.000	20.18	29.61	49.79	74.00	-24.21	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3V

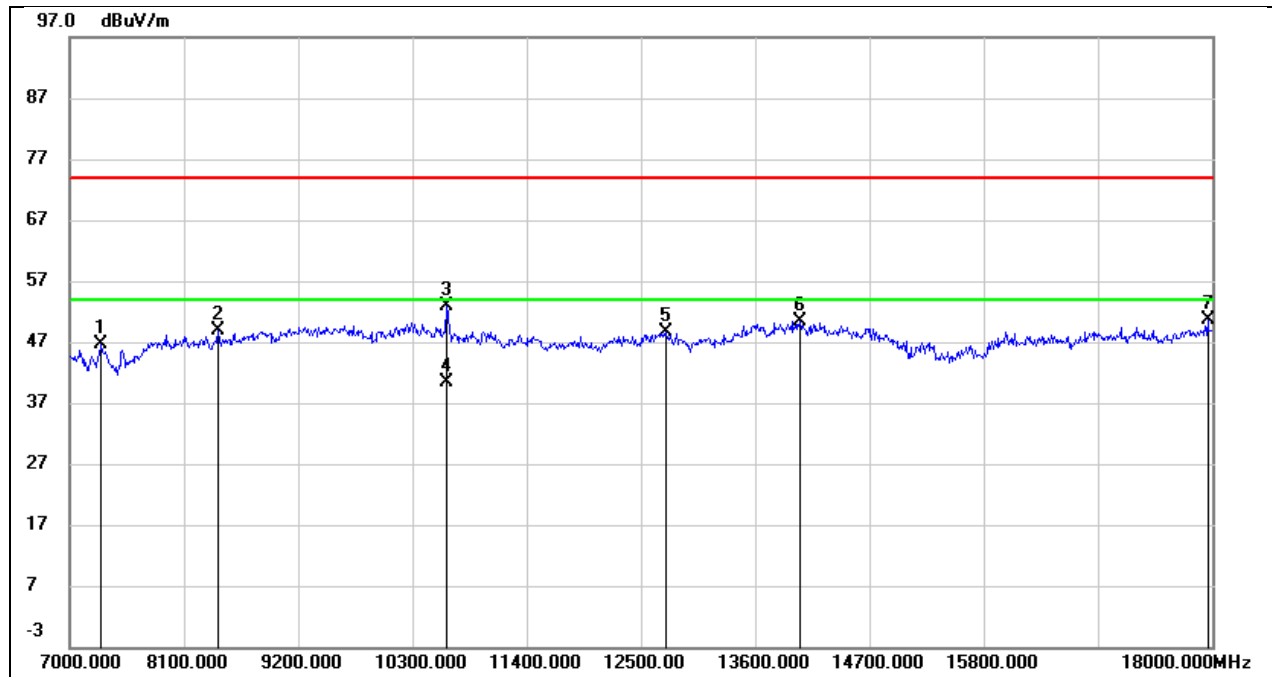


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	38.38	8.30	46.68	74.00	-27.32	peak
2	8430.000	39.62	9.17	48.79	74.00	-25.21	peak
3	10630.000	39.29	13.57	52.86	74.00	-21.14	peak
4	10630.000	26.80	13.57	40.37	54.00	-13.63	AVG
5	12742.000	29.94	18.70	48.64	74.00	-25.36	peak
6	14029.000	28.51	21.96	50.47	74.00	-23.53	peak
7	17956.000	23.50	27.13	50.63	74.00	-23.37	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

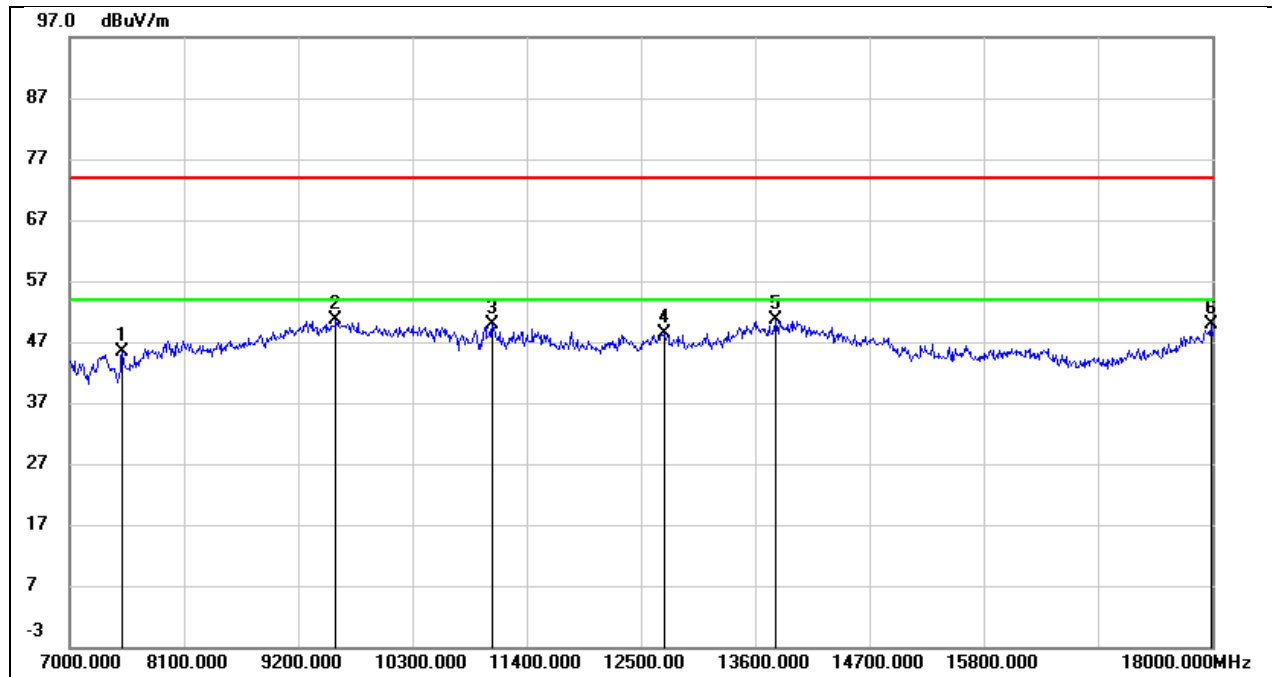


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.54	7.84	45.38	74.00	-28.62	peak
2	9563.000	37.29	13.23	50.52	74.00	-23.48	peak
3	11070.000	34.39	15.44	49.83	74.00	-24.17	peak
4	12720.000	28.83	19.65	48.48	74.00	-25.52	peak
5	13798.000	27.94	22.79	50.73	74.00	-23.27	peak
6	17989.000	20.42	29.49	49.91	74.00	-24.09	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3V

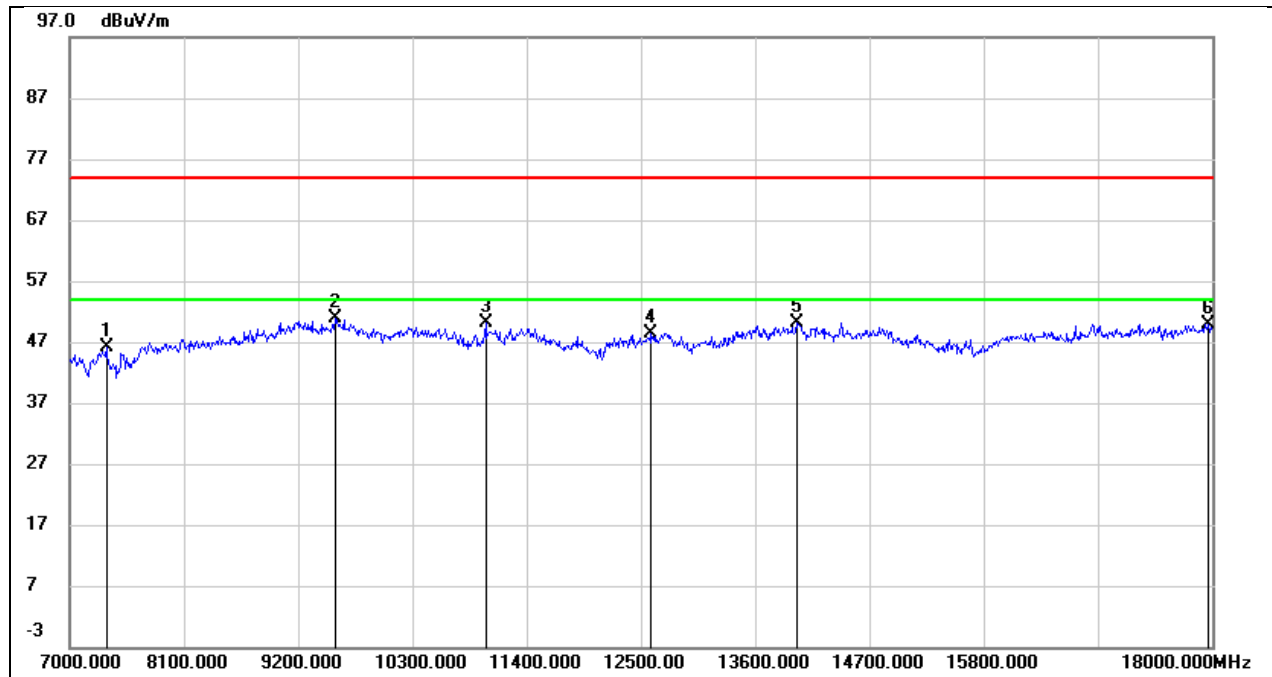


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.78	8.31	46.09	74.00	-27.91	peak
2	9552.000	37.73	13.10	50.83	74.00	-23.17	peak
3	11004.000	35.79	14.27	50.06	74.00	-23.94	peak
4	12599.000	30.25	18.20	48.45	74.00	-25.55	peak
5	13996.000	28.12	21.99	50.11	74.00	-23.89	peak
6	17956.000	22.84	27.13	49.97	74.00	-24.03	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3V

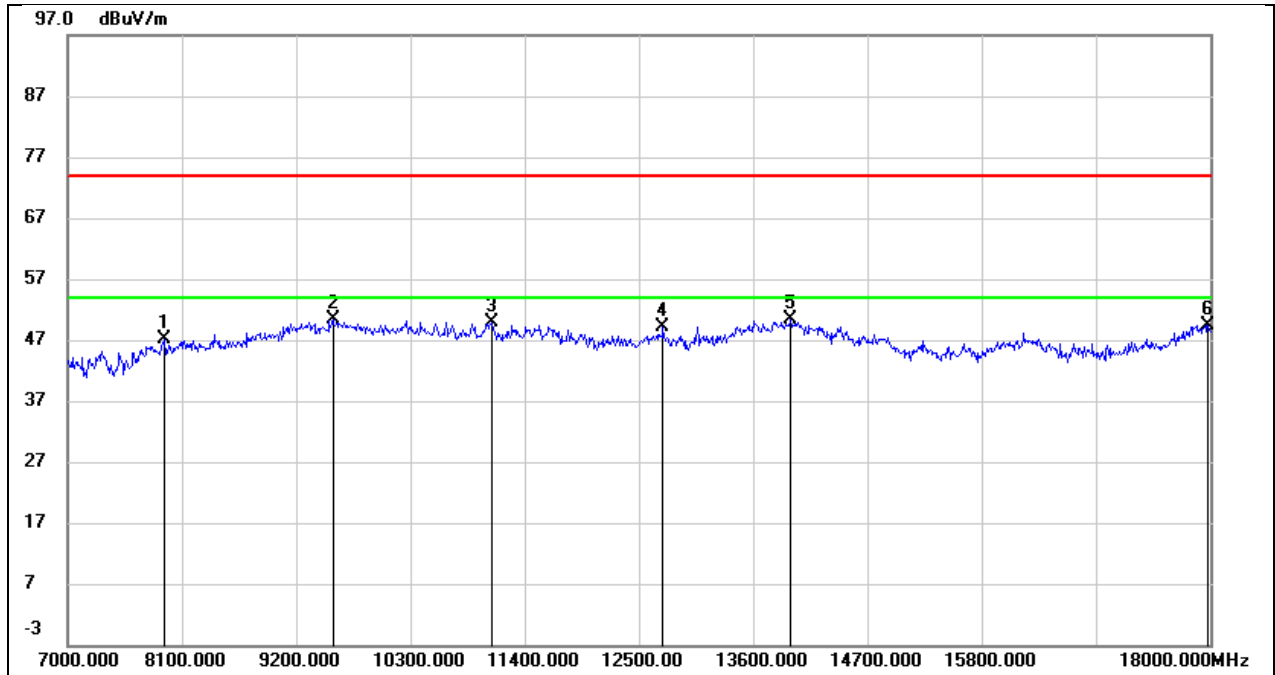


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7935.000	38.98	8.05	47.03	74.00	-26.97	peak
2	9552.000	37.23	13.17	50.40	74.00	-23.60	peak
3	11081.000	34.25	15.51	49.76	74.00	-24.24	peak
4	12731.000	29.37	19.70	49.07	74.00	-24.93	peak
5	13963.000	26.94	23.46	50.40	74.00	-23.60	peak
6	17978.000	20.02	29.38	49.40	74.00	-24.60	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3V

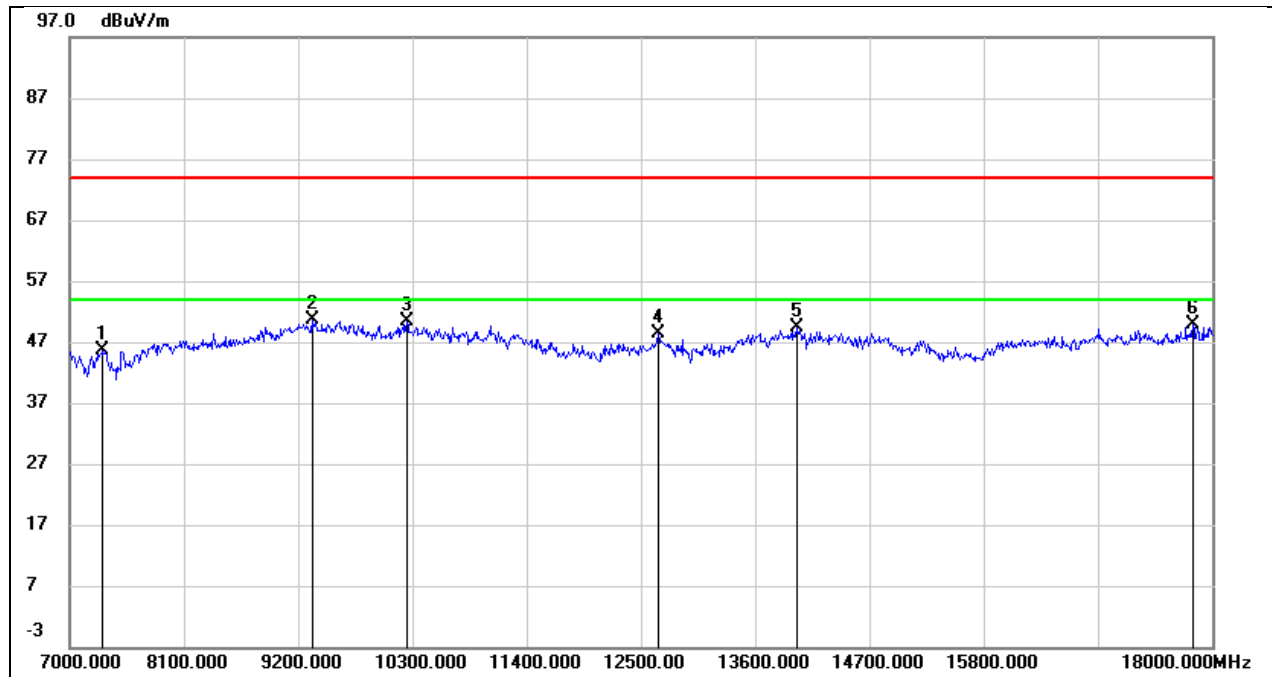


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	37.42	8.30	45.72	74.00	-28.28	peak
2	9332.000	38.45	12.13	50.58	74.00	-23.42	peak
3	10245.000	37.64	12.76	50.40	74.00	-23.60	peak
4	12665.000	29.96	18.42	48.38	74.00	-25.62	peak
5	13996.000	27.32	21.99	49.31	74.00	-24.69	peak
6	17813.000	23.58	26.24	49.82	74.00	-24.18	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

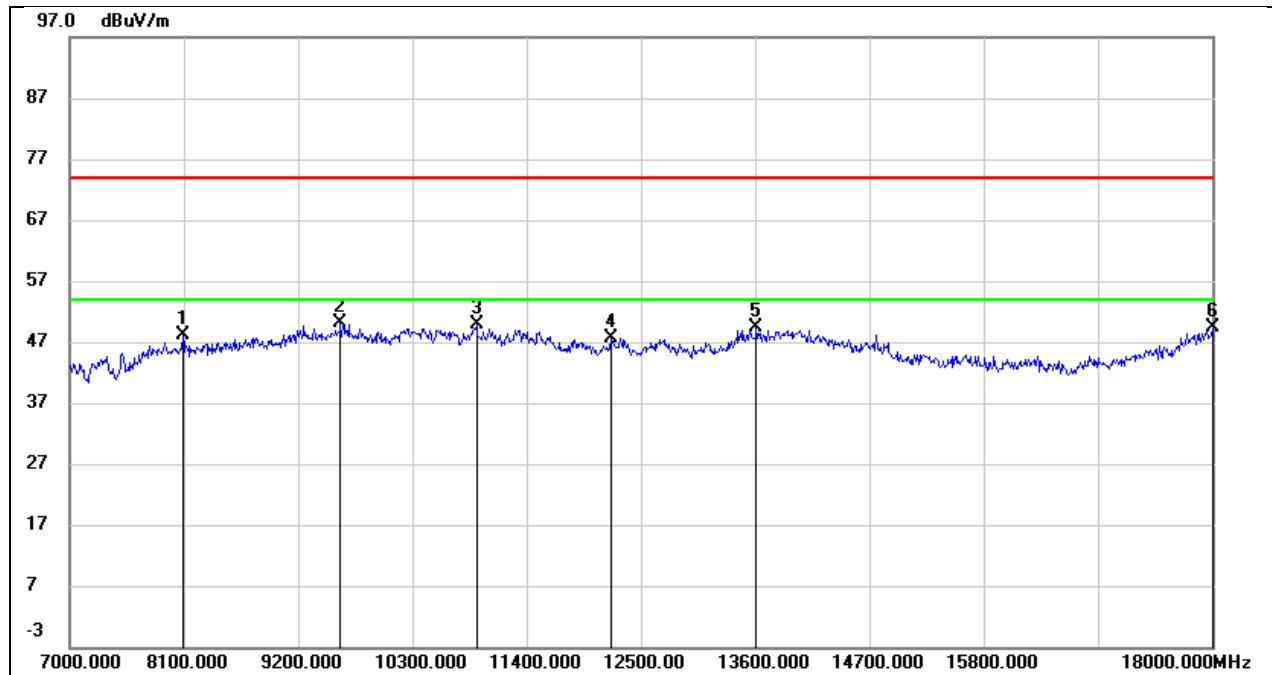


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8089.000	39.92	8.19	48.11	74.00	-25.89	peak
2	9607.000	36.72	13.48	50.20	74.00	-23.80	peak
3	10916.000	34.97	14.79	49.76	74.00	-24.24	peak
4	12214.000	28.87	18.73	47.60	74.00	-26.40	peak
5	13611.000	27.19	22.25	49.44	74.00	-24.56	peak
6	18000.000	19.69	29.61	49.30	74.00	-24.70	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3V

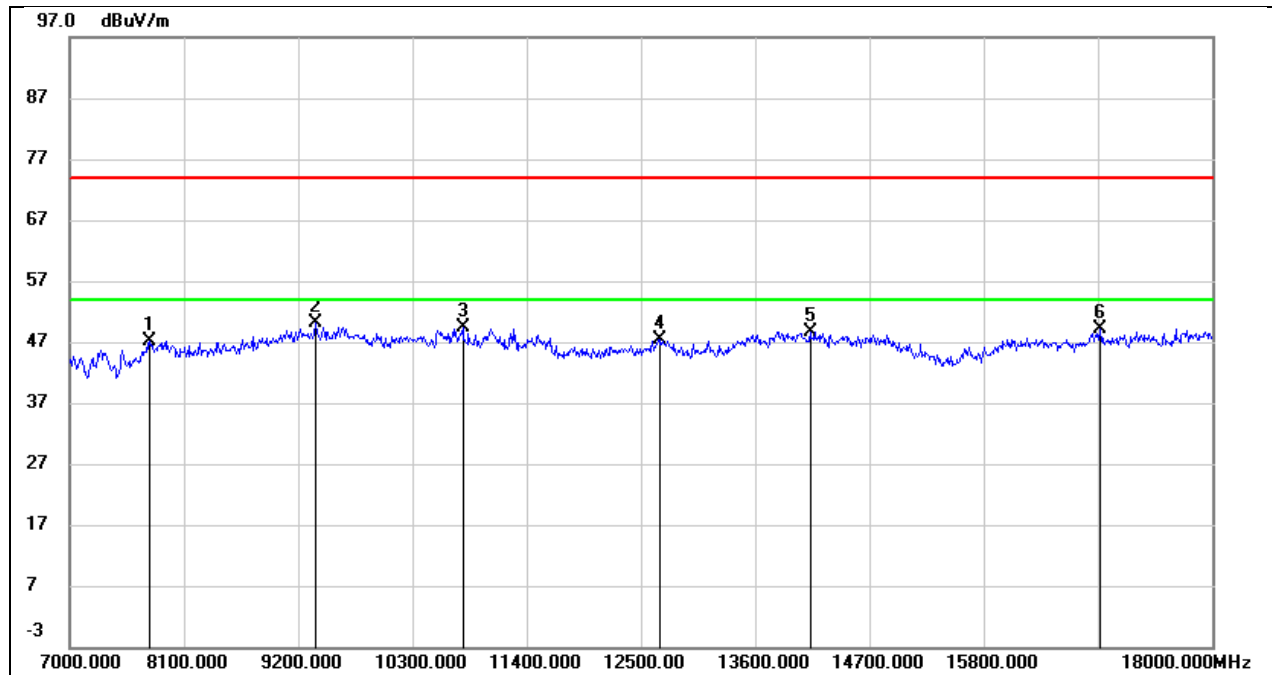


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7770.000	38.64	8.49	47.13	74.00	-26.87	peak
2	9365.000	37.91	12.20	50.11	74.00	-23.89	peak
3	10784.000	35.60	13.83	49.43	74.00	-24.57	peak
4	12676.000	28.90	18.47	47.37	74.00	-26.63	peak
5	14128.000	26.89	21.82	48.71	74.00	-25.29	peak
6	16922.000	24.89	24.28	49.17	74.00	-24.83	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3V

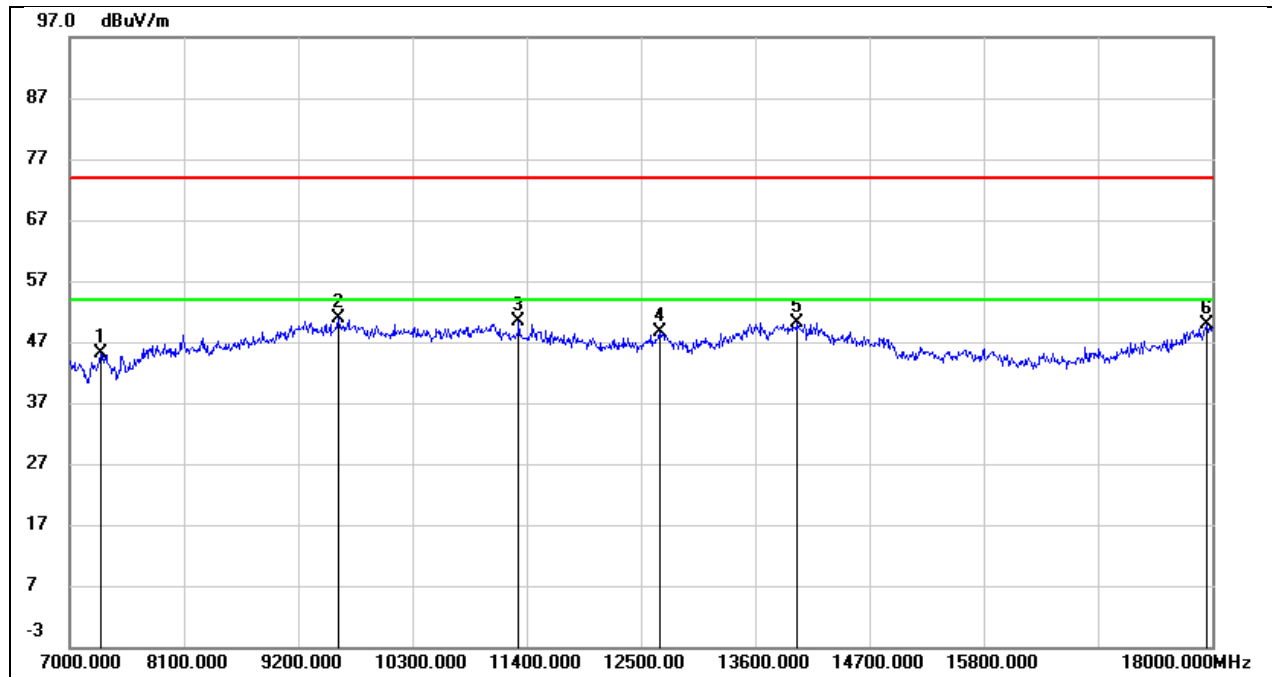


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.39	7.64	45.03	74.00	-28.97	peak
2	9585.000	37.41	13.38	50.79	74.00	-23.21	peak
3	11323.000	33.50	16.89	50.39	74.00	-23.61	peak
4	12676.000	29.21	19.48	48.69	74.00	-25.31	peak
5	14007.000	26.50	23.59	50.09	74.00	-23.91	peak
6	17945.000	20.78	29.03	49.81	74.00	-24.19	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3V

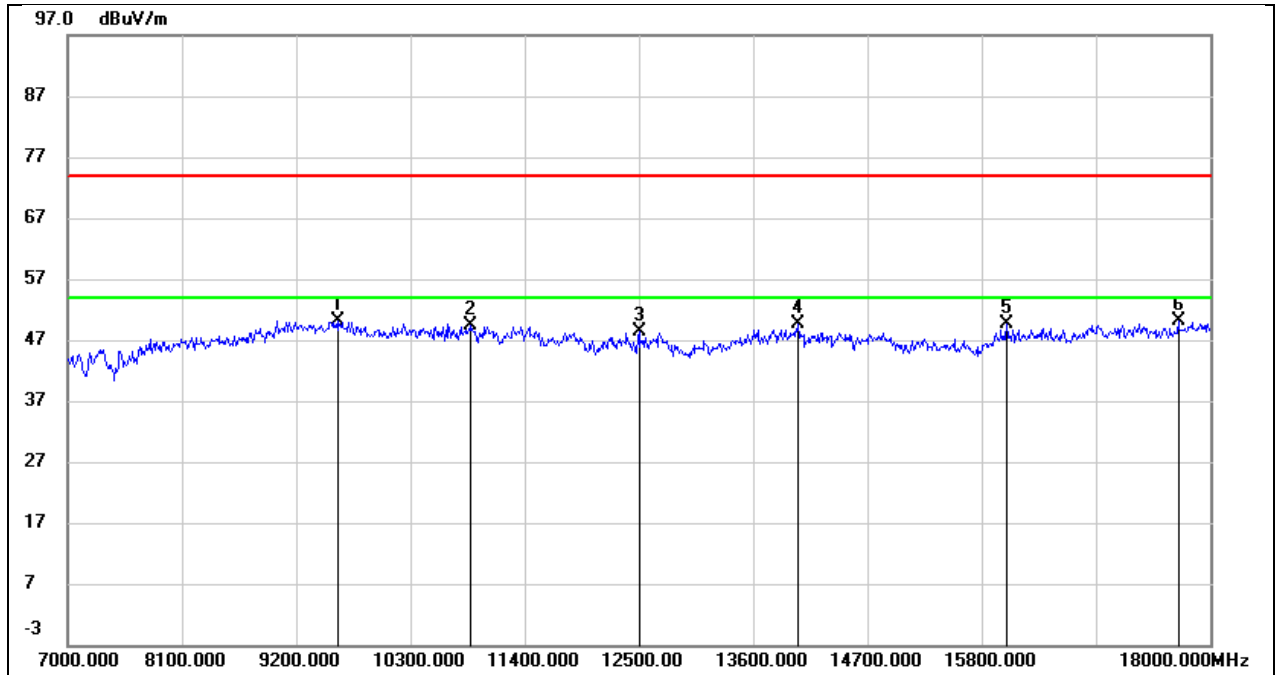


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9607.000	36.91	13.33	50.24	74.00	-23.76	peak
2	10883.000	35.32	14.02	49.34	74.00	-24.66	peak
3	12500.000	30.22	18.09	48.31	74.00	-25.69	peak
4	14029.000	27.55	21.96	49.51	74.00	-24.49	peak
5	16042.000	26.53	23.15	49.68	74.00	-24.32	peak
6	17692.000	24.66	25.59	50.25	74.00	-23.75	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

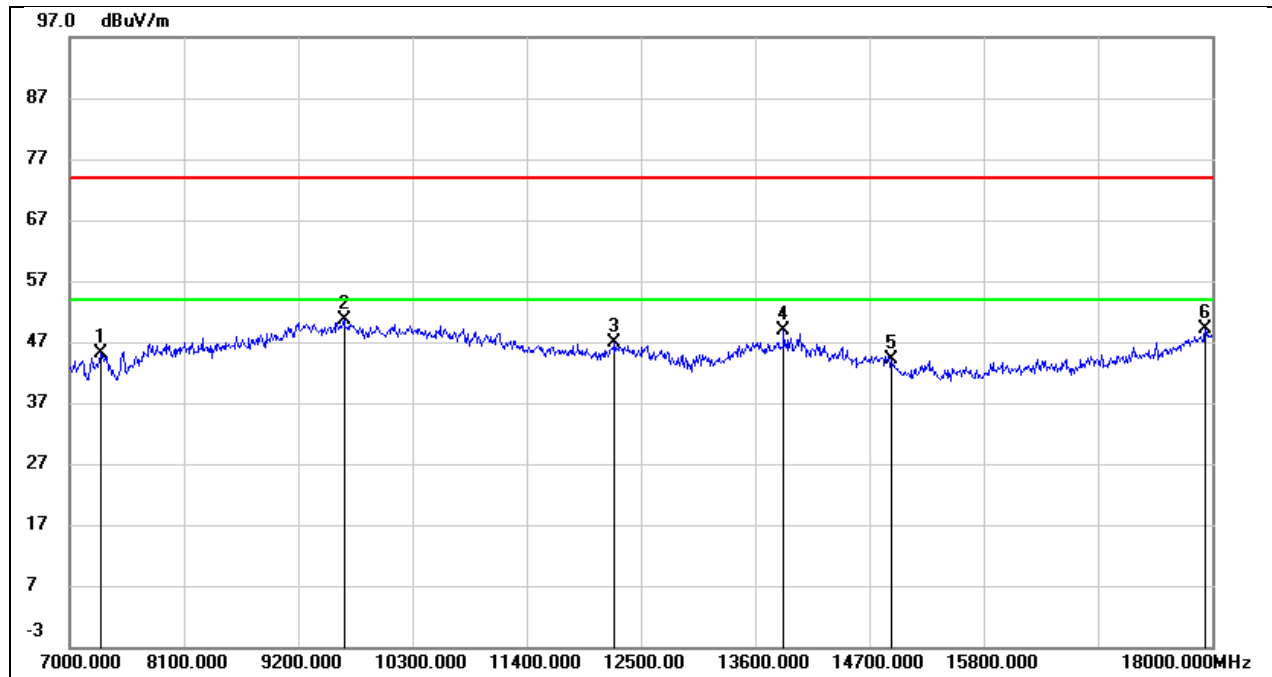


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.38	7.64	45.02	74.00	-28.98	peak
2	9640.000	36.99	13.53	50.52	74.00	-23.48	peak
3	12247.000	28.14	18.77	46.91	74.00	-27.09	peak
4	13875.000	25.80	23.11	48.91	74.00	-25.09	peak
5	14909.000	24.29	19.74	44.03	74.00	-29.97	peak
6	17934.000	20.16	28.91	49.07	74.00	-24.93	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3V

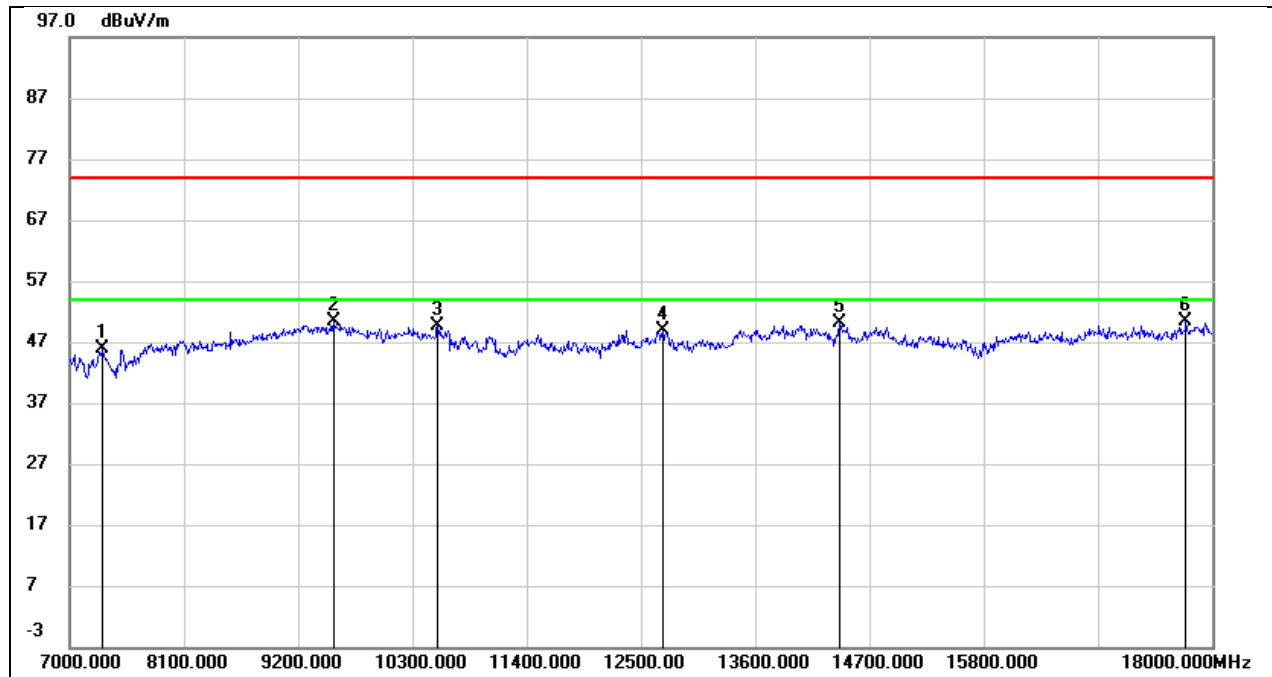


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	37.46	8.30	45.76	74.00	-28.24	peak
2	9541.000	37.24	13.04	50.28	74.00	-23.72	peak
3	10542.000	36.19	13.41	49.60	74.00	-24.40	peak
4	12709.000	30.27	18.58	48.85	74.00	-25.15	peak
5	14414.000	29.11	20.99	50.10	74.00	-23.90	peak
6	17747.000	24.37	25.89	50.26	74.00	-23.74	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3V

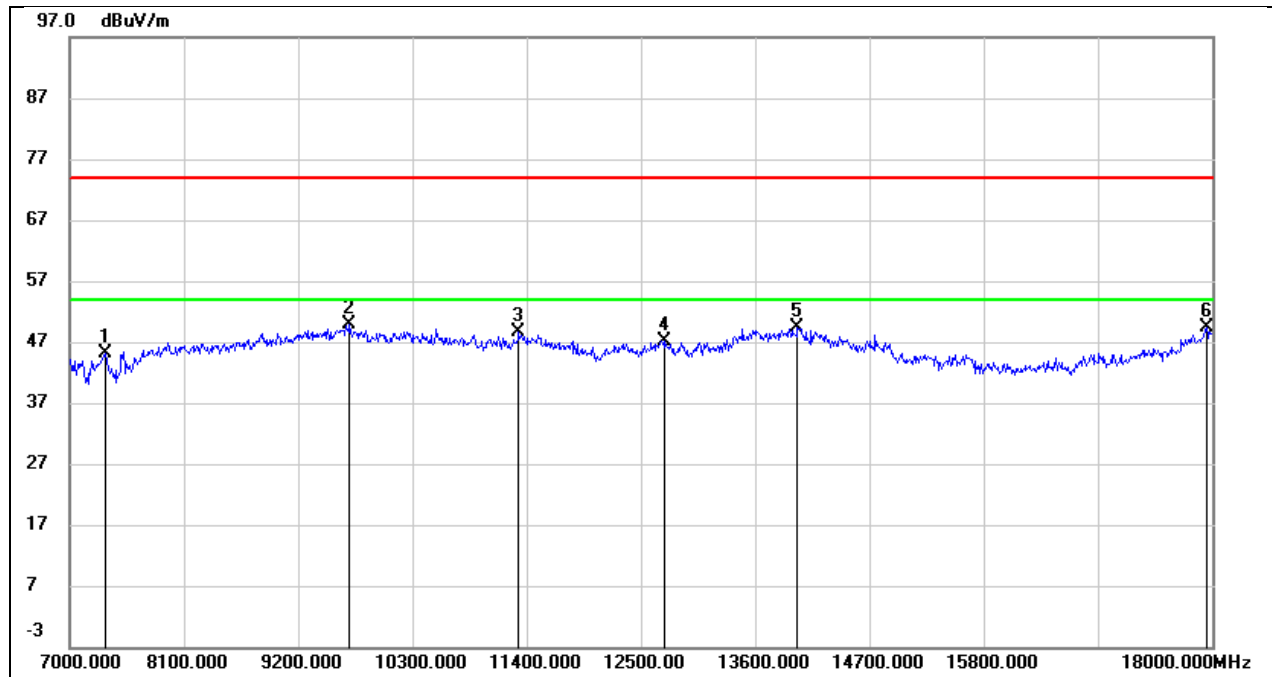


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.38	7.68	45.06	74.00	-28.94	peak
2	9695.000	36.27	13.62	49.89	74.00	-24.11	peak
3	11323.000	31.66	16.89	48.55	74.00	-25.45	peak
4	12731.000	27.45	19.70	47.15	74.00	-26.85	peak
5	14007.000	25.84	23.59	49.43	74.00	-24.57	peak
6	17945.000	20.32	29.03	49.35	74.00	-24.65	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3V

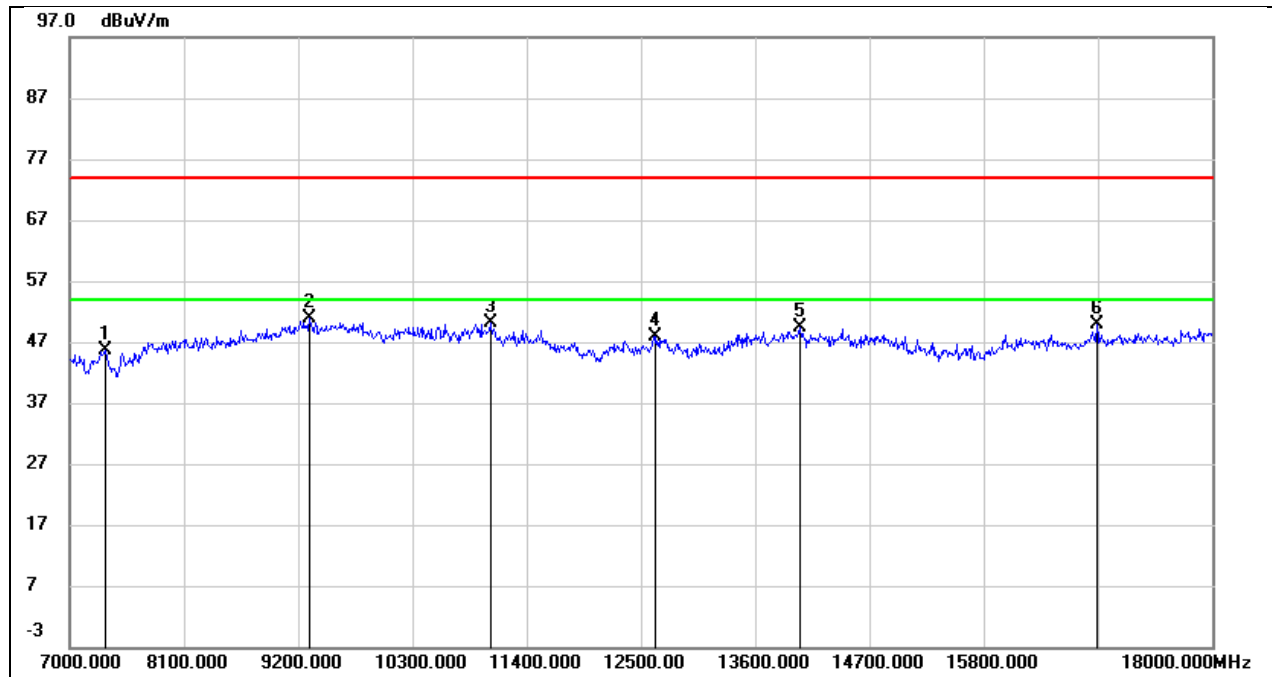


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.37	8.30	45.67	74.00	-28.33	peak
2	9310.000	38.73	12.07	50.80	74.00	-23.20	peak
3	11048.000	35.63	14.46	50.09	74.00	-23.91	peak
4	12643.000	29.47	18.35	47.82	74.00	-26.18	peak
5	14029.000	27.32	21.96	49.28	74.00	-24.72	peak
6	16889.000	25.66	24.21	49.87	74.00	-24.13	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

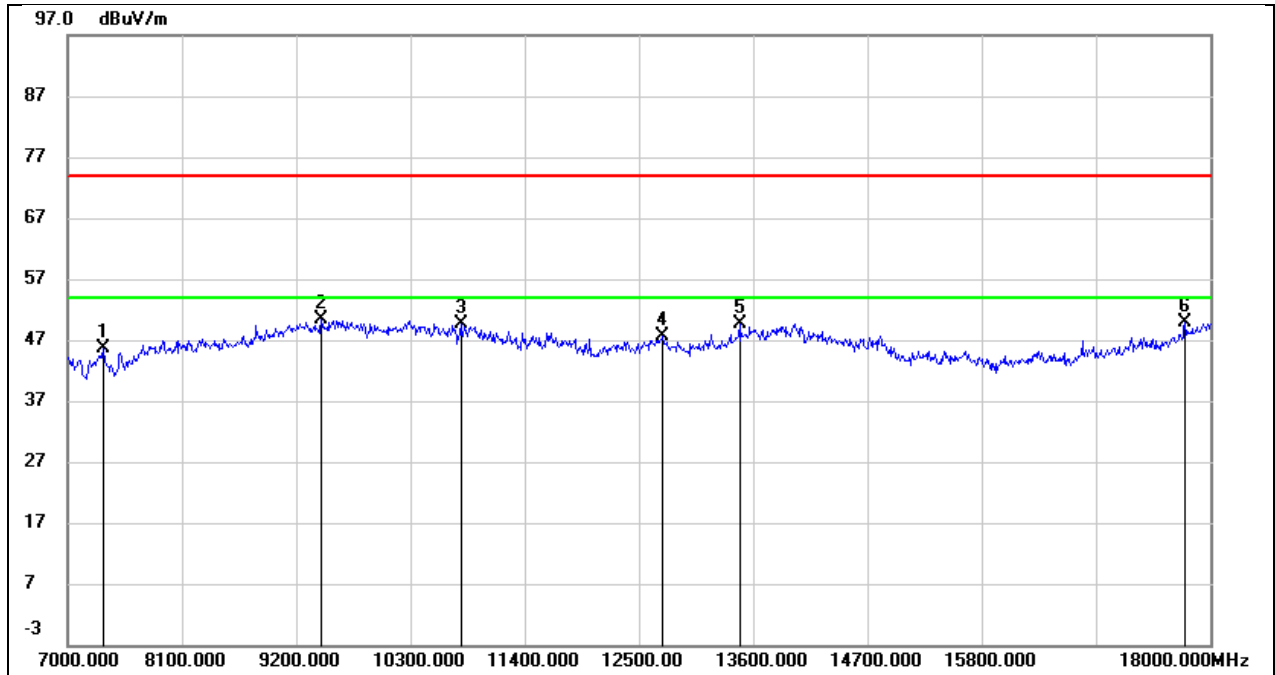


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.88	7.68	45.56	74.00	-28.44	peak
2	9442.000	38.00	12.48	50.48	74.00	-23.52	peak
3	10784.000	35.26	14.37	49.63	74.00	-24.37	peak
4	12731.000	27.85	19.70	47.55	74.00	-26.45	peak
5	13468.000	27.78	21.91	49.69	74.00	-24.31	peak
6	17758.000	22.79	27.07	49.86	74.00	-24.14	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3V

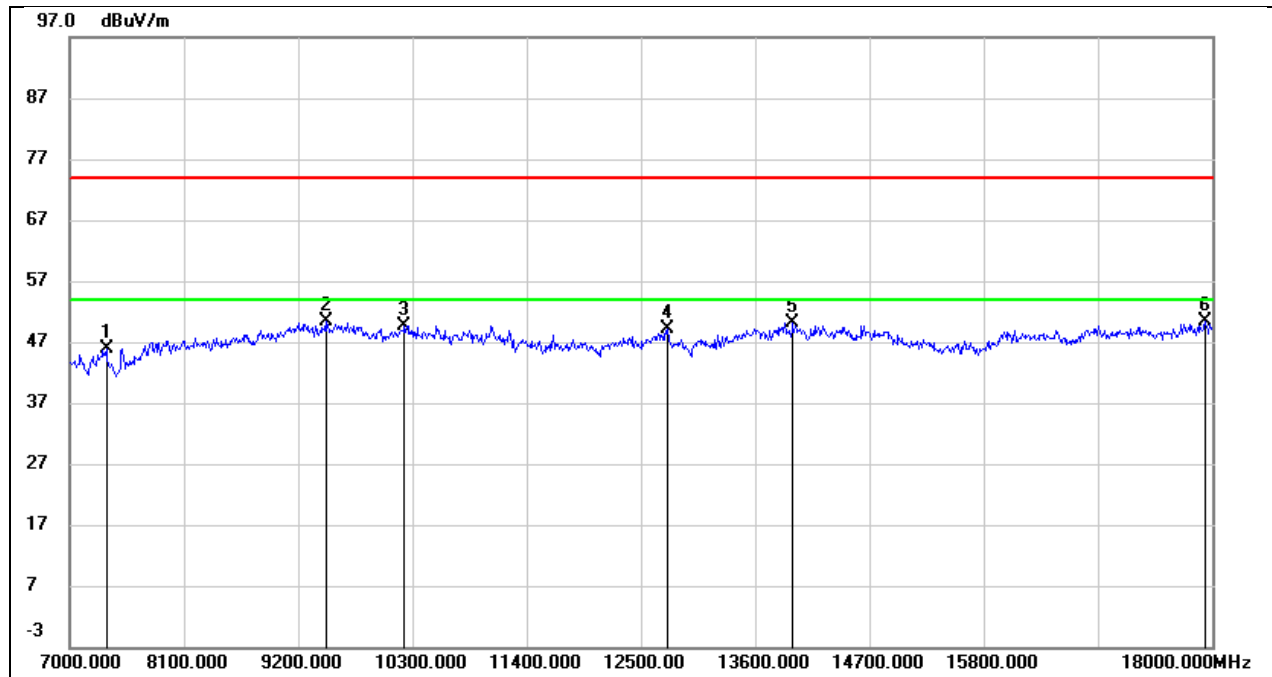


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.49	8.31	45.80	74.00	-28.20	peak
2	9464.000	37.74	12.65	50.39	74.00	-23.61	peak
3	10223.000	37.00	12.72	49.72	74.00	-24.28	peak
4	12753.000	30.44	18.73	49.17	74.00	-24.83	peak
5	13963.000	28.27	21.85	50.12	74.00	-23.88	peak
6	17934.000	23.46	27.00	50.46	74.00	-23.54	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3V

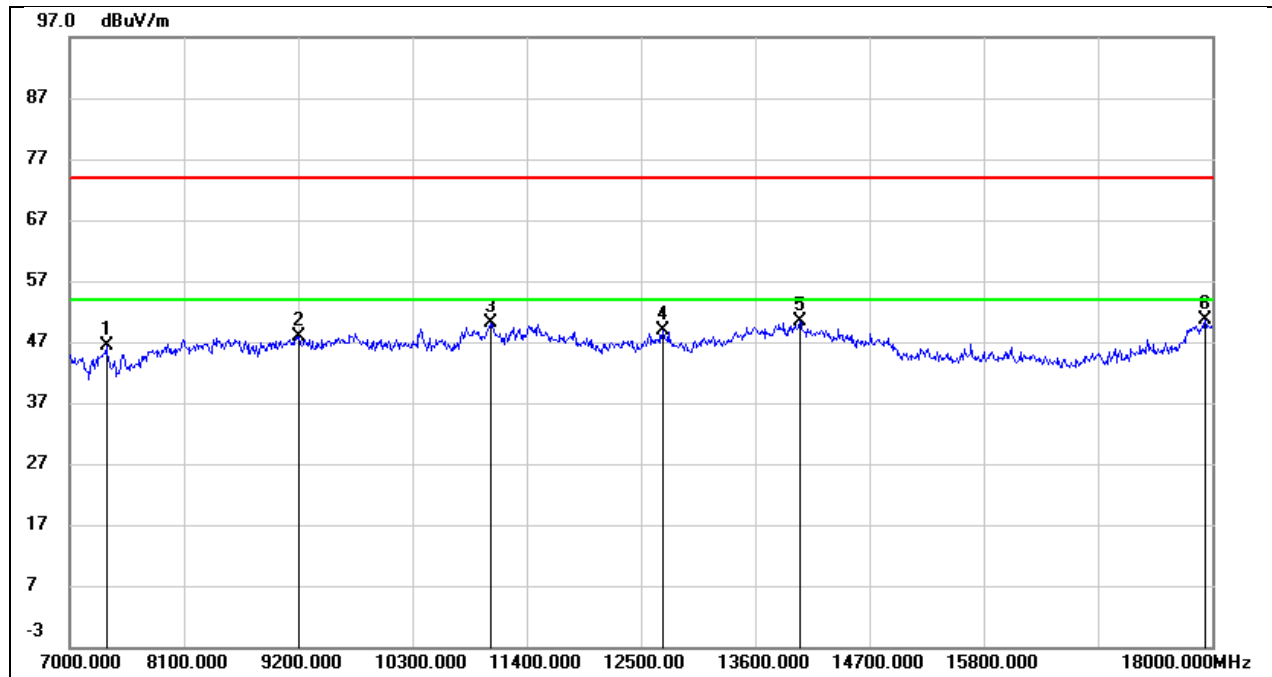


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	38.75	7.69	46.44	74.00	-27.56	peak
2	9211.000	36.18	11.59	47.77	74.00	-26.23	peak
3	11059.000	34.63	15.39	50.02	74.00	-23.98	peak
4	12709.000	29.40	19.60	49.00	74.00	-25.00	peak
5	14029.000	26.97	23.49	50.46	74.00	-23.54	peak
6	17934.000	21.74	28.91	50.65	74.00	-23.35	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 3.3V

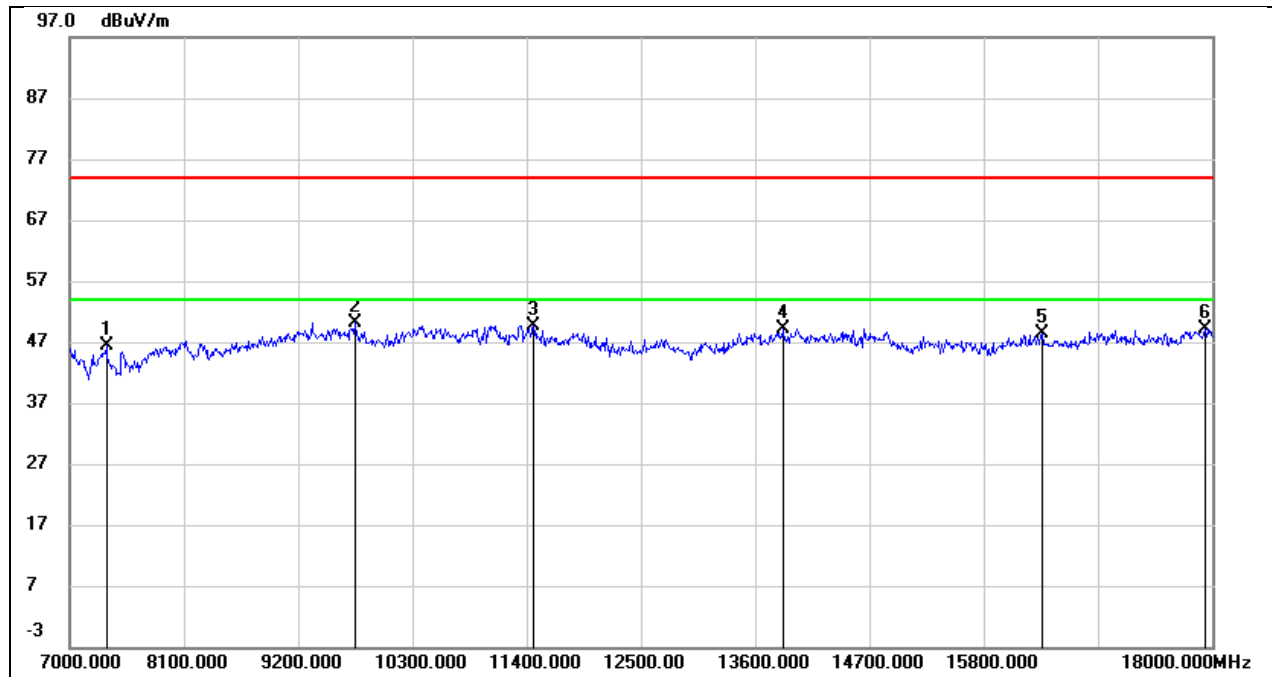


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	38.08	8.31	46.39	74.00	-27.61	peak
2	9750.000	36.81	13.37	50.18	74.00	-23.82	peak
3	11466.000	33.52	16.22	49.74	74.00	-24.26	peak
4	13864.000	27.73	21.43	49.16	74.00	-24.84	peak
5	16361.000	24.71	23.71	48.42	74.00	-25.58	peak
6	17934.000	22.18	27.00	49.18	74.00	-24.82	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3V

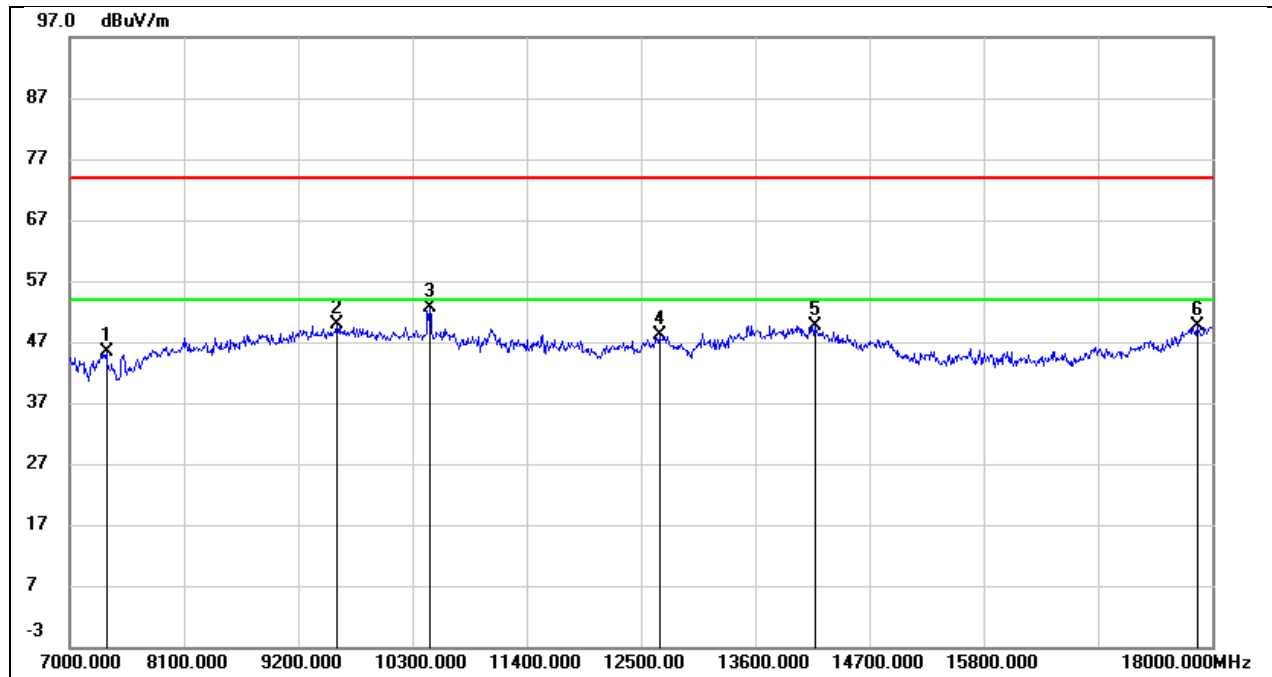


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.66	7.69	45.35	74.00	-28.65	peak
2	9574.000	36.48	13.31	49.79	74.00	-24.21	peak
3	10465.000	39.18	13.47	52.65	74.00	-21.35	peak
4	12676.000	28.57	19.48	48.05	74.00	-25.95	peak
5	14172.000	26.78	22.90	49.68	74.00	-24.32	peak
6	17857.000	21.44	28.08	49.52	74.00	-24.48	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 3.3V

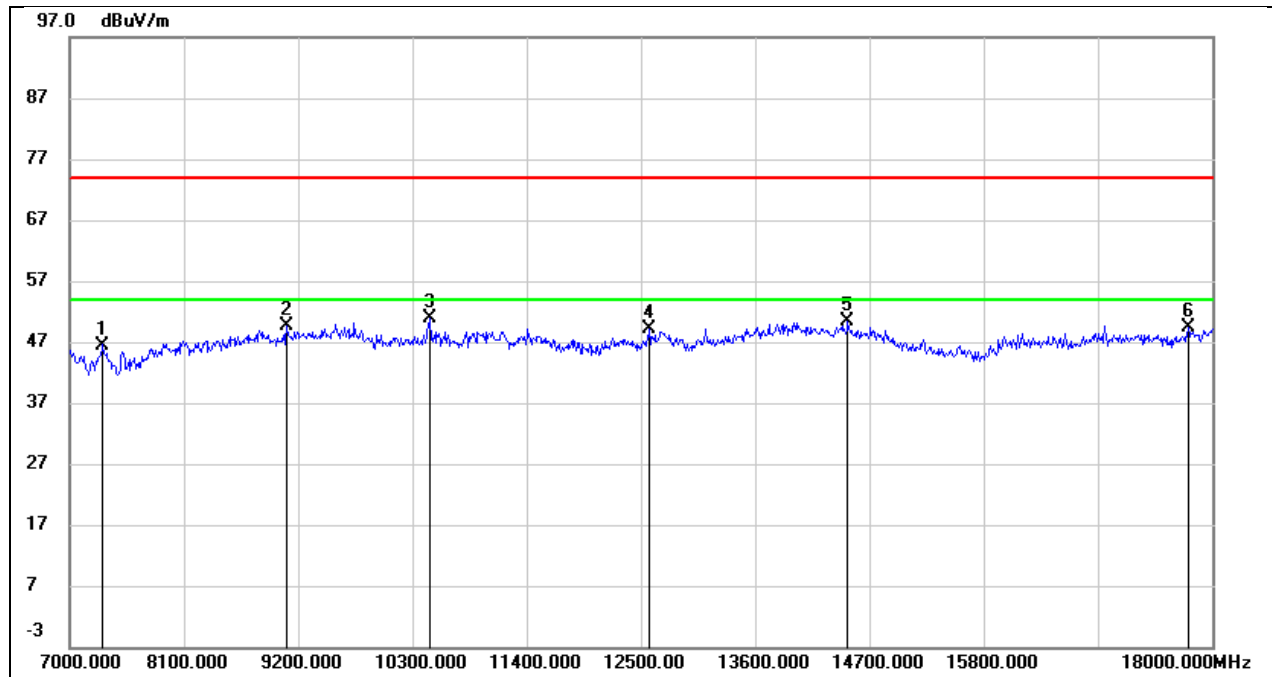


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	38.20	8.30	46.50	74.00	-27.50	peak
2	9090.000	38.12	11.39	49.51	74.00	-24.49	peak
3	10465.000	37.64	13.23	50.87	74.00	-23.13	peak
4	12577.000	30.86	18.18	49.04	74.00	-24.96	peak
5	14491.000	29.38	20.96	50.34	74.00	-23.66	peak
6	17769.000	23.49	26.00	49.49	74.00	-24.51	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3V

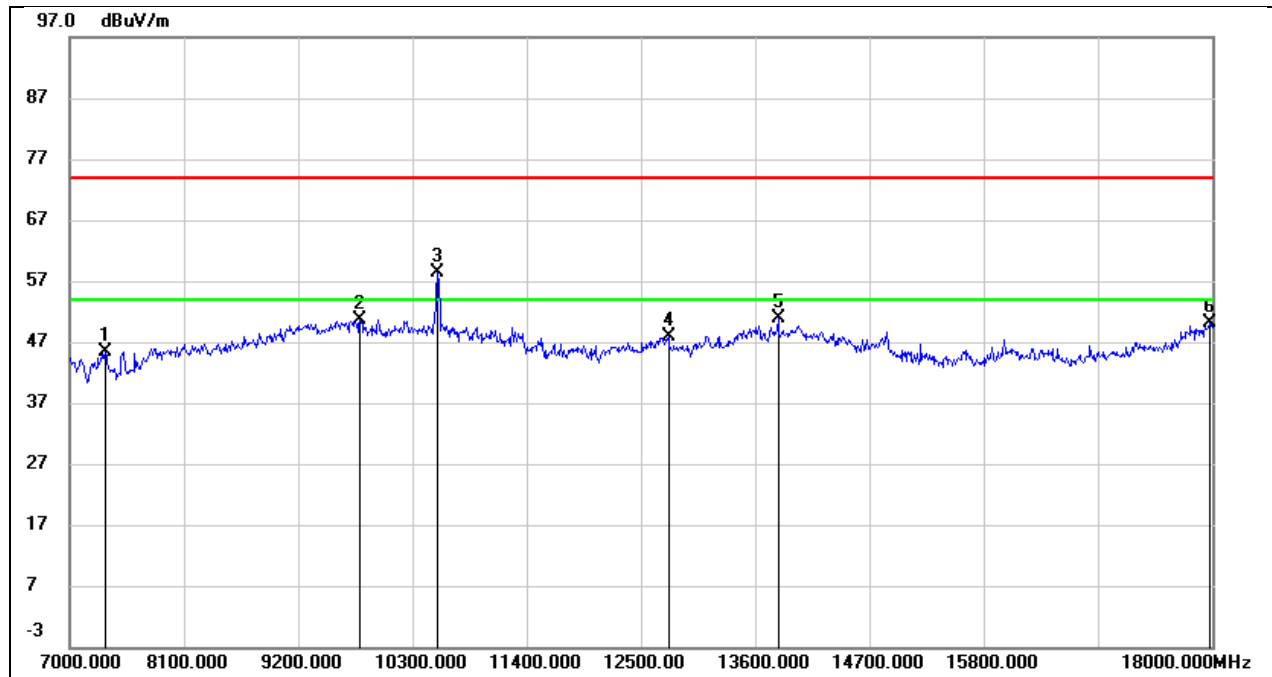


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.80	7.68	45.48	74.00	-28.52	peak
2	9794.000	36.88	13.78	50.66	74.00	-23.34	peak
3	10542.000	44.84	13.66	58.50	74.00	-15.50	peak
4	12764.000	28.15	19.83	47.98	74.00	-26.02	peak
5	13820.000	27.90	22.88	50.78	74.00	-23.22	peak
6	17978.000	20.64	29.38	50.02	74.00	-23.98	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 3.3V

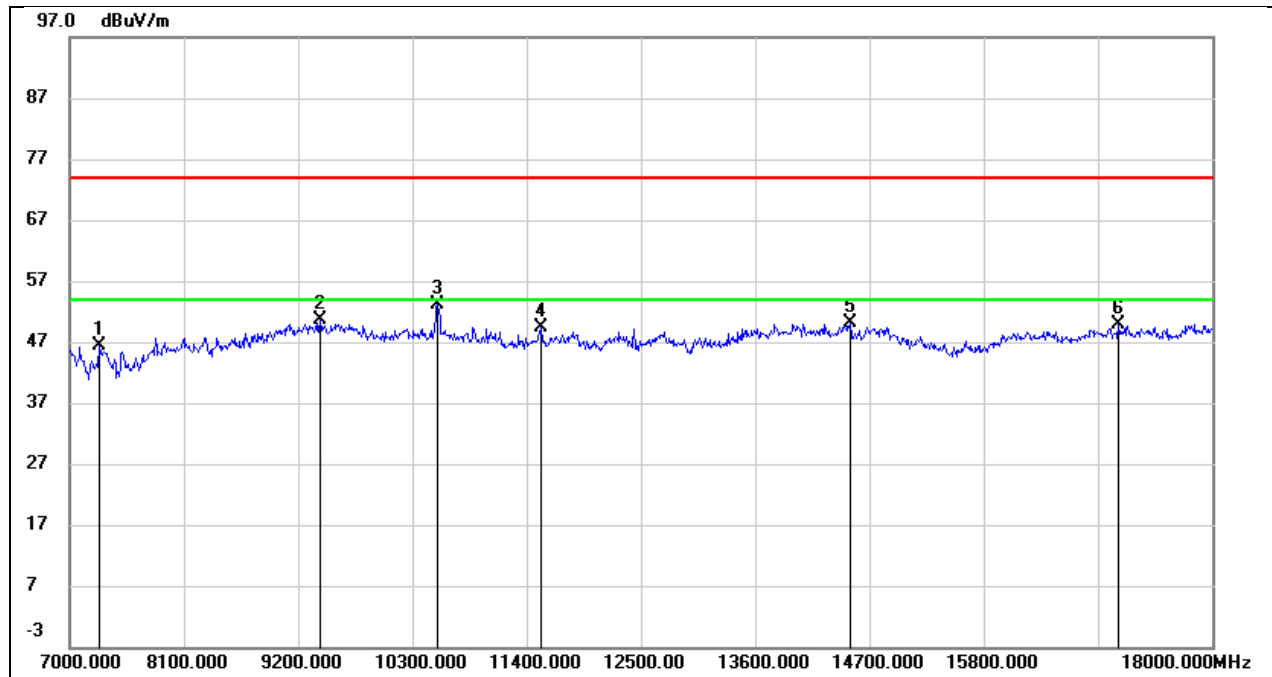


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	38.11	8.29	46.40	74.00	-27.60	peak
2	9409.000	38.32	12.34	50.66	74.00	-23.34	peak
3	10542.000	39.60	13.41	53.01	74.00	-20.99	peak
4	11543.000	32.79	16.47	49.26	74.00	-24.74	peak
5	14513.000	29.10	20.95	50.05	74.00	-23.95	peak
6	17098.000	25.34	24.66	50.00	74.00	-24.00	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3V

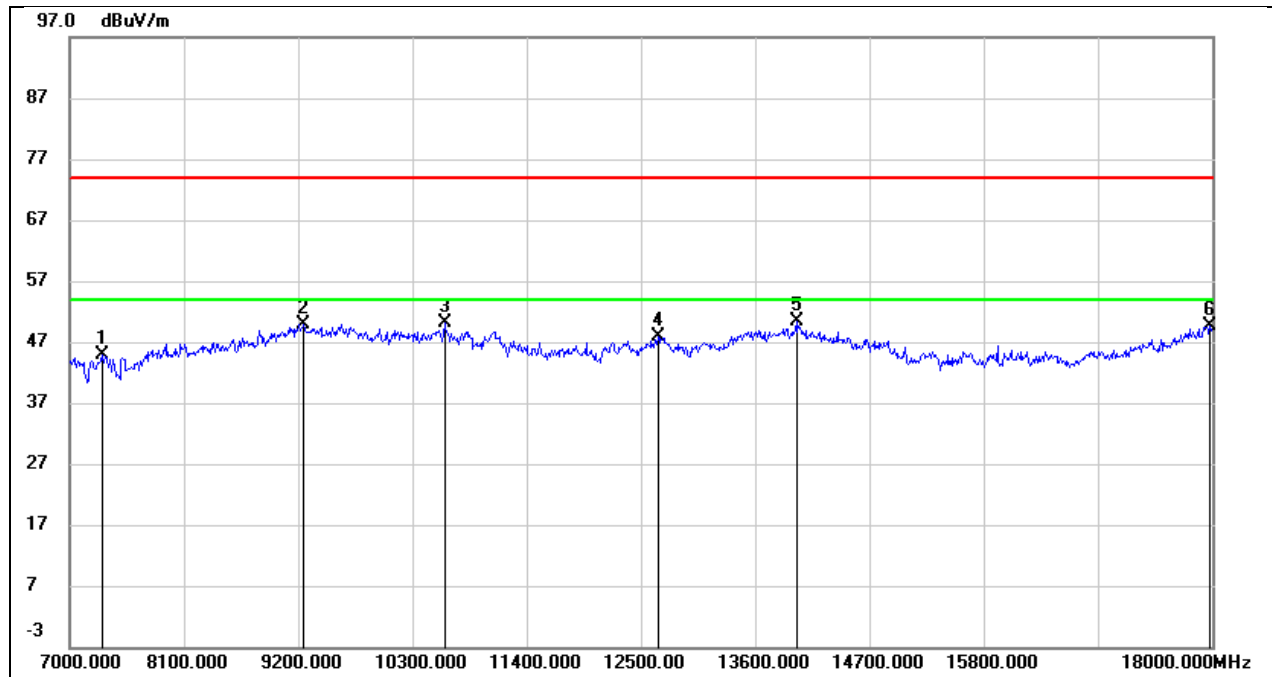


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.35	7.64	44.99	74.00	-29.01	peak
2	9255.000	38.16	11.74	49.90	74.00	-24.10	peak
3	10608.000	36.28	13.85	50.13	74.00	-23.87	peak
4	12665.000	28.34	19.42	47.76	74.00	-26.24	peak
5	13996.000	26.74	23.59	50.33	74.00	-23.67	peak
6	17978.000	20.13	29.38	49.51	74.00	-24.49	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 3.3V

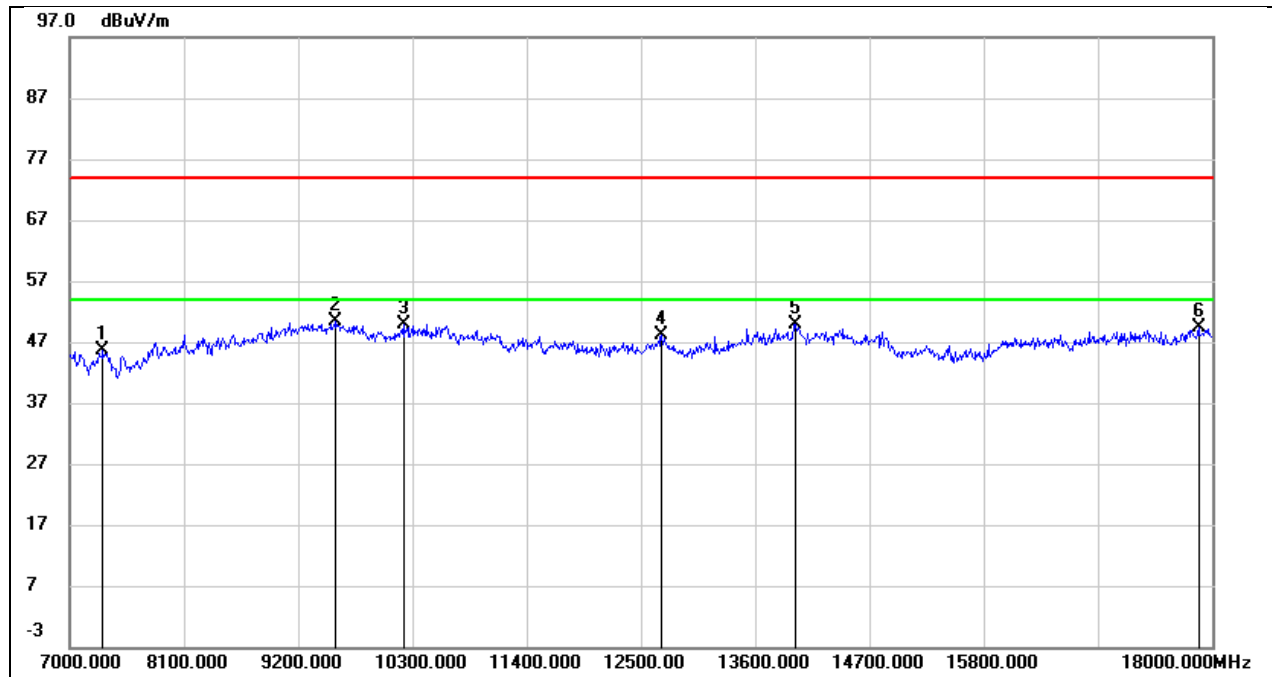


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	37.25	8.30	45.55	74.00	-28.45	peak
2	9563.000	37.32	13.14	50.46	74.00	-23.54	peak
3	10212.000	37.21	12.71	49.92	74.00	-24.08	peak
4	12698.000	29.51	18.54	48.05	74.00	-25.95	peak
5	13985.000	27.89	21.95	49.84	74.00	-24.16	peak
6	17868.000	22.69	26.59	49.28	74.00	-24.72	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3V

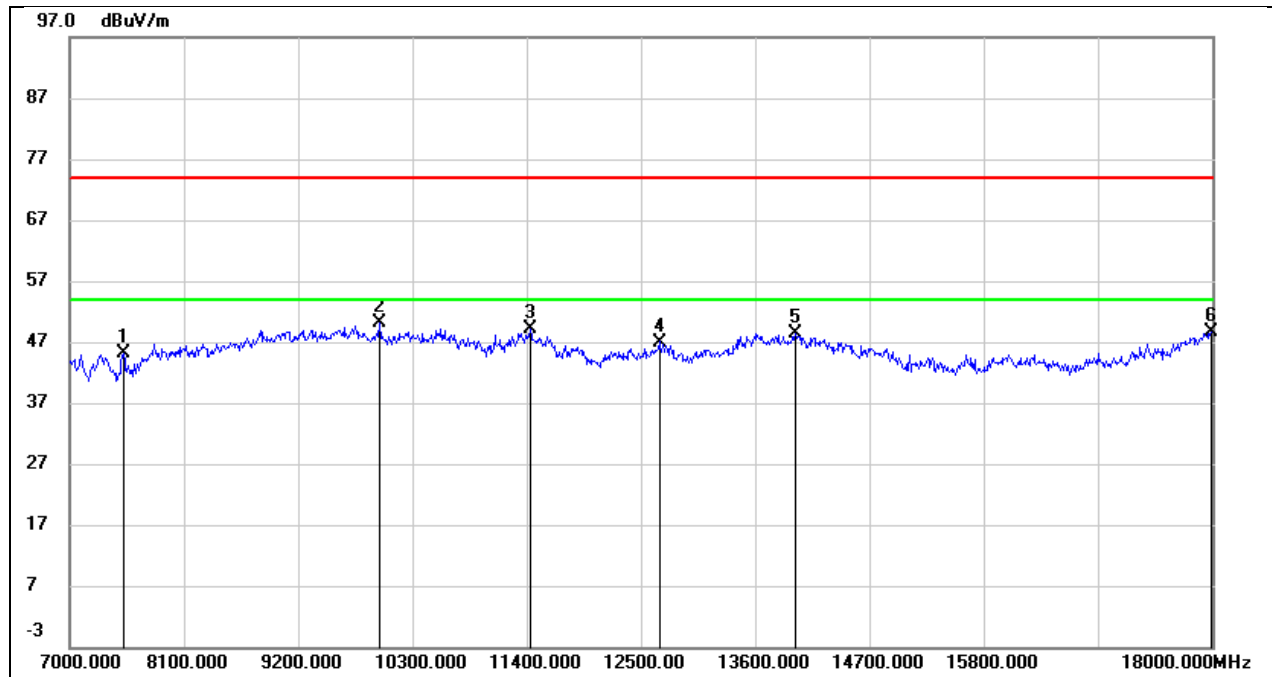


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7517.000	37.27	7.85	45.12	74.00	-28.88	peak
2	9981.000	36.68	13.39	50.07	74.00	-23.93	peak
3	11433.000	31.60	17.51	49.11	74.00	-24.89	peak
4	12676.000	27.52	19.48	47.00	74.00	-27.00	peak
5	13985.000	24.95	23.55	48.50	74.00	-25.50	peak
6	17989.000	19.06	29.49	48.55	74.00	-25.45	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 3.3V

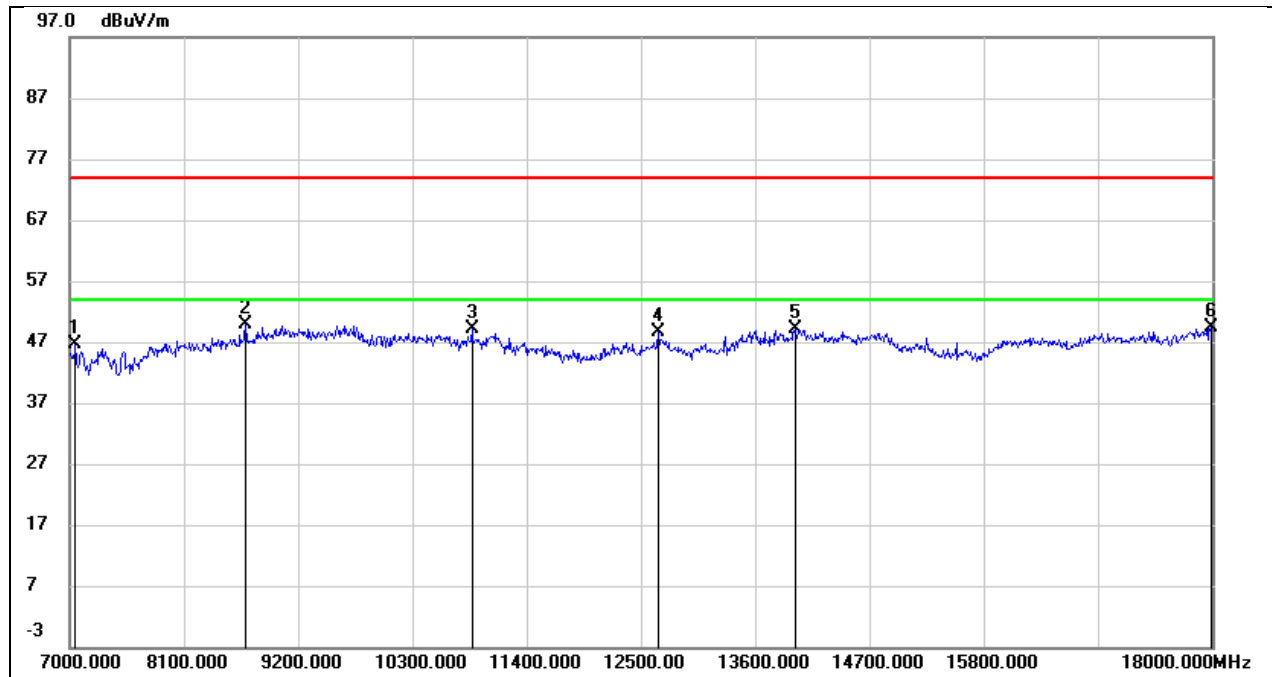


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7055.000	38.42	8.09	46.51	74.00	-27.49	peak
2	8694.000	40.03	9.79	49.82	74.00	-24.18	peak
3	10872.000	35.16	14.00	49.16	74.00	-24.84	peak
4	12665.000	30.11	18.42	48.53	74.00	-25.47	peak
5	13985.000	27.13	21.95	49.08	74.00	-24.92	peak
6	17989.000	22.06	27.33	49.39	74.00	-24.61	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 3.3V

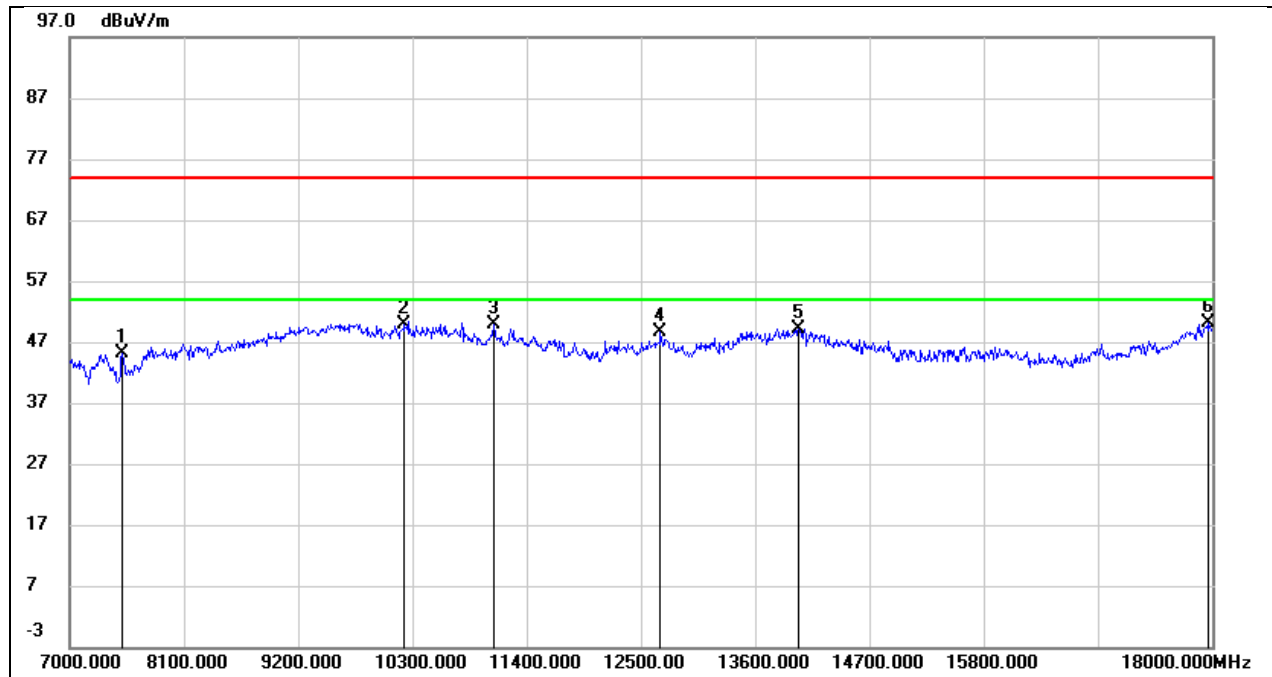


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.30	7.84	45.14	74.00	-28.86	peak
2	10223.000	36.77	13.19	49.96	74.00	-24.04	peak
3	11081.000	34.32	15.51	49.83	74.00	-24.17	peak
4	12687.000	29.00	19.52	48.52	74.00	-25.48	peak
5	14018.000	25.64	23.54	49.18	74.00	-24.82	peak
6	17956.000	21.03	29.14	50.17	74.00	-23.83	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 3.3V

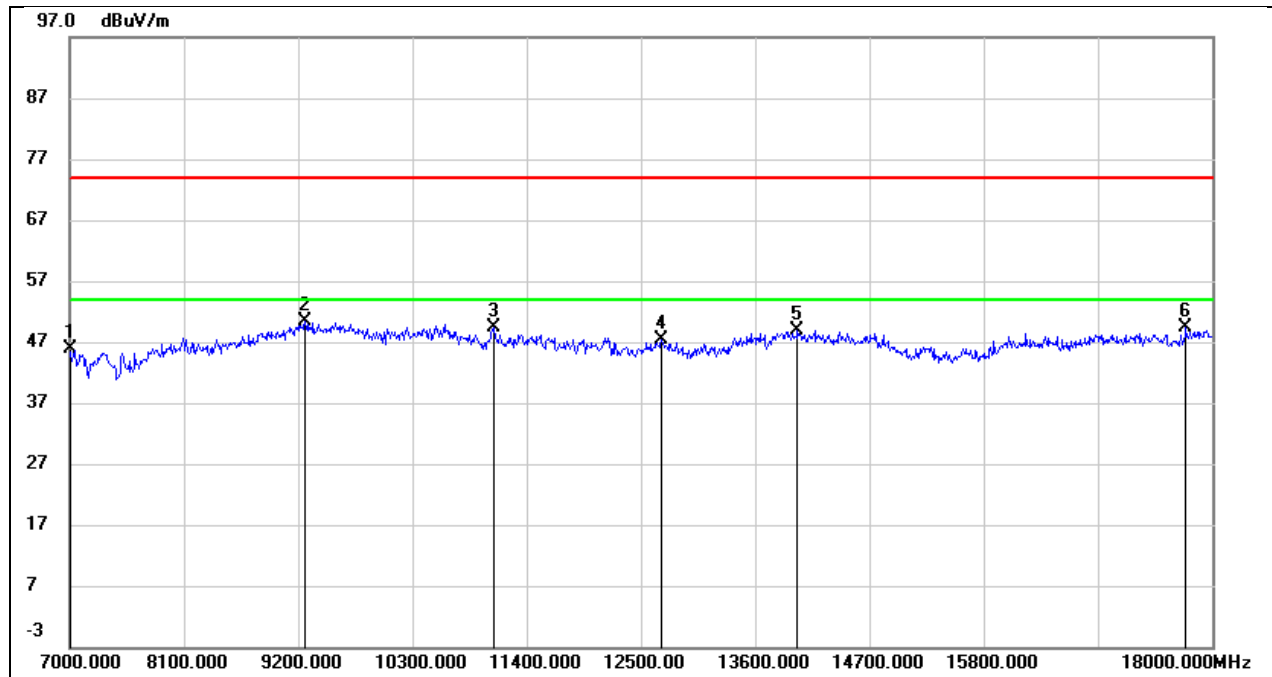


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7000.000	37.80	8.02	45.82	74.00	-28.18	peak
2	9266.000	38.43	11.96	50.39	74.00	-23.61	peak
3	11081.000	34.74	14.59	49.33	74.00	-24.67	peak
4	12698.000	28.79	18.54	47.33	74.00	-26.67	peak
5	14007.000	26.99	22.01	49.00	74.00	-25.00	peak
6	17747.000	23.43	25.89	49.32	74.00	-24.68	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.3V

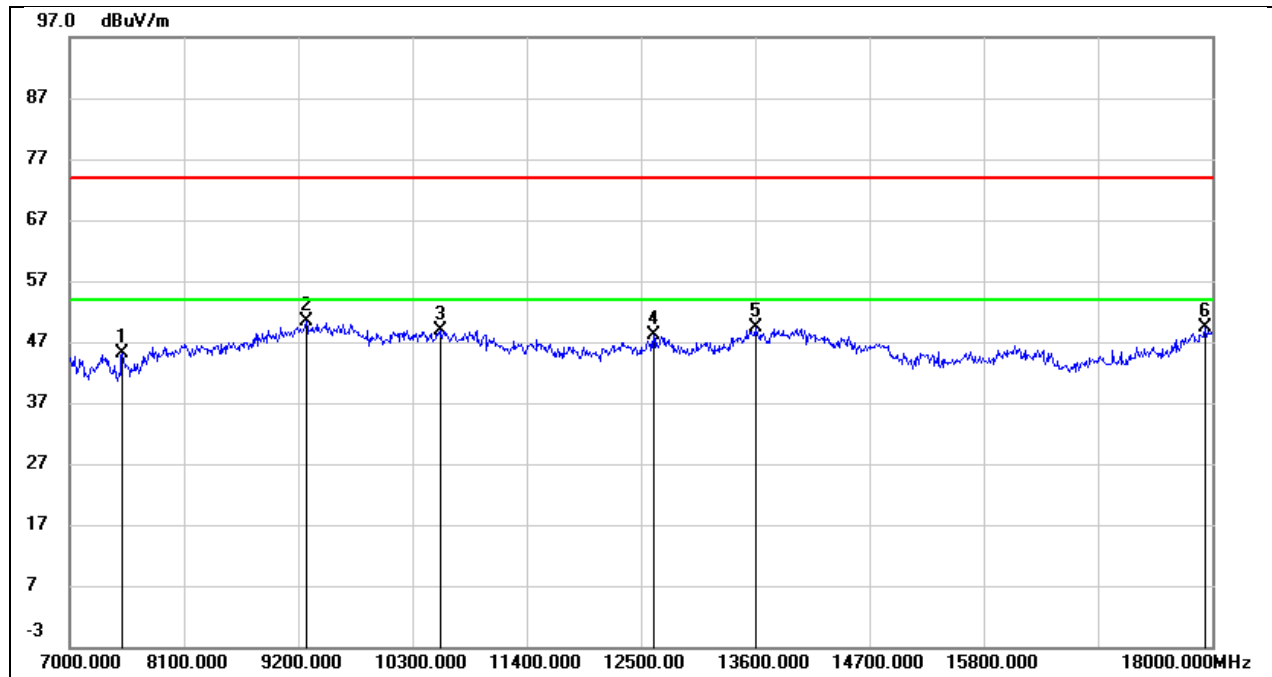


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.23	7.84	45.07	74.00	-28.93	peak
2	9277.000	38.52	11.81	50.33	74.00	-23.67	peak
3	10575.000	35.07	13.75	48.82	74.00	-25.18	peak
4	12621.000	28.87	19.24	48.11	74.00	-25.89	peak
5	13600.000	27.12	22.22	49.34	74.00	-24.66	peak
6	17934.000	20.52	28.91	49.43	74.00	-24.57	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 3.3V

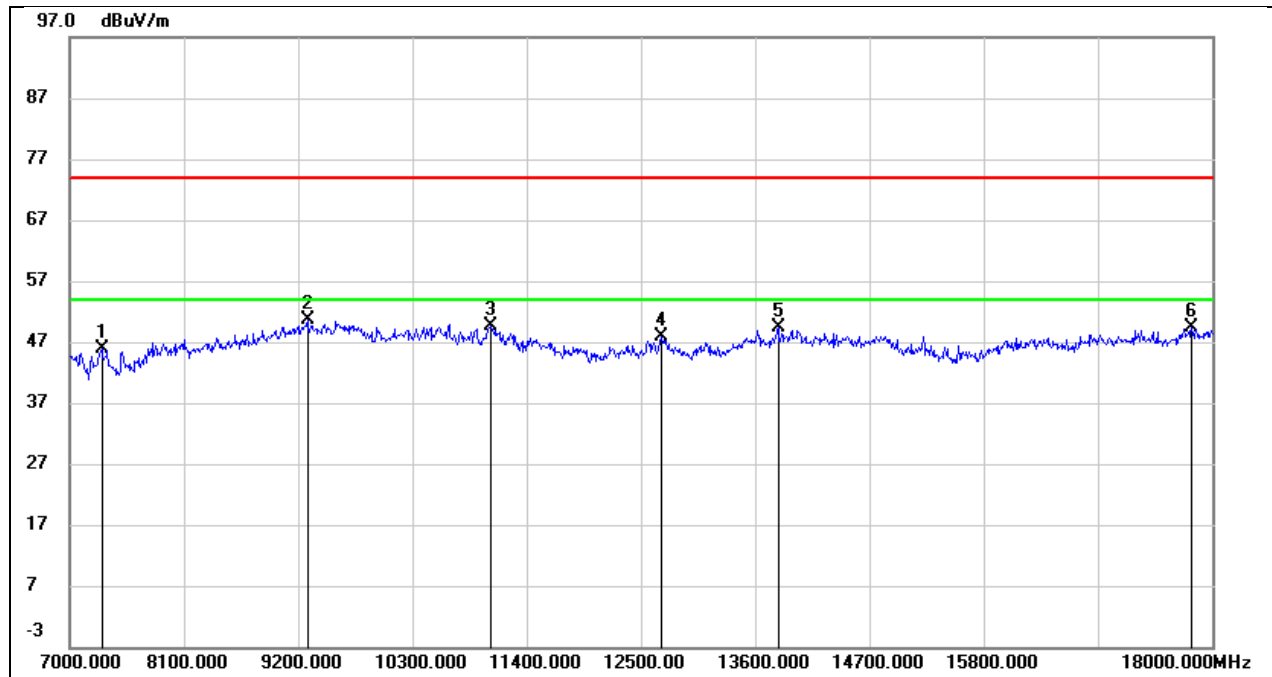


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.58	8.29	45.87	74.00	-28.13	peak
2	9288.000	38.64	12.01	50.65	74.00	-23.35	peak
3	11048.000	35.15	14.46	49.61	74.00	-24.39	peak
4	12698.000	29.22	18.54	47.76	74.00	-26.24	peak
5	13820.000	28.18	21.24	49.42	74.00	-24.58	peak
6	17802.000	23.13	26.18	49.31	74.00	-24.69	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 3.3V

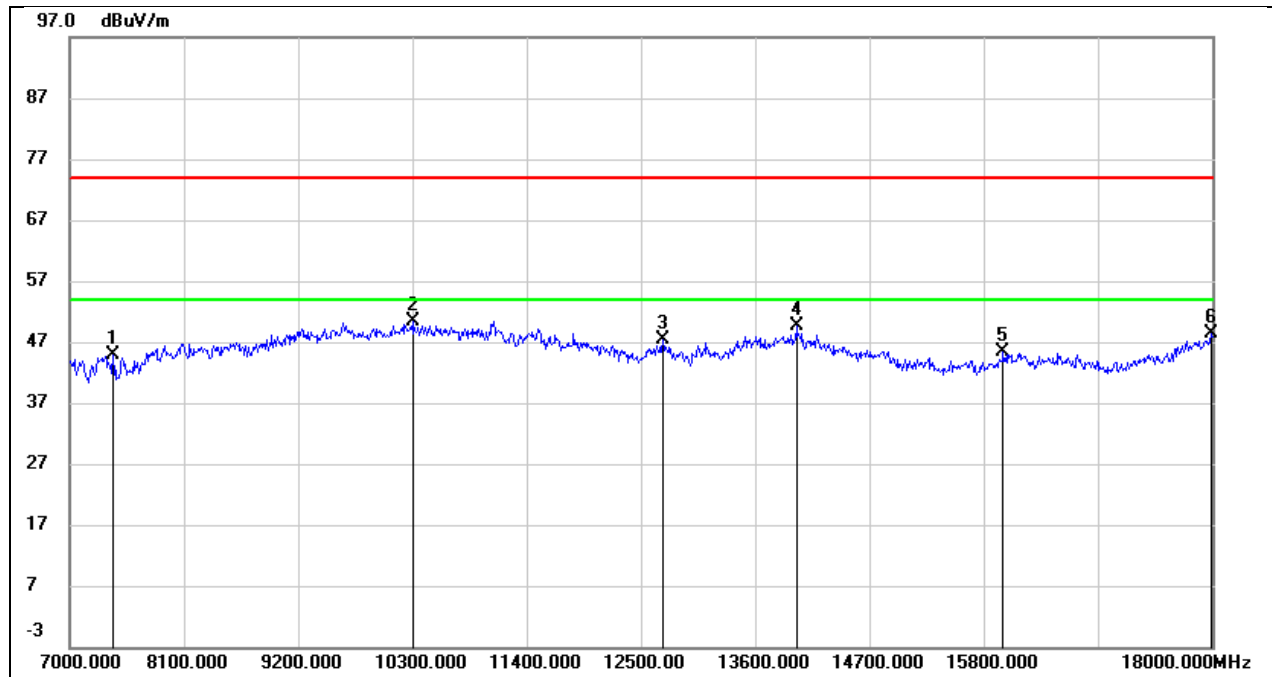


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7418.000	37.10	7.76	44.86	74.00	-29.14	peak
2	10311.000	37.13	13.28	50.41	74.00	-23.59	peak
3	12709.000	27.66	19.60	47.26	74.00	-26.74	peak
4	13996.000	26.00	23.59	49.59	74.00	-24.41	peak
5	15987.000	25.01	20.41	45.42	74.00	-28.58	peak
6	17989.000	18.92	29.49	48.41	74.00	-25.59	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 3.3V

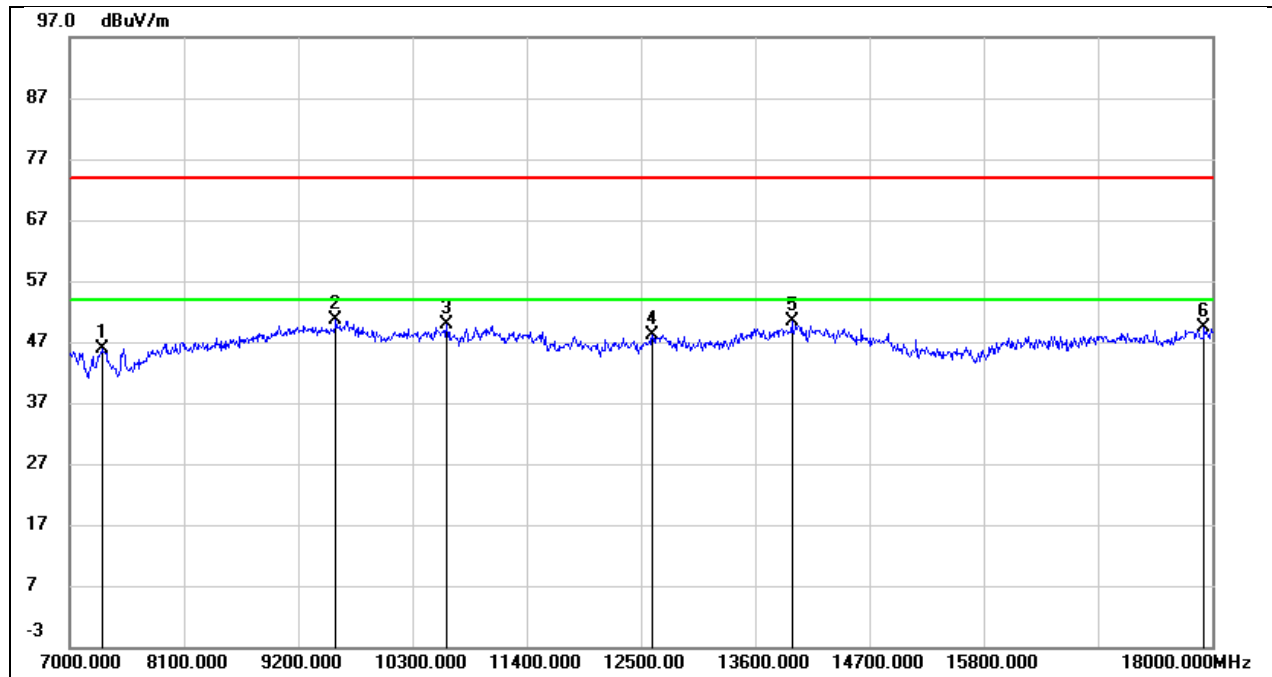


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.69	8.29	45.98	74.00	-28.02	peak
2	9563.000	37.42	13.14	50.56	74.00	-23.44	peak
3	10630.000	36.33	13.57	49.90	74.00	-24.10	peak
4	12610.000	29.90	18.24	48.14	74.00	-25.86	peak
5	13952.000	28.57	21.81	50.38	74.00	-23.62	peak
6	17923.000	22.40	26.92	49.32	74.00	-24.68	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3V

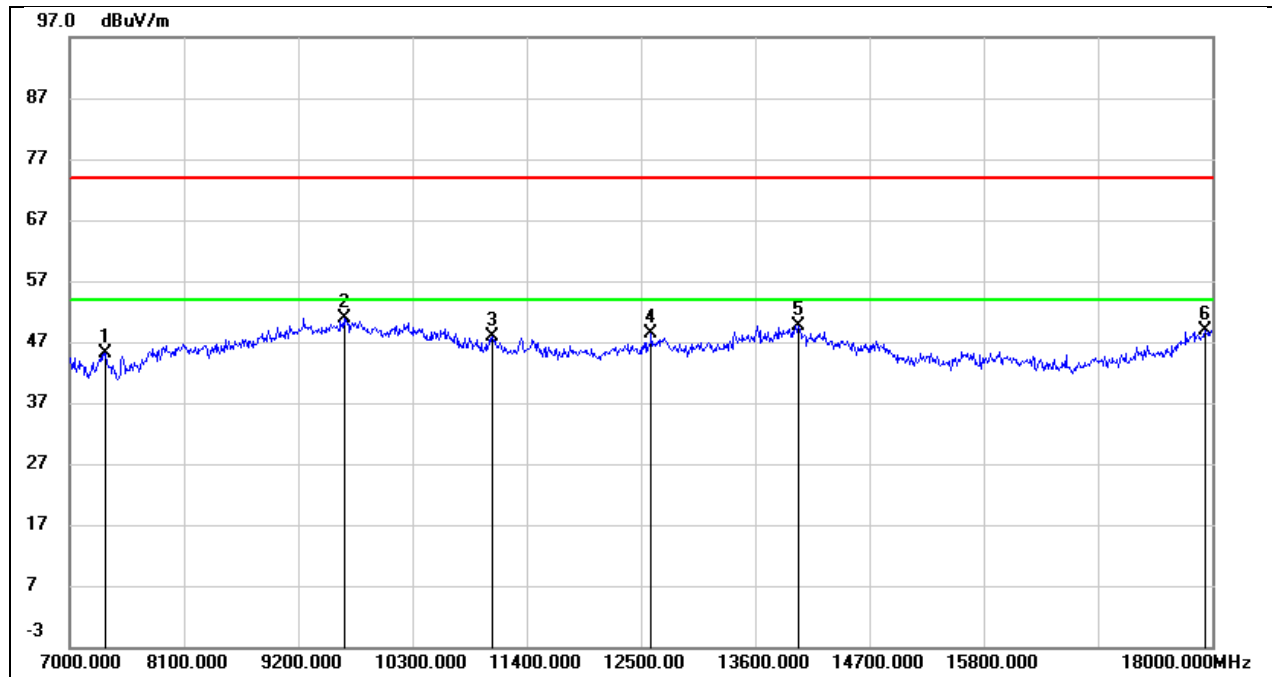


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.54	7.68	45.22	74.00	-28.78	peak
2	9640.000	37.45	13.53	50.98	74.00	-23.02	peak
3	11070.000	32.34	15.44	47.78	74.00	-26.22	peak
4	12599.000	29.10	19.16	48.26	74.00	-25.74	peak
5	14018.000	26.13	23.54	49.67	74.00	-24.33	peak
6	17934.000	20.08	28.91	48.99	74.00	-25.01	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 3.3V

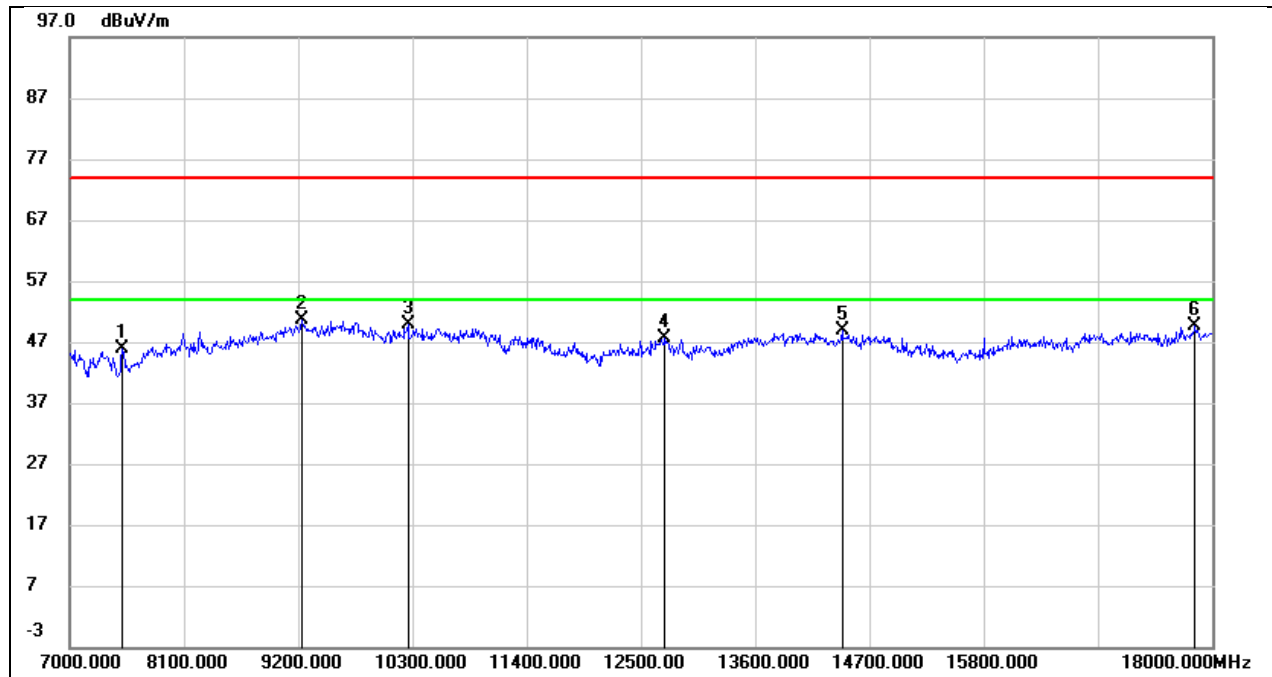


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.62	8.34	45.96	74.00	-28.04	peak
2	9233.000	38.64	11.88	50.52	74.00	-23.48	peak
3	10256.000	37.18	12.79	49.97	74.00	-24.03	peak
4	12731.000	28.89	18.66	47.55	74.00	-26.45	peak
5	14436.000	28.01	20.98	48.99	74.00	-25.01	peak
6	17835.000	23.25	26.38	49.63	74.00	-24.37	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3V

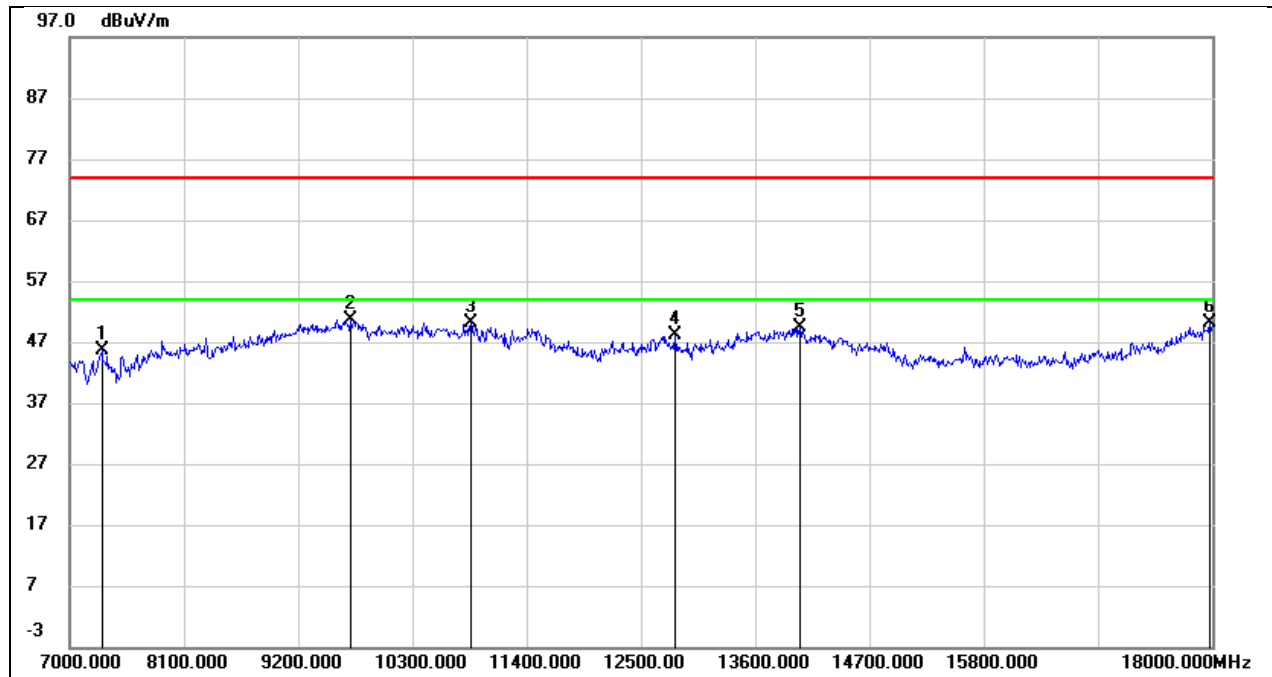


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	38.05	7.64	45.69	74.00	-28.31	peak
2	9706.000	37.06	13.65	50.71	74.00	-23.29	peak
3	10861.000	35.53	14.61	50.14	74.00	-23.86	peak
4	12830.000	28.10	19.99	48.09	74.00	-25.91	peak
5	14029.000	25.98	23.49	49.47	74.00	-24.53	peak
6	17978.000	20.68	29.38	50.06	74.00	-23.94	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 3.3V

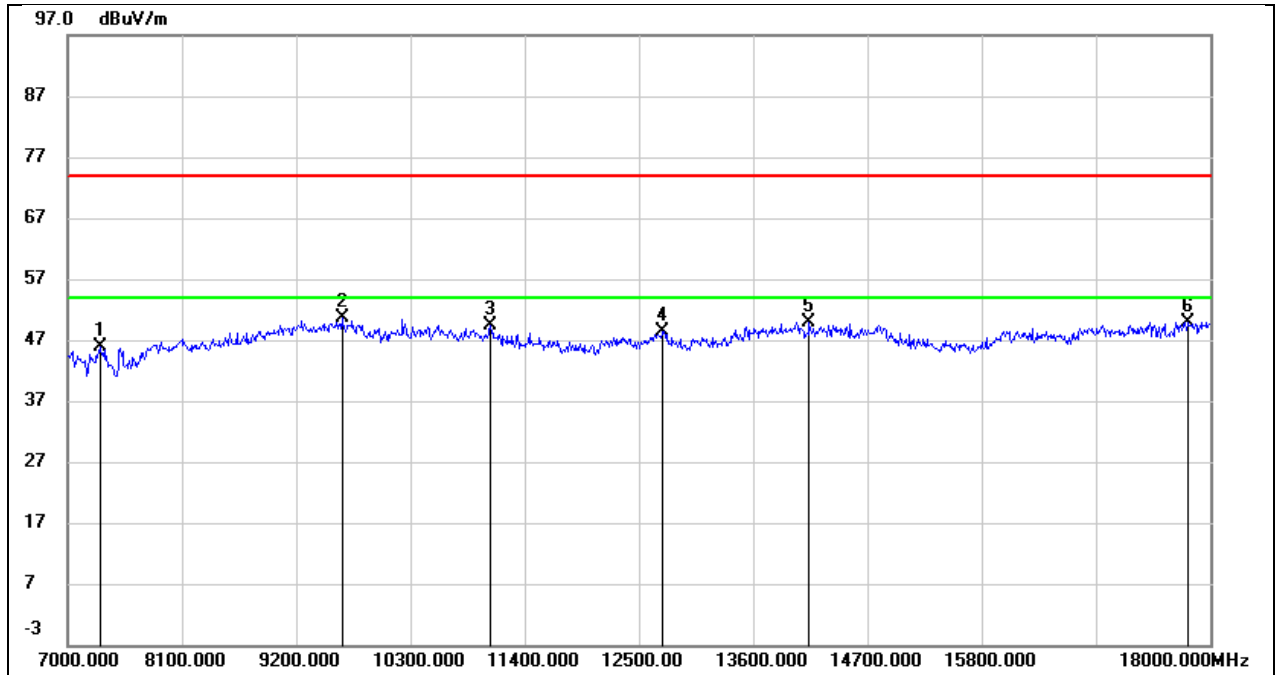


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.49	8.29	45.78	74.00	-28.22	peak
2	9640.000	37.36	13.33	50.69	74.00	-23.31	peak
3	11070.000	34.72	14.55	49.27	74.00	-24.73	peak
4	12731.000	29.69	18.66	48.35	74.00	-25.65	peak
5	14139.000	28.18	21.81	49.99	74.00	-24.01	peak
6	17791.000	23.88	26.11	49.99	74.00	-24.01	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3V

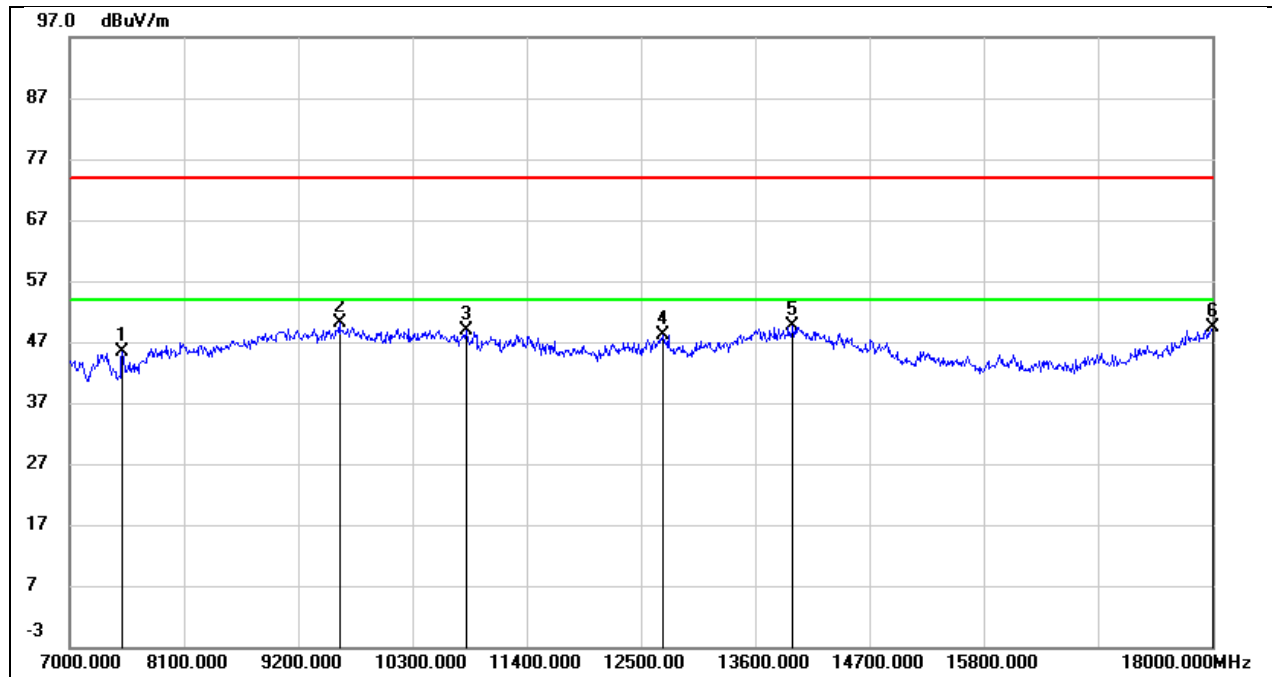


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.57	7.84	45.41	74.00	-28.59	peak
2	9596.000	36.63	13.44	50.07	74.00	-23.93	peak
3	10817.000	34.41	14.48	48.89	74.00	-25.11	peak
4	12709.000	28.47	19.60	48.07	74.00	-25.93	peak
5	13963.000	26.23	23.46	49.69	74.00	-24.31	peak
6	18000.000	19.80	29.61	49.41	74.00	-24.59	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 3.3V

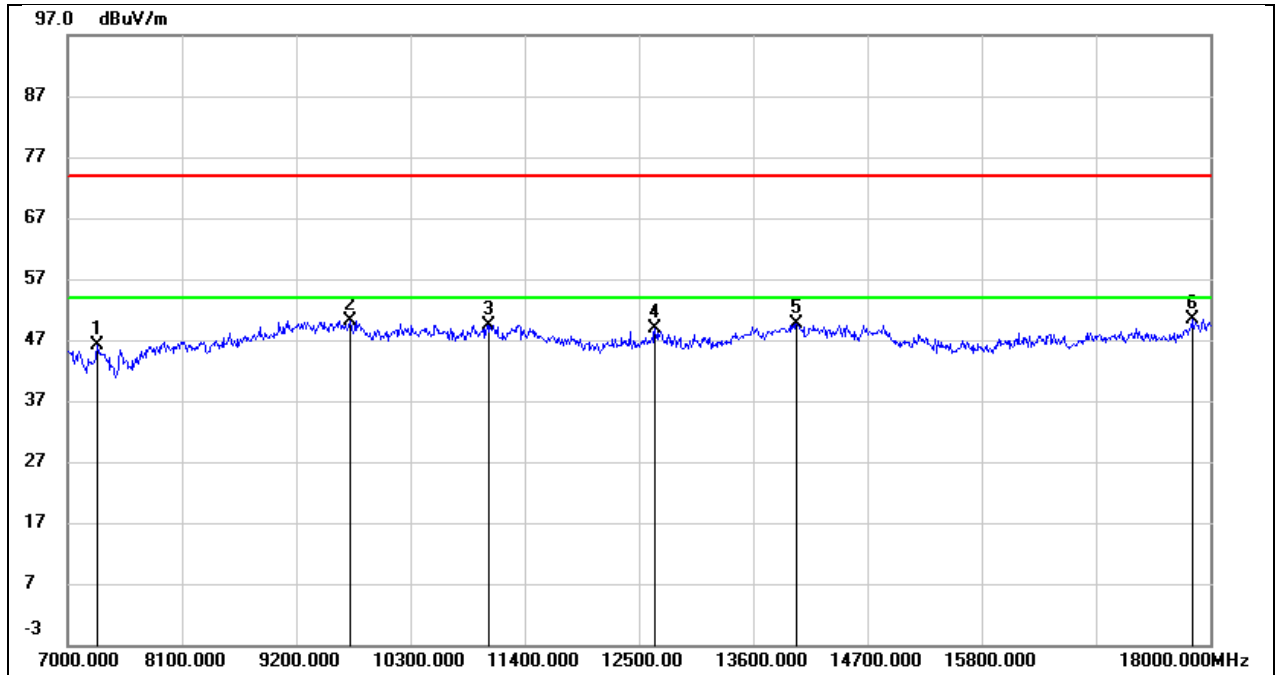


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	37.87	8.29	46.16	74.00	-27.84	peak
2	9717.000	36.80	13.35	50.15	74.00	-23.85	peak
3	11048.000	35.00	14.46	49.46	74.00	-24.54	peak
4	12654.000	30.51	18.39	48.90	74.00	-25.10	peak
5	14018.000	27.75	21.99	49.74	74.00	-24.26	peak
6	17824.000	24.11	26.31	50.42	74.00	-23.58	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3V

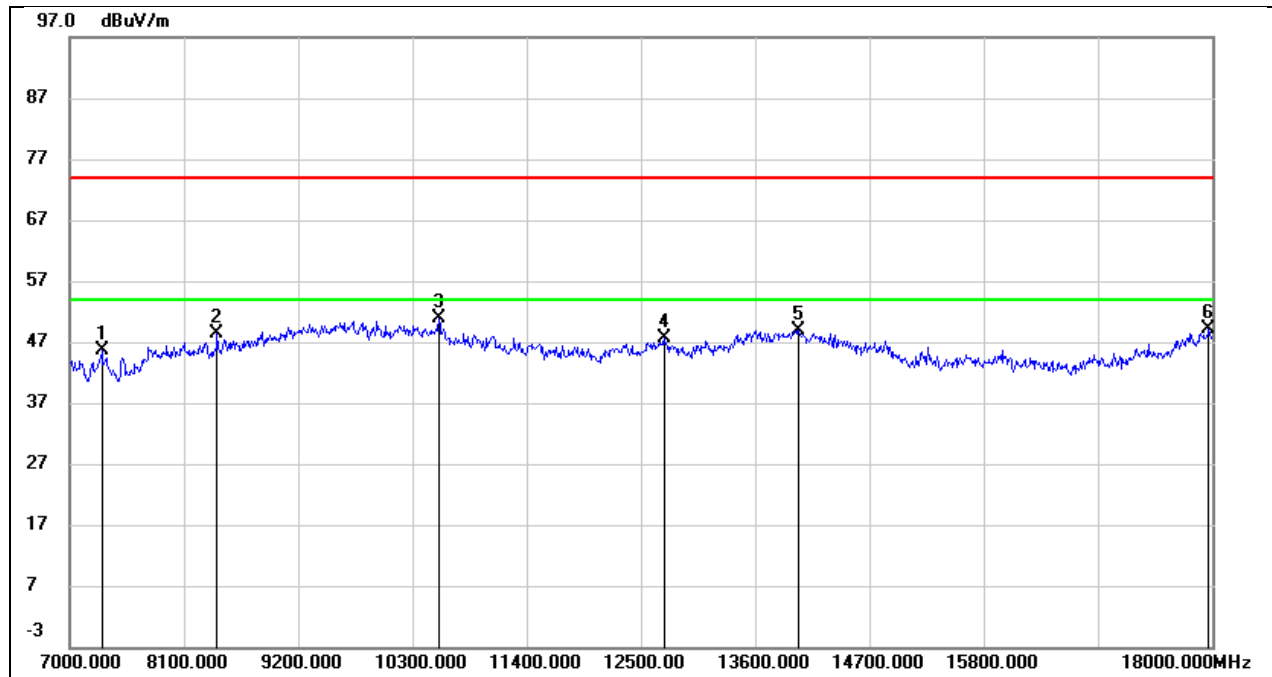


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	38.05	7.64	45.69	74.00	-28.31	peak
2	8419.000	39.69	8.57	48.26	74.00	-25.74	peak
3	10553.000	37.11	13.70	50.81	74.00	-23.19	peak
4	12720.000	27.86	19.65	47.51	74.00	-26.49	peak
5	14018.000	25.44	23.54	48.98	74.00	-25.02	peak
6	17967.000	19.81	29.26	49.07	74.00	-24.93	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 3.3V

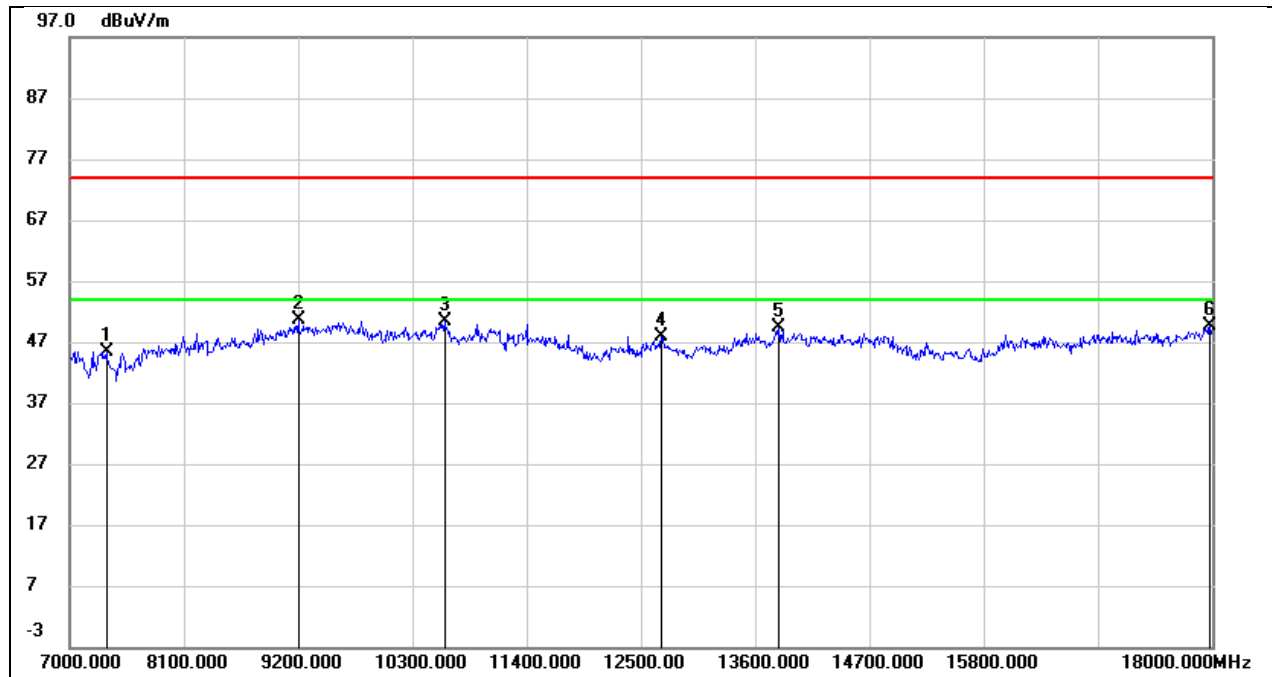


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.14	8.31	45.45	74.00	-28.55	peak
2	9200.000	38.72	11.80	50.52	74.00	-23.48	peak
3	10608.000	36.93	13.52	50.45	74.00	-23.55	peak
4	12698.000	29.40	18.54	47.94	74.00	-26.06	peak
5	13831.000	28.01	21.30	49.31	74.00	-24.69	peak
6	17978.000	22.31	27.28	49.59	74.00	-24.41	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3V

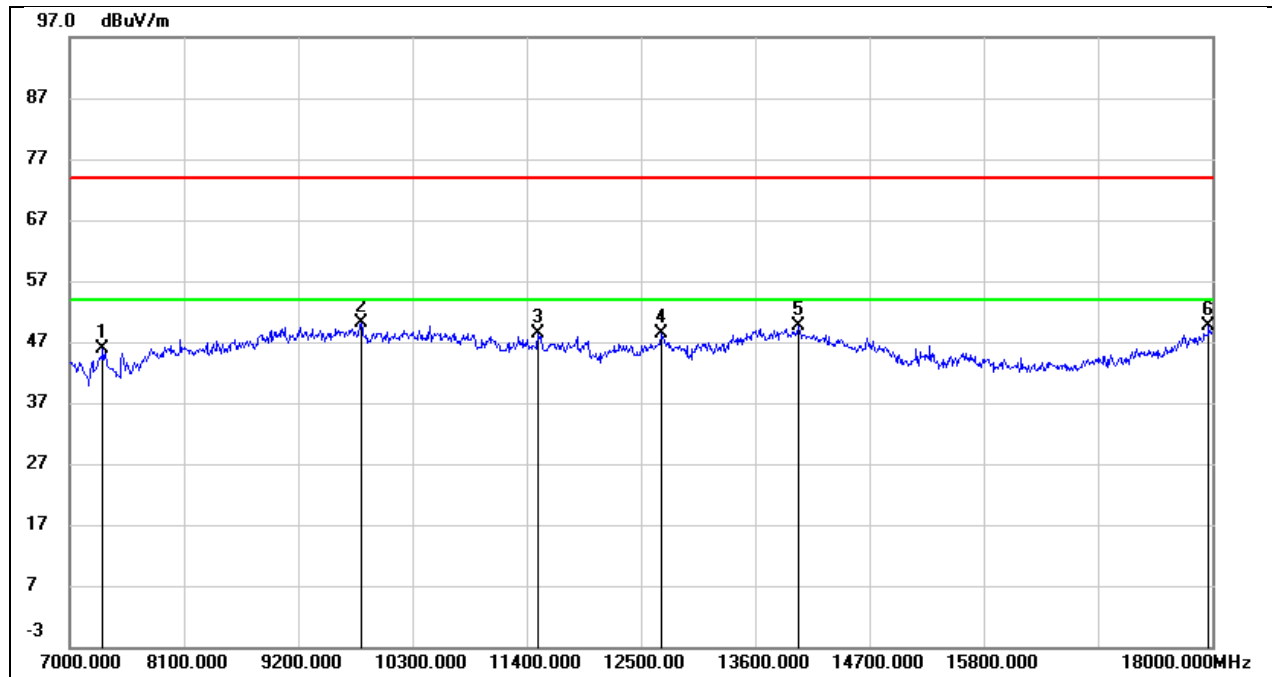


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	38.22	7.66	45.88	74.00	-28.12	peak
2	9805.000	36.26	13.80	50.06	74.00	-23.94	peak
3	11510.000	30.47	17.86	48.33	74.00	-25.67	peak
4	12698.000	28.71	19.56	48.27	74.00	-25.73	peak
5	14018.000	26.07	23.54	49.61	74.00	-24.39	peak
6	17967.000	20.44	29.26	49.70	74.00	-24.30	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.3V

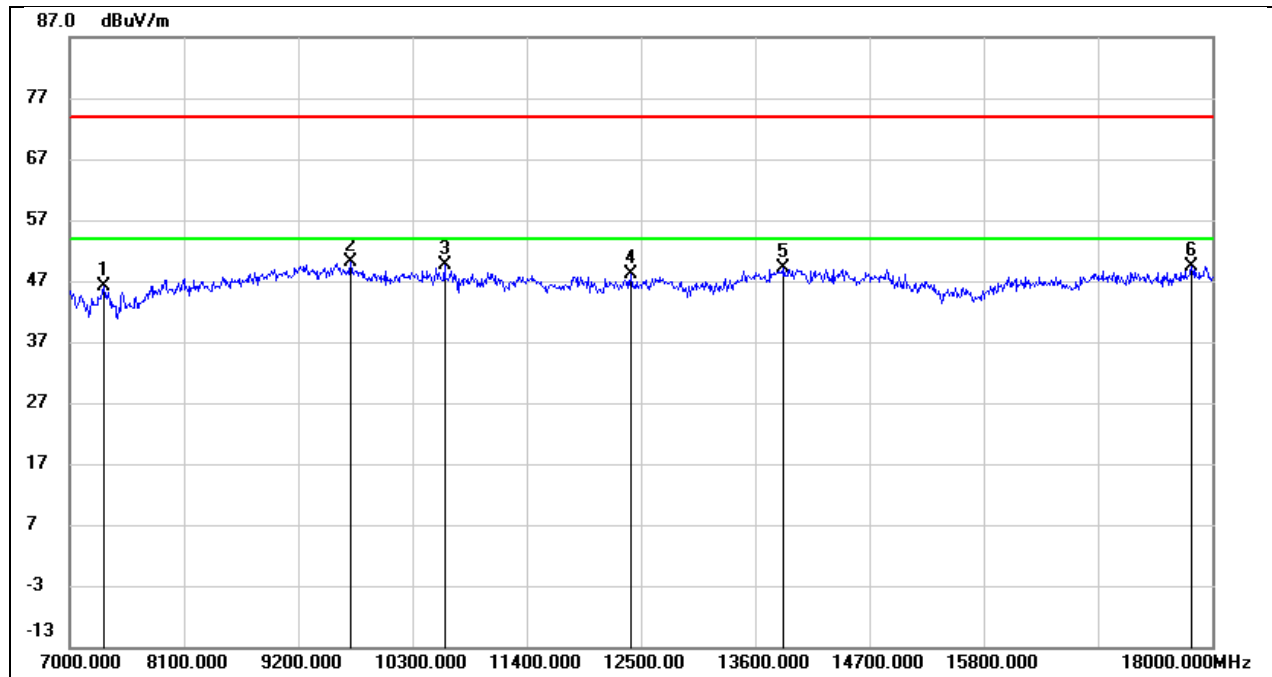


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	37.72	8.30	46.02	74.00	-27.98	peak
2	9706.000	36.83	13.36	50.19	74.00	-23.81	peak
3	10608.000	36.03	13.52	49.55	74.00	-24.45	peak
4	12401.000	30.12	18.04	48.16	74.00	-25.84	peak
5	13875.000	27.56	21.49	49.05	74.00	-24.95	peak
6	17802.000	23.20	26.18	49.38	74.00	-24.62	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3V

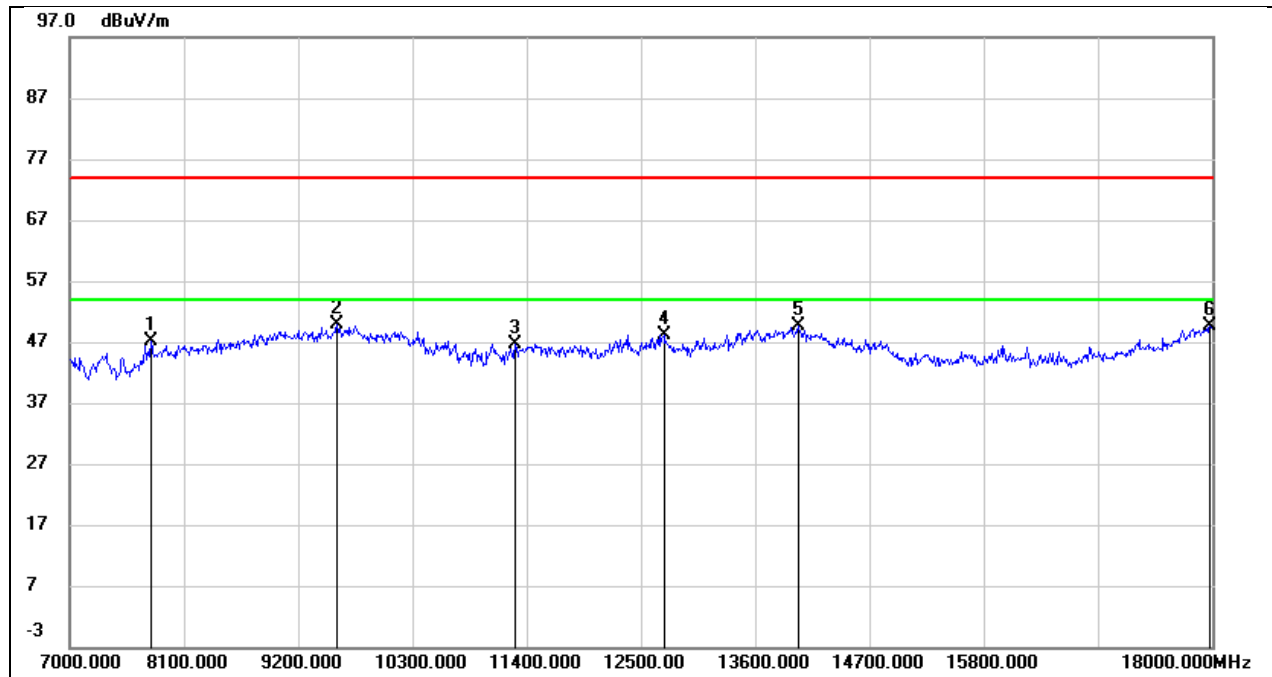


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7781.000	39.10	7.99	47.09	74.00	-26.91	peak
2	9574.000	36.59	13.31	49.90	74.00	-24.10	peak
3	11290.000	30.03	16.70	46.73	74.00	-27.27	peak
4	12720.000	28.44	19.65	48.09	74.00	-25.91	peak
5	14018.000	26.01	23.54	49.55	74.00	-24.45	peak
6	17978.000	20.13	29.38	49.51	74.00	-24.49	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.3V

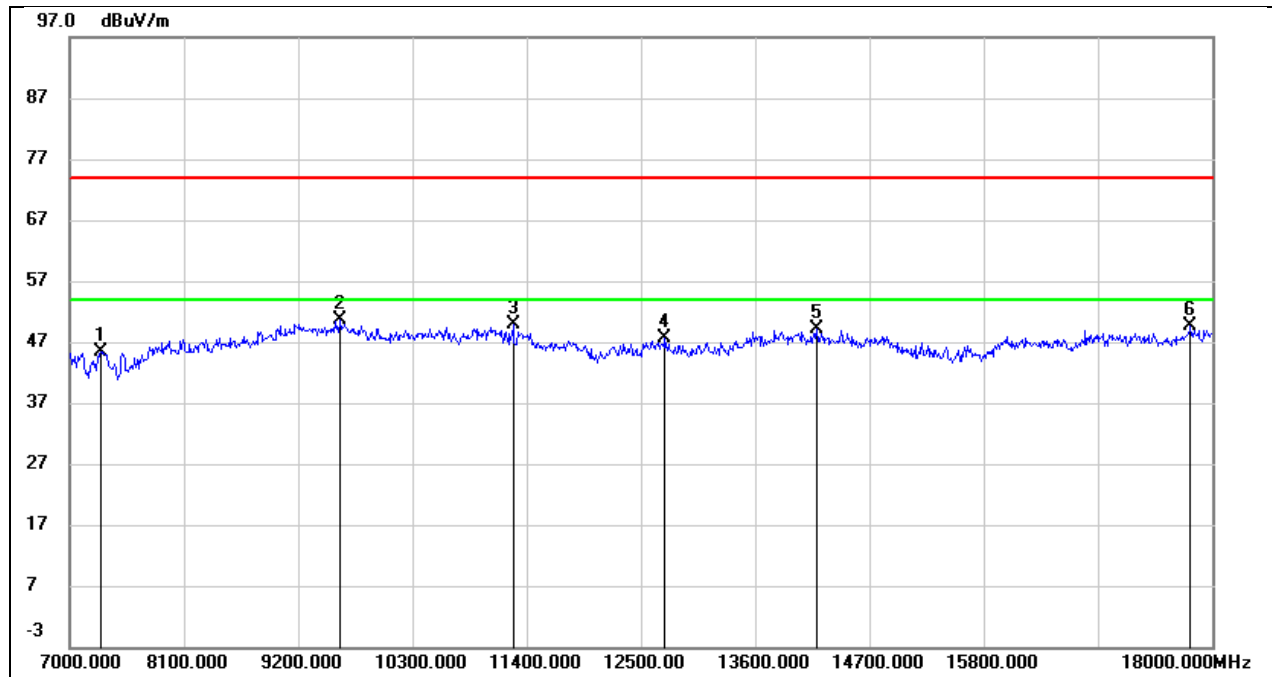


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.02	8.30	45.32	74.00	-28.68	peak
2	9607.000	37.36	13.33	50.69	74.00	-23.31	peak
3	11268.000	34.40	15.39	49.79	74.00	-24.21	peak
4	12731.000	29.03	18.66	47.69	74.00	-26.31	peak
5	14194.000	27.31	21.71	49.02	74.00	-24.98	peak
6	17791.000	23.50	26.11	49.61	74.00	-24.39	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.3V

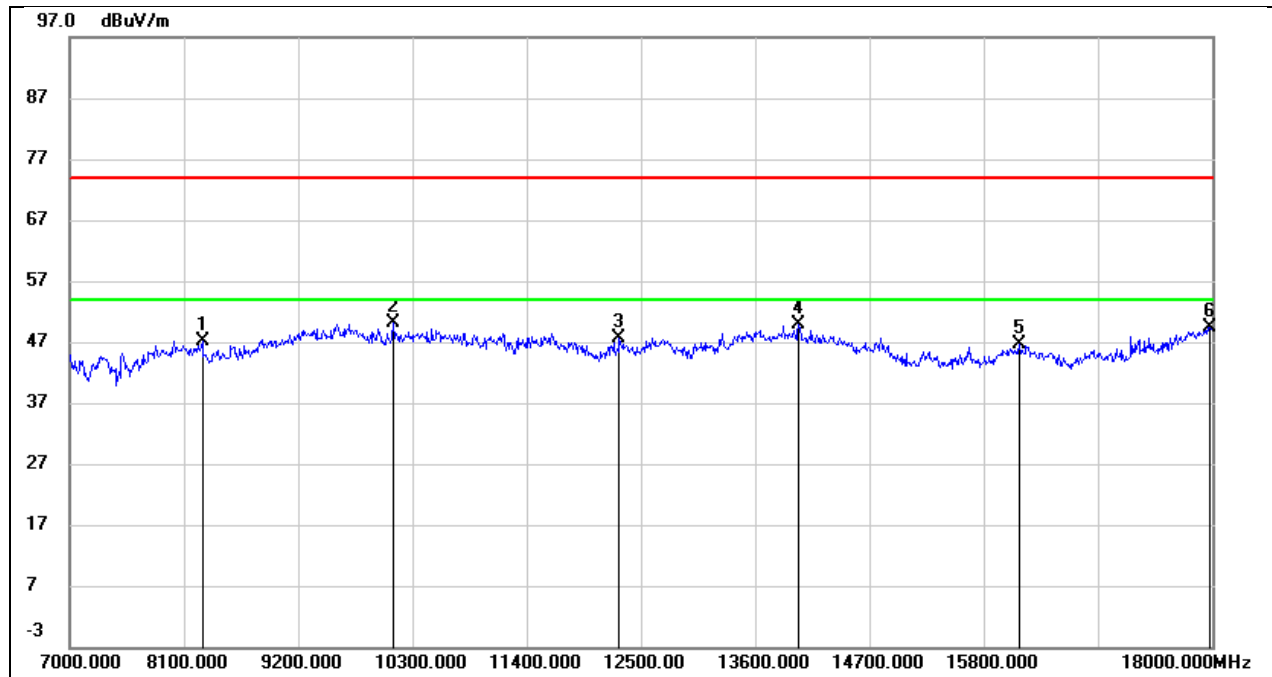


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8276.000	38.66	8.43	47.09	74.00	-26.91	peak
2	10113.000	36.91	13.26	50.17	74.00	-23.83	peak
3	12291.000	28.76	18.83	47.59	74.00	-26.41	peak
4	14018.000	26.28	23.54	49.82	74.00	-24.18	peak
5	16141.000	24.98	21.58	46.56	74.00	-27.44	peak
6	17978.000	19.98	29.38	49.36	74.00	-24.64	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.3V

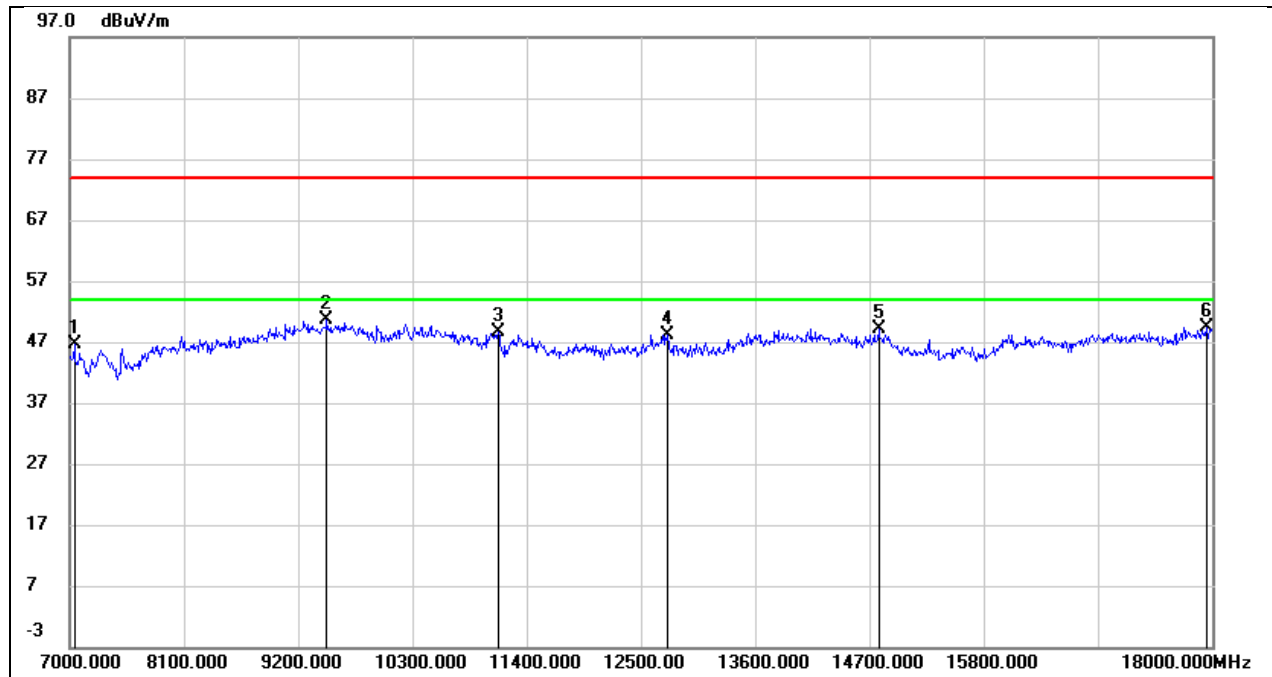


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7044.000	38.51	8.08	46.59	74.00	-27.41	peak
2	9475.000	37.83	12.72	50.55	74.00	-23.45	peak
3	11125.000	33.86	14.78	48.64	74.00	-25.36	peak
4	12753.000	29.40	18.73	48.13	74.00	-25.87	peak
5	14788.000	28.51	20.61	49.12	74.00	-24.88	peak
6	17945.000	22.41	27.07	49.48	74.00	-24.52	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3V

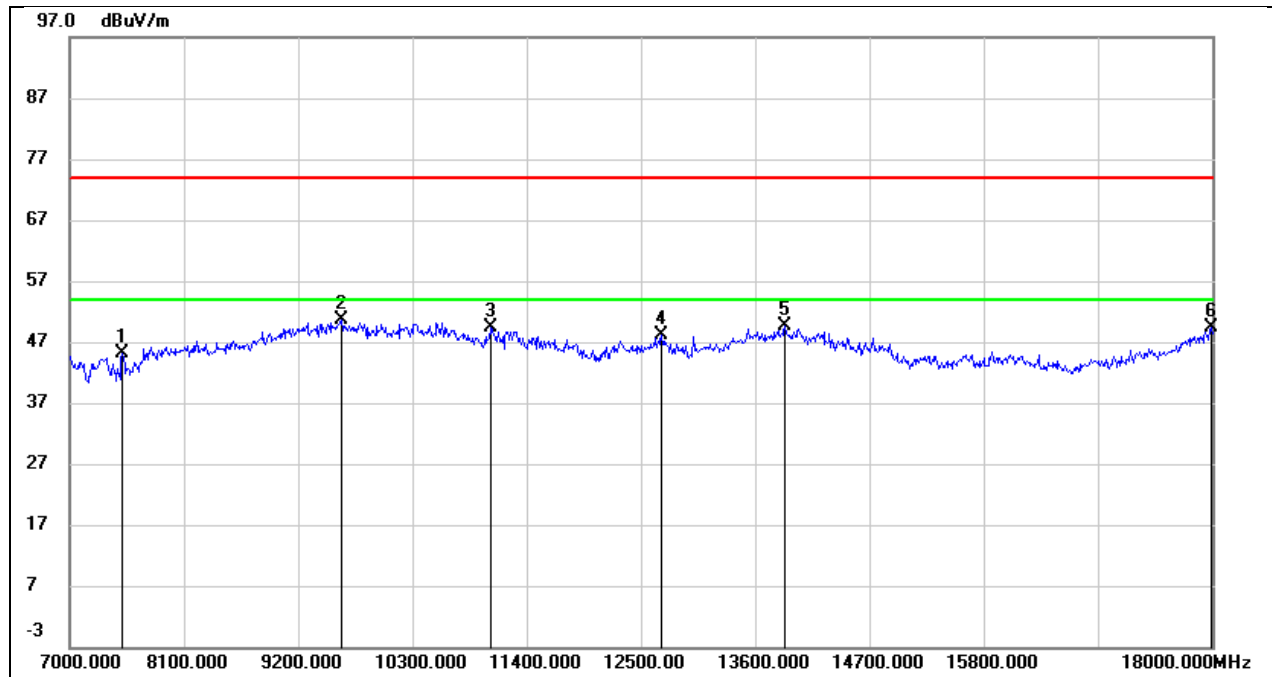


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.19	7.84	45.03	74.00	-28.97	peak
2	9618.000	37.02	13.49	50.51	74.00	-23.49	peak
3	11048.000	34.10	15.33	49.43	74.00	-24.57	peak
4	12698.000	28.50	19.56	48.06	74.00	-25.94	peak
5	13886.000	26.42	23.15	49.57	74.00	-24.43	peak
6	17989.000	19.84	29.49	49.33	74.00	-24.67	peak

Test Mode:	802.11ax HE80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.3V

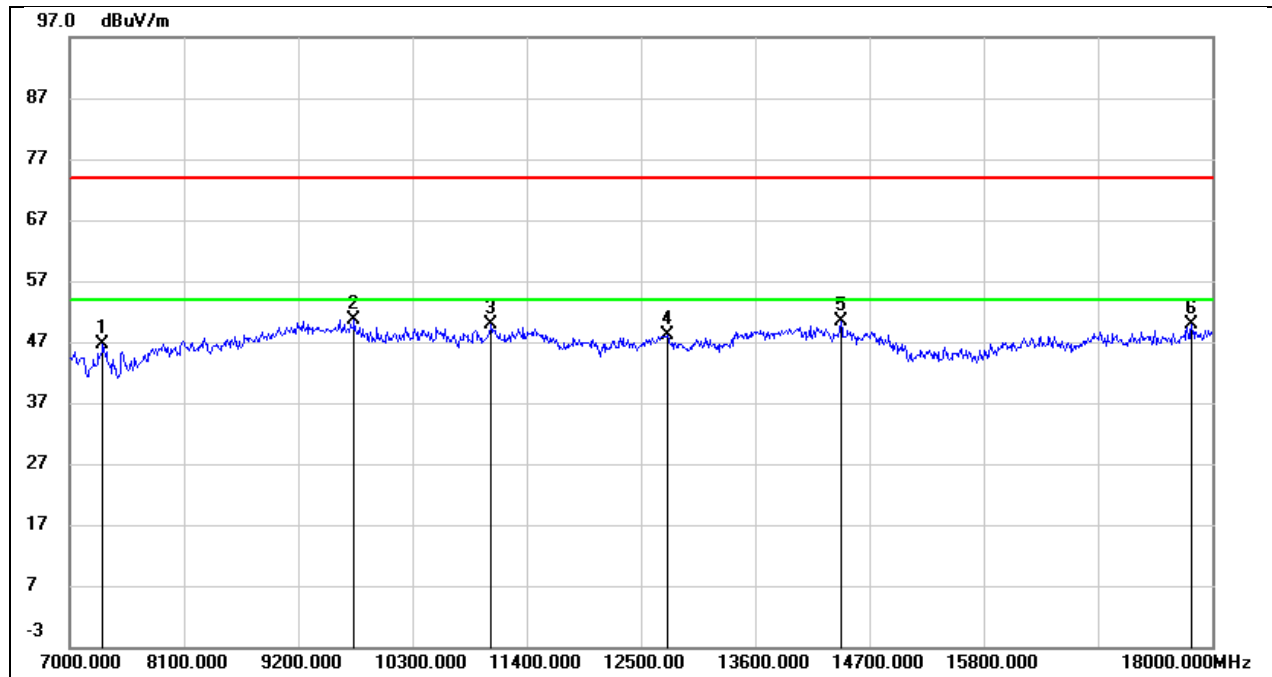


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	38.35	8.30	46.65	74.00	-27.35	peak
2	9739.000	37.29	13.36	50.65	74.00	-23.35	peak
3	11059.000	35.34	14.51	49.85	74.00	-24.15	peak
4	12753.000	29.36	18.73	48.09	74.00	-25.91	peak
5	14425.000	29.30	20.98	50.28	74.00	-23.72	peak
6	17802.000	23.77	26.18	49.95	74.00	-24.05	peak

Test Mode:	802.11ax HE160	Frequency(MHz):	5250
Polarity:	Horizontal	Test Voltage:	DC 3.3V

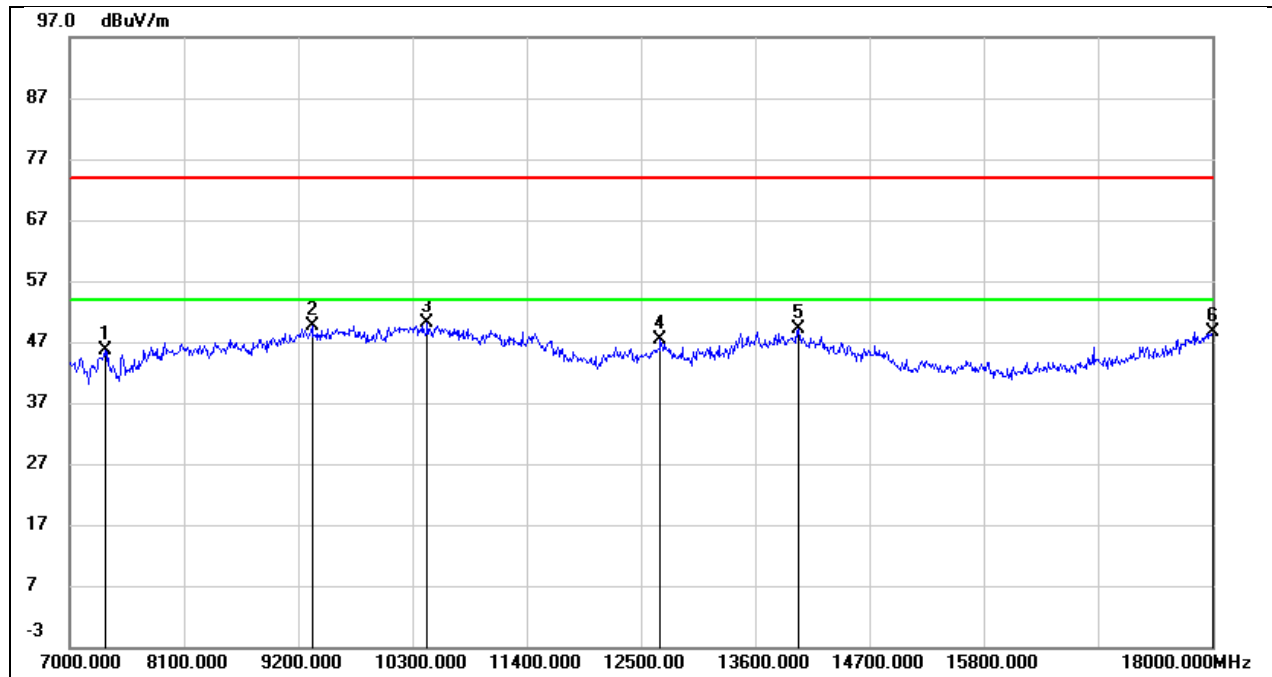


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.88	7.68	45.56	74.00	-28.44	peak
2	9332.000	37.66	11.99	49.65	74.00	-24.35	peak
3	10443.000	36.69	13.43	50.12	74.00	-23.88	peak
4	12687.000	27.77	19.52	47.29	74.00	-26.71	peak
5	14018.000	25.52	23.54	49.06	74.00	-24.94	peak
6	18000.000	19.10	29.61	48.71	74.00	-25.29	peak

Test Mode:	802.11ax HE160	Frequency(MHz):	5250
Polarity:	Vertical	Test Voltage:	DC 3.3V

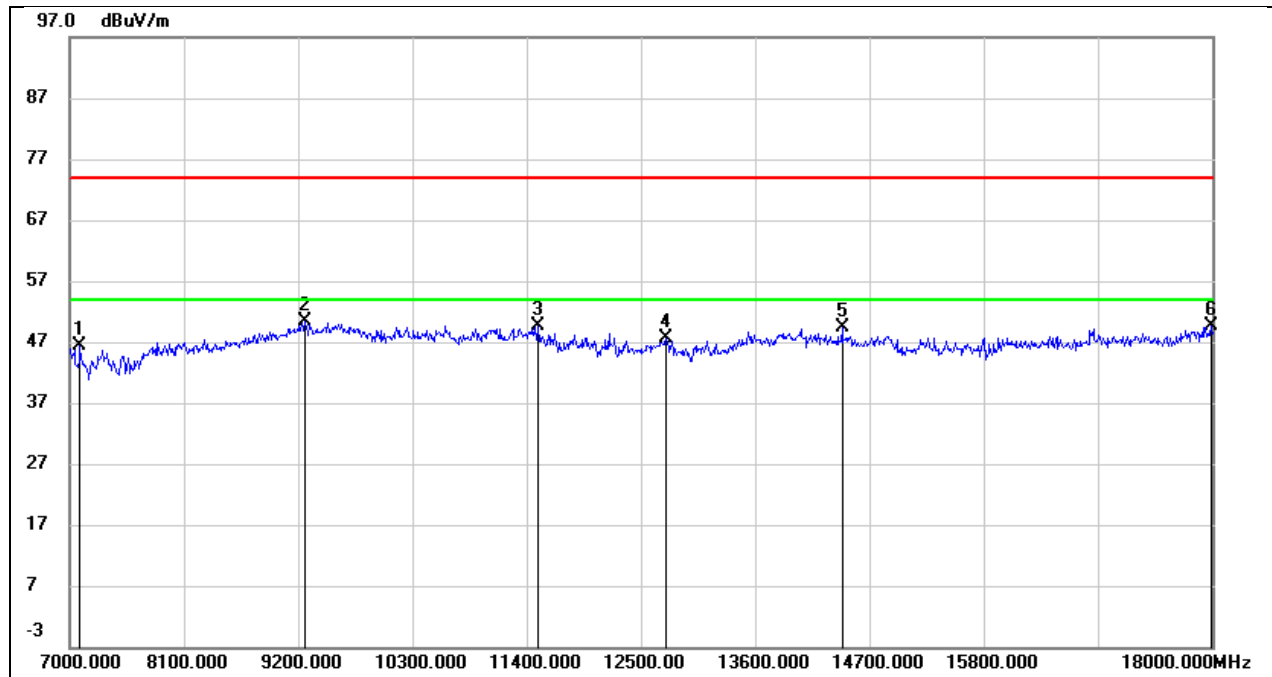


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7099.000	38.32	8.14	46.46	74.00	-27.54	peak
2	9266.000	38.39	11.96	50.35	74.00	-23.65	peak
3	11510.000	33.23	16.37	49.60	74.00	-24.40	peak
4	12742.000	28.97	18.70	47.67	74.00	-26.33	peak
5	14436.000	28.31	20.98	49.29	74.00	-24.71	peak
6	17989.000	22.35	27.33	49.68	74.00	-24.32	peak

Test Mode:	802.11ax HE160	Frequency(MHz):	5570
Polarity:	Horizontal	Test Voltage:	DC 3.3V

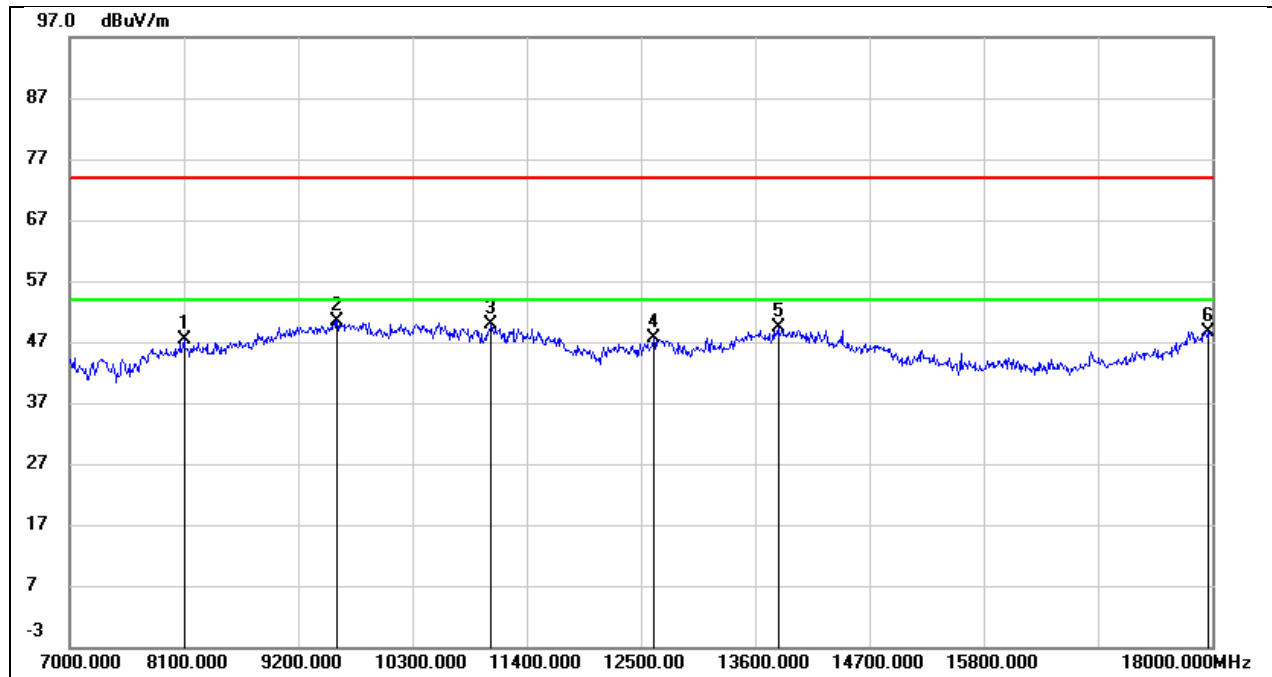

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8100.000	39.17	8.21	47.38	74.00	-26.62	peak
2	9574.000	37.19	13.31	50.50	74.00	-23.50	peak
3	11059.000	34.40	15.39	49.79	74.00	-24.21	peak
4	12621.000	28.30	19.24	47.54	74.00	-26.46	peak
5	13820.000	26.40	22.88	49.28	74.00	-24.72	peak
6	17967.000	19.47	29.26	48.73	74.00	-25.27	peak

Test Mode:	802.11ax HE160	Frequency(MHz):	5570
Polarity:	Vertical	Test Voltage:	DC 3.3V

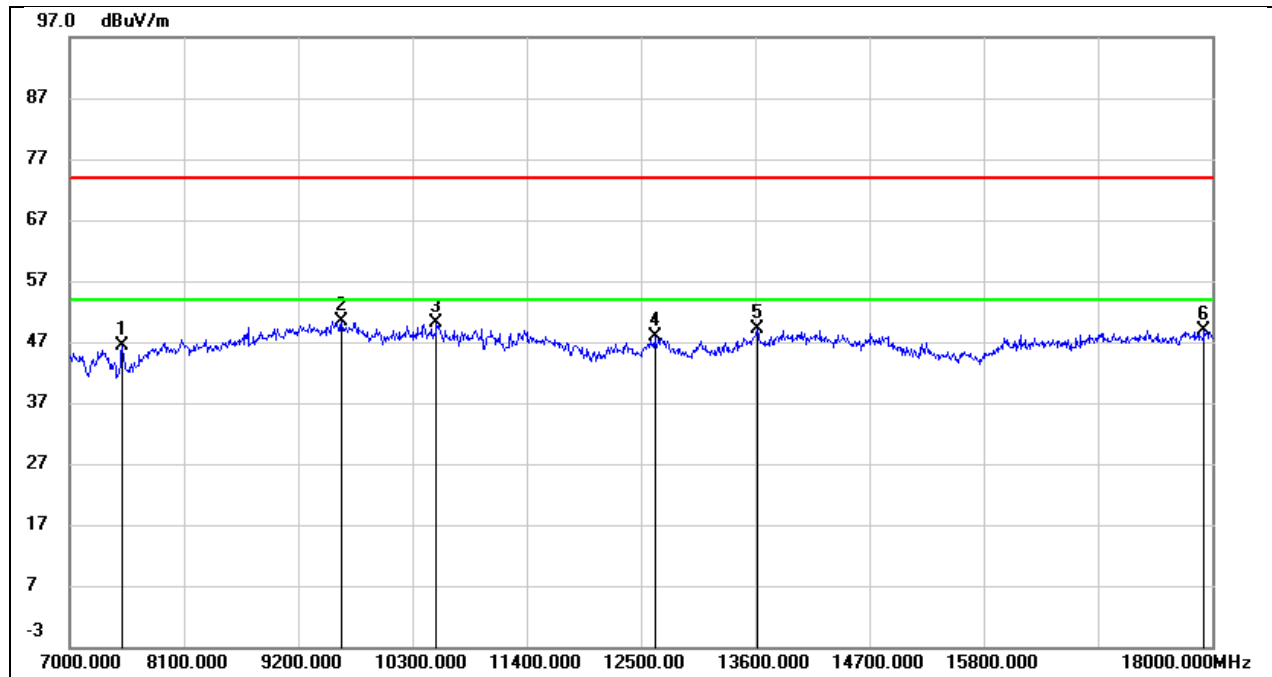


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.96	8.34	46.30	74.00	-27.70	peak
2	9618.000	37.10	13.32	50.42	74.00	-23.58	peak
3	10531.000	36.77	13.39	50.16	74.00	-23.84	peak
4	12632.000	29.54	18.32	47.86	74.00	-26.14	peak
5	13622.000	28.54	20.60	49.14	74.00	-24.86	peak
6	17923.000	21.93	26.92	48.85	74.00	-25.15	peak

8.9. SPURIOUS EMISSIONS(7 GHZ~18 GHZ) - CONDITION 2 FPC ANTENNA PARTIAL RU


Note: For the 3 data of Frequency means: Frequency, RU Size, RU index

Test Mode:	802.11ax HE20	Frequency(MHz):	5180 26 0
Polarity:	Horizontal	Test Voltage:	DC 3.3V

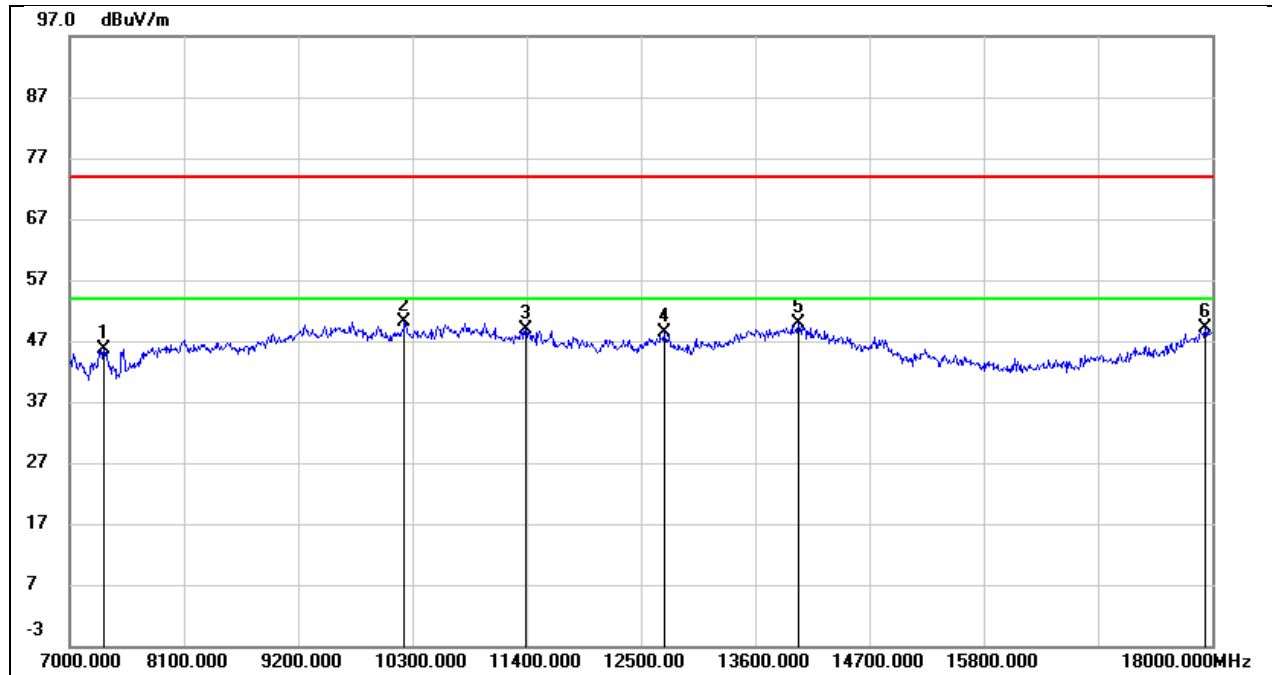


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	37.97	7.66	45.63	74.00	-28.37	peak
2	10223.000	36.96	13.19	50.15	74.00	-23.85	peak
3	11389.000	31.60	17.30	48.90	74.00	-25.10	peak
4	12720.000	28.66	19.65	48.31	74.00	-25.69	peak
5	14018.000	26.23	23.54	49.77	74.00	-24.23	peak
6	17934.000	20.20	28.91	49.11	74.00	-24.89	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5180 26 0
Polarity:	Vertical	Test Voltage:	DC 3.3V

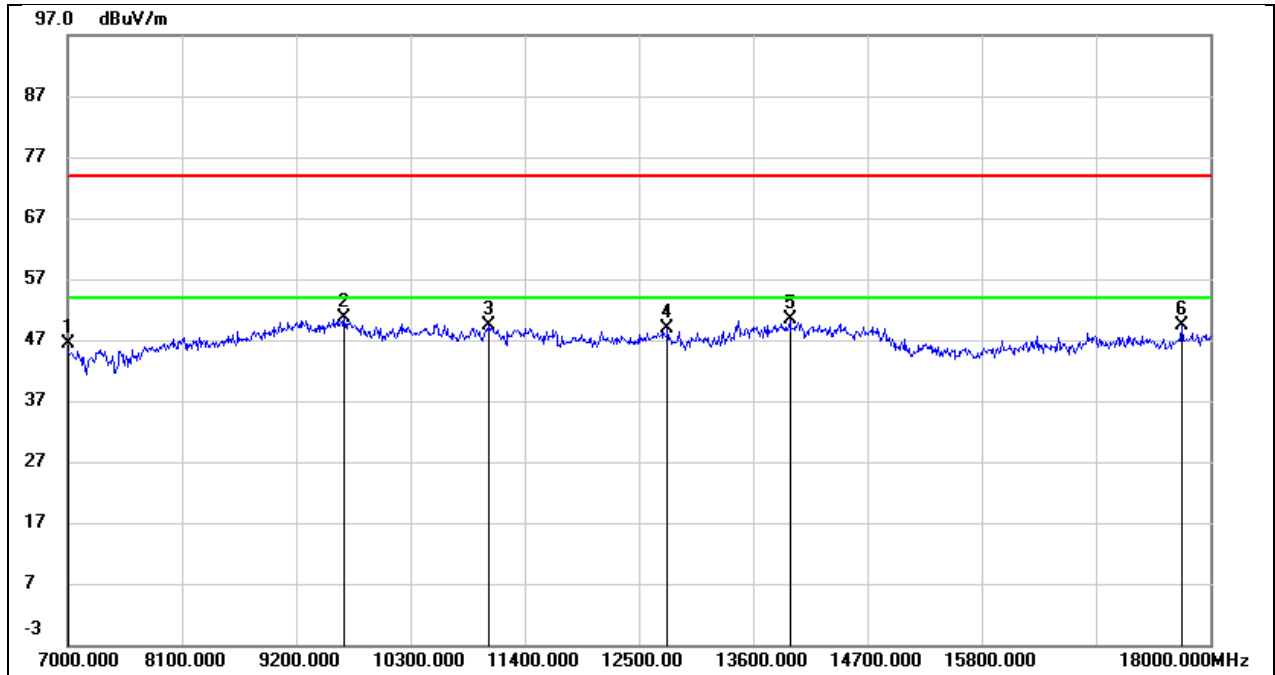


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7000.000	38.46	8.02	46.48	74.00	-27.52	peak
2	9662.000	37.17	13.34	50.51	74.00	-23.49	peak
3	11059.000	34.89	14.51	49.40	74.00	-24.60	peak
4	12775.000	30.08	18.82	48.90	74.00	-25.10	peak
5	13952.000	28.51	21.81	50.32	74.00	-23.68	peak
6	17725.000	23.51	25.76	49.27	74.00	-24.73	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200 26 4
Polarity:	Horizontal	Test Voltage:	DC 3.3V

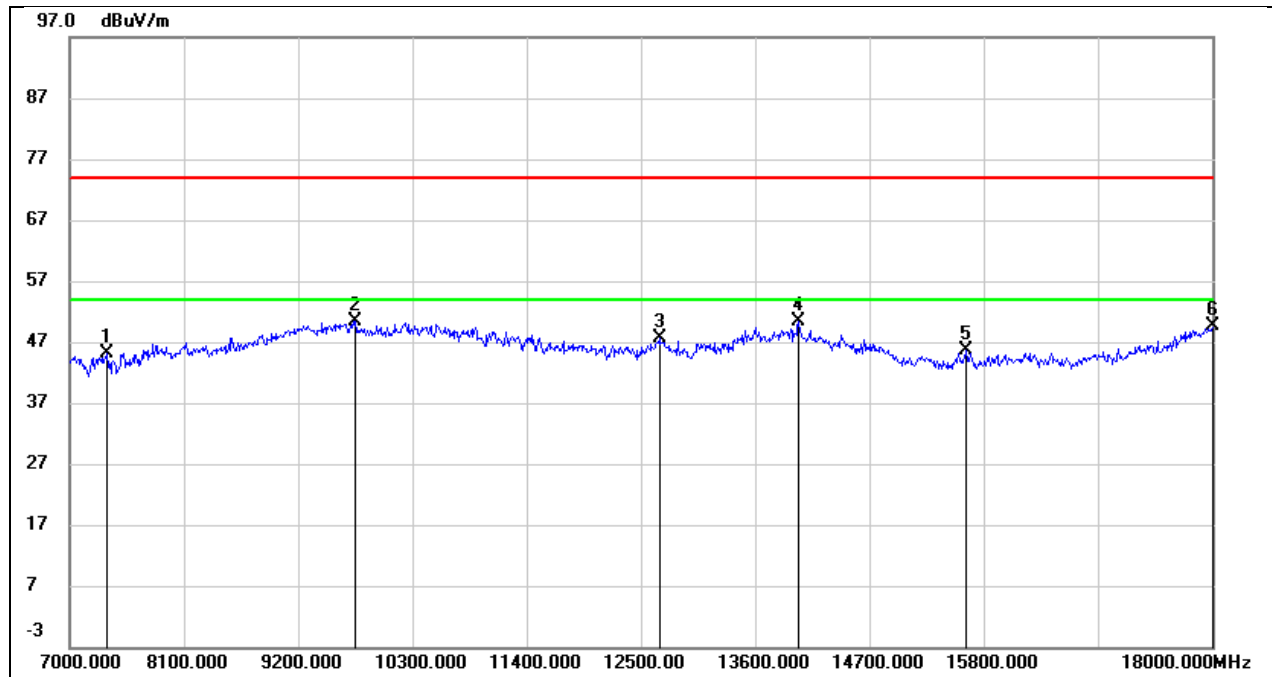


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7363.000	37.51	7.70	45.21	74.00	-28.79	peak
2	9750.000	36.69	13.72	50.41	74.00	-23.59	peak
3	12676.000	28.12	19.48	47.60	74.00	-26.40	peak
4	14018.000	26.95	23.54	50.49	74.00	-23.51	peak
5	15635.000	26.37	19.33	45.70	74.00	-28.30	peak
6	18000.000	20.08	29.61	49.69	74.00	-24.31	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5200 26 4
Polarity:	Vertical	Test Voltage:	DC 3.3V

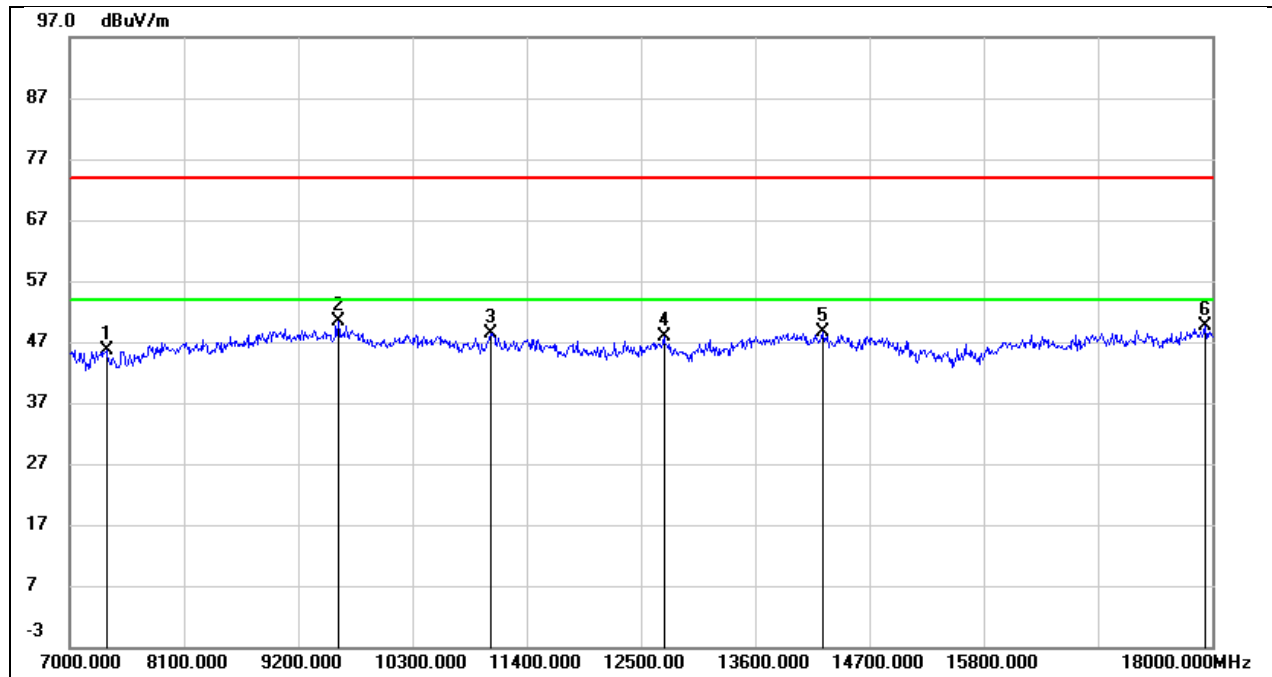


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.20	8.31	45.51	74.00	-28.49	peak
2	9585.000	37.20	13.26	50.46	74.00	-23.54	peak
3	11048.000	33.98	14.46	48.44	74.00	-25.56	peak
4	12720.000	29.35	18.62	47.97	74.00	-26.03	peak
5	14249.000	27.08	21.54	48.62	74.00	-25.38	peak
6	17934.000	22.70	27.00	49.70	74.00	-24.30	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240 26 8
Polarity:	Horizontal	Test Voltage:	DC 3.3V

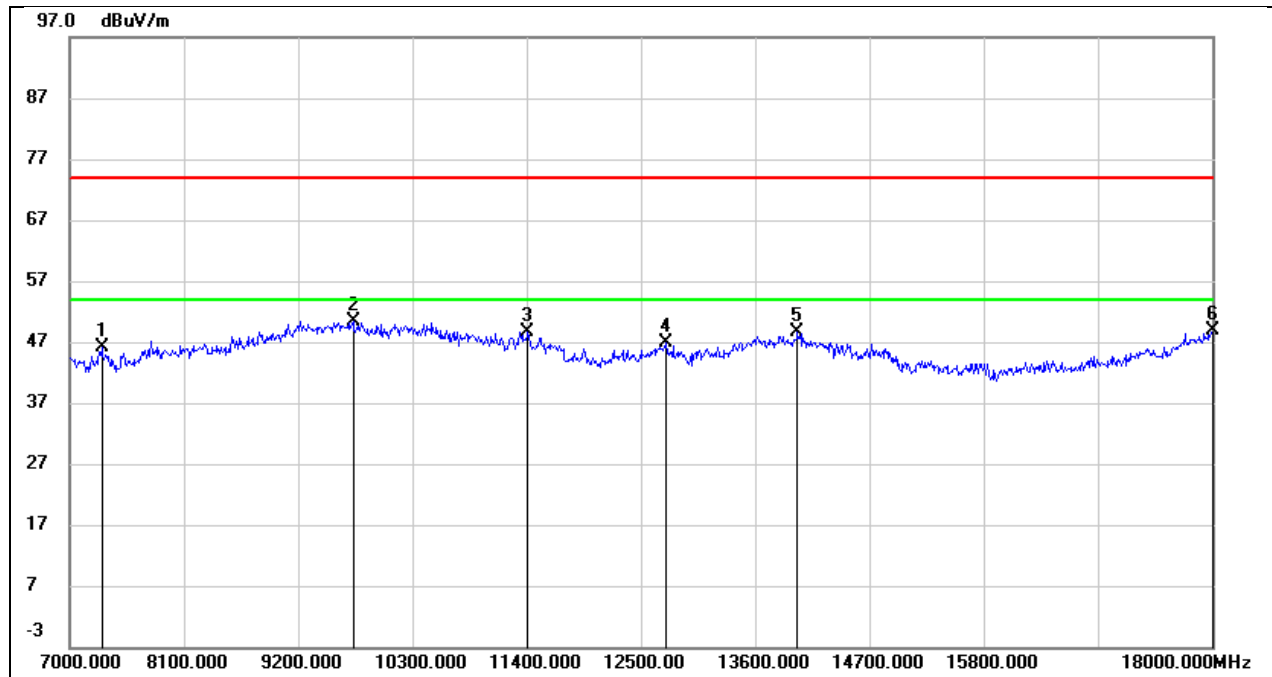


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	38.42	7.64	46.06	74.00	-27.94	peak
2	9728.000	36.76	13.68	50.44	74.00	-23.56	peak
3	11411.000	31.27	17.41	48.68	74.00	-25.32	peak
4	12742.000	27.18	19.75	46.93	74.00	-27.07	peak
5	14007.000	25.06	23.59	48.65	74.00	-25.35	peak
6	18000.000	19.29	29.61	48.90	74.00	-25.10	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5240 26 8
Polarity:	Vertical	Test Voltage:	DC 3.3V

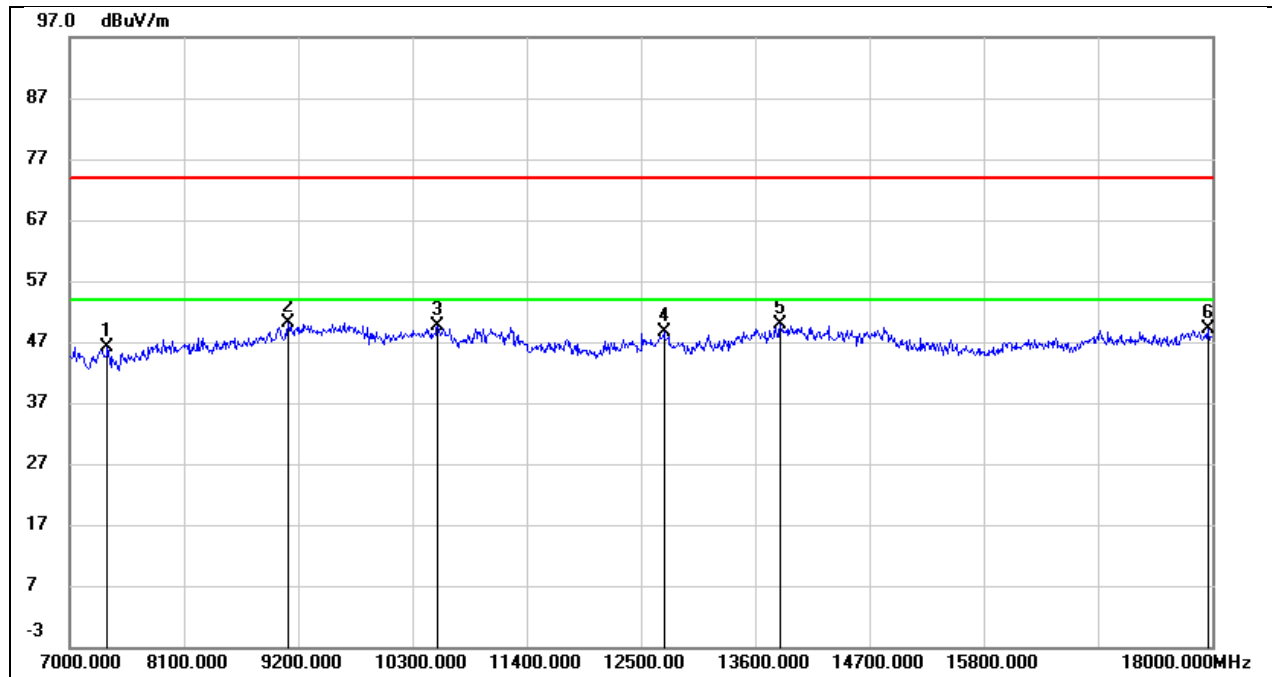


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7363.000	37.86	8.31	46.17	74.00	-27.83	peak
2	9101.000	38.79	11.43	50.22	74.00	-23.78	peak
3	10542.000	36.20	13.41	49.61	74.00	-24.39	peak
4	12720.000	30.12	18.62	48.74	74.00	-25.26	peak
5	13842.000	28.52	21.33	49.85	74.00	-24.15	peak
6	17956.000	21.98	27.13	49.11	74.00	-24.89	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260 26 0
Polarity:	Horizontal	Test Voltage:	DC 3.3V

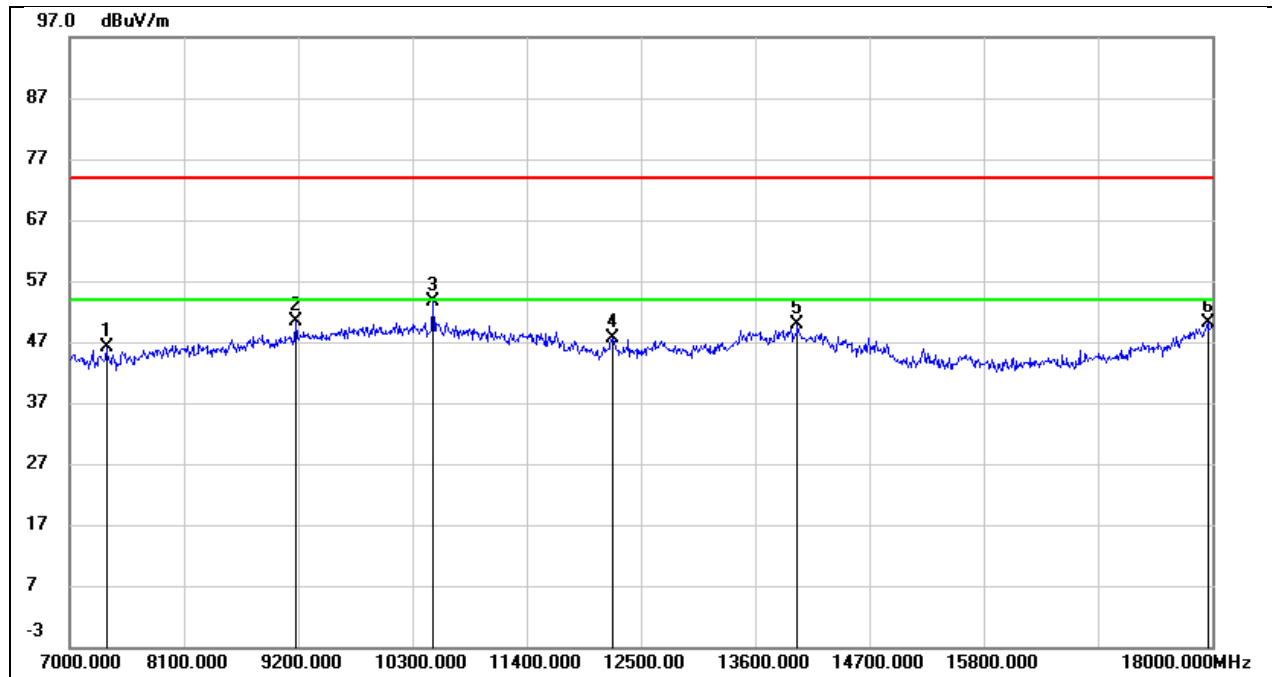


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	38.34	7.69	46.03	74.00	-27.97	peak
2	9178.000	38.92	11.45	50.37	74.00	-23.63	peak
3	10498.000	40.04	13.53	53.57	74.00	-20.43	peak
4	12225.000	28.78	18.74	47.52	74.00	-26.48	peak
5	14007.000	26.31	23.59	49.90	74.00	-24.10	peak
6	17956.000	20.92	29.14	50.06	74.00	-23.94	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5260 26 0
Polarity:	Vertical	Test Voltage:	DC 3.3V

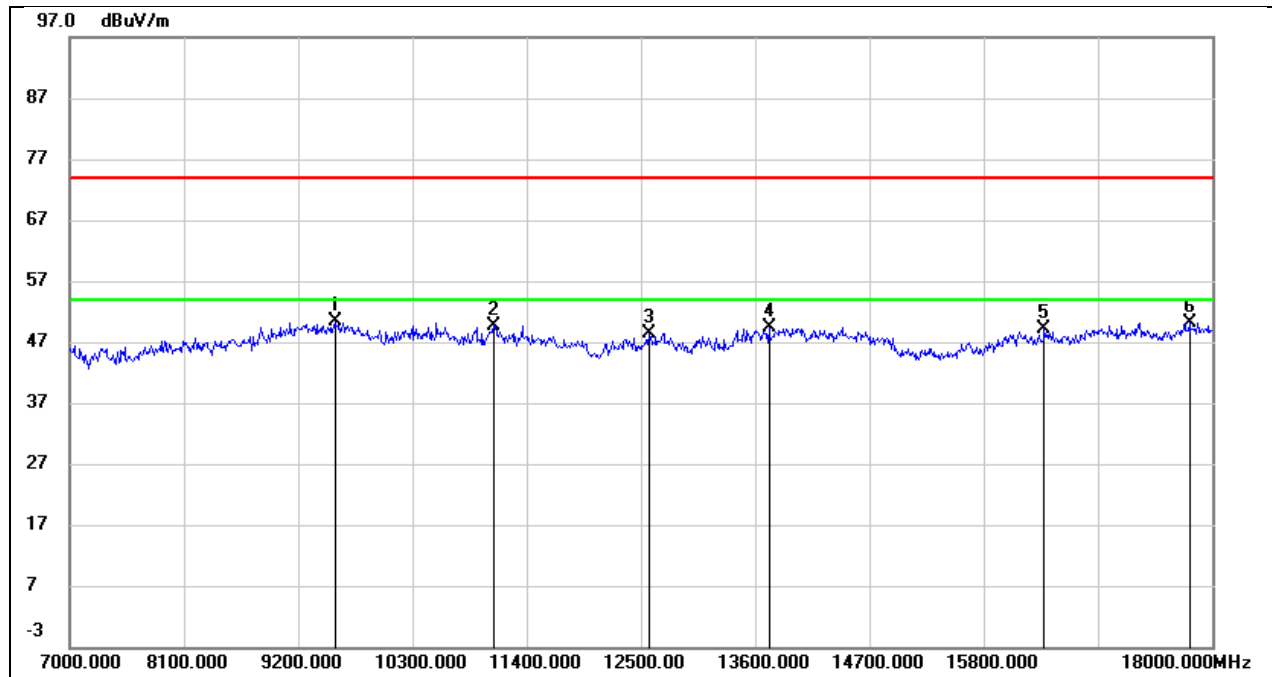


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9552.000	37.29	13.10	50.39	74.00	-23.61	peak
2	11081.000	35.16	14.59	49.75	74.00	-24.25	peak
3	12577.000	30.30	18.18	48.48	74.00	-25.52	peak
4	13732.000	28.54	20.95	49.49	74.00	-24.51	peak
5	16383.000	25.60	23.65	49.25	74.00	-24.75	peak
6	17780.000	24.08	26.06	50.14	74.00	-23.86	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280 26 4
Polarity:	Horizontal	Test Voltage:	DC 3.3V

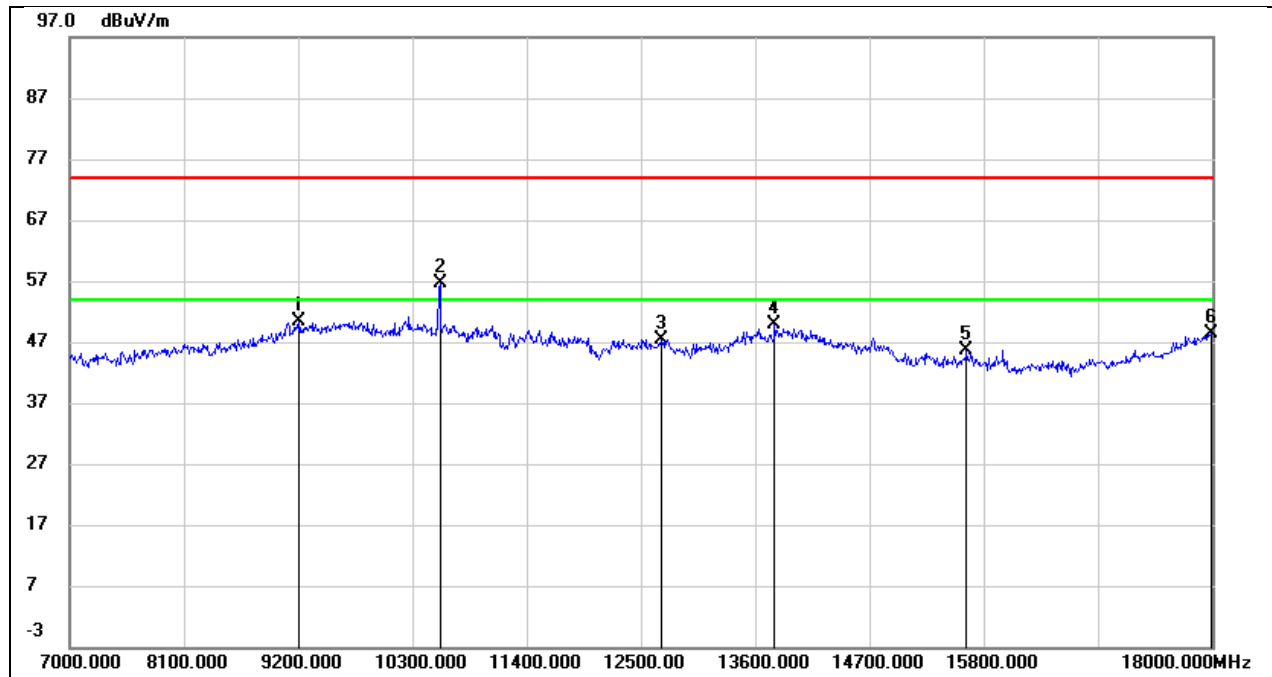


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	38.79	11.59	50.38	74.00	-23.62	peak
2	10564.000	43.02	13.72	56.74	74.00	-17.26	peak
3	12698.000	27.85	19.56	47.41	74.00	-26.59	peak
4	13787.000	27.15	22.76	49.91	74.00	-24.09	peak
5	15635.000	26.40	19.33	45.73	74.00	-28.27	peak
6	17989.000	18.91	29.49	48.40	74.00	-25.60	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5280 26 4
Polarity:	Vertical	Test Voltage:	DC 3.3V

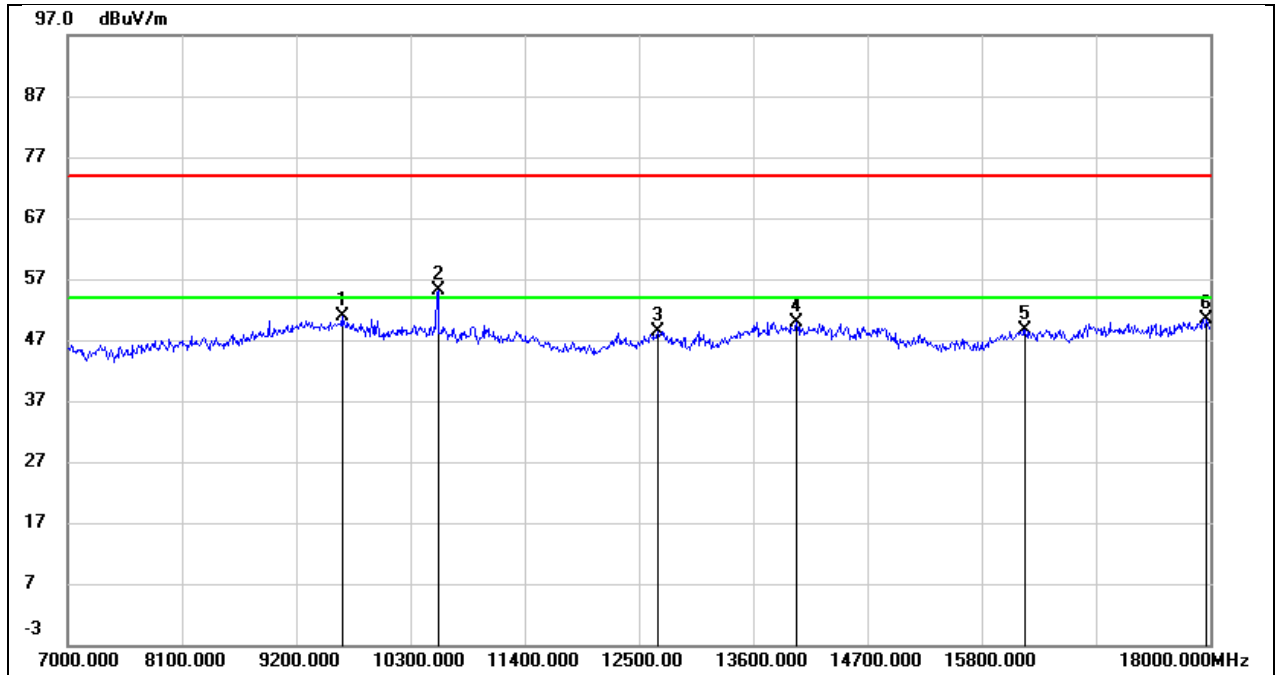


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9640.000	37.56	13.33	50.89	74.00	-23.11	peak
2	10564.000	41.62	13.44	55.06	74.00	-18.94	peak
3	12676.000	30.00	18.47	48.47	74.00	-25.53	peak
4	14018.000	27.95	21.99	49.94	74.00	-24.06	peak
5	16218.000	24.56	24.11	48.67	74.00	-25.33	peak
6	17967.000	23.25	27.20	50.45	74.00	-23.55	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320 26 8
Polarity:	Horizontal	Test Voltage:	DC 3.3V

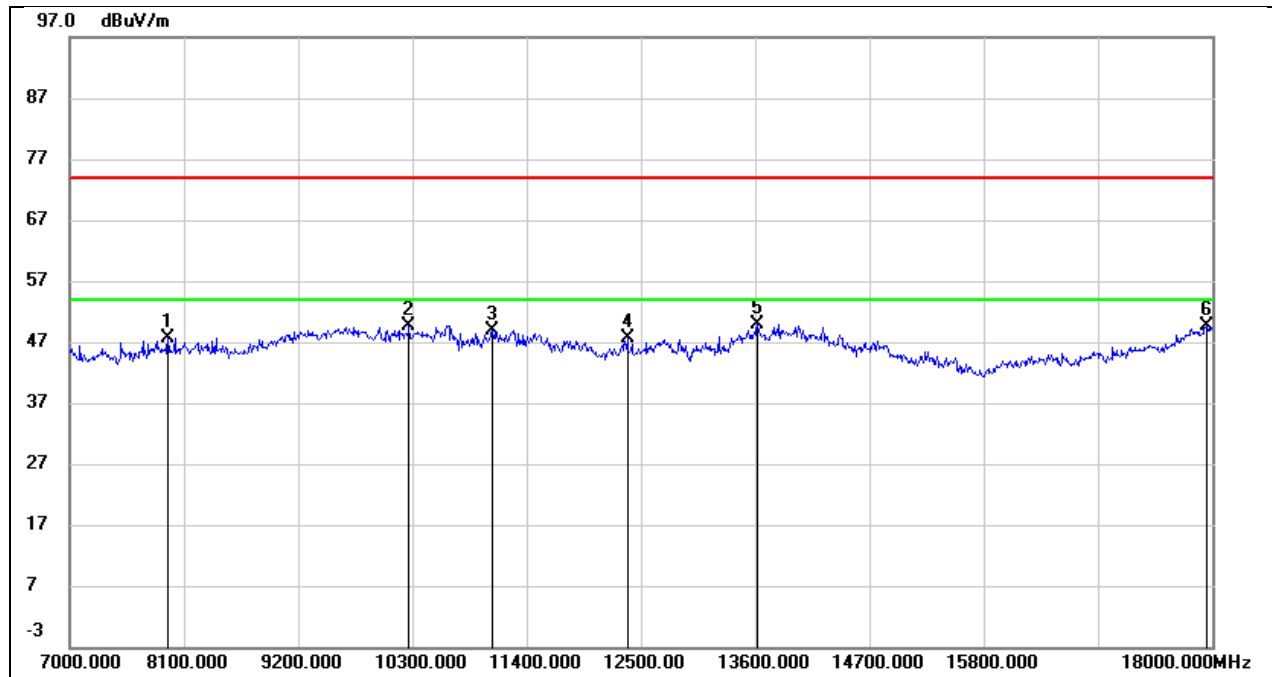


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7946.000	39.59	8.06	47.65	74.00	-26.35	peak
2	10267.000	36.50	13.23	49.73	74.00	-24.27	peak
3	11070.000	33.39	15.44	48.83	74.00	-25.17	peak
4	12368.000	28.80	18.94	47.74	74.00	-26.26	peak
5	13622.000	27.72	22.28	50.00	74.00	-24.00	peak
6	17945.000	20.49	29.03	49.52	74.00	-24.48	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5320 26 8
Polarity:	Vertical	Test Voltage:	DC 3.3V

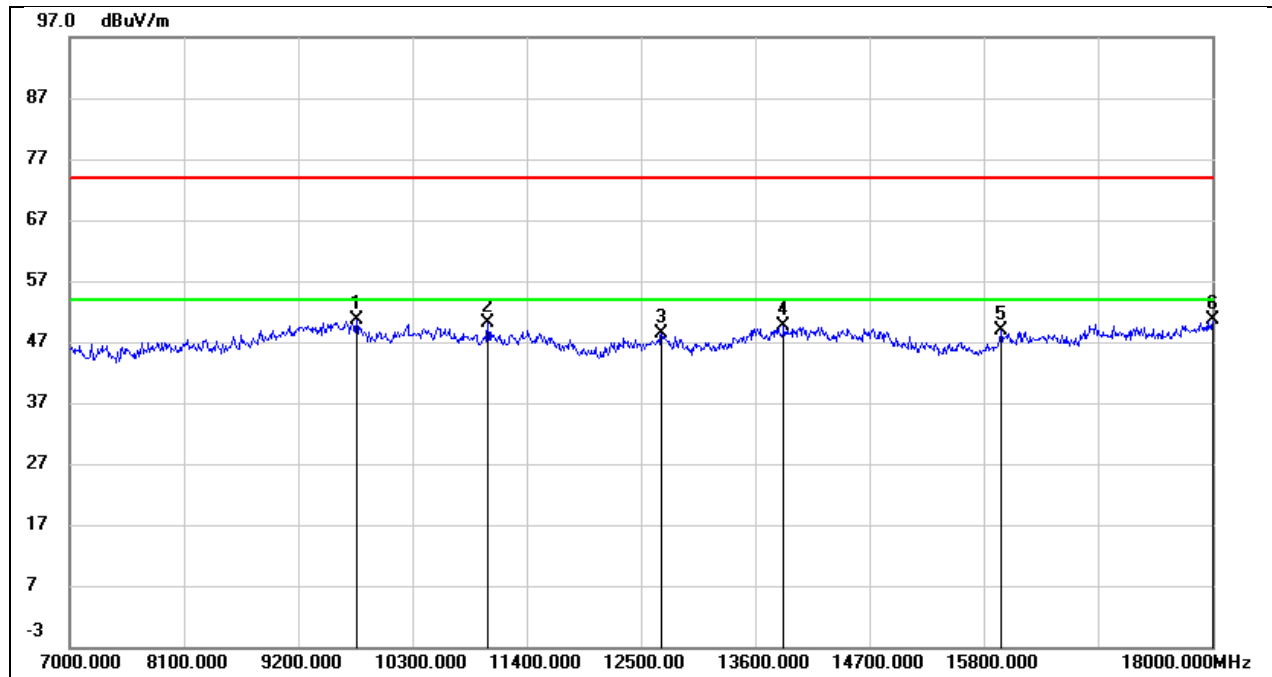


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9761.000	37.16	13.37	50.53	74.00	-23.47	peak
2	11026.000	35.81	14.37	50.18	74.00	-23.82	peak
3	12698.000	29.93	18.54	48.47	74.00	-25.53	peak
4	13875.000	28.07	21.49	49.56	74.00	-24.44	peak
5	15965.000	26.28	22.66	48.94	74.00	-25.06	peak
6	18000.000	23.30	27.41	50.71	74.00	-23.29	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500 26 0
Polarity:	Horizontal	Test Voltage:	DC 3.3V

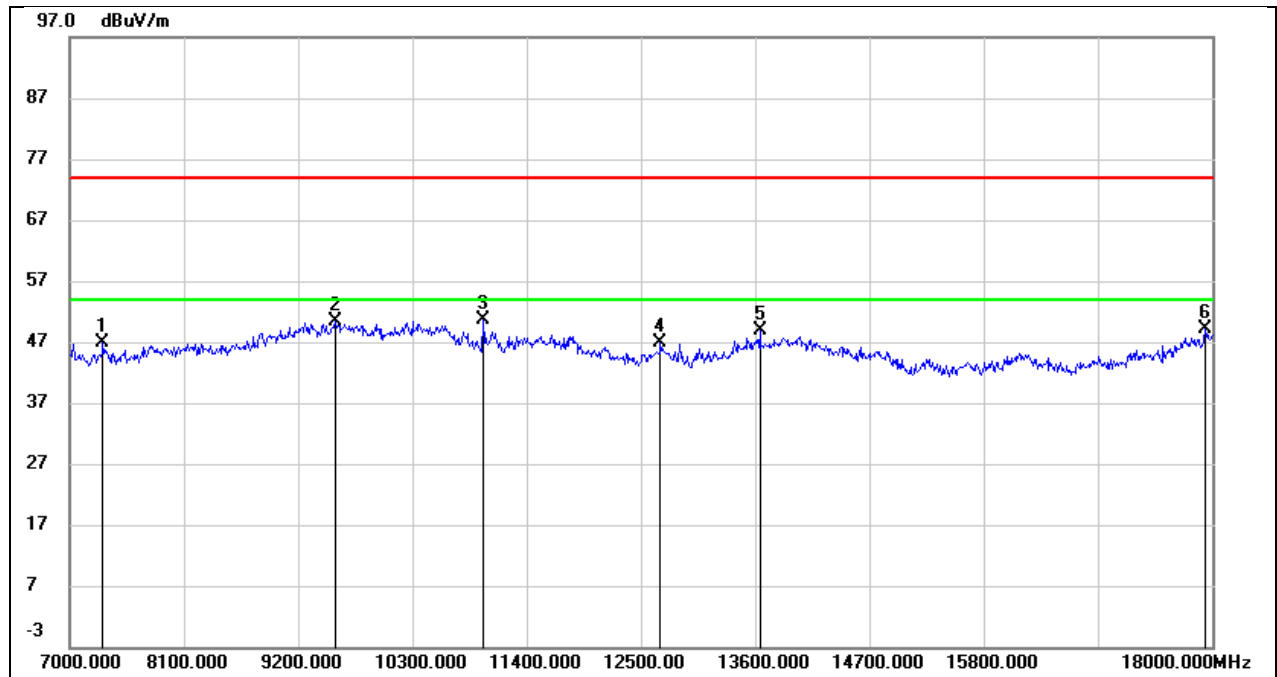


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	39.14	7.66	46.80	74.00	-27.20	peak
2	9552.000	37.17	13.17	50.34	74.00	-23.66	peak
3	10982.000	35.64	15.00	50.64	74.00	-23.36	peak
4	12687.000	27.25	19.52	46.77	74.00	-27.23	peak
5	13644.000	26.52	22.35	48.87	74.00	-25.13	peak
6	17934.000	20.12	28.91	49.03	74.00	-24.97	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5500 26 0
Polarity:	Vertical	Test Voltage:	DC 3.3V

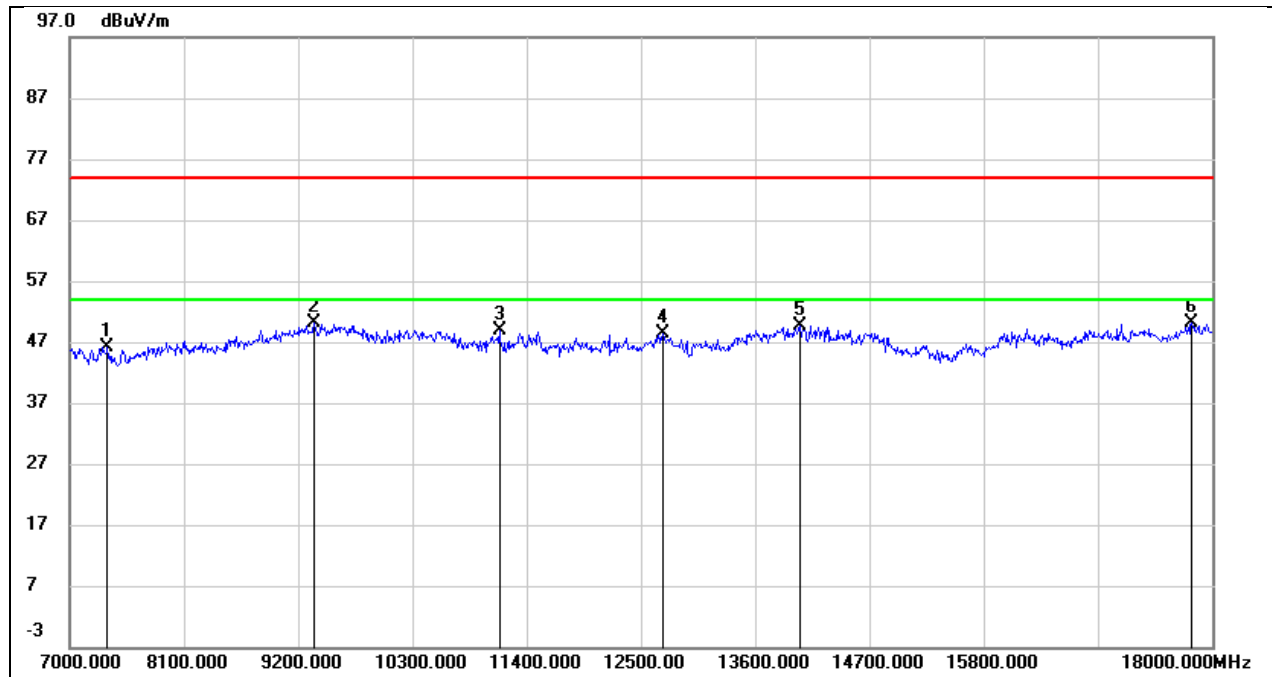


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7363.000	37.87	8.31	46.18	74.00	-27.82	peak
2	9354.000	37.95	12.17	50.12	74.00	-23.88	peak
3	11136.000	33.97	14.82	48.79	74.00	-25.21	peak
4	12709.000	29.70	18.58	48.28	74.00	-25.72	peak
5	14029.000	27.77	21.96	49.73	74.00	-24.27	peak
6	17802.000	23.84	26.18	50.02	74.00	-23.98	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580 26 4
Polarity:	Horizontal	Test Voltage:	DC 3.3V

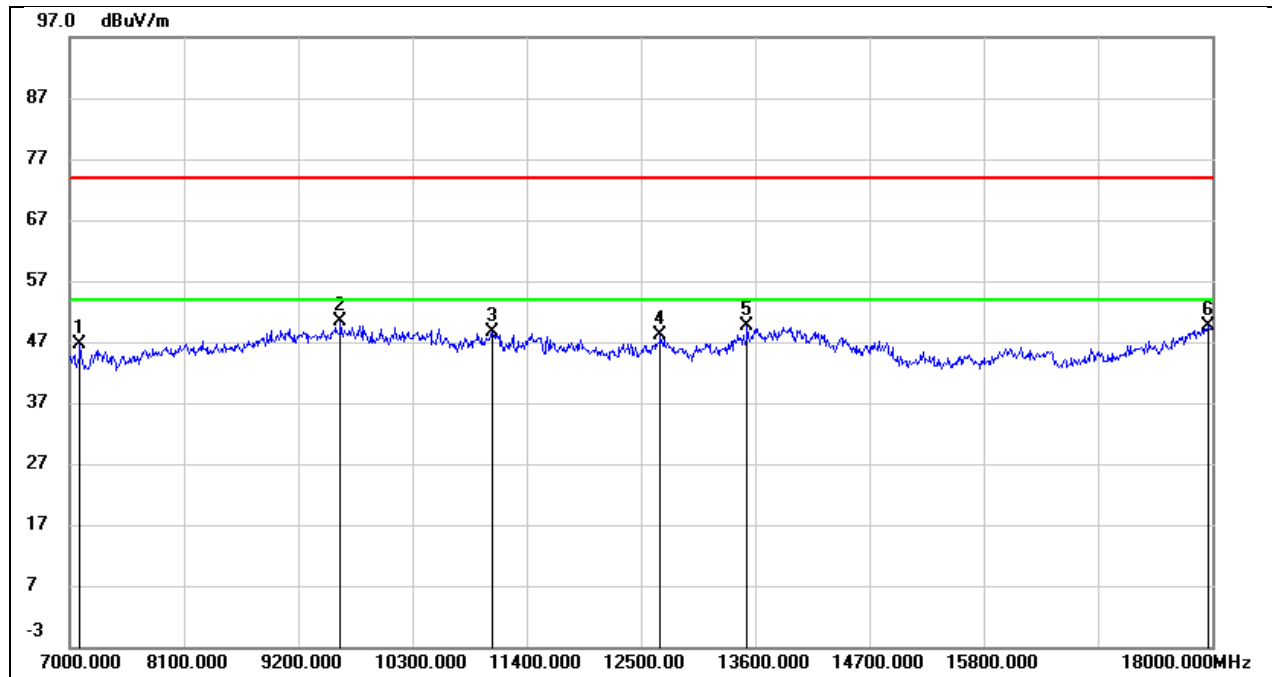


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7099.000	39.21	7.32	46.53	74.00	-27.47	peak
2	9607.000	36.81	13.48	50.29	74.00	-23.71	peak
3	11070.000	33.28	15.44	48.72	74.00	-25.28	peak
4	12687.000	28.73	19.52	48.25	74.00	-25.75	peak
5	13523.000	27.44	22.08	49.52	74.00	-24.48	peak
6	17967.000	20.47	29.26	49.73	74.00	-24.27	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5580 26 4
Polarity:	Vertical	Test Voltage:	DC 3.3V

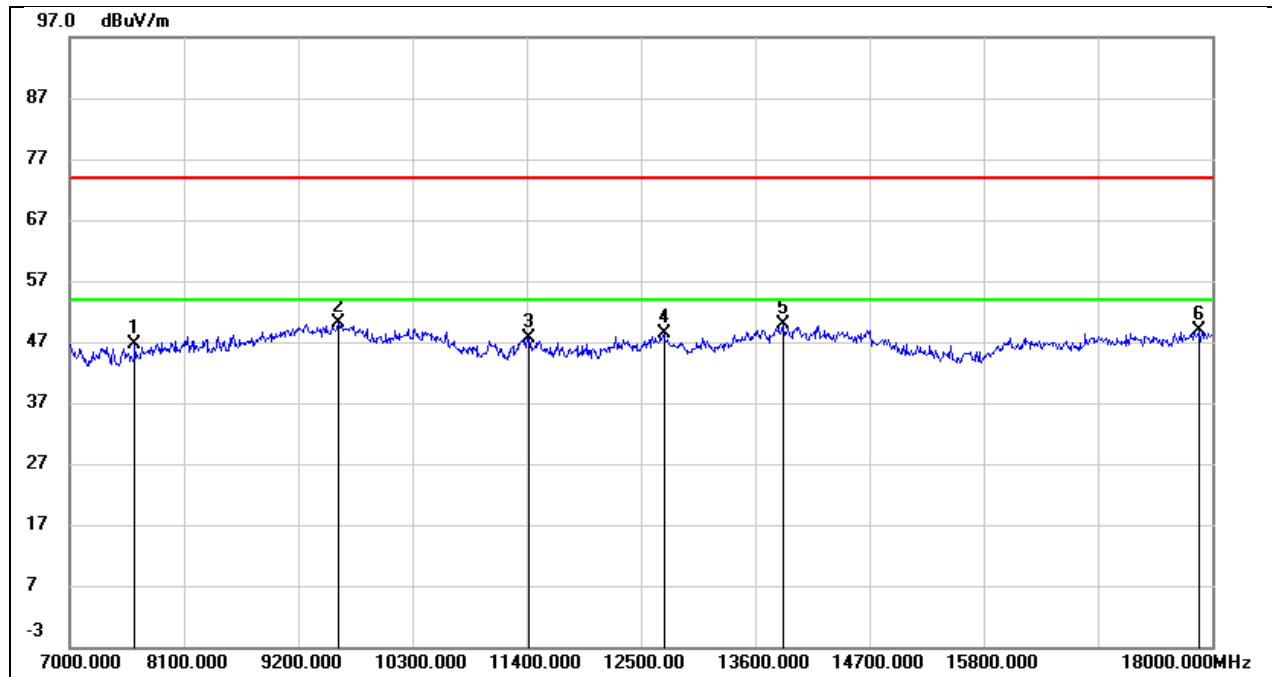


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7627.000	38.21	8.37	46.58	74.00	-27.42	peak
2	9585.000	36.78	13.26	50.04	74.00	-23.96	peak
3	11422.000	31.67	16.07	47.74	74.00	-26.26	peak
4	12720.000	29.87	18.62	48.49	74.00	-25.51	peak
5	13864.000	28.52	21.43	49.95	74.00	-24.05	peak
6	17868.000	22.24	26.59	48.83	74.00	-25.17	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700 26 8
Polarity:	Horizontal	Test Voltage:	DC 3.3V

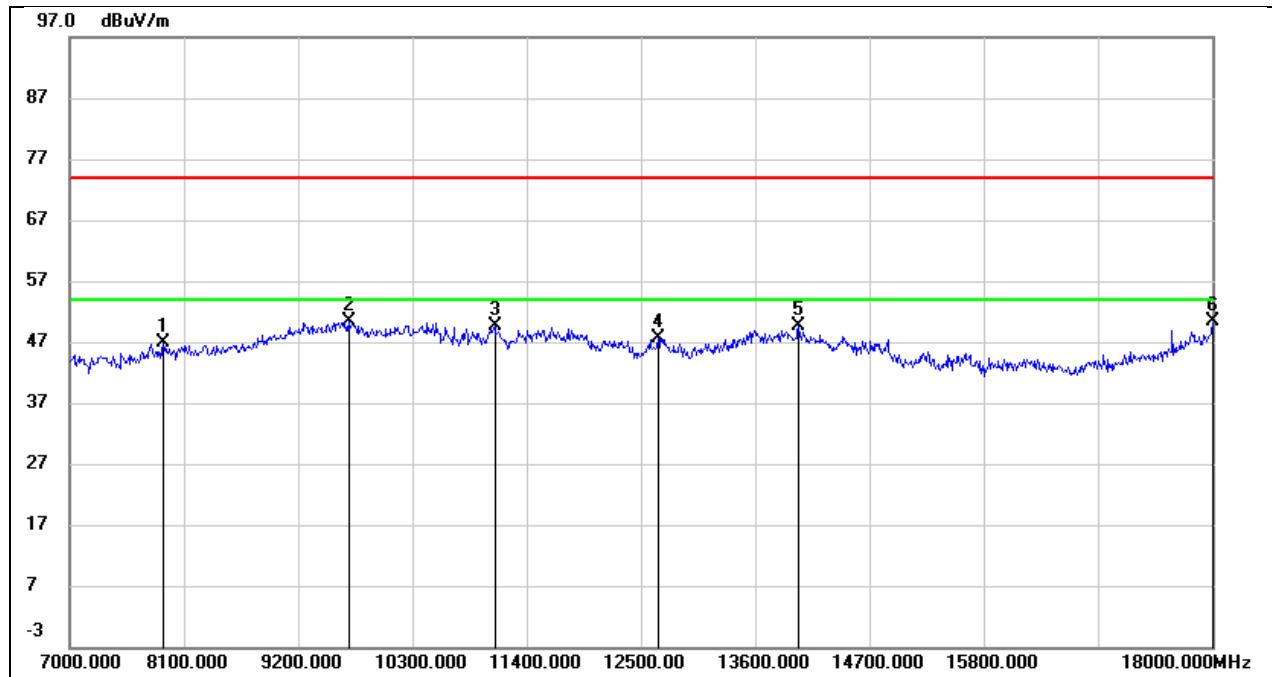


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7902.000	38.79	8.04	46.83	74.00	-27.17	peak
2	9684.000	36.70	13.60	50.30	74.00	-23.70	peak
3	11092.000	33.95	15.56	49.51	74.00	-24.49	peak
4	12665.000	28.12	19.42	47.54	74.00	-26.46	peak
5	14018.000	26.02	23.54	49.56	74.00	-24.44	peak
6	18000.000	20.68	29.61	50.29	74.00	-23.71	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5700 26 8
Polarity:	Vertical	Test Voltage:	DC 3.3V

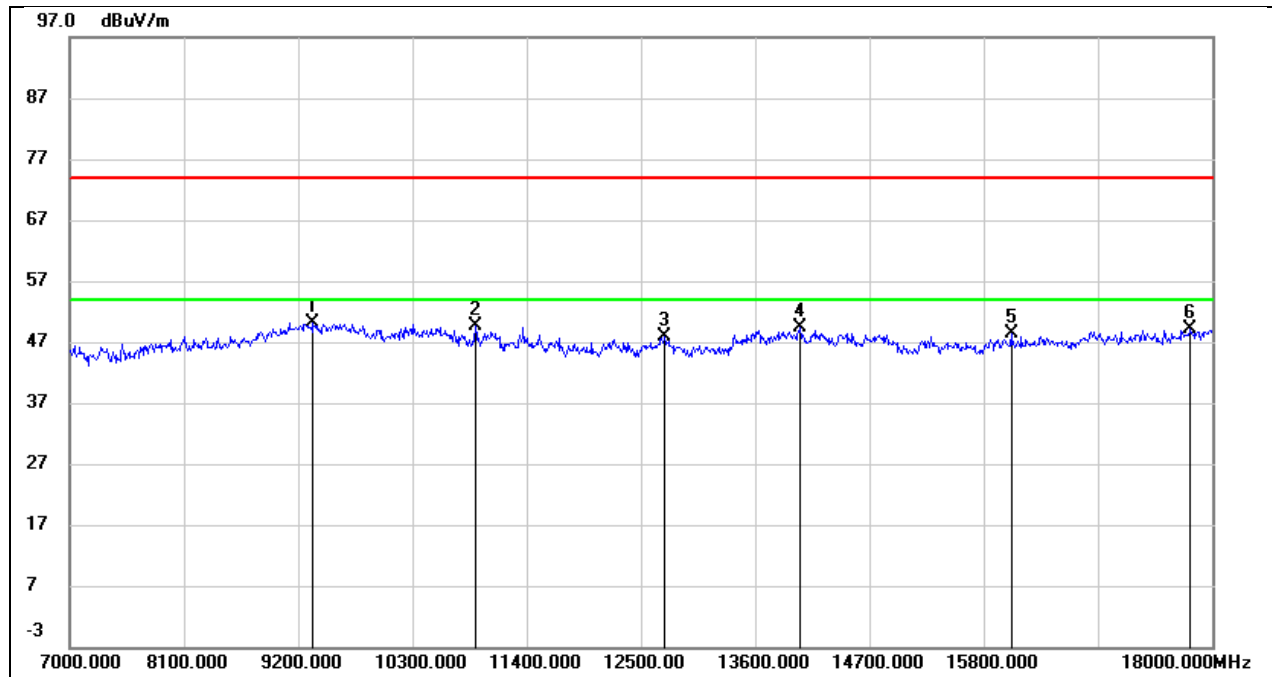


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9343.000	38.09	12.15	50.24	74.00	-23.76	peak
2	10905.000	35.53	14.06	49.59	74.00	-24.41	peak
3	12731.000	29.17	18.66	47.83	74.00	-26.17	peak
4	14029.000	27.31	21.96	49.27	74.00	-24.73	peak
5	16064.000	25.22	23.28	48.50	74.00	-25.50	peak
6	17791.000	22.98	26.11	49.09	74.00	-24.91	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745 26 0
Polarity:	Horizontal	Test Voltage:	DC 3.3V

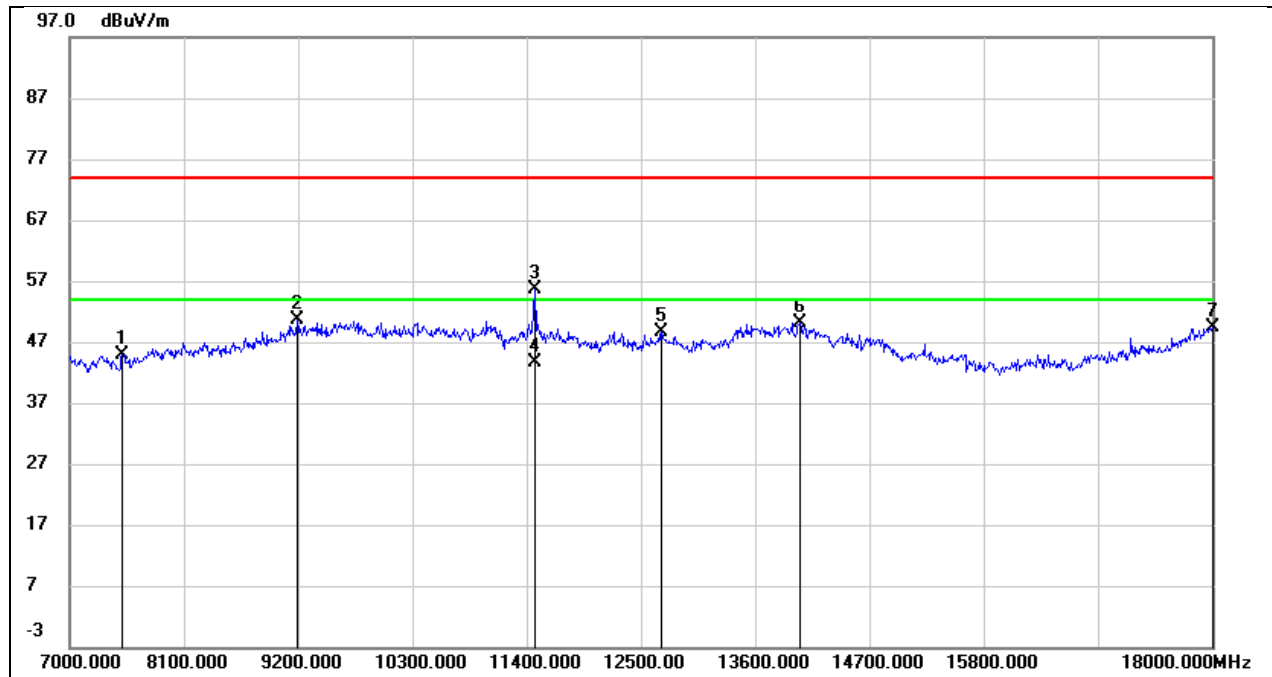


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.09	7.84	44.93	74.00	-29.07	peak
2	9189.000	39.14	11.51	50.65	74.00	-23.35	peak
3	11477.000	37.92	17.73	55.65	74.00	-18.35	peak
4	11477.000	25.94	17.73	43.67	54.00	-10.33	AVG
5	12698.000	29.09	19.56	48.65	74.00	-25.35	peak
6	14029.000	26.64	23.49	50.13	74.00	-23.87	peak
7	18000.000	19.89	29.61	49.50	74.00	-24.50	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5745 26 0
Polarity:	Vertical	Test Voltage:	DC 3.3V

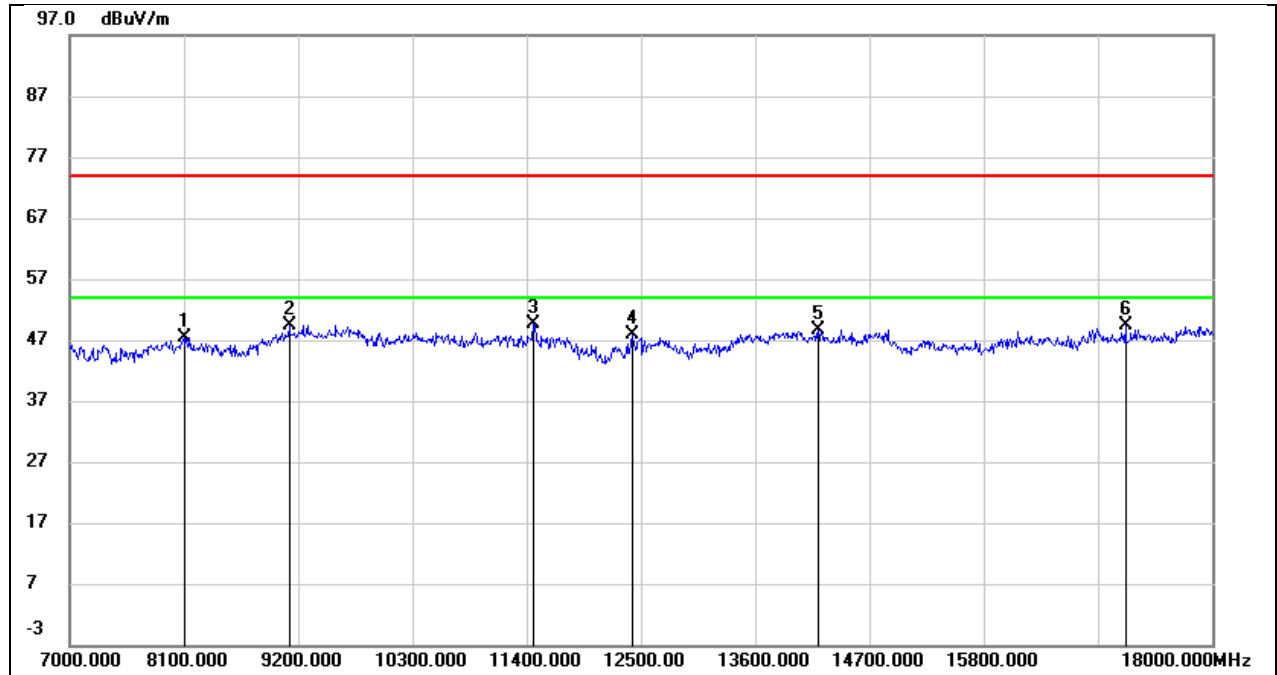


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8100.000	38.68	8.73	47.41	74.00	-26.59	peak
2	9112.000	37.99	11.48	49.47	74.00	-24.53	peak
3	11466.000	33.39	16.22	49.61	74.00	-24.39	peak
4	12412.000	29.82	18.04	47.86	74.00	-26.14	peak
5	14205.000	27.05	21.69	48.74	74.00	-25.26	peak
6	17164.000	24.67	24.82	49.49	74.00	-24.51	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785 26 4
Polarity:	Horizontal	Test Voltage:	DC 3.3V

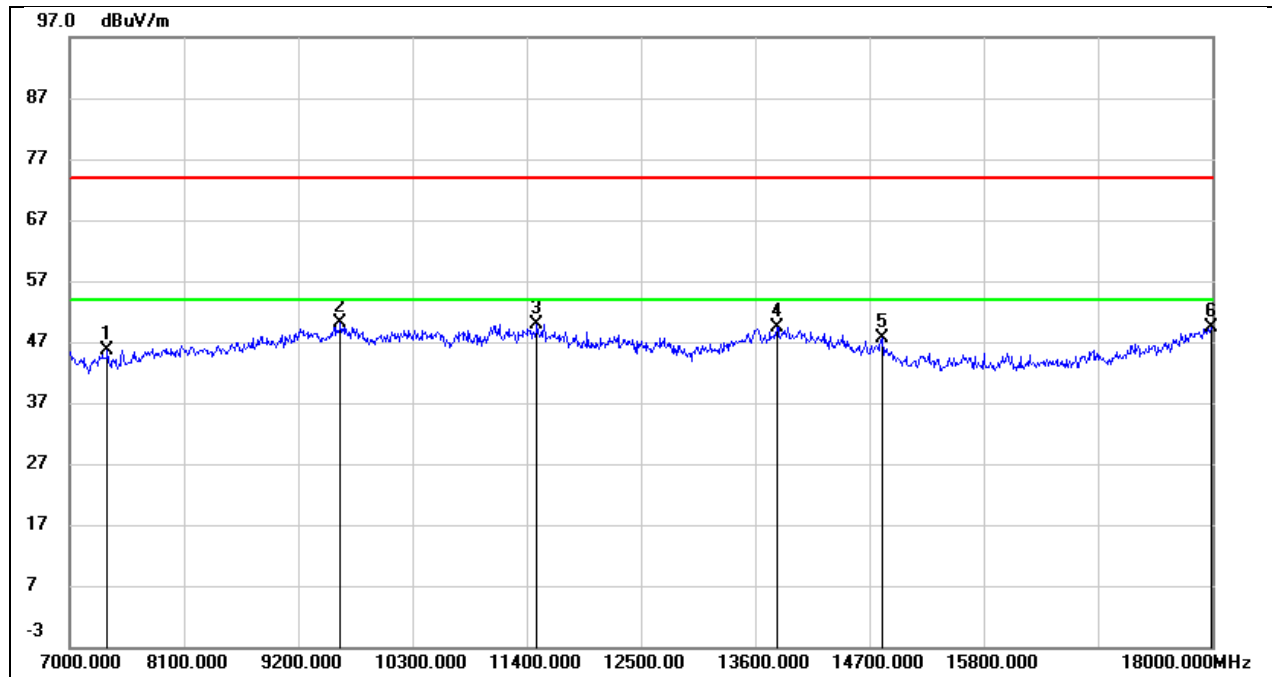


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7363.000	37.99	7.70	45.69	74.00	-28.31	peak
2	9607.000	36.53	13.48	50.01	74.00	-23.99	peak
3	11499.000	32.07	17.83	49.90	74.00	-24.10	peak
4	13809.000	26.58	22.83	49.41	74.00	-24.59	peak
5	14821.000	27.50	20.20	47.70	74.00	-26.30	peak
6	17989.000	19.94	29.49	49.43	74.00	-24.57	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5785 26 4
Polarity:	Vertical	Test Voltage:	DC 3.3V

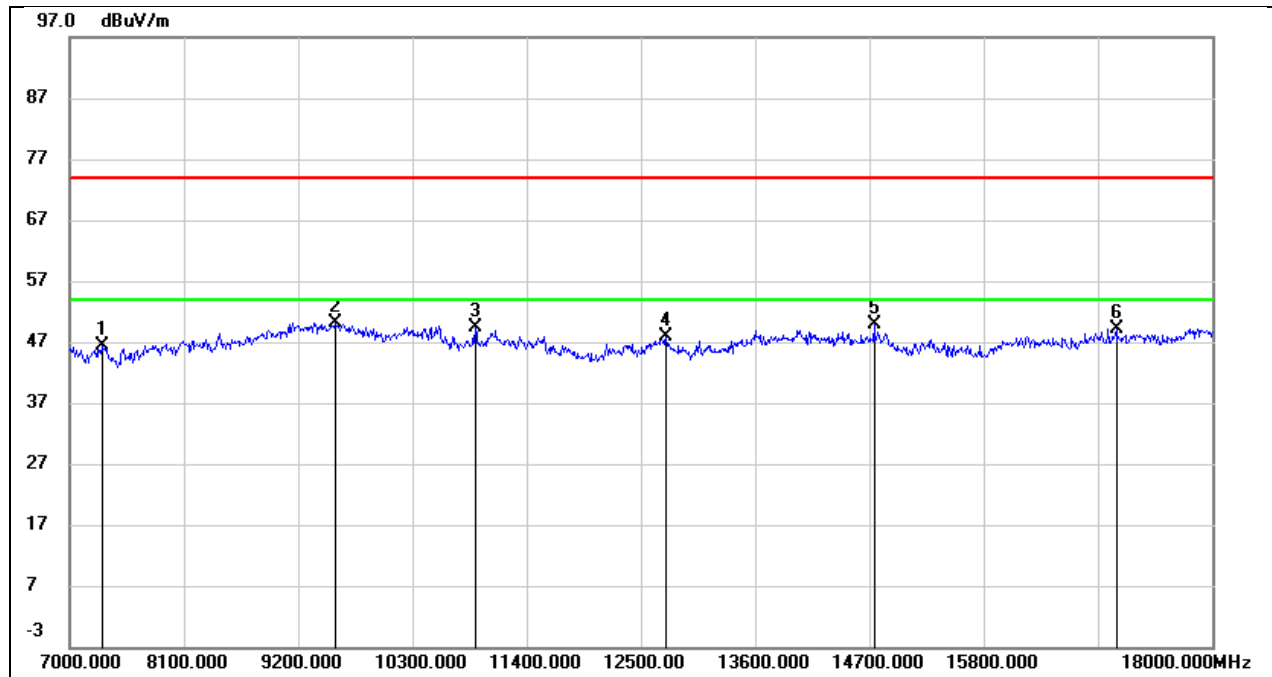


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	38.05	8.29	46.34	74.00	-27.66	peak
2	9563.000	36.99	13.14	50.13	74.00	-23.87	peak
3	10905.000	35.20	14.06	49.26	74.00	-24.74	peak
4	12742.000	29.19	18.70	47.89	74.00	-26.11	peak
5	14744.000	29.23	20.68	49.91	74.00	-24.09	peak
6	17076.000	24.63	24.61	49.24	74.00	-24.76	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	5825 26 8
Polarity:	Horizontal	Test Voltage:	DC 3.3V

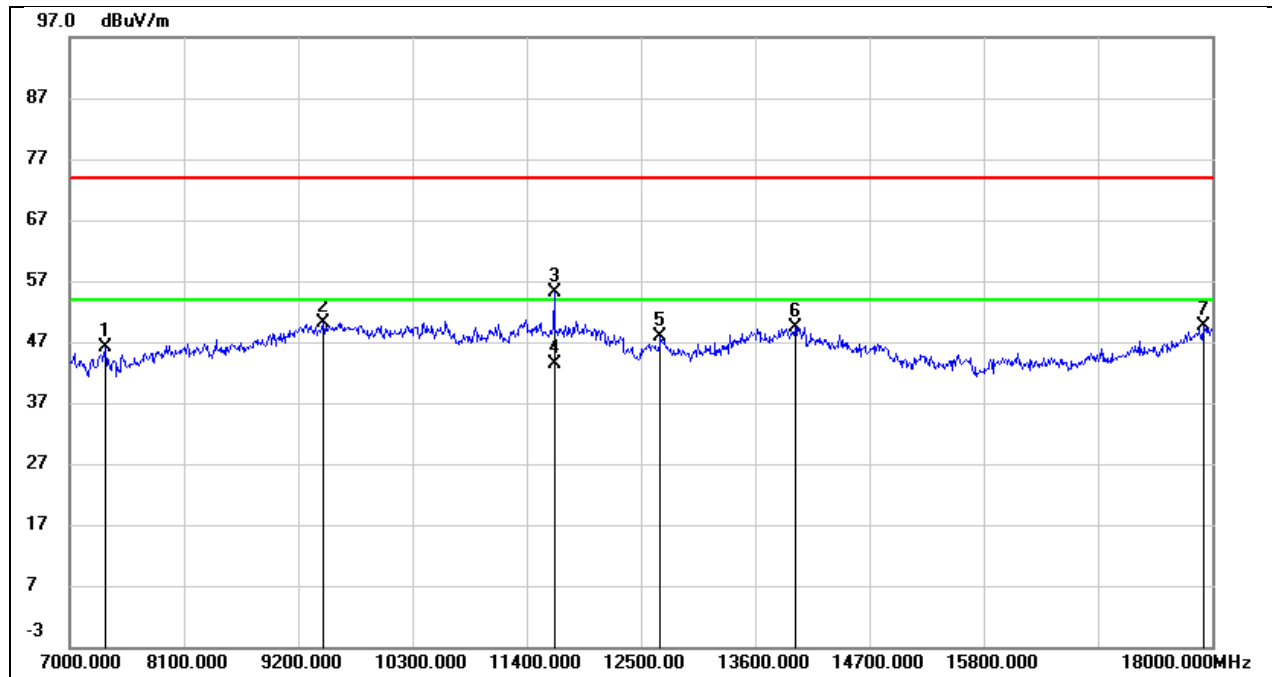

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	38.47	7.68	46.15	74.00	-27.85	peak
2	9442.000	37.75	12.48	50.23	74.00	-23.77	peak
3	11664.000	37.10	18.05	55.15	74.00	-18.85	peak
4	11664.000	25.23	18.05	43.28	54.00	-10.72	AVG
5	12687.000	28.43	19.52	47.95	74.00	-26.05	peak
6	13985.000	25.88	23.55	49.43	74.00	-24.57	peak
7	17923.000	20.77	28.78	49.55	74.00	-24.45	peak


Test Mode:	802.11ax HE20	Frequency(MHz):	5825 26 8
Polarity:	Vertical	Test Voltage:	DC 3.3V

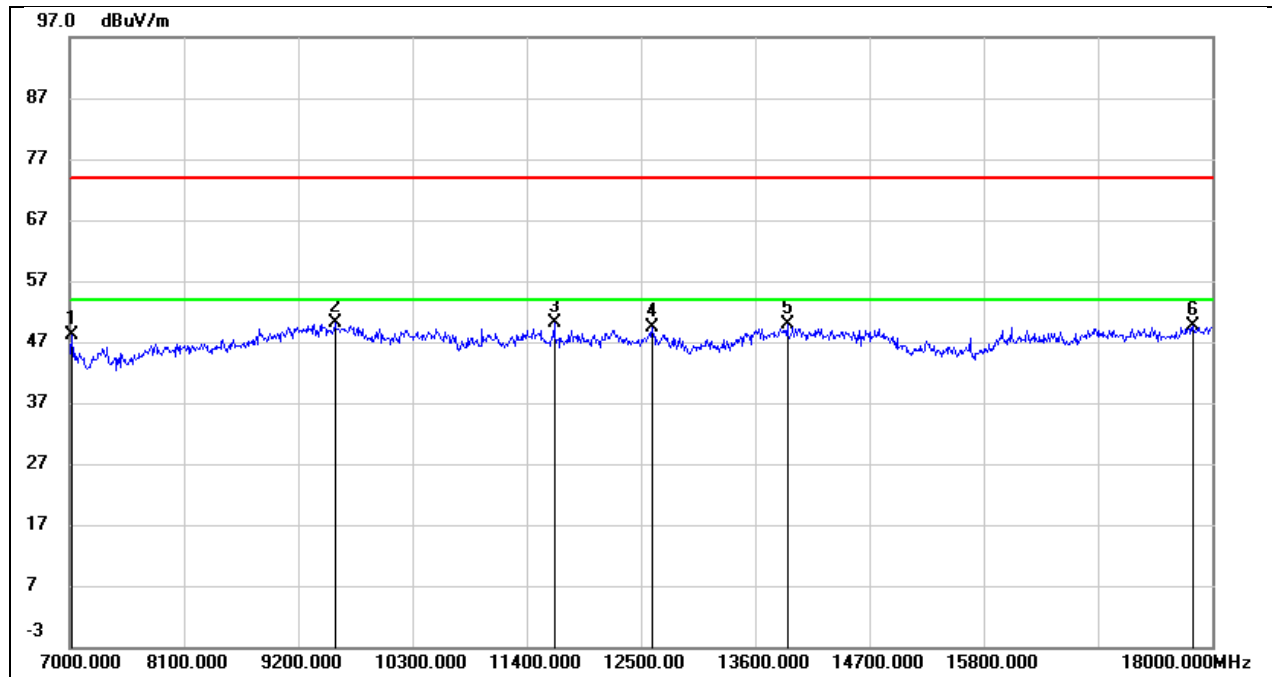

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7022.000	40.05	8.04	48.09	74.00	-25.91	peak
2	9552.000	37.04	13.10	50.14	74.00	-23.86	peak
3	11664.000	33.43	16.68	50.11	74.00	-23.89	peak
4	12610.000	31.08	18.24	49.32	74.00	-24.68	peak
5	13908.000	28.16	21.62	49.78	74.00	-24.22	peak
6	17813.000	23.49	26.24	49.73	74.00	-24.27	peak


8.10. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

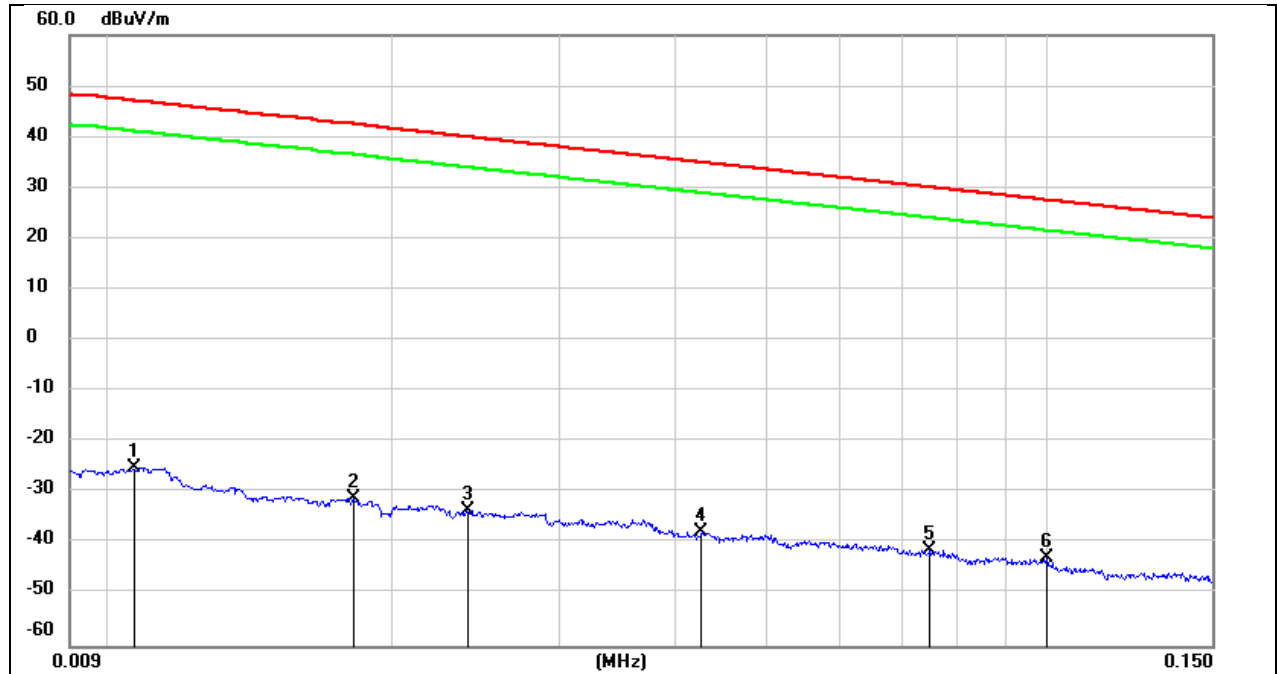


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0106	76.38	-101.39	-25.01	47.09	-76.51	-4.41	-72.10	peak
2	0.0181	70.35	-101.36	-31.01	42.45	-82.51	-9.05	-73.46	peak
3	0.0240	68.05	-101.36	-33.31	40.00	-84.81	-11.50	-73.31	peak
4	0.0427	63.67	-101.45	-37.78	34.99	-89.28	-16.51	-72.77	peak
5	0.0748	60.30	-101.59	-41.29	30.12	-92.79	-21.38	-71.41	peak
6	0.1000	59.17	-101.80	-42.63	27.60	-94.13	-23.90	-70.23	peak

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

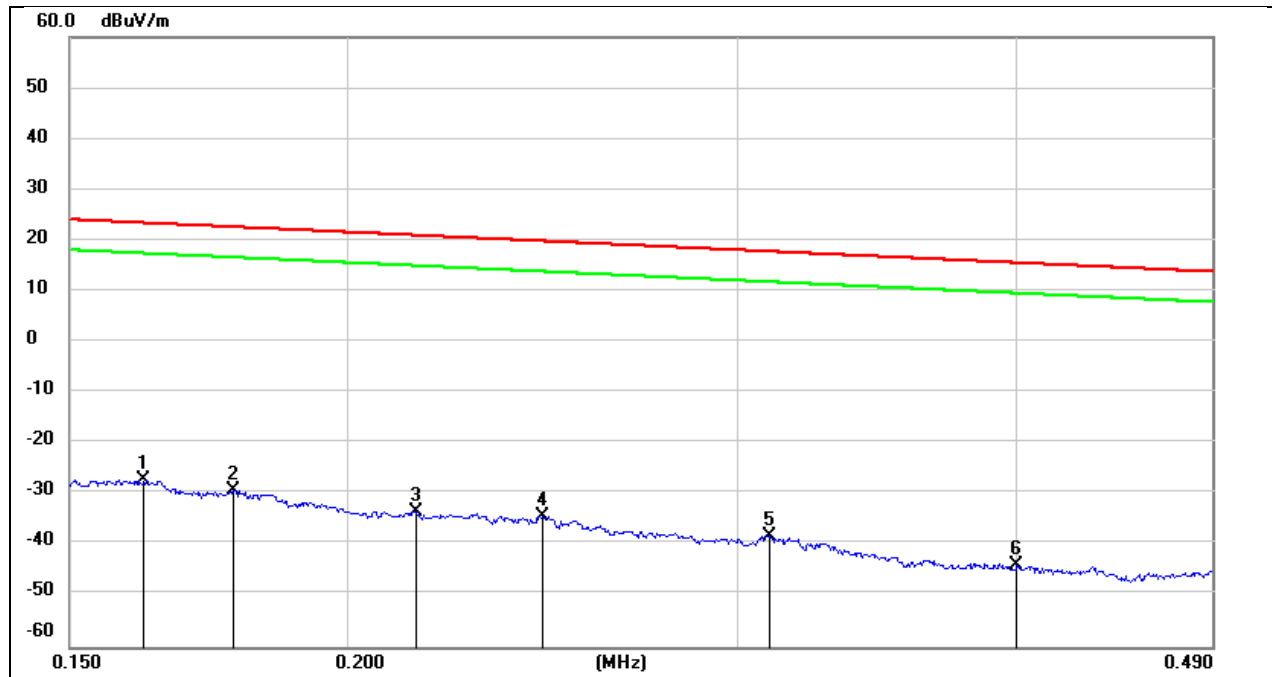

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1621	74.42	-101.65	-27.23	23.41	-78.73	-28.09	-50.64	peak
2	0.1776	72.45	-101.68	-29.23	22.62	-80.73	-28.88	-51.85	peak
3	0.2149	68.20	-101.75	-33.55	20.96	-85.05	-30.54	-54.51	peak
4	0.2449	67.58	-101.79	-34.21	19.82	-85.71	-31.68	-54.03	peak
5	0.3094	63.57	-101.86	-38.29	17.79	-89.79	-33.71	-56.08	peak
6	0.4001	57.95	-101.96	-44.01	15.56	-95.51	-35.94	-59.57	peak


Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

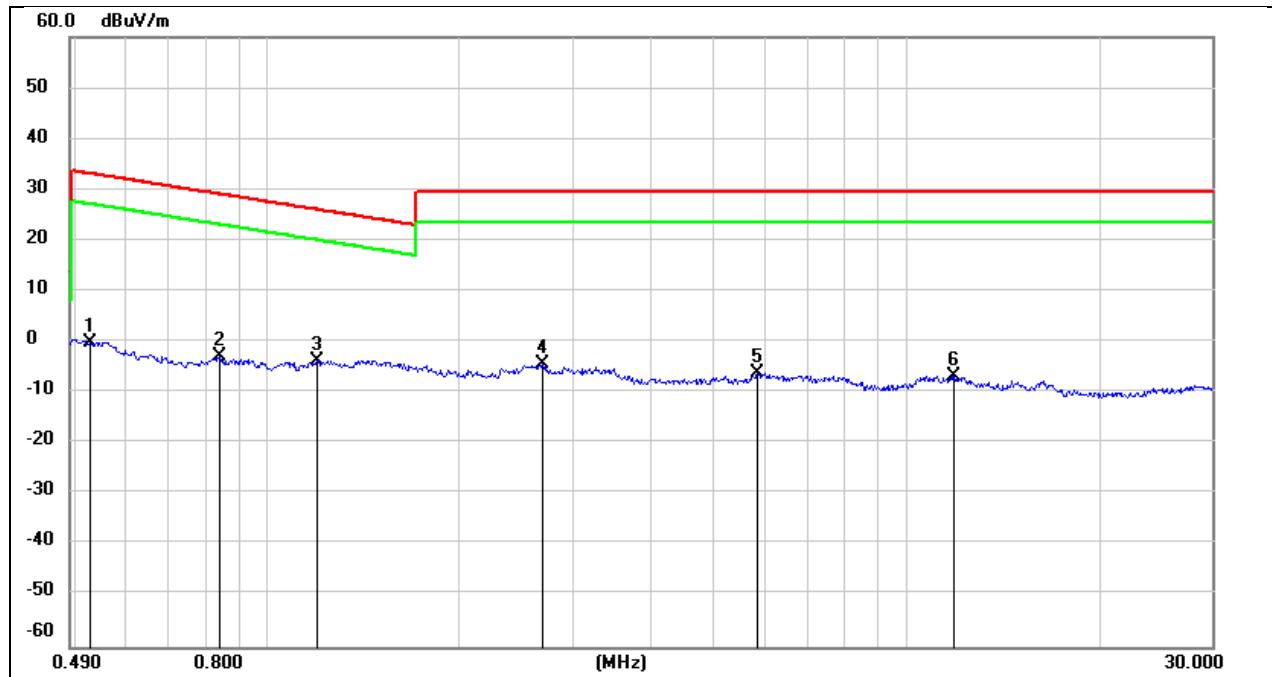

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.5272	62.04	-62.07	-0.03	33.16	-51.53	-18.34	-33.19	peak
2	0.8400	59.21	-62.17	-2.96	29.12	-54.46	-22.38	-32.08	peak
3	1.1915	58.57	-62.18	-3.61	26.08	-55.11	-25.42	-29.69	peak
4	2.6913	57.30	-61.65	-4.35	29.54	-55.85	-21.96	-33.89	peak
5	5.8334	55.13	-61.37	-6.24	29.54	-57.74	-21.96	-35.78	peak
6	11.8513	54.06	-60.88	-6.82	29.54	-58.32	-21.96	-36.36	peak


8.11. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

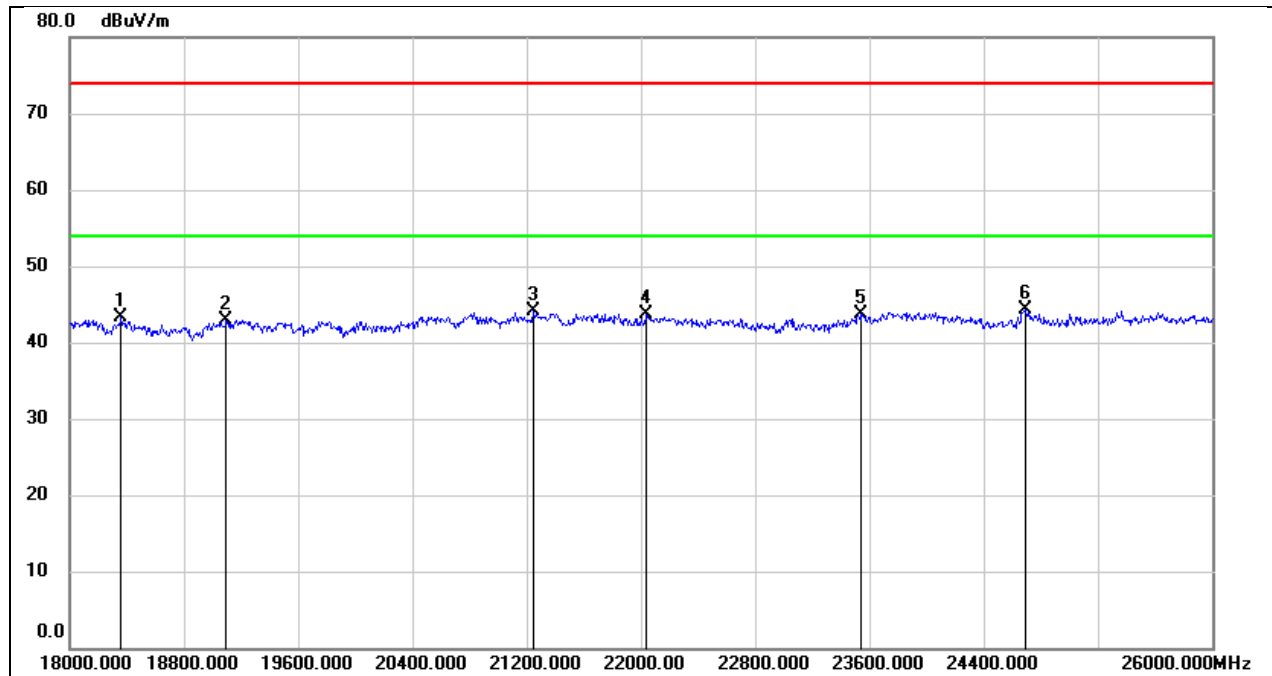

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18360.000	48.66	-5.42	43.24	74.00	-30.76	peak
2	19096.000	48.32	-5.36	42.96	74.00	-31.04	peak
3	21248.000	48.79	-4.77	44.02	74.00	-29.98	peak
4	22040.000	48.07	-4.44	43.63	74.00	-30.37	peak
5	23544.000	46.91	-3.15	43.76	74.00	-30.24	peak
6	24688.000	46.65	-2.32	44.33	74.00	-29.67	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

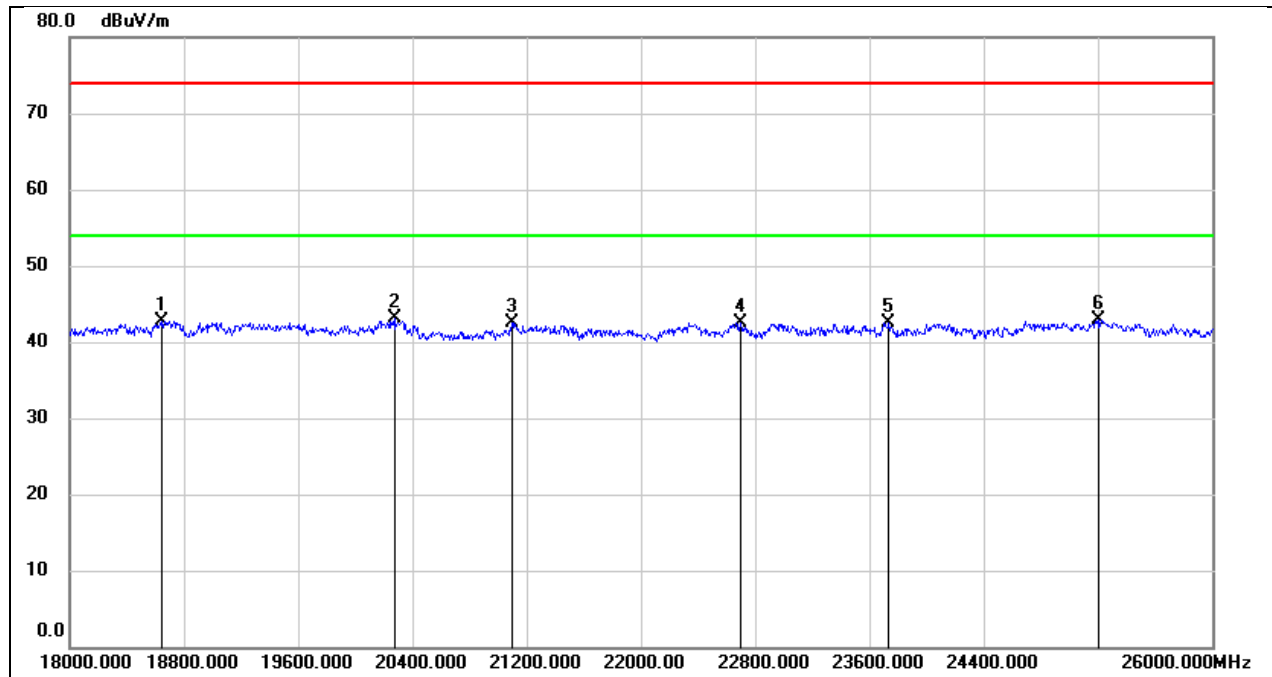

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18640.000	48.11	-5.35	42.76	74.00	-31.24	peak
2	20272.000	48.77	-5.60	43.17	74.00	-30.83	peak
3	21096.000	47.33	-4.83	42.50	74.00	-31.50	peak
4	22696.000	46.30	-3.73	42.57	74.00	-31.43	peak
5	23736.000	45.69	-3.19	42.50	74.00	-31.50	peak
6	25200.000	44.61	-1.76	42.85	74.00	-31.15	peak


8.12. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

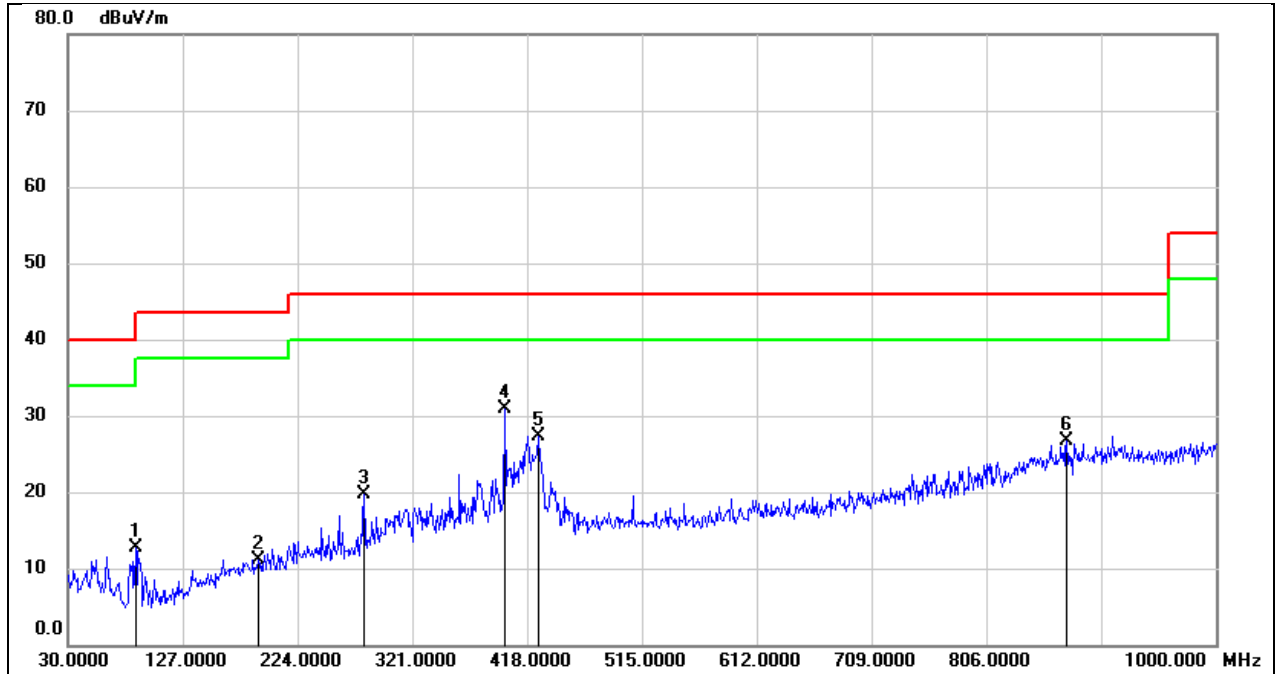

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	87.2300	29.24	-16.51	12.73	40.00	-27.27	QP
2	191.0200	23.16	-11.97	11.19	43.50	-32.31	QP
3	280.2600	32.46	-12.73	19.73	46.00	-26.27	QP
4	398.6000	40.56	-9.62	30.94	46.00	-15.06	QP
5	427.7000	36.22	-8.85	27.37	46.00	-18.63	QP
6	873.9000	27.58	-0.83	26.75	46.00	-19.25	QP


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

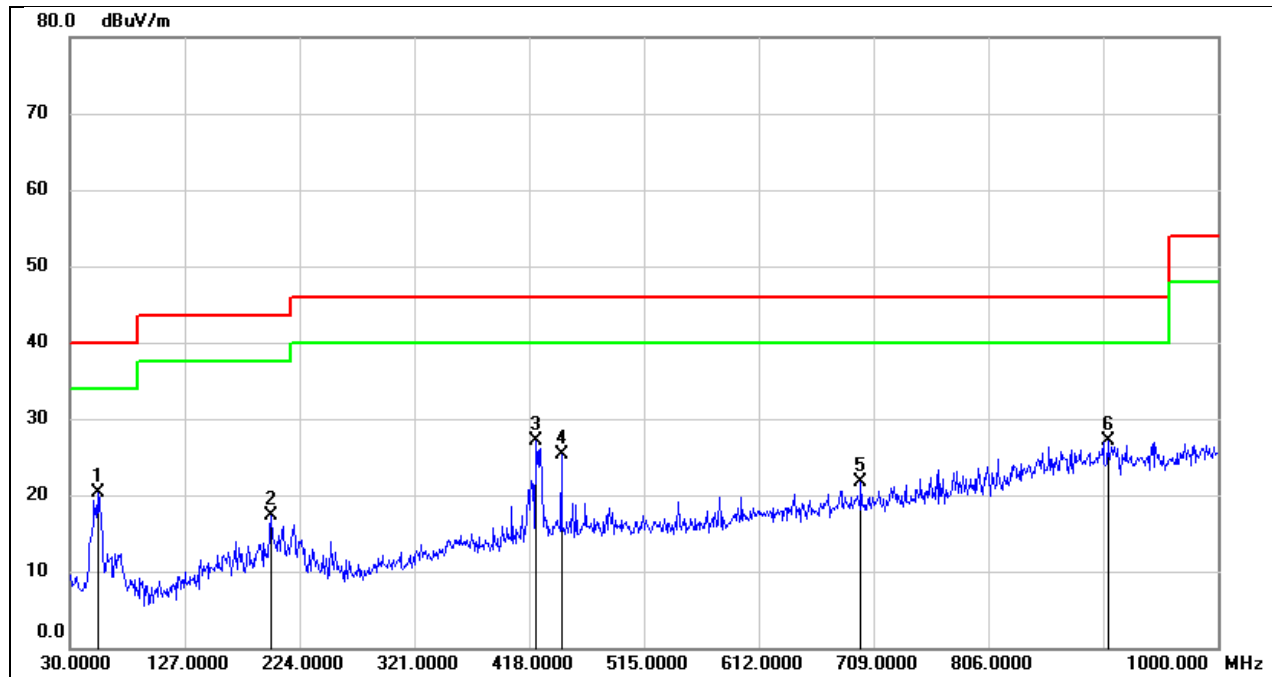

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	53.2800	35.30	-15.04	20.26	40.00	-19.74	QP
2	199.7500	29.59	-12.29	17.30	43.50	-26.20	QP
3	423.8200	36.14	-8.98	27.16	46.00	-18.84	QP
4	445.1600	33.67	-8.28	25.39	46.00	-20.61	QP
5	698.3300	25.88	-4.26	21.62	46.00	-24.38	QP
6	906.8800	27.57	-0.46	27.11	46.00	-18.89	QP


8.13. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

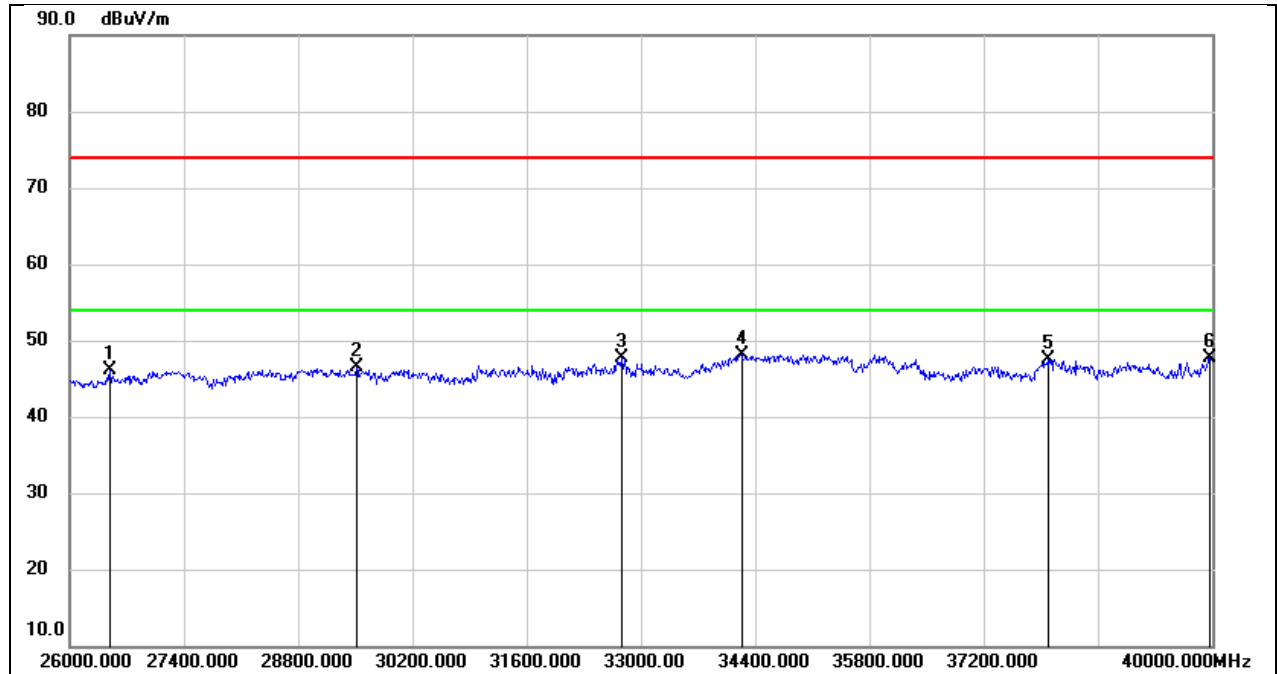

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26490.000	50.79	-4.74	46.05	74.00	-27.95	peak
2	29514.000	47.30	-0.73	46.57	74.00	-27.43	peak
3	32762.000	48.95	-1.21	47.74	74.00	-26.26	peak
4	34232.000	47.04	1.14	48.18	74.00	-25.82	peak
5	37998.000	44.33	3.26	47.59	74.00	-26.41	peak
6	39972.000	42.58	5.13	47.71	74.00	-26.29	peak

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

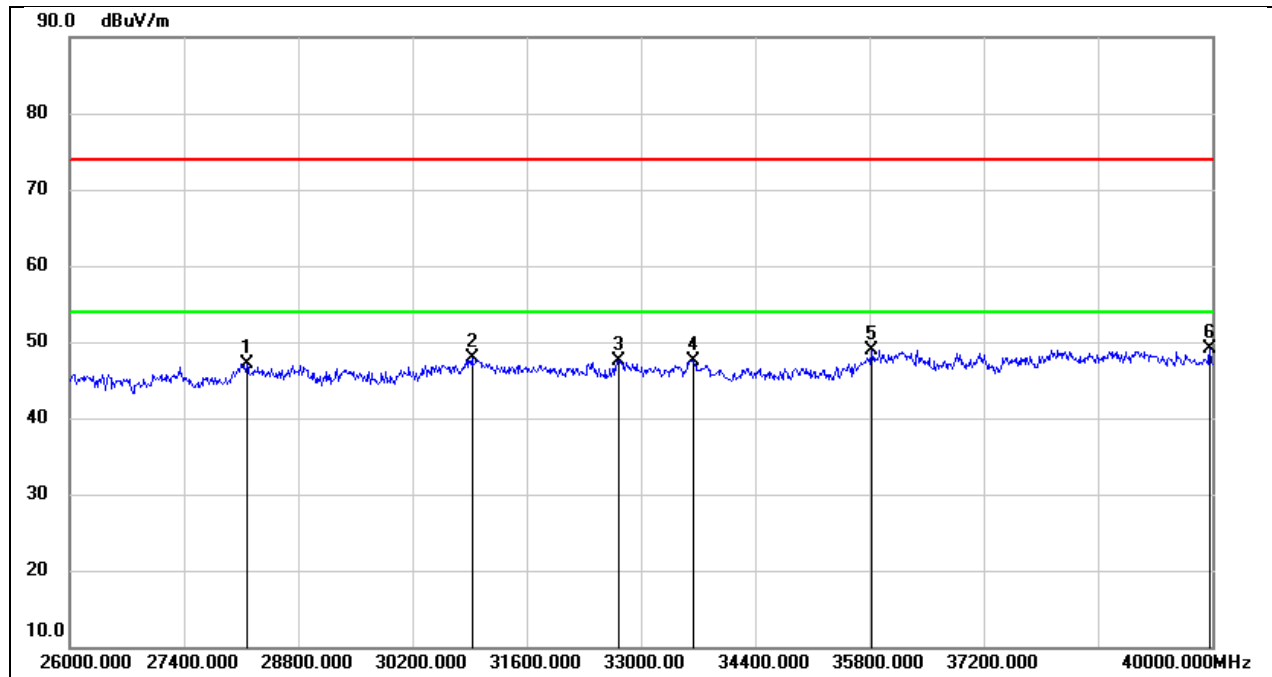

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	28170.000	50.09	-2.92	47.17	74.00	-26.83	peak
2	30928.000	48.82	-0.84	47.98	74.00	-26.02	peak
3	32720.000	48.88	-1.28	47.60	74.00	-26.40	peak
4	33644.000	47.06	0.42	47.48	74.00	-26.52	peak
5	35828.000	45.25	3.67	48.92	74.00	-25.08	peak
6	39972.000	43.95	5.13	49.08	74.00	-24.92	peak

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISSED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

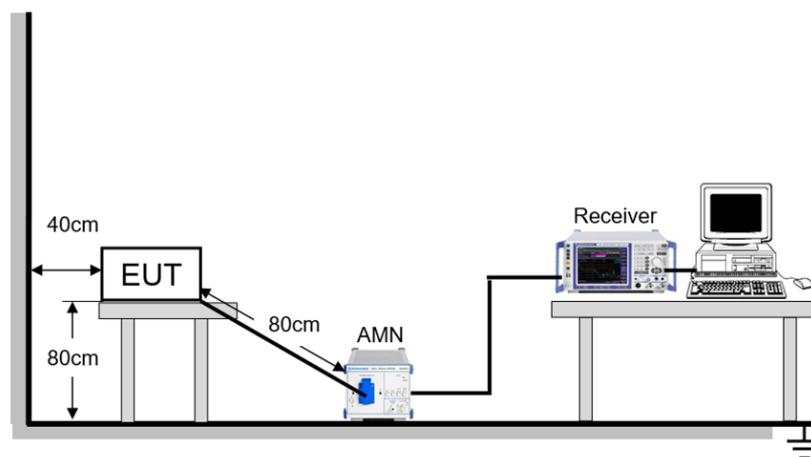

TEST ENVIRONMENT


Temperature	23.2°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	March 5, 2025	Test By	Karl Wu
-----------	---------------	---------	---------

TEST RESULTS

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Line		

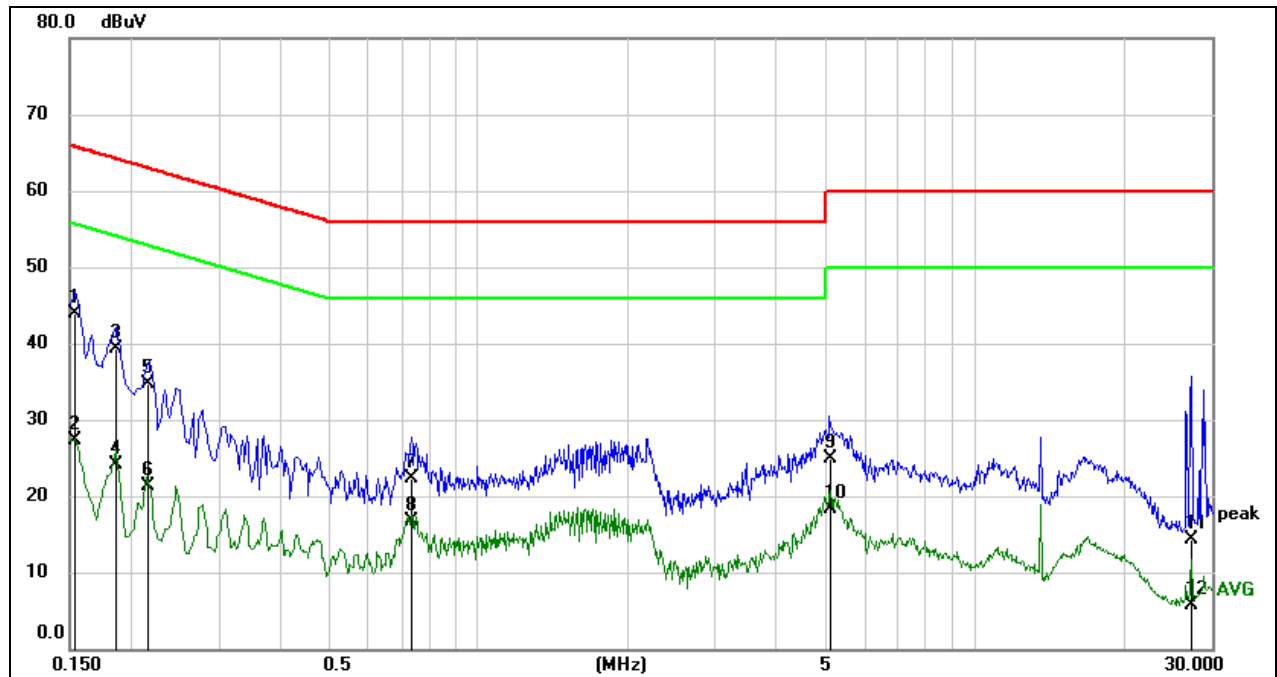


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1539	34.08	9.73	43.81	65.79	-21.98	QP
2	0.1539	17.57	9.73	27.30	55.79	-28.49	AVG
3	0.1846	29.55	9.67	39.22	64.28	-25.06	QP
4	0.1846	14.48	9.67	24.15	54.28	-30.13	AVG
5	0.2143	25.11	9.64	34.75	63.04	-28.29	QP
6	0.2143	11.73	9.64	21.37	53.04	-31.67	AVG
7	0.7315	12.61	9.63	22.24	56.00	-33.76	QP
8	0.7315	7.01	9.63	16.64	46.00	-29.36	AVG
9	5.1387	15.25	9.73	24.98	60.00	-35.02	QP
10	5.1387	8.57	9.73	18.30	50.00	-31.70	AVG
11	27.3604	4.53	9.68	14.21	60.00	-45.79	QP
12	27.3604	-3.90	9.68	5.78	50.00	-44.22	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11a 20	Frequency(MHz):	5180
Line:	Neutral		

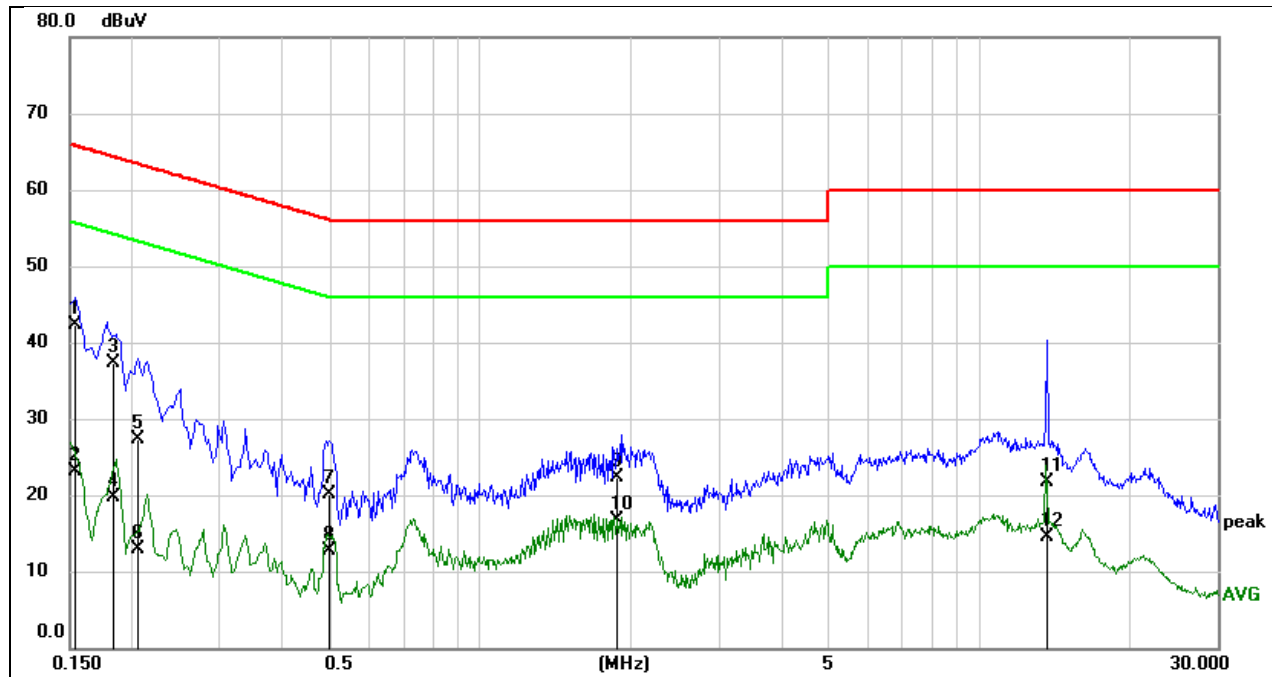

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1529	32.56	9.73	42.29	65.84	-23.55	QP
2	0.1529	13.47	9.73	23.20	55.84	-32.64	AVG
3	0.1826	27.62	9.67	37.29	64.37	-27.08	QP
4	0.1826	9.95	9.67	19.62	54.37	-34.75	AVG
5	0.2040	17.74	9.64	27.38	63.45	-36.07	QP
6	0.2040	3.18	9.64	12.82	53.45	-40.63	AVG
7	0.4964	10.54	9.64	20.18	56.06	-35.88	QP
8	0.4964	3.15	9.64	12.79	46.06	-33.27	AVG
9	1.8845	12.52	9.73	22.25	56.00	-33.75	QP
10	1.8845	7.07	9.73	16.80	46.00	-29.20	AVG
11	13.6729	12.02	9.74	21.76	60.00	-38.24	QP
12	13.6729	4.83	9.74	14.57	50.00	-35.43	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA

11.1. APPENDIX A: EMISSION BANDWIDTH


11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Verdict
11A	Ant3	5180	26.92	5168.12	5195.04	PASS
		5200	24.72	5188.36	5213.08	PASS
		5240	19.84	5230.16	5250.00	PASS
		5260	25.28	5247.36	5272.64	PASS
		5280	23.48	5268.36	5291.84	PASS
		5320	25.44	5307.08	5332.52	PASS
		5500	24.36	5488.00	5512.36	PASS
		5580	23.36	5567.88	5591.24	PASS
		5700	22.12	5688.28	5710.40	PASS
		5720	27.36	5705.52	5732.88	PASS
		5720 UNII-2C	19.48	5705.52	5725	PASS
		5720 UNII-3	7.88	5725	5732.88	PASS
		5745	22.00	5735.24	5757.24	PASS
		5785	24.52	5772.24	5796.76	PASS
		5825	25.72	5810.96	5836.68	PASS
11N20SISO	Ant3	5180	26.48	5166.88	5193.36	PASS
		5200	25.36	5187.64	5213.00	PASS
		5240	20.44	5229.68	5250.12	PASS
		5260	25.60	5246.84	5272.44	PASS
		5280	23.44	5268.96	5292.40	PASS
		5320	24.28	5307.88	5332.16	PASS
		5500	25.52	5487.52	5513.04	PASS
		5580	21.08	5569.52	5590.60	PASS
		5700	24.84	5685.96	5710.80	PASS
		5720	21.32	5709.12	5730.44	PASS
		5720 UNII-2C	15.88	5709.12	5725	PASS
		5720 UNII-3	5.44	5725	5730.44	PASS
		5745	24.24	5733.76	5758.00	PASS
		5785	25.32	5772.72	5798.04	PASS
		5825	25.96	5812.12	5838.08	PASS
11N40SISO	Ant3	5190	57.28	5165.92	5223.20	PASS
		5230	41.60	5209.28	5250.88	PASS
		5270	41.44	5249.28	5290.72	PASS
		5310	60.96	5274.88	5335.84	PASS
		5510	59.68	5484.48	5544.16	PASS
		5550	42.16	5528.88	5571.04	PASS
		5670	67.92	5636.00	5703.92	PASS
		5710	42.32	5689.04	5731.36	PASS
		5710 UNII-2C	35.96	5689.04	5725	PASS
		5710 UNII-3	6.36	5725	5731.36	PASS
		5755	57.84	5733.80	5791.64	PASS
		5795	41.60	5774.20	5815.80	PASS
		5210	113.60	5162.96	5276.56	PASS
		5290	110.08	5227.60	5337.68	PASS
		5530	113.92	5481.52	5595.44	PASS
11AC80SISO	Ant3	5610	80.32	5570.00	5650.32	PASS
		5690	80.48	5649.84	5730.32	PASS
		5690 UNII-2C	75.16	5649.84	5725	PASS
		5690 UNII-3	5.32	5725	5730.32	PASS
		5775	80.00	5735.16	5815.16	PASS
		5250	172.80	5166.48	5339.28	PASS
11AC160SISO	Ant3	5250	172.80	5166.48	5339.28	PASS


		5250 UNII-1	83.52	5166.48	5250	PASS
		5250 UNII-2A	89.28	5250	5339.28	PASS
		5570	175.04	5485.52	5660.56	PASS
11AX20SISO SU	Ant3	5180	21.32	5169.04	5190.36	PASS
		5200	22.12	5188.84	5210.96	PASS
		5240	20.00	5230.00	5250.00	PASS
		5260	21.84	5249.08	5270.92	PASS
		5280	21.64	5269.08	5290.72	PASS
		5320	21.84	5309.00	5330.84	PASS
		5500	21.44	5489.64	5511.08	PASS
		5580	27.60	5566.16	5593.76	PASS
		5700	21.68	5688.76	5710.44	PASS
		5720	21.40	5709.28	5730.68	PASS
		5720 UNII-2C	15.72	5709.28	5725	PASS
		5720 UNII-3	5.68	5725	5730.68	PASS
		5745	21.96	5733.60	5755.56	PASS
		5785	21.44	5774.12	5795.56	PASS
		5825	21.16	5814.48	5835.64	PASS
11AX40SISO SU	Ant3	5190	39.76	5170.16	5209.92	PASS
		5230	39.76	5210.16	5249.92	PASS
		5270	39.76	5250.16	5289.92	PASS
		5310	39.68	5290.16	5329.84	PASS
		5510	39.92	5490.08	5530.00	PASS
		5550	39.92	5530.16	5570.08	PASS
		5670	39.68	5650.16	5689.84	PASS
		5710	39.84	5690.08	5729.92	PASS
		5710 UNII-2C	34.92	5690.08	5725	PASS
		5710 UNII-3	4.92	5725	5729.92	PASS
		5755	39.76	5735.16	5774.92	PASS
		5795	40.00	5775.08	5815.08	PASS
11AX80SISO SU	Ant3	5210	82.56	5168.08	5250.64	PASS
		5290	80.64	5249.84	5330.48	PASS
		5530	82.24	5488.24	5570.48	PASS
		5610	80.48	5569.84	5650.32	PASS
		5690	80.64	5649.68	5730.32	PASS
		5690 UNII-2C	75.32	5649.68	5725	PASS
		5690 UNII-3	5.32	5725	5730.32	PASS
		5775	80.64	5734.68	5815.32	PASS
11AX160SISO SU	Ant3	5250	165.44	5167.76	5333.20	PASS
		5250 UNII-1	82.24	5167.76	5250	PASS
		5250 UNII-2A	83.2	5250	5333.20	PASS
		5570	164.16	5488.08	5652.24	PASS

Test Mode	Antenna	Channel	Ru Size	Ru Index	26db BW [MHz]	FL [MHz]	FH [MHz]	Verdict
11AX20SISO	Ant3	5180	26Tone	RU0	20.24	5168.72	5188.96	PASS
			52Tone	RU37	19.80	5169.20	5189.00	PASS
			106Tone	RU53	20.36	5168.76	5189.12	PASS
		5200	26Tone	RU4	18.12	5190.84	5208.96	PASS
			52Tone	RU38	18.28	5190.76	5209.04	PASS
			106Tone	RU53	20.12	5189.00	5209.12	PASS
		5240	26Tone	RU8	19.24	5230.76	5250.00	PASS
			52Tone	RU40	19.40	5230.60	5250.00	PASS
			106Tone	RU54	19.44	5230.56	5250.00	PASS
		5260	26Tone	RU0	20.20	5248.76	5268.96	PASS
			52Tone	RU37	20.04	5249.00	5269.04	PASS
			106Tone	RU53	20.56	5248.56	5269.12	PASS
		5280	26Tone	RU4	18.16	5270.80	5288.96	PASS
			52Tone	RU38	18.56	5270.56	5289.12	PASS
			106Tone	RU53	20.84	5268.36	5289.20	PASS
		5320	26Tone	RU8	20.28	5310.84	5331.12	PASS
			52Tone	RU40	21.12	5310.52	5331.64	PASS
			106Tone	RU54	20.56	5310.48	5331.04	PASS
		5500	26Tone	RU0	20.08	5488.88	5508.96	PASS
			52Tone	RU37	20.60	5488.44	5509.04	PASS
			106Tone	RU53	20.92	5488.16	5509.08	PASS
		5580	26Tone	RU4	18.08	5570.88	5588.96	PASS
			52Tone	RU38	18.40	5570.64	5589.04	PASS
			106Tone	RU53	20.48	5568.64	5589.12	PASS
		5700	26Tone	RU8	20.48	5690.84	5711.32	PASS
			52Tone	RU40	20.64	5690.92	5711.56	PASS
			106Tone	RU54	20.84	5690.80	5711.64	PASS
		5745	26Tone	RU0	19.96	5734.00	5753.96	PASS
			52Tone	RU37	20.80	5733.28	5754.08	PASS
			106Tone	RU53	21.00	5733.24	5754.24	PASS
		5785	26Tone	RU4	18.24	5775.72	5793.96	PASS
			52Tone	RU38	18.48	5775.52	5794.00	PASS
			106Tone	RU53	20.80	5773.36	5794.16	PASS
		5825	26Tone	RU8	20.84	5815.76	5836.60	PASS
			52Tone	RU40	21.04	5815.60	5836.64	PASS
			106Tone	RU54	21.96	5815.44	5837.40	PASS


11.1.2. Test Graphs

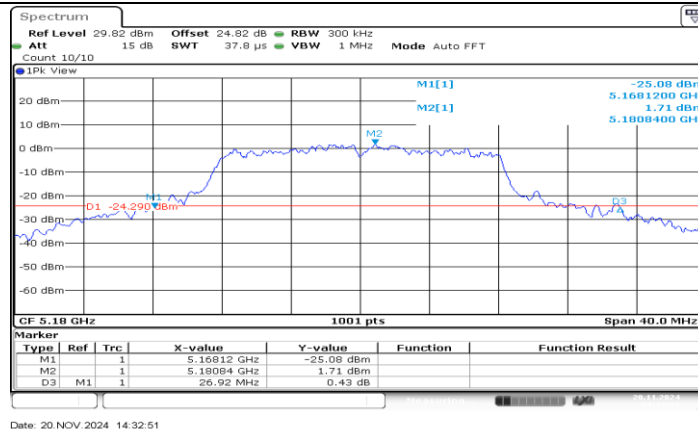


11A Ant3 5180

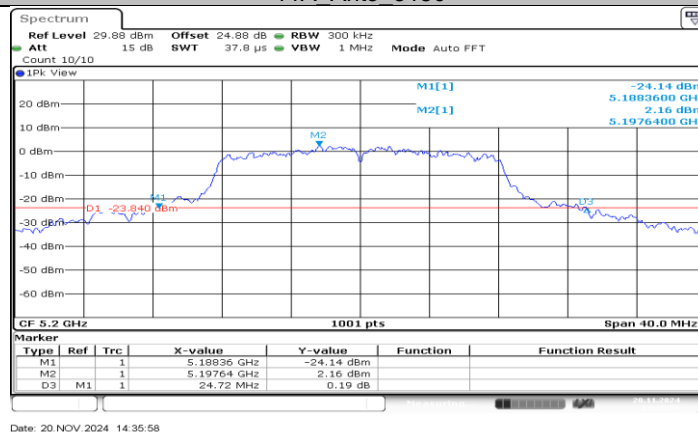


11A Ant3 5200

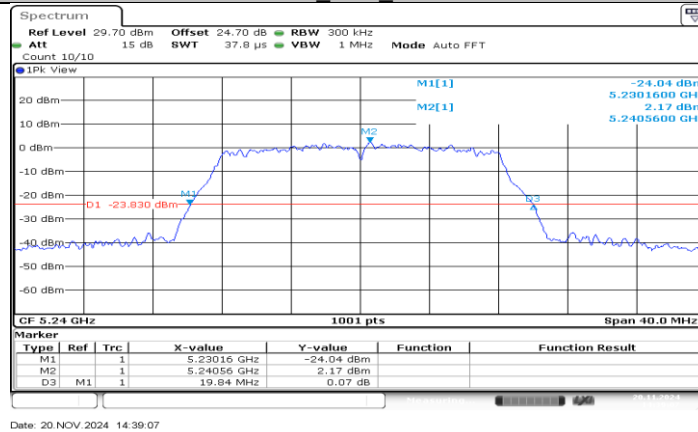


11A Ant3 5240

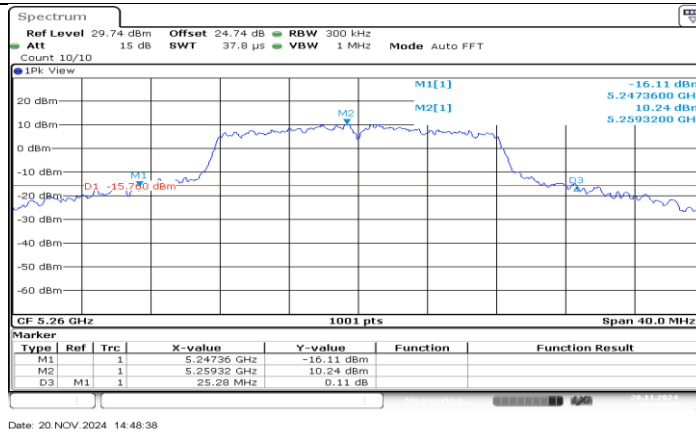


11A_Ant3_5260

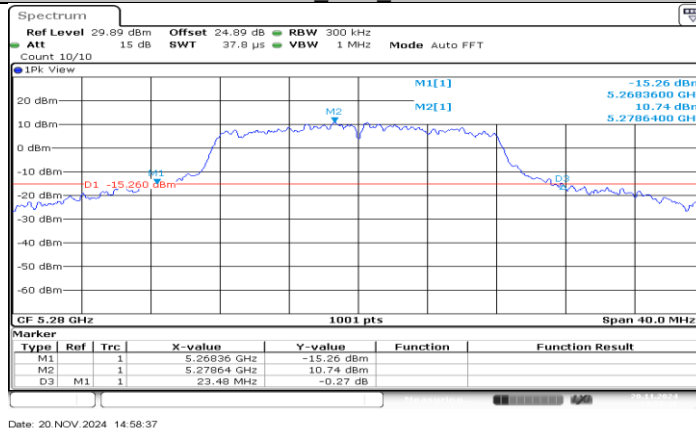


11A_Ant3_5280

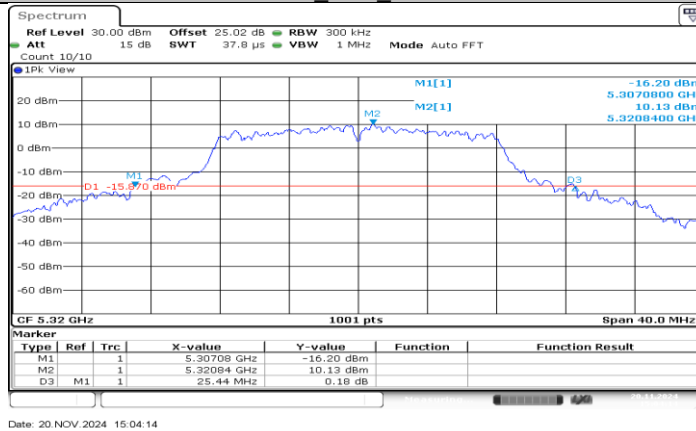


11A_Ant3_5320

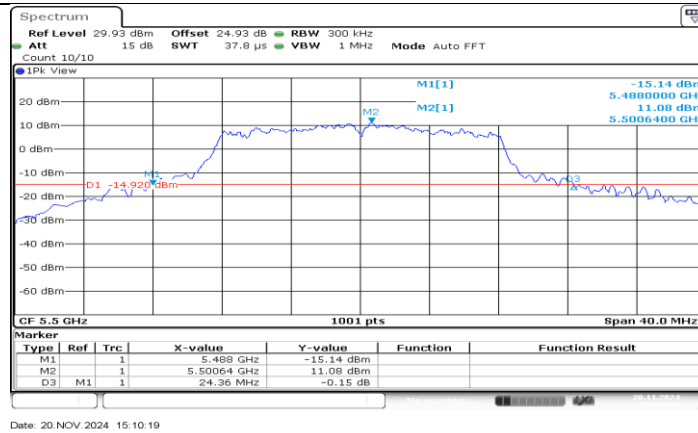


11A_Ant3_5500

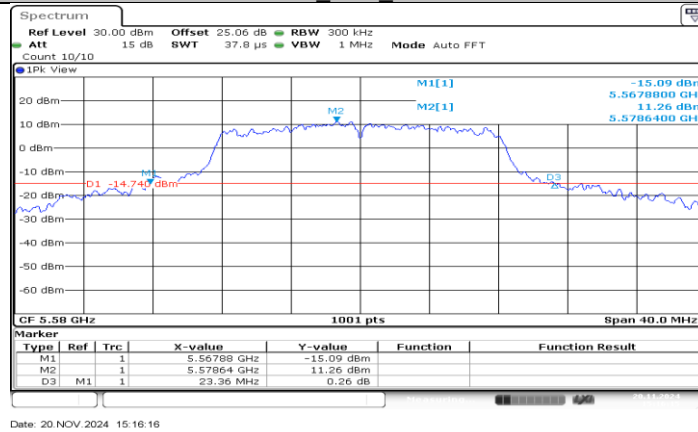


11A_Ant3_5580

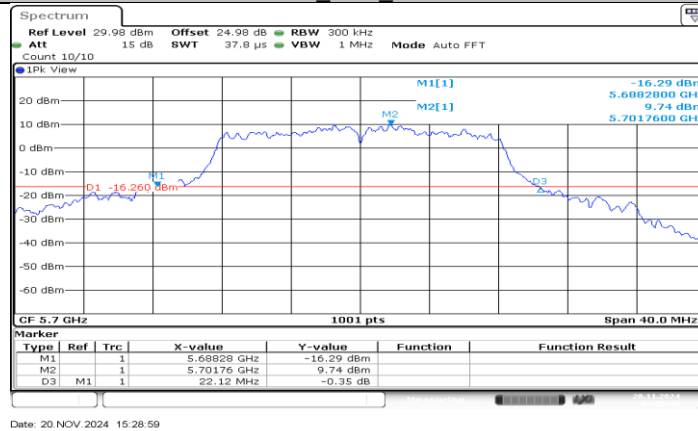


11A_Ant3_5700

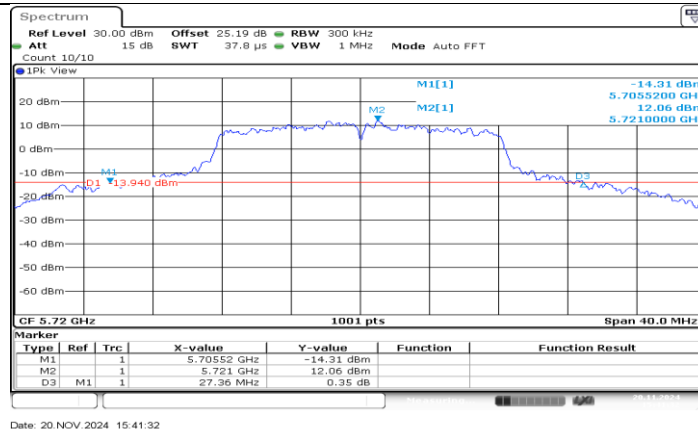


11A_Ant3_5720

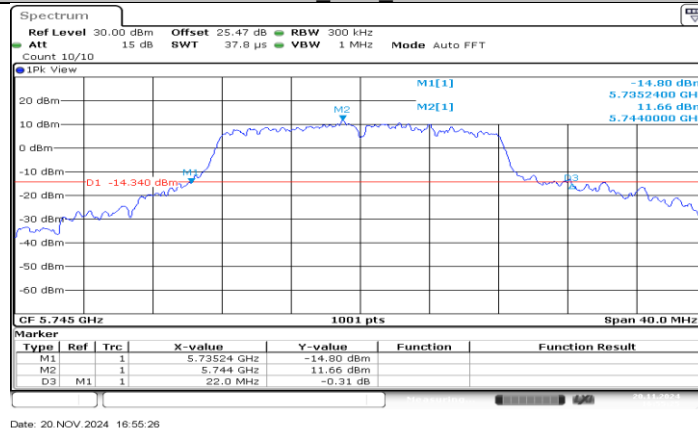


11A_Ant3_5745

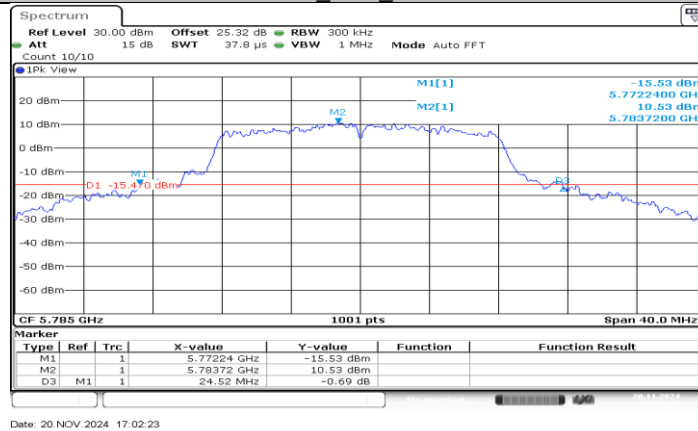


11A_Ant3_5785

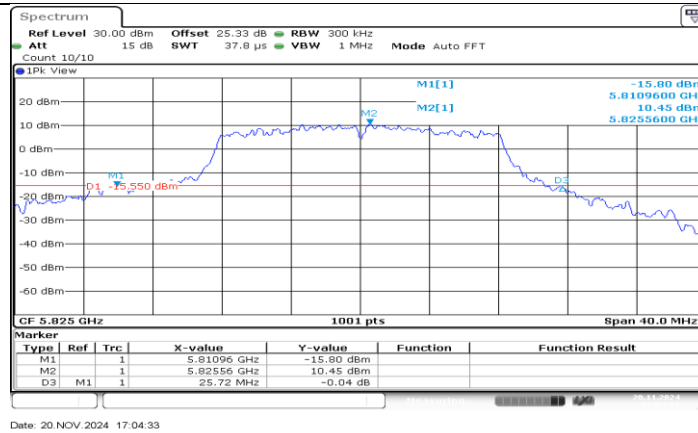


11A_Ant3_5825

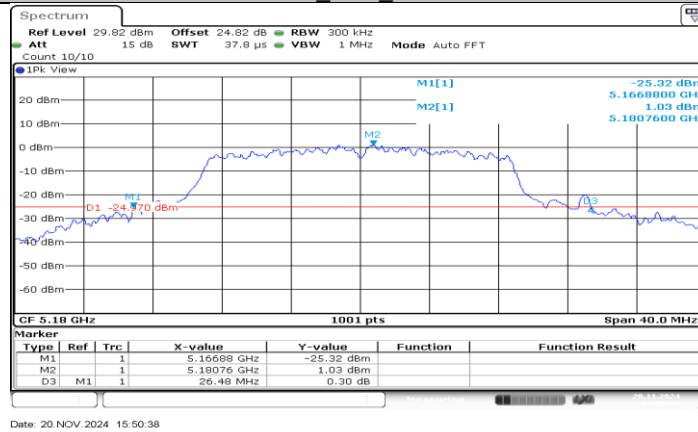


11N20SISO_Ant3_5180

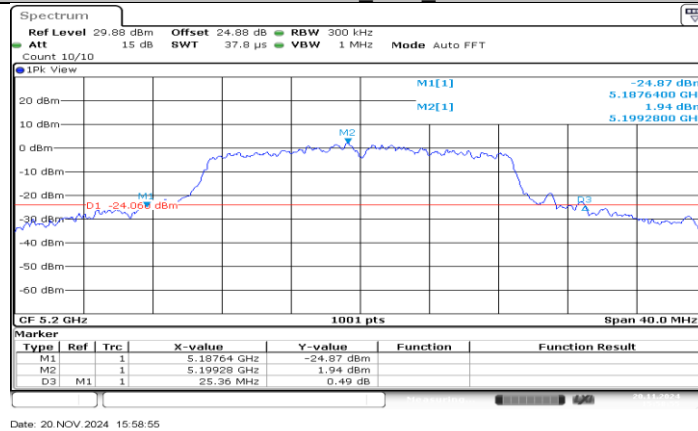


11N20SISO_Ant3_5200

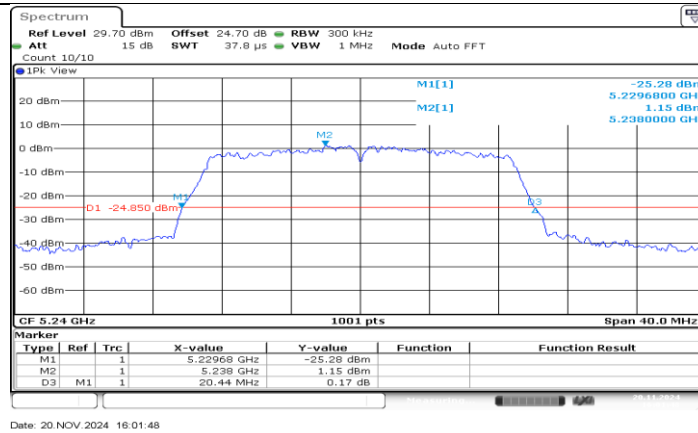


11N20SISO_Ant3_5240

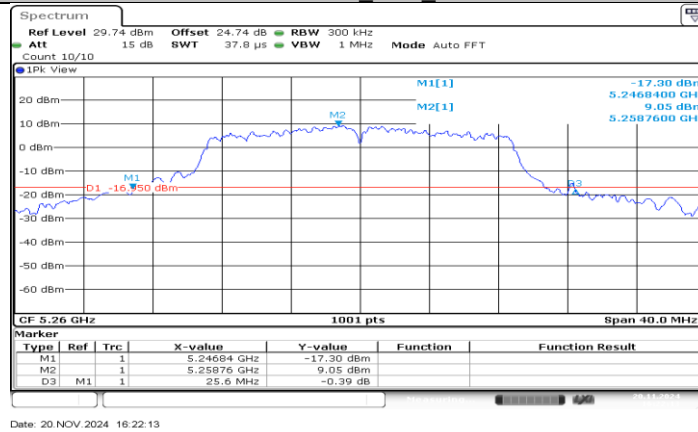


11N20SISO_Ant3_5260

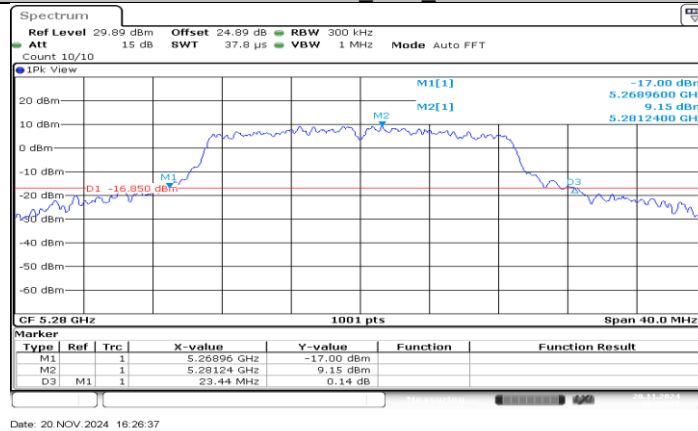


11N20SISO_Ant3_5280

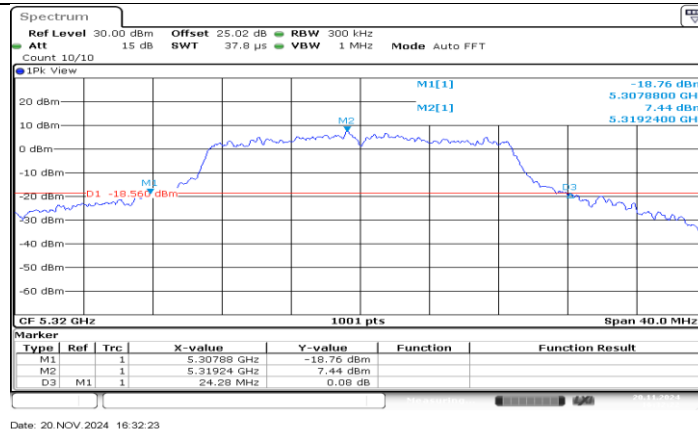


11N20SISO_Ant3_5320

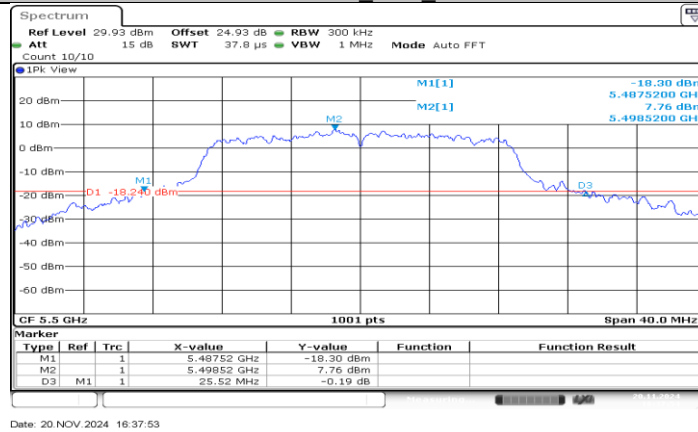


11N20SISO_Ant3_5500

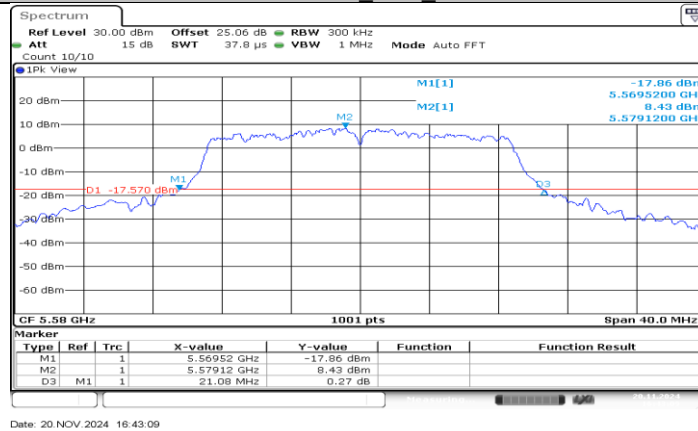


11N20SISO_Ant3_5580

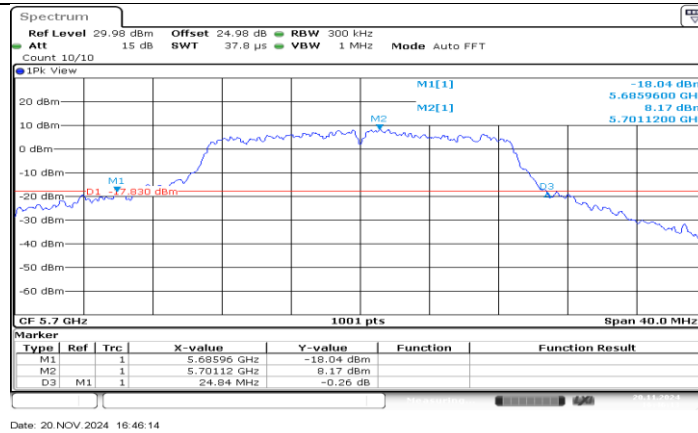


11N20SISO_Ant3_5700

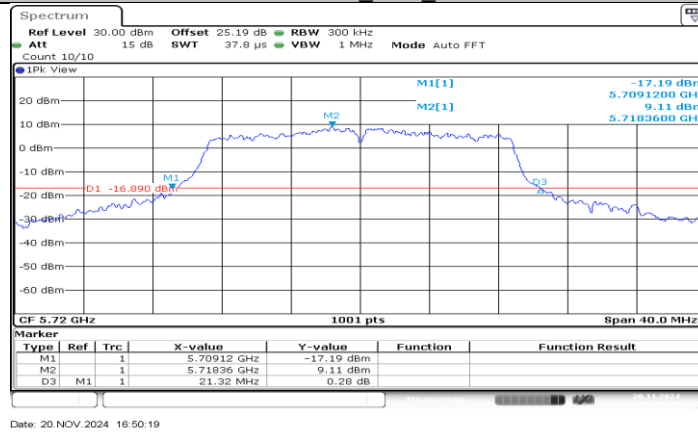


11N20SISO_Ant3_5720

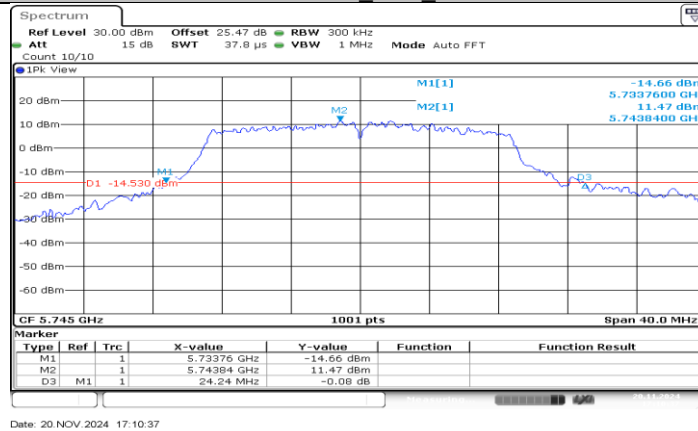


11N20SISO_Ant3_5745

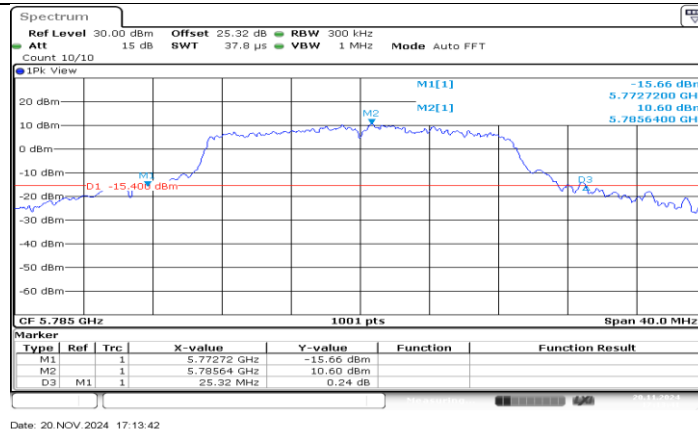


11N20SISO_Ant3_5785

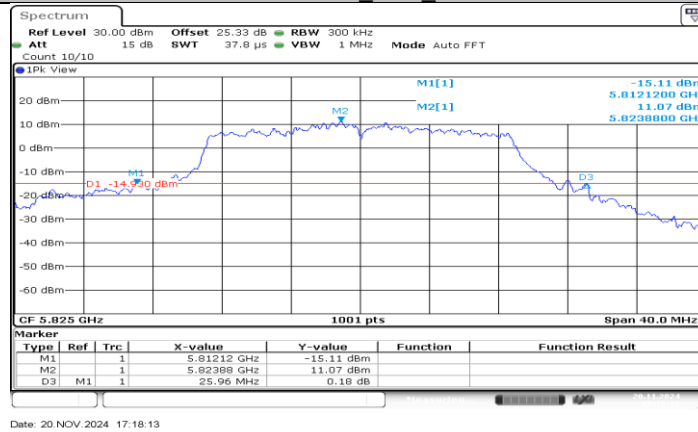


11N20SISO_Ant3_5825

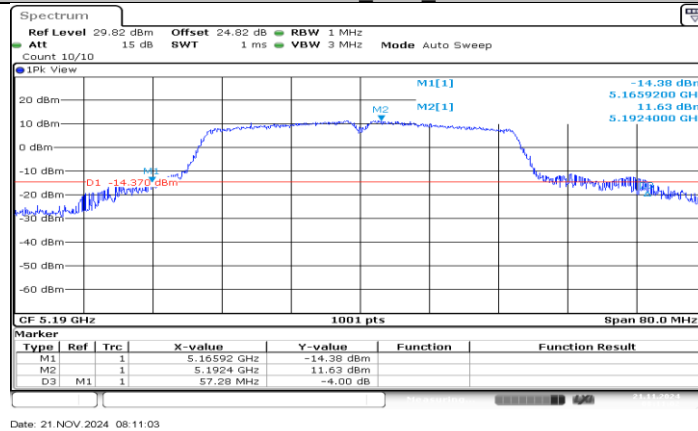


11N40SISO_Ant3_5190

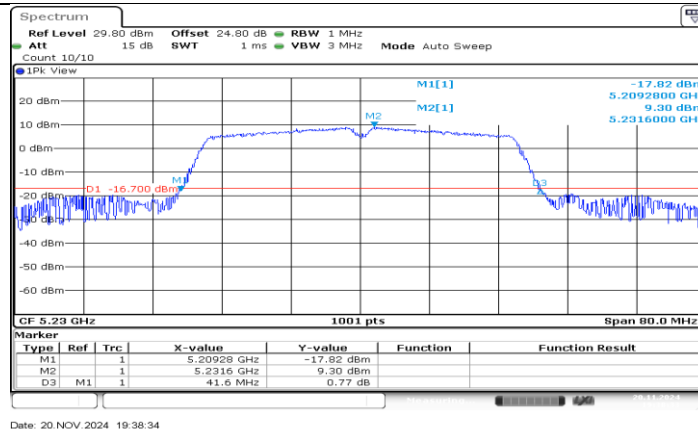


11N40SISO_Ant3_5230

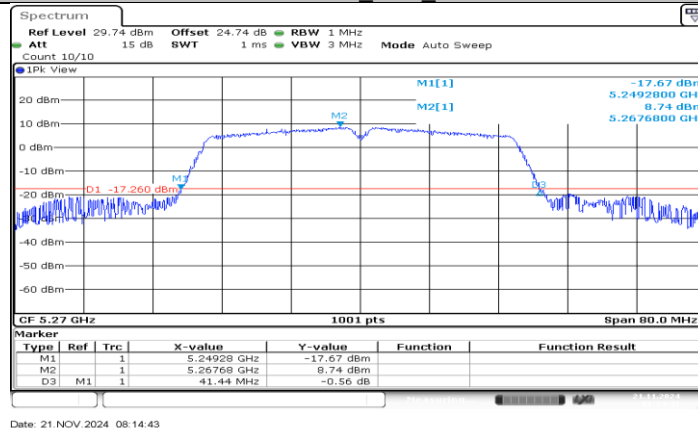


11N40SISO_Ant3_5270

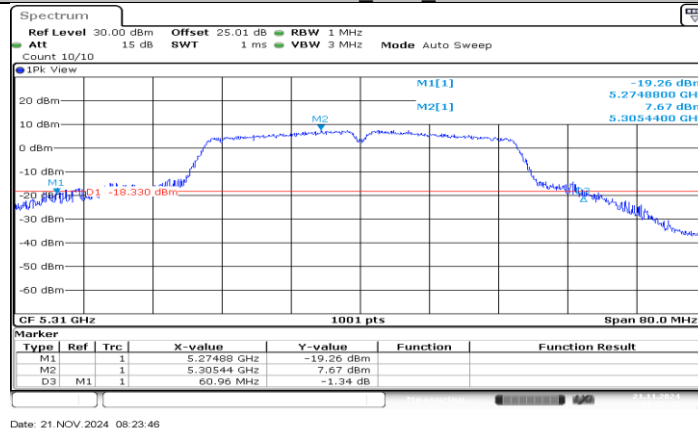


11N40SISO_Ant3_5310

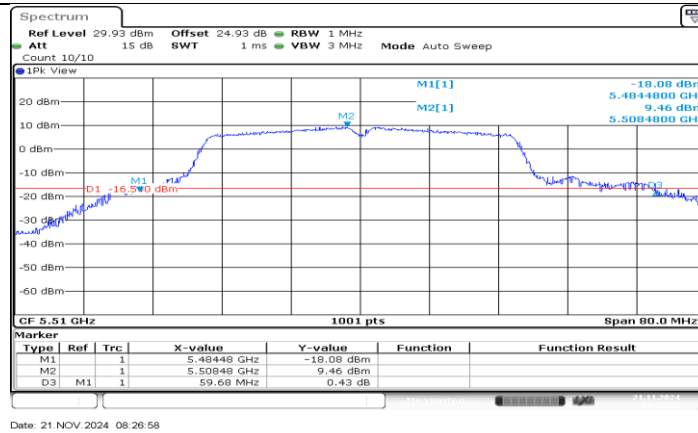

11N40SISO_Ant3_5510

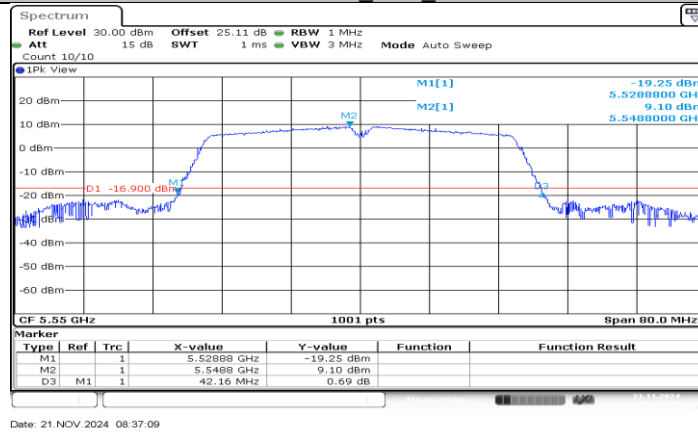

11N40SISO_Ant3_5550

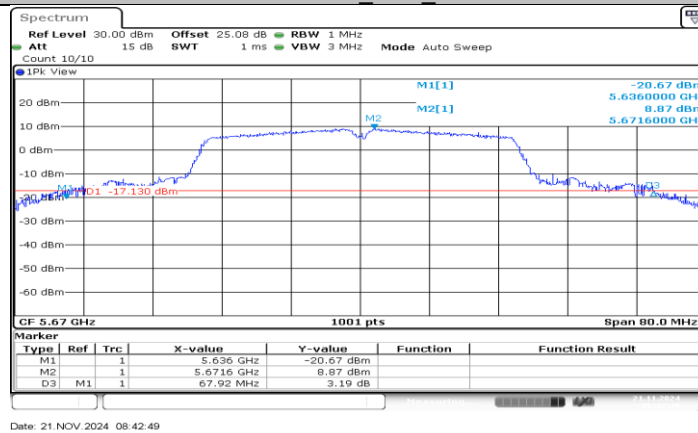

11N40SISO_Ant3_5670