

Appendix

TABLE OF CONTENTS

1.	EQUIPMENT LIST	3
2.	MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)	3
3.	AC POWER LINE CONDUCTED EMISSIONS	4
4.	DUTY CYCLE	6
4.1.	TEST RESULTS	6
4.2.	TEST PLOTS	6
5.	CONDUCTED OUTPUT POWER	9
5.1.	TEST RESULTS	9
6.	DTS (6 DB) BANDWIDTH & 99% OCCUPIED BANDWIDTH	10
6.1.	TEST RESULTS	10
6.2.	TEST PLOTS	11
7.	POWER SPECTRAL DENSITY	23
7.1.	TEST RESULTS	23
7.2.	TEST PLOTS	24
8.	BAND-EDGE FOR RF CONDUCTED EMISSIONS	30
8.1.	TEST PLOTS	30
9.	RF CONDUCTED SPURIOUS EMISSIONS	34
9.1.	TEST PLOTS	34

1. Equipment List

Conducted Emission					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Duedate
				(yyyy-mm-dd)	(yyyy-mm-dd)
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2017/5/10	2020/5/9
LISN	Rohde & Schwarz	ENV216	SEM007-01	2018/9/2	2019/9/2
LISN	ETS-LINDGREN	Feb-16	SEM007-02	2018/4/2	2019/4/1
Measurement Software	AUDIX	e3 V5.4.1221d	N/A	N/A	N/A
Coaxial Cable	SGS	N/A	SEM024-01	2018/7/12	2019/7/11
2 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T2-02	EMC0122	2019/2/11	2020/2/10
EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2018/4/2	2019/4/1
RF conducted test					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date	Cal.Duedate
				(yyyy-mm-dd)	(yyyy-mm-dd)
DC Power Supply	Agilent Technologies Inc	66311B	W009-09	2018/9/15	2019/9/15
Signal Analyzer	Rohde & Schwarz	FSV	W025-05	2019/1/13	2020/1/12
Coaxial Cable	SGS	N/A	SEM031-01	2018/7/13	2019/7/12
Attenuator	Weinschel Associates	WA41	SEM021-09	N/A	N/A
Signal Generator	KEYSIGHT	N5173B	SEM006-05	2018/9/2	2019/9/2
Temperature Chamber	GIANT FORCE	ICT-150-40-CP-AR	W027-03	2018/11/27	2019/11/27
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2018/9/2	2019/9/2

2. Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.75dB
2	RF power density, conducted	±2.84dB
3	Spurious emissions, conducted	±0.75dB
4	Conduct emission test	±3.12 dB (9KHz- 30MHz)


3. AC Power Line Conducted Emissions

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live Line:

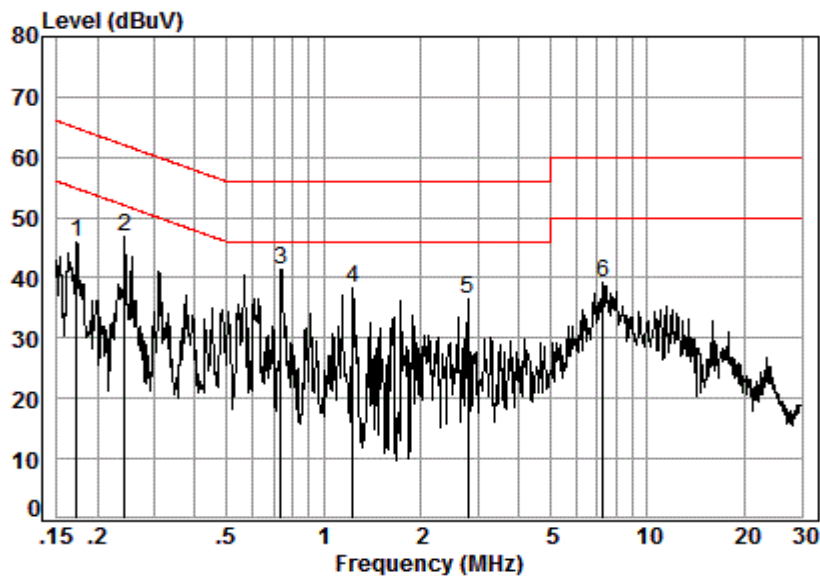

Site : Shielding Room
Condition: Line
Job No. : 11311CR
Test mode:

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.17	0.02	9.66	36.31	45.99	54.81	-8.82	Peak
2	0.24	0.03	9.67	37.20	46.90	52.00	-5.10	Peak
3	0.74	0.08	9.70	31.74	41.52	46.00	-4.48	Peak
4	1.23	0.11	9.73	28.42	38.26	46.00	-7.74	Peak
5	2.79	0.16	9.71	26.62	36.49	46.00	-9.51	Peak
6	7.29	0.17	9.79	29.35	39.31	50.00	-10.69	Peak

Neutral Line:

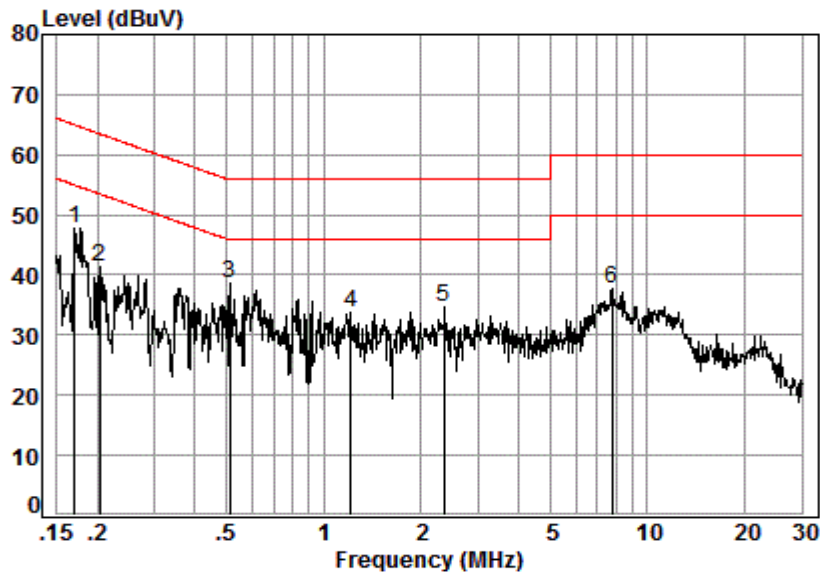

Site : Shielding Room

Condition: Neutral

Job No. : 11311CR

Test mode:

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.17	0.02	9.64	38.13	47.79	54.94	-7.15	Peak
2	0.20	0.02	9.64	31.84	41.50	53.49	-11.99	Peak
3	0.51	0.06	9.64	28.80	38.50	46.00	-7.50	Peak
4	1.22	0.11	9.70	24.10	33.91	46.00	-12.09	Peak
5	2.36	0.16	9.68	24.78	34.62	46.00	-11.38	Peak
6	7.77	0.17	9.78	27.65	37.60	50.00	-12.40	Peak

Remarks:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.


4. Duty Cycle

4.1. Test Results

Test Mode	TX Freq. [MHz]	Duty cycle [%]
11B	Ant 1: CH1,CH6,CH11	97.69
11G	Ant 1: CH1,CH6,CH11	86.84
11N20	Ant 1: CH1,CH6,CH11	86.05
11N40	Ant 1: CH3,CH6,CH9	71.98


4.2. Test Plots

ANT1
11B

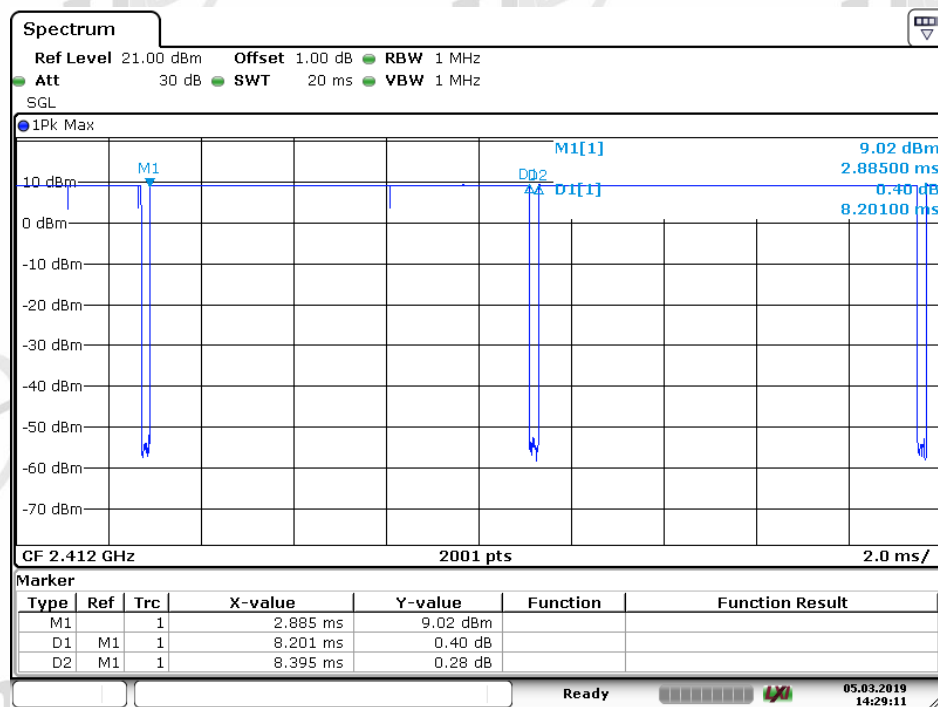


Date: 5 MAR. 2019 14:29:11

11G

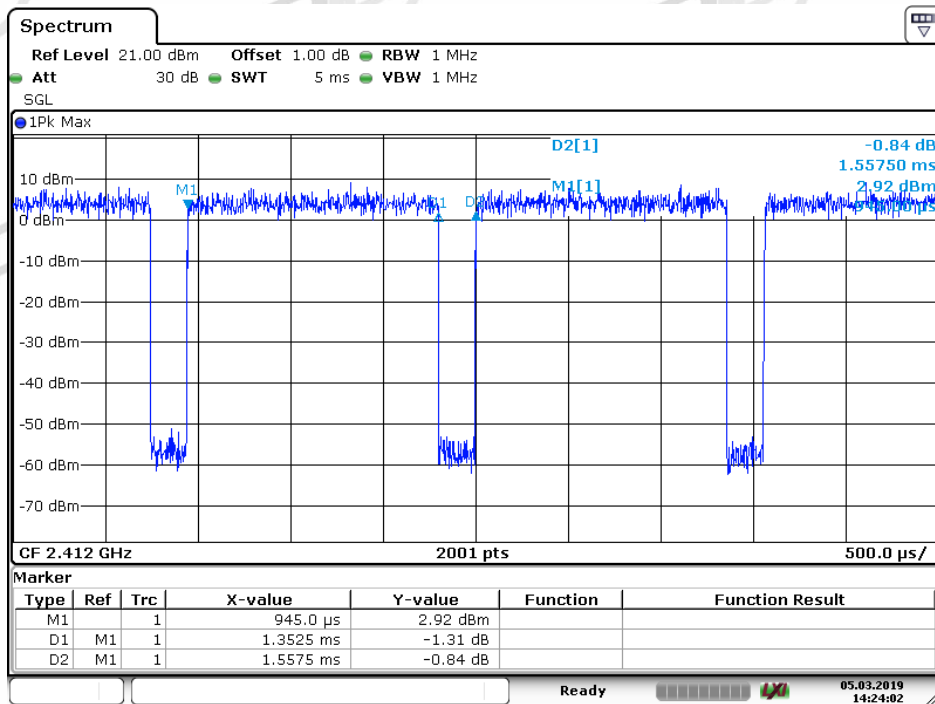


Date: 5 MAR 2019 14:24:02

11N20

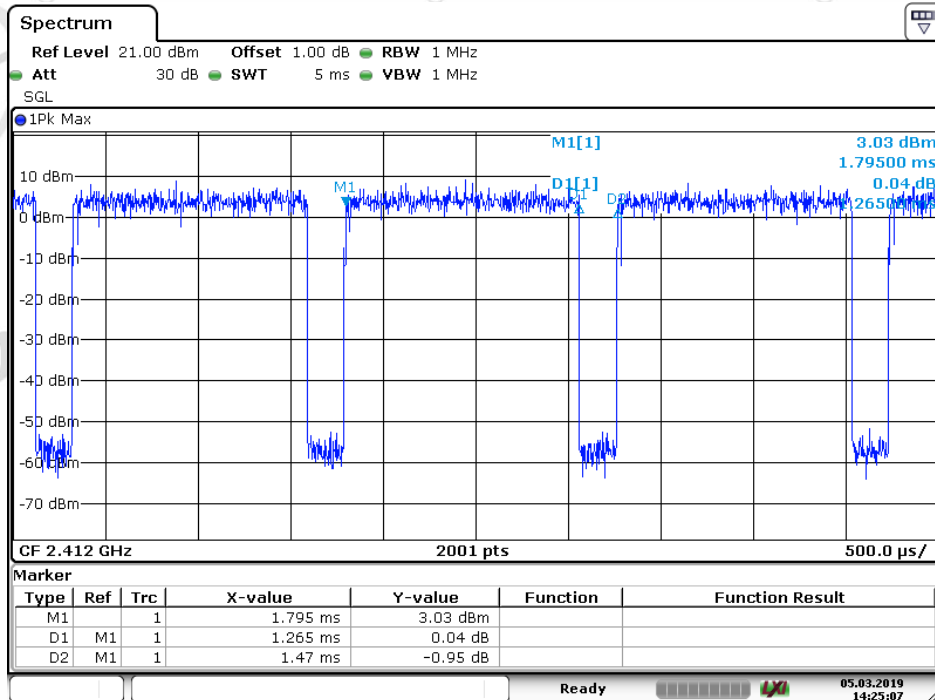

Date: 5 MAR 2019 14:25:07

11N40

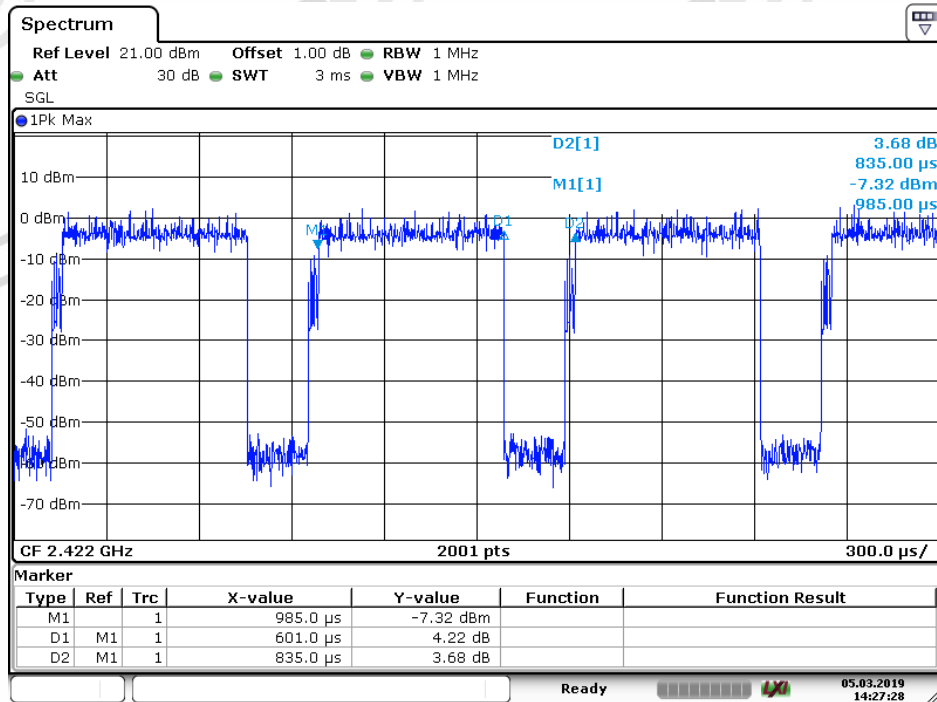

Date: 5 MAR. 2019 14:27:28

5. Conducted Output Power

5.1. Test Results

Measurement Data of Peak Power:

Mode	Test Channel	Peak Output Power (dBm)	Limit (dBm)	Result
802.11B	Lowest	18.86	30.00	Pass
	Middle	19.13	30.00	Pass
	Highest	19.44	30.00	Pass
802.11G	Lowest	21.64	30.00	Pass
	Middle	22.29	30.00	Pass
	Highest	22.13	30.00	Pass
802.11N20	Lowest	21.51	30.00	Pass
	Middle	21.81	30.00	Pass
	Highest	22.13	30.00	Pass
802.11N40	Lowest	21.85	30.00	Pass
	Middle	21.78	30.00	Pass
	Highest	21.89	30.00	Pass

6. DTS (6 dB) Bandwidth & 99% Occupied Bandwidth


6.1. Test Results

Mode	Test Channel	Occupied Bandwidth (MHz)	6dB Emission Bandwidth (MHz)	Limit (kHz)	Result
802.11B	Lowest	12.85	8.09	≥500	Pass
	Middle	12.86	8.57	≥500	Pass
	Highest	12.92	8.57	≥500	Pass
802.11G	Lowest	17.26	16.18	≥500	Pass
	Middle	17.35	16.36	≥500	Pass
	Highest	17.44	16.42	≥500	Pass
802.11N20	Lowest	18.22	17.41	≥500	Pass
	Middle	18.22	17.59	≥500	Pass
	Highest	18.19	17.62	≥500	Pass
802.11N40	Lowest	36.26	34.95	≥500	Pass
	Middle	36.44	35.01	≥500	Pass
	Highest	36.50	35.14	≥500	Pass


6.2. Test plots

ANT1

802.11B_Lowest Channel

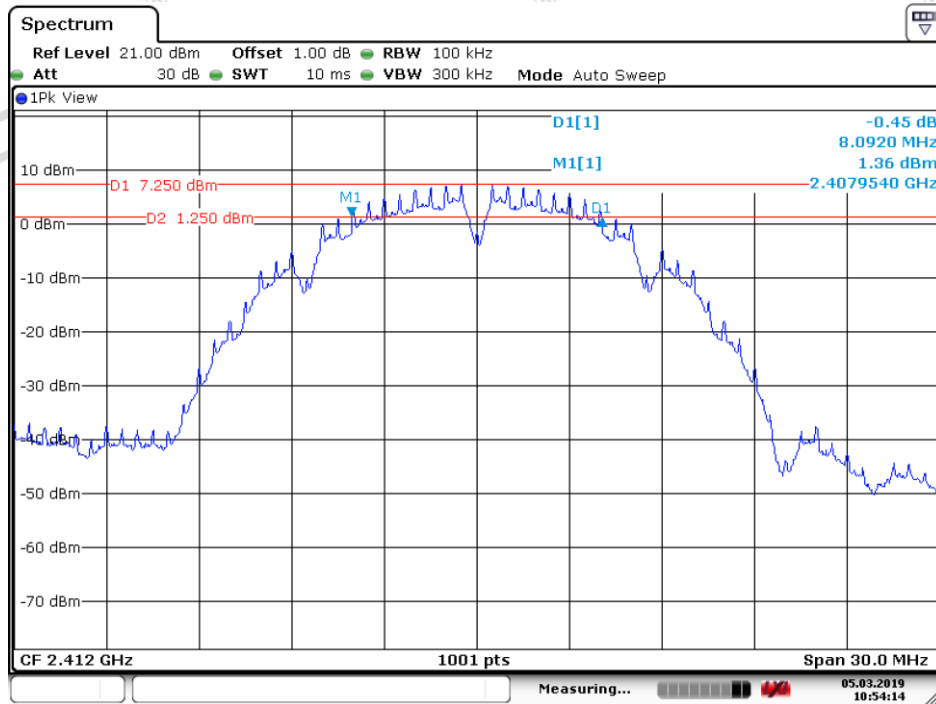


Date: 5.MAR.2019 10:54:15

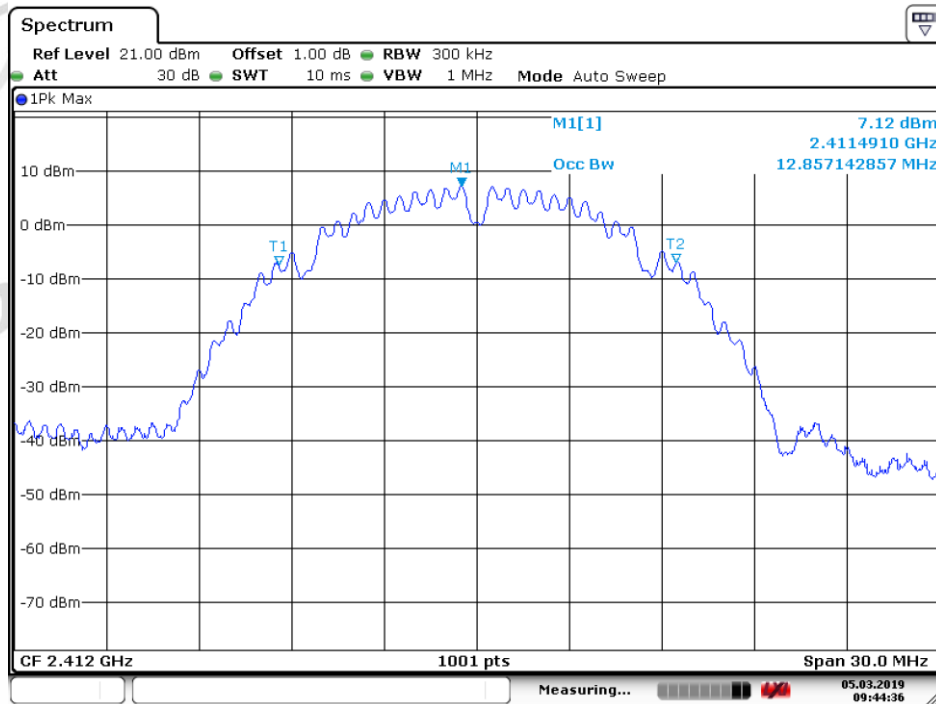


Date: 5.MAR.2019 09:44:36

802.11B_Middle Channel

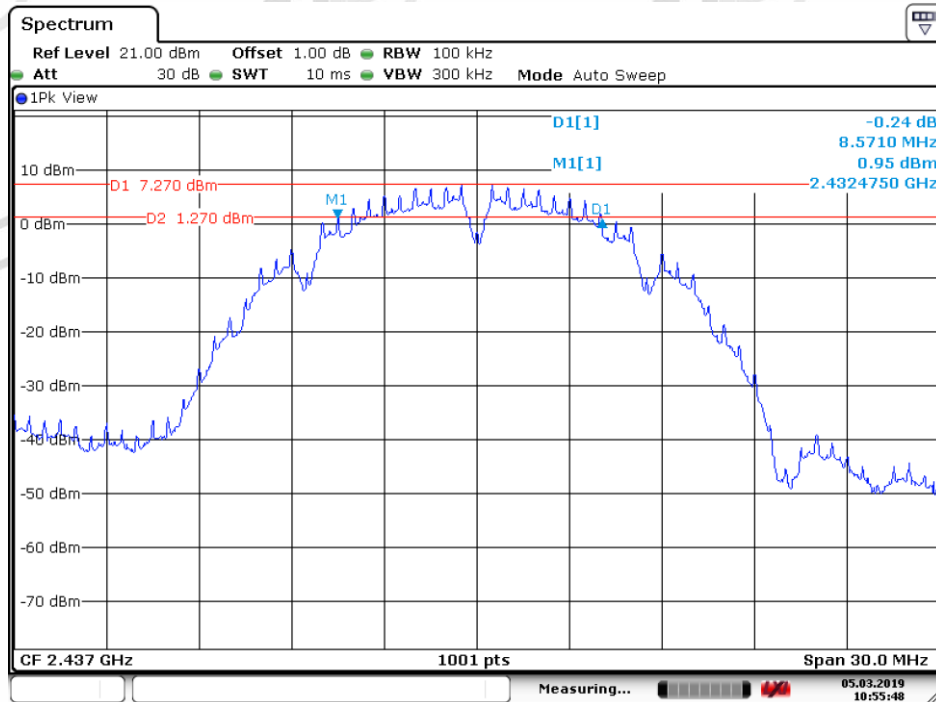


Date: 5.MAR.2019 10:55:48

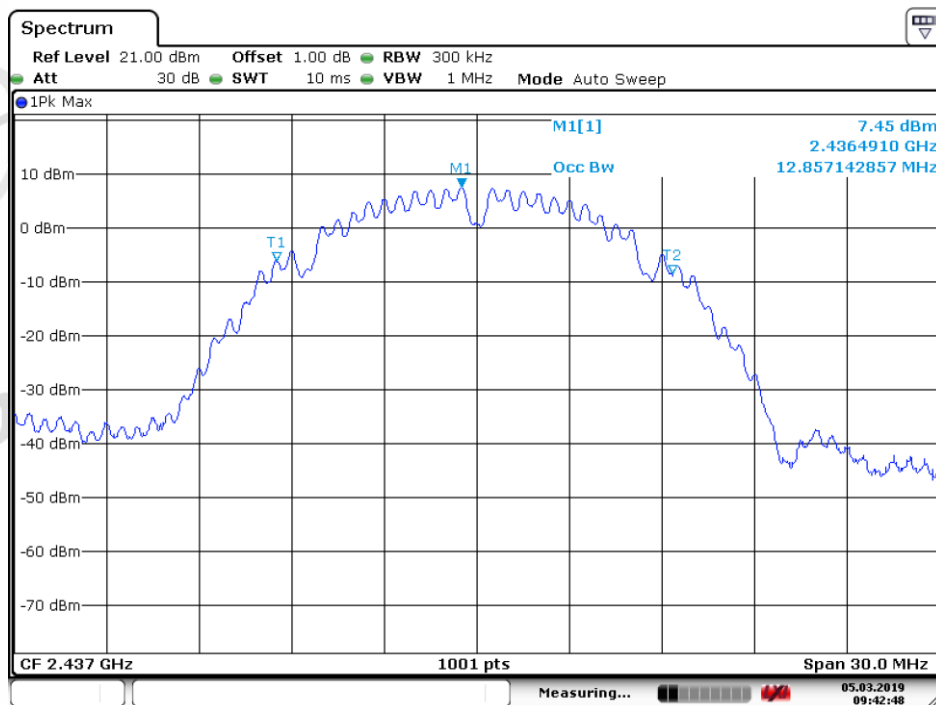


Date: 5.MAR.2019 09:42:49

802.11B_Highest Channel

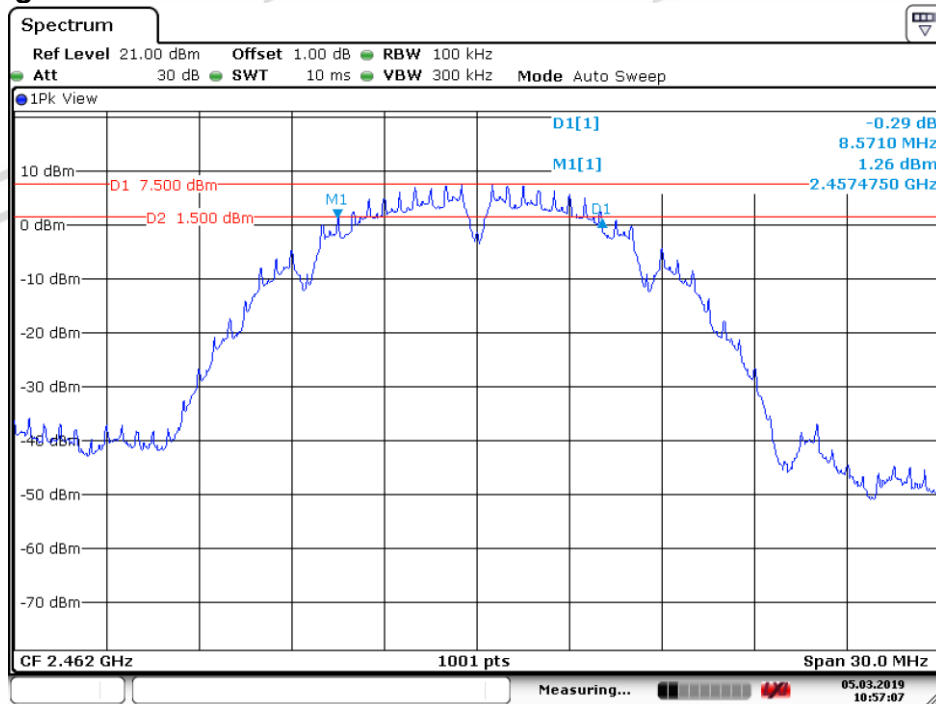


Date: 5.MAR.2019 10:57:07

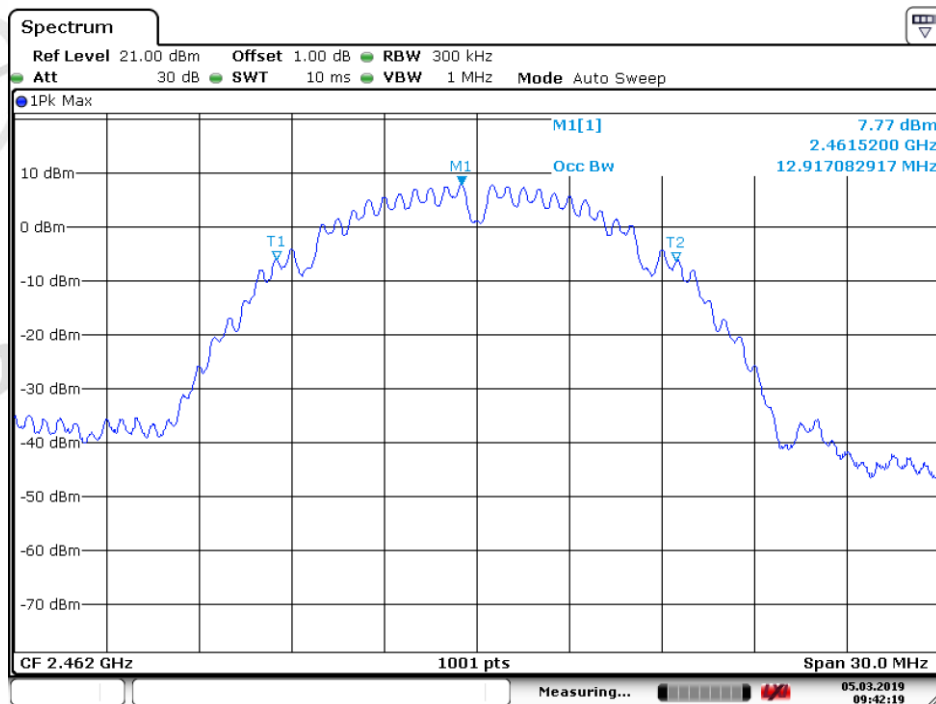


Date: 5.MAR.2019 09:42:19

802.11G_Lowest Channel

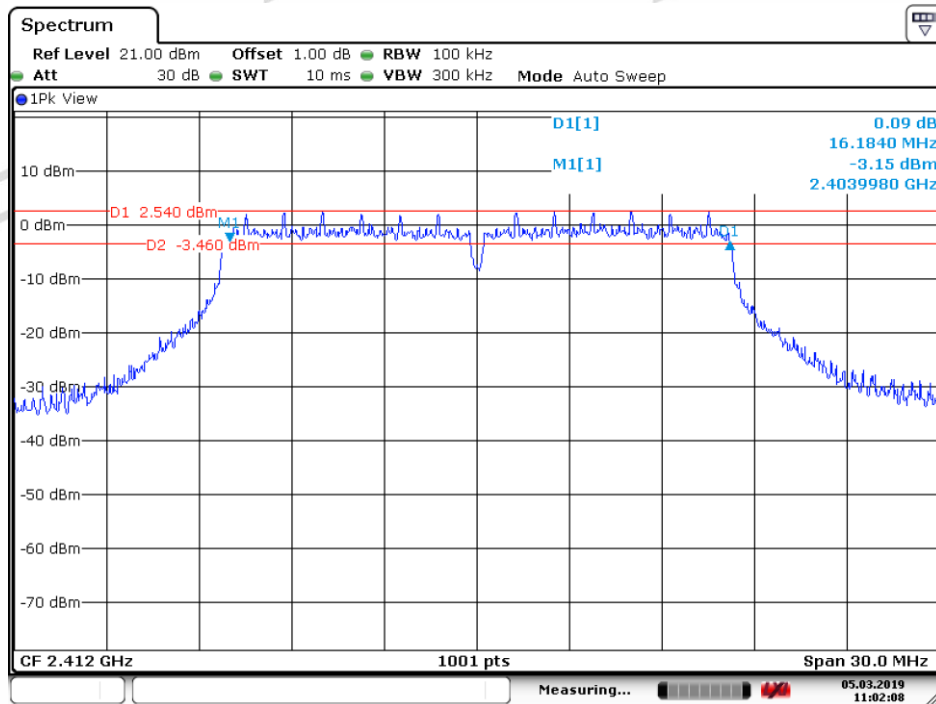


Date: 5.MAR.2019 11:02:08

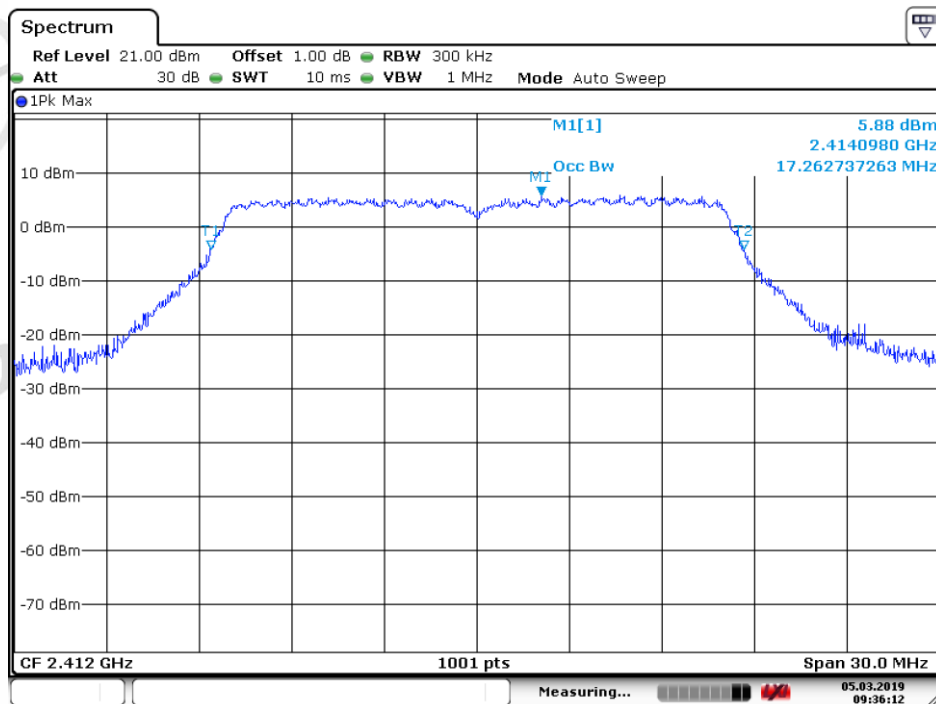


Date: 5.MAR.2019 09:36:13

802.11G_ Middle Channel

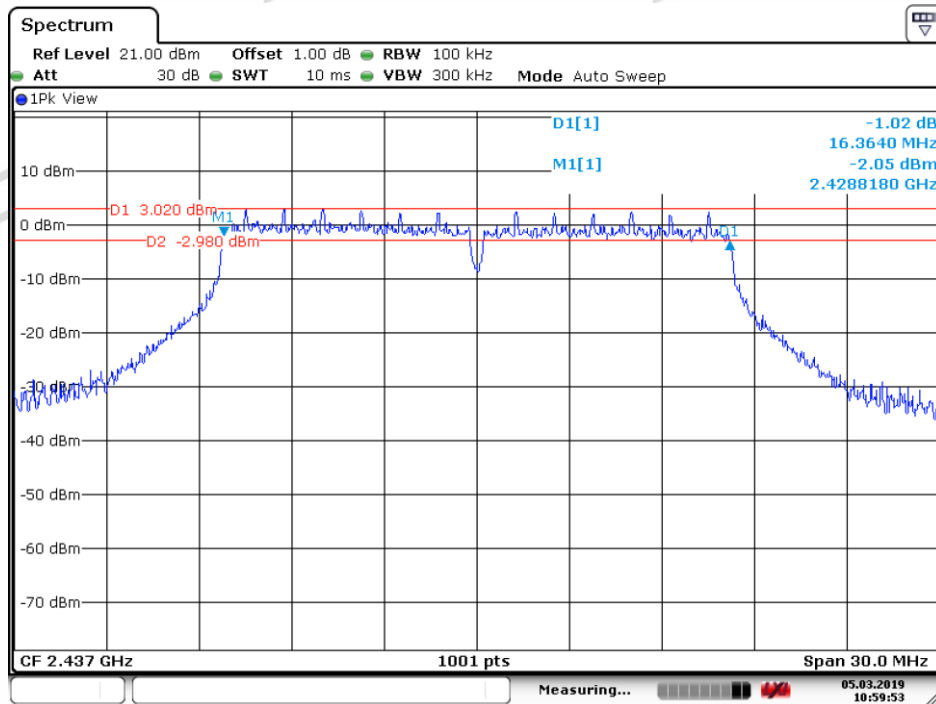


Date: 5.MAR.2019 10:59:54

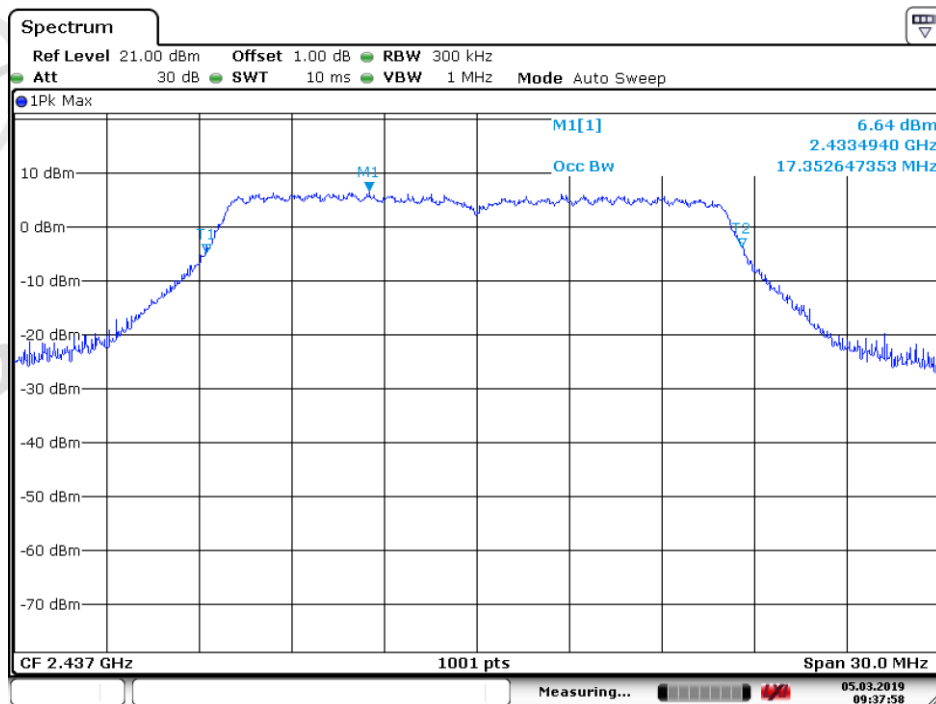


Date: 5.MAR.2019 09:37:58

802.11G_Highest Channel

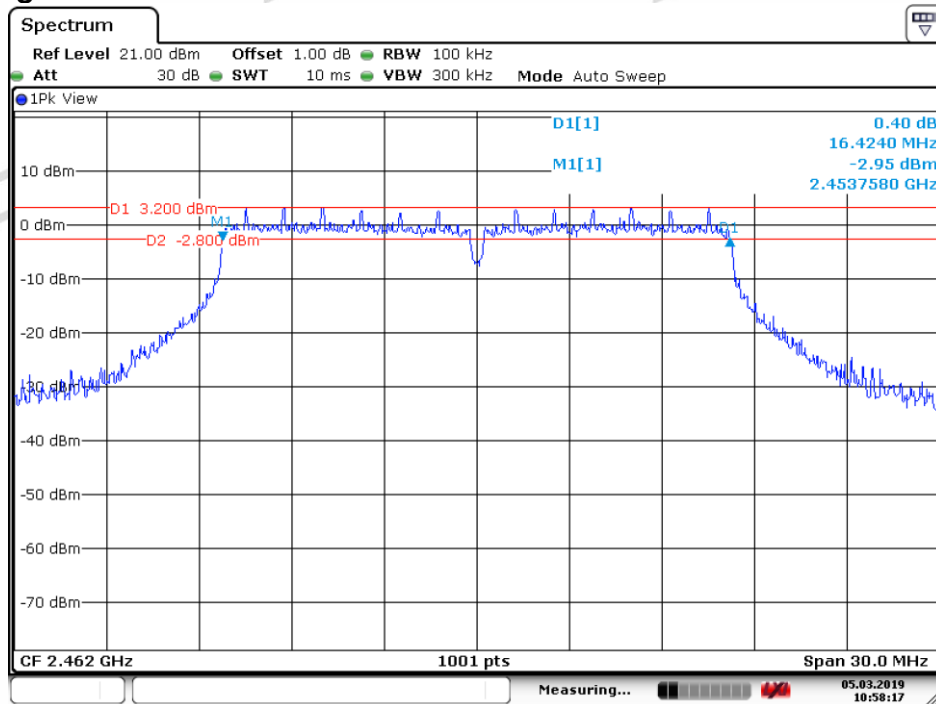


Date: 5.MAR.2019 10:58:17

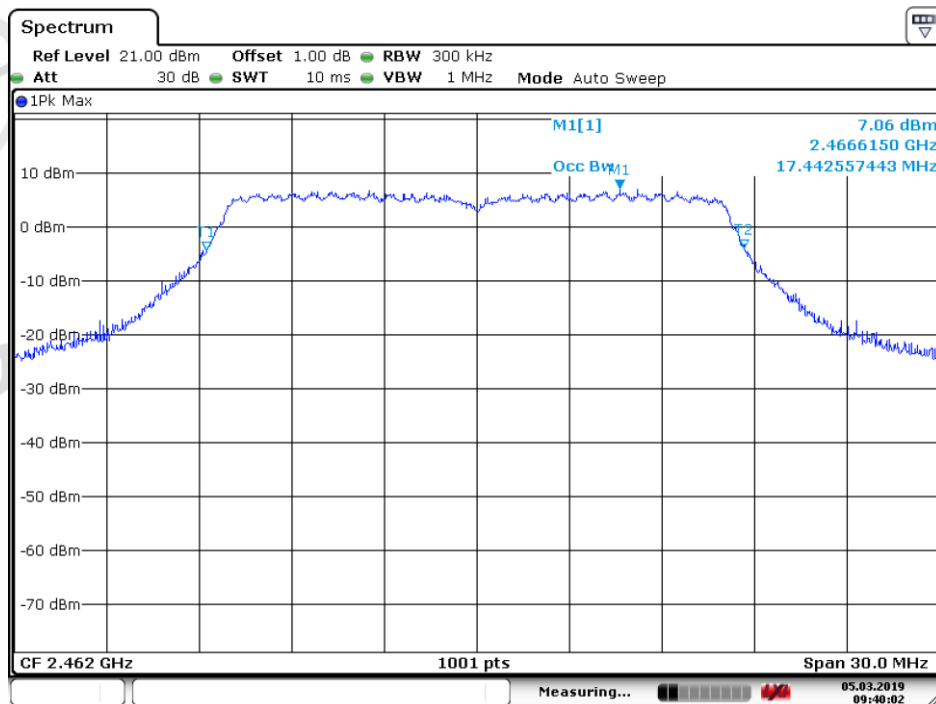


Date: 5.MAR.2019 09:40:01

802.11N20_Lowest Channel

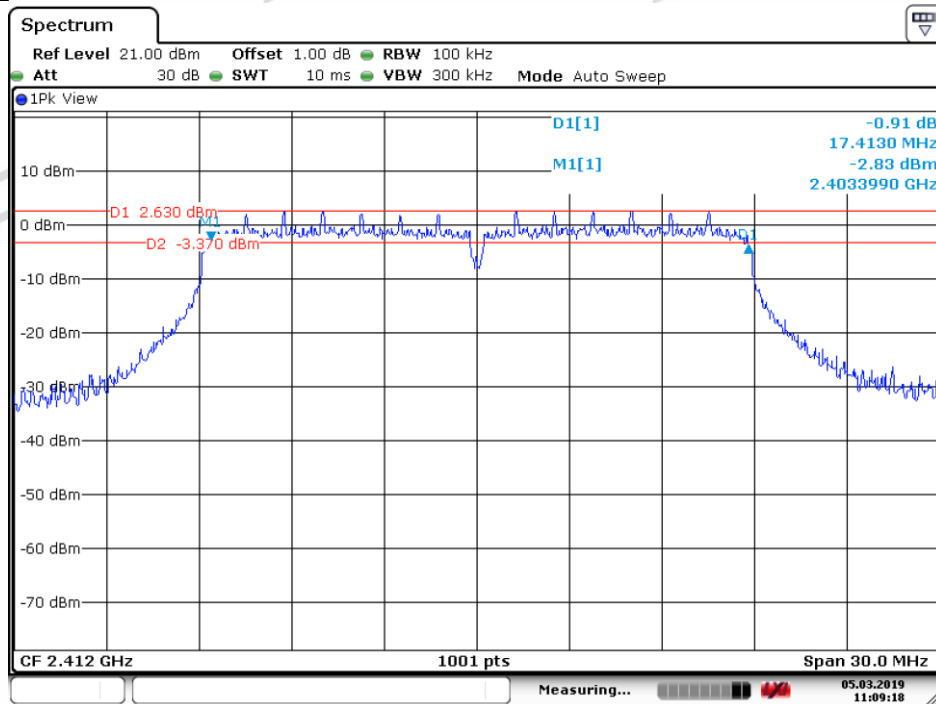


Date: 5.MAR.2019 11:09:18

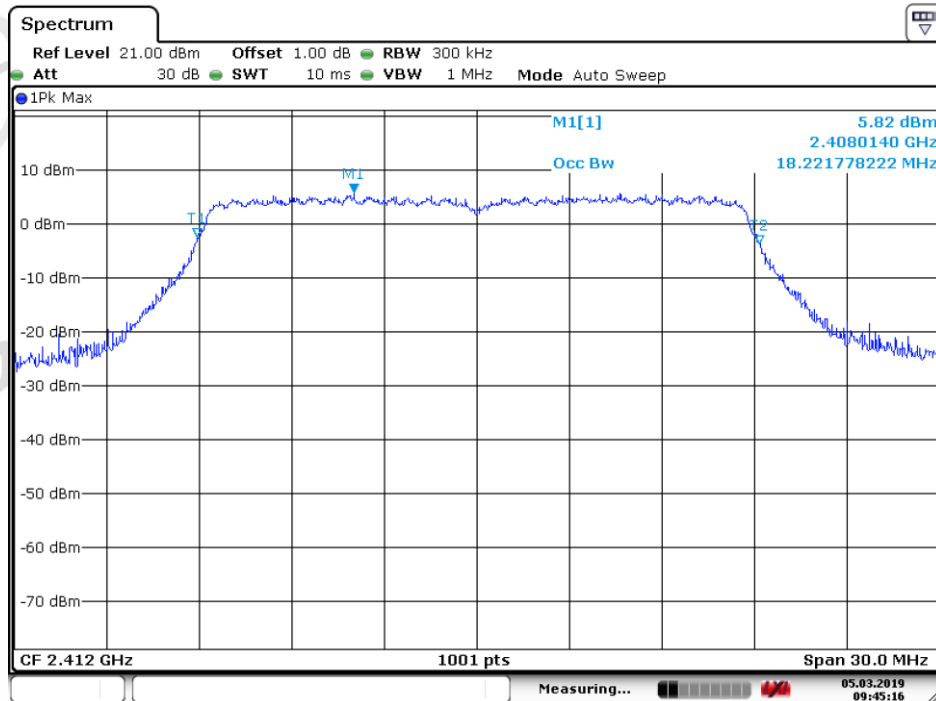


Date: 5.MAR.2019 09:45:17

802.11 N20_ Middle Channel

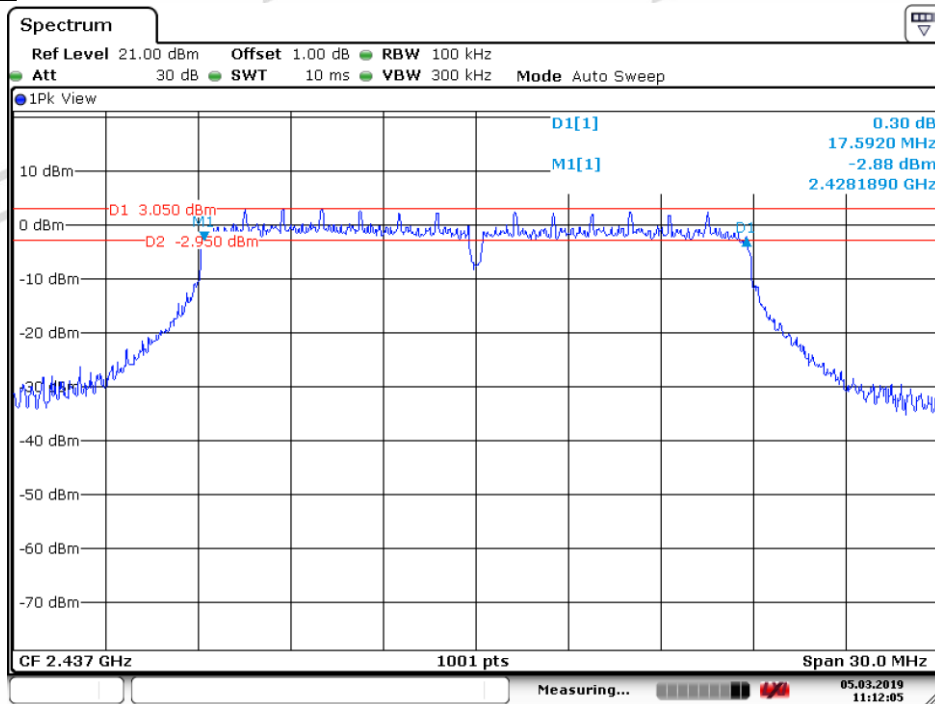


Date: 5.MAR.2019 11:12:05

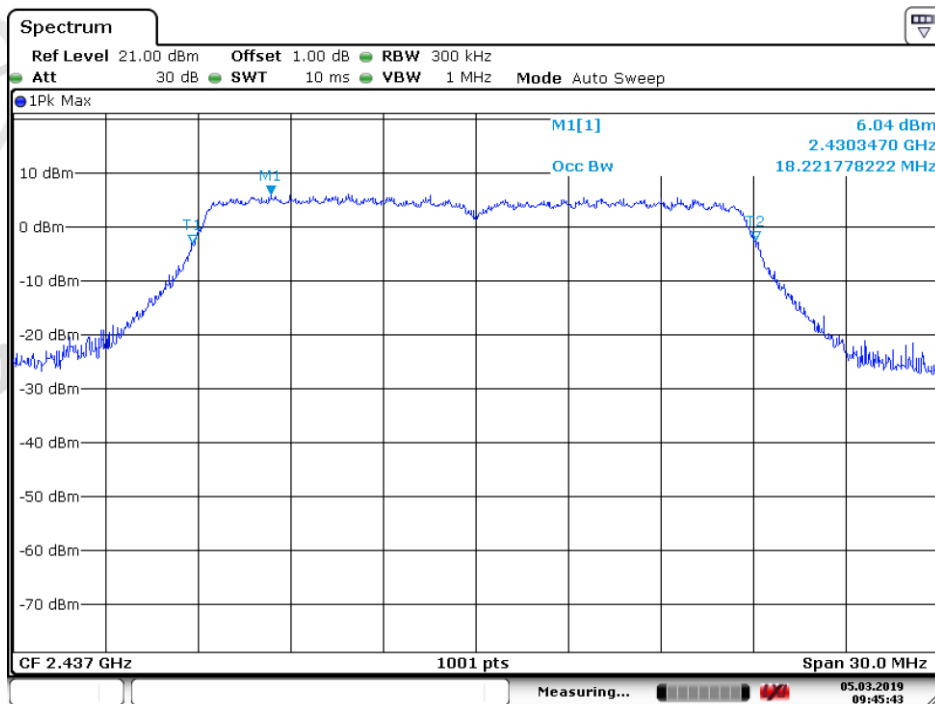


Date: 5.MAR.2019 09:45:43

802.11 N20_Highest Channel

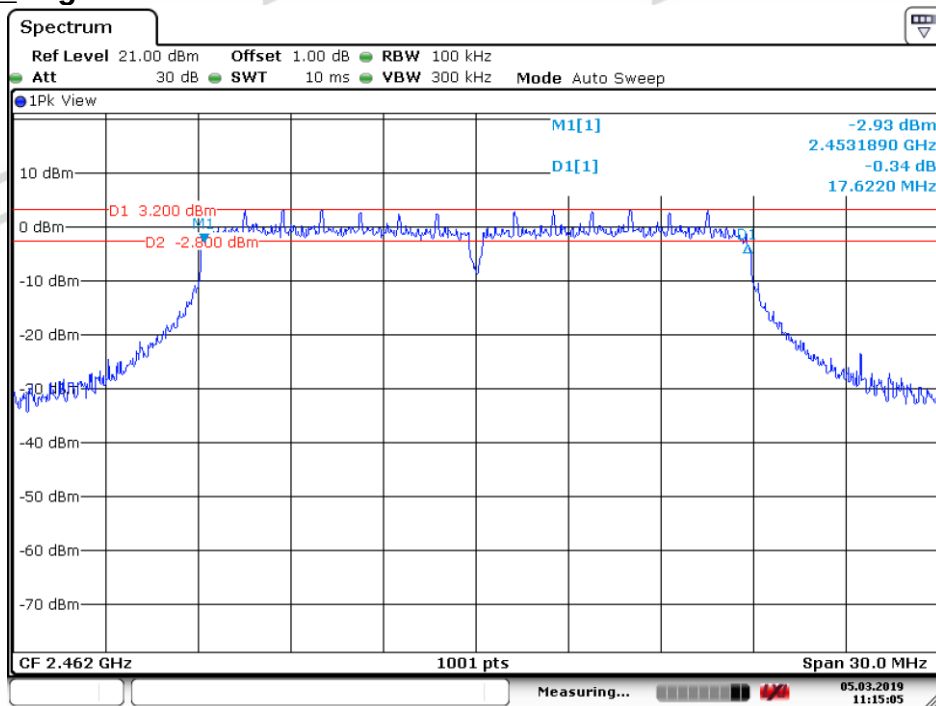


Date: 5.MAR.2019 11:15:05

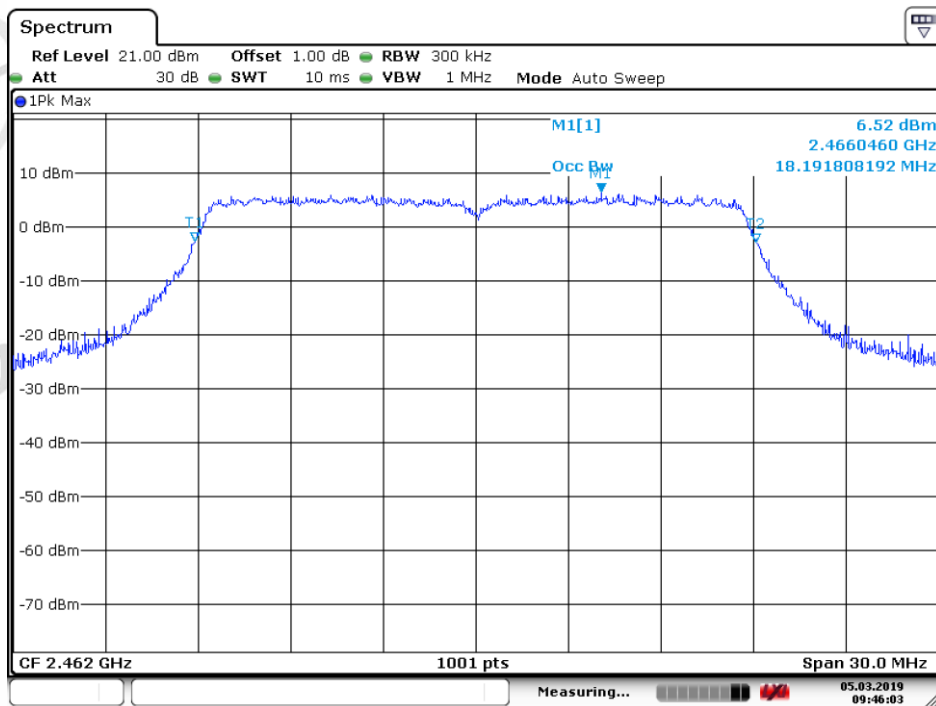


Date: 5.MAR.2019 09:46:03

802.11N40_Lowest Channel

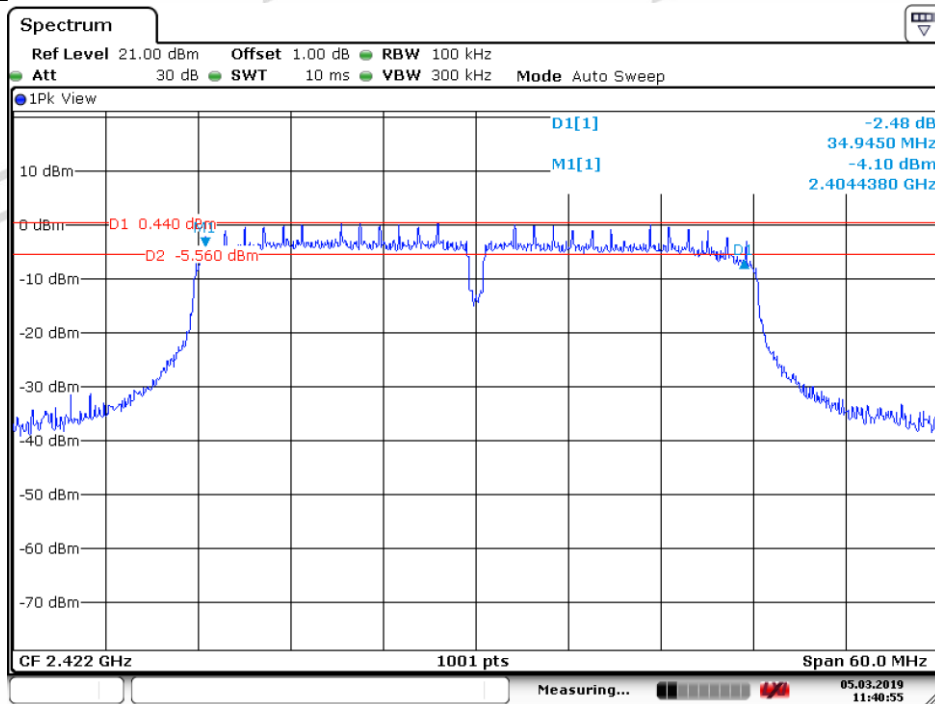


Date: 5.MAR.2019 11:40:55

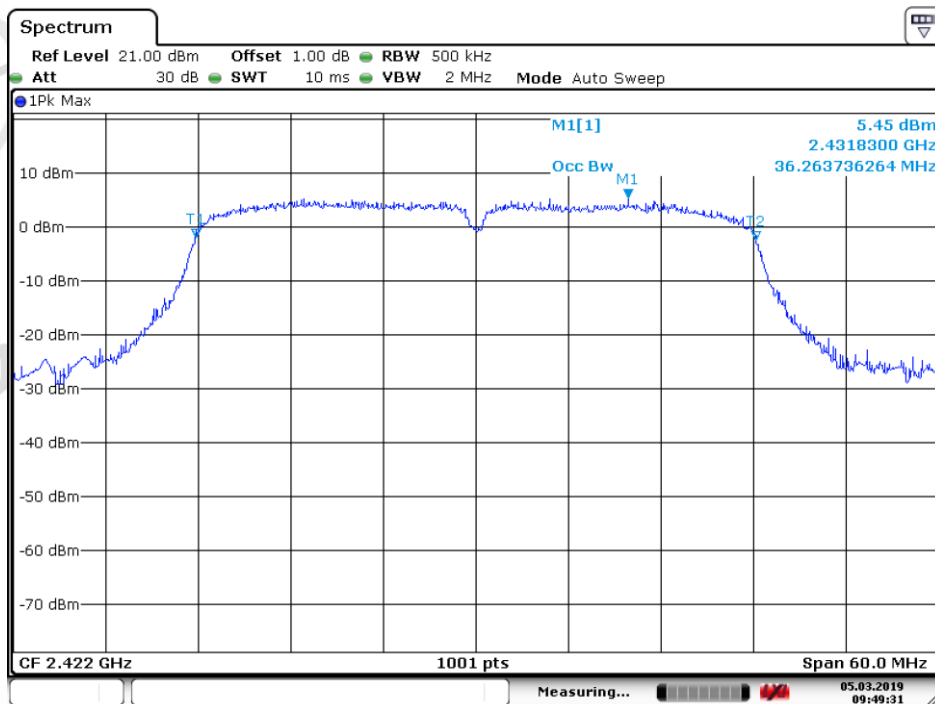


Date: 5.MAR.2019 09:49:32

802.11 N40_ Middle Channel

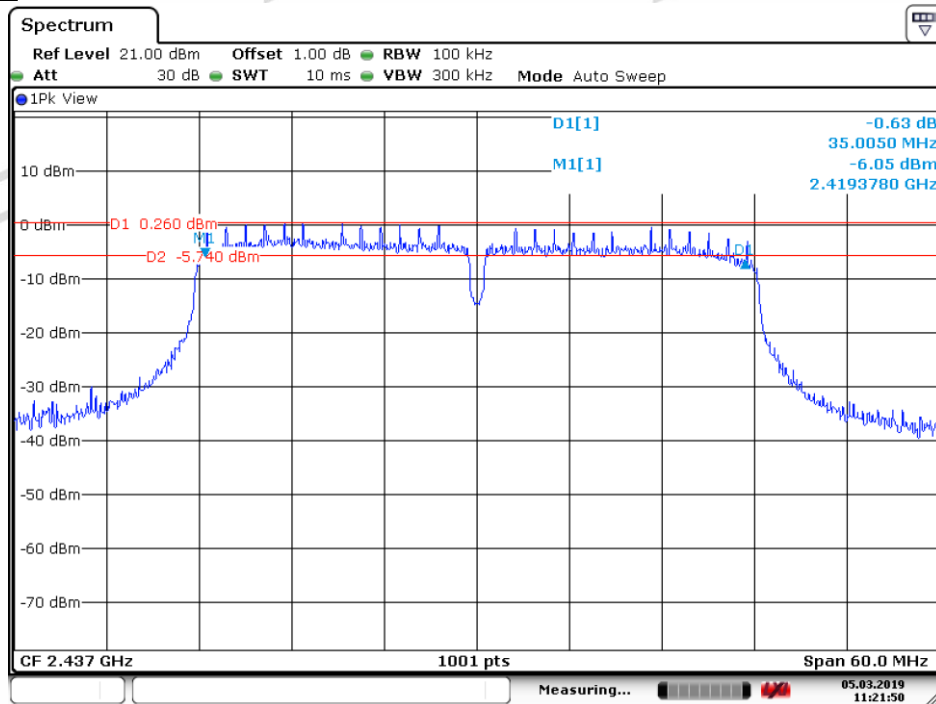


Date: 5.MAR.2019 11:21:51

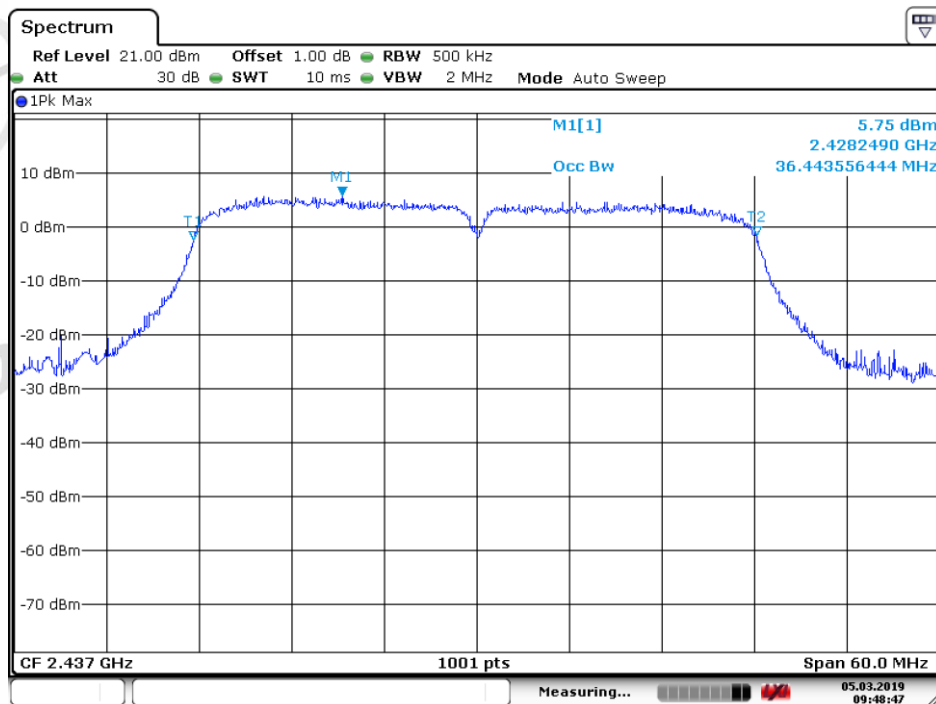


Date: 5.MAR.2019 09:48:47

802.11 N40_Highest Channel

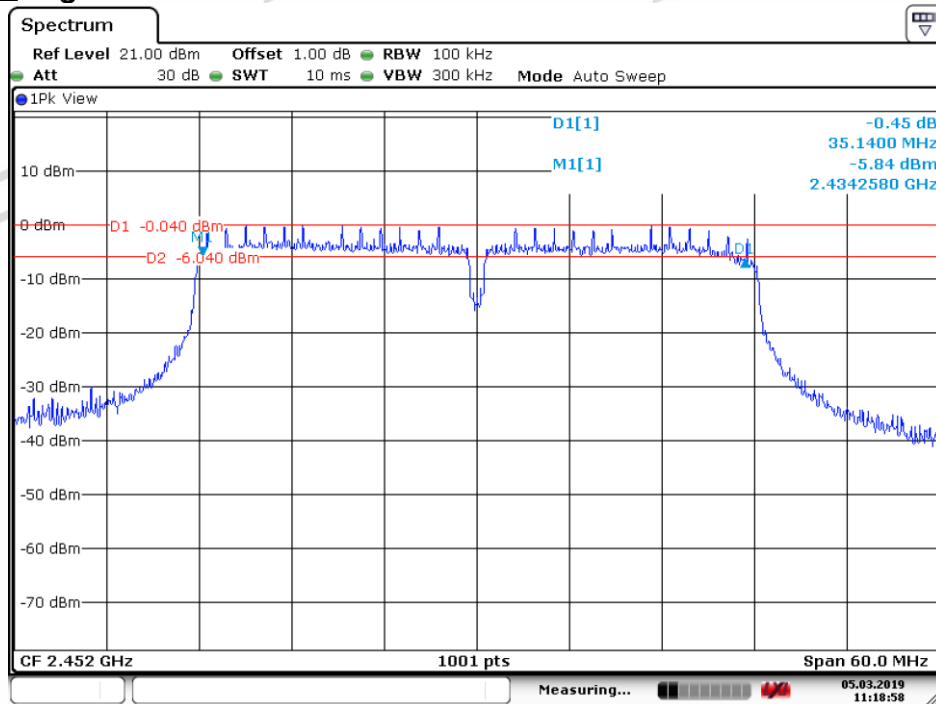

Date: 5.MAR.2019 11:18:59

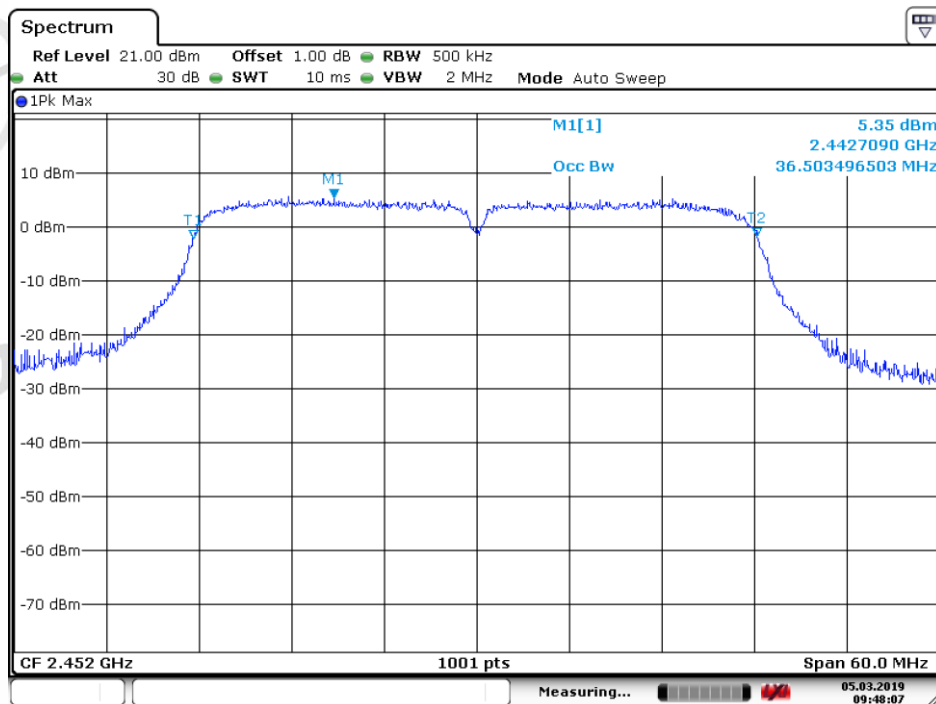

Date: 5.MAR.2019 09:48:07

7. Power Spectral Density


7.1. Test Results

Mode	Test Channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11B	Lowest	-5.83	≤8.00	Pass
	Middle	-5.12	≤8.00	Pass
	Highest	-4.35	≤8.00	Pass
802.11G	Lowest	-8.22	≤8.00	Pass
	Middle	-9.06	≤8.00	Pass
	Highest	-8.41	≤8.00	Pass
802.11N20	Lowest	-9.94	≤8.00	Pass
	Middle	-8.63	≤8.00	Pass
	Highest	-8.94	≤8.00	Pass
802.11N40	Lowest	-13.17	≤8.00	Pass
	Middle	-12.91	≤8.00	Pass
	Highest	-12.53	≤8.00	Pass

7.2. Test plots


ANT1

802.11B_Lowest Channel

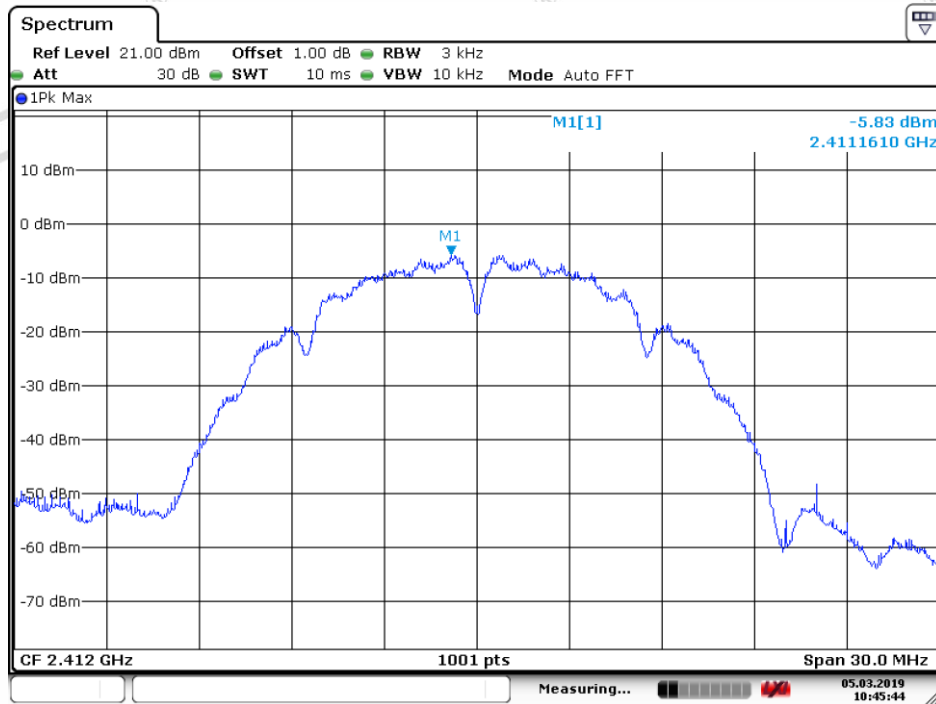


Date: 5.MAR.2019 10:45:45

802.11B_Middle Channel

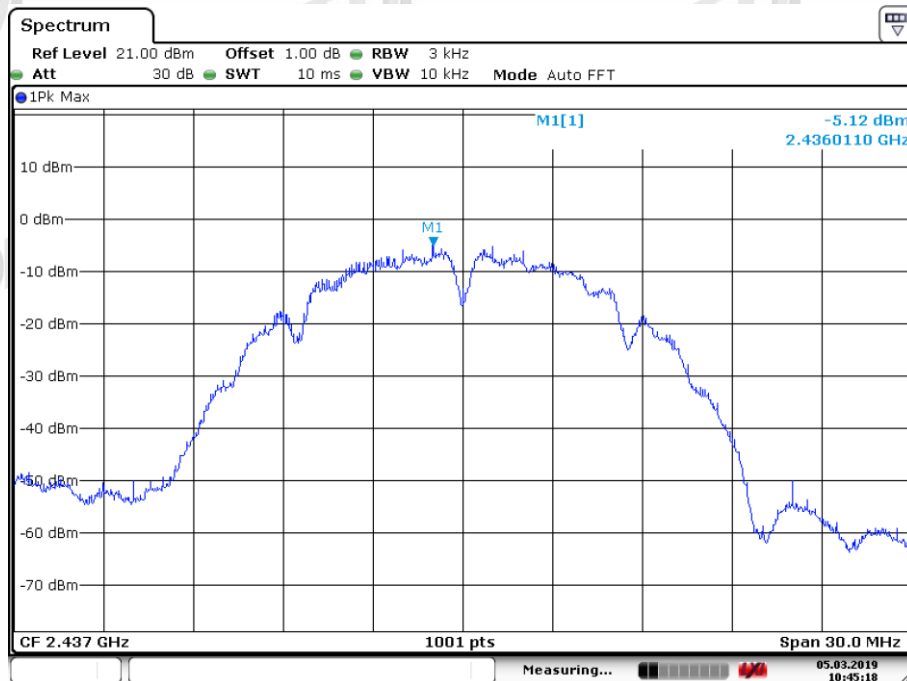


Date: 5.MAR.2019 10:45:18

802.11B_Highest Channel

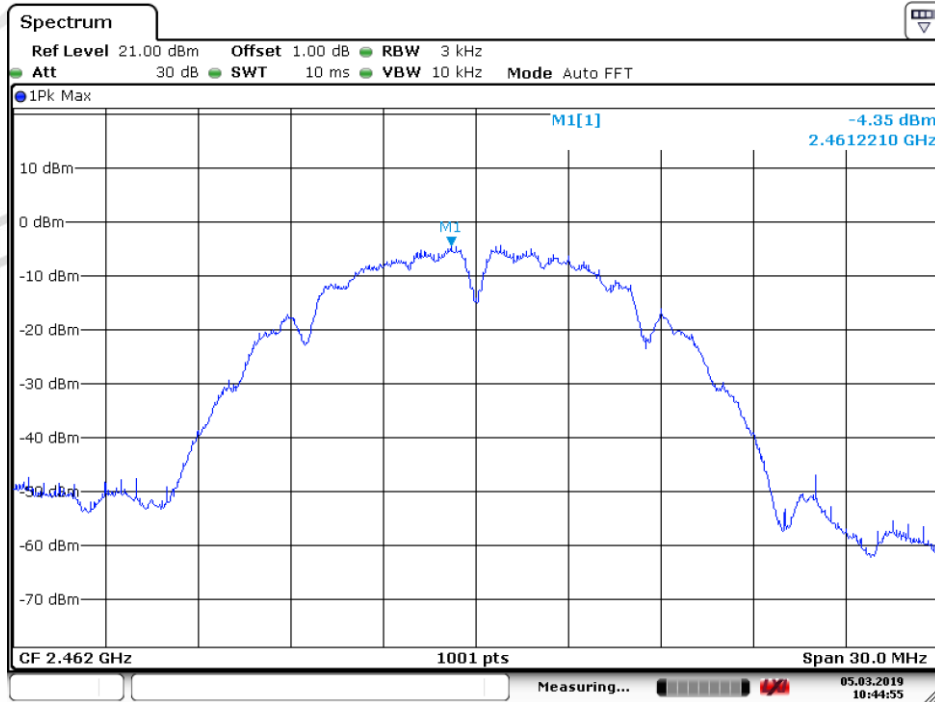


Date: 5.MAR.2019 10:44:55

802.11G_Lowest Channel

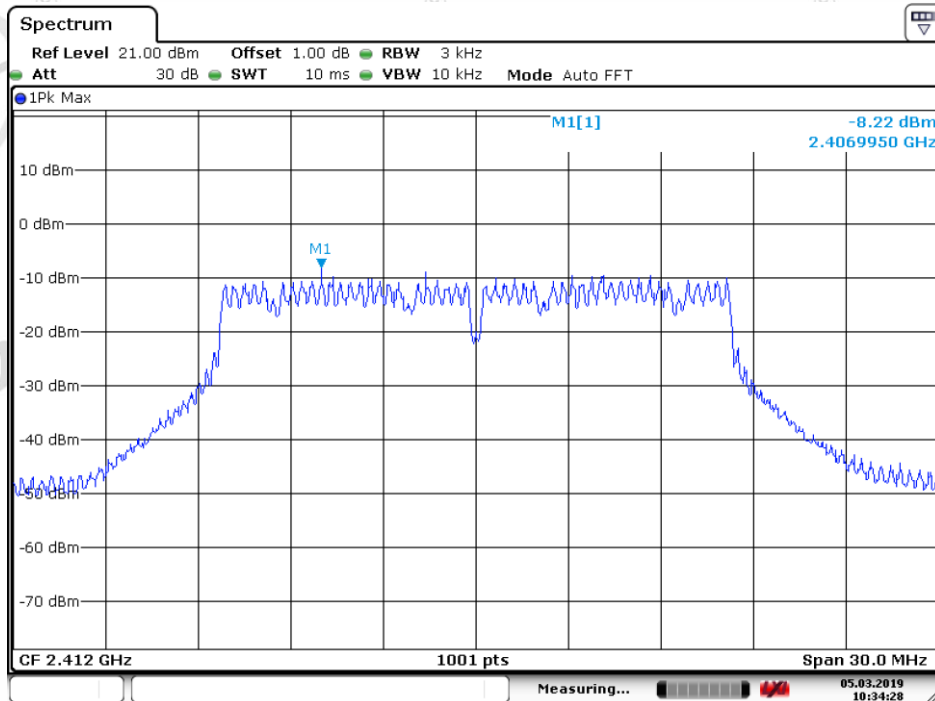


Date: 5.MAR.2019 10:34:29

802.11G_Middle Channel

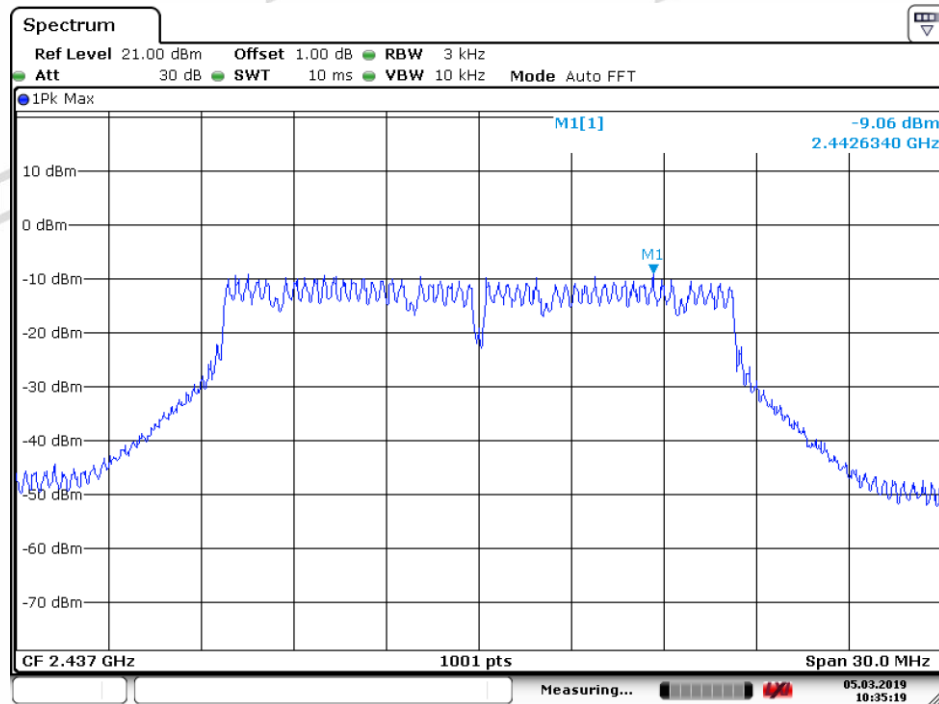


Date: 5.MAR.2019 10:35:19

802.11G_Highest Channel

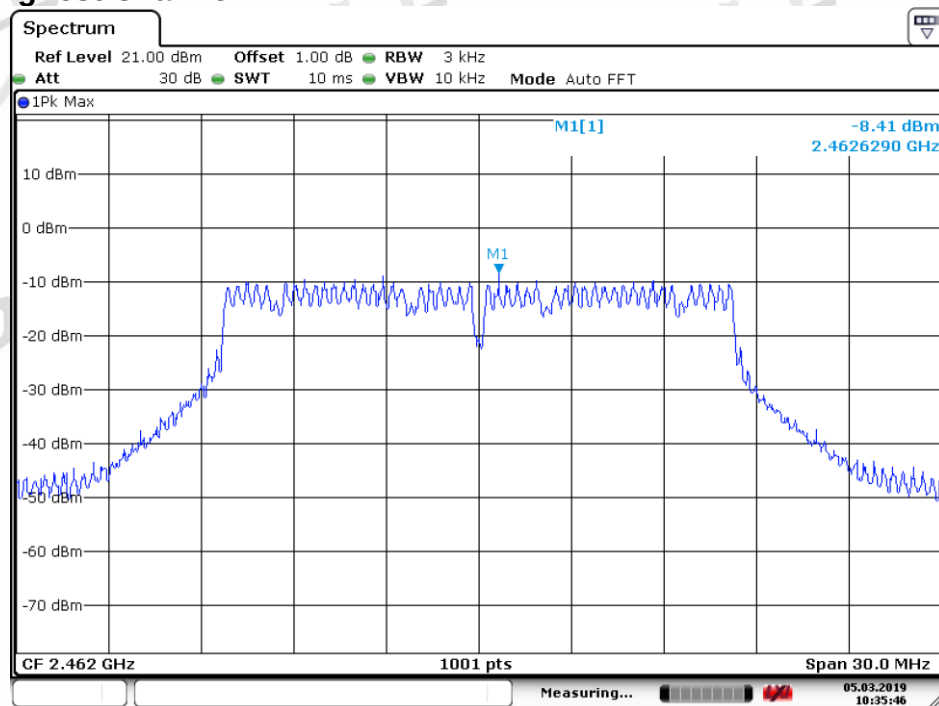


Date: 5.MAR.2019 10:35:46

802.11N20_Lowest Channel

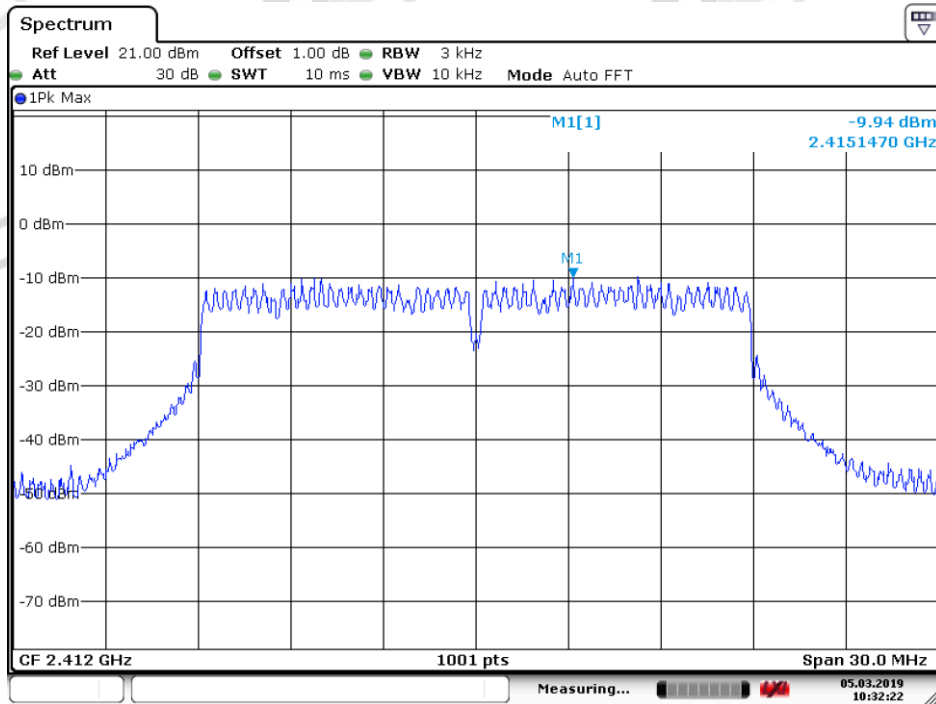


Date: 5.MAR.2019 10:32:23

802.11 N20_Middle Channel

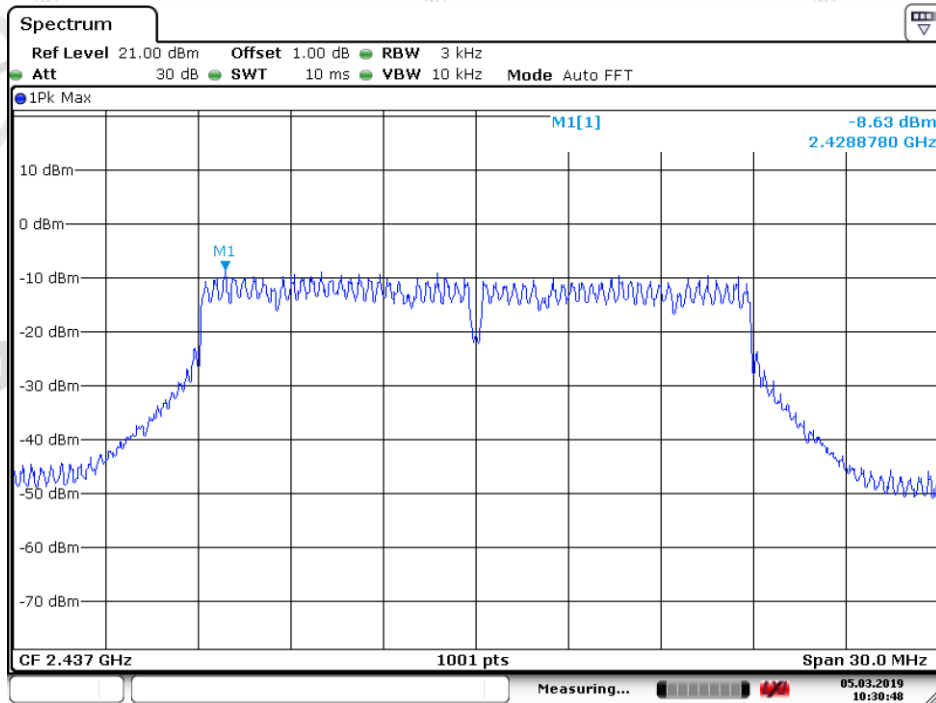


Date: 5.MAR.2019 10:30:49

802.11 N20_Highest Channel

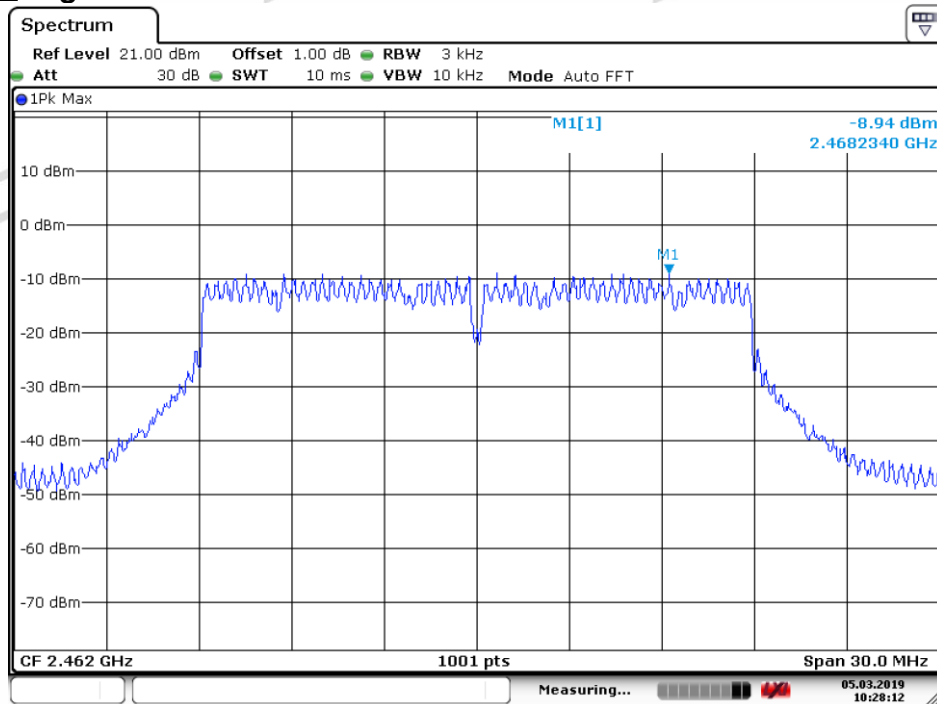


Date: 5.MAR.2019 10:28:13

802.11N40_Lowest Channel

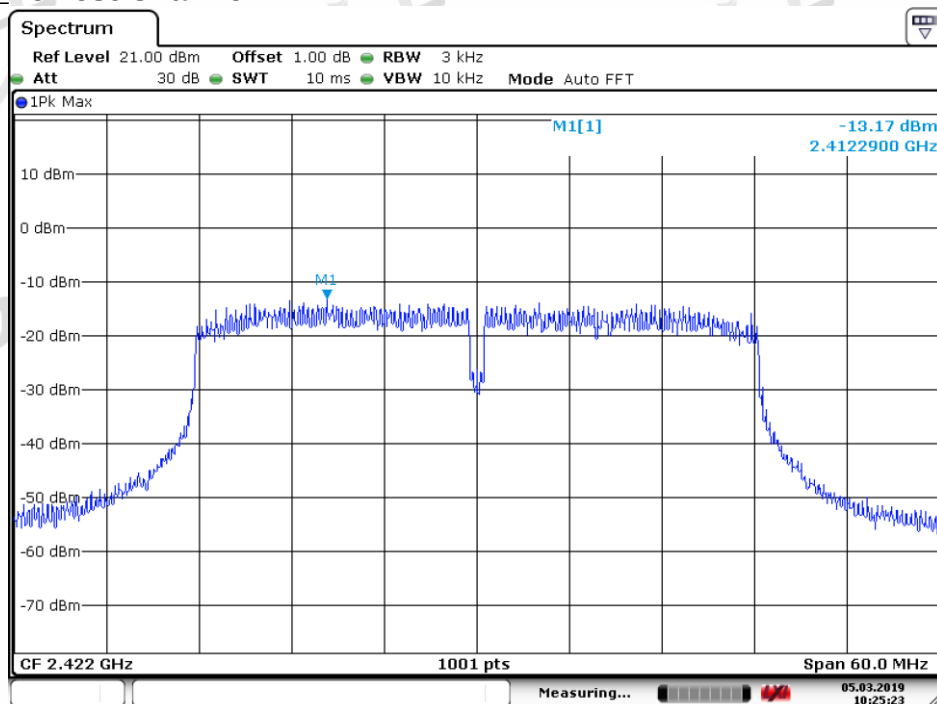


Date: 5.MAR.2019 10:25:24

802.11 N40_Middle Channel

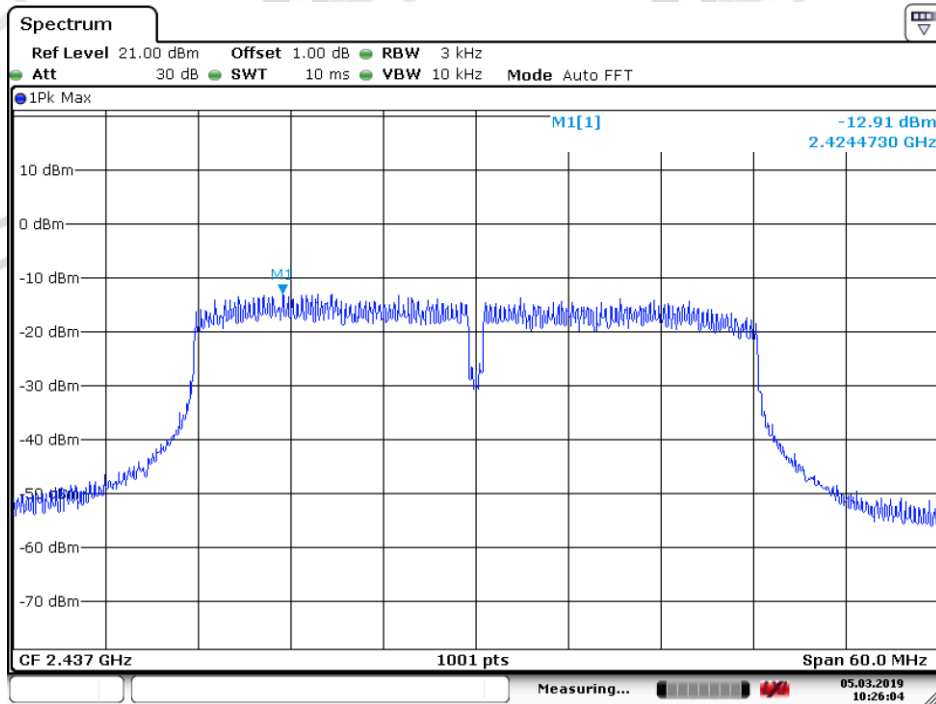

Date: 5.MAR.2019 10:26:04

802.11 N40_Highest Channel

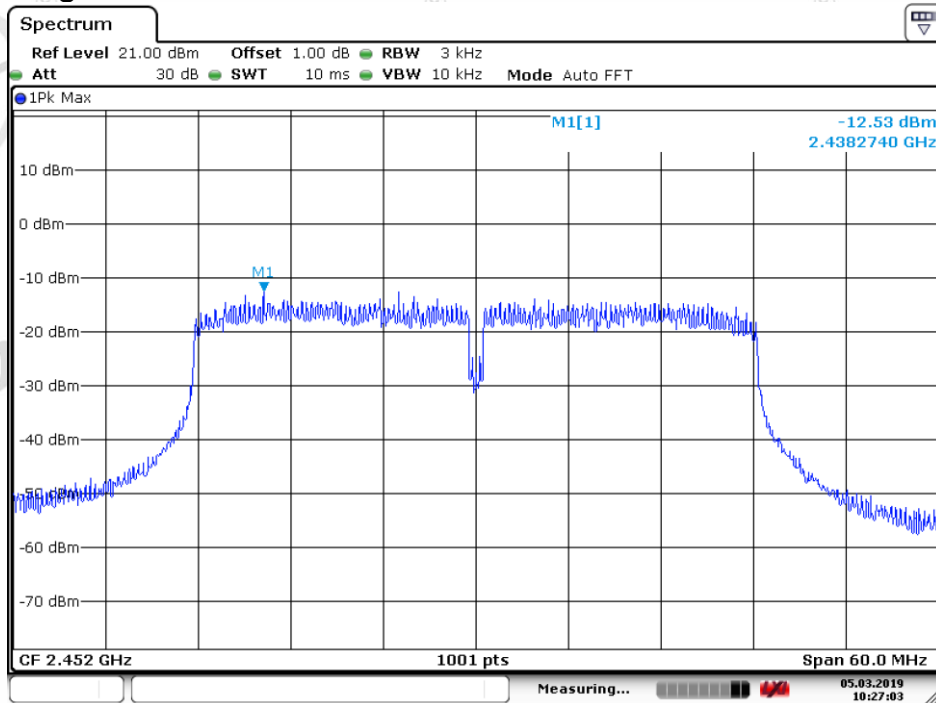


Date: 5.MAR.2019 10:27:03

8. Band-edge for RF Conducted Emissions

8.1. Test plots


ANT1

802.11B_Lowest Channel

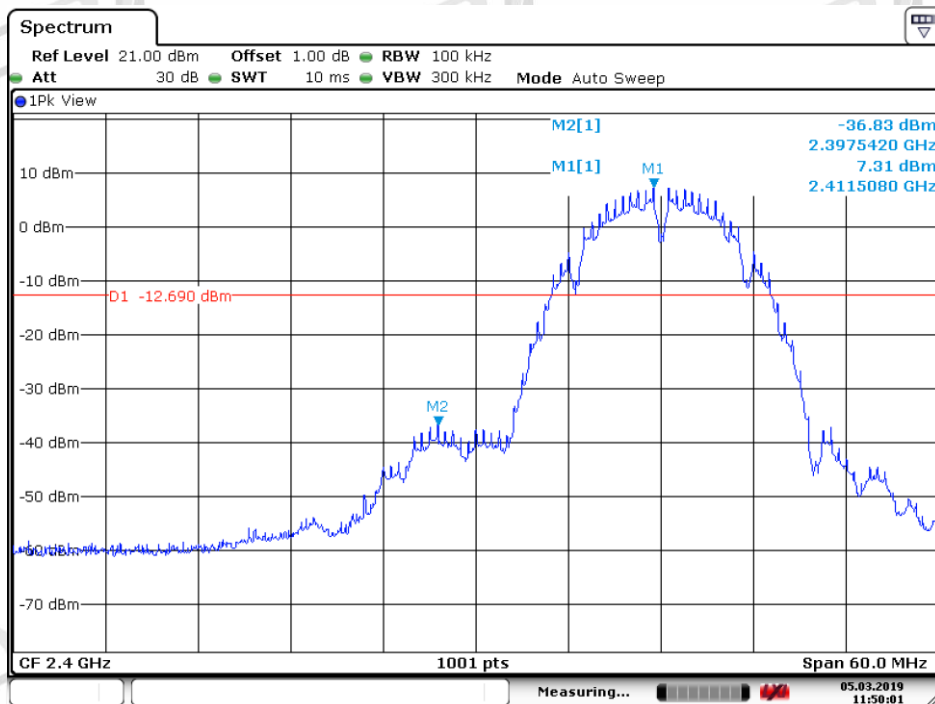


Date: 5.MAR.2019 11:50:01

802.11B_Highest Channel

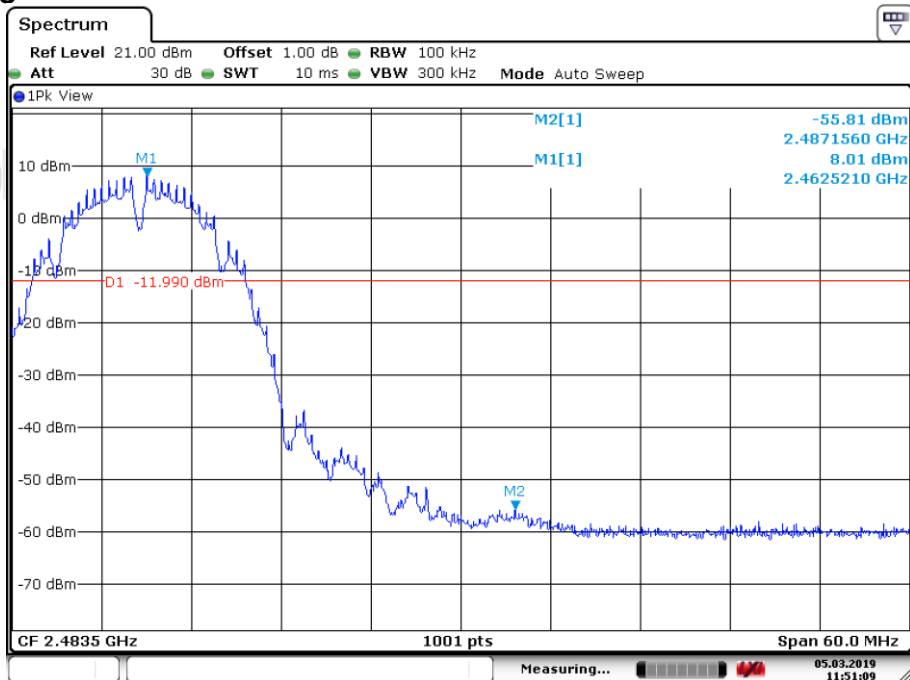


Date: 5.MAR.2019 11:51:08

802.11G_Lowest Channel

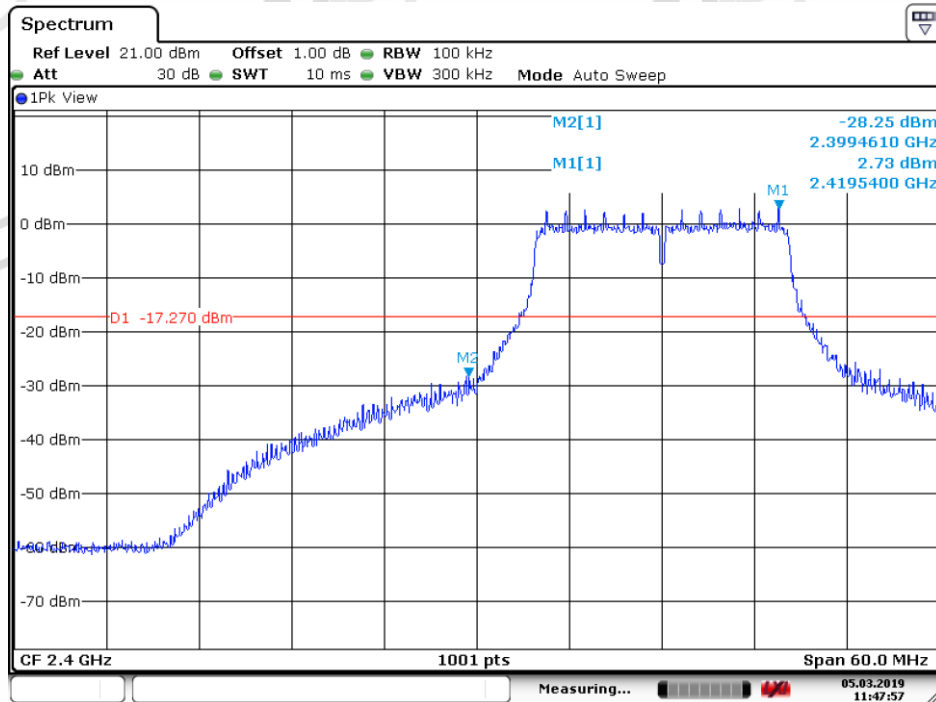


Date: 5.MAR.2019 11:47:57

802.11G_Highest Channel

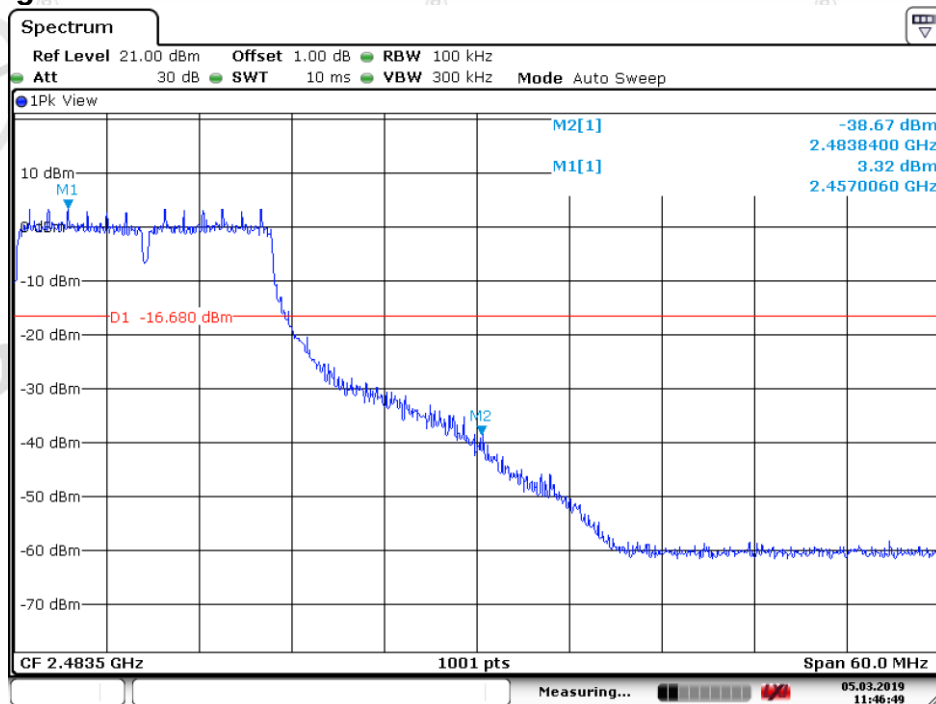


Date: 5.MAR.2019 11:46:49

802.11N20_Lowest Channel

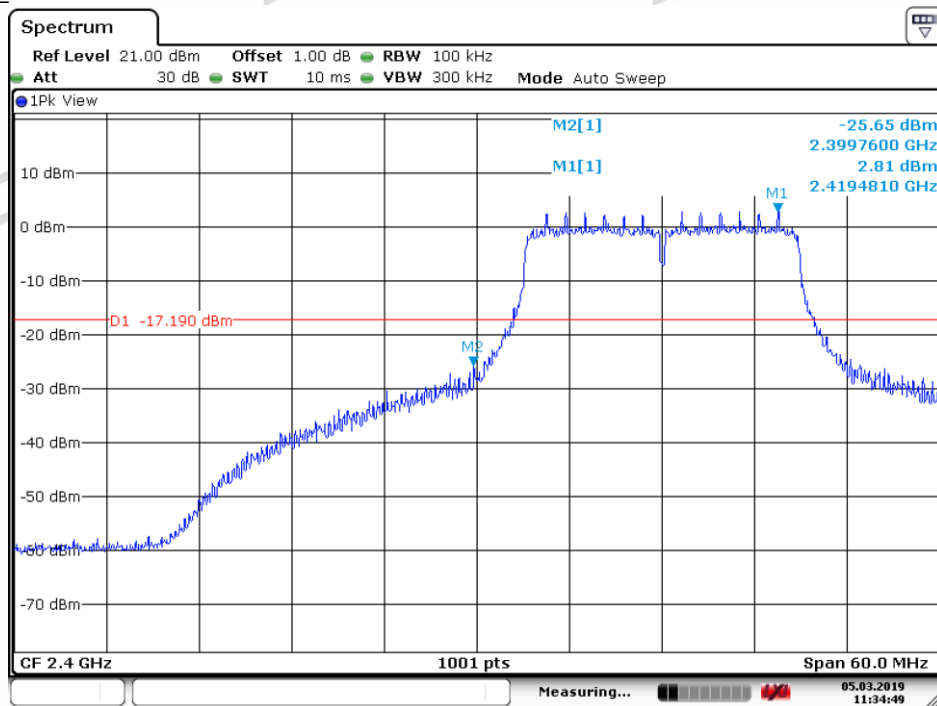


Date: 5.MAR.2019 11:34:49

802.11 N20_Highest Channel

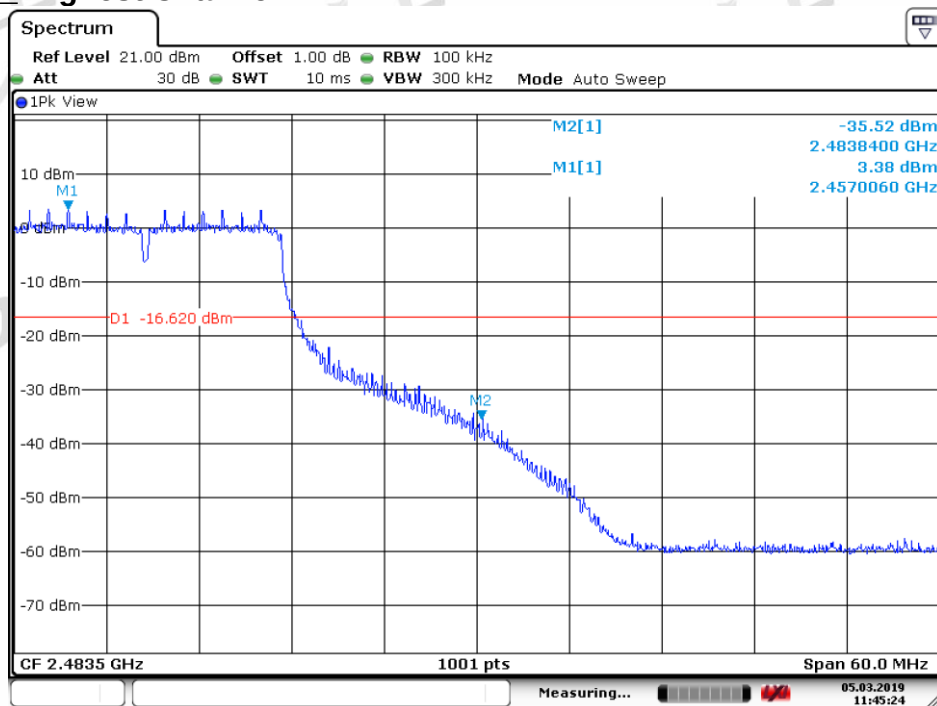


Date: 5.MAR.2019 11:45:24

802.11N40_Lowest Channel

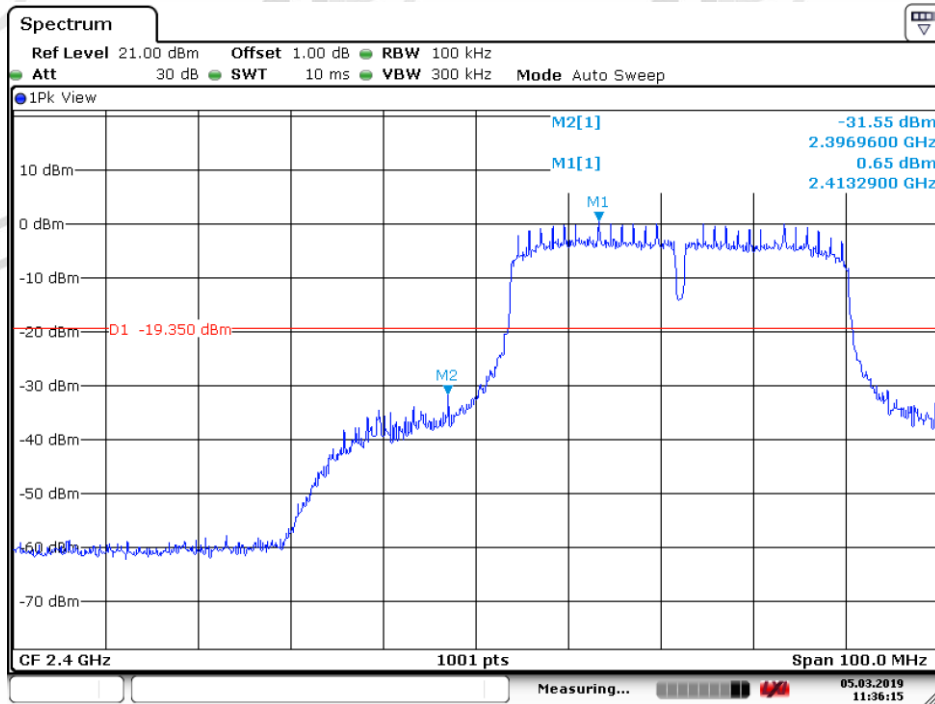

Date: 5.MAR.2019 11:36:16

802.11 N40_Highest Channel

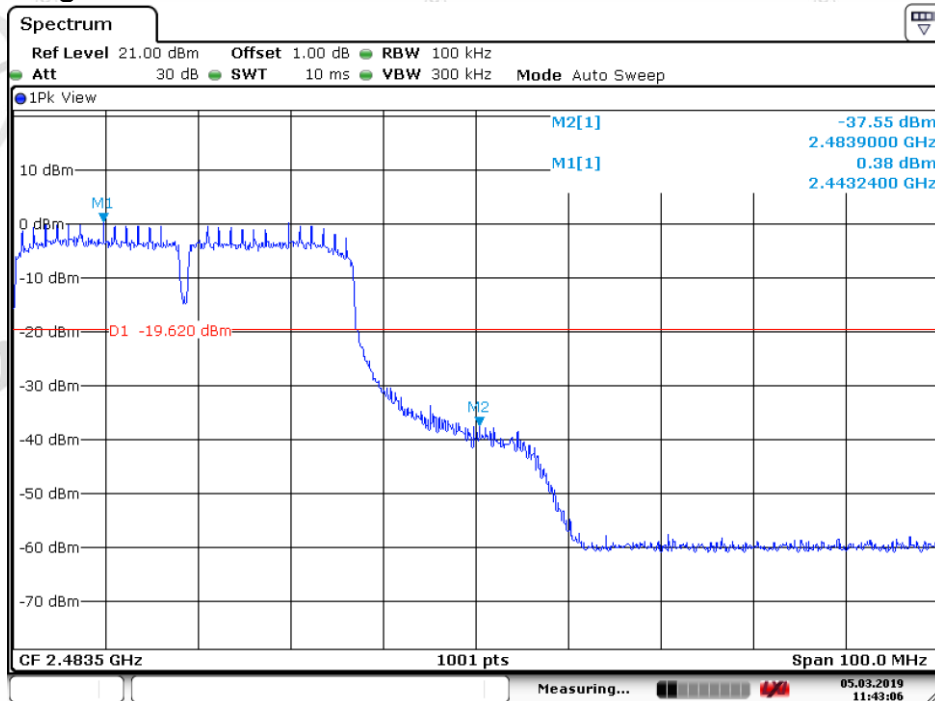


Date: 5.MAR.2019 11:43:06

9. RF Conducted Spurious Emissions

9.1. Test plots


ANT1

802.11B_Lowest Channel

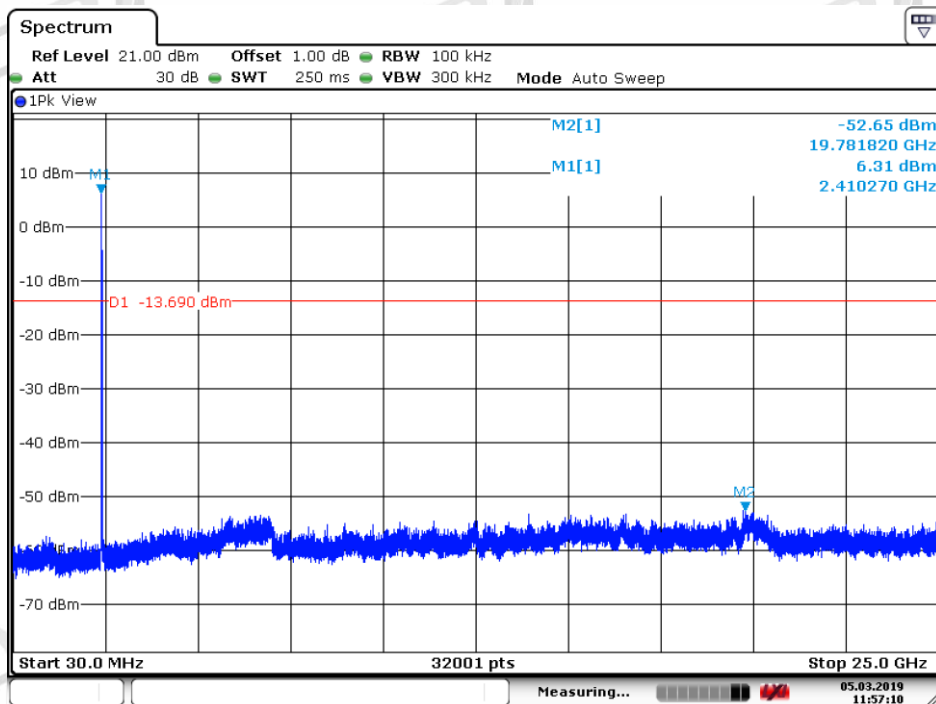


Date: 5.MAR.2019 11:57:10

802.11B_Middle Channel

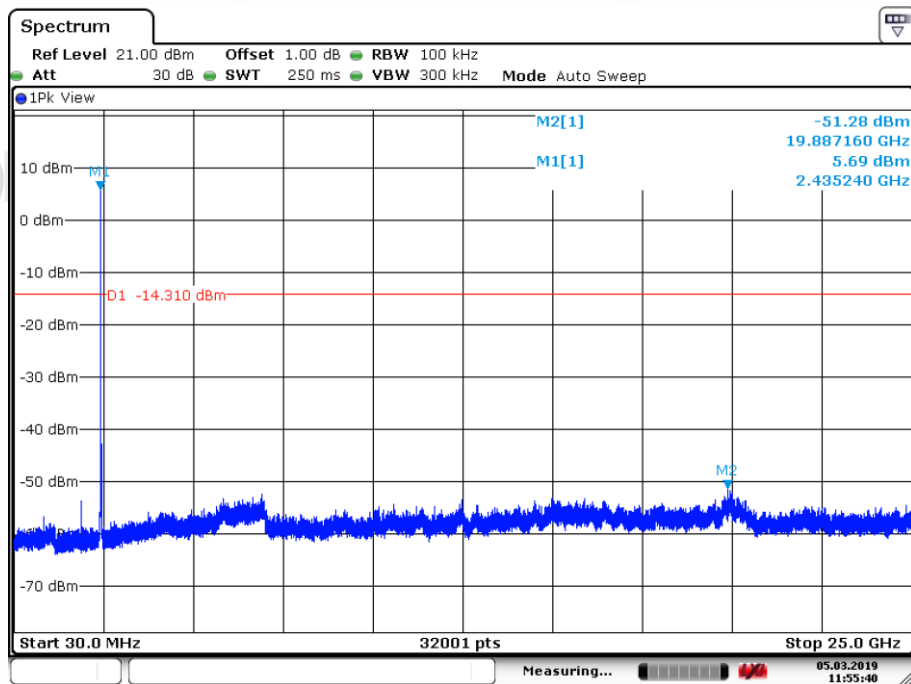


Date: 5.MAR.2019 11:55:41

802.11B_Highest Channel

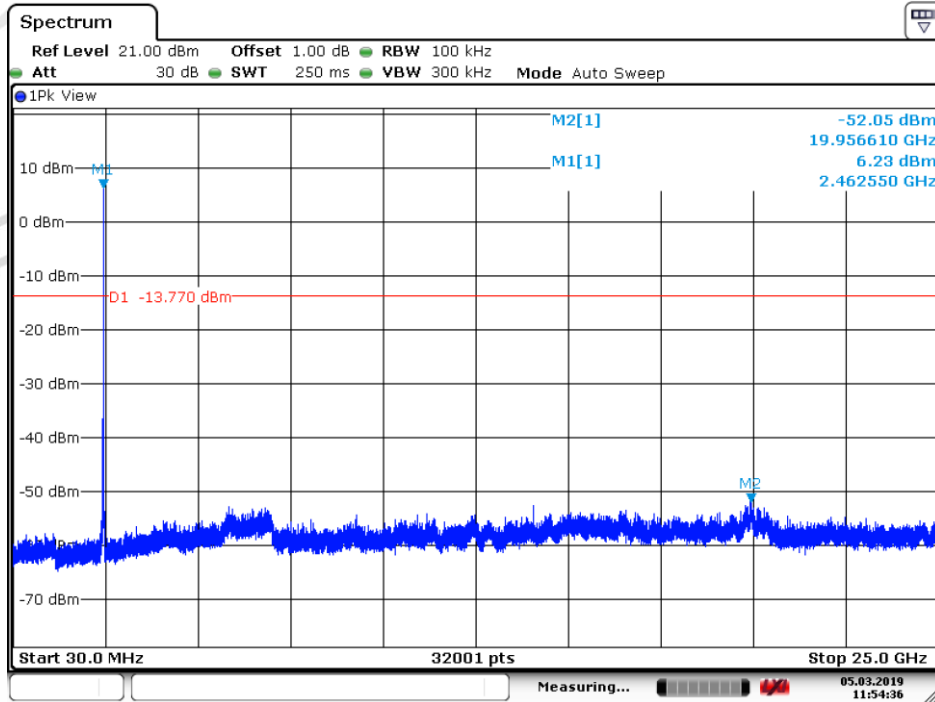


Date: 5.MAR.2019 11:54:37

802.11G_Lowest Channel

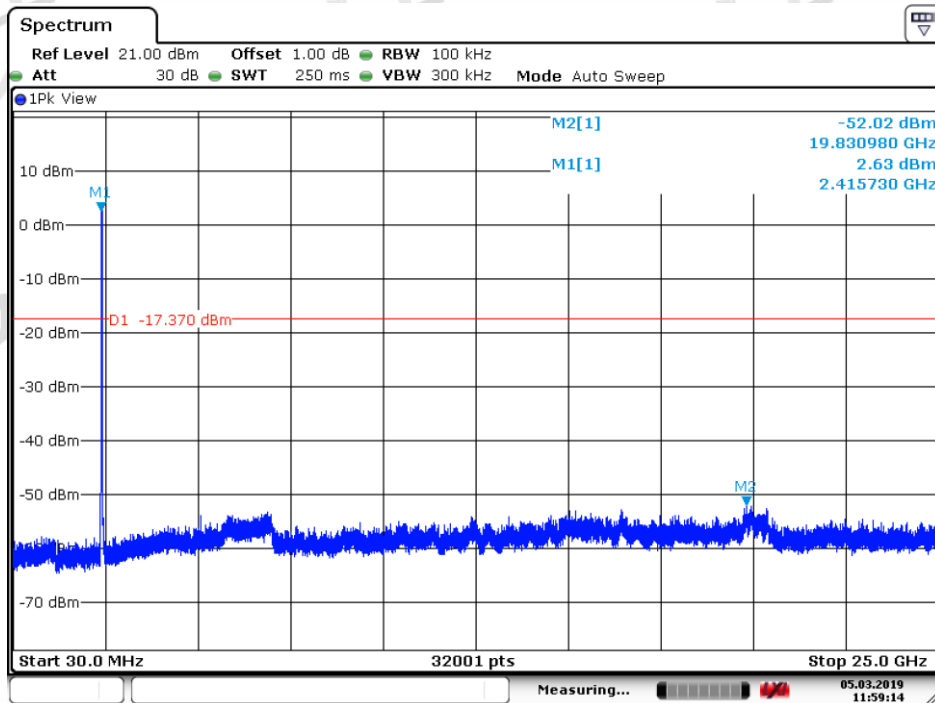


Date: 5.MAR.2019 11:59:14

802.11G_Middle Channel

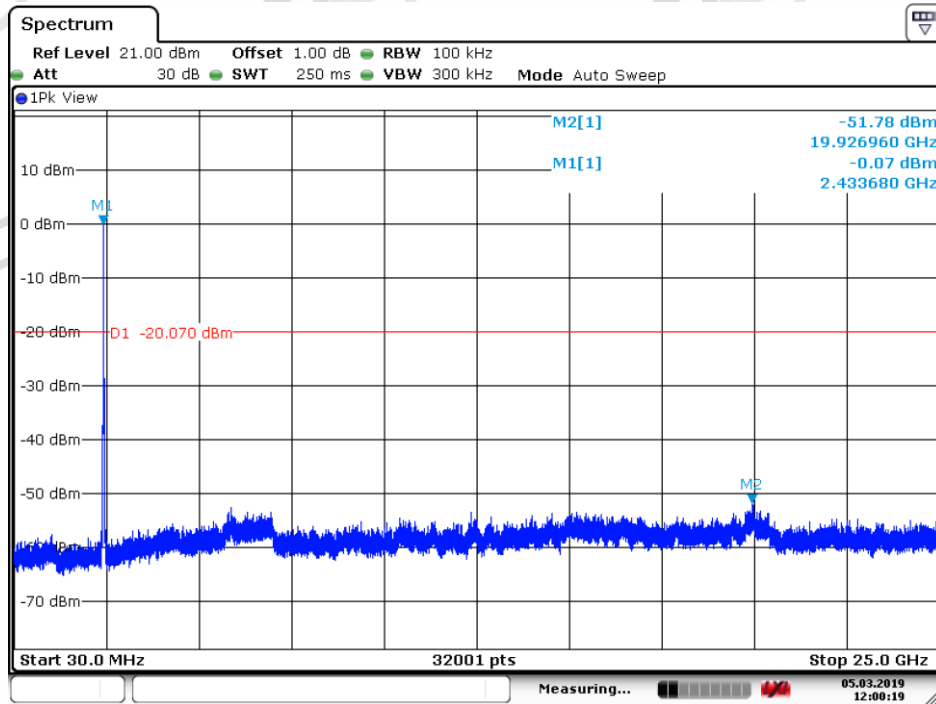


Date: 5.MAR.2019 12:00:19

802.11G_Highest Channel

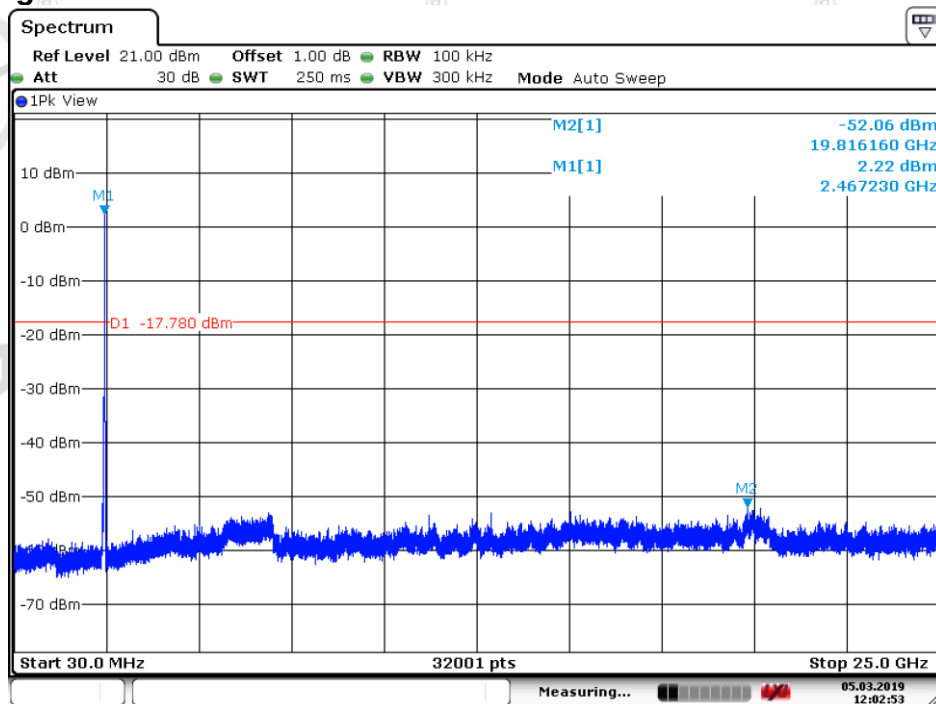


Date: 5.MAR.2019 12:02:53

802.11N20_Lowest Channel

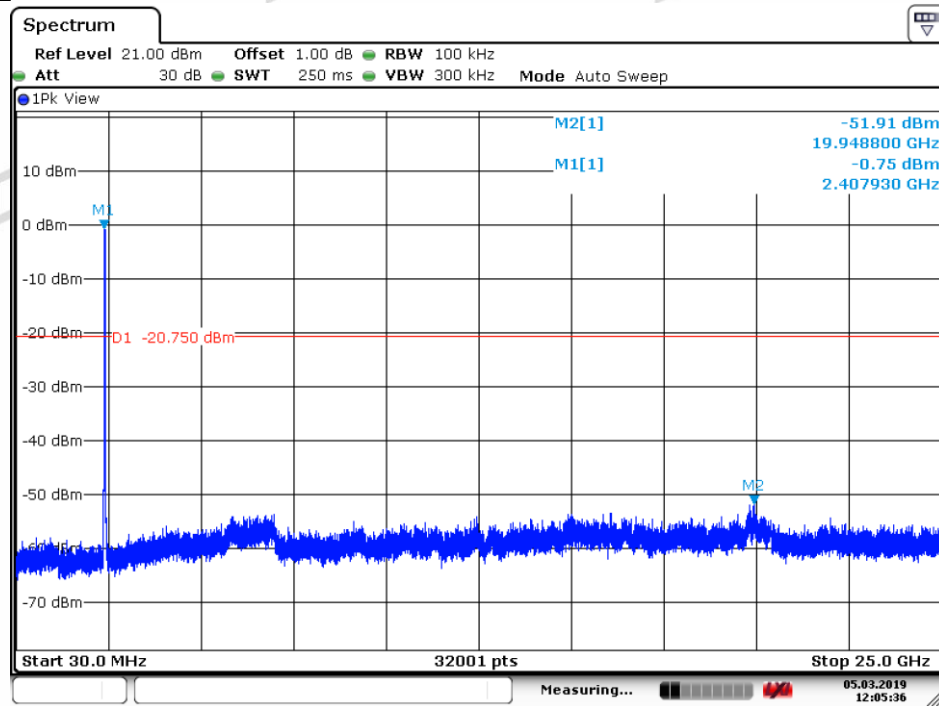


Date: 5.MAR.2019 12:05:36

802.11 N20_Middle Channel

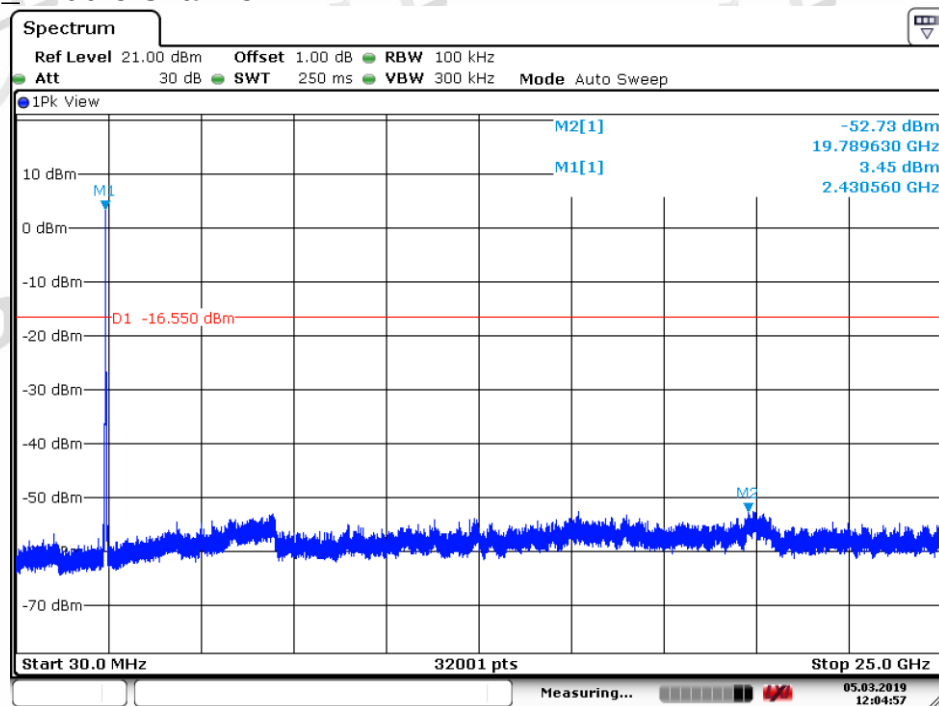


Date: 5.MAR.2019 12:04:58

802.11 N20_Highest Channel

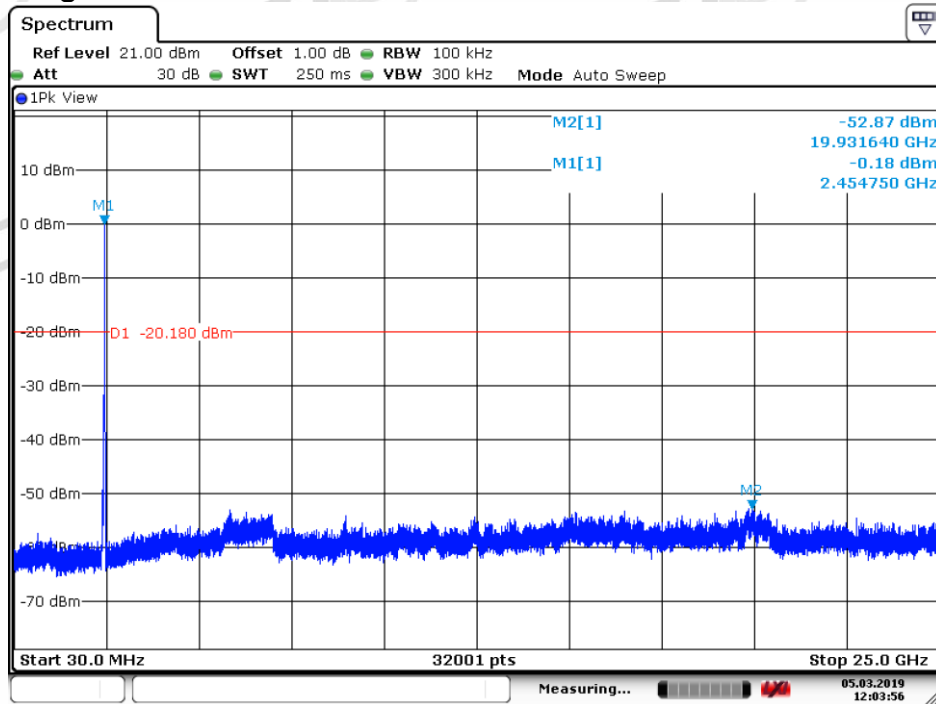


Date: 5.MAR.2019 12:03:57

802.11N40_Lowest Channel

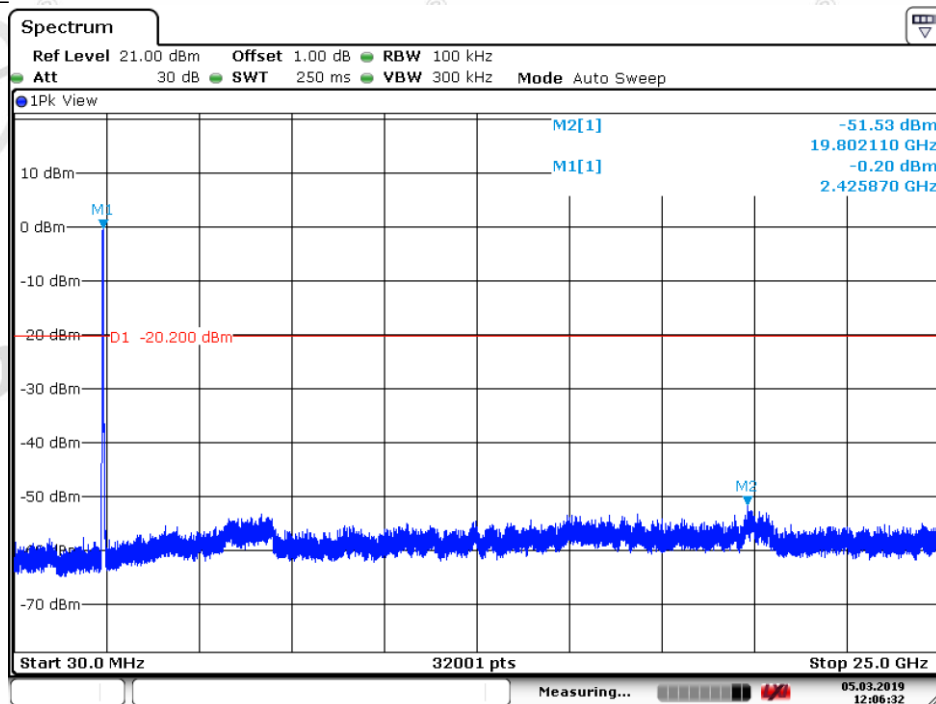


Date: 5.MAR.2019 12:06:33

802.11 N40 Middle Channel

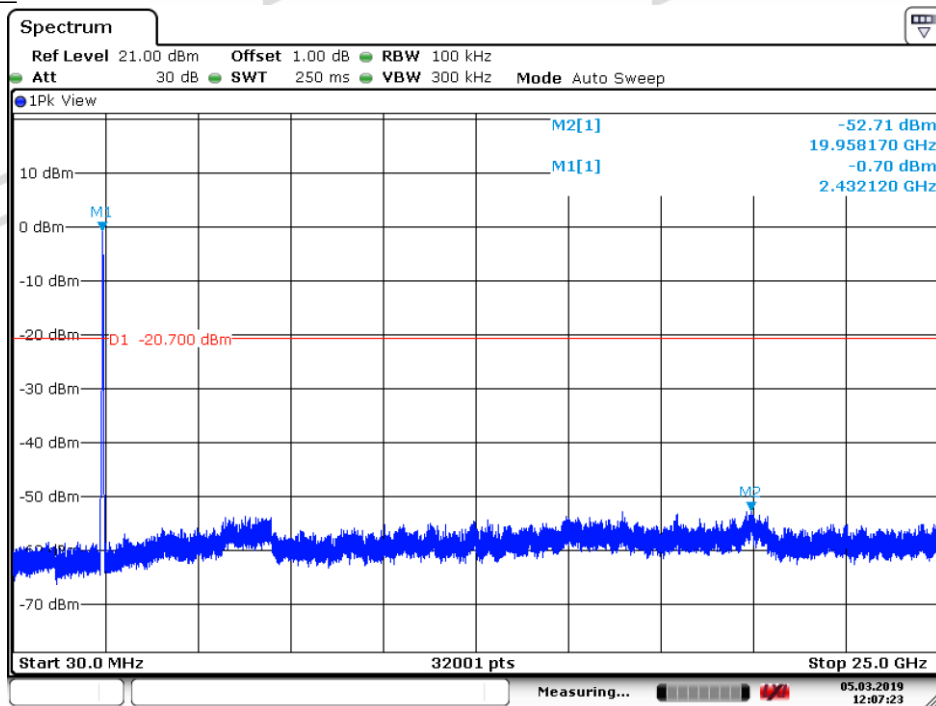

Date: 5.MAR.2019 12:07:23

802.11 N40 Highest Channel

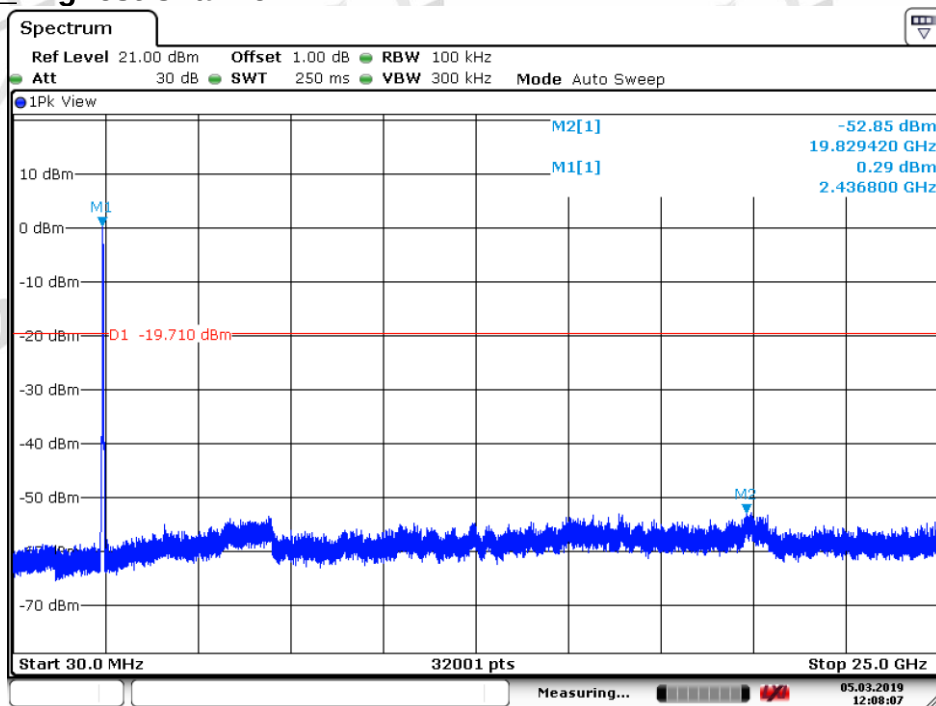

Date: 5.MAR.2019 12:08:07

Remark:

Scan from 9kHz to 25GHz, the disturbance between 9KHz to 30MHz was very low, and the above harmonics were the highest point could be found when testing, The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

The End