



Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6505 MHz		
Remark:			

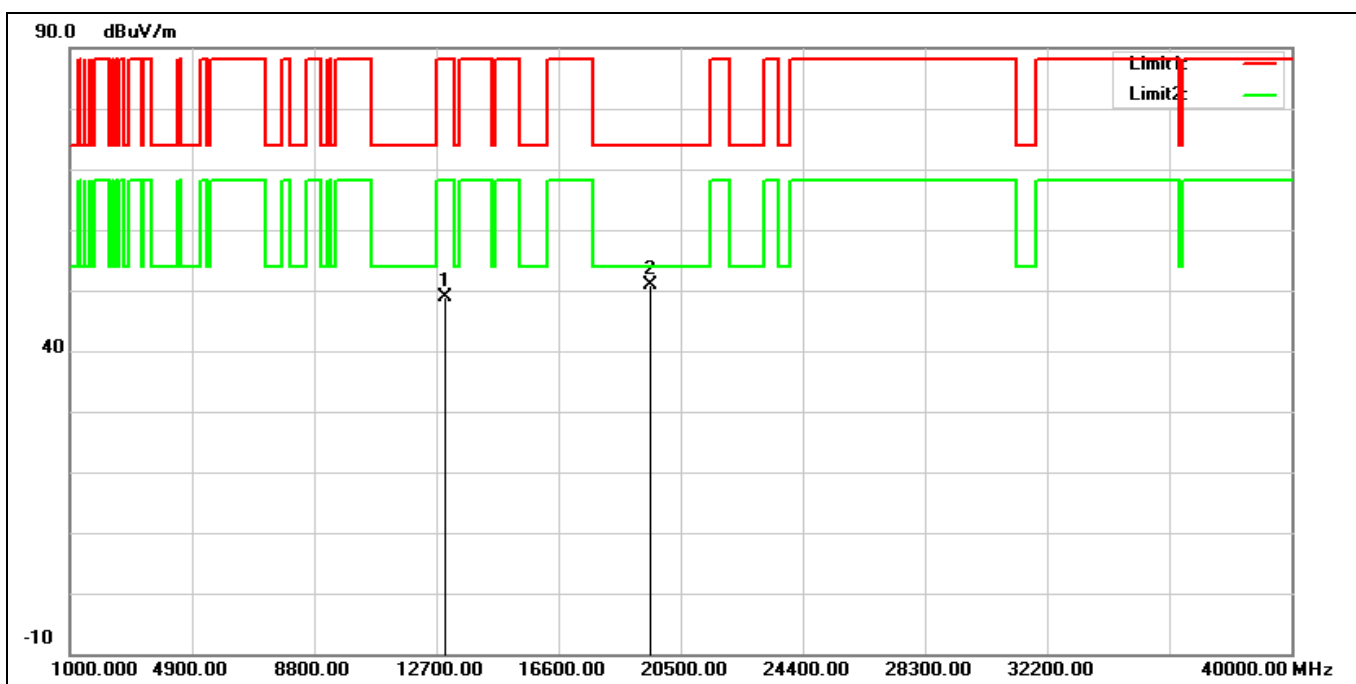


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13010.000	32.49	16.39	48.88	88.20	-39.32	peak
2*	19515.000	30.09	20.76	50.85	74.00	-23.15	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6505 MHz		
Remark:			

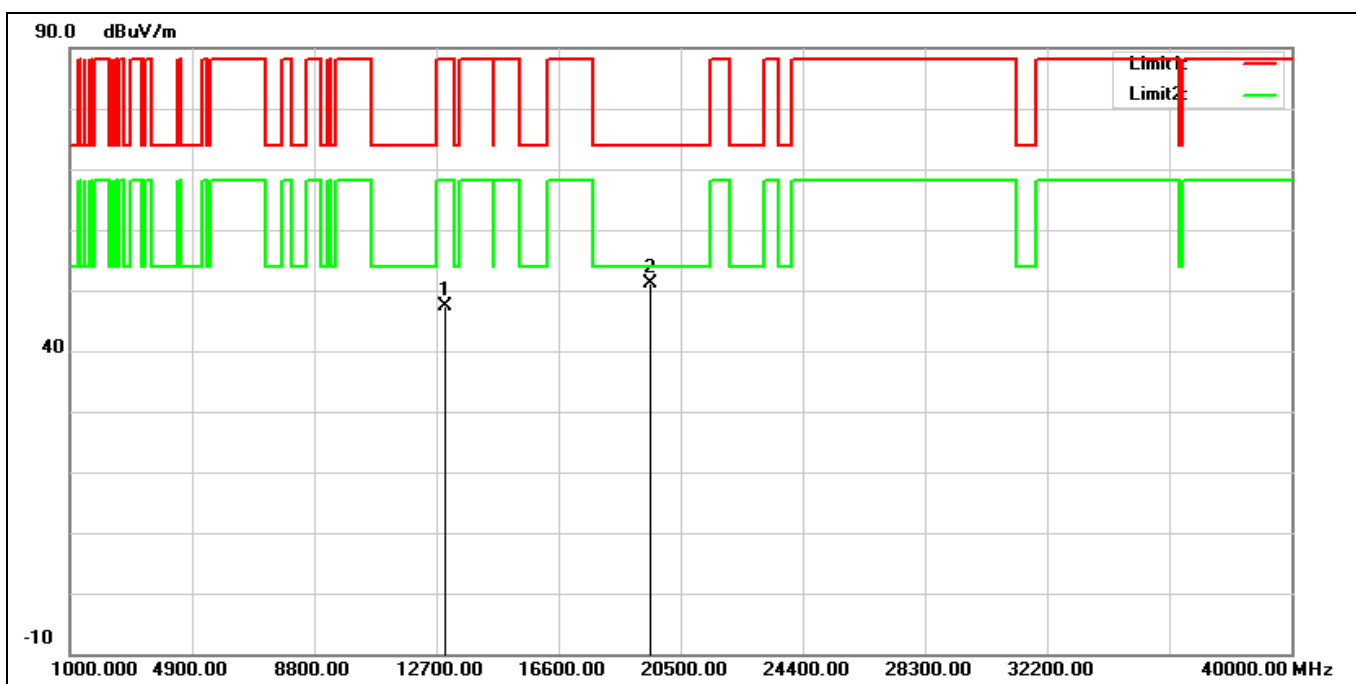


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13010.000	30.87	16.39	47.26	88.20	-40.94	peak
2*	19515.000	30.32	20.76	51.08	74.00	-22.92	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6665 MHz		
Remark:			

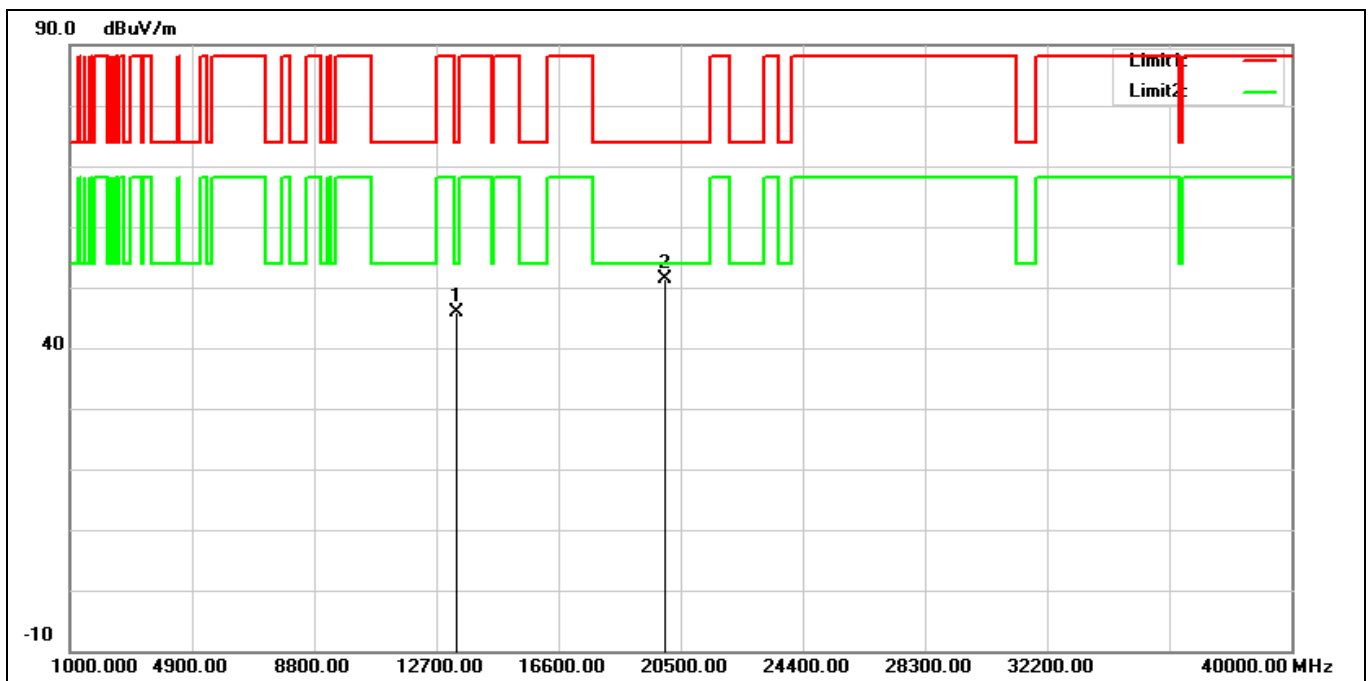


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13330.000	31.20	14.74	45.94	74.00	-28.06	peak
2*	19995.000	30.32	21.16	51.48	74.00	-22.52	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6665 MHz		
Remark:			

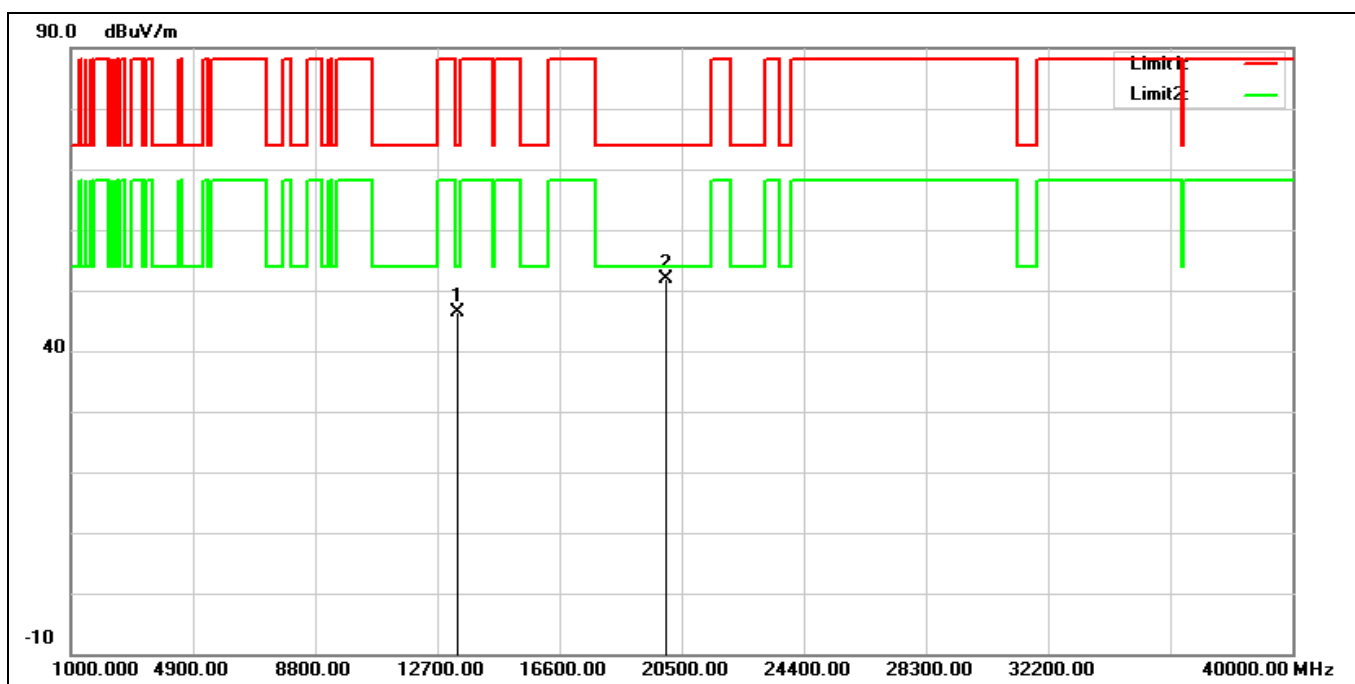


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13330.000	31.69	14.74	46.43	74.00	-27.57	peak
2*	19995.000	30.78	21.16	51.94	74.00	-22.06	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT160 6825 MHz
Remark:

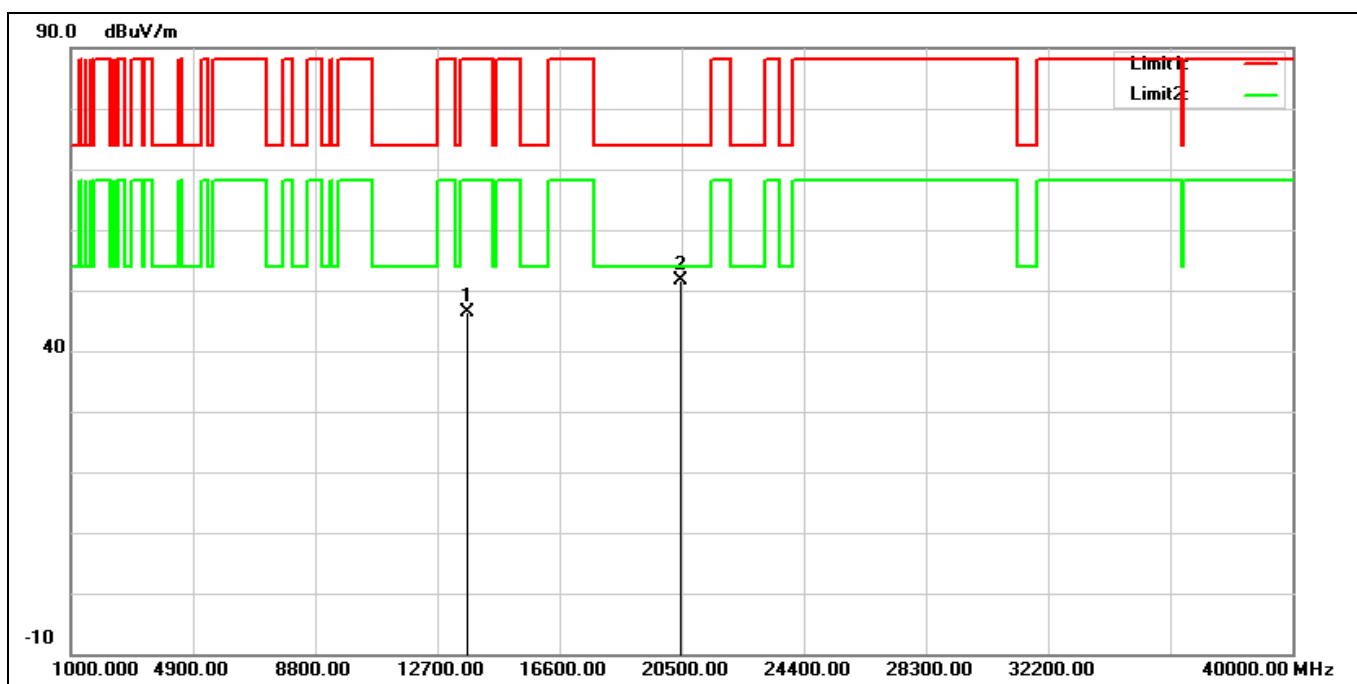


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13650.000	30.75	15.56	46.31	88.20	-41.89	peak
2*	20475.000	31.77	19.87	51.64	74.00	-22.36	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6825 MHz		
Remark:			

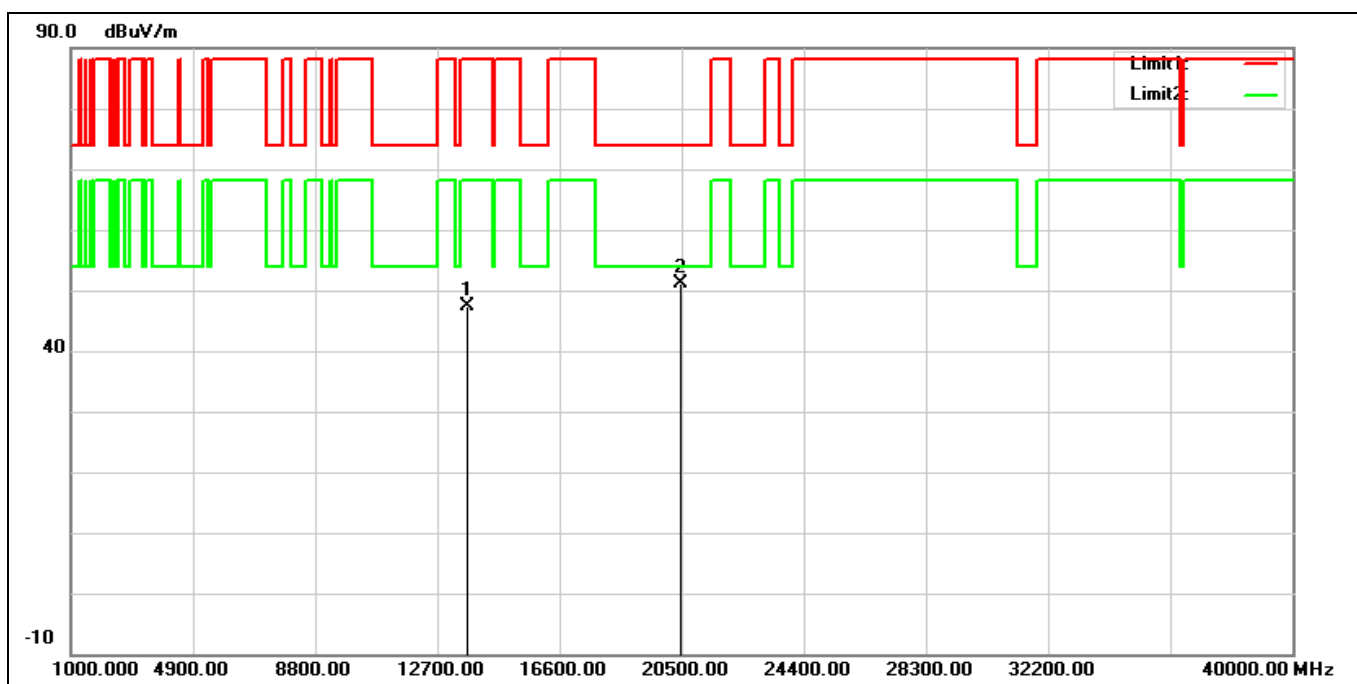


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13650.000	31.85	15.56	47.41	88.20	-40.79	peak
2*	20475.000	31.22	19.87	51.09	74.00	-22.91	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6985 MHz		
Remark:			

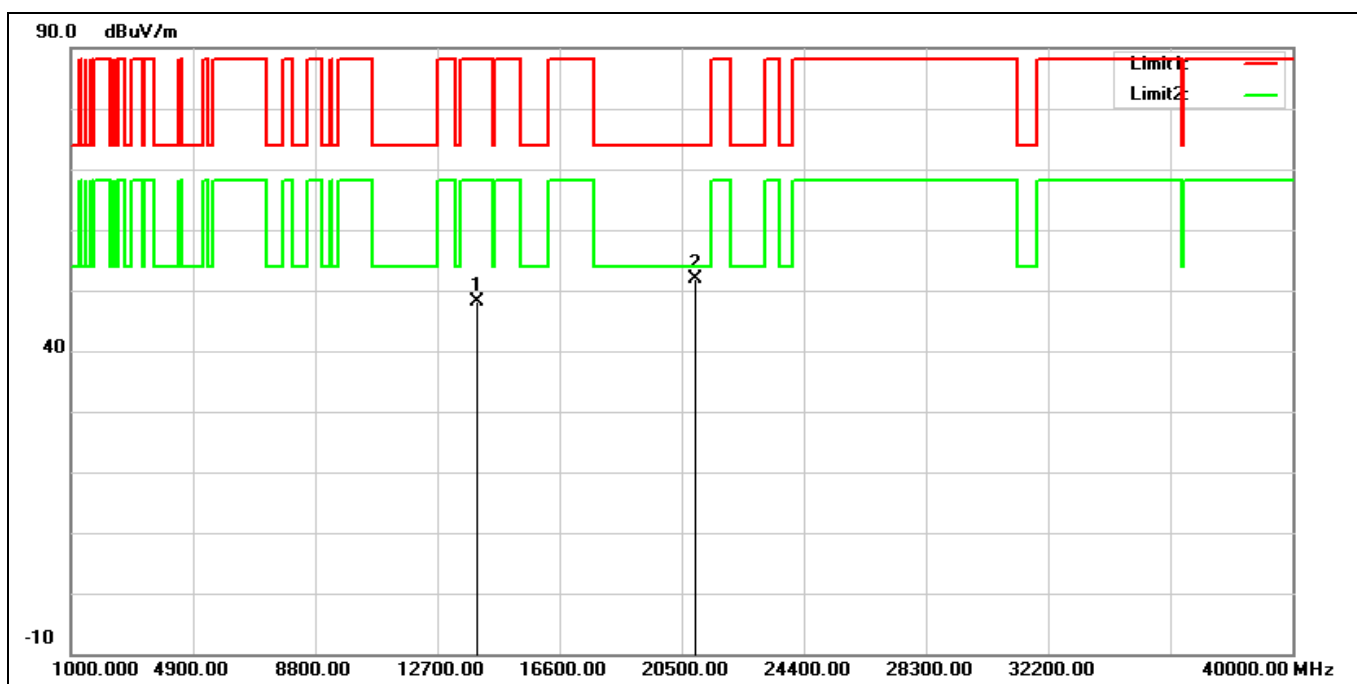


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13970.000	30.36	17.87	48.23	88.20	-39.97	peak
2*	20955.000	31.04	20.87	51.91	74.00	-22.09	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6985 MHz		
Remark:			

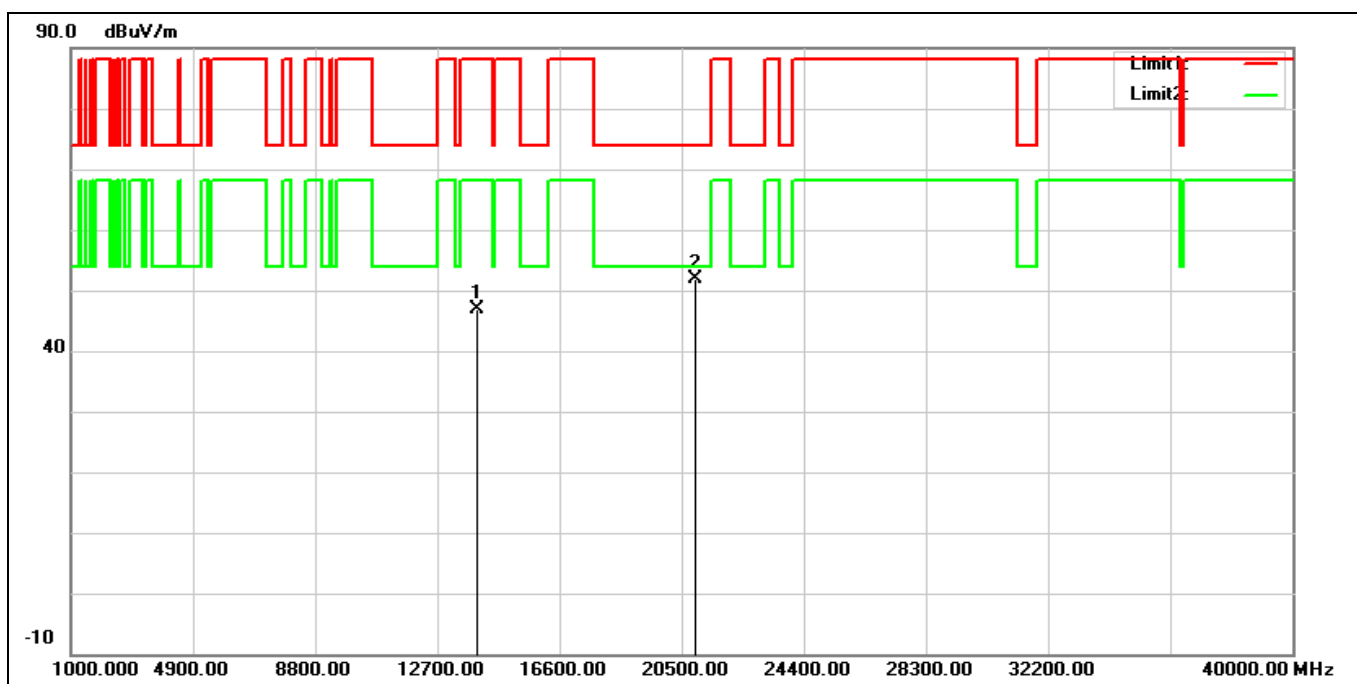


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13970.000	28.89	17.87	46.76	88.20	-41.44	peak
2*	20955.000	30.95	20.87	51.82	74.00	-22.18	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT320 6105 MHz
Remark:

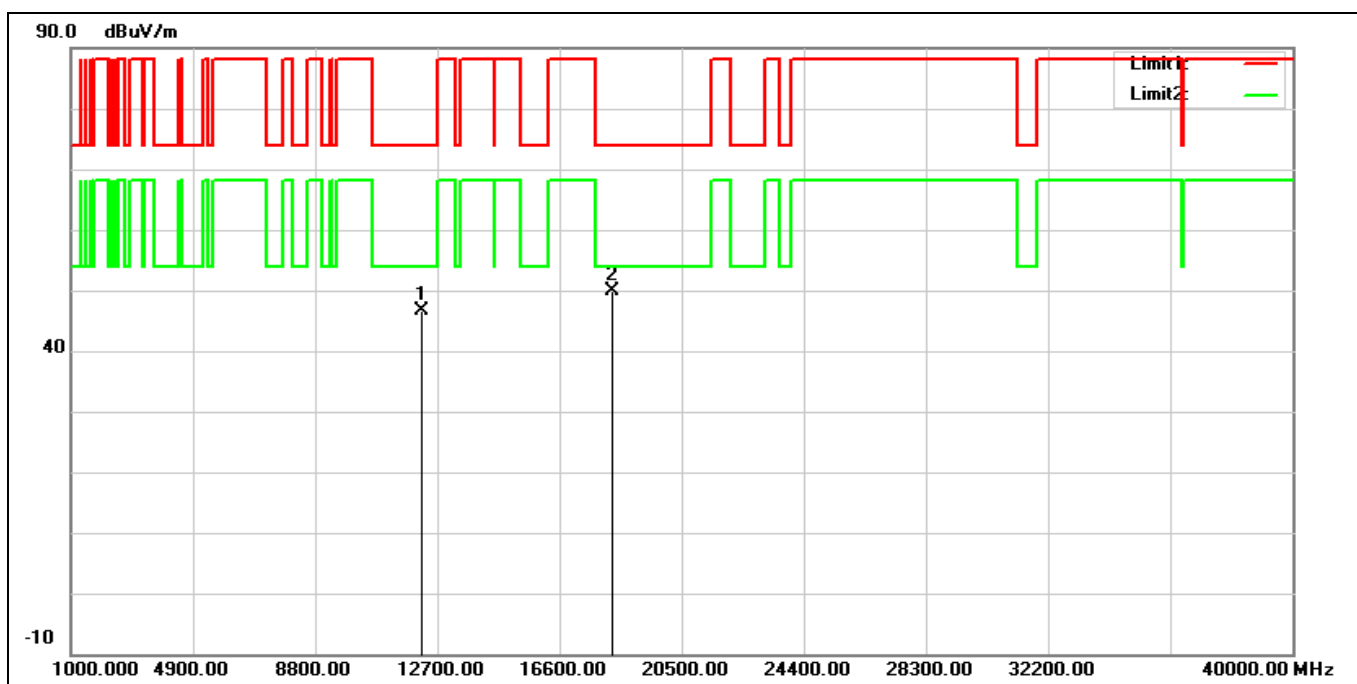


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12210.000	32.15	14.43	46.58	74.00	-27.42	peak
2*	18315.000	31.52	18.47	49.99	74.00	-24.01	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6105 MHz		
Remark:			

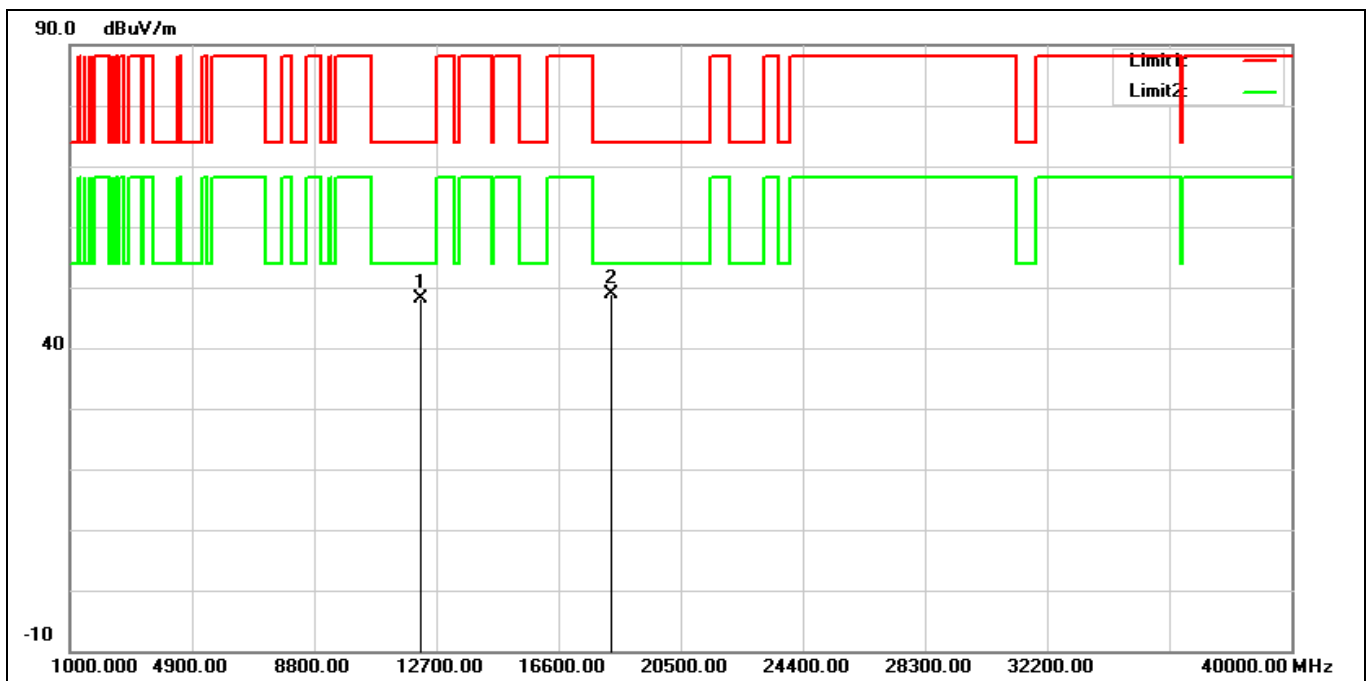


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12210.000	33.70	14.43	48.13	74.00	-25.87	peak
2*	18315.000	30.34	18.47	48.81	74.00	-25.19	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6265 MHz		
Remark:			

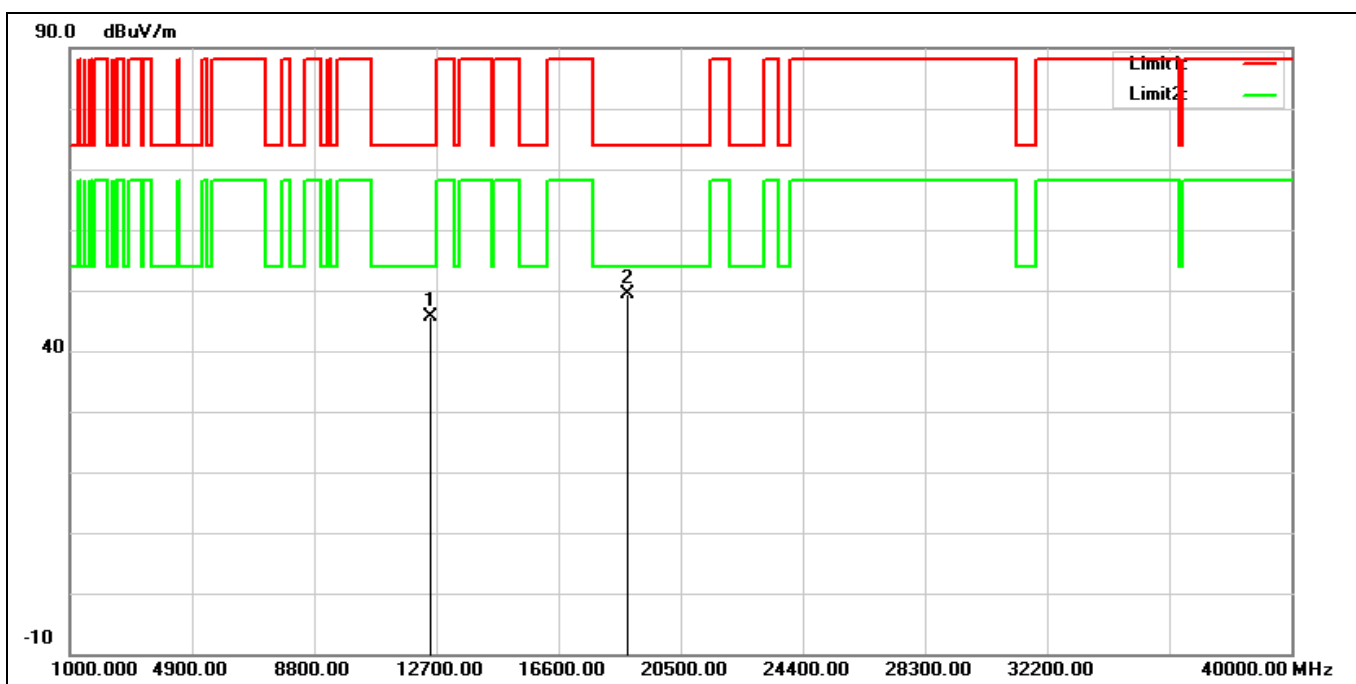


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12530.000	31.17	14.40	45.57	74.00	-28.43	peak
2*	18795.000	30.34	19.16	49.50	74.00	-24.50	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6265 MHz		
Remark:			

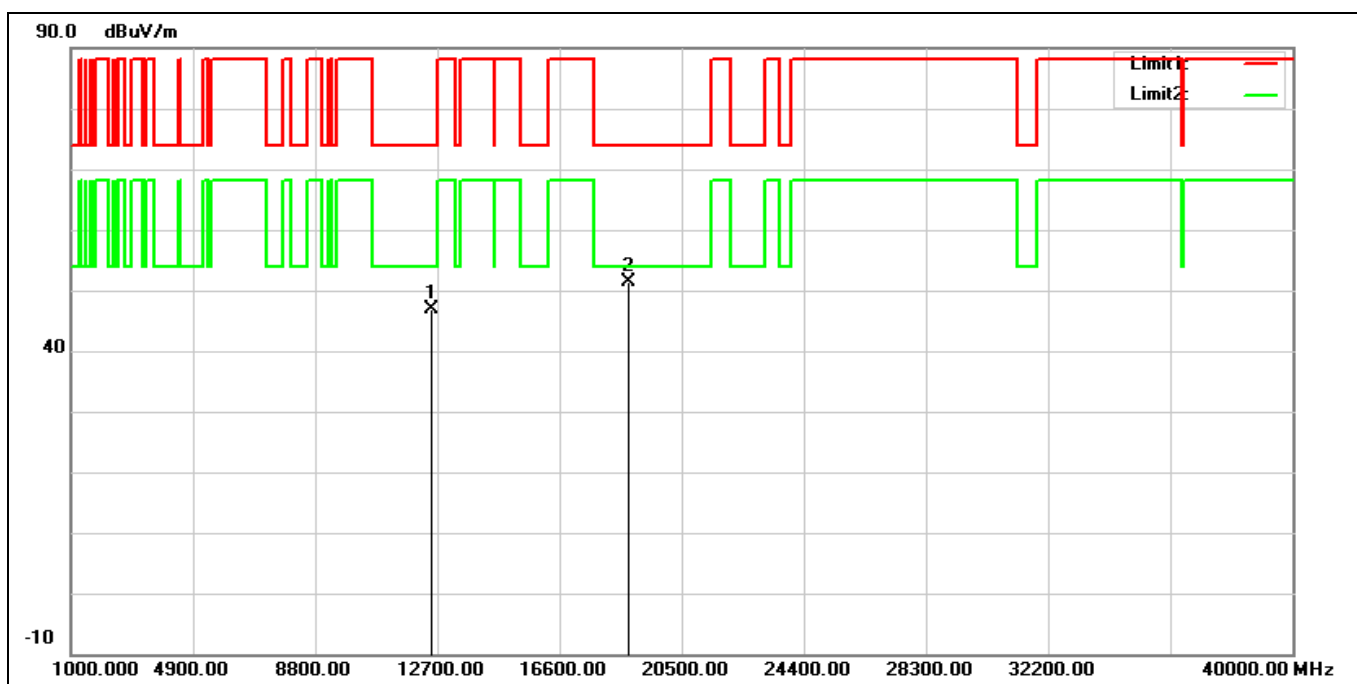


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12530.000	32.54	14.40	46.94	74.00	-27.06	peak
2*	18795.000	32.24	19.16	51.40	74.00	-22.60	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6425 MHz		
Remark:			

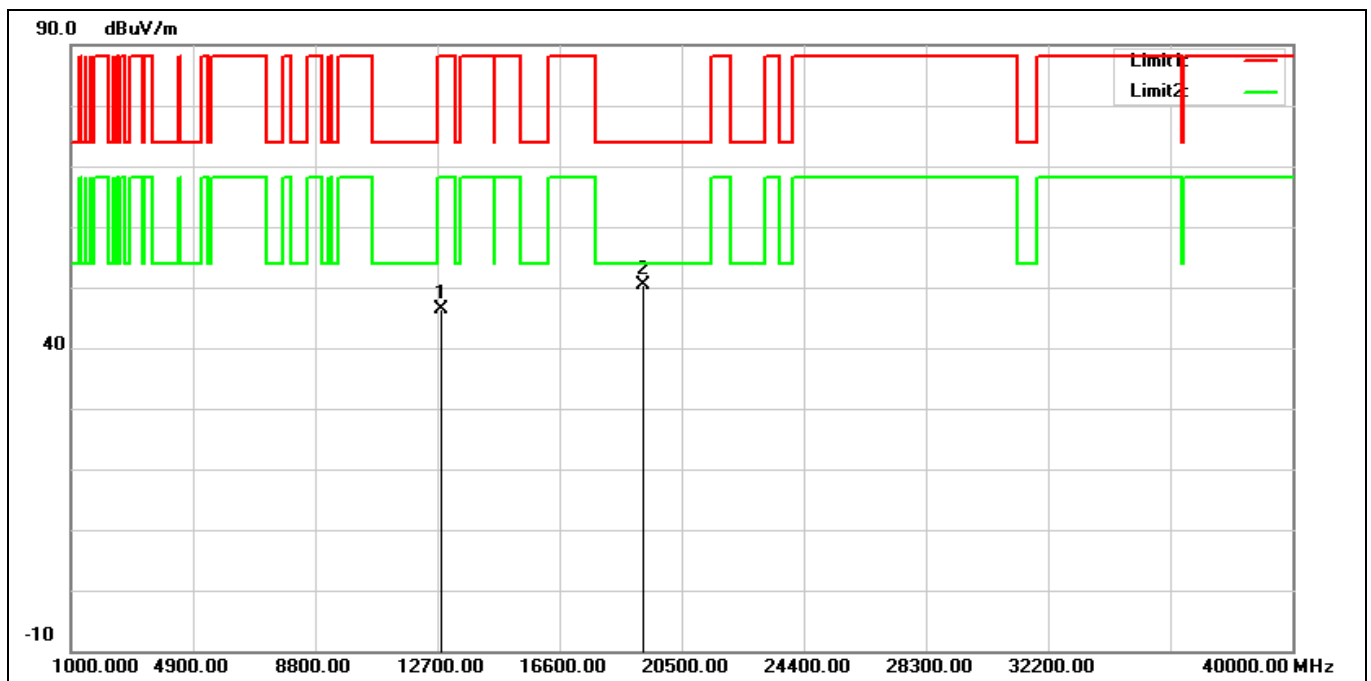


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12850.000	30.29	16.01	46.30	88.20	-41.90	peak
2*	19275.000	30.24	20.21	50.45	74.00	-23.55	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT320 6425 MHz
Remark:

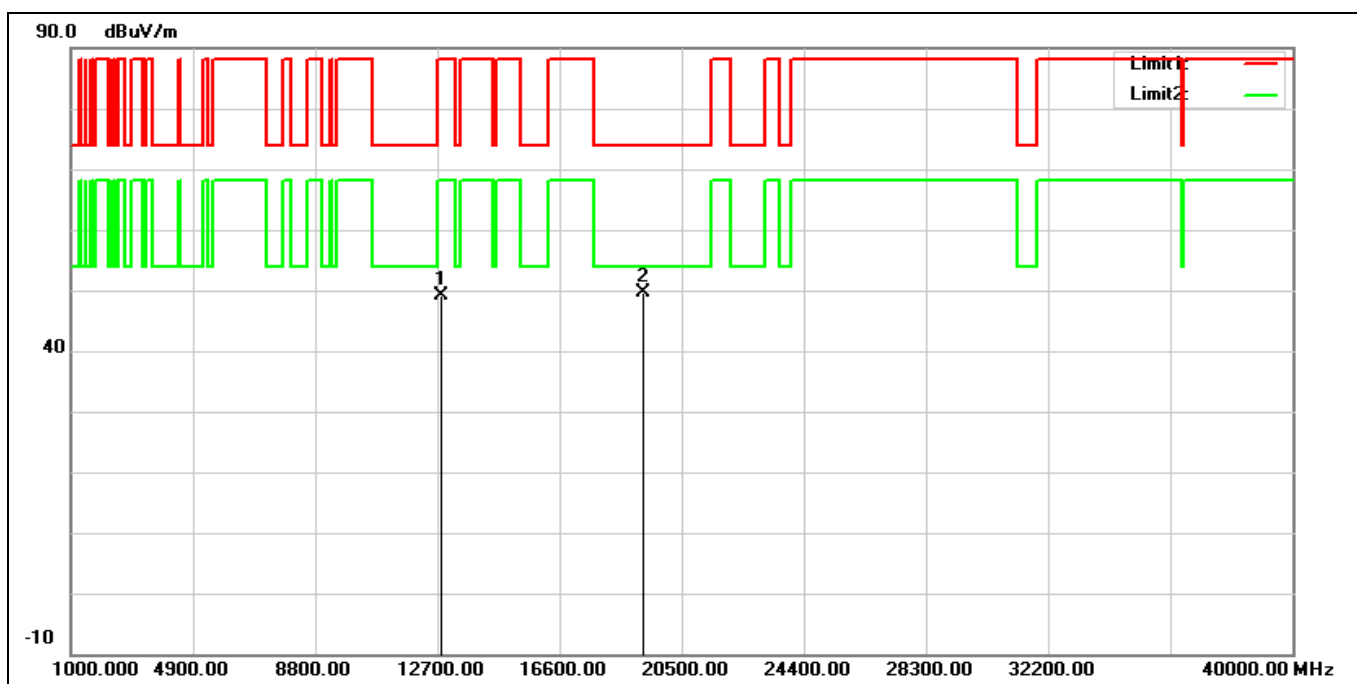


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12850.000	33.16	16.01	49.17	88.20	-39.03	peak
2*	19275.000	29.51	20.21	49.72	74.00	-24.28	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6585 MHz		
Remark:			

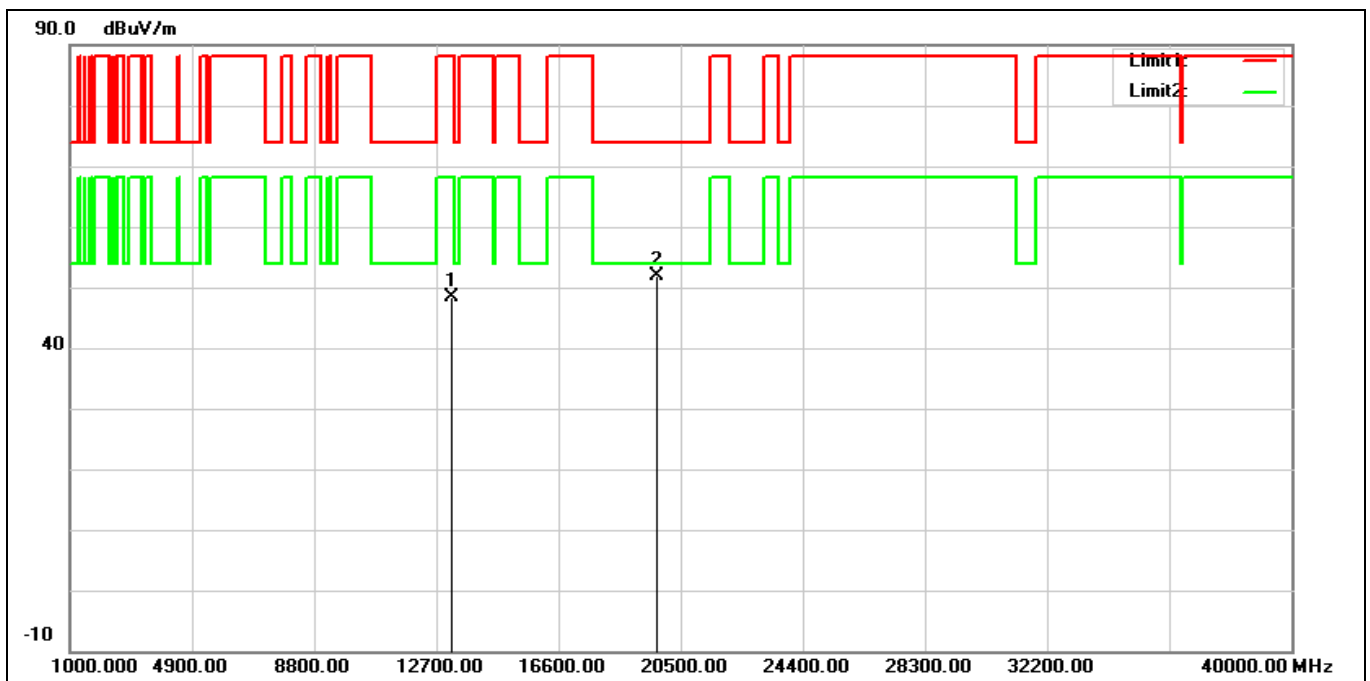


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13170.000	33.01	15.38	48.39	88.20	-39.81	peak
2*	19755.000	30.85	20.96	51.81	74.00	-22.19	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6585 MHz		
Remark:			

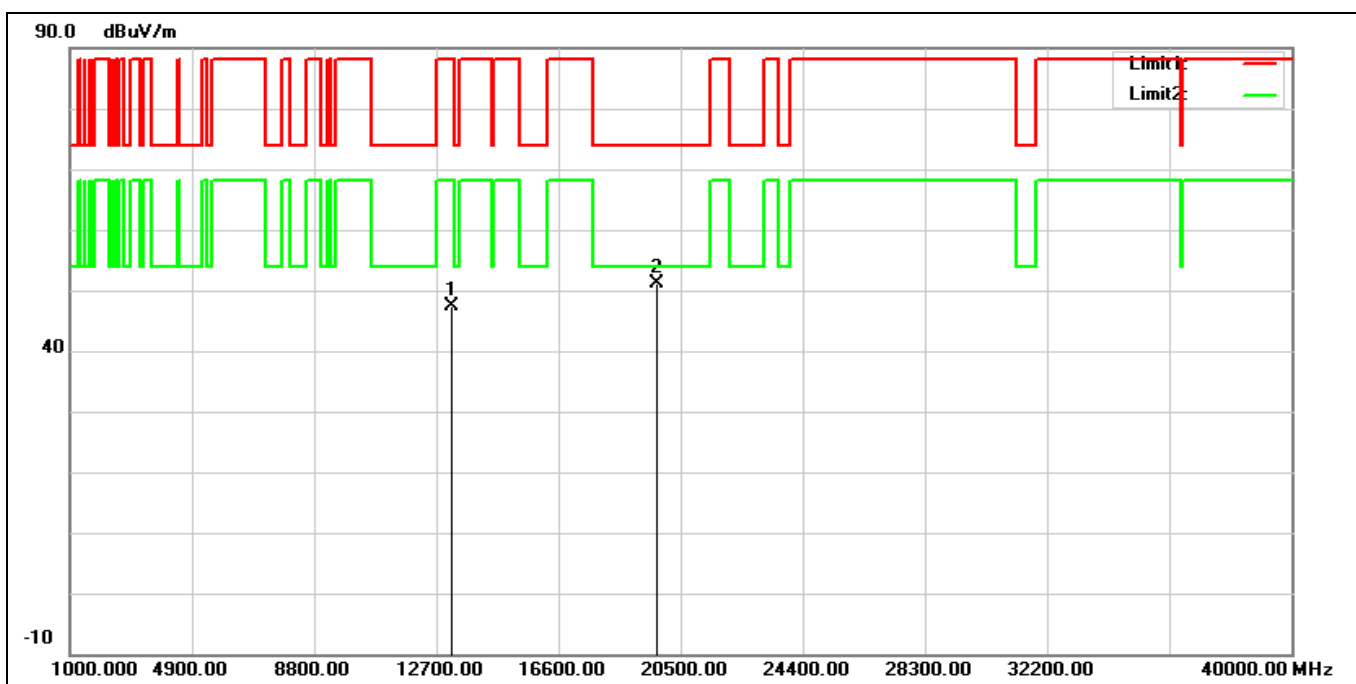


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13170.000	32.02	15.38	47.40	88.20	-40.80	peak
2*	19755.000	30.26	20.96	51.22	74.00	-22.78	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6745 MHz		
Remark:			

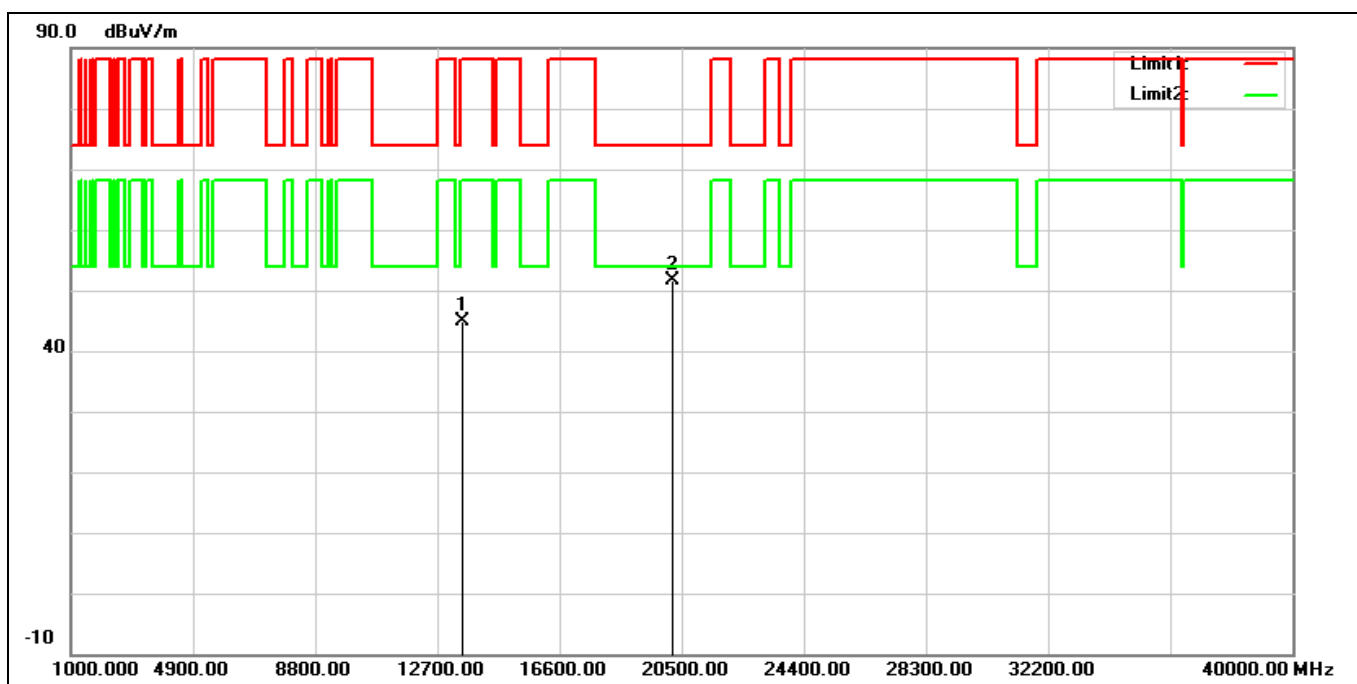


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13490.000	30.39	14.48	44.87	88.20	-43.33	peak
2*	20235.000	31.15	20.52	51.67	74.00	-22.33	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6745 MHz		
Remark:			

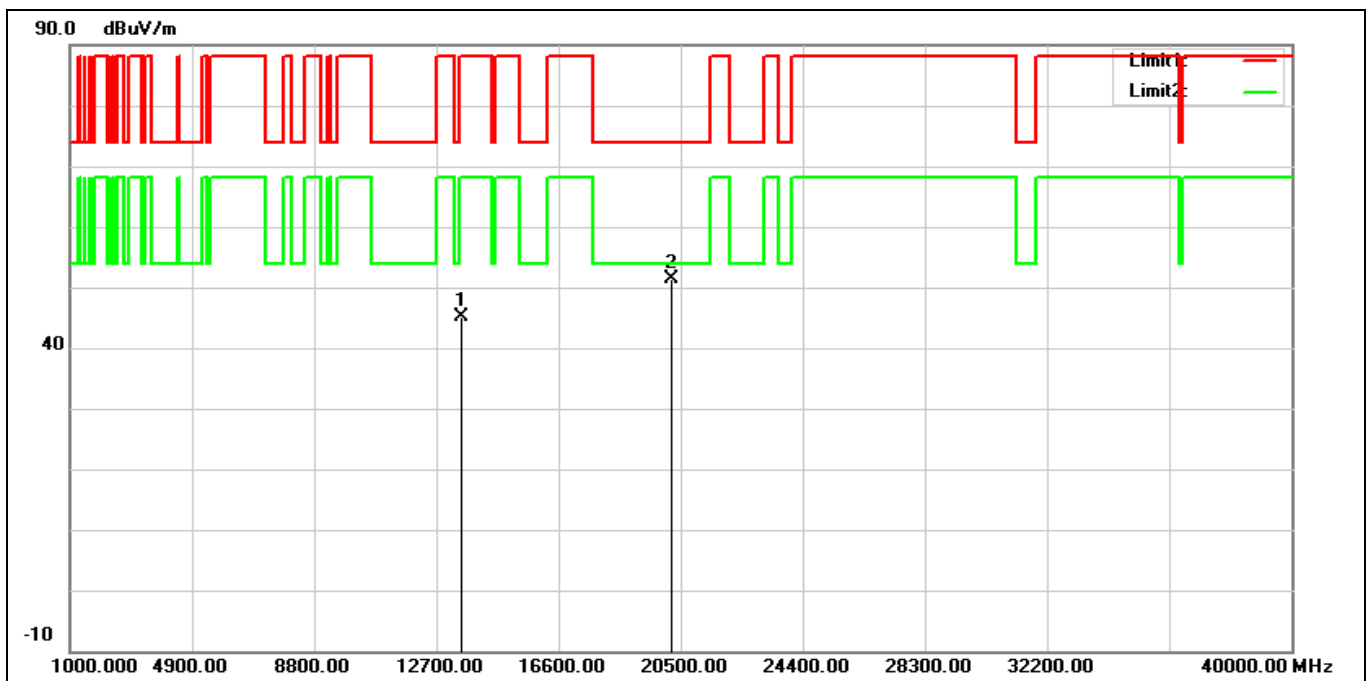


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13490.000	30.58	14.48	45.06	88.20	-43.14	peak
2*	20235.000	30.77	20.52	51.29	74.00	-22.71	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

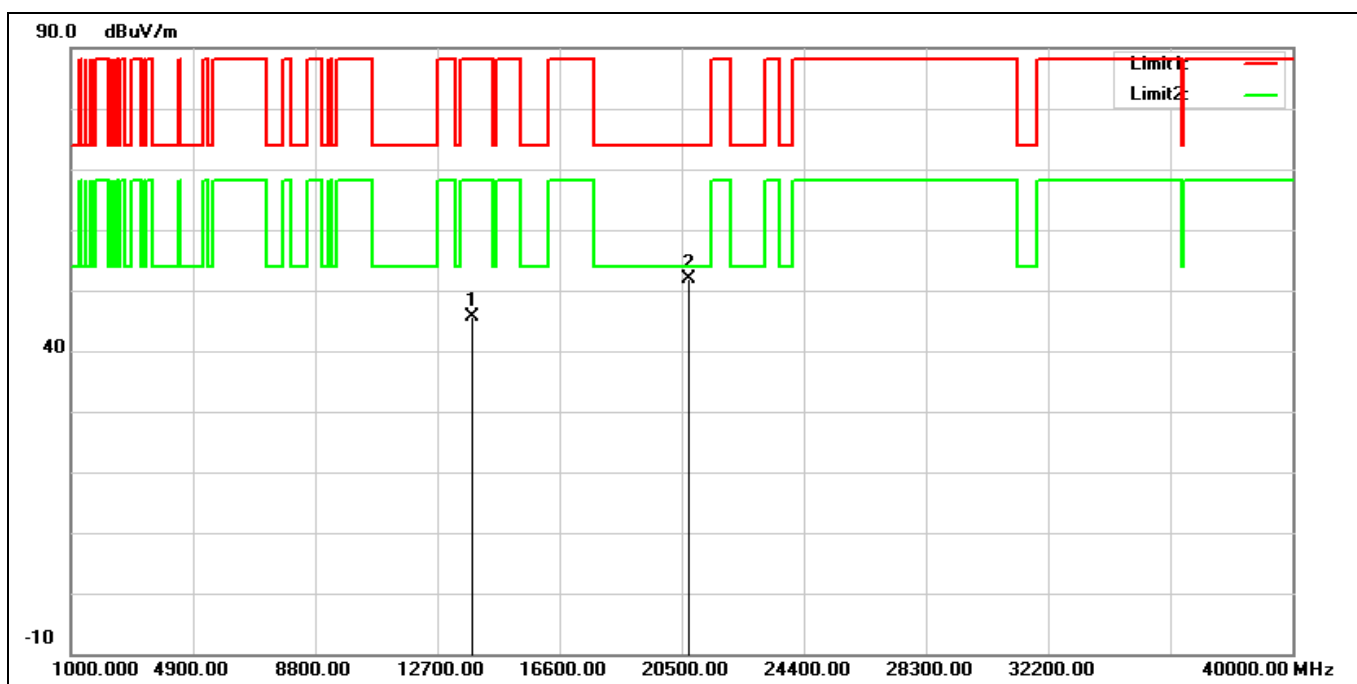

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13810.000	29.20	16.38	45.58	88.20	-42.62	peak
2*	20715.000	31.62	20.30	51.92	74.00	-22.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

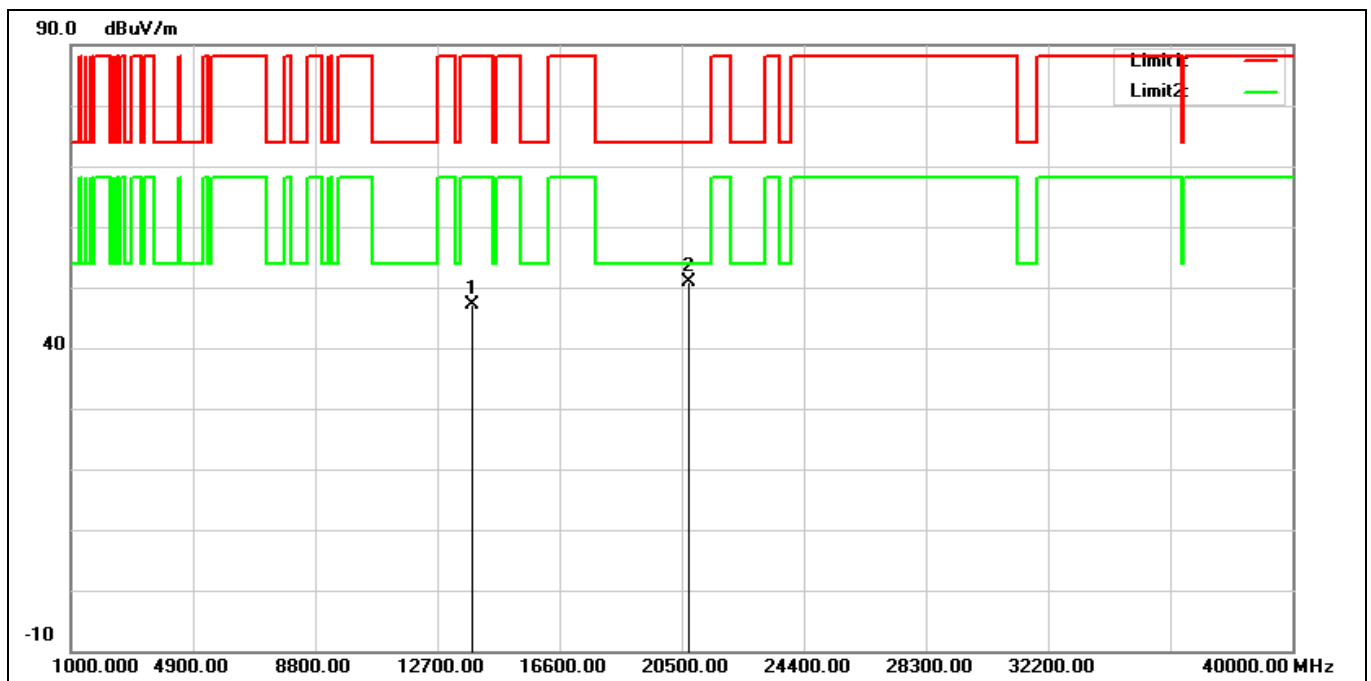


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13810.000	30.70	16.38	47.08	88.20	-41.12	peak
2*	20715.000	30.49	20.30	50.79	74.00	-23.21	peak

Band Edge


Peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5955 MHz		
Remark:			

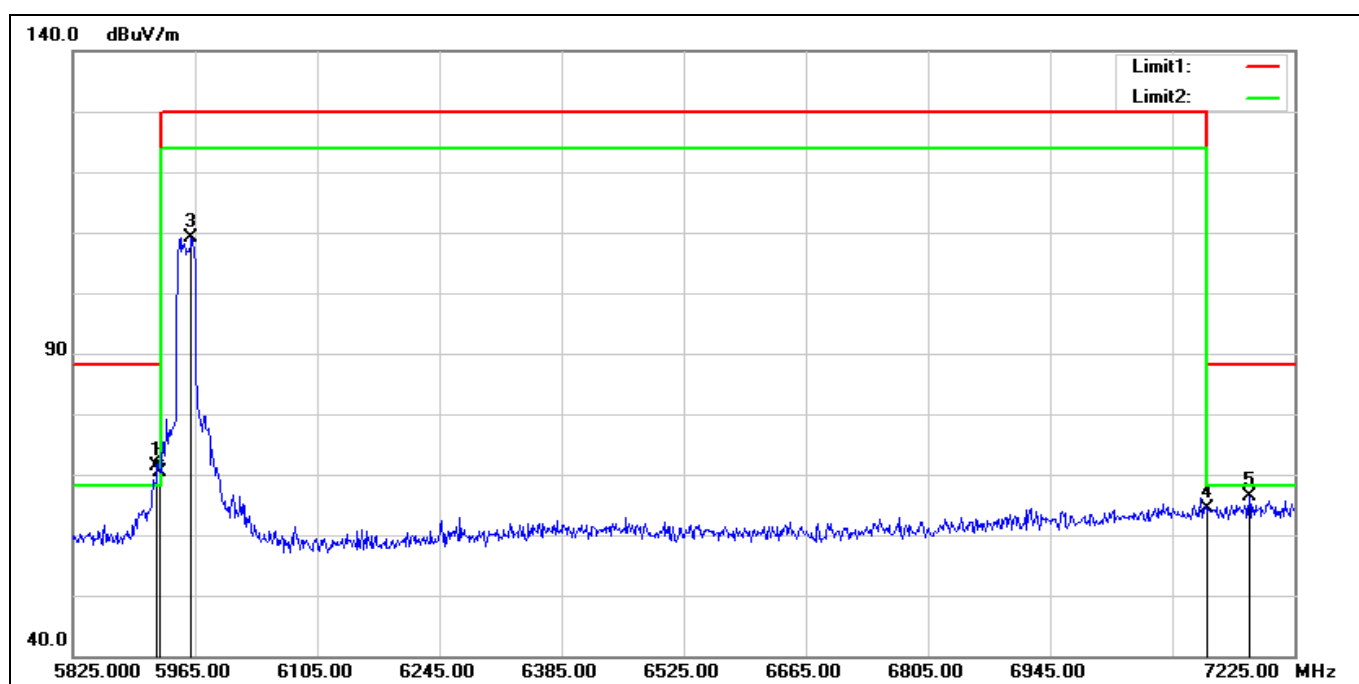


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5921.600	69.19	2.24	71.43	88.20	-16.77	peak
2	5925.000	68.23	2.23	70.46	88.20	-17.74	peak
3	5960.800	106.98	2.08	109.06	130.00	-20.94	peak
4	7125.000	57.63	6.69	64.32	88.20	-23.88	peak
5	7173.200	59.43	6.88	66.31	88.20	-21.89	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5955 MHz		
Remark:			

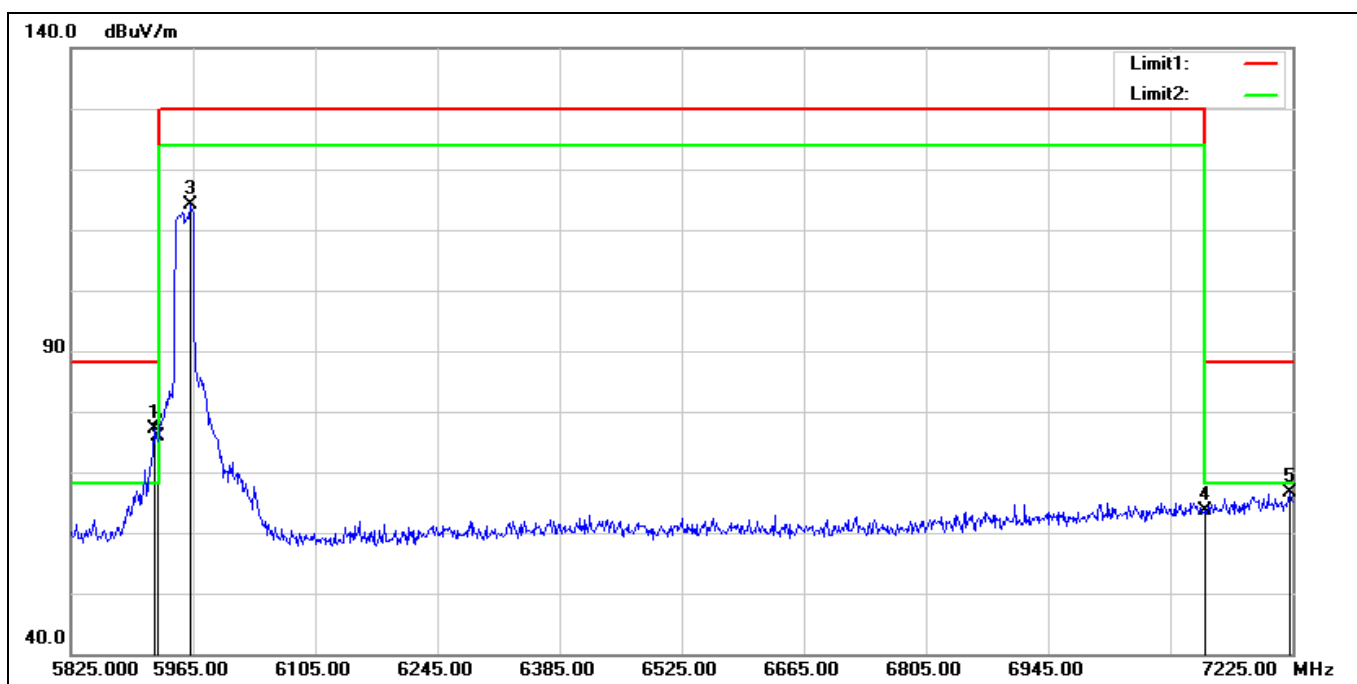


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5920.200	74.95	2.25	77.20	88.20	-11.00	peak
2	5925.000	73.71	2.23	75.94	88.20	-12.26	peak
3	5962.200	112.02	2.08	114.10	130.00	-15.90	peak
4	7125.000	57.00	6.69	63.69	88.20	-24.51	peak
5	7222.200	59.44	7.09	66.53	88.20	-21.67	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

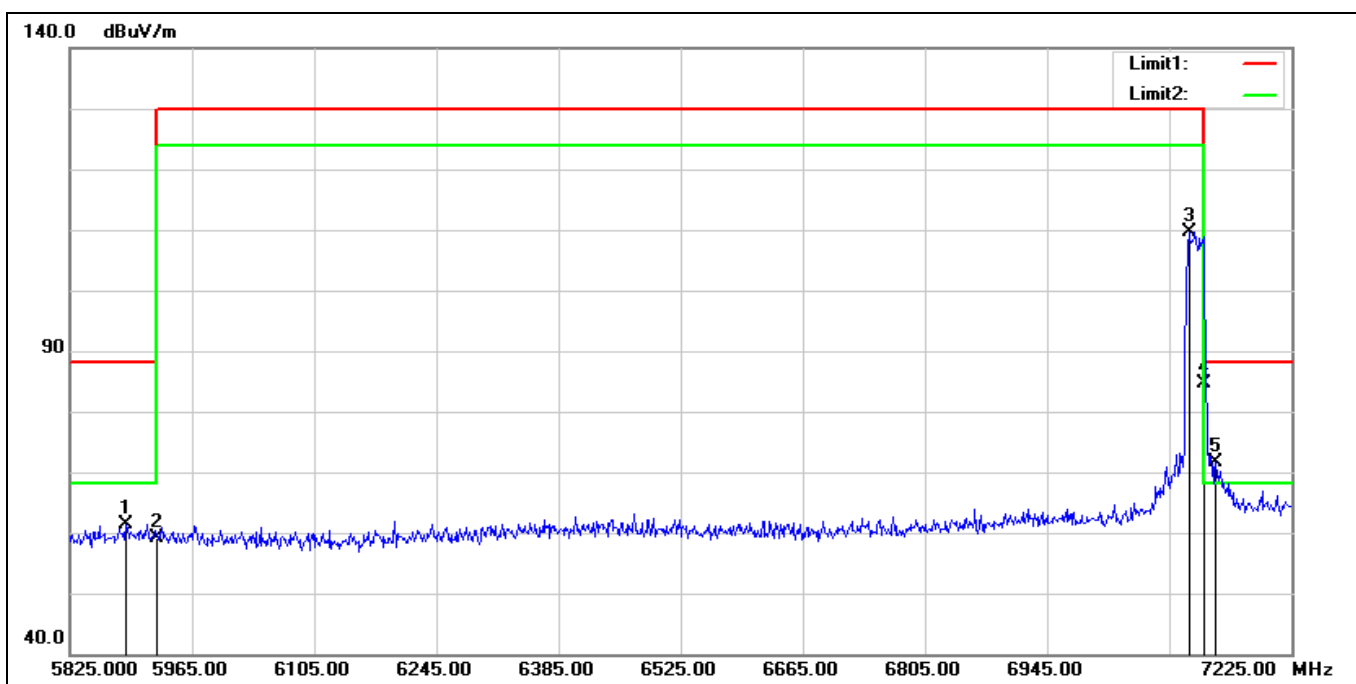


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5889.400	59.04	2.36	61.40	88.20	-26.80	peak
2	5925.000	56.99	2.23	59.22	88.20	-28.98	peak
3	7107.400	103.04	6.63	109.67	130.00	-20.33	peak
4*	7125.000	77.94	6.69	84.63	88.20	-3.57	peak
5	7138.200	64.85	6.74	71.59	88.20	-16.61	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

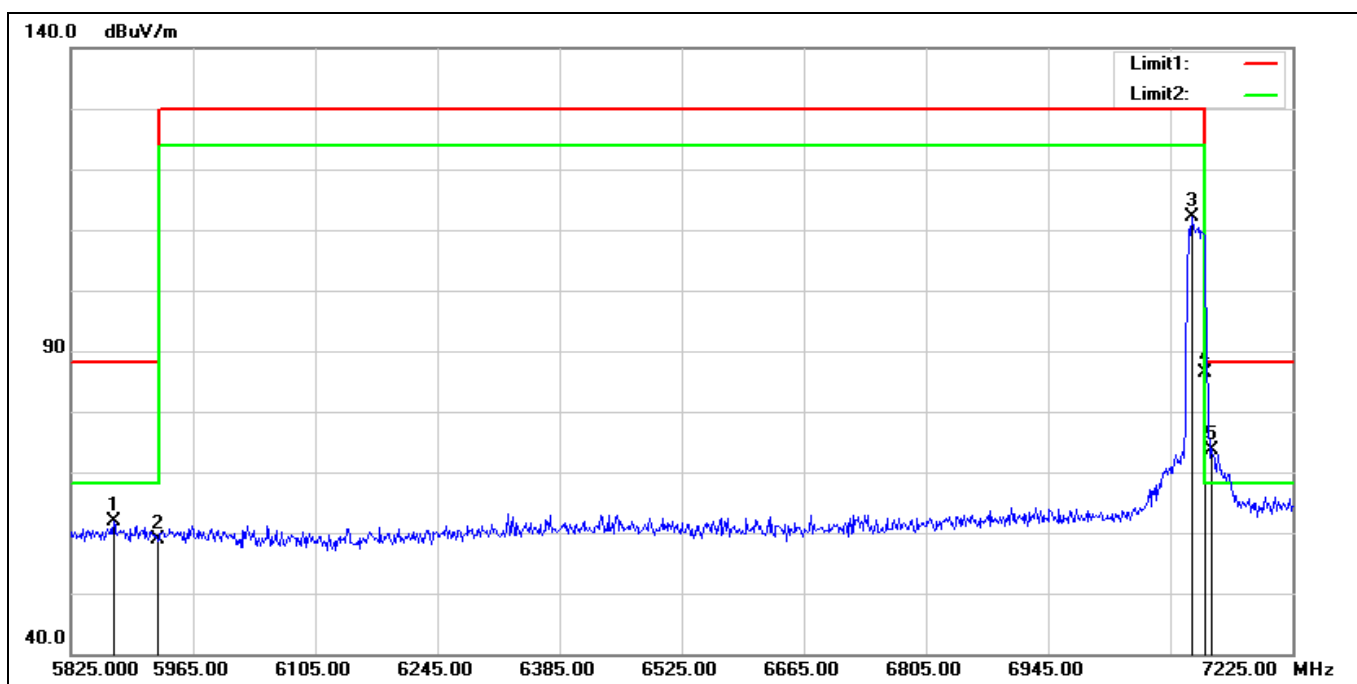


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5874.000	59.42	2.34	61.76	88.20	-26.44	peak
2	5925.000	56.63	2.23	58.86	88.20	-29.34	peak
3	7110.200	105.48	6.65	112.13	130.00	-17.87	peak
4*	7125.000	79.61	6.69	86.30	88.20	-1.90	peak
5	7132.600	66.82	6.73	73.55	88.20	-14.65	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5965 MHz		
Remark:			

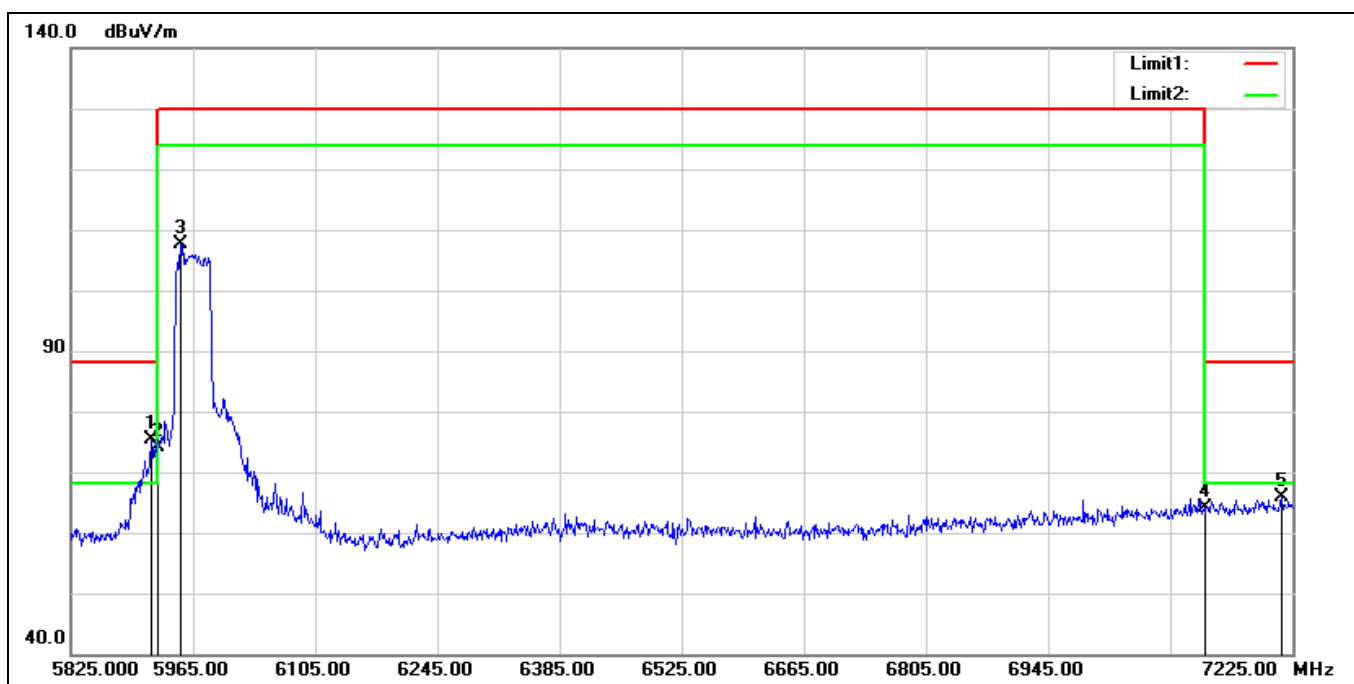


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5917.400	73.17	2.27	75.44	88.20	-12.76	peak
2	5925.000	71.81	2.23	74.04	88.20	-14.16	peak
3	5951.000	105.46	2.06	107.52	130.00	-22.48	peak
4	7125.000	57.41	6.69	64.10	88.20	-24.10	peak
5	7212.400	58.70	7.06	65.76	88.20	-22.44	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5965 MHz		
Remark:			

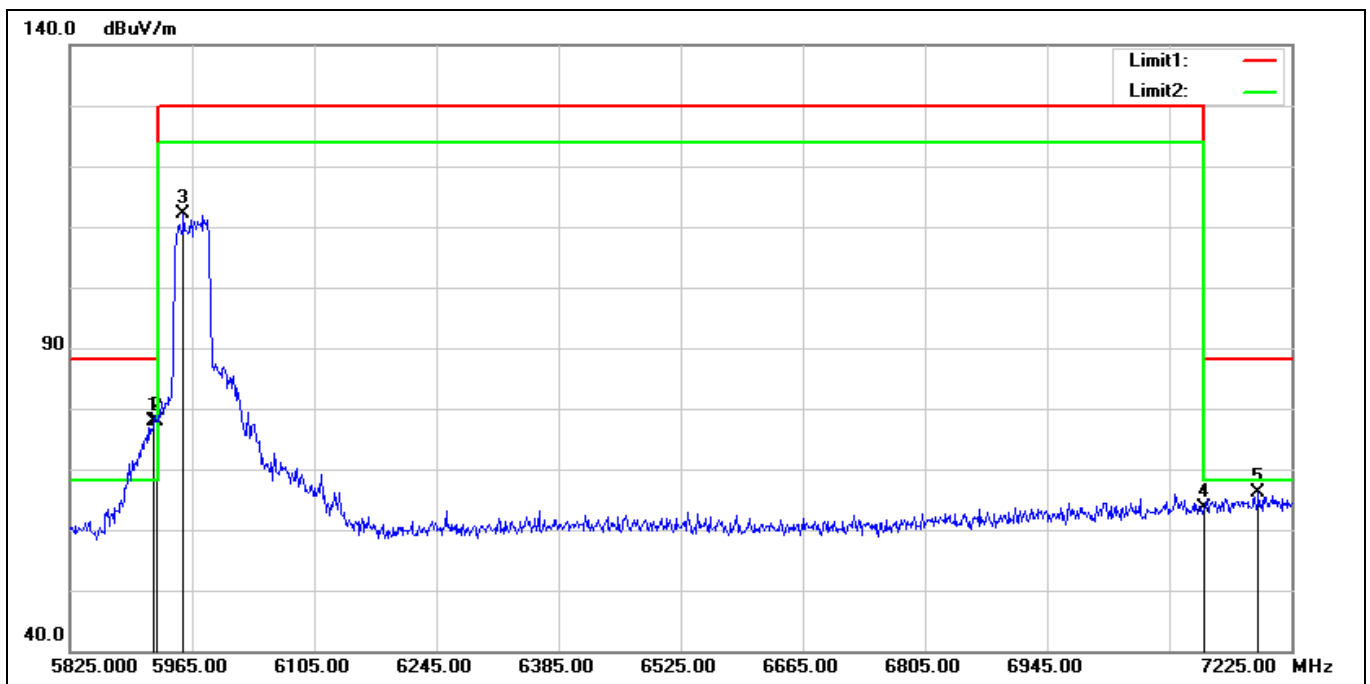


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5921.600	75.58	2.24	77.82	88.20	-10.38	peak
2*	5925.000	75.77	2.23	78.00	88.20	-10.20	peak
3	5955.200	109.97	2.08	112.05	130.00	-17.95	peak
4	7125.000	56.90	6.69	63.59	88.20	-24.61	peak
5	7187.200	59.15	6.96	66.11	88.20	-22.09	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 7085 MHz		
Remark:			

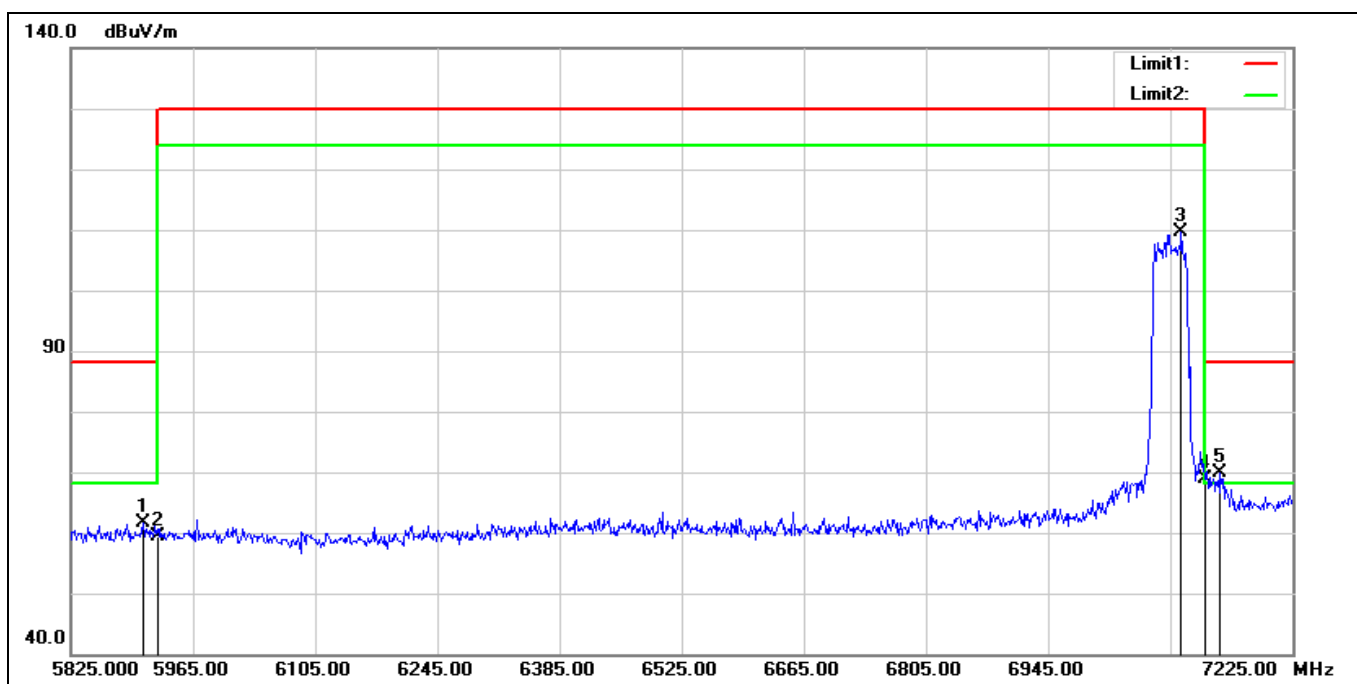


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5907.600	59.42	2.32	61.74	88.20	-26.46	peak
2	5925.000	57.15	2.23	59.38	88.20	-28.82	peak
3	7097.600	103.09	6.60	109.69	130.00	-20.31	peak
4	7125.000	62.15	6.69	68.84	88.20	-19.36	peak
5*	7142.400	63.02	6.75	69.77	88.20	-18.43	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 7085 MHz		
Remark:			

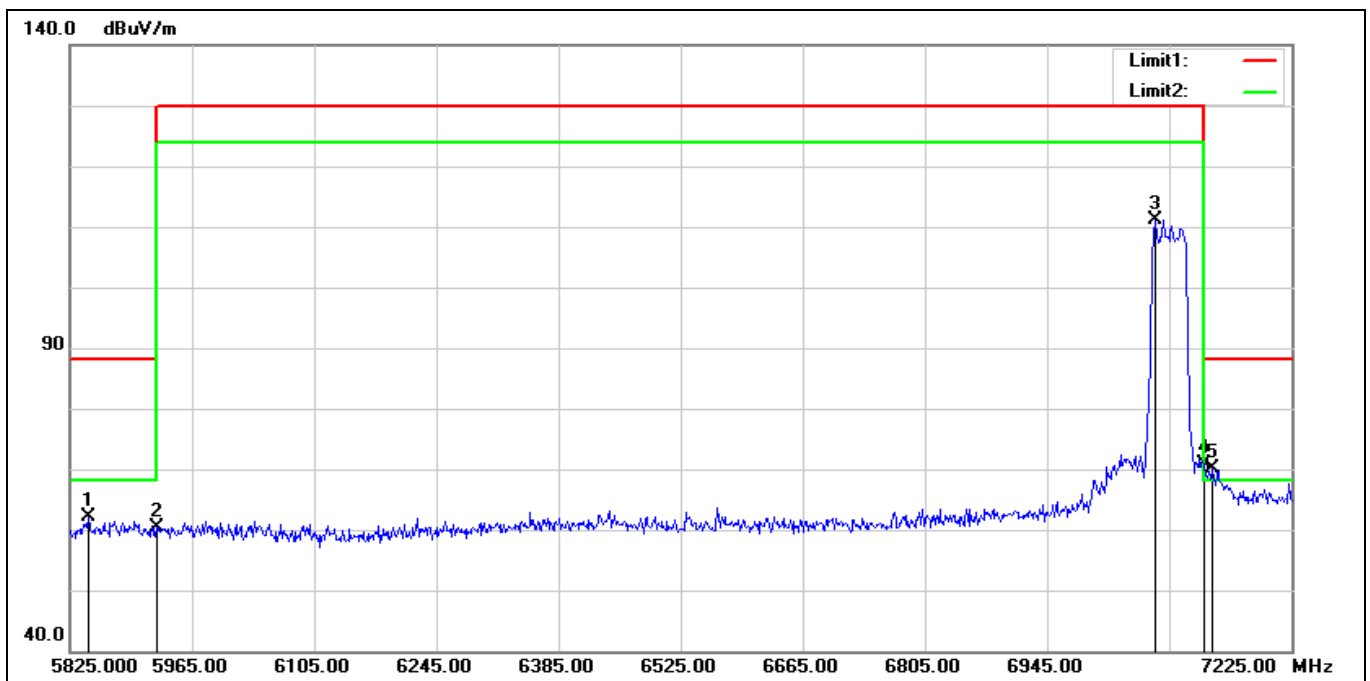


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5846.000	59.77	2.29	62.06	88.20	-26.14	peak
2	5925.000	58.07	2.23	60.30	88.20	-27.90	peak
3	7068.200	104.82	6.33	111.15	130.00	-18.85	peak
4*	7125.000	64.24	6.69	70.93	88.20	-17.27	peak
5	7134.000	63.34	6.73	70.07	88.20	-18.13	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5985 MHz		
Remark:			

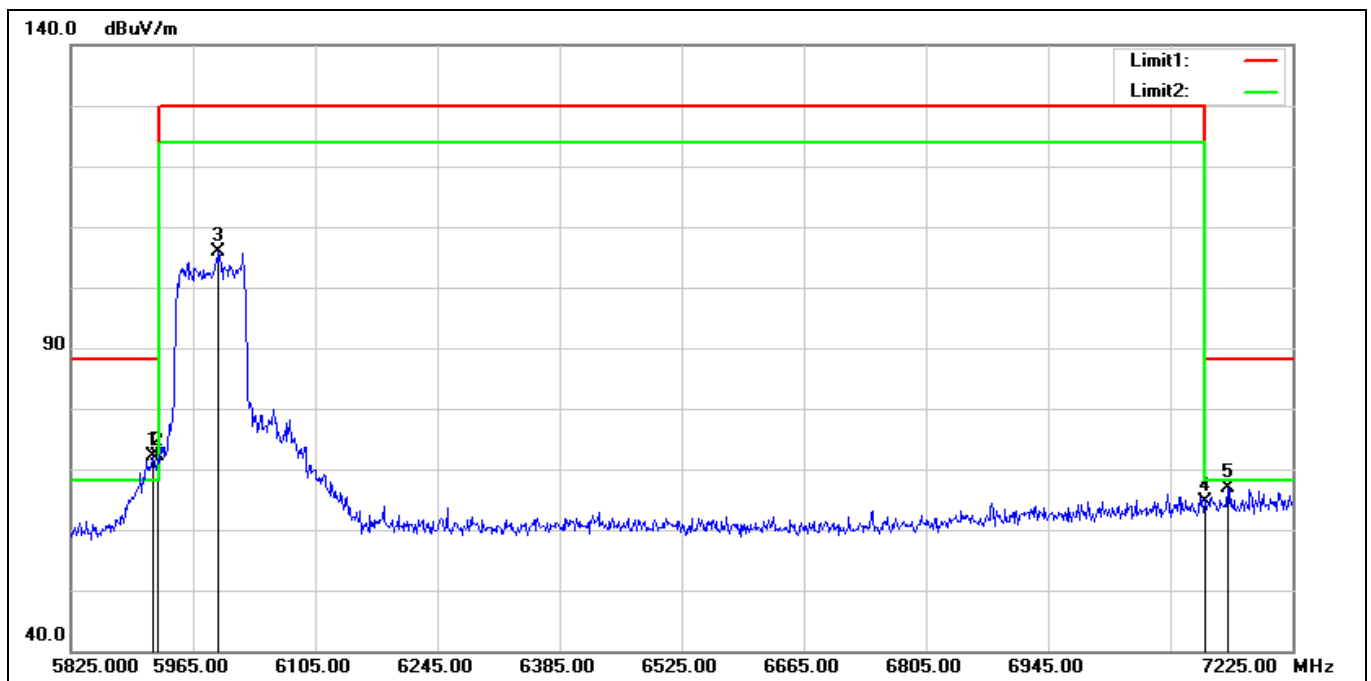


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5918.800	69.99	2.26	72.25	88.20	-15.95	peak
2	5925.000	69.96	2.23	72.19	88.20	-16.01	peak
3	5994.400	103.77	2.15	105.92	130.00	-24.08	peak
4	7125.000	57.83	6.69	64.52	88.20	-23.68	peak
5	7150.800	60.08	6.77	66.85	88.20	-21.35	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5985 MHz		
Remark:			

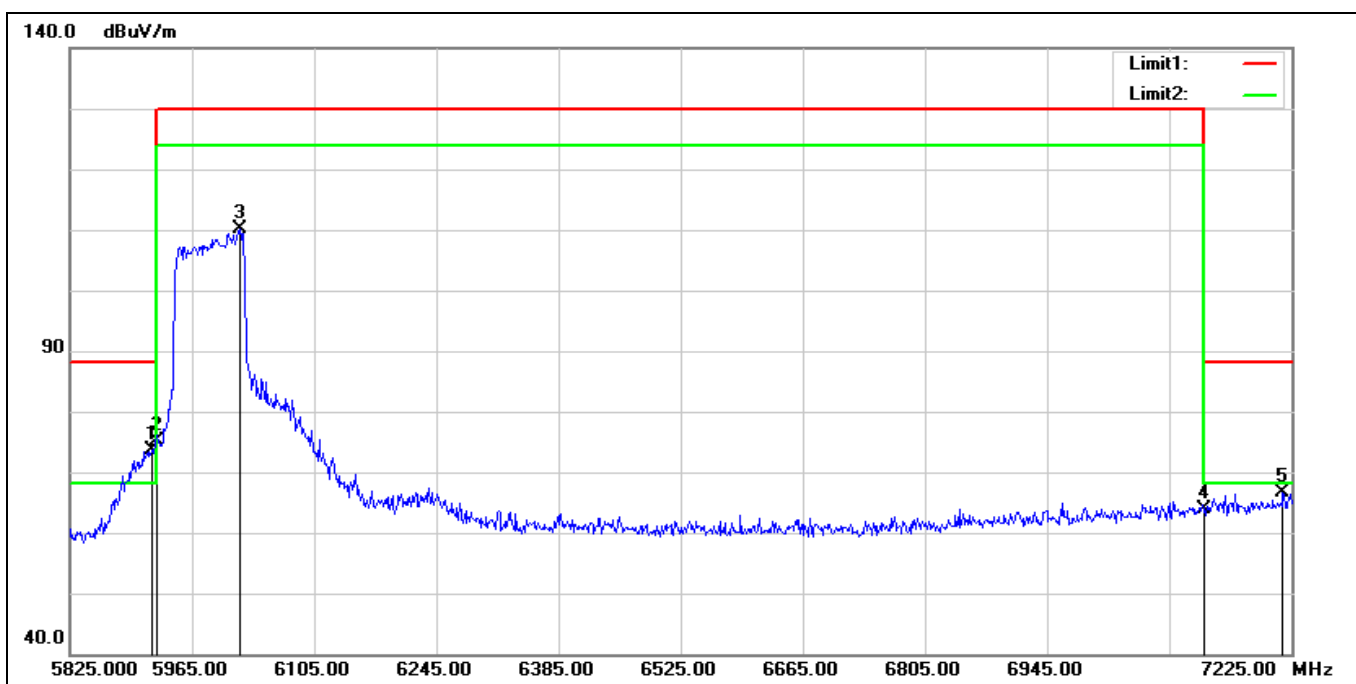


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5918.800	71.36	2.26	73.62	88.20	-14.58	peak
2*	5925.000	72.80	2.23	75.03	88.20	-13.17	peak
3	6019.600	107.86	2.19	110.05	130.00	-19.95	peak
4	7125.000	57.22	6.69	63.91	88.20	-24.29	peak
5	7215.200	59.47	7.07	66.54	88.20	-21.66	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 7025 MHz		
Remark:			

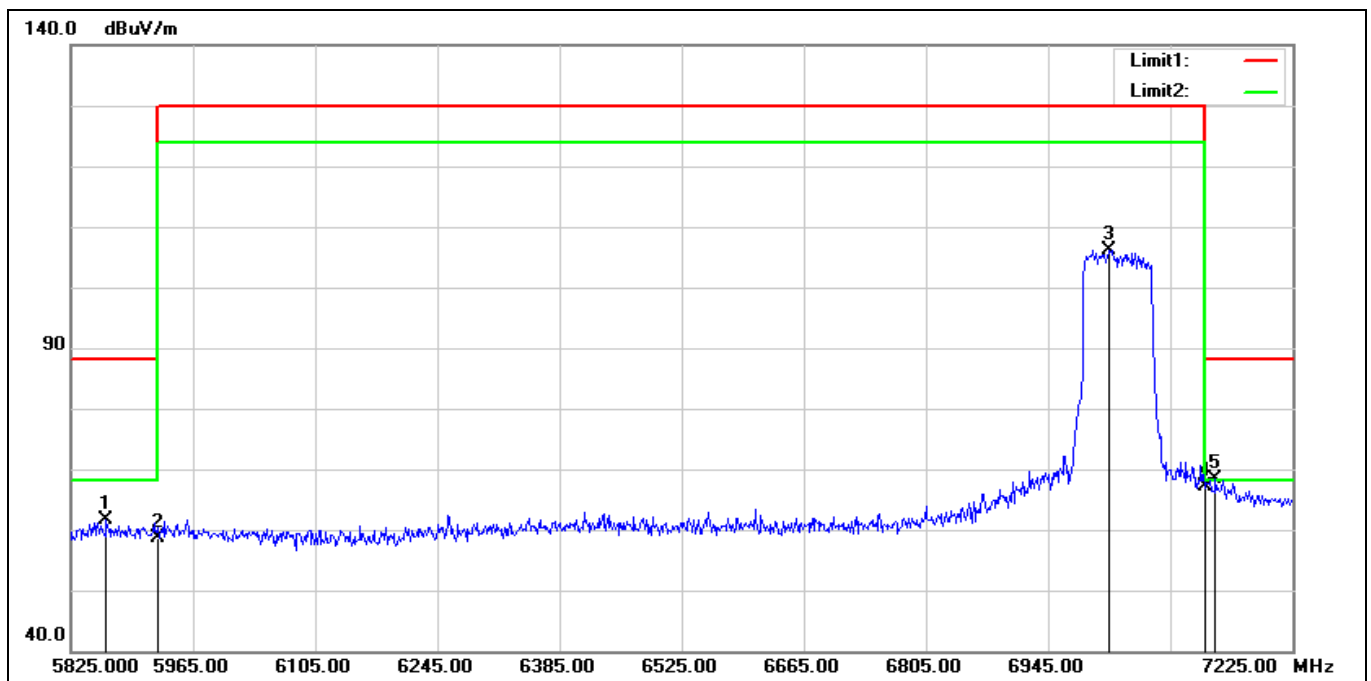


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5865.600	59.27	2.32	61.59	88.20	-26.61	peak
2	5925.000	56.48	2.23	58.71	88.20	-29.49	peak
3	7015.000	100.21	5.91	106.12	130.00	-23.88	peak
4	7125.000	60.39	6.69	67.08	88.20	-21.12	peak
5*	7136.800	61.73	6.73	68.46	88.20	-19.74	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 7025 MHz		
Remark:			

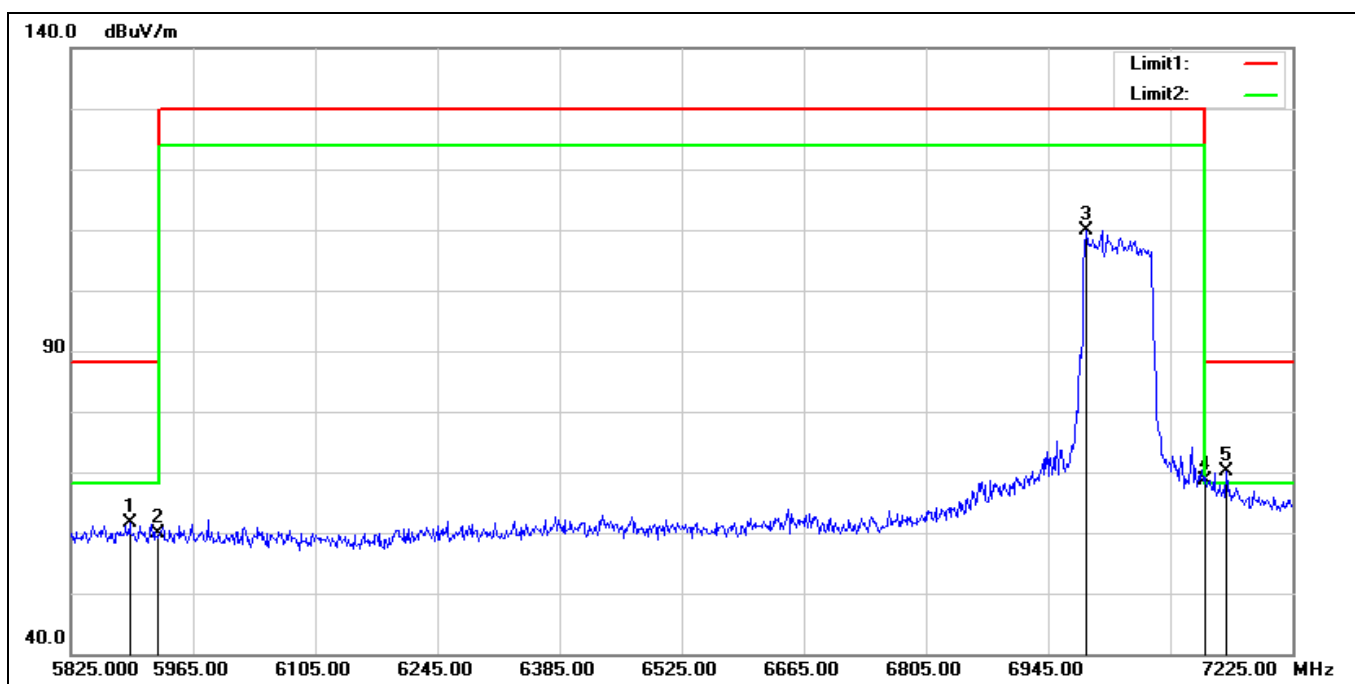


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5892.200	59.19	2.36	61.55	88.20	-26.65	peak
2	5925.000	57.59	2.23	59.82	88.20	-28.38	peak
3	6988.400	104.14	5.77	109.91	130.00	-20.09	peak
4	7125.000	62.02	6.69	68.71	88.20	-19.49	peak
5*	7149.400	63.39	6.77	70.16	88.20	-18.04	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6025 MHz		
Remark:			

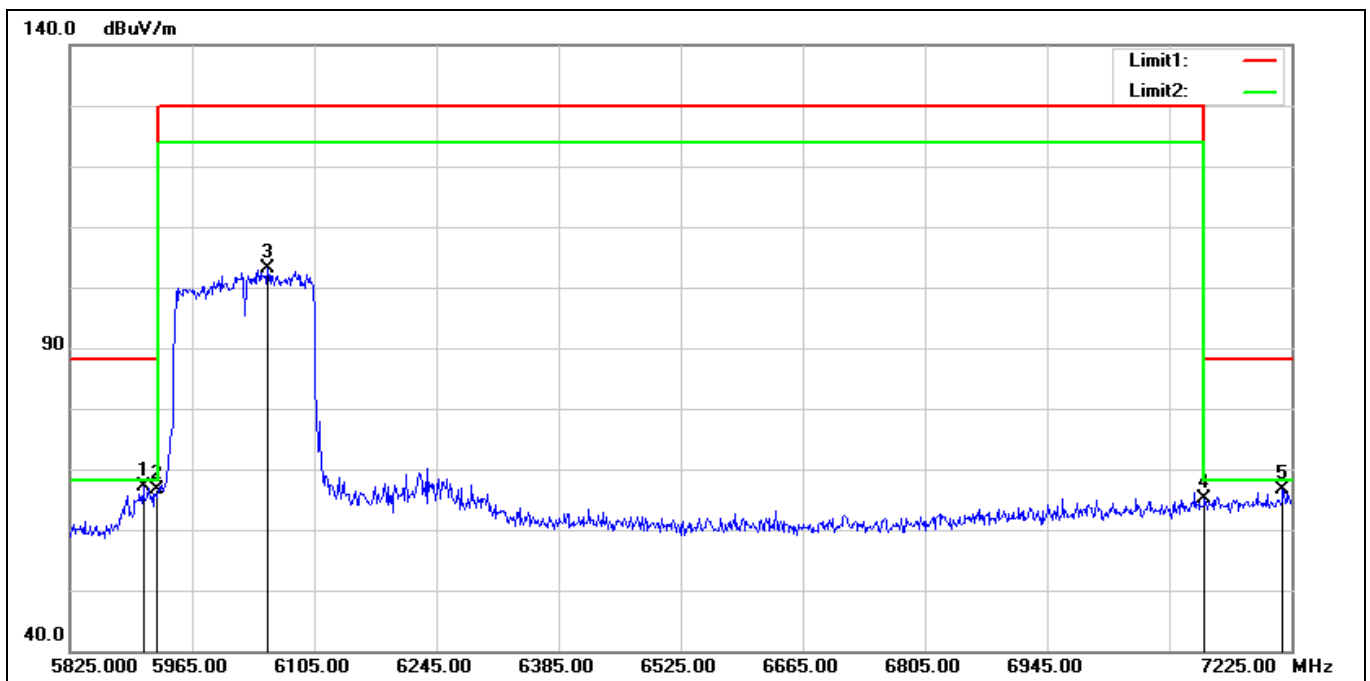


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5909.000	64.73	2.32	67.05	88.20	-21.15	peak
2	5925.000	64.52	2.23	66.75	88.20	-21.45	peak
3	6051.800	100.86	2.27	103.13	130.00	-26.87	peak
4	7125.000	58.48	6.69	65.17	88.20	-23.03	peak
5	7215.200	59.67	7.07	66.74	88.20	-21.46	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6025 MHz		
Remark:			

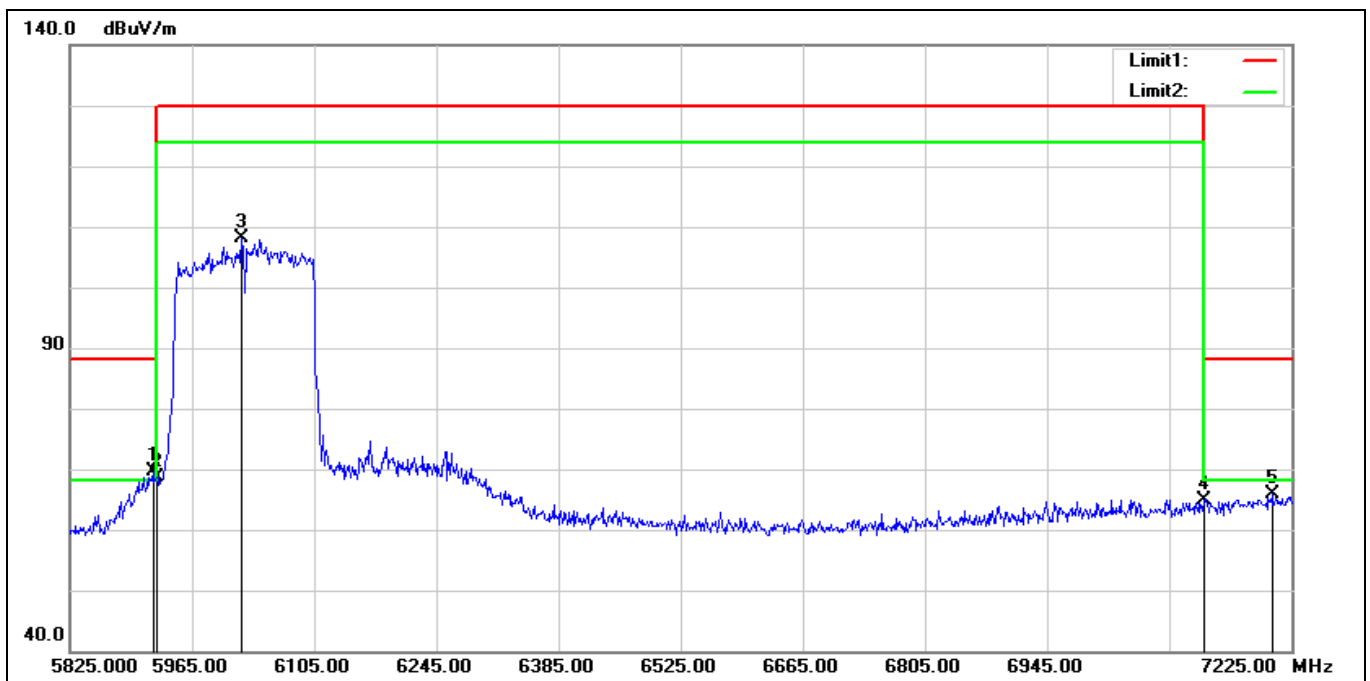


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5920.200	67.49	2.25	69.74	88.20	-18.46	peak
2	5925.000	66.32	2.23	68.55	88.20	-19.65	peak
3	6021.000	105.86	2.19	108.05	130.00	-21.95	peak
4	7125.000	58.22	6.69	64.91	88.20	-23.29	peak
5	7202.600	58.86	7.04	65.90	88.20	-22.30	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6985 MHz		
Remark:			

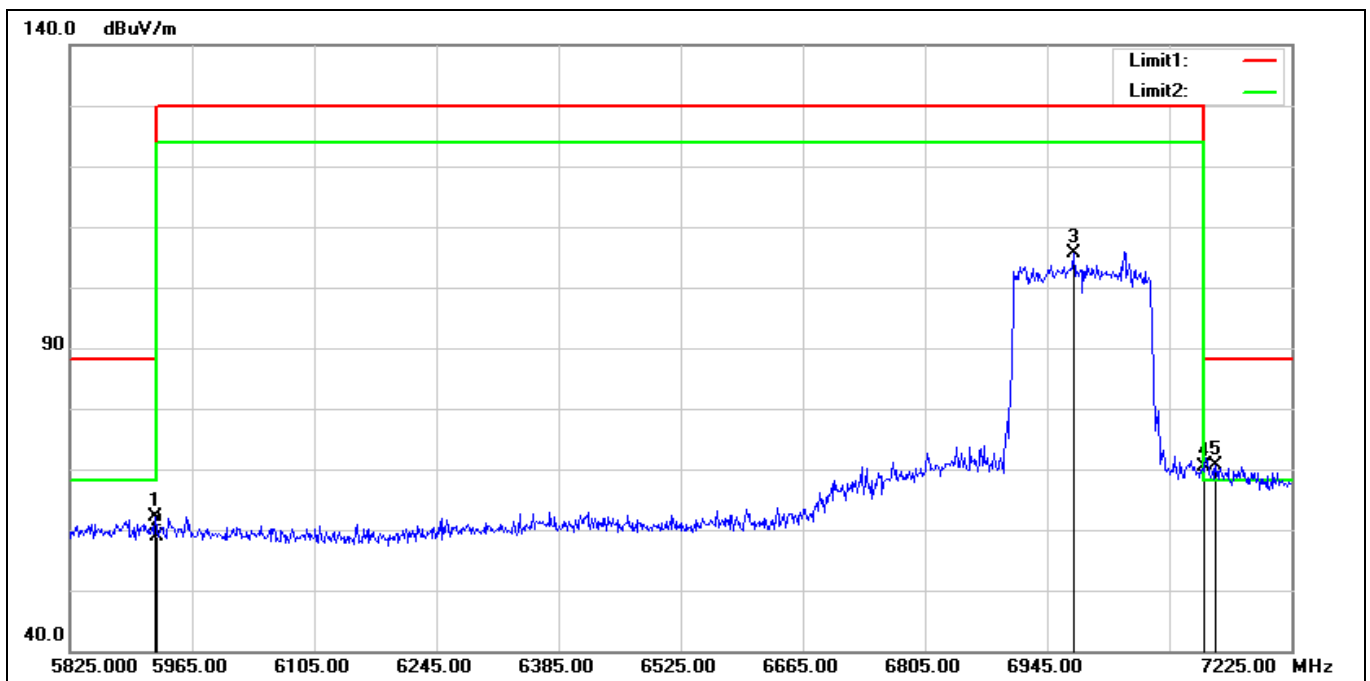


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5923.000	59.92	2.23	62.15	88.20	-26.05	peak
2	5925.000	56.64	2.23	58.87	88.20	-29.33	peak
3	6975.800	99.88	5.72	105.60	130.00	-24.40	peak
4	7125.000	63.73	6.69	70.42	88.20	-17.78	peak
5*	7138.200	63.98	6.74	70.72	88.20	-17.48	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6985 MHz		
Remark:			

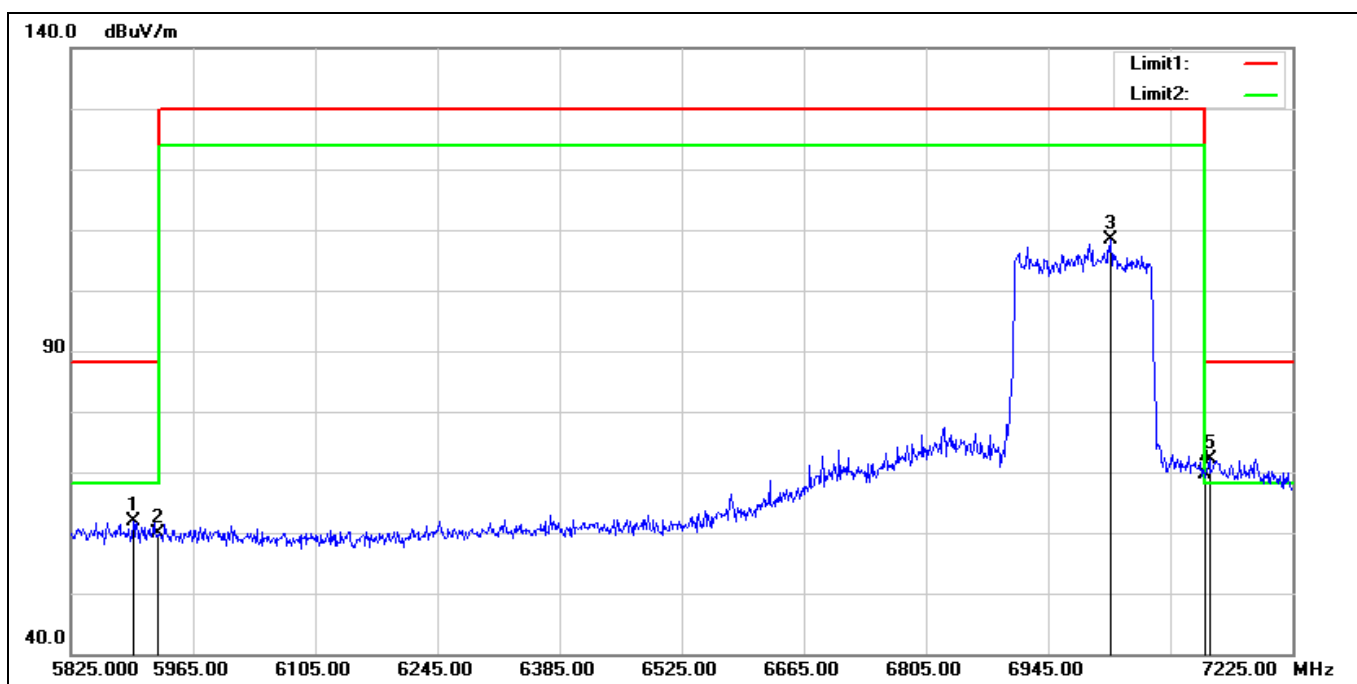


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5896.400	59.56	2.38	61.94	88.20	-26.26	peak
2	5925.000	57.68	2.23	59.91	88.20	-28.29	peak
3	7016.400	102.36	5.92	108.28	130.00	-21.72	peak
4	7125.000	62.91	6.69	69.60	88.20	-18.60	peak
5*	7129.800	65.52	6.70	72.22	88.20	-15.98	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6105 MHz		
Remark:			

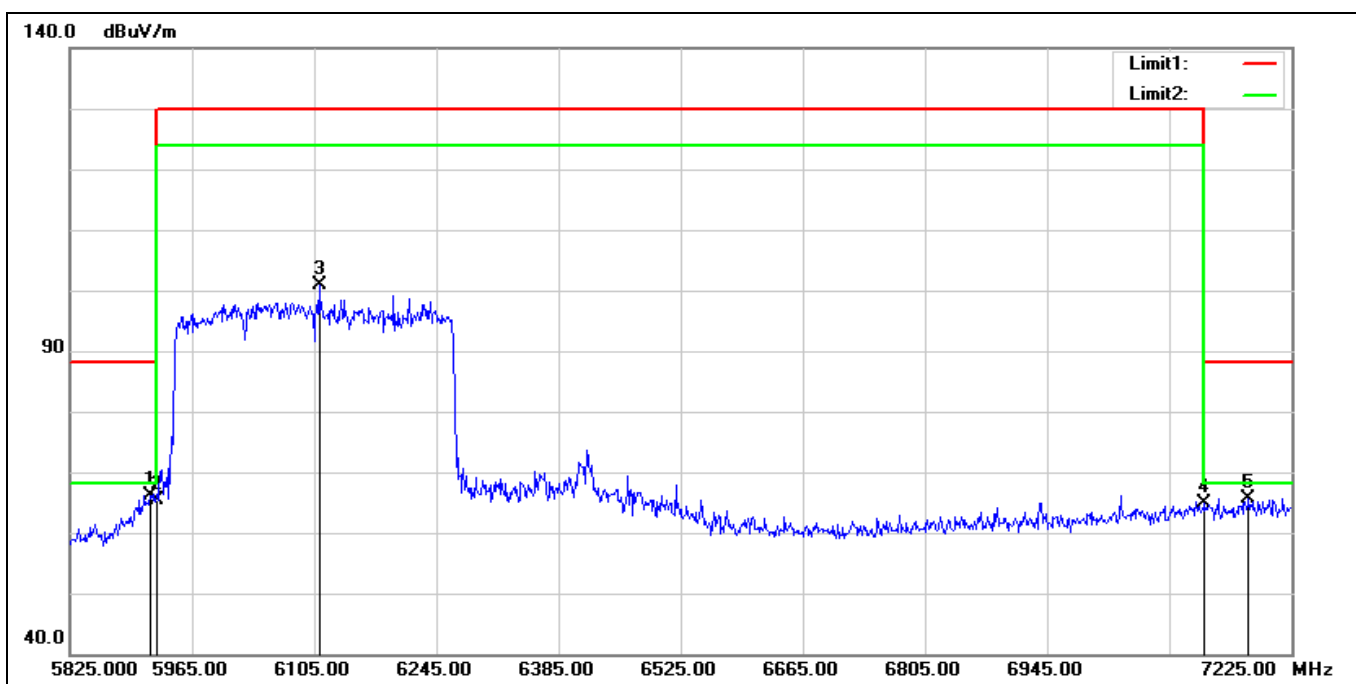


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5917.400	63.92	2.27	66.19	88.20	-22.01	peak
2	5925.000	63.08	2.23	65.31	88.20	-22.89	peak
3	6110.600	98.29	2.49	100.78	130.00	-29.22	peak
4	7125.000	58.22	6.69	64.91	88.20	-23.29	peak
5	7176.000	58.83	6.89	65.72	88.20	-22.48	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6105 MHz		
Remark:			

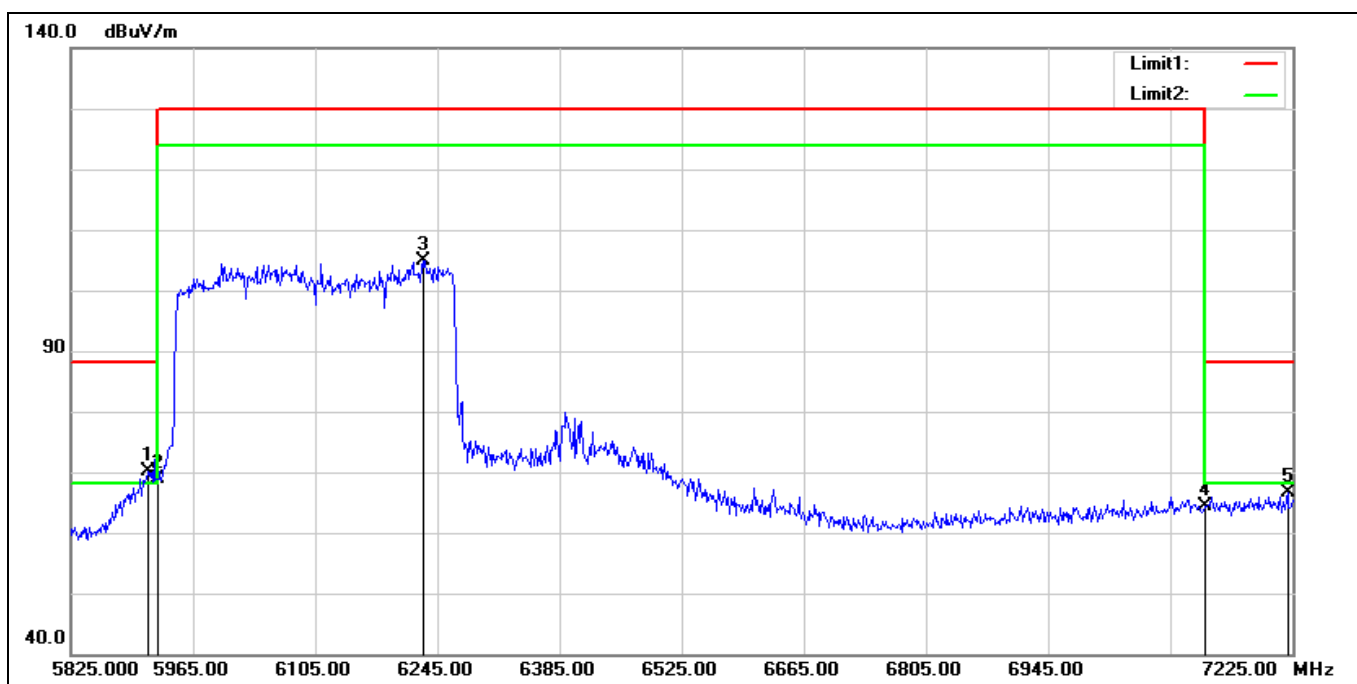


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5913.200	67.76	2.30	70.06	88.20	-18.14	peak
2	5925.000	66.56	2.23	68.79	88.20	-19.41	peak
3	6228.200	102.00	2.84	104.84	130.00	-25.16	peak
4	7125.000	57.74	6.69	64.43	88.20	-23.77	peak
5	7219.400	59.52	7.08	66.60	88.20	-21.60	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

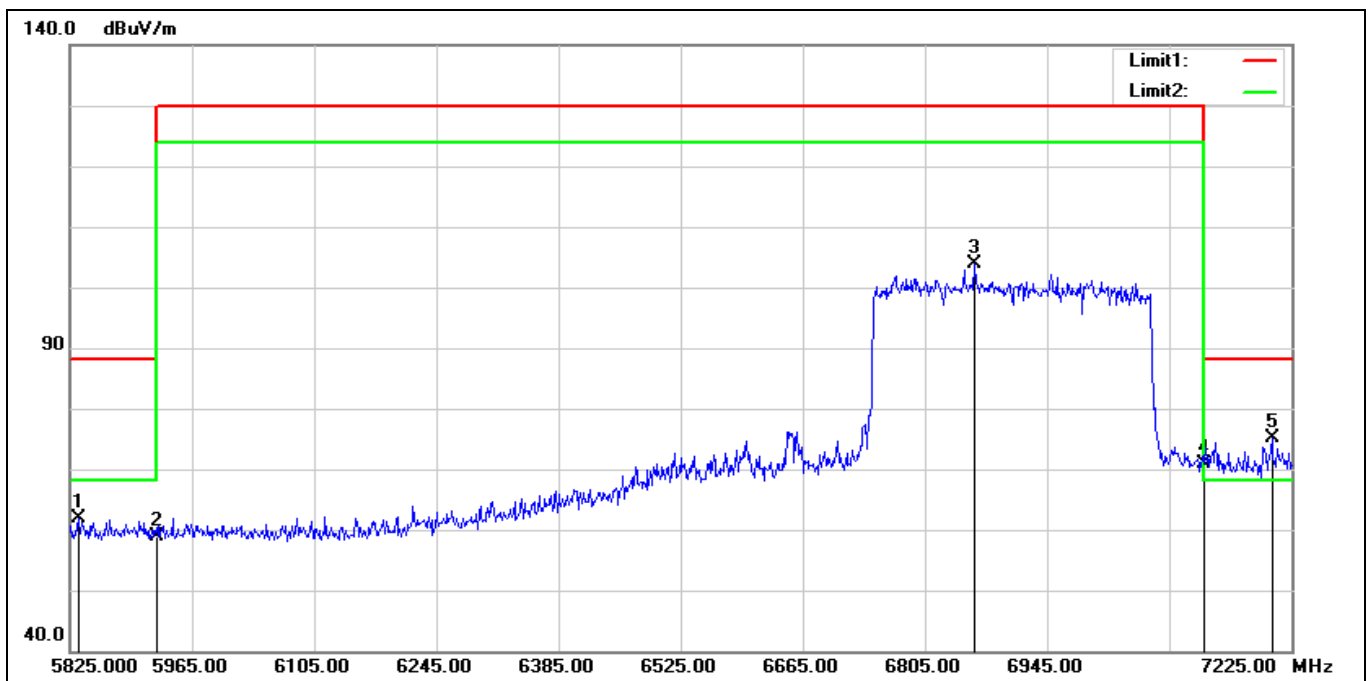

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5834.800	59.51	2.27	61.78	88.20	-26.42	peak
2	5925.000	56.63	2.23	58.86	88.20	-29.34	peak
3	6862.400	98.70	5.21	103.91	130.00	-26.09	peak
4	7125.000	64.29	6.69	70.98	88.20	-17.22	peak
5*	7202.600	68.12	7.04	75.16	88.20	-13.04	peak


Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

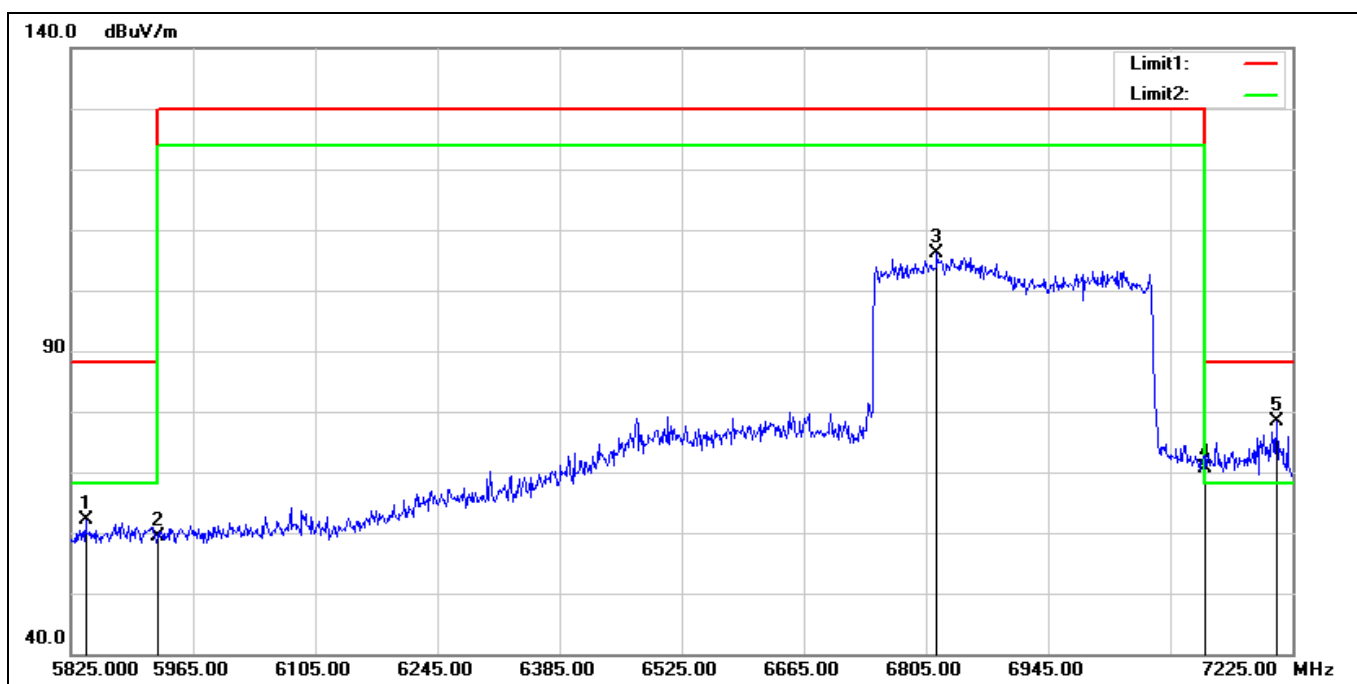

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5841.800	59.76	2.28	62.04	88.20	-26.16	peak
2	5925.000	57.14	2.23	59.37	88.20	-28.83	peak
3	6817.600	101.22	5.02	106.24	130.00	-23.76	peak
4	7125.000	63.92	6.69	70.61	88.20	-17.59	peak
5*	7206.800	71.40	7.04	78.44	88.20	-9.76	peak


Average

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT20 5955 MHz
Remark:

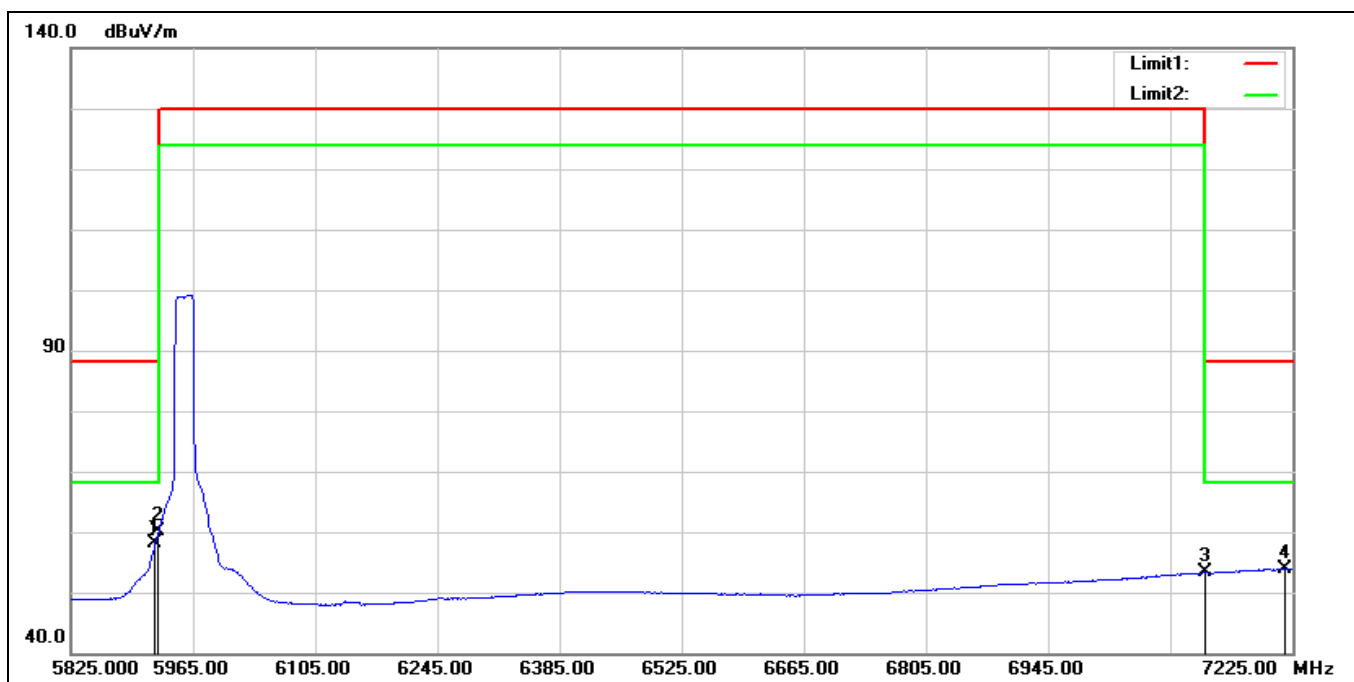


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5921.600	55.81	2.24	58.05	68.20	-10.15	AVG
2*	5925.000	57.99	2.23	60.22	68.20	-7.98	AVG
3	7125.000	46.57	6.69	53.26	68.20	-14.94	AVG
4	7216.600	46.92	7.07	53.99	68.20	-14.21	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5955 MHz		
Remark:			

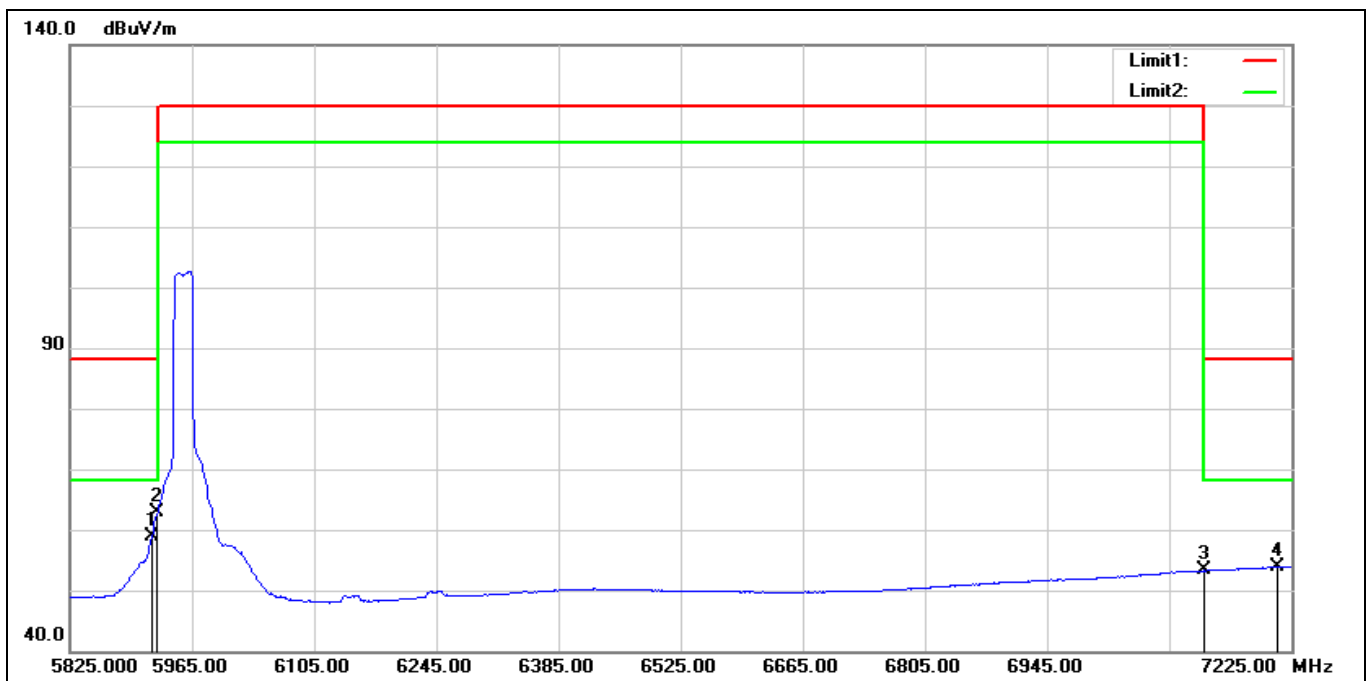


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5918.800	56.54	2.26	58.80	68.20	-9.40	AVG
2*	5925.000	60.72	2.23	62.95	68.20	-5.25	AVG
3	7125.000	46.61	6.69	53.30	68.20	-14.90	AVG
4	7209.600	46.89	7.05	53.94	68.20	-14.26	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

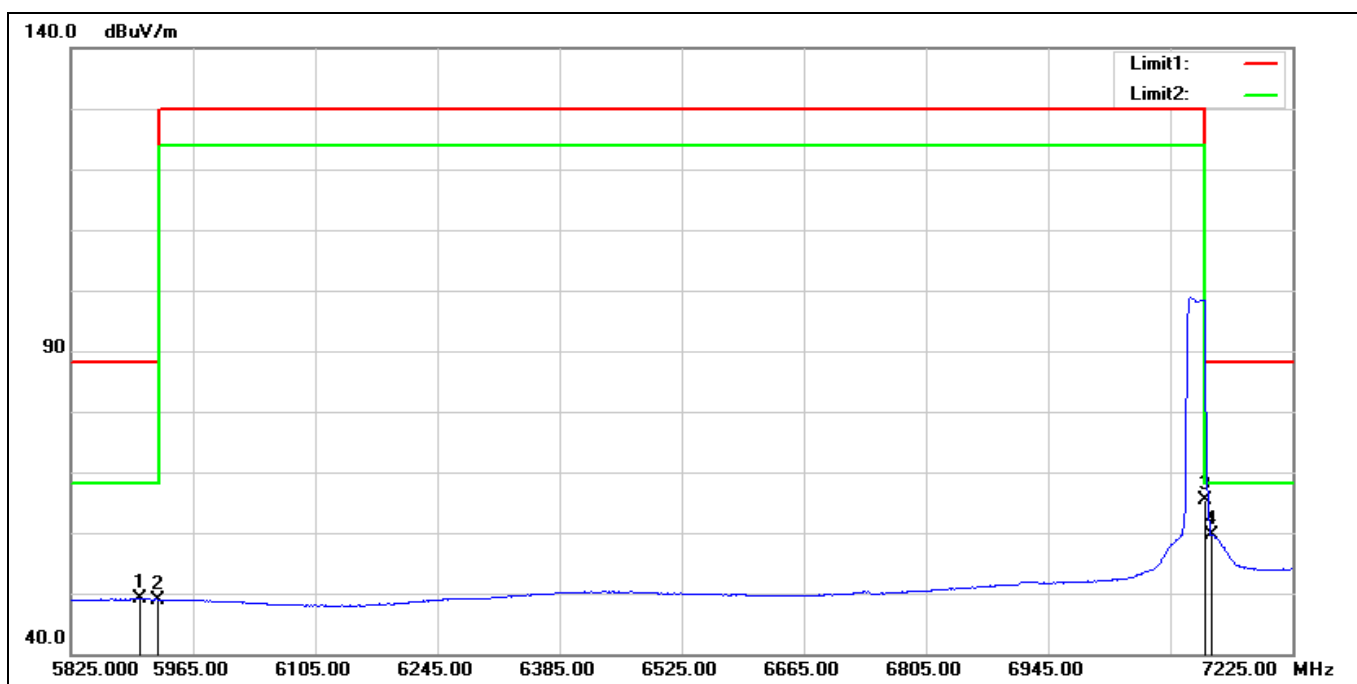


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5903.400	46.76	2.36	49.12	68.20	-19.08	AVG
2	5925.000	46.73	2.23	48.96	68.20	-19.24	AVG
3*	7125.000	58.62	6.69	65.31	68.20	-2.89	AVG
4	7132.600	52.81	6.73	59.54	68.20	-8.66	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

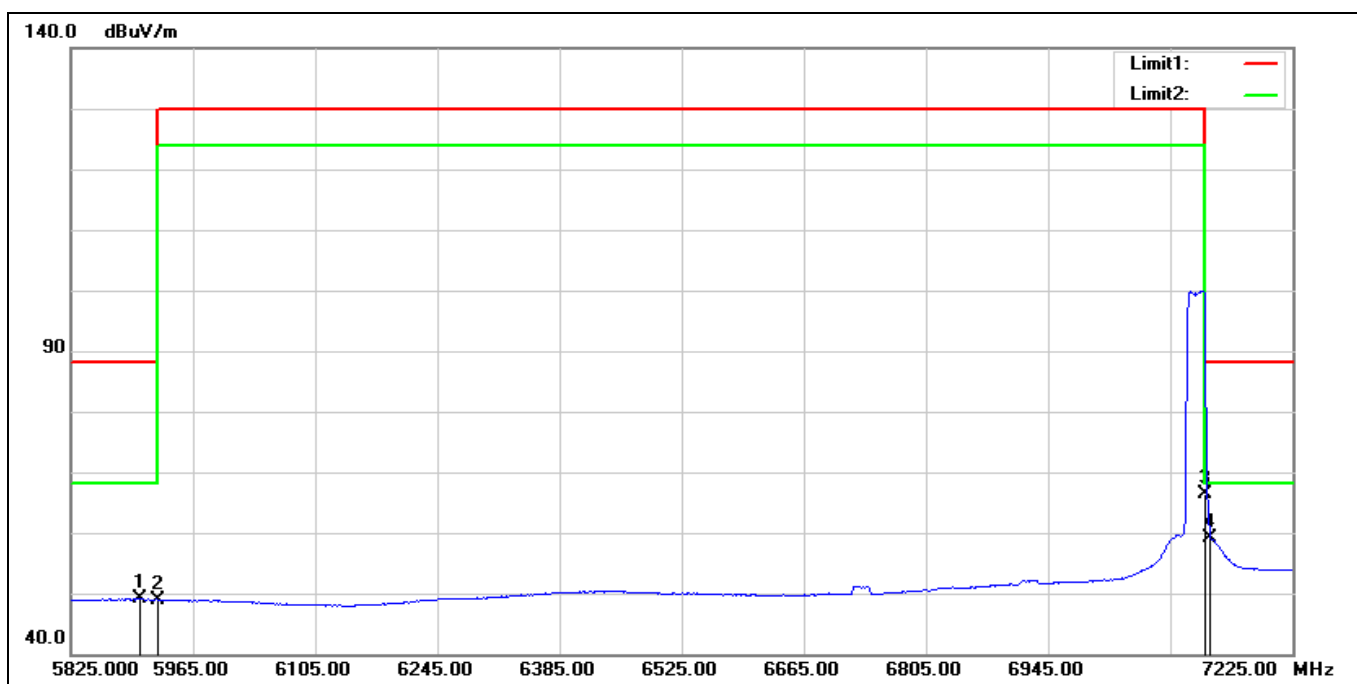


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5904.800	46.74	2.35	49.09	68.20	-19.11	AVG
2	5925.000	46.67	2.23	48.90	68.20	-19.30	AVG
3*	7125.000	59.63	6.69	66.32	68.20	-1.88	AVG
4	7131.200	52.32	6.71	59.03	68.20	-9.17	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5965 MHz		
Remark:			

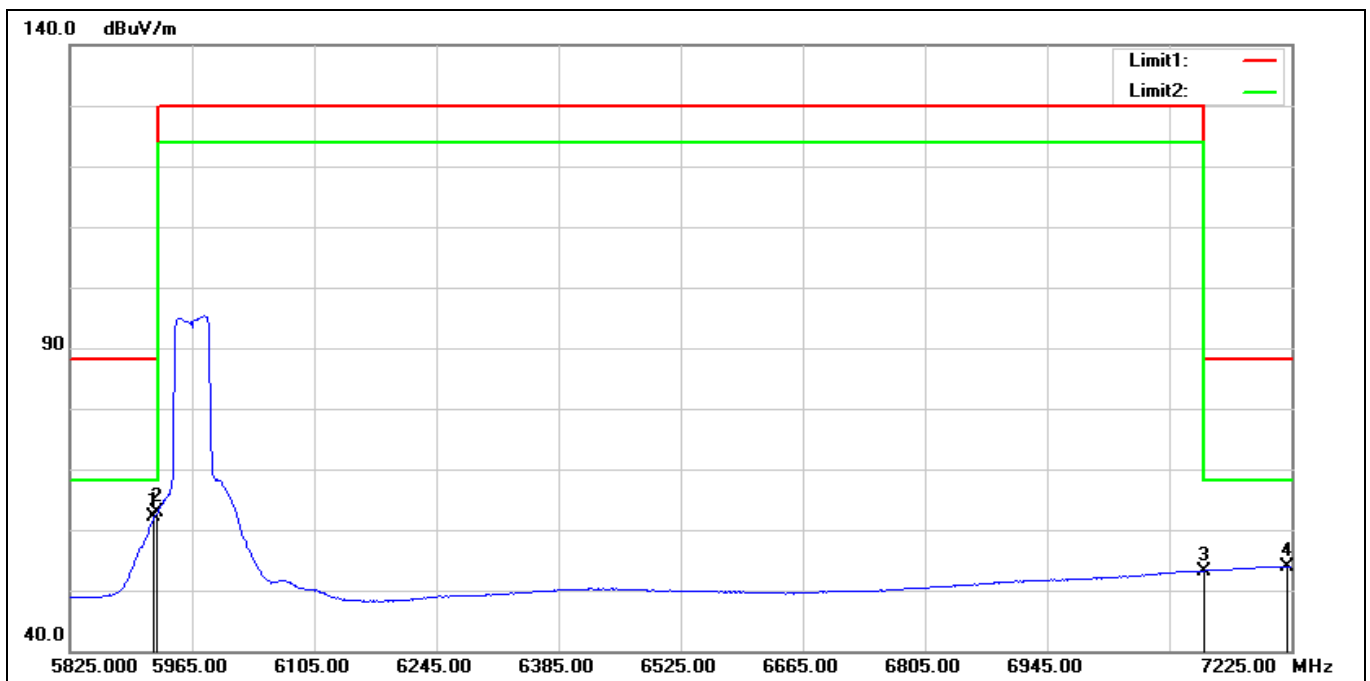


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5921.600	59.81	2.24	62.05	68.20	-6.15	AVG
2*	5925.000	60.63	2.23	62.86	68.20	-5.34	AVG
3	7125.000	46.56	6.69	53.25	68.20	-14.95	AVG
4	7219.400	46.92	7.08	54.00	68.20	-14.20	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5965 MHz		
Remark:			

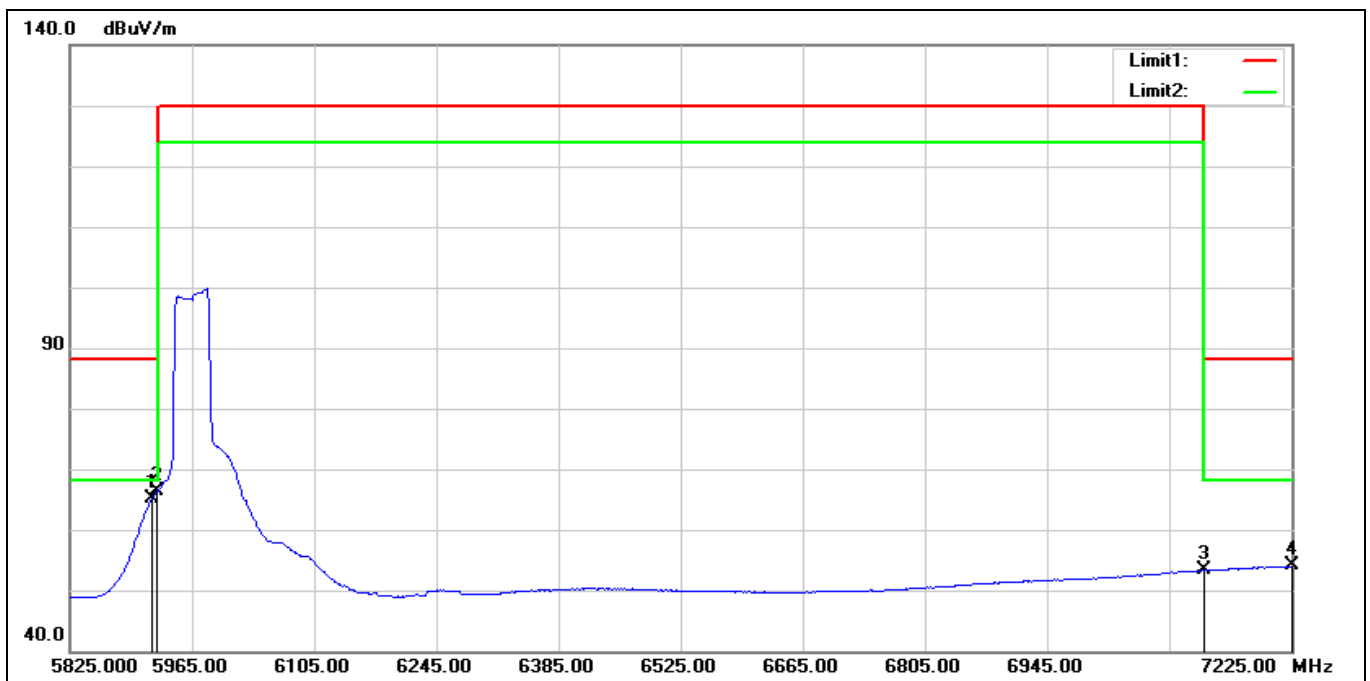


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5918.800	62.94	2.26	65.20	68.20	-3.00	AVG
2*	5925.000	64.22	2.23	66.45	68.20	-1.75	AVG
3	7125.000	46.64	6.69	53.33	68.20	-14.87	AVG
4	7225.000	46.94	7.10	54.04	68.20	-14.16	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 7085 MHz		
Remark:			

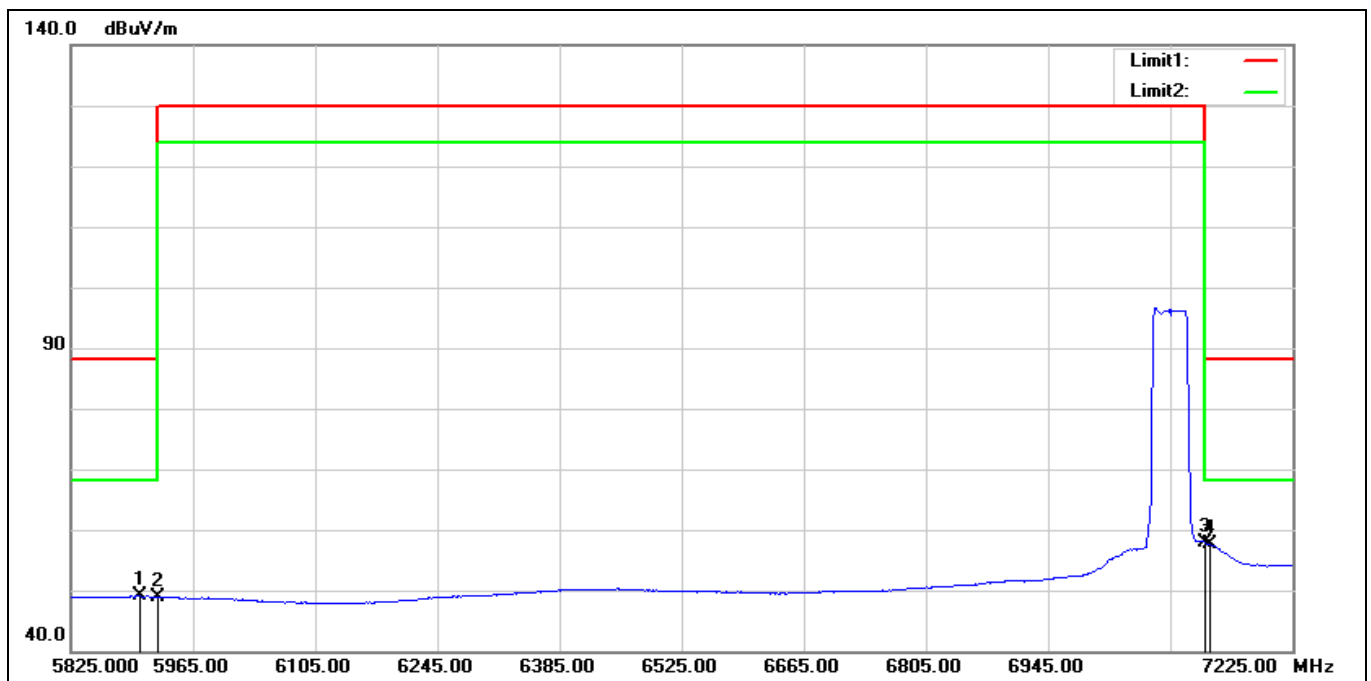


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5904.800	46.78	2.35	49.13	68.20	-19.07	AVG
2	5925.000	46.61	2.23	48.84	68.20	-19.36	AVG
3*	7125.000	51.15	6.69	57.84	68.20	-10.36	AVG
4	7131.200	50.87	6.71	57.58	68.20	-10.62	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 7085 MHz		
Remark:			

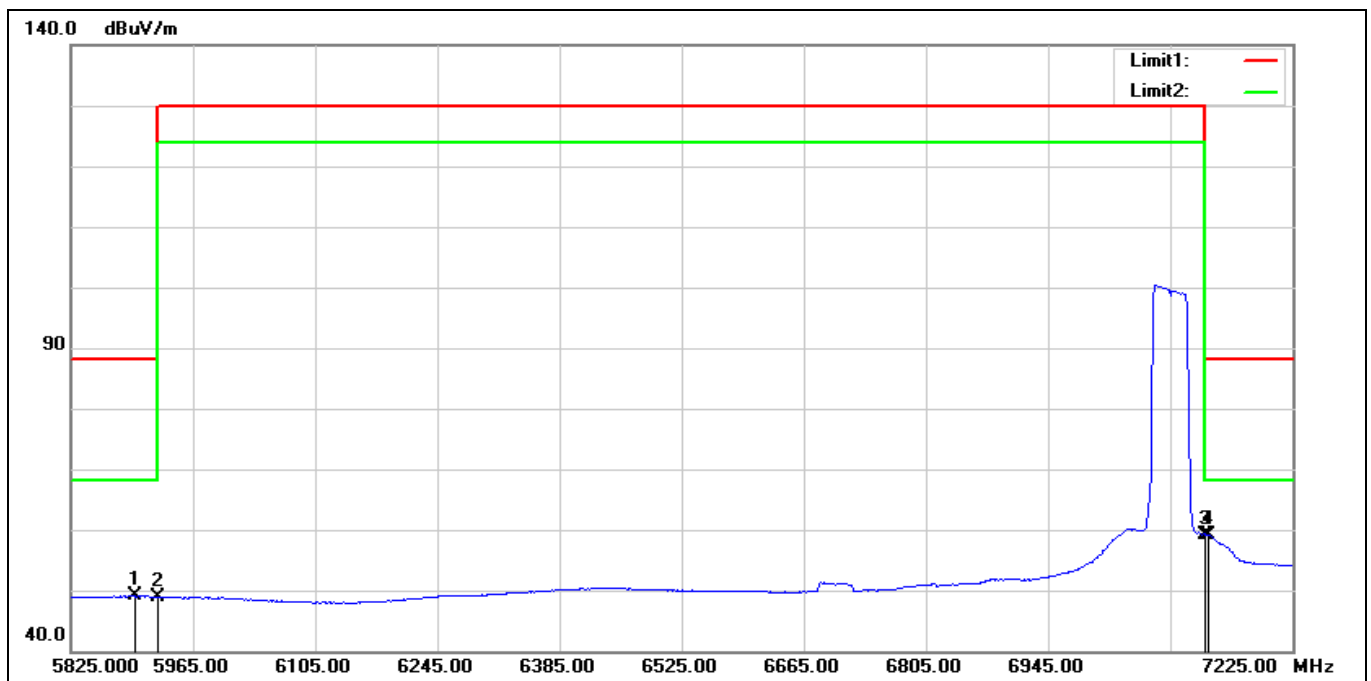


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5899.200	46.71	2.38	49.09	68.20	-19.11	AVG
2	5925.000	46.71	2.23	48.94	68.20	-19.26	AVG
3*	7125.000	52.56	6.69	59.25	68.20	-8.95	AVG
4	7128.400	52.43	6.70	59.13	68.20	-9.07	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5985 MHz		
Remark:			

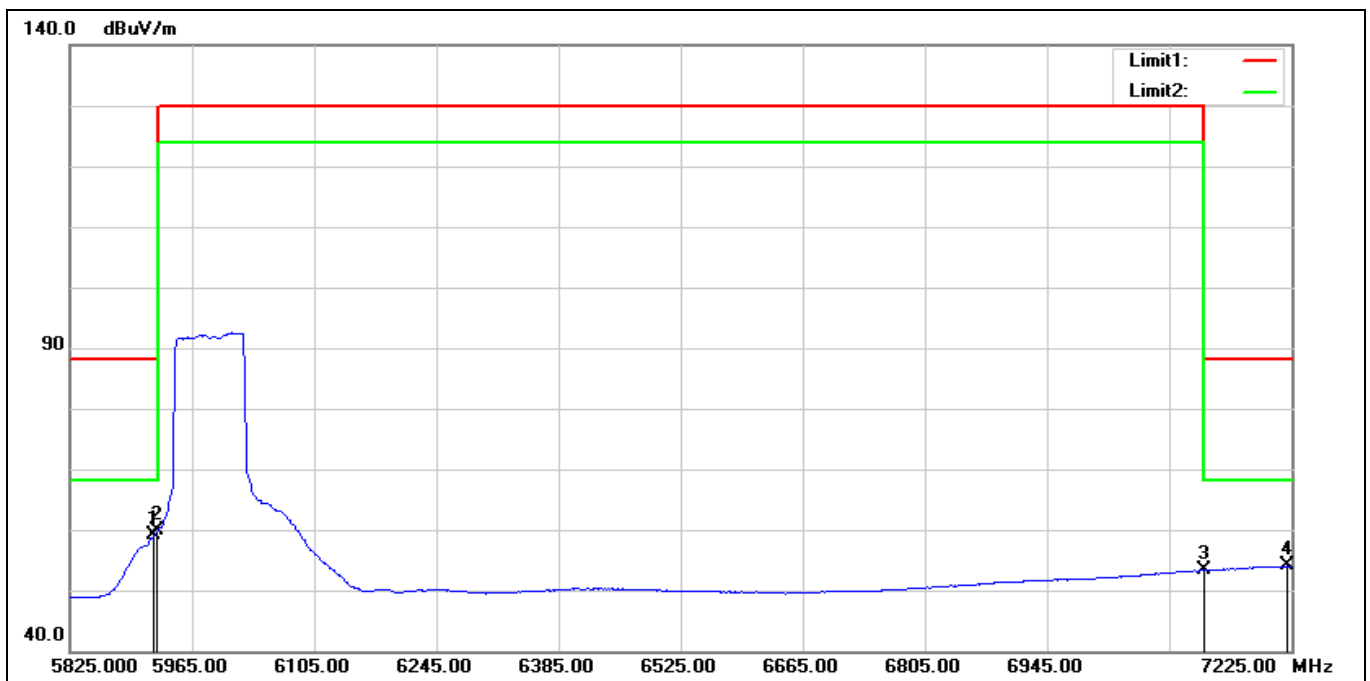


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5921.600	56.88	2.24	59.12	68.20	-9.08	AVG
2*	5925.000	57.58	2.23	59.81	68.20	-8.39	AVG
3	7125.000	46.63	6.69	53.32	68.20	-14.88	AVG
4	7220.800	46.95	7.08	54.03	68.20	-14.17	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5985 MHz		
Remark:			

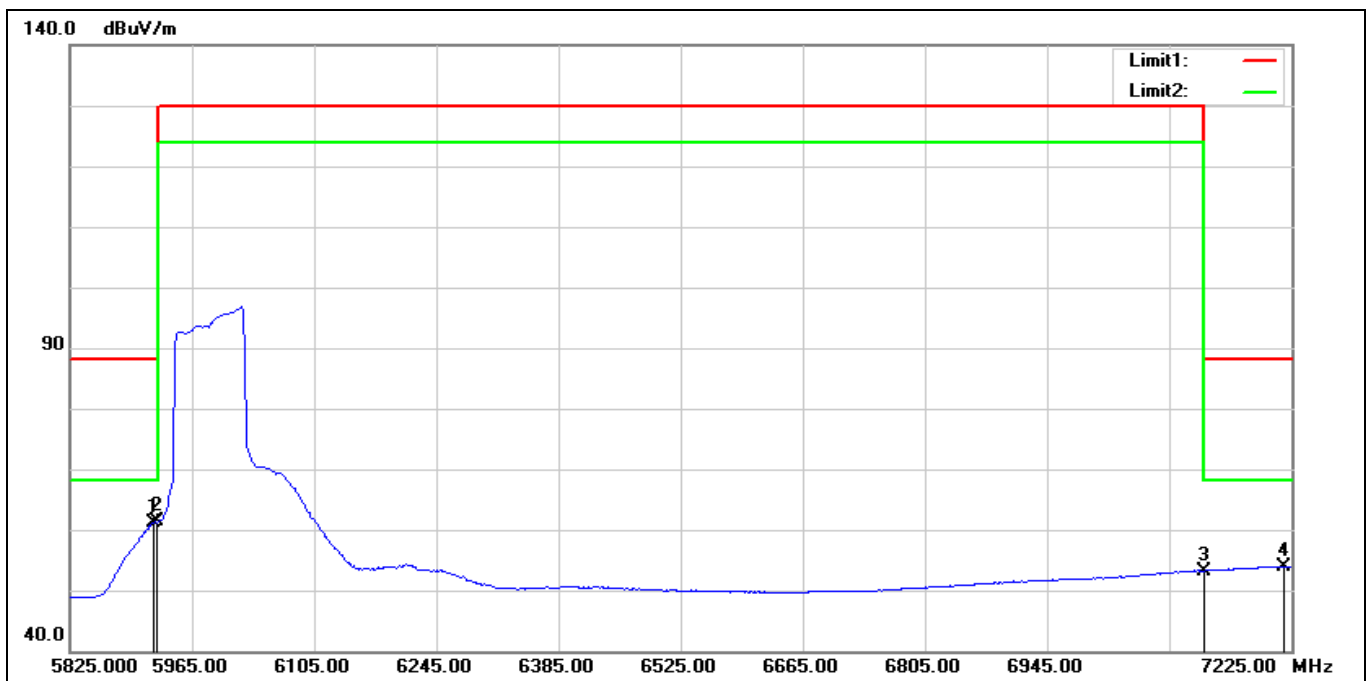


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5921.600	58.81	2.24	61.05	68.20	-7.15	AVG
2*	5925.000	59.08	2.23	61.31	68.20	-6.89	AVG
3	7125.000	46.54	6.69	53.23	68.20	-14.97	AVG
4	7216.600	46.89	7.07	53.96	68.20	-14.24	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 7025 MHz		
Remark:			

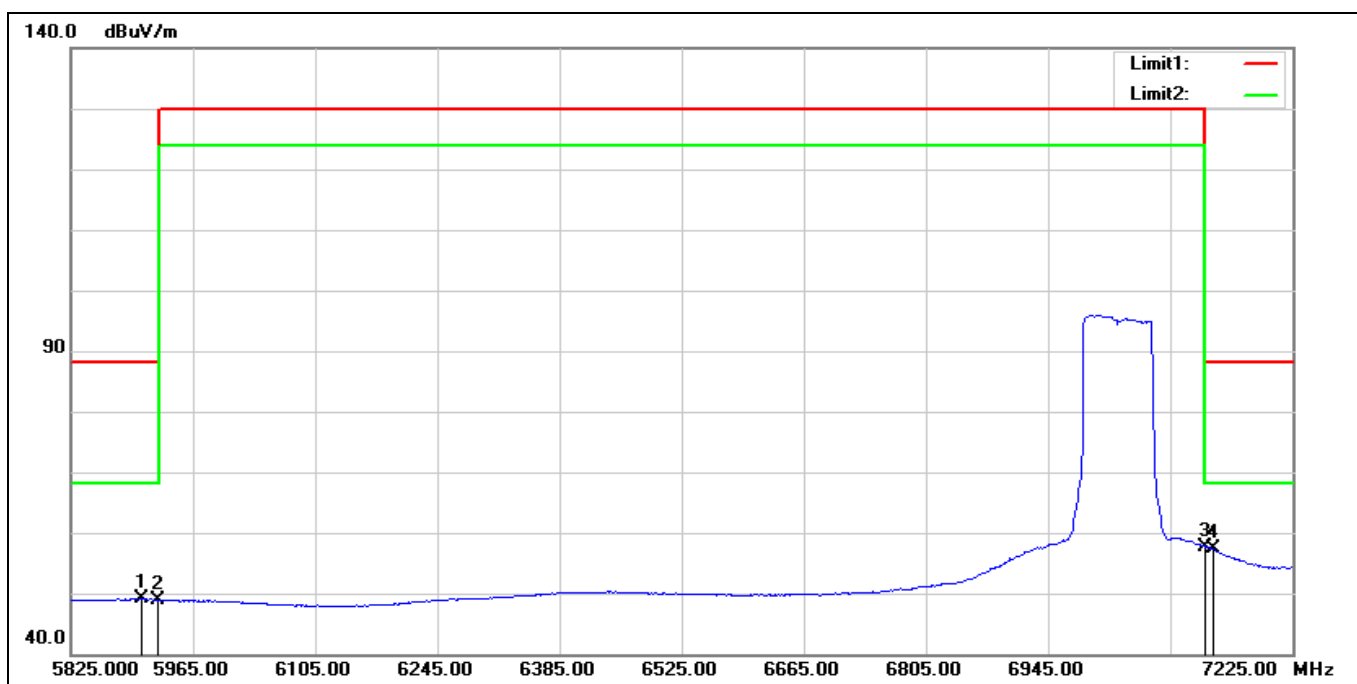


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5906.200	46.81	2.34	49.15	68.20	-19.05	AVG
2	5925.000	46.69	2.23	48.92	68.20	-19.28	AVG
3*	7125.000	50.99	6.69	57.68	68.20	-10.52	AVG
4	7134.000	50.73	6.73	57.46	68.20	-10.74	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT80 7025 MHz
Remark:

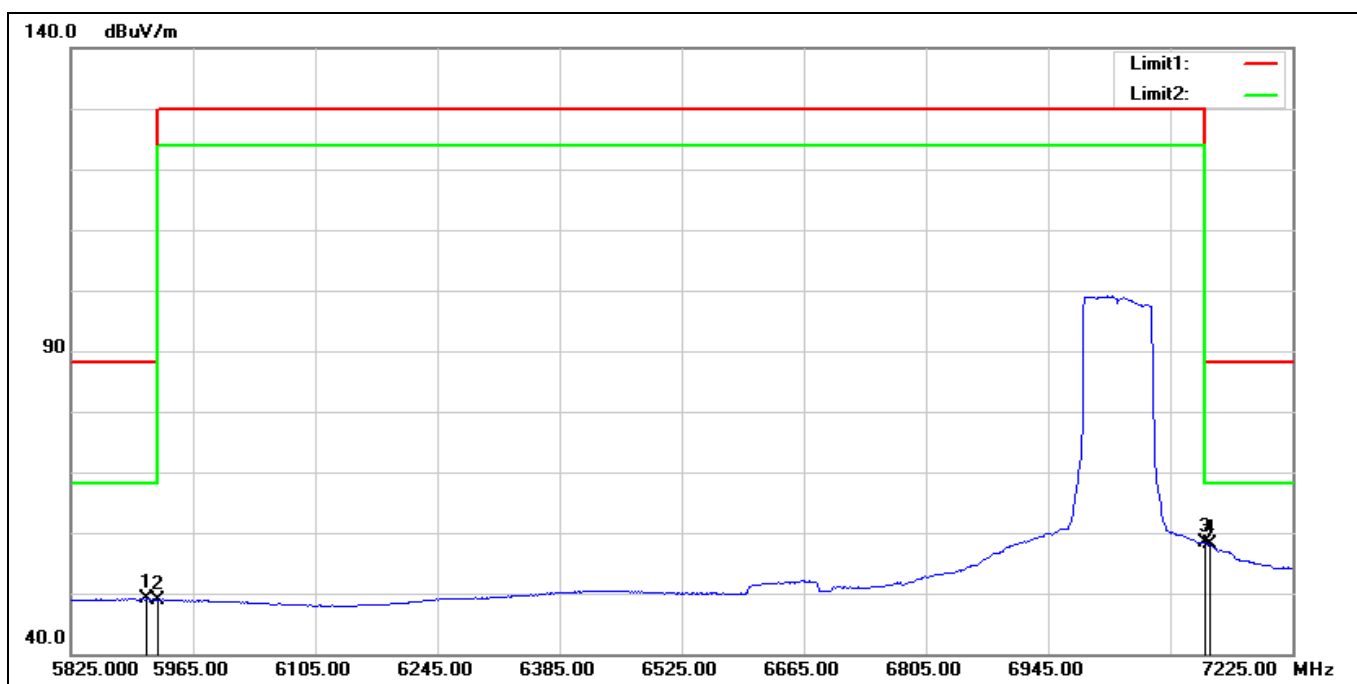


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5911.800	46.81	2.31	49.12	68.20	-19.08	AVG
2	5925.000	46.69	2.23	48.92	68.20	-19.28	AVG
3*	7125.000	51.66	6.69	58.35	68.20	-9.85	AVG
4	7131.200	51.31	6.71	58.02	68.20	-10.18	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6025 MHz		
Remark:			

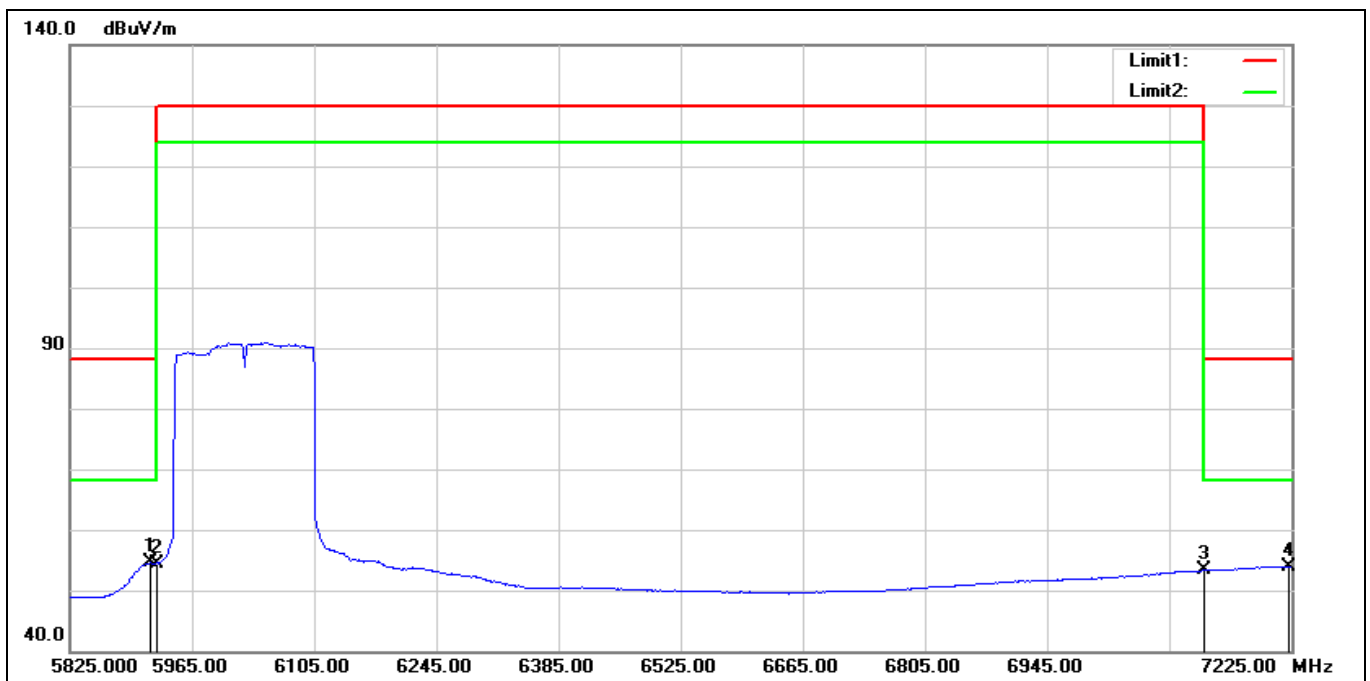


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	5917.400	52.26	2.27	54.53	68.20	-13.67	AVG
2	5925.000	52.25	2.23	54.48	68.20	-13.72	AVG
3	7125.000	46.58	6.69	53.27	68.20	-14.93	AVG
4	7222.200	46.88	7.09	53.97	68.20	-14.23	AVG

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT160 6025 MHz
Remark:

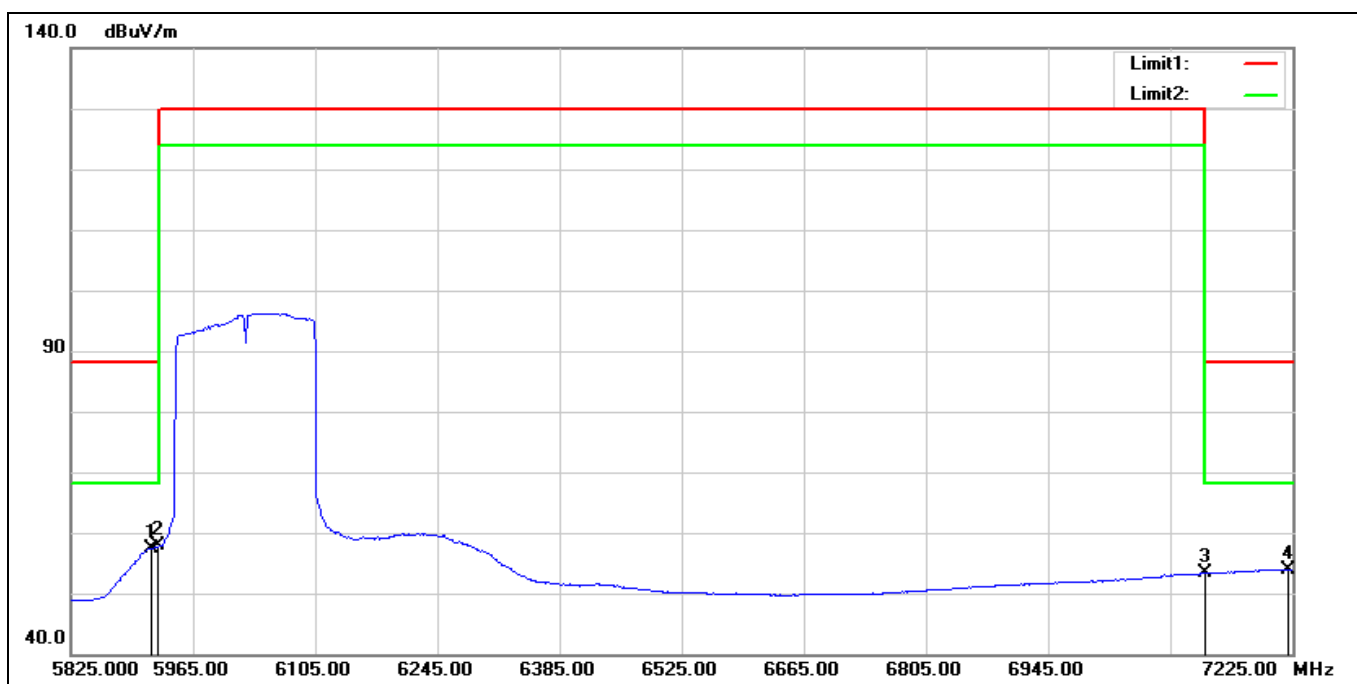


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5917.400	55.22	2.27	57.49	68.20	-10.71	AVG
2*	5925.000	55.53	2.23	57.76	68.20	-10.44	AVG
3	7125.000	46.64	6.69	53.33	68.20	-14.87	AVG
4	7220.800	46.92	7.08	54.00	68.20	-14.20	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT160 6985 MHz		
Remark:			

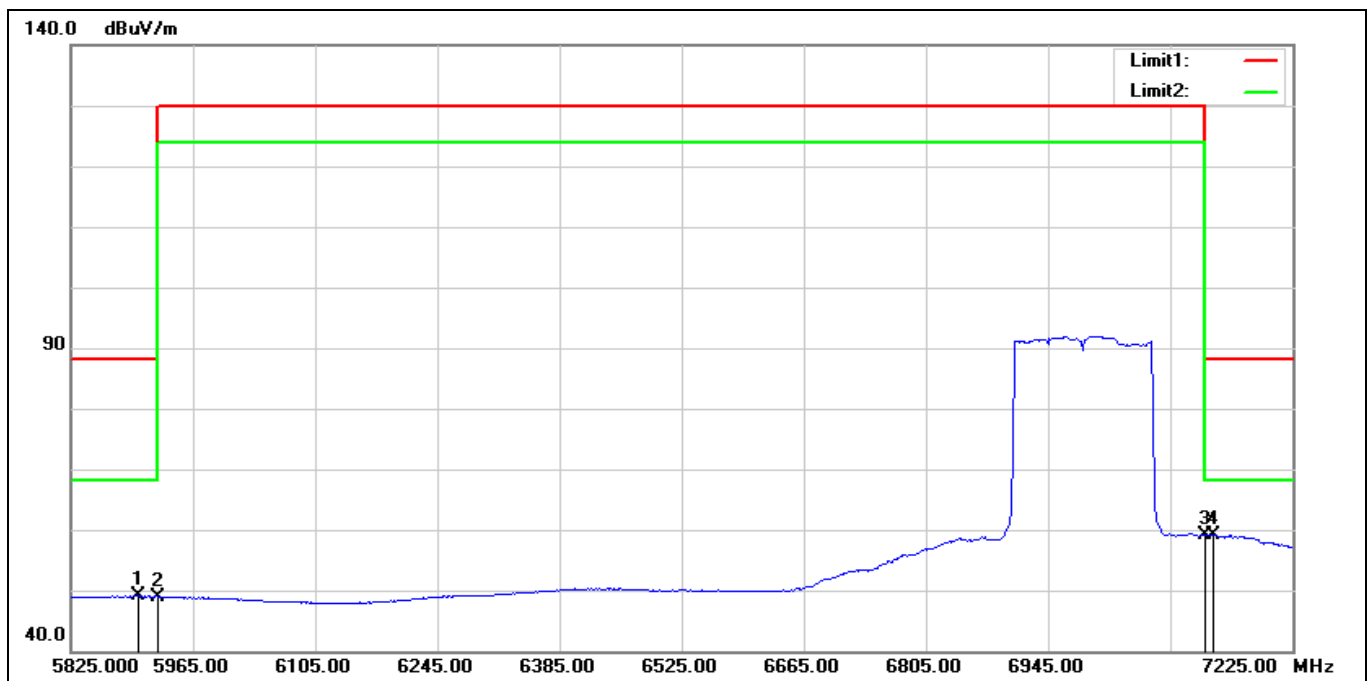


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5902.000	46.76	2.37	49.13	68.20	-19.07	AVG
2	5925.000	46.65	2.23	48.88	68.20	-19.32	AVG
3*	7125.000	52.54	6.69	59.23	68.20	-8.97	AVG
4	7134.000	52.45	6.73	59.18	68.20	-9.02	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT160 6985 MHz		
Remark:			

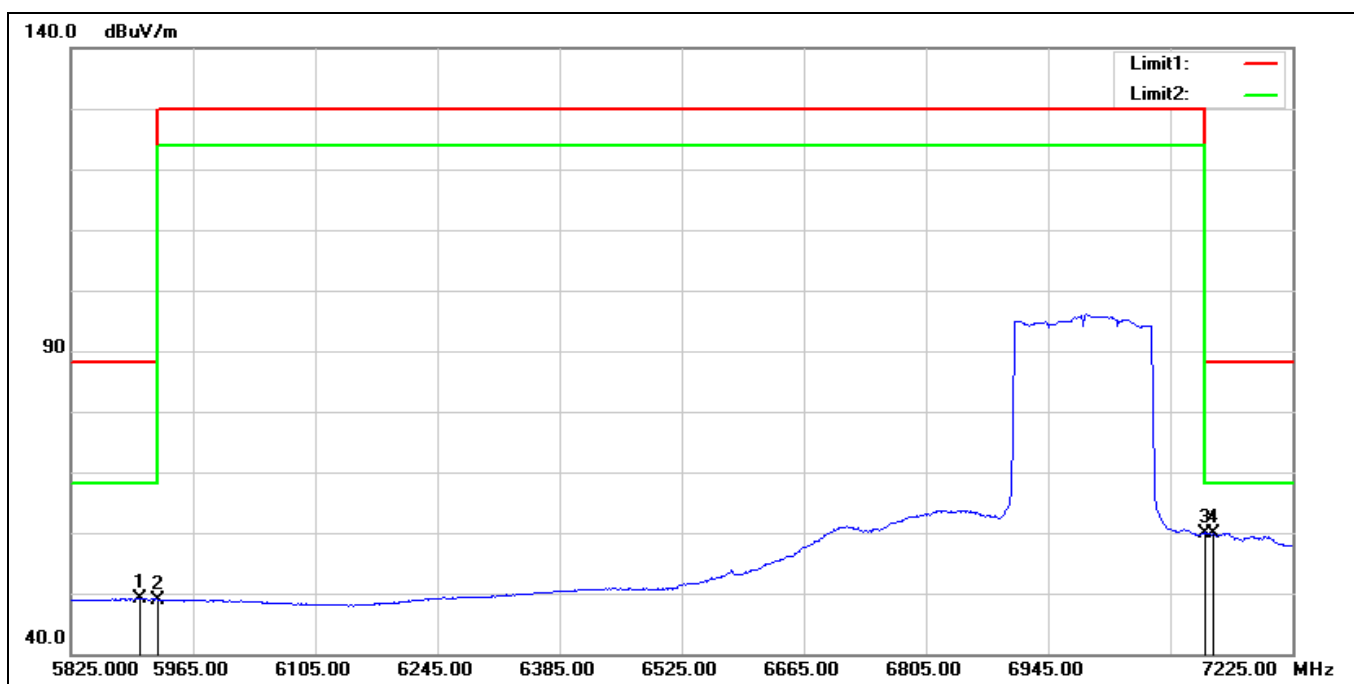


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5904.800	46.77	2.35	49.12	68.20	-19.08	AVG
2	5925.000	46.70	2.23	48.93	68.20	-19.27	AVG
3*	7125.000	53.31	6.69	60.00	68.20	-8.20	AVG
4	7134.000	53.09	6.73	59.82	68.20	-8.38	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6105 MHz		
Remark:			

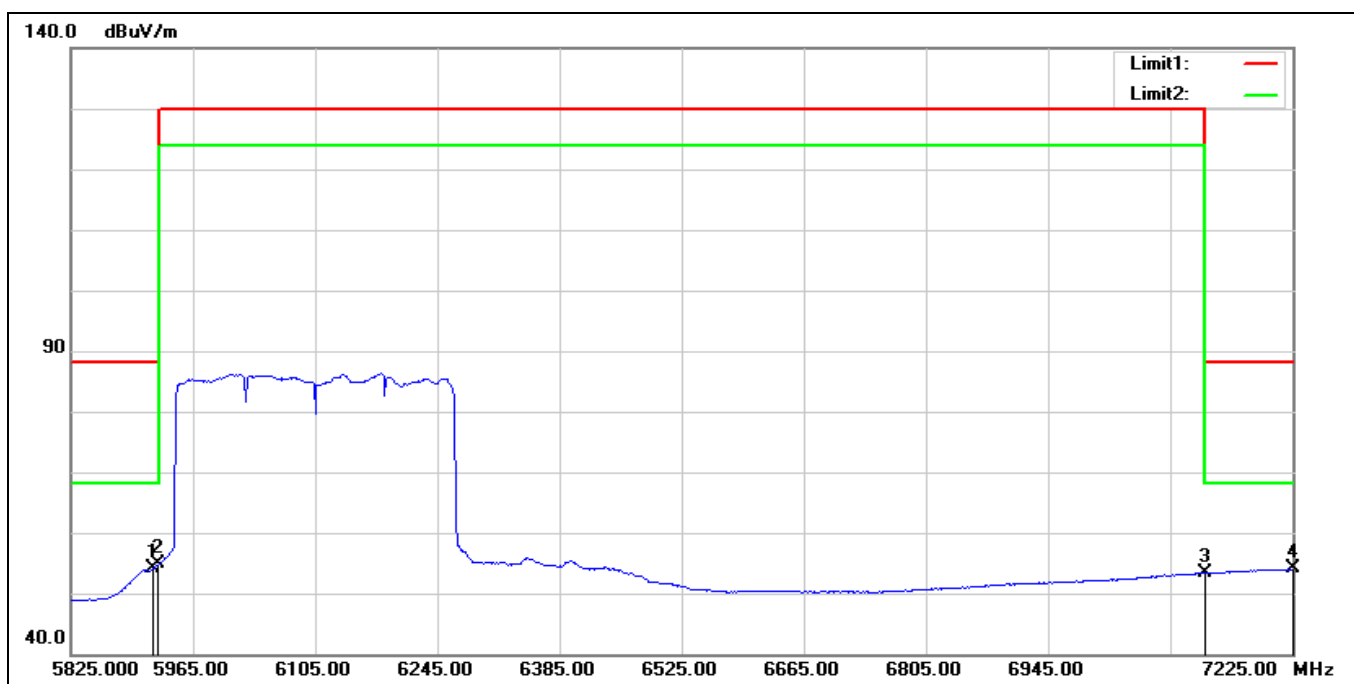


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5918.800	51.78	2.26	54.04	68.20	-14.16	AVG
2*	5925.000	52.58	2.23	54.81	68.20	-13.39	AVG
3	7125.000	46.65	6.69	53.34	68.20	-14.86	AVG
4	7225.000	46.96	7.10	54.06	68.20	-14.14	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6105 MHz		
Remark:			

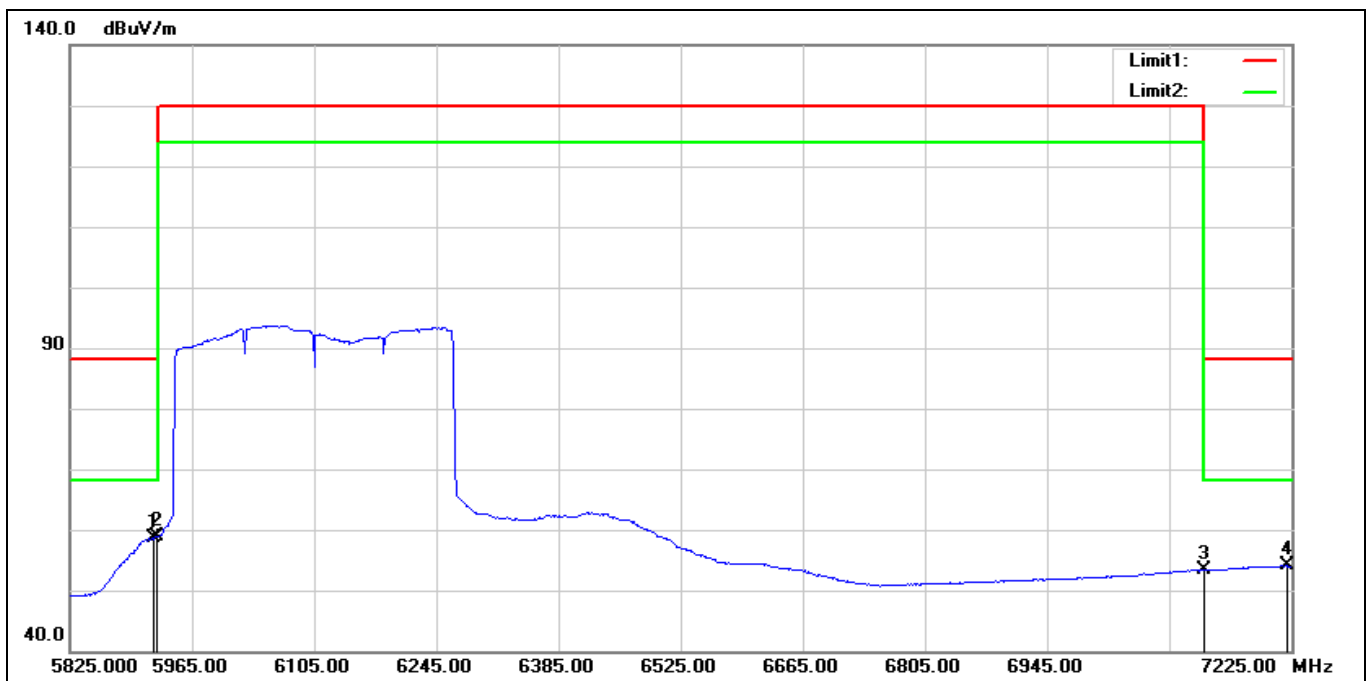


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5921.600	56.39	2.24	58.63	68.20	-9.57	AVG
2*	5925.000	56.65	2.23	58.88	68.20	-9.32	AVG
3	7125.000	46.64	6.69	53.33	68.20	-14.87	AVG
4	7219.400	47.00	7.08	54.08	68.20	-14.12	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

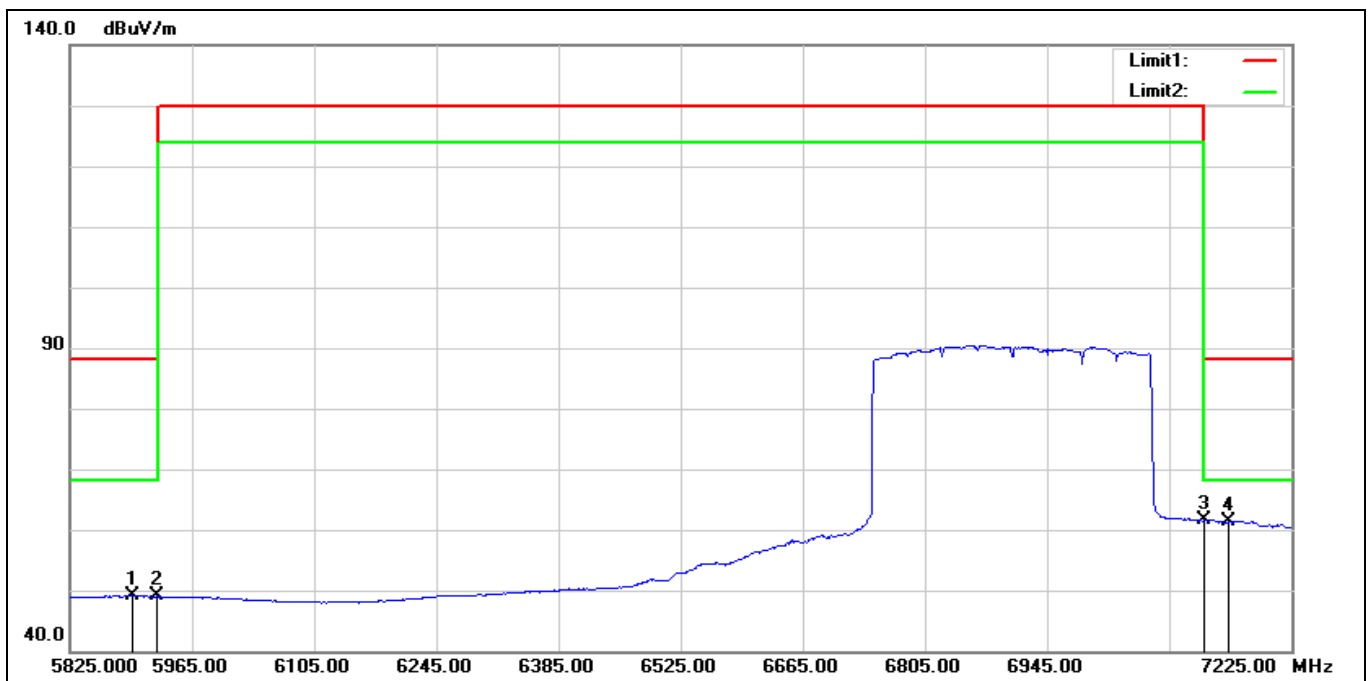

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5896.400	46.77	2.38	49.15	68.20	-19.05	AVG
2	5925.000	46.81	2.23	49.04	68.20	-19.16	AVG
3*	7125.000	54.89	6.69	61.58	68.20	-6.62	AVG
4	7153.600	54.65	6.79	61.44	68.20	-6.76	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT320 6905 MHz		
Remark:			

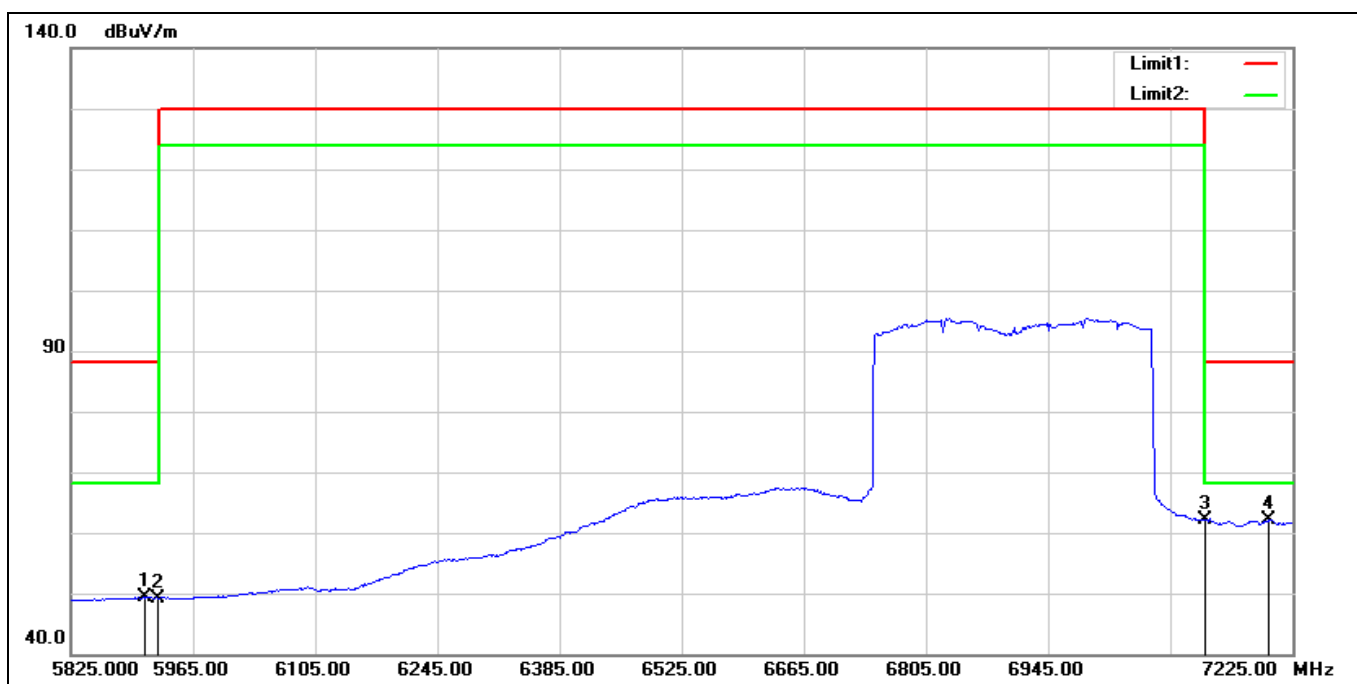


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5909.000	47.05	2.32	49.37	68.20	-18.83	AVG
2	5925.000	47.00	2.23	49.23	68.20	-18.97	AVG
3*	7125.000	55.53	6.69	62.22	68.20	-5.98	AVG
4	7198.400	55.08	7.01	62.09	68.20	-6.11	AVG

4X4


Below 1 GHz

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

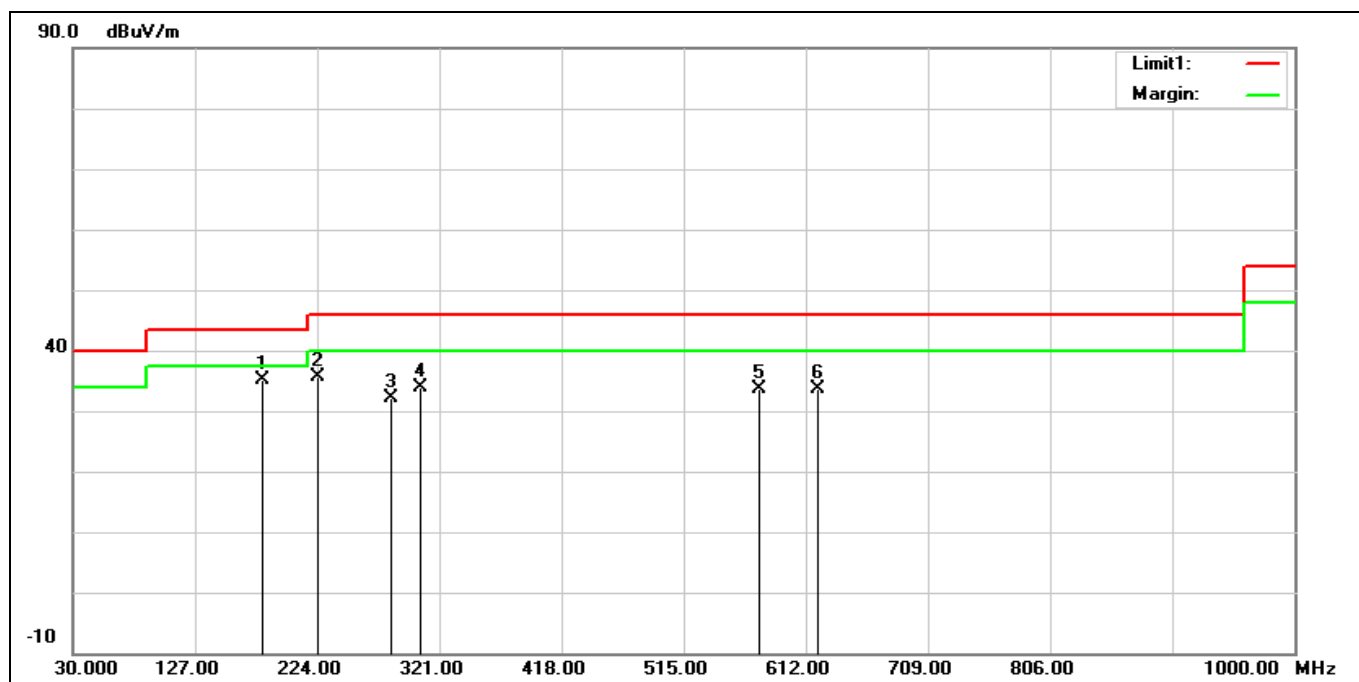

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	180.3500	42.97	-7.93	35.04	43.50	-8.46	QP
2	224.9700	44.19	-8.64	35.55	46.00	-10.45	QP
3	282.2000	38.14	-5.90	32.24	46.00	-13.76	QP
4	306.4500	39.23	-5.35	33.88	46.00	-12.12	QP
5	575.1400	33.95	-0.43	33.52	46.00	-12.48	QP
6	621.7000	33.21	0.48	33.69	46.00	-12.31	QP

Standard: Part 15E Test Site: 966 Chamber
Polarization: Vertical
Test Mode: 802.11be EHT20 7115 MHz
Remark:

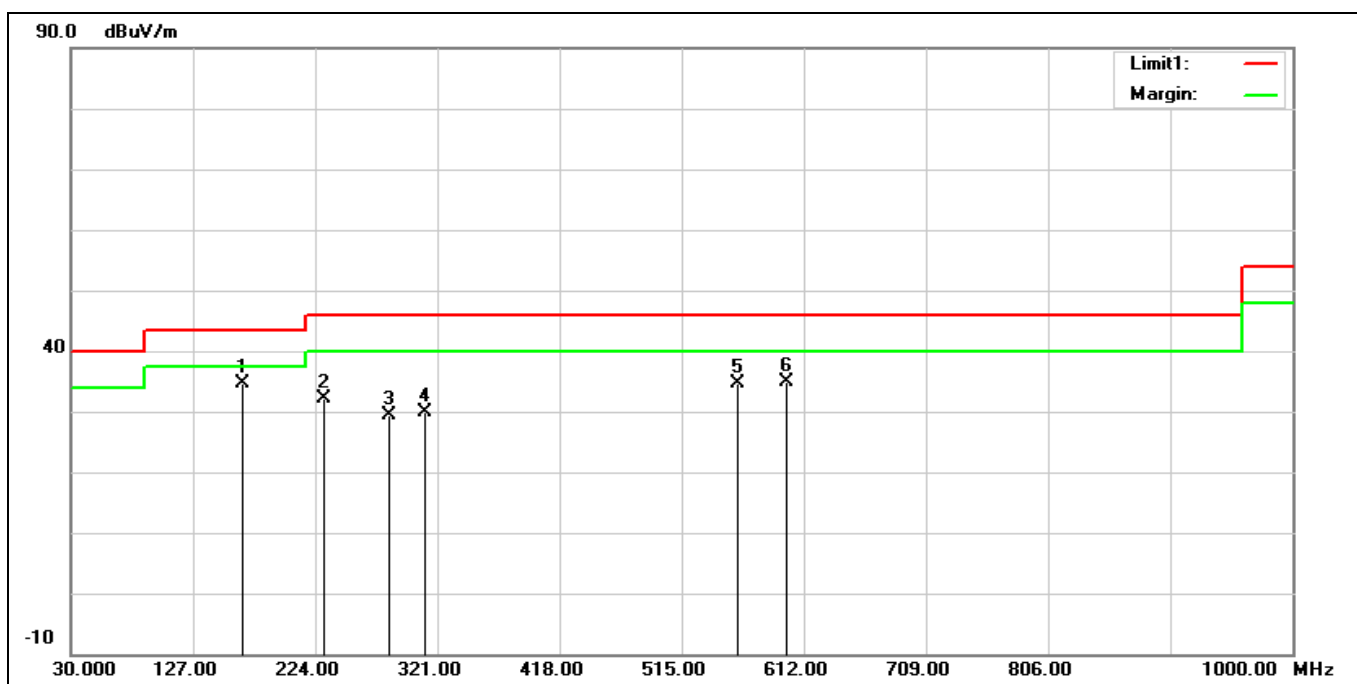


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1*	166.7700	41.28	-6.68	34.60	43.50	-8.90	QP
2	230.7900	40.23	-8.22	32.01	46.00	-13.99	QP
3	282.2000	35.17	-5.90	29.27	46.00	-16.73	QP
4	311.3000	35.17	-5.26	29.91	46.00	-16.09	QP
5	559.6200	35.33	-0.82	34.51	46.00	-11.49	QP
6	598.4200	34.60	0.17	34.77	46.00	-11.23	QP

Harmonic


Above 1 GHz

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 5955 MHz		
Remark:			

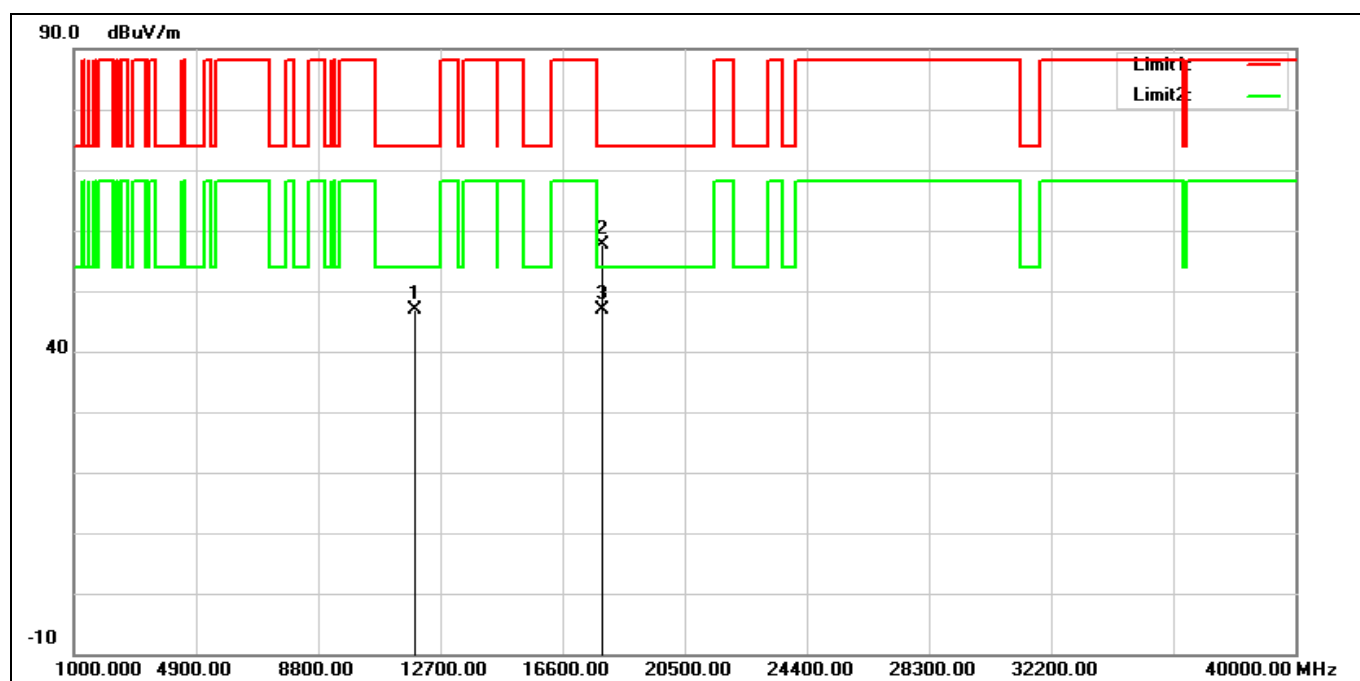


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11910.000	32.88	13.99	46.87	74.00	-27.13	peak
2	17865.000	30.07	27.60	57.67	74.00	-16.33	peak
3*	17865.000	19.32	27.60	46.92	54.00	-7.08	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 5955 MHz		
Remark:			

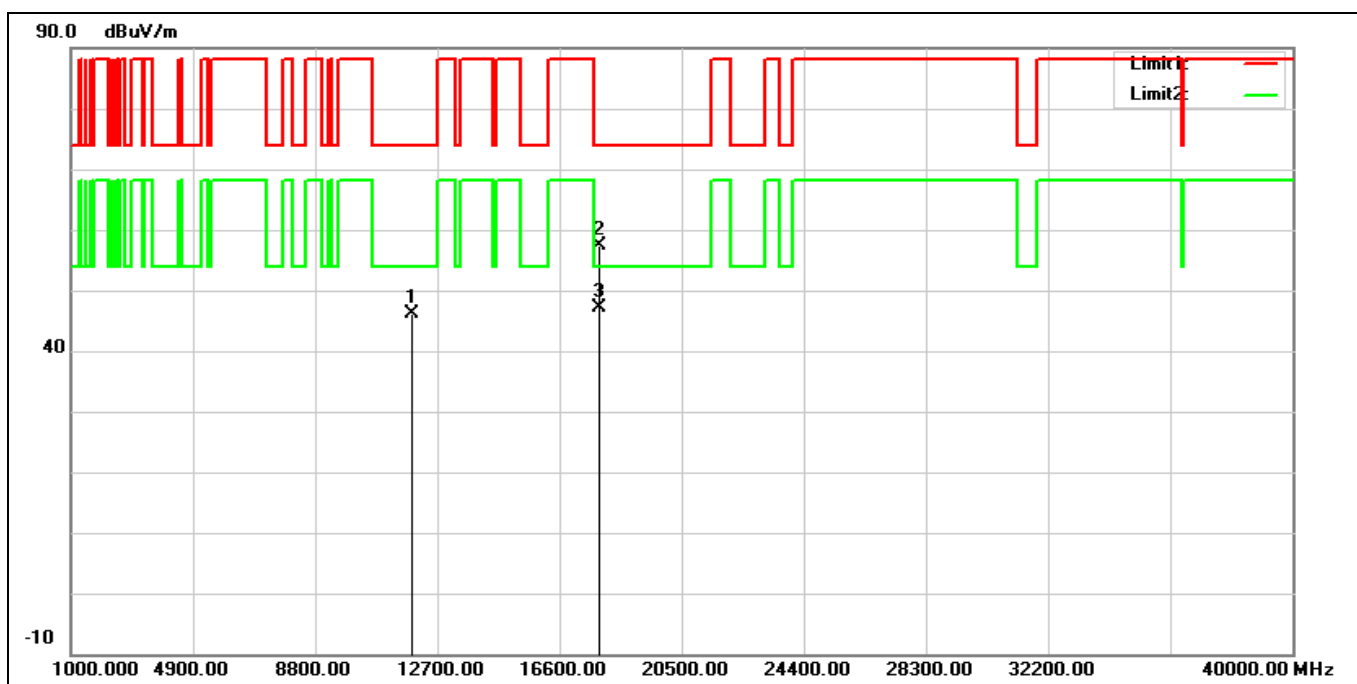


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11910.000	32.21	13.99	46.20	74.00	-27.80	peak
2	17865.000	29.90	27.60	57.50	74.00	-16.50	peak
3*	17865.000	19.43	27.60	47.03	54.00	-6.97	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6175 MHz		
Remark:			

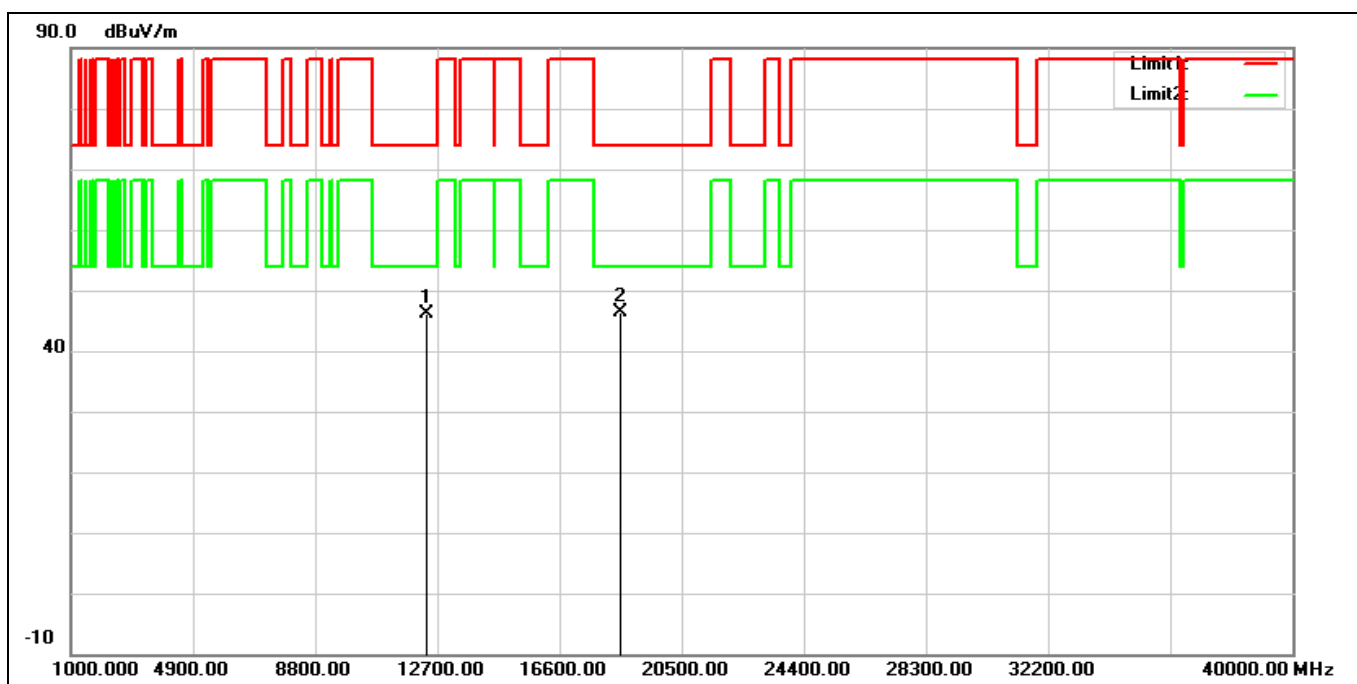


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12350.000	31.73	14.30	46.03	74.00	-27.97	peak
2*	18525.000	27.75	18.65	46.40	74.00	-27.60	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6175 MHz		
Remark:			

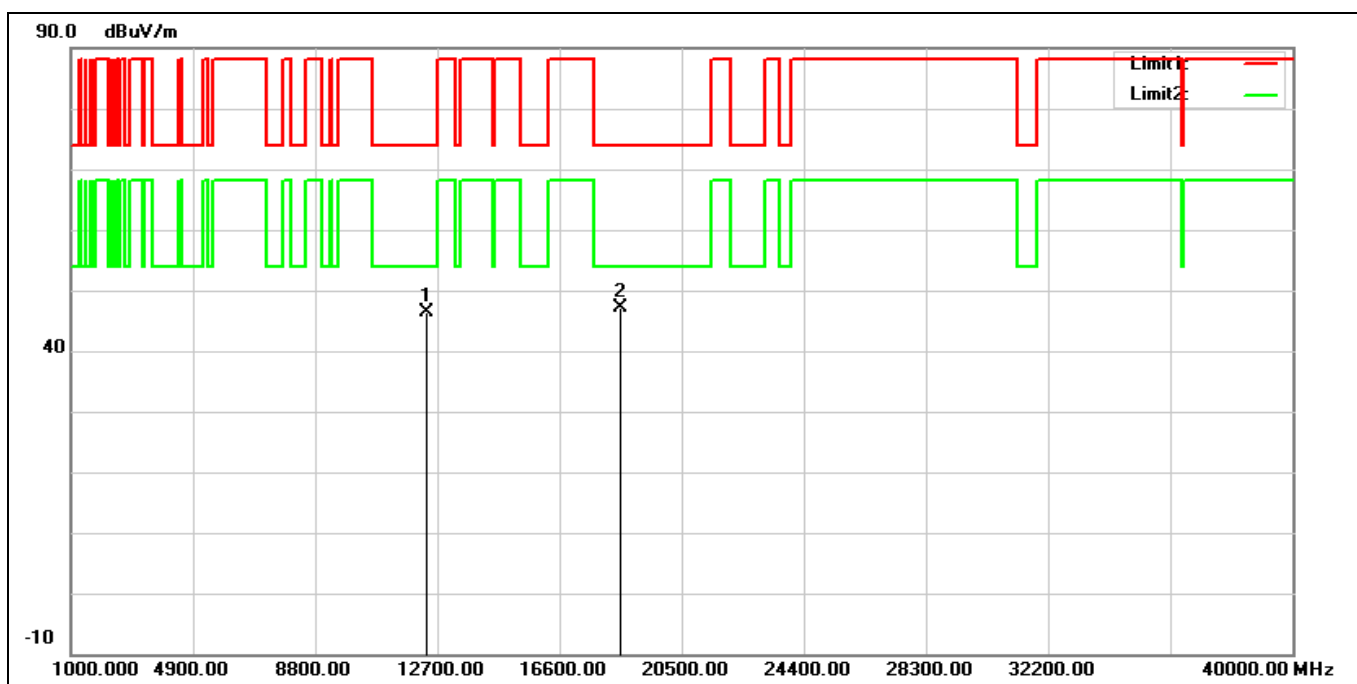


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12350.000	32.12	14.30	46.42	74.00	-27.58	peak
2*	18525.000	28.58	18.65	47.23	74.00	-26.77	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6415 MHz		
Remark:			

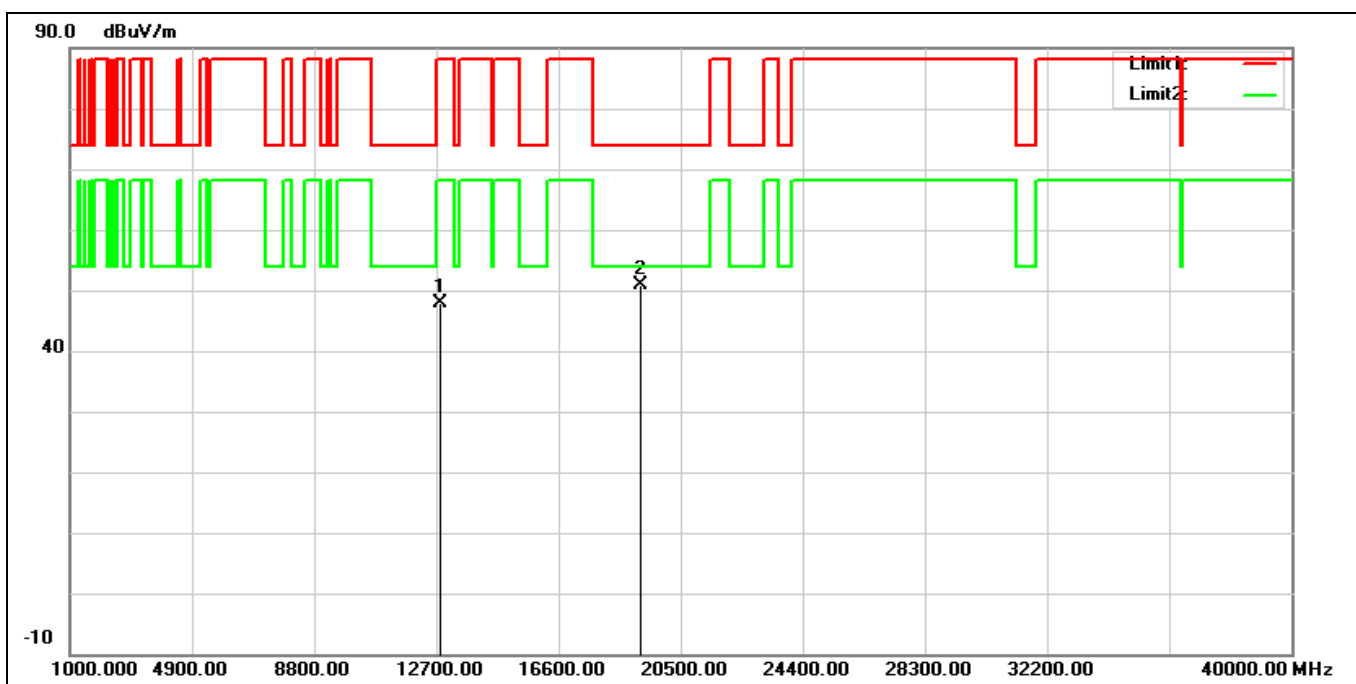


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12830.000	31.94	15.96	47.90	88.20	-40.30	peak
2*	19245.000	30.78	20.14	50.92	74.00	-23.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6415 MHz		
Remark:			

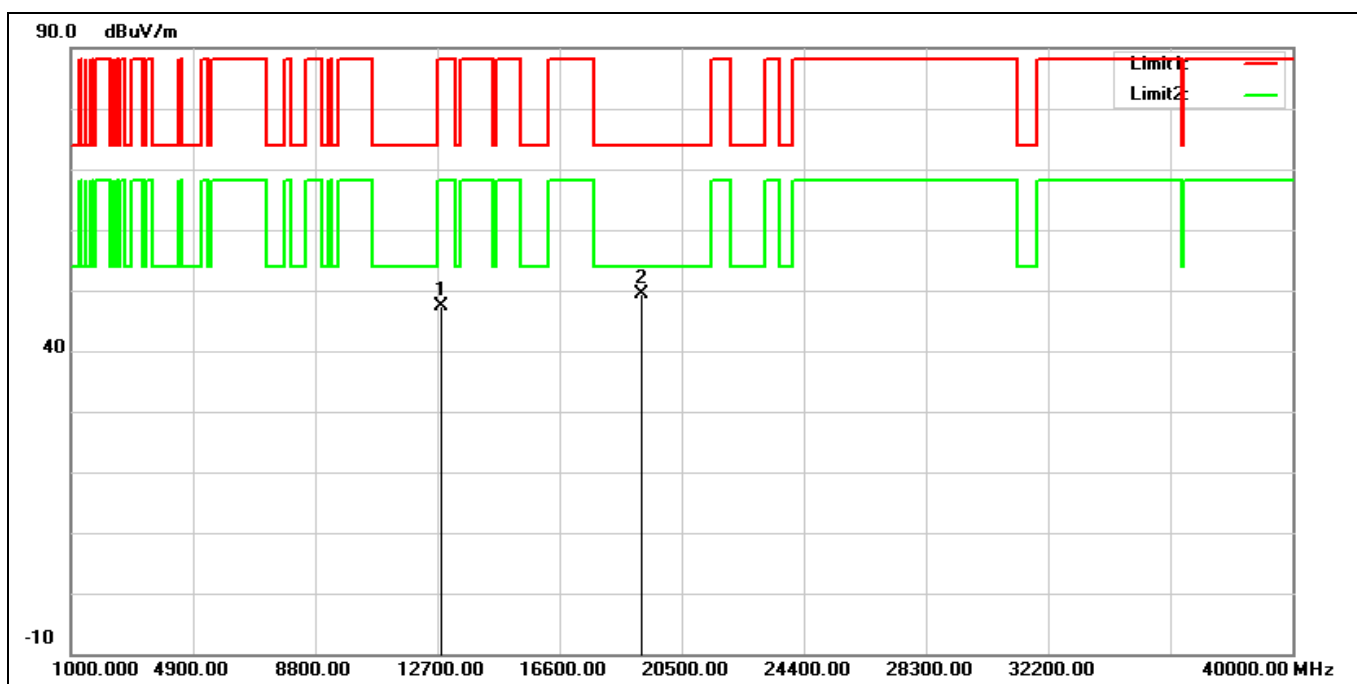


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12830.000	31.35	15.96	47.31	88.20	-40.89	peak
2*	19245.000	29.18	20.14	49.32	74.00	-24.68	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6435 MHz		
Remark:			

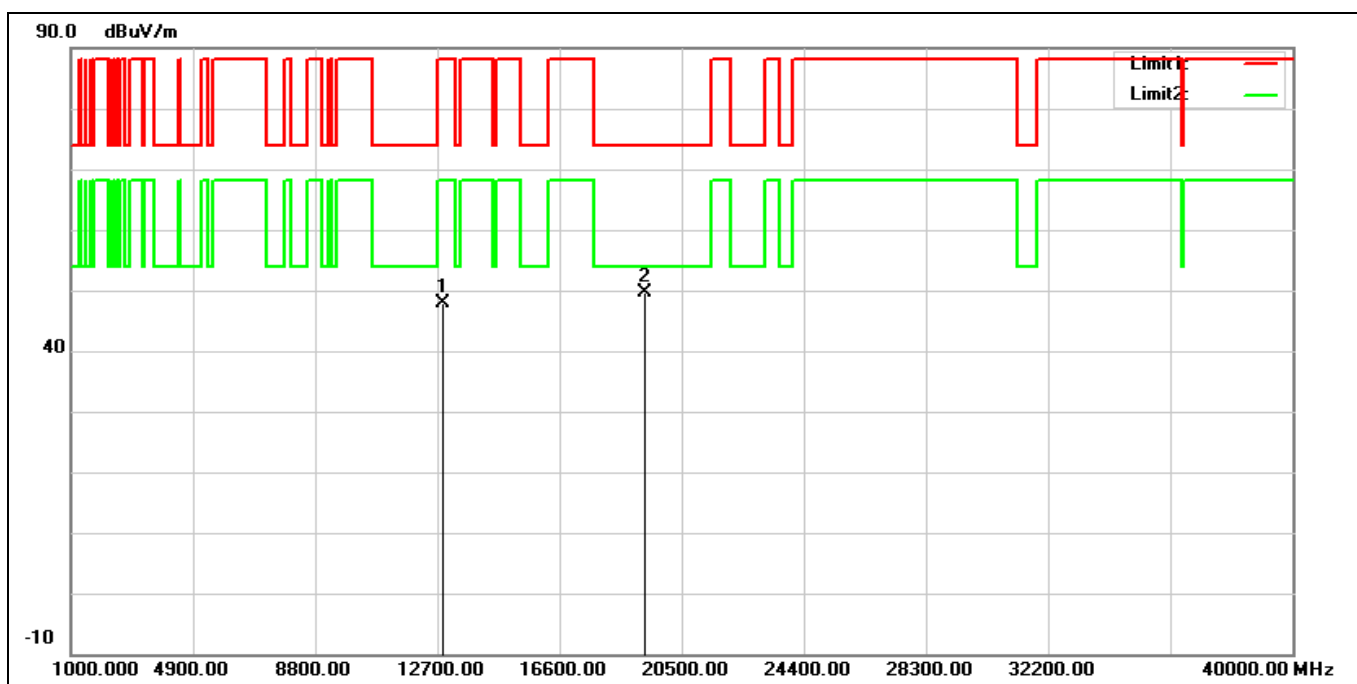


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12870.000	31.72	16.06	47.78	88.20	-40.42	peak
2*	19305.000	29.46	20.28	49.74	74.00	-24.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6435 MHz		
Remark:			

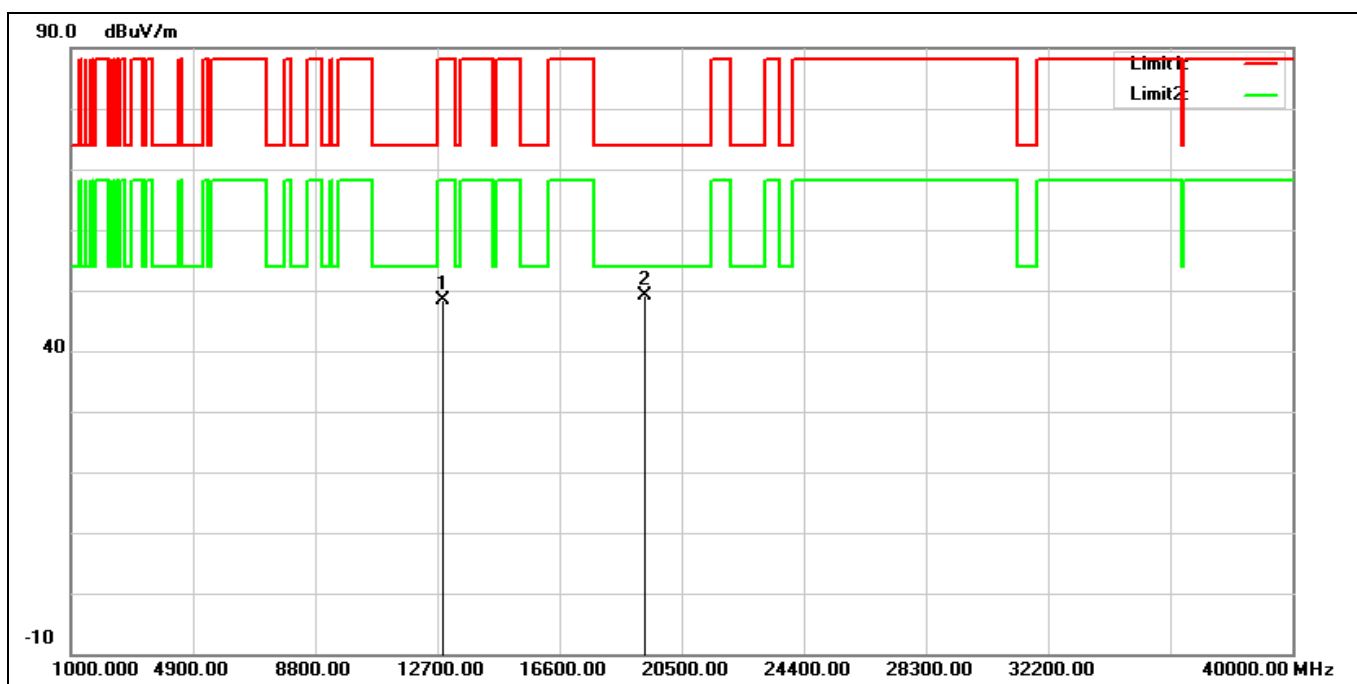


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12870.000	32.39	16.06	48.45	88.20	-39.75	peak
2*	19305.000	28.86	20.28	49.14	74.00	-24.86	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6475 MHz		
Remark:			

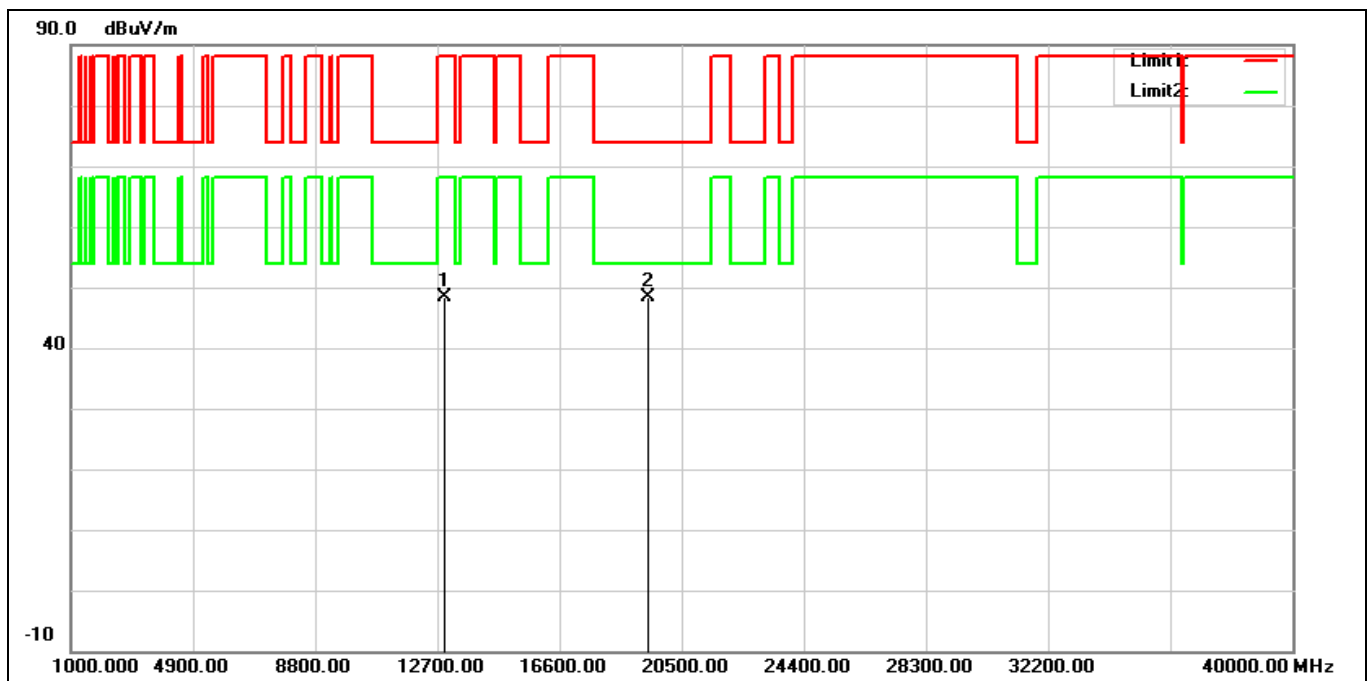


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12950.000	32.00	16.30	48.30	88.20	-39.90	peak
2*	19425.000	27.86	20.57	48.43	74.00	-25.57	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6475 MHz		
Remark:			

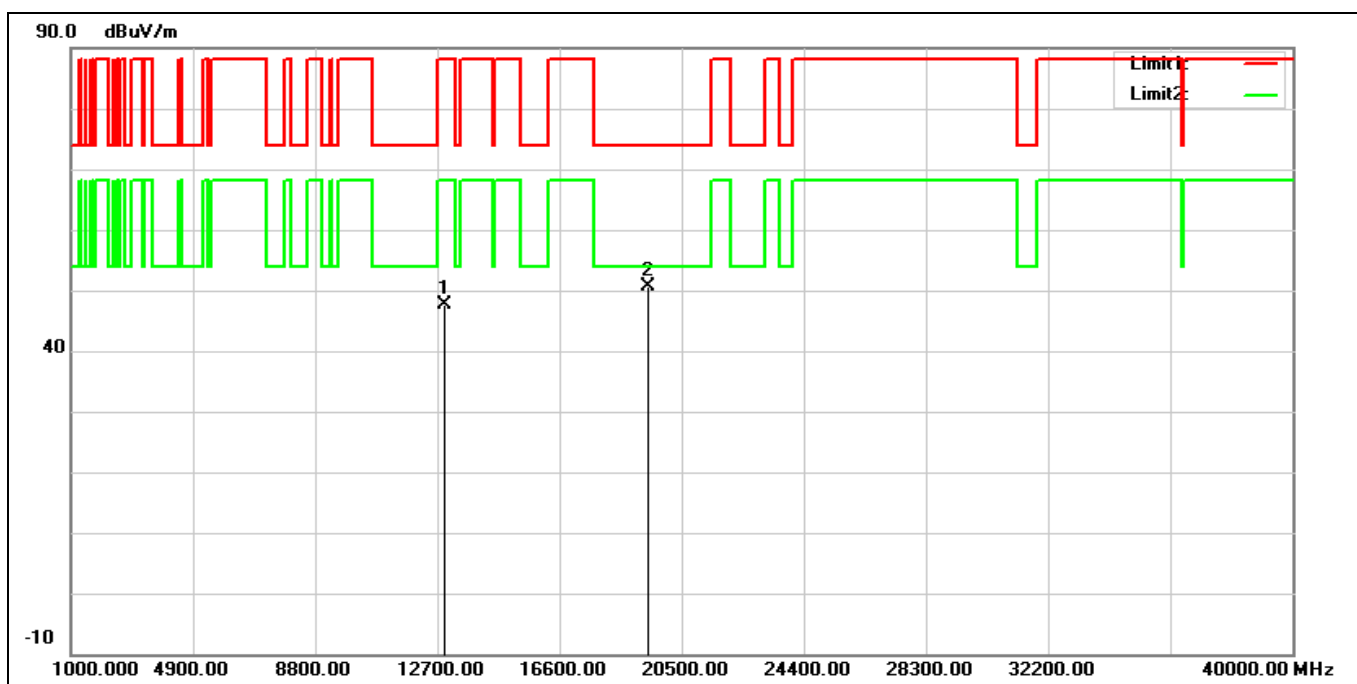


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12950.000	31.24	16.30	47.54	88.20	-40.66	peak
2*	19425.000	29.98	20.57	50.55	74.00	-23.45	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6515 MHz		
Remark:			

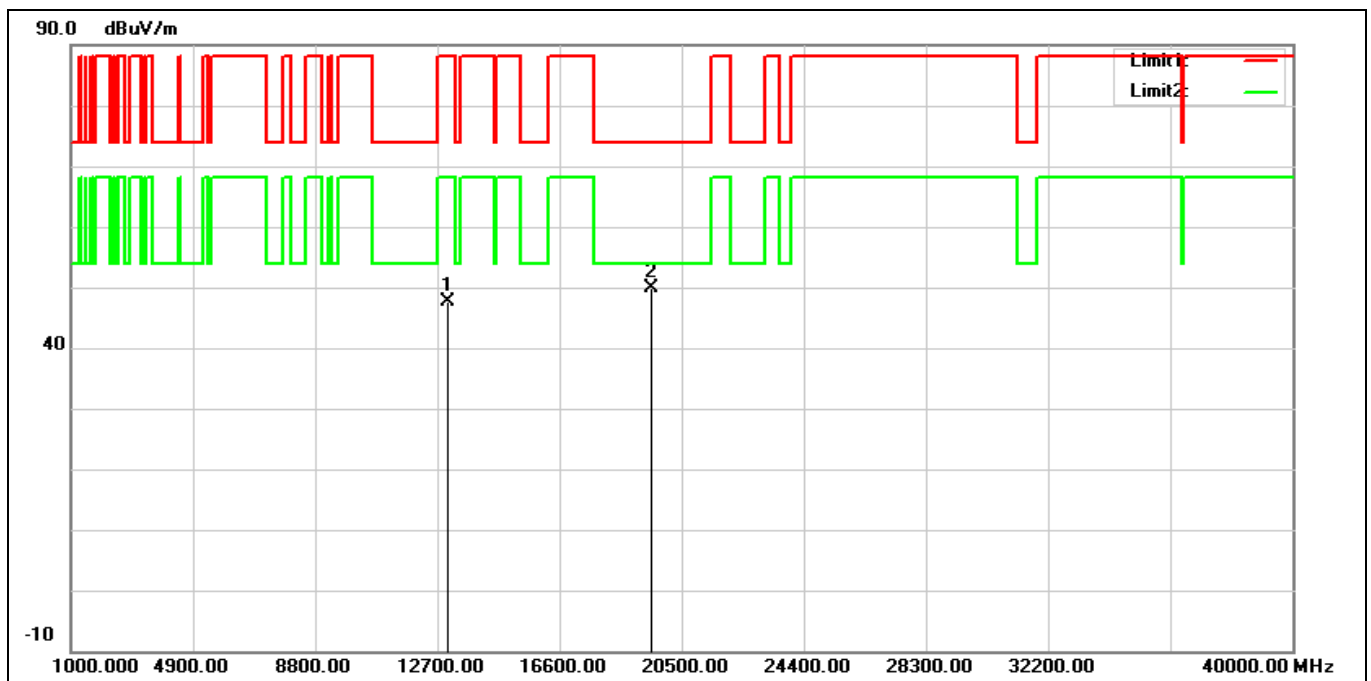


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13030.000	31.48	16.24	47.72	88.20	-40.48	peak
2*	19545.000	28.99	20.78	49.77	74.00	-24.23	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6515 MHz		
Remark:			

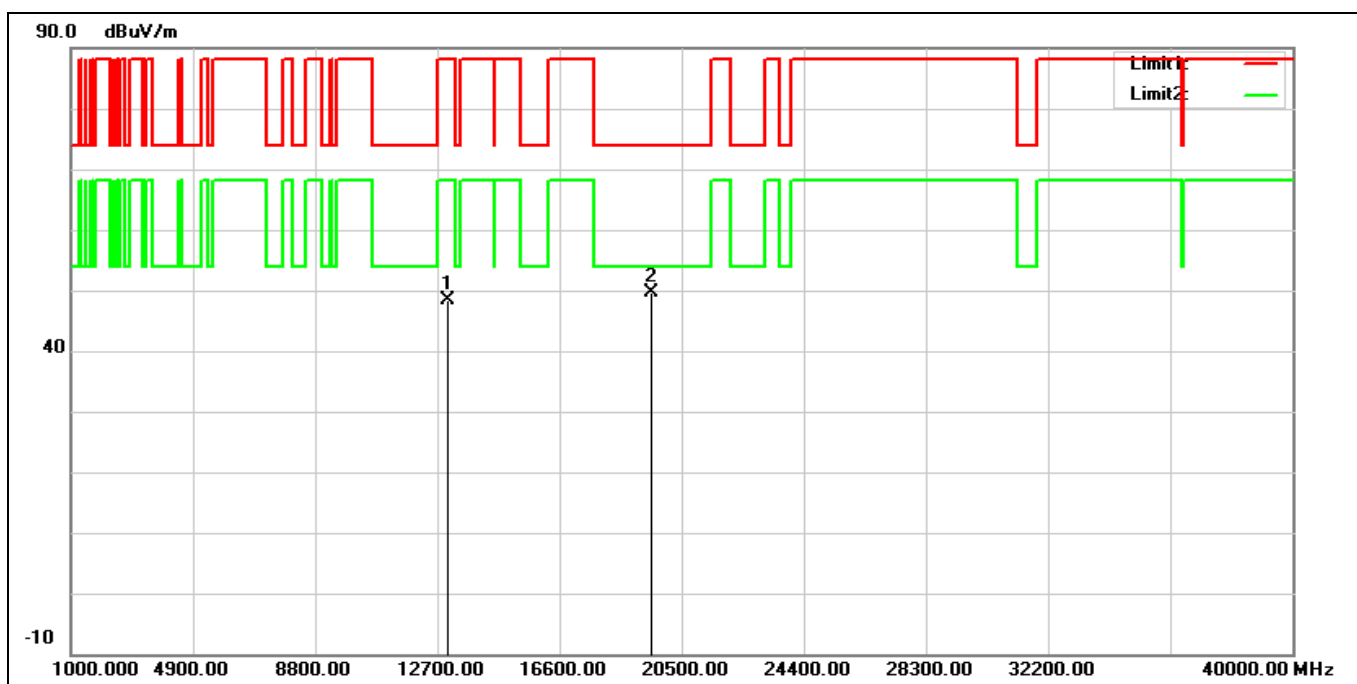


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13030.000	32.15	16.24	48.39	88.20	-39.81	peak
2*	19545.000	28.96	20.78	49.74	74.00	-24.26	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6535 MHz		
Remark:			

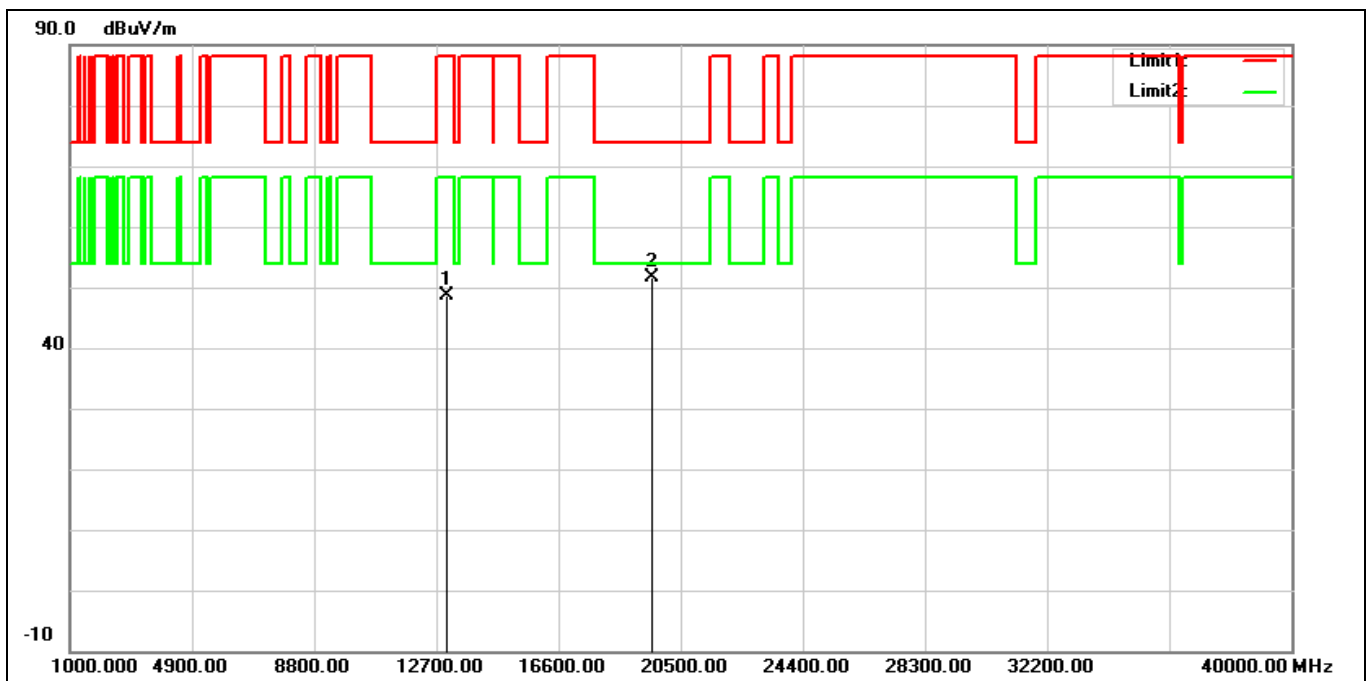


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13070.000	32.43	16.09	48.52	88.20	-39.68	peak
2*	19605.000	30.92	20.81	51.73	74.00	-22.27	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6535 MHz		
Remark:			

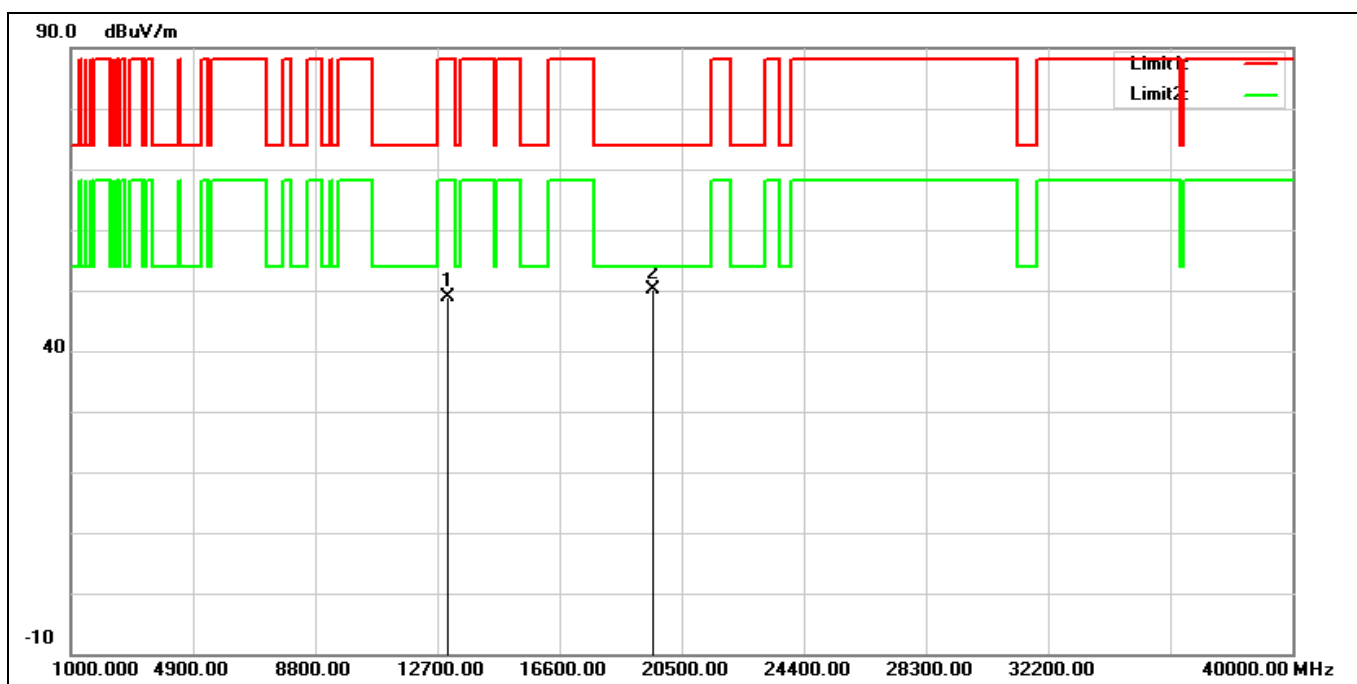


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13070.000	32.67	16.09	48.76	88.20	-39.44	peak
2*	19605.000	29.44	20.81	50.25	74.00	-23.75	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6695 MHz		
Remark:			

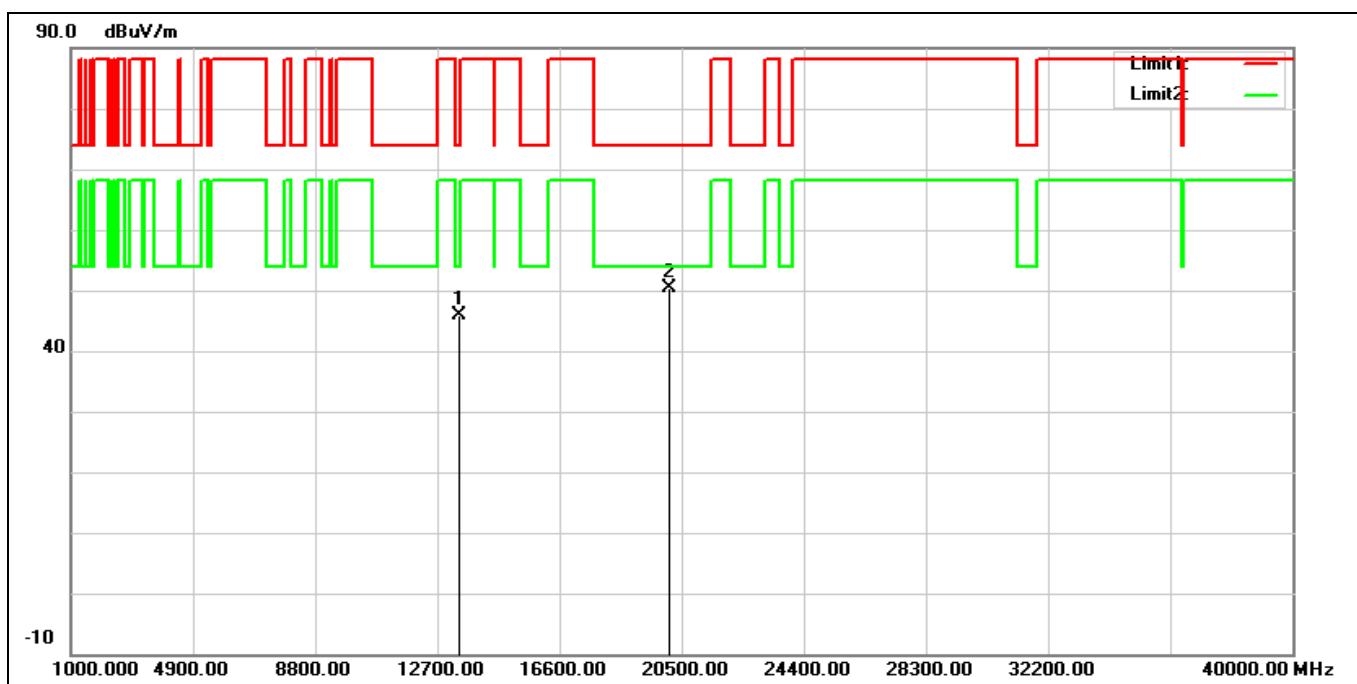


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13390.000	31.13	14.64	45.77	74.00	-28.23	peak
2*	20085.000	29.57	20.93	50.50	74.00	-23.50	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6695 MHz		
Remark:			

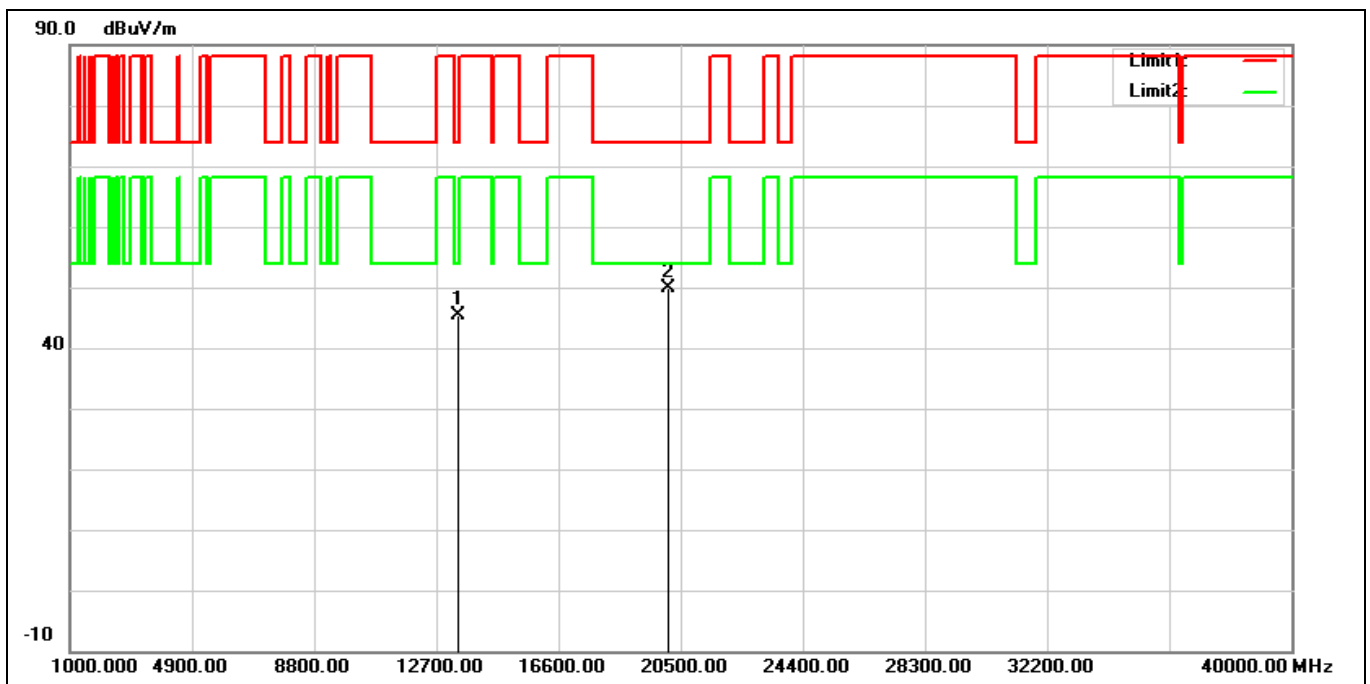


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13390.000	30.81	14.64	45.45	74.00	-28.55	peak
2*	20085.000	28.90	20.93	49.83	74.00	-24.17	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6855 MHz		
Remark:			

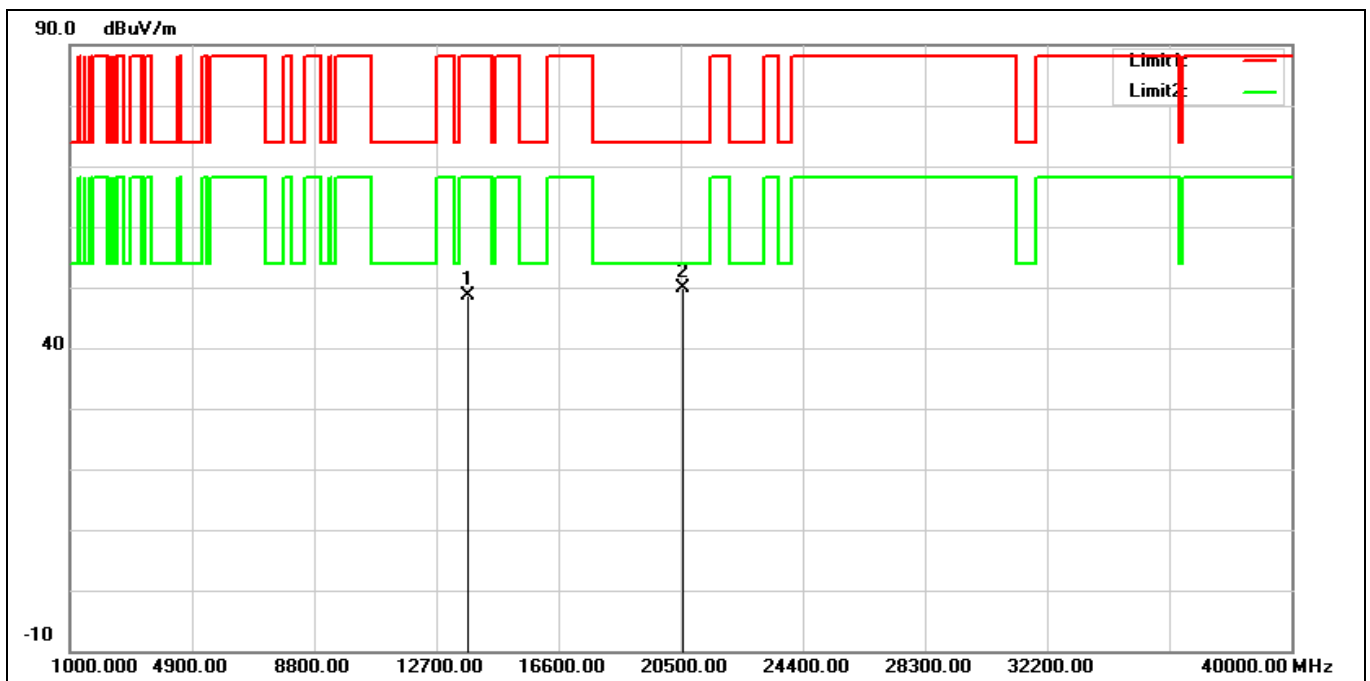


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13710.000	32.74	15.99	48.73	88.20	-39.47	peak
2*	20565.000	29.94	19.96	49.90	74.00	-24.10	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6855 MHz		
Remark:			

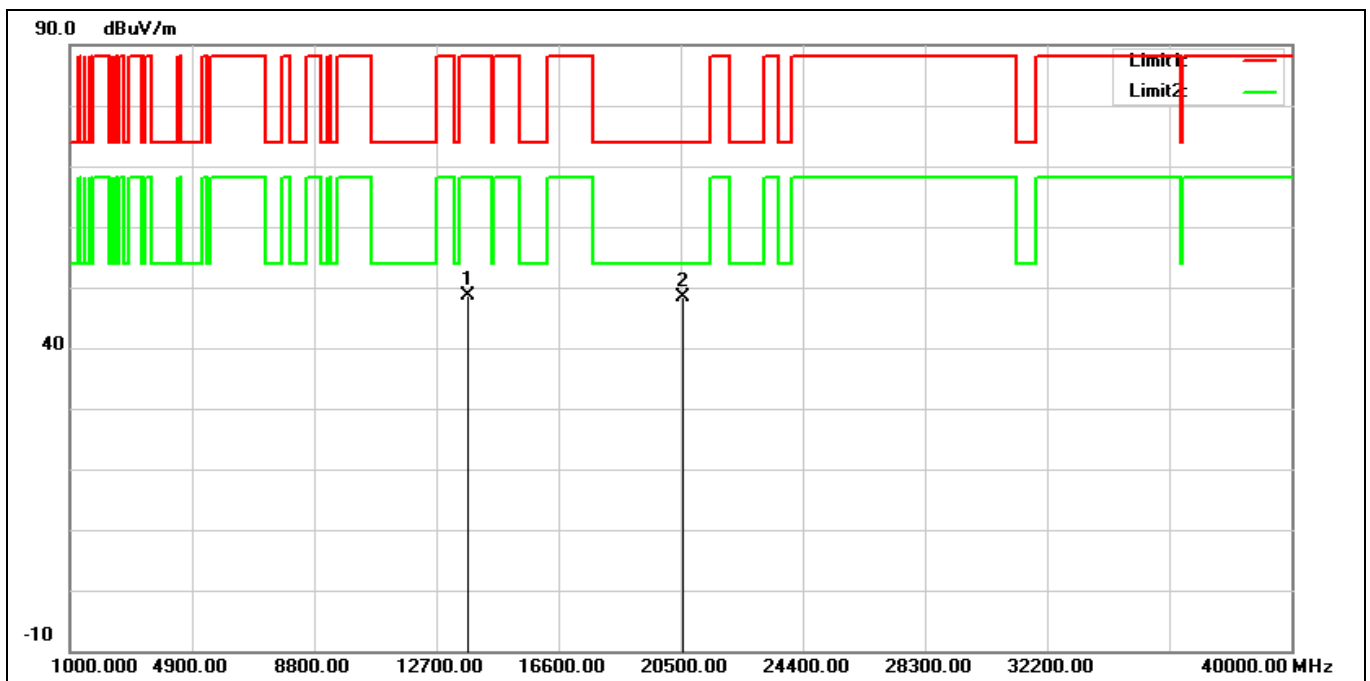


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13710.000	32.60	15.99	48.59	88.20	-39.61	peak
2*	20565.000	28.45	19.96	48.41	74.00	-25.59	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6875 MHz		
Remark:			

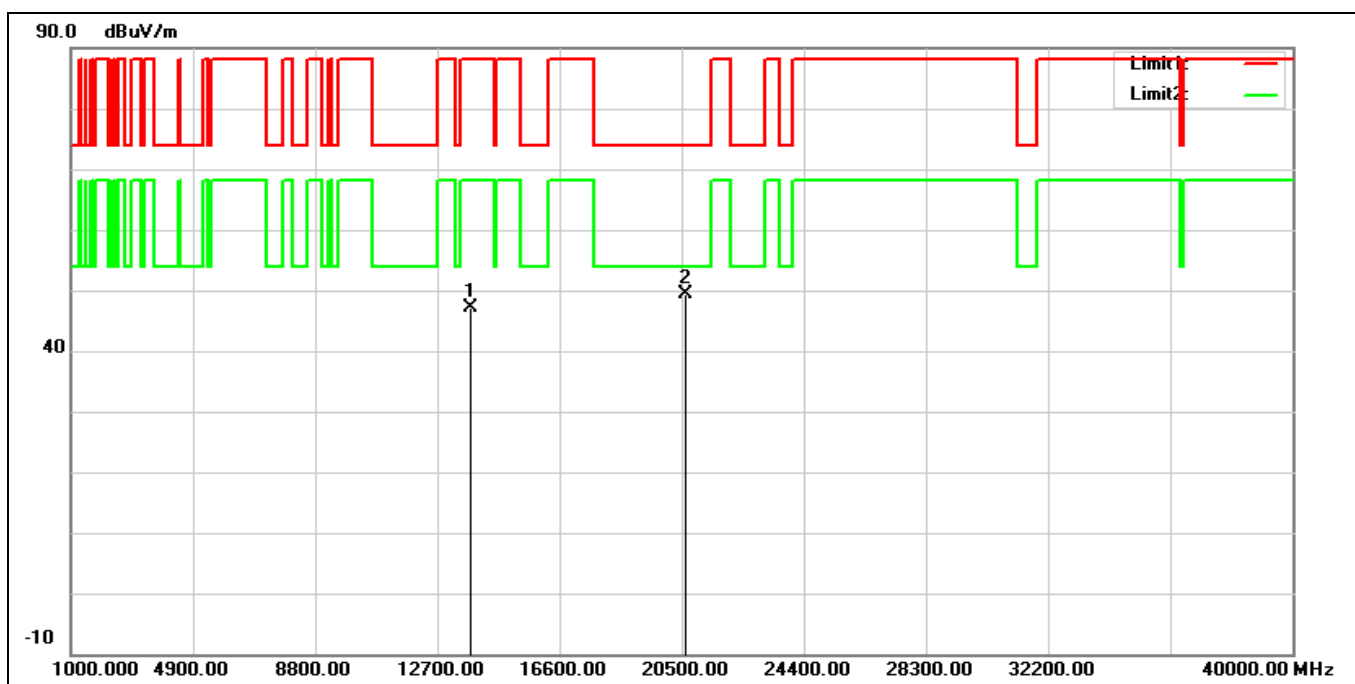


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13750.000	31.04	16.11	47.15	88.20	-41.05	peak
2*	20625.000	29.17	20.09	49.26	74.00	-24.74	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6875 MHz		
Remark:			

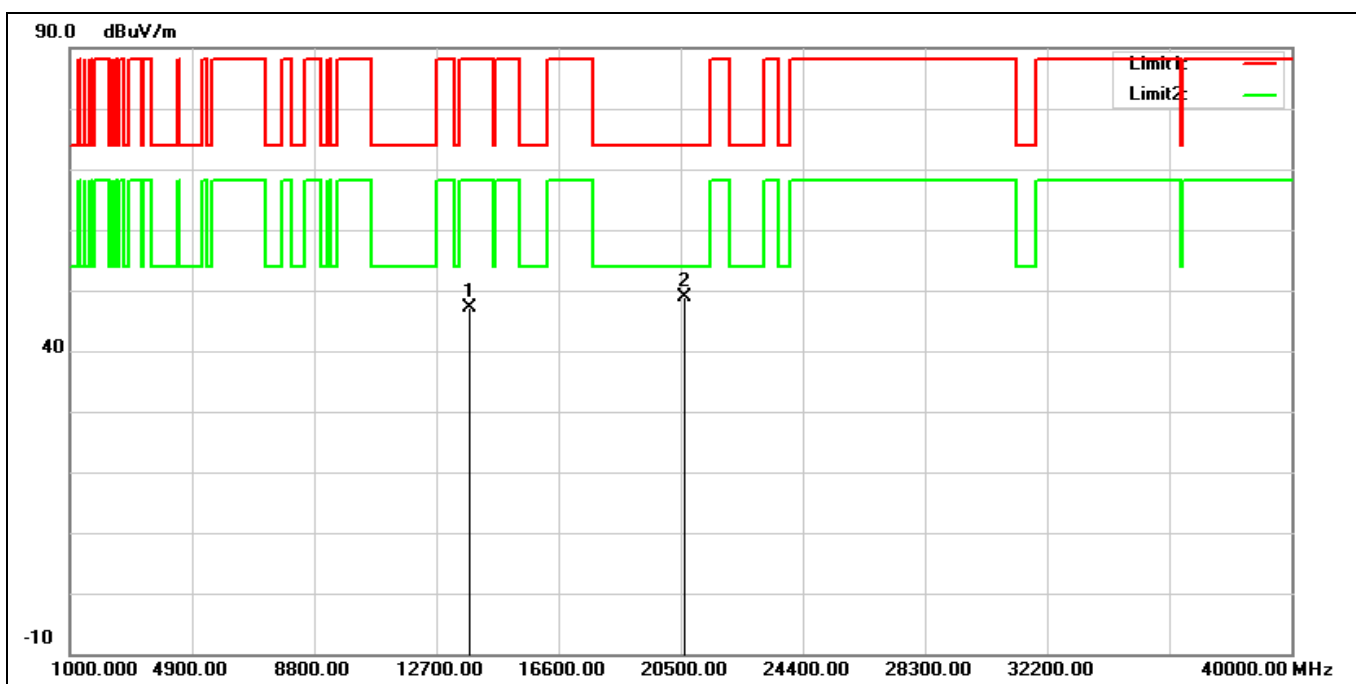


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13750.000	31.04	16.11	47.15	88.20	-41.05	peak
2*	20625.000	28.78	20.09	48.87	74.00	-25.13	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6895 MHz		
Remark:			

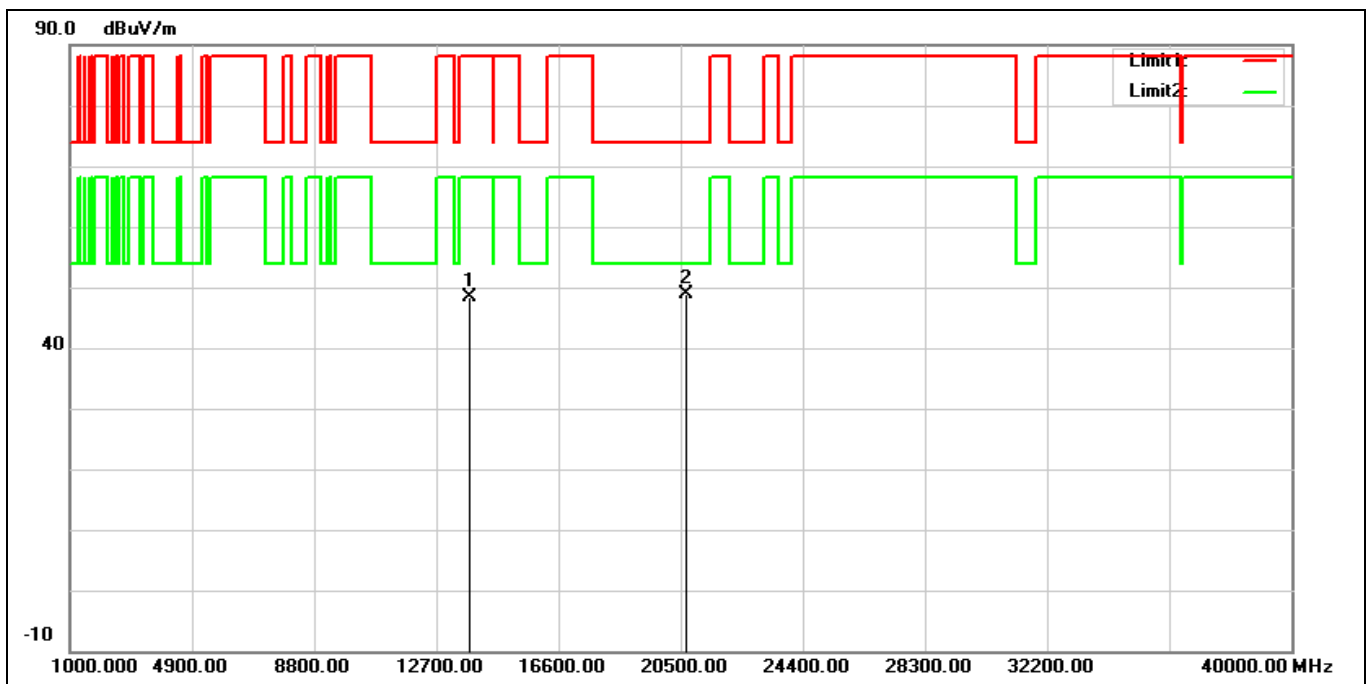


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13790.000	32.06	16.22	48.28	88.20	-39.92	peak
2*	20685.000	28.53	20.24	48.77	74.00	-25.23	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6895 MHz		
Remark:			

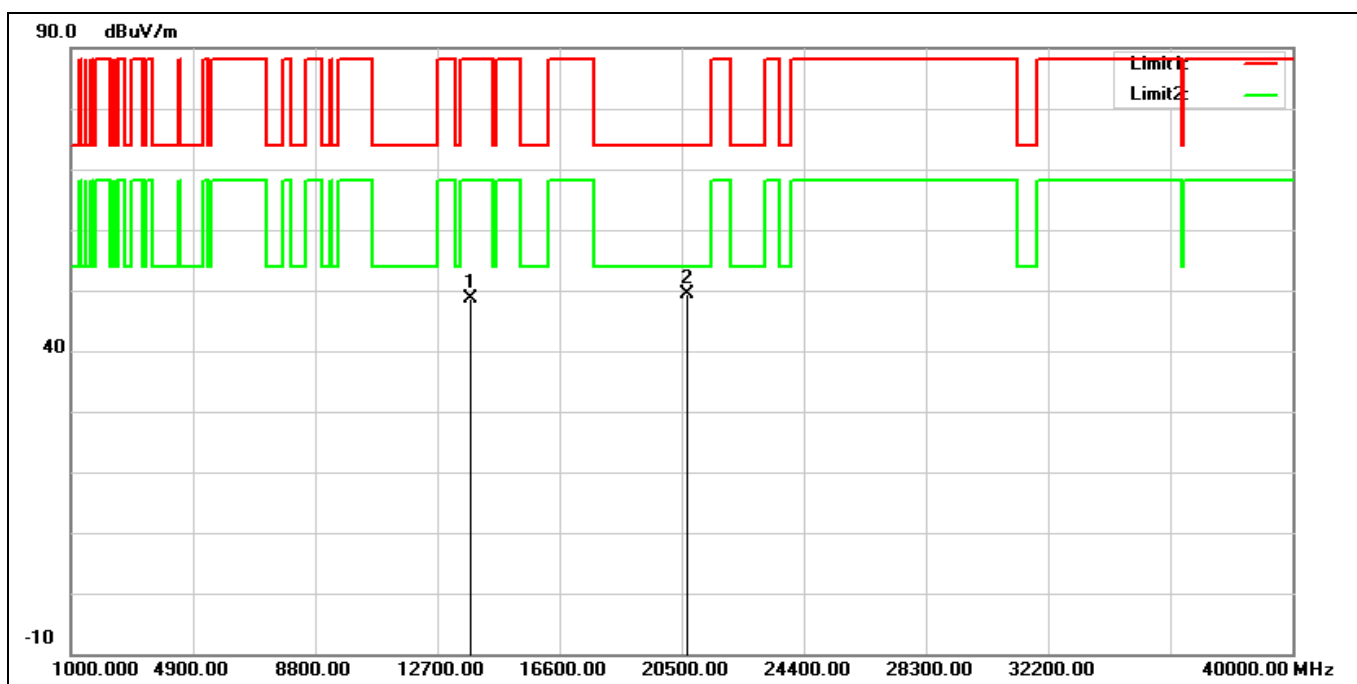


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13790.000	32.43	16.22	48.65	88.20	-39.55	peak
2*	20685.000	29.11	20.24	49.35	74.00	-24.65	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 6995 MHz		
Remark:			

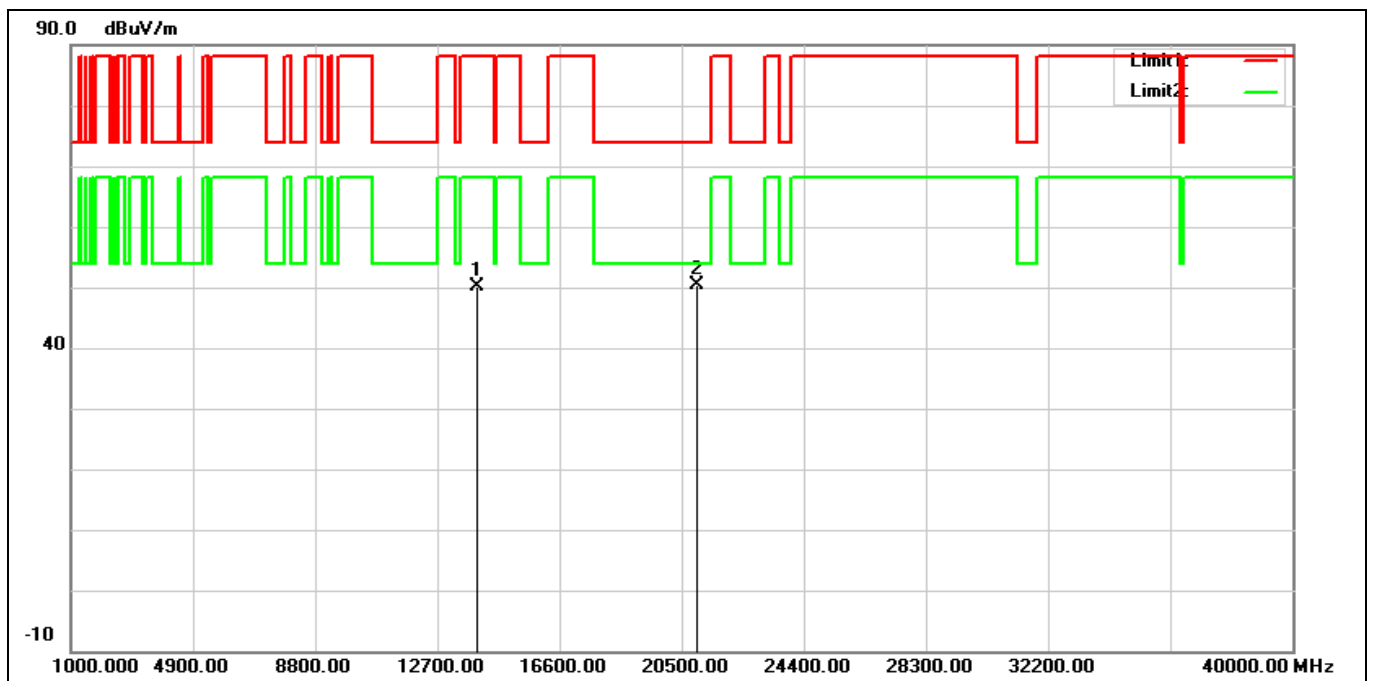


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13990.000	32.21	17.99	50.20	88.20	-38.00	peak
2*	20985.000	29.45	20.94	50.39	74.00	-23.61	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 6995 MHz		
Remark:			

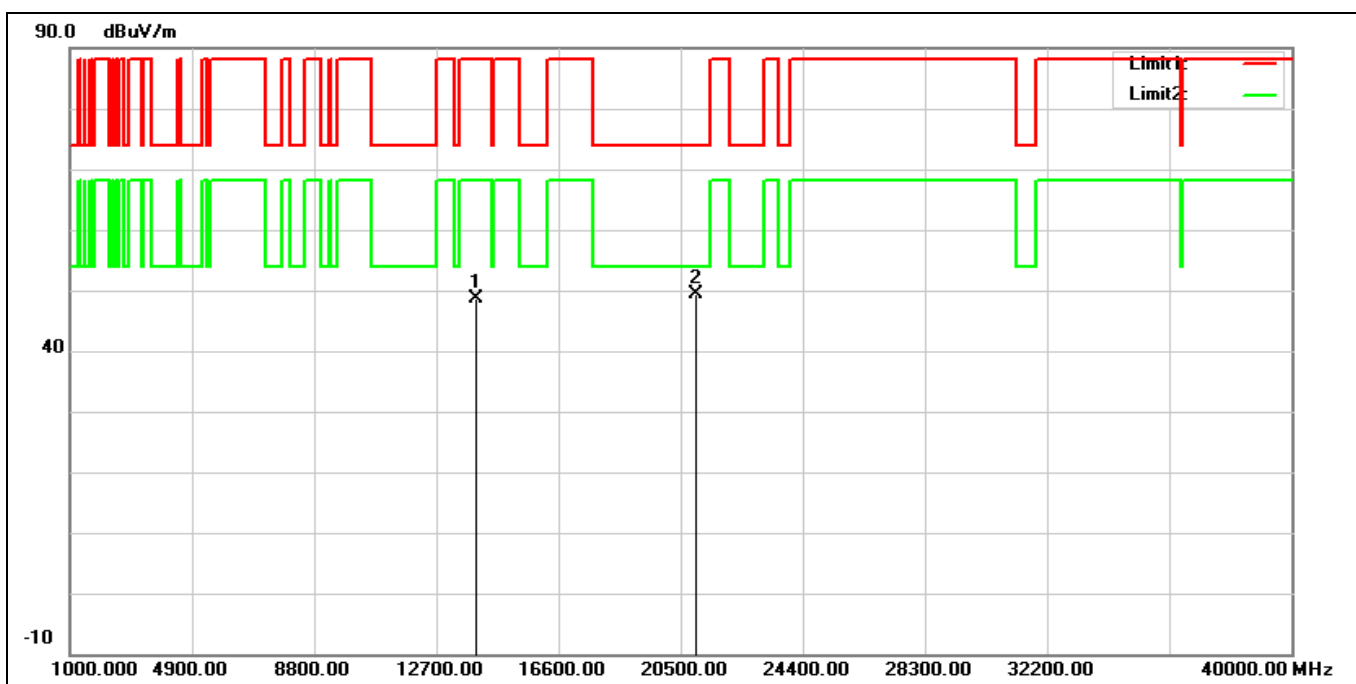


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13990.000	30.71	17.99	48.70	88.20	-39.50	peak
2*	20985.000	28.44	20.94	49.38	74.00	-24.62	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

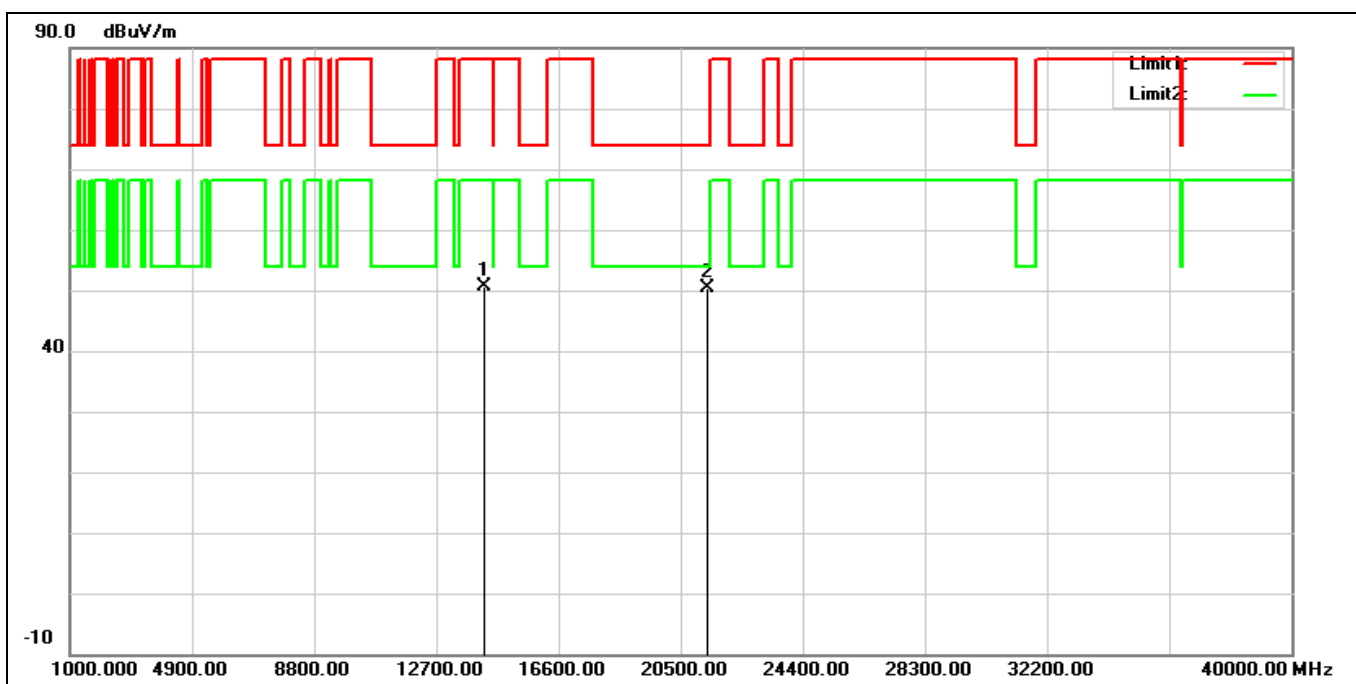


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14230.000	32.12	18.58	50.70	88.20	-37.50	peak
2*	21345.000	30.17	20.26	50.43	74.00	-23.57	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT20 7115 MHz		
Remark:			

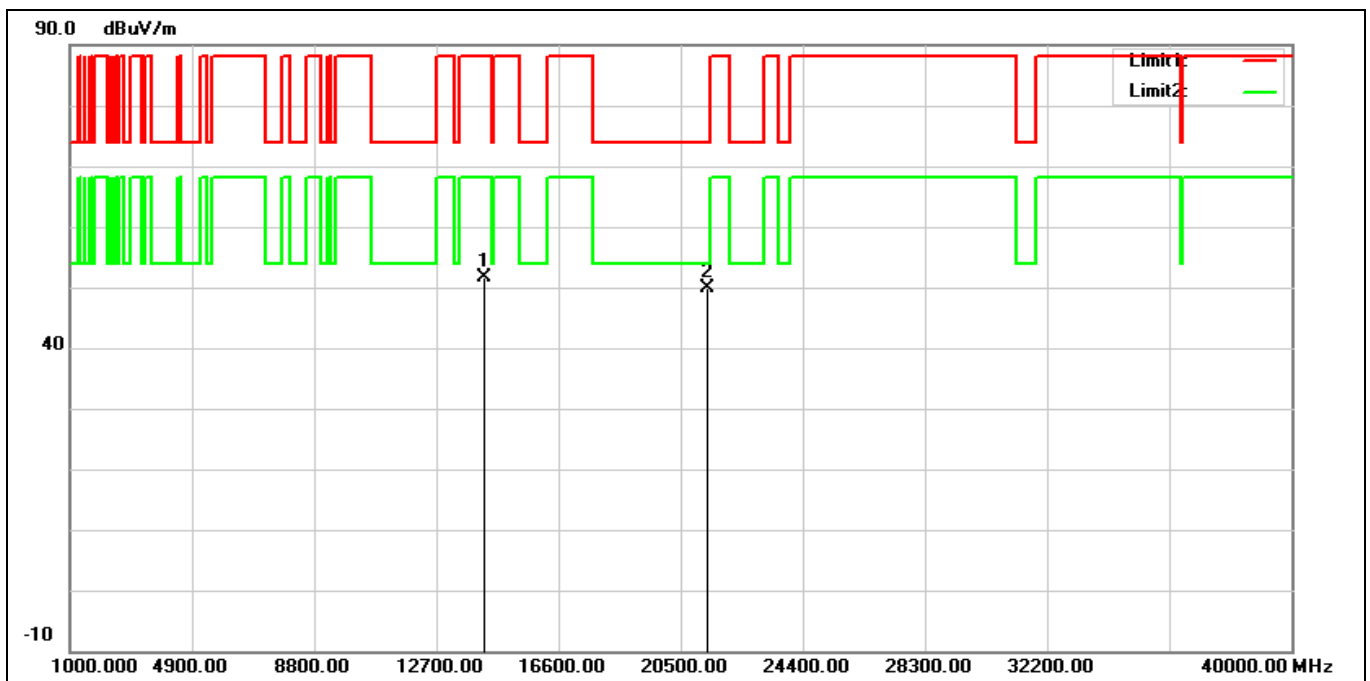


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14230.000	32.93	18.58	51.51	88.20	-36.69	peak
2*	21345.000	29.52	20.26	49.78	74.00	-24.22	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 5965 MHz		
Remark:			

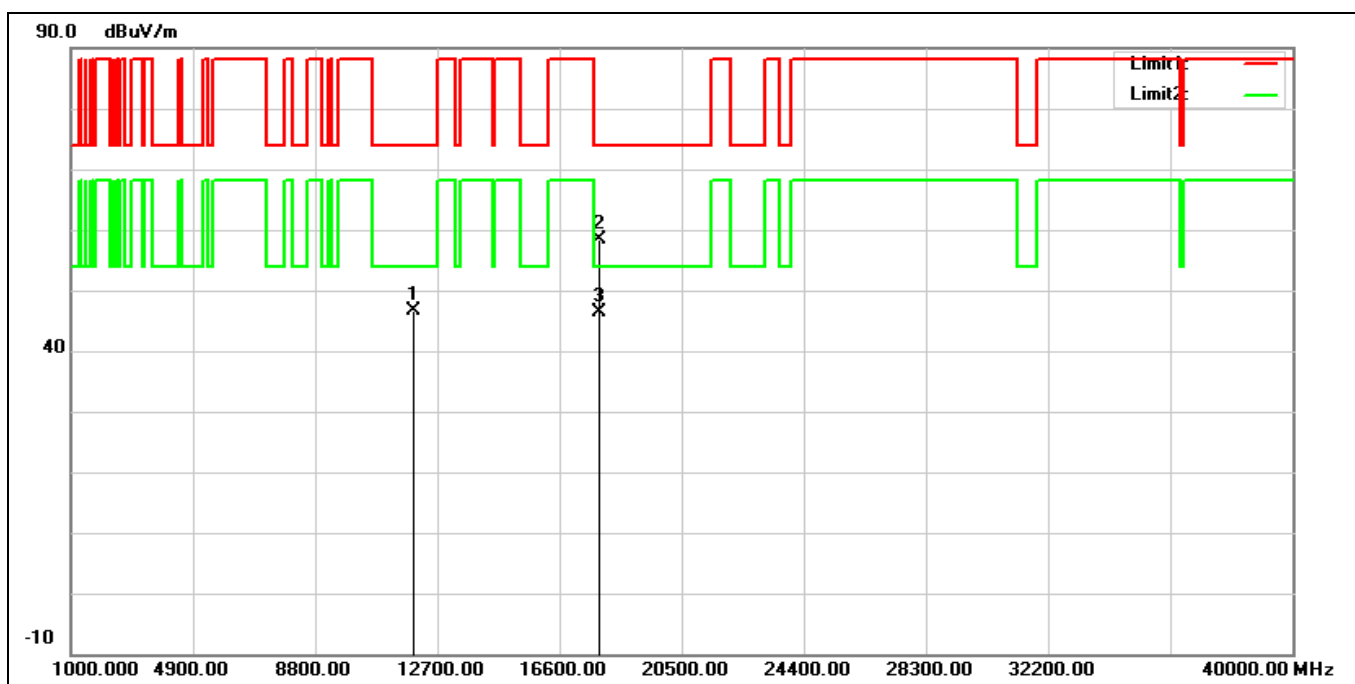


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11930.000	32.64	14.03	46.67	74.00	-27.33	peak
2	17895.000	30.30	28.12	58.42	74.00	-15.58	peak
3*	17895.000	18.37	28.12	46.49	54.00	-7.51	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 5965 MHz		
Remark:			

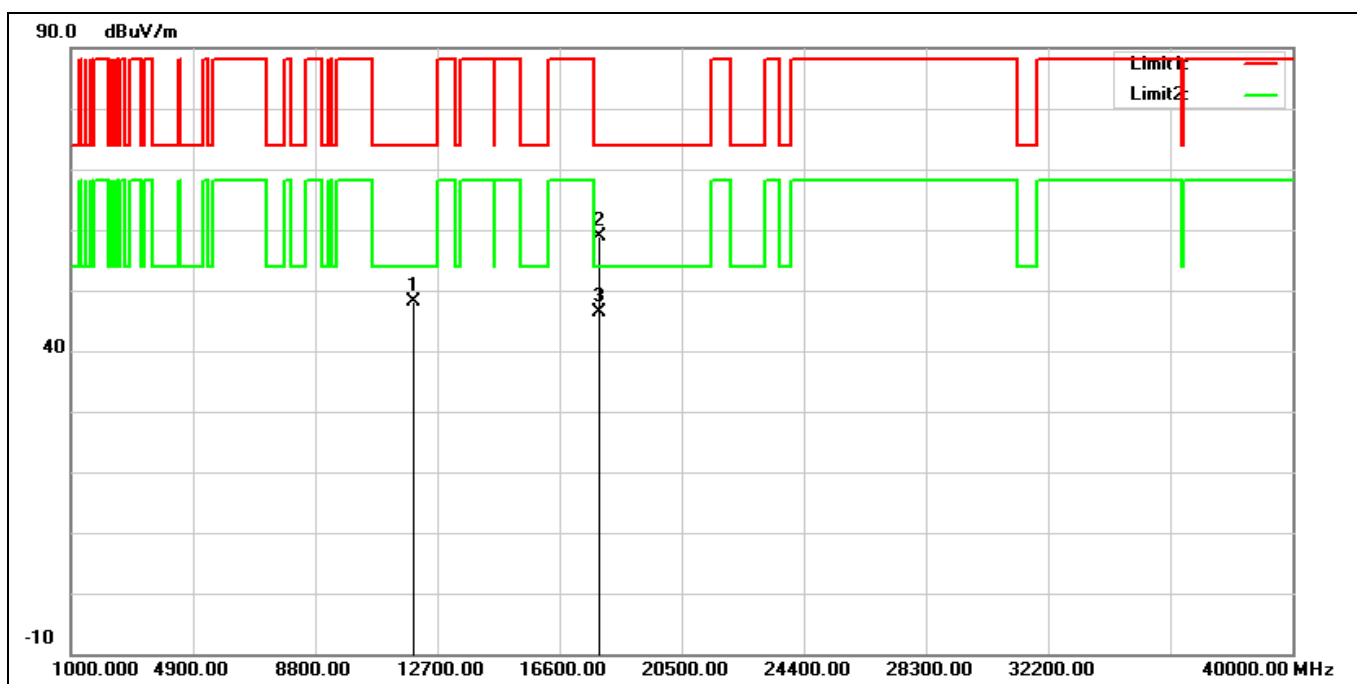


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11930.000	34.10	14.03	48.13	74.00	-25.87	peak
2	17895.000	30.68	28.12	58.80	74.00	-15.20	peak
3*	17895.000	18.31	28.12	46.43	54.00	-7.57	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6165 MHz		
Remark:			

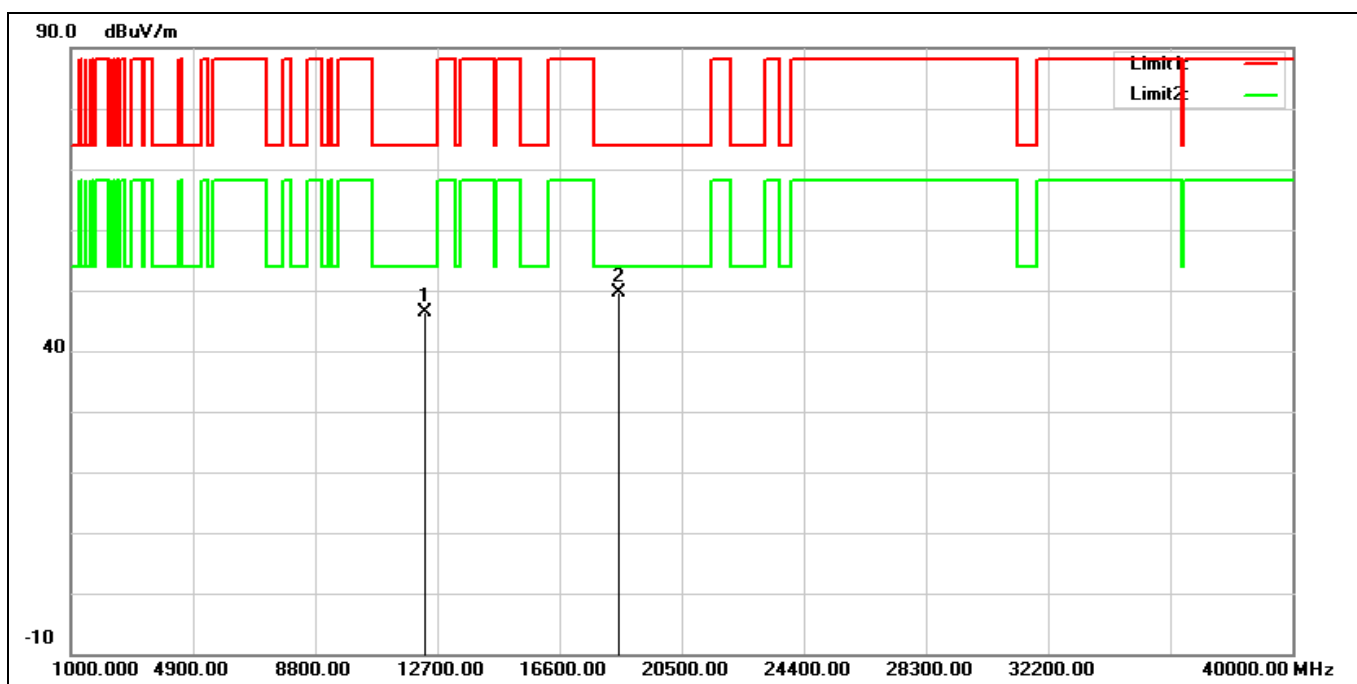


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12330.000	32.01	14.34	46.35	74.00	-27.65	peak
2*	18495.000	31.10	18.59	49.69	74.00	-24.31	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6165 MHz		
Remark:			

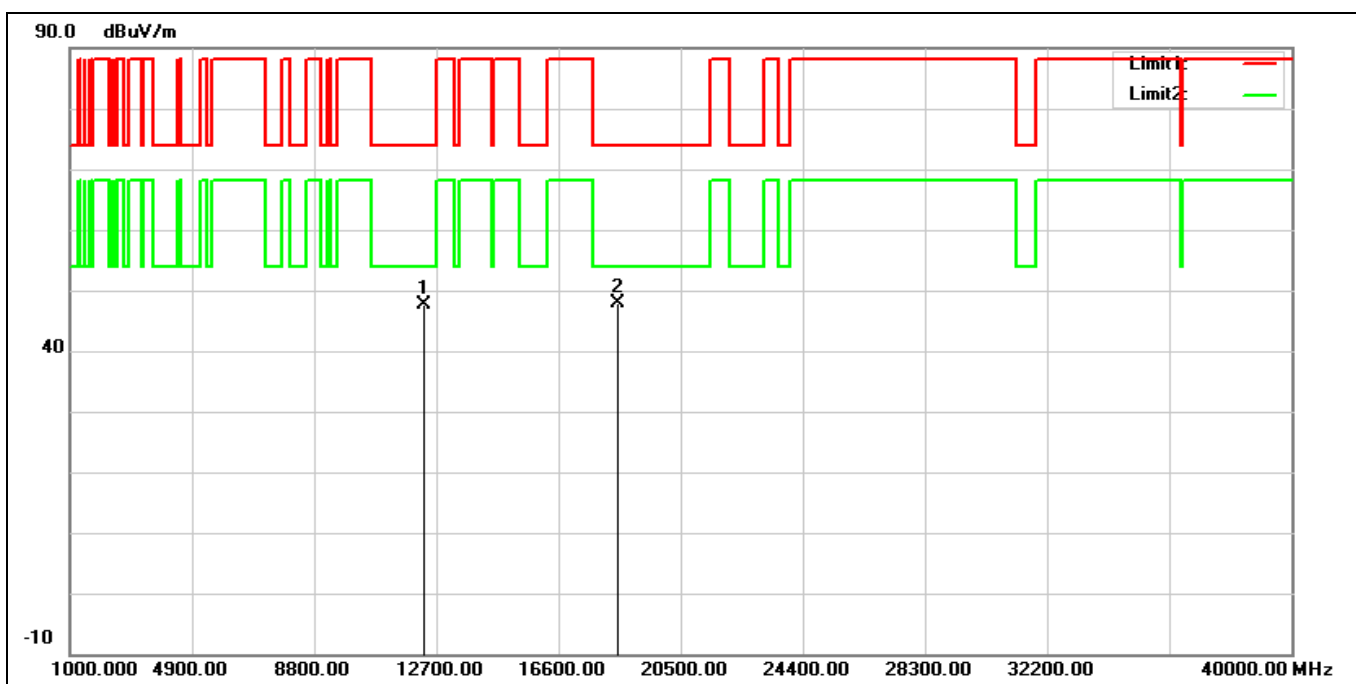


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12330.000	33.26	14.34	47.60	74.00	-26.40	peak
2*	18495.000	29.29	18.59	47.88	74.00	-26.12	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6405 MHz		
Remark:			

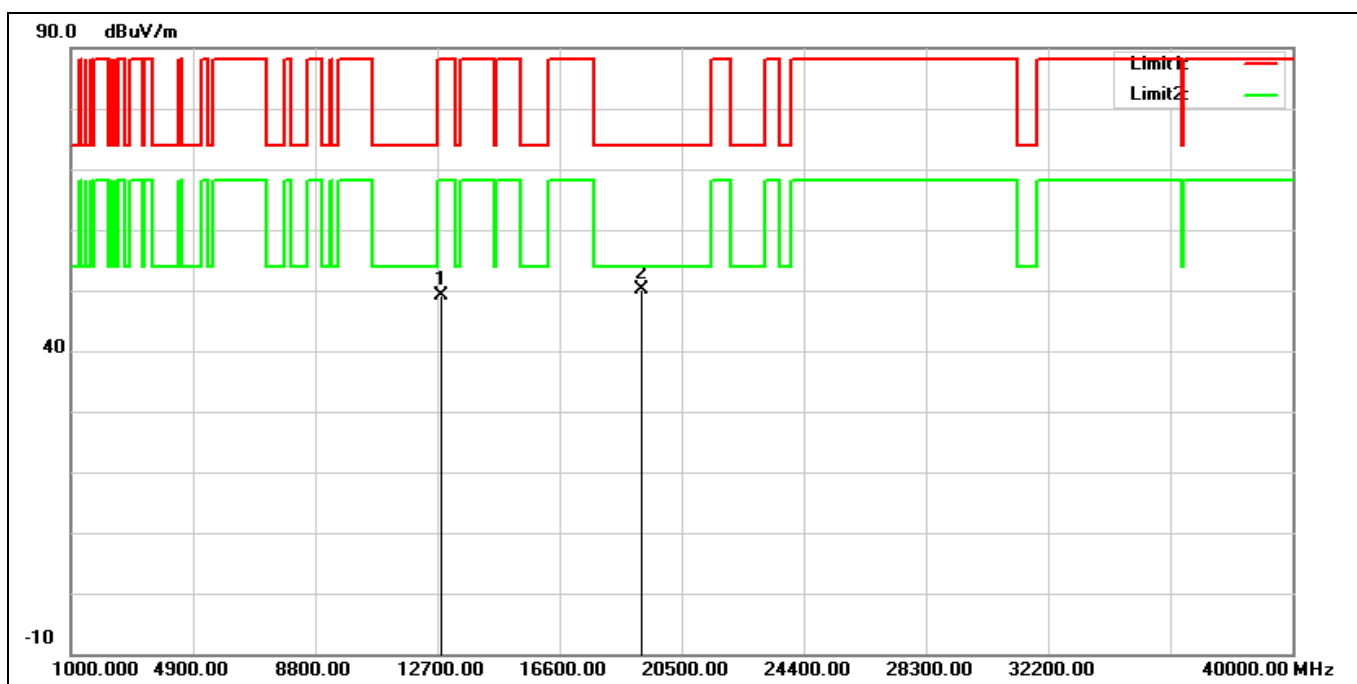


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12810.000	33.28	15.92	49.20	88.20	-39.00	peak
2*	19215.000	30.04	20.07	50.11	74.00	-23.89	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6405 MHz		
Remark:			

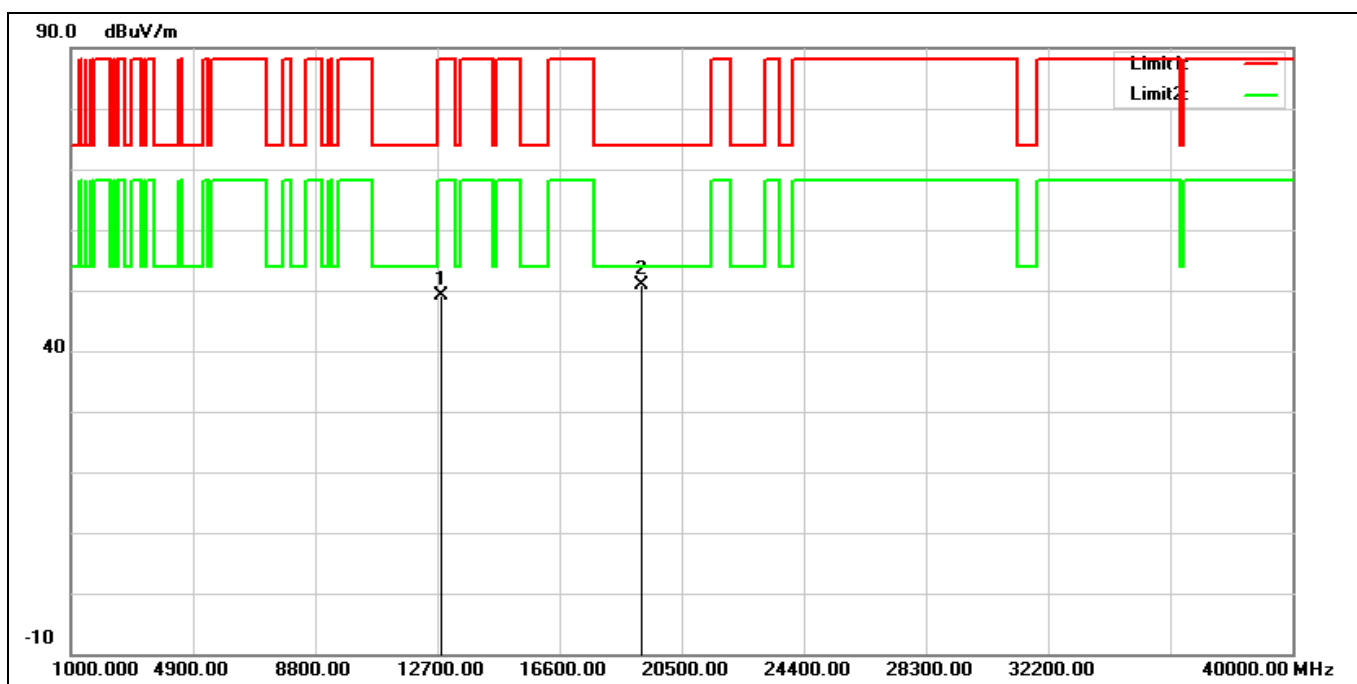


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12810.000	33.25	15.92	49.17	88.20	-39.03	peak
2*	19215.000	30.92	20.07	50.99	74.00	-23.01	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 6445 MHz
Remark:

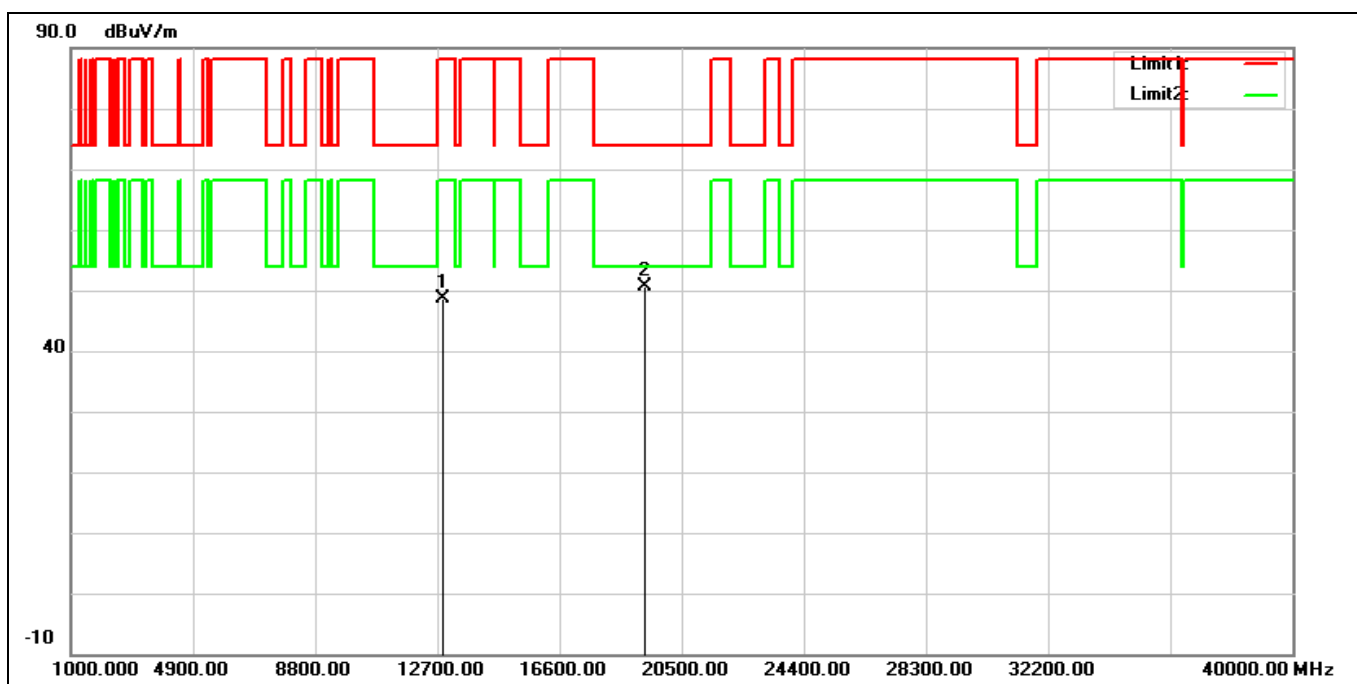


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12890.000	32.51	16.11	48.62	88.20	-39.58	peak
2*	19335.000	30.36	20.35	50.71	74.00	-23.29	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6445 MHz		
Remark:			

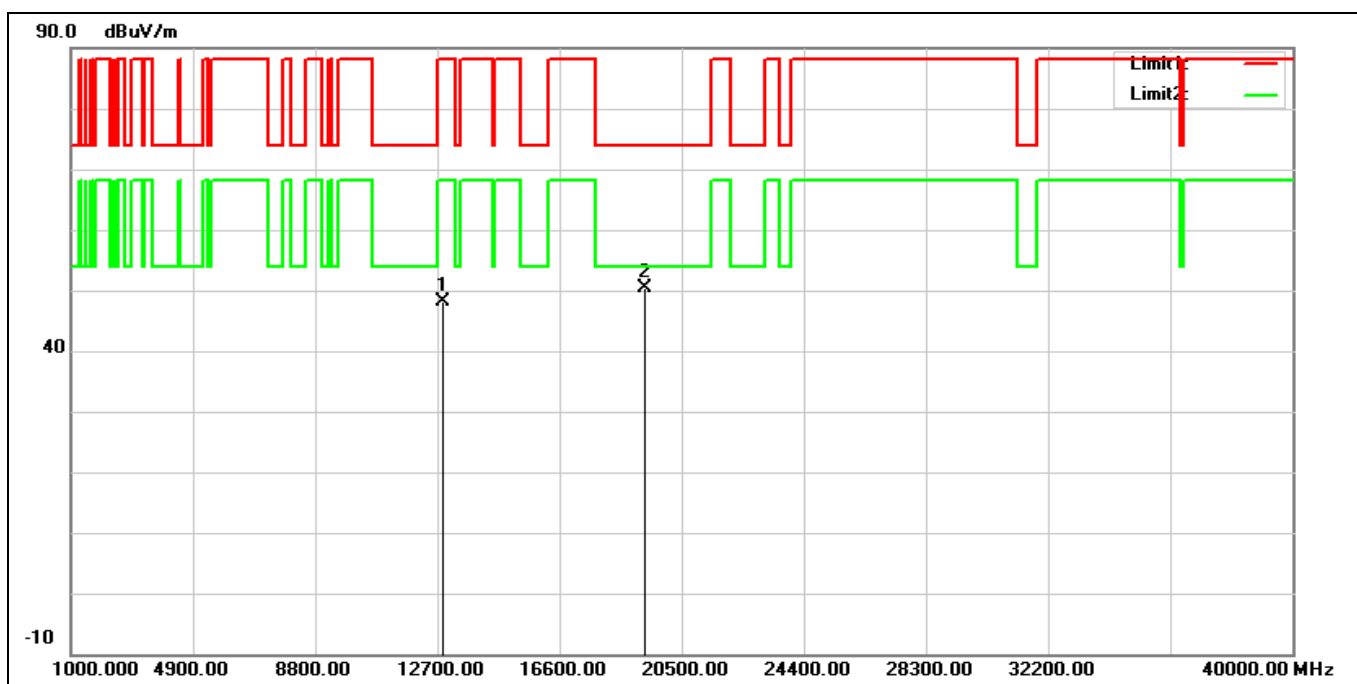


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12890.000	32.06	16.11	48.17	88.20	-40.03	peak
2*	19335.000	30.07	20.35	50.42	74.00	-23.58	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6485 MHz		
Remark:			

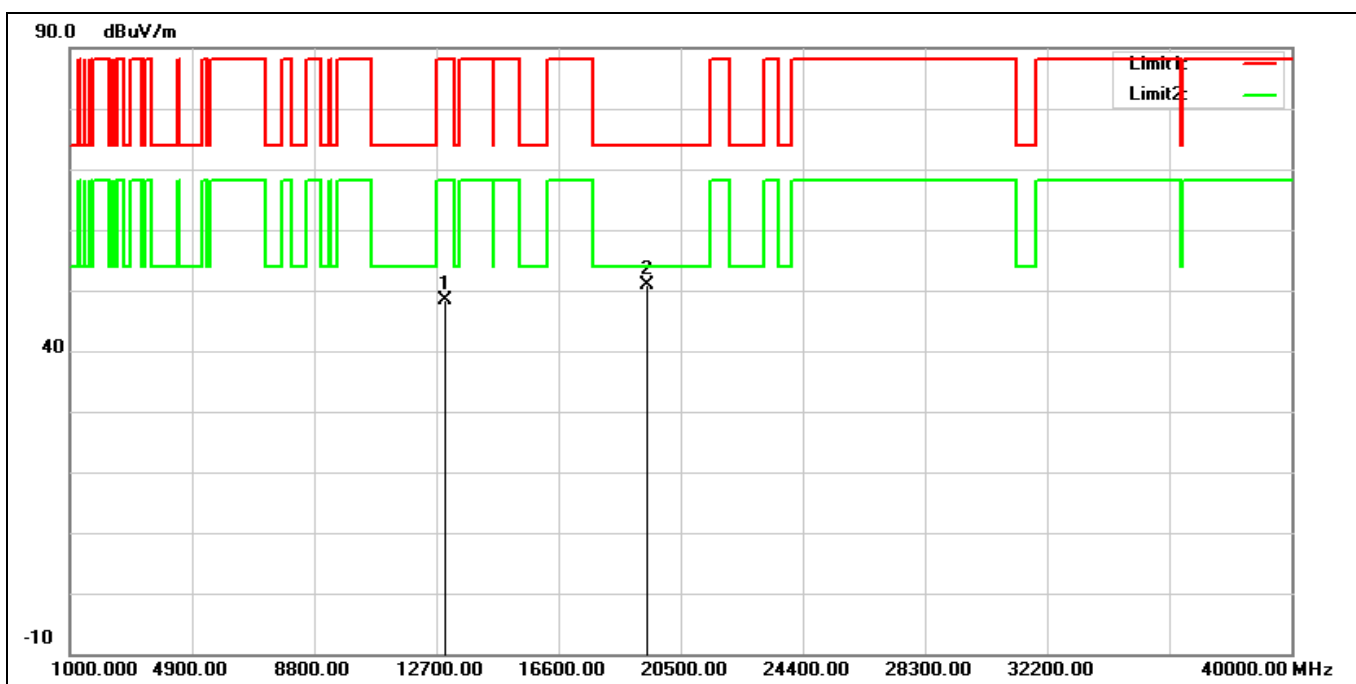


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12970.000	31.90	16.37	48.27	88.20	-39.93	peak
2*	19455.000	30.25	20.64	50.89	74.00	-23.11	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6485 MHz		
Remark:			

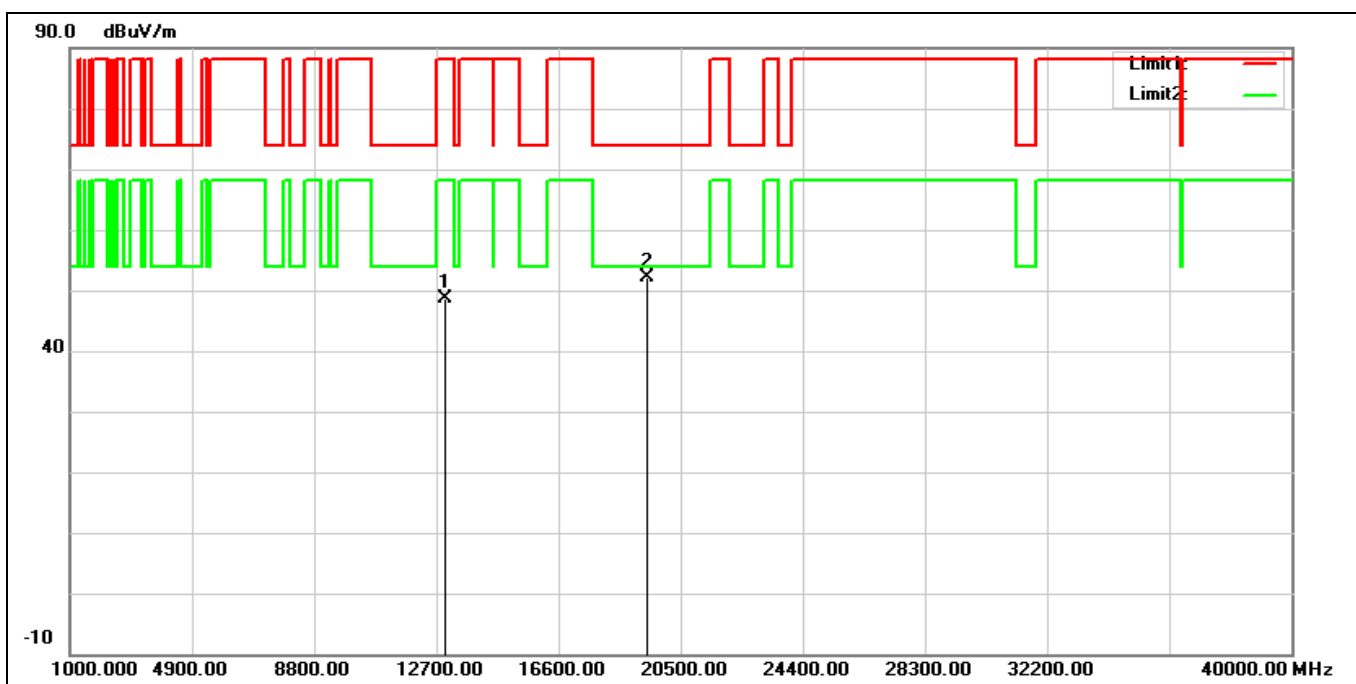


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12970.000	32.19	16.37	48.56	88.20	-39.64	peak
2*	19455.000	31.31	20.64	51.95	74.00	-22.05	peak

Standard: Part 15E Test Site: 966 Chamber
Polarization: Horizontal
Test Mode: 802.11be EHT40 6525 MHz
Remark:

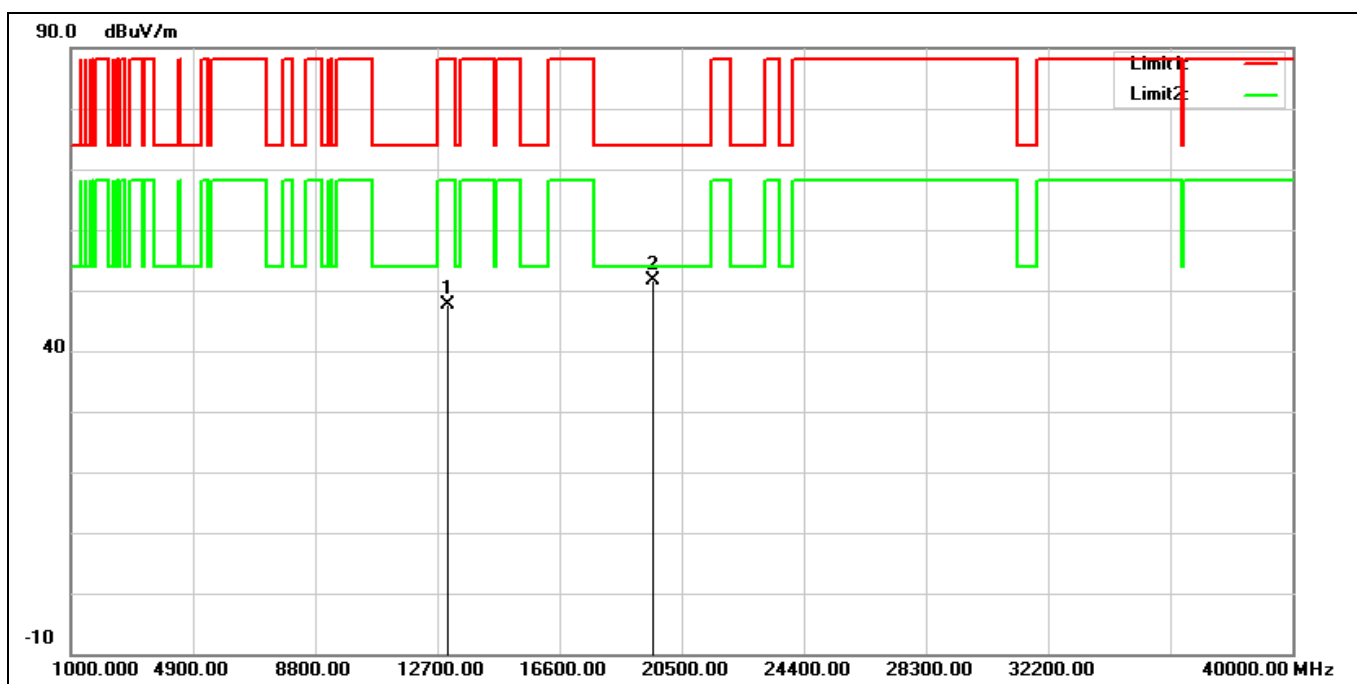


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13050.000	31.50	16.09	47.59	88.20	-40.61	peak
2*	19575.000	30.72	20.81	51.53	74.00	-22.47	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6525 MHz		
Remark:			

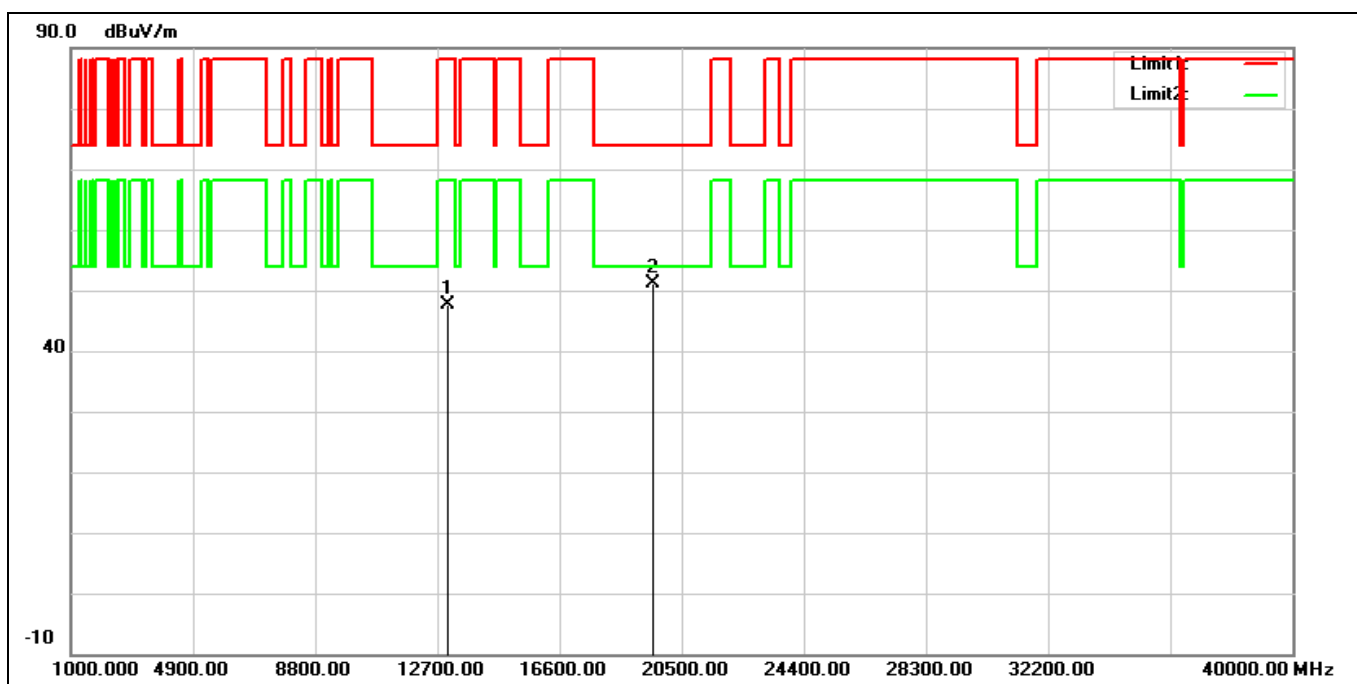


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13050.000	31.60	16.09	47.69	88.20	-40.51	peak
2*	19575.000	30.25	20.81	51.06	74.00	-22.94	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6565 MHz		
Remark:			

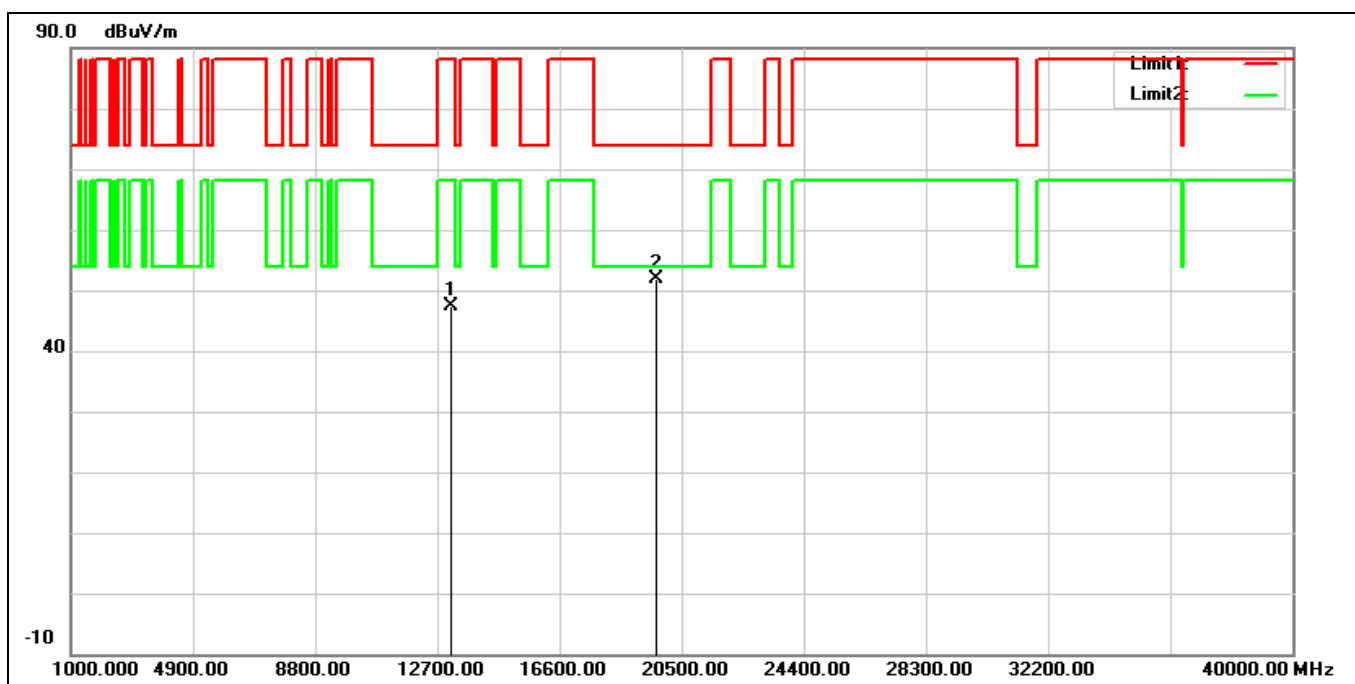


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13130.000	31.78	15.57	47.35	88.20	-40.85	peak
2*	19695.000	31.00	20.91	51.91	74.00	-22.09	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6565 MHz		
Remark:			

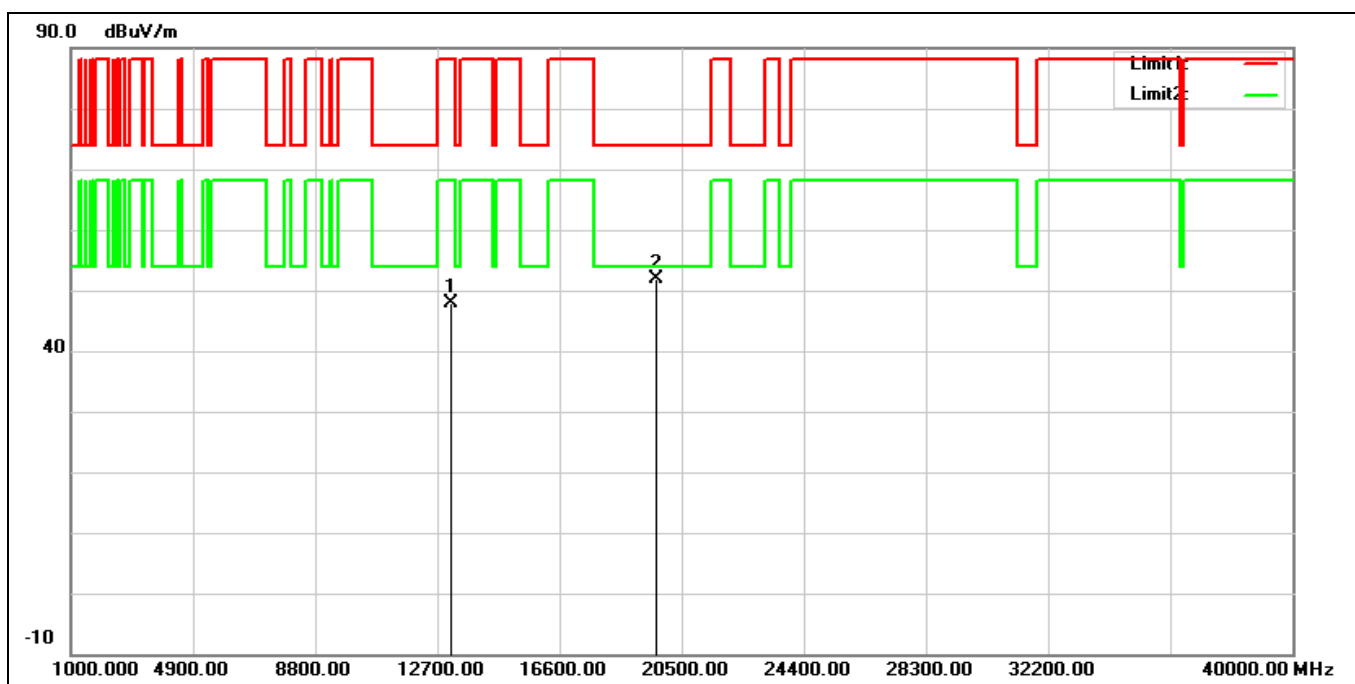


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13130.000	32.19	15.57	47.76	88.20	-40.44	peak
2*	19695.000	31.01	20.91	51.92	74.00	-22.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6685 MHz		
Remark:			

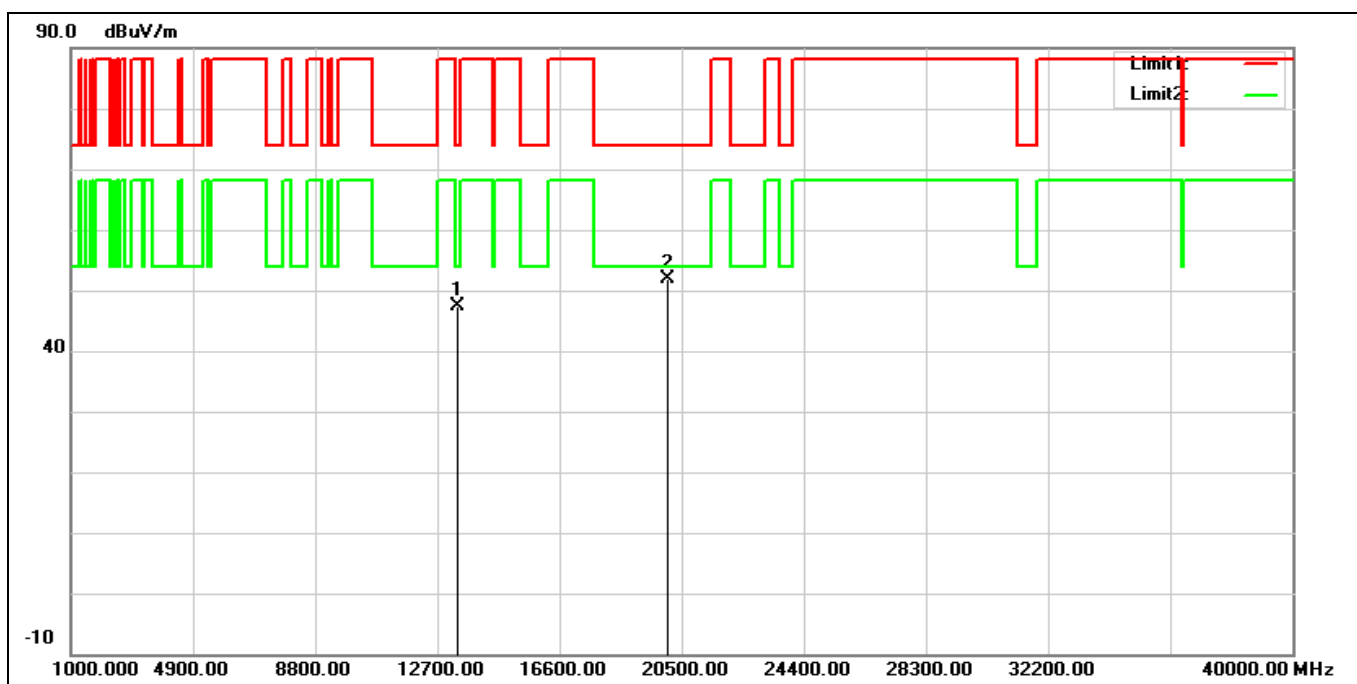


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13370.000	32.59	14.67	47.26	74.00	-26.74	peak
2*	20055.000	30.78	21.01	51.79	74.00	-22.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6685 MHz		
Remark:			

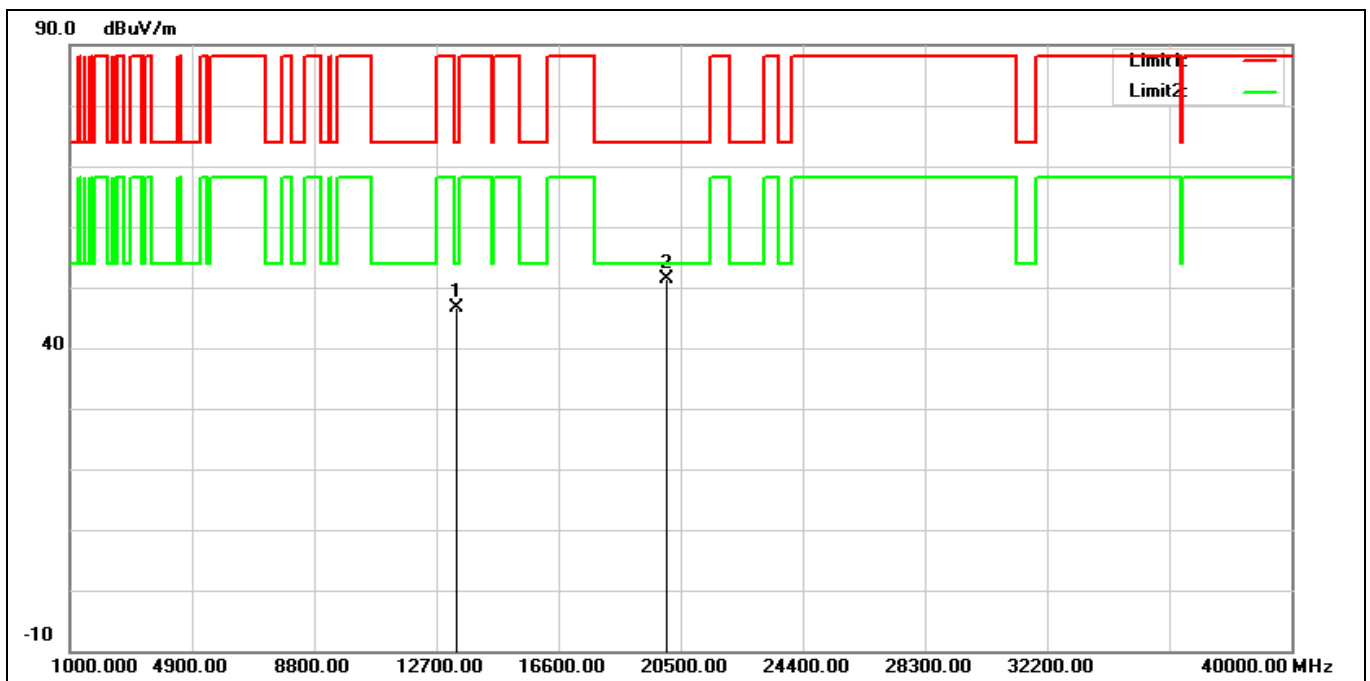


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13370.000	31.88	14.67	46.55	74.00	-27.45	peak
2*	20055.000	30.42	21.01	51.43	74.00	-22.57	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6845 MHz		
Remark:			

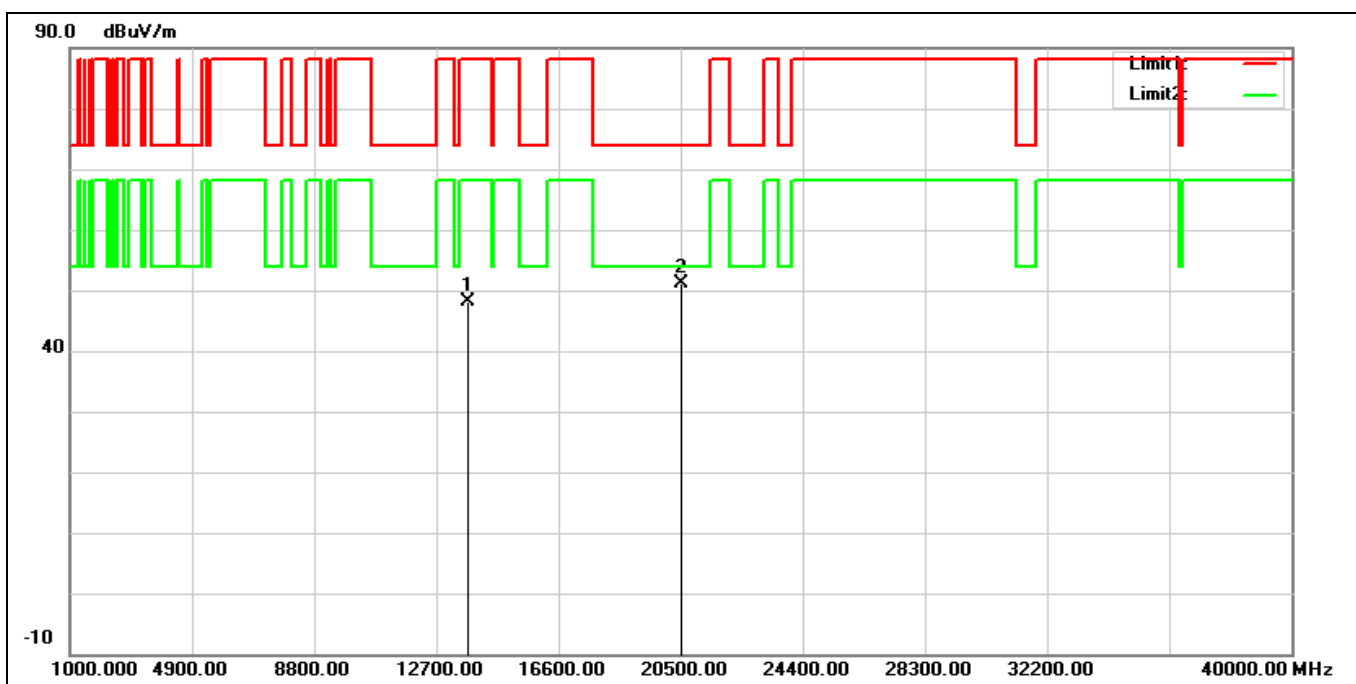


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13690.000	32.30	15.87	48.17	88.20	-40.03	peak
2*	20535.000	31.30	19.88	51.18	74.00	-22.82	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6845 MHz		
Remark:			

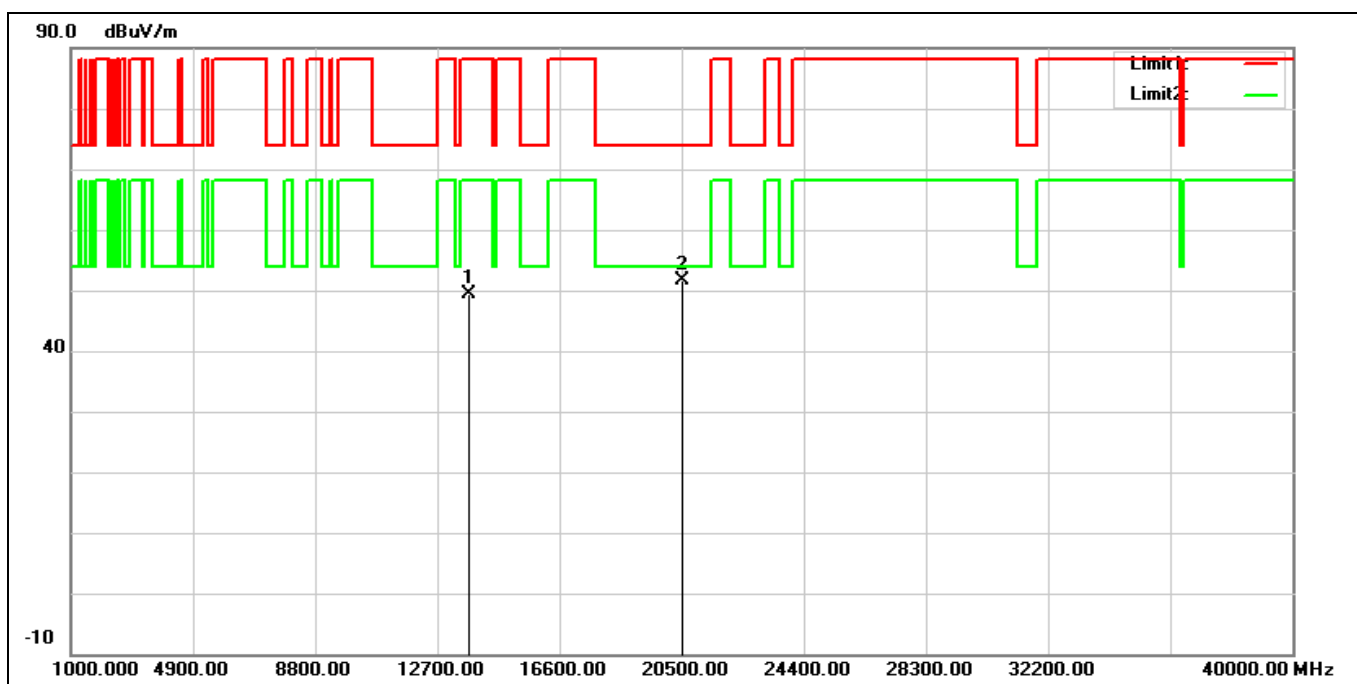


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13690.000	33.56	15.87	49.43	88.20	-38.77	peak
2*	20535.000	31.76	19.88	51.64	74.00	-22.36	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6885 MHz		
Remark:			

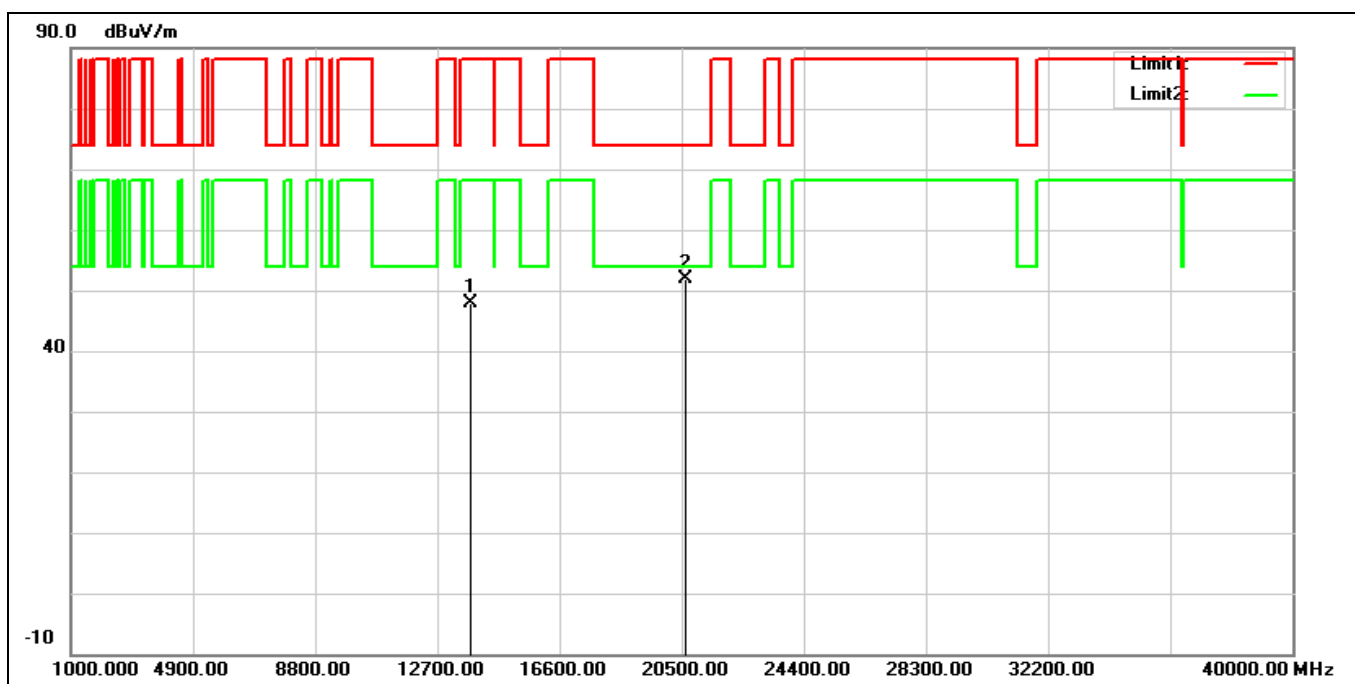


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13770.000	31.74	16.16	47.90	88.20	-40.30	peak
2*	20655.000	31.62	20.17	51.79	74.00	-22.21	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6885 MHz		
Remark:			

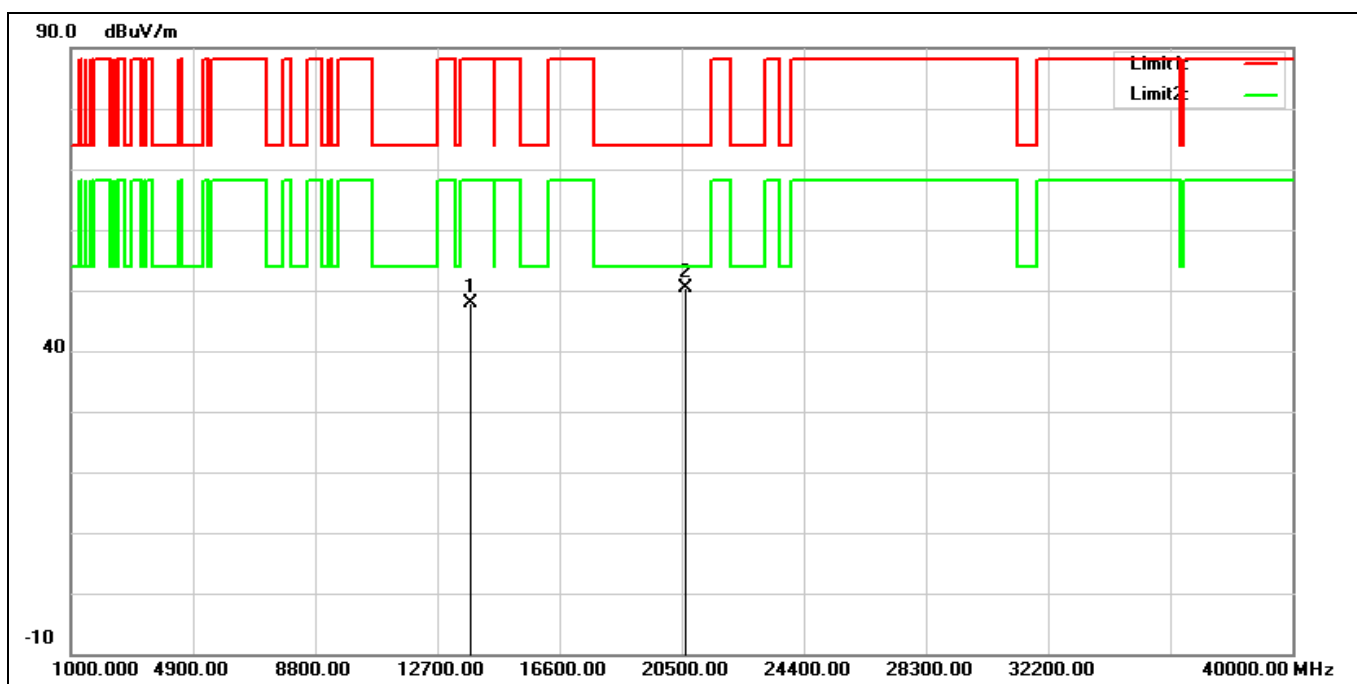


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13770.000	31.77	16.16	47.93	88.20	-40.27	peak
2*	20655.000	30.21	20.17	50.38	74.00	-23.62	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 6925 MHz		
Remark:			

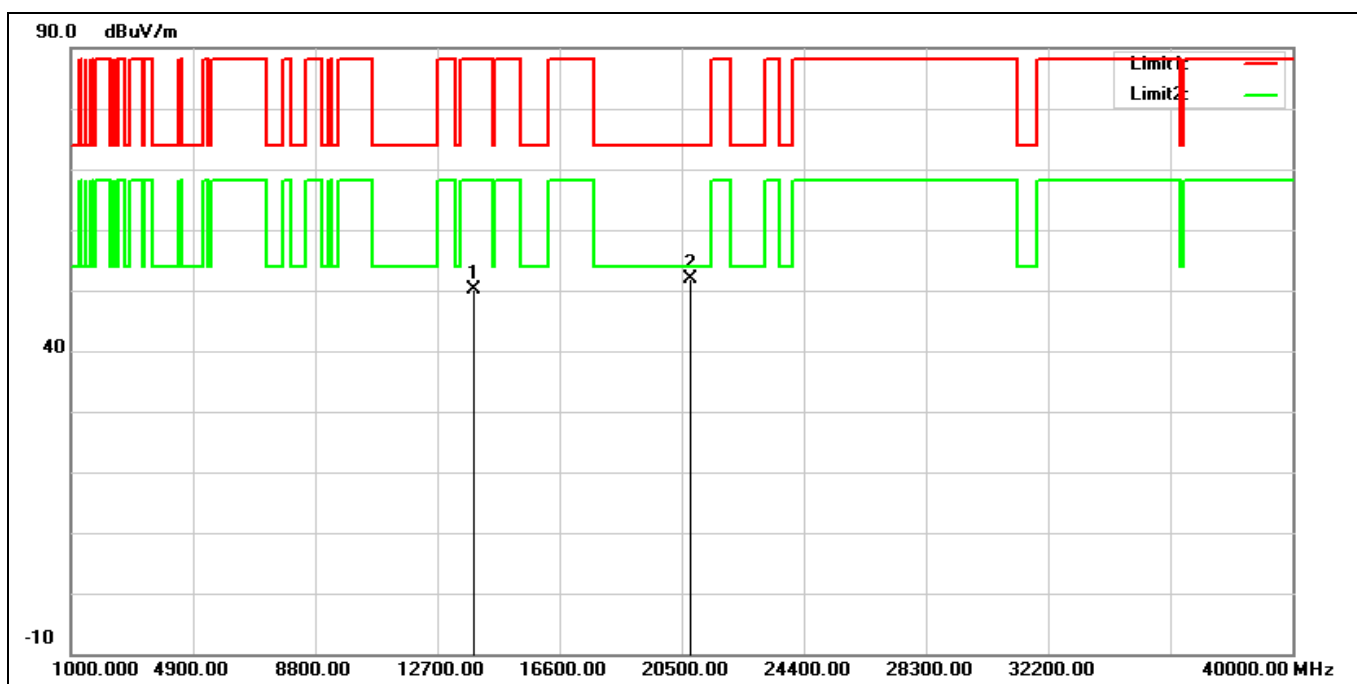


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13850.000	33.35	16.85	50.20	88.20	-38.00	peak
2*	20775.000	31.46	20.45	51.91	74.00	-22.09	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 6925 MHz		
Remark:			

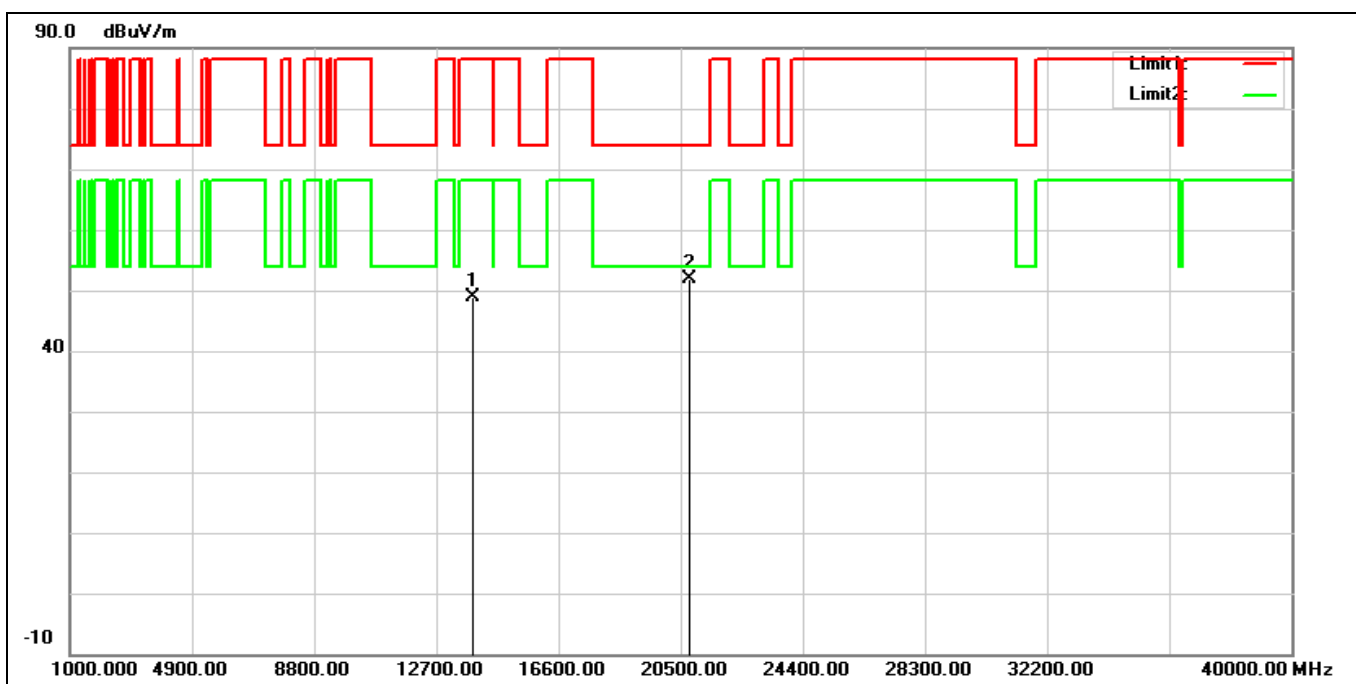


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13850.000	32.08	16.85	48.93	88.20	-39.27	peak
2*	20775.000	31.36	20.45	51.81	74.00	-22.19	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 7005 MHz		
Remark:			

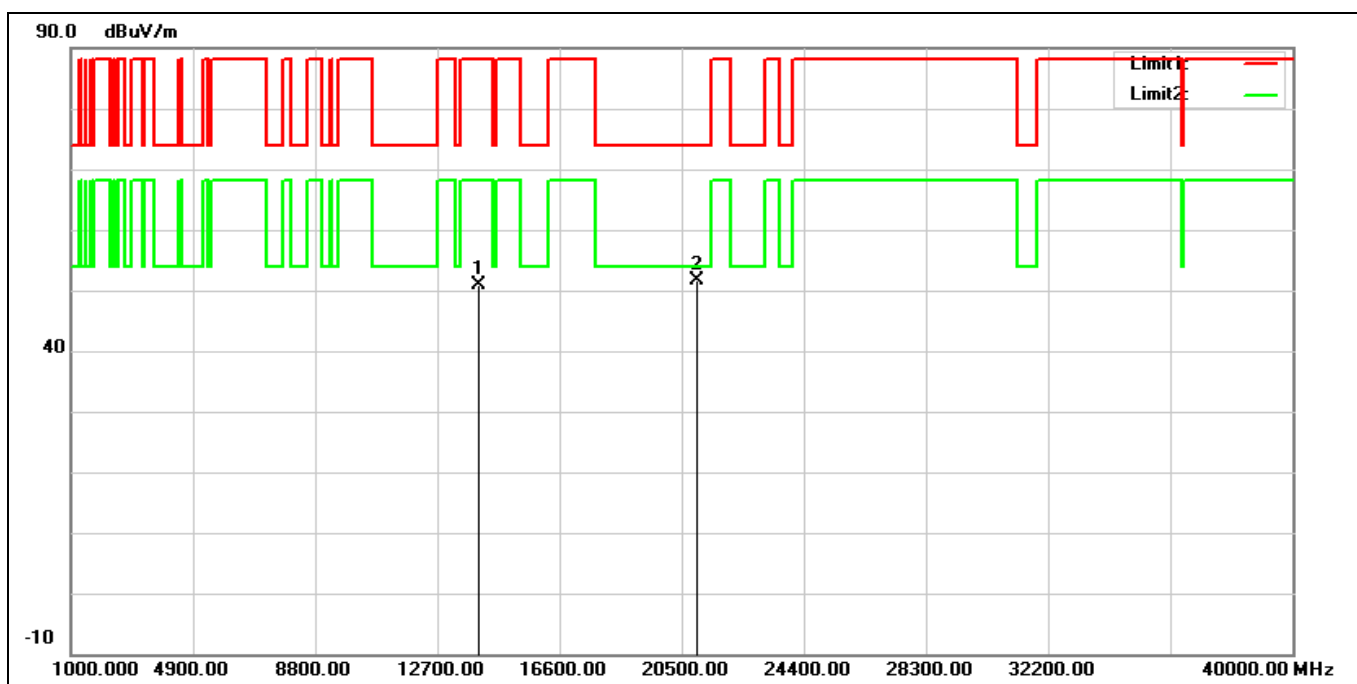


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14010.000	32.89	18.11	51.00	88.20	-37.20	peak
2*	21015.000	30.61	20.95	51.56	74.00	-22.44	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 7005 MHz		
Remark:			

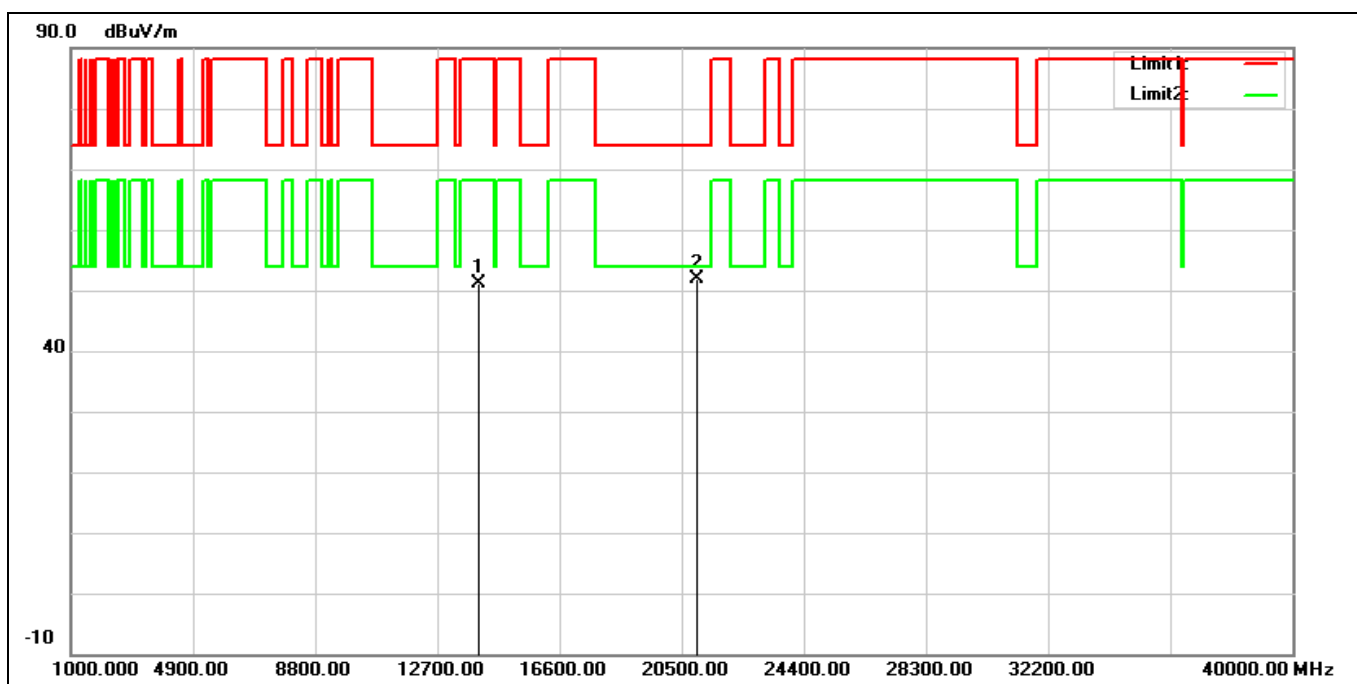


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14010.000	33.04	18.11	51.15	88.20	-37.05	peak
2*	21015.000	30.83	20.95	51.78	74.00	-22.22	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT40 7085 MHz		
Remark:			

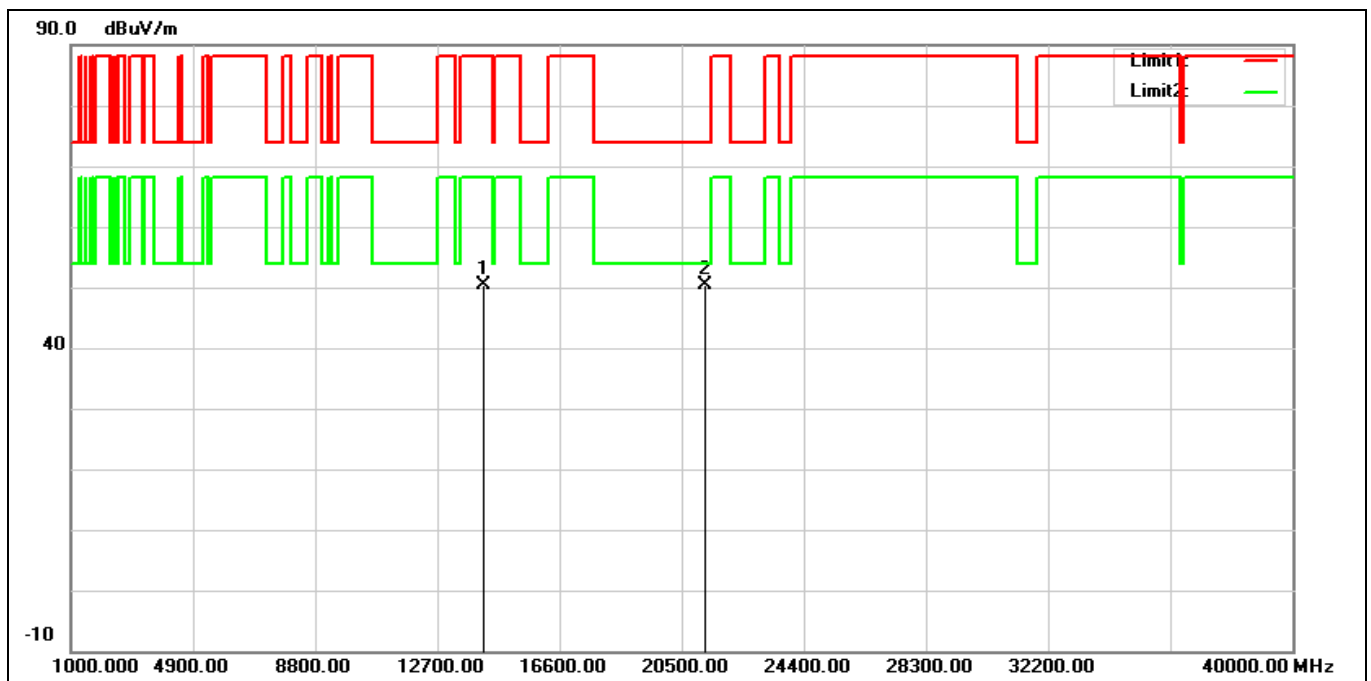


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14170.000	31.71	18.56	50.27	88.20	-37.93	peak
2*	21255.000	29.81	20.45	50.26	74.00	-23.74	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT40 7085 MHz		
Remark:			

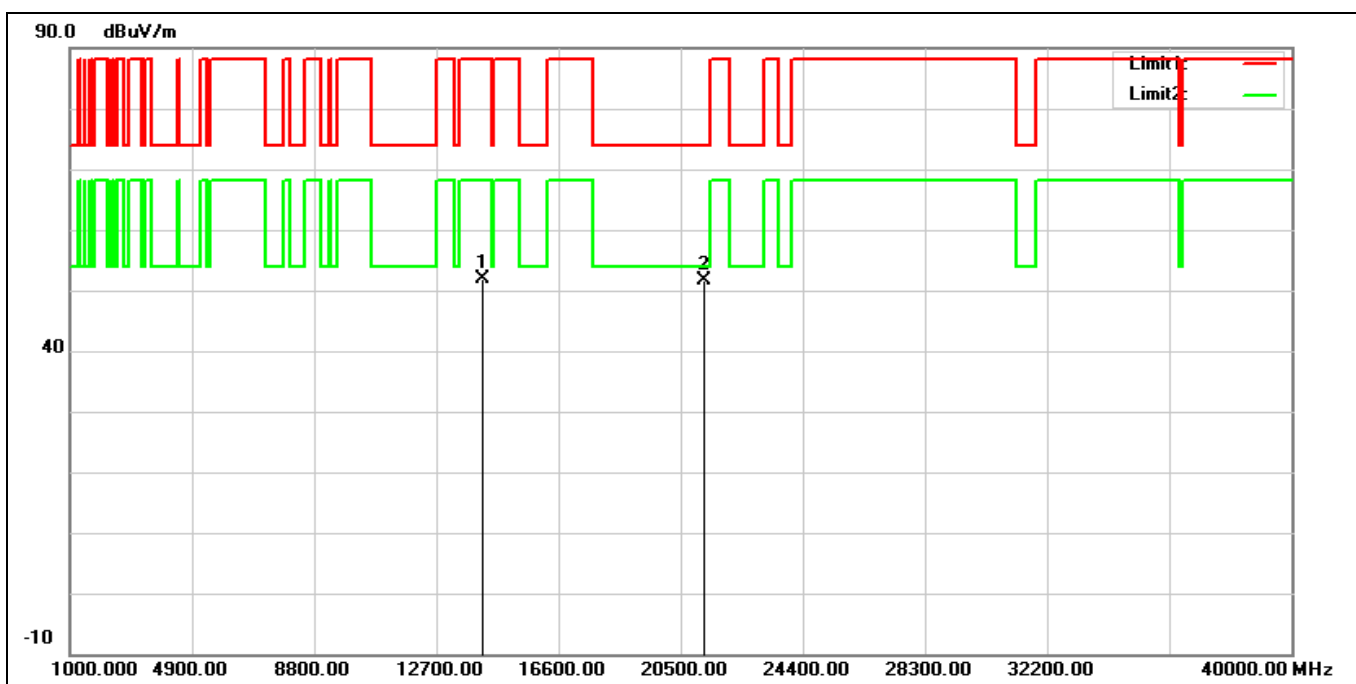


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	14170.000	33.21	18.56	51.77	88.20	-36.43	peak
2*	21255.000	31.06	20.45	51.51	74.00	-22.49	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 5985 MHz		
Remark:			

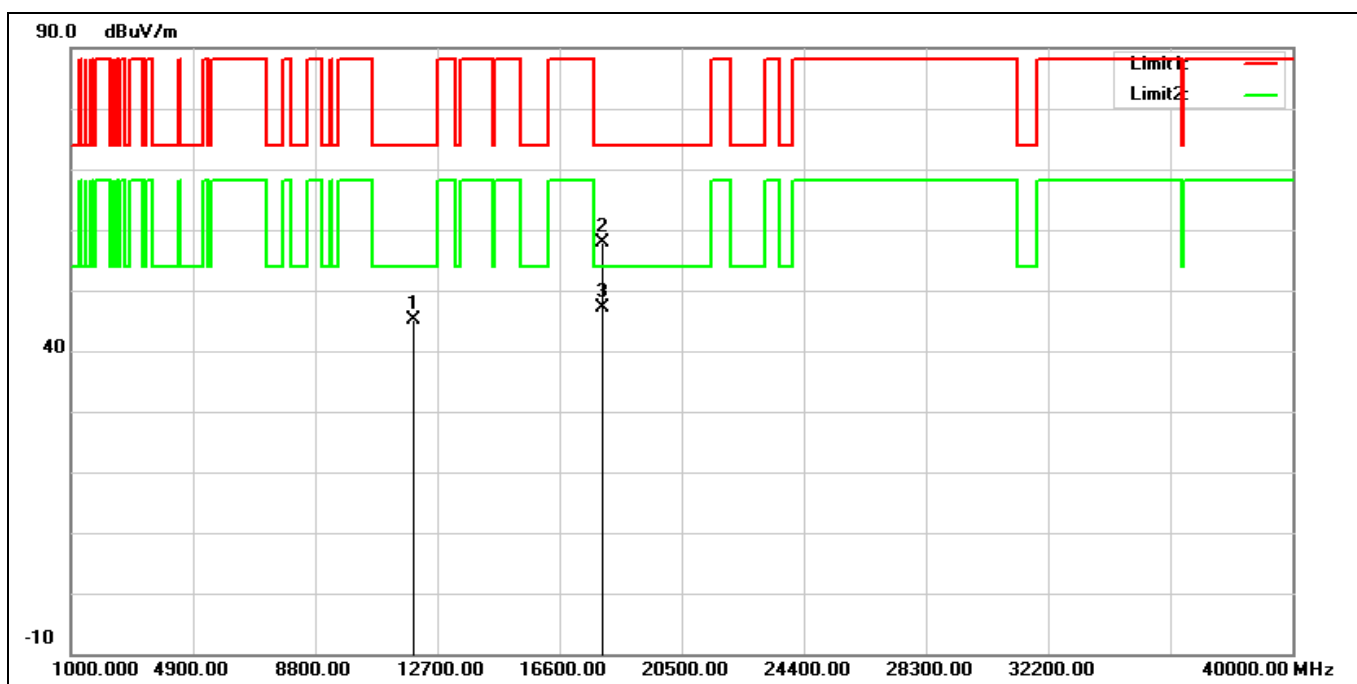


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11970.000	30.92	14.10	45.02	74.00	-28.98	peak
2	17955.000	28.78	29.16	57.94	74.00	-16.06	peak
3*	17955.000	18.08	29.16	47.24	54.00	-6.76	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 5985 MHz		
Remark:			

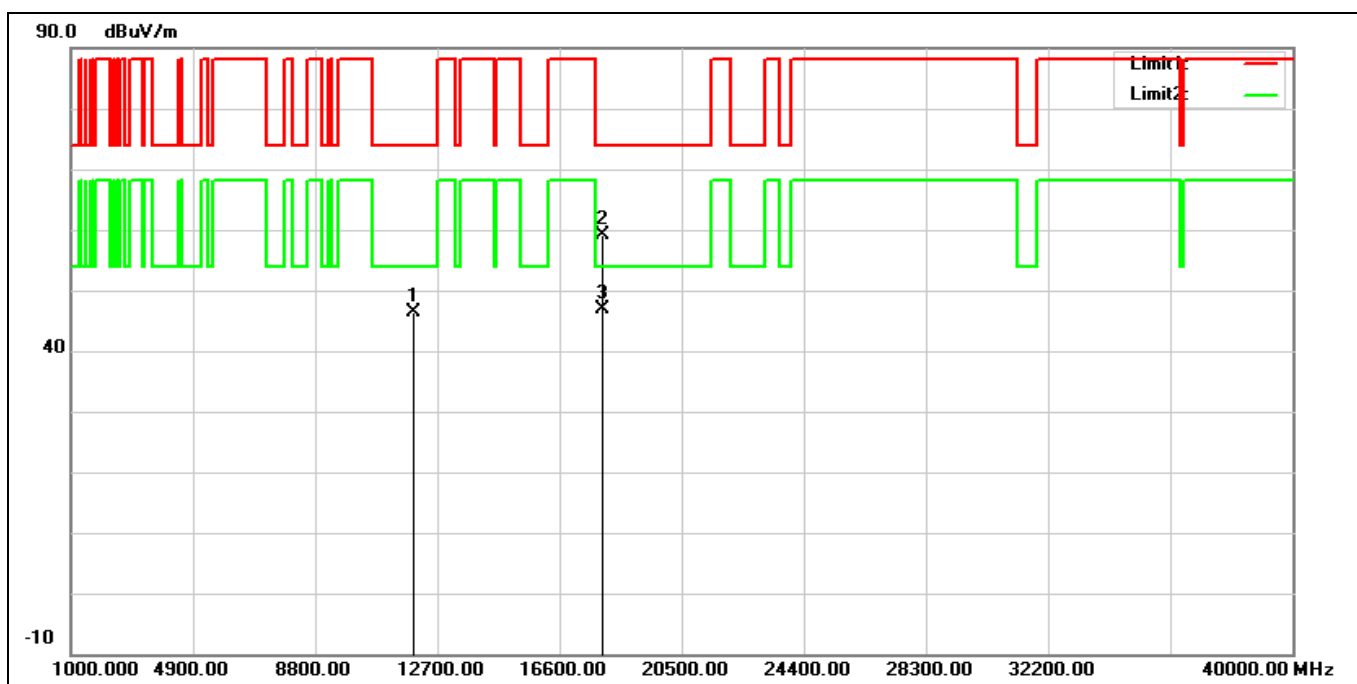


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11970.000	32.35	14.10	46.45	74.00	-27.55	peak
2	17955.000	29.94	29.16	59.10	74.00	-14.90	peak
3*	17955.000	17.72	29.16	46.88	54.00	-7.12	AVG

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6145 MHz		
Remark:			

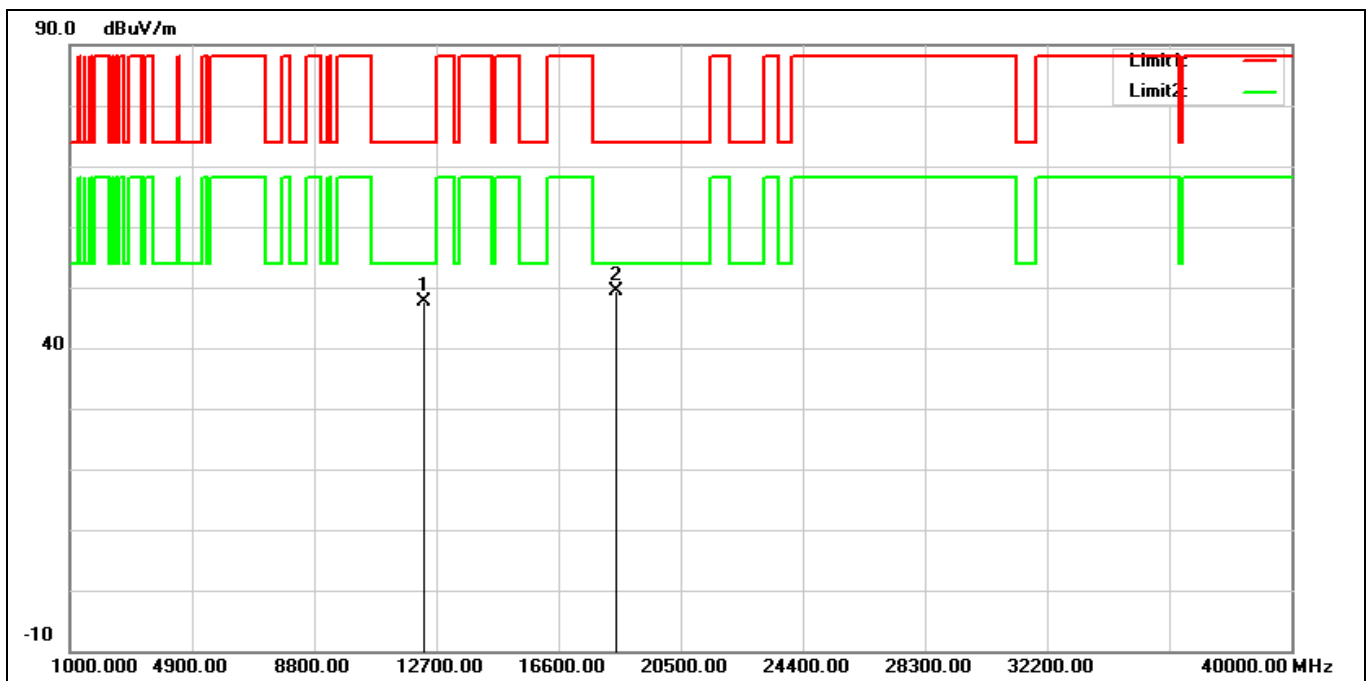


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12290.000	33.14	14.40	47.54	74.00	-26.46	peak
2*	18435.000	30.75	18.55	49.30	74.00	-24.70	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6145 MHz		
Remark:			

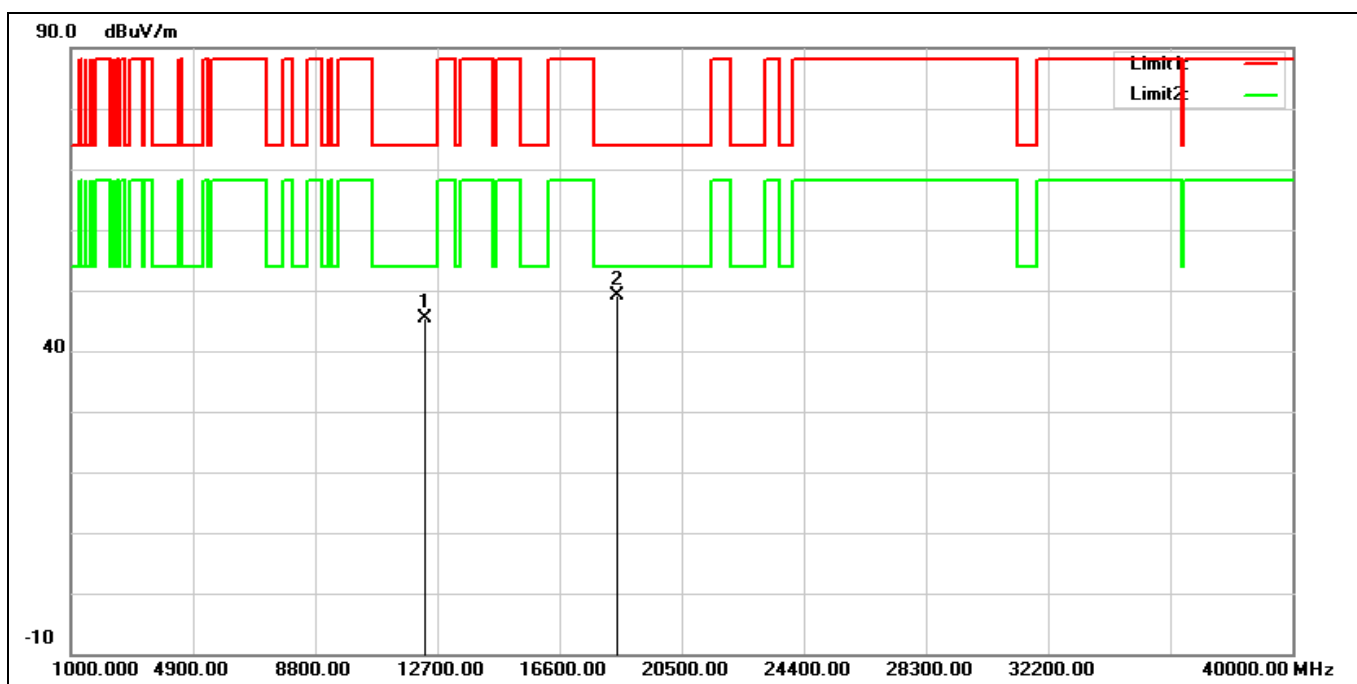


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12290.000	31.02	14.40	45.42	74.00	-28.58	peak
2*	18435.000	30.49	18.55	49.04	74.00	-24.96	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6385 MHz		
Remark:			

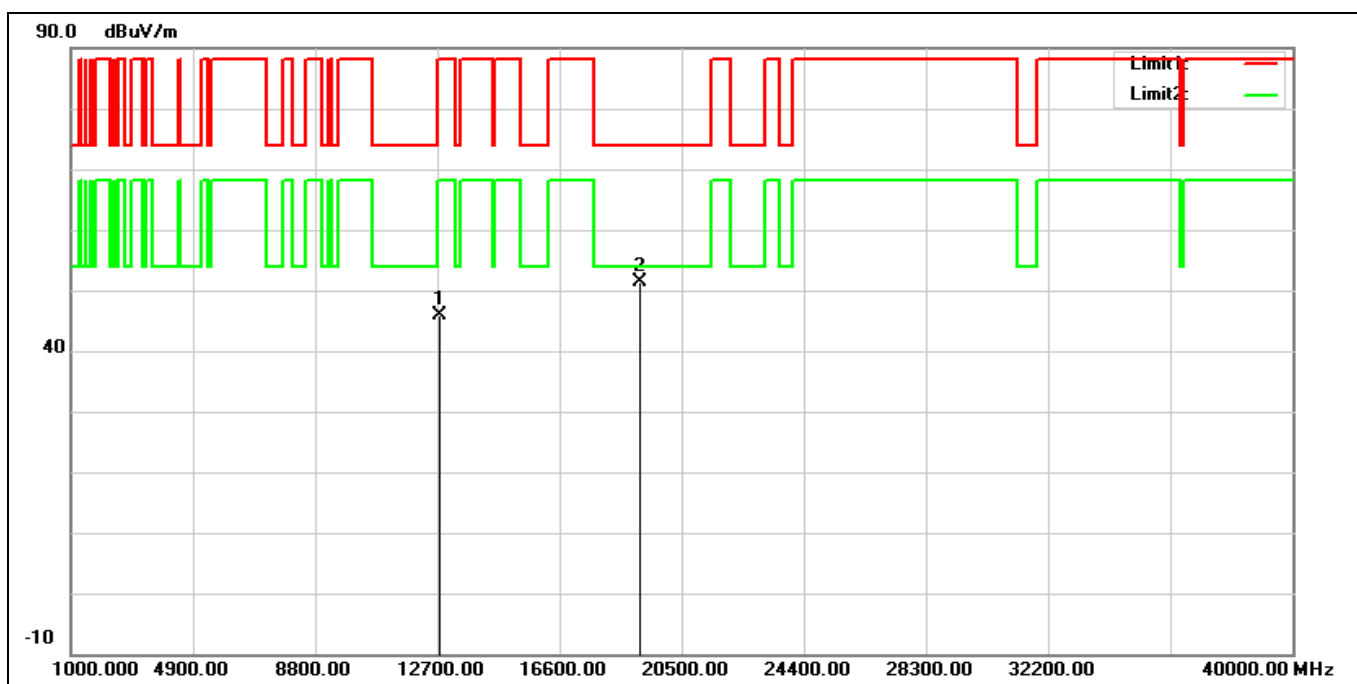


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12770.000	30.26	15.70	45.96	88.20	-42.24	peak
2*	19155.000	31.43	19.92	51.35	74.00	-22.65	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6385 MHz		
Remark:			

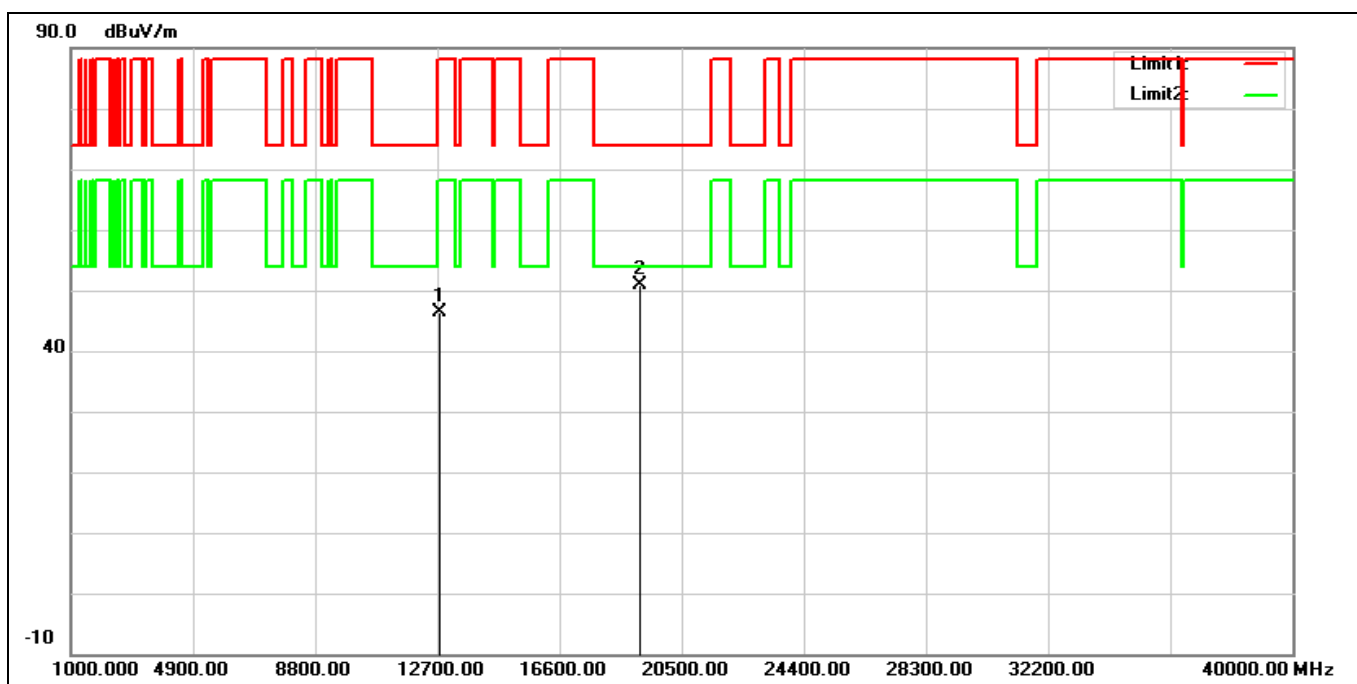


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12770.000	30.79	15.70	46.49	88.20	-41.71	peak
2*	19155.000	31.00	19.92	50.92	74.00	-23.08	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6465 MHz		
Remark:			

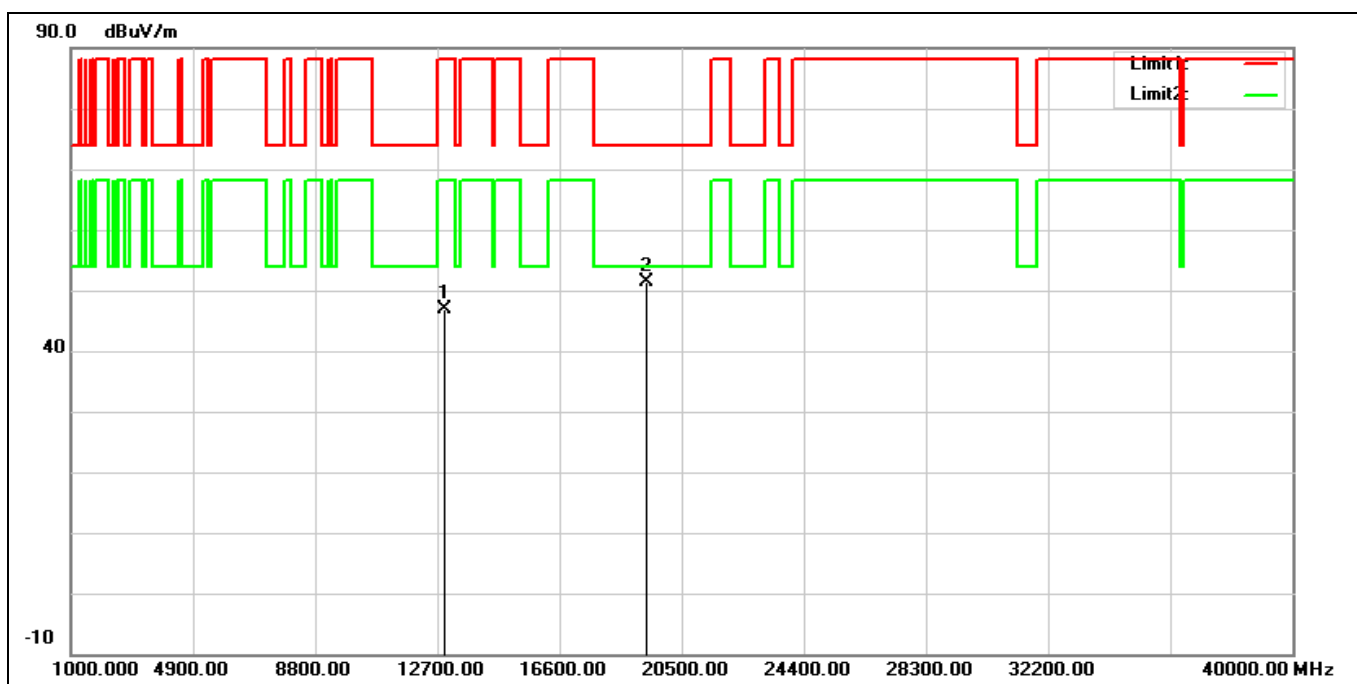


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12930.000	30.69	16.24	46.93	88.20	-41.27	peak
2*	19395.000	30.79	20.49	51.28	74.00	-22.72	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6465 MHz		
Remark:			

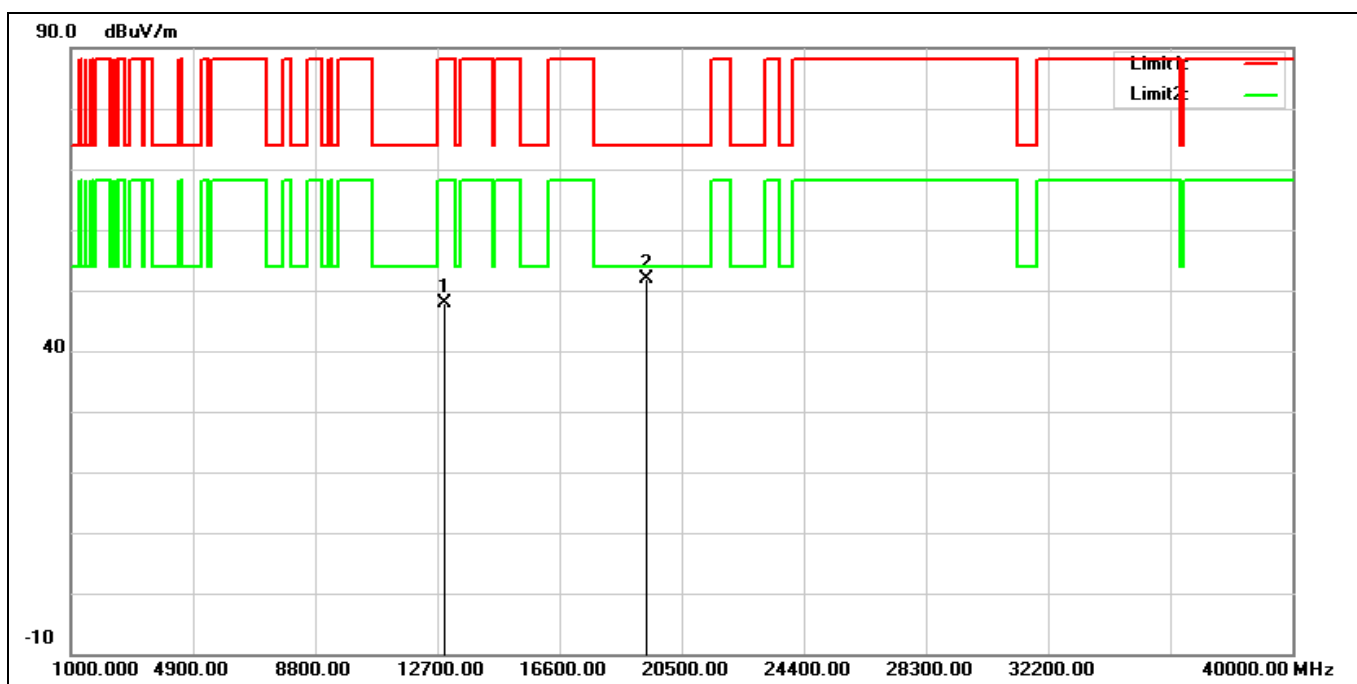


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	12930.000	31.59	16.24	47.83	88.20	-40.37	peak
2*	19395.000	31.35	20.49	51.84	74.00	-22.16	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6545 MHz		
Remark:			

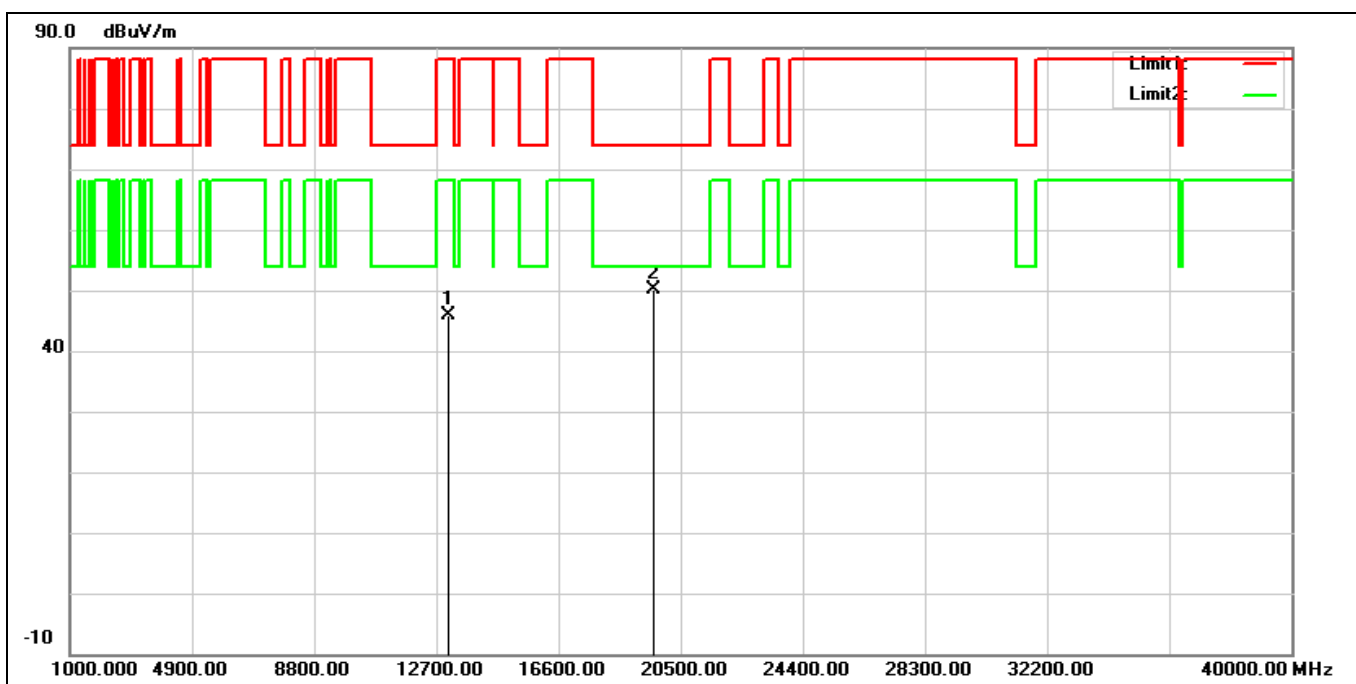


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13090.000	30.08	15.78	45.86	88.20	-42.34	peak
2*	19635.000	29.24	20.85	50.09	74.00	-23.91	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6545 MHz		
Remark:			

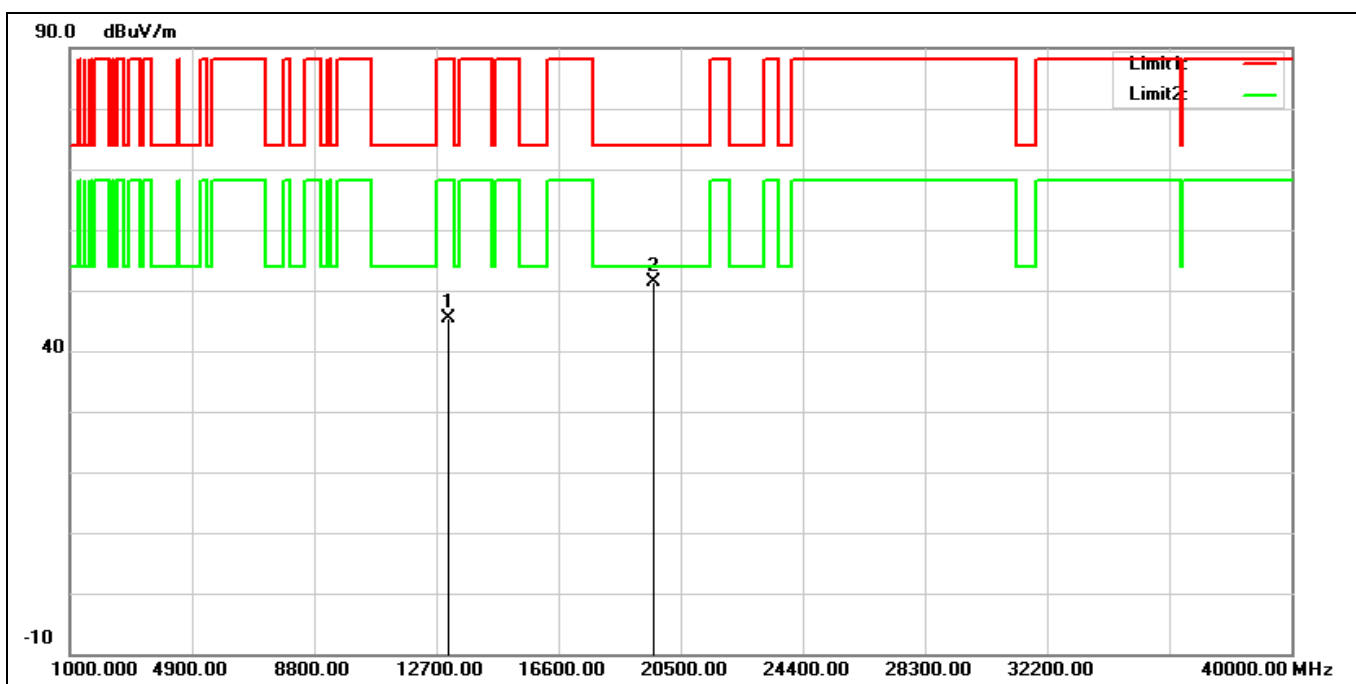


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13090.000	29.70	15.78	45.48	88.20	-42.72	peak
2*	19635.000	30.59	20.85	51.44	74.00	-22.56	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6625 MHz		
Remark:			

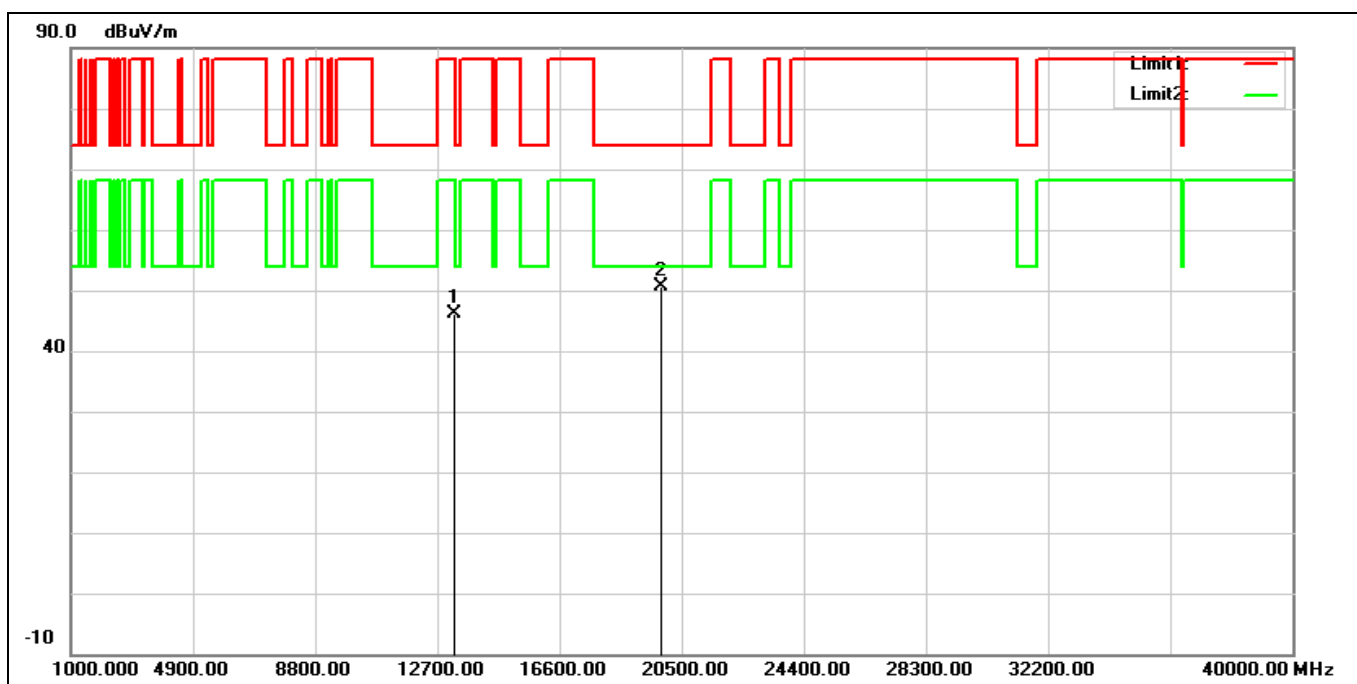


No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13250.000	31.14	15.01	46.15	74.00	-27.85	peak
2*	19875.000	29.53	21.05	50.58	74.00	-23.42	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Vertical		
Test Mode:	802.11be EHT80 6625 MHz		
Remark:			

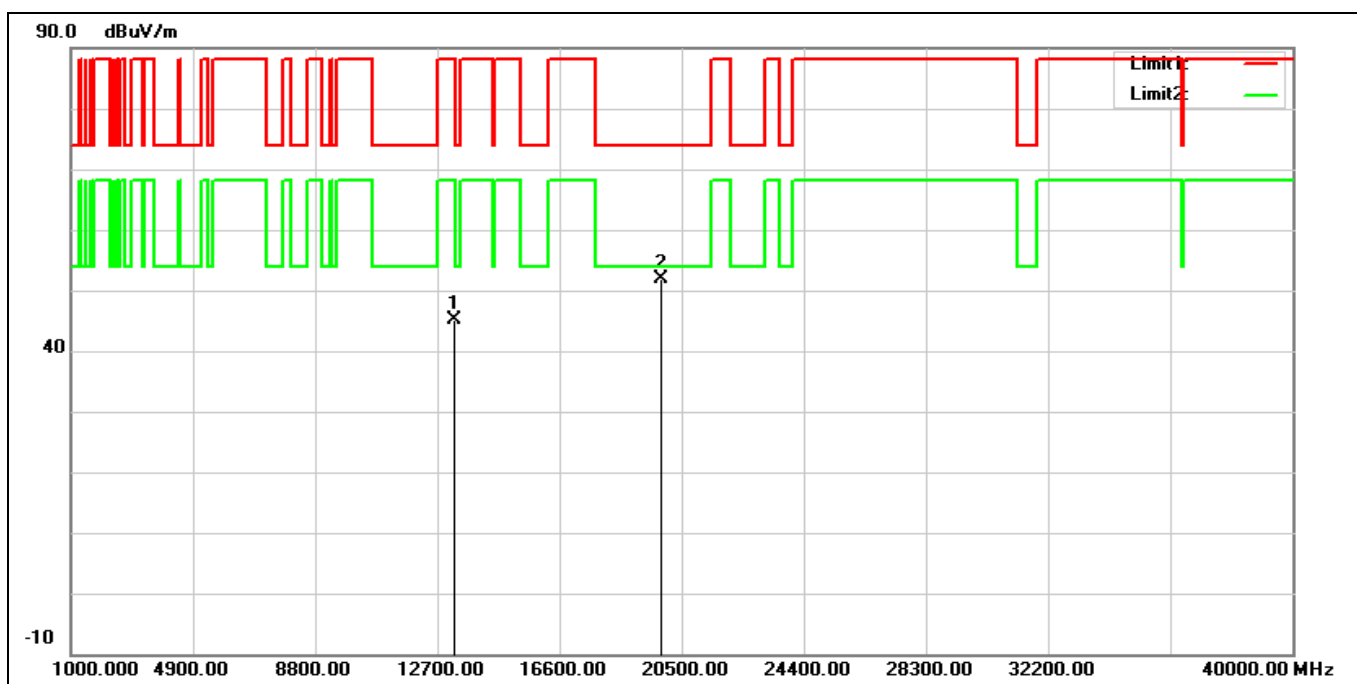

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13250.000	30.19	15.01	45.20	74.00	-28.80	peak
2*	19875.000	30.85	21.05	51.90	74.00	-22.10	peak

Standard:	Part 15E	Test Site:	966 Chamber
Polarization:	Horizontal		
Test Mode:	802.11be EHT80 6705 MHz		
Remark:			

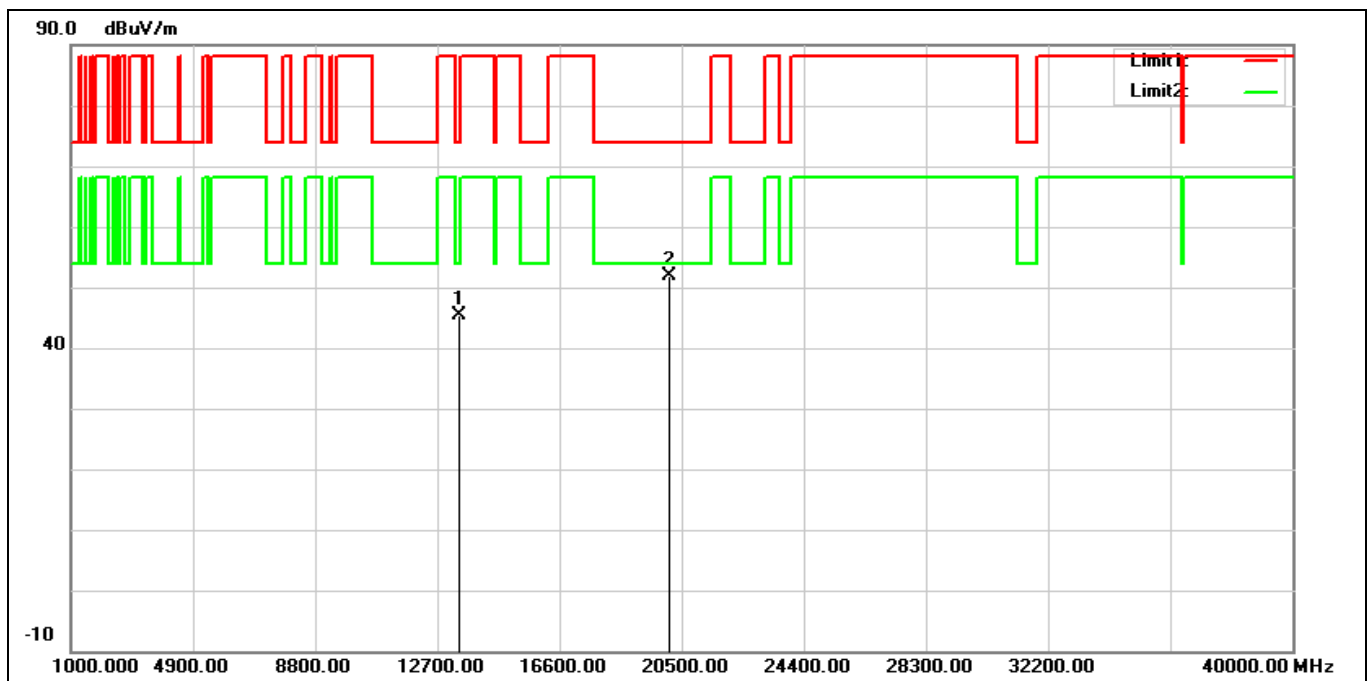

No.	Frequency (MHz)	Reading (dBuV)	Correction (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	13410.000	30.84	14.61	45.45	88.20	-42.75	peak
2*	20115.000	30.95	20.84	51.79	74.00	-22.21	peak