

47 CFR PART 15 SUBPART C TEST REPORT

for

Smart Home Energy Monitor Gen3

Model No.: EMV3A

FCC ID: 2AS6P-EMV3A

of

Applicant: Emporia Corp

Address: 7901 Shaffer Pkwy. Littleton, CO 80127 United States

Tested and Prepared

by

Worldwide Testing Services (Taiwan) Co., Ltd.

FCC Registration No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A



Report No.: W6M22301-22427-C-1

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: wtst@wtst-lab.com





TABLE OF CONTENTS

1	GENERAL INFORMATION	2
1.1	NOTES.....	2
1.2	TESTING LABORATORY	3
1.3	DETAILS OF APPROVAL HOLDER.....	3
1.4	APPLICATION DETAILS	4
1.5	GENERAL INFORMATION OF TEST ITEM	4
1.6	TEST STANDARDS.....	6
1.7	DUTY CYCLE AND FACTOR	6
2	TECHNICAL TEST	10
2.1	SUMMARY OF TEST RESULTS	10
2.2	TEST ENVIRONMENT	10
2.3	TEST EQUIPMENT LIST	11
2.4	GENERAL TEST PROCEDURE	14
3	TEST RESULTS (ENCLOSURE)	16
3.1	PEAK OUTPUT POWER (TRANSMITTER)	17
3.2	TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS.....	31
3.3	SPURIOUS EMISSIONS (TX)	32
3.4	CARRIER FREQUENCY SEPARATION	34
3.5	NUMBER OF HOPPING FREQUENCIES.....	37
3.6	TIME OF OCCUPANCY (DWELL TIME)	40
3.7	20dB BANDWIDTH.....	46
3.8	MINIMUM 6 dB BANDWIDTH	50
3.9	EMISSIONS IN NONRESTRICTED FREQUENCY BANDS	59
3.10	PEAK POWER SPECTRAL DENSITY	69
3.11	RADIATED EMISSION FROM RECEIVER PART.....	78
3.12	POWER LINE CONDUCTED EMISSION	79



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

1 General Information

1.1 Notes

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

Laboratory disclaimer-

1. The test results of this test report relate exclusively to the item tested as specified in 1.5.
2. The test report may only be reproduced or published in full.
3. Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.
4. Antenna gain is provided by applicant and laboratory issue relevant data and results.

Specific Conditions:

Usage of the hereunder tested device in combination with other integrated or external antennas requires at least additional output power measurements, spurious emission measurements, conducted emission measurements (AC supply lines) and radio frequency exposure evaluations for each individual configuration performed, for certification by FCC.

Tester:

June 08, 2023

Sora Kuo

Date

WTS-Lab.

Name

Signature

Technical responsibility for area of testing:

June 08, 2023


Kevin Wang

Date

WTS

Name

Signature



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

1.2 Testing laboratory

1.2.1 Location

10m OATS

No.5-1, Lishui, Shuang Sing Village, Wanli Dist.,
New Taipei City 207, Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6613-0228

Worldwide Testing Services (Taiwan) Co., Ltd.

6F., No. 58, Ln. 188, Ruiguang Rd., Neihu Dist.,
Taipei City 114, Taiwan (R.O.C.)
Tel: 886-2-6606-8877

1.2.2 Details of accreditation status

Accredited testing laboratory

FCC filed test laboratory Reg. No.: TW1477, TW1072

Industry Canada filed test laboratory Reg. No.: 20037, 5107A

Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :

Name:	./.
Accredited number:	./.
Street:	./.
Town:	./.
Country:	./.

1.3 Details of approval holder

Name:	Emporia Corp
Street:	7901 Shaffer Pkwy. Littleton,
Town:	CO 80127
Country:	United States



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

1.4 Application details

Date of receipt of test item: January 16, 2023

Date of test: from January 17, 2023 to May 11, 2023

1.5 General information of Test item

Type of test item: Smart Home Energy Monitor Gen3

Model number: EMV3A

Brand name: Emporia

Multi-listing model number: ./.

Sample no.: #05

Technical data

Frequency band: 2.4 GHz – 2.4835 GHz

Number of channels: 802.11b, g, n 20MHz: 11 channels, 11n 40MHz: 7 channels
Bluetooth: 79 channels(Normal & EDR), 40channels(LE)

Operation modes: Duplex

Modulation type: DSSS/OFDM、GFSK、 $\pi/4$ DQPSK、8DPSK

Fixed point-to-point operation: ☐ Yes / ☒ No

Type of antenna: Whip antenna

Antenna gain: 2.2 dBi



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

Technical data:

WLAN

Band	Mode	Channel	Conducted Power (dBm)
2.4GHz	802.11b	Ch 1 : 2412 MHz	17.69
		Ch 6 : 2437 MHz	17.87
		Ch 11 : 2462 MHz	17.97
	802.11g	Ch 1 : 2412 MHz	14.37
		Ch 6 : 2437 MHz	14.50
		Ch 11 : 2462 MHz	14.17
	802.11n 20M	Ch 1 : 2412 MHz	12.32
		Ch 6 : 2437 MHz	12.47
		Ch 11 : 2462 MHz	12.14
	802.11n 40M	Ch 1 : 2422 MHz	11.58
		Ch 4 : 2437 MHz	11.43
		Ch 7 : 2452 MHz	11.75

Bluetooth

Normal & EDR

Band	Mode	Channel	Conducted Power (dBm)
2.4GHz	BR	Ch 0 : 2402 MHz	8.92
		Ch 39 : 2441 MHz	9.51
		Ch 78 : 2480 MHz	9.84
	EDR	Ch 0 : 2402 MHz	11.01
		Ch 39 : 2441 MHz	11.66
		Ch 78 : 2480 MHz	12.19

Low Energy

Band	Mode	Channel	Conducted Power (dBm)
2.4GHz	BLE	Ch 0 : 2402 MHz	7.48
		Ch 19 : 2440 MHz	8.38
		Ch 39 : 2480 MHz	8.90

Power supply:

100-240V a.c.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

Manufacturer: (if applicable)

Name: VVDN Technology Pvt. Ltd.
Street: Plot No: CP-07, Sector-8, IMT Manesar,
Town: Gurugram, Haryana-122050
Country: India

1.6 Test standards

47 CFR PART 15 SUBPART C § 15.247 (2021-10)

1.7 Duty cycle and factor

The duty factor is computed as $[10 \log (1 / D)]$, where D is the duty cycle.


WLAN

Mode	T _{on} (ms)	T _{on} +T _{off} (ms)	Duty cycle (%)	Duty Factor (dB)	1/T - VBW (kHz)
802.11b	100	100	100.00%	0.00	0.01
802.11g	100	100	100.00%	0.00	0.01
802.11n 20M	100	100	100.00%	0.00	0.01
802.11n 40M	100	100	100.00%	0.00	0.01

Bluetooth

Low Energy

Mode	T _{on} (ms)	T _{on} +T _{off} (ms)	Duty cycle (%)	1/T - VBW (kHz)
BLE	2.131	2.5	85.24%	0.47




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A


Duty cycle plot

WLAN

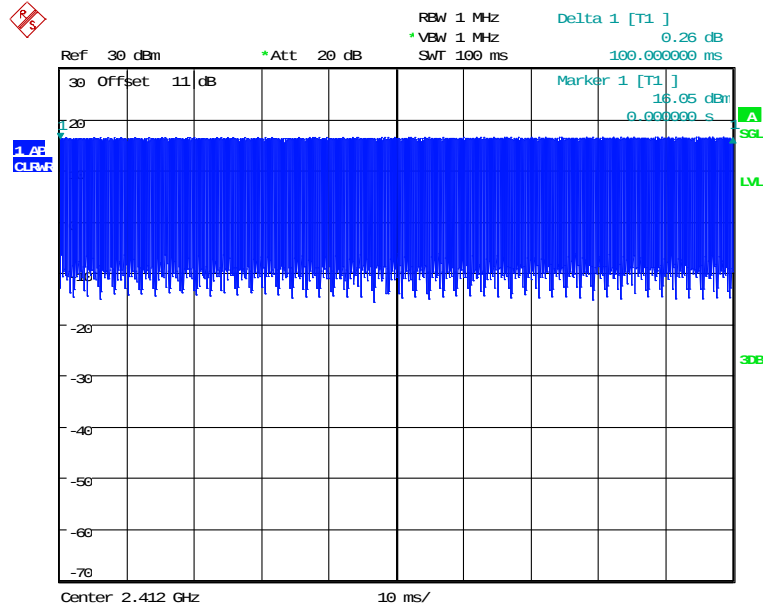


DUTY 802.11B

Date: 9.FEB.2023 11:39:39

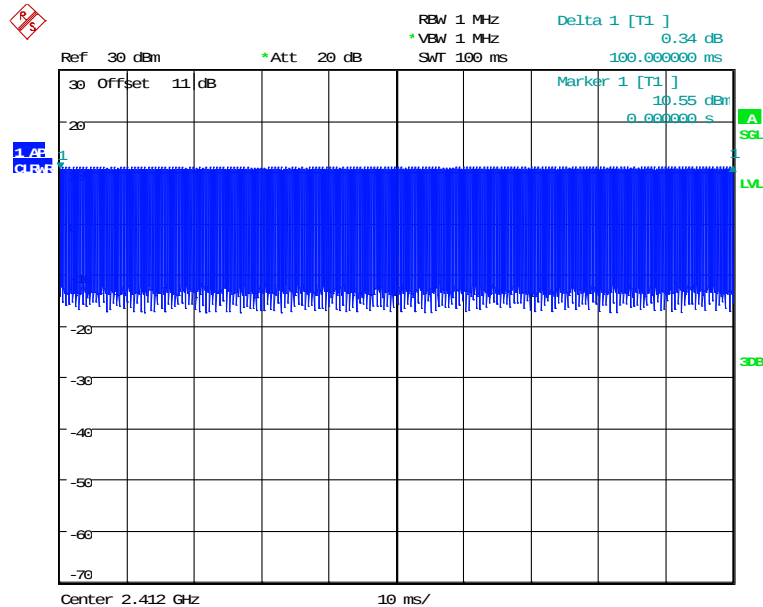


DUTY 802.11G


Date: 9.FEB.2023 11:40:56




Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

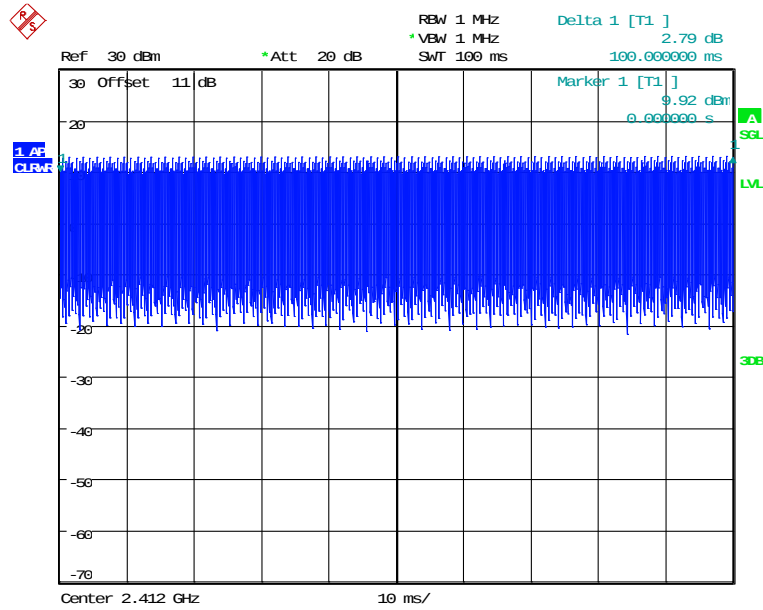

DUTY 802.11N 20MHZ
Date: 9.FEB.2023 11:42:29

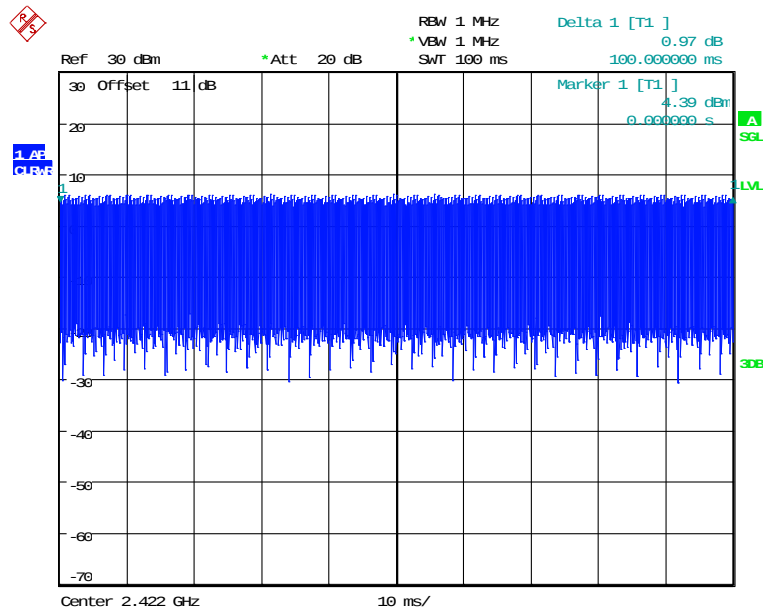


DUTY 802.11N 40MHZ
Date: 9.FEB.2023 11:43:56




Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A


Bluetooth Low Energy

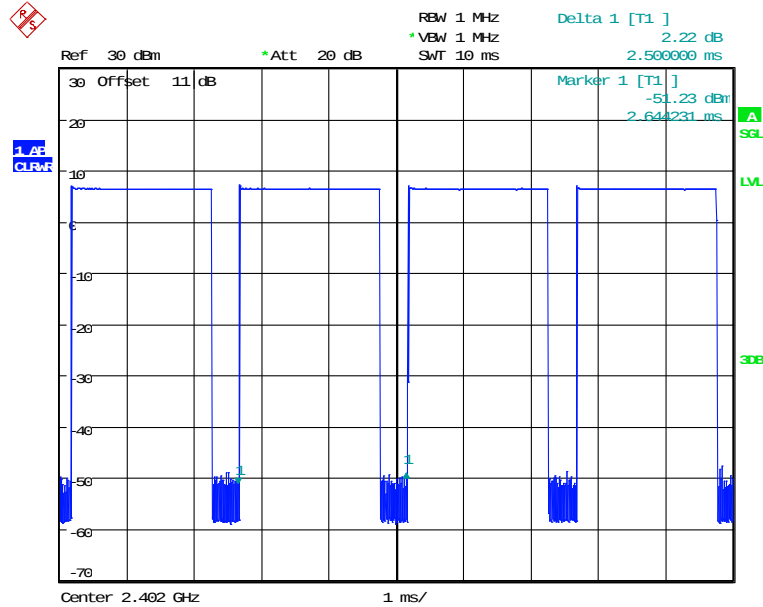

DUTY BLE 1M
Date: 7.FEB.2023 15:41:38

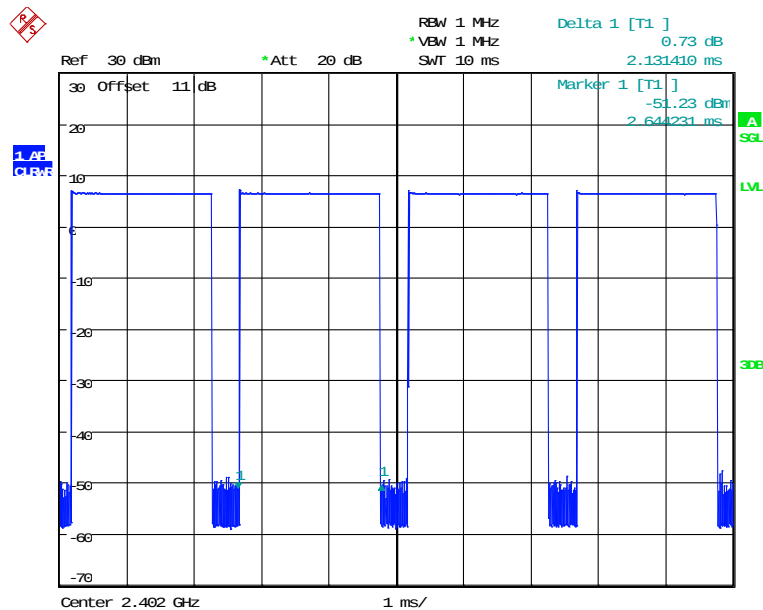

DUTY BLE 1M
Date: 7.FEB.2023 15:34:32



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed. ☒

or

The deviations were ascertained in the course of the tests performed. ☐

2.2 Test environment

Relative humidity content: 20 ... 75 %

Air pressure: 86 ... 103 kPa

Extreme conditions parameters: ./.

Test item Name	Uncertainty
Estimation Result of Uncertainty of Conducted Emission (Power Line Conducted Emission)	Expanded Uncertainty : AMN : 0.94 dB Voltage probe : 0.96 dB Include Pulse Limiter : 1.52 dB
Estimation Result of Uncertainty of Radiated Emission(3M) (Transmitter Radiated Emissions in Restricted Bands, Spurious Emissions (tx), Radiated Emission from Digital Part)	Expanded Uncertainty : 0.009-30 MHz : 3.48 dB 30-1000 MHz : 3.96 dB 1-18 GHz : 2.46 dB 18-40 GHz : 2.44 dB
Estimation Result of Uncertainty of Bandwidth Measurement (20 dB Bandwidth, Minimum 6 dB Bandwidth)	Expanded Uncertainty : 0.45 kHz
Estimation Result of Uncertainty of Conducted Output Power Measurement (Peak Output Power (transmitter))	Expanded Uncertainty : 1.48 dB
Estimation Result of Uncertainty of Power Density Measurement (Peak Power Spectral Density)	Expanded Uncertainty : 1.48 dB
Estimation Result of Uncertainty of Band Edge Measurement (Emissions in nonrestricted frequency bands)	Expanded Uncertainty : 0.67 dBc
Estimation Result of Uncertainty of Frequency Separation Measurement (Carrier Frequency Separation, Number of Hopping Frequencies)	Expanded Uncertainty : 554.14 Hz
Estimation Result of Uncertainty of Duty Cycle Measurement (Time of Occupancy (Dwell Time))	Expanded Uncertainty : 0.1 ms

The decision rule is: Measurement uncertainty is not included in the calculation of test results.




Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2022/6/22	2023/6/21
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2022/10/24	2023/10/23
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2022/10/24	2023/10/23
ETSTW-CE 008	HF-EICHLITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2022/8/3	2023/8/2
ETSTW-CE 016	TWO-LINE V-NETWORK	ENV216	100050	R&S	2022/11/9	2023/11/8
ETSTW-CE 028	MXE EMI Receiver	N9038A	MY53220110	Agilent	2022/7/29	2023/7/28
ETSTW-RE 003	EMI TEST RECEIVER	ESI 26	831438/001	R&S	2022/6/21	2023/6/20
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2022/10/17	2023/10/16
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2022/8/18	2023/8/17
ETSTW-RE 019	MICROWAVE HORN ANTENNA	22240-25	121074	FM	2023/5/18	2024/5/17
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2022/6/22	2023/6/21
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	ETS-Lindgren	2023/5/18	2024/5/17
ETSTW-RE 042	Biconical Antenna	HK116	100172	R&S	2023/3/2	2024/3/1
ETSTW-RE 043	Log-Periodic Dipole Antenna	HL223	100166	R&S	2022/6/28	2023/6/27
ETSTW-RE 044	Log-Periodic Antenna	HL050	100094	R&S	2022/8/1	2023/7/31
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2023/3/22	2024/3/21
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2023/2/17	2024/2/16
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2023/2/20	2024/2/19
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	ETS-Lindgren	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2022/11/5	2023/11/4
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2022/9/16	2023/9/15
ETSTW-RE 091	Match Pad	MDCS1500	None	WOKEN	2023/5/18	2024/5/17
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2023/2/17	2024/2/16
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	T-0A023536	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2023/1/4	2024/1/3




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	2022/11/8	2023/11/7
ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2022/6/20	2023/6/19
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2022/8/5	2023/8/4
ETSTW-RE 126	5GHz Notch filter	5NSL12-5800/E221.3-O/O	1	K&L Microwave	2022/8/5	2023/8/4
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2023/2/17	2024/2/16
ETSTW-RE 128	5.3GHz Notch filter	N0153001	SN487233	Microwave Circuits	2022/8/5	2023/8/4
ETSTW-RE 129	5.5GHz Notch filter	N0555984	SN487234	Microwave Circuits	2022/8/5	2023/8/4
ETSTW-RE 130	Handheld RF Spectrum Analyzer	N9340A	CN0147000204	Agilent	Pre-test Use	
ETSTW-RE 142	Amplifier	8447D	2805A03378	Agilent	2023/2/20	2024/2/19
ETSTW-RE 146	Preamplifier	JPA-10M1G	15090004	JPT	2023/5/18	2024/5/17
ETSTW-RE 152	Bi-log Hybrid Antenna	MCTD 2786B	BLB20J04029	ETC	2023/3/21	2024/3/20
ETSTW-RE 153	Signal Analyzer	FSV40	101929	R&S	2022/10/3	2023/10/2
ETSTW-RE 159	Bi-log Hybrid Antenna (30M~1000 MHz)	MCTD 2786B	BLB21N04035	ETC	2022/12/22	2023/12/21
ETSTW-RE 177	Bi-log Hybrid Antenna with 6dB Attenuator	VULB 9168&EMCI-N-6-06	01380&AT-06007	SCHWARZBECK&EMC	2022/9/1	2023/8/31
ETSTW-RF 002	Electromagnetic field probe	LF-30	K-0007	STT	2022/7/14	2023/7/13
ETSTW-EMI 011	USB Compact Modulator	SFC-U	101689	R&S	2023/5/18	2024/5/17
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2023/3/22	2024/3/21
ETSTW-GSM 003	Radio Communication Analyzer	MT8820C	6201342073	Anritsu	2023/4/27	2024/4/26
ETSTW-GSM 004	Wideband Radio Communication Tester	CMW500	128092	R&S	2022/10/24	2023/10/23
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2023/1/4	2024/1/3
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2023/1/4	2024/1/3
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2023/1/4	2024/1/3
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2023/1/4	2024/1/3
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2022/9/2	2023/9/1
ETSTW-GSM 024	Radio Communication Analyzer	MT8821C	None	Anritsu	2023/4/24	2024/4/23
ETSTW-GSM 025	Band Reject Filter	BRM19835	001	Micro-Tronics	2022/8/5	2023/8/4
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2023/2/4	2024/2/3
ETSTW-Cable 020	N TYPE Cable	OATS Cable 1	N30N30-L335-15M	JYE BAO CO.,LTD.	2022/6/29	2023/6/28
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2023/4/27	2024/4/26
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2022/9/16	2023/9/15
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2022/9/16	2023/9/15
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S_Cable 9)	279067	HUBER+SUHNER	2023/02/17	2024/2/16
ETSTW-Cable 045	Microwave Cable	SUCOFLEX 104	325536	HUBER+SUHNER	2022/10/21	2023/10/20




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

ETSTW-Cable 058	Microwave Cable	SUCOFLEX 104	none	HUBER+SUHNER	2023/5/18	2024/5/17
ETSTW-Cable 064	Microwave Cable	SUCOFLEX 104	MY28891	HUBER+SUHNER	2023/2/20	2024/2/19
ETSTW-Cable 071	N TYPE CABLE	EMCCFD400-NM-NM-25000	170239	EMCI	2023/5/18	2024/5/17
ETSTW-Cable 072	SMA type cable (8m)	SUCOFLEX 104	805800/4	HUBER+SUHNER	2023/2/20	2024/2/19
ETSTW-Cable 074	SMA type cable (2m)	SUCOFLEX 104	802563/4	HUBER+SUHNER	2023/2/20	2024/2/19
ETSTW-Cable 076	SMA type cable (1m)	N/A	812652/4	HUBER+SUHNER	2023/2/20	2024/2/19
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1 Version EMEC-3A1+	
WTSTW-SW 006	EMI TEST SOFTWARE	e3	None	AUDIX	Version 9.161014	
WTSTW-SW 008	Signal studio	Agilent	None	AUDIX	Version 2.0.0.1	
ETSTW-TH 002	Thermohygrometer	608-H1	45204317	Testo	2022/9/16	2023/9/15
ETSTW-TH 003	Wireless weather station	GAIA	N/A	TFA	2022/10/28	2023/10/27



2.4 General Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The procedure used was ANSI STANDARD C63.10-2013 6.2 using a 50 μ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

RADIATION INTERFERENCE: The test procedure used was according to ANSI STANDARD C63.10-2013 6.3 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB μ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:


Freq (MHz)	METER READING + ACF + CABLE LOSS (to the receiver) = FS
33	20 dB μ V + 10.36 dB + 6 dB = 36.36 dB μ V/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.10-2013 6.2.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:


Average = Peak + Duty Factor

Duty Factor = $20 \log (\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.10-2013 B.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

3 Test results (enclosure)

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)	☒	☒	☐
Equivalent isotropically radiated Power	15.247(b)	☒	☒	☐
Spurious Emissions radiated – Transmitter operating	15.247(d):15.209	☒	☒	☐
Spurious Emissions conducted – Transmitter operating	15.247	☐	☐	☐
Carrier Frequency Separation	15.247(a) (1)	☒	☒	☐
Number of Hopping Frequencies	15.247(a) (1)(i)	☒	☒	☐
Time of Occupancy (Dwell Time)	15.247(a) (1)(i)	☒	☒	☐
20 dB Bandwidth	15.247(a) (1)(i)	☒	☒	☐
Minimum 6 dB Bandwidth	15.247(a)(2)	☒	☒	☐
Emissions in nonrestricted frequency bands	15.247(d)	☒	☒	☐
Peak Power Spectral Density	15.247(e)	☒	☒	☐
Radiated Emission from Receiver part	15.109	☐	☐	☐
Power Line Conducted Emission	15.207(a)	☒	☒	☐



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

3.1 Peak Output Power (transmitter)

FCC Rule: 15.247(b)(3)

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

Test date: February 07, 2023-May 09, 2023

Temperature: 22.1°C


Humidity: 57.0 %

Tester: Sora


WLAN

802.11b


Band	Mode	Channel	Conducted power with DF	DF (dB)	Limit (dBm)
			Antenna 1 (dBm)		
2.4GHz	802.11b	Ch 1 : 2412 MHz	17.69	0.00	30
		Ch 6 : 2437 MHz	17.87	0.00	30
		Ch 11 : 2462 MHz	17.97	0.00	30
	802.11g	Ch 1 : 2412 MHz	14.37	0.00	30
		Ch 6 : 2437 MHz	14.50	0.00	30
		Ch 11 : 2462 MHz	14.17	0.00	30
	802.11n 20M	Ch 1 : 2412 MHz	12.32	0.00	30
		Ch 6 : 2437 MHz	12.47	0.00	30
		Ch 11 : 2462 MHz	12.14	0.00	30
	802.11n 40M	Ch 1 : 2422 MHz	11.58	0.00	30
		Ch 4 : 2437 MHz	11.43	0.00	30
		Ch 7 : 2452 MHz	11.75	0.00	30




Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

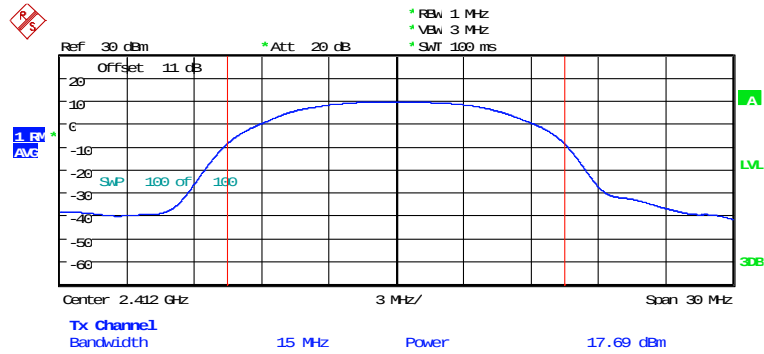

MAX OUTPUT POWER 802.11B CH01
Date: 9.FEB.2023 10:23:56

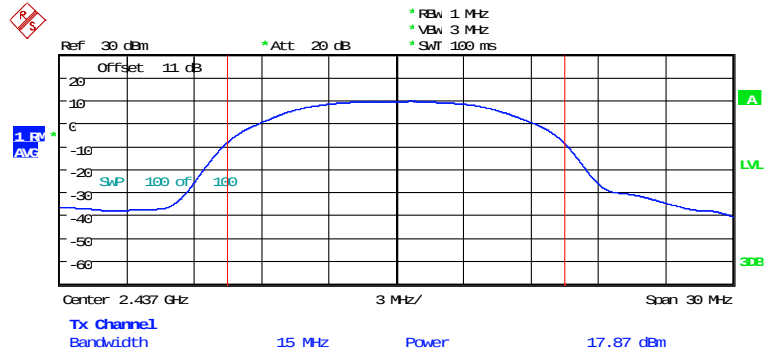


MAX OUTPUT POWER 802.11B CH06
Date: 9.FEB.2023 10:24:37



Registration number: W6M22301-22427-C-1


FCC ID: 2AS6P-EMV3A

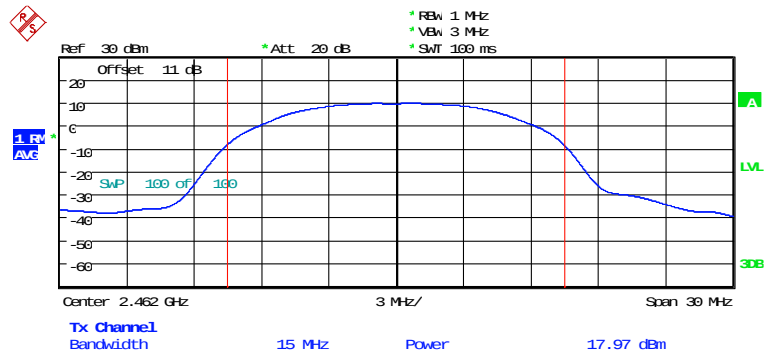

MAX OUTPUT POWER 802.11B CH11


Date: 9.FEB.2023 10:25:27

802.11g

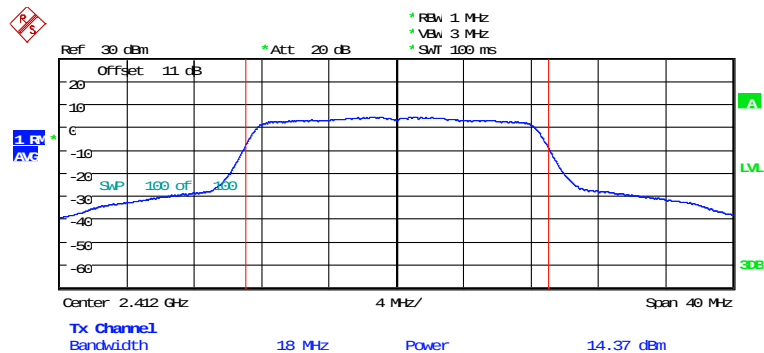


MAX OUTPUT POWER 802.11G CH01

Date: 9.MAY.2023 09:26:35




Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

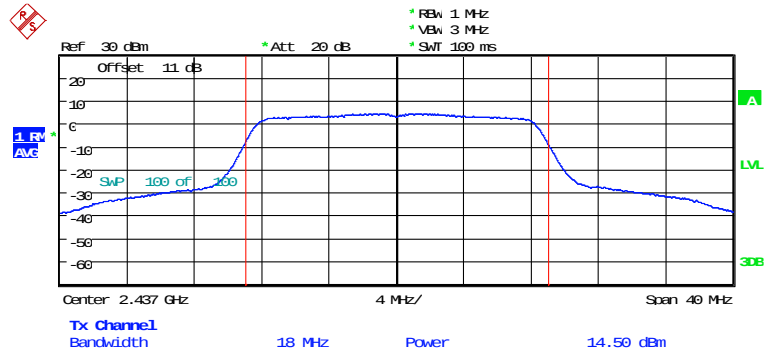


MAX OUTPUT POWER 802.11G CH06

Date: 9.MAY.2023 09:28:43

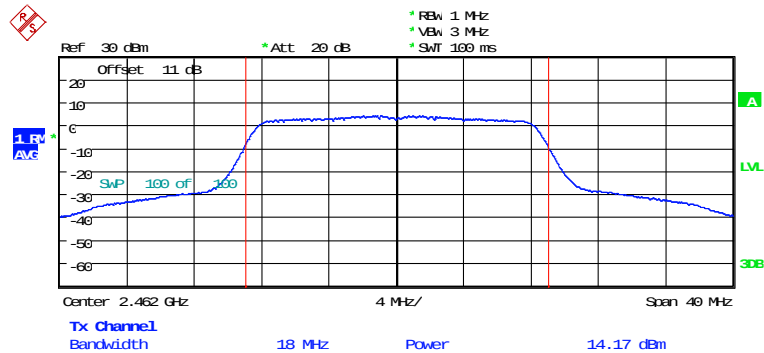

MAX OUTPUT POWER 802.11G CH11

Date: 9.MAY.2023 09:29:44




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22301-22427-C-1


FCC ID: 2AS6P-EMV3A

802.11n 20MHz

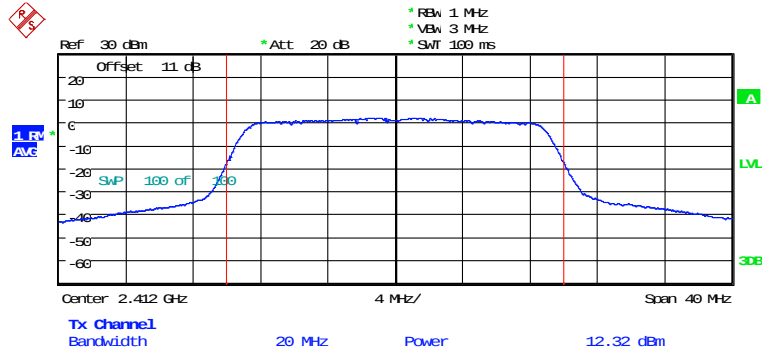

MAX OUTPUT POWER 802.11N 20MHZ CH01

Date: 9.MAY.2023 09:36:09

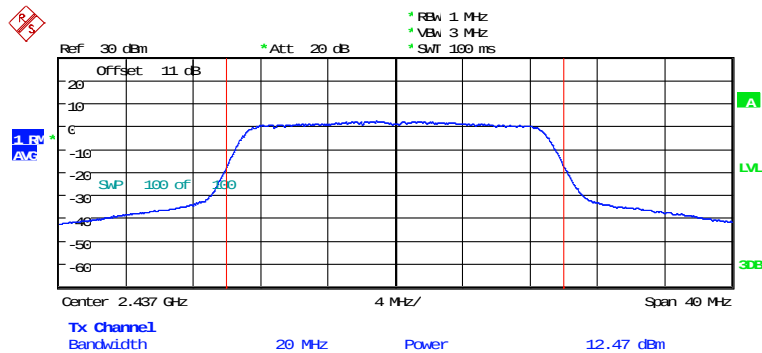


MAX OUTPUT POWER 802.11N 20MHZ CH06

Date: 9.MAY.2023 09:37:15



Registration number: W6M22301-22427-C-1


FCC ID: 2AS6P-EMV3A

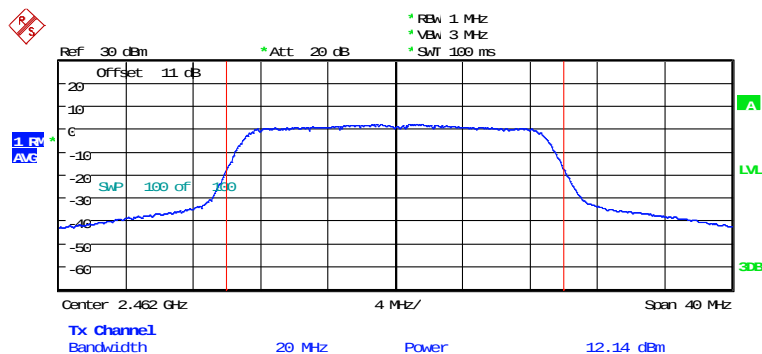

MAX OUTPUT POWER 802.11N 20MHZ CH11


Date: 9.MAY.2023 09:39:51

802.11n 40MHz

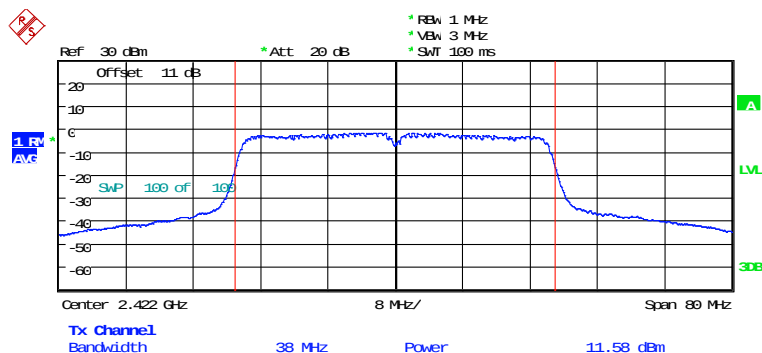

MAX OUTPUT POWER 802.11N 40MHZ CH01


Date: 9.MAY.2023 09:45:00



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

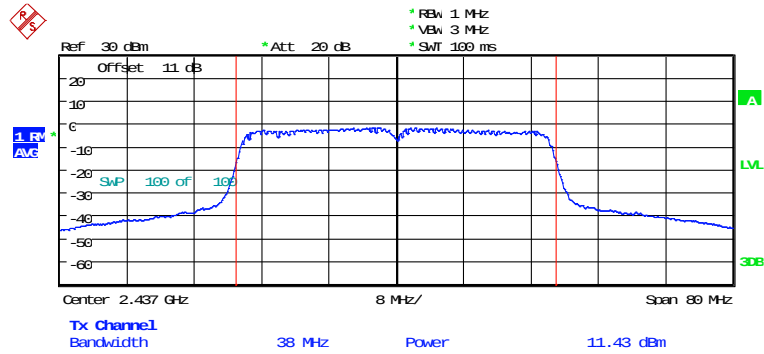


MAX OUTPUT POWER 802.11N 40MHZ CH04

Date: 9.MAY.2023 09:49:17

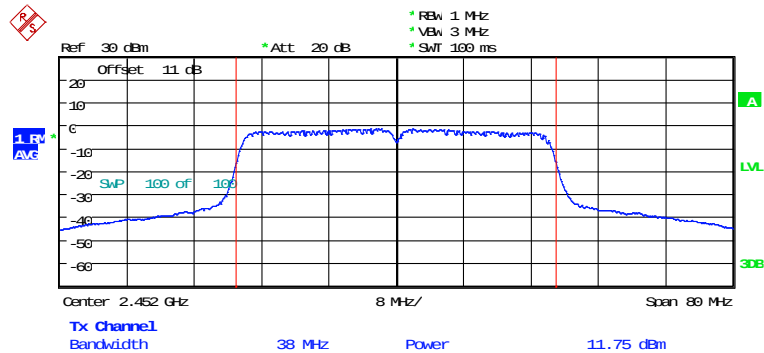

MAX OUTPUT POWER 802.11N 40MHZ CH07

Date: 9.MAY.2023 09:52:57




Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

Bluetooth


Band	Mode	Channel	Power (dBm)	Limit (dBm)
2.4GHz	BR	Ch 0 : 2402 MHz	8.92	21
		Ch 39 : 2441 MHz	9.51	21
		Ch 78 : 2480 MHz	9.84	21
	EDR	Ch 0 : 2402 MHz	11.01	21
		Ch 39 : 2441 MHz	11.66	21
		Ch 78 : 2480 MHz	12.19	21

Normal mode

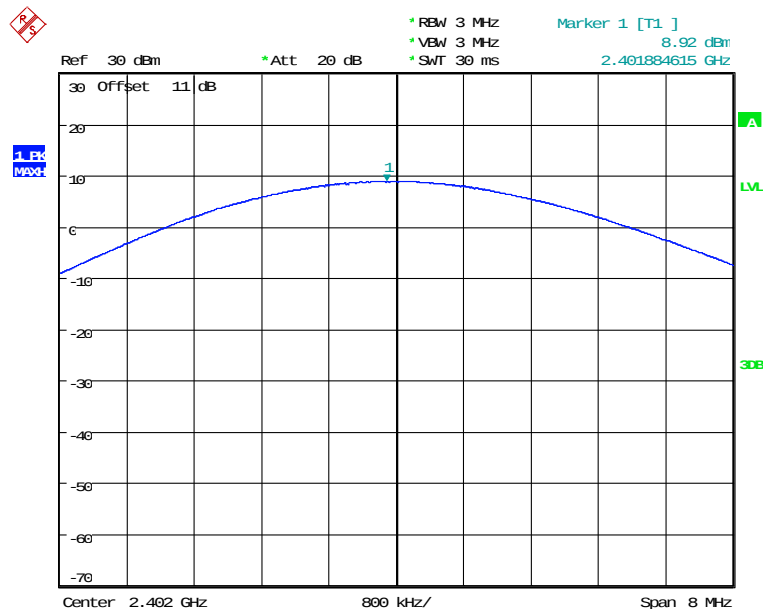


MAX OUTPUT POWER CH0


Date: 8.FEB.2023 16:33:01




Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

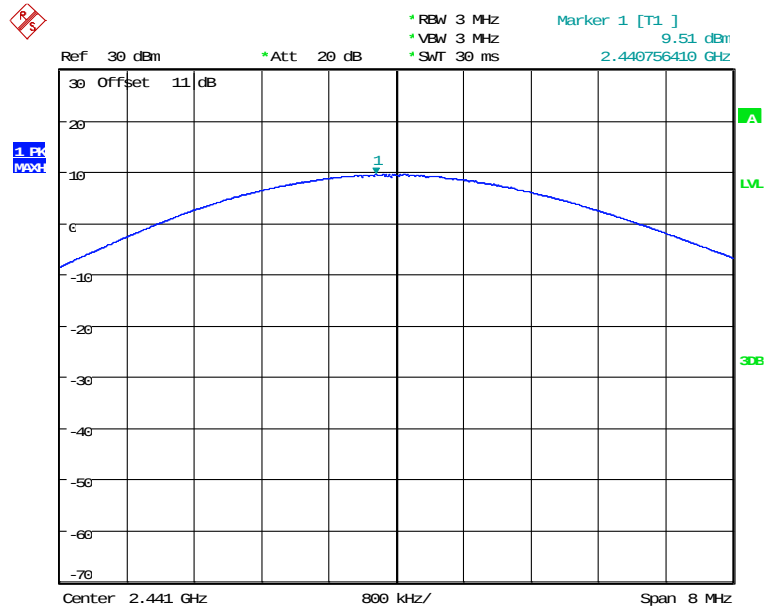

MAX OUTPUT POWER CH39
Date: 8.FEB.2023 16:33:39

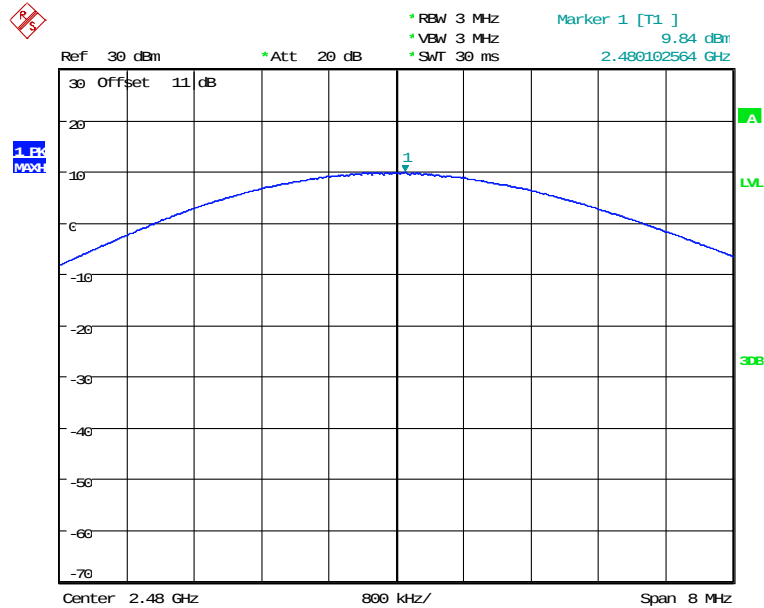

MAX OUTPUT POWER CH78
Date: 8.FEB.2023 16:34:30




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22301-22427-C-1


FCC ID: 2AS6P-EMV3A

EDR mode

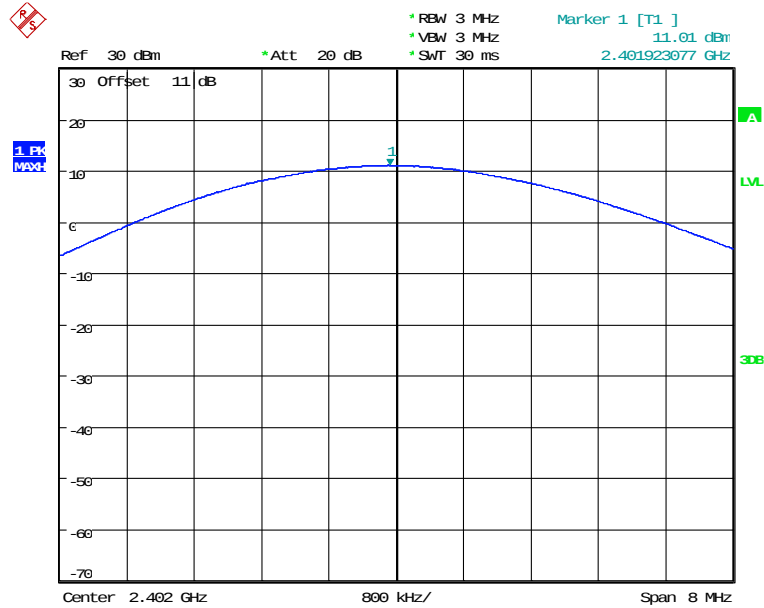


MAX OUTPUT POWER CH0 EDR MODE

Date: 8.FEB.2023 16:37:53

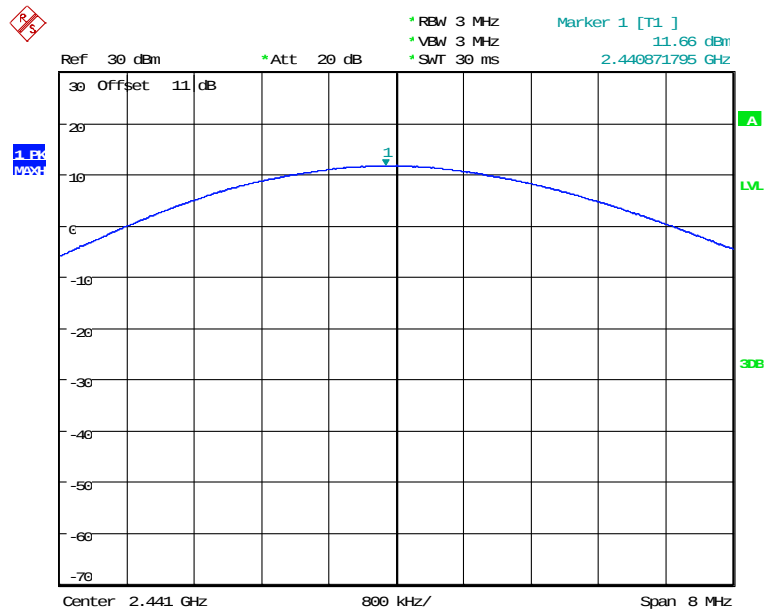


MAX OUTPUT POWER CH39 EDR MODE

Date: 8.FEB.2023 16:36:40




Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

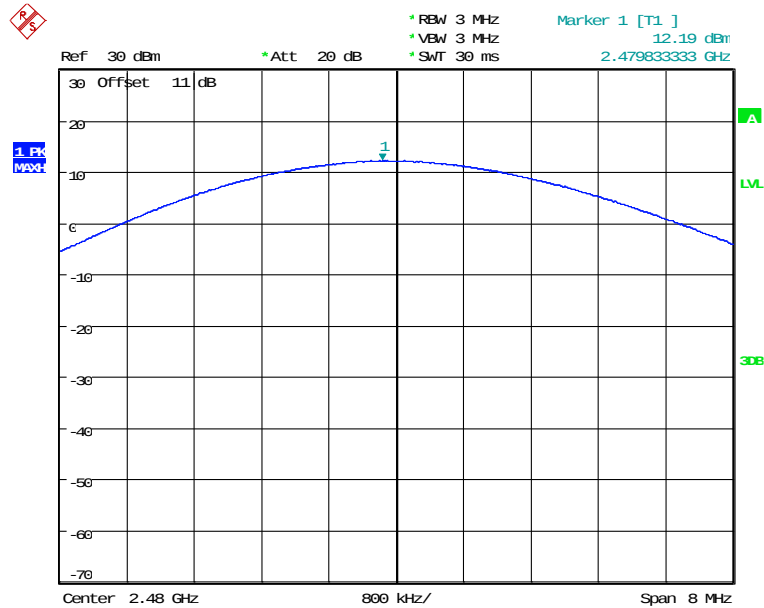

MAX OUTPUT POWER CH78 EDR MODE
Date: 8.FEB.2023 16:35:36




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A


Low Energy

Band	Mode	Channel	Power (dBm)	Limit (dBm)
2.4GHz	BLE	Ch 0 : 2402 MHz	7.48	30
		Ch 19 : 2440 MHz	8.38	30
		Ch 39 : 2480 MHz	8.90	30

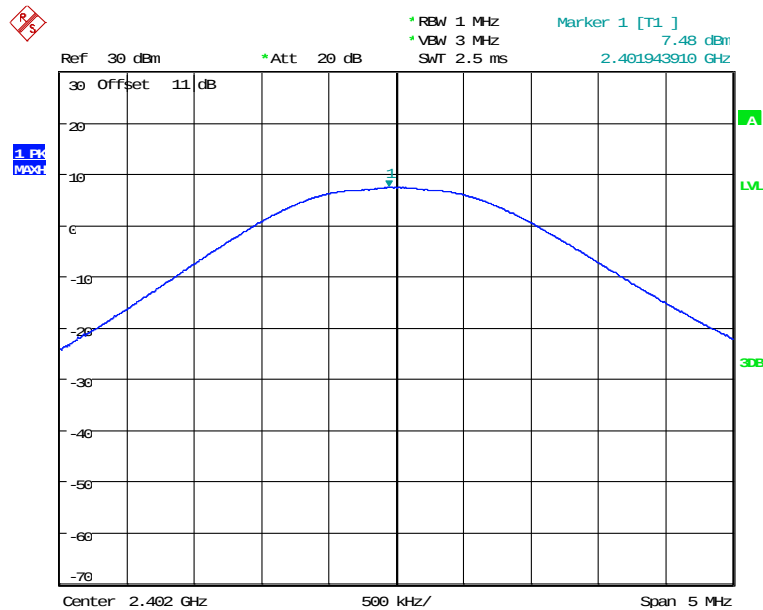


MAX OUTPUT POWER BLE 1M CH00


Date: 7.FEB.2023 15:44:44




Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

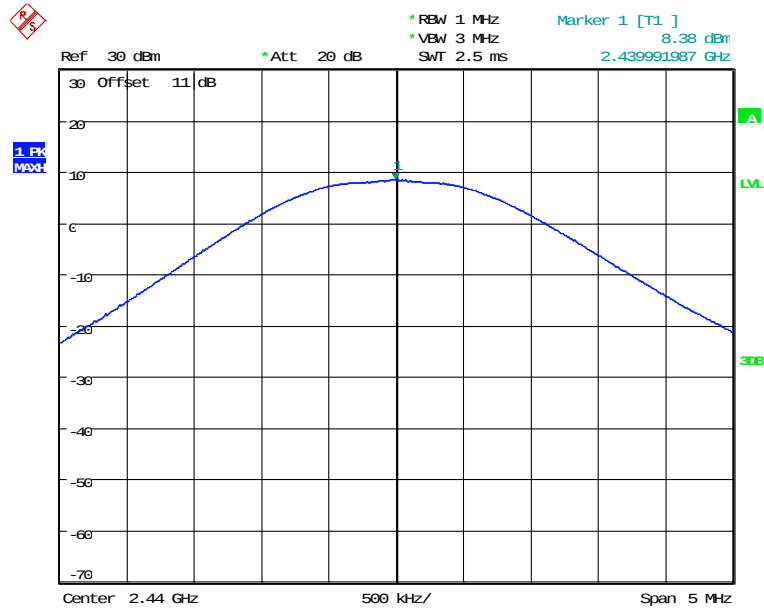

MAX OUTPUT POWER BLE 1M CH19
Date: 7.FEB.2023 15:45:39

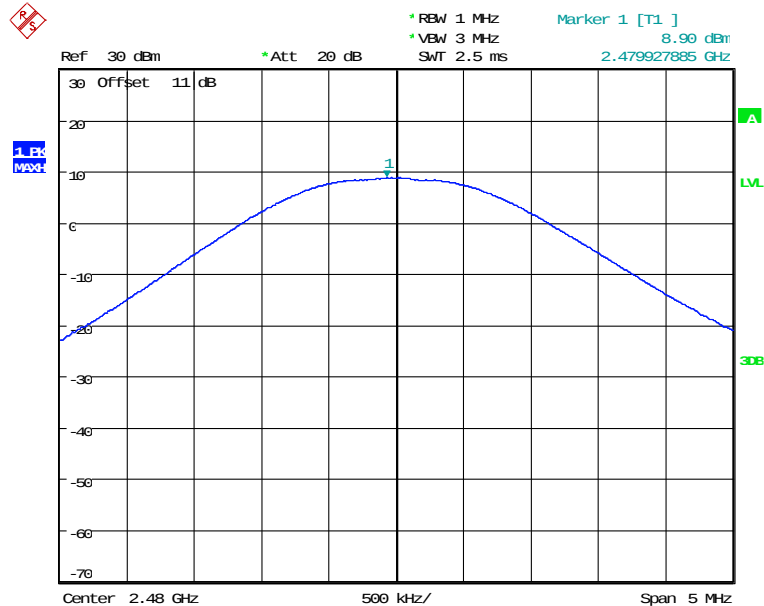

MAX OUTPUT POWER BLE 1M CH39
Date: 7.FEB.2023 15:46:32



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

Limits:

Frequency MHz	Power dBm
902 - 928	30
2400 – 2483.5	30
5725 – 5850	30

In case of employing transmitter antennas having antenna gain > 6 dBi and using fixed point-to point operation consider §15.247 (b)(4)

Test equipment used: ETSTW-RE 055, ETSTW-RE 050, ETSTW-RE 064



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

3.2 Transmitter Radiated Emissions in Restricted Bands

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26500 MHz.

For radiated emission tests, the analyzer setting was as followings:

Frequency $\leq$ 1 GHz, RBW:100 kHz, VBW: 100 kHz (Peak measurements)

Frequency $>$ 1 GHz, RBW: 1 MHz, VBW: 1 MHz (Peak measurements)

Frequency $>$ 1 GHz , RBW:1 MHz , VBW: 10 Hz (Average measurements)

Limits.

For frequencies below 1GHz:

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of Digit Transmission Systems:


“If the emission is pulsed, modify the unit for continuous operation, use the setting shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty cycle correction = $20 \log (\text{dwell time} / 100\text{ms})$

Note: No duty cycle correction was added to the reading of this EUT.

Explanation: See attached diagrams in Appendix.



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

3.3 Spurious Emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

FCC Rule: 15.247(d), 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies above 1GHz (Peak measurements).

Modified Limit for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

For frequencies above 1GHz (Average measurements).

Max. reading – 20dB

Max. reading – 20 dB

Guidance on Measurement of Digit Transmission Systems:

“If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.”

The correction factor, based on the total channel dwell time in a 100 ms period, may be mathematically applied to a measurement made with an average detector, to further reduce the value.

Duty Cycle correction = $20 \log (\text{dwell time}/100\text{ms})$

Test equipment used: ETSTW-RE 030, ETSTW-RE 111, ETSTW-RE 088, ETSTW-RE 018,
ETSTW-RE 064

Note: No duty cycle correction was added to the reading of EUT.



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance with point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value and exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Correction Factor".

Summary table with radiated data of the test plots

Model:	EMV3A	Date:	--					
Mode:	--	Temperature:	--	°C	Engineer:	--		
Polarization:	--	Humidity:	--	%				
Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBuV)		Factor (dB)	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.	Corr.	Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

Note


1. **Correction Factor = Antenna factor + Cable loss - Preamplifier**
2. **The formula of measured value as: Test Result = Reading + Correction Factor**
3. **Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
4. **All not in the table noted test results are more than 20 dB below the relevant limits.**
5. **After evaluated, the test result in this report adopt the worst case to measure, please see attached diagrams in appendix.**

TEST RESULT (Transmitter): The unit DOES meet the FCC requirements.


Test equipment used: ETSTW-RE 030, ETSTW-RE 111, ETSTW-RE 088, ETSTW-RE 018,
ETSTW-RE 064




FCC ID: 2AS6P-EMV3A




Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

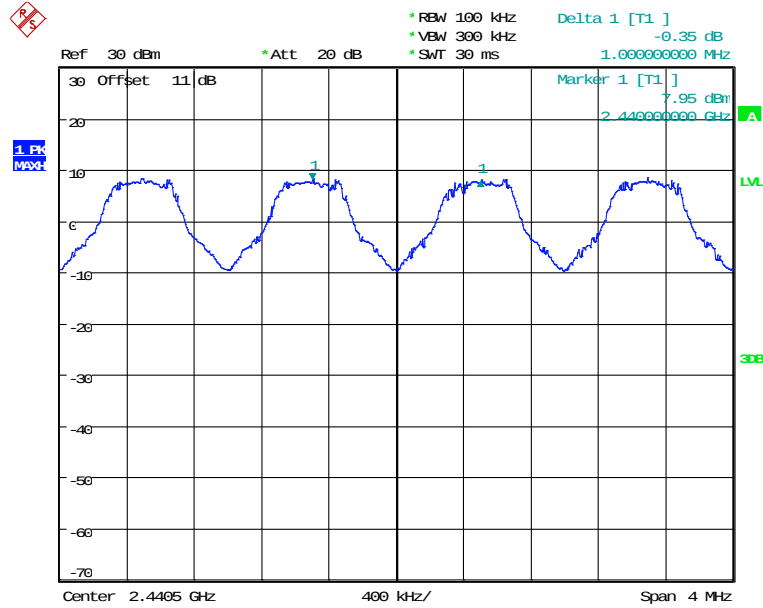

FREQUENCY SEPARATION CH39
Date: 8.FEB.2023 16:43:57

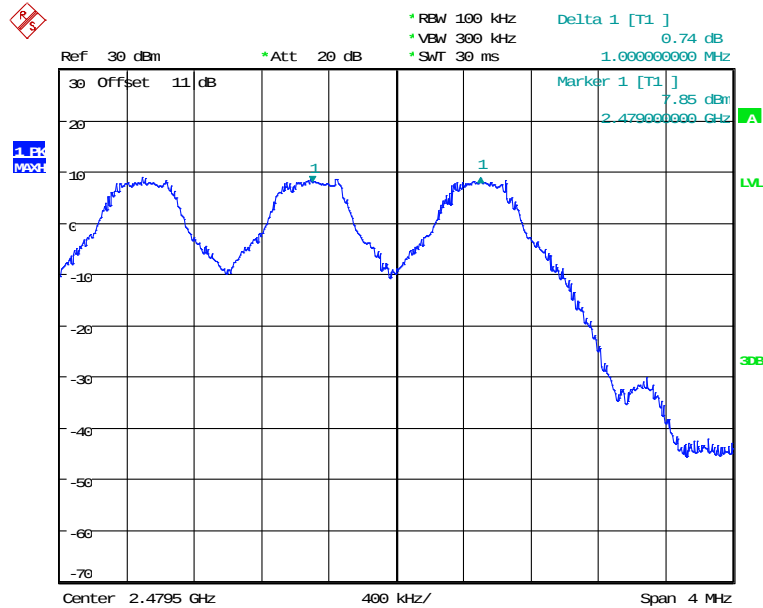

FREQUENCY SEPARATION CH78
Date: 8.FEB.2023 16:45:22



Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

Limits:

Frequency Range MHz	Limits	
	20 dB bandwidth < 25 kHz	20 dB bandwidth > 25 kHz
902-928	25 kHz	20 dB bandwidth
2400-2483.5 5725-5850.0	25 kHz	20 dB bandwidth

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

3.5 Number of Hopping Frequencies

According to FCC rules part 15 subpart C §15.247 frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies. Frequency hopping systems in 5725-5850 MHz bands shall use least 75 hopping frequencies.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20dB bandwidth of the hopping channel 250 kHz or greater, the system shall use at least 25 hopping frequencies.

Test date: February 07, 2023


Temperature: 20.3°C

Humidity: 59.2 %


Tester: Sora

Bluetooth


Normal & EDR

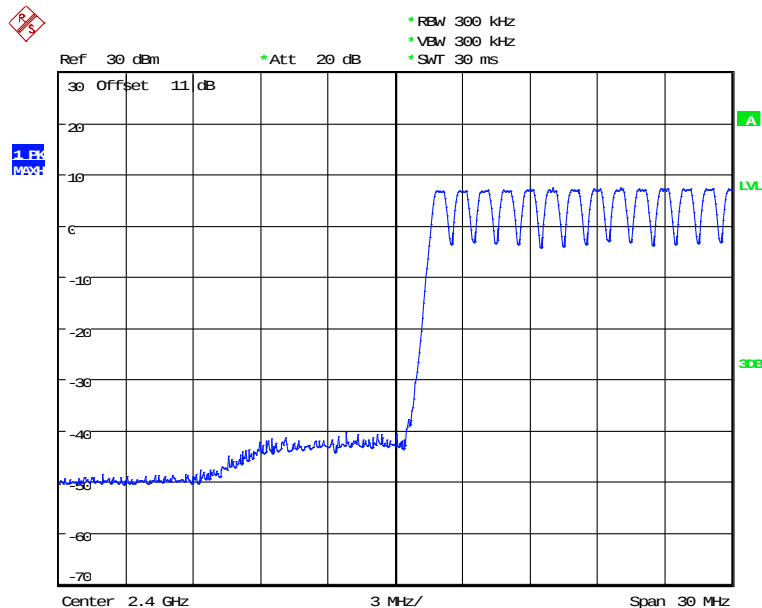


NUMBER OF HOPPING CH0-13
Date: 7.FEB.2023 17:58:42




Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

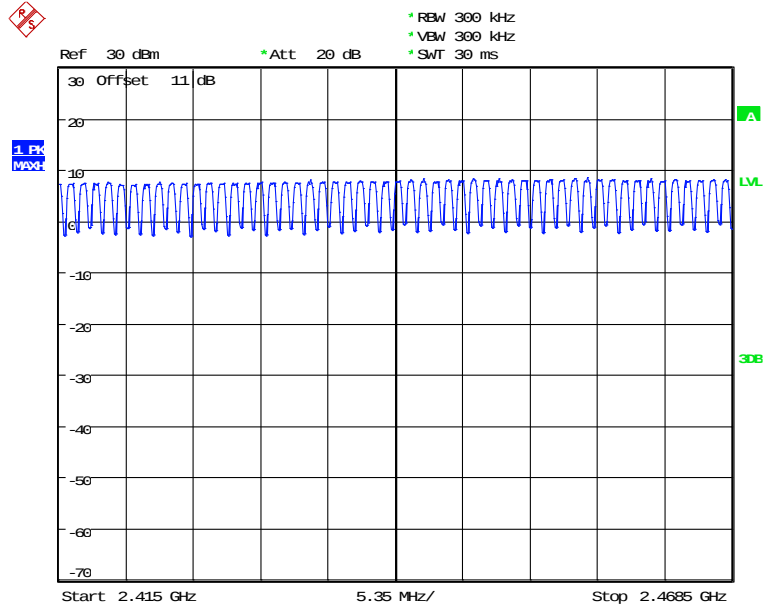

NUMBER OF HOPPING CH14-66
Date: 7.FEB.2023 18:01:21

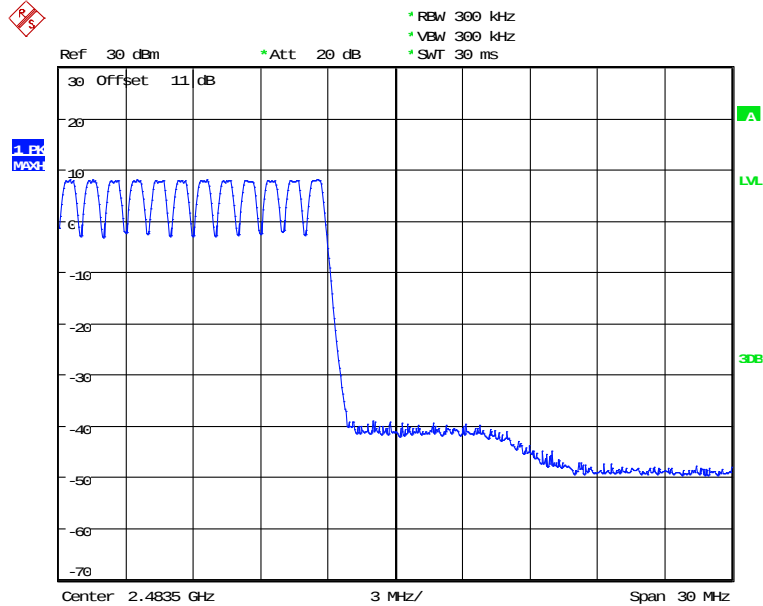

NUMBER OF HOPPING CH67-78
Date: 7.FEB.2023 18:03:17



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

Limits:

Frequency Range MHz	Limit	
	20dB Bandwidth	Number of Channels
902-928 MHz	Bandwidth < 250 kHz	≥ 50
	Bandwidth ≥ 250 kHz	≥ 25
2400-2483.5	not defined	15
5725-5850.0 MHz	1 MHz	75

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

3.5.1 Pseudorandom Frequency Hopping Sequence


The generation of the hopping sequence is determined by the Bluetooth core specification and complies with the FCC requirements.

3.5.2 Coordination of hopping sequences to other transmitters

According to the Bluetooth core specification such a coordination is not possible. During scatternet function only one of the two hopping sequences will be used at a definite moment.

3.5.3 System Receiver Hopping Capability

According to the Bluetooth core specification. The system receivers shift frequencies in synchronization with the transmitted signals.



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

3.6 Time of Occupancy (Dwell Time)

Frequency hopping systems operating in the 5725-5850 MHz band shall use an average time of occupancy on any frequency not greater than 0.4 seconds within a 30 second period.

In 2400-2483.5 MHz band the average time of occupancy on any channel shall not be greater than 0.4 seconds multiplied by the number of hopping channels employed.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not greater than 0.4 seconds within a 20 second period; if the 20dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

Test date: February 07, 2023


Temperature: 20.3°C

Humidity: 59.2 %


Tester: Sora

Bluetooth

Normal & EDR

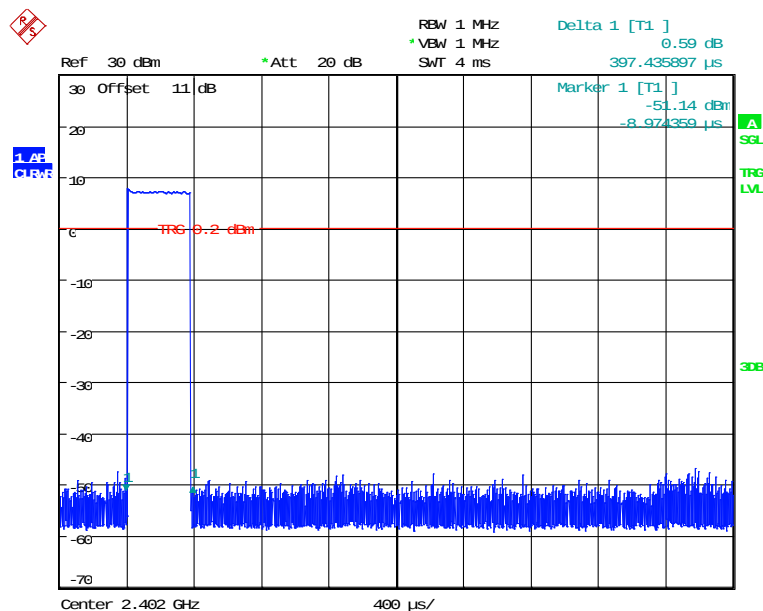


DWELL TIME CH0 DH1 (0.397ms * 320 events = 127.04ms)
Date: 7.FEB.2023 18:38:44




Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

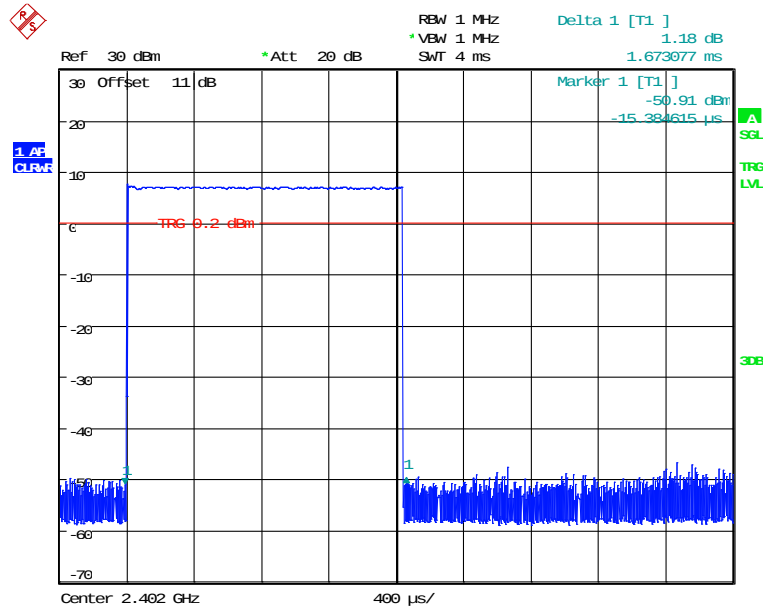

DWELL TIME CH0 DH3 (1.673ms * 160 events = 267.68ms)

Date: 7.FEB.2023 18:41:52


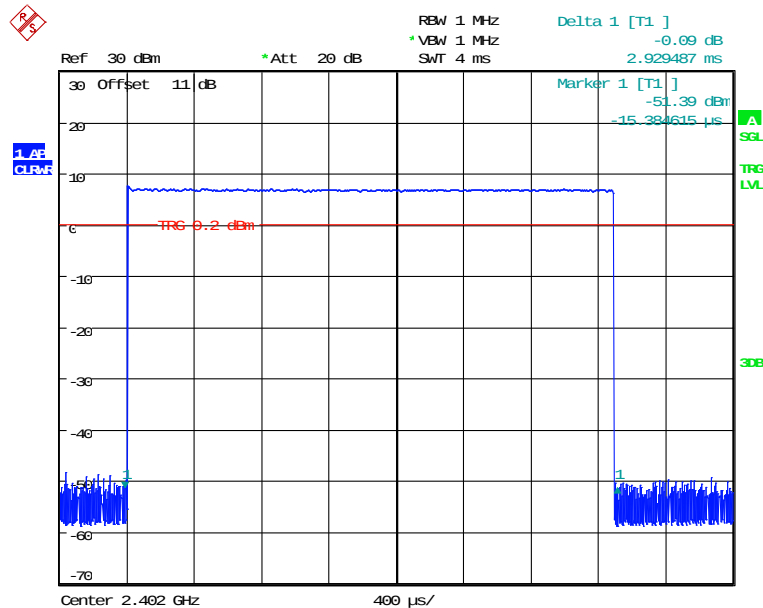



DWELL TIME CH0 DH5 (2.929ms * 106 events = 310.47ms)

Date: 7.FEB.2023 18:45:13




FCC ID: 2AS6P-EMV3A






Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

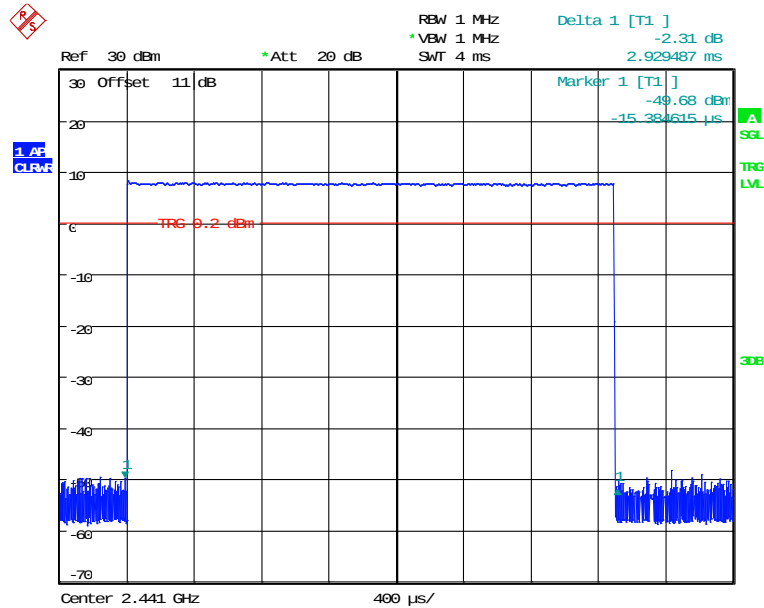

DWELL TIME CH39 DH5 (2.929ms * 106 events = 310.47ms)
Date: 7.FEB.2023 18:46:37

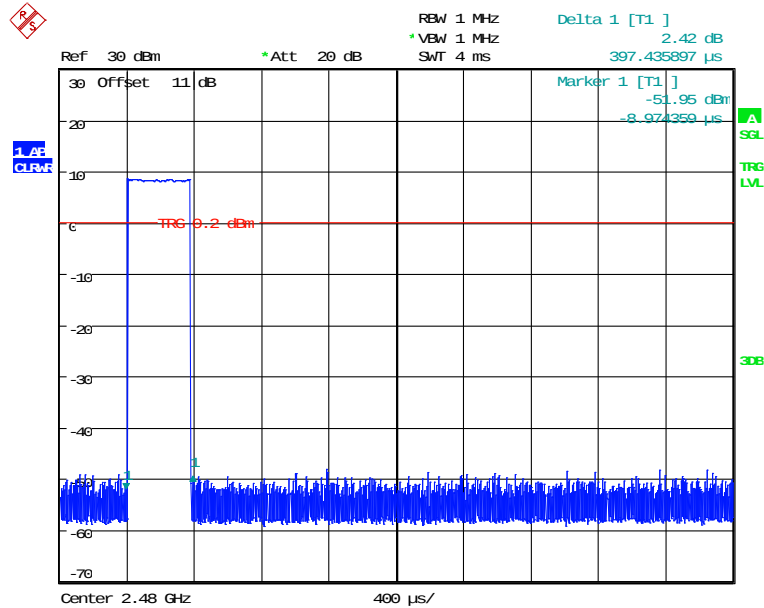


DWELL TIME CH78 DH1 (0.397ms * 320 events = 127.04ms)
Date: 7.FEB.2023 18:39:52



FCC ID: 2AS6P-EMV3A






Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

Limits and measurement periods:

Frequency MHz	Number of channels	Measurement Period	Limit
902 – 928	≥ 50	20 s	0.4 s
	$49 \geq 25$	10 s	0.4 s
2400 – 2483.5	≥ 15	0.4 s * number of used channels	0.4 s
5725- 5850	≥ 75	30 s	0.4s

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

3.7 20dB Bandwidth

Frequency hopping systems operating in the 5725-5850 MHz bands shall use a maximum 20dB bandwidth of 1 MHz.

The 20dB bandwidth is measured on the lowest, middle and highest hopping channel.

For frequency hopping systems operating in the 902-928 MHz band the maximum 20dB bandwidth of the hopping channel is 500 kHz.


Test date: February 07, 2023

Temperature: 20.3°C

Humidity: 59.2 %


Tester: Sora

Bluetooth Normal

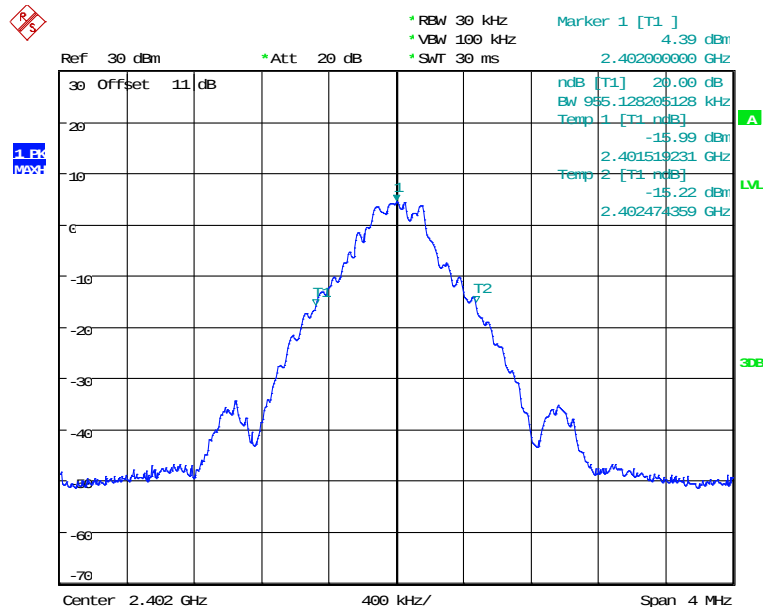


20DB BANDWIDTH CH0


Date: 7.FEB.2023 17:06:33




Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

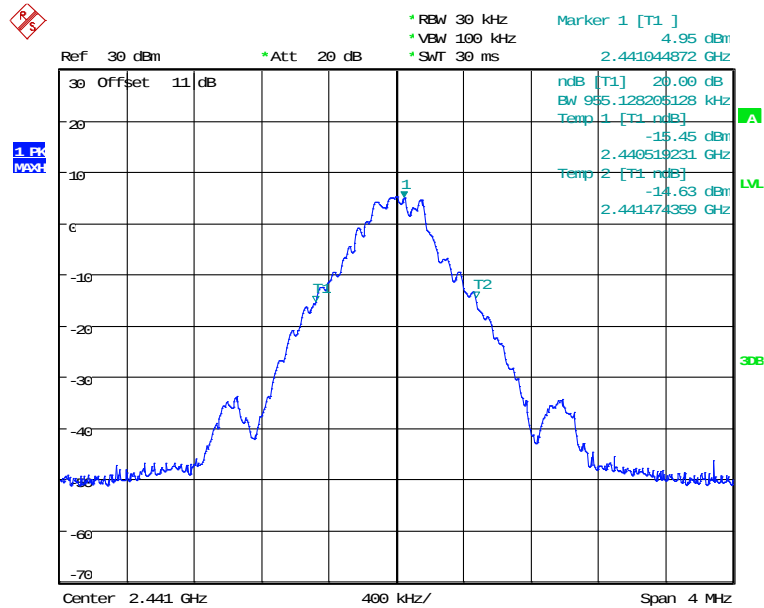

20DB BANDWIDTH CH39
Date: 7.FEB.2023 17:10:11

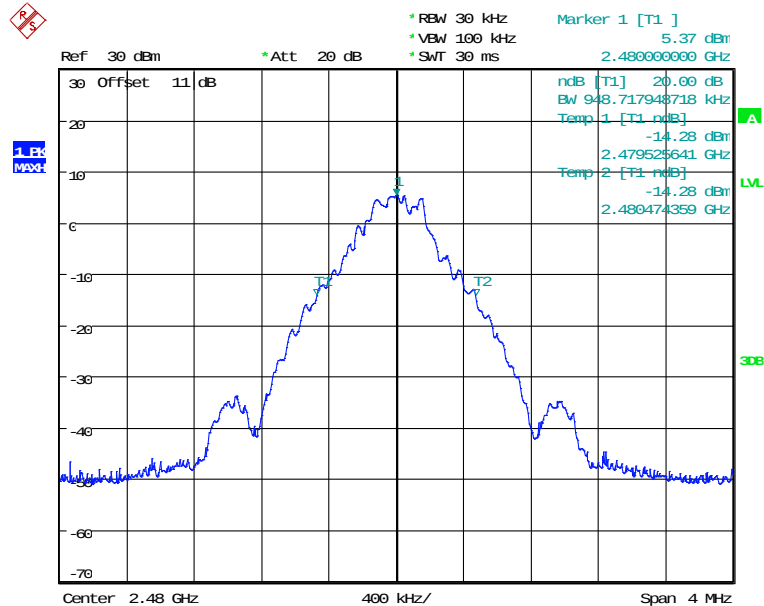


20DB BANDWIDTH CH78
Date: 7.FEB.2023 17:09:34



Registration number: W6M22301-22427-C-1


FCC ID: 2AS6P-EMV3A

EDR

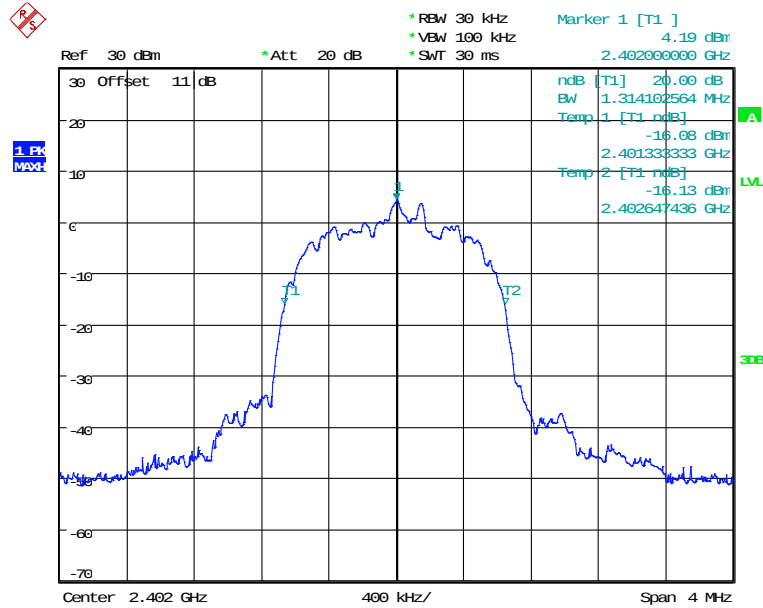

20DB BANDWIDTH CH0 EDR MODE

Date: 7.FEB.2023 17:12:22

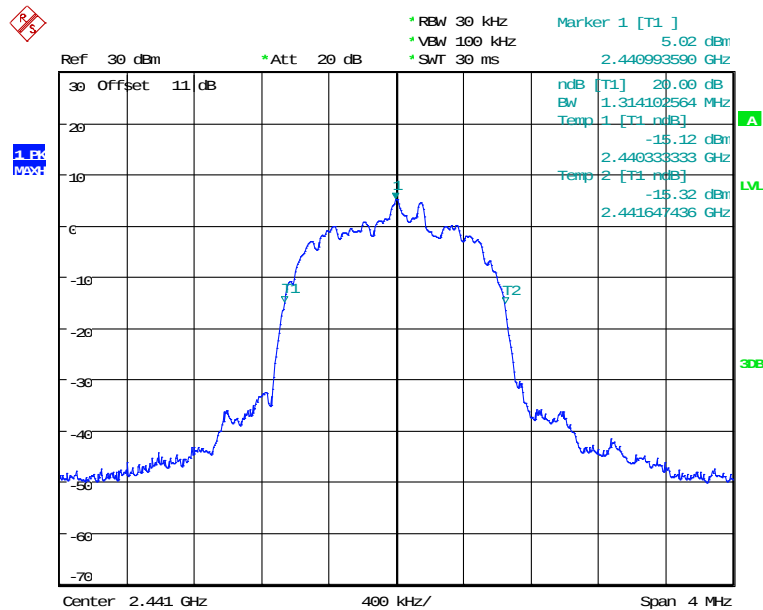


20DB BANDWIDTH CH39 EDR MODE

Date: 7.FEB.2023 17:13:41

Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

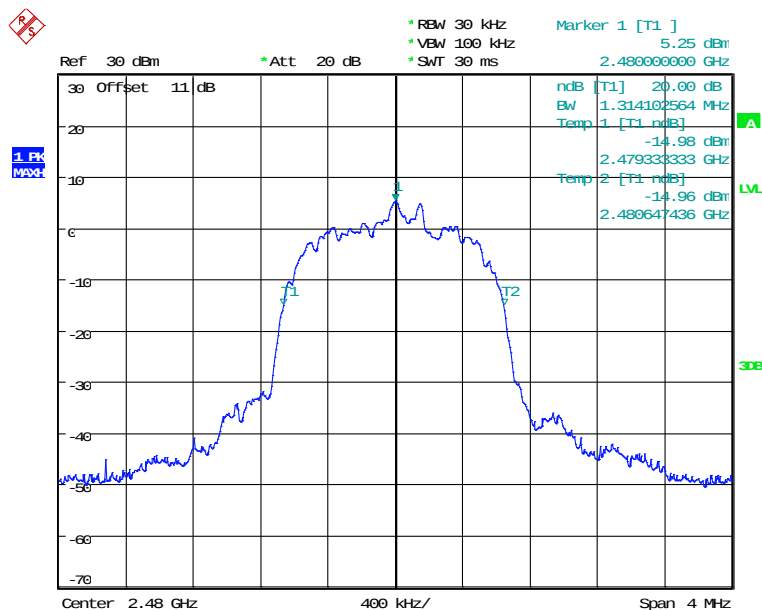

20DB BANDWIDTH CH78 EDR MODE
Date: 7.FEB.2023 17:14:40

Limits:

Frequency Range / MHz	Limit
902-928	≤ 500 kHz
2400-2483.5	not defined
5725-5850	≤ 1 MHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

3.7.1 System Receiver Input Bandwidth

It is determined in the Bluetooth core specification. The value matches to the bandwidth of transmitter signal.

Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

3.8 Minimum 6 dB Bandwidth

The analyzer ResBW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK reading was taken, two markers were set 6 dB below the maximum level on the right and the left side of the emission. The 6 dB bandwidth is the frequency difference between the two markers.


Test date: February 08, 2023- May 09, 2023

Temperature: 22.1°C

Humidity: 57.0 %


Tester: Sora

WLAN 802.11b

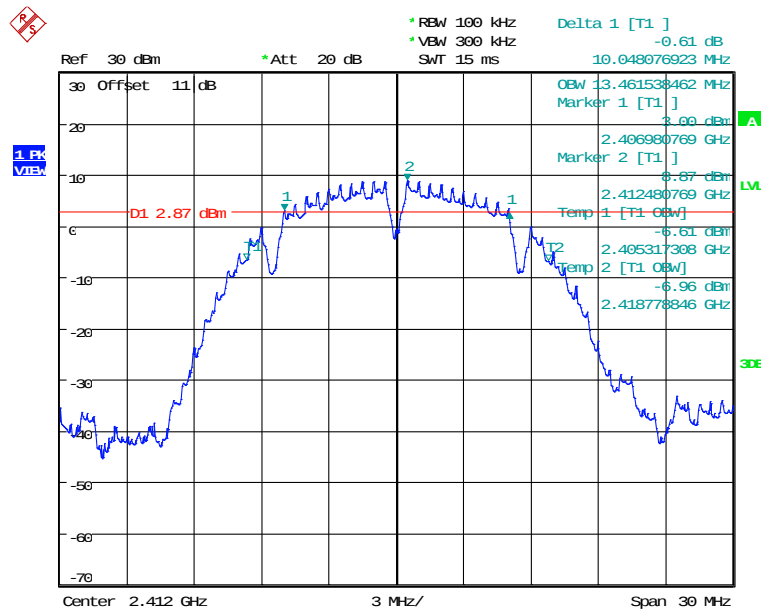


6DB BANDWIDTH 802.11B CH01


Date: 8.FEB.2023 16:52:21




Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

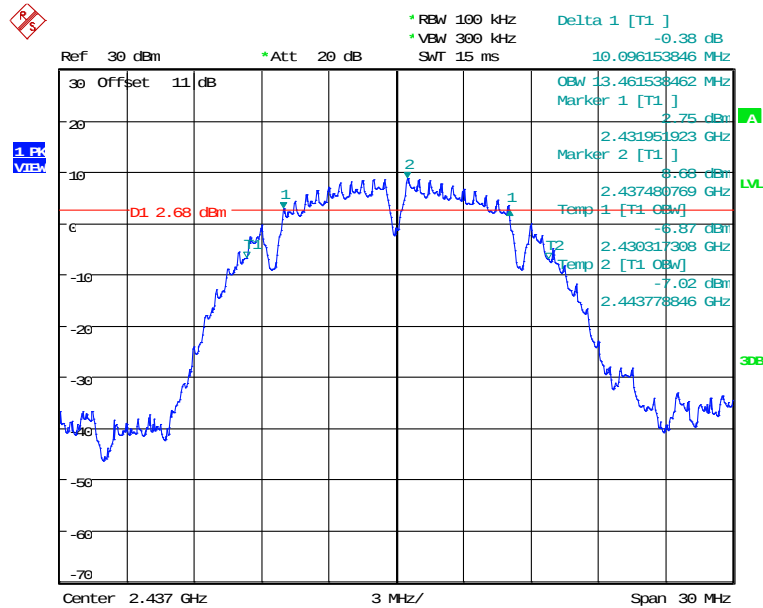

6DB BANDWIDTH 802.11B CH06
Date: 8.FEB.2023 16:55:07

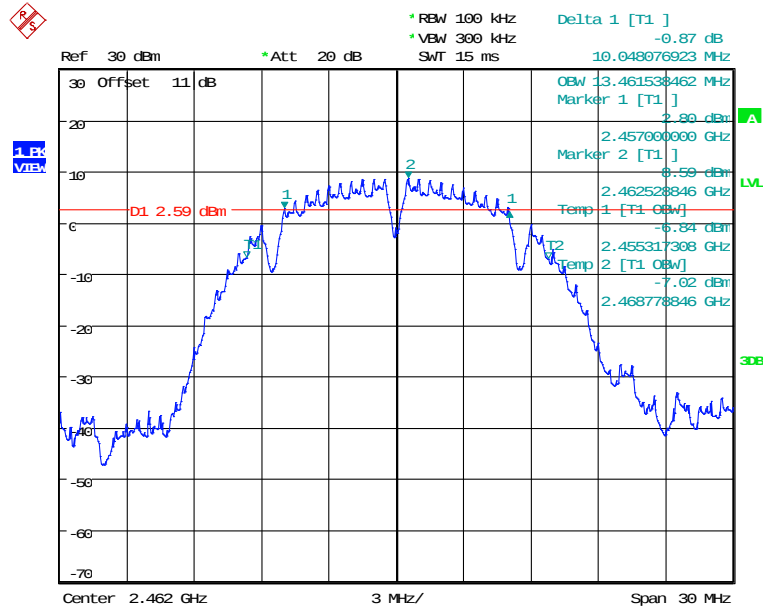


6DB BANDWIDTH 802.11B CH11
Date: 8.FEB.2023 16:56:40



Registration number: W6M22301-22427-C-1


FCC ID: 2AS6P-EMV3A

802.11g

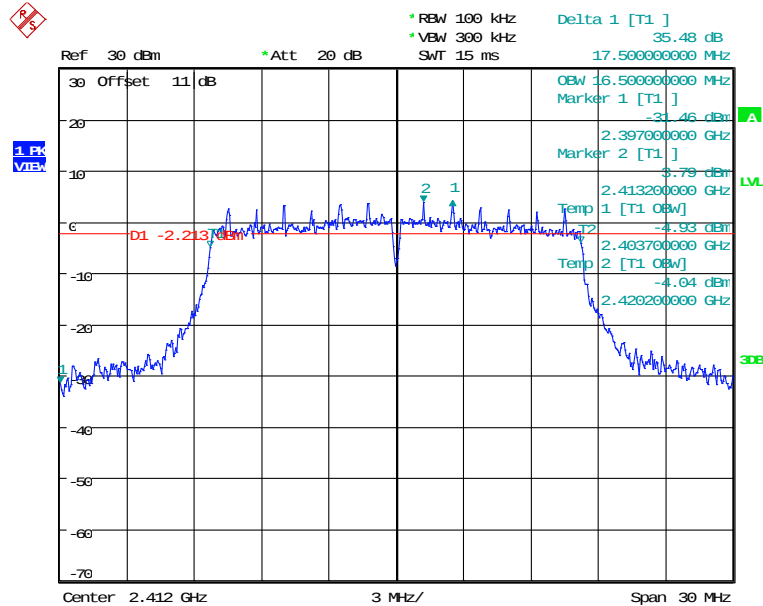

6DB BANDWIDTH 802.11G CH01

Date: 9.MAY.2023 09:25:14

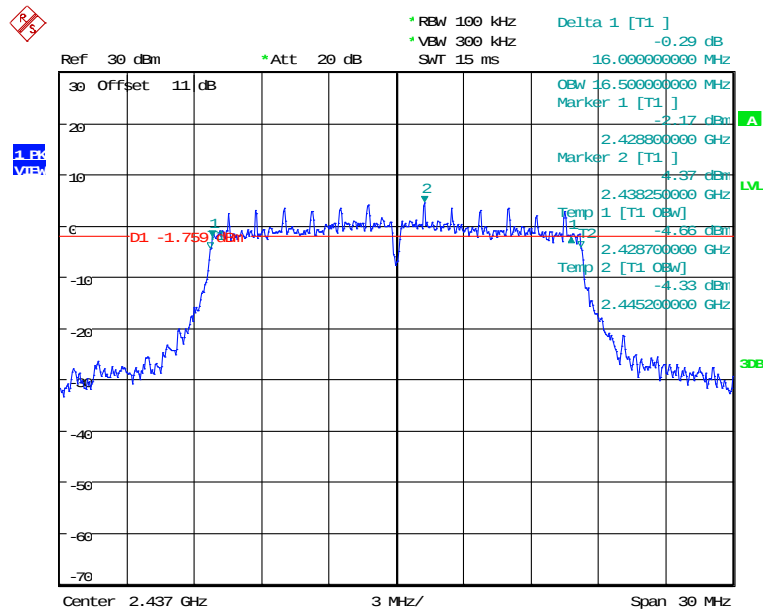


6DB BANDWIDTH 802.11G CH06

Date: 9.MAY.2023 09:32:15




Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

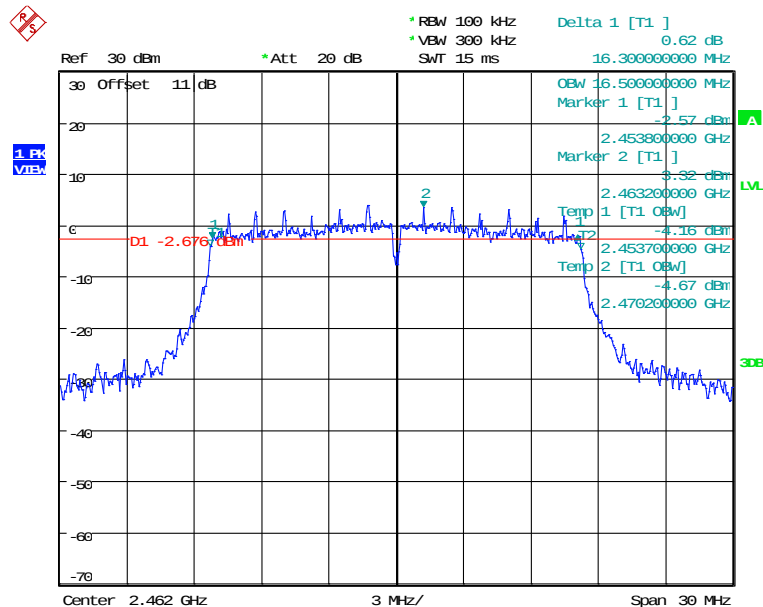

6DB BANDWIDTH 802.11G CH11
Date: 9.MAY.2023 09:30:14

802.11n 20MHz

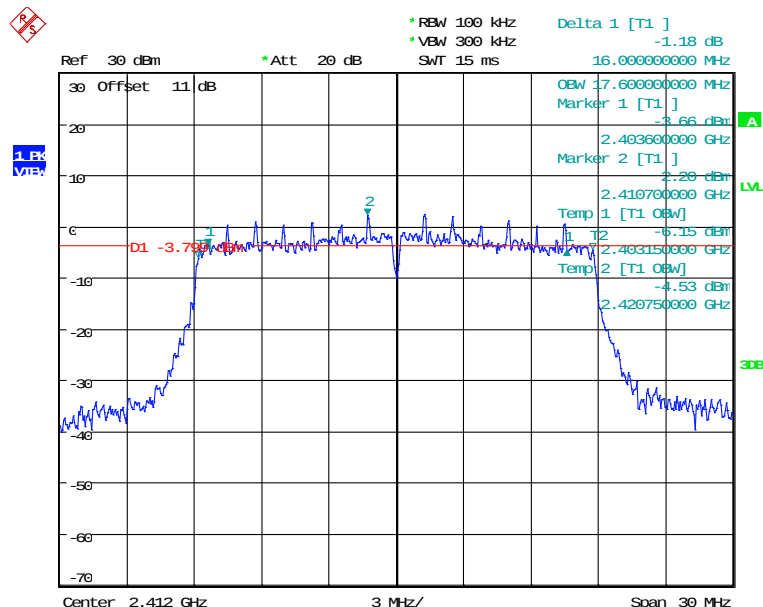


6DB BANDWIDTH 802.11N 20MHZ CH01
Date: 9.MAY.2023 09:42:34




Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

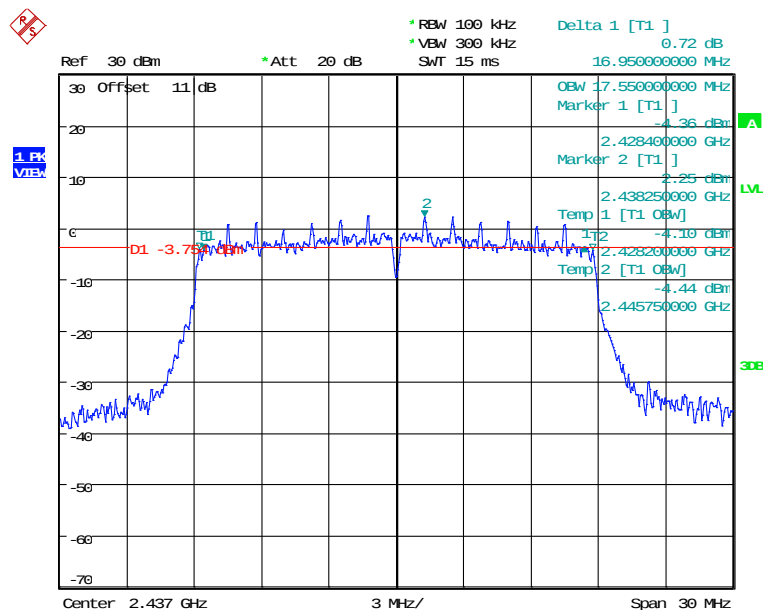


6DB BANDWIDTH 802.11N 20MHZ CH06

Date: 9.MAY.2023 09:37:44

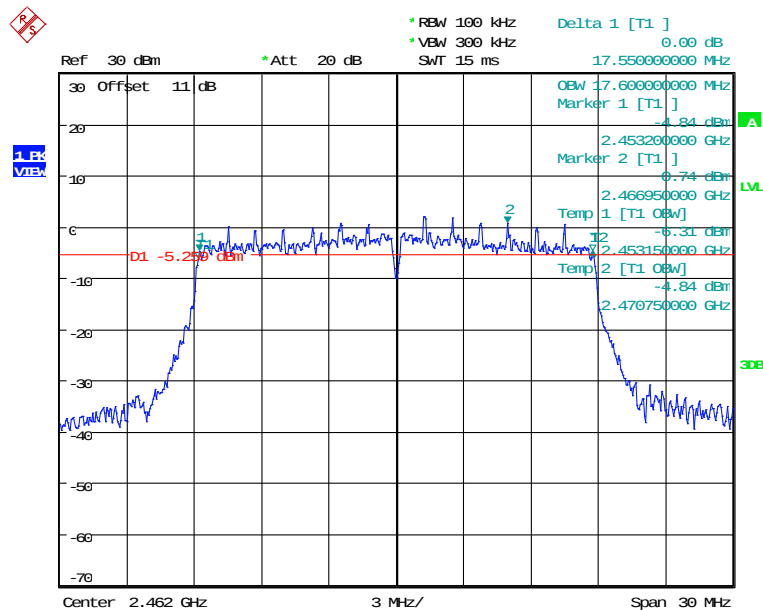

6DB BANDWIDTH 802.11N 20MHZ CH11


Date: 9.MAY.2023 09:40:23



Registration number: W6M22301-22427-C-1


FCC ID: 2AS6P-EMV3A

802.11n 40MHz

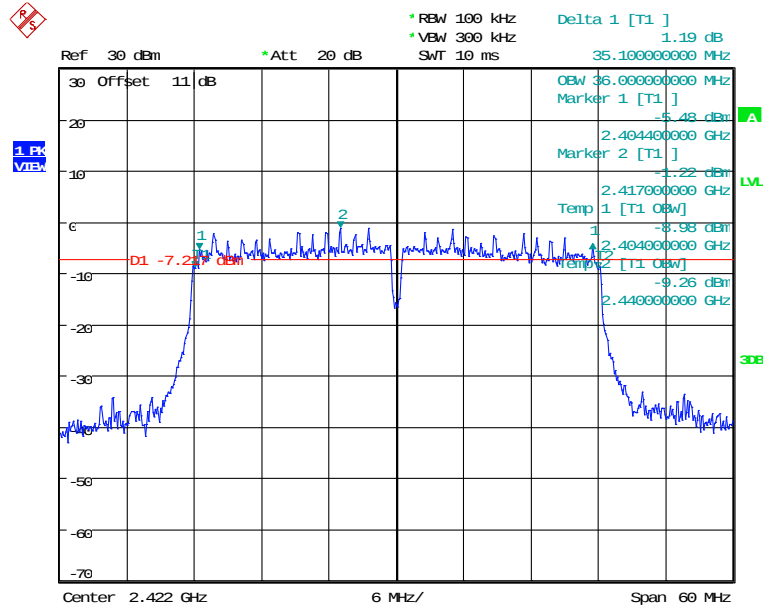


6DB BANDWIDTH 802.11N 40MHZ CH01

Date: 9.MAY.2023 09:45:35

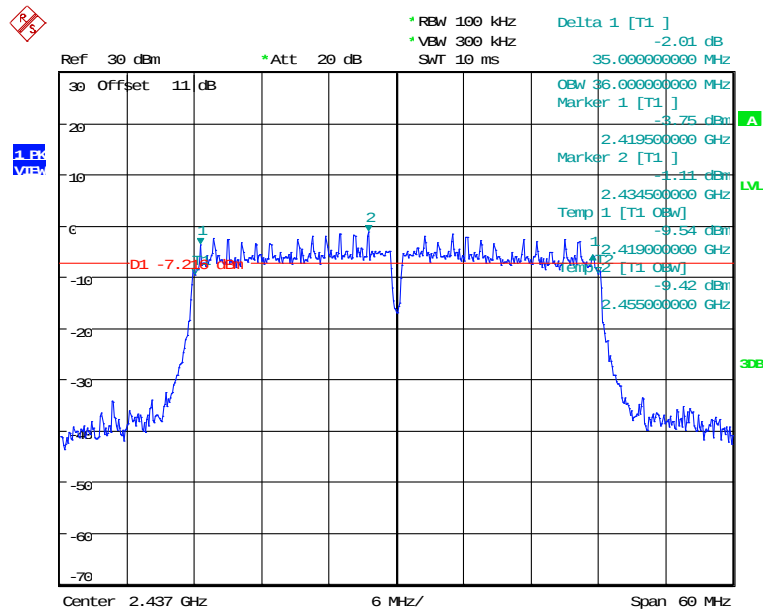


6DB BANDWIDTH 802.11N 40MHZ CH04

Date: 9.MAY.2023 09:49:39




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

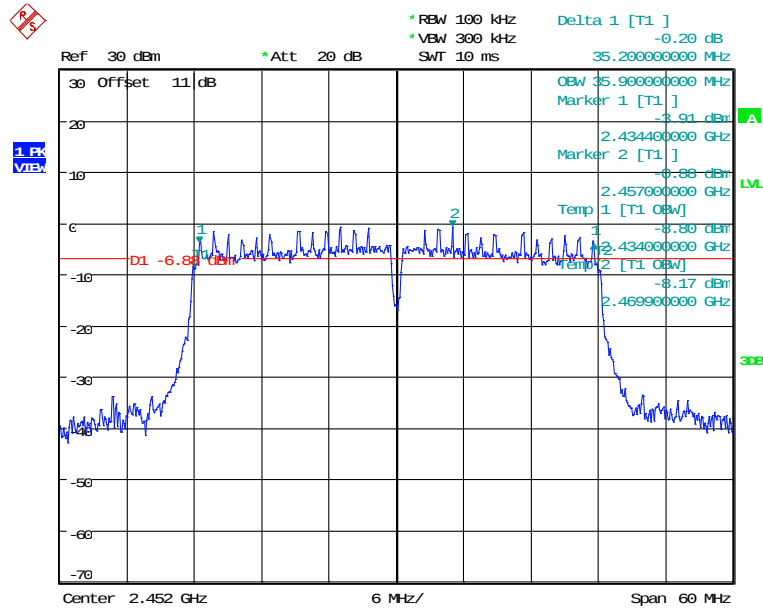


6DB BANDWIDTH 802.11N 40MHZ CH07
Date: 9.MAY.2023 09:53:49


Bluetooth Low Energy

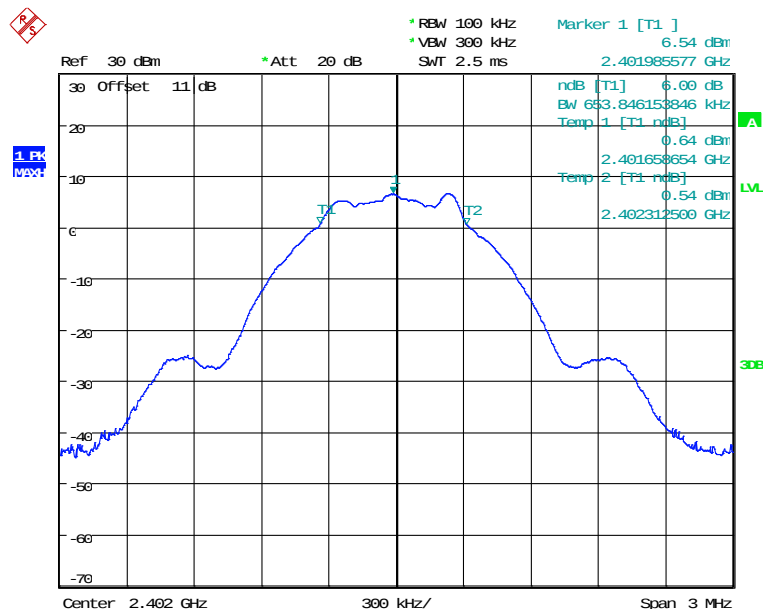


6DB BANDWIDTH BLE 1M CH00
Date: 7.FEB.2023 14:56:29




Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

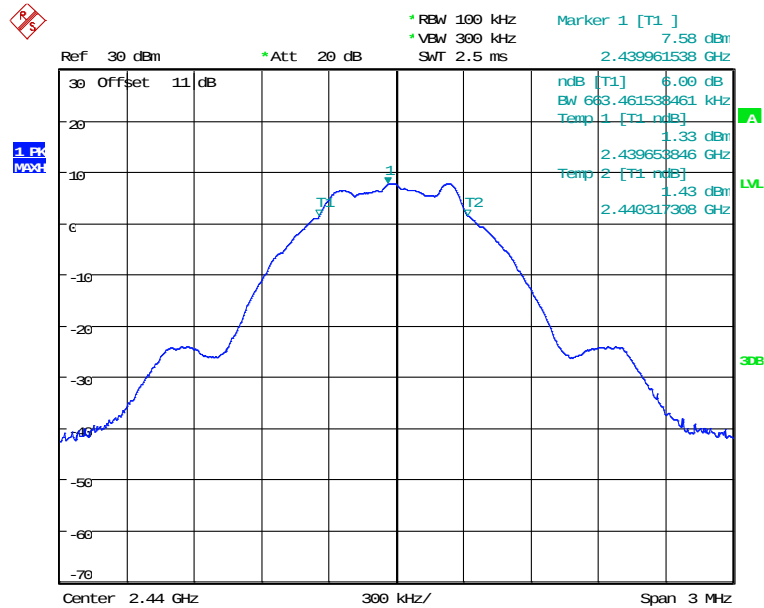

6DB BANDWIDTH BLE 1M CH19
Date: 7.FEB.2023 15:01:20

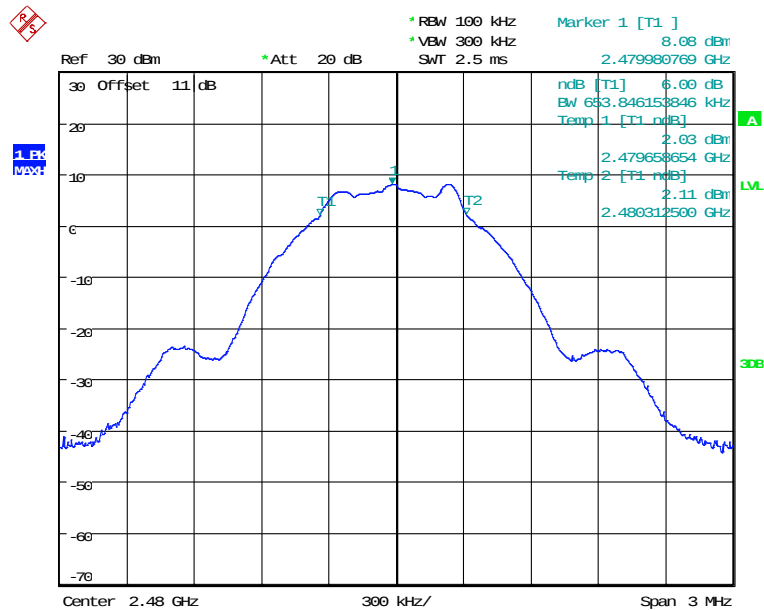

6DB BANDWIDTH BLE 1M CH39
Date: 7.FEB.2023 15:02:24




Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

Limits:

Frequency Range MHz	Limits
902-928	min 500 kHz
2400-2483.5	min 500 kHz
5725-5850	min 500 kHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

3.9 Emissions in nonrestricted frequency bands

According to FCC rules part 15 subpart C §15.247(c) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.


Test date: February 07, 2023~May 09, 2023

Temperature: 22.1°C


Humidity: 57.0 %

Tester: Sora


WLAN 802.11b

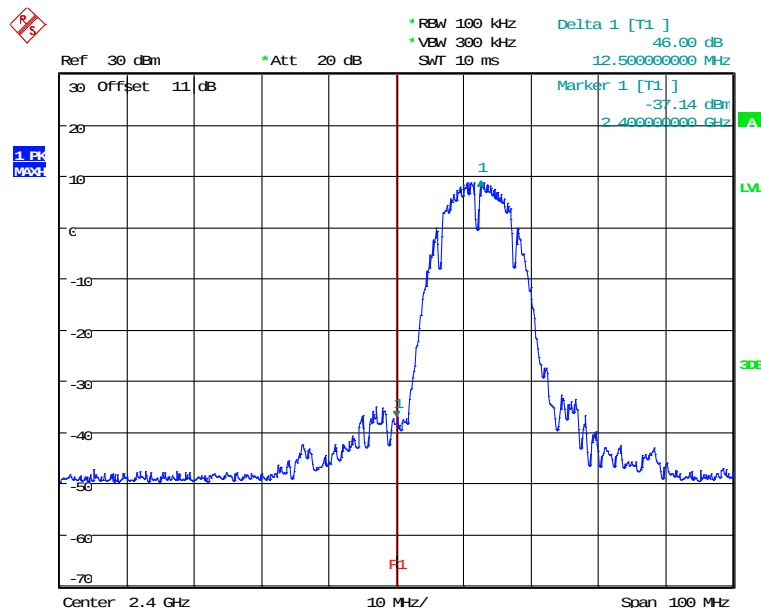

BANDEDGE 802.11B CH01
Date: 8.FEB.2023 18:25:11




Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

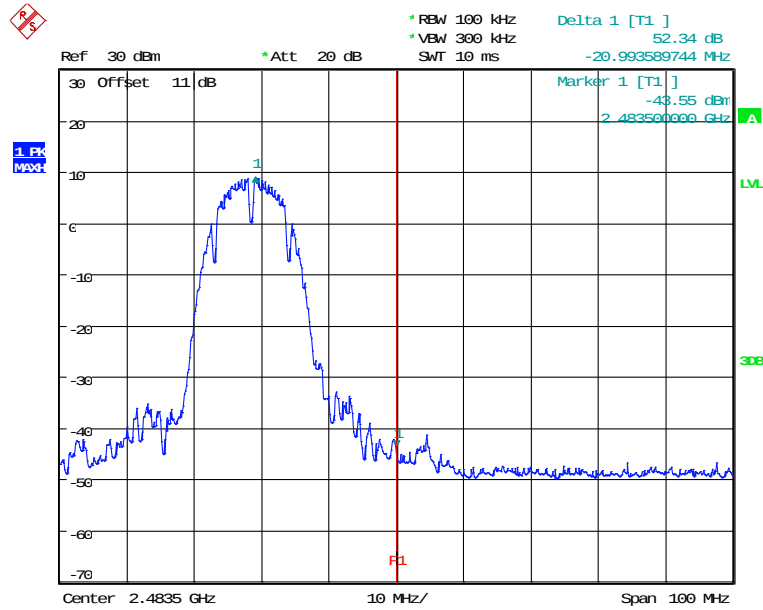

BANDEDGE 802.11B CH11
Date: 8.FEB.2023 18:27:08


802.11g

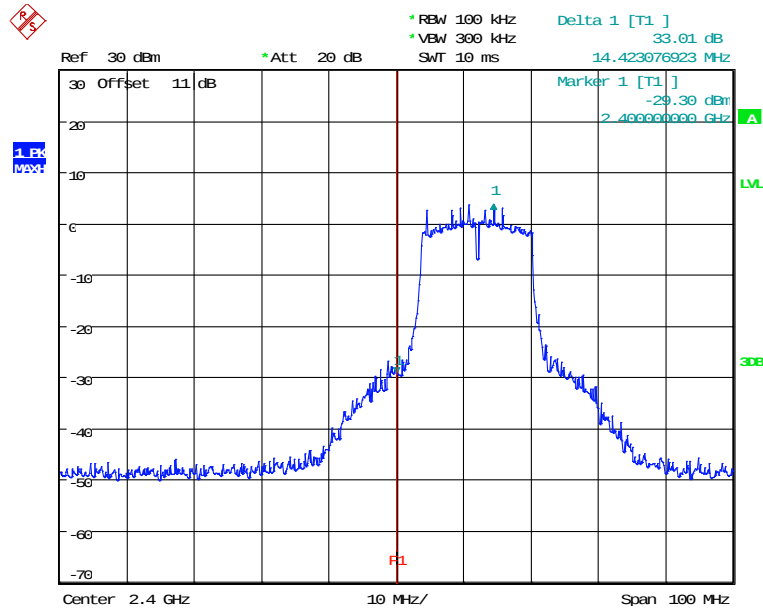

BANDEDGE 802.11G CH01
Date: 9.MAY.2023 09:25:28



FCC ID: 2AS6P-EMV3A



Ref 30 dBm *Att 20 dB


*RBW 100 kHz
*VBW 300 kHz
Swt 10 ms

Delta 1 [T1]
36.80 dB
9.455128205 MHz

Marker 1 [T1]
-35.37 dBm
2.400000000 GHz


Center 2.4 GHz 10 MHz/ Span 100 MHz

BANEDGE 802.11N 20MHZ CH01
Date: 9.MAY.2023 09:42:47




Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

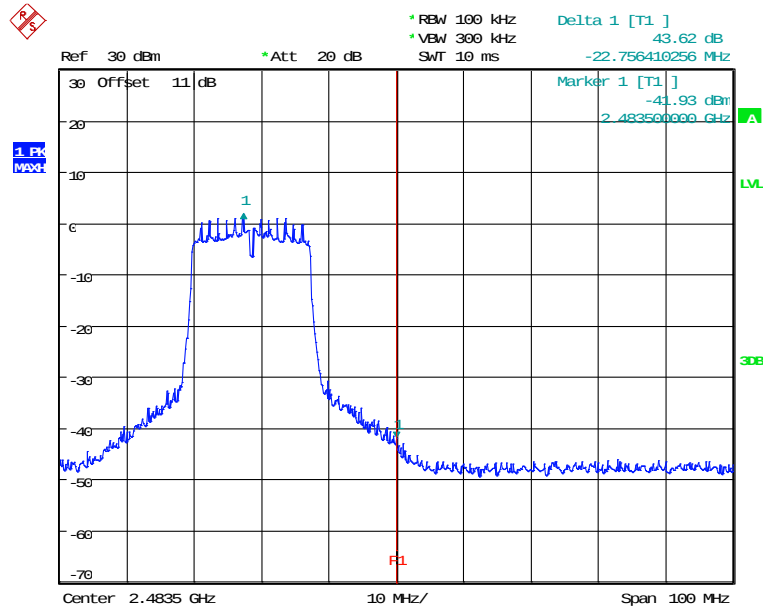


BANDEDGE 802.11N 20MHZ CH11
Date: 9.MAY.2023 09:40:57


802.11n 40MHz

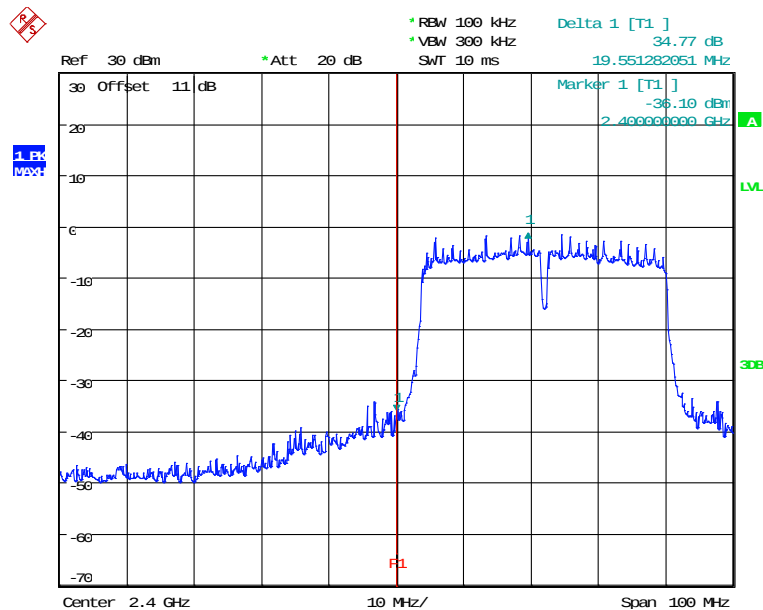

BANDEDGE 802.11N 40MHZ CH01
Date: 9.MAY.2023 09:45:52




Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

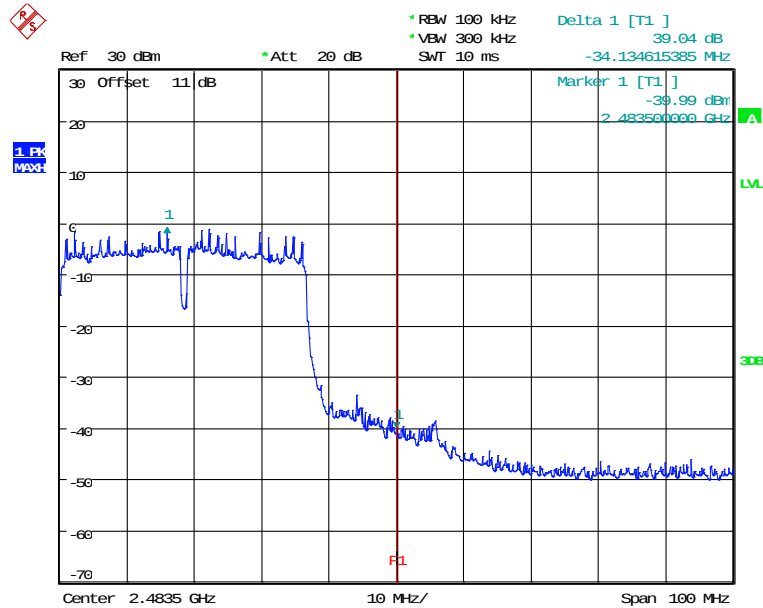


BANDEDGE 802.11N 40MHZ CH07
Date: 9.MAY.2023 09:54:05

Bluetooth Normal

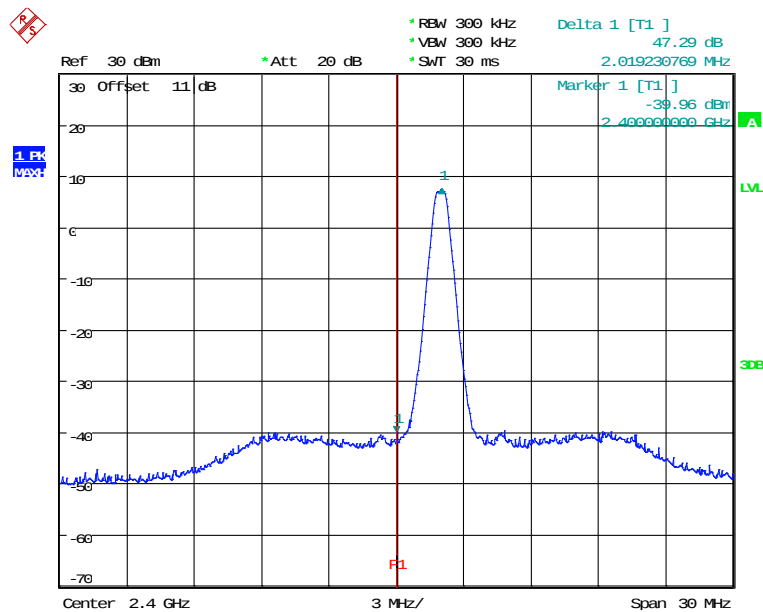


BANDEDGE CH0
Date: 7.FEB.2023 17:22:21




Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

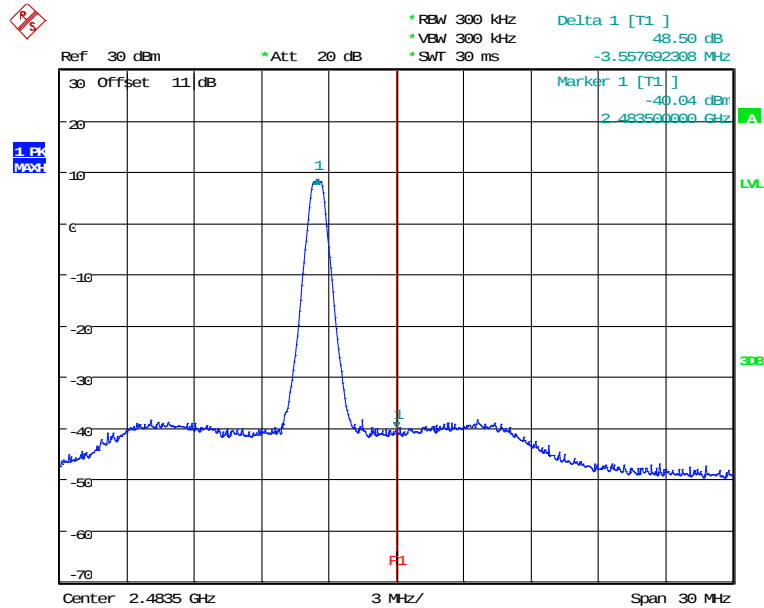


BANDEDGE CH78

Date: 7.FEB.2023 17:23:39

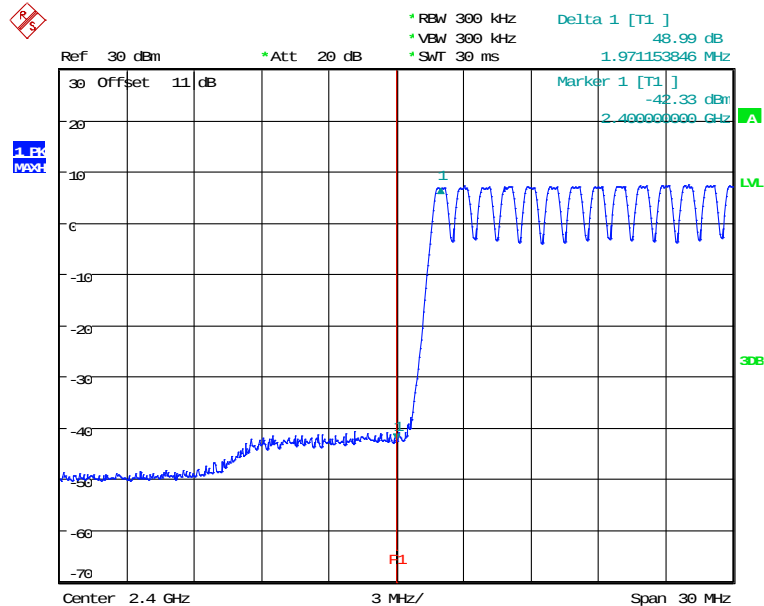


BANDEDGE CH0 HOPPPING MODE

Date: 7.FEB.2023 17:50:02




Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

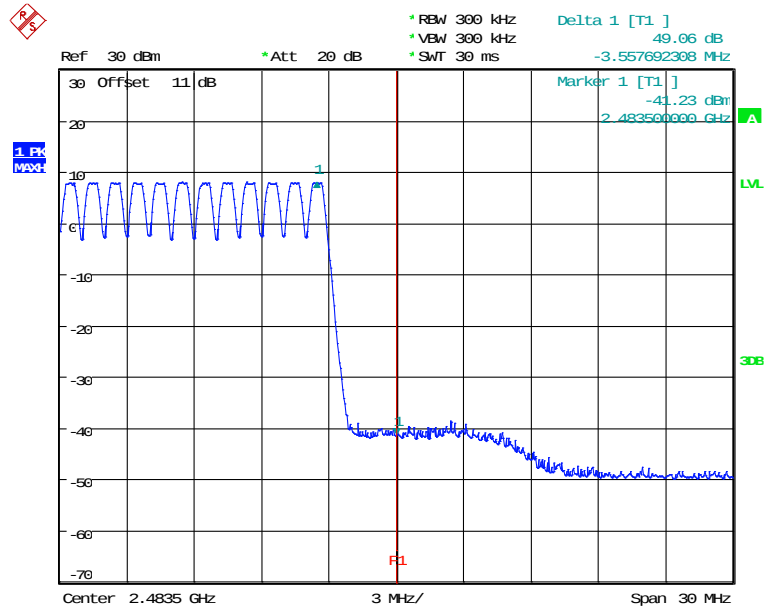

BANDEDGE CH78 HOPPING MODE
Date: 7.FEB.2023 17:51:21


EDR

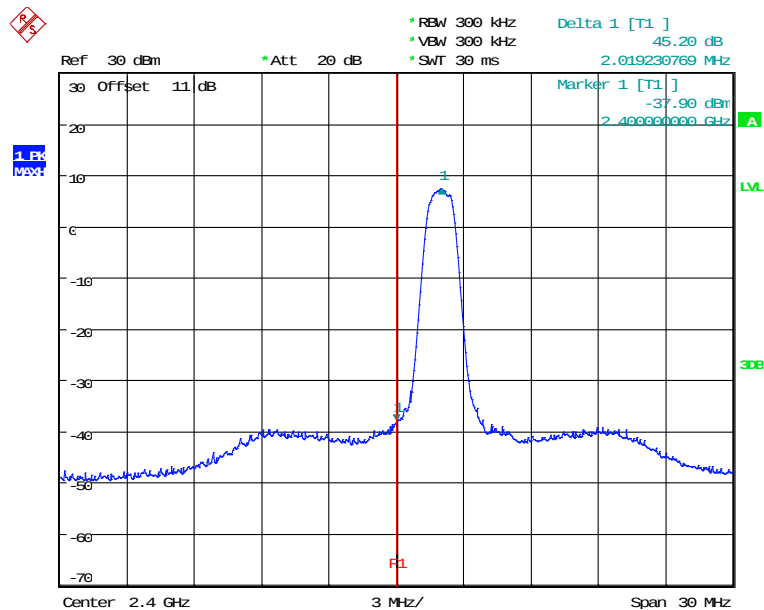


BANDEDGE CH0 EDR MODE
Date: 7.FEB.2023 17:35:20




FCC ID: 2AS6P-EMV3A

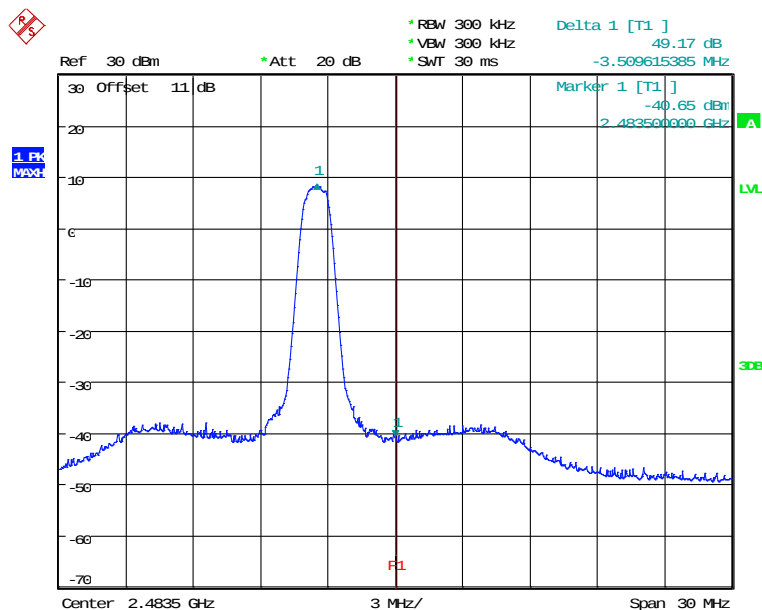


BANEDGE CH78 EDR MODE
Date: 7.FEB.2023 17:36:39

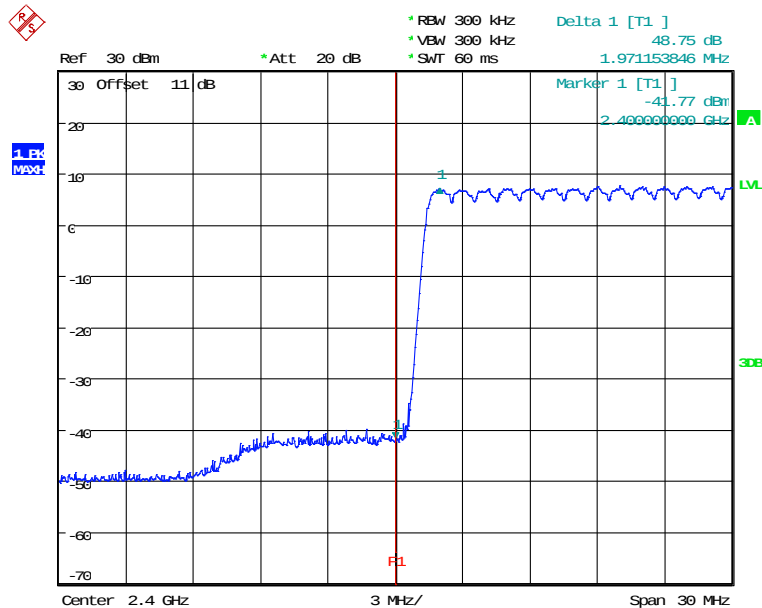

BANDEDGE CH0 EDR HOPPPING MODE
Date: 7.FEB.2023 17:42:28




Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

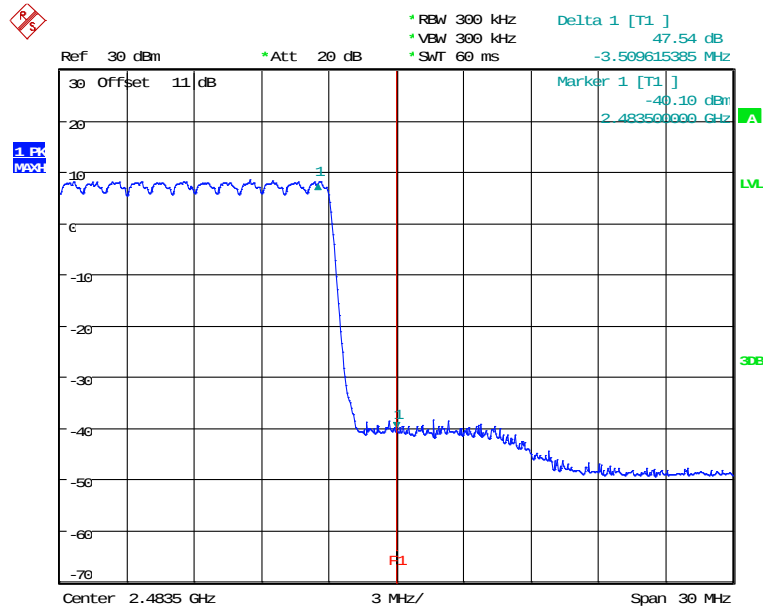


BANDEDGE CH78 EDR HOPPING MODE
Date: 7.FEB.2023 17:40:05

Low Energy

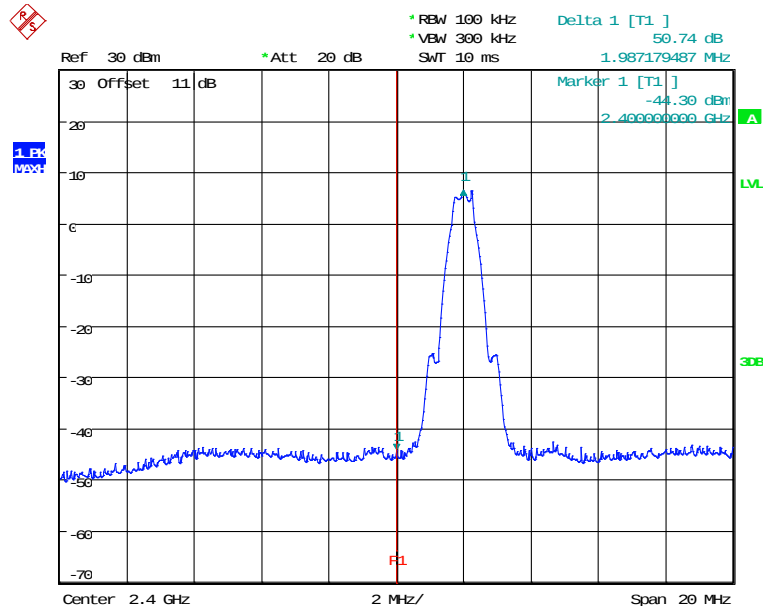


BANDEDGE BLE 1M CH00
Date: 7.FEB.2023 15:05:18



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

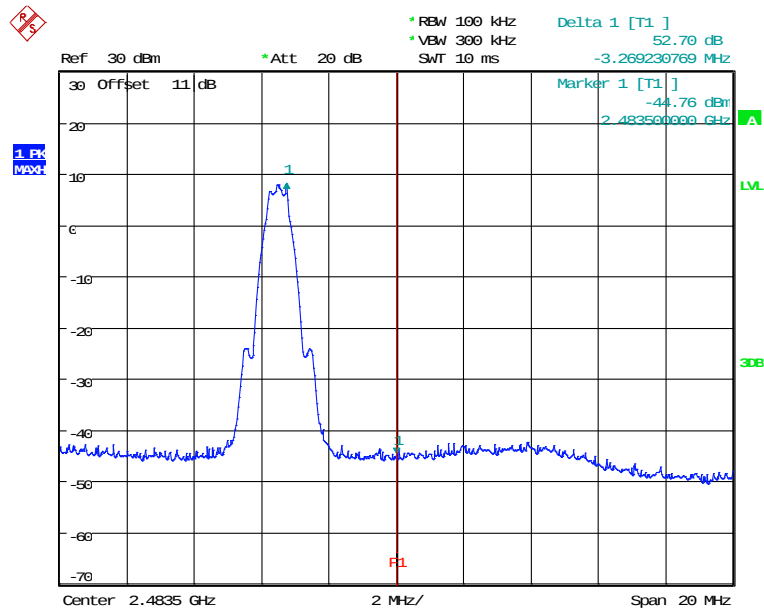

BANDEDGE BLE 1M CH39
Date: 7.FEB.2023 15:06:44

Limit:

Frequency Range / MHz	Limit
902 – 928	- 20 dB
2400 – 2483.5	
5725 - 5850	

Test equipment used: ETSTW-RE 055, ETSTW-RE 050, ETSTW-RE 064

Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

3.10 Peak Power Spectral Density

Peak Power Spectral density is a measured at low, middle and high channel.

The peak output power is measured with a measurement bandwidth of 10 MHz and displayed on diagram together with Peak Power Spectral Density result which was measured with a bandwidth of 3 kHz, appreciate frequency span and sweep time.


Test date: February 07, 2023~May 09, 2023

Temperature: 22.1°C


Humidity: 57.0 %

Tester: Sora


WLAN 802.11b

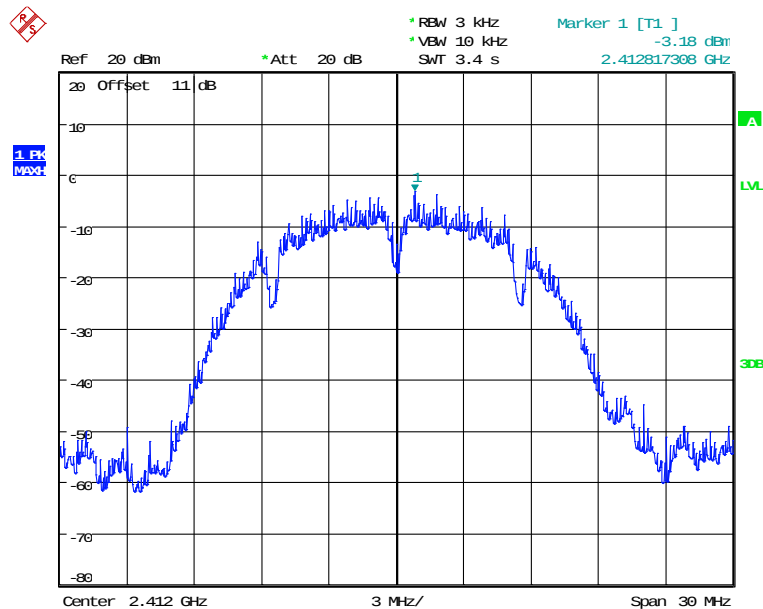


POWER DENSITY 802.11B CH01
Date: 9.FEB.2023 10:59:01




Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

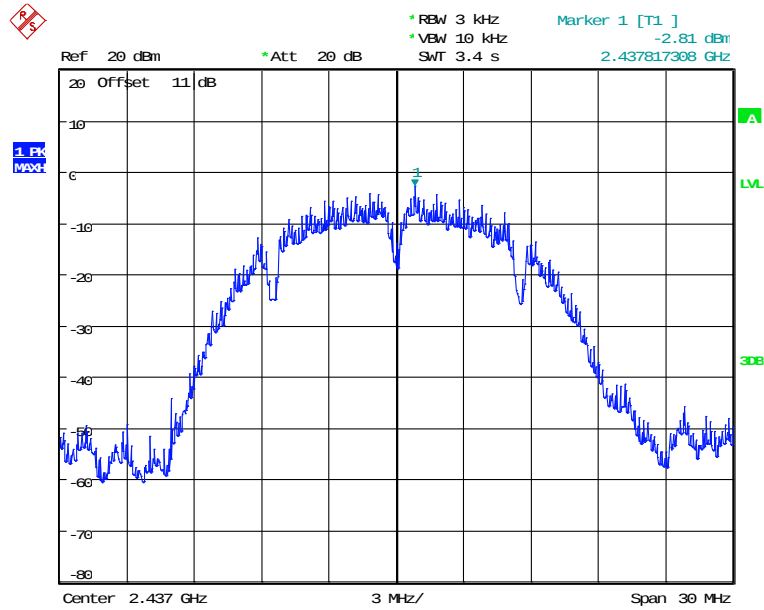

POWER DENSITY 802.11B CH06
Date: 9.FEB.2023 10:59:58

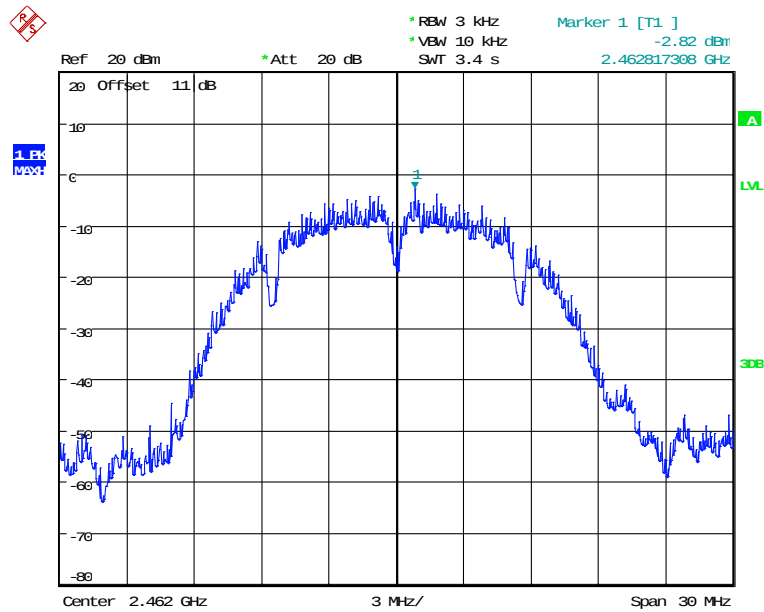

POWER DENSITY 802.11B CH11
Date: 9.FEB.2023 11:00:35




Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22301-22427-C-1


FCC ID: 2AS6P-EMV3A

802.11g

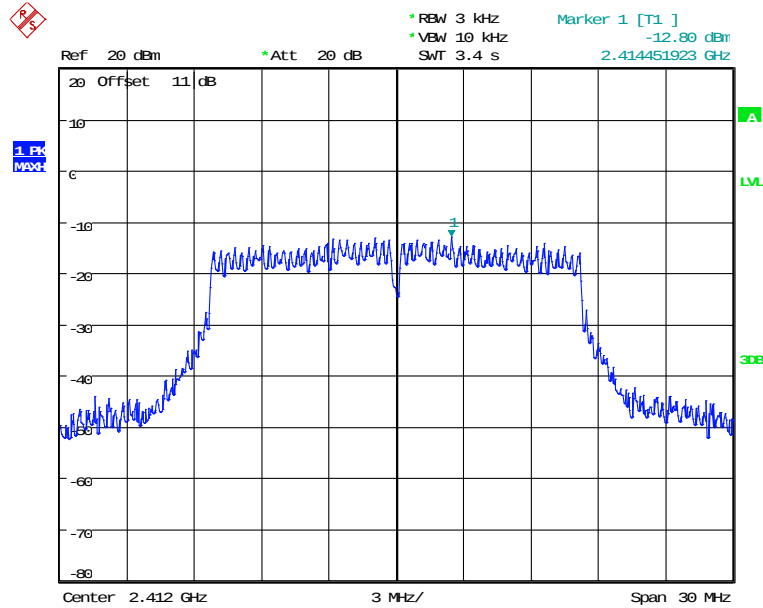


POWER DENSITY 802.11G CH01

Date: 9.MAY.2023 09:25:23

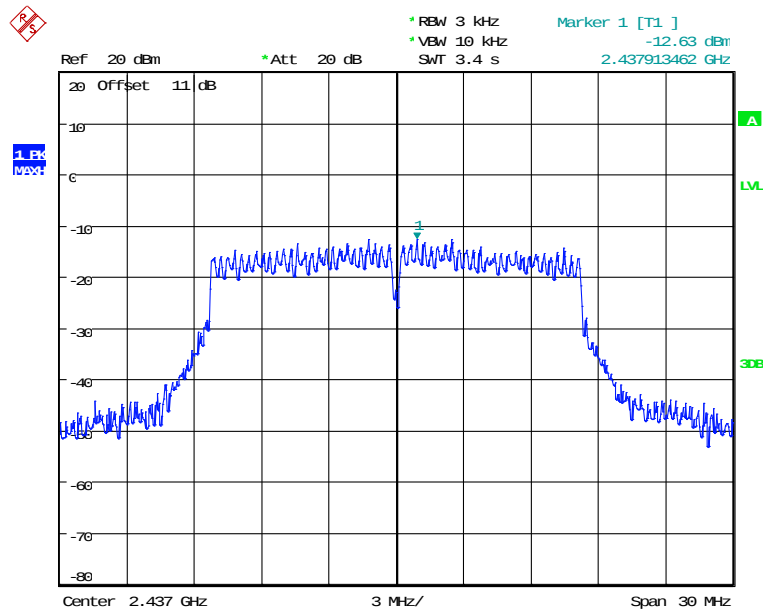


POWER DENSITY 802.11G CH06

Date: 9.MAY.2023 09:32:24




Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

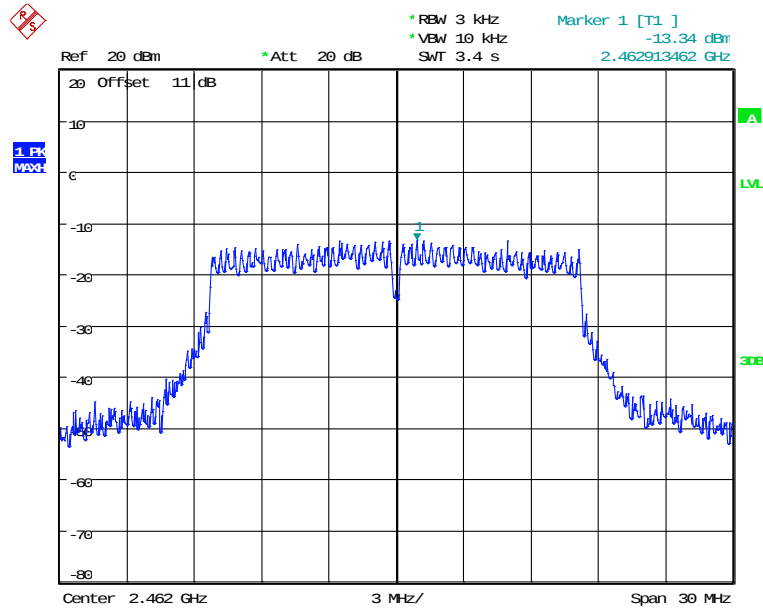


POWER DENSITY 802.11G CH11
Date: 9.MAY.2023 09:30:23


802.11n 20MHz

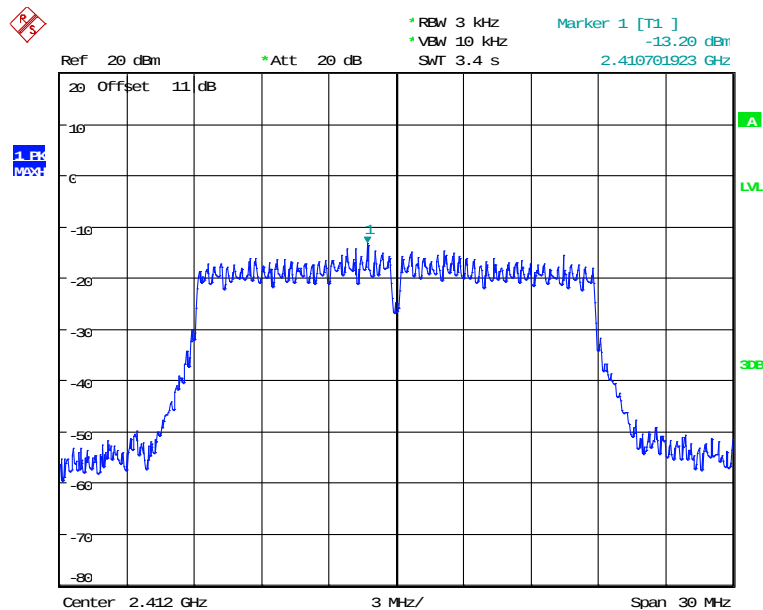


POWER DENSITY 802.11N 20MHZ CH01
Date: 9.MAY.2023 09:42:43




Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

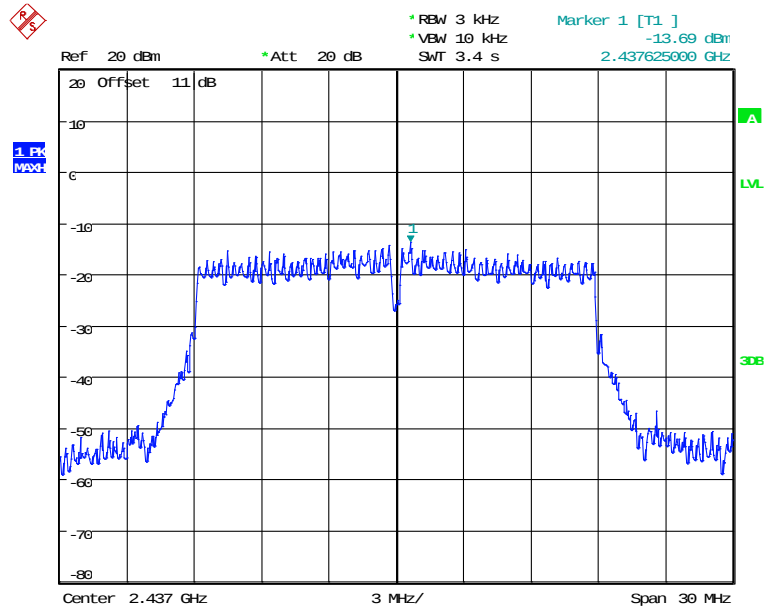

POWER DENSITY 802.11N 20MHZ CH06
Date: 9.MAY.2023 09:37:53

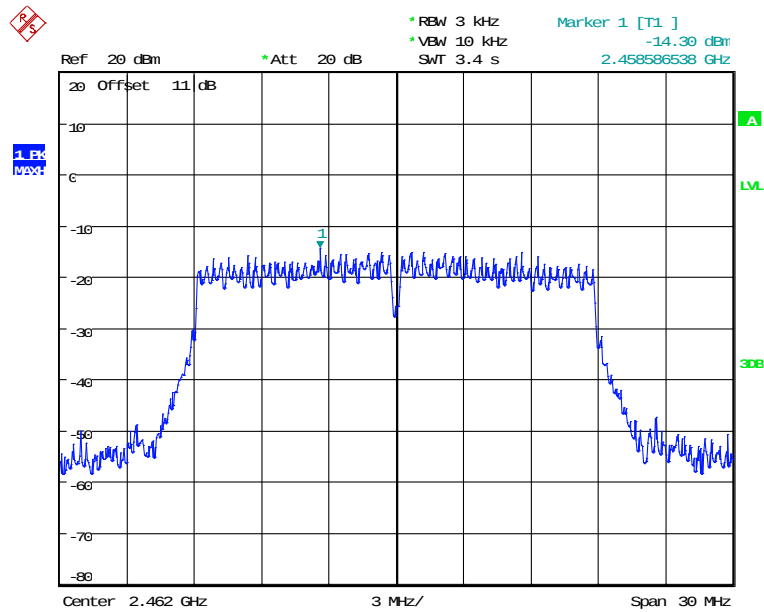


POWER DENSITY 802.11N 20MHZ CH11
Date: 9.MAY.2023 09:40:32



Registration number: W6M22301-22427-C-1


FCC ID: 2AS6P-EMV3A

802.11n 40MHz

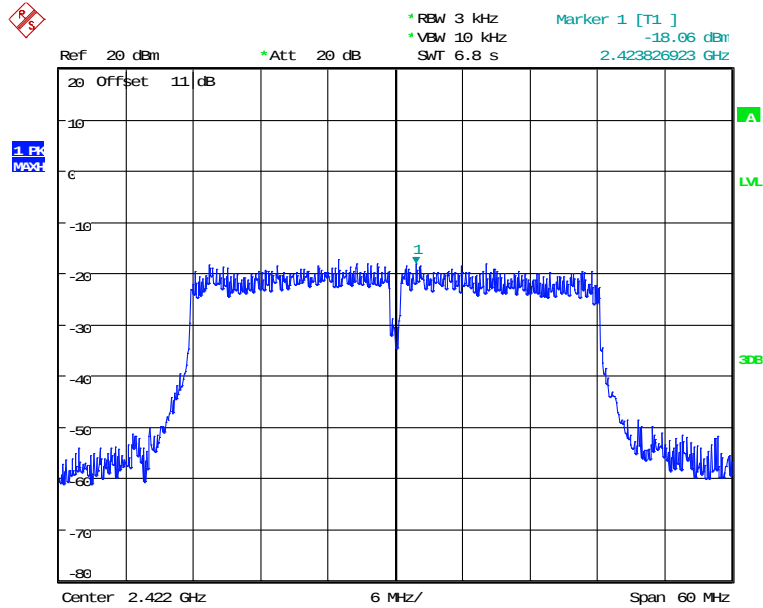


POWER DENSITY 802.11N 40MHZ CH01

Date: 9.MAY.2023 09:45:46

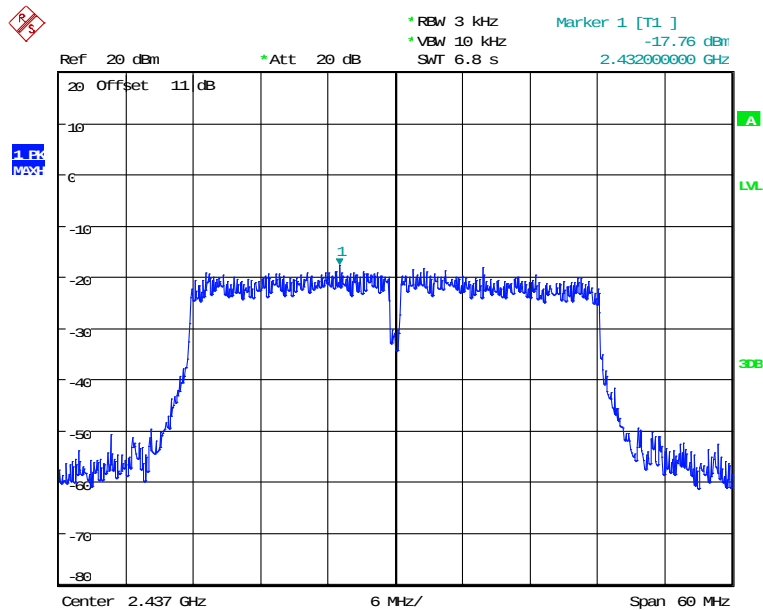


POWER DENSITY 802.11N 40MHZ CH04

Date: 9.MAY.2023 09:49:50




Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

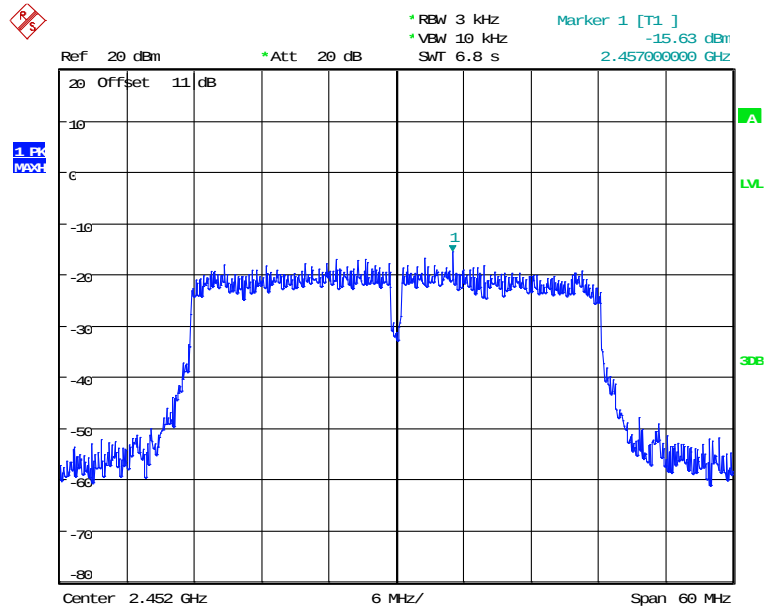

POWER DENSITY 802.11N 40MHZ CH07
Date: 9.MAY.2023 09:54:00



Bluetooth Low Energy

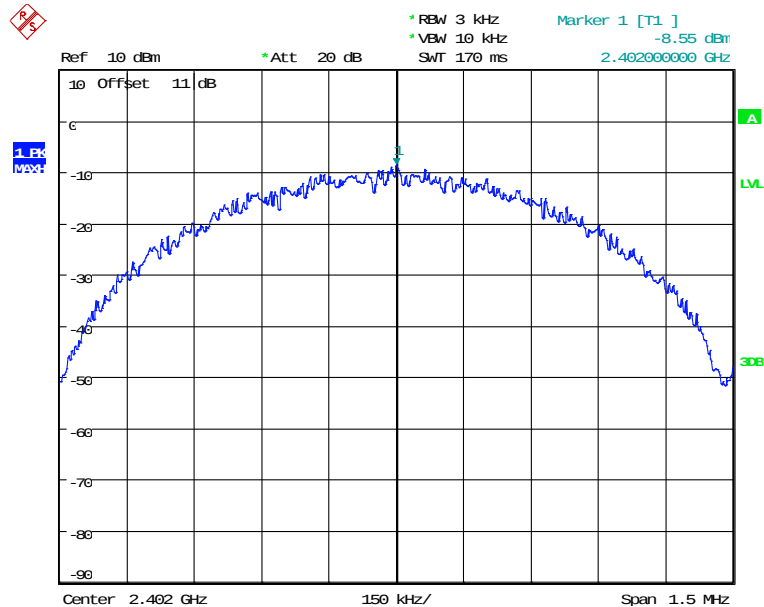


POWER DENSITY BLE 1M CH00
Date: 7.FEB.2023 15:48:54



FCC ID: 2AS6P-EMV3A






Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

Limits:

Frequency Range MHz	dBm
902-928	8
2400-2483.5	8
5725-5850	8

Test equipment used: ETSTW-RE 055, ETSTW-RE 050



Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

3.10 Radiated Emission from Receiver Part

Model: EMV3A

Date: --

Mode: --

Temperature: -- °C

Engineer: --

Polarization: --


Humidity: -- %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result (dBuV/m)		Limit (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (m)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--	--	--

Note

1. Correction Factor = Antenna factor + Cable loss - Preamplifier
2. The formula of measured value as: Test Result = Reading + Correction Factor
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Please see attached diagrams in Appendix.




Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A


3.11 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

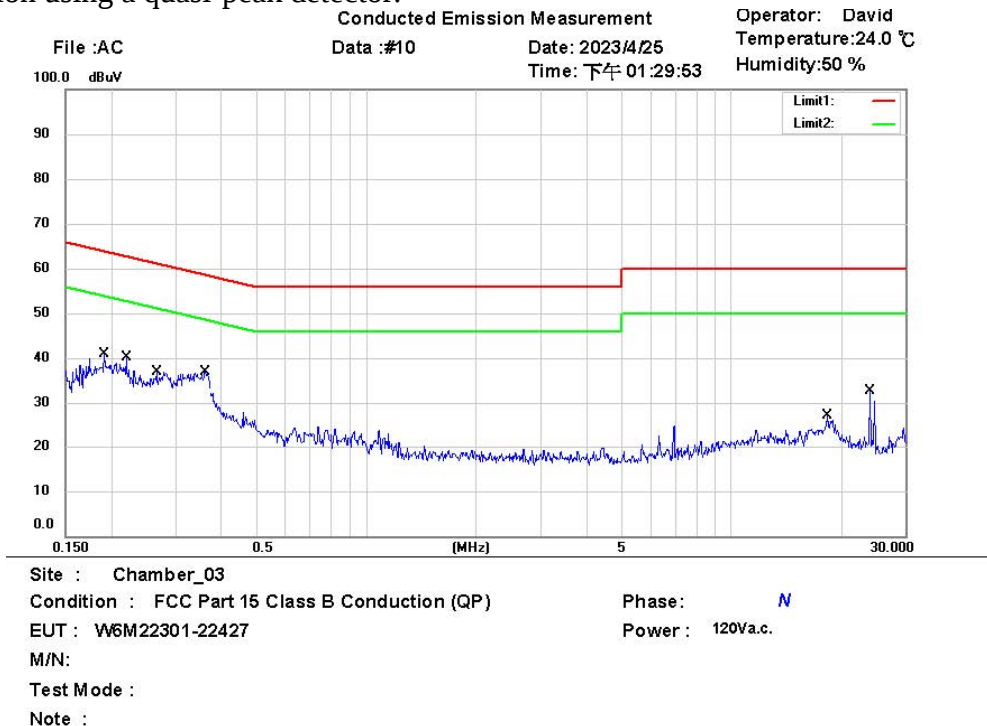


Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1913	31.53	QP	0.00	31.53	63.98	-32.45	
	0.1913	21.94	AVG	0.00	21.94	53.98	-32.04	
	0.2197	30.57	QP	0.00	30.57	62.83	-32.26	
	0.2197	21.50	AVG	0.00	21.50	52.83	-31.33	
	0.2646	28.76	QP	0.00	28.76	61.29	-32.53	
	0.2646	20.15	AVG	0.00	20.15	51.29	-31.14	
	0.3597	32.28	QP	0.00	32.28	58.74	-26.46	
	0.3597	23.34	AVG	0.00	23.34	48.74	-25.40	
	18.2500	17.44	QP	0.00	17.44	60.00	-42.56	
	18.2500	10.30	AVG	0.00	10.30	50.00	-39.70	
	24.0000	27.91	QP	0.00	27.91	60.00	-32.09	
*	24.0000	27.11	AVG	0.00	27.11	50.00	-22.89	



Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M22301-22427-C-1

FCC ID: 2AS6P-EMV3A

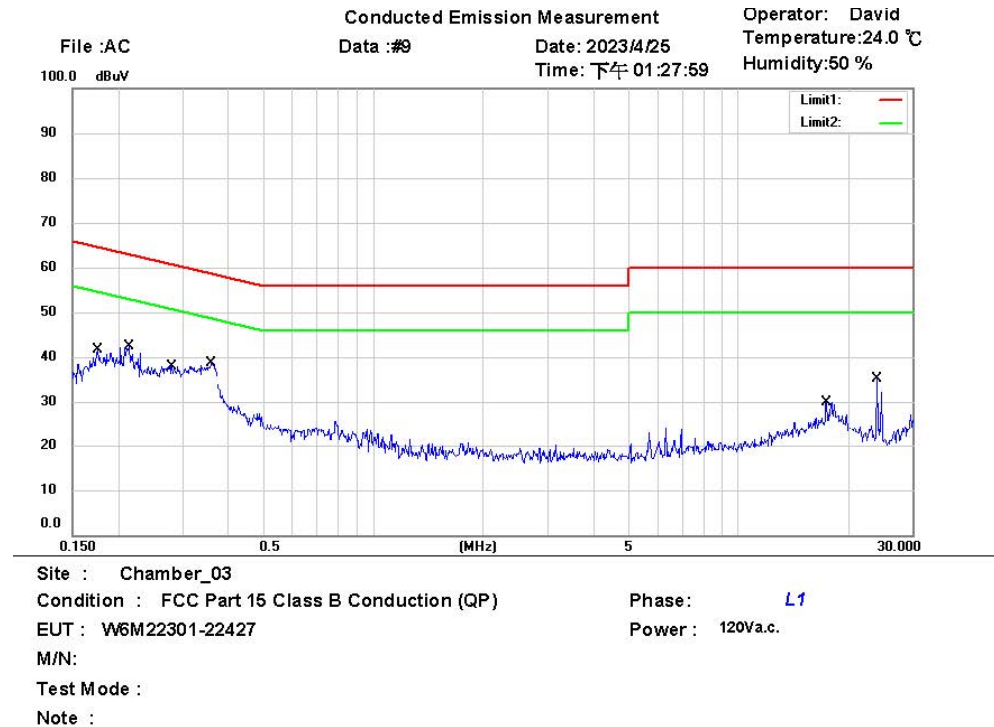

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Comment
	0.1751	34.11	QP	0.00	34.11	64.71	-30.60	
	0.1751	23.68	AVG	0.00	23.68	54.71	-31.03	
	0.2135	35.57	QP	0.00	35.57	63.07	-27.50	
	0.2135	23.90	AVG	0.00	23.90	53.07	-29.17	
	0.2802	31.71	QP	0.00	31.71	60.81	-29.10	
	0.2802	22.91	AVG	0.00	22.91	50.81	-27.90	
	0.3588	34.16	QP	0.00	34.16	58.76	-24.60	
	0.3588	25.51	AVG	0.00	25.51	48.76	-23.25	
	17.3875	20.48	QP	0.00	20.48	60.00	-39.52	
	17.3875	12.61	AVG	0.00	12.61	50.00	-37.39	
	24.0000	30.32	QP	0.00	30.32	60.00	-29.68	
*	24.0000	29.50	AVG	0.00	29.50	50.00	-20.50	


Note

1. The formula of measured value as: Test Result = Reading + Correction Factor
2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
4. All not in the table noted test results are more than 20 dB below the relevant limits.
5. Up Line: QP Limit Line, Down Line: Ave Limit Line.

Limits:

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Test equipment used: ETSTW-CE 001, ETSTW-CE 016, ETSTW-RE 045



Registration number: W6M22301-22427-C-1
FCC ID: 2AS6P-EMV3A

Appendix

Measurement diagrams

Spurious Emissions radiated



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 1_WiFi 2

Data : #1


Date: 2023/2/25

Temperature: 21.1 °C

80.0 dBuV/m

Time: 上午 04:14:08

Humidity: 62.8 %

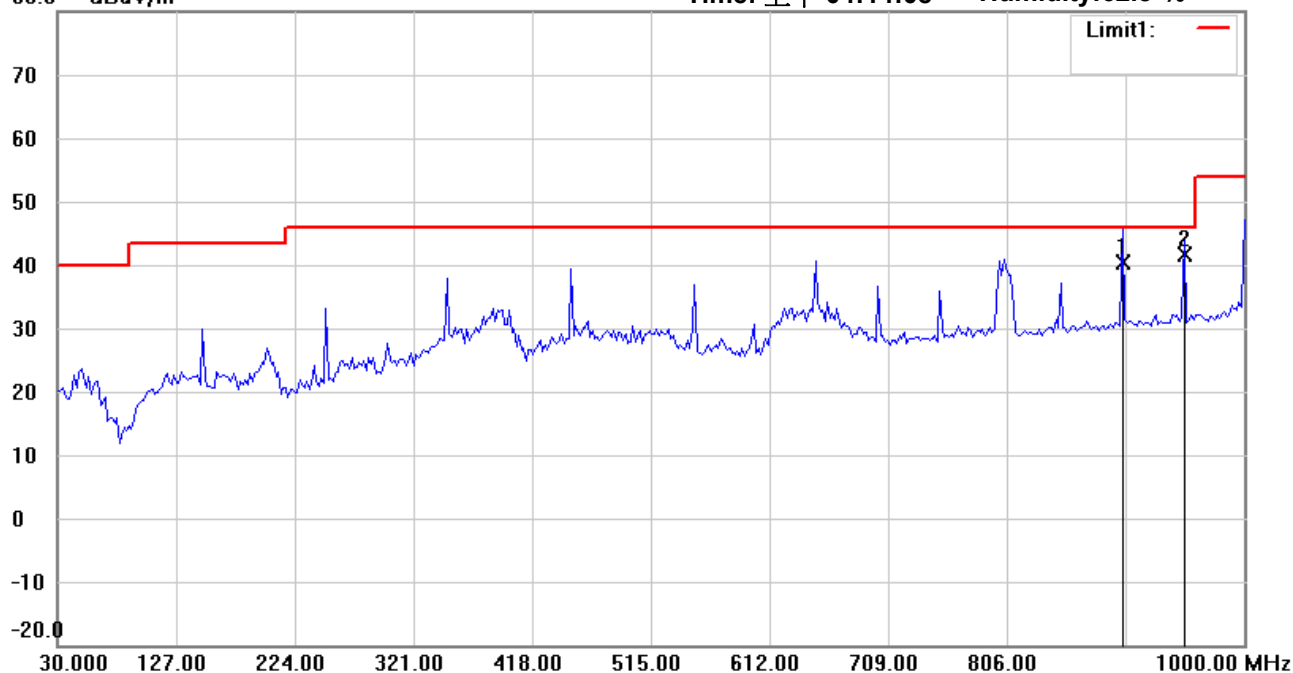

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	900.8617	36.86	QP	3.61	40.47	46.00	100	83	-5.53	
*	951.4028	37.08	QP	4.59	41.67	46.00	100	166	-4.33	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :1_WiFi 2

Data :#2


Date: 2023/2/25

Temperature:21.1 °C

80.0 dBuV/m

Time: 上午 04:15:29

Humidity:62.8 %

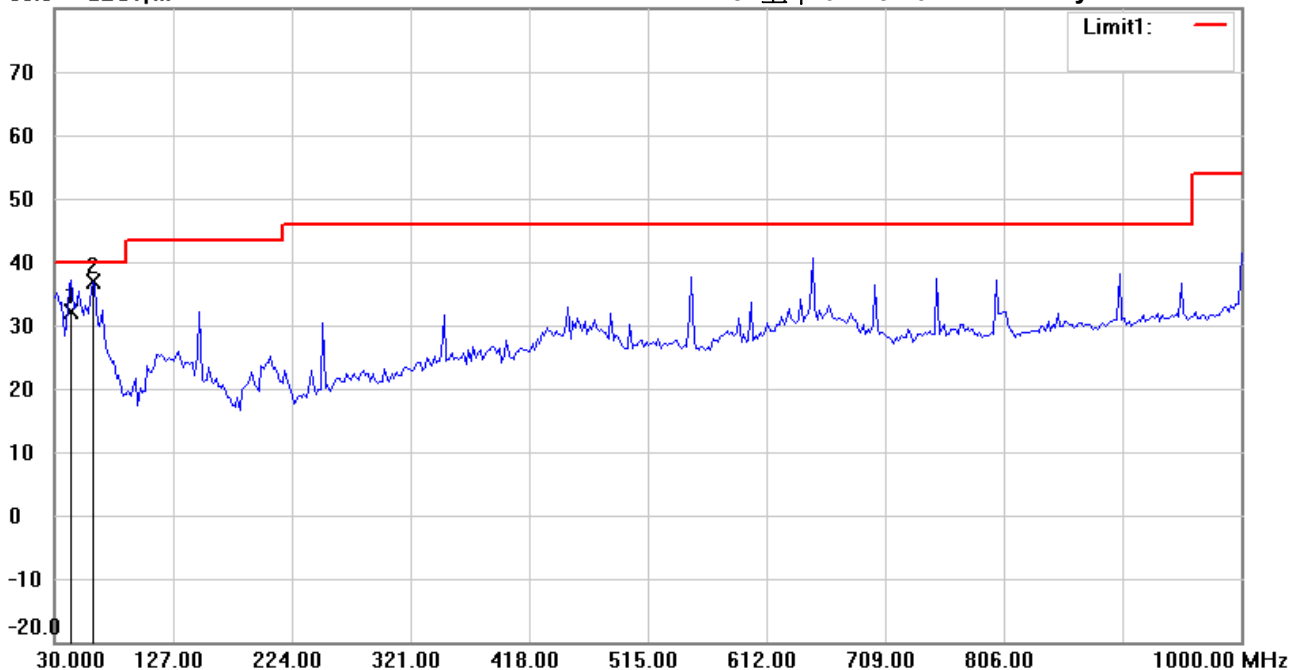

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	43.6072	41.35	QP	-9.12	32.23	40.00	100	25	-7.77	
*	61.1022	49.15	peak	-12.38	36.77	40.00	100	126	-3.23	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 09:57:14

Humidity: 72.9 %

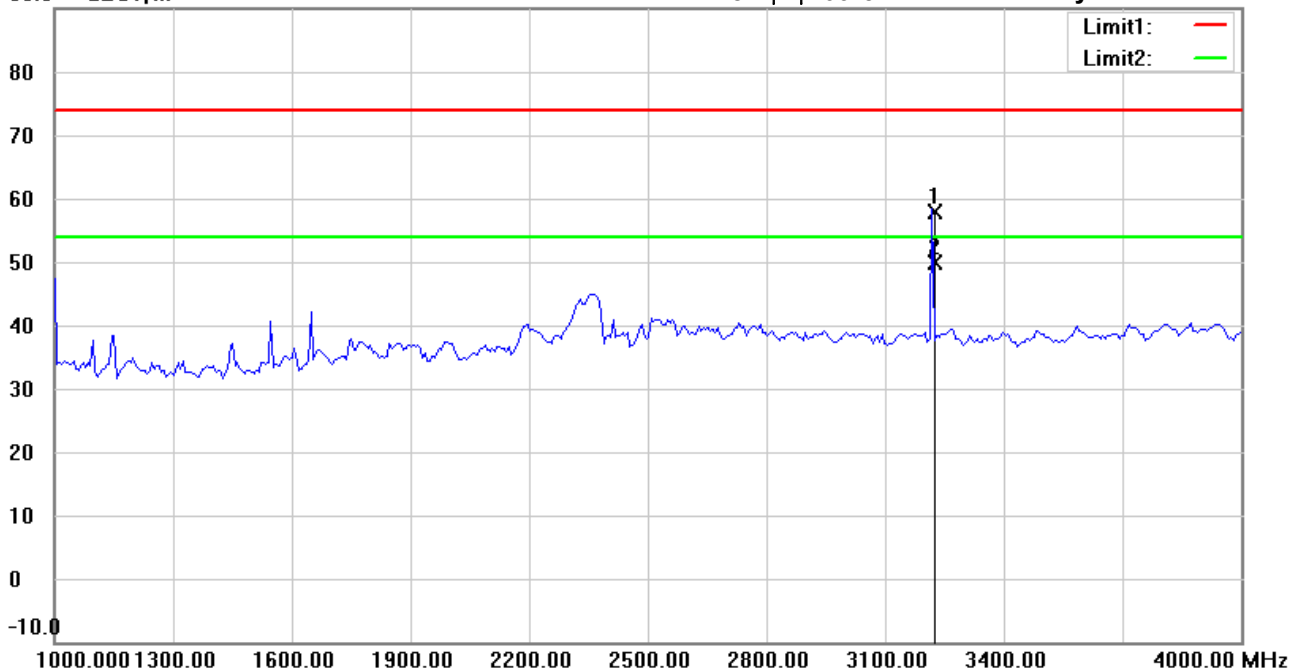

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3218.437	61.24	peak	-3.35	57.89	74.00	150	40	-16.11	
*	3218.437	53.19	AVG	-3.35	49.84	54.00	150	40	-4.16	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:02:41

Humidity:72.9 %

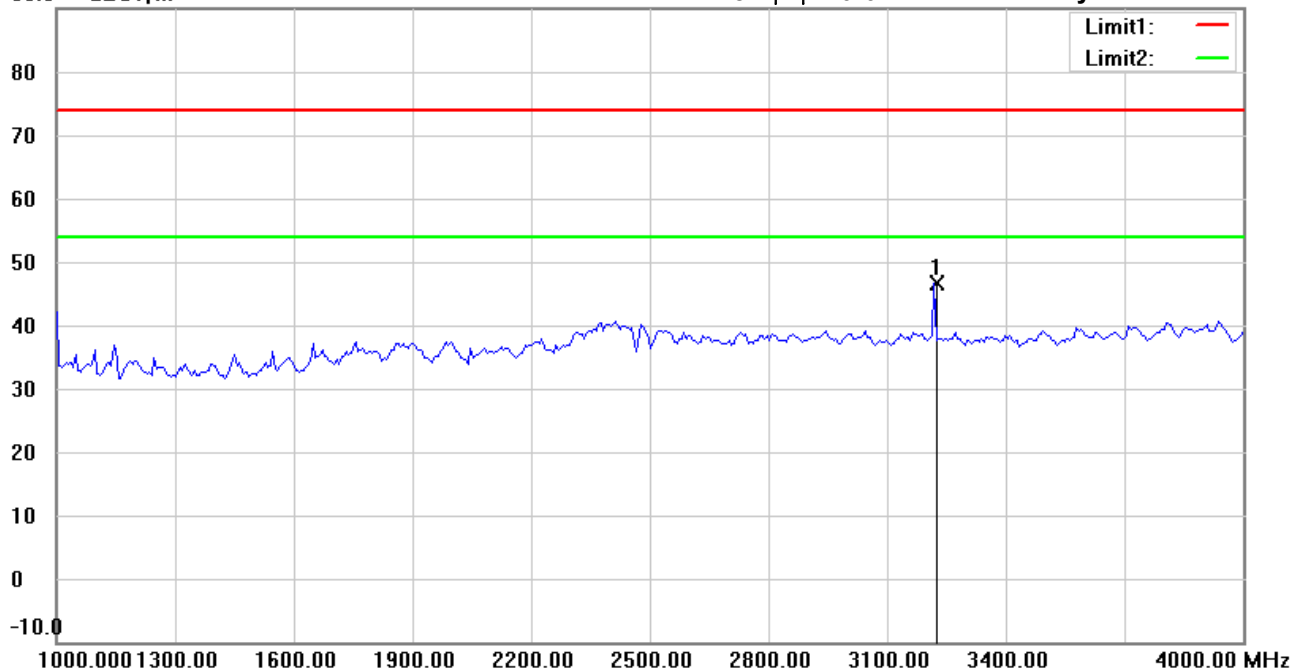

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	3218.437	49.94	peak	-3.35	46.59	74.00	150	14	-27.41	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#2


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 09:58:34

Humidity:72.9 %

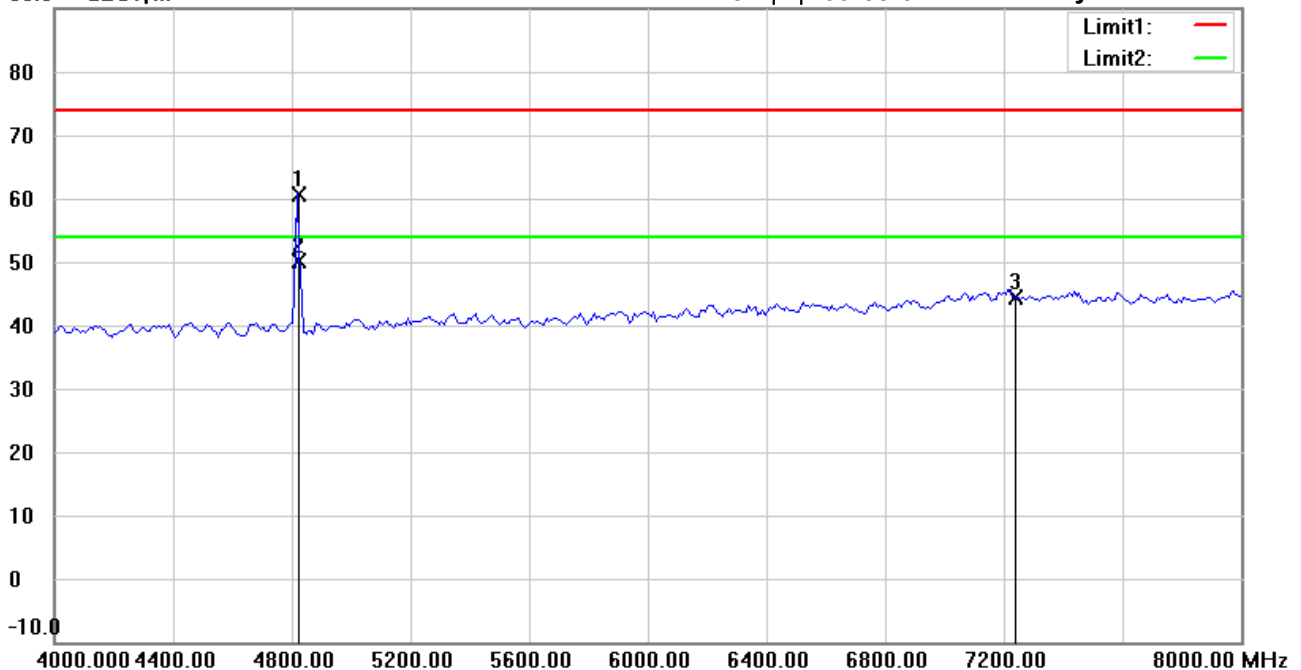

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.060	62.17	peak	-1.65	60.52	74.00	150	165	-13.48	
*	4824.060	51.70	AVG	-1.65	50.05	54.00	150	165	-3.95	
	7236.000	40.41	peak	3.93	44.34	74.00	150	20	-29.66	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 10:04:02

Humidity: 72.9 %

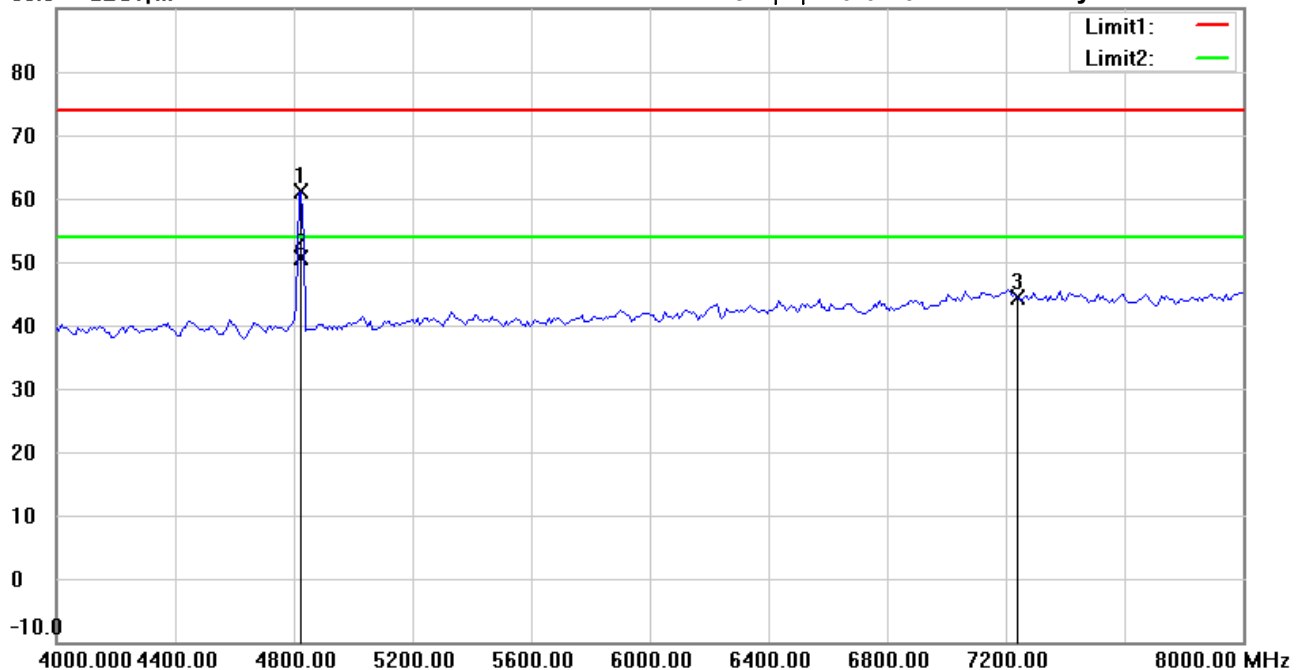

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4823.980	62.72	peak	-1.65	61.07	74.00	150	190	-12.93	
*	4823.980	52.36	AVG	-1.65	50.71	54.00	150	190	-3.29	
	7236.000	40.49	peak	3.93	44.42	74.00	150	190	-29.58	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:00:41

Humidity:72.9 %

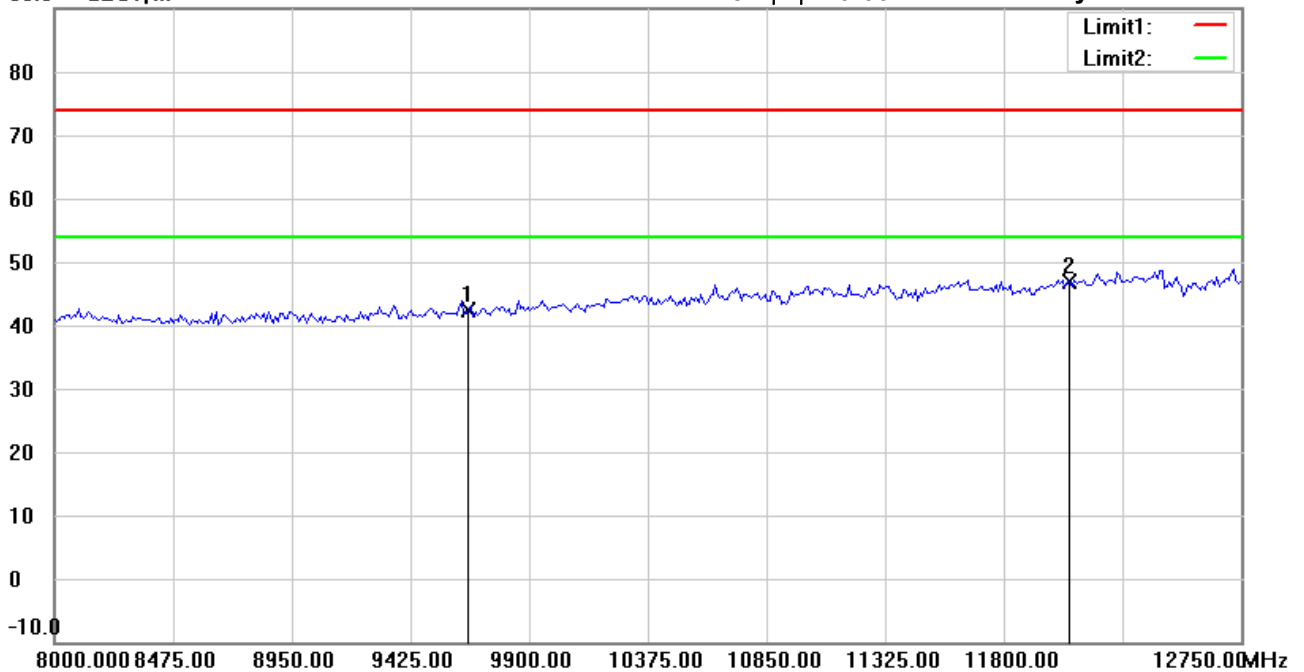

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.51	peak	6.81	42.32	74.00	150	201	-31.68	
*	12060.000	34.43	peak	12.53	46.96	74.00	150	49	-27.04	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#8


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:05:32

Humidity:72.9 %

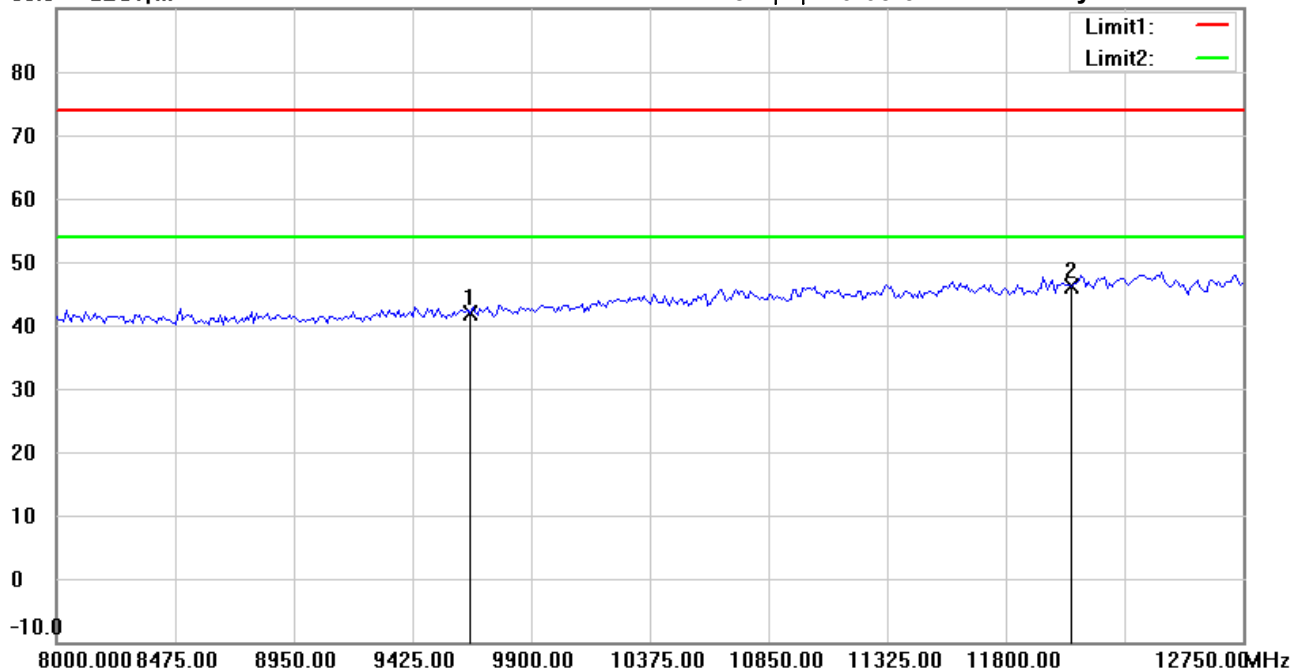

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	34.95	peak	6.81	41.76	74.00	150	41	-32.24	
*	12060.000	33.67	peak	12.53	46.20	74.00	150	100	-27.80	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:00:55

Humidity:72.9 %

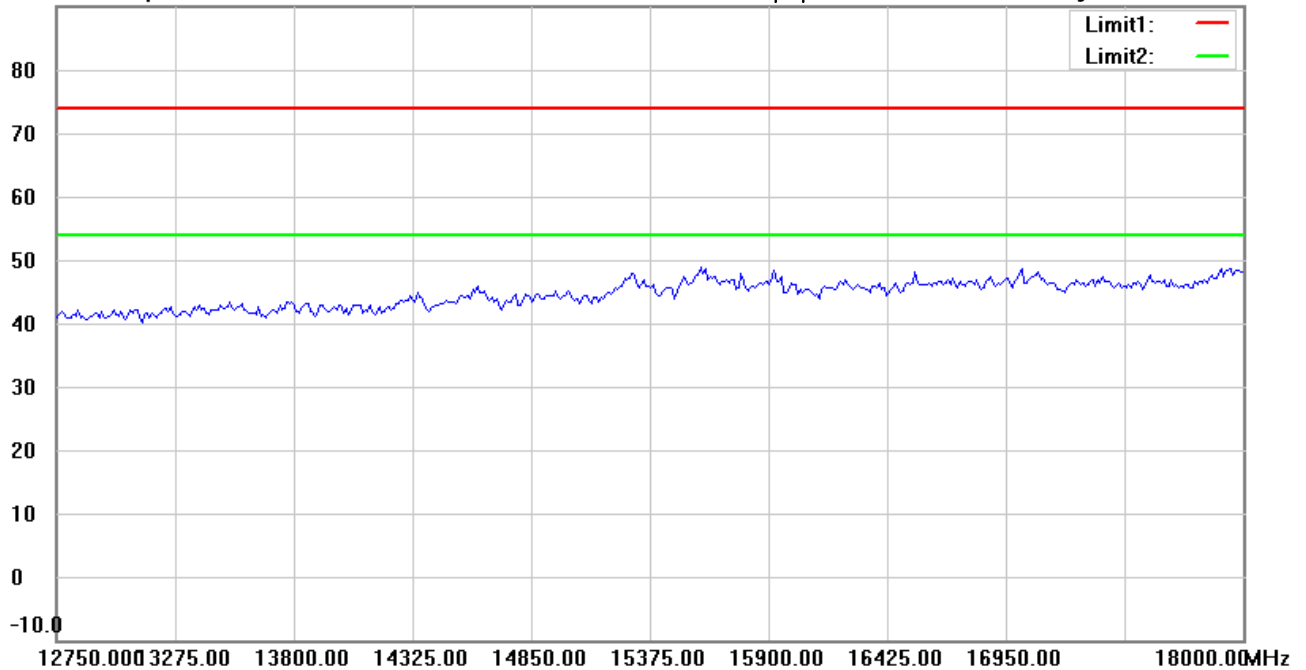

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:05:45

Humidity:72.9 %

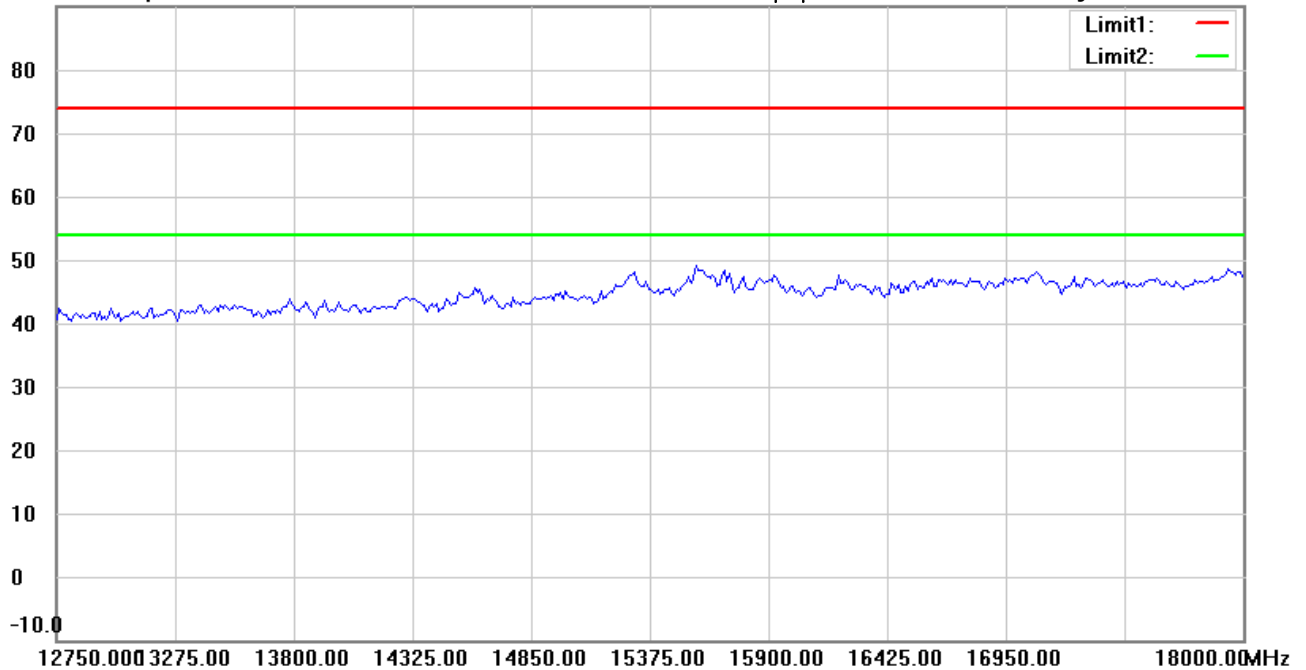

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:01:05

Humidity:72.9 %

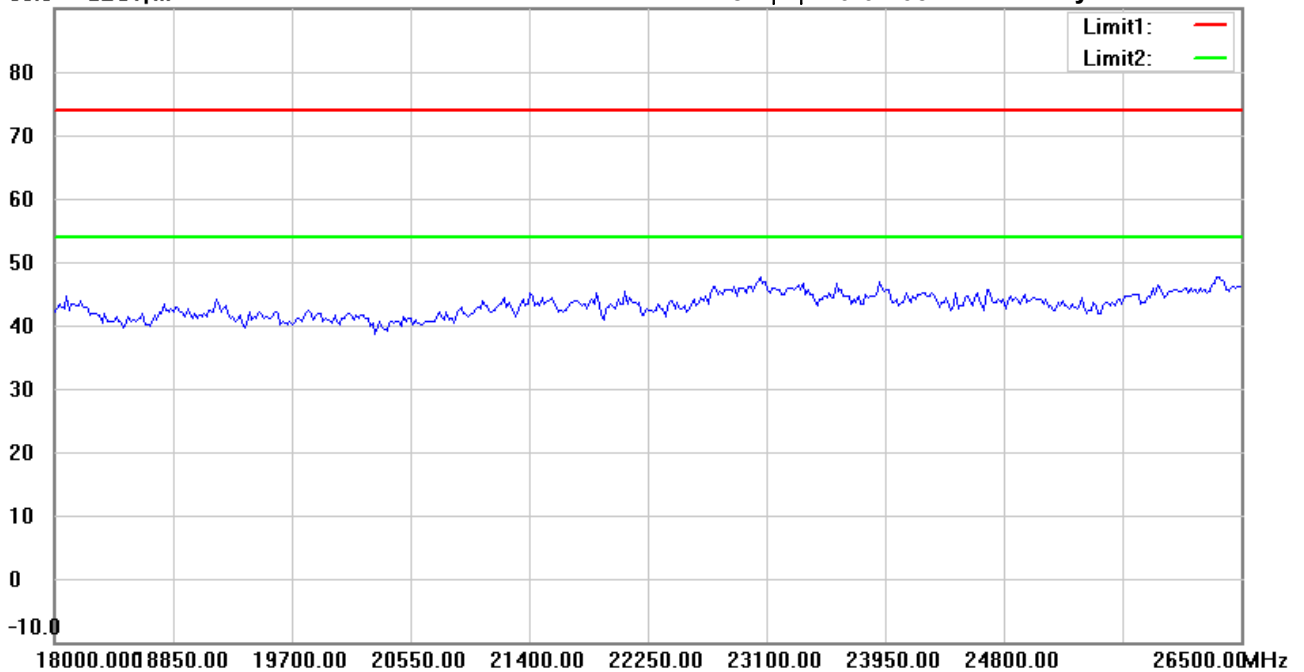

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:05:55

Humidity:72.9 %

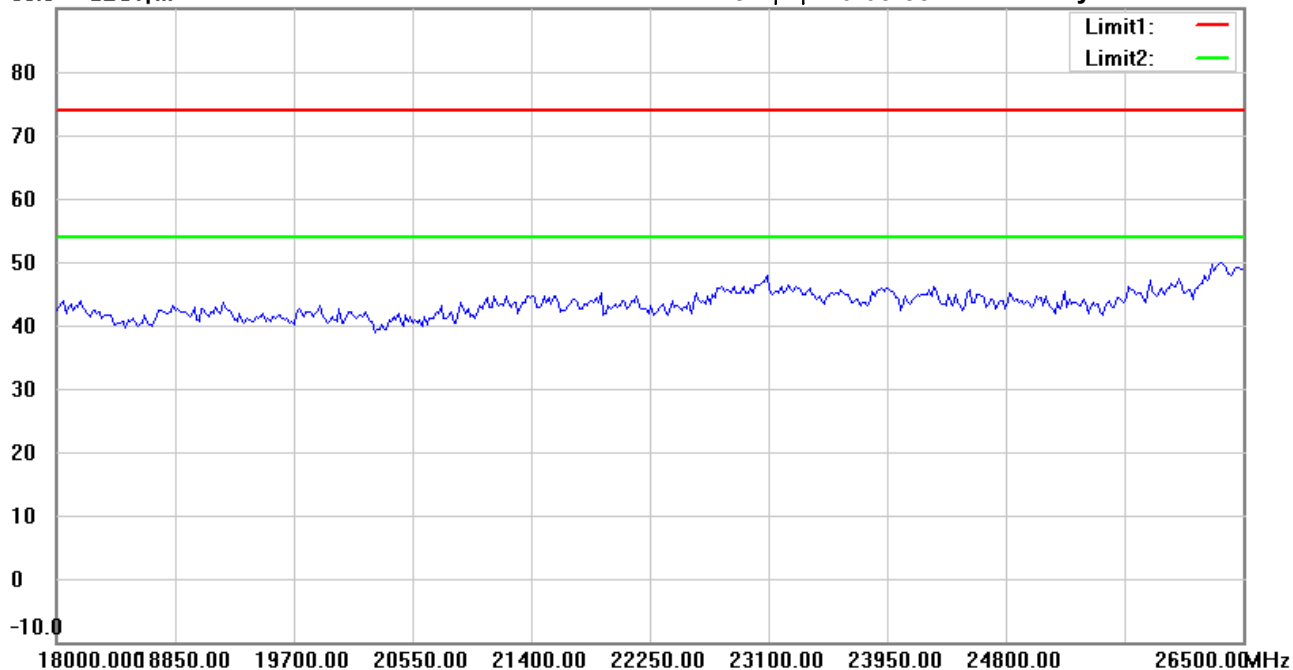

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 10:31:34

Humidity: 72.9 %

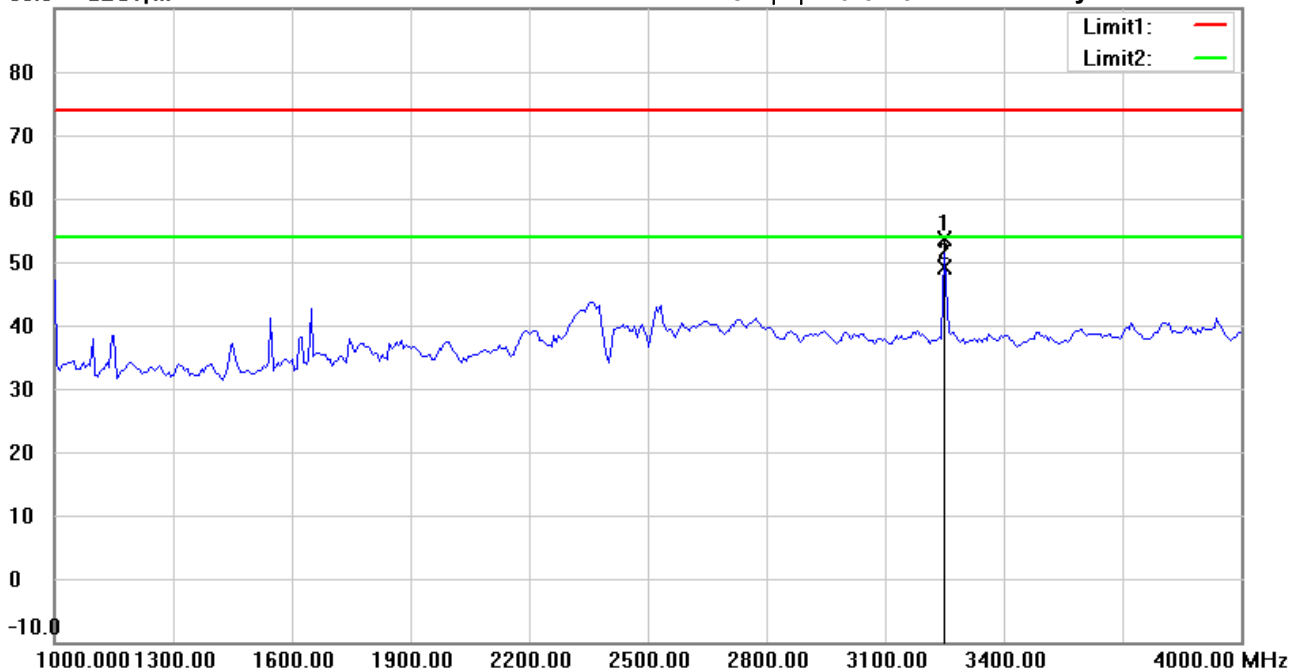

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3248.497	57.14	peak	-3.46	53.68	74.00	150	202	-20.32	
*	3248.497	52.69	AVG	-3.46	49.23	54.00	150	202	-4.77	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:36:16

Humidity:72.9 %

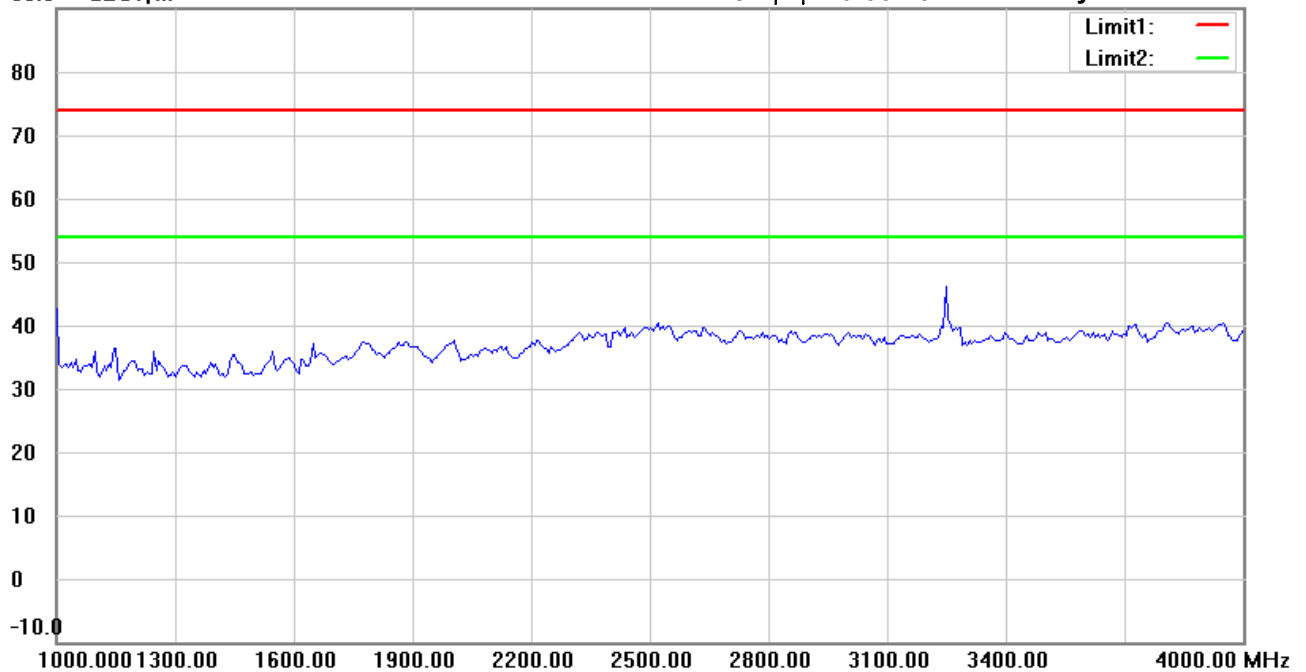

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#2


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:32:55

Humidity:72.9 %

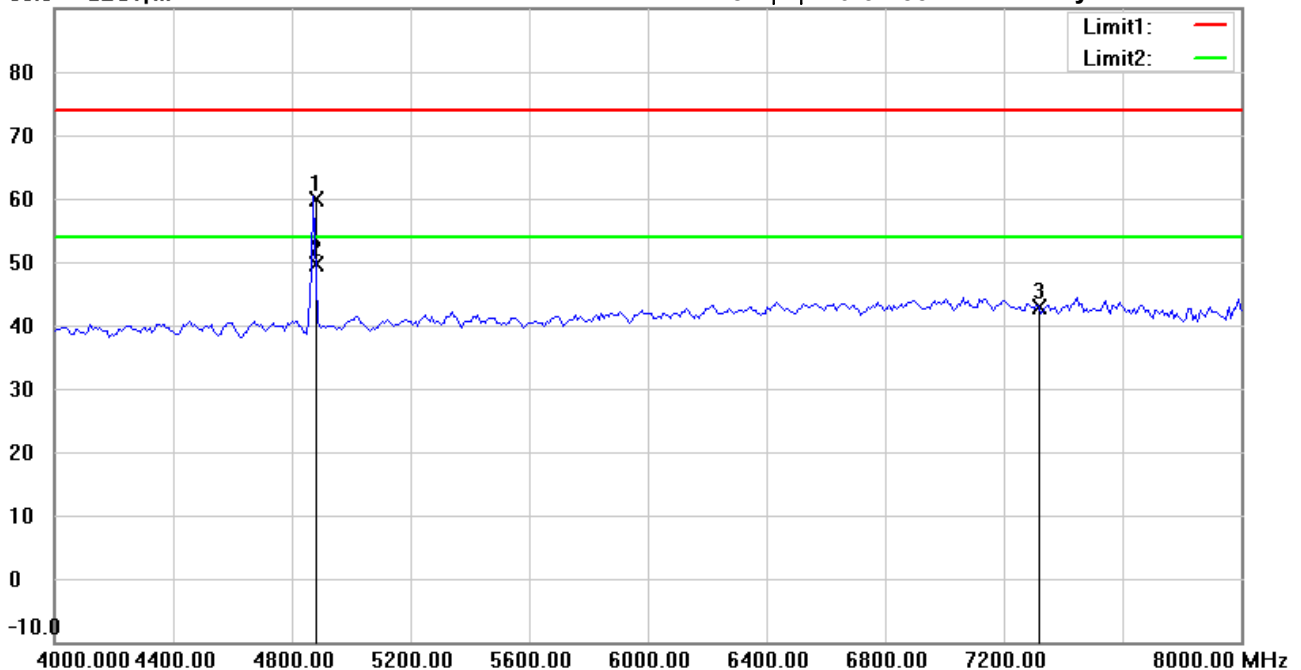

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4873.748	61.32	peak	-1.43	59.89	74.00	150	312	-14.11	
*	4873.748	50.96	AVG	-1.43	49.53	54.00	150	312	-4.47	
	7311.000	38.96	peak	3.82	42.78	74.00	150	6	-31.22	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#7


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:37:37

Humidity:72.9 %

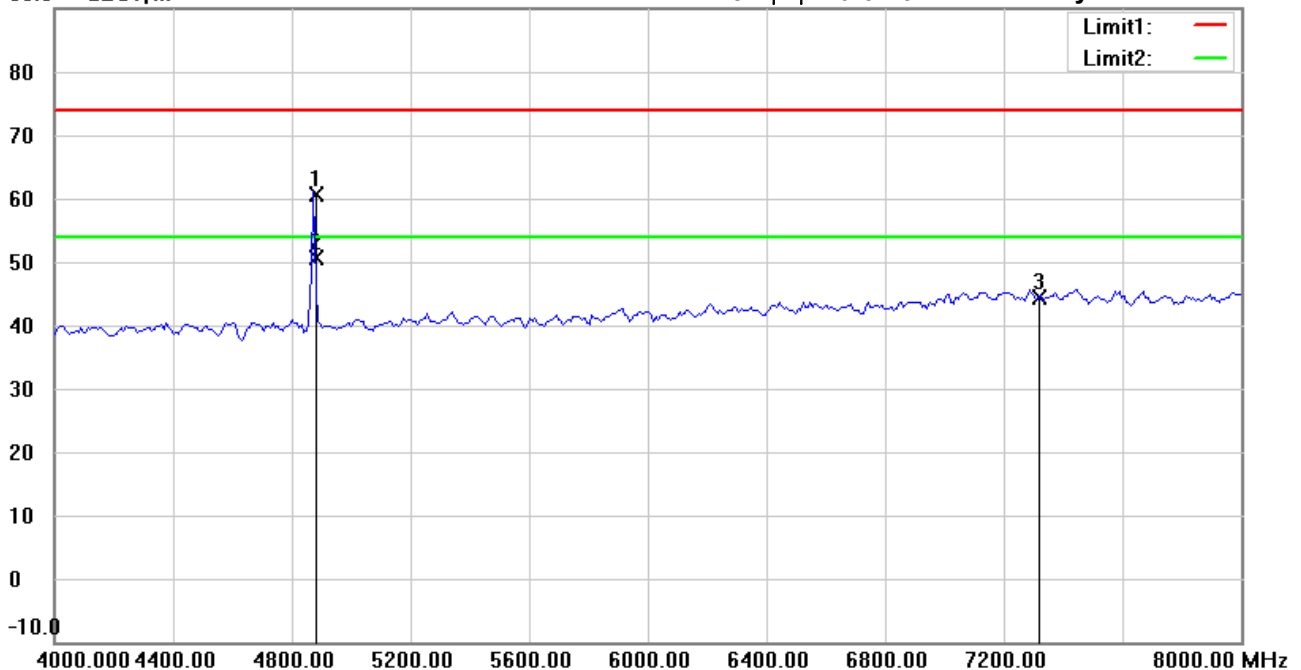

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4873.748	61.96	peak	-1.43	60.53	74.00	150	100	-13.47	
*	4873.748	52.10	AVG	-1.43	50.67	54.00	150	100	-3.33	
	7311.000	40.54	peak	3.82	44.36	74.00	150	107	-29.64	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:34:30

Humidity:72.9 %

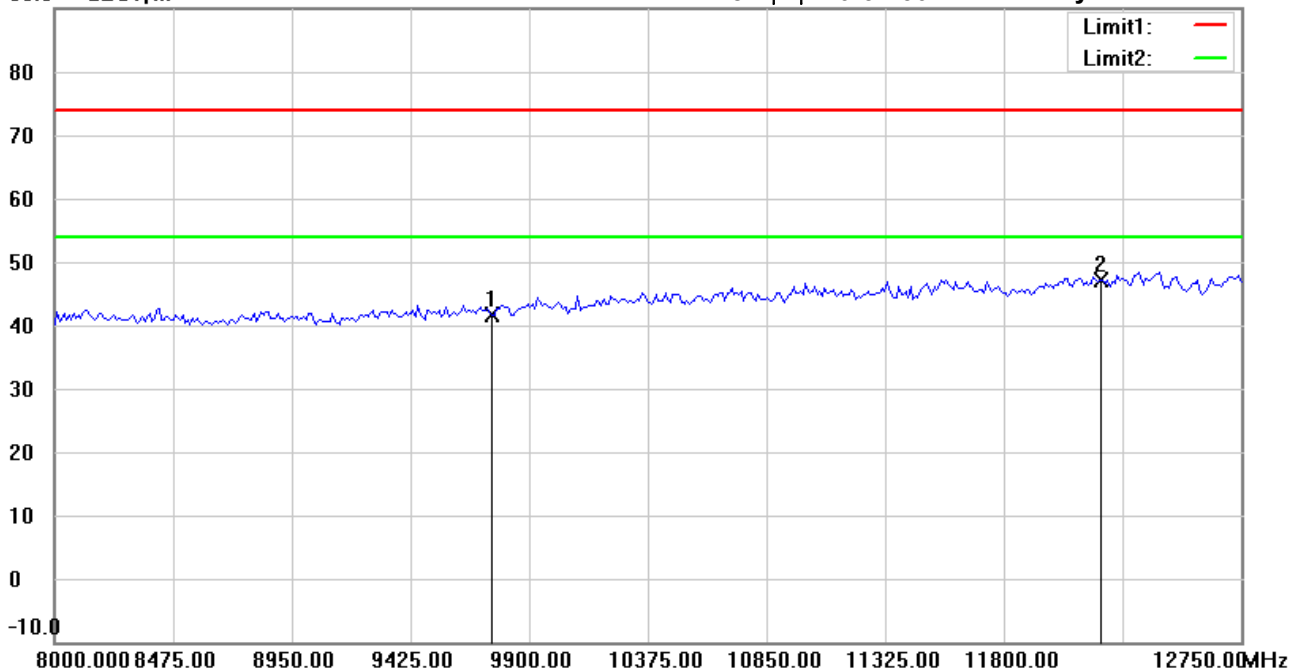

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.68	peak	6.98	41.66	74.00	150	101	-32.34	
*	12185.000	33.74	peak	13.49	47.23	74.00	150	122	-26.77	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #8


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 10:39:11

Humidity: 72.9 %

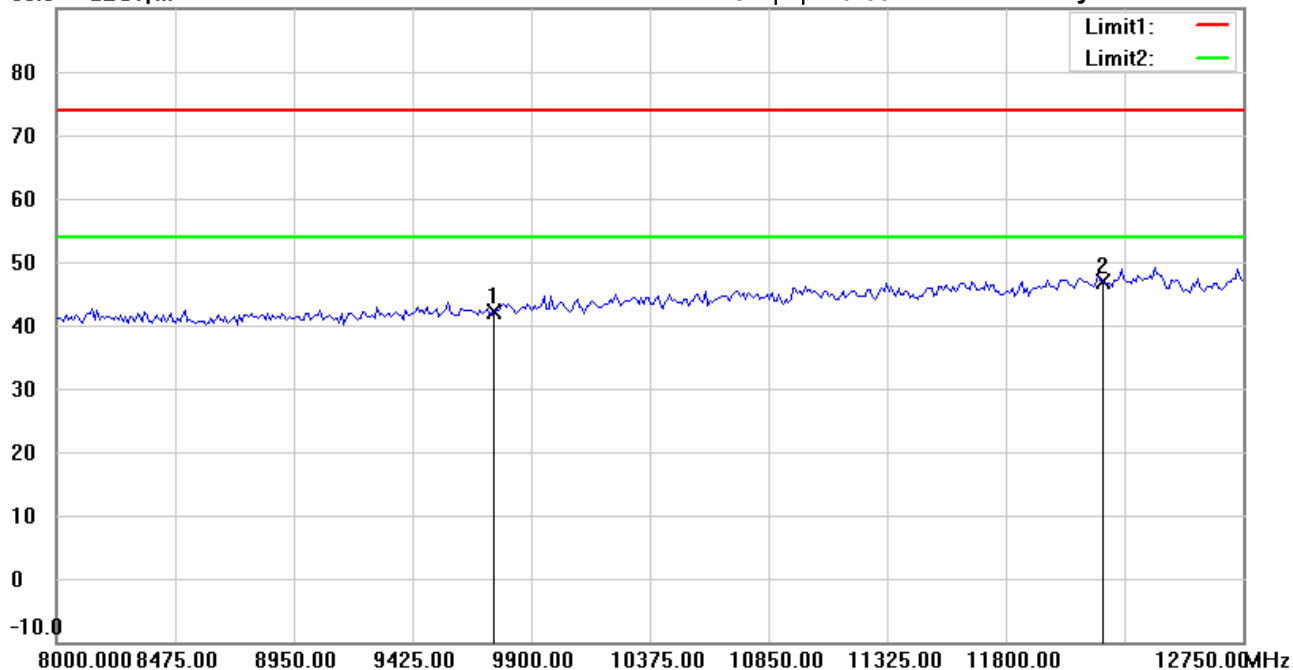

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.21	peak	6.98	42.19	74.00	150	24	-31.81	
*	12185.000	33.43	peak	13.49	46.92	74.00	150	71	-27.08	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:34:44

Humidity:72.9 %

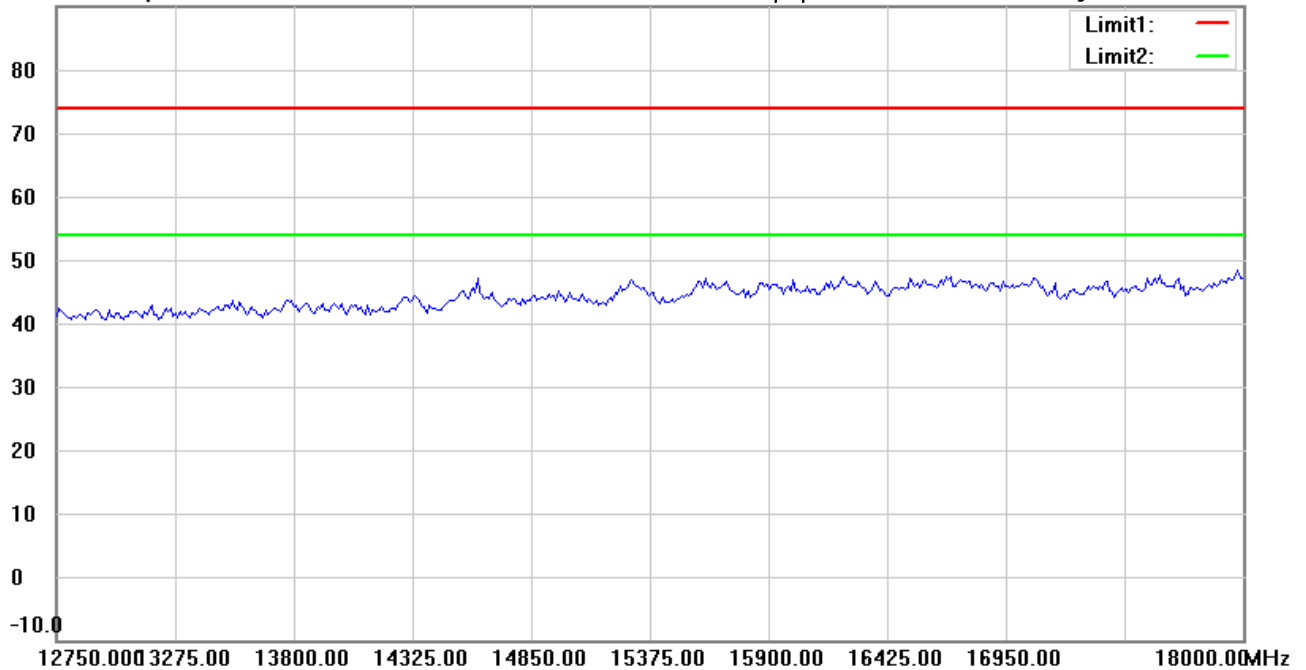

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:39:25

Humidity:72.9 %

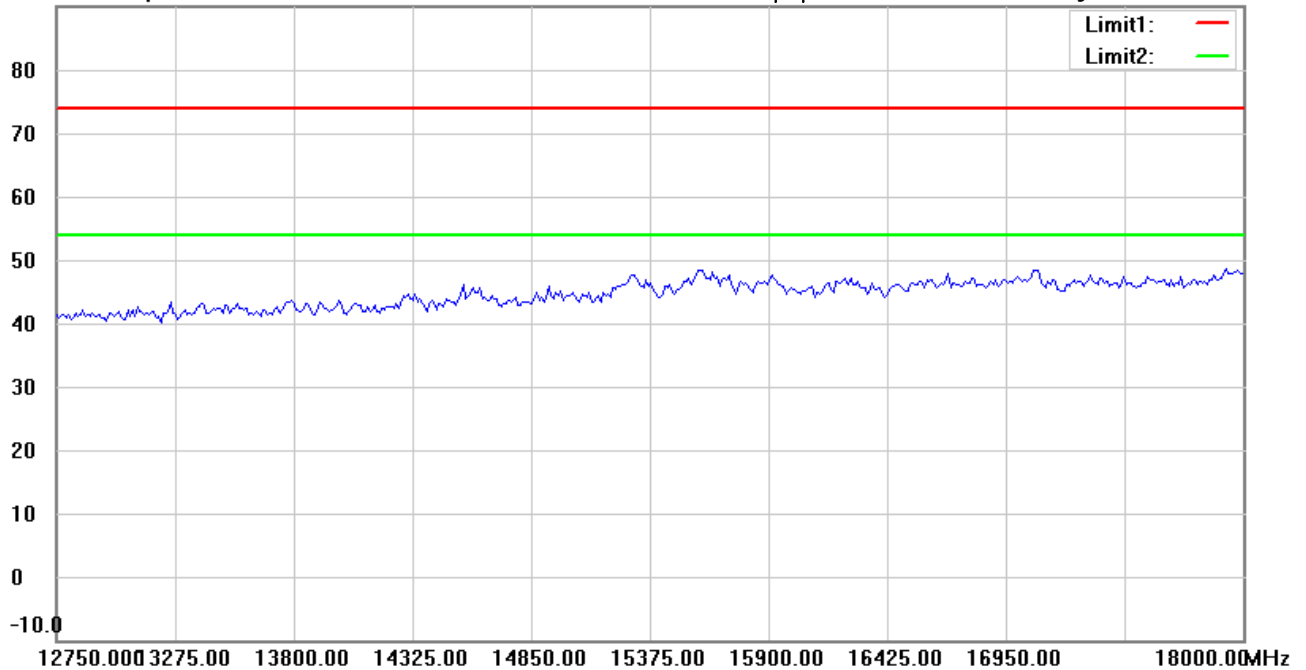

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:34:53

Humidity:72.9 %

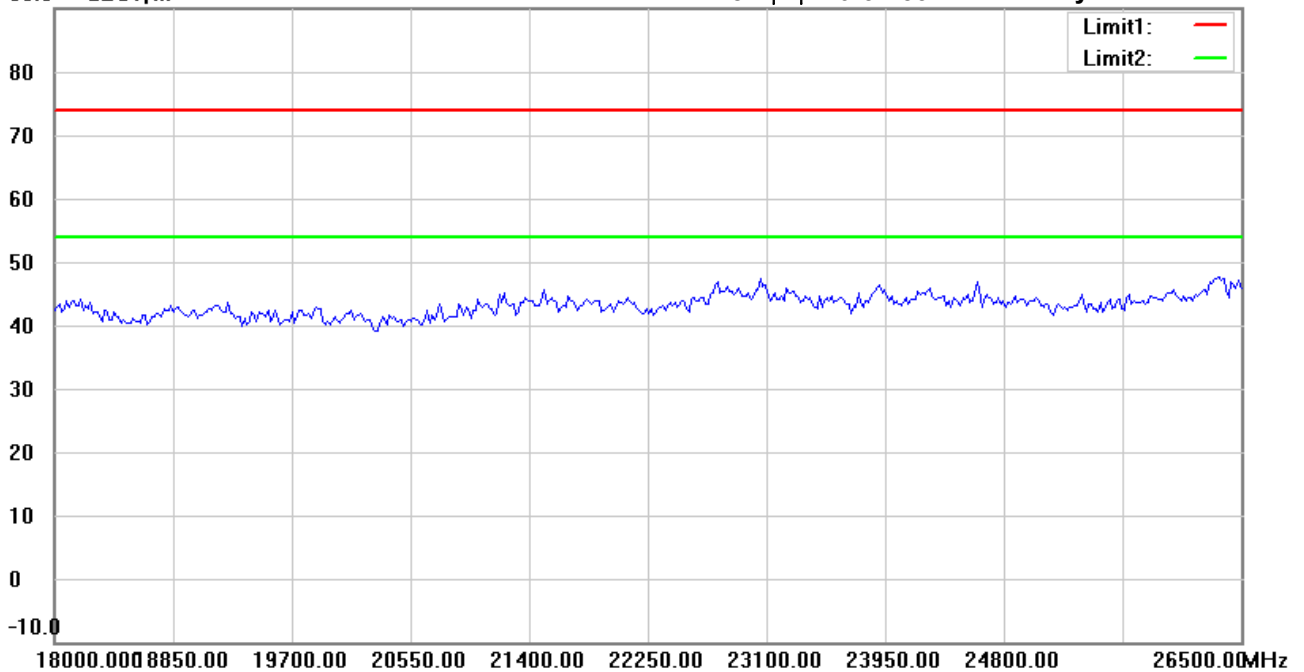

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:39:35

Humidity:72.9 %

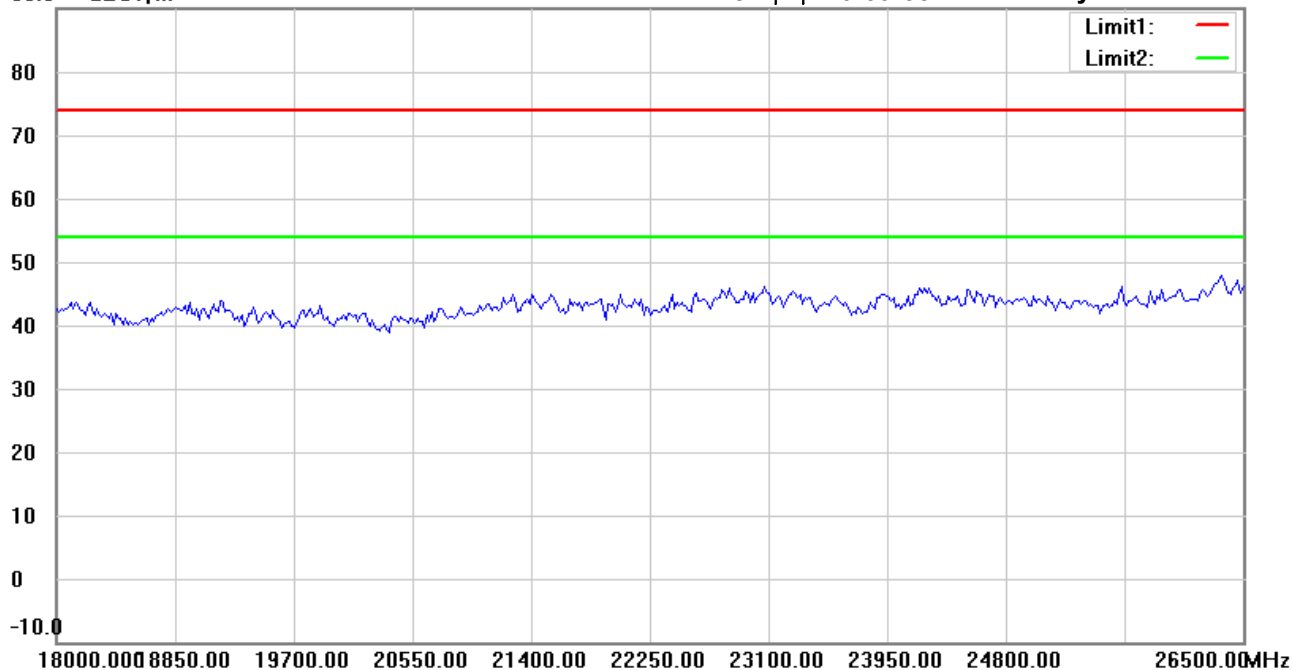

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH6

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#1


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:46:23

Humidity:72.9 %

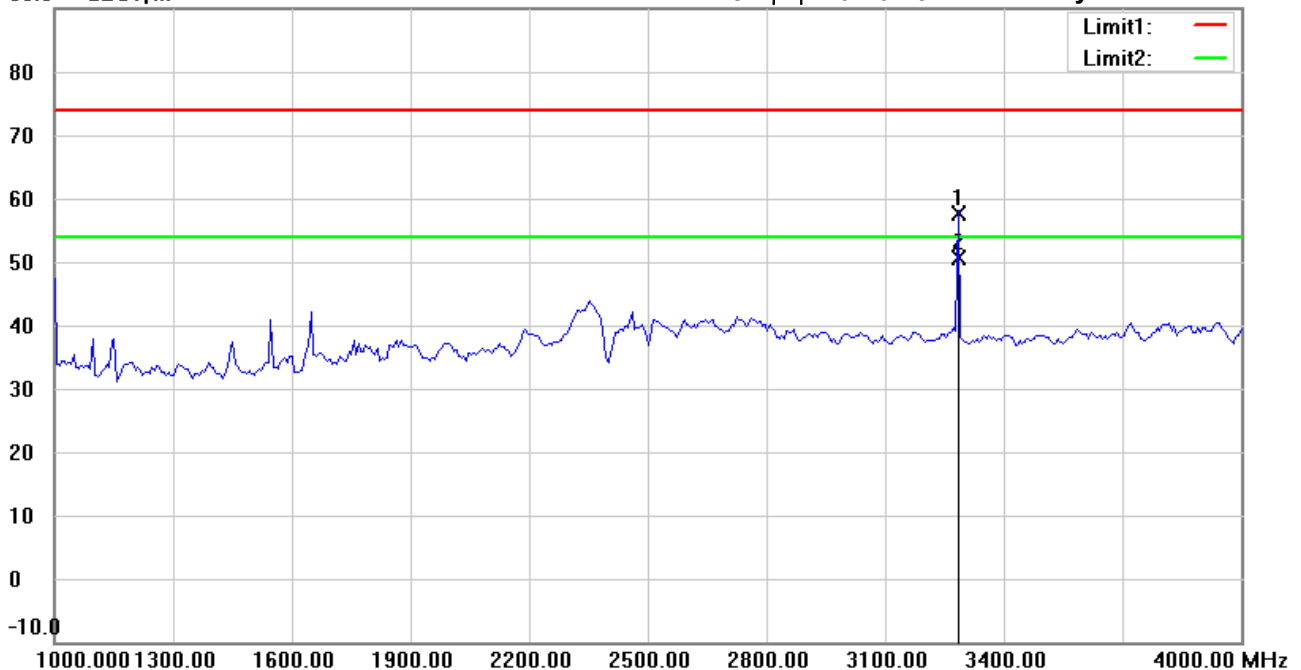

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3284.569	61.24	peak	-3.59	57.65	74.00	150	302	-16.35	
*	3284.569	54.34	AVG	-3.59	50.75	54.00	150	302	-3.25	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 10:52:02

Humidity: 72.9 %

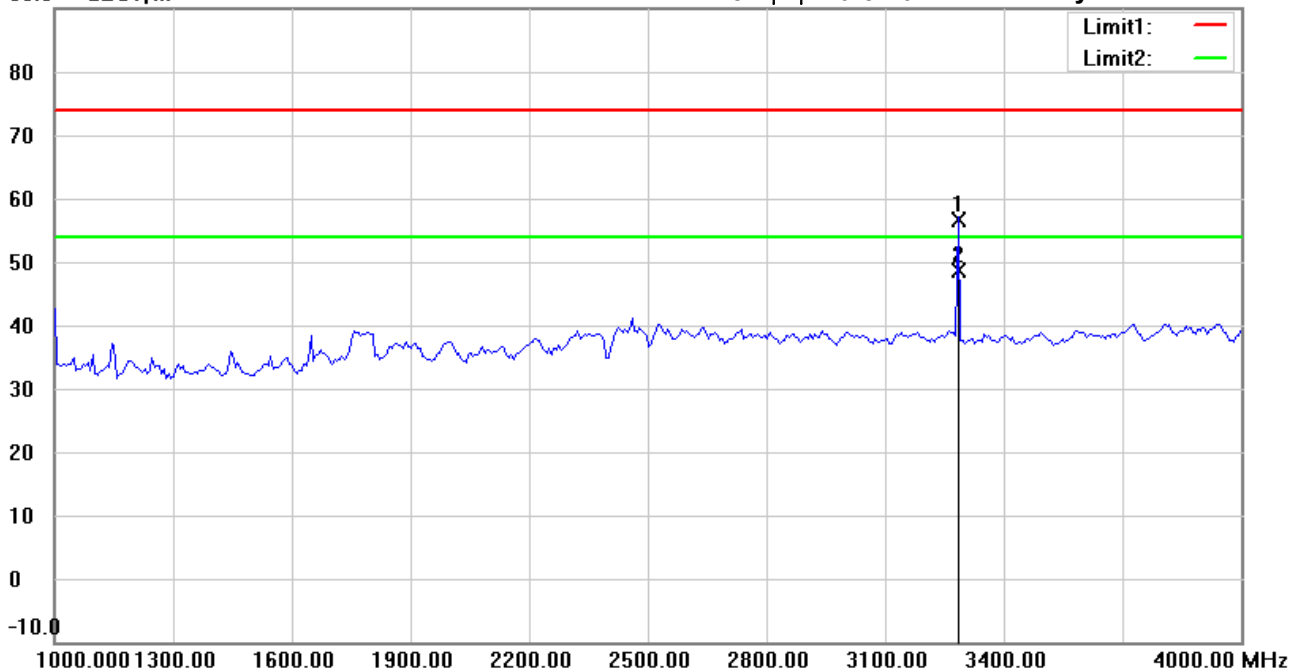

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3284.569	60.32	peak	-3.59	56.73	74.00	150	200	-17.27	
*	3284.569	52.26	AVG	-3.59	48.67	54.00	150	200	-5.33	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#2


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 10:47:44

Humidity: 72.9 %

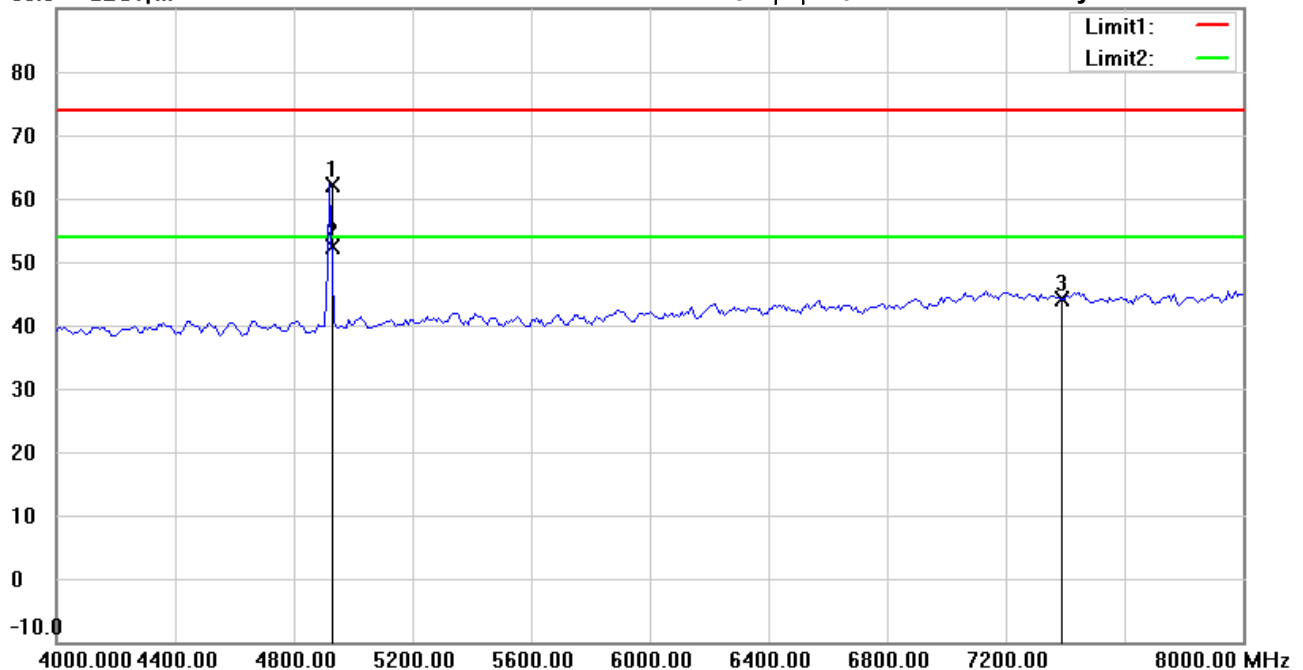

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4921.844	63.28	peak	-1.13	62.15	74.00	150	210	-11.85	
*	4921.844	53.49	AVG	-1.13	52.36	54.00	150	210	-1.64	
	7386.000	40.17	peak	4.06	44.23	74.00	150	80	-29.77	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#7


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:53:23

Humidity:72.9 %

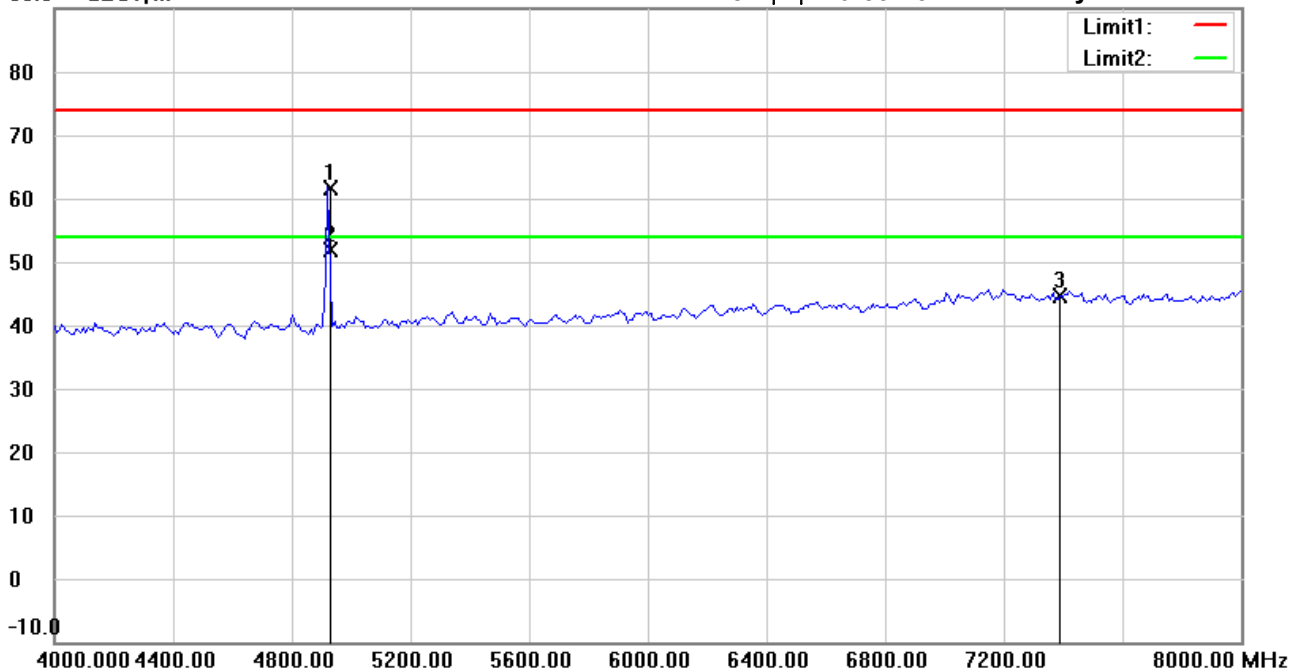

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4921.844	62.86	peak	-1.13	61.73	74.00	150	221	-12.27	
*	4921.844	52.89	AVG	-1.13	51.76	54.00	150	221	-2.24	
	7386.000	40.53	peak	4.06	44.59	74.00	150	3	-29.41	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:49:41

Humidity:72.9 %

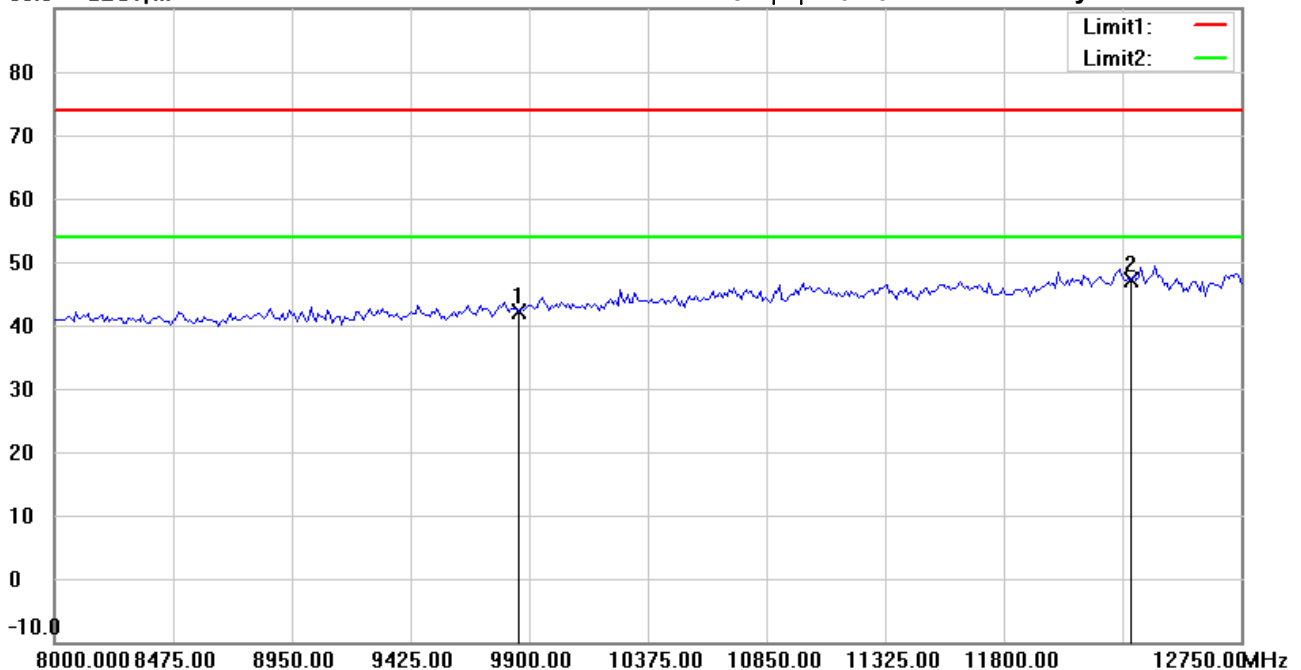

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	34.93	peak	7.32	42.25	74.00	150	43	-31.75	
*	12310.000	33.93	peak	13.20	47.13	74.00	150	99	-26.87	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#8


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:54:59

Humidity:72.9 %

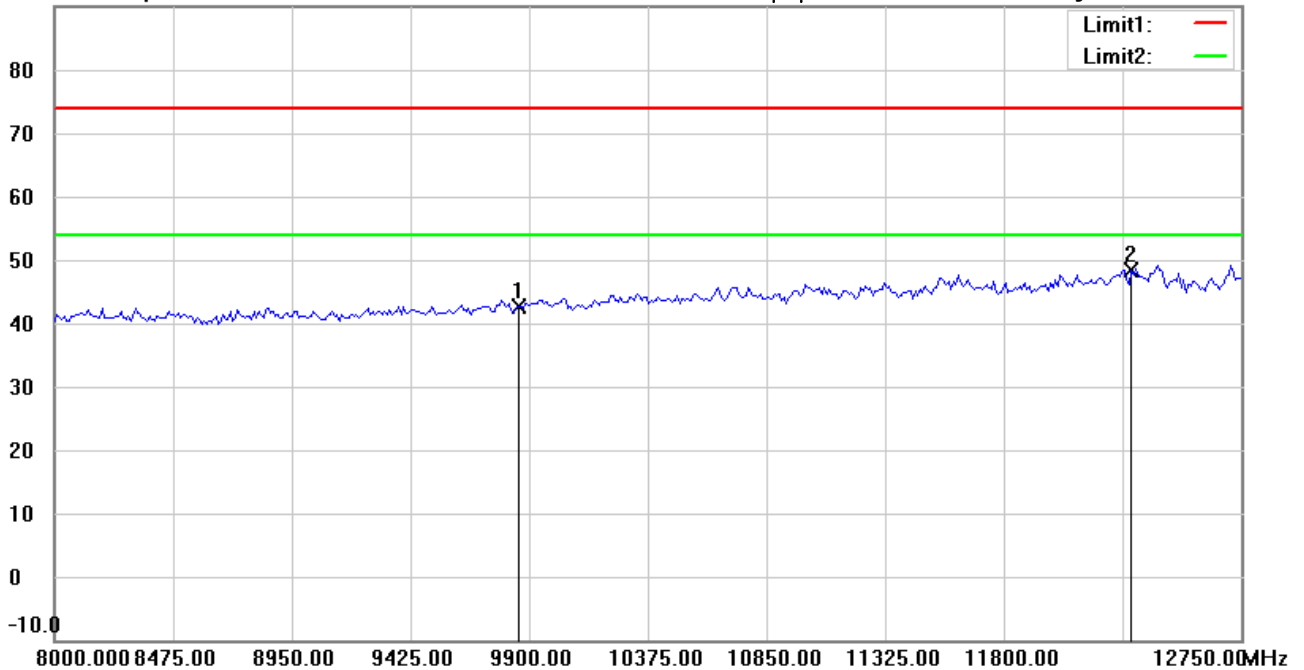

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.23	peak	7.32	42.55	74.00	150	24	-31.45	
*	12310.000	35.06	peak	13.20	48.26	74.00	150	100	-25.74	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:49:55

Humidity:72.9 %

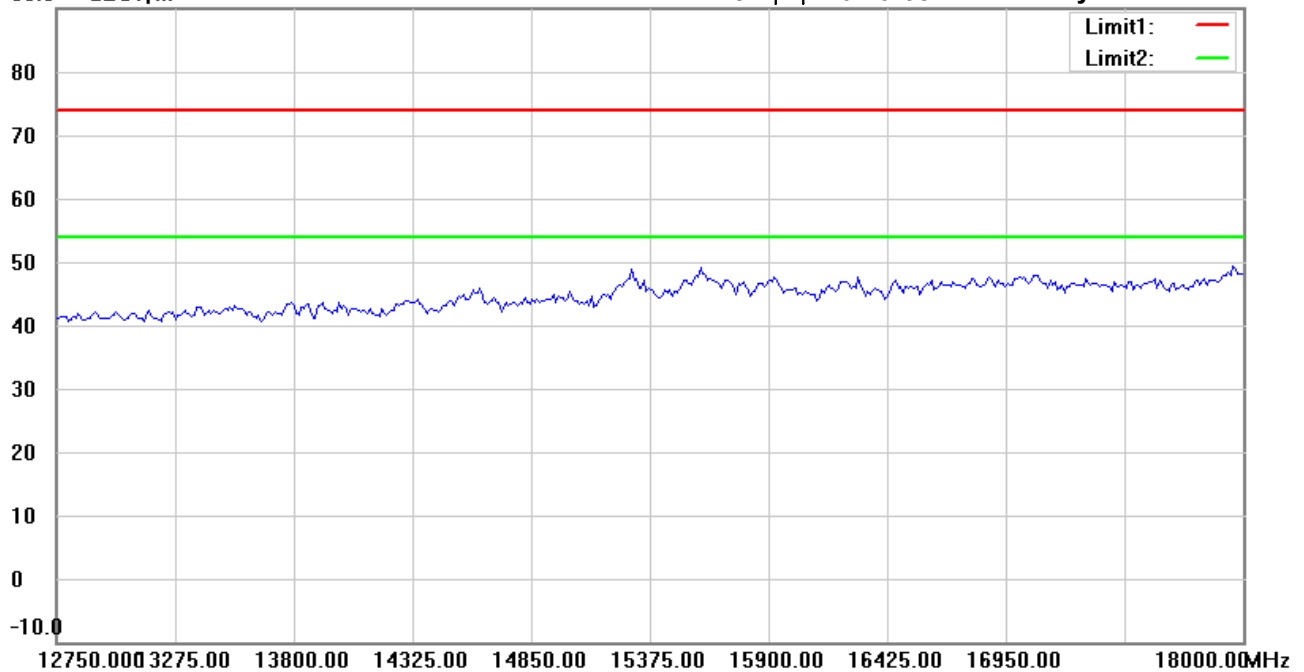

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:55:13

Humidity:72.9 %

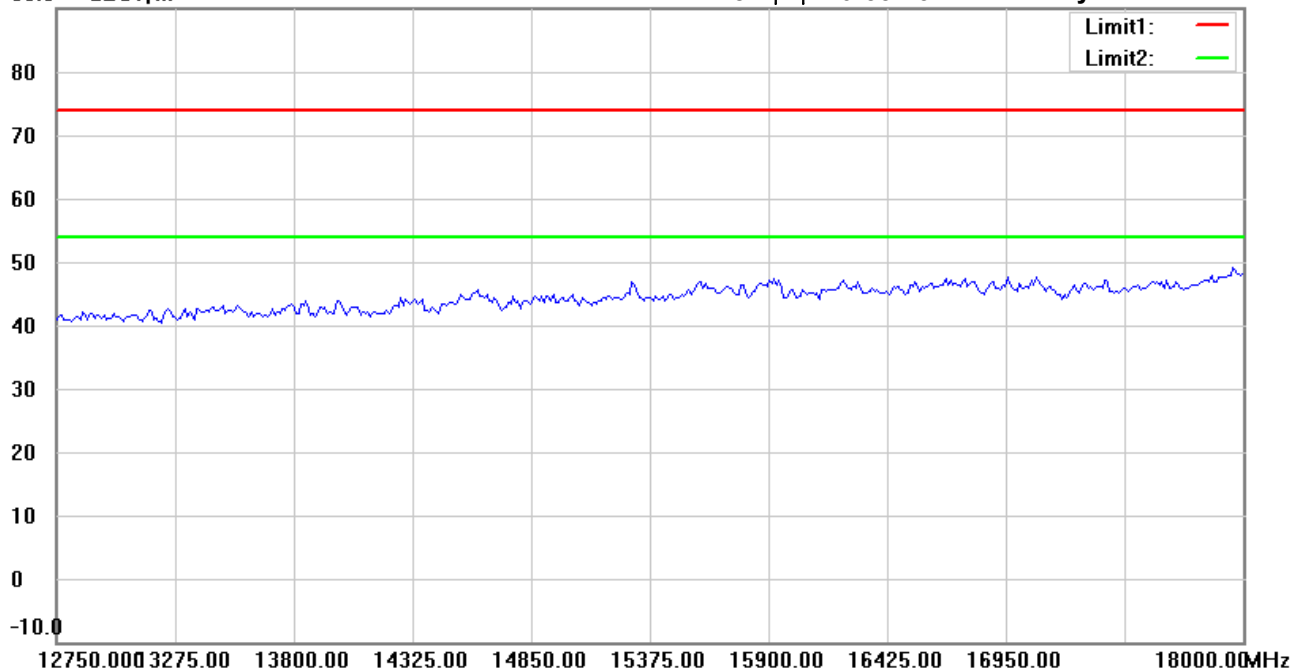

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:50:05

Humidity:72.9 %

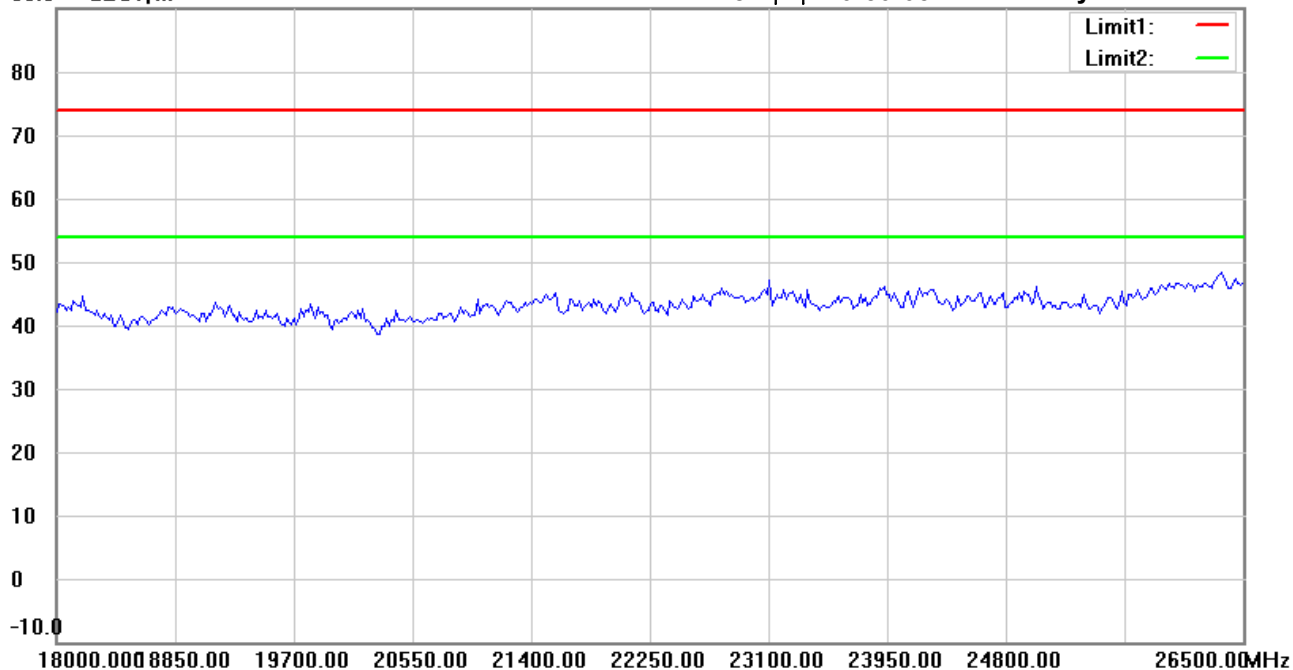

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 10:55:23

Humidity:72.9 %

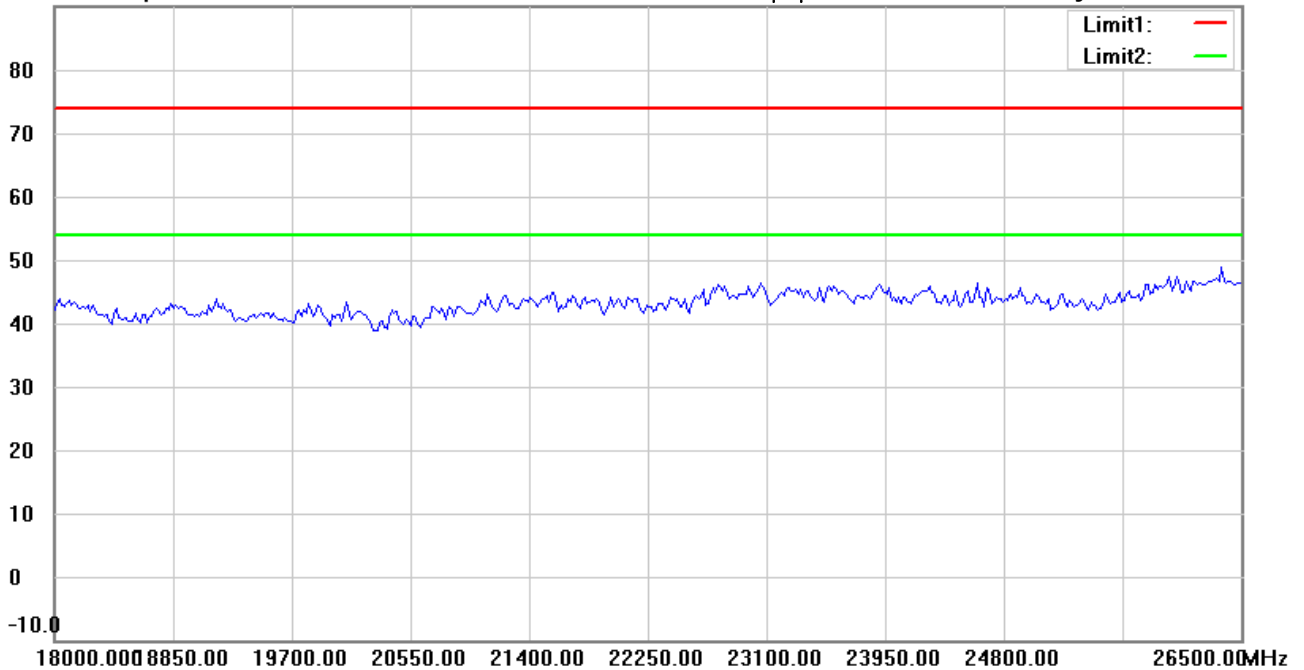

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 11:06:57

Humidity: 72.9 %

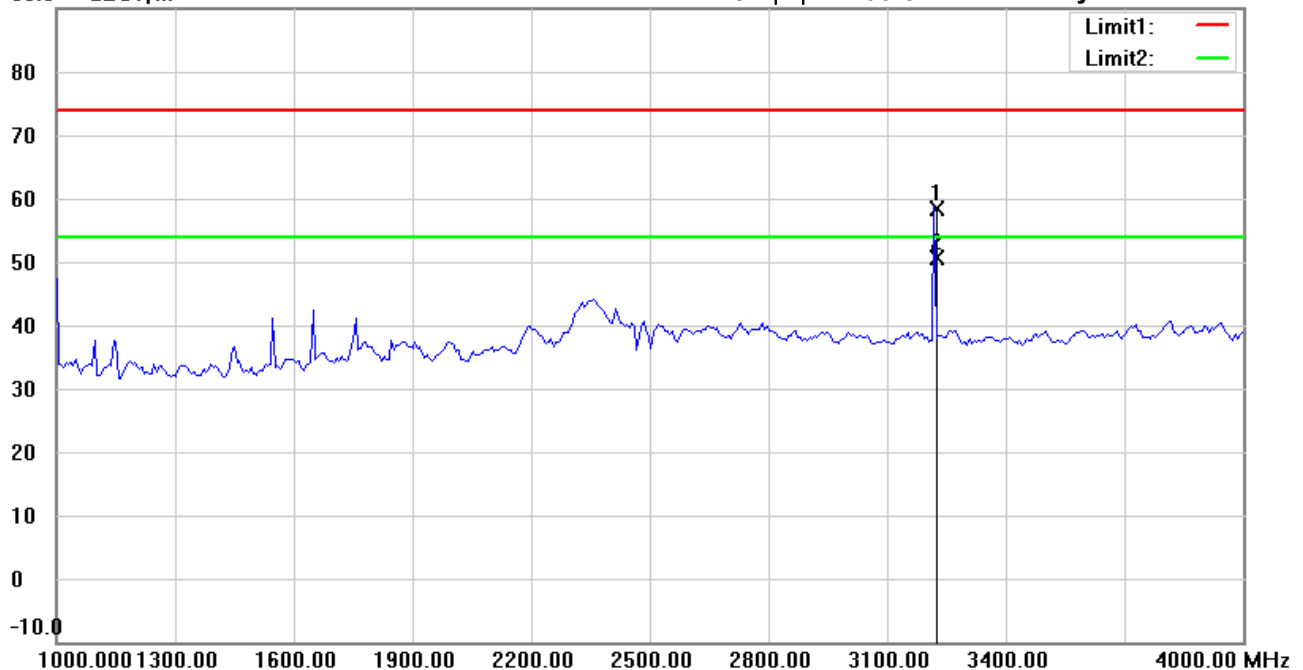

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3218.437	61.84	peak	-3.35	58.49	74.00	150	3	-15.51	
*	3218.437	53.96	AVG	-3.35	50.61	54.00	150	3	-3.39	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #6


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 11:11:51

Humidity: 72.9 %

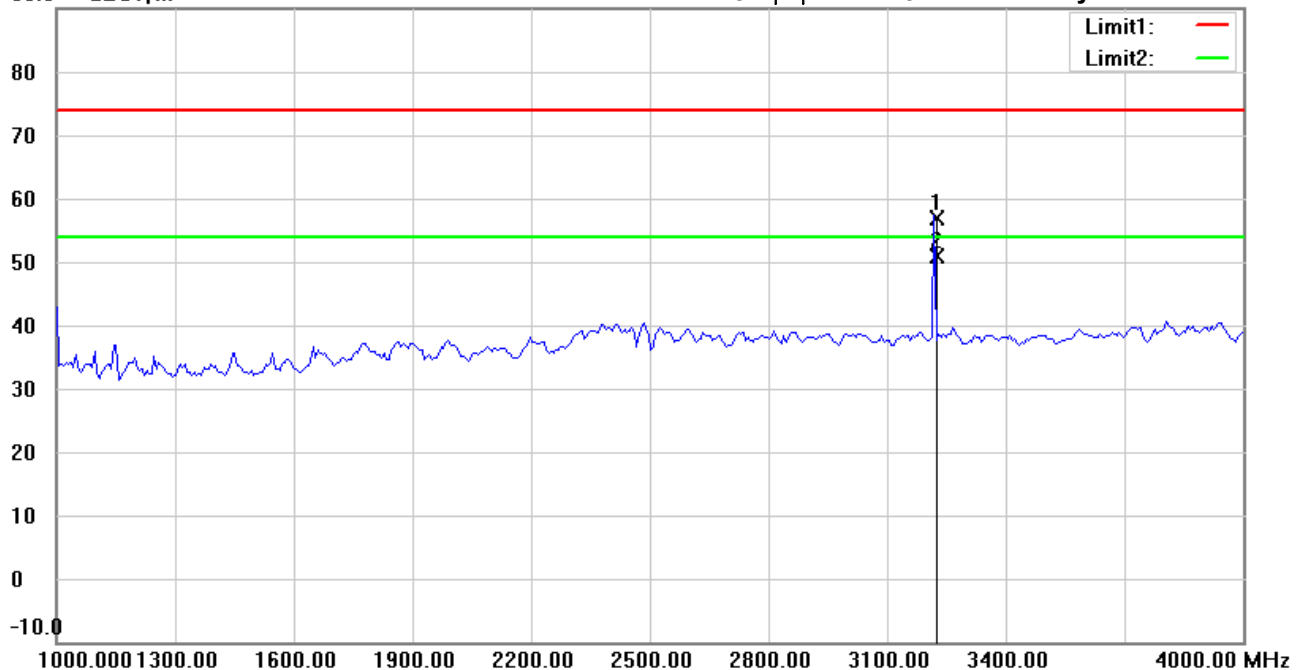

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3218.437	60.30	peak	-3.35	56.95	74.00	150	204	-17.05	
*	3218.437	54.19	AVG	-3.35	50.84	54.00	150	204	-3.16	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 11:08:18

Humidity: 72.9 %

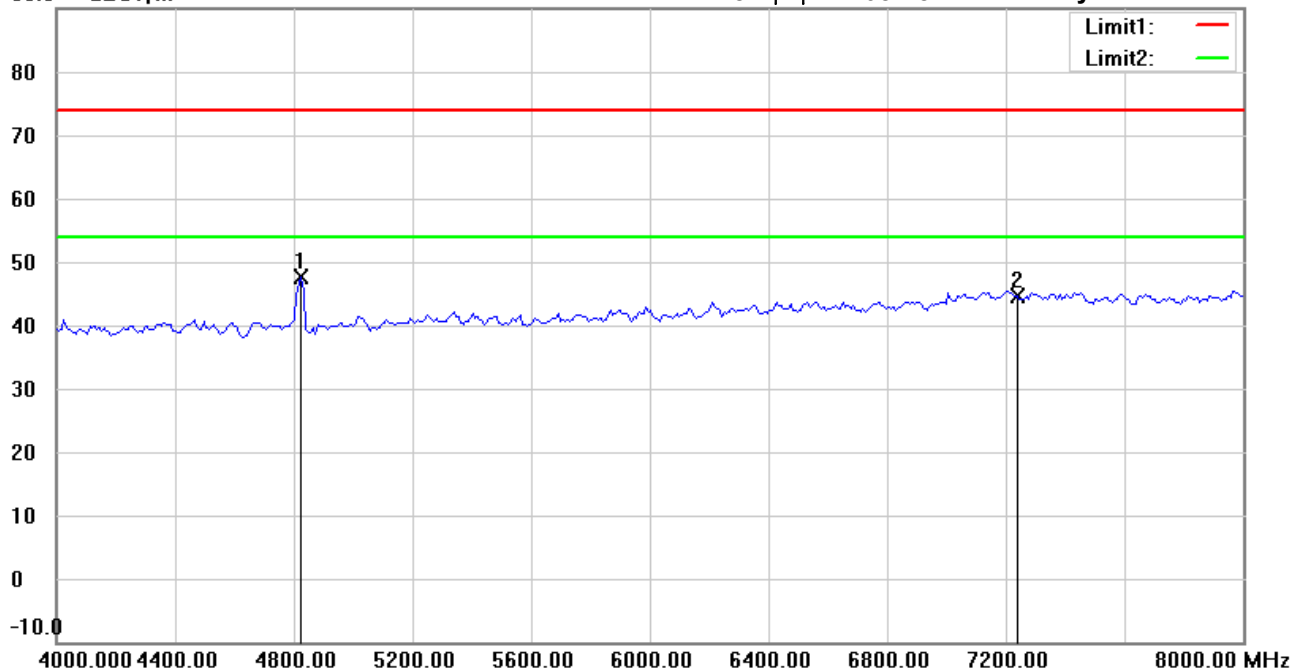

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4824.000	49.18	peak	-1.65	47.53	74.00	150	300	-26.47	
	7236.000	40.70	peak	3.93	44.63	74.00	150	9	-29.37	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#7


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 11:13:12

Humidity:72.9 %

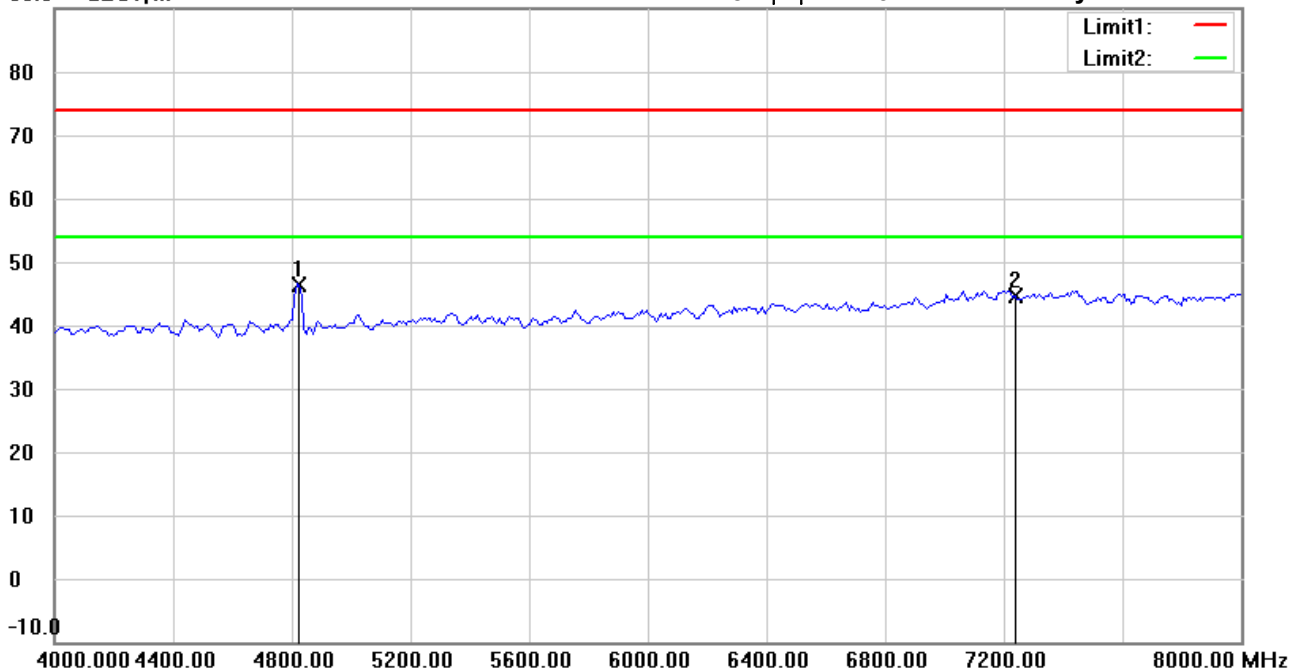

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	4824.000	48.09	peak	-1.65	46.44	74.00	150	28	-27.56	
	7236.000	40.78	peak	3.93	44.71	74.00	150	41	-29.29	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 11:10:00

Humidity:72.9 %

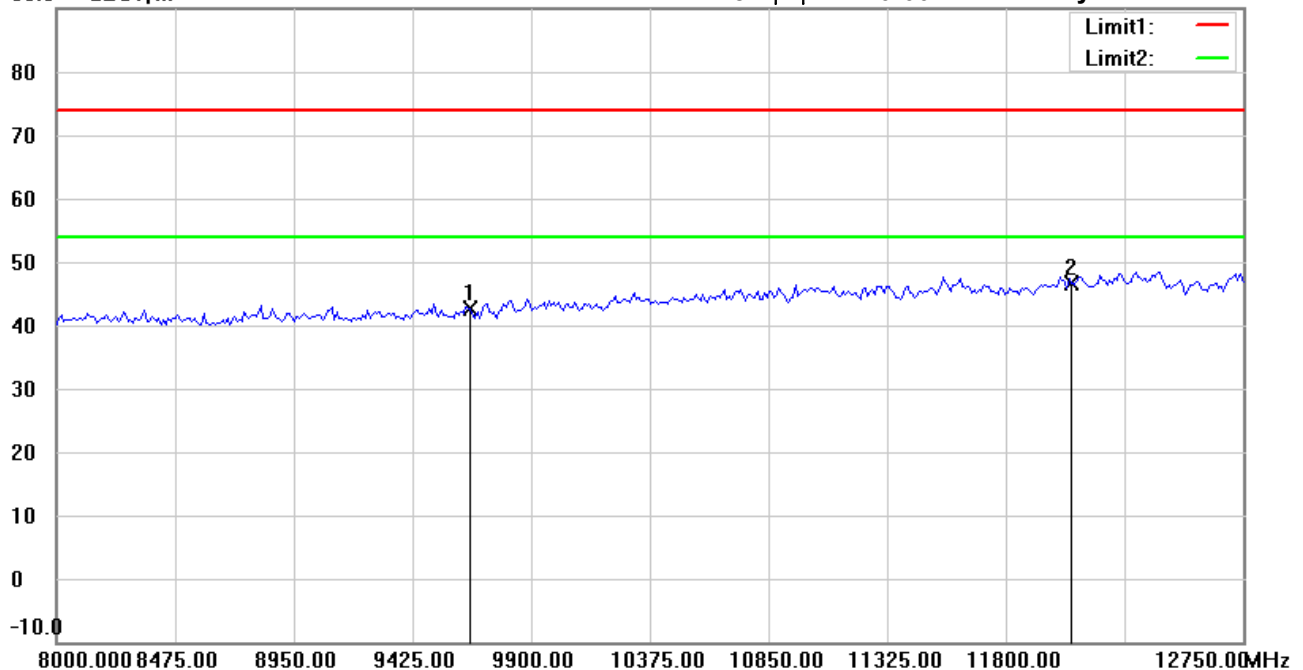

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.77	peak	6.81	42.58	74.00	150	214	-31.42	
*	12060.000	34.03	peak	12.53	46.56	74.00	150	7	-27.44	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#8


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 11:15:05

Humidity:72.9 %

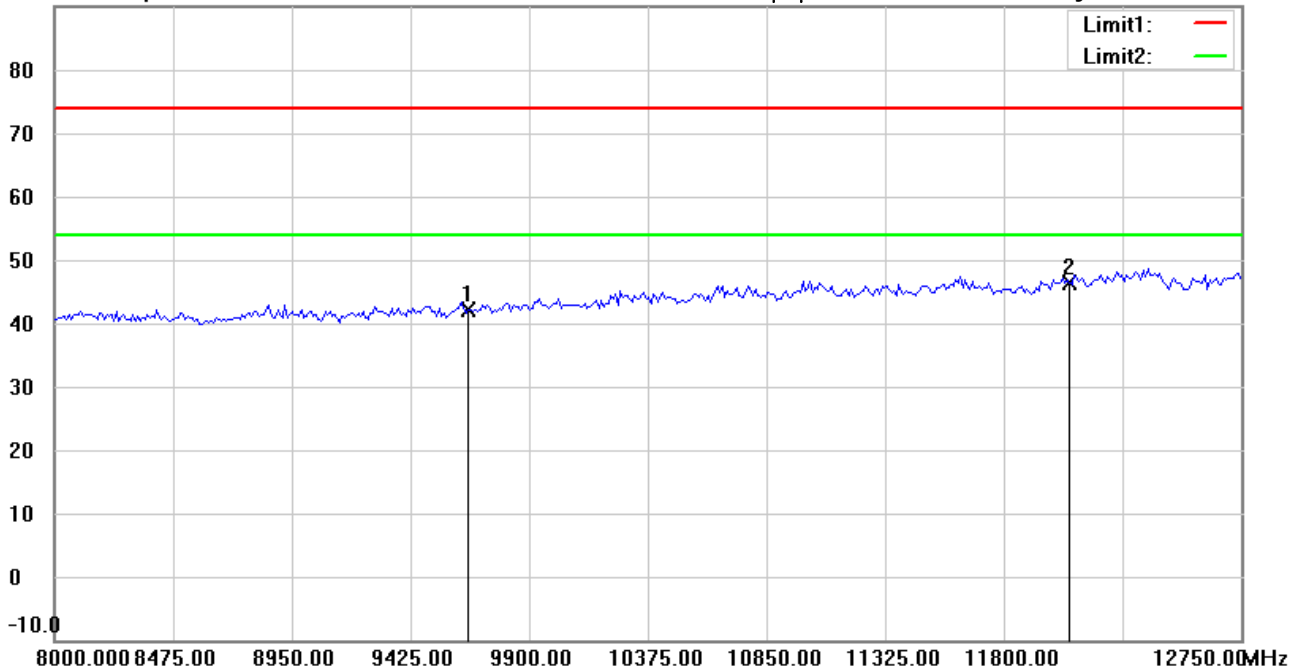

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.21	peak	6.81	42.02	74.00	150	3	-31.98	
*	12060.000	33.91	peak	12.53	46.44	74.00	150	100	-27.56	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 11:10:14

Humidity:72.9 %

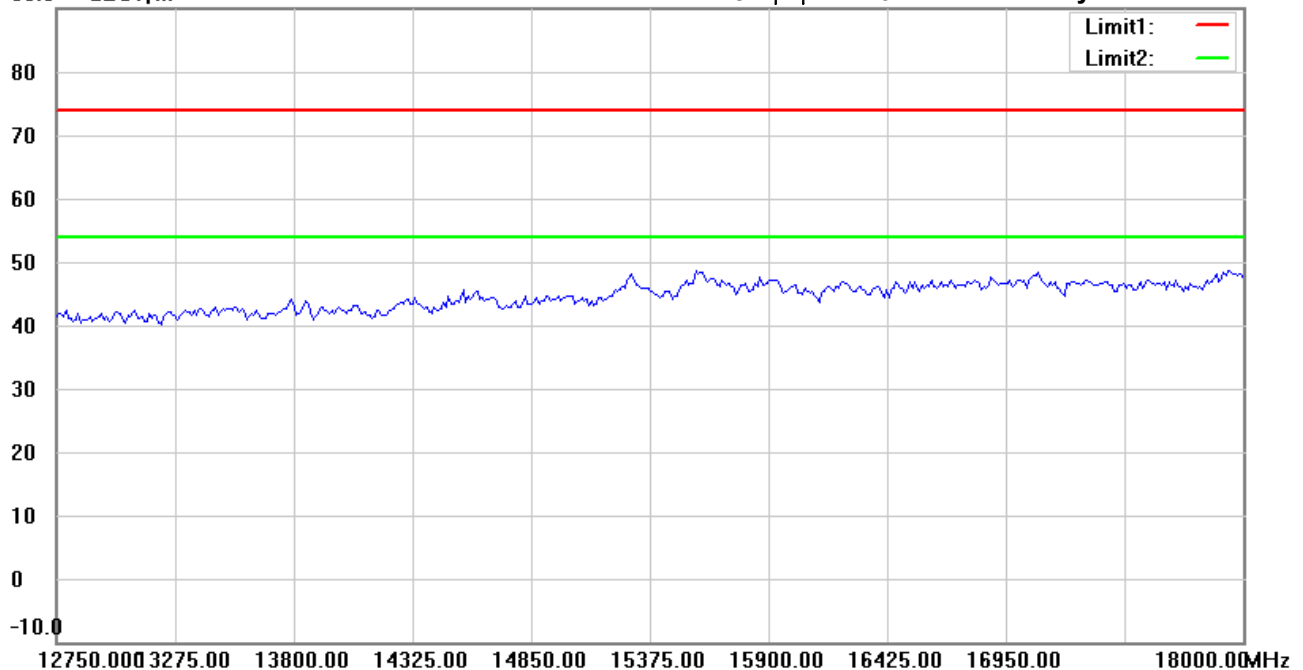

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 11:15:19

Humidity:72.9 %

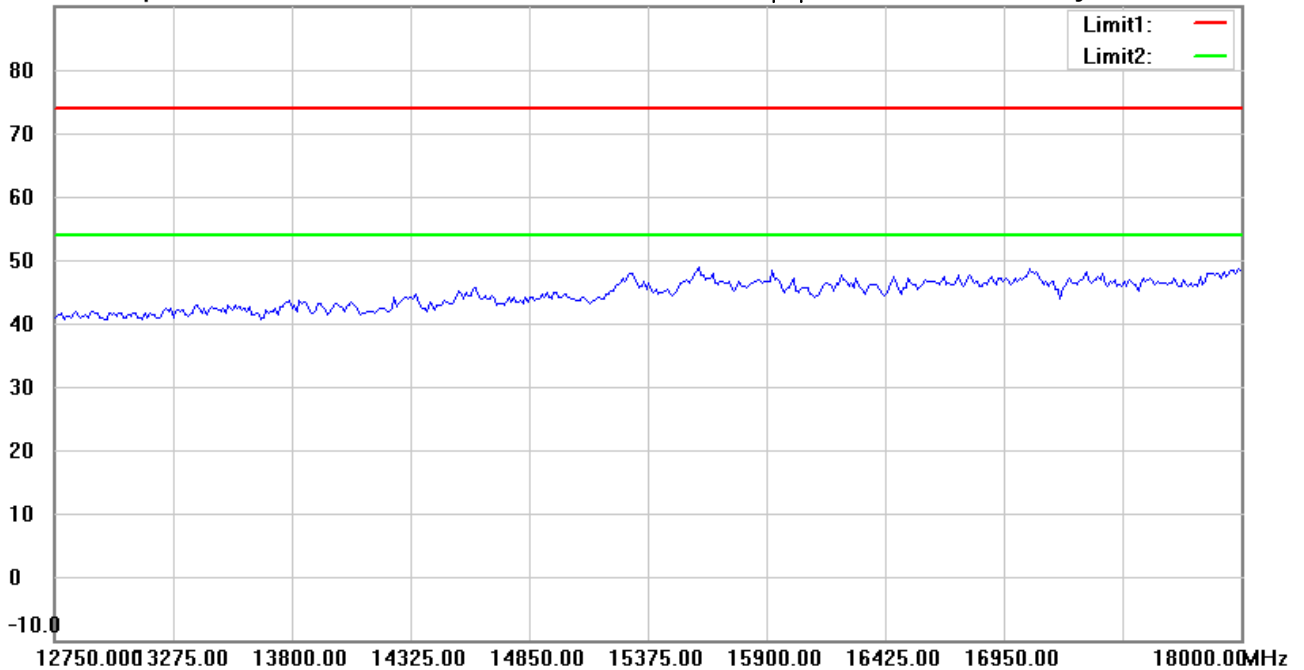

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 11:10:24

Humidity:72.9 %

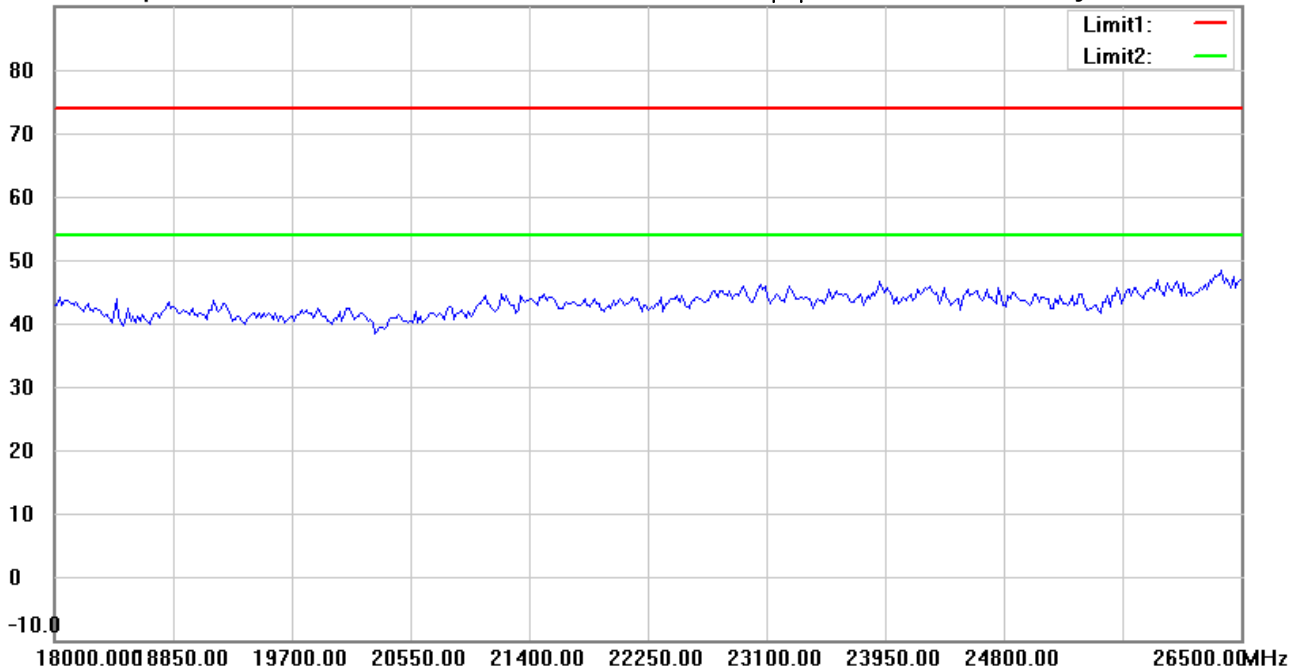

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 11:15:29

Humidity:72.9 %

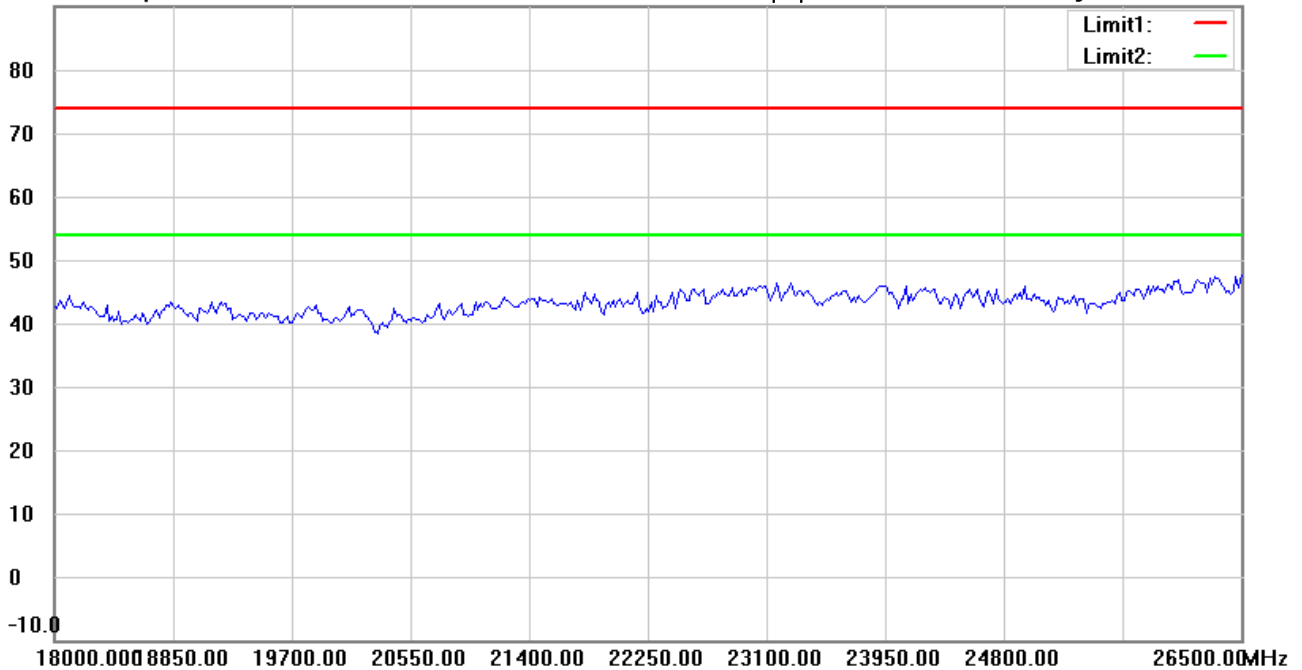

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#1


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 12:13:09

Humidity:62.8 %

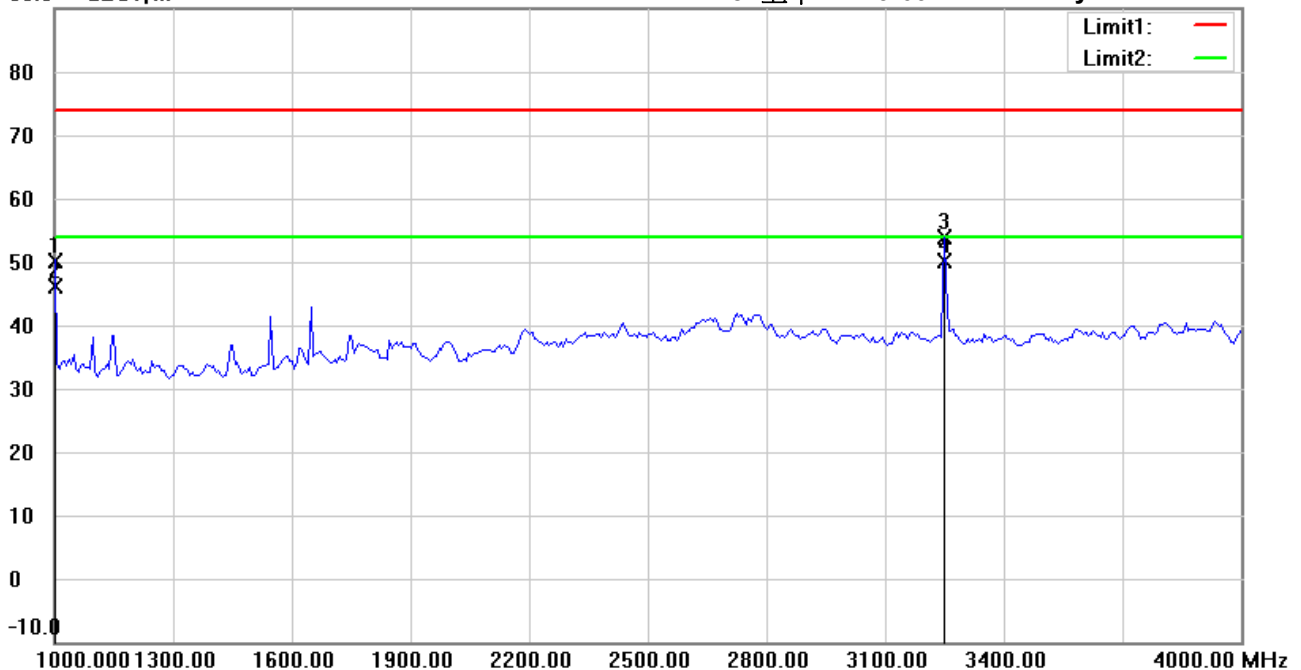

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH6

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1000.0000	57.62	peak	-7.37	50.25	74.00	150	150	-23.75	
	1000.0000	53.42	AVG	-7.37	46.05	54.00	150	150	-7.95	
	3248.497	57.37	peak	-3.46	53.91	74.00	150	200	-20.09	
*	3248.497	53.61	AVG	-3.46	50.15	54.00	150	200	-3.85	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #6


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 12:20:07

Humidity: 62.8 %

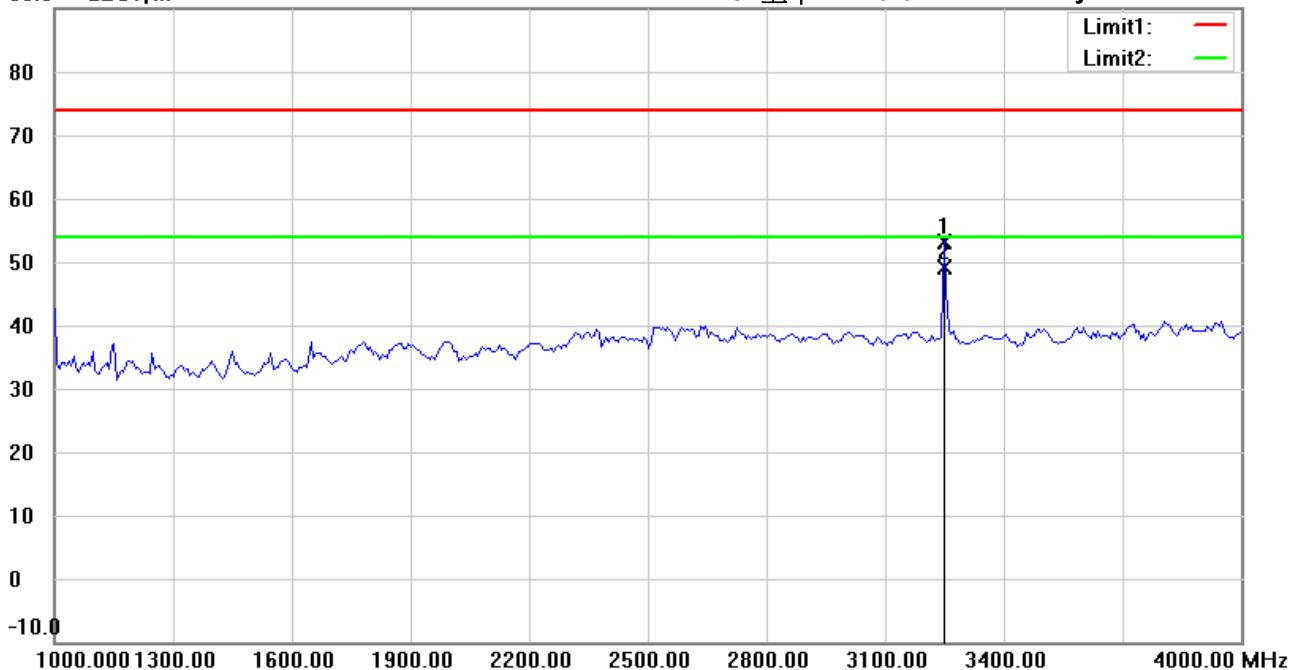

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH6

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3248.497	56.53	peak	-3.46	53.07	74.00	150	164	-20.93	
*	3248.497	52.48	AVG	-3.46	49.02	54.00	150	164	-4.98	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#2


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 12:14:29

Humidity:62.8 %

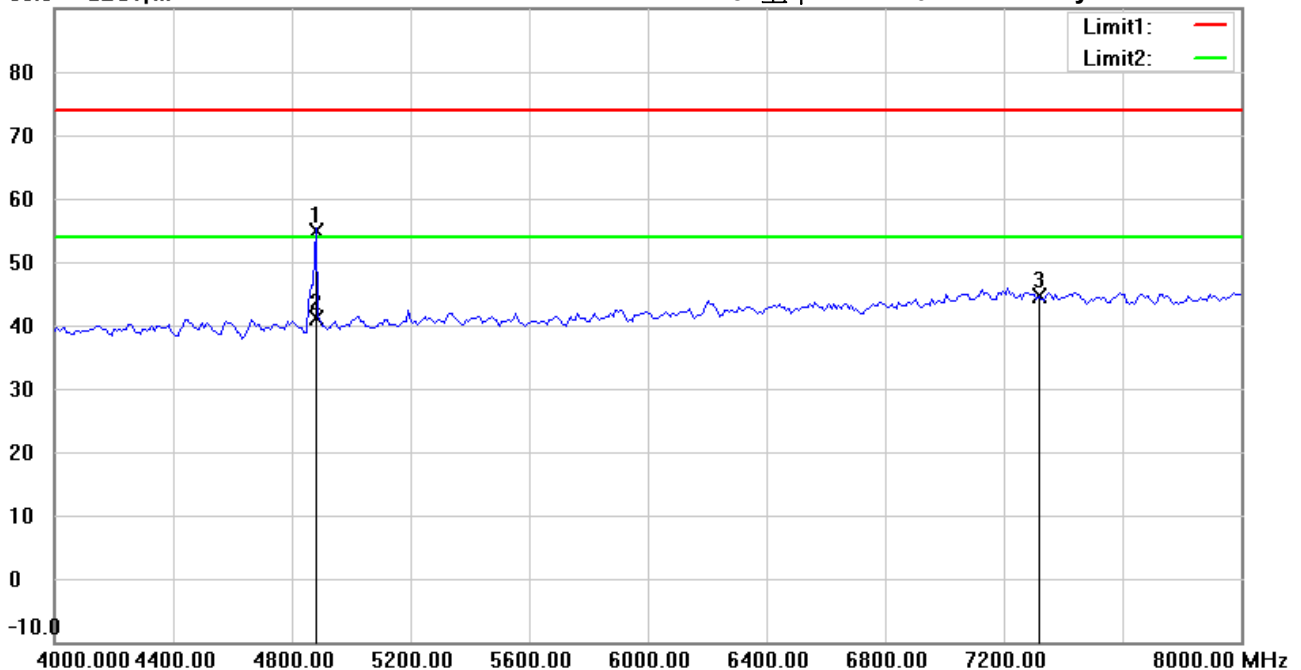

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH6

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	56.19	peak	-1.43	54.76	74.00	150	360	-19.24	
*	4874.000	42.51	AVG	-1.43	41.08	54.00	150	360	-12.92	
	7311.000	40.74	peak	3.82	44.56	74.00	152	318	-29.44	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#7


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 12:21:28

Humidity:62.8 %

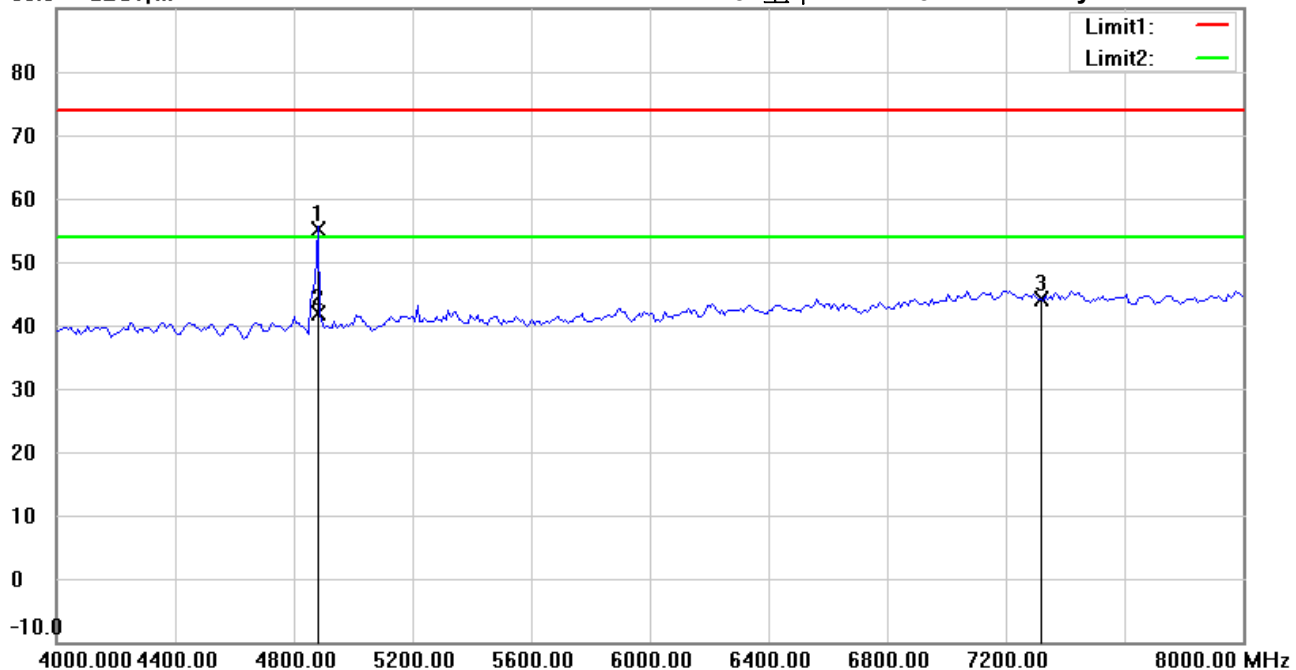

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH6

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	56.62	peak	-1.43	55.19	74.00	150	180	-18.81	
*	4874.000	43.43	AVG	-1.43	42.00	54.00	150	180	-12.00	
	7311.000	40.41	peak	3.82	44.23	74.00	153	224	-29.77	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Nei-hu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #3


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 12:17:01

Humidity: 62.8 %

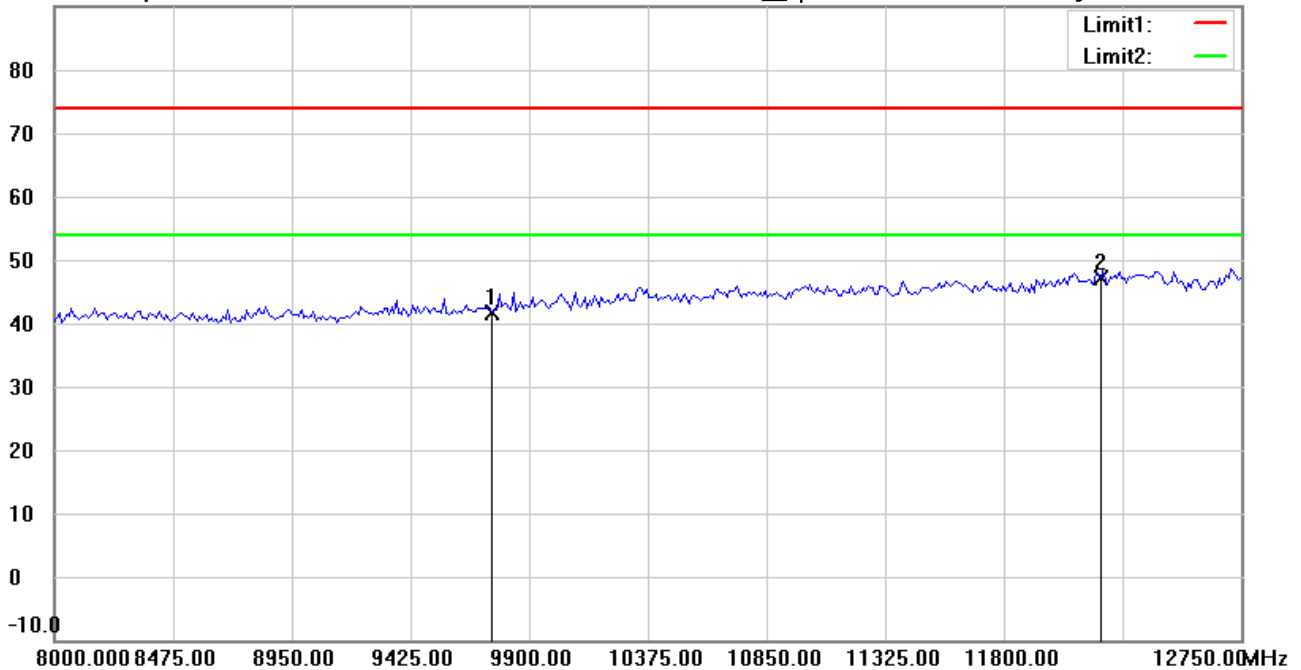

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH6

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.54	peak	6.98	41.52	74.00	150	221	-32.48	
*	12185.000	33.74	peak	13.49	47.23	74.00	150	289	-26.77	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #8


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 12:23:51

Humidity: 62.8 %

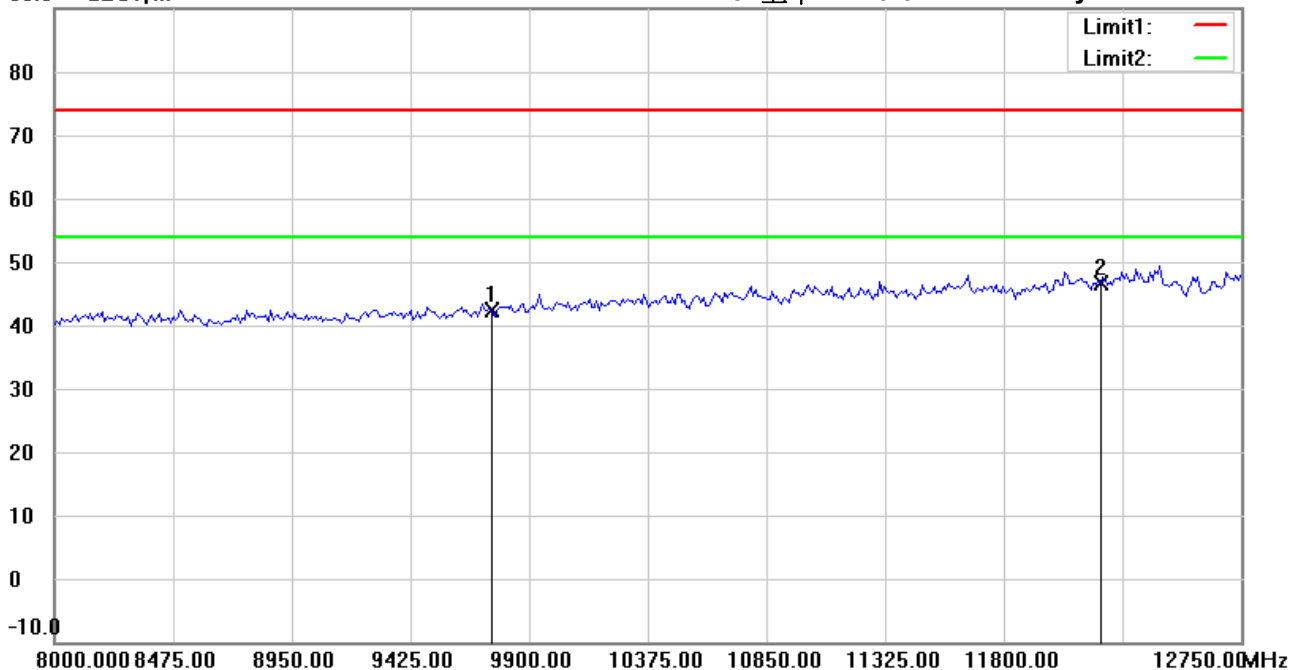

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH6

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.45	peak	6.98	42.43	74.00	150	167	-31.57	
*	12185.000	33.13	peak	13.49	46.62	74.00	150	235	-27.38	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#4


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 12:17:15

Humidity:62.8 %

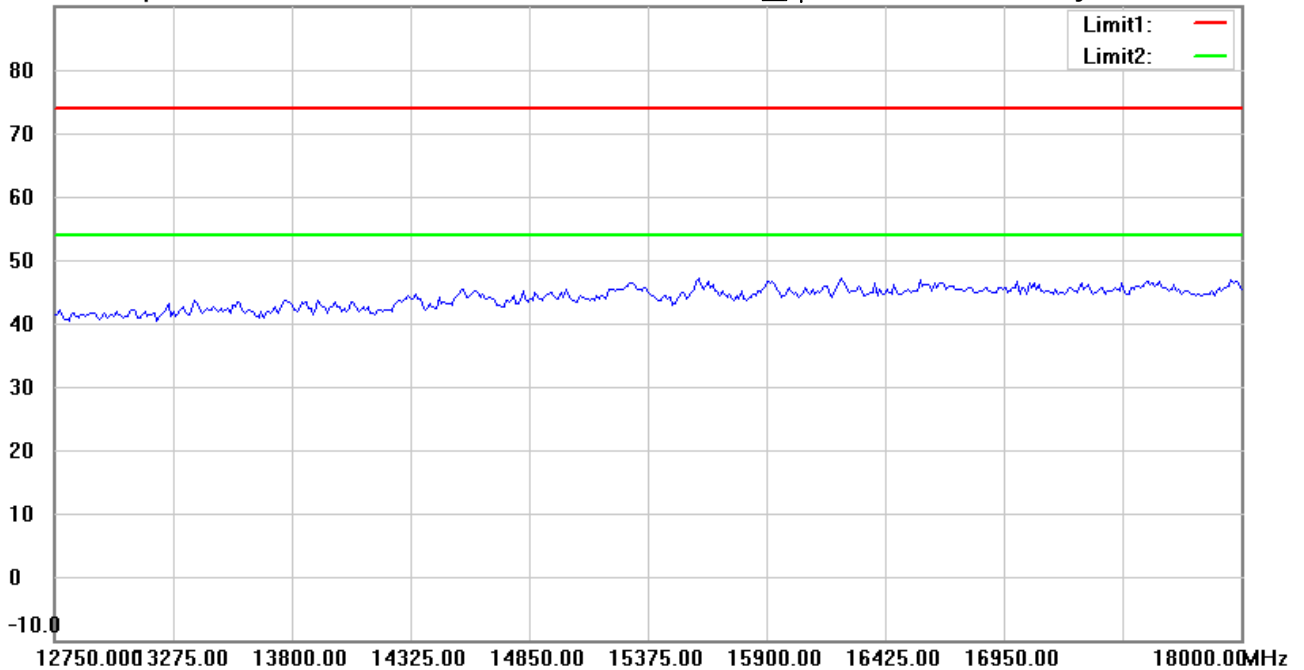

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH6

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#9


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 12:24:05

Humidity:62.8 %

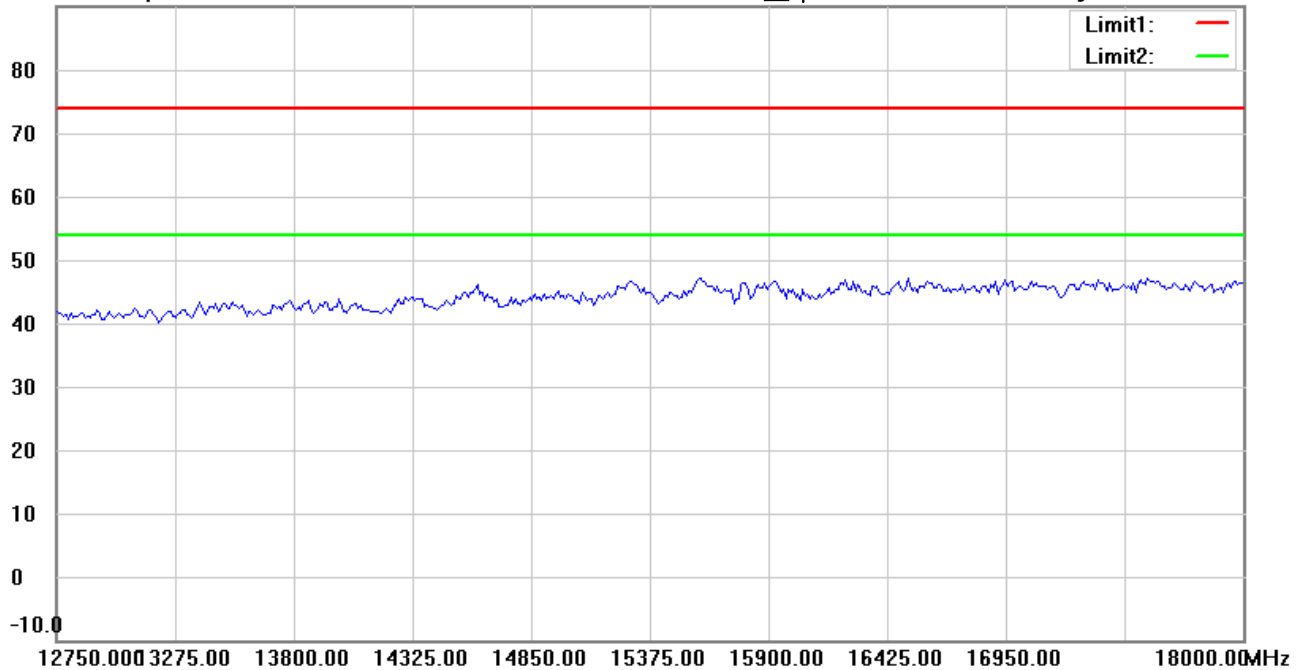

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH6

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#5


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 12:17:25

Humidity:62.8 %

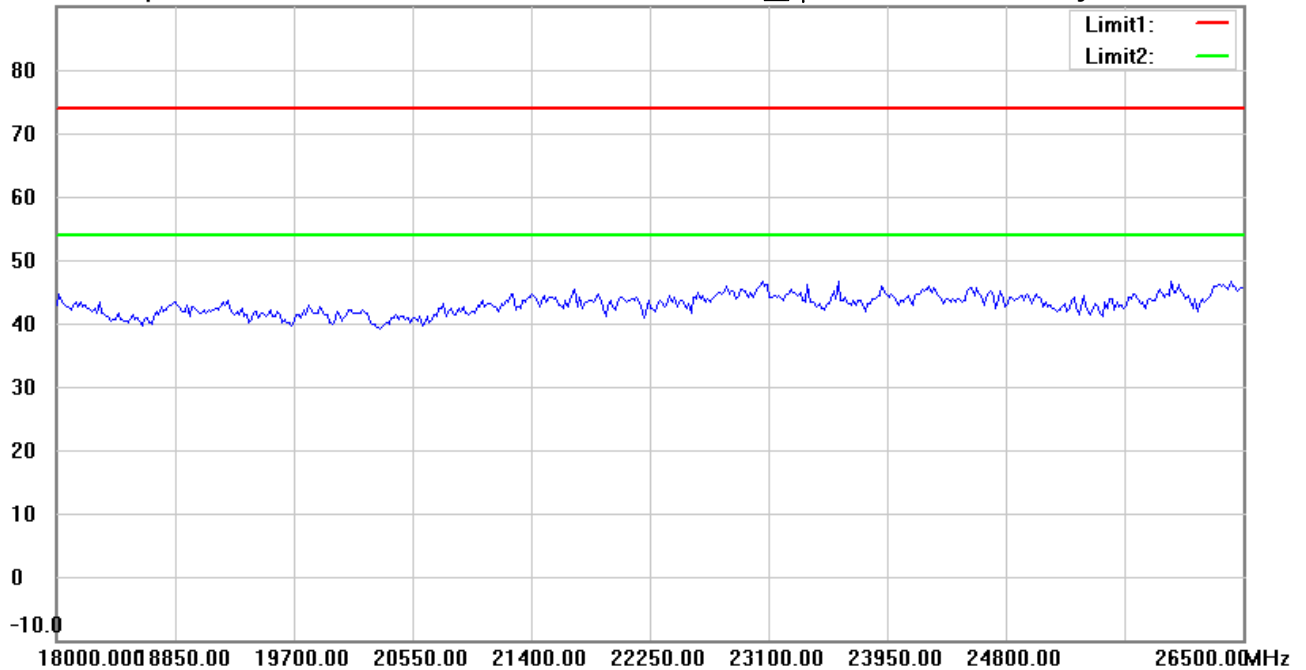

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH6

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#10


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 12:24:15

Humidity:62.8 %

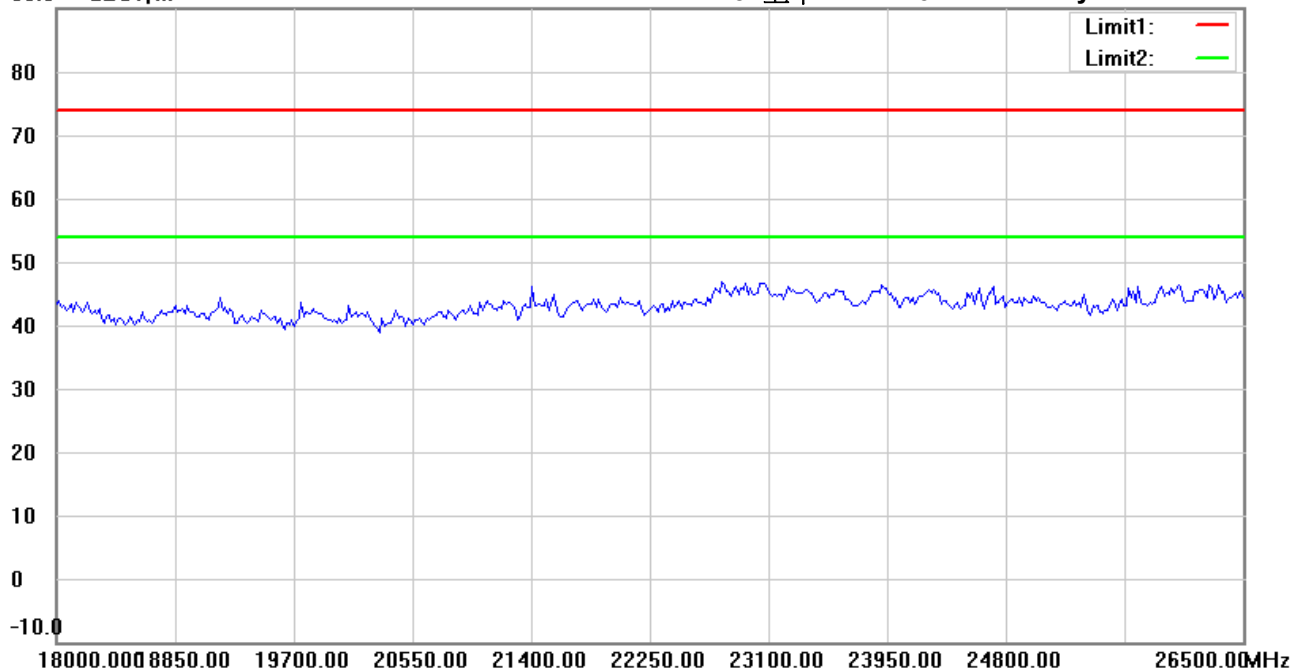

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH6

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #1


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 12:48:52

Humidity: 62.8 %

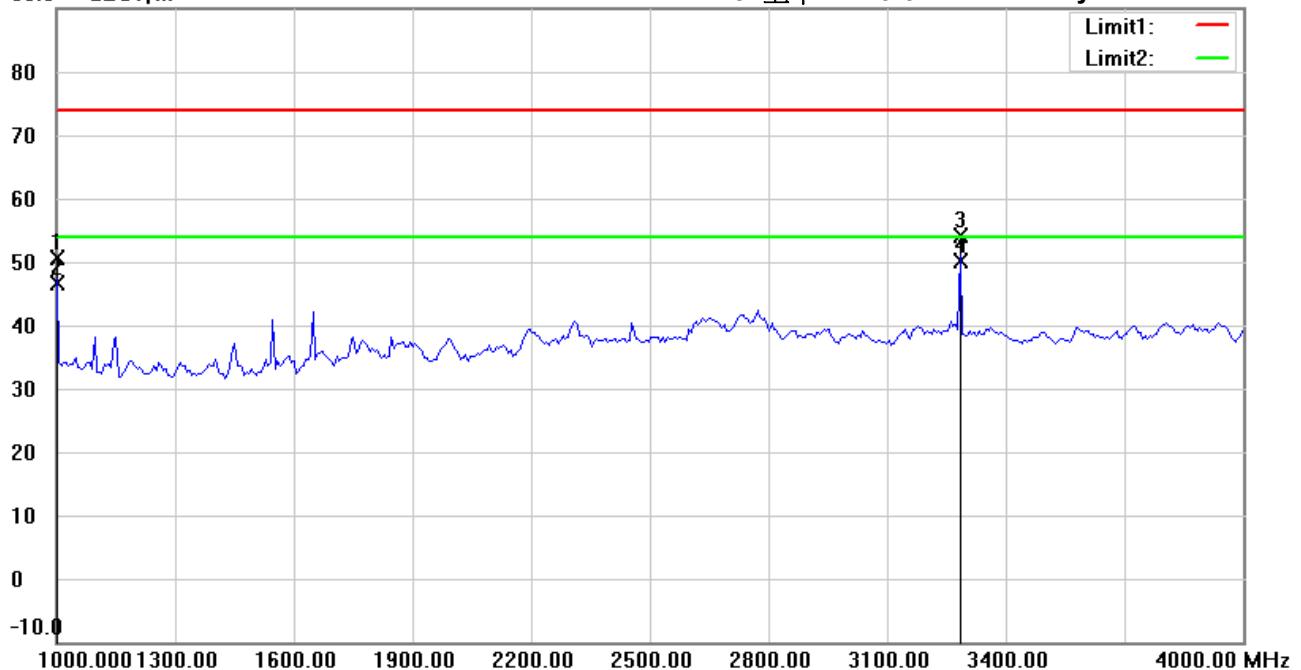

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1000.0000	57.98	peak	-7.37	50.61	74.00	150	154	-23.39	
	1000.0000	53.99	AVG	-7.37	46.62	54.00	150	154	-7.38	
	3284.569	57.75	peak	-3.59	54.16	74.00	150	220	-19.84	
*	3284.569	53.60	AVG	-3.59	50.01	54.00	150	220	-3.99	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #6


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 12:53:52

Humidity: 62.8 %

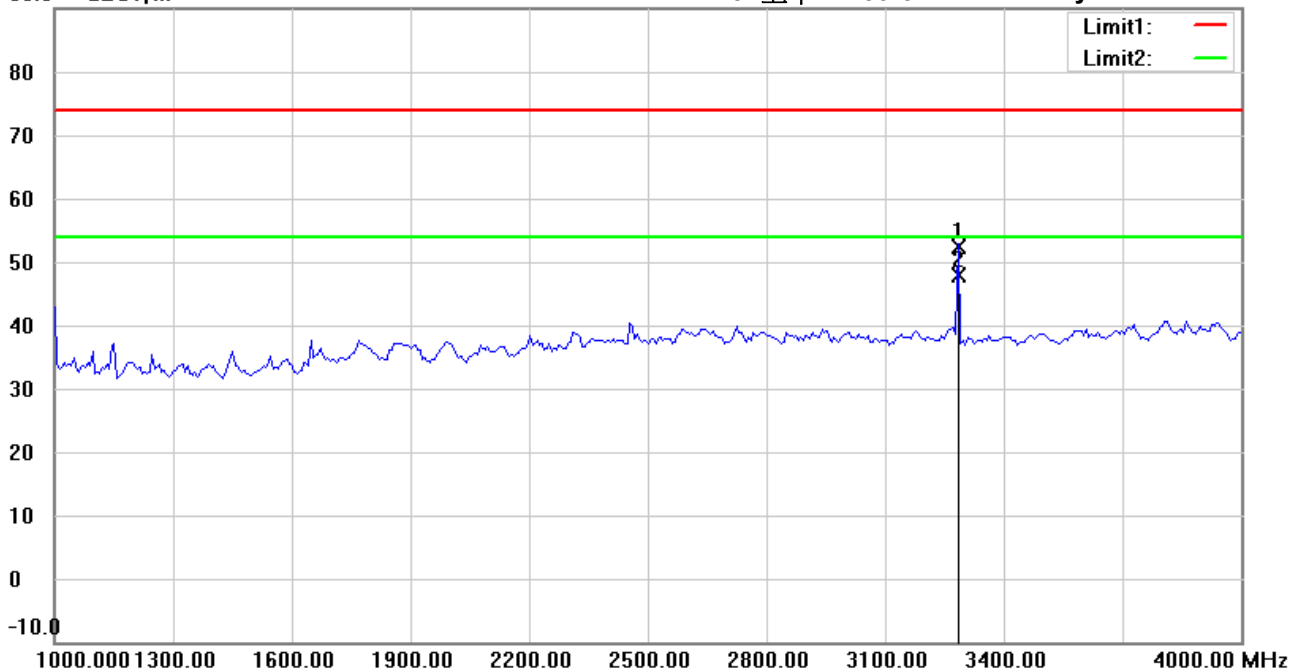

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3284.569	55.87	peak	-3.59	52.28	74.00	150	188	-21.72	
*	3284.569	51.50	AVG	-3.59	47.91	54.00	150	188	-6.09	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#2


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 12:50:13

Humidity:62.8 %

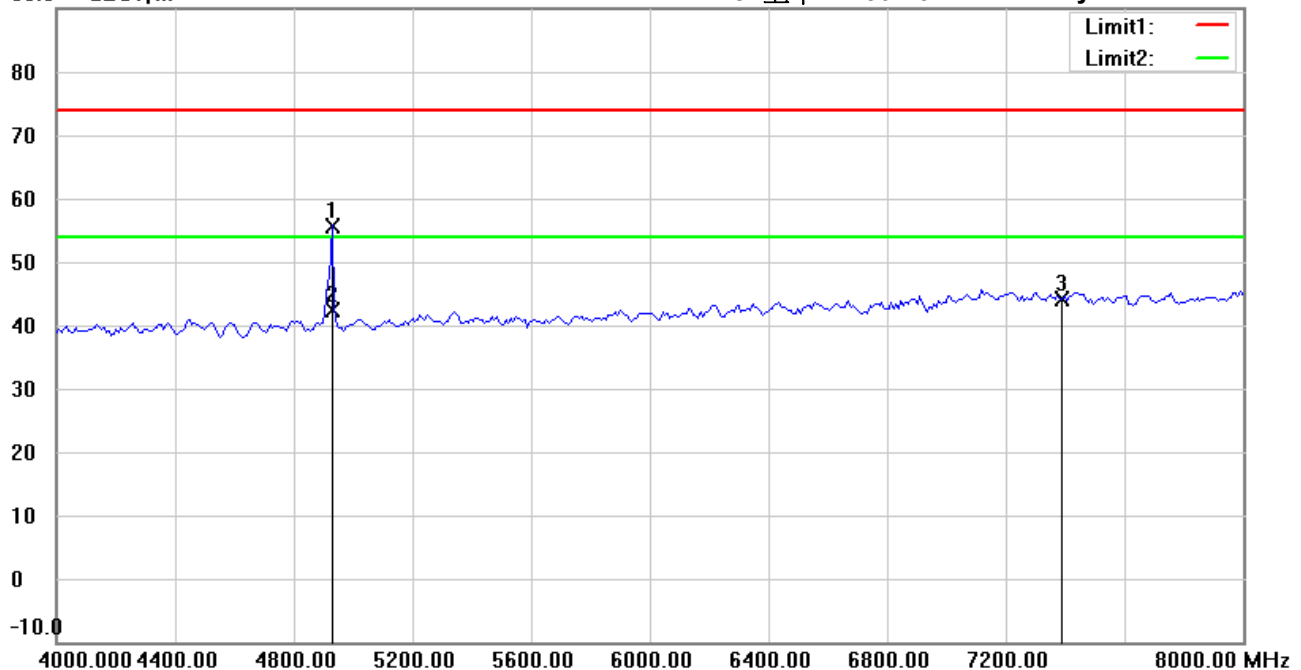

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	56.78	peak	-1.11	55.67	74.00	150	25	-18.33	
*	4924.000	43.47	AVG	-1.11	42.36	54.00	150	25	-11.64	
	7386.000	40.12	peak	4.06	44.18	74.00	150	315	-29.82	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#7


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 12:55:13

Humidity:62.8 %

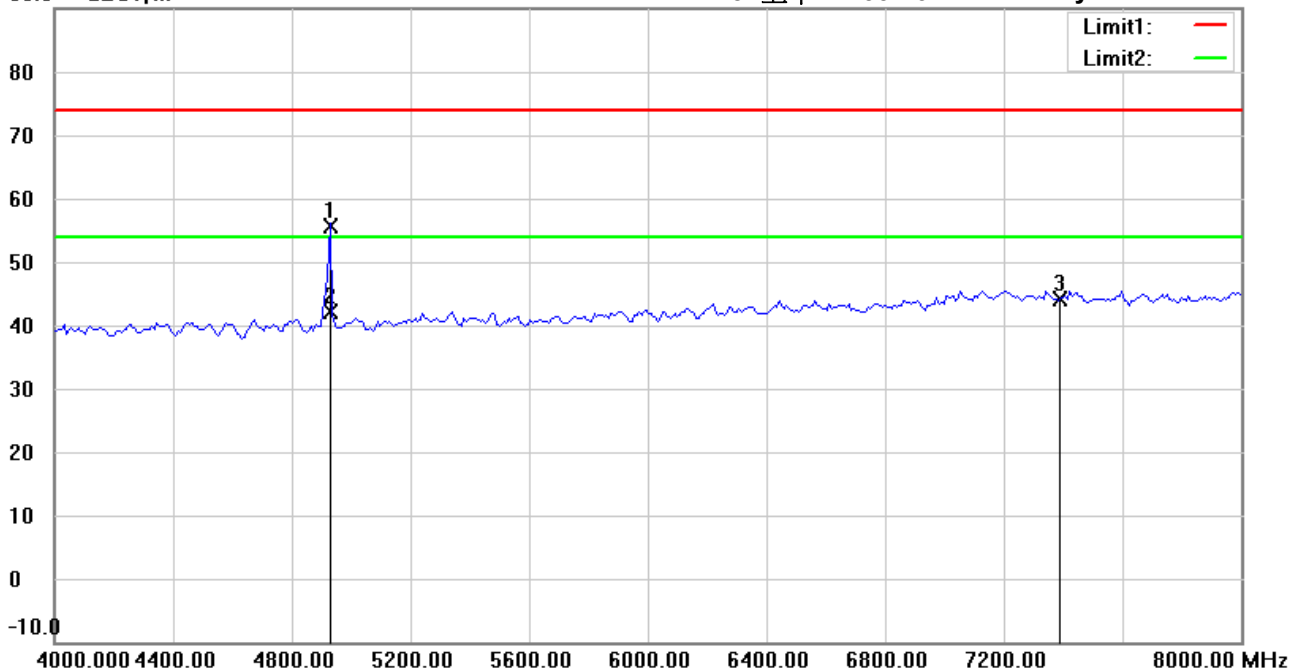

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	56.81	peak	-1.11	55.70	74.00	150	180	-18.30	
*	4924.000	43.36	AVG	-1.11	42.25	54.00	150	180	-11.75	
	7386.000	40.13	peak	4.06	44.19	74.00	150	226	-29.81	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#3


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 12:51:46

Humidity:62.8 %

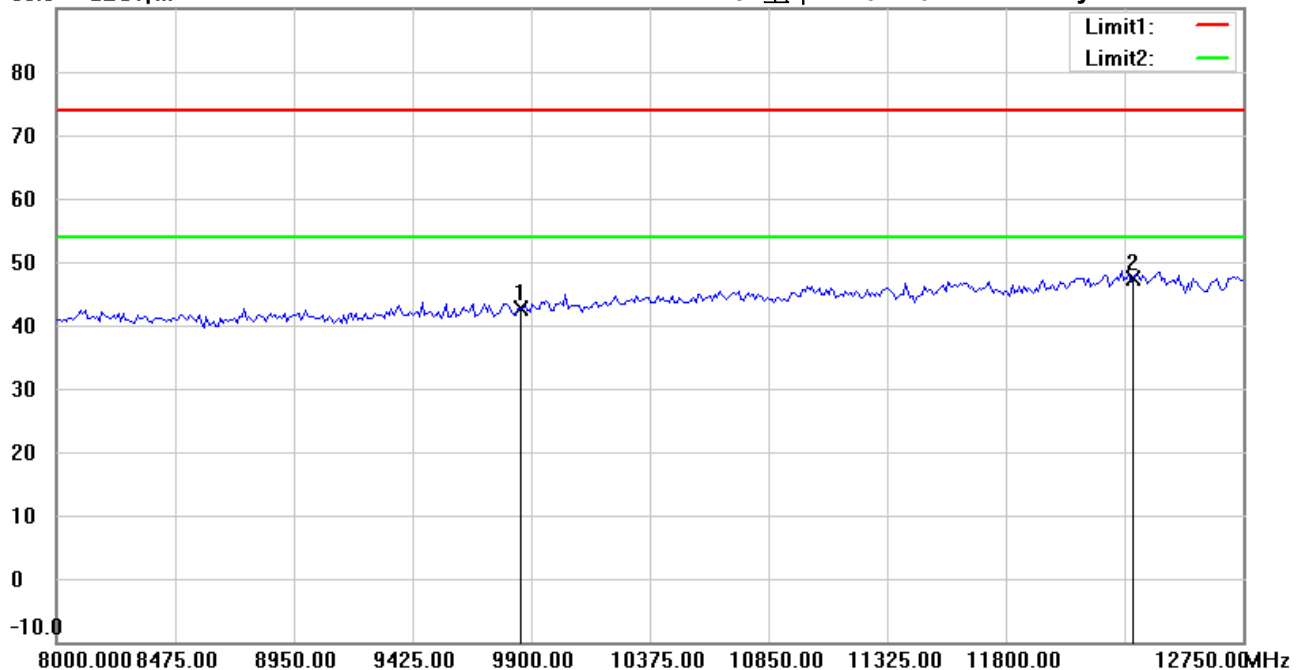

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.32	peak	7.32	42.64	74.00	150	236	-31.36	
*	12310.000	34.20	peak	13.20	47.40	74.00	150	264	-26.60	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#8


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 12:56:59

Humidity:62.8 %

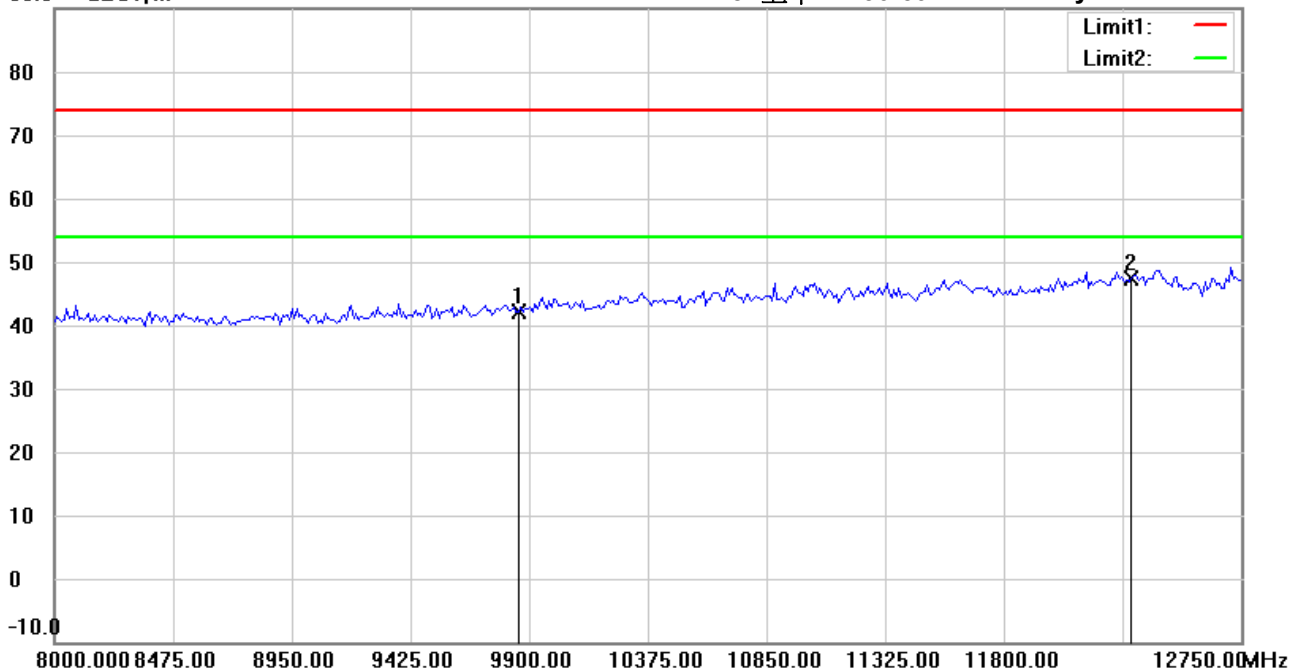

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	34.91	peak	7.32	42.23	74.00	150	121	-31.77	
*	12310.000	34.14	peak	13.20	47.34	74.00	150	296	-26.66	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#4


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 12:52:00

Humidity:62.8 %

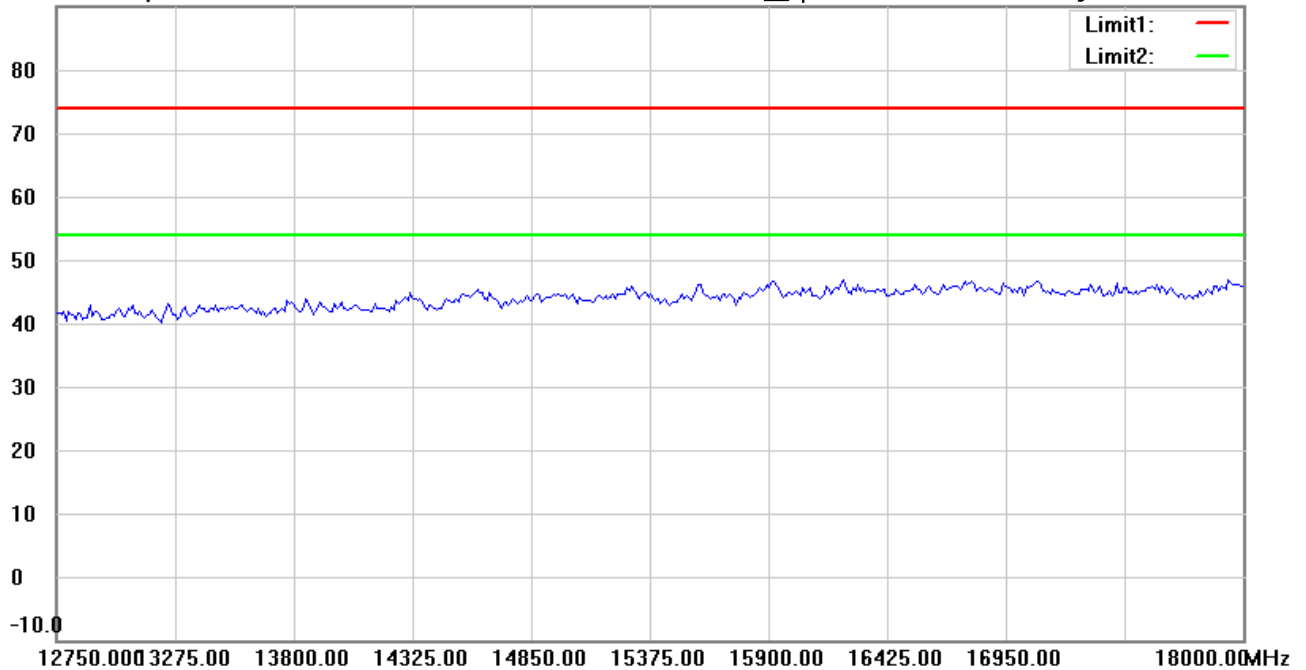

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#9


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 12:57:13

Humidity:62.8 %

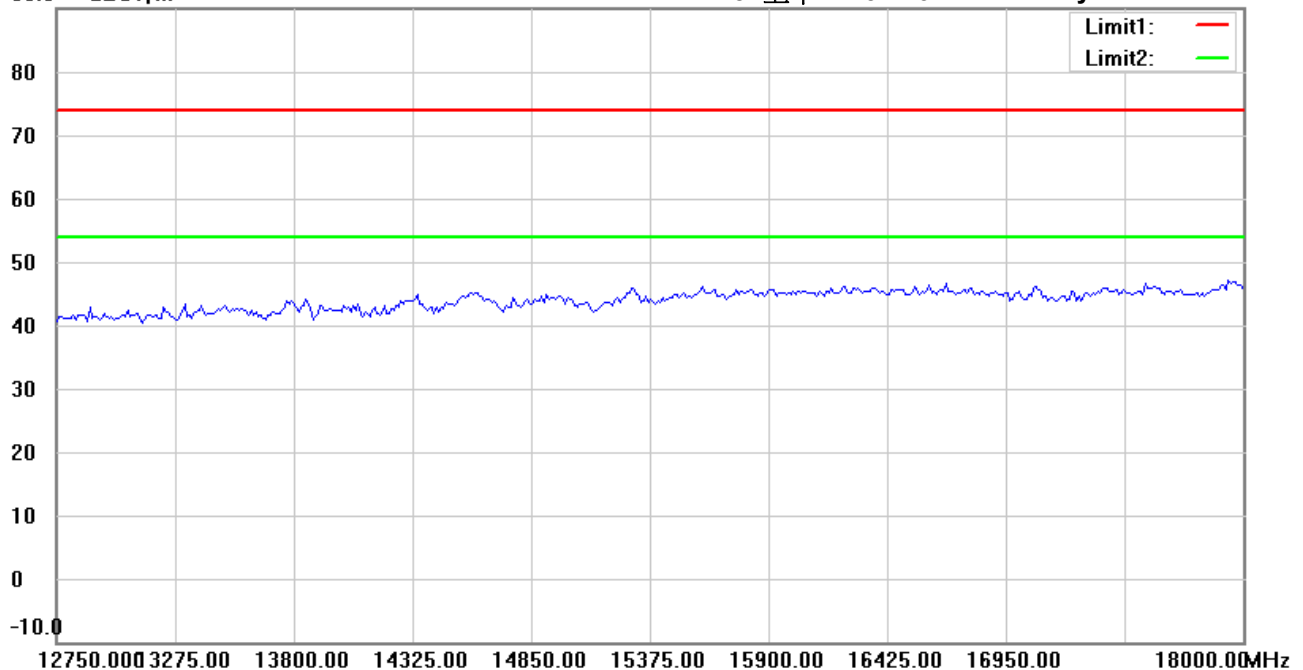

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#5


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 12:52:10

Humidity:62.8 %

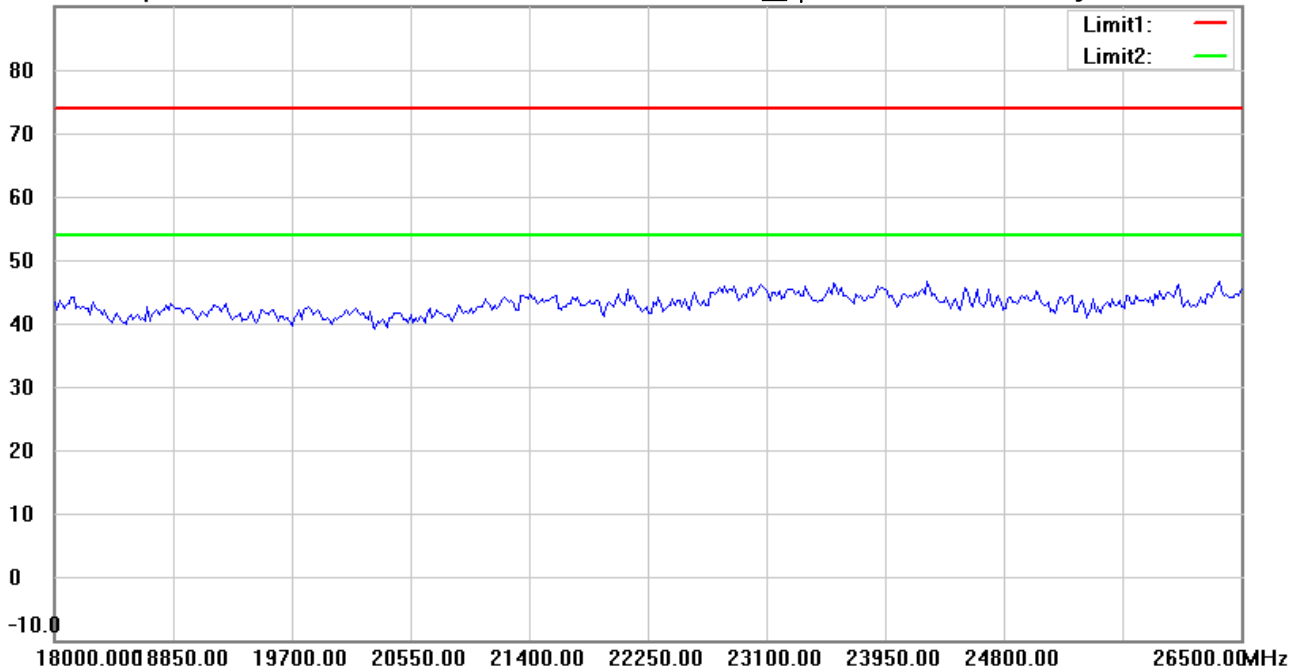

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#10


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 12:57:23

Humidity:62.8 %

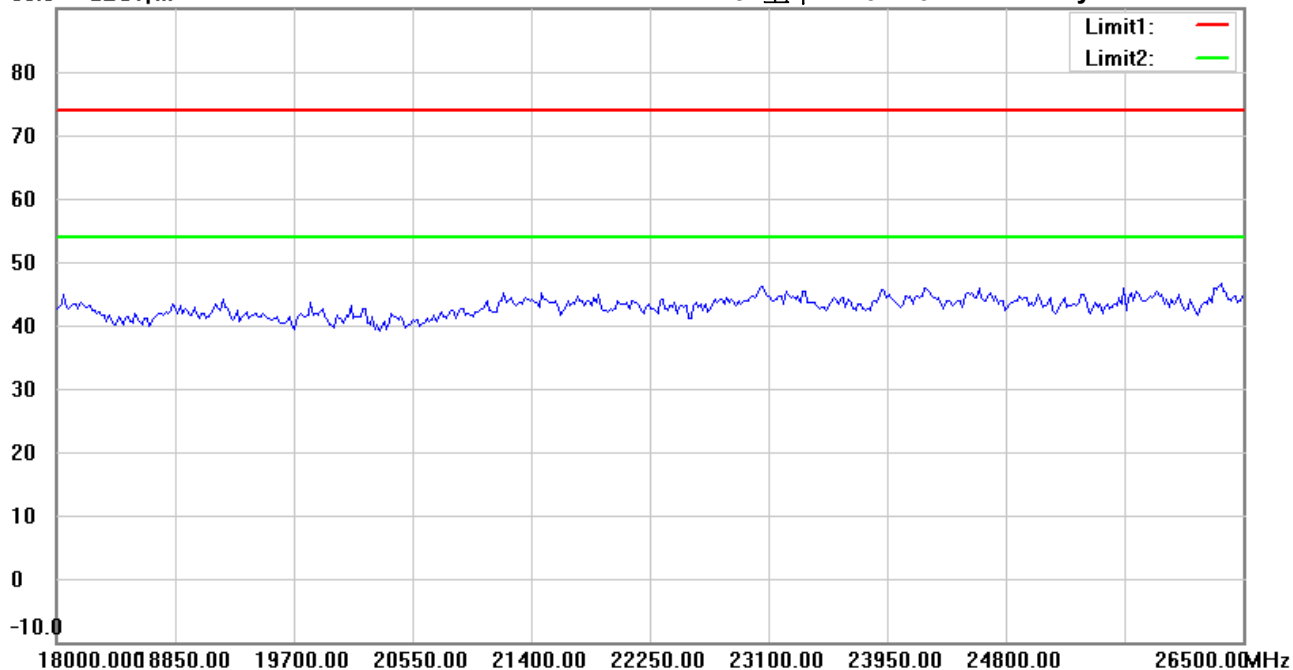

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#1


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 01:29:17

Humidity:62.8 %

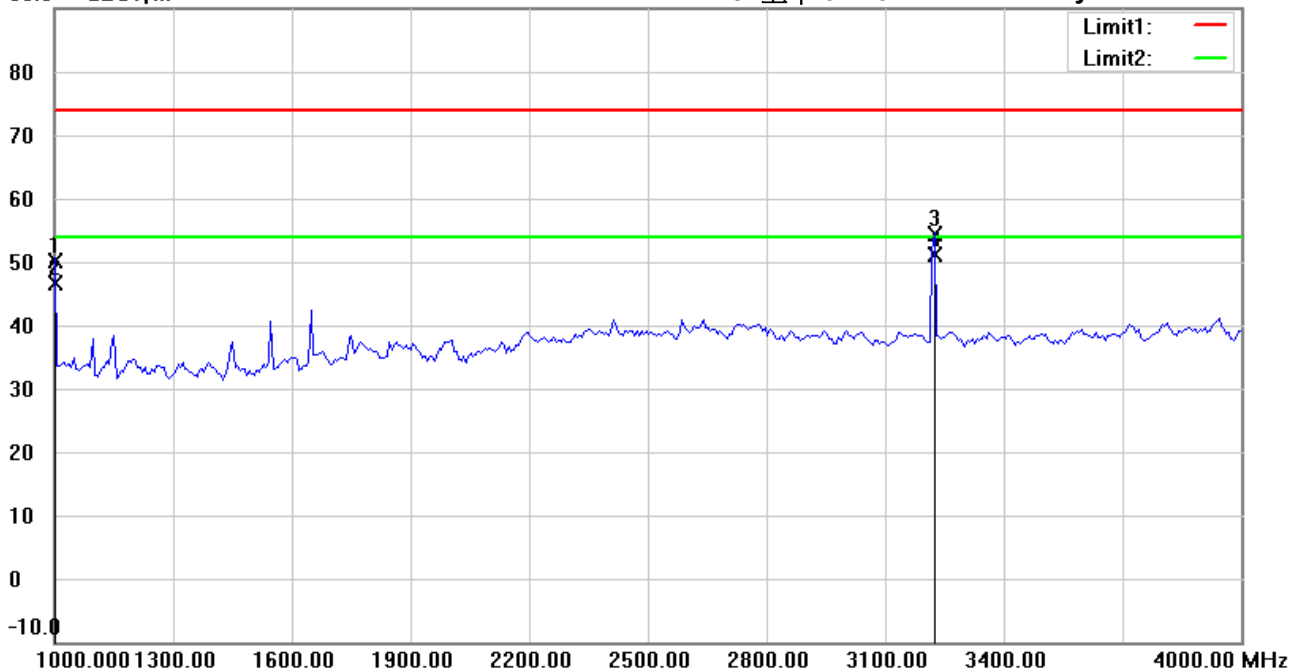

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH1

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1000.0000	57.53	peak	-7.37	50.16	74.00	152	155	-23.84	
	1000.0000	54.10	AVG	-7.37	46.73	54.00	152	155	-7.27	
	3218.437	57.83	peak	-3.35	54.48	74.00	154	219	-19.52	
*	3218.437	54.52	AVG	-3.35	51.17	54.00	154	219	-2.83	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #6


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 01:34:10

Humidity: 62.8 %

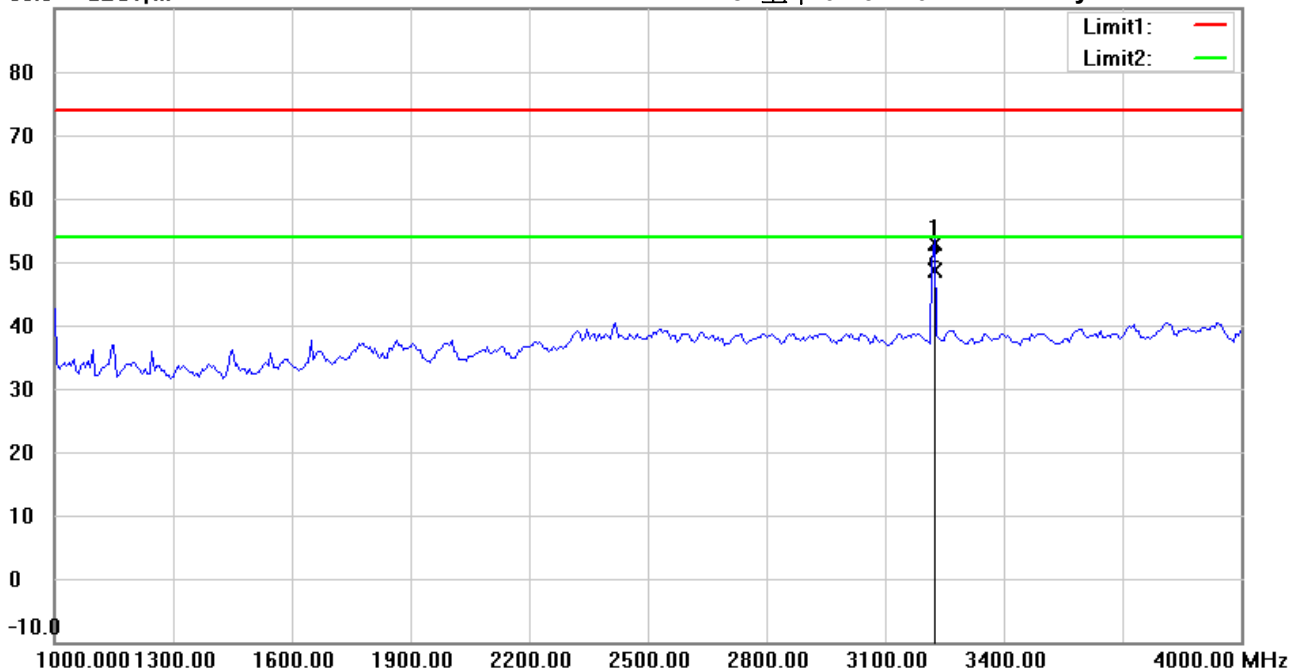

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH1

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3218.437	56.20	peak	-3.35	52.85	74.00	150	189	-21.15	
*	3218.437	51.96	AVG	-3.35	48.61	54.00	150	189	-5.39	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#2


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 01:30:38

Humidity:62.8 %

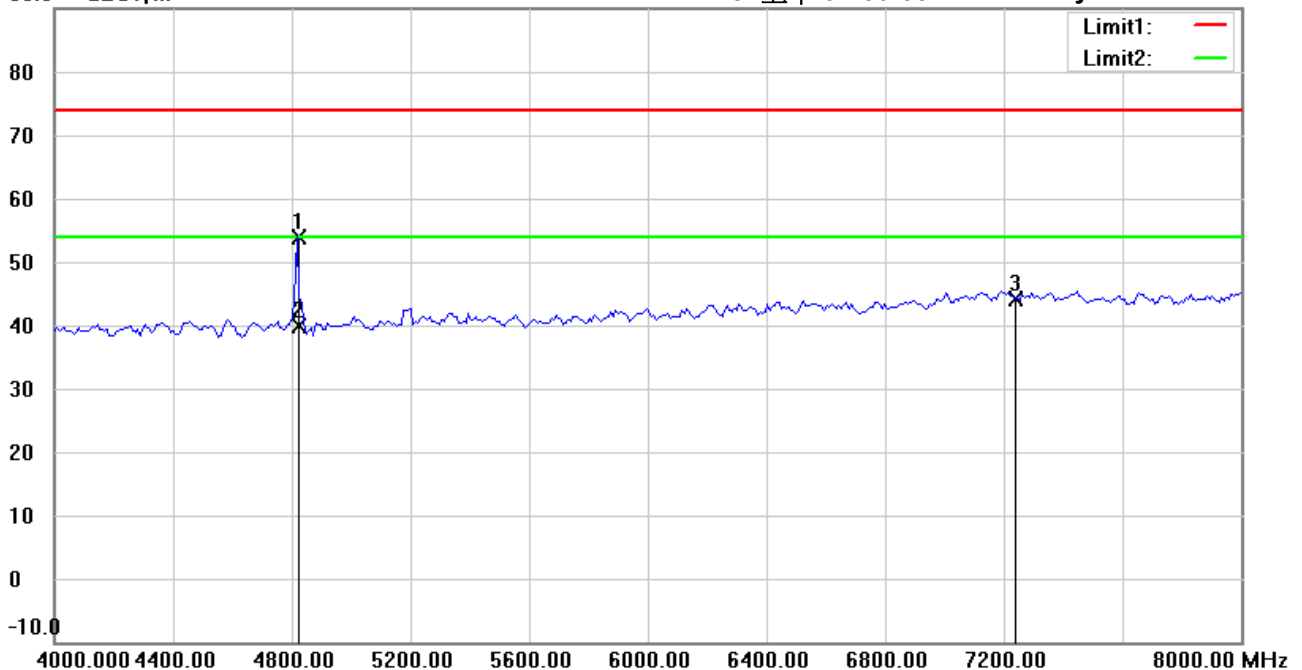

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH1

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	55.44	peak	-1.65	53.79	74.00	156	170	-20.21	
*	4824.000	41.57	AVG	-1.65	39.92	54.00	156	170	-14.08	
	7236.000	40.25	peak	3.93	44.18	74.00	156	315	-29.82	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #7


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 01:35:31

Humidity: 62.8 %

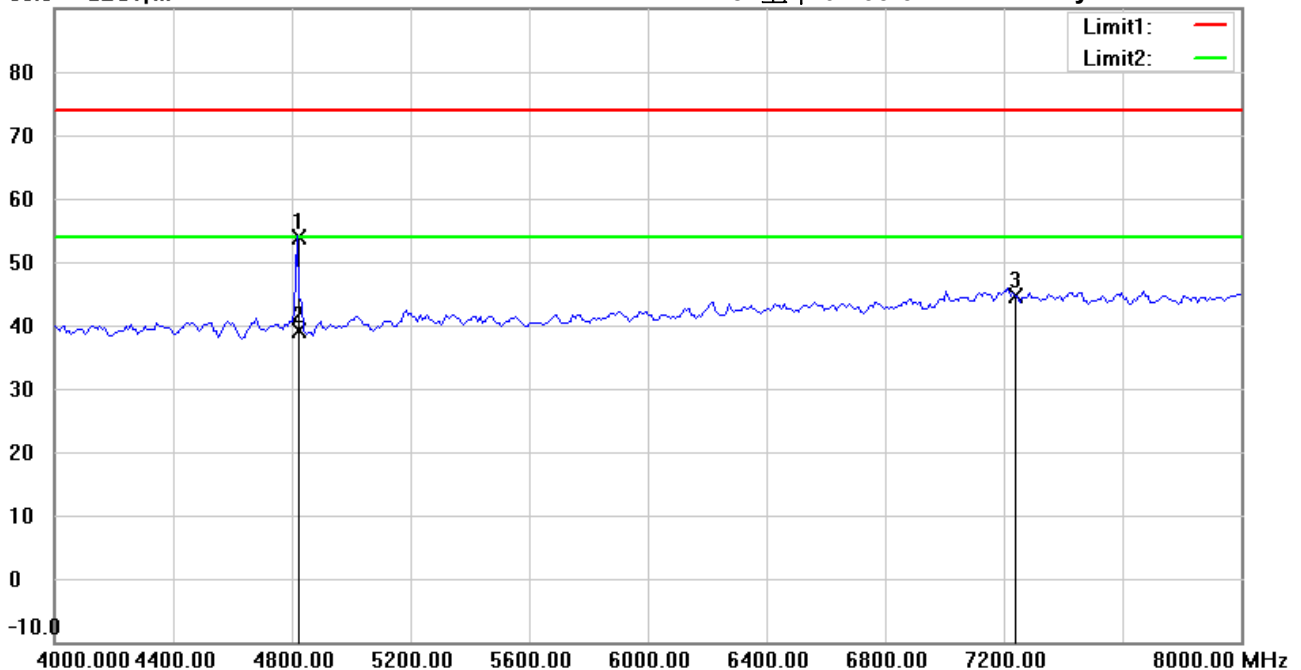

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH1

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4824.000	55.54	peak	-1.65	53.89	74.00	150	180	-20.11	
*	4824.000	40.82	AVG	-1.65	39.17	54.00	150	180	-14.83	
	7236.000	40.75	peak	3.93	44.68	74.00	154	63	-29.32	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#3


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 01:32:09

Humidity: 62.8 %

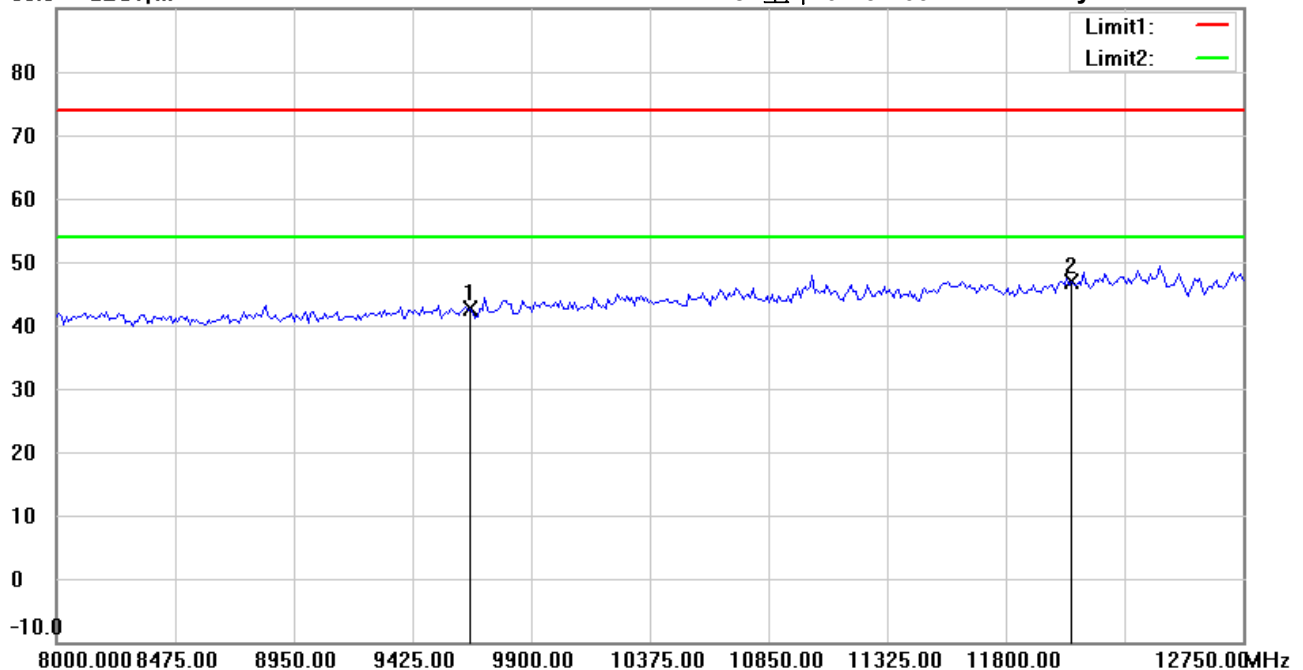

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH1

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	35.86	peak	6.81	42.67	74.00	152	89	-31.33	
*	12060.000	34.45	peak	12.53	46.98	74.00	158	288	-27.02	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#8


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 01:36:56

Humidity: 62.8 %

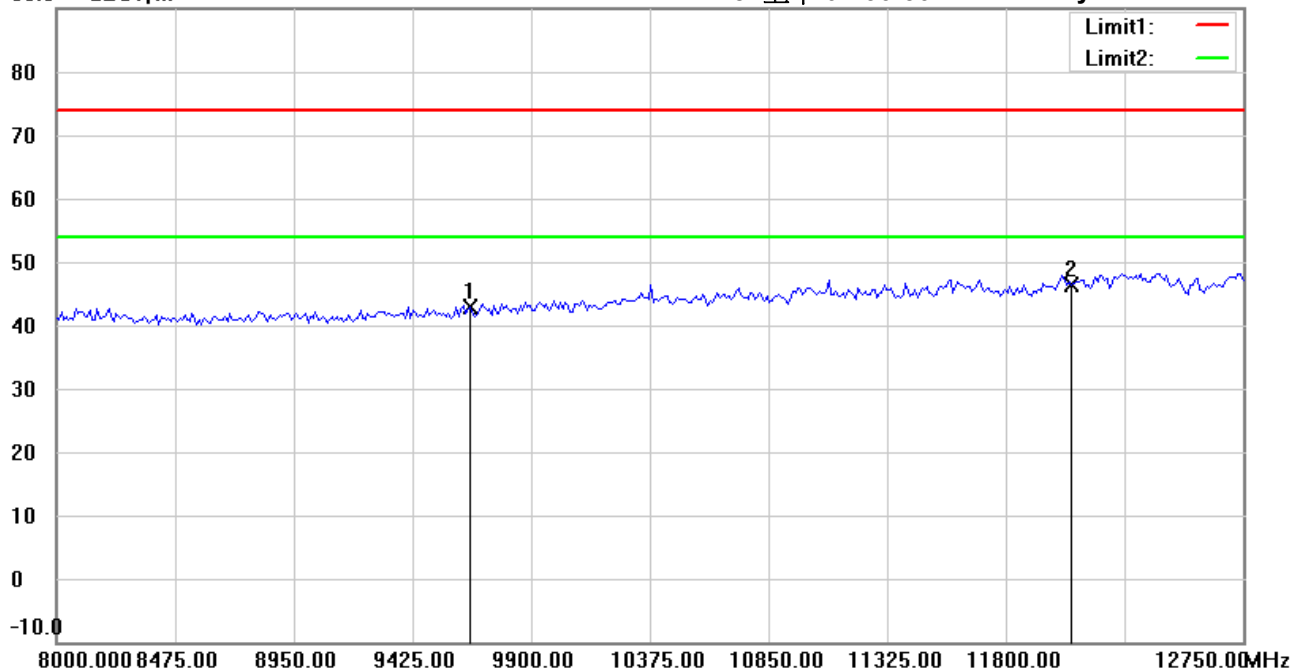

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH1

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9648.000	36.06	peak	6.81	42.87	74.00	150	271	-31.13	
*	12060.000	33.92	peak	12.53	46.45	74.00	150	318	-27.55	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#4


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 01:32:23

Humidity:62.8 %

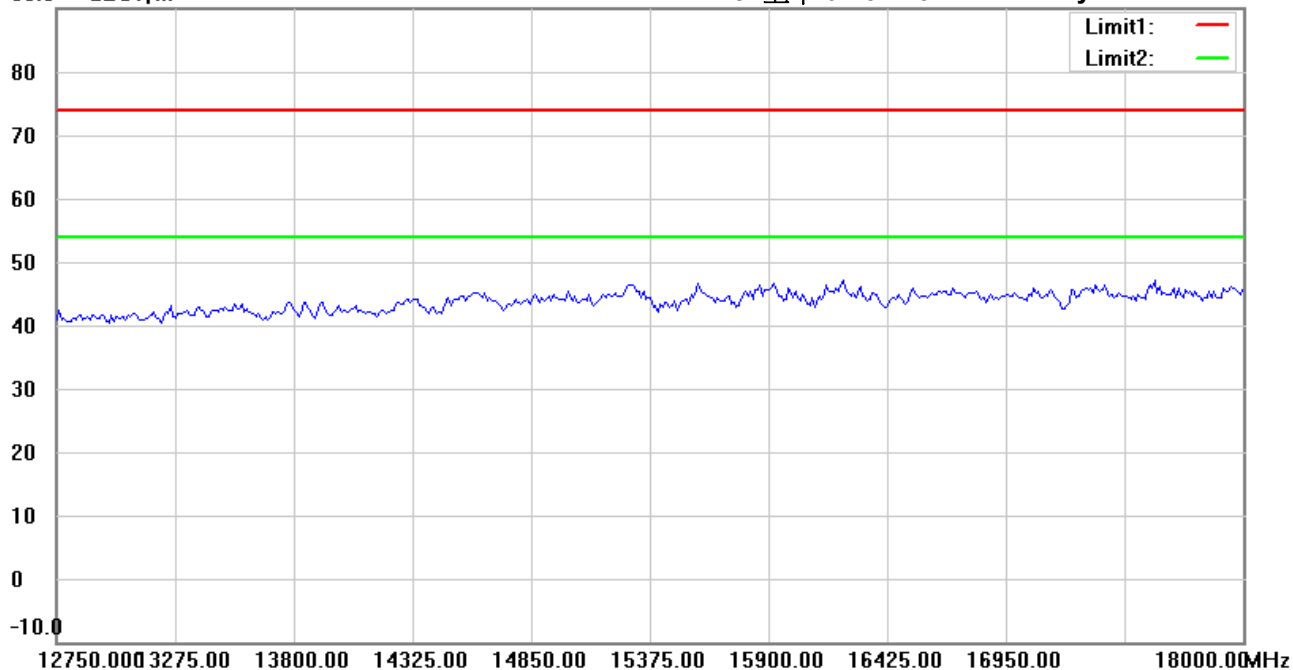

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH1

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #9


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 01:37:10

Humidity: 62.8 %

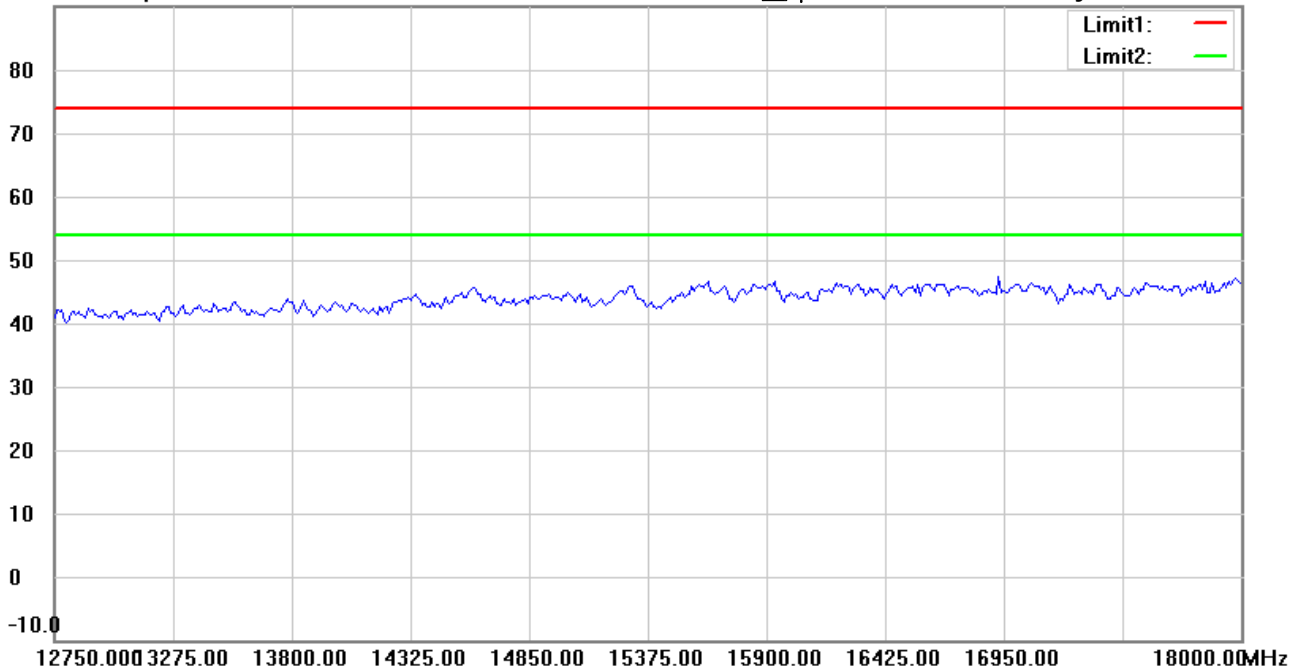

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH1

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#5


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 01:32:33

Humidity:62.8 %

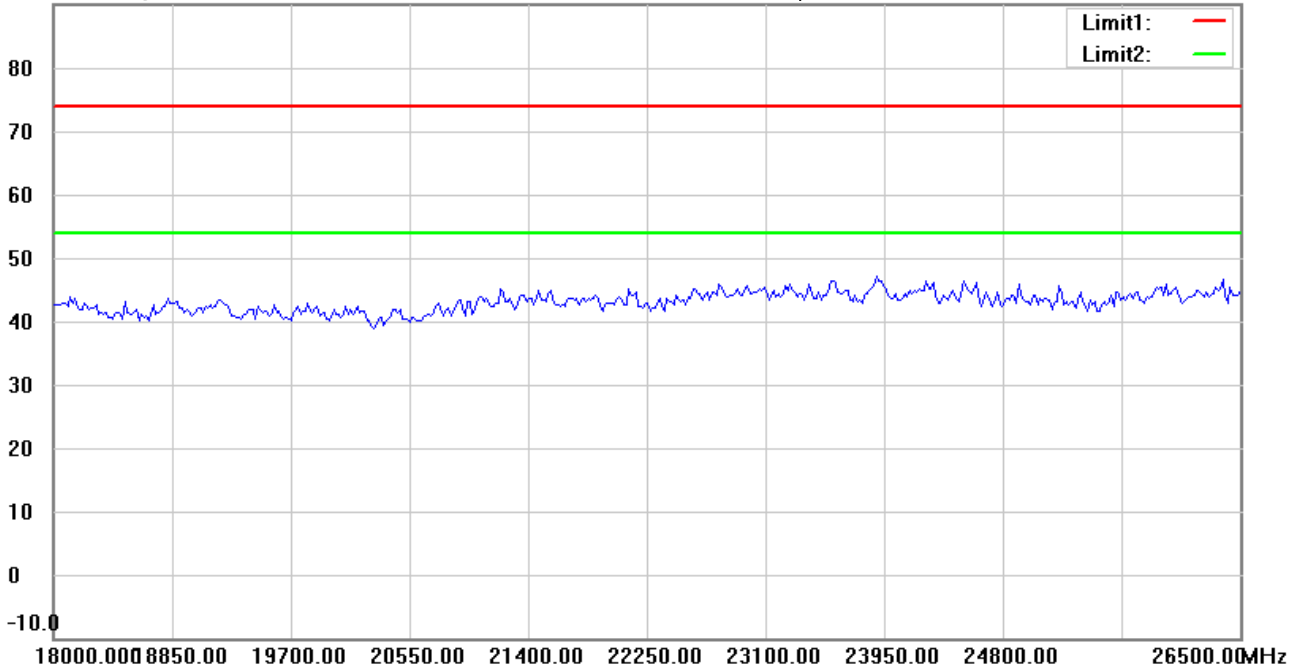

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH1

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#10


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 01:37:20

Humidity:62.8 %

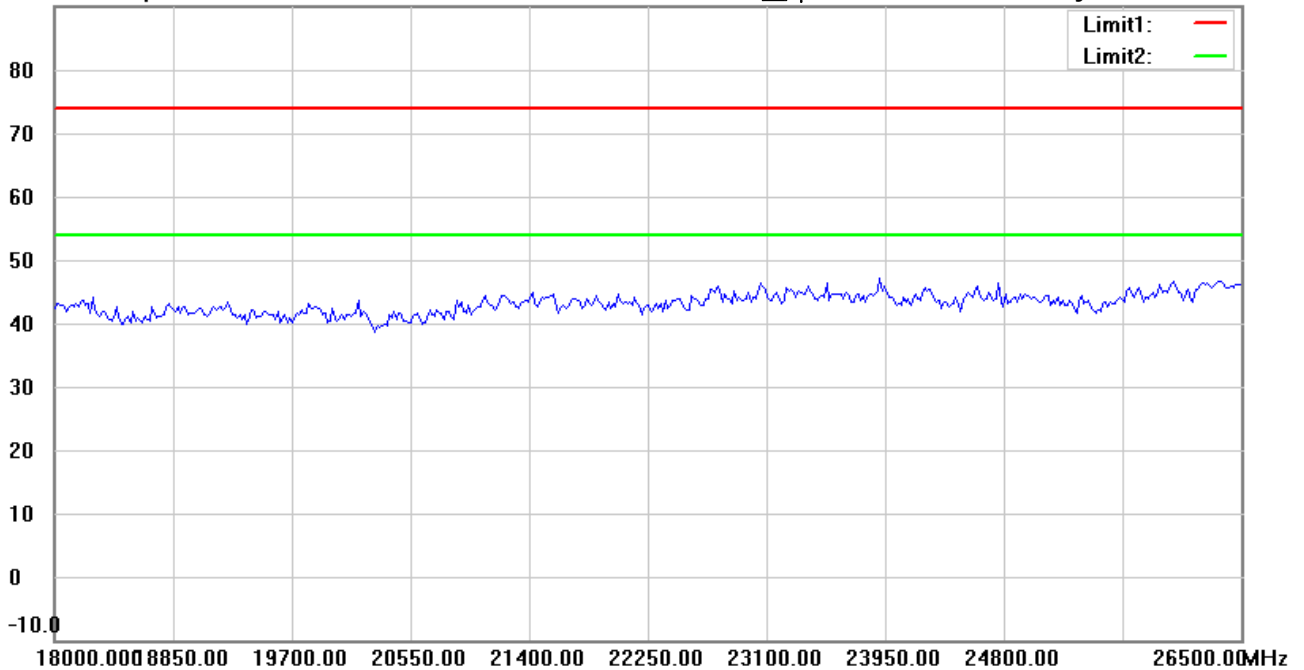

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH1

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#1


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 01:53:52

Humidity:62.8 %

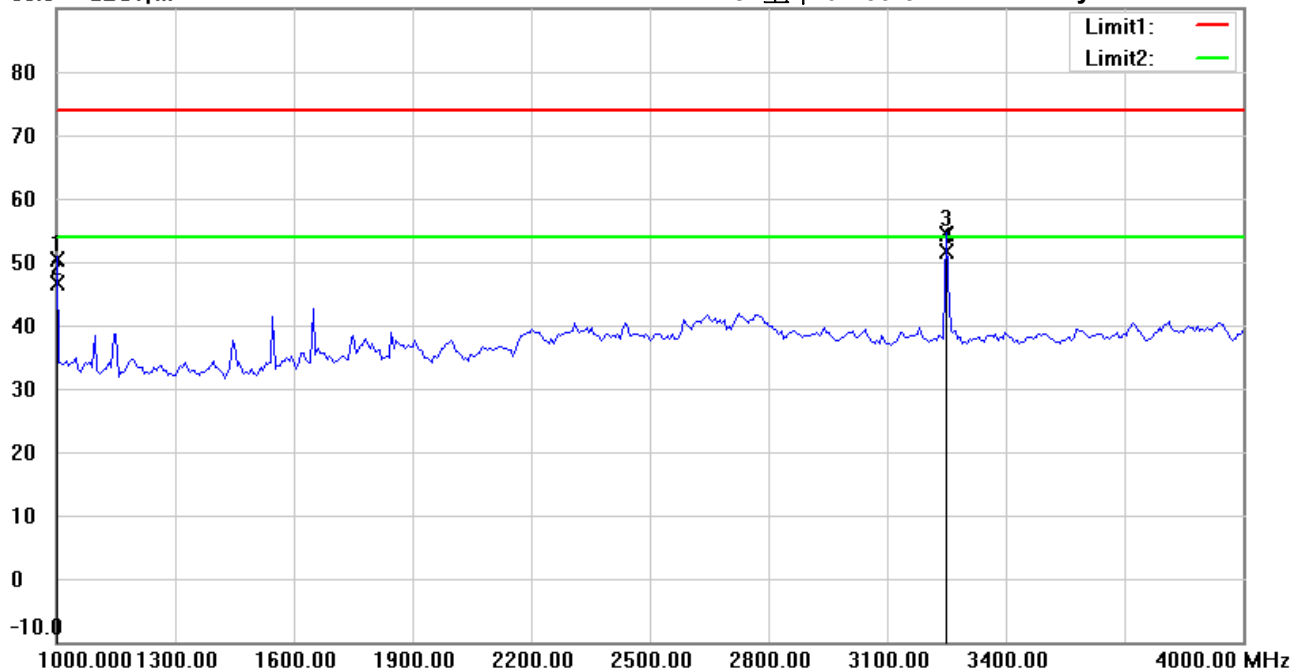

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH6

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1000.0000	57.76	peak	-7.37	50.39	74.00	154	154	-23.61	
	1000.0000	54.01	AVG	-7.37	46.64	54.00	154	154	-7.36	
	3248.497	57.89	peak	-3.46	54.43	74.00	156	218	-19.57	
*	3248.497	55.17	AVG	-3.46	51.71	54.00	156	218	-2.29	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#6


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 01:58:43

Humidity: 62.8 %

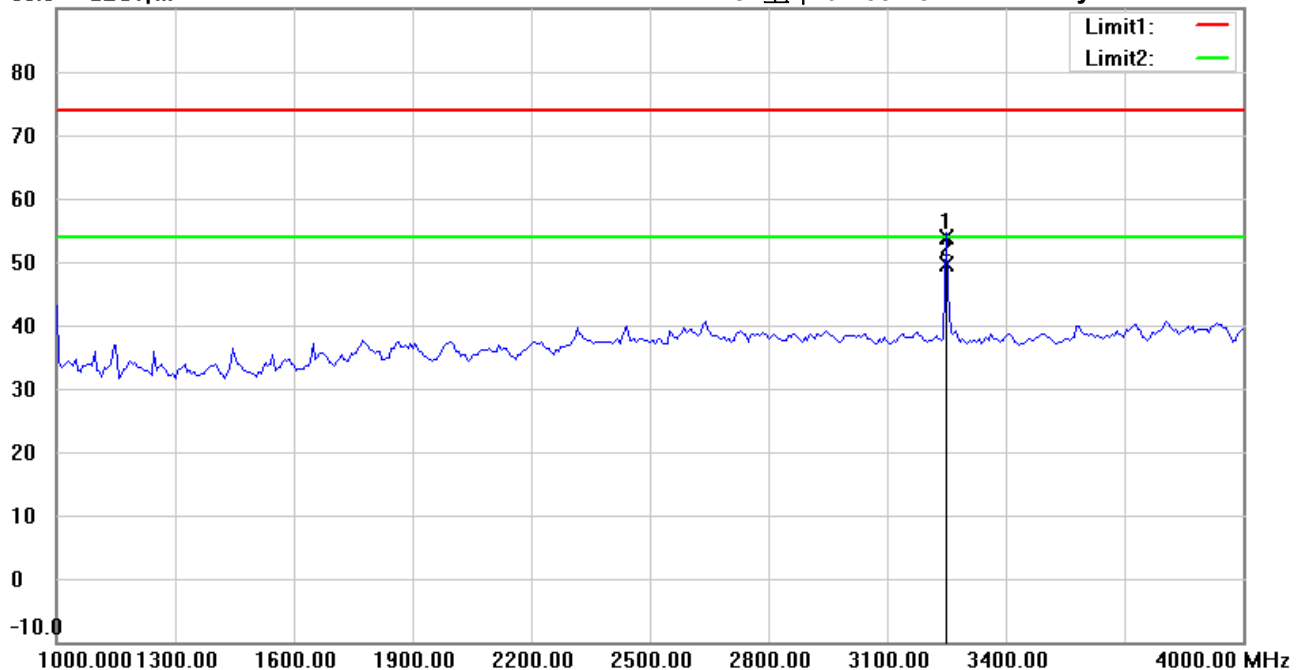

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH6

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3248.497	57.29	peak	-3.46	53.83	74.00	152	190	-20.17	
*	3248.497	53.18	AVG	-3.46	49.72	54.00	152	190	-4.28	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #2


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 01:55:12

Humidity: 62.8 %

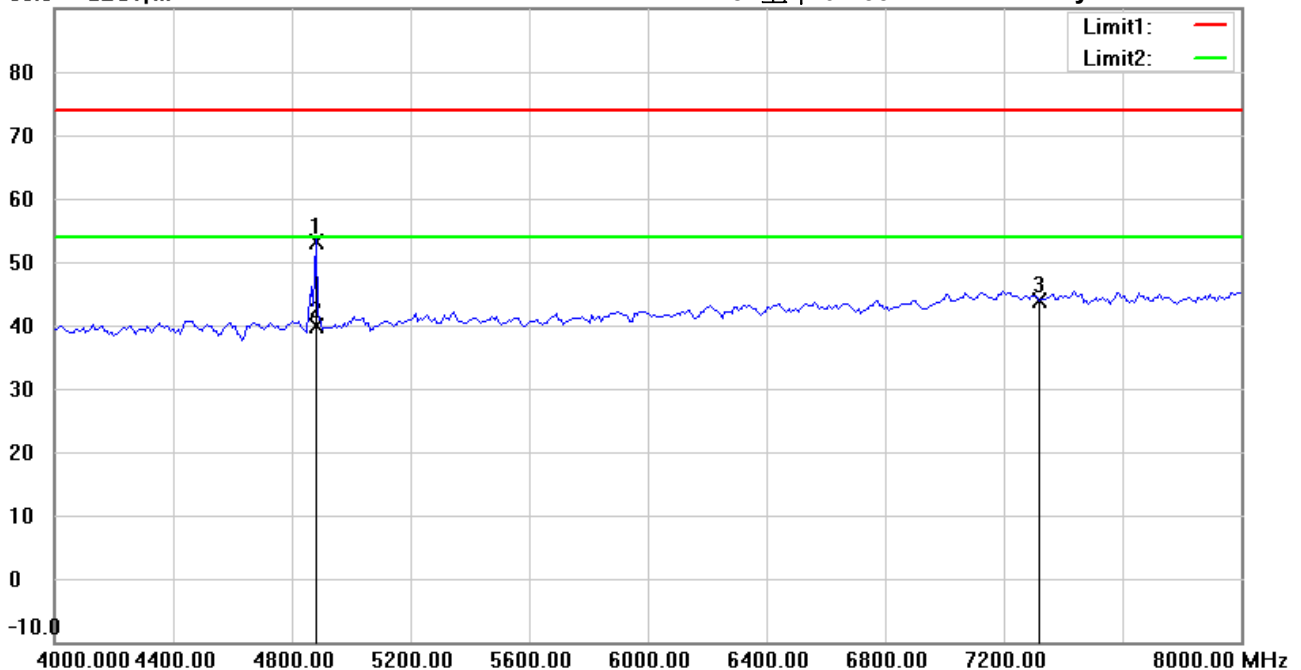

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH6

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	54.53	peak	-1.43	53.10	74.00	152	169	-20.90	
*	4874.000	41.31	AVG	-1.43	39.88	54.00	152	169	-14.12	
	7311.000	40.01	peak	3.82	43.83	74.00	154	144	-30.17	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #7


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 02:00:04

Humidity: 62.8 %

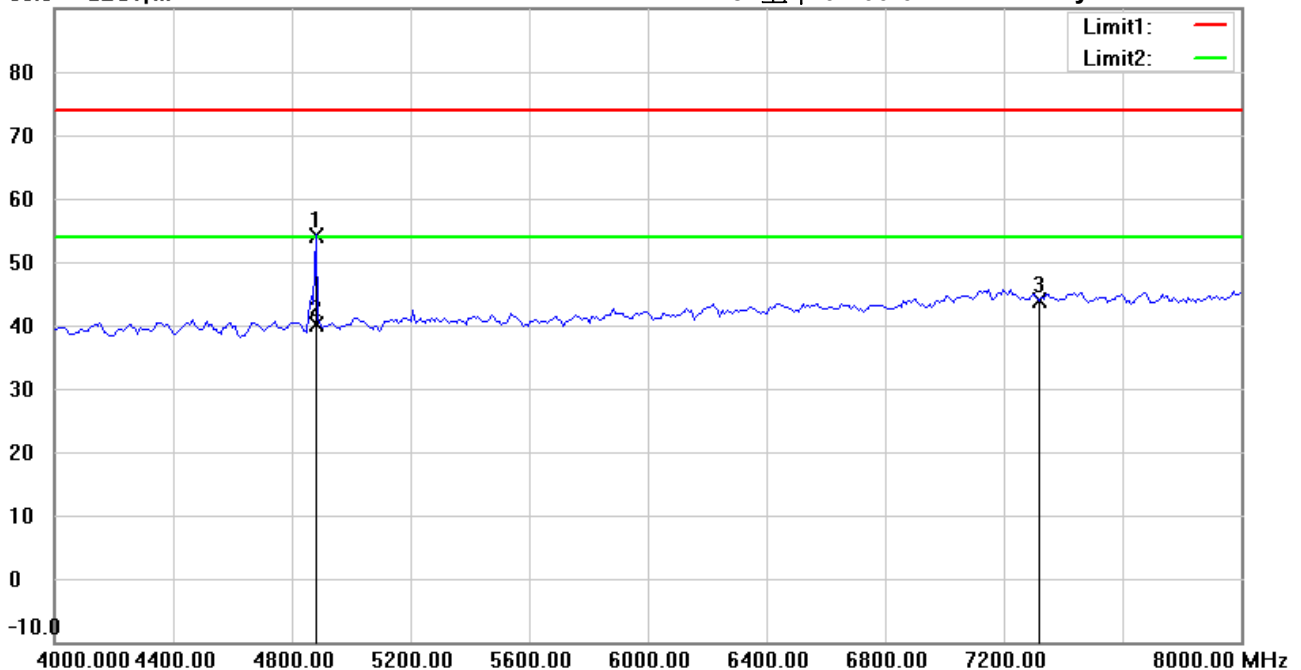

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH6

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	55.60	peak	-1.43	54.17	74.00	150	178	-19.83	
*	4874.000	41.57	AVG	-1.43	40.14	54.00	150	178	-13.86	
	7311.000	39.95	peak	3.82	43.77	74.00	150	302	-30.23	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #3


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 01:56:50

Humidity: 62.8 %

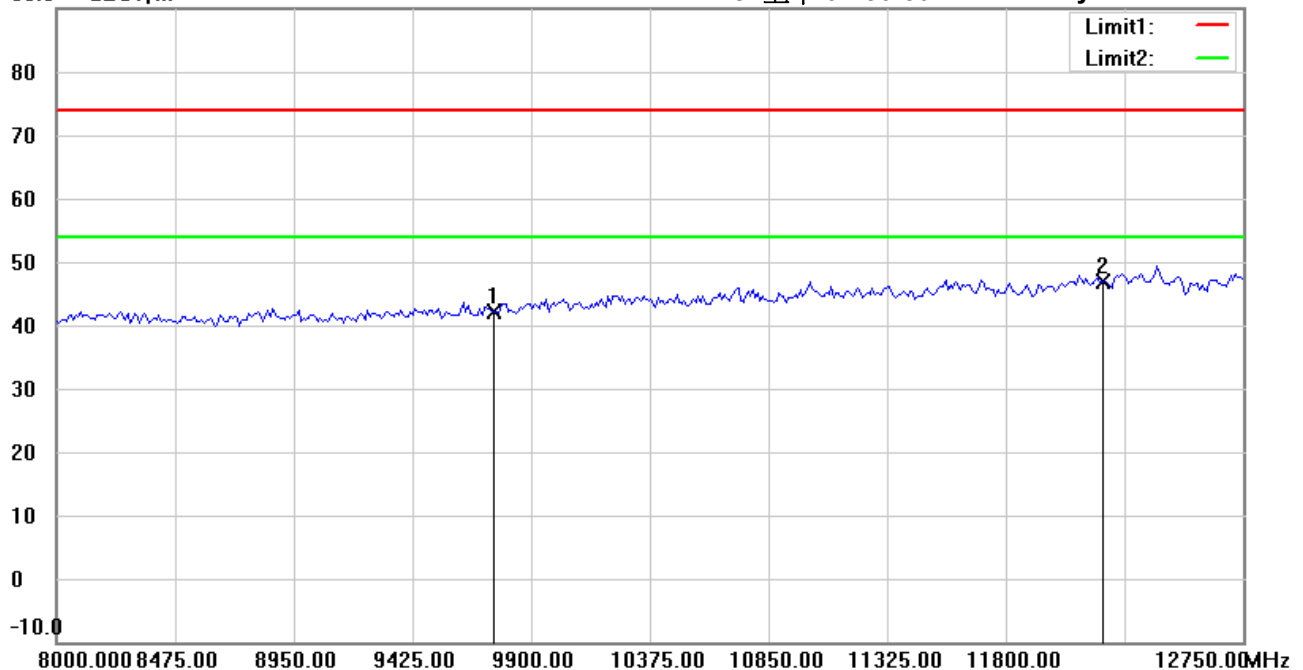

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH6

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.15	peak	6.98	42.13	74.00	153	238	-31.87	
*	12185.000	33.27	peak	13.49	46.76	74.00	152	117	-27.24	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#8


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 02:01:33

Humidity: 62.8 %

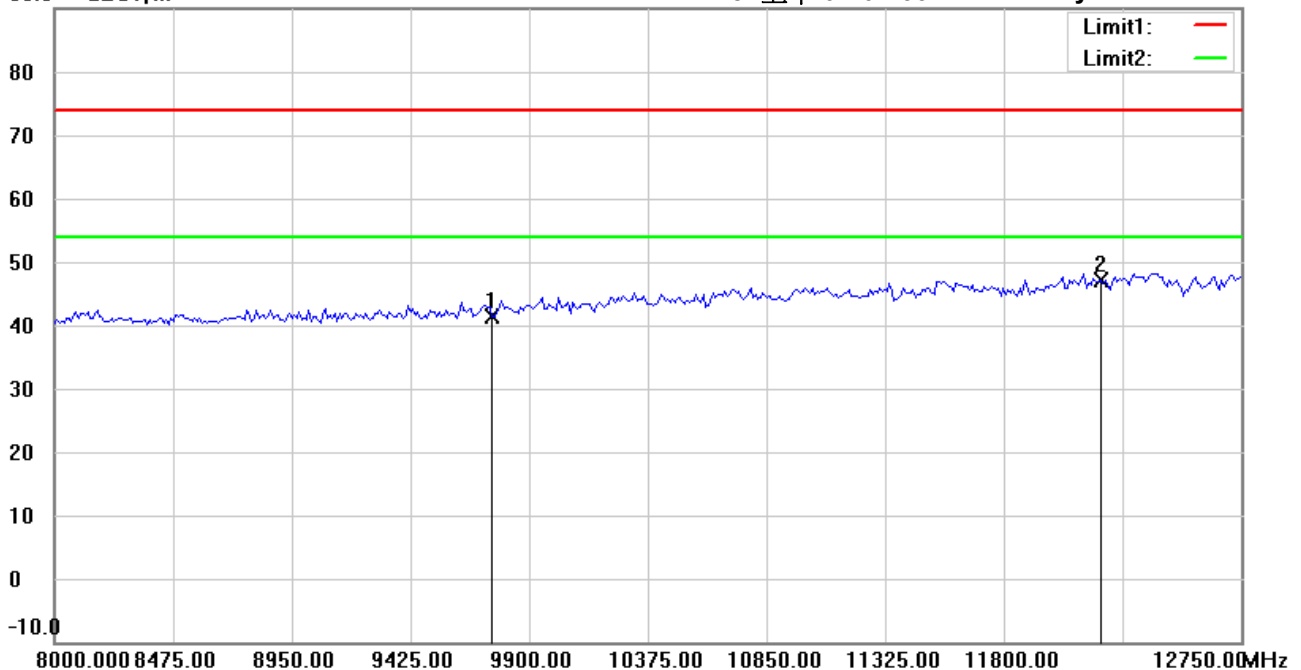

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH6

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	34.30	peak	6.98	41.28	74.00	158	225	-32.72	
*	12185.000	33.59	peak	13.49	47.08	74.00	157	360	-26.92	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#4


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 01:57:04

Humidity:62.8 %

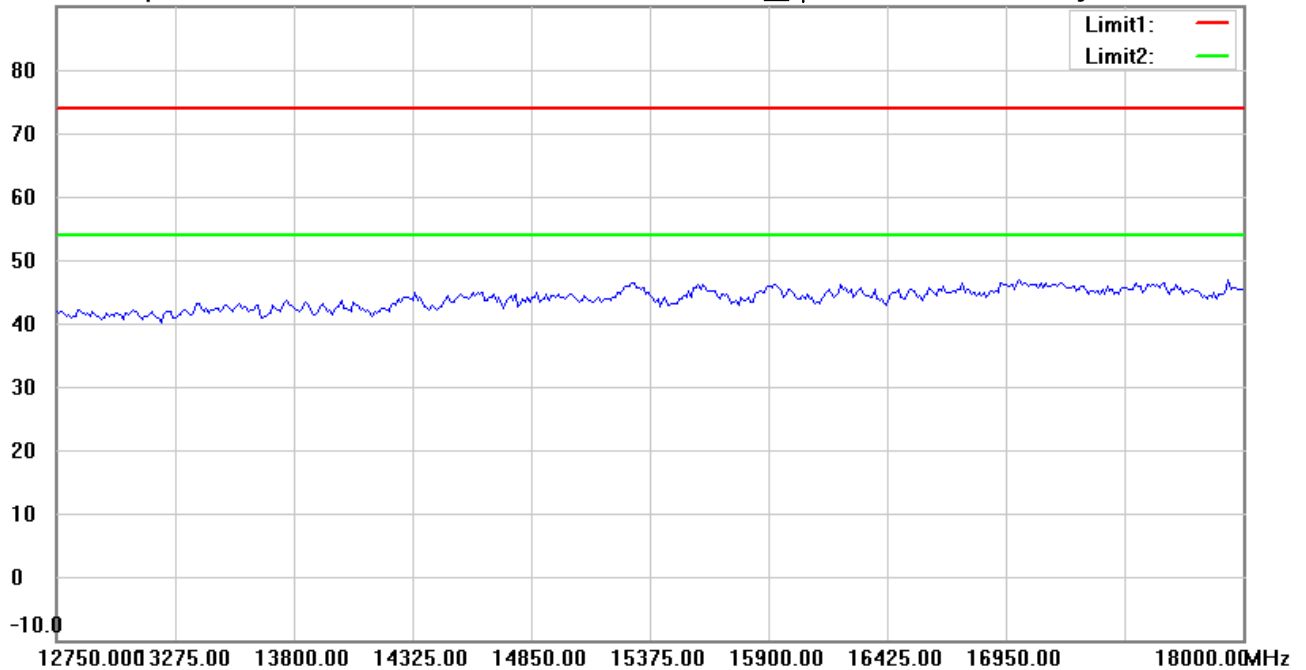

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH6

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#9


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 02:01:47

Humidity:62.8 %

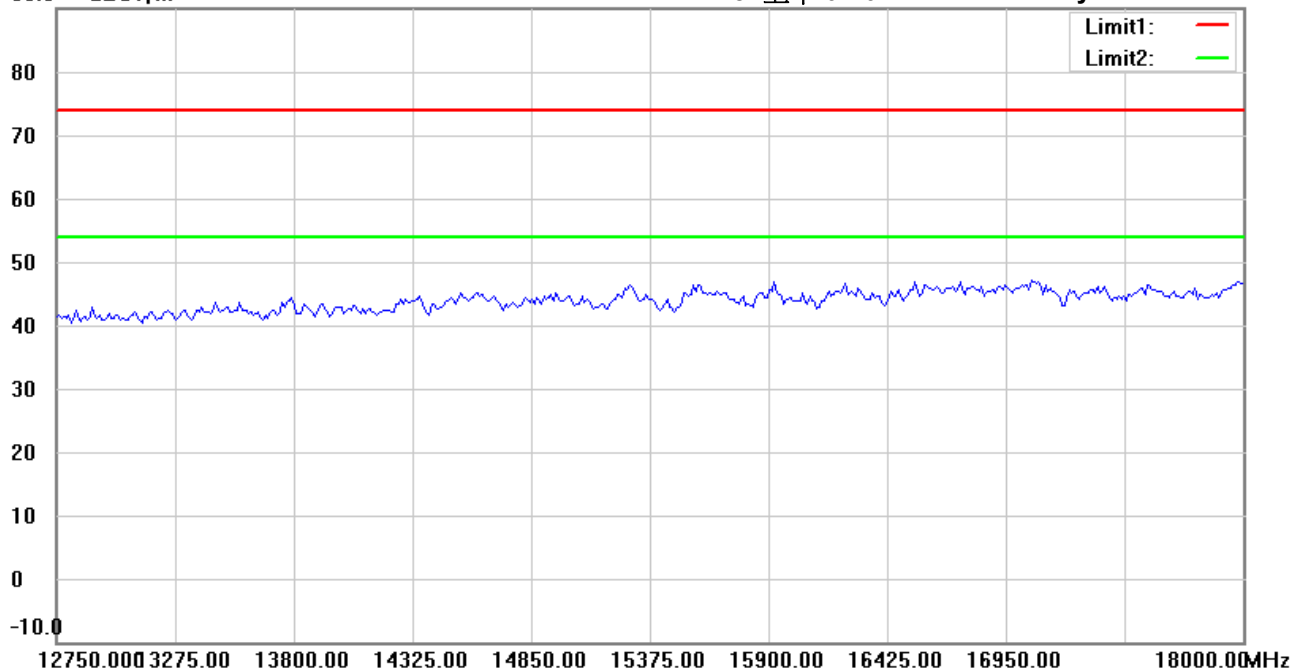

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH6

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#5


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 01:57:14

Humidity:62.8 %

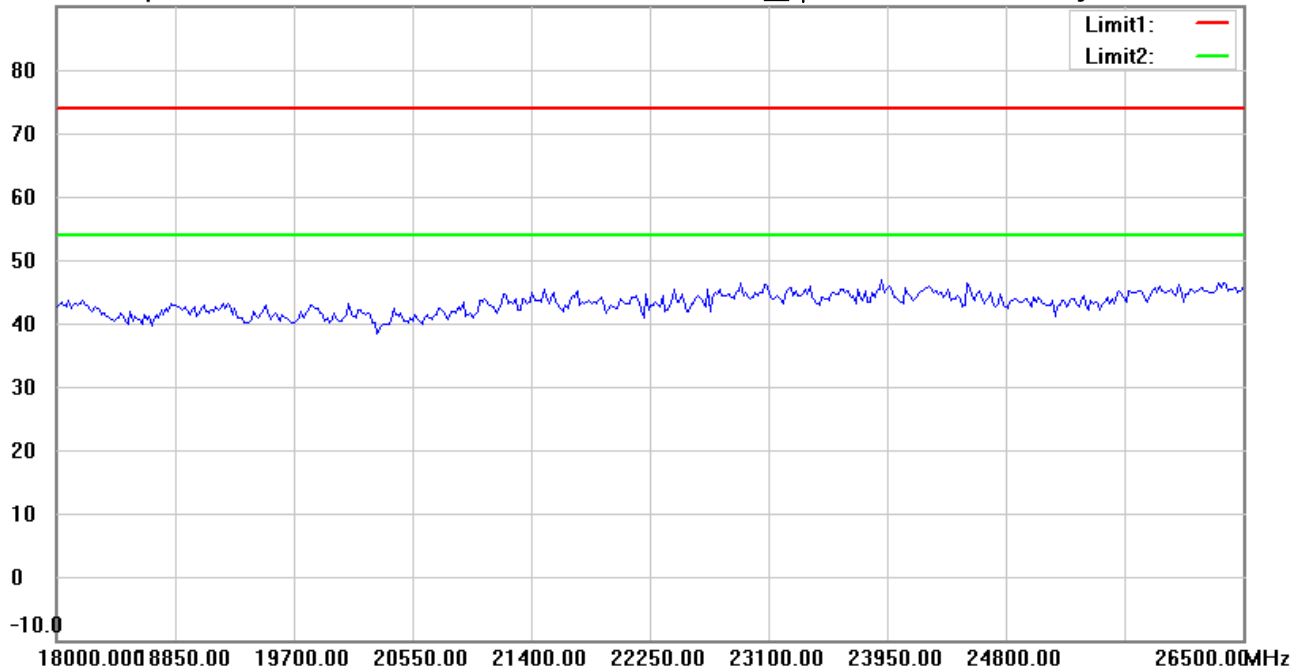

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH6

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#10


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 02:01:57

Humidity:62.8 %

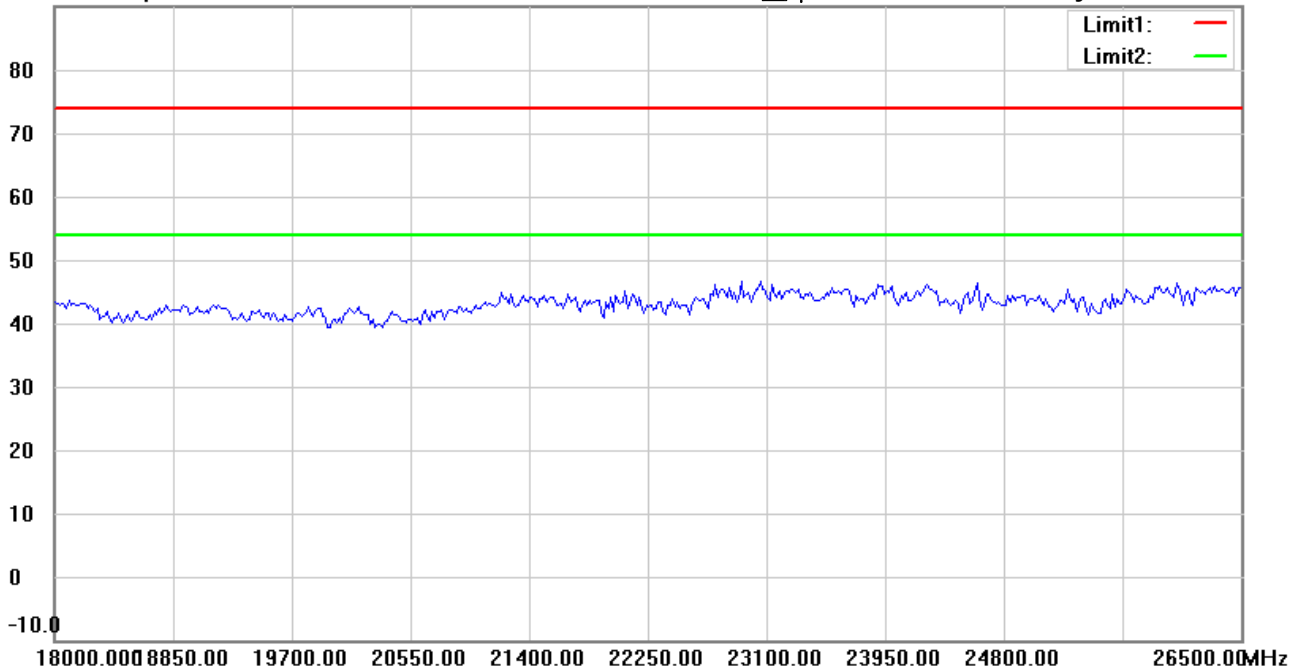

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH6

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#1


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 02:20:23

Humidity: 62.8 %

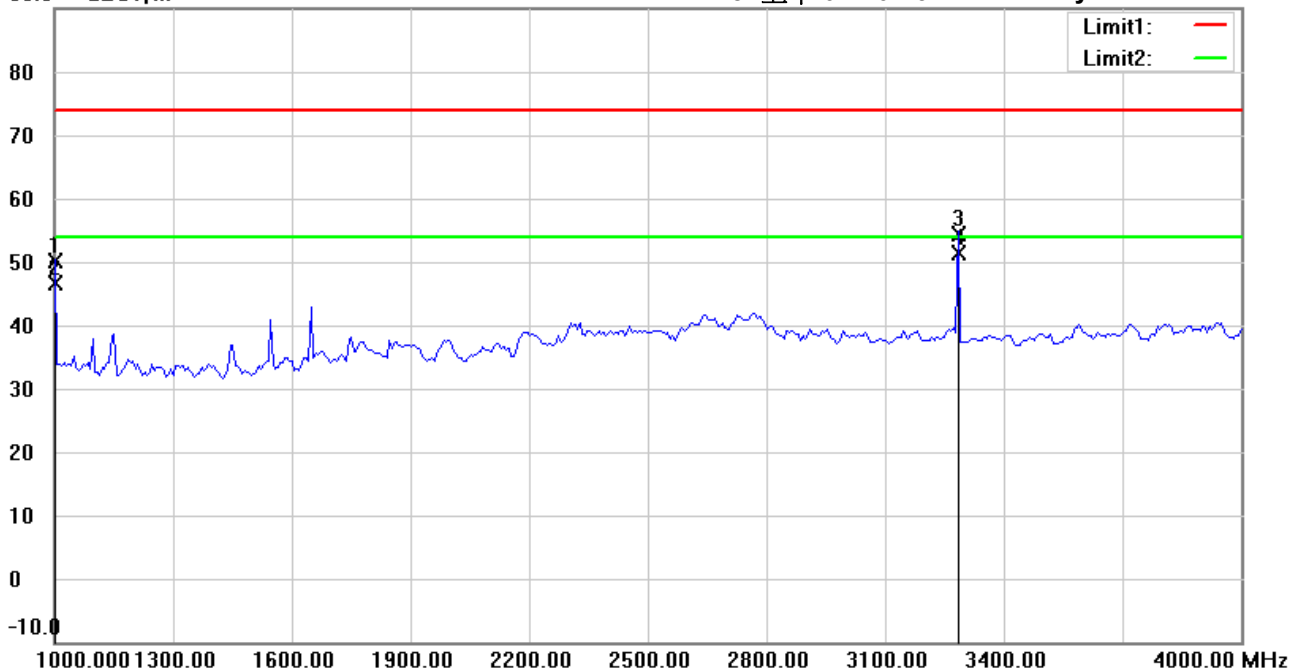

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH11

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1000.0000	57.44	peak	-7.37	50.07	74.00	153	153	-23.93	
	1000.0000	53.95	AVG	-7.37	46.58	54.00	153	153	-7.42	
	3284.569	57.91	peak	-3.59	54.32	74.00	154	221	-19.68	
*	3284.569	54.88	AVG	-3.59	51.29	54.00	154	221	-2.71	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#6


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 02:25:25

Humidity: 62.8 %

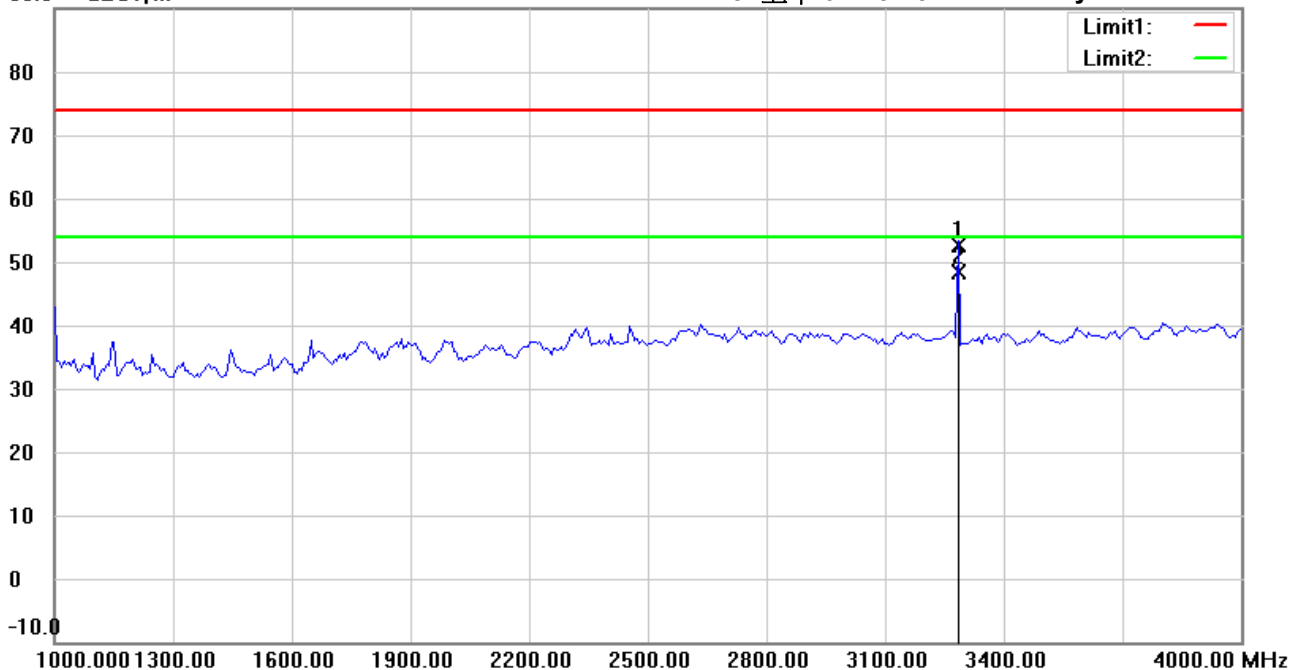

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH11

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3284.569	56.22	peak	-3.59	52.63	74.00	150	191	-21.37	
*	3284.569	51.96	AVG	-3.59	48.37	54.00	150	191	-5.63	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#2


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 02:21:44

Humidity:62.8 %

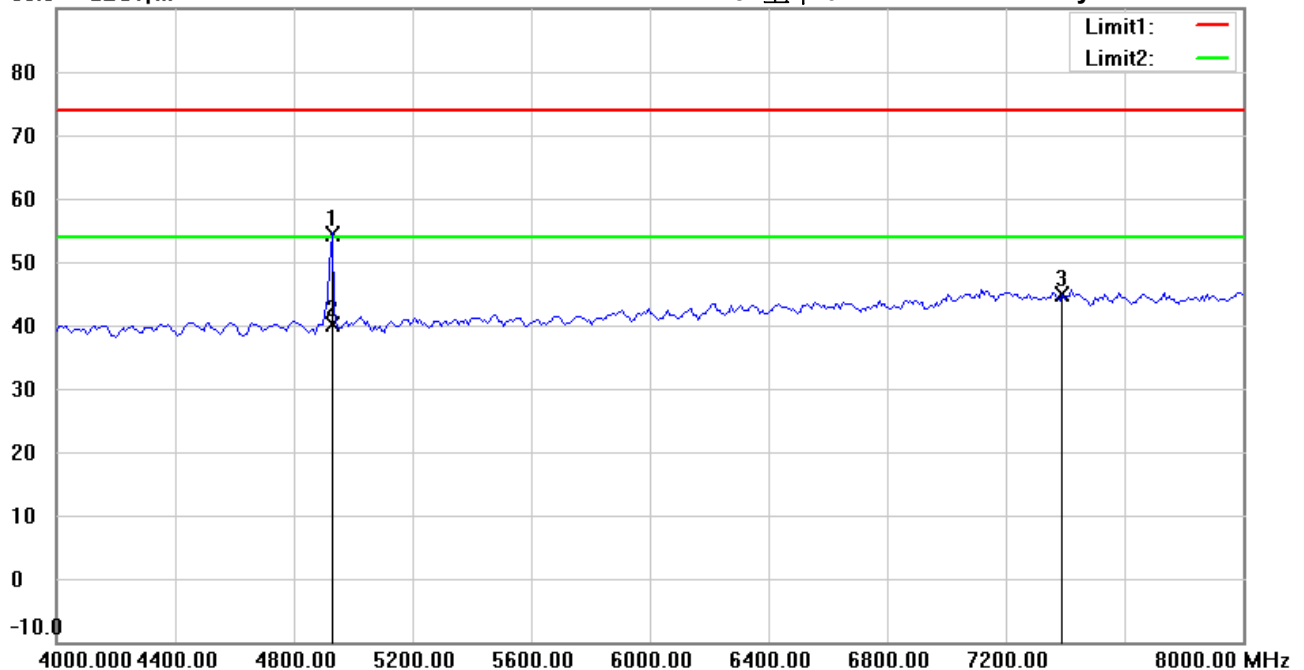

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH11

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	55.37	peak	-1.11	54.26	74.00	153	170	-19.74	
*	4924.000	41.33	AVG	-1.11	40.22	54.00	153	170	-13.78	
	7386.000	40.73	peak	4.06	44.79	74.00	156	268	-29.21	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #7


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 02:26:46

Humidity: 62.8 %

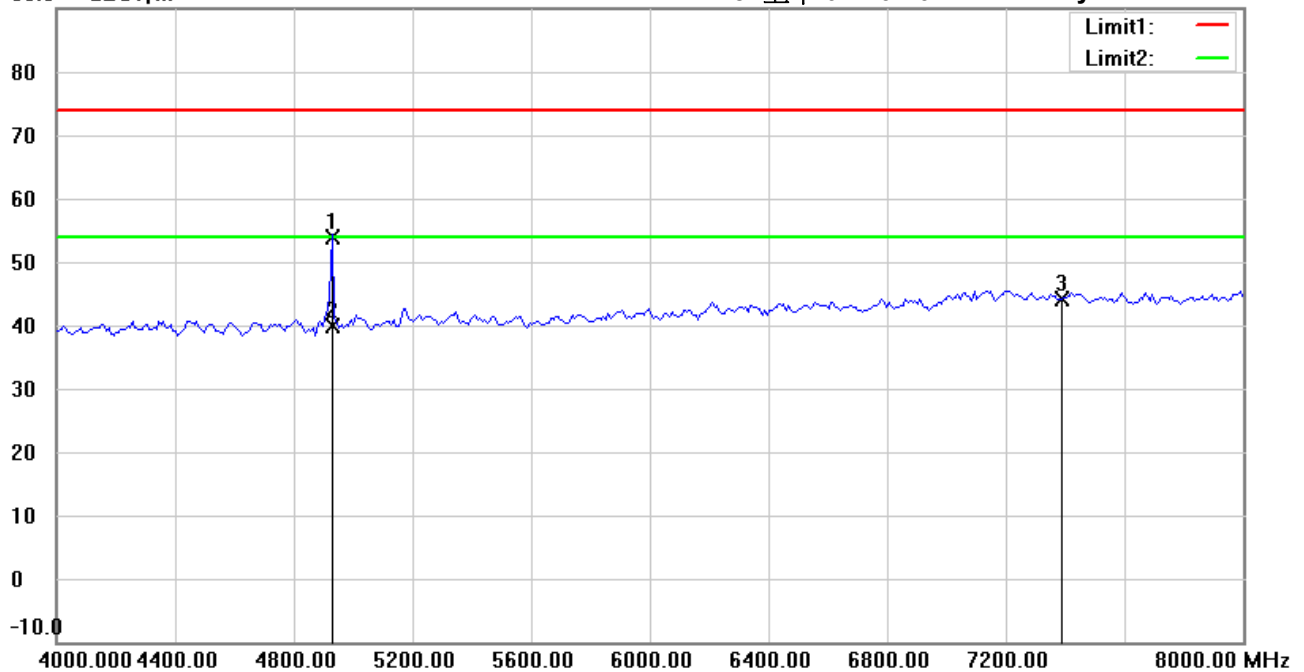

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH11

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4924.000	54.87	peak	-1.11	53.76	74.00	150	180	-20.24	
*	4924.000	40.97	AVG	-1.11	39.86	54.00	150	180	-14.14	
	7386.000	40.05	peak	4.06	44.11	74.00	152	224	-29.89	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #3


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 02:23:33

Humidity: 62.8 %

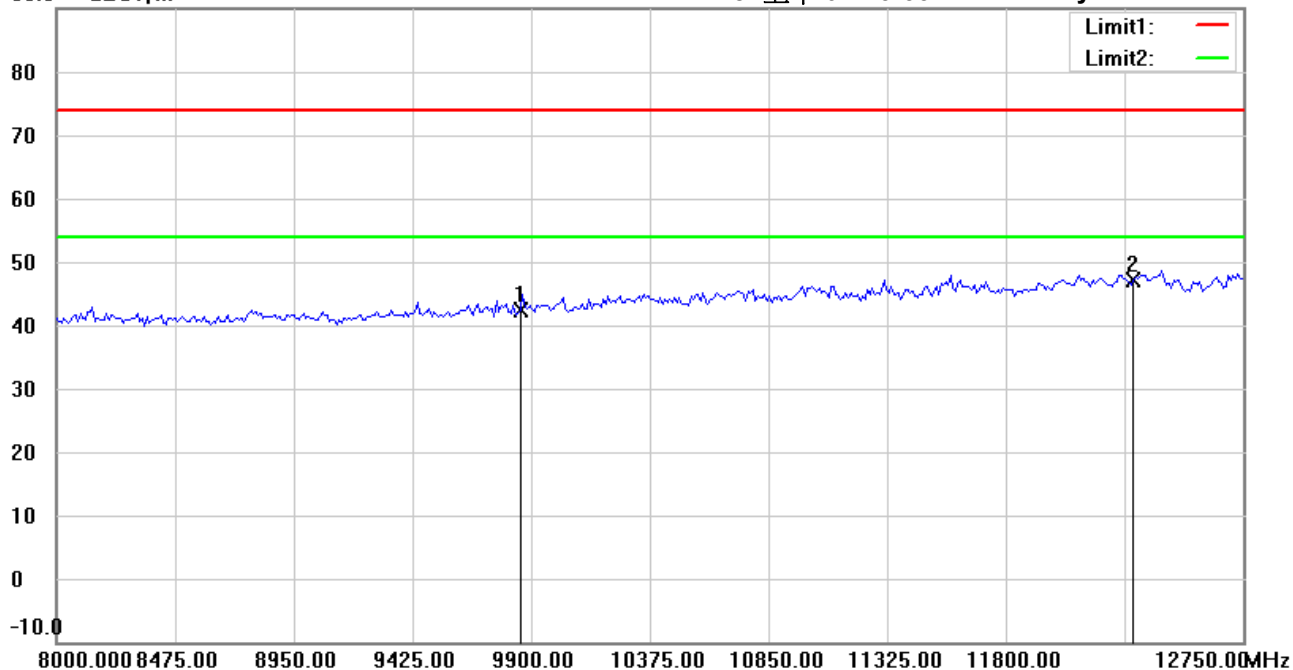

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH11

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	34.98	peak	7.32	42.30	74.00	157	269	-31.70	
*	12310.000	33.95	peak	13.20	47.15	74.00	158	284	-26.85	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #8


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 02:28:09

Humidity: 62.8 %

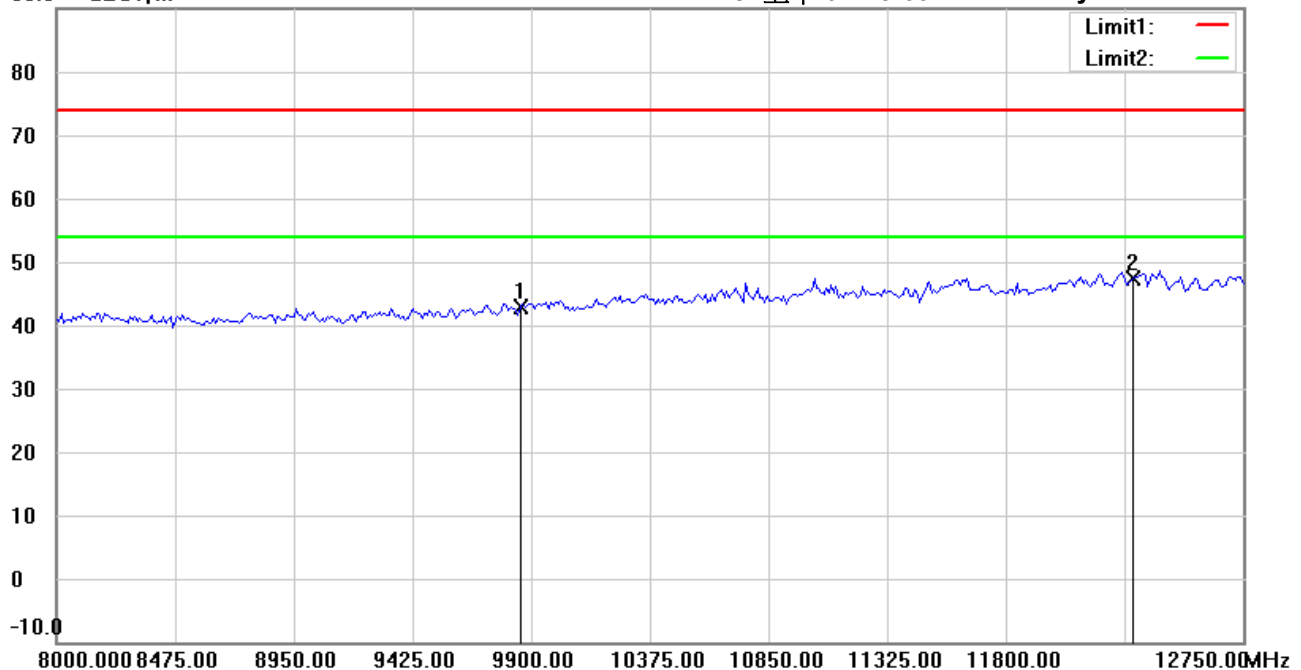

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH11

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9848.000	35.54	peak	7.32	42.86	74.00	152	185	-31.14	
*	12310.000	34.08	peak	13.20	47.28	74.00	152	311	-26.72	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#4


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 02:23:47

Humidity:62.8 %

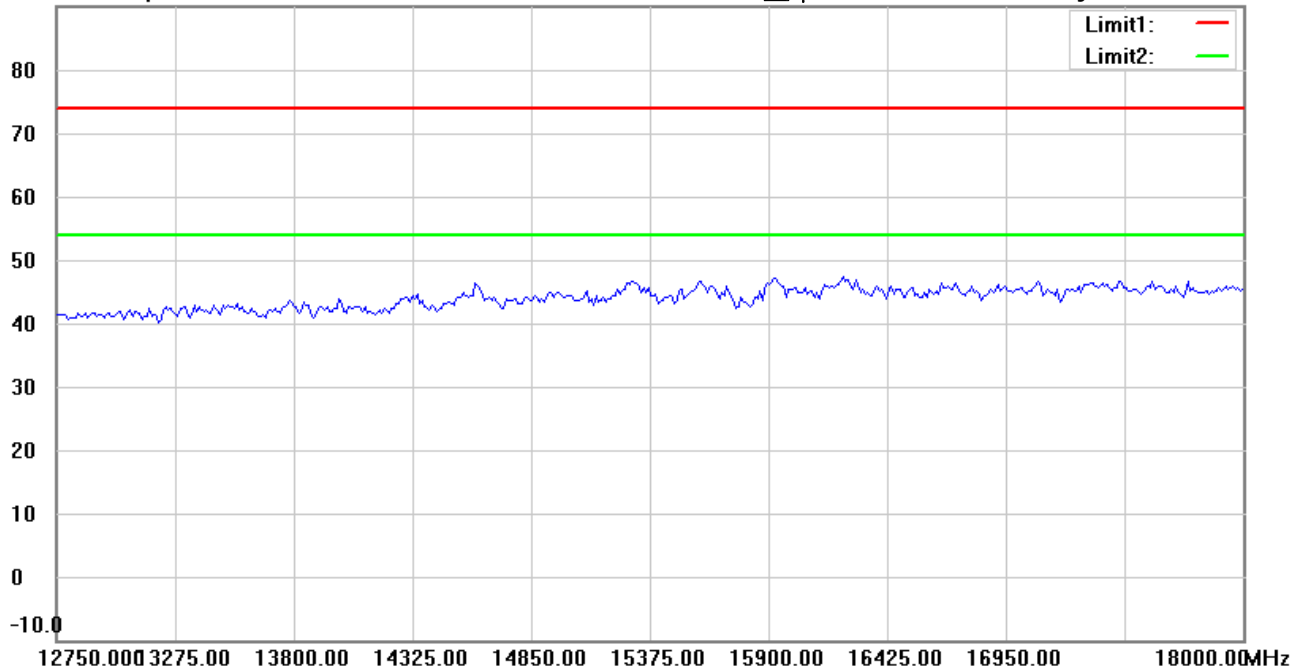

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH11

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#9


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 02:28:23

Humidity:62.8 %

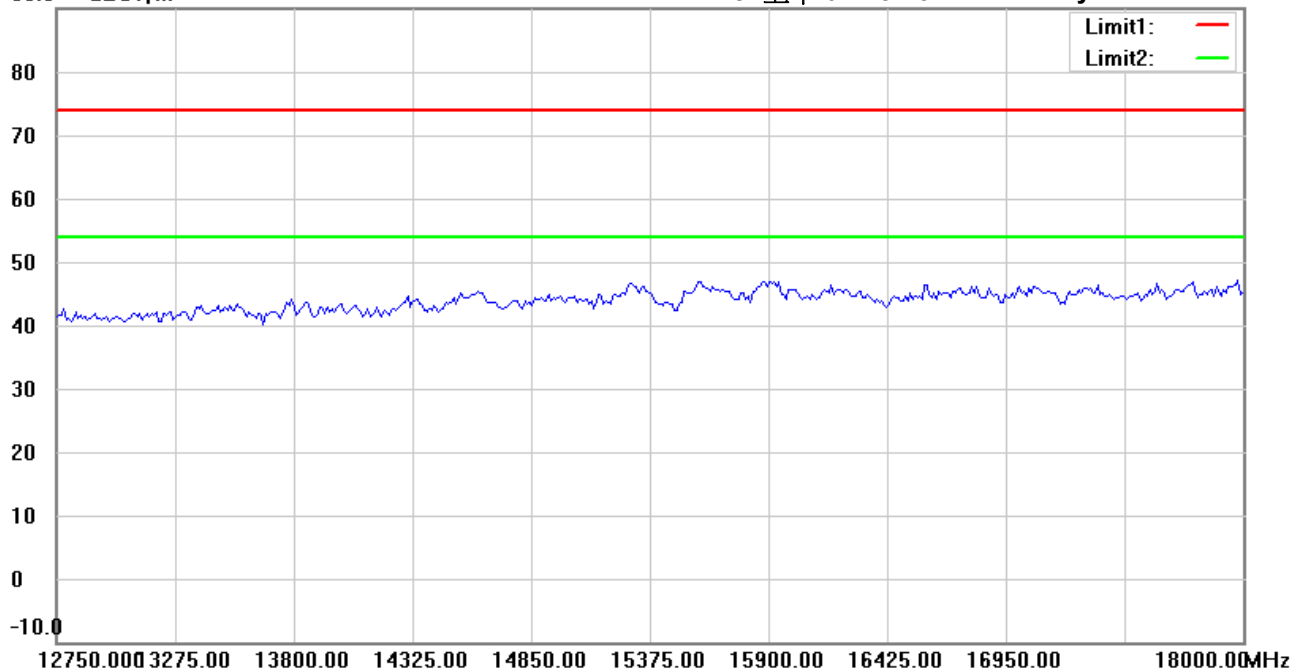

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH11

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#5


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 02:23:56

Humidity:62.8 %

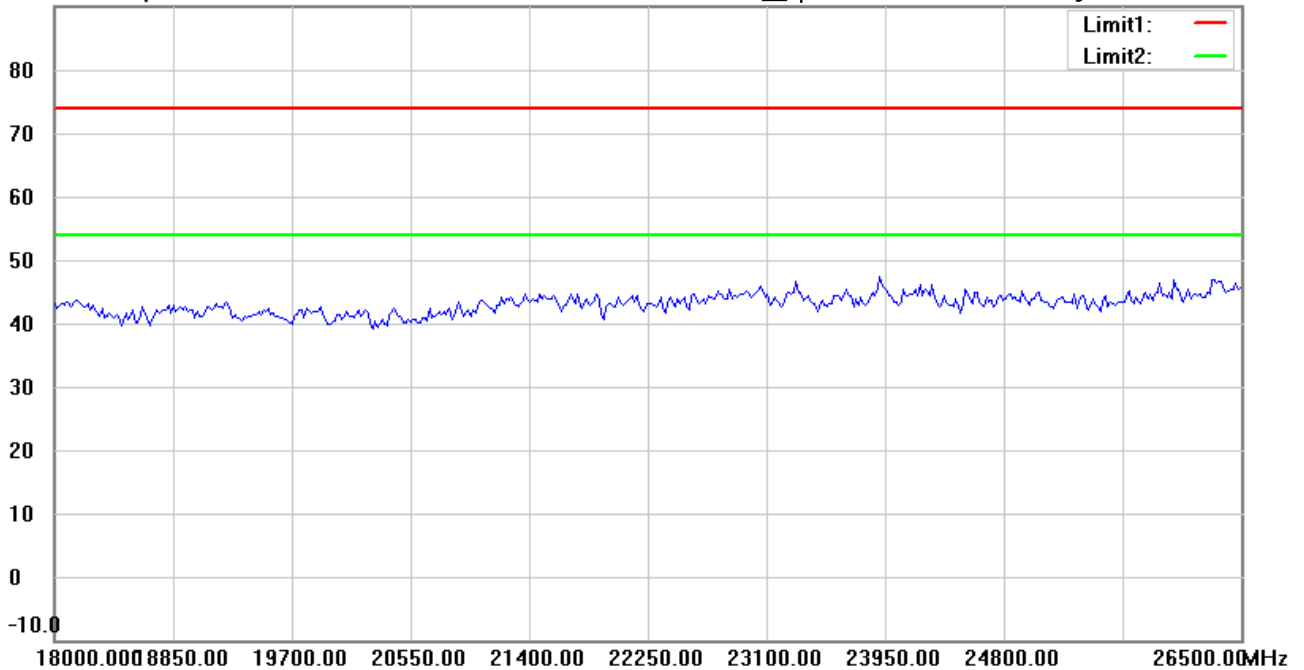

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH11

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#10


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 02:28:33

Humidity:62.8 %

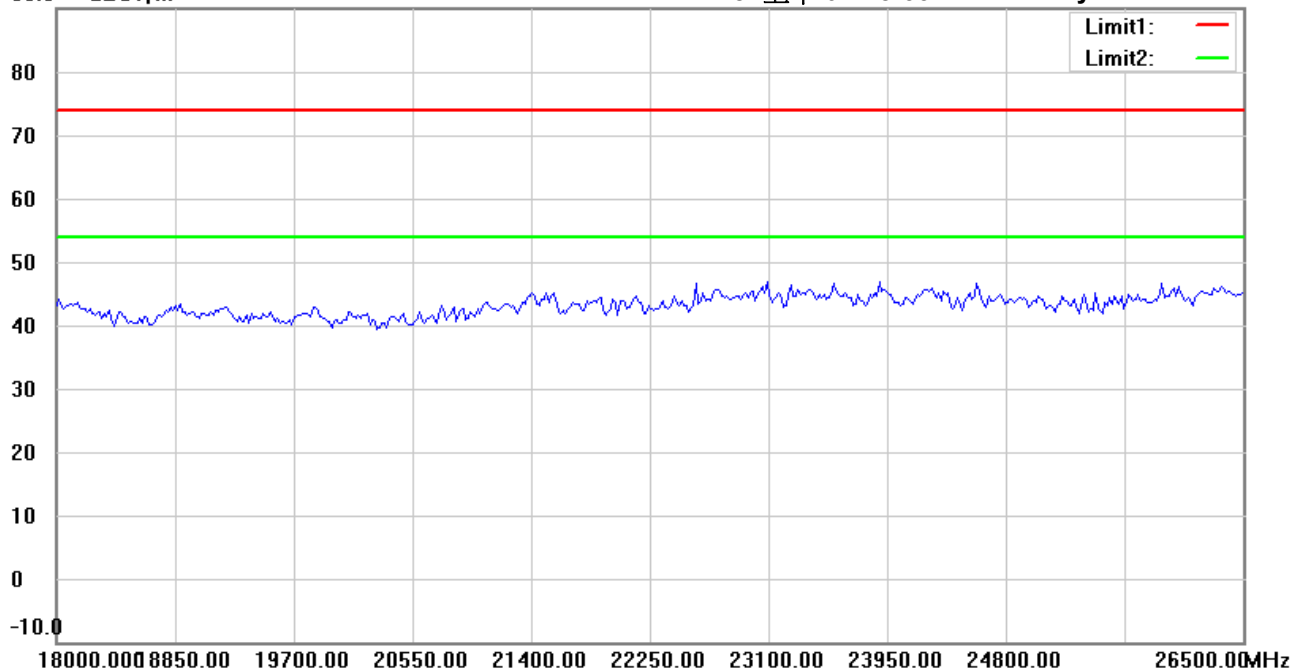

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH11

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#1


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 02:47:29

Humidity:62.8 %

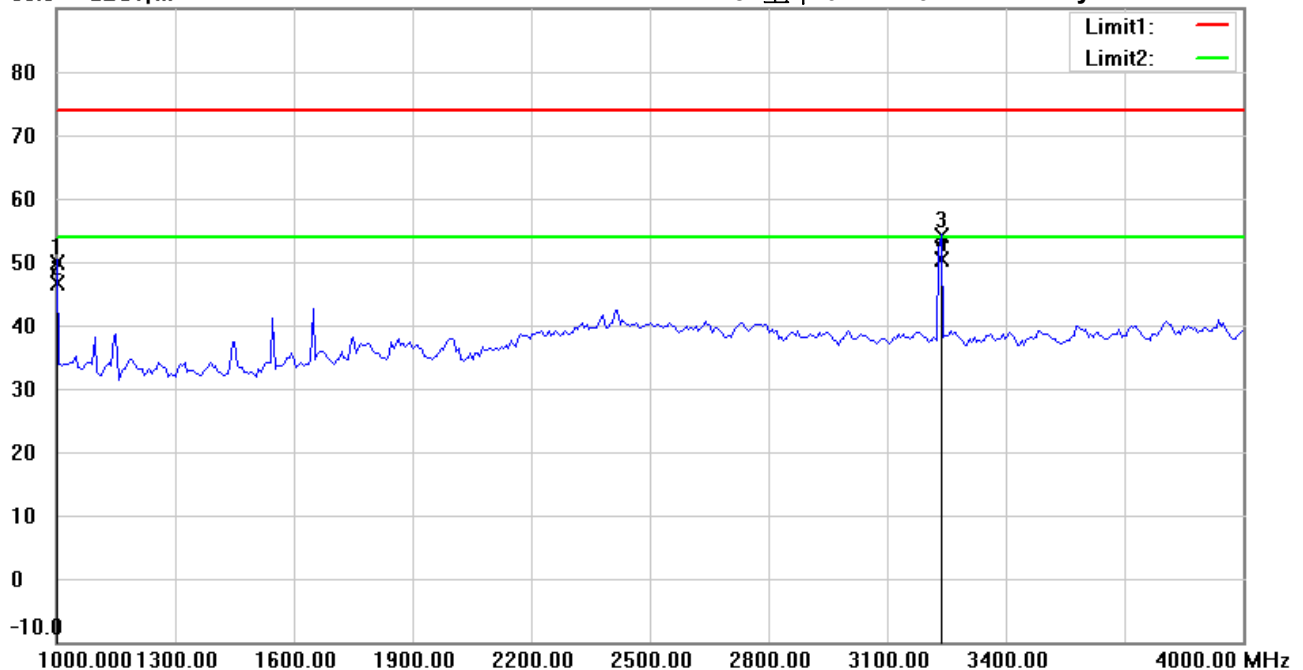

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH1

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1000.0000	57.31	peak	-7.37	49.94	74.00	152	153	-24.06	
	1000.0000	53.93	AVG	-7.37	46.56	54.00	152	153	-7.44	
	3230.461	57.42	peak	-3.40	54.02	74.00	159	221	-19.98	
*	3230.461	53.82	AVG	-3.40	50.42	54.00	159	221	-3.58	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#6


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 02:52:22

Humidity: 62.8 %

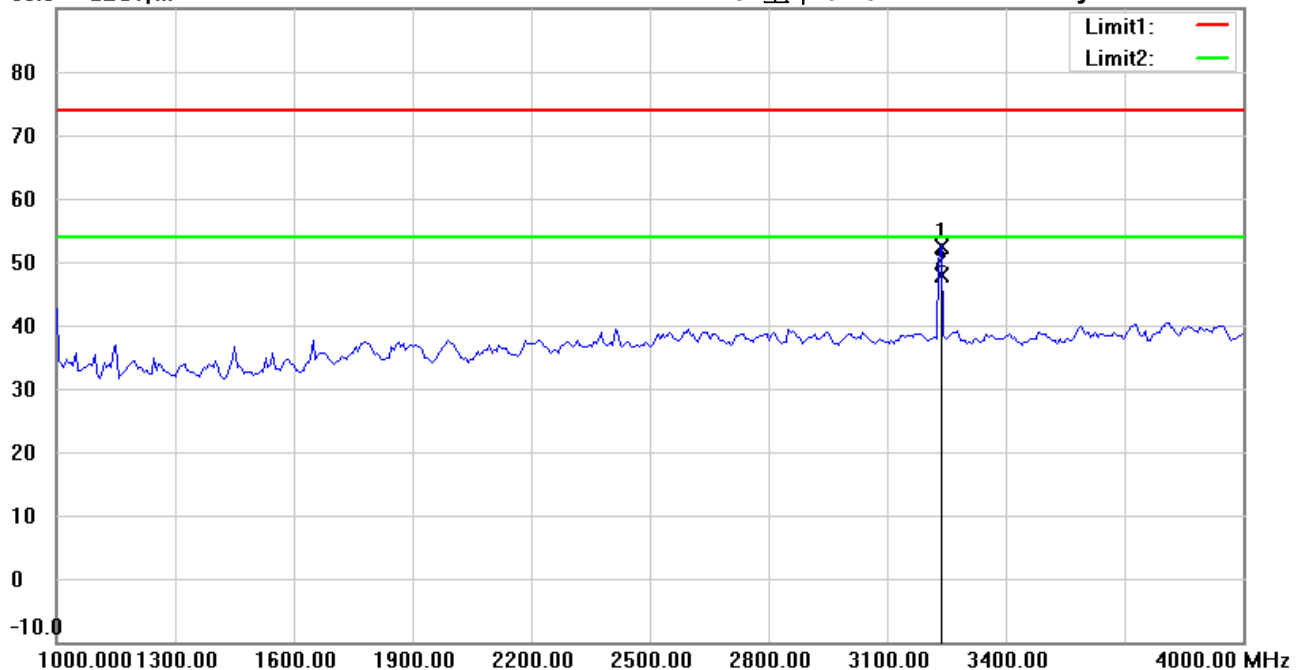

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH1

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3230.461	55.83	peak	-3.40	52.43	74.00	155	188	-21.57	
*	3230.461	51.29	AVG	-3.40	47.89	54.00	155	188	-6.11	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#2


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 02:48:50

Humidity: 62.8 %

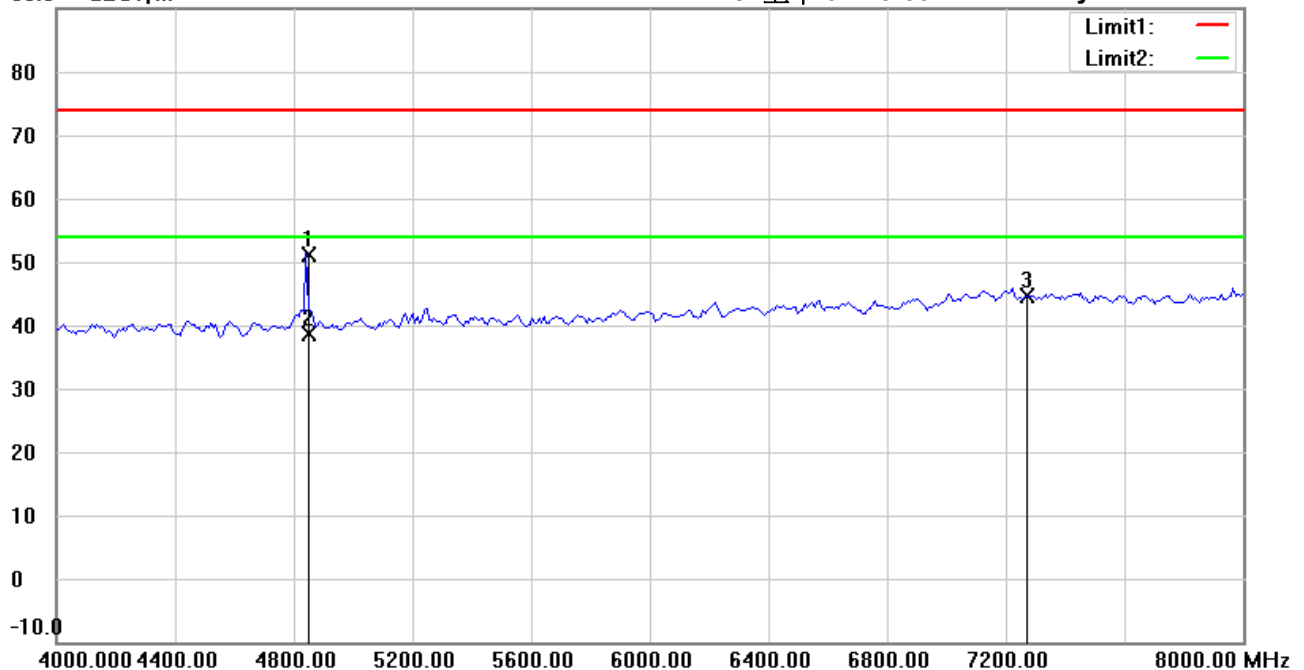

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH1

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4844.000	52.62	peak	-1.56	51.06	74.00	160	168	-22.94	
*	4844.000	40.17	AVG	-1.56	38.61	54.00	160	168	-15.39	
	7266.000	40.67	peak	3.86	44.53	74.00	157	295	-29.47	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#7


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 02:53:43

Humidity:62.8 %

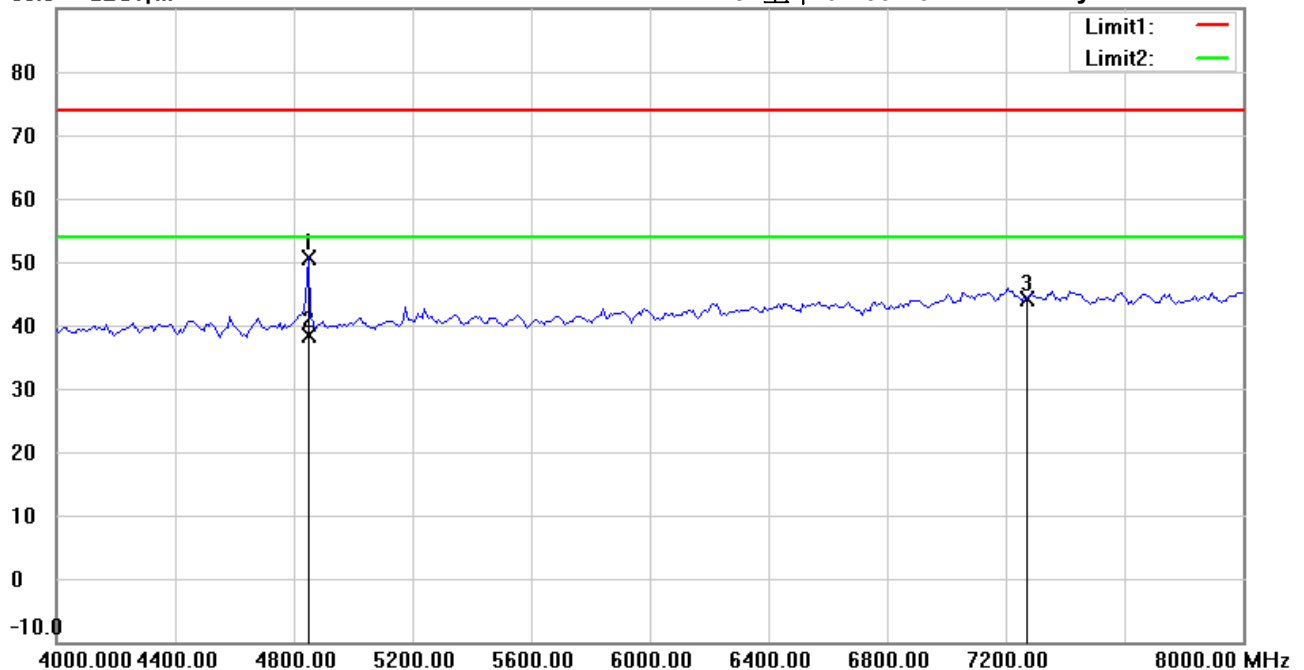

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH1

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4844.000	52.09	peak	-1.56	50.53	74.00	154	183	-23.47	
*	4844.000	39.99	AVG	-1.56	38.43	54.00	154	183	-15.57	
	7266.000	40.18	peak	3.86	44.04	74.00	153	237	-29.96	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#3


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 02:50:28

Humidity: 62.8 %

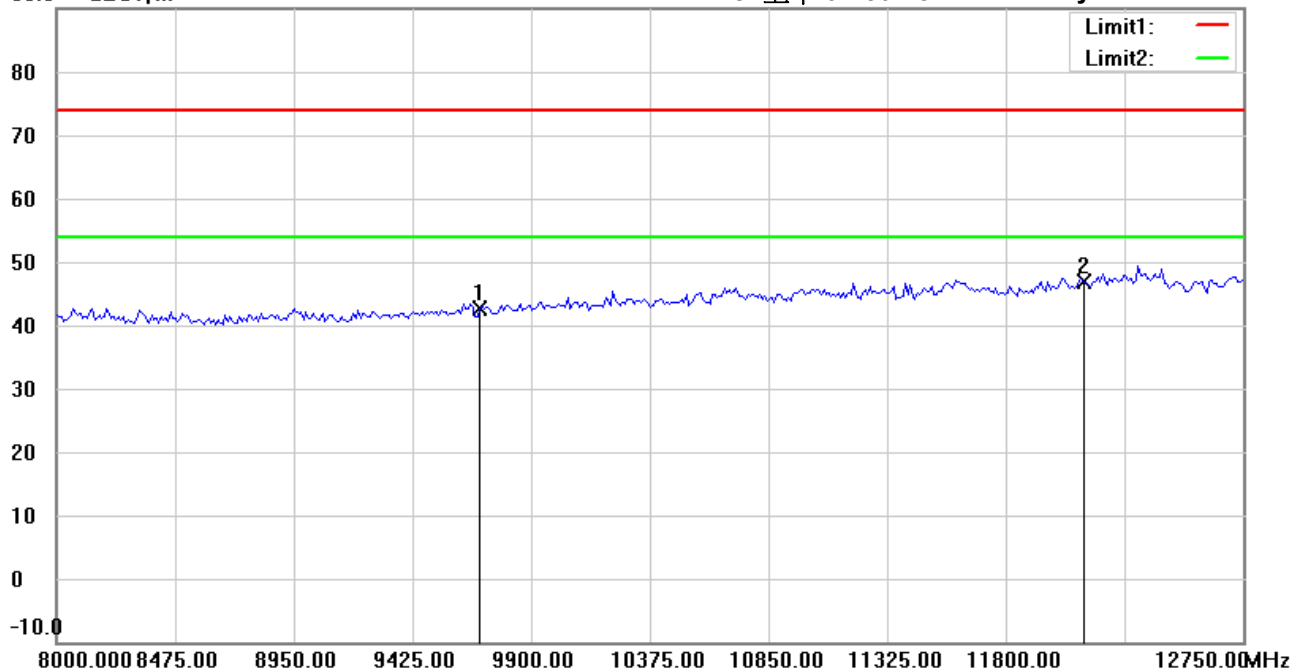

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH1

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9688.000	35.70	peak	6.82	42.52	74.00	150	142	-31.48	
*	12110.000	33.92	peak	12.96	46.88	74.00	150	90	-27.12	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #8


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 02:55:17

Humidity: 62.8 %

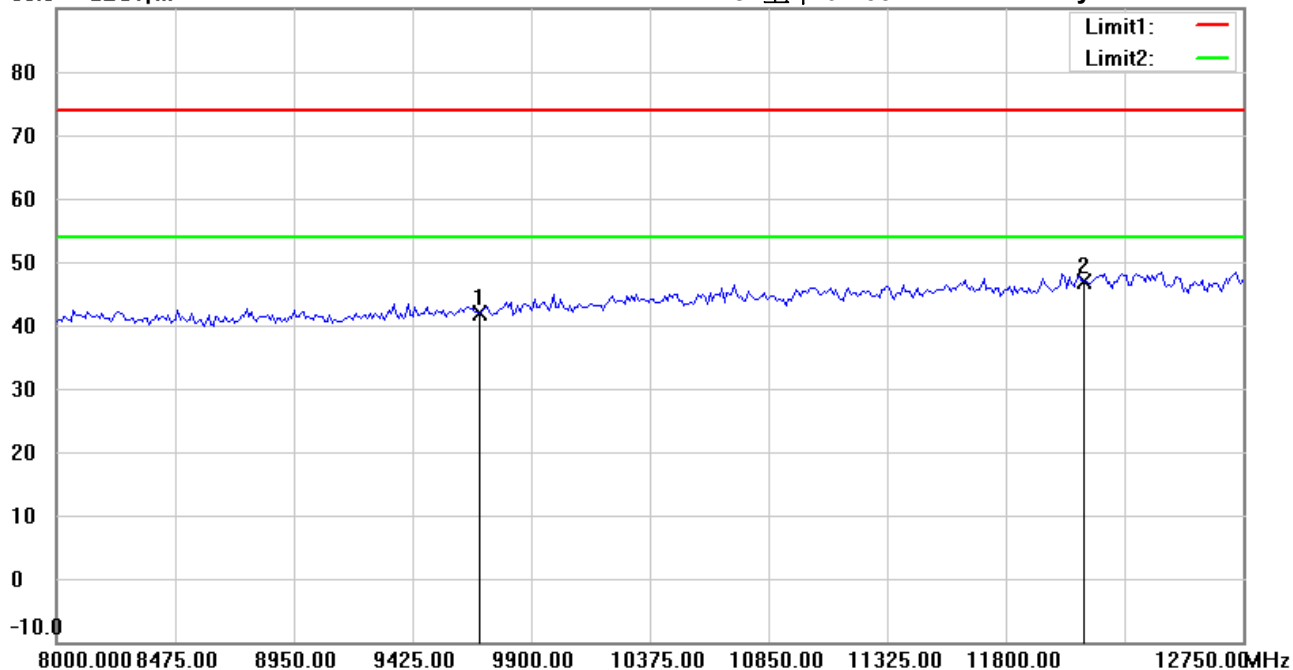

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH1

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9688.000	35.11	peak	6.82	41.93	74.00	155	358	-32.07	
*	12110.000	33.92	peak	12.96	46.88	74.00	152	257	-27.12	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#4


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 02:50:42

Humidity:62.8 %

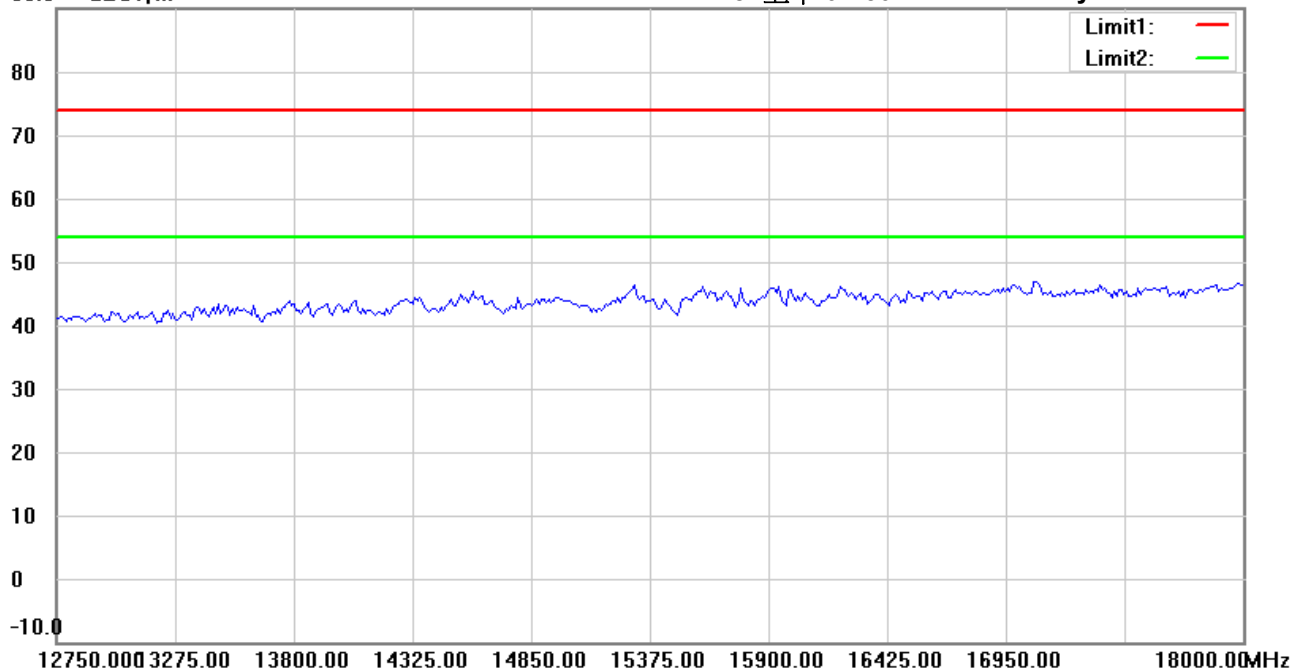

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH1

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#9


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 02:55:31

Humidity:62.8 %

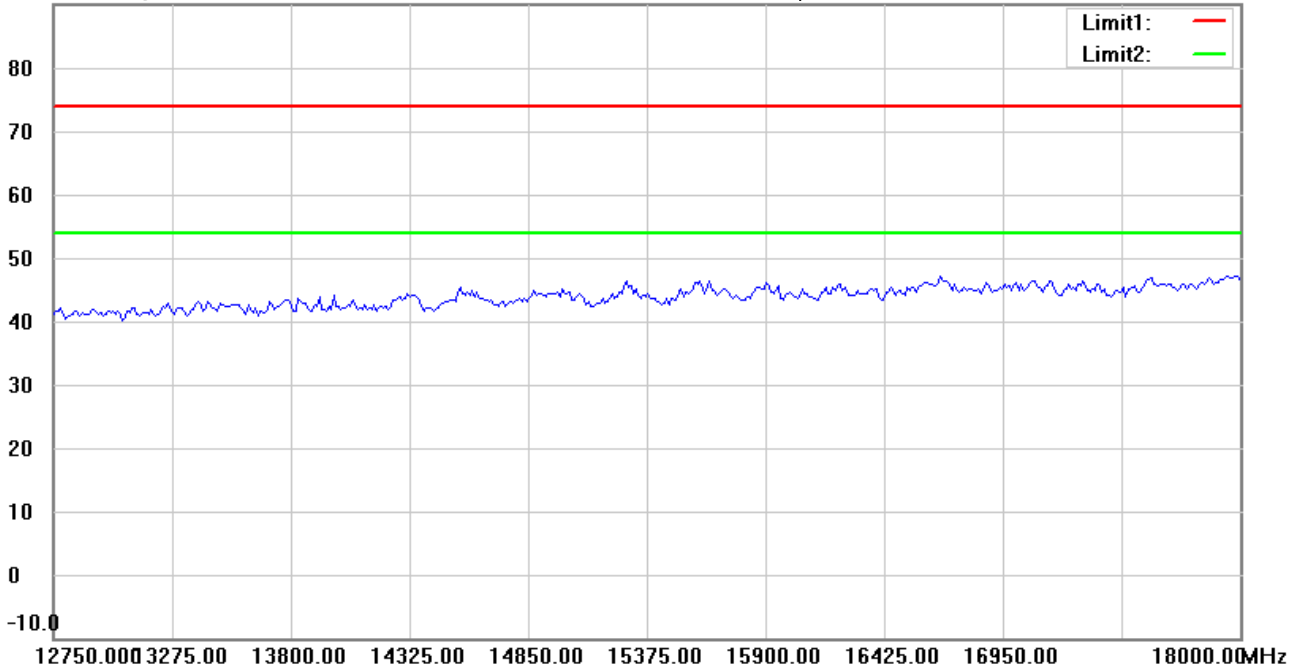

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH1

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#5


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 02:50:52

Humidity:62.8 %

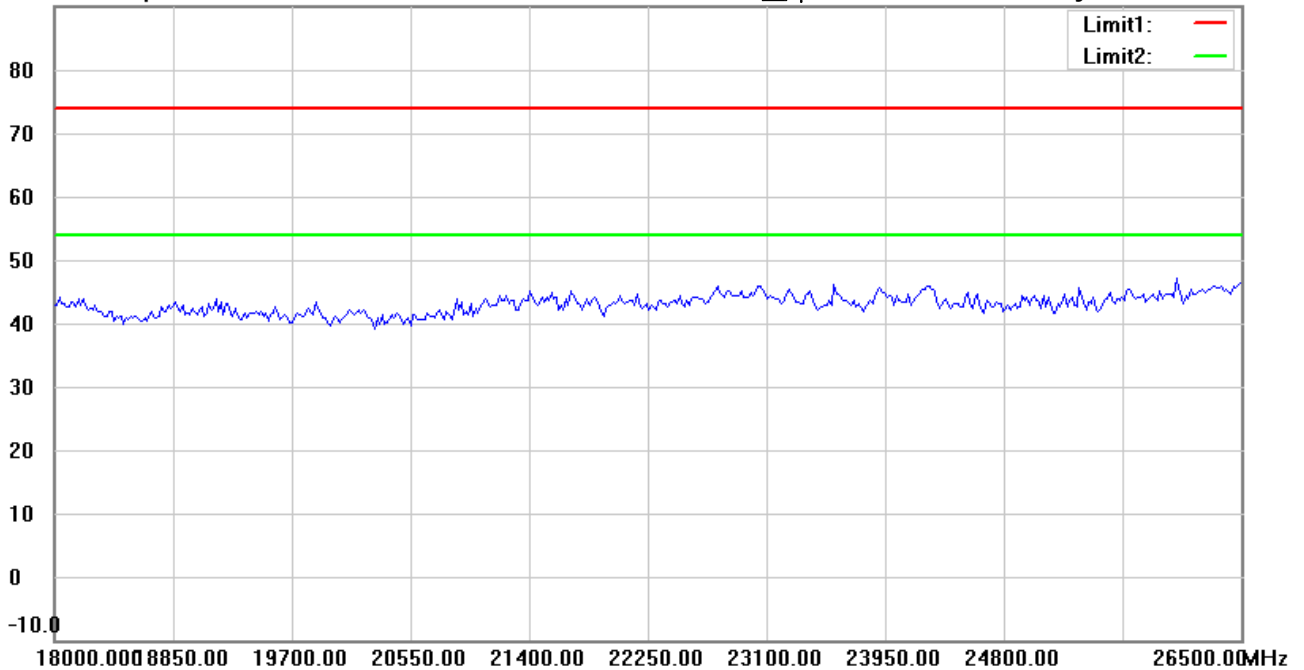

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH1

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#10


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 02:55:41

Humidity:62.8 %

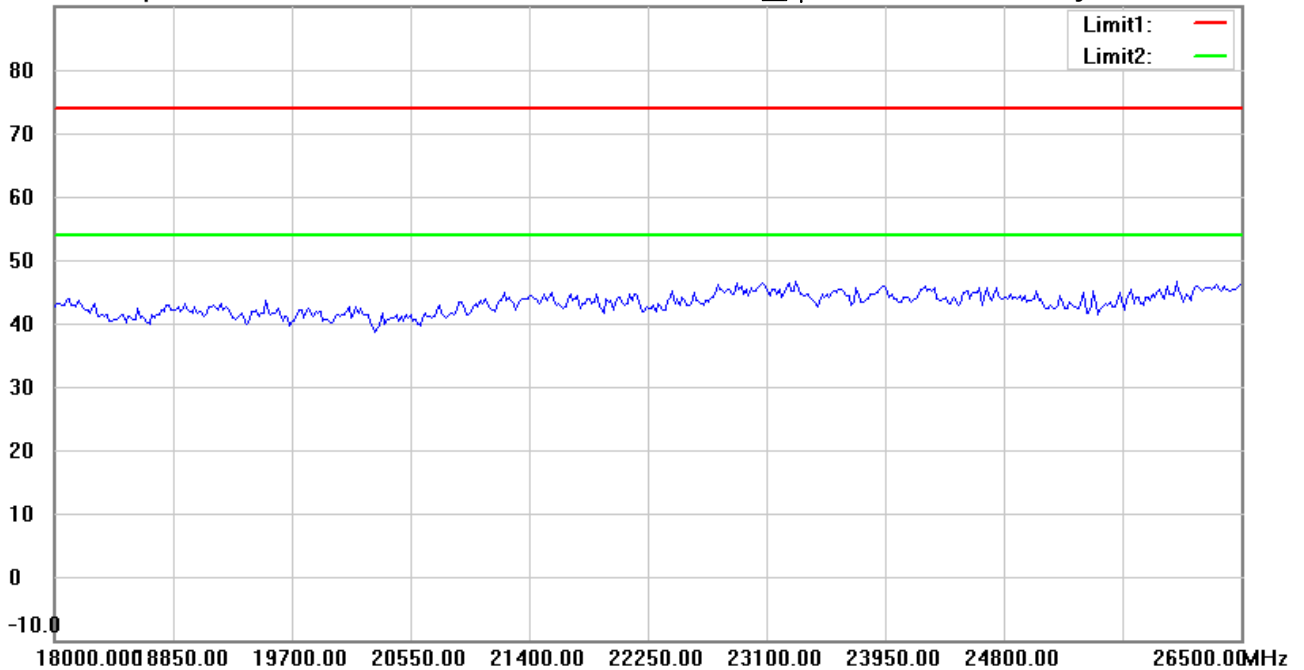

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH1

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#1


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 03:11:04

Humidity:62.8 %

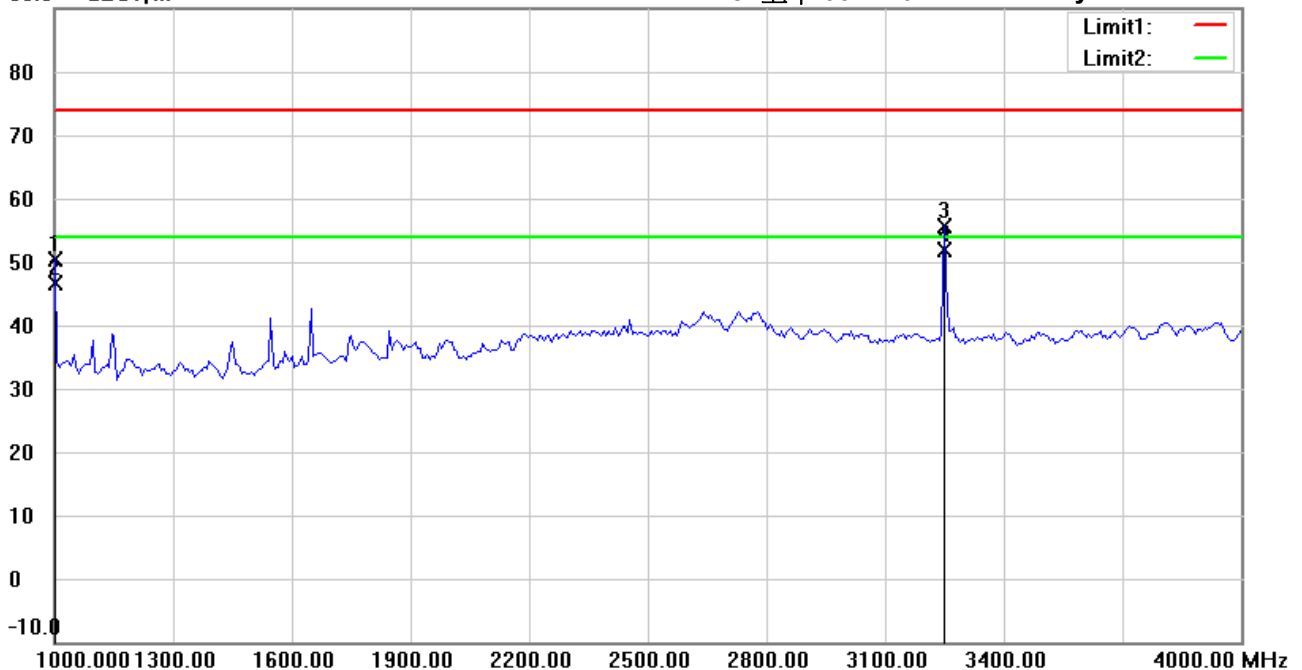

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH4

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1000.0000	57.83	peak	-7.37	50.46	74.00	151	159	-23.54	
	1000.0000	54.09	AVG	-7.37	46.72	54.00	151	159	-7.28	
	3248.497	58.98	peak	-3.46	55.52	74.00	154	214	-18.48	
*	3248.497	55.32	AVG	-3.46	51.86	54.00	154	214	-2.14	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #6


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 03:19:18

Humidity: 62.8 %

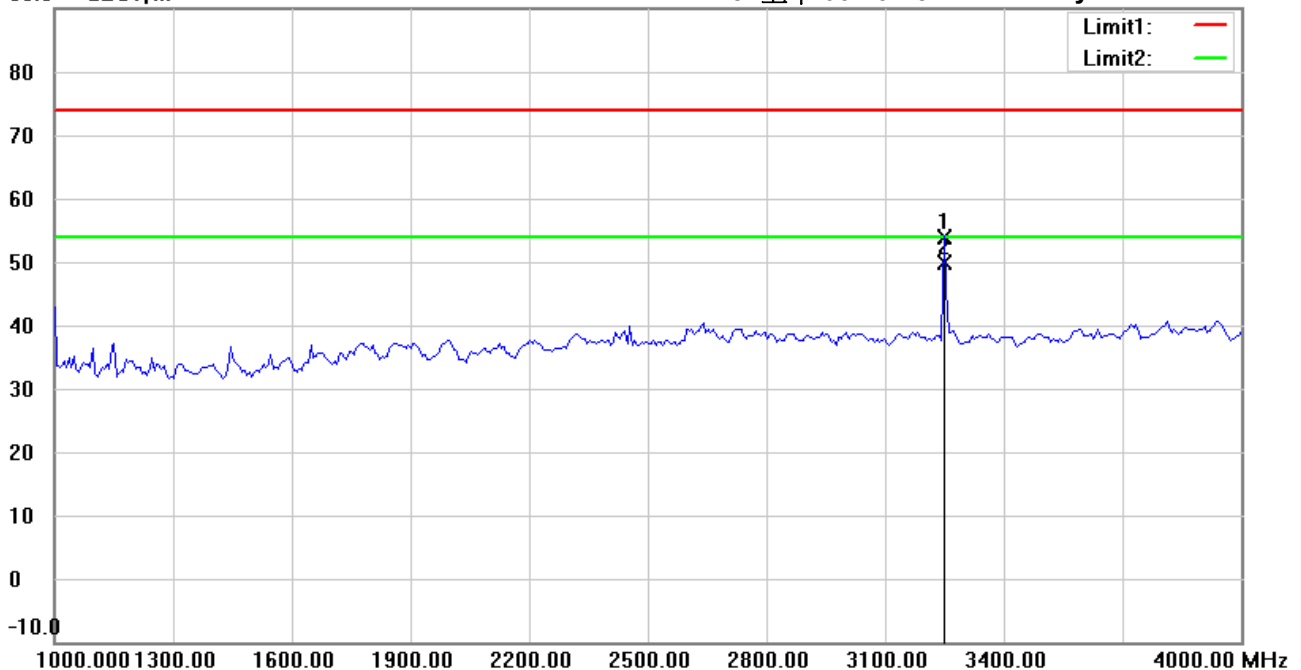

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH4

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3248.497	57.35	peak	-3.46	53.89	74.00	155	190	-20.11	
*	3248.497	53.33	AVG	-3.46	49.87	54.00	155	190	-4.13	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #2


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 03:12:25

Humidity: 62.8 %

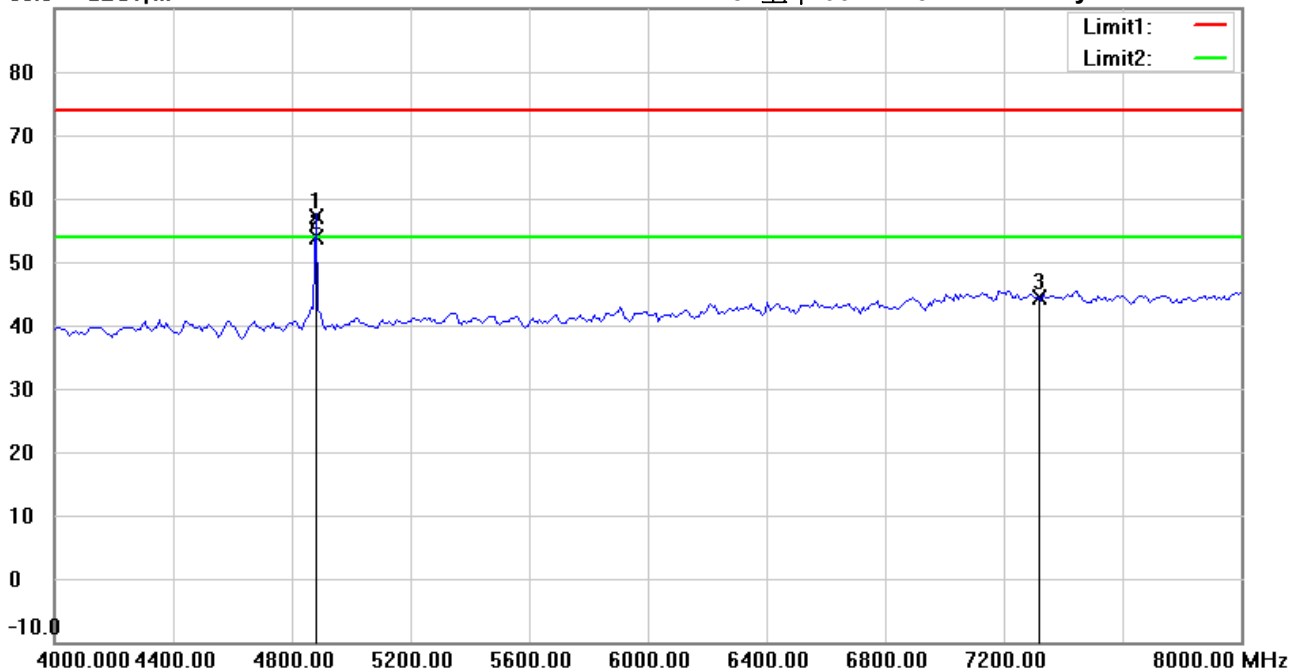

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH4

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	58.48	peak	-1.43	57.05	74.00	152	214	-16.95	
*	4874.000	55.31	AVG	-1.43	53.88	54.00	152	214	-0.12	
	7311.000	40.56	peak	3.82	44.38	74.00	156	228	-29.62	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#7


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 03:20:39

Humidity: 62.8 %

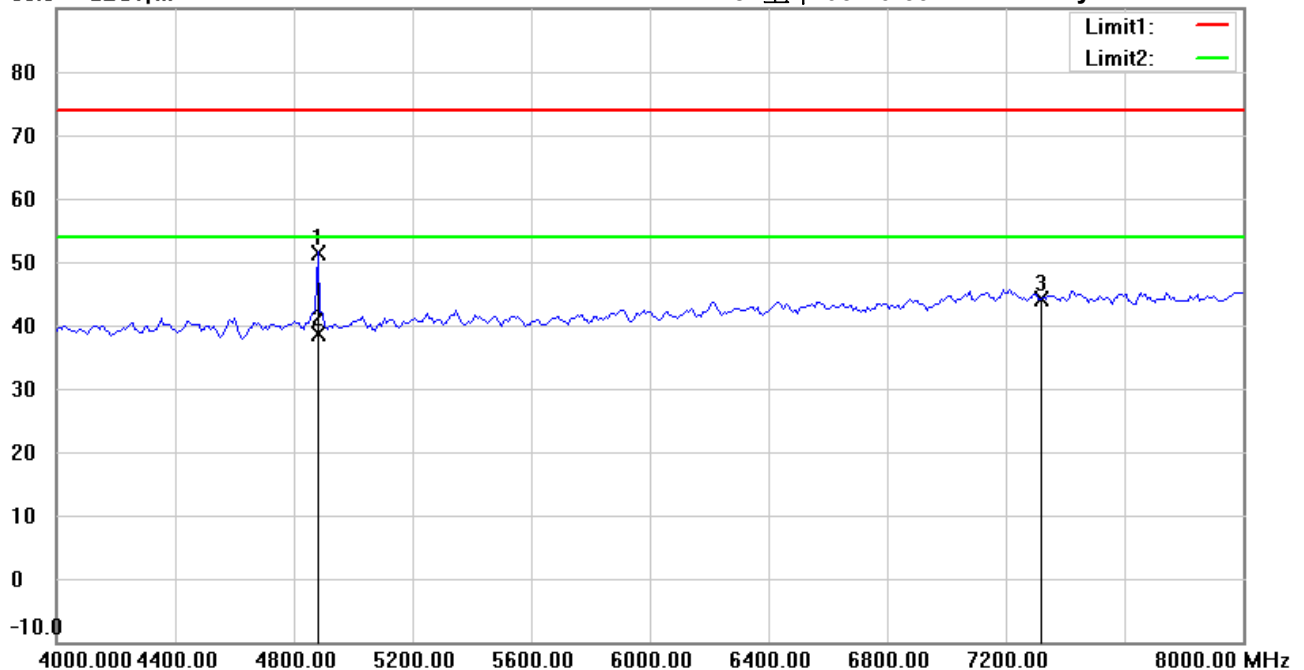

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH4

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4874.000	52.71	peak	-1.43	51.28	74.00	153	180	-22.72	
*	4874.000	39.97	AVG	-1.43	38.54	54.00	153	180	-15.46	
	7311.000	40.23	peak	3.82	44.05	74.00	159	360	-29.95	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#3


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 03:17:20

Humidity:62.8 %

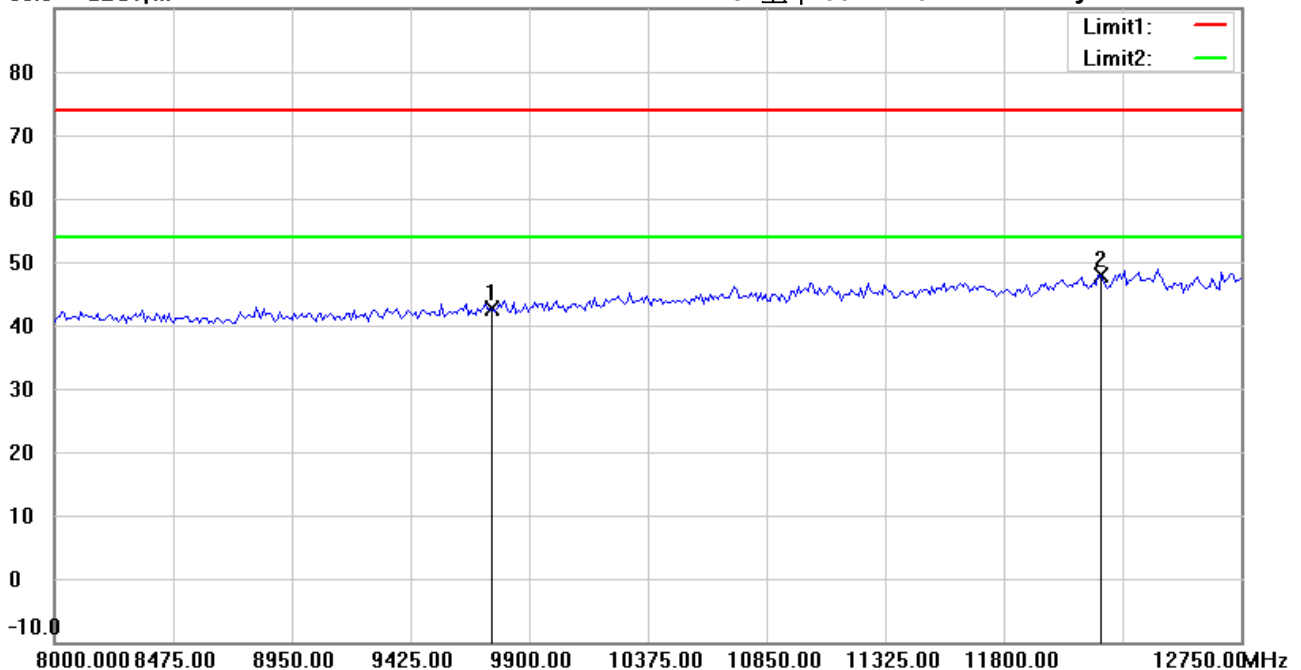

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH4

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.74	peak	6.98	42.72	74.00	156	360	-31.28	
*	12185.000	34.30	peak	13.49	47.79	74.00	159	239	-26.21	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#8


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 03:22:41

Humidity: 62.8 %

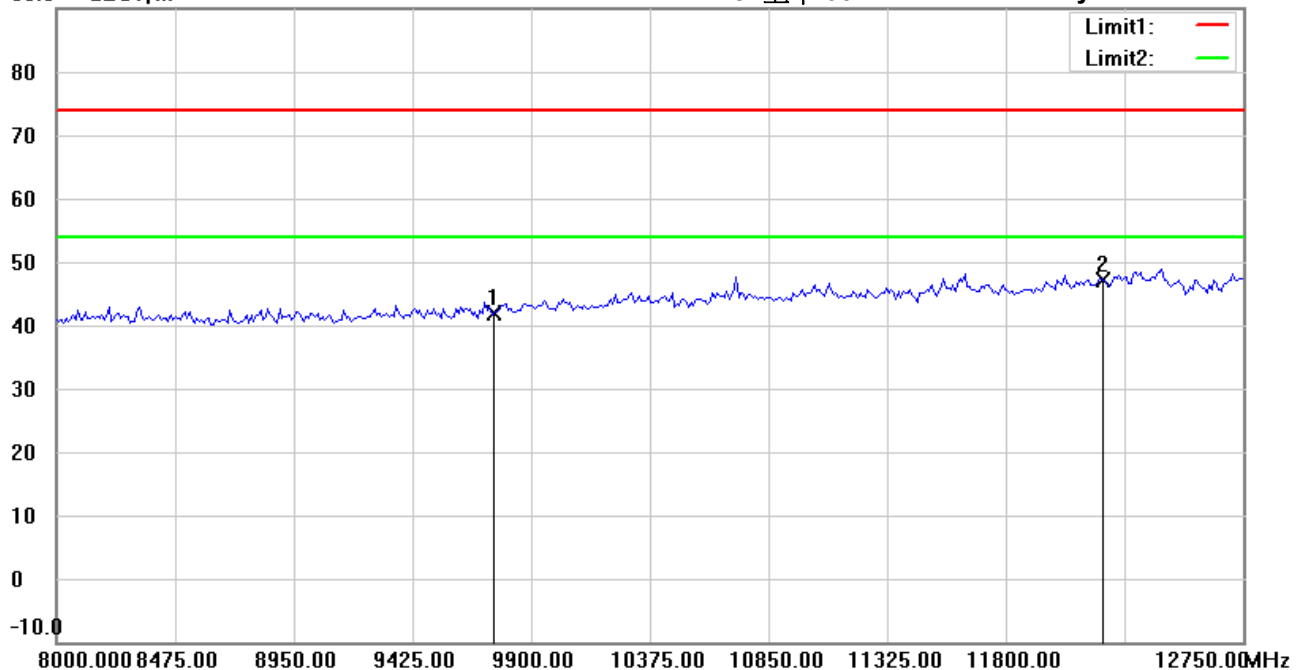

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH4

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9748.000	35.02	peak	6.98	42.00	74.00	153	68	-32.00	
*	12185.000	33.73	peak	13.49	47.22	74.00	158	113	-26.78	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#4


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 03:17:34

Humidity:62.8 %

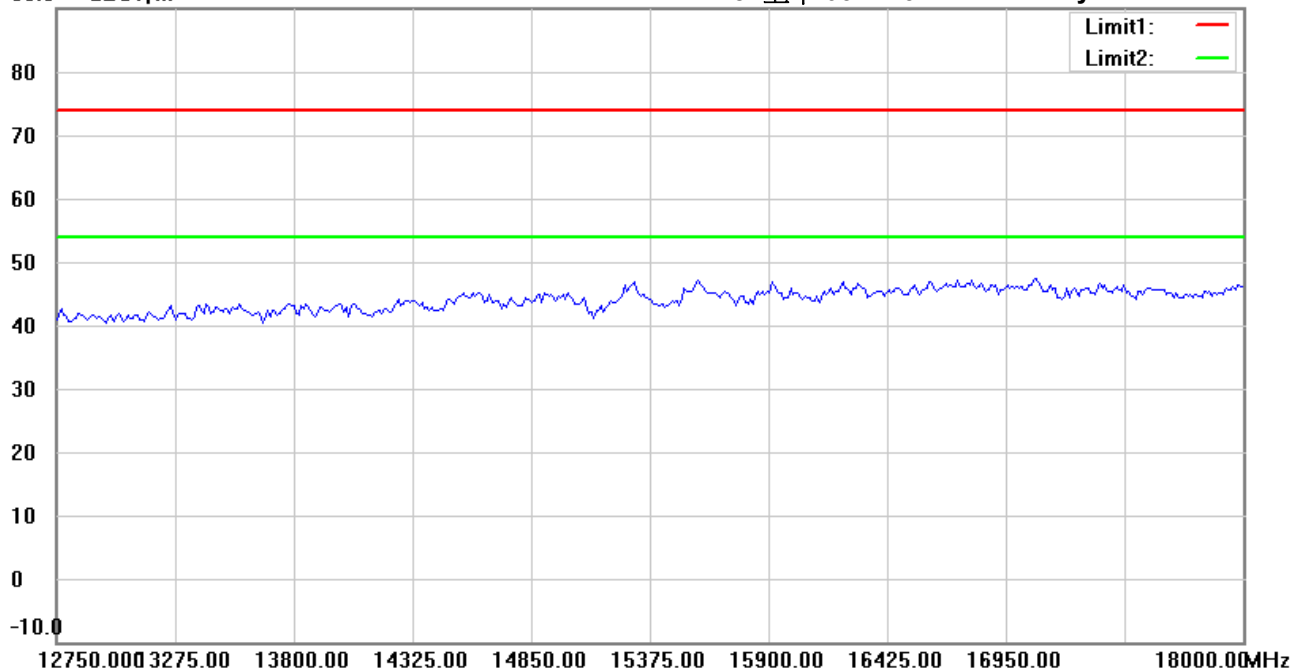

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH4

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#9


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 03:22:55

Humidity:62.8 %

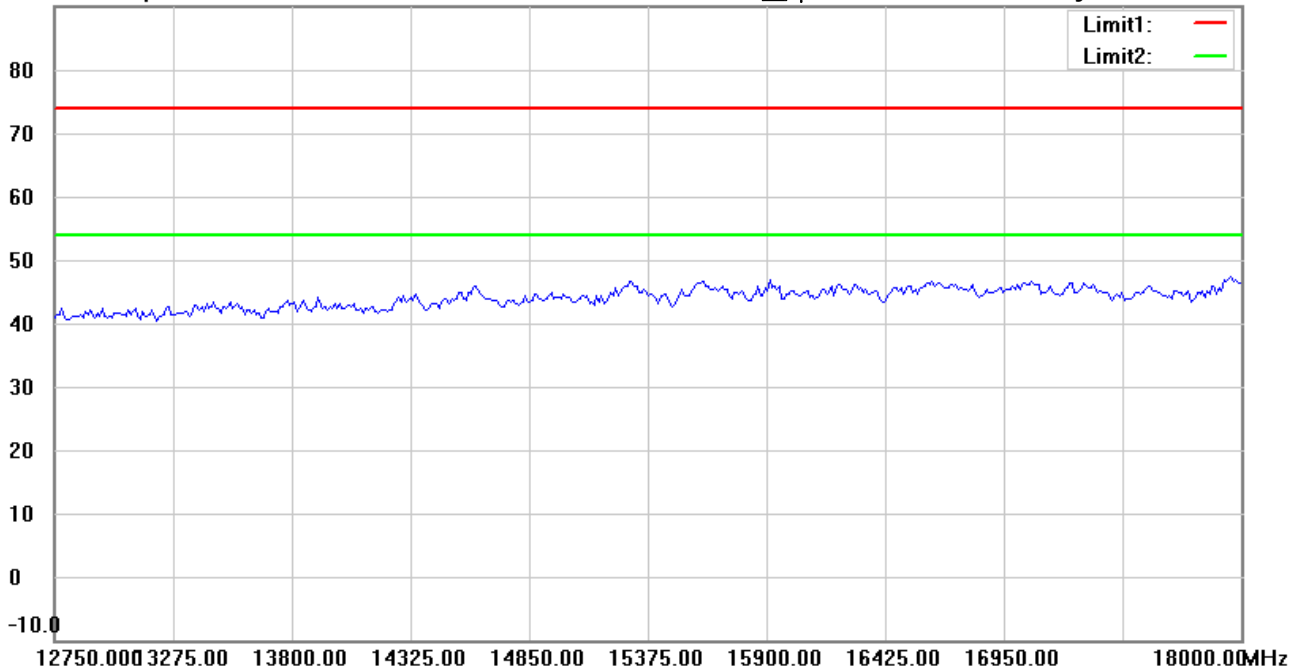

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH4

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#5


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 03:17:44

Humidity:62.8 %

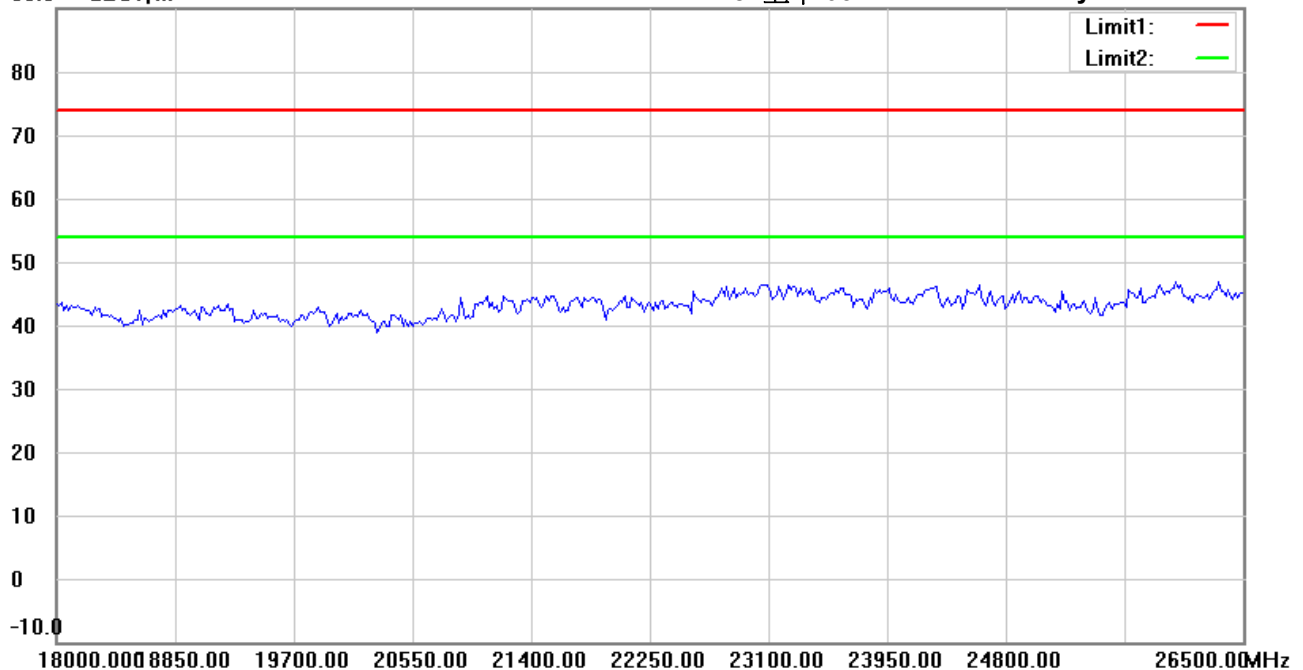

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH4

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#10


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 03:23:05

Humidity:62.8 %

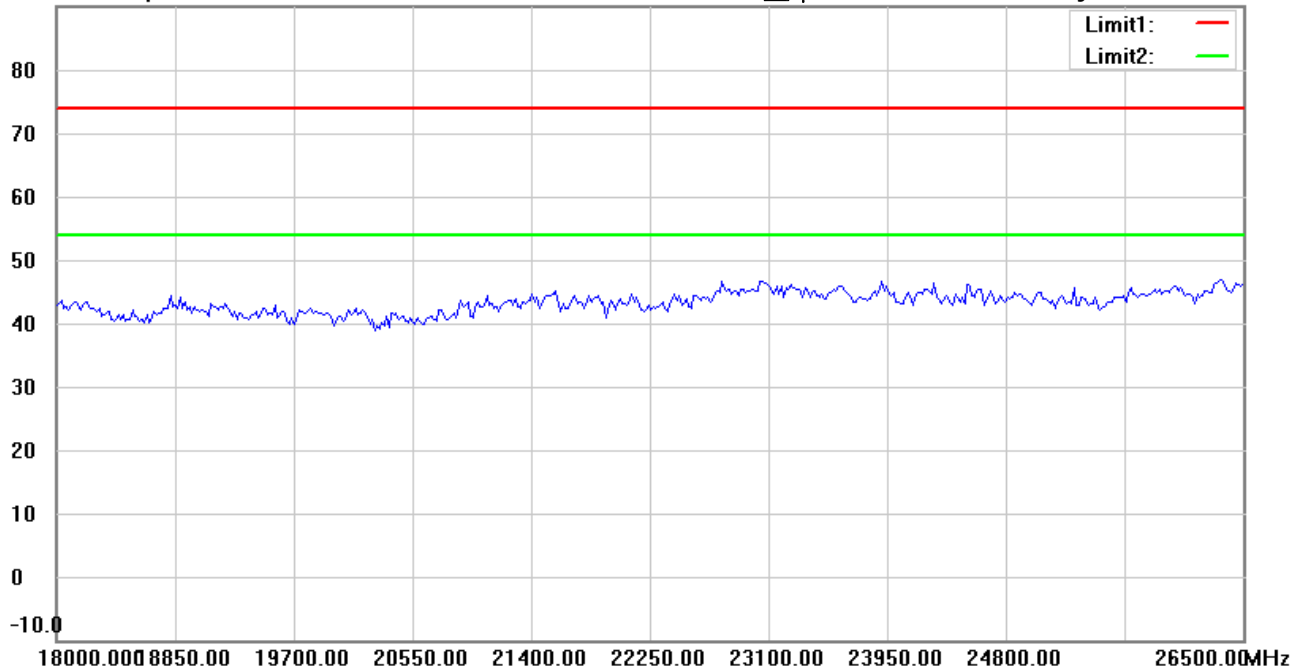

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH4

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#1


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 03:38:32

Humidity: 62.8 %

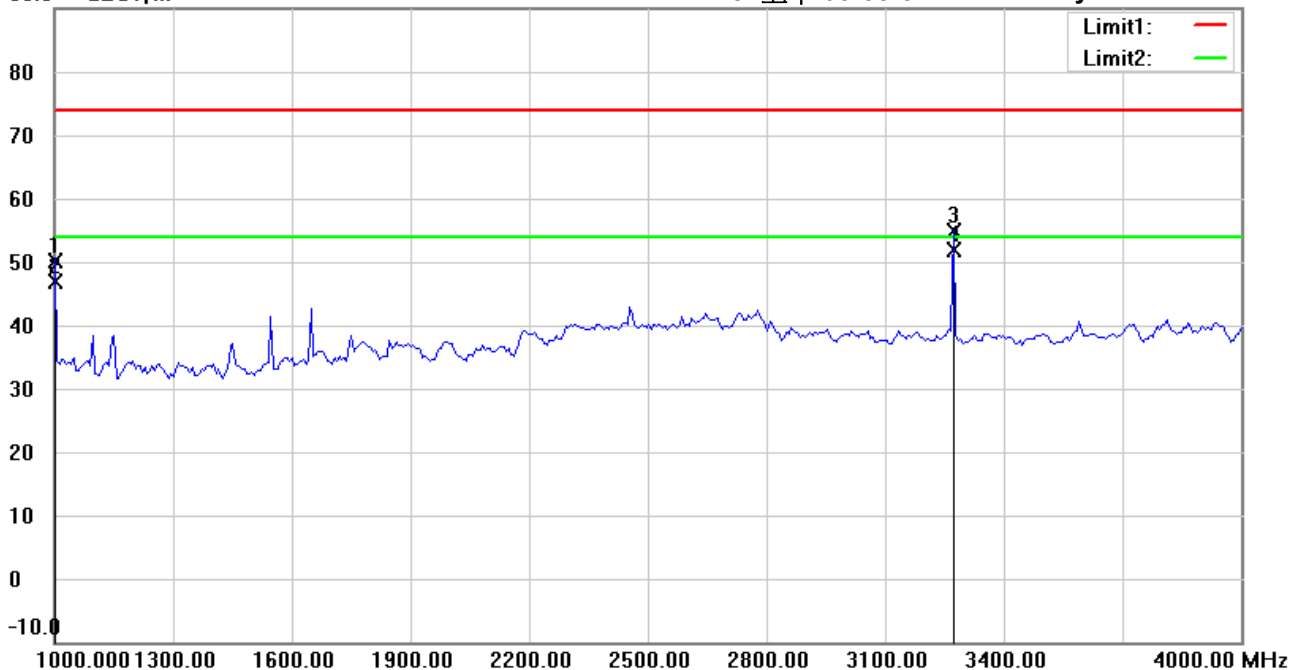

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH7

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	1000.0000	57.51	peak	-7.37	50.14	74.00	155	155	-23.86	
	1000.0000	54.14	AVG	-7.37	46.77	54.00	155	155	-7.23	
	3272.545	58.36	peak	-3.54	54.82	74.00	159	223	-19.18	
*	3272.545	55.45	AVG	-3.54	51.91	54.00	159	223	-2.09	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#6


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 03:45:51

Humidity:62.8 %

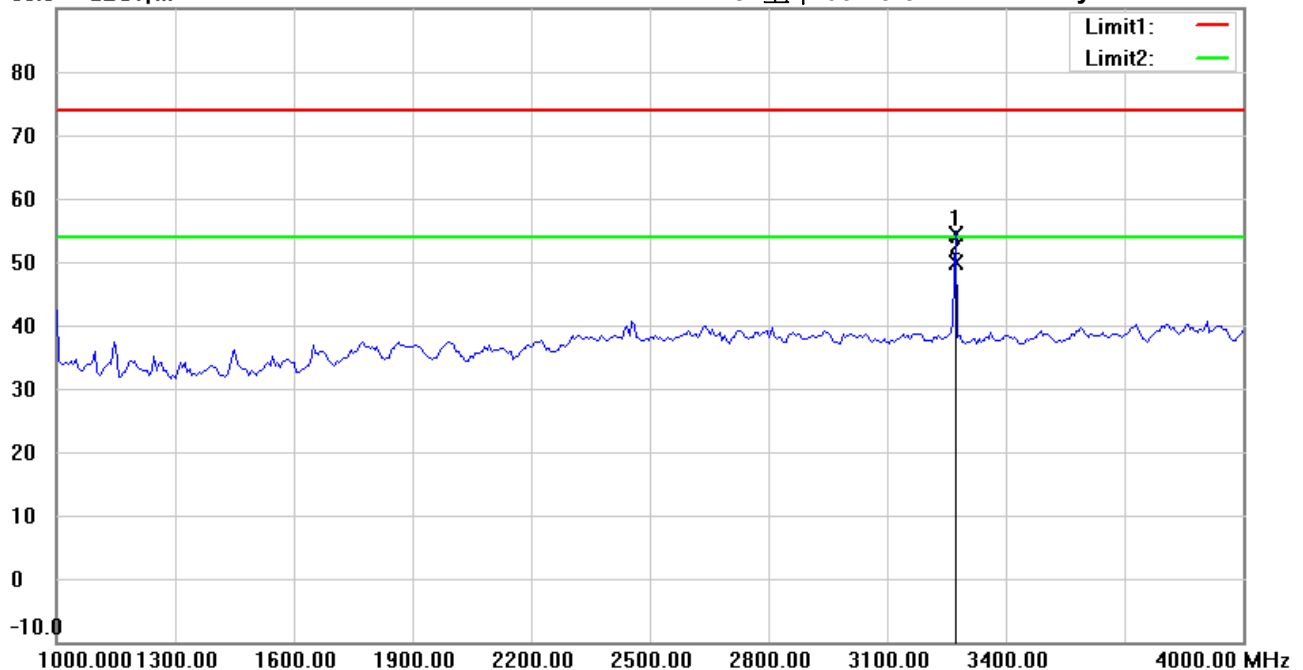

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH7

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3272.545	57.80	peak	-3.54	54.26	74.00	155	190	-19.74	
*	3272.545	53.42	AVG	-3.54	49.88	54.00	155	190	-4.12	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#2


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 03:39:53

Humidity:62.8 %

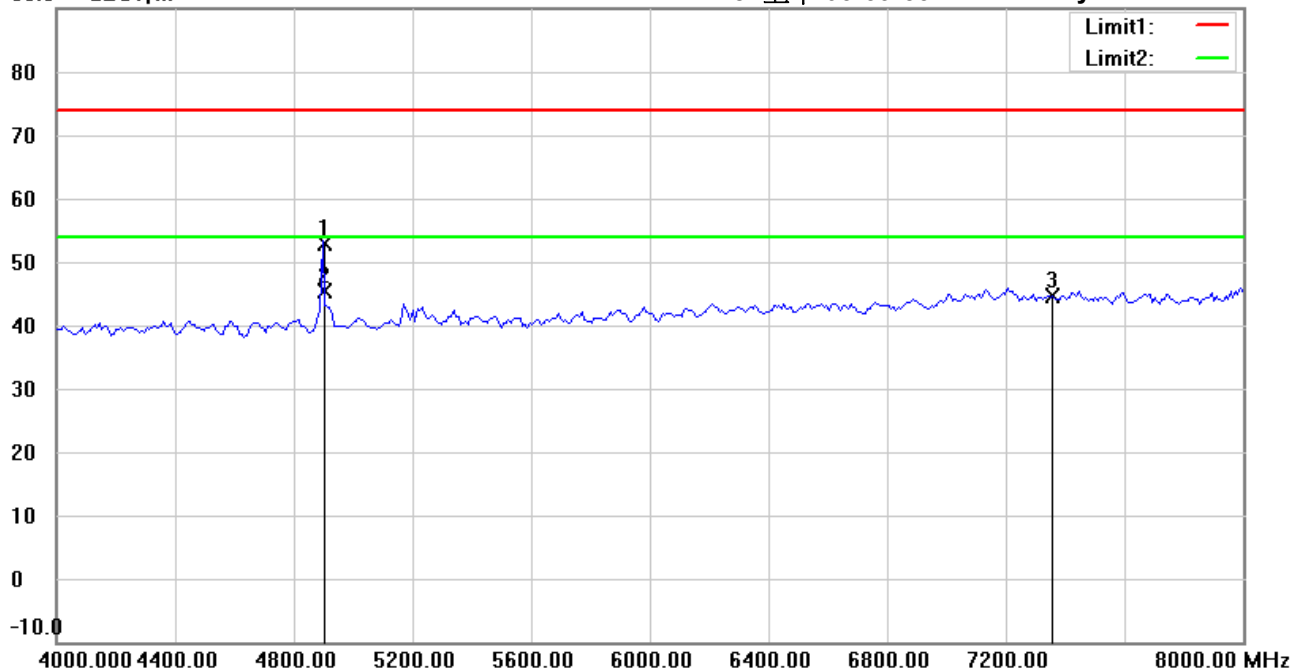

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH7

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4904.000	54.27	peak	-1.28	52.99	74.00	150	170	-21.01	
*	4904.000	46.78	AVG	-1.28	45.50	54.00	150	170	-8.50	
	7356.000	40.78	peak	3.96	44.74	74.00	152	120	-29.26	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#7


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 03:47:12

Humidity: 62.8 %

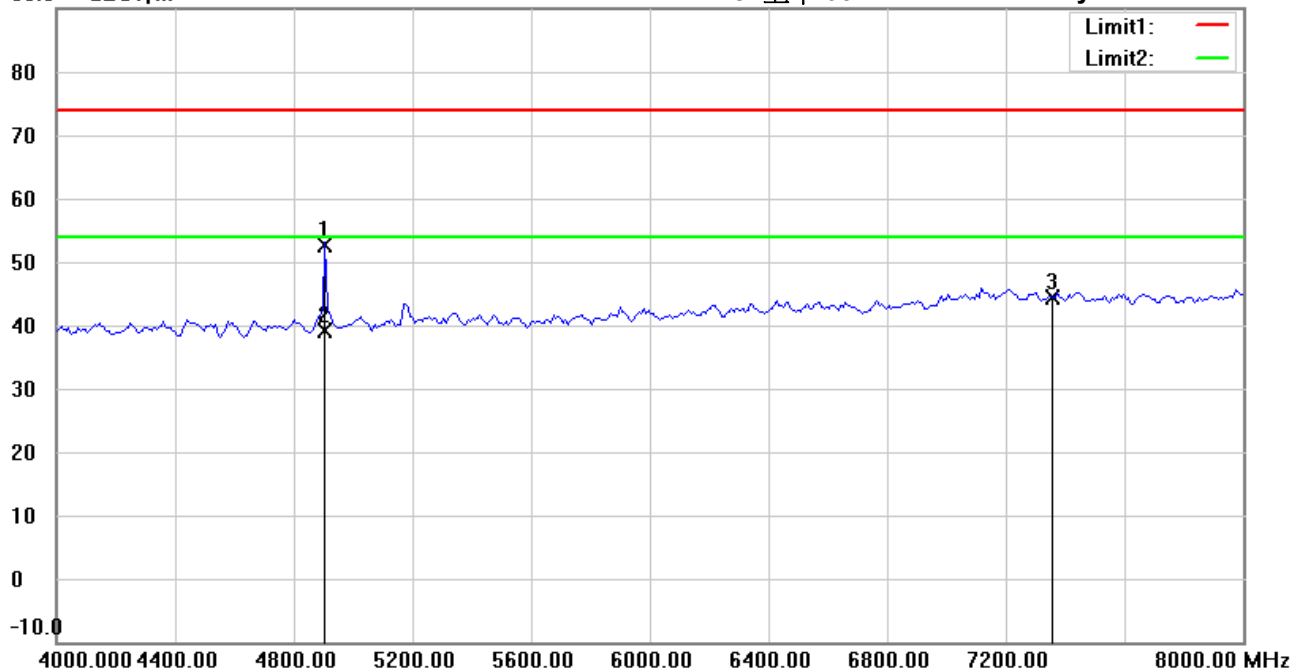

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH7

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4904.000	53.86	peak	-1.28	52.58	74.00	153	180	-21.42	
*	4904.000	40.40	AVG	-1.28	39.12	54.00	153	180	-14.88	
	7356.000	40.47	peak	3.96	44.43	74.00	150	142	-29.57	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#3


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 03:43:07

Humidity:62.8 %

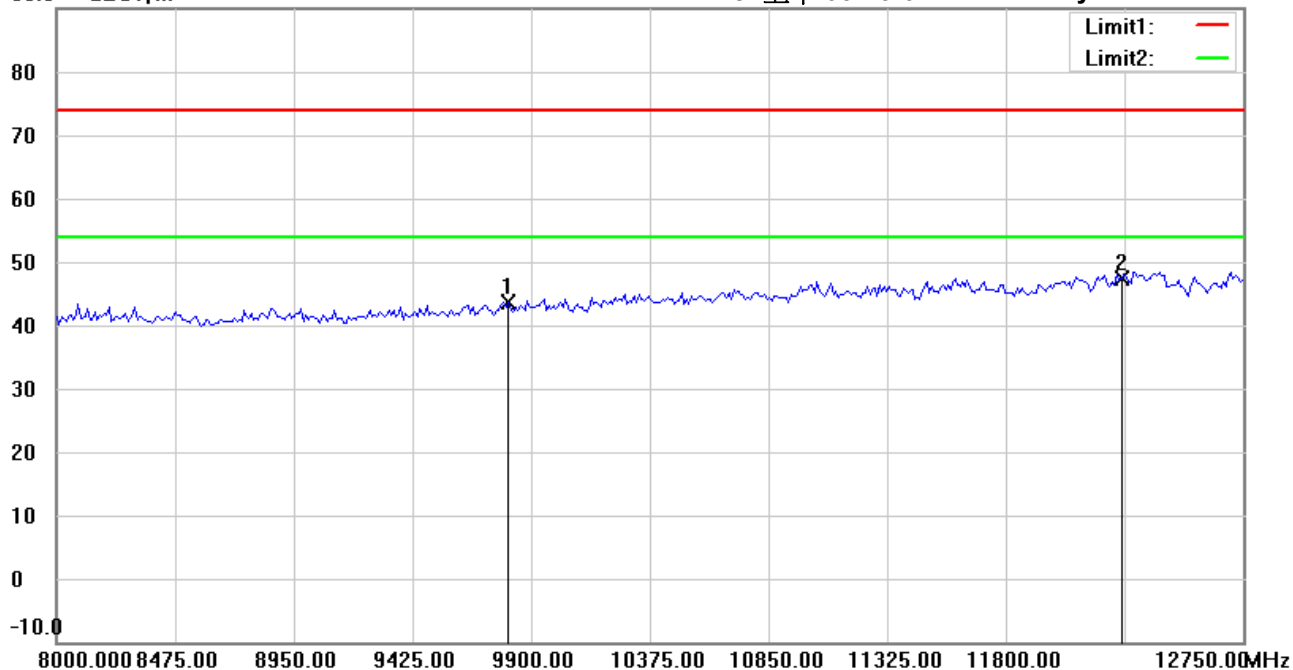

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH7

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9808.000	36.46	peak	7.18	43.64	74.00	156	292	-30.36	
*	12260.000	33.98	peak	13.32	47.30	74.00	168	352	-26.70	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#8


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 03:48:36

Humidity:62.8 %

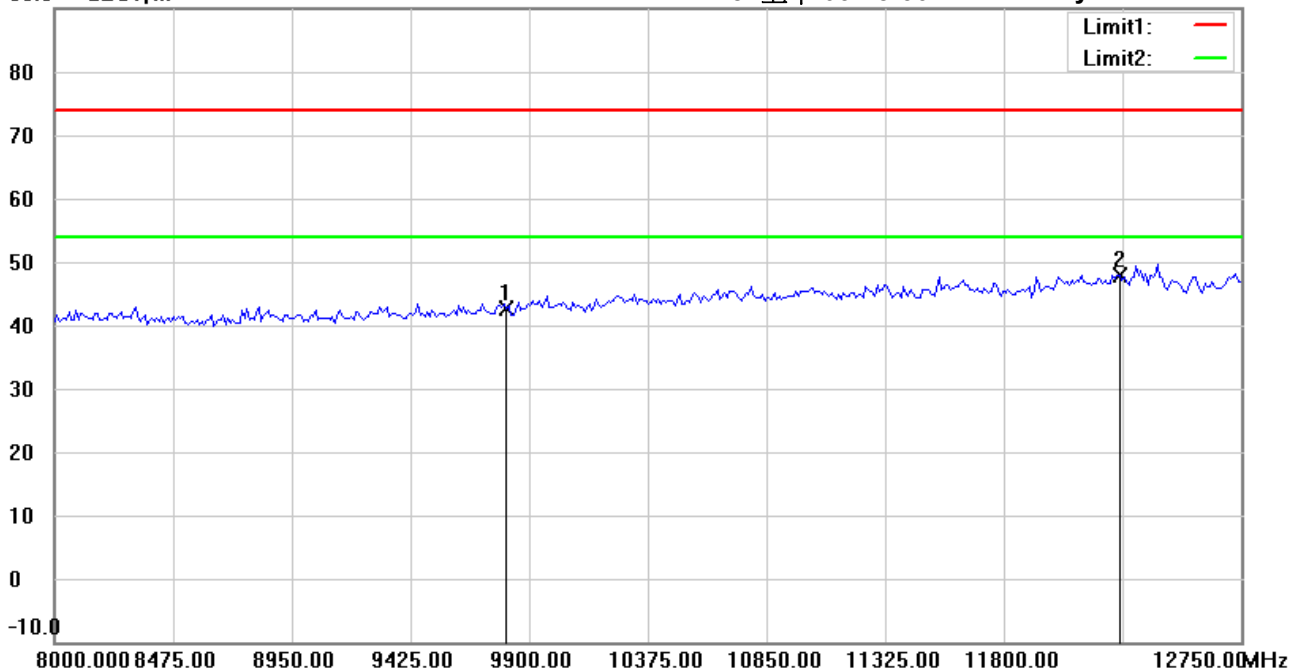

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH7

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9808.000	35.37	peak	7.18	42.55	74.00	155	271	-31.45	
*	12260.000	34.44	peak	13.32	47.76	74.00	158	317	-26.24	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#4


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 03:43:21

Humidity:62.8 %

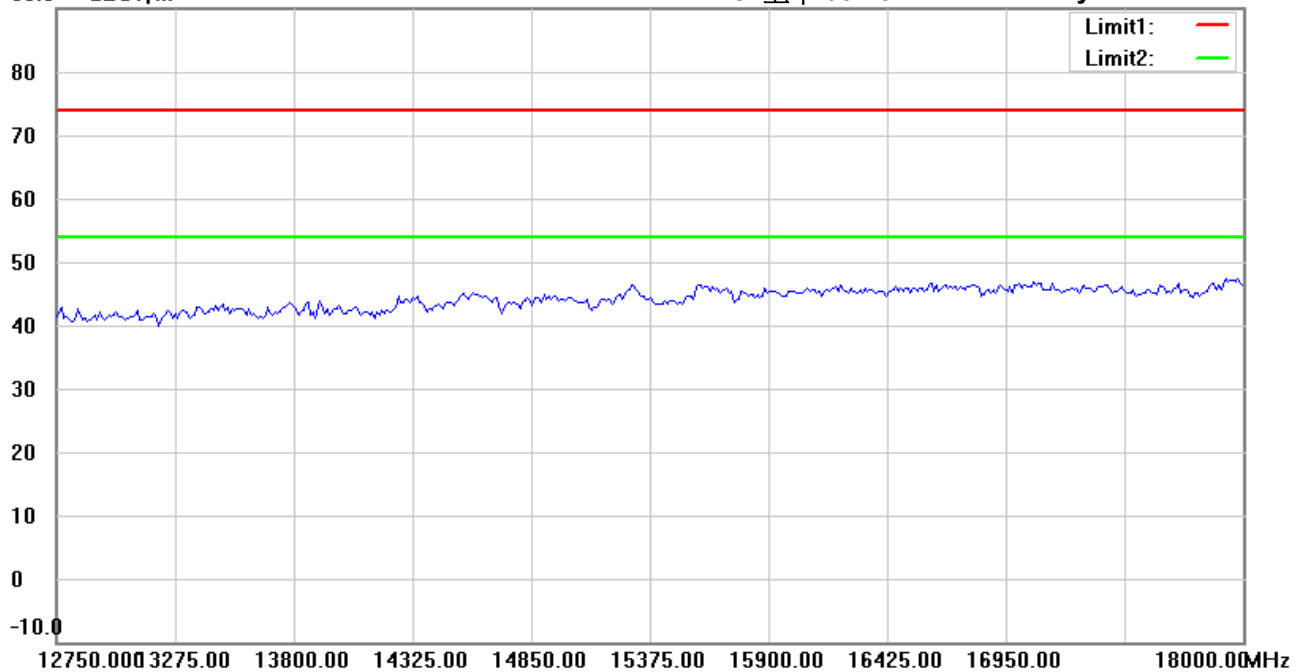

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH7

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#9


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 03:48:50

Humidity:62.8 %

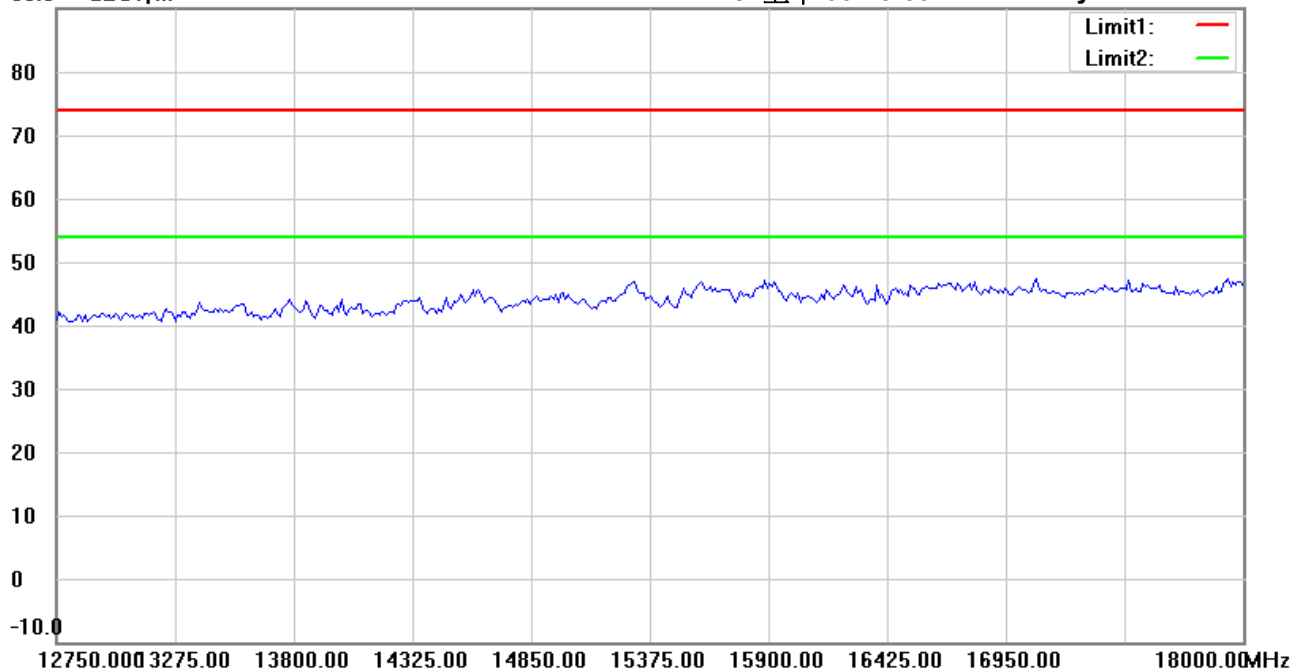

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH7

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #5


Date: 2023/2/25

Temperature: 21.1 °C

90.0 dBuV/m

Time: 上午 03:43:31

Humidity: 62.8 %

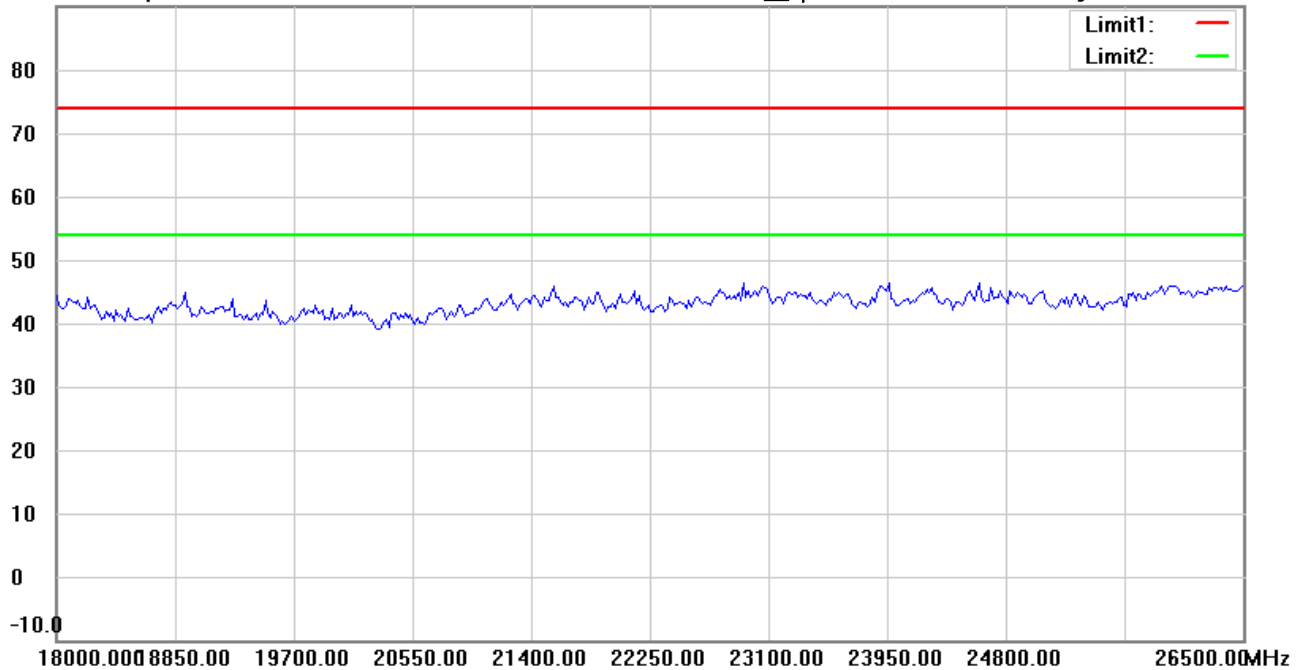

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH7

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#10


Date: 2023/2/25

Temperature:21.1 °C

90.0 dBuV/m

Time: 上午 03:49:00

Humidity:62.8 %

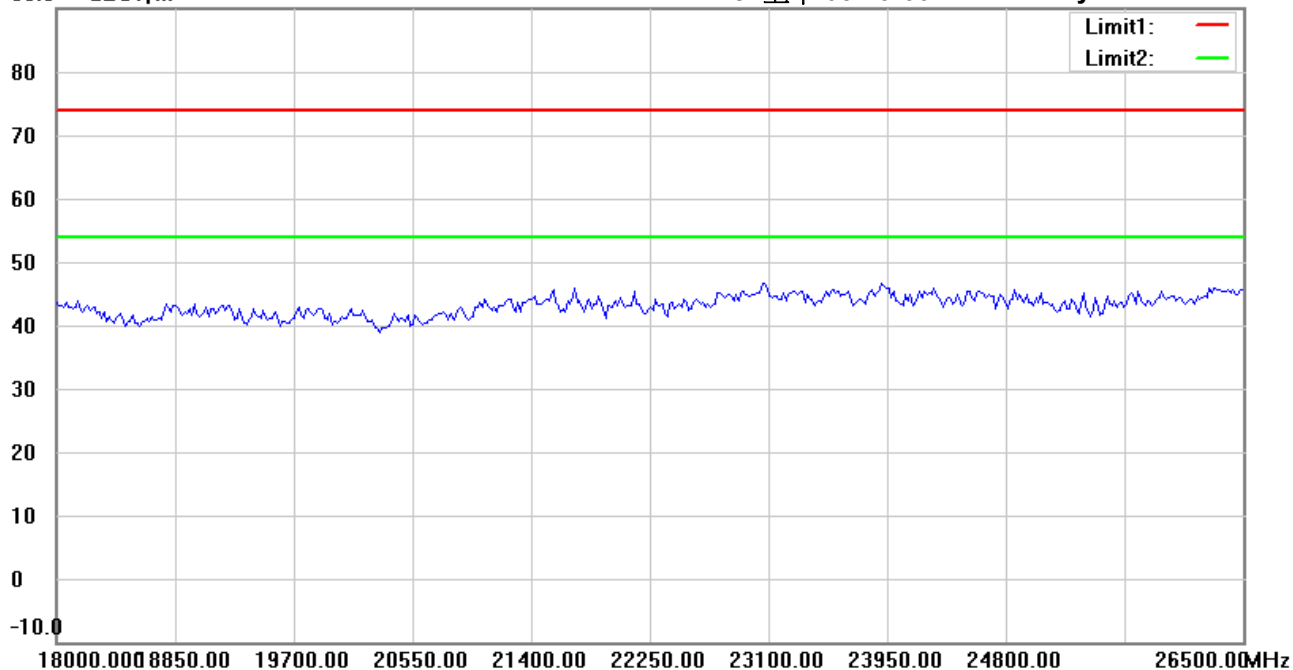

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH7

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#1


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 04:04:01

Humidity:72.9 %

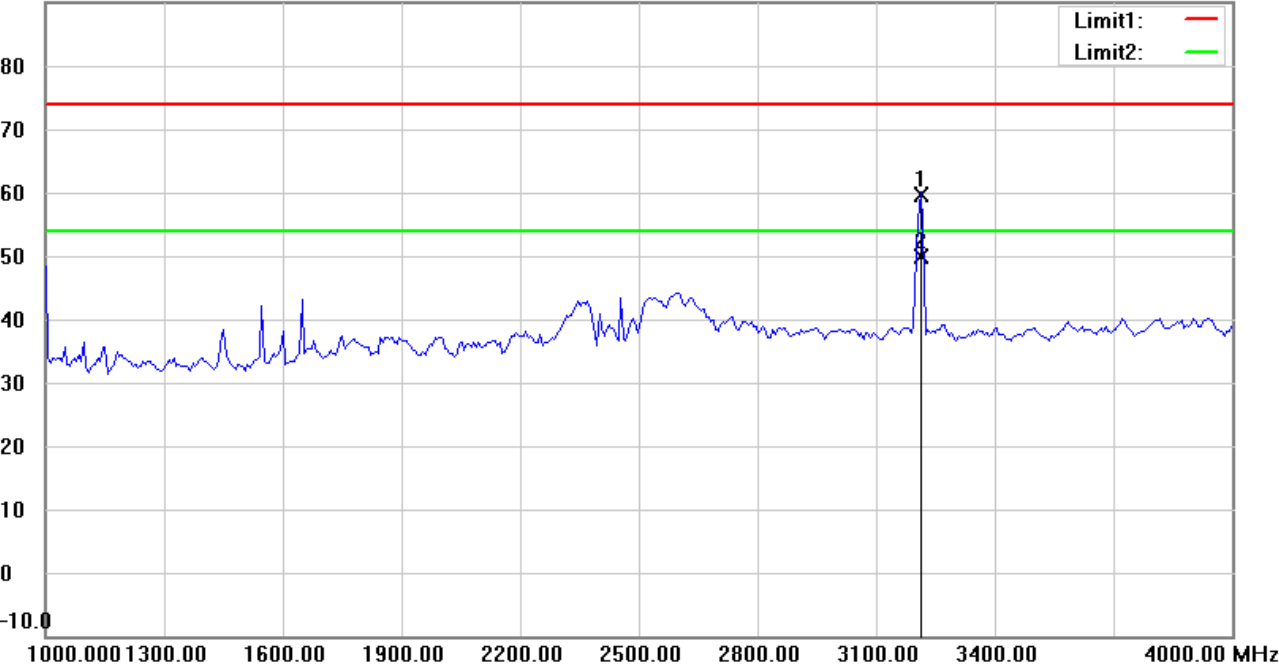

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3206.413	62.84	peak	-3.31	59.53	74.00	150	131	-14.47	
*	3206.413	53.11	AVG	-3.31	49.80	54.00	150	131	-4.20	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #6


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 04:08:49

Humidity: 72.9 %

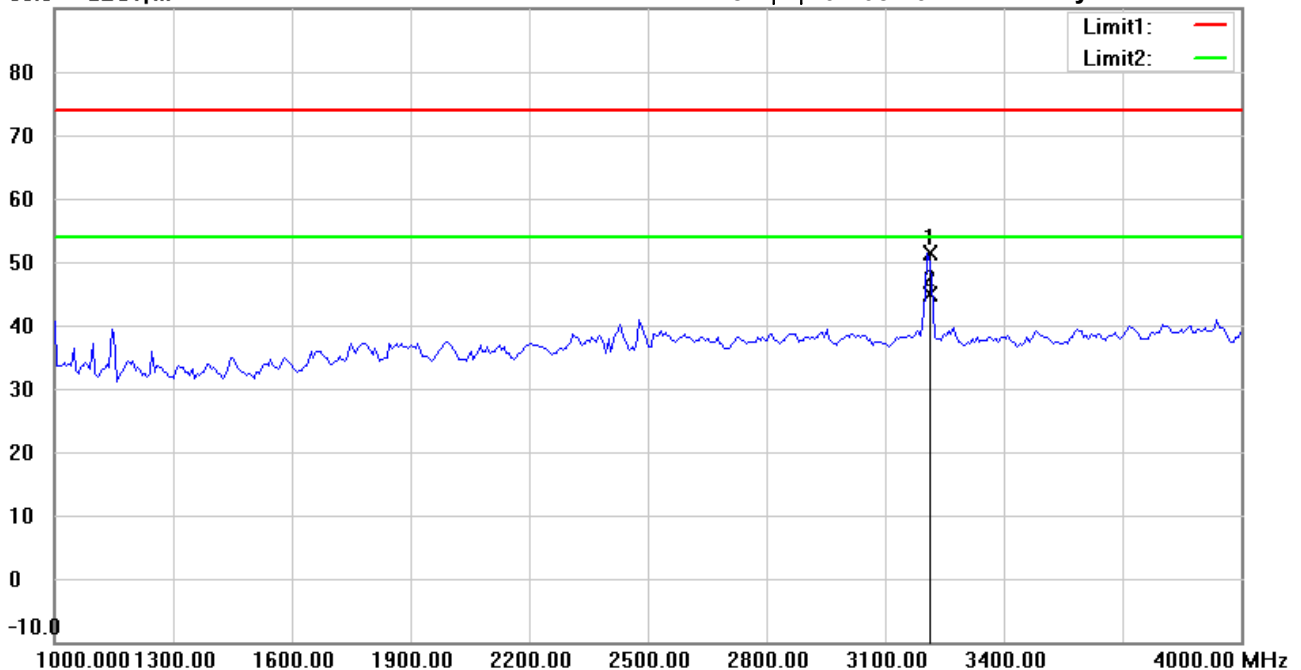

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3206.413	54.71	peak	-3.31	51.40	74.00	150	148	-22.60	
*	3206.413	48.27	AVG	-3.31	44.96	54.00	150	148	-9.04	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#2


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 04:05:23

Humidity: 72.9 %

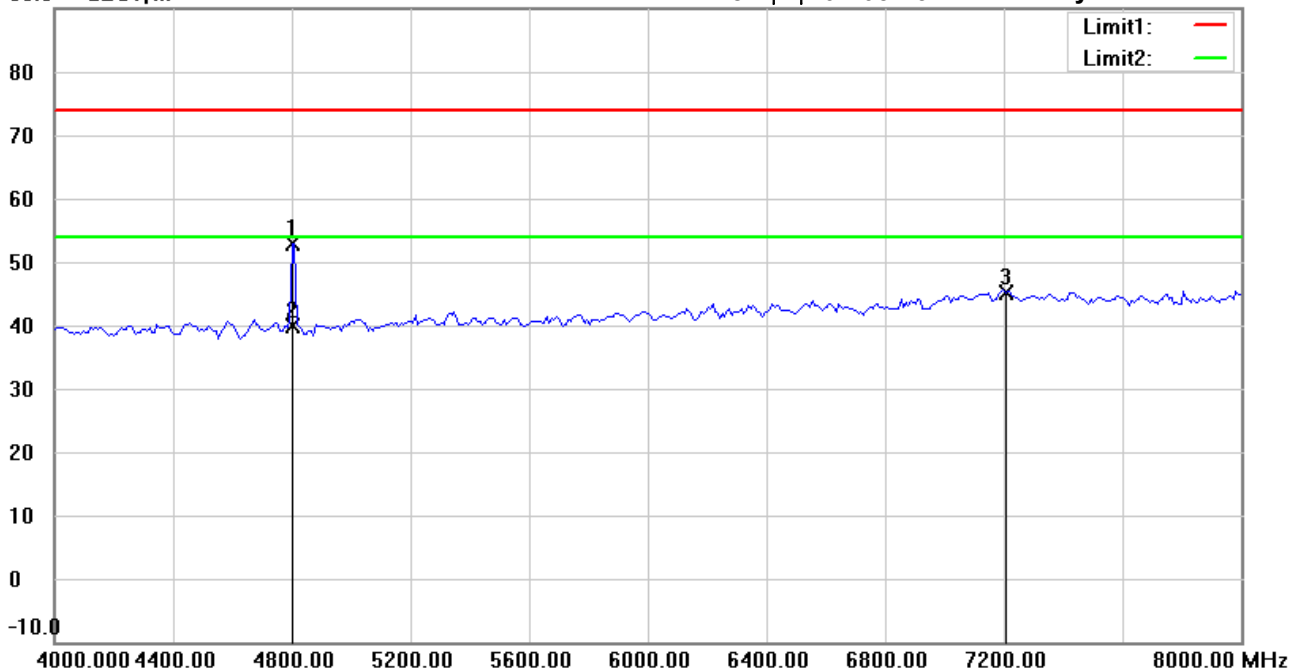

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4801.603	54.55	peak	-1.74	52.81	74.00	150	276	-21.19	
*	4801.603	41.55	AVG	-1.74	39.81	54.00	150	276	-14.19	
	7206.000	41.17	peak	4.01	45.18	74.00	150	103	-28.82	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #7


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 04:10:11

Humidity: 72.9 %

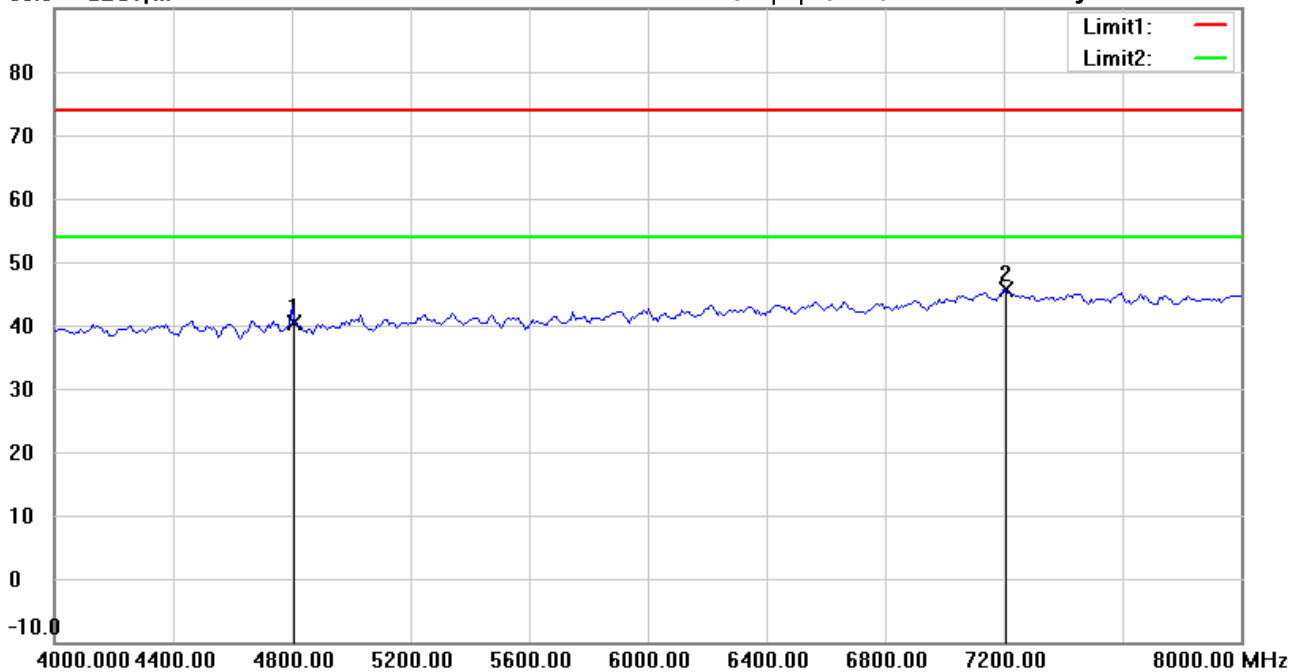

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4804.000	42.04	peak	-1.73	40.31	74.00	150	223	-33.69	
*	7206.000	41.64	peak	4.01	45.65	74.00	150	57	-28.35	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#3


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 04:06:57

Humidity: 72.9 %

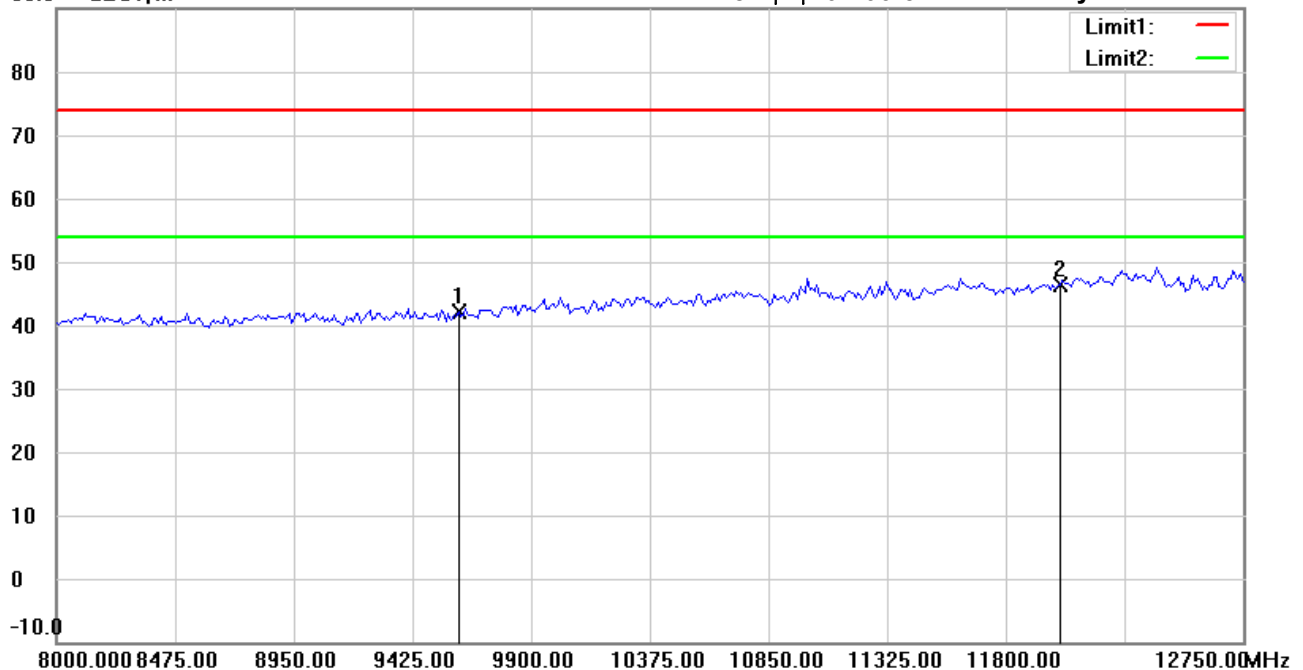

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	35.30	peak	6.80	42.10	74.00	150	64	-31.90	
*	12010.000	34.32	peak	12.09	46.41	74.00	150	302	-27.59	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#8


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 04:11:37

Humidity: 72.9 %

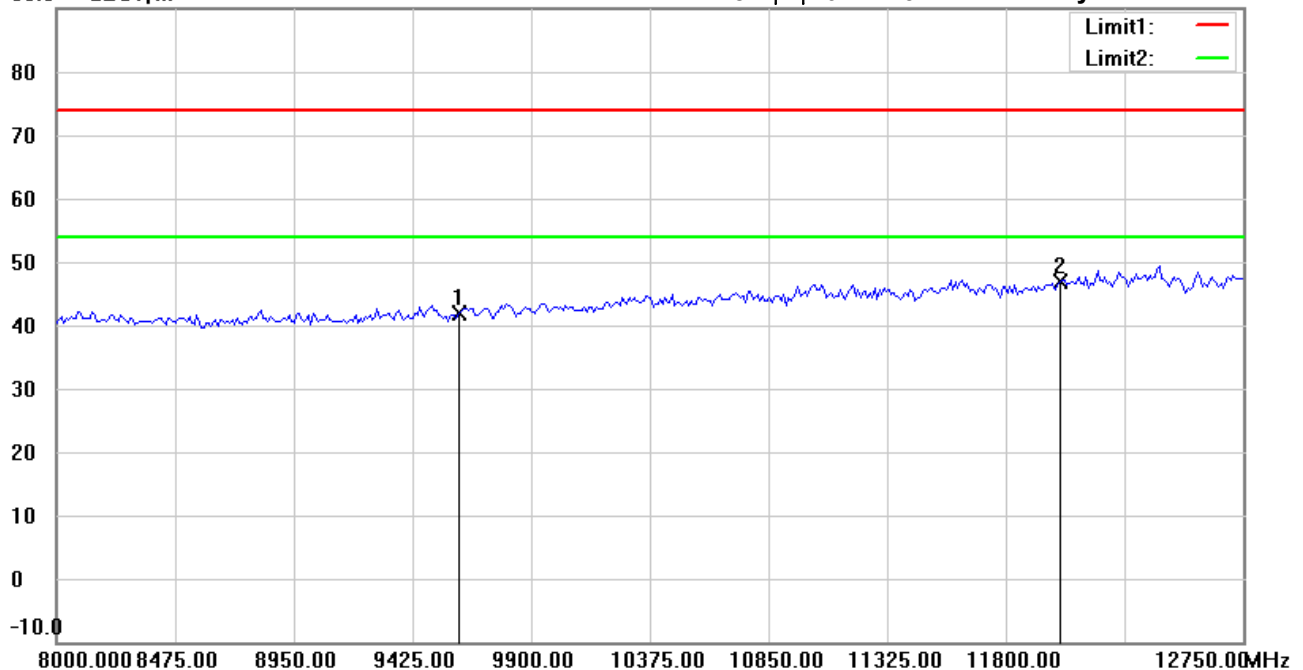

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	35.10	peak	6.80	41.90	74.00	150	205	-32.10	
*	12010.000	34.76	peak	12.09	46.85	74.00	150	91	-27.15	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#4


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 04:07:13

Humidity:72.9 %

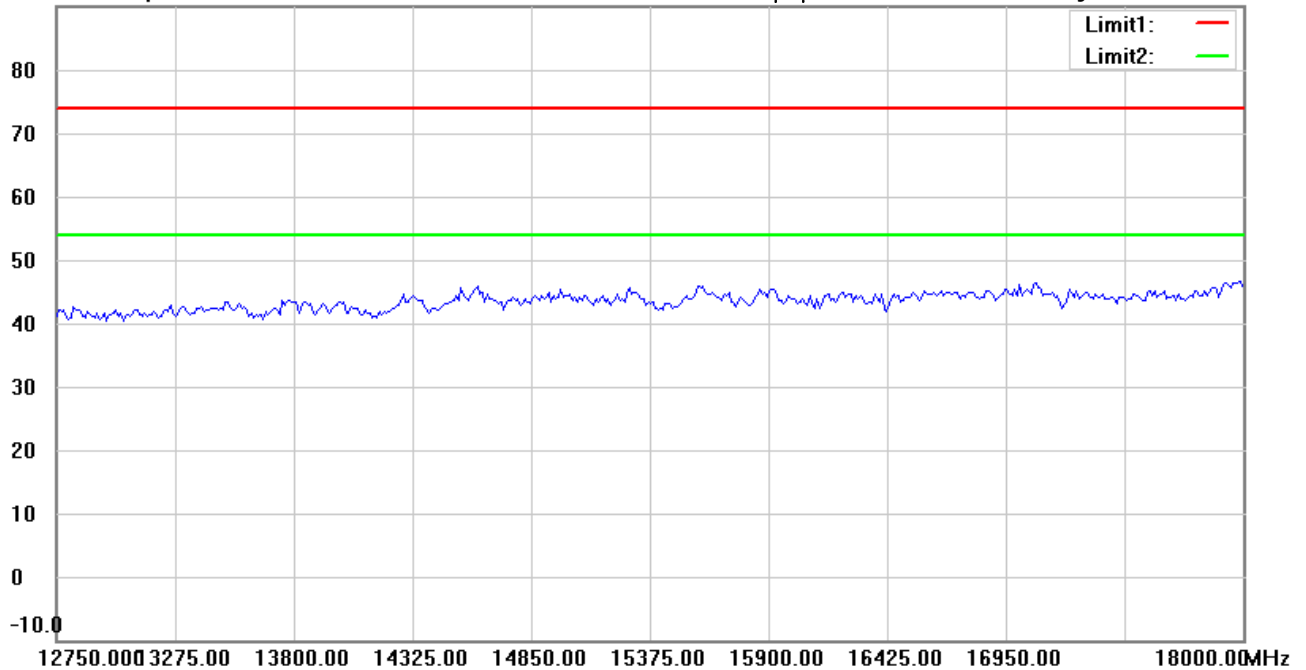

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#9


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 04:11:53

Humidity:72.9 %

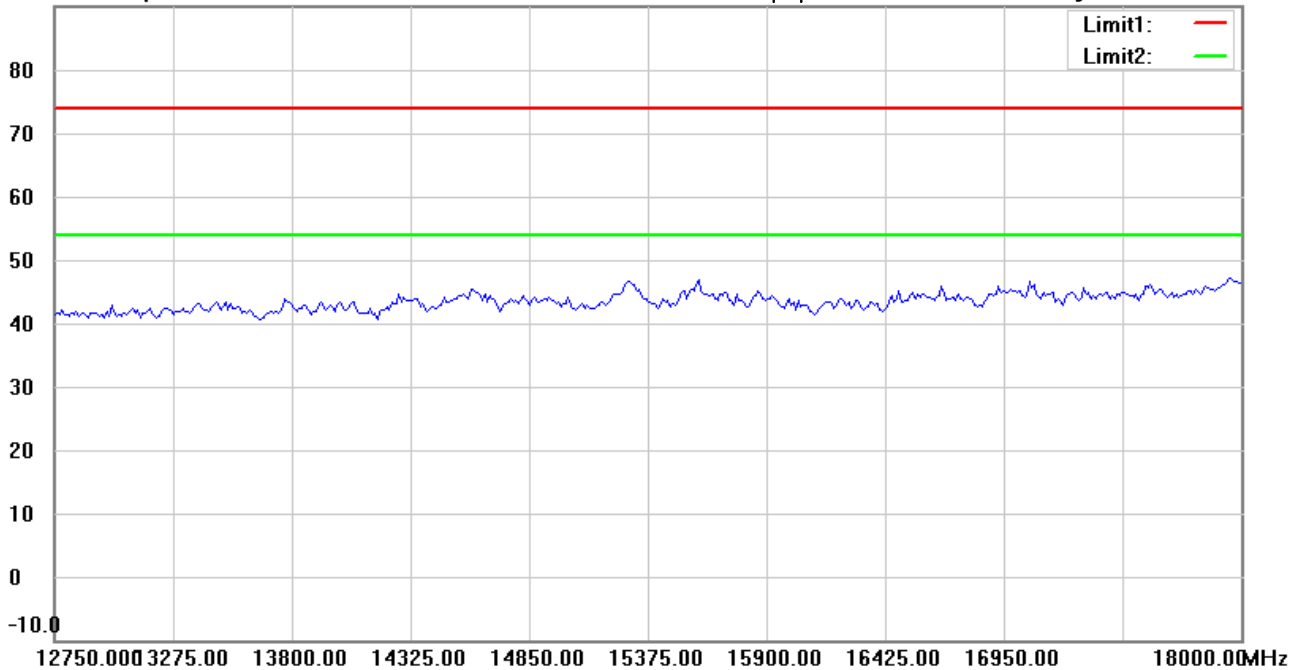

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#5


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 04:07:24

Humidity:72.9 %

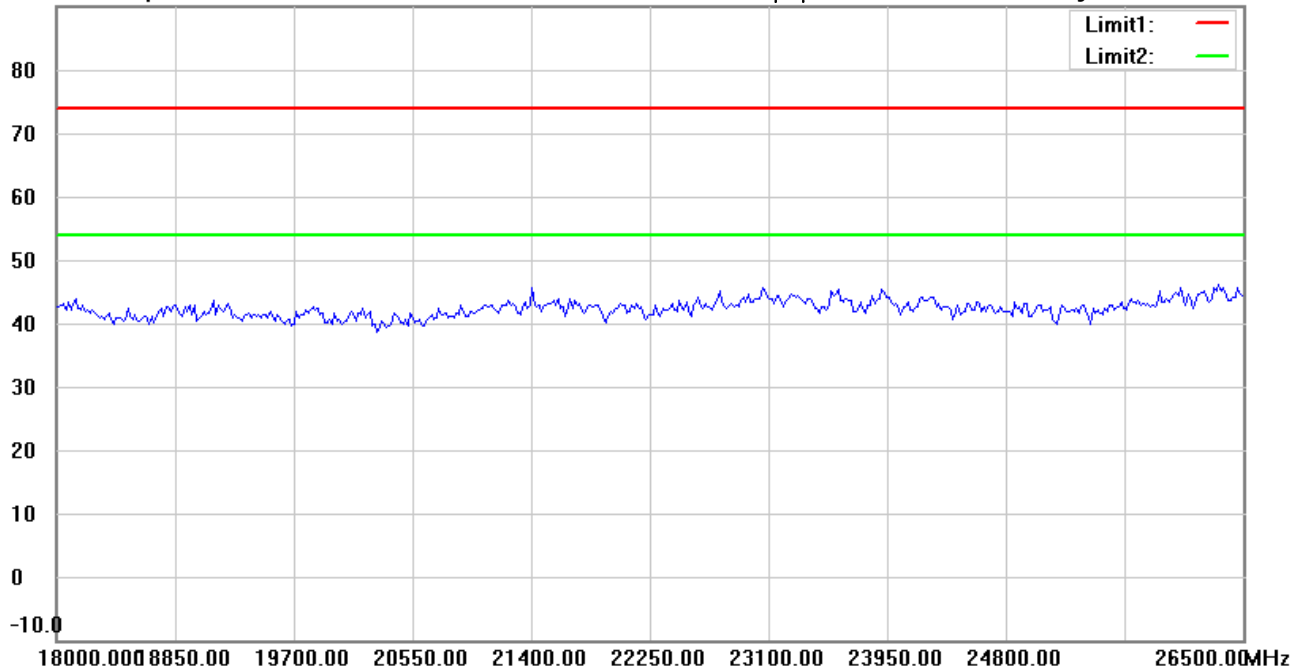

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#10


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 04:12:03

Humidity:72.9 %

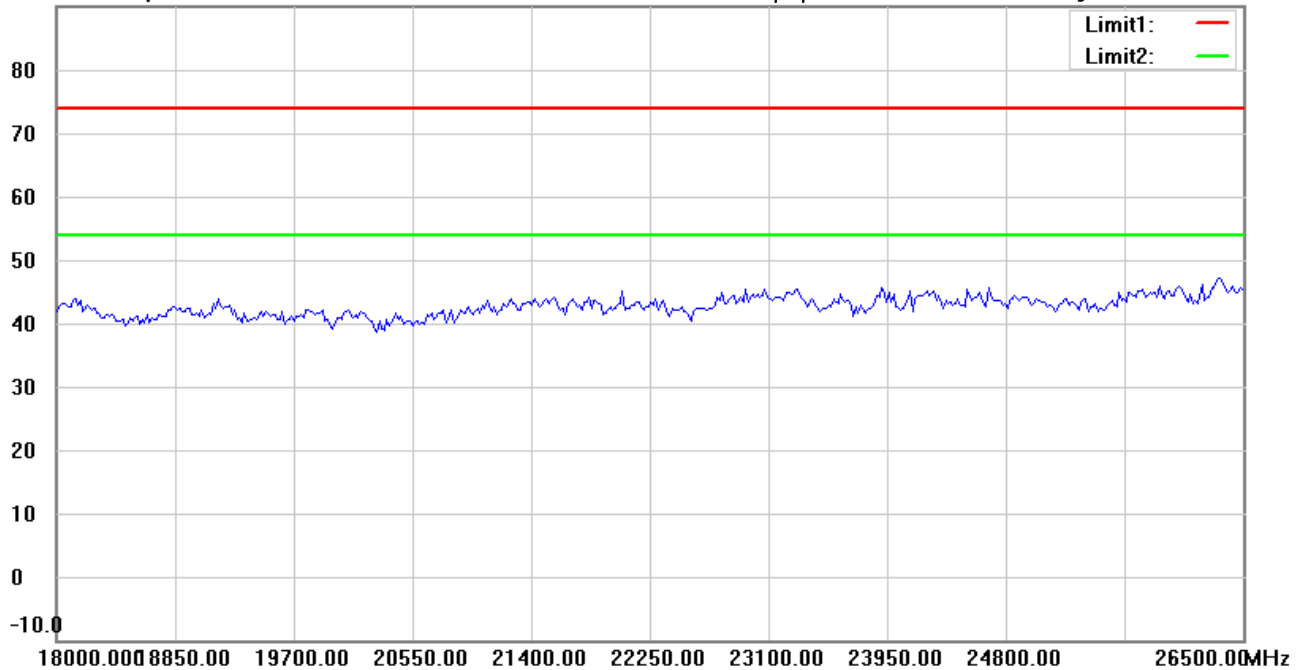

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#1


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 04:34:19

Humidity: 72.9 %

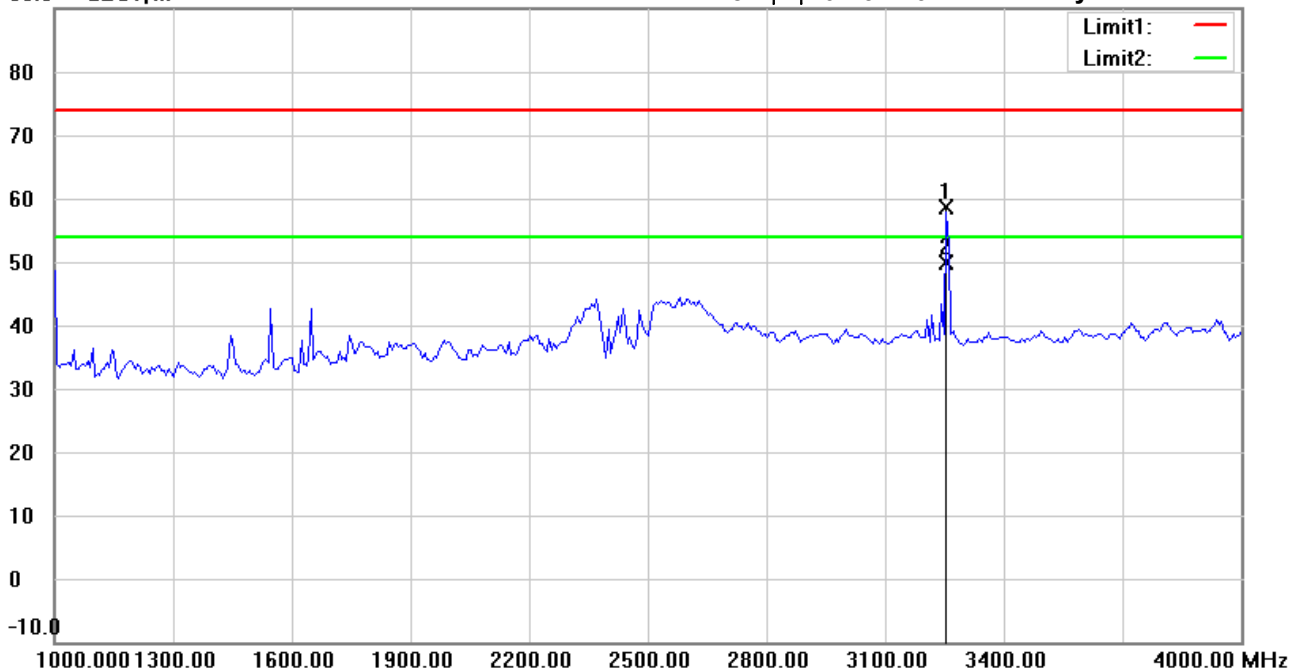

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3254.509	62.14	peak	-3.48	58.66	74.00	150	132	-15.34	
*	3254.509	53.26	AVG	-3.48	49.78	54.00	150	132	-4.22	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#6


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 04:39:01

Humidity:72.9 %

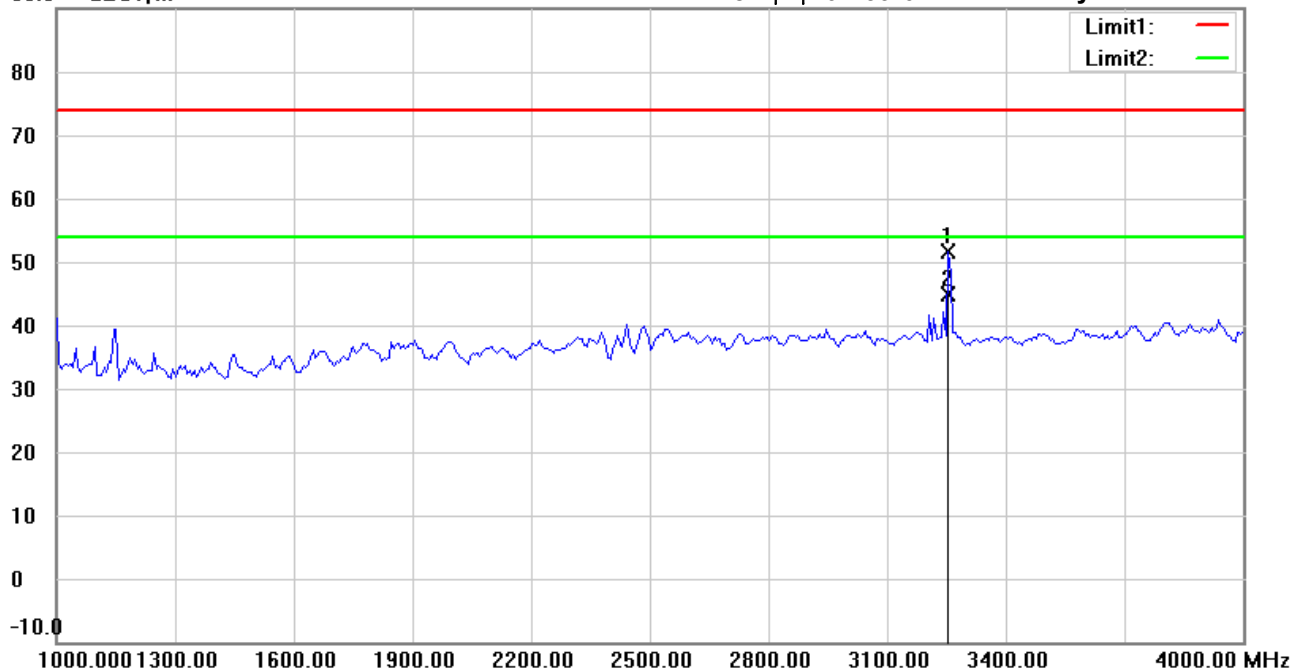

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3254.509	55.16	peak	-3.48	51.68	74.00	150	148	-22.32	
*	3254.509	48.33	AVG	-3.48	44.85	54.00	150	148	-9.15	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#2


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 04:35:40

Humidity:72.9 %

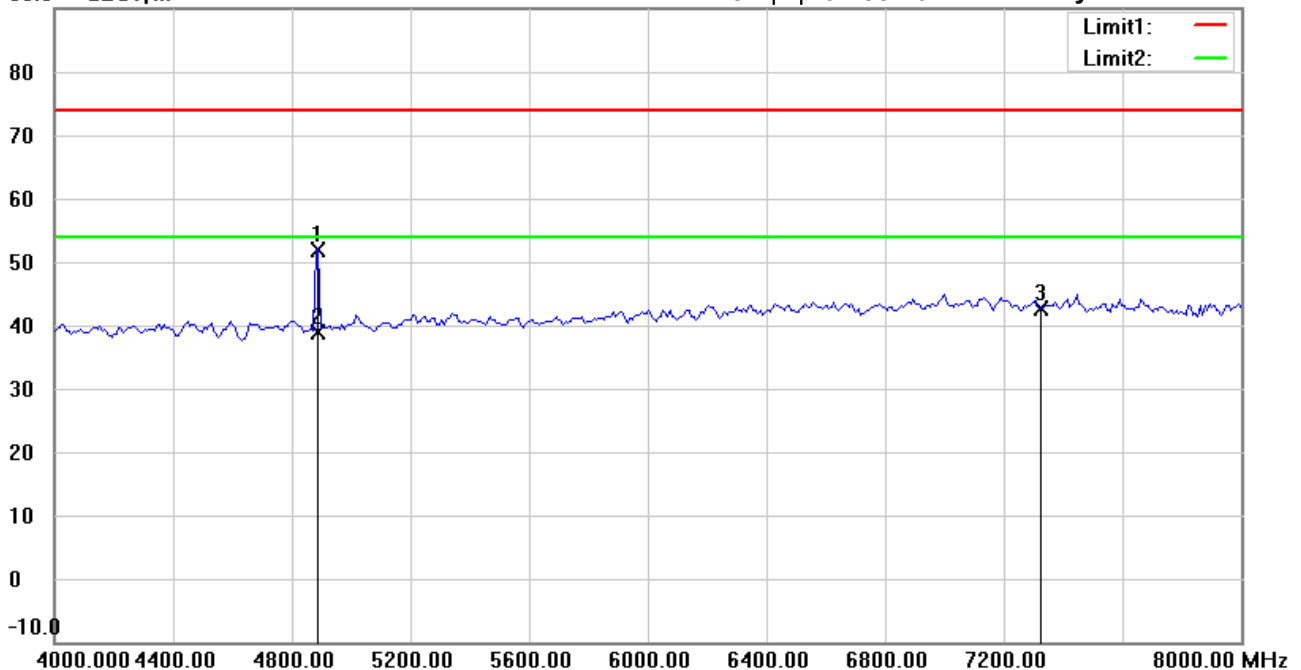

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4881.764	53.39	peak	-1.40	51.99	74.00	150	103	-22.01	
*	4881.764	40.17	AVG	-1.40	38.77	54.00	150	103	-15.23	
	7323.000	38.71	peak	3.86	42.57	74.00	150	24	-31.43	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #7


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 04:40:22

Humidity: 72.9 %

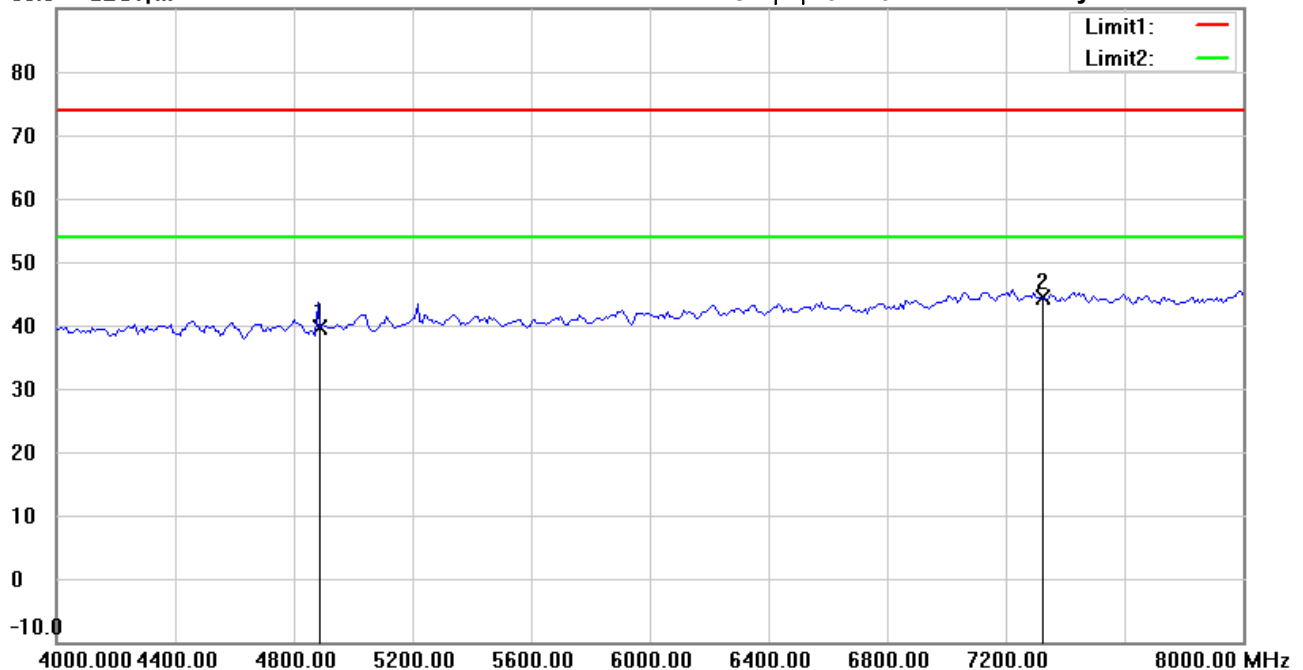

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4882.000	41.14	peak	-1.40	39.74	74.00	150	98	-34.26	
*	7323.000	40.58	peak	3.86	44.44	74.00	150	184	-29.56	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#3


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 04:37:12

Humidity: 72.9 %

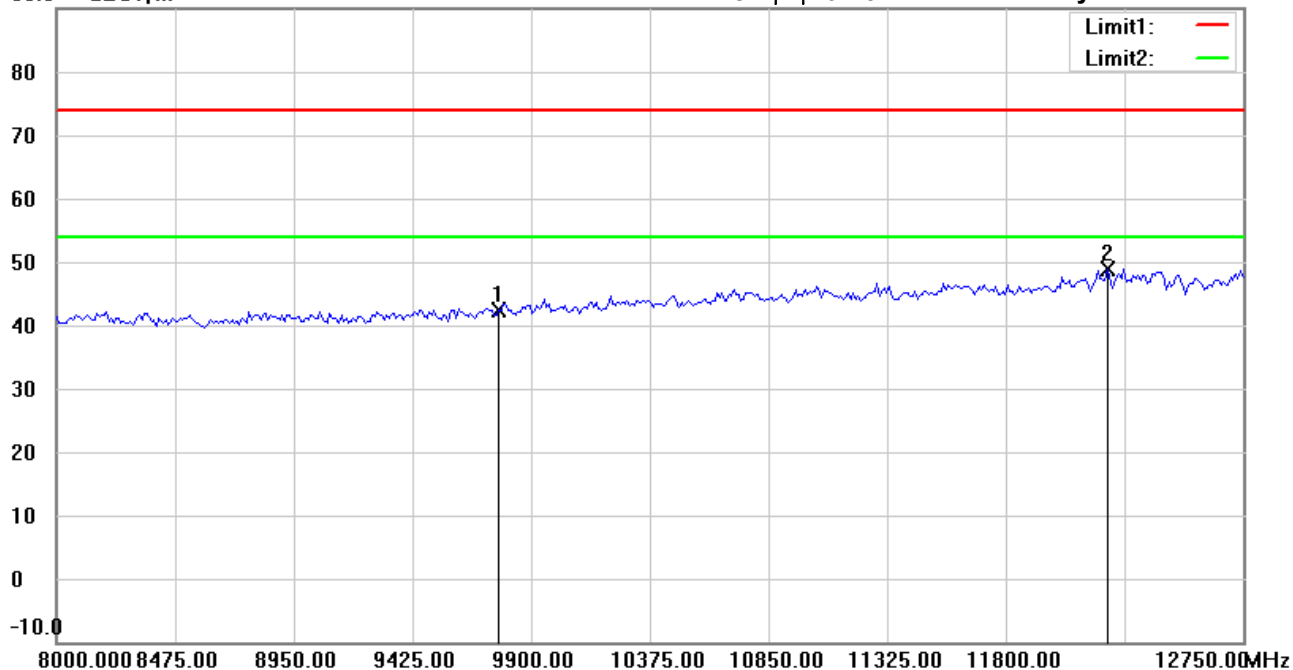

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9764.000	35.35	peak	7.03	42.38	74.00	150	92	-31.62	
*	12205.000	35.35	peak	13.58	48.93	74.00	150	229	-25.07	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#8


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 04:47:03

Humidity:72.9 %

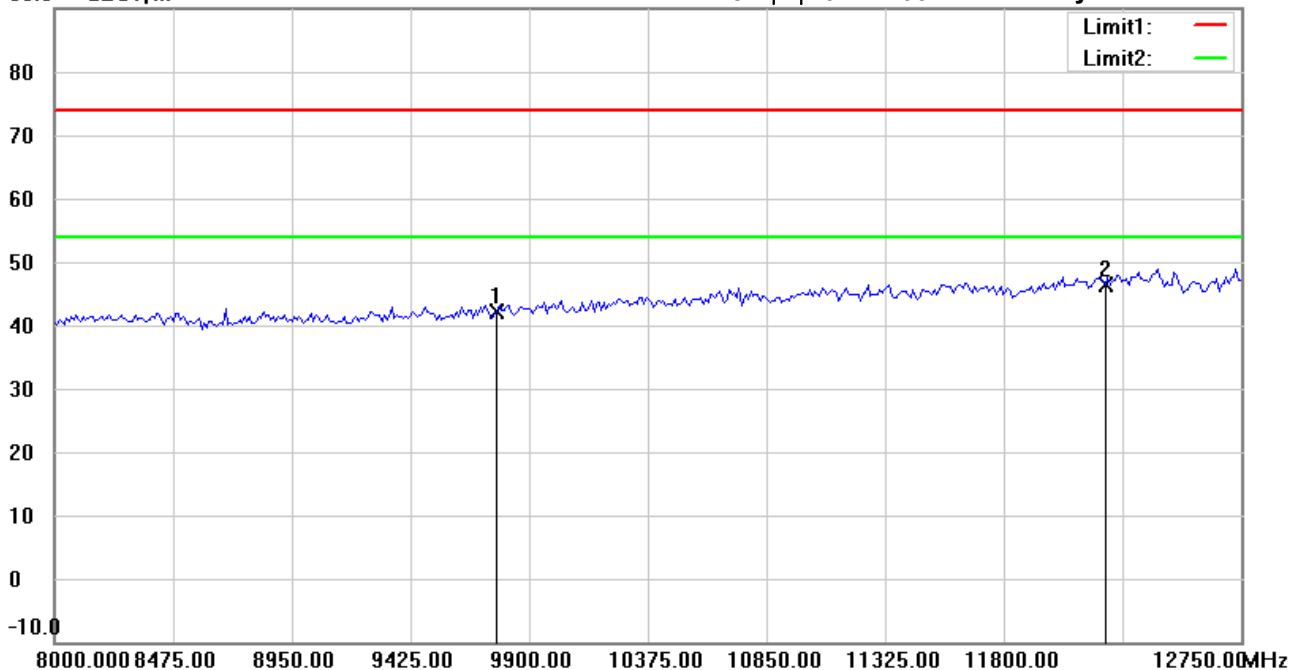

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9764.000	35.13	peak	7.03	42.16	74.00	150	67	-31.84	
*	12205.000	32.81	peak	13.58	46.39	74.00	150	112	-27.61	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#4


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 04:37:26

Humidity:72.9 %

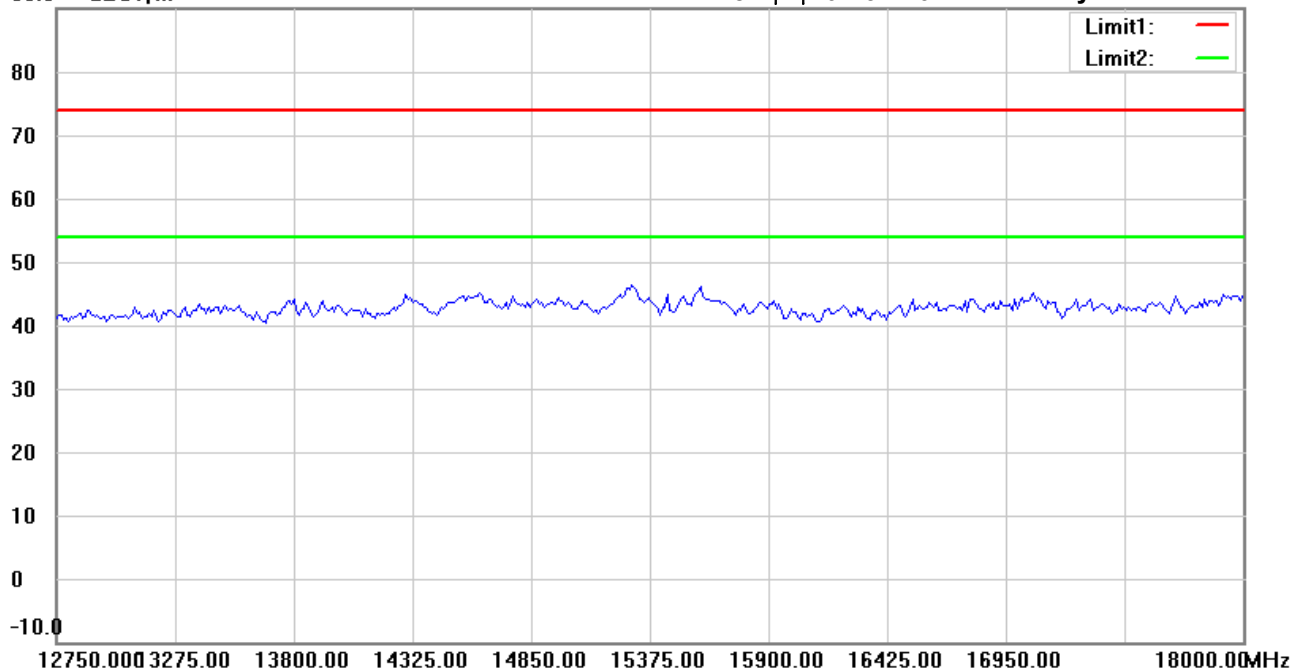

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#9


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 04:47:17

Humidity:72.9 %

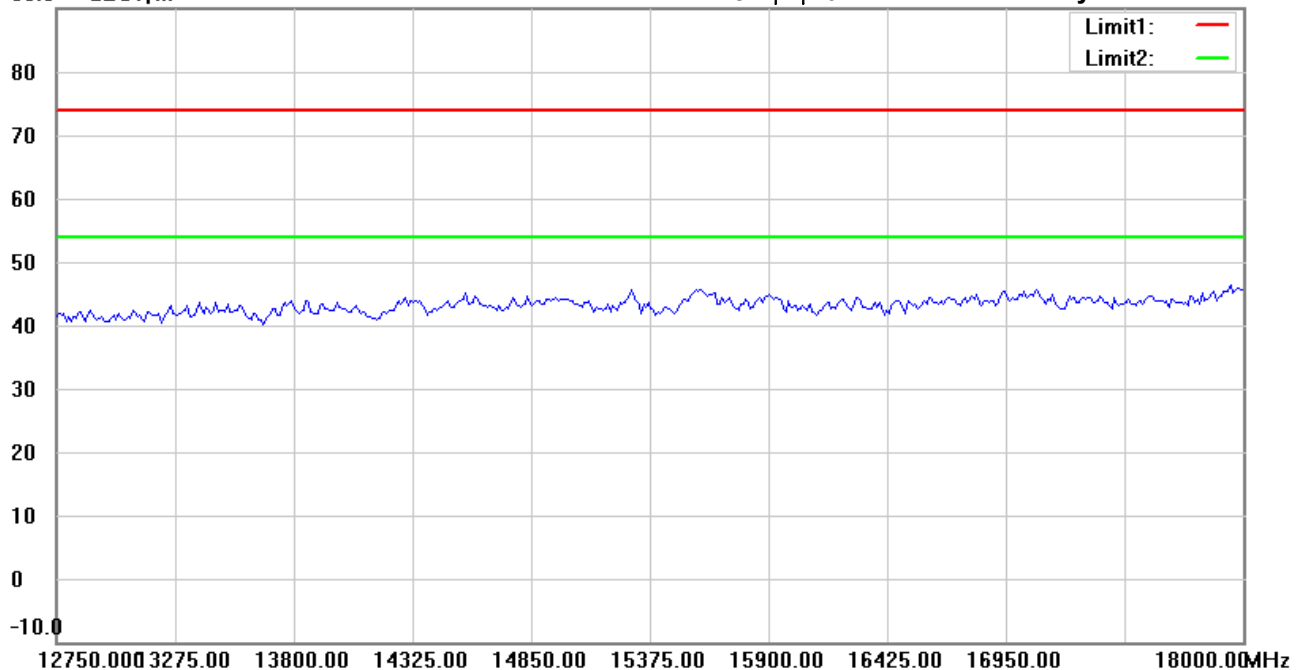

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#5


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 04:37:36

Humidity:72.9 %

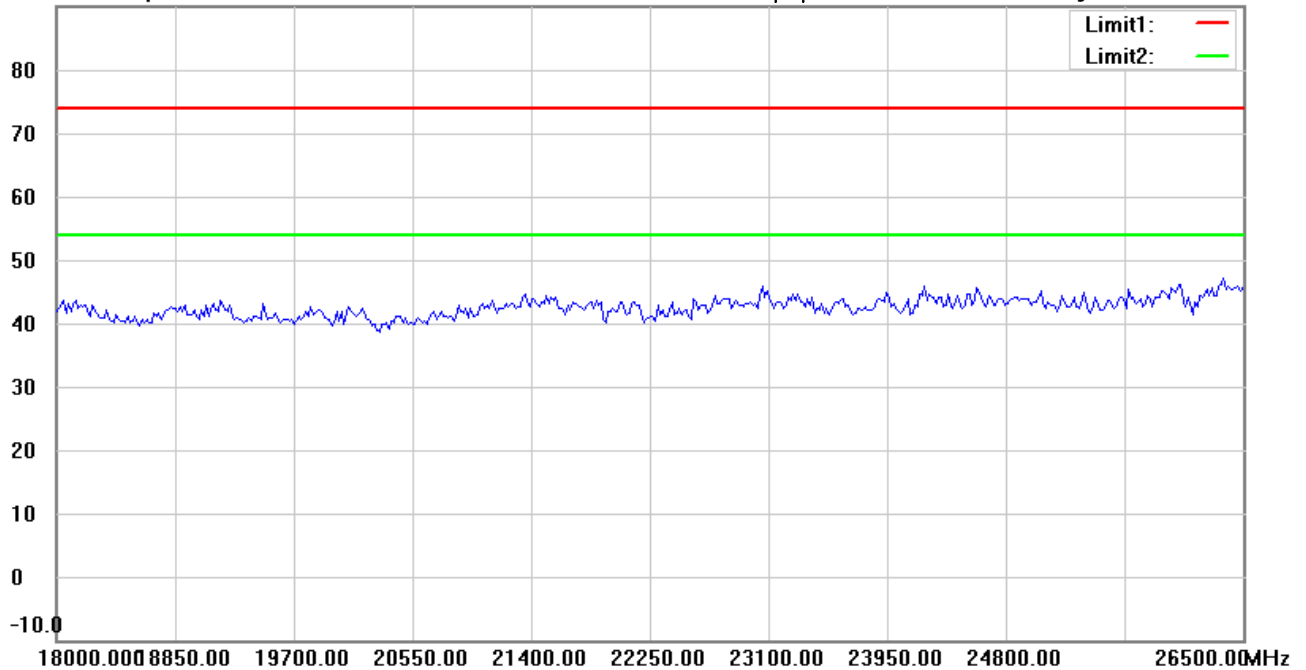

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#10


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 04:47:27

Humidity:72.9 %

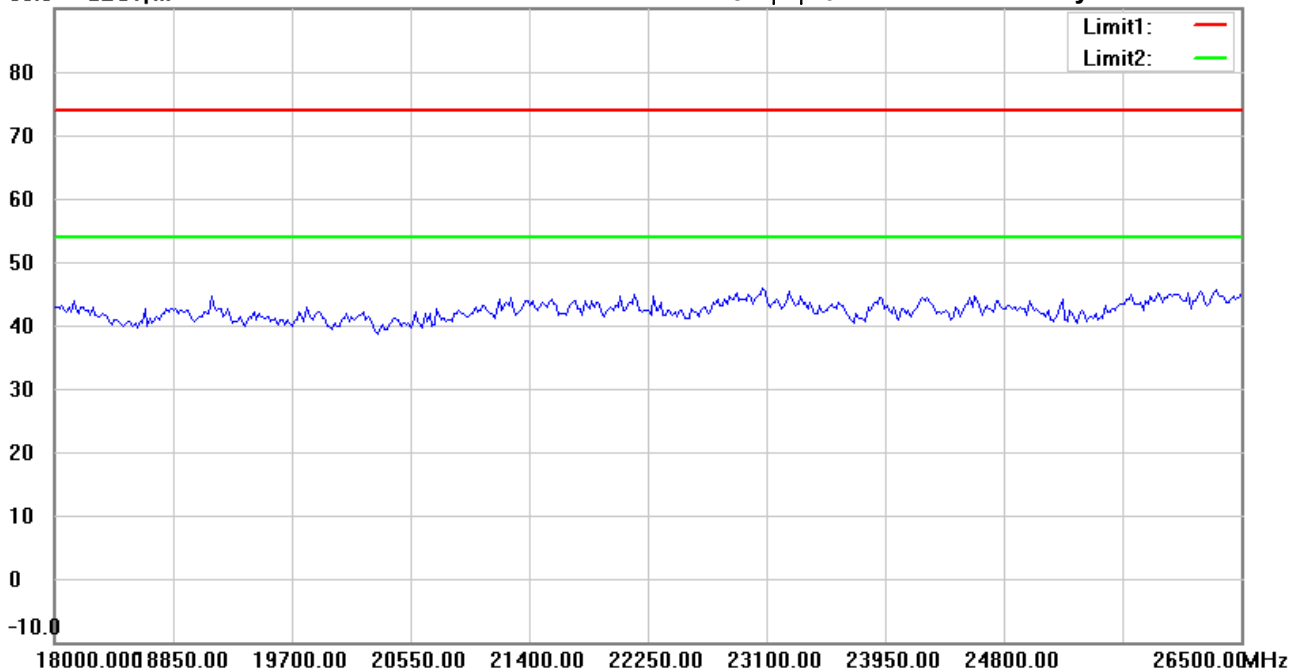

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#1


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 04:59:33

Humidity:72.9 %

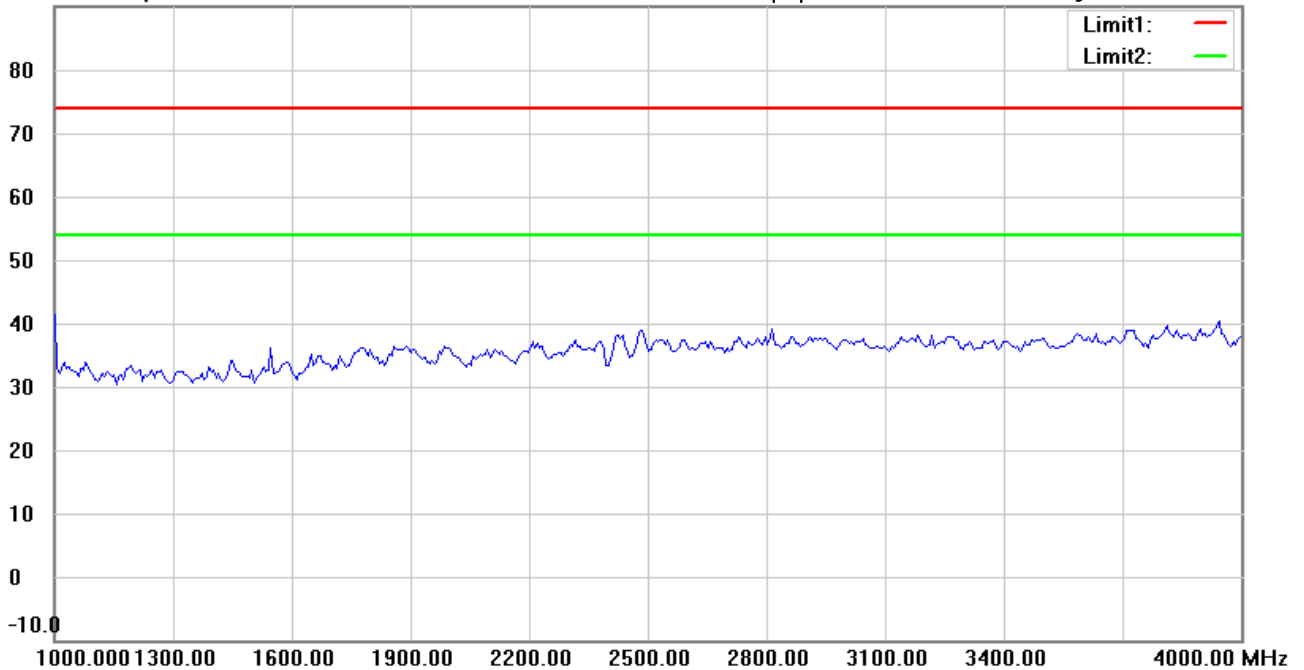

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #6


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 05:04:16

Humidity: 72.9 %

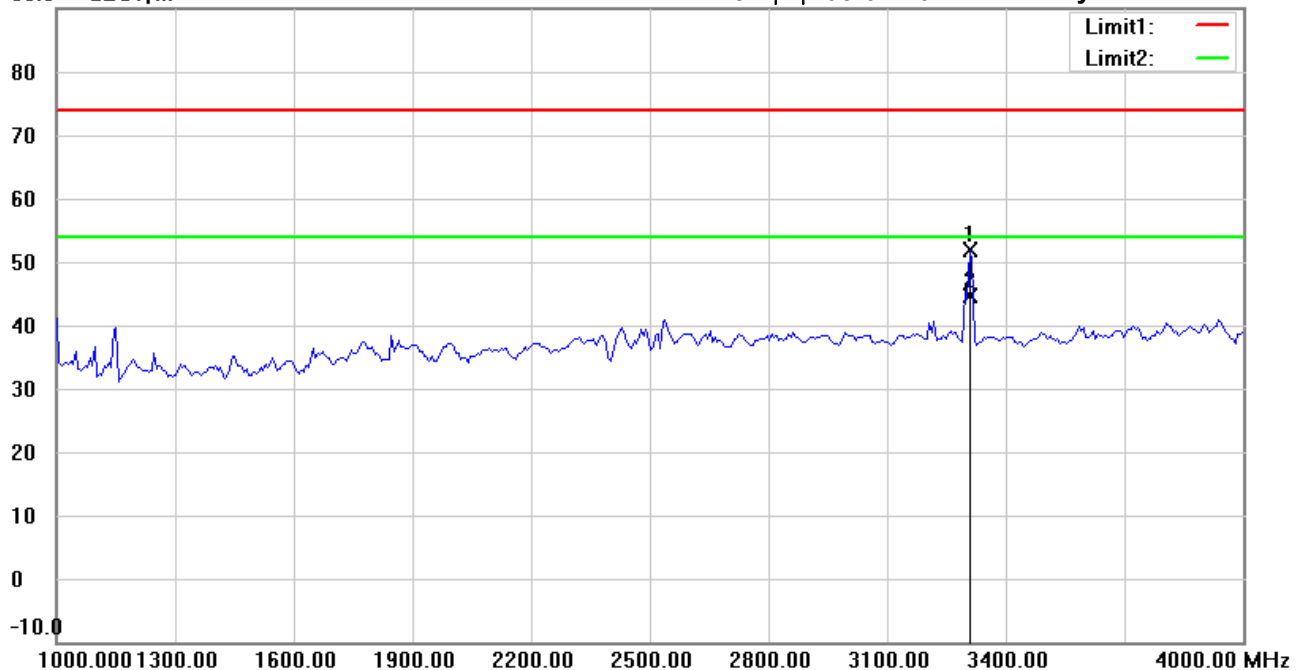

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3308.617	55.51	peak	-3.63	51.88	74.00	150	142	-22.12	
*	3308.617	48.24	AVG	-3.63	44.61	54.00	150	142	-9.39	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#2


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 05:00:54

Humidity:72.9 %

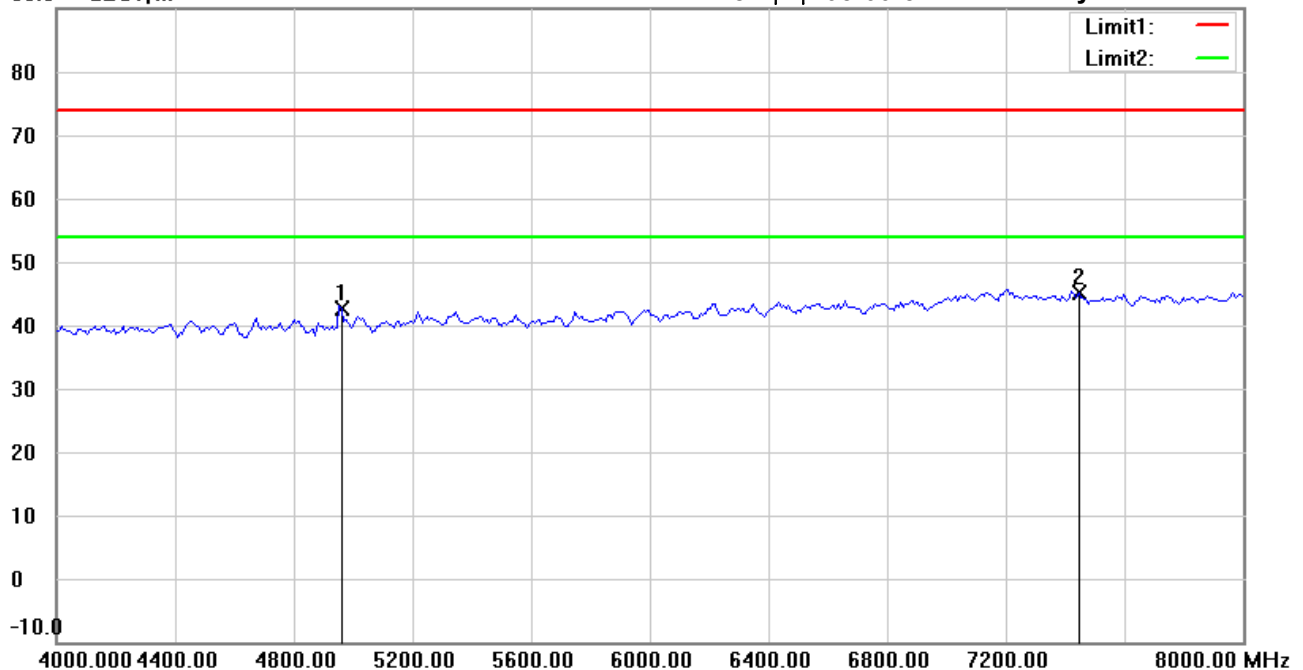

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	43.45	peak	-0.79	42.66	74.00	150	135	-31.34	
*	7440.000	41.42	peak	3.83	45.25	74.00	150	221	-28.75	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 3

Data : #7


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 05:05:37

Humidity: 72.9 %

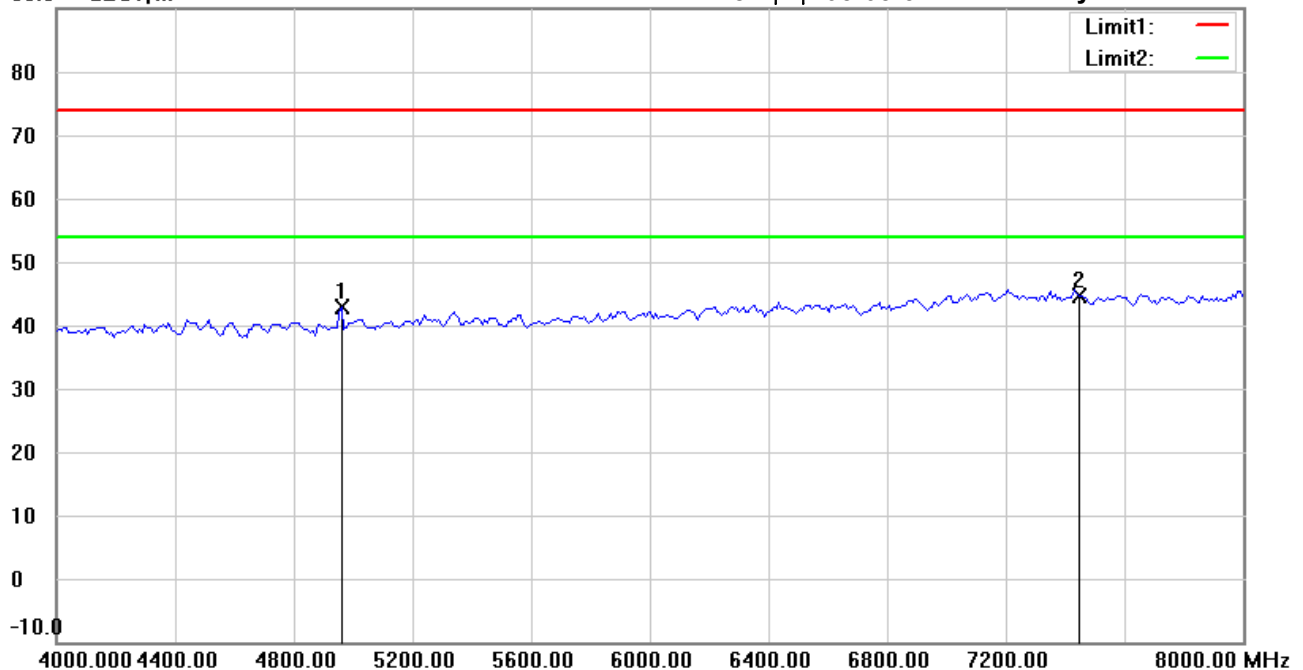

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	43.61	peak	-0.79	42.82	74.00	150	90	-31.18	
*	7440.000	40.82	peak	3.83	44.65	74.00	150	71	-29.35	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#3


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 05:02:28

Humidity:72.9 %

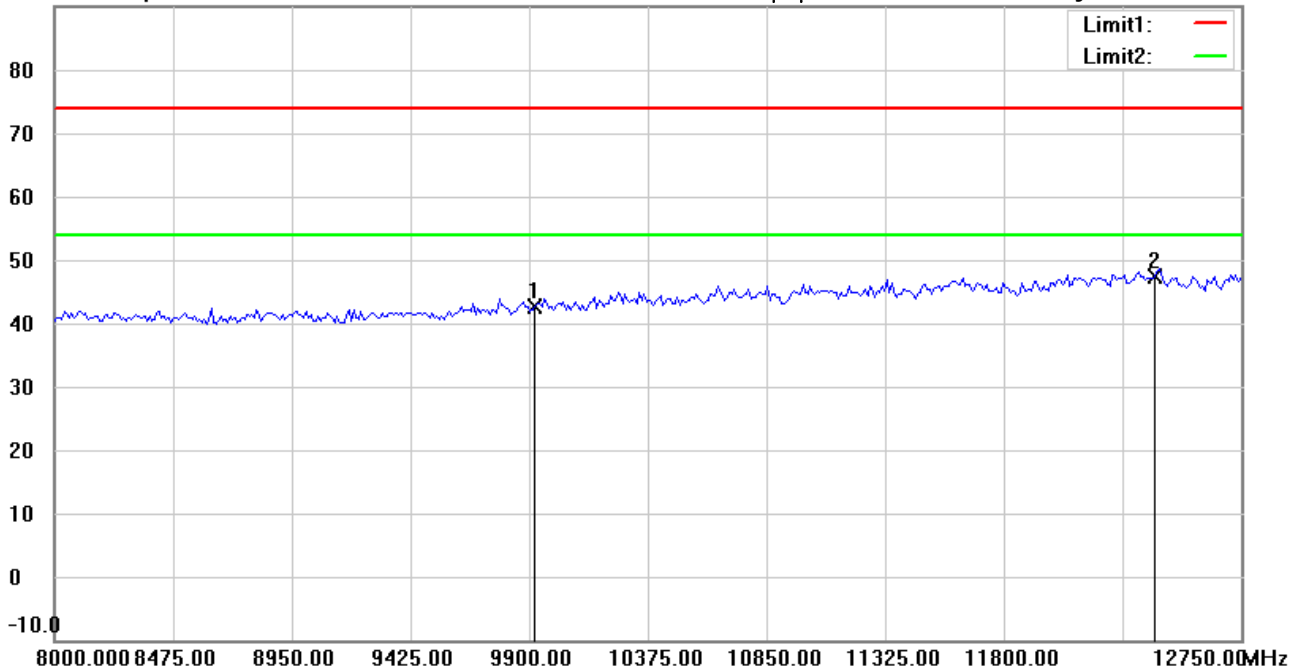

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	35.03	peak	7.54	42.57	74.00	150	65	-31.43	
*	12400.000	33.65	peak	13.71	47.36	74.00	150	147	-26.64	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#8


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 05:07:07

Humidity: 72.9 %

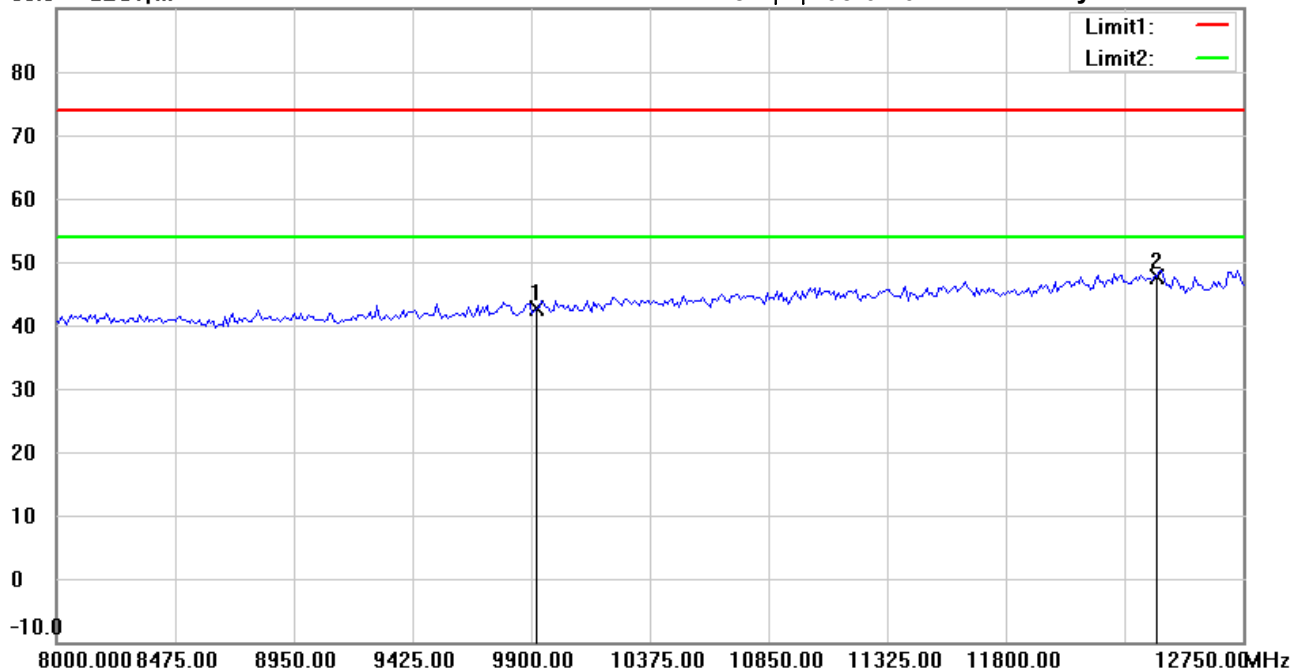

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	34.98	peak	7.54	42.52	74.00	150	92	-31.48	
*	12400.000	34.03	peak	13.71	47.74	74.00	150	244	-26.26	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#4


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 05:02:42

Humidity:72.9 %

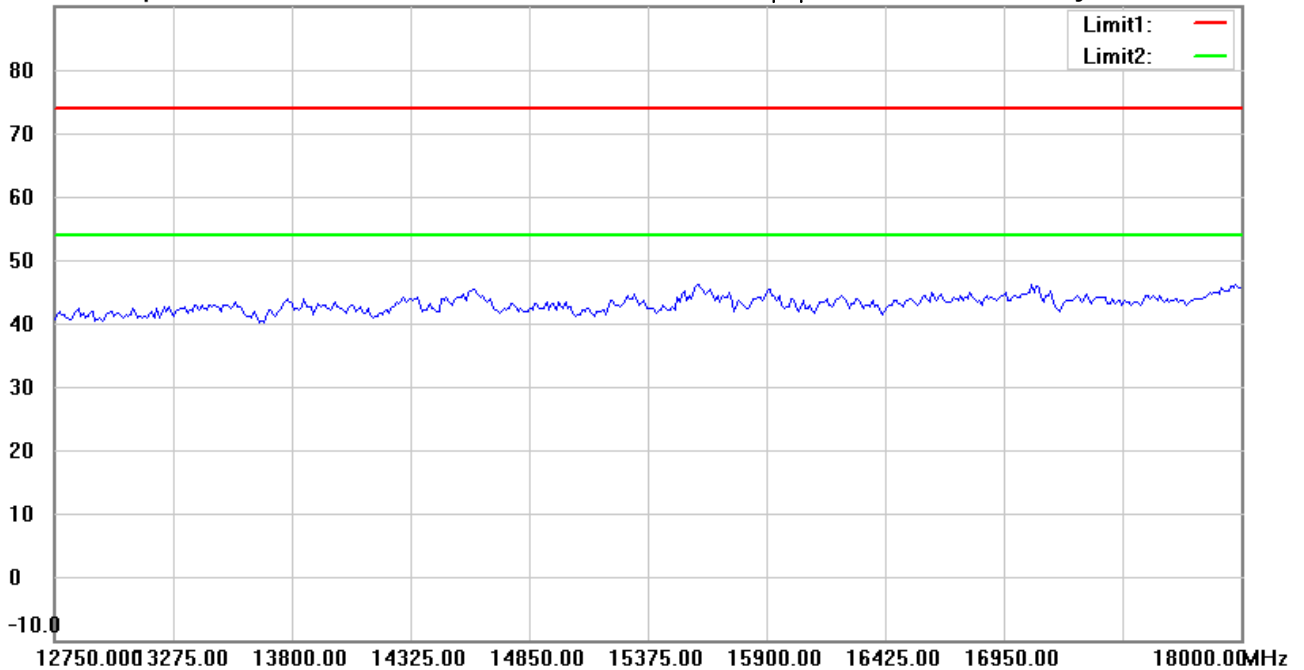

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#9


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 05:07:20

Humidity:72.9 %

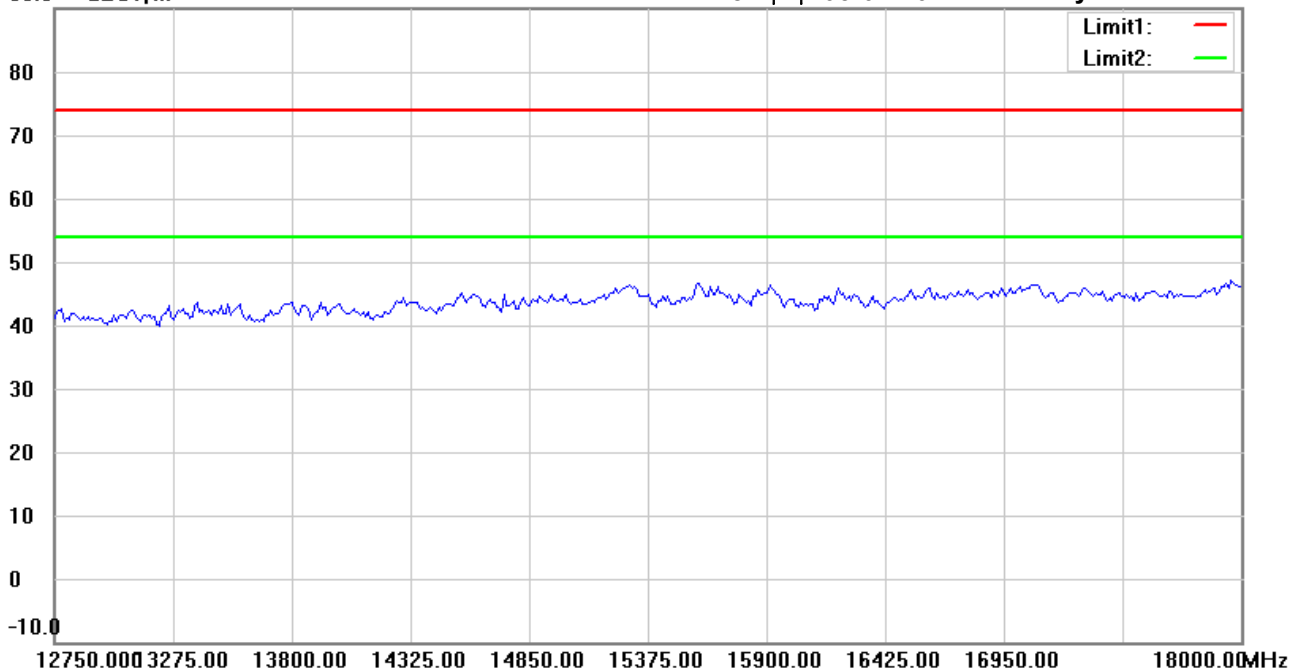

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#5


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 05:02:52

Humidity:72.9 %

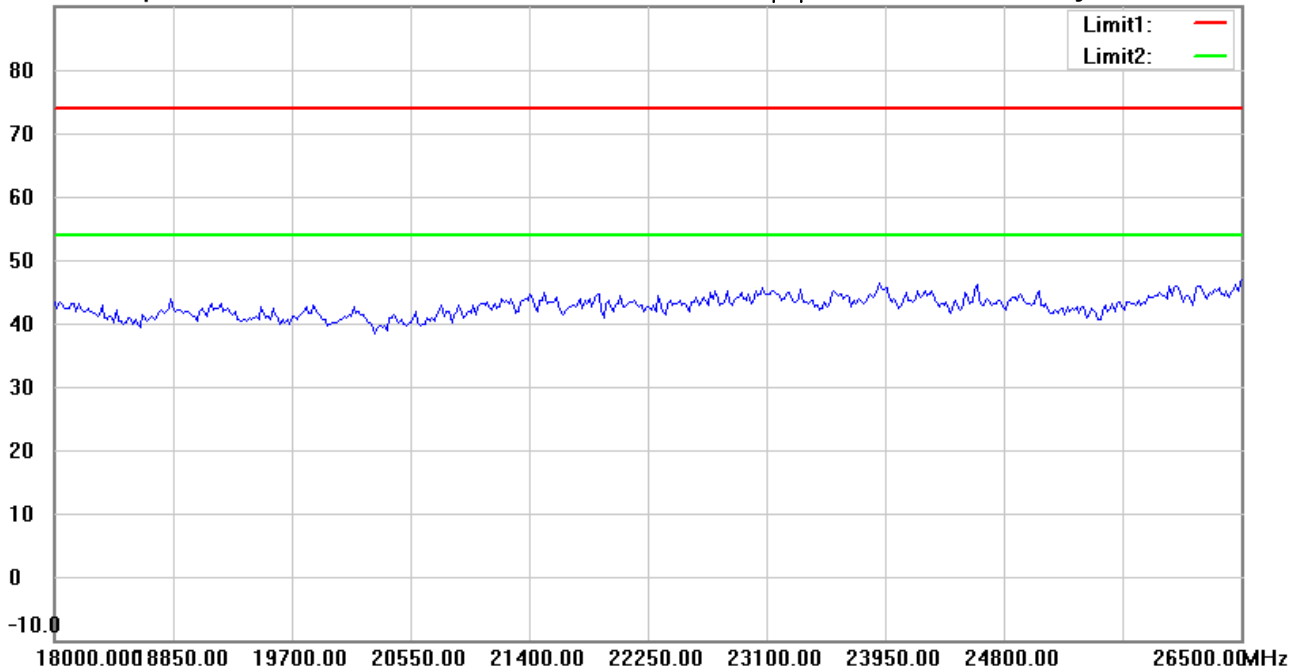

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File :3

Data :#10


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 05:07:30

Humidity:72.9 %

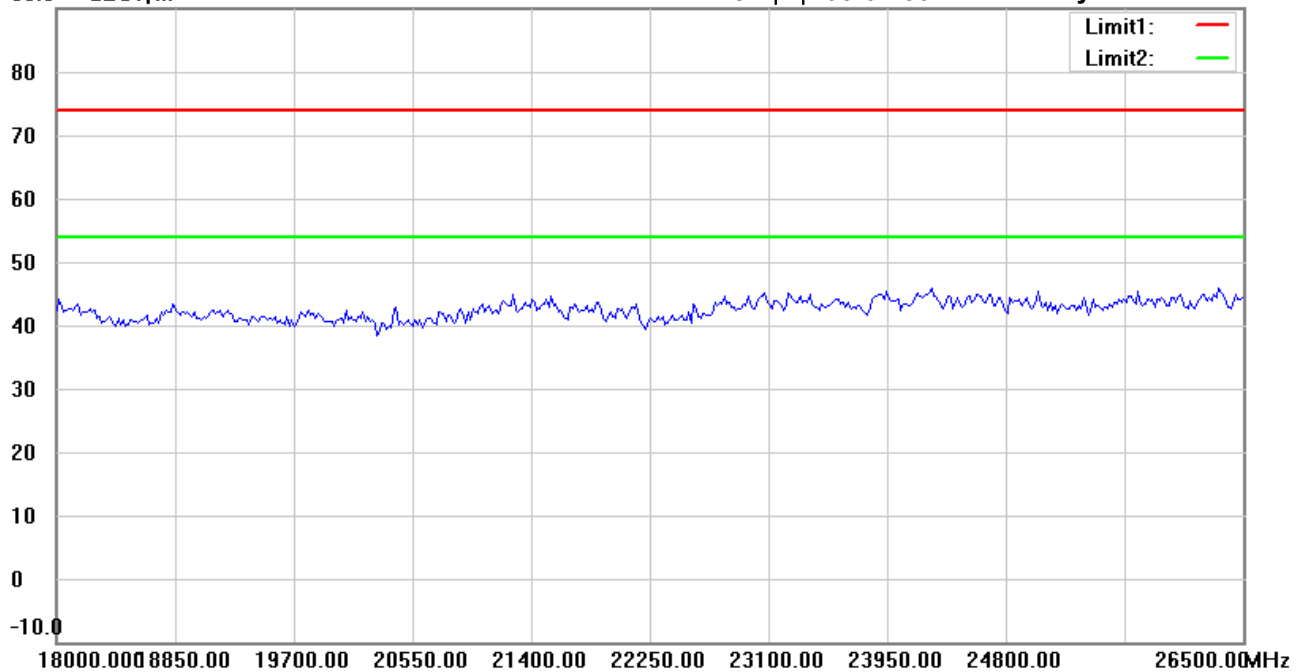

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.


Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

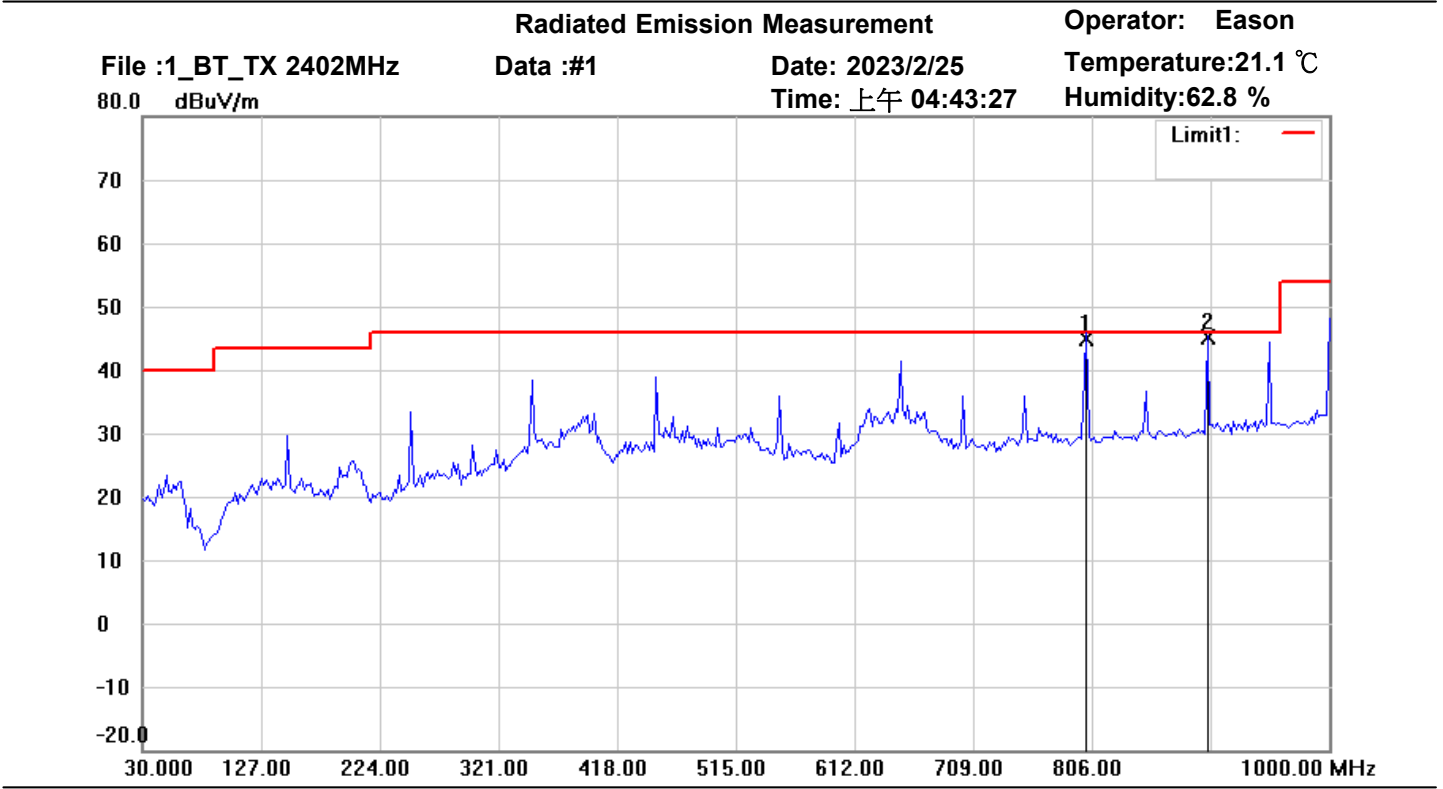

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	801.7234	43.51	QP	1.38	44.89	46.00	100	129	-1.11	
*	900.8617	41.48	QP	3.61	45.09	46.00	100	91	-0.91	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 1_BT_TX 2402MHz

Data : #2


Date: 2023/2/25

Temperature: 21.1 °C

80.0 dBuV/m

Time: 上午 04:44:47

Humidity: 62.8 %

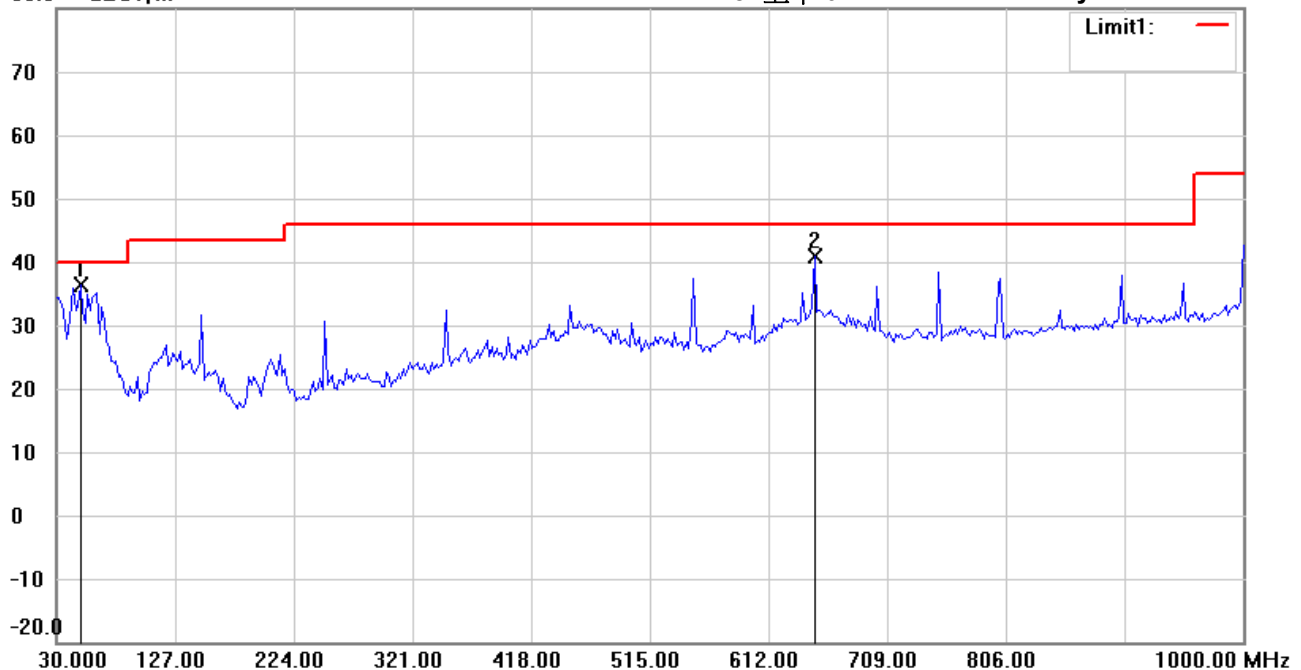

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	49.4388	46.21	peak	-9.74	36.47	40.00	100	165	-3.53	
	650.1001	39.96	peak	0.99	40.95	46.00	100	250	-5.05	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File : 3

Data : #1


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 上午 11:12:51

Humidity: 72.9 %

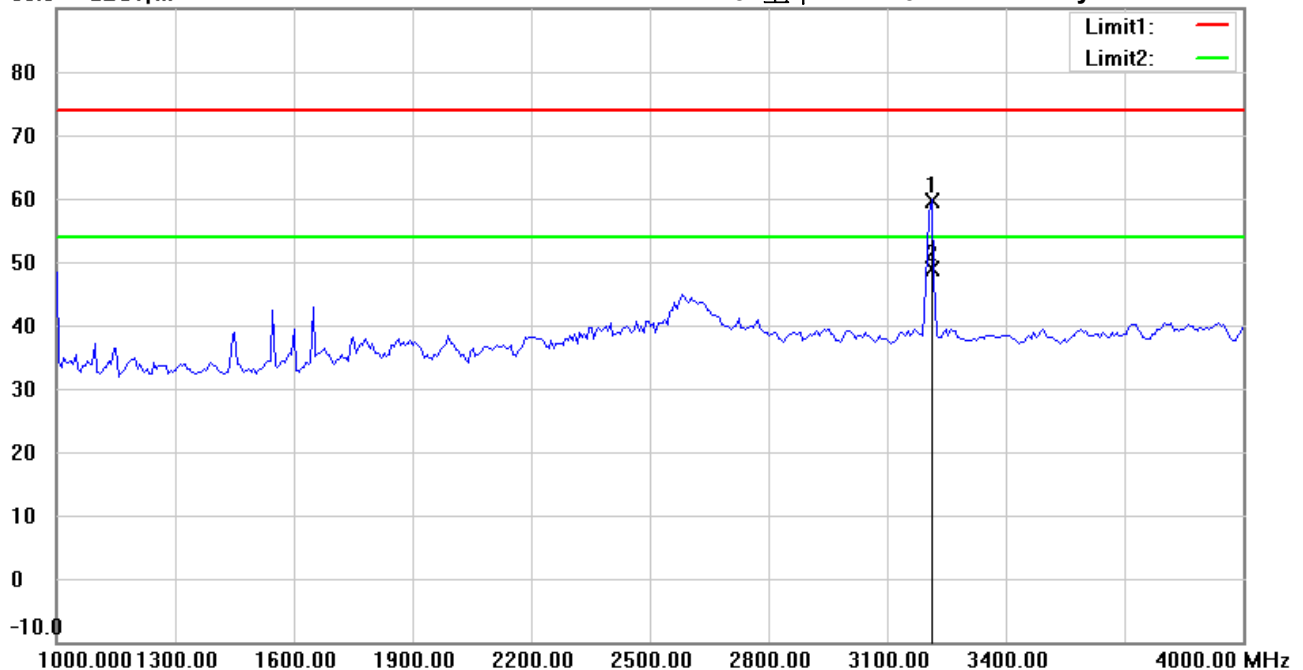

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3206.413	62.94	peak	-3.31	59.63	74.00	192	267	-14.37	
*	3206.413	52.20	AVG	-3.31	48.89	54.00	192	267	-5.11	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#6


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 上午 11:17:45

Humidity: 72.9 %

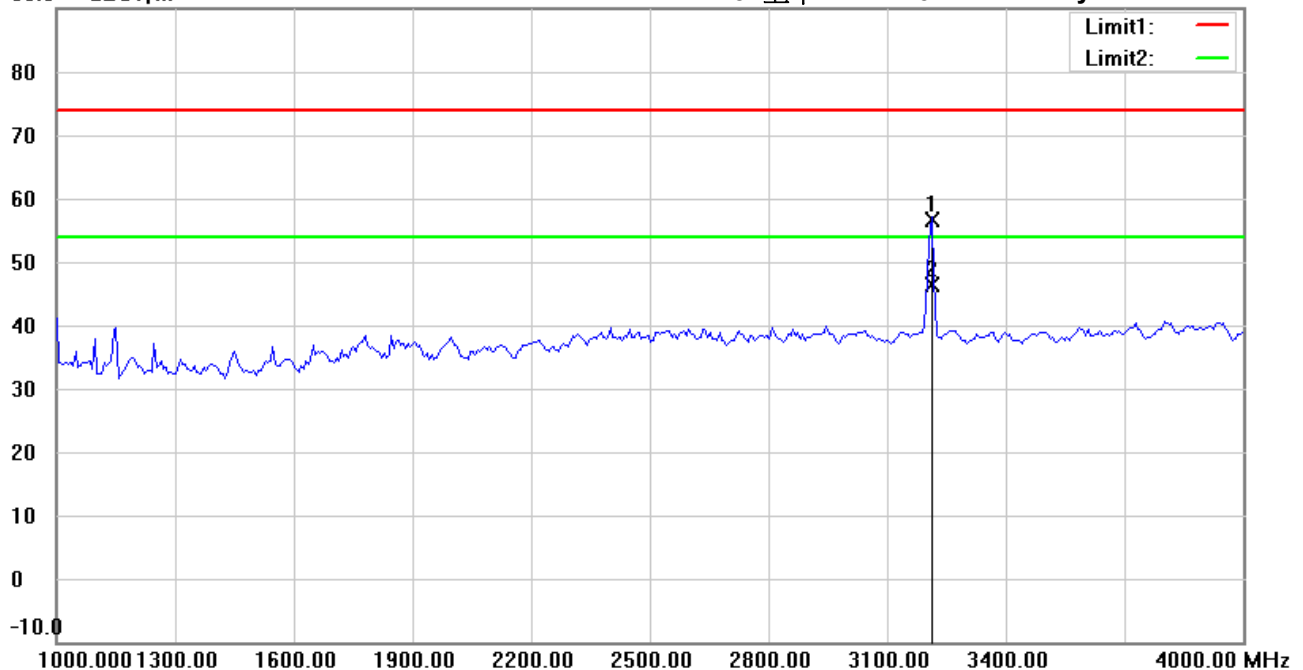

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3206.413	59.92	peak	-3.31	56.61	74.00	153	152	-17.39	
*	3206.413	49.69	AVG	-3.31	46.38	54.00	153	152	-7.62	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#2


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 上午 11:14:17

Humidity:72.9 %

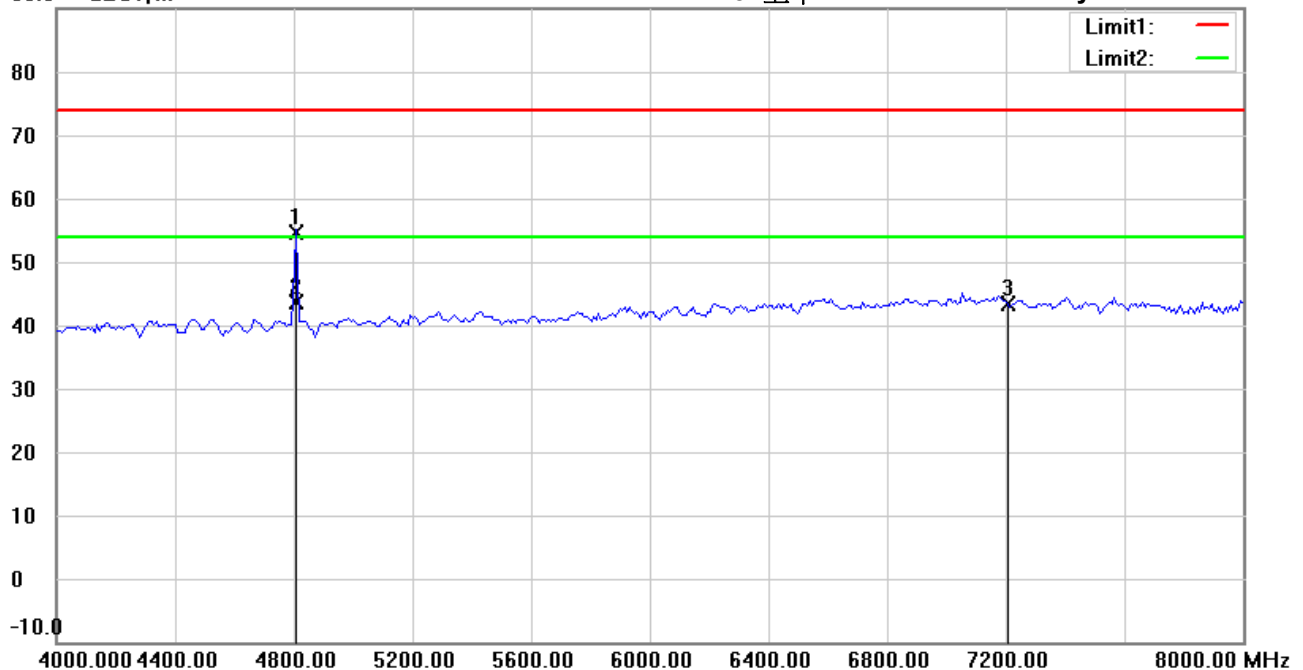

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4804.000	56.25	peak	-1.73	54.52	74.00	176	134	-19.48	
*	4804.000	45.46	AVG	-1.73	43.73	54.00	176	134	-10.27	
	7206.000	39.27	peak	4.01	43.28	74.00	150	298	-30.72	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#7


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 上午 11:19:11

Humidity: 72.9 %

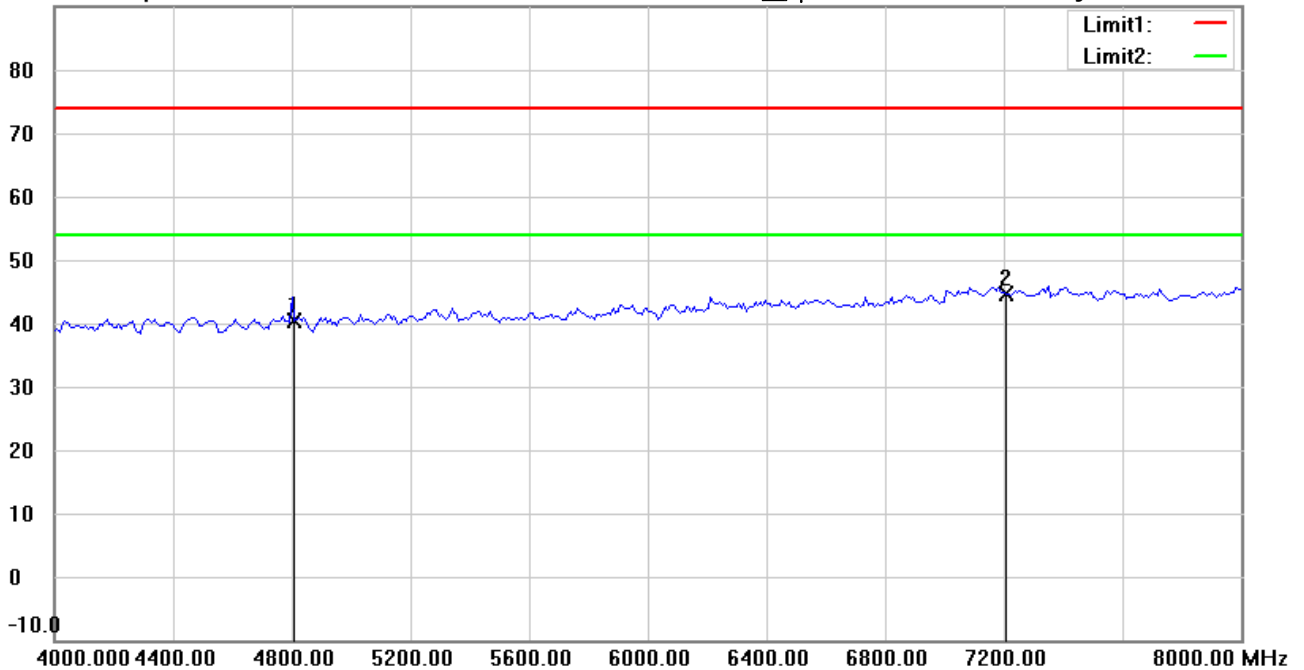

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4804.000	42.09	peak	-1.73	40.36	74.00	150	311	-33.64	
*	7206.000	40.70	peak	4.01	44.71	74.00	150	68	-29.29	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#3


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 上午 11:15:50

Humidity:72.9 %

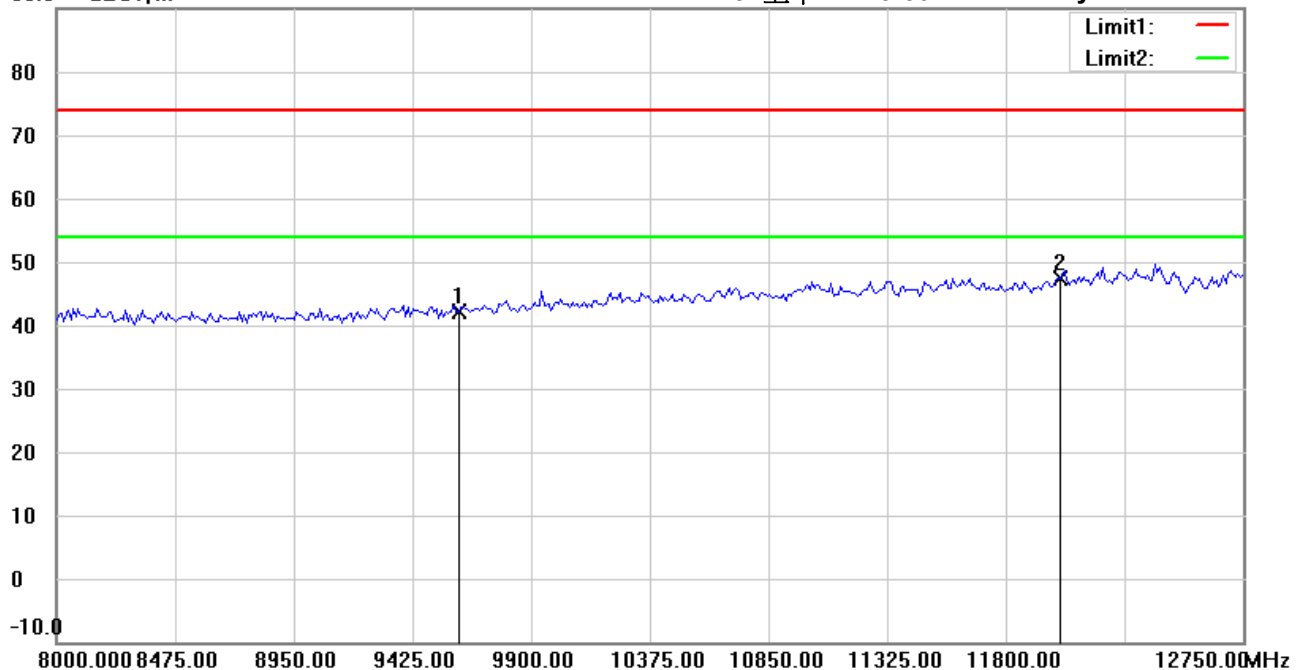

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	35.28	peak	6.80	42.08	74.00	150	106	-31.92	
*	12010.000	35.41	peak	12.09	47.50	74.00	150	279	-26.50	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#8


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 上午 11:20:36

Humidity: 72.9 %

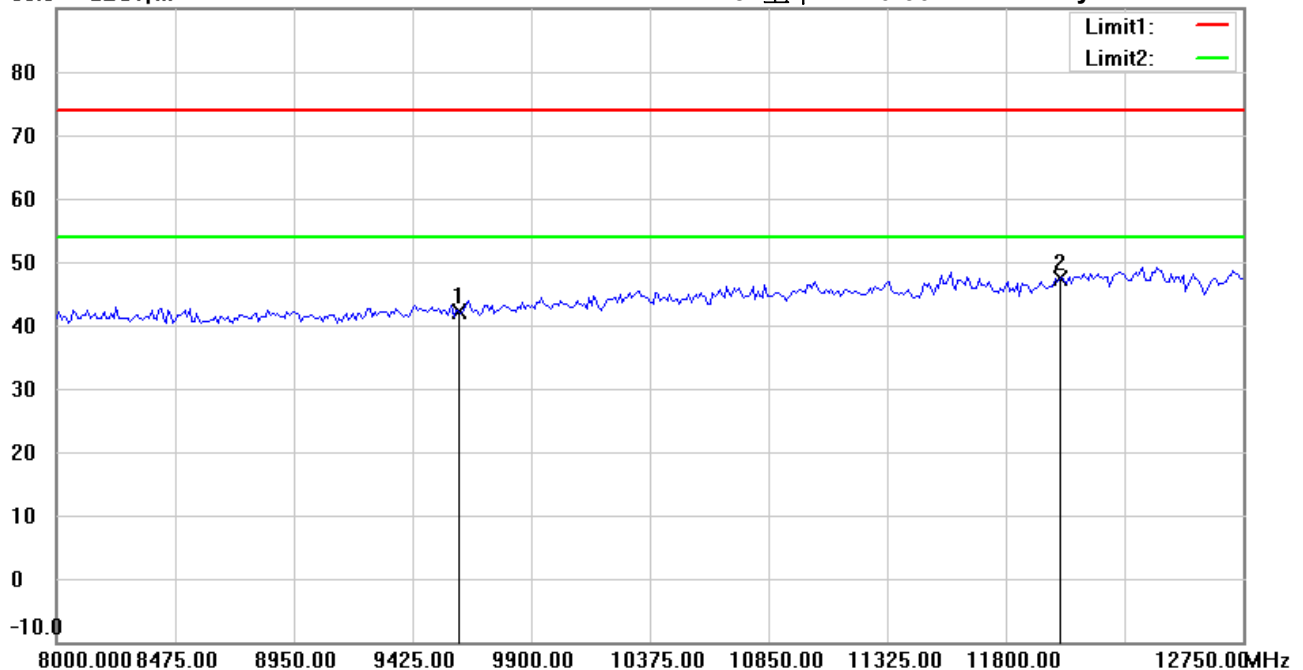

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	35.28	peak	6.80	42.08	74.00	150	113	-31.92	
*	12010.000	35.36	peak	12.09	47.45	74.00	150	190	-26.55	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#4


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 上午 11:16:06

Humidity:72.9 %

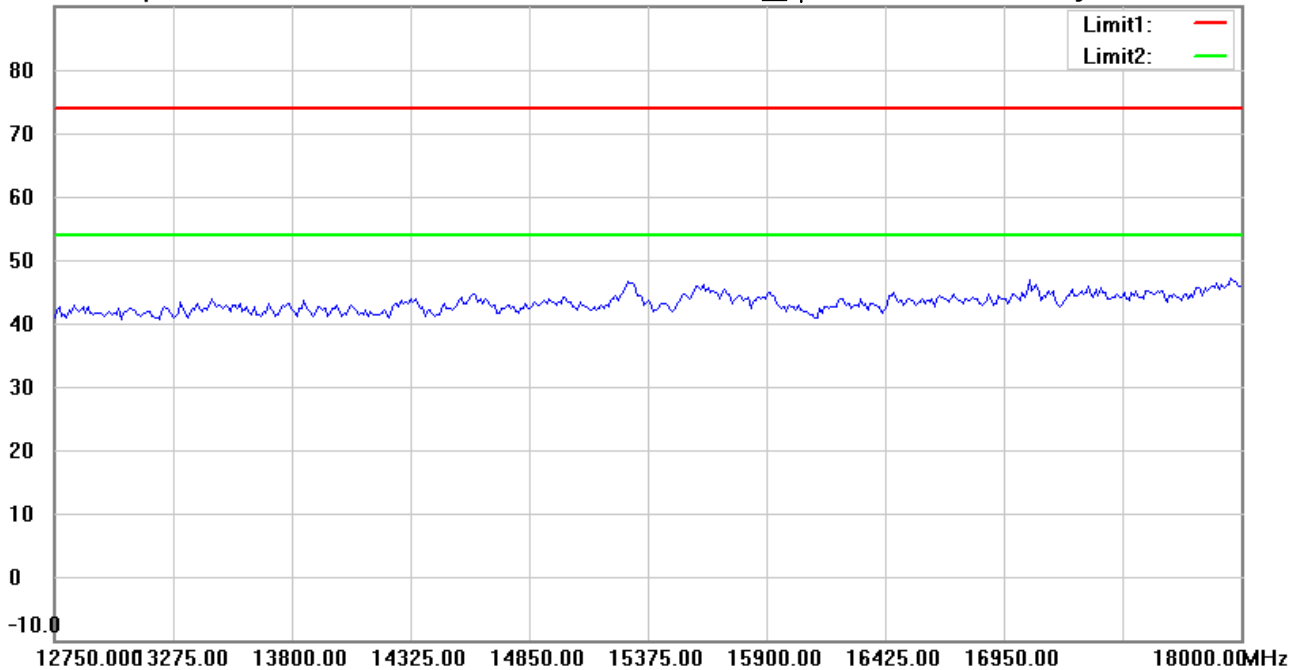

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#9


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 上午 11:20:51

Humidity:72.9 %

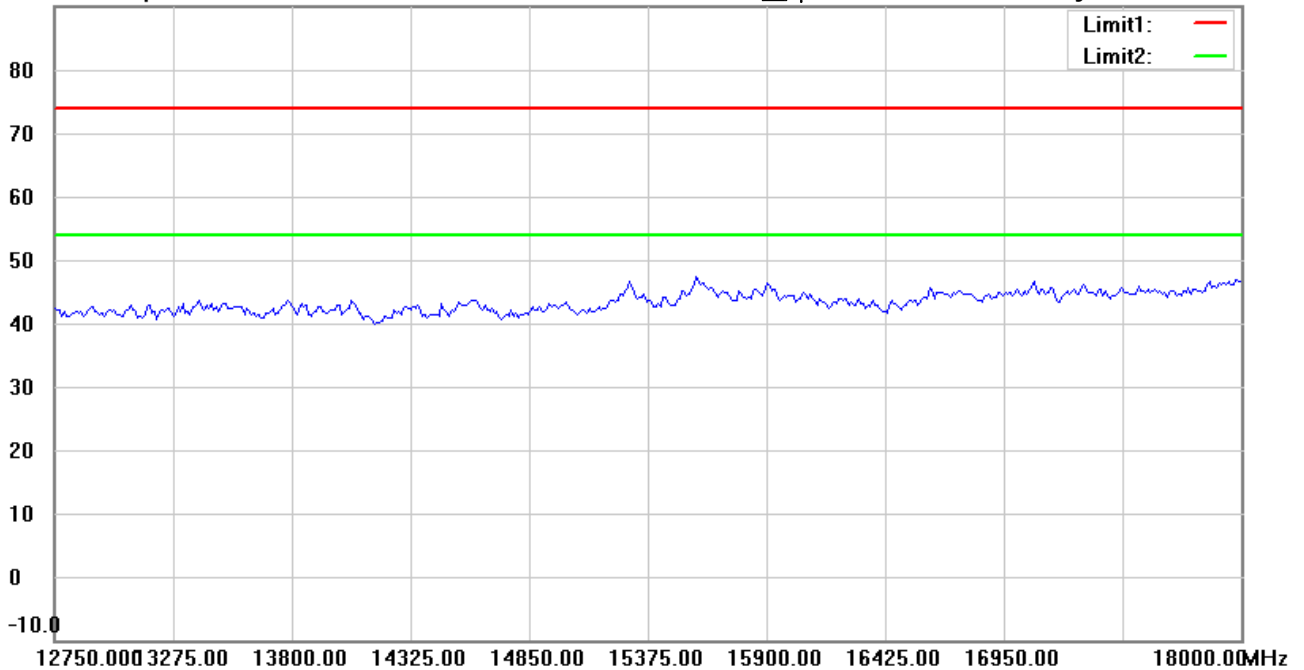

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#5


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 上午 11:16:16

Humidity:72.9 %

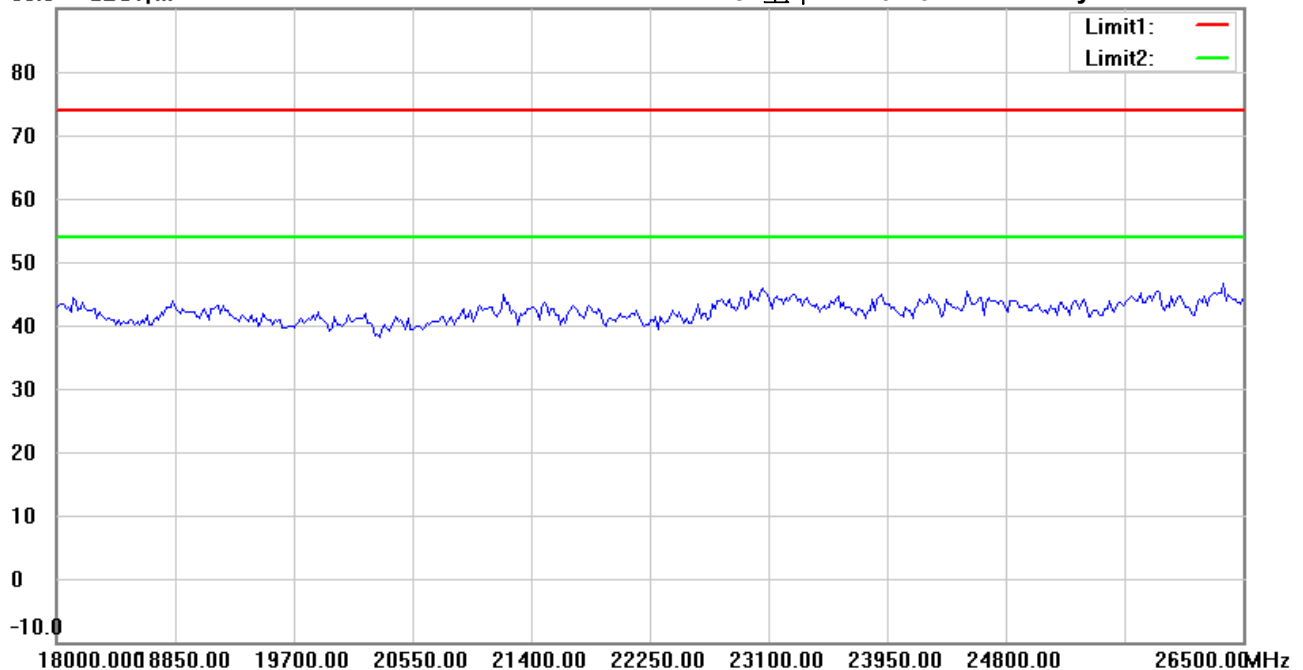

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#10


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 上午 11:21:02

Humidity:72.9 %

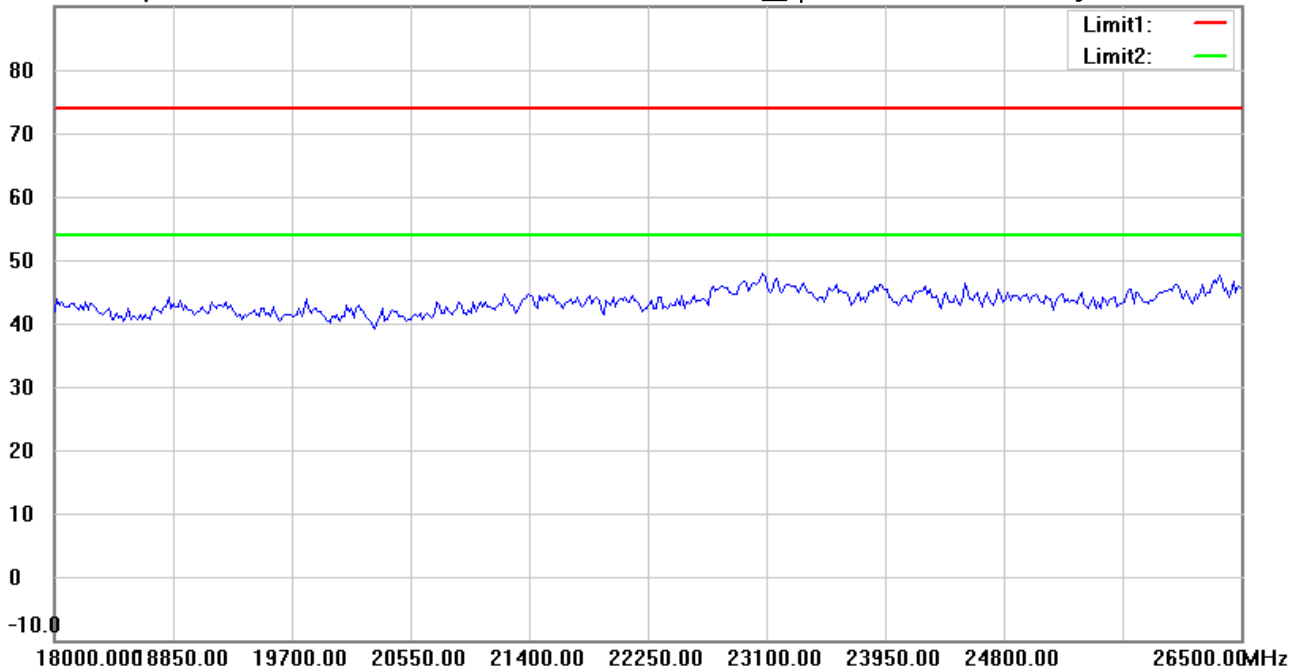

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#1


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 上午 11:54:49

Humidity: 72.9 %

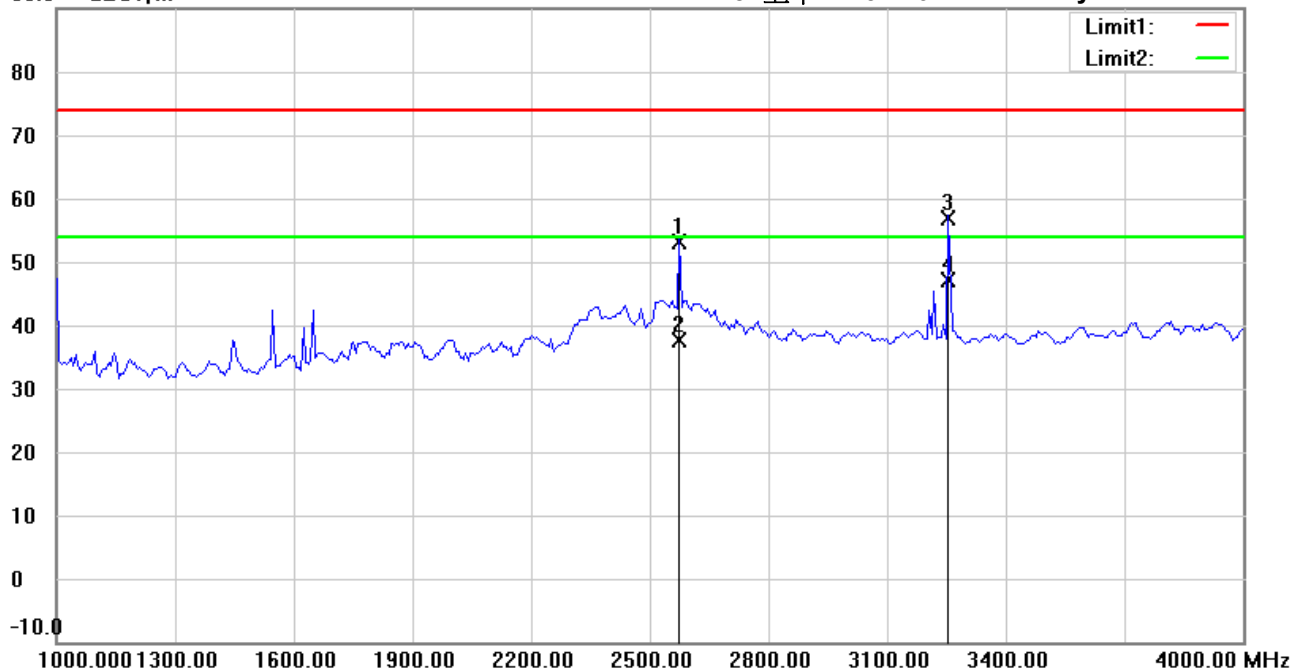

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2575.150	57.96	peak	-4.77	53.19	74.00	150	79	-20.81	
	2575.150	42.48	AVG	-4.77	37.71	54.00	150	79	-16.29	
	3254.509	60.34	peak	-3.48	56.86	74.00	152	130	-17.14	
*	3254.509	50.56	AVG	-3.48	47.08	54.00	152	130	-6.92	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File : 3

Data : #6


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 上午 11:59:33

Humidity: 72.9 %

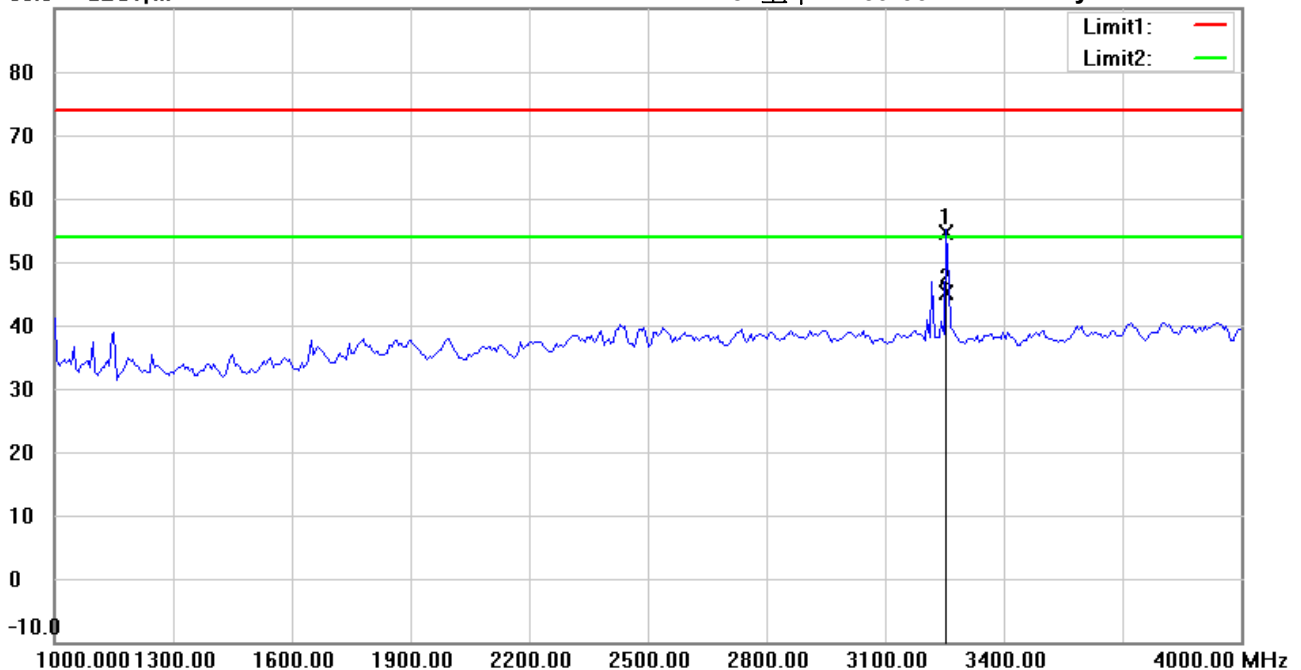

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3254.509	57.99	peak	-3.48	54.51	74.00	150	150	-19.49	
*	3254.509	48.53	AVG	-3.48	45.05	54.00	150	150	-8.95	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#2


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 上午 11:56:15

Humidity: 72.9 %

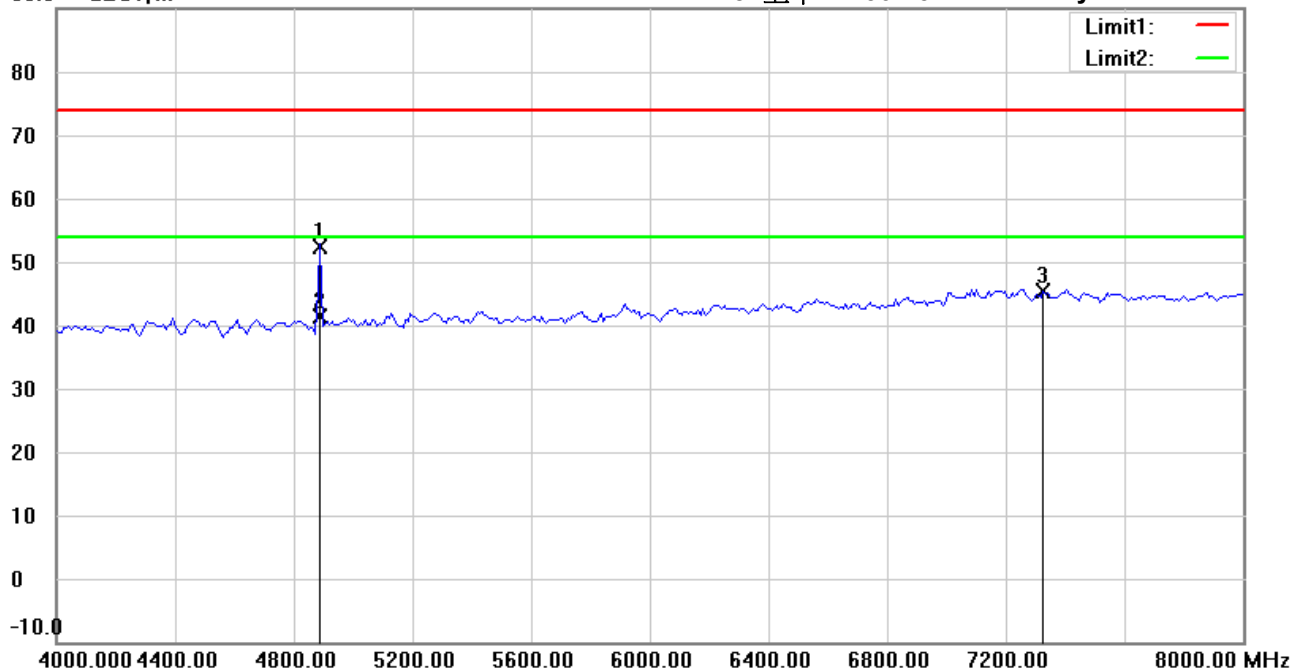

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4882.000	53.82	peak	-1.40	52.42	74.00	176	135	-21.58	
*	4882.000	42.71	AVG	-1.40	41.31	54.00	176	135	-12.69	
	7323.000	41.43	peak	3.86	45.29	74.00	150	211	-28.71	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#7


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 12:01:00

Humidity: 72.9 %

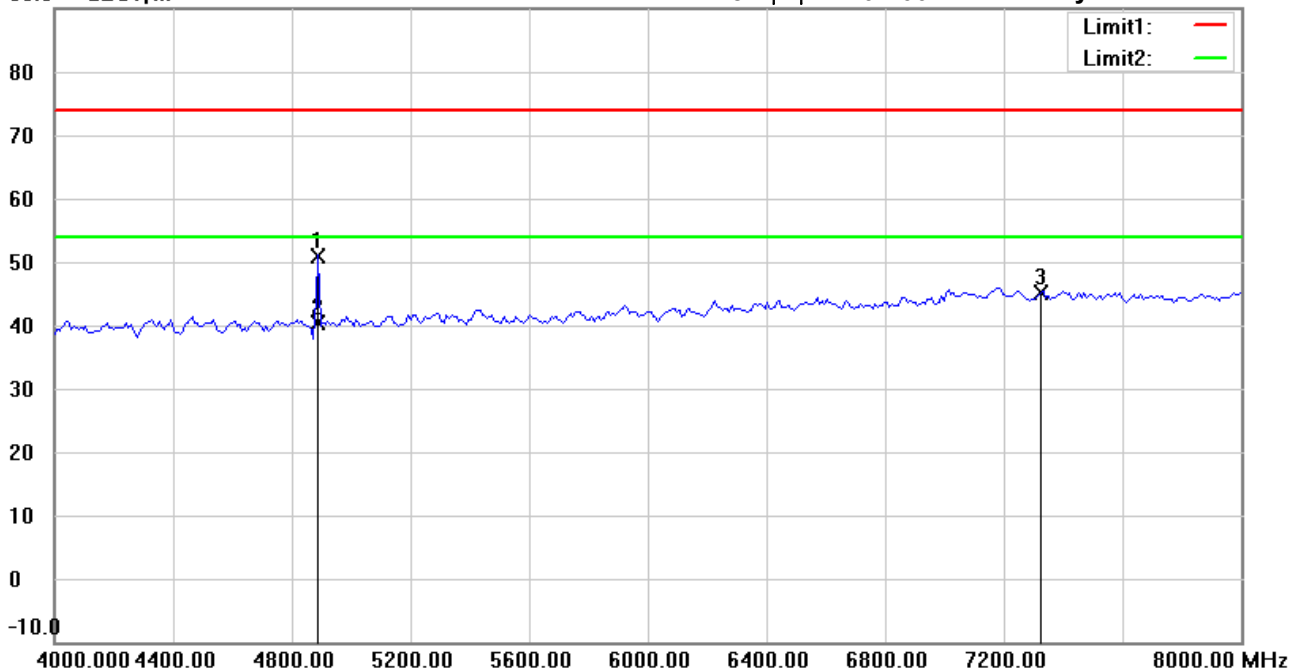

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4882.000	52.32	peak	-1.40	50.92	74.00	152	100	-23.08	
*	4882.000	41.68	AVG	-1.40	40.28	54.00	152	100	-13.72	
	7323.000	41.18	peak	3.86	45.04	74.00	150	296	-28.96	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#3


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 上午 11:57:46

Humidity: 72.9 %

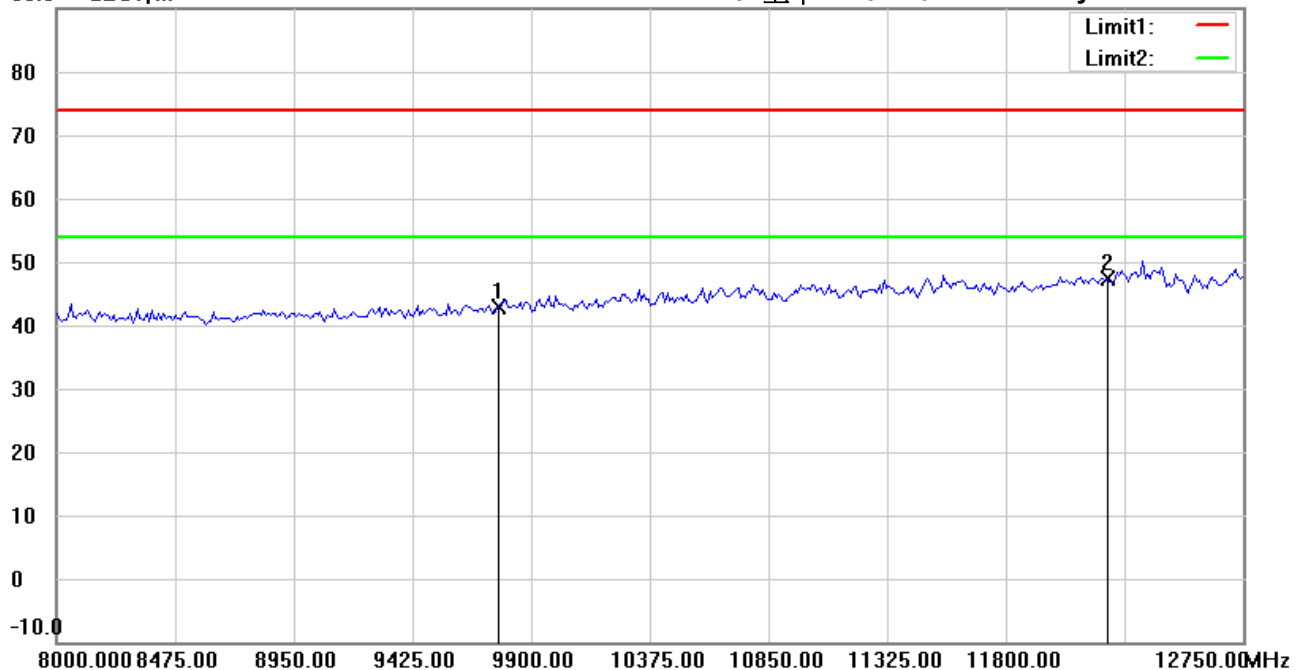

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9764.000	35.88	peak	7.03	42.91	74.00	150	177	-31.09	
*	12205.000	33.91	peak	13.58	47.49	74.00	150	301	-26.51	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#8


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 12:02:25

Humidity:72.9 %

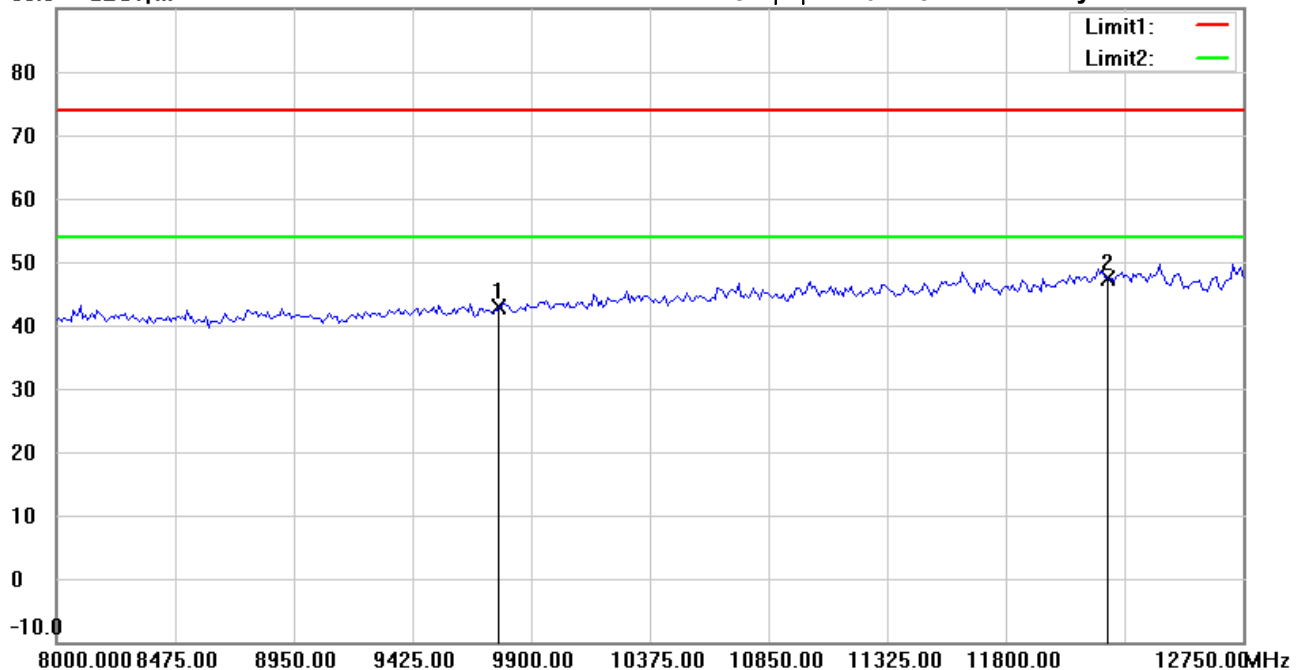

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9764.000	35.77	peak	7.03	42.80	74.00	150	86	-31.20	
*	12205.000	33.87	peak	13.58	47.45	74.00	150	214	-26.55	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#4


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 上午 11:58:00

Humidity:72.9 %

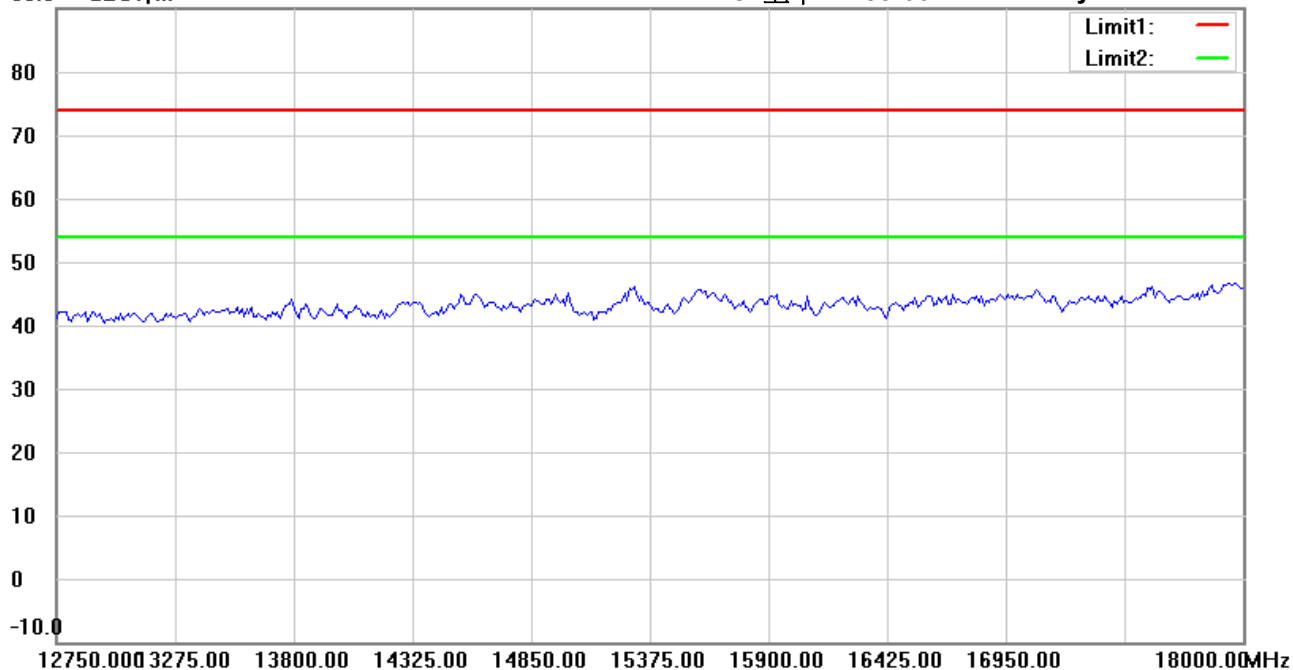

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#9


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 12:02:39

Humidity:72.9 %

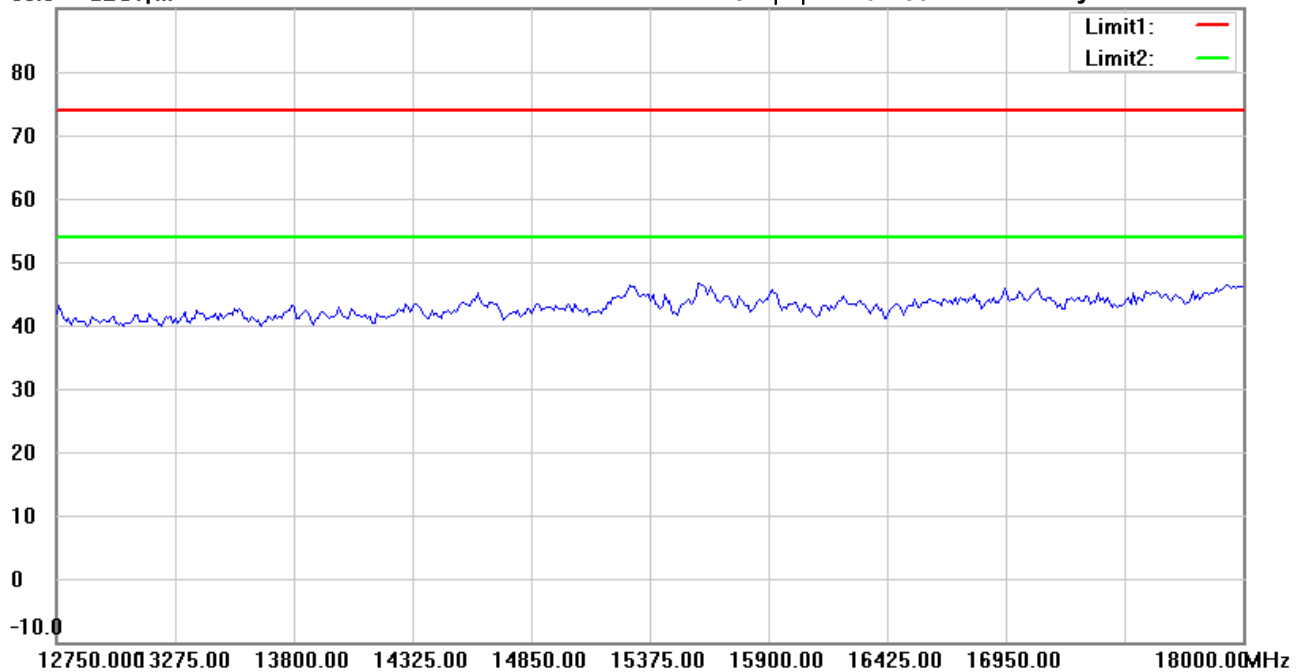

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#5


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 上午 11:58:09

Humidity:72.9 %

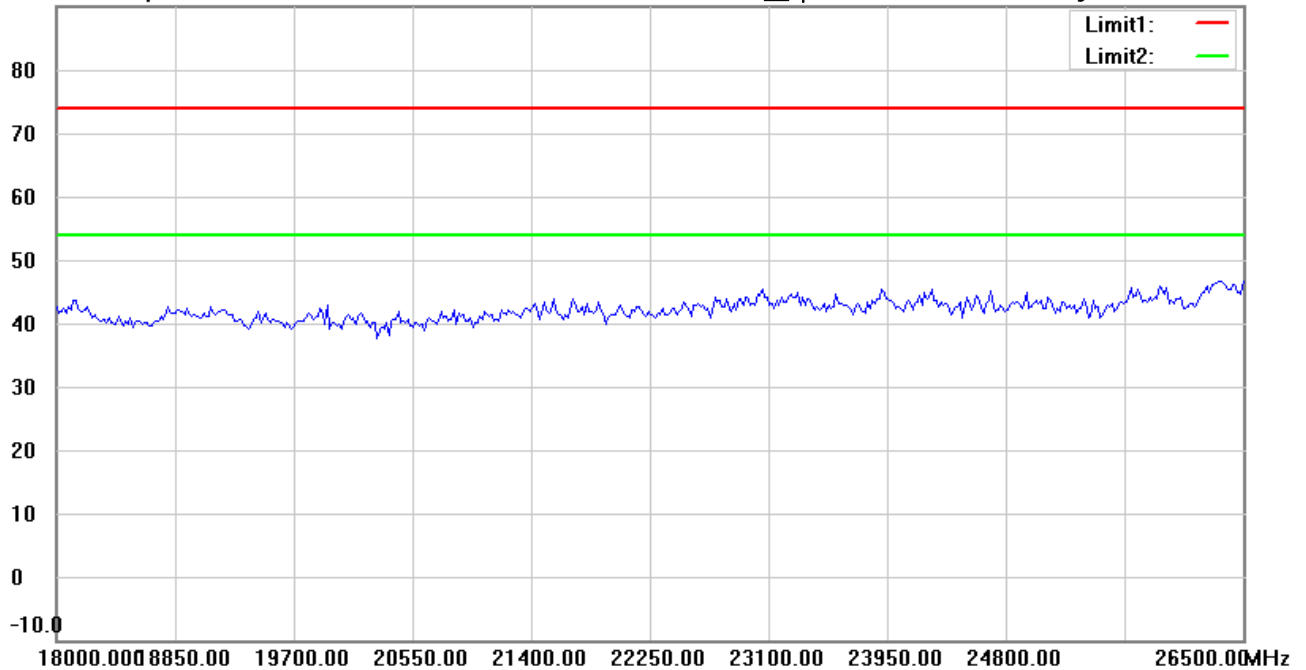

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#10


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 12:02:49

Humidity:72.9 %

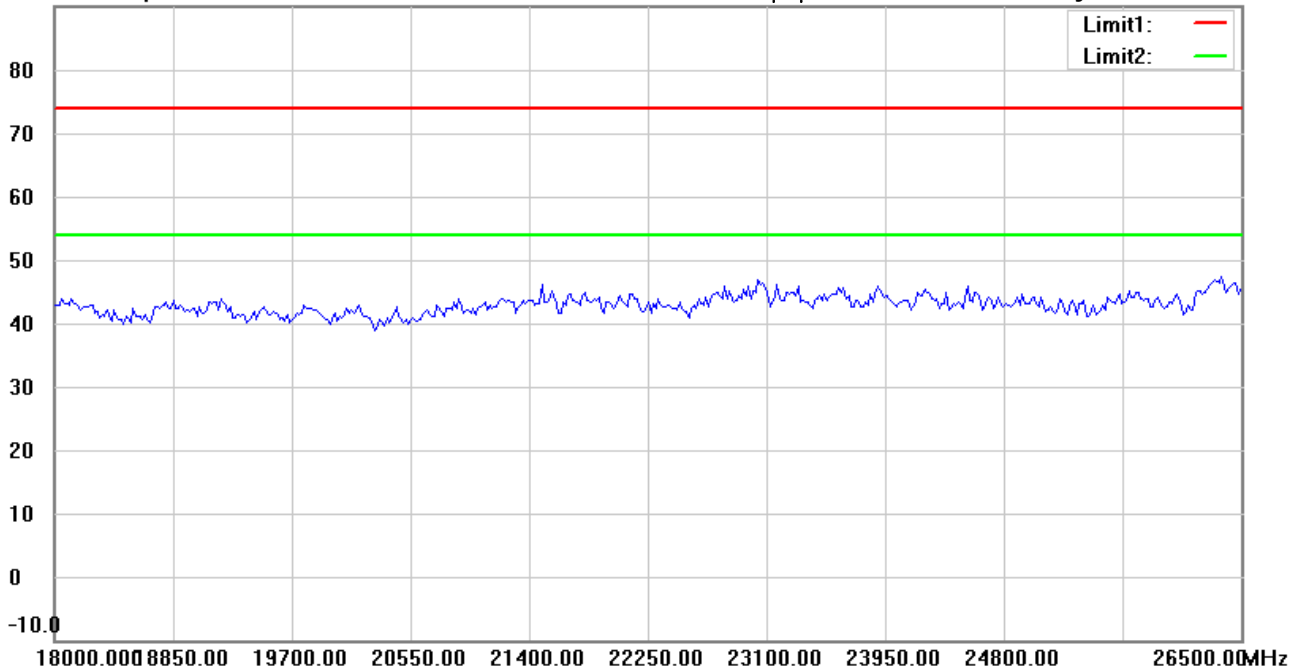

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2441 MHz

Note :

Polarization: *Vertical*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#1


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 01:44:03

Humidity:72.9 %

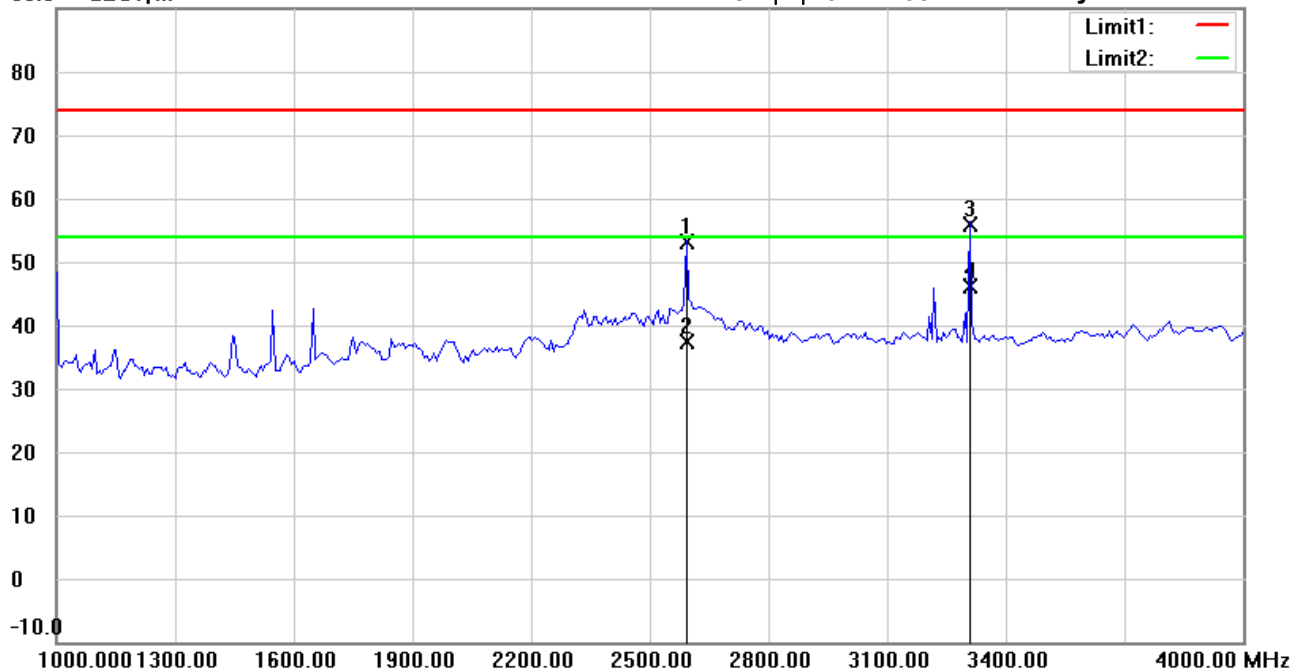

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2593.186	58.04	peak	-4.89	53.15	74.00	150	77	-20.85	
	2593.186	42.36	AVG	-4.89	37.47	54.00	150	77	-16.53	
	3308.617	59.53	peak	-3.63	55.90	74.00	154	132	-18.10	
*	3308.617	49.83	AVG	-3.63	46.20	54.00	154	132	-7.80	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#6


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 01:48:47

Humidity: 72.9 %

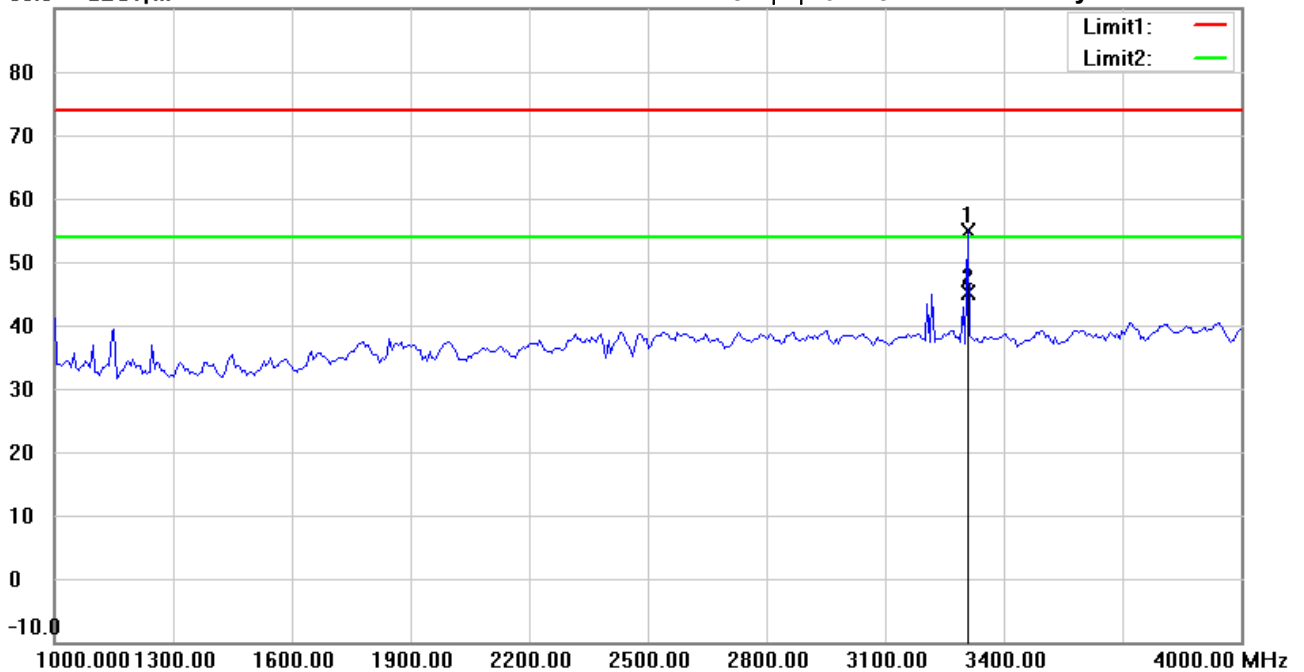

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3308.617	58.44	peak	-3.63	54.81	74.00	193	152	-19.19	
*	3308.617	48.84	AVG	-3.63	45.21	54.00	193	152	-8.79	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihsu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File : 3

Data : #2


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 01:45:27

Humidity: 72.9 %

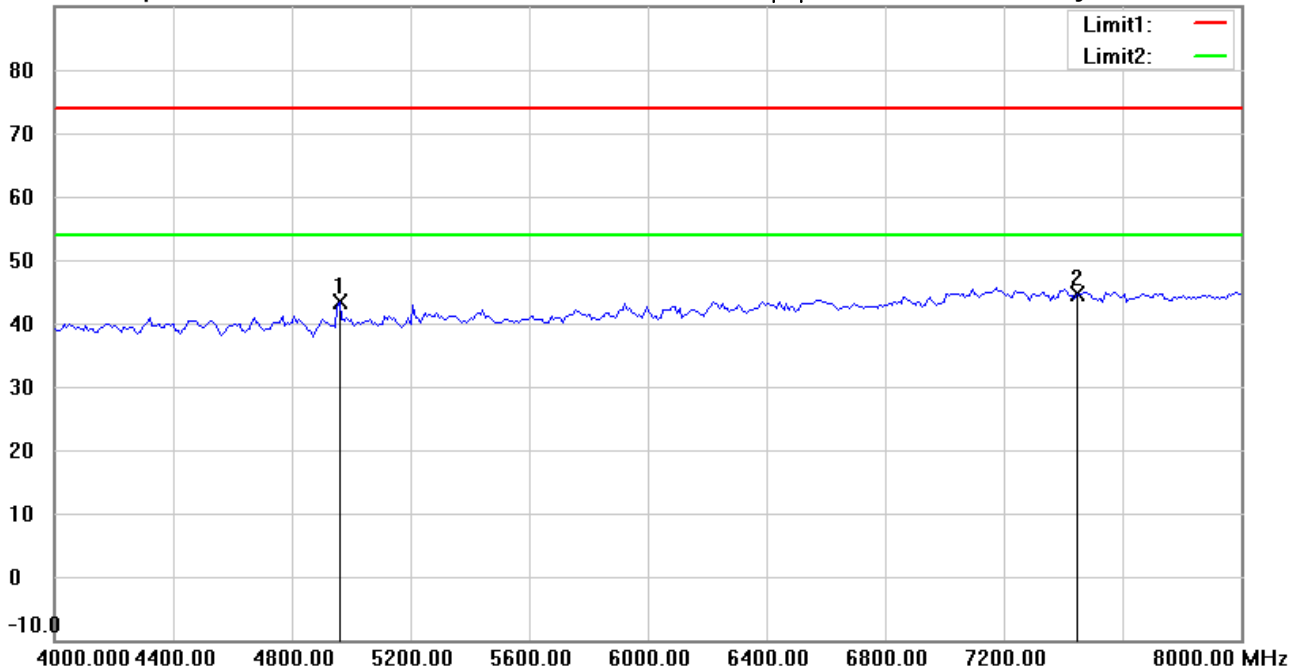

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	44.17	peak	-0.79	43.38	74.00	150	159	-30.62	
*	7440.000	40.86	peak	3.83	44.69	74.00	150	246	-29.31	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#7


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 01:50:12

Humidity:72.9 %

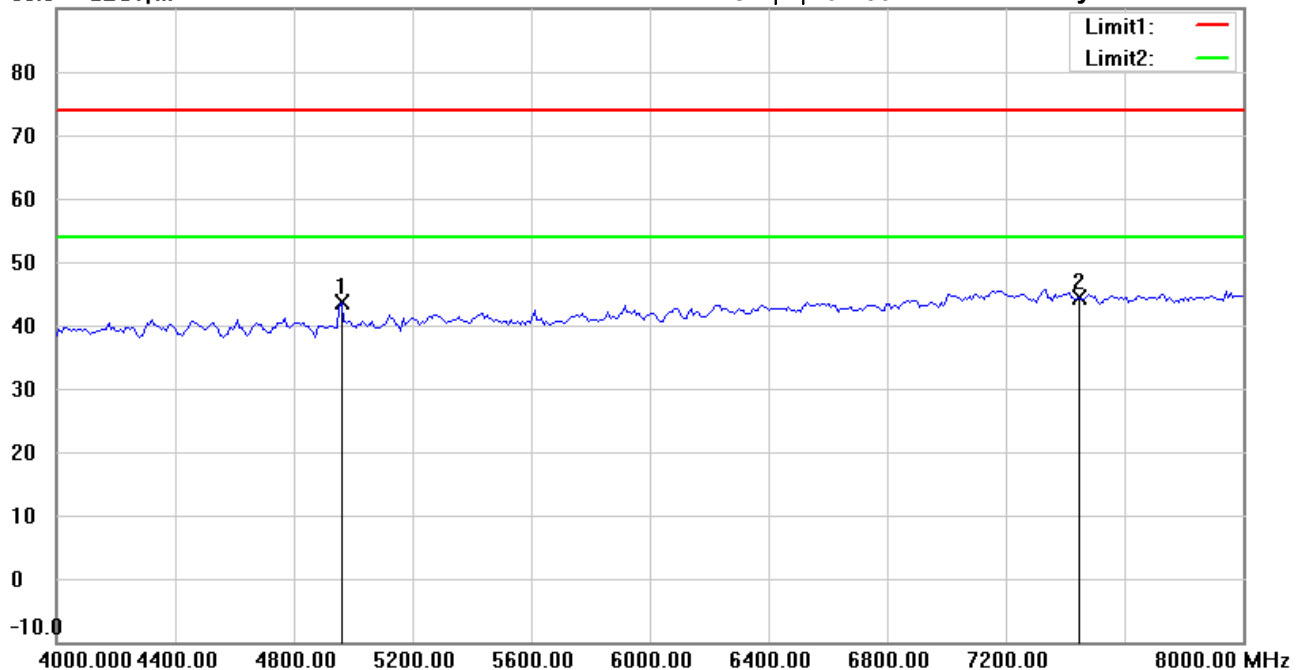

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4960.000	44.44	peak	-0.79	43.65	74.00	150	117	-30.35	
*	7440.000	40.60	peak	3.83	44.43	74.00	150	290	-29.57	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#3


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 01:46:59

Humidity:72.9 %

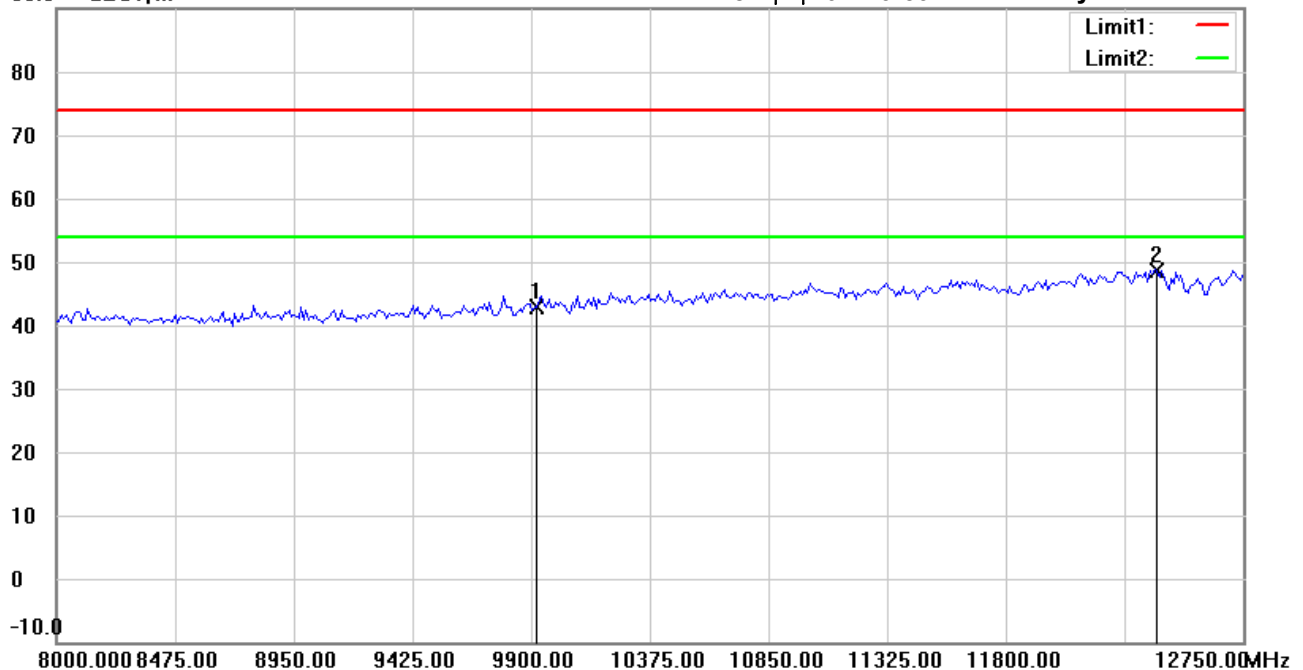

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	35.31	peak	7.54	42.85	74.00	150	302	-31.15	
*	12400.000	34.86	peak	13.71	48.57	74.00	150	63	-25.43	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#8


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 01:51:36

Humidity: 72.9 %

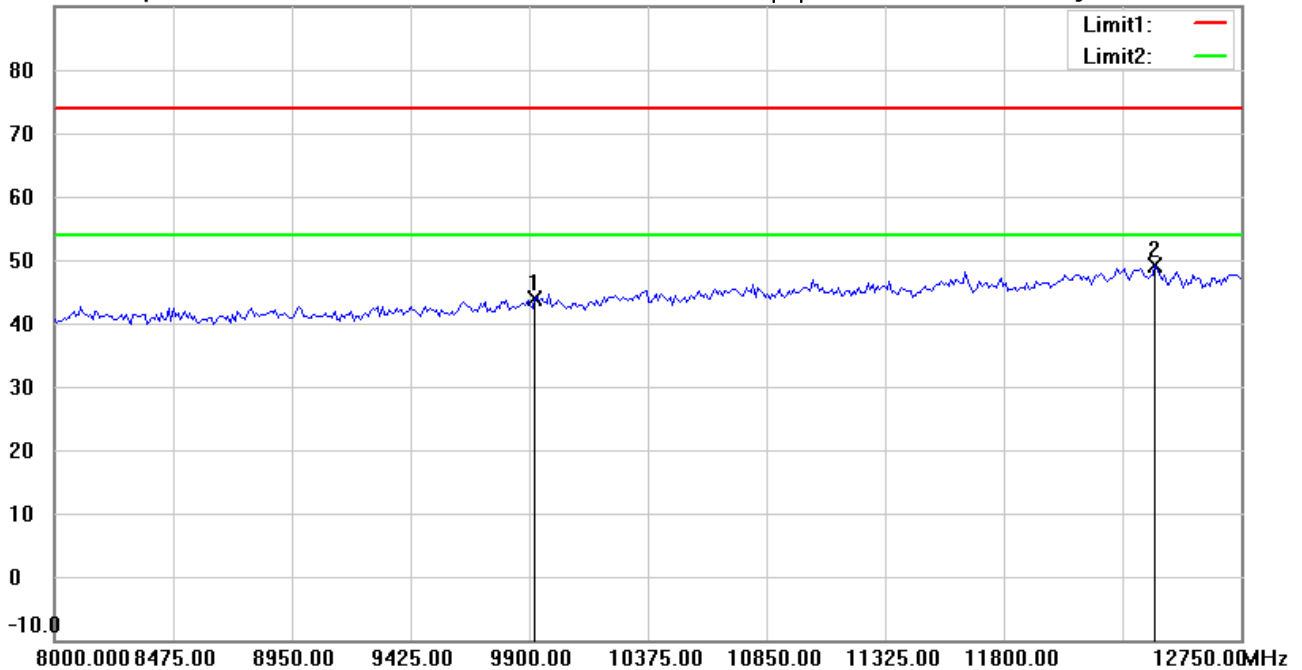

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	36.40	peak	7.54	43.94	74.00	150	85	-30.06	
*	12400.000	35.35	peak	13.71	49.06	74.00	150	190	-24.94	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#4


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 01:47:13

Humidity:72.9 %

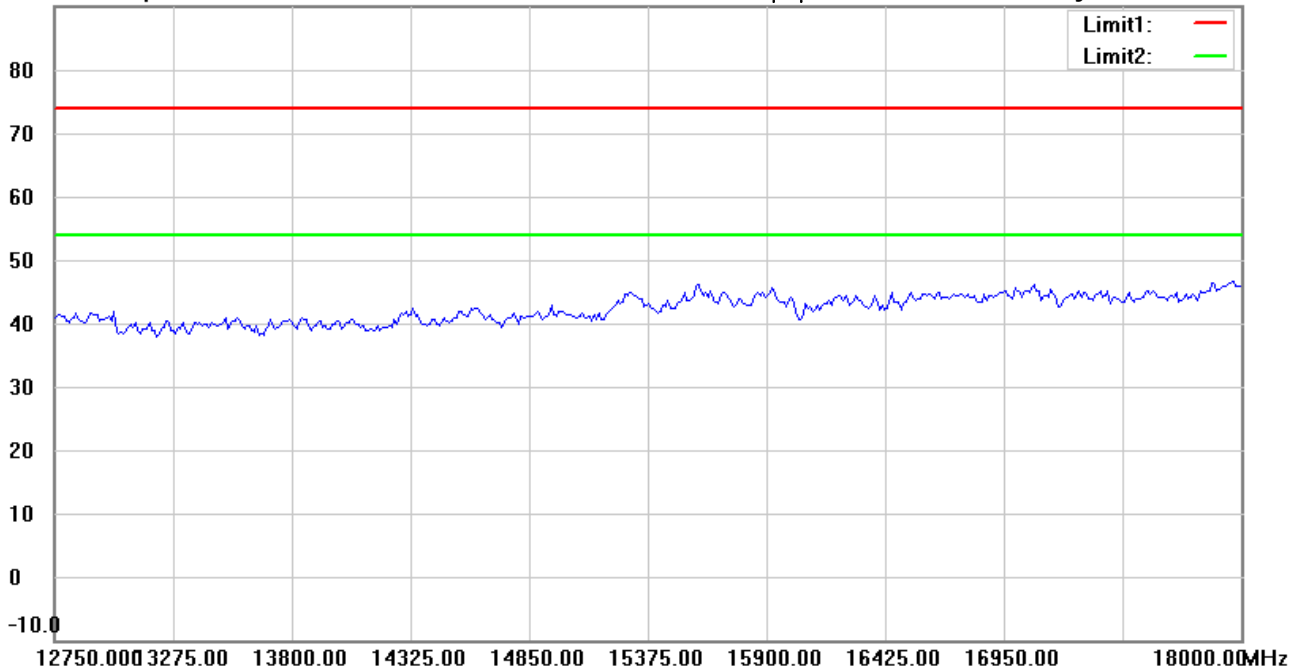

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#9


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 01:51:50

Humidity:72.9 %

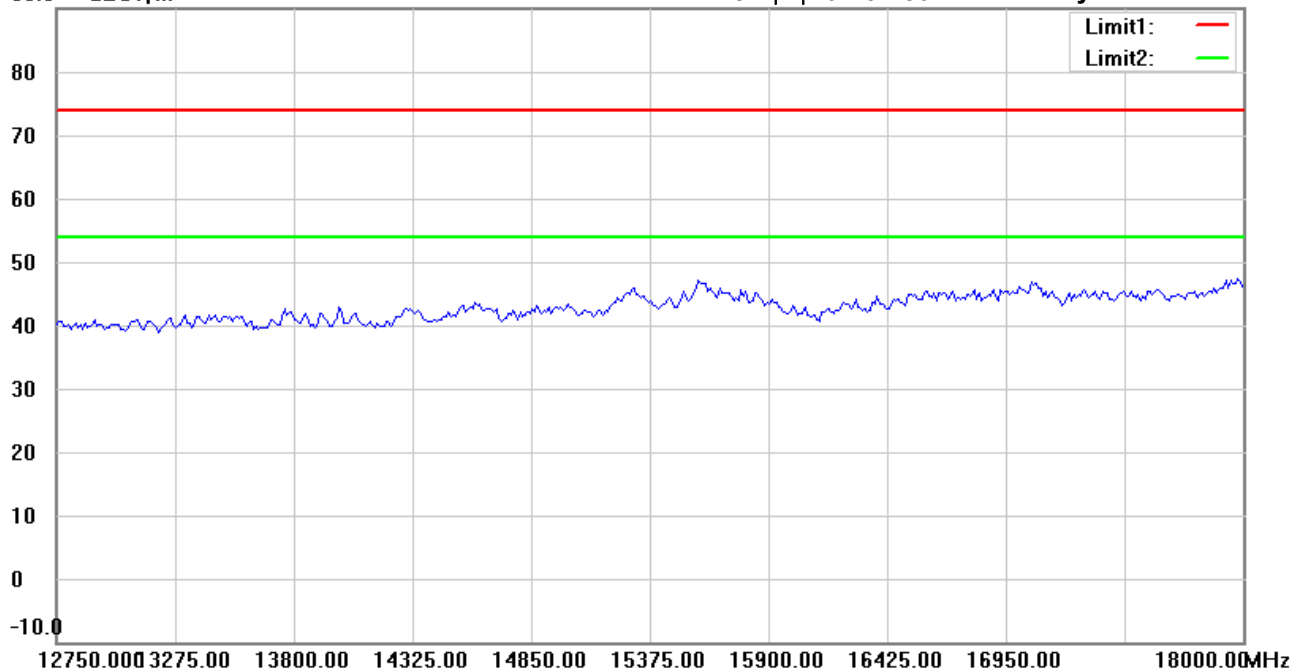

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#5


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 01:47:23

Humidity:72.9 %

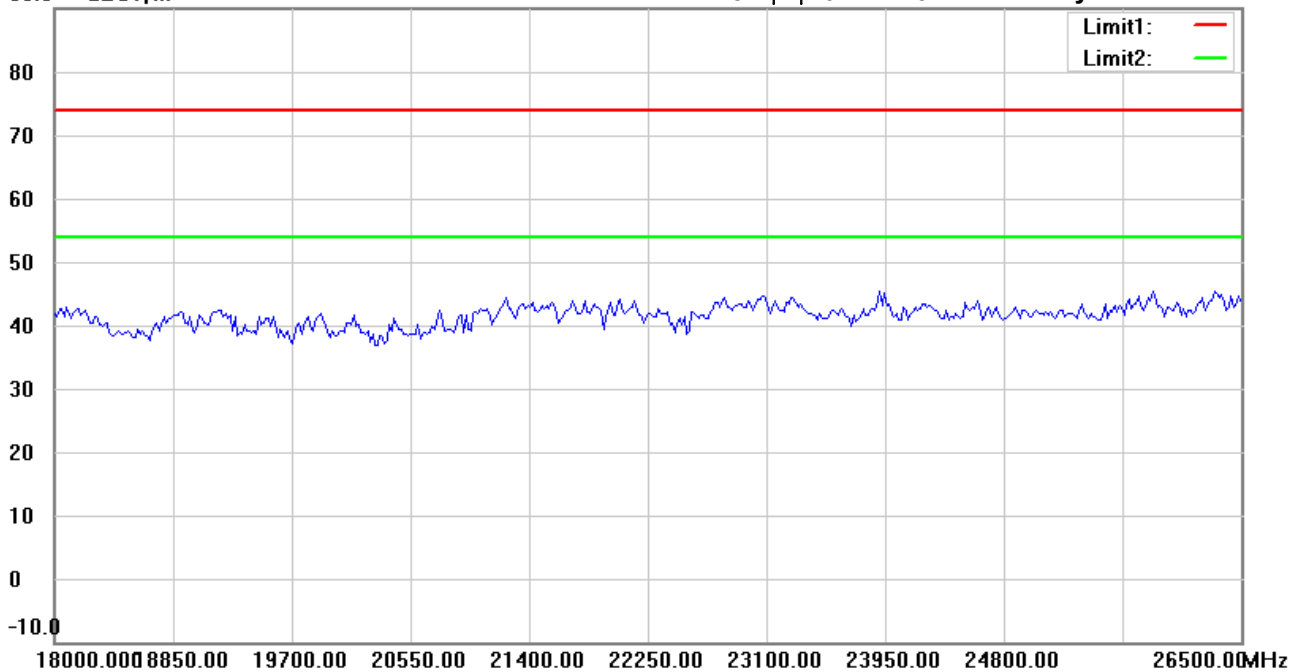

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Gino

File :3

Data :#10


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 01:52:00

Humidity:72.9 %

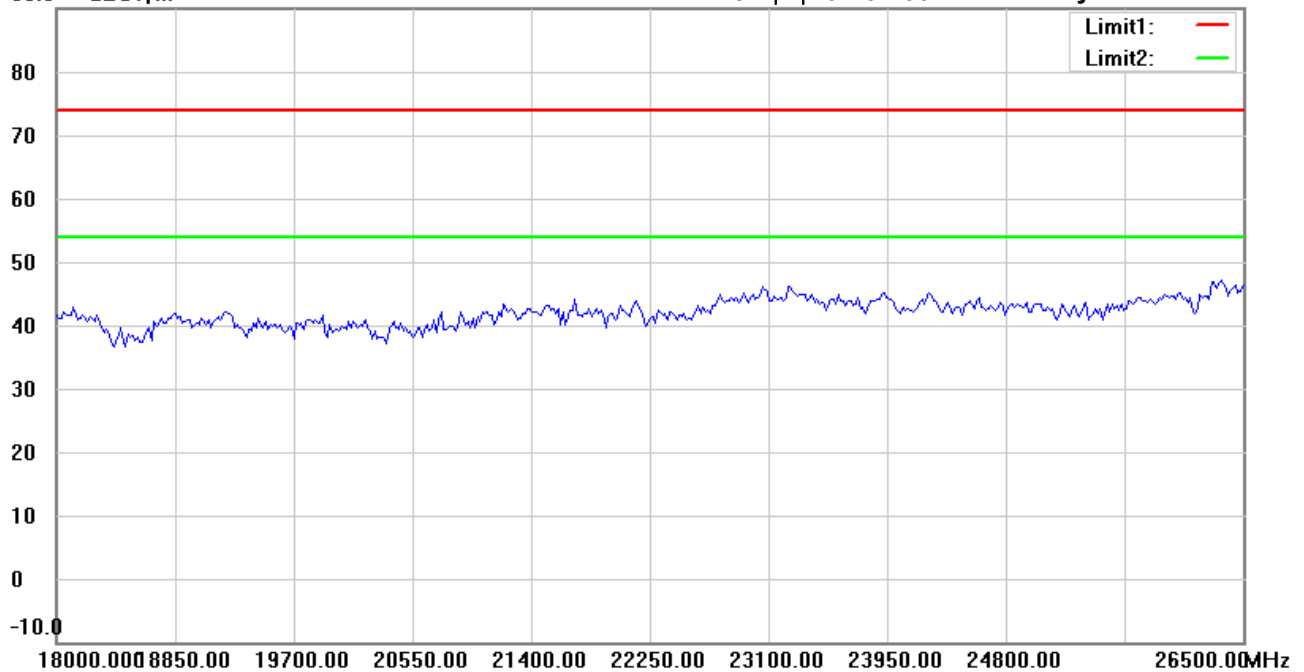

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Eason


File :1_BLE(1M)_TX 2402MHz Data :#1

Date: 2023/2/25

Temperature:21.1 °C

Time: 上午 05:25:31

Humidity:62.8 %

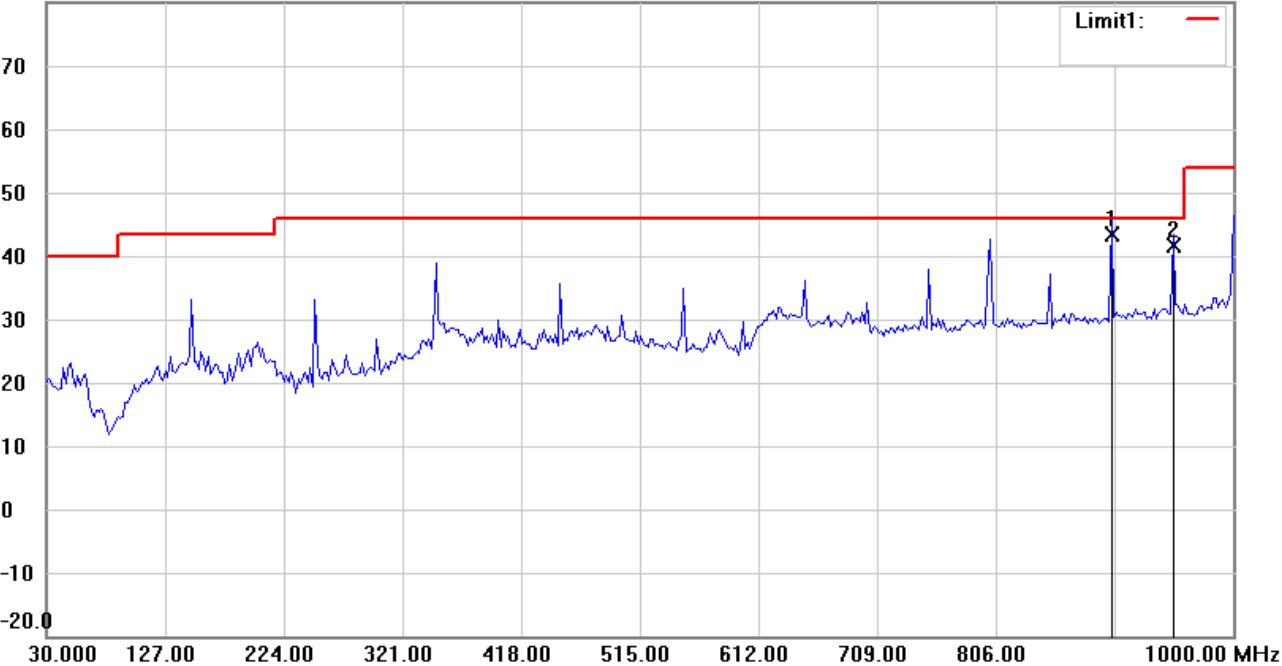

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	900.8617	39.84	QP	3.61	43.45	46.00	100	84	-2.55	
	951.4028	37.12	QP	4.59	41.71	46.00	100	167	-4.29	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Eason

File : 1_BLE(1M)_TX 2402MHz Data : #2


Date: 2023/2/25

Temperature: 21.1 °C

80.0 dBuV/m

Time: 上午 05:26:52

Humidity: 62.8 %

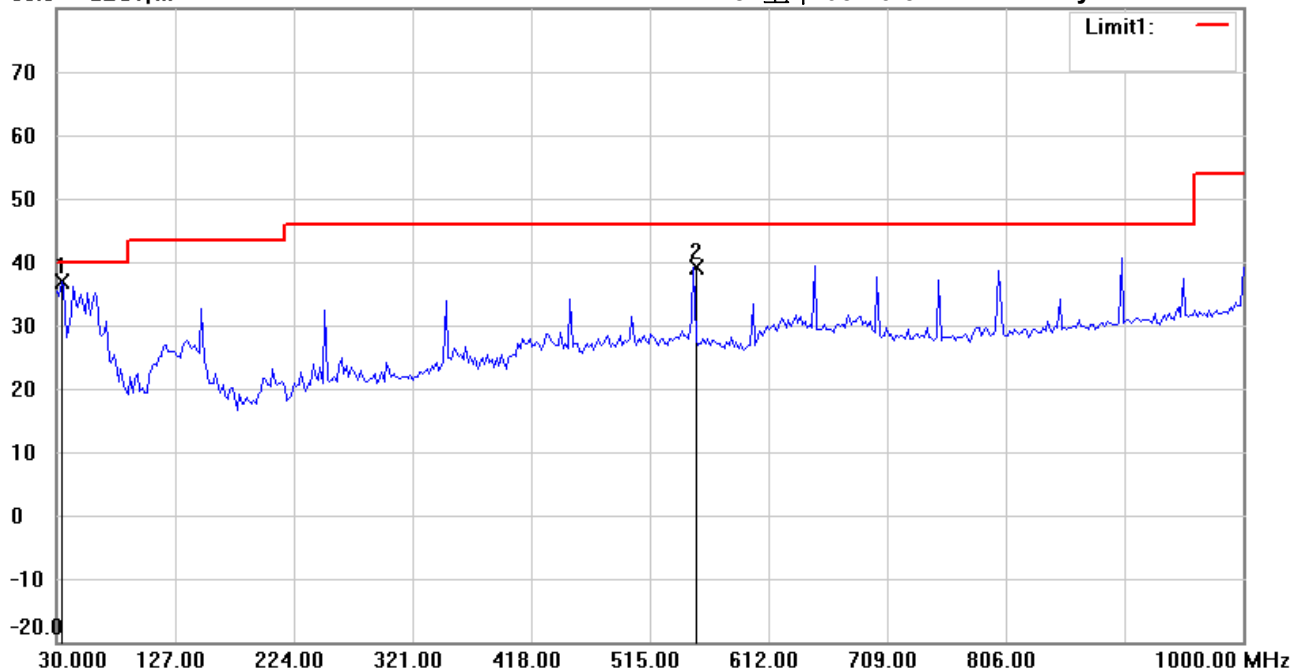

Site : Chamber

Condition : FCC_part 15 RE-Class C_30-1000MHz

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
*	33.8878	44.79	peak	-8.00	36.79	40.00	100	250	-3.21	
	550.9620	41.13	peak	-1.98	39.15	46.00	100	160	-6.85	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 2023/2/24

Temperature: 21.4 °C

Time: 下午 07:39:02

Humidity: 72.9 %

90.0 dBuV/m

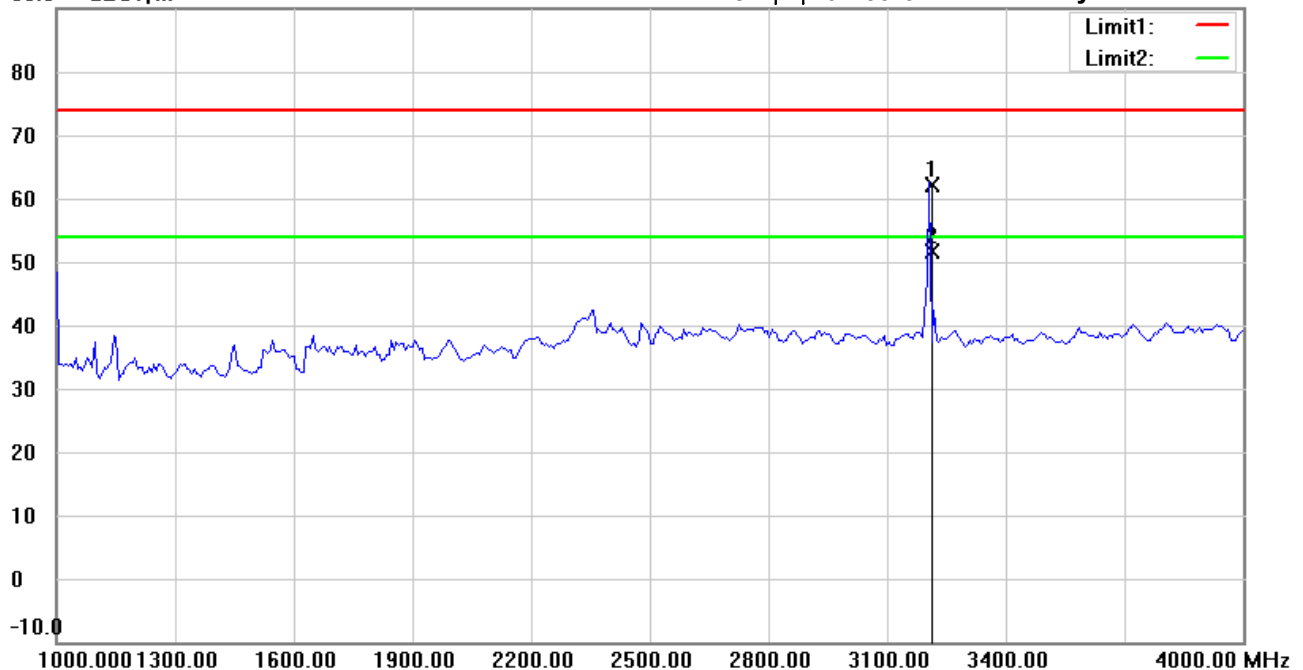

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3206.413	65.39	peak	-3.31	62.08	74.00	150	40	-11.92	
*	3206.413	54.96	AVG	-3.31	51.65	54.00	150	40	-2.35	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 07:44:09

Humidity: 72.9 %

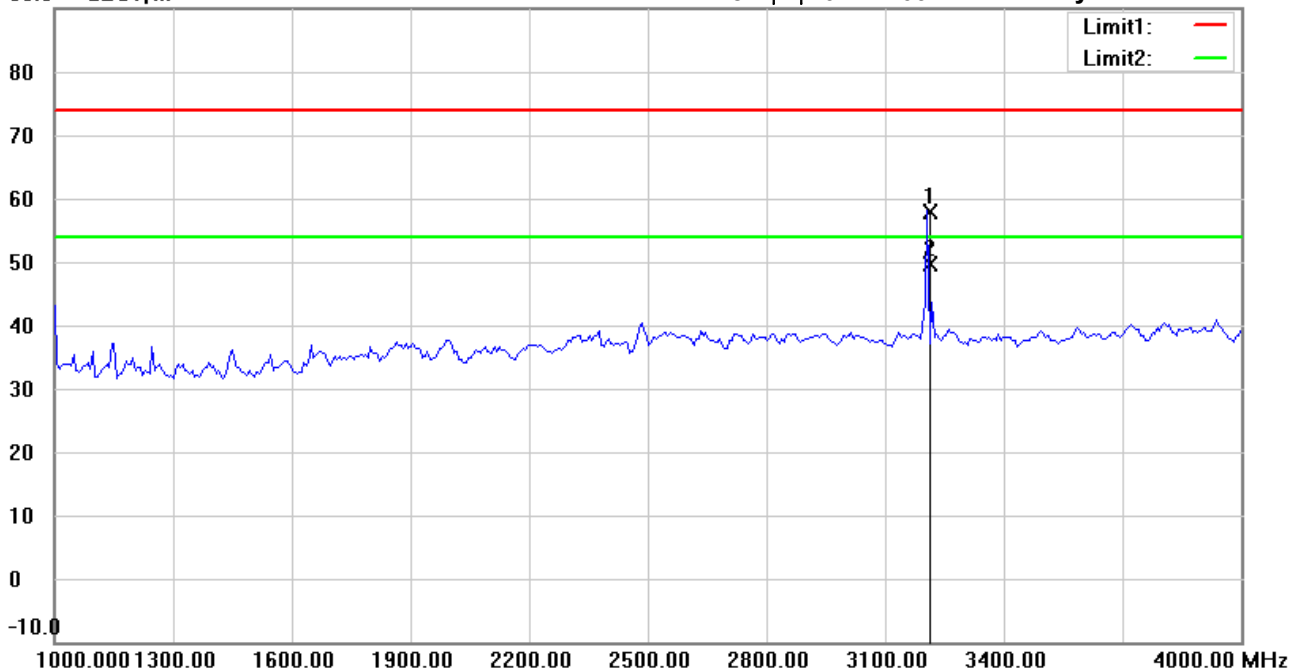

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3206.413	61.28	peak	-3.31	57.97	74.00	150	330	-16.03	
*	3206.413	53.06	AVG	-3.31	49.75	54.00	150	330	-4.25	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 07:40:23

Humidity: 72.9 %

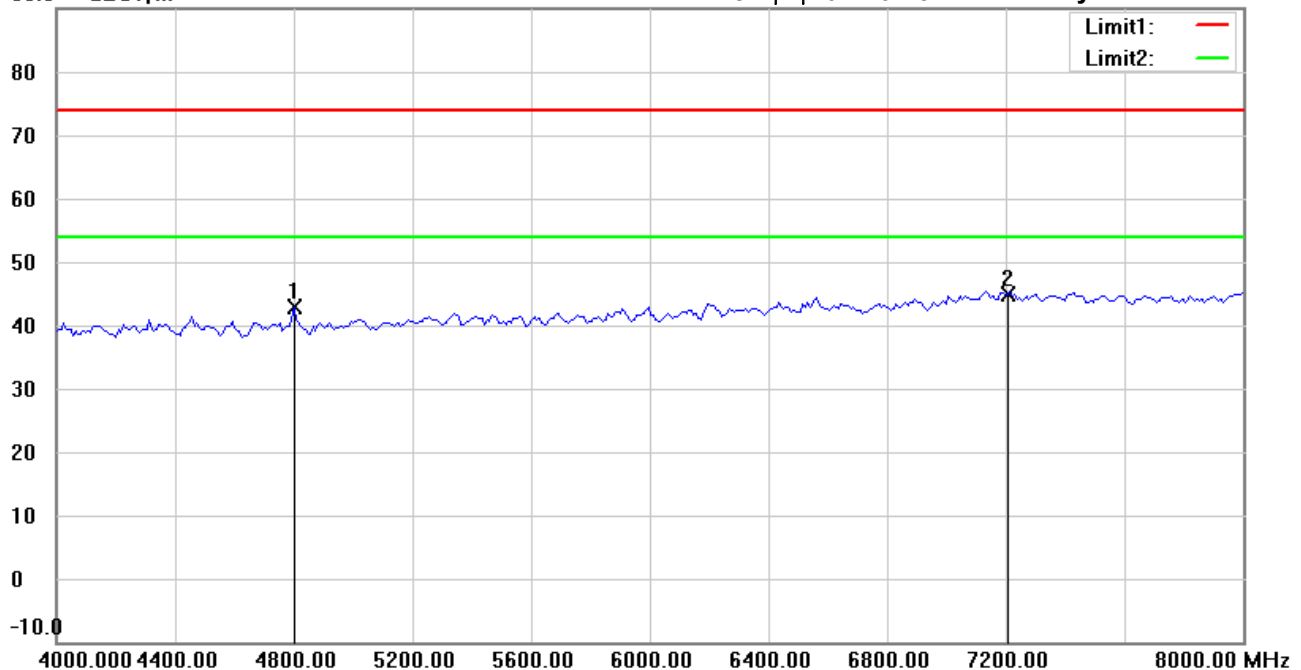

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4801.603	44.57	peak	-1.74	42.83	74.00	150	110	-31.17	
*	7206.000	40.97	peak	4.01	44.98	74.00	150	26	-29.02	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 07:45:31

Humidity: 72.9 %

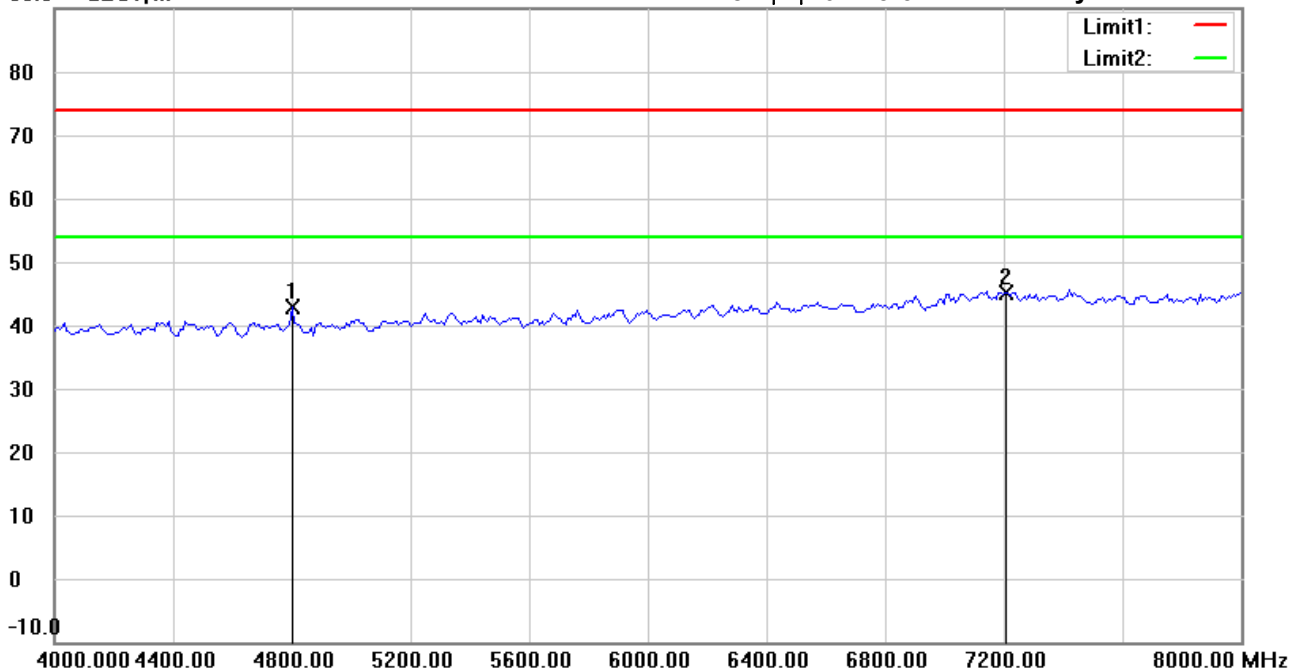

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4801.603	44.63	peak	-1.74	42.89	74.00	150	100	-31.11	
*	7206.000	41.10	peak	4.01	45.11	74.00	150	302	-28.89	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:41:55

Humidity:72.9 %

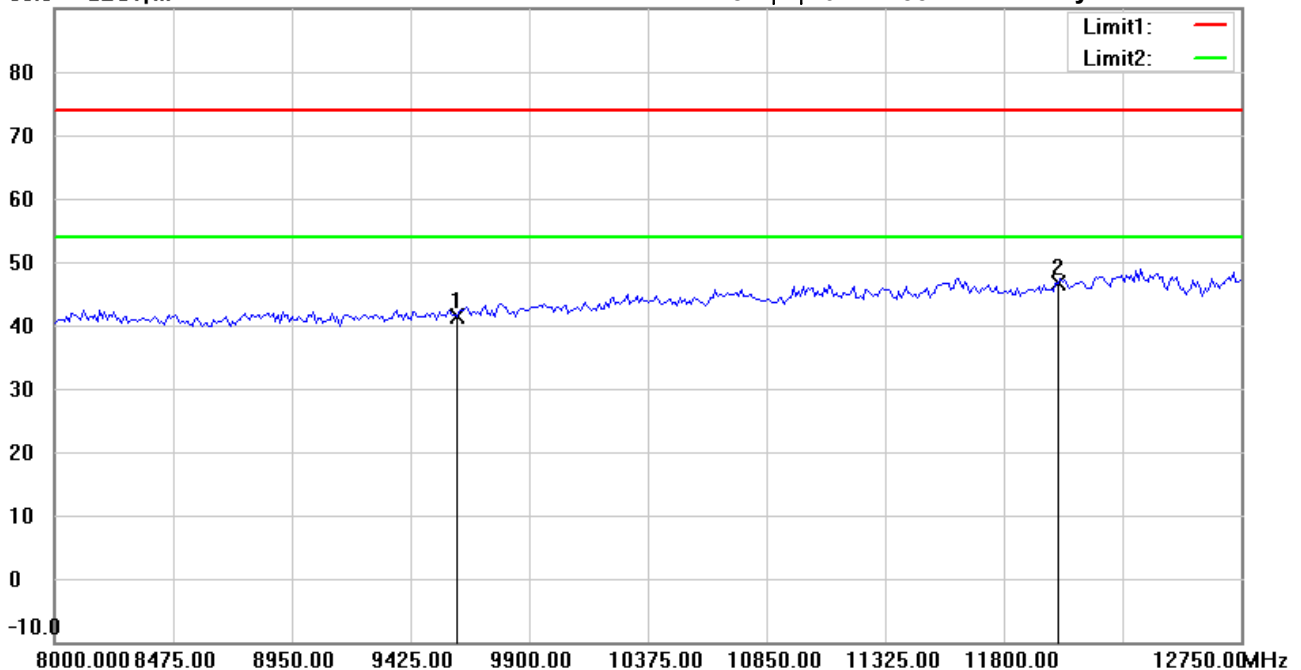

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	34.62	peak	6.80	41.42	74.00	150	107	-32.58	
*	12010.000	34.65	peak	12.09	46.74	74.00	150	4	-27.26	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #8


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 07:47:19

Humidity: 72.9 %

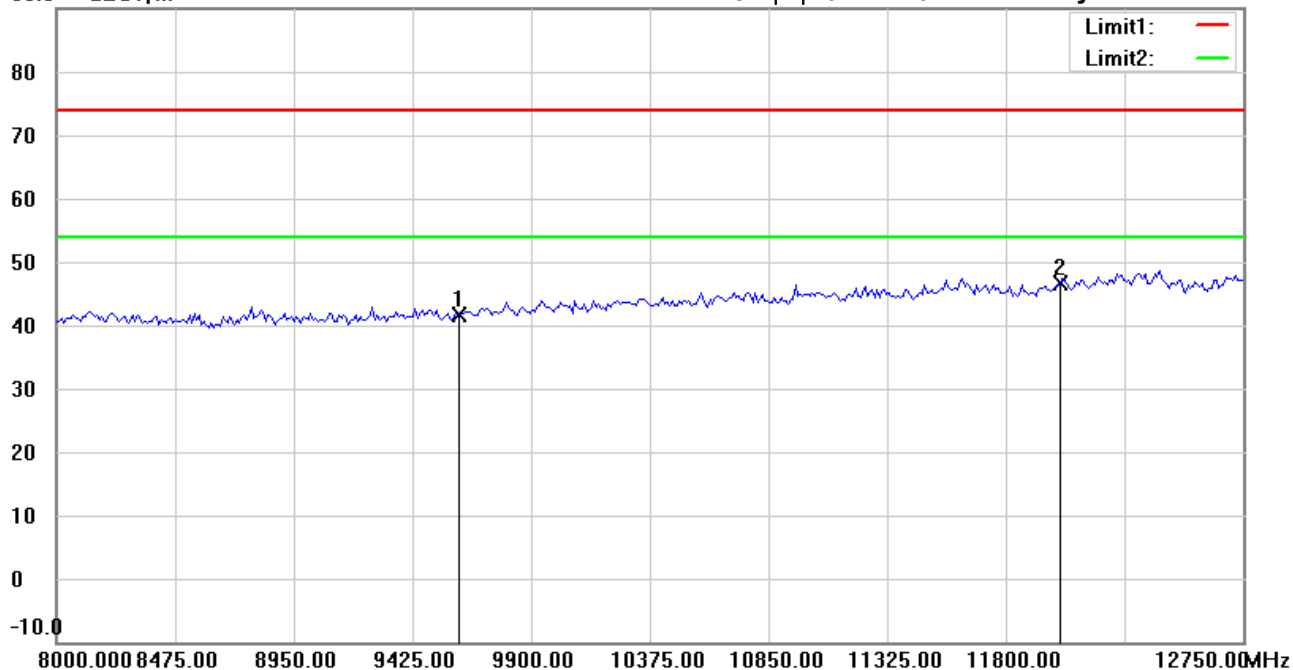

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9608.000	34.83	peak	6.80	41.63	74.00	150	230	-32.37	
*	12010.000	34.61	peak	12.09	46.70	74.00	150	100	-27.30	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:42:11

Humidity:72.9 %

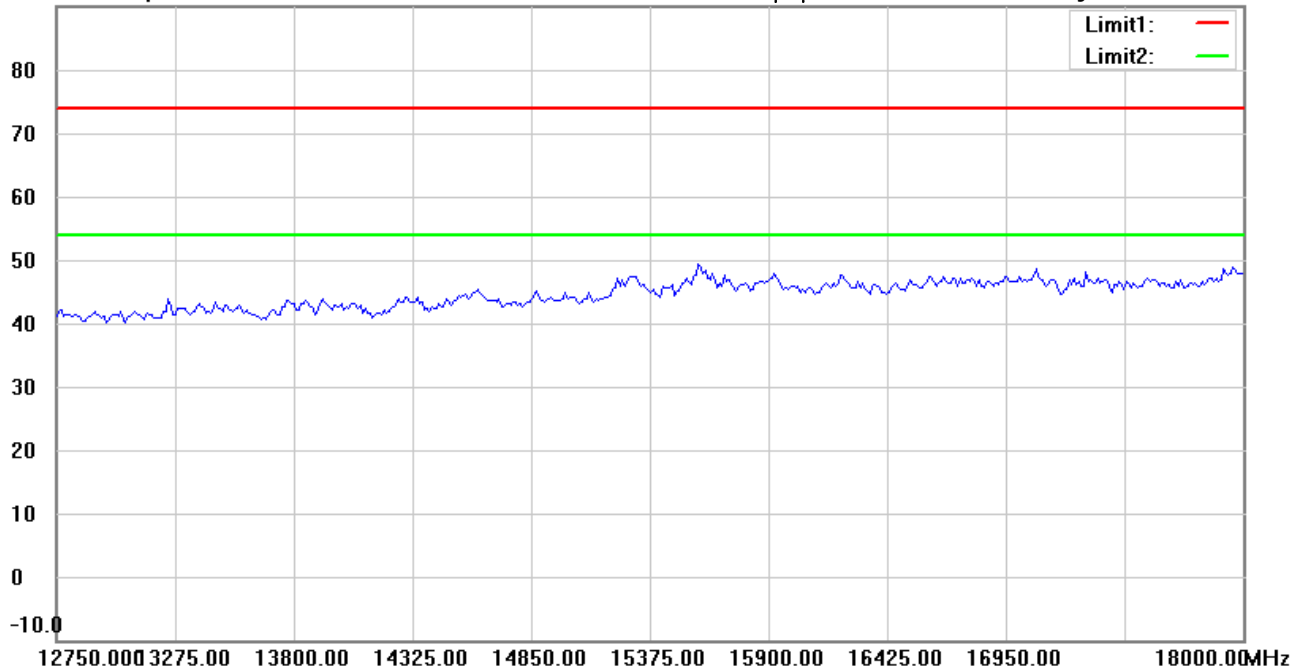

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:47:34

Humidity:72.9 %

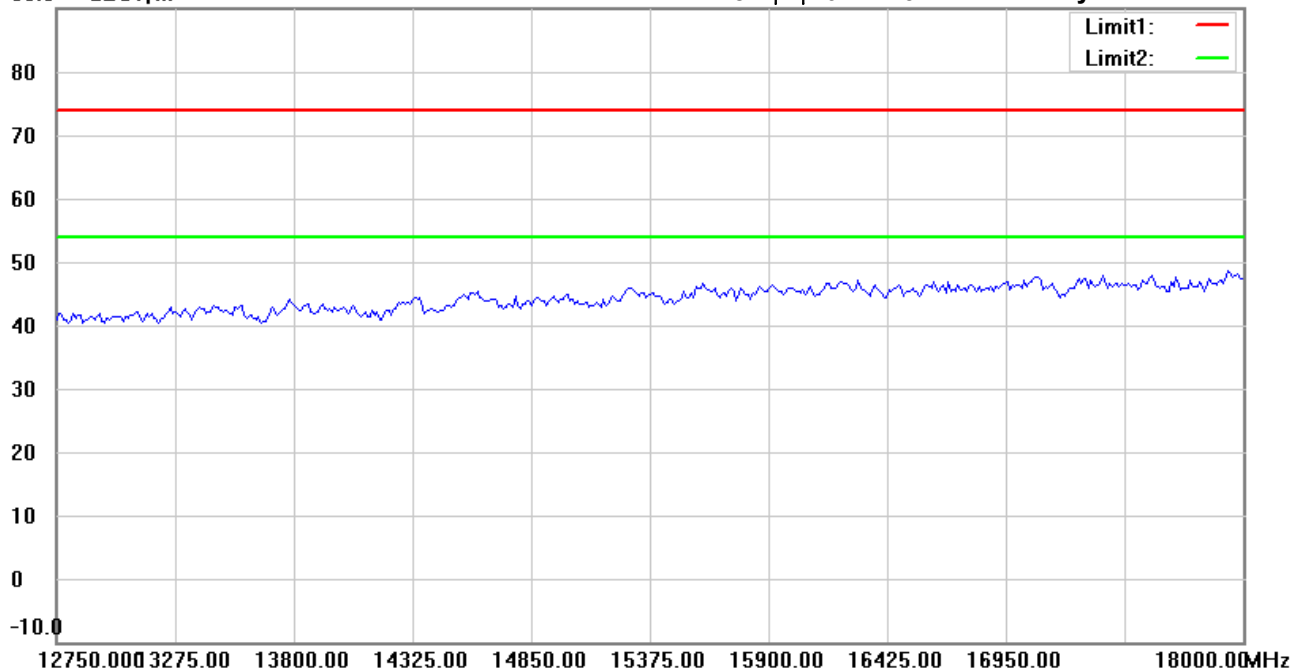

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:42:22

Humidity:72.9 %

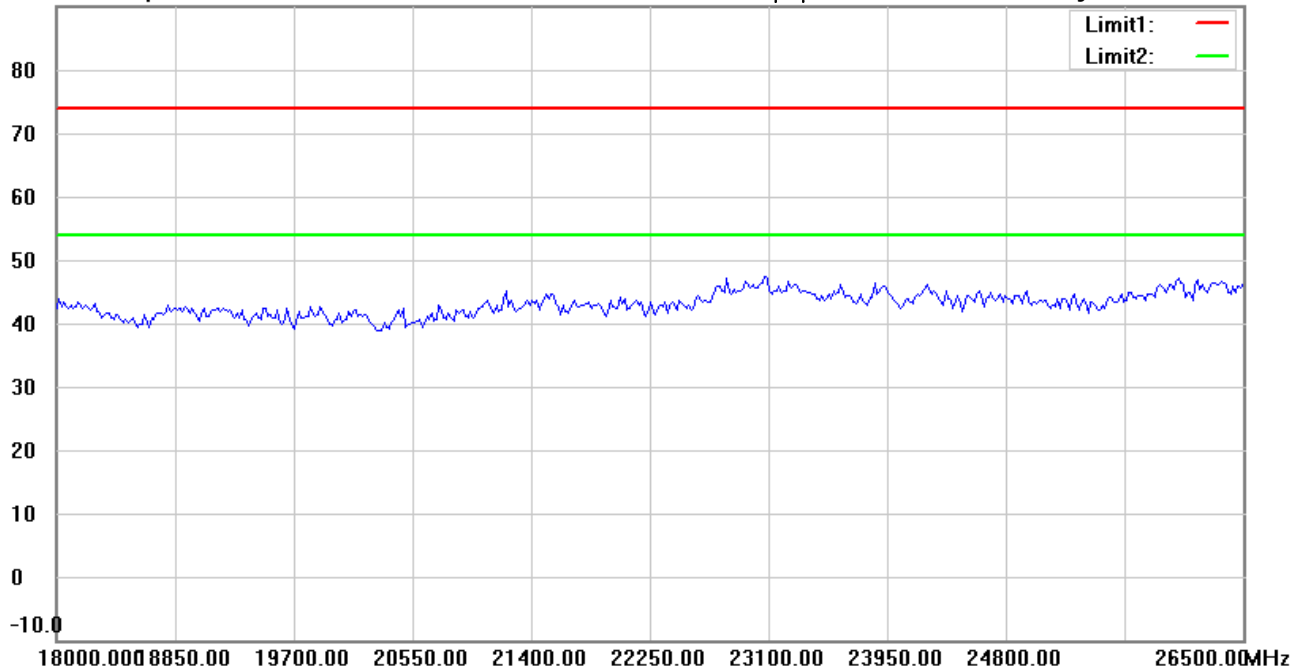

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:47:45

Humidity:72.9 %

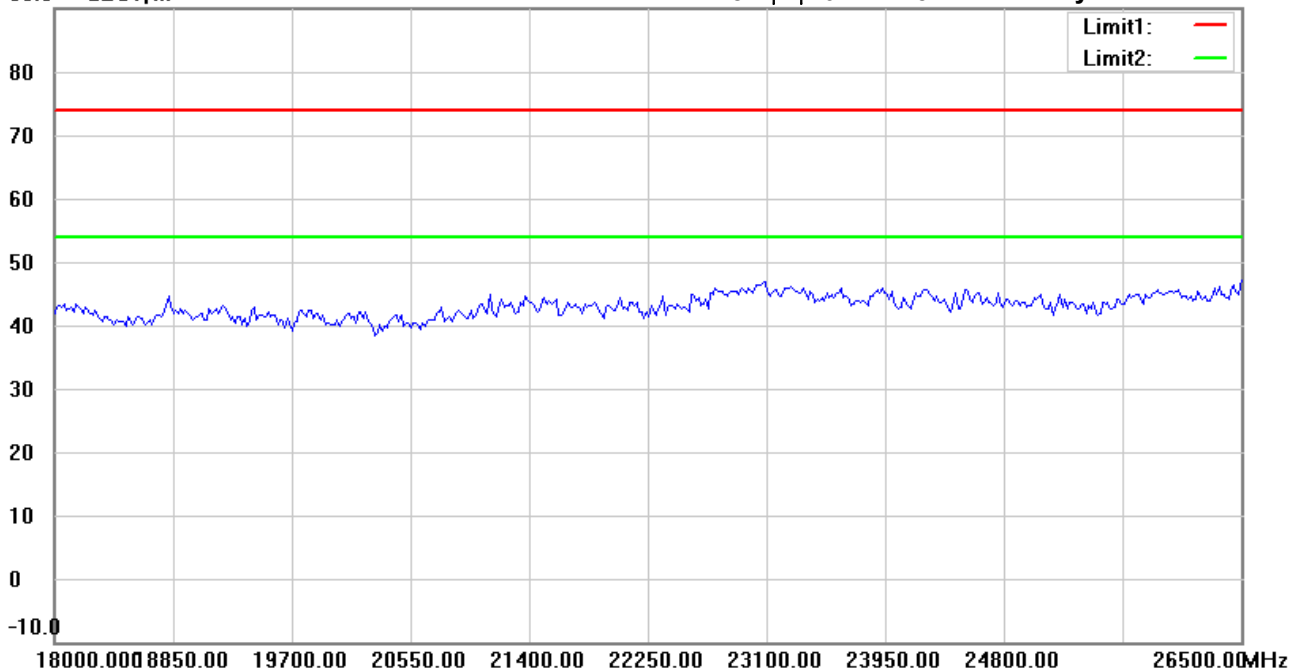

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 07:23:17

Humidity: 72.9 %

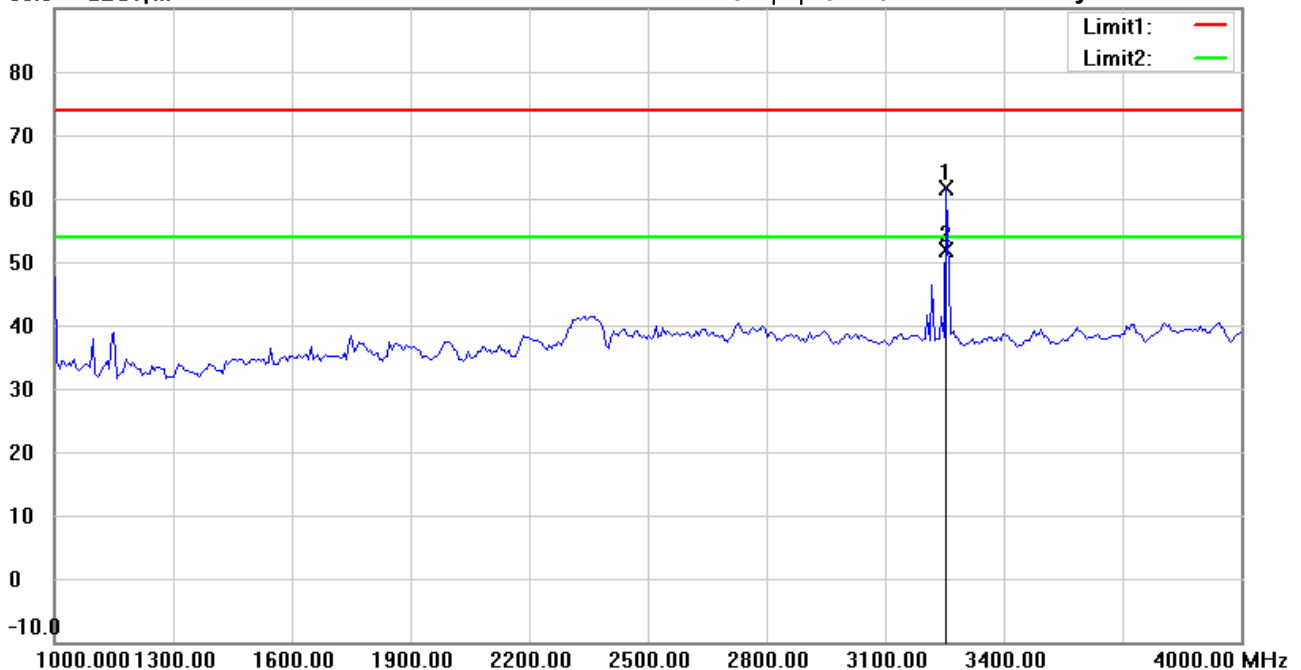

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2440 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3254.509	65.21	peak	-3.48	61.73	74.00	150	119	-12.27	
*	3254.509	55.36	AVG	-3.48	51.88	54.00	150	119	-2.12	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 07:27:55

Humidity: 72.9 %

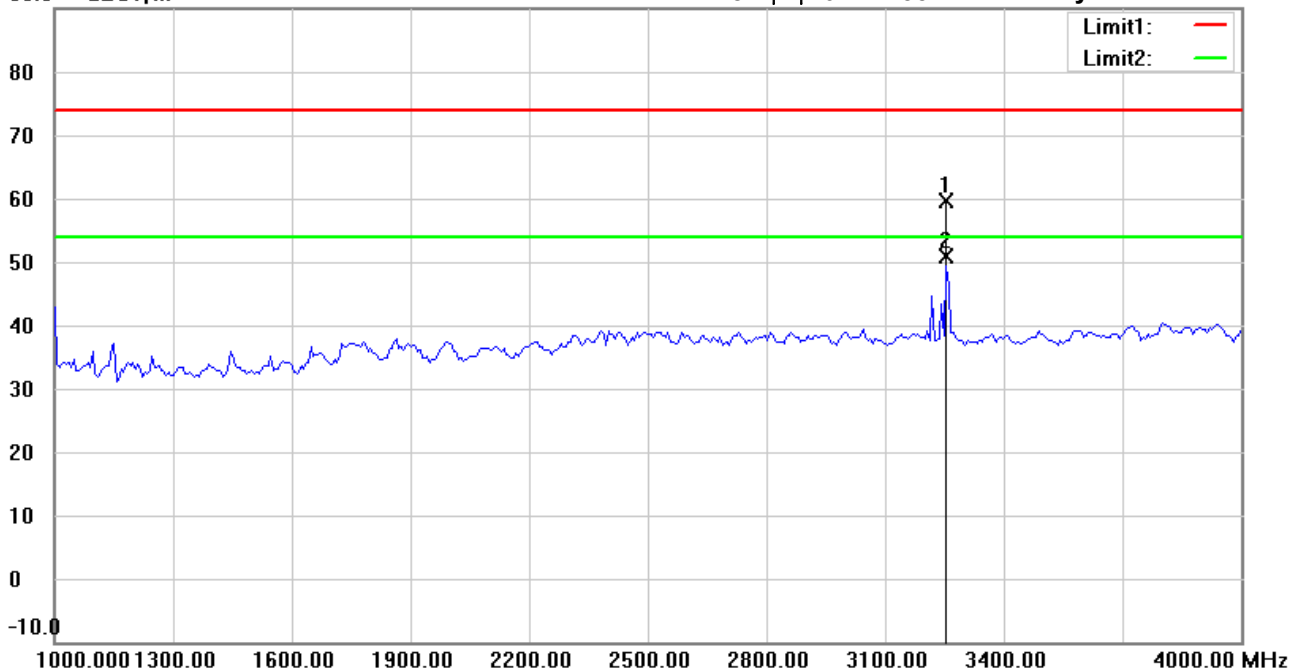

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2440 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3254.509	63.21	peak	-3.48	59.73	74.00	100	6	-14.27	
*	3254.509	54.28	AVG	-3.48	50.80	54.00	100	6	-3.20	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #2


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 07:24:38

Humidity: 72.9 %

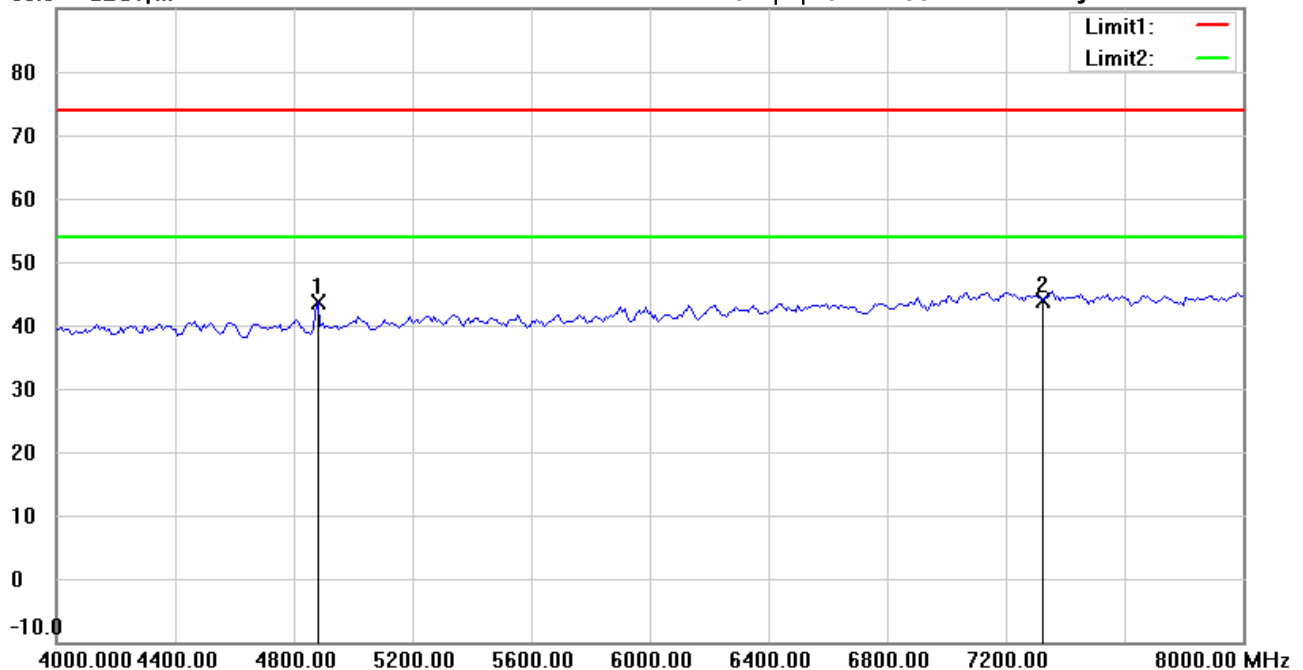

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2440 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4880.000	45.12	peak	-1.41	43.71	74.00	150	86	-30.29	
*	7320.000	40.07	peak	3.85	43.92	74.00	150	229	-30.08	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #7


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 07:29:16

Humidity: 72.9 %

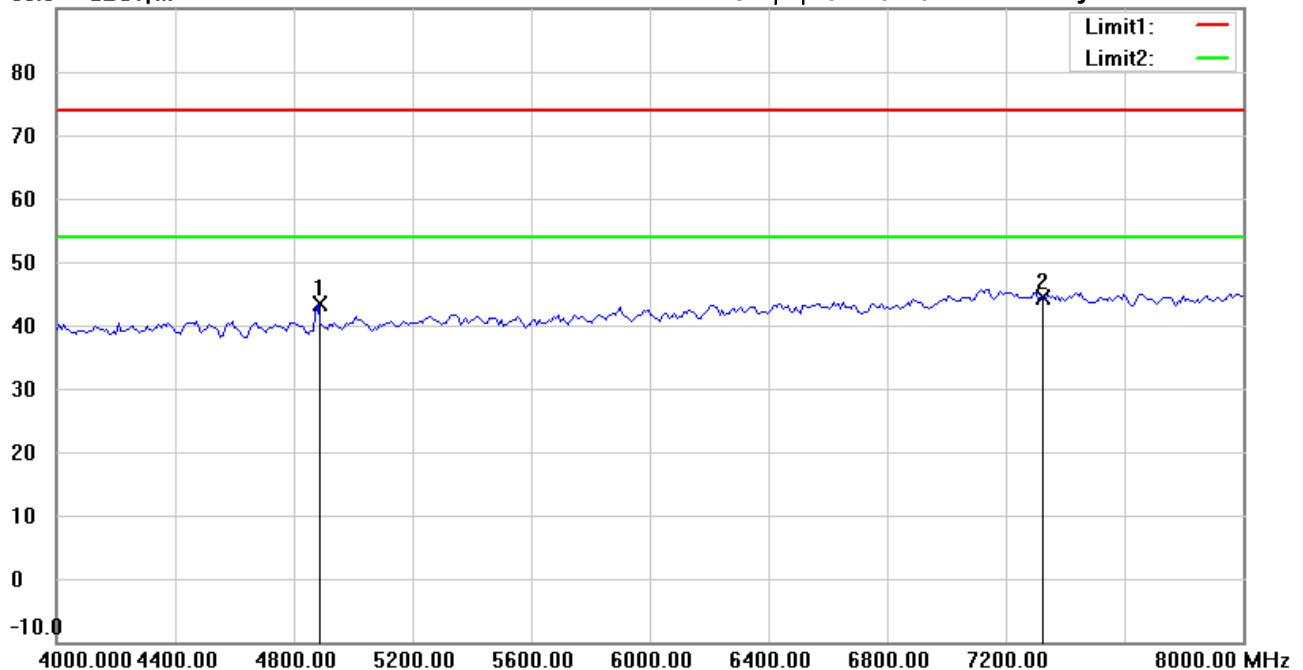

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2440 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4881.764	44.76	peak	-1.40	43.36	74.00	150	109	-30.64	
*	7320.000	40.47	peak	3.85	44.32	74.00	150	77	-29.68	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 07:26:06

Humidity: 72.9 %

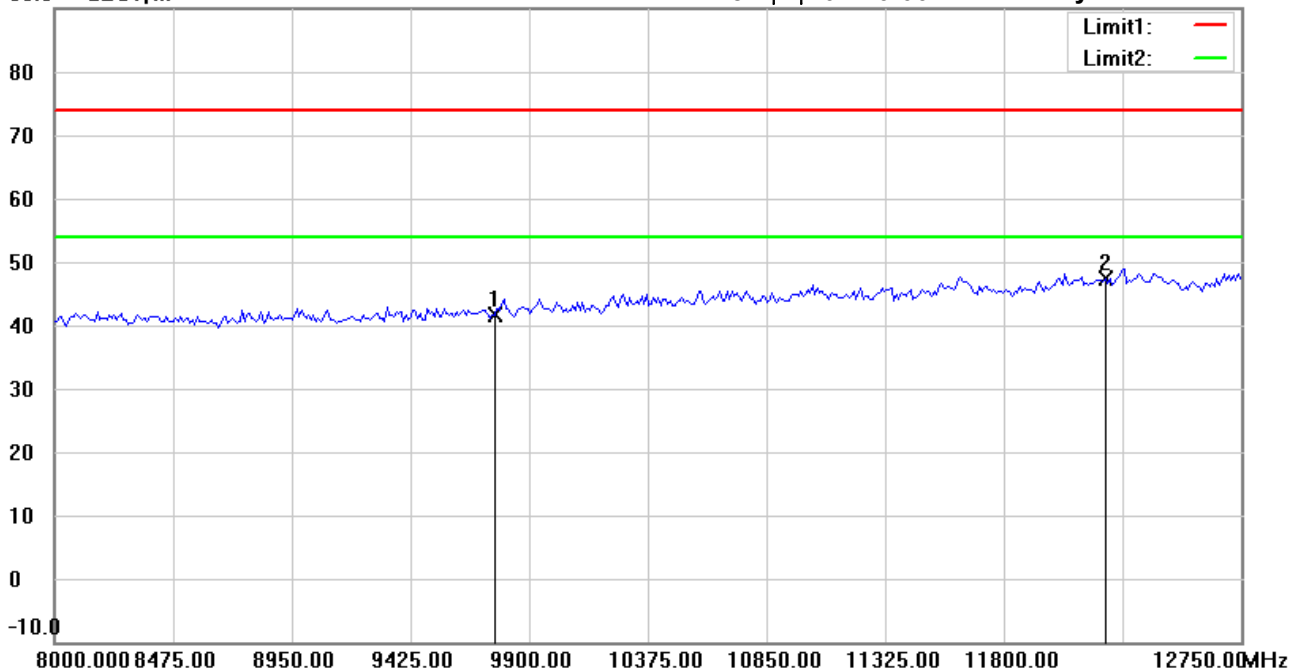

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2440 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	34.67	peak	7.02	41.69	74.00	150	217	-32.31	
*	12200.000	33.84	peak	13.60	47.44	74.00	150	4	-26.56	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#8


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 07:31:26

Humidity: 72.9 %

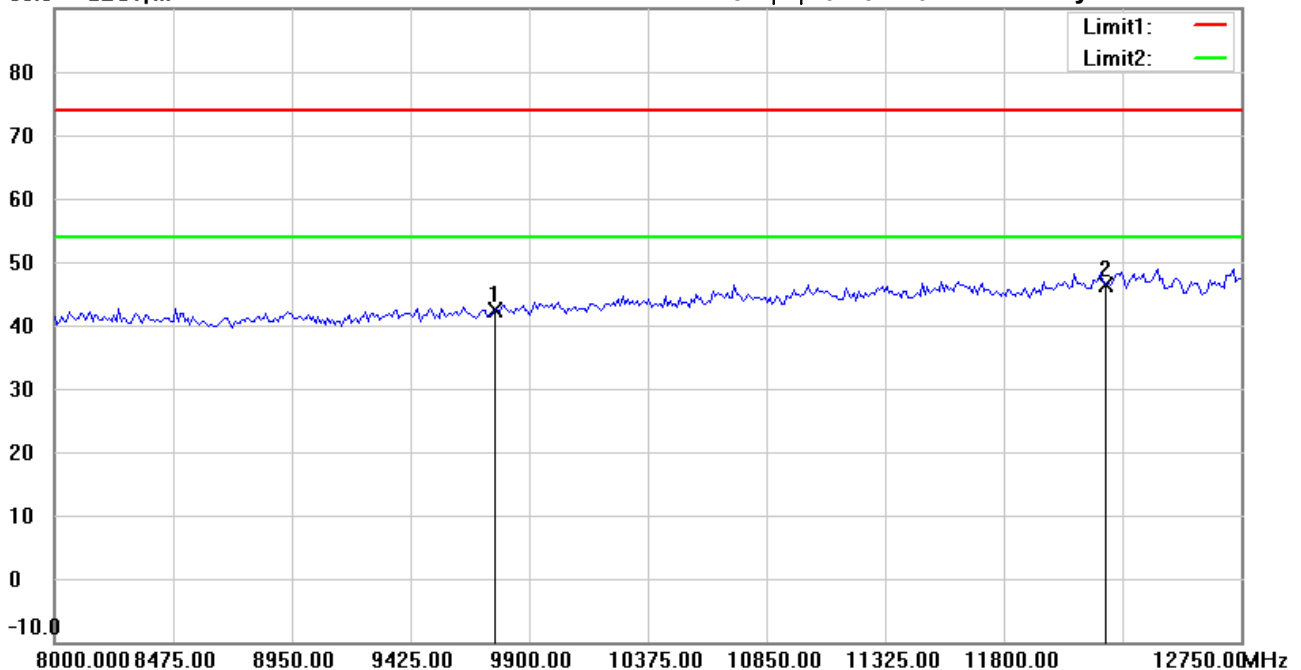

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2440 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9760.000	35.41	peak	7.02	42.43	74.00	150	40	-31.57	
*	12200.000	32.66	peak	13.60	46.26	74.00	150	331	-27.74	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:26:21

Humidity:72.9 %

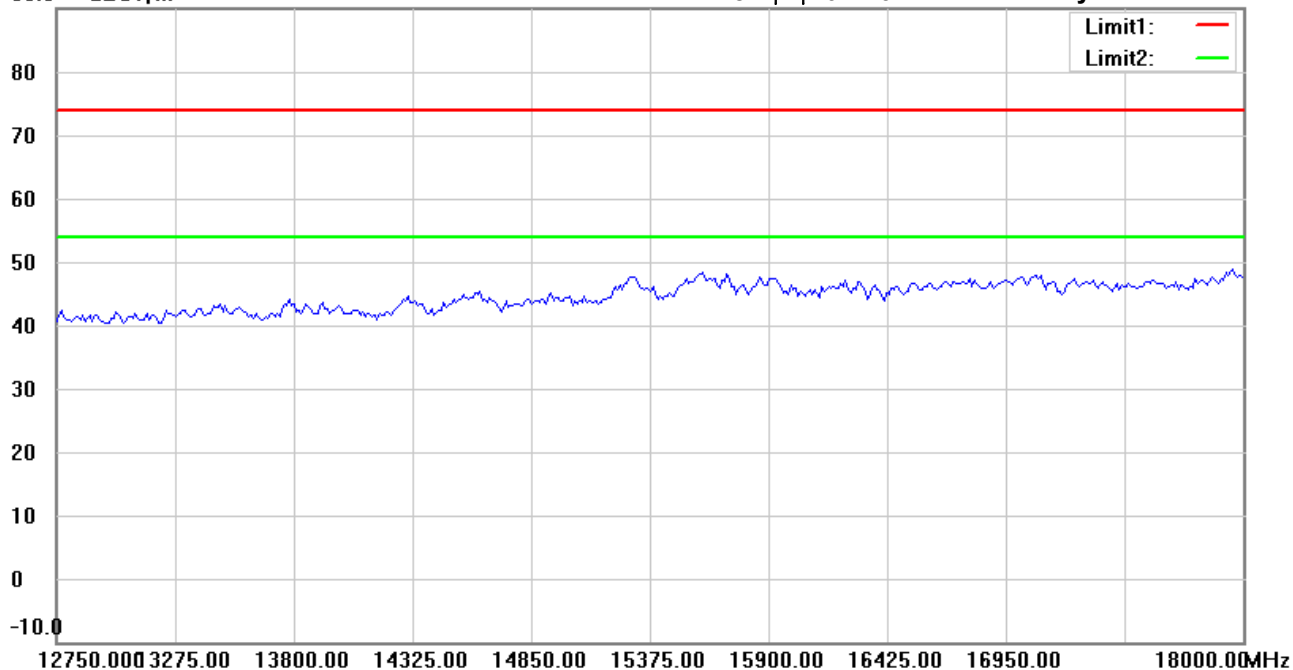

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2440 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:31:40

Humidity:72.9 %

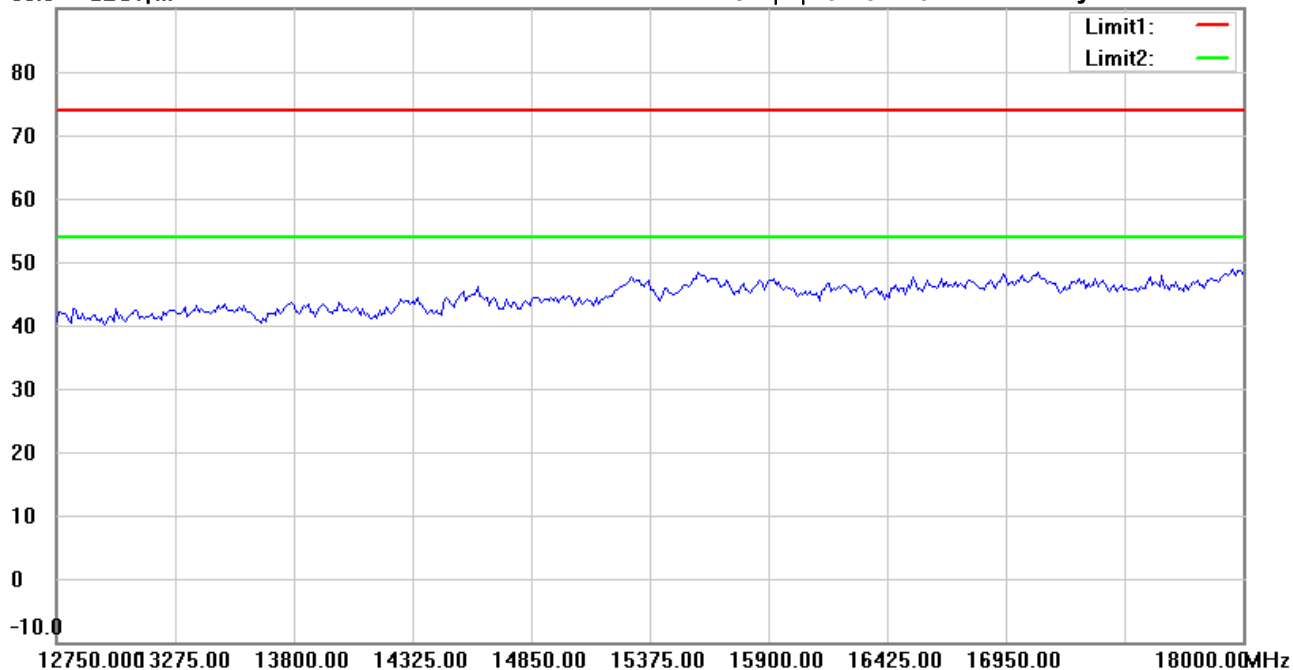

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2440 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:26:30

Humidity:72.9 %

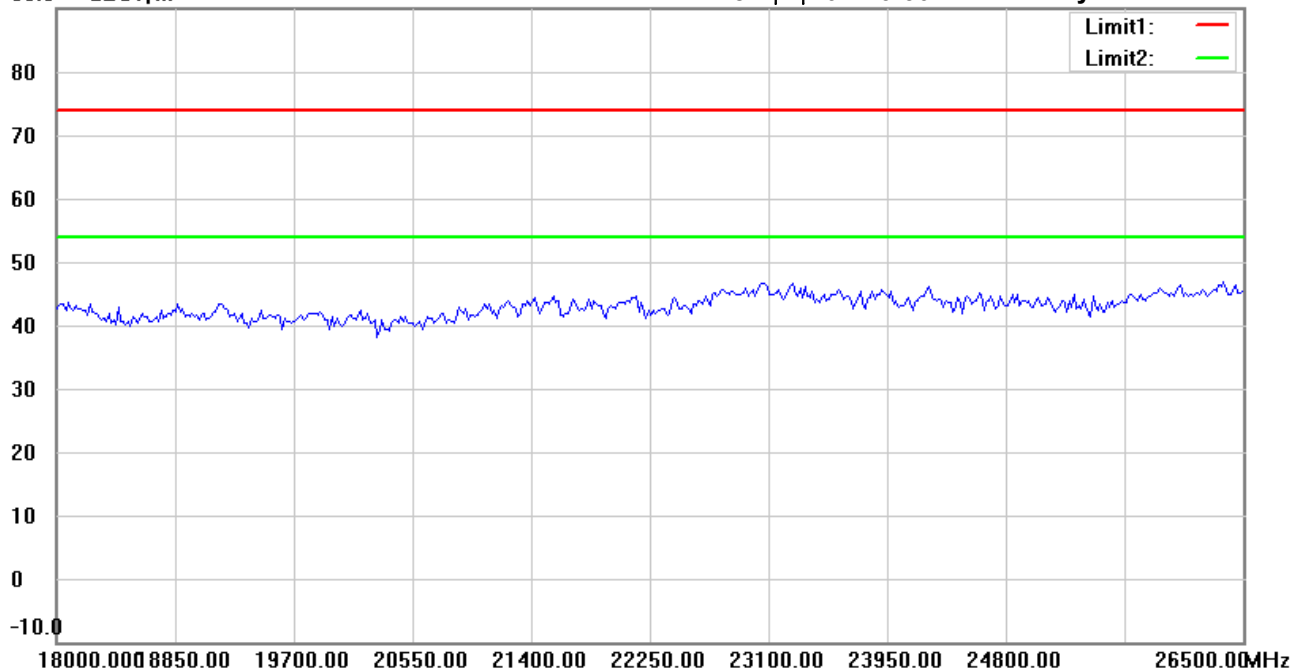

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2440 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:31:49

Humidity:72.9 %

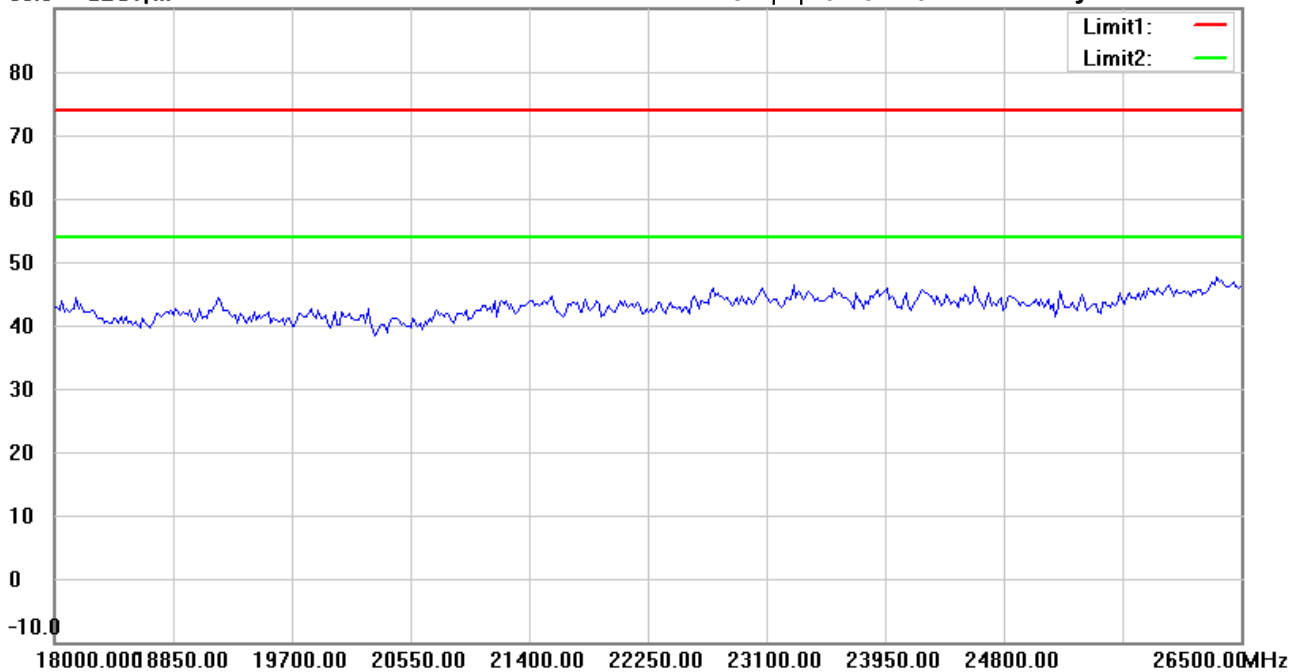

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2440 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #1


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 07:08:55

Humidity: 72.9 %

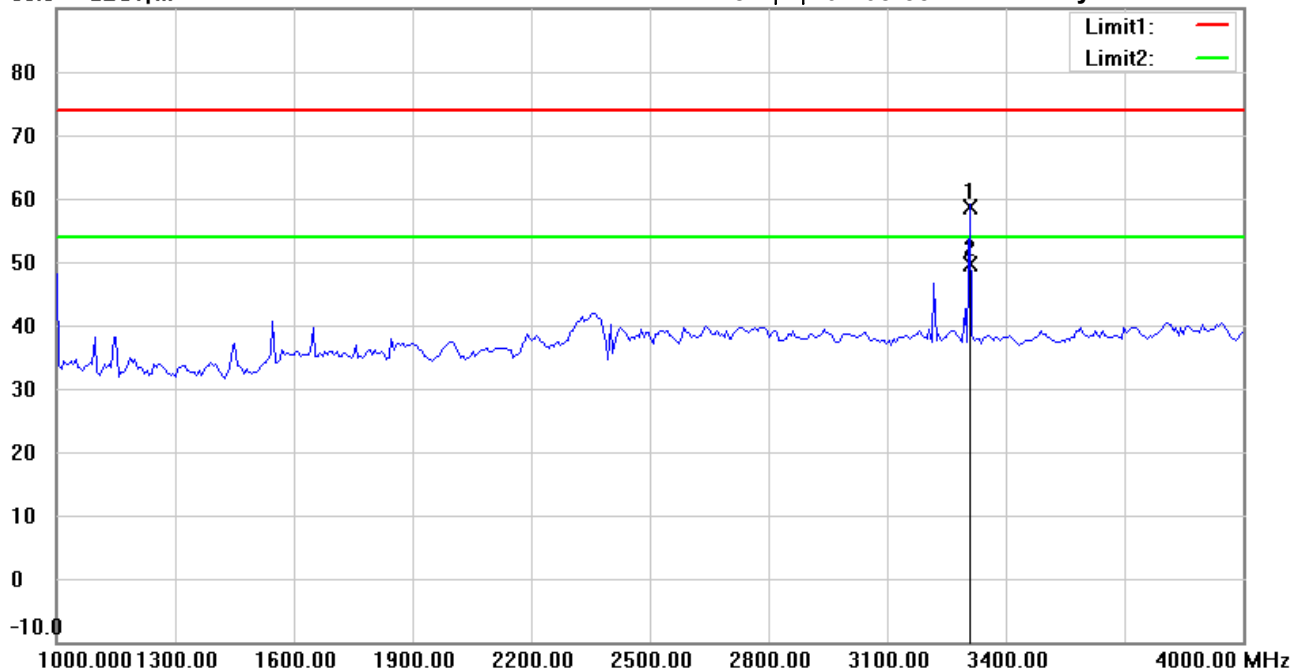

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3308.617	62.17	peak	-3.63	58.54	74.00	150	7	-15.46	
*	3308.617	53.28	AVG	-3.63	49.65	54.00	150	7	-4.35	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#6


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:13:55

Humidity:72.9 %

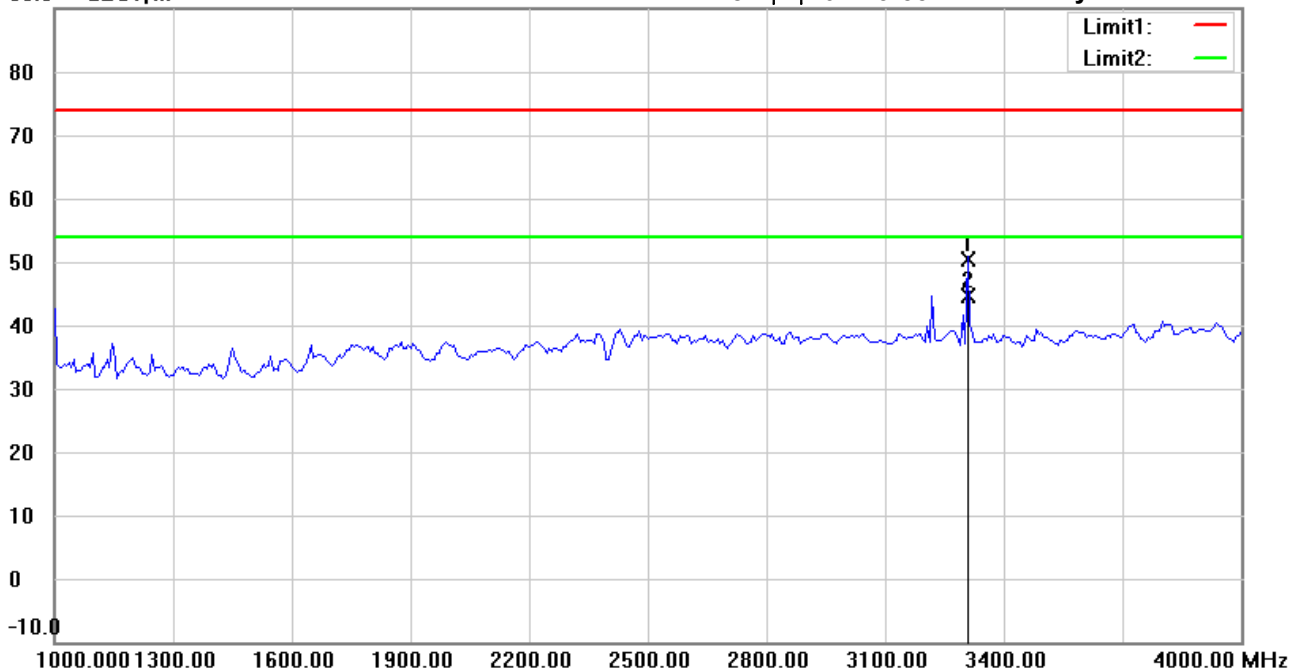

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	3308.617	54.00	peak	-3.63	50.37	74.00	150	30	-23.63	
*	3308.617	48.17	AVG	-3.63	44.54	54.00	150	30	-9.46	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#2


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:10:16

Humidity:72.9 %

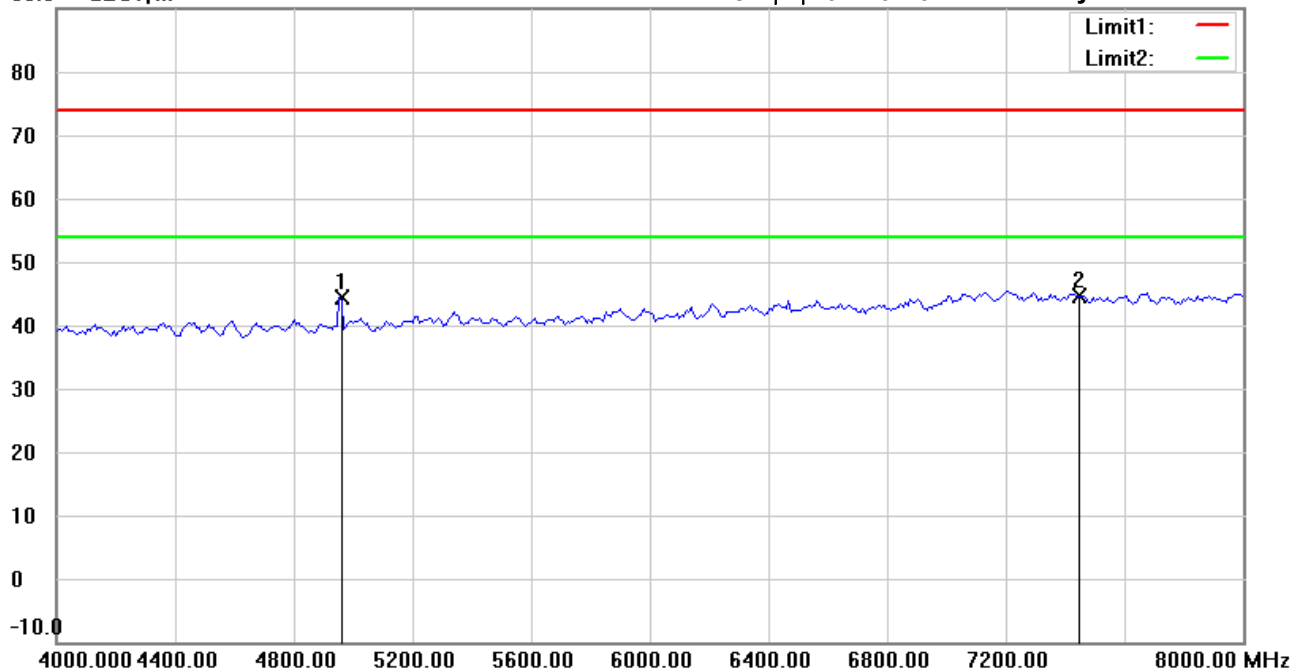

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4953.908	45.24	peak	-0.85	44.39	74.00	150	100	-29.61	
*	7440.000	40.82	peak	3.83	44.65	74.00	150	82	-29.35	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#7


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:15:16

Humidity:72.9 %

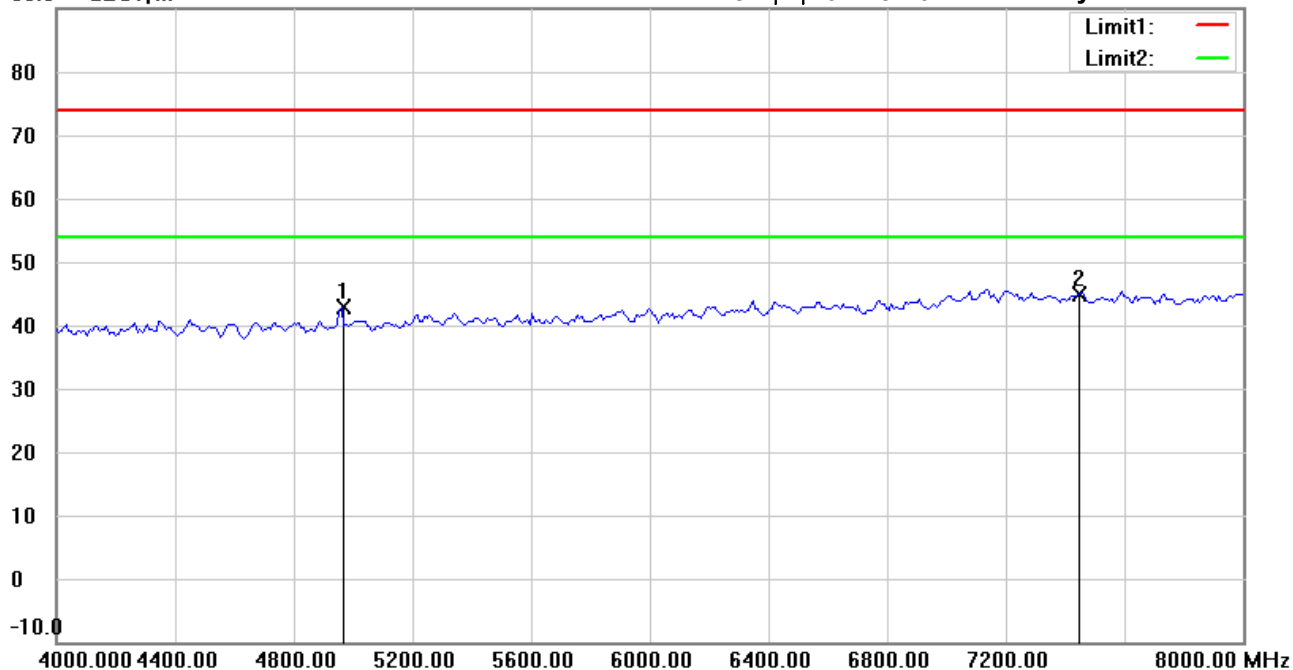

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	4961.924	43.54	peak	-0.78	42.76	74.00	150	107	-31.24	
*	7440.000	41.12	peak	3.83	44.95	74.00	150	28	-29.05	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#3


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:12:08

Humidity:72.9 %

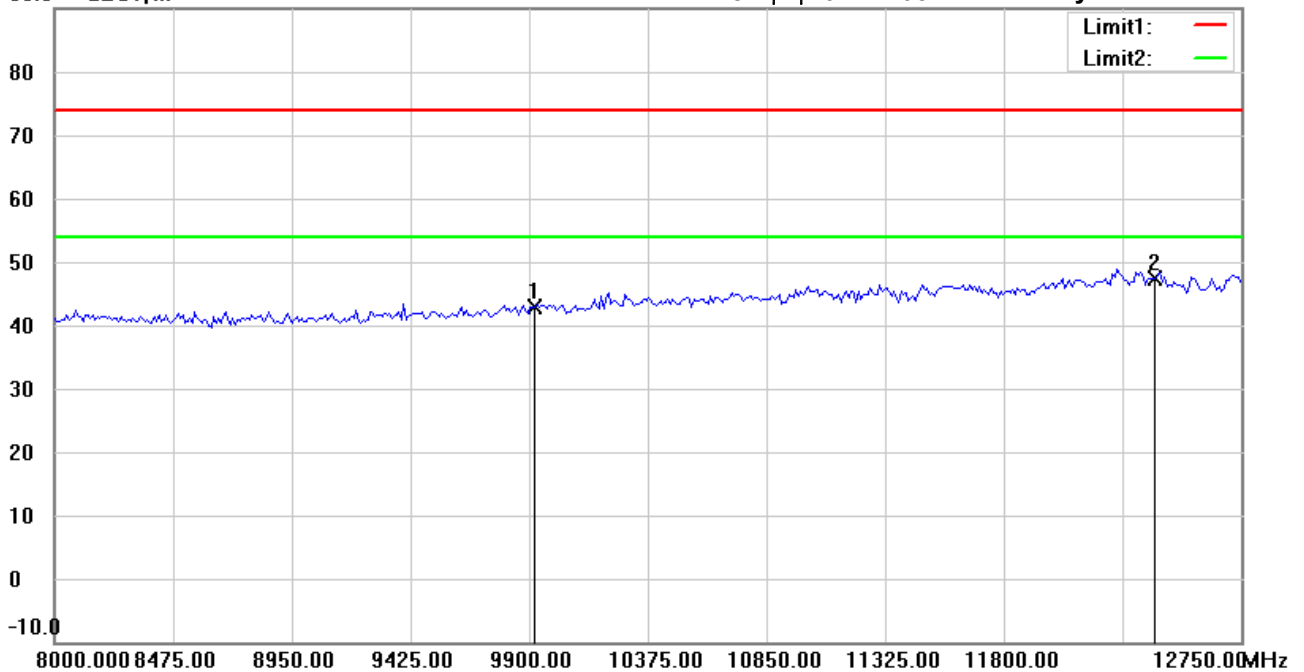

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	35.44	peak	7.54	42.98	74.00	150	6	-31.02	
*	12400.000	33.73	peak	13.71	47.44	74.00	150	331	-26.56	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File : 3

Data : #8


Date: 2023/2/24

Temperature: 21.4 °C

90.0 dBuV/m

Time: 下午 07:17:08

Humidity: 72.9 %

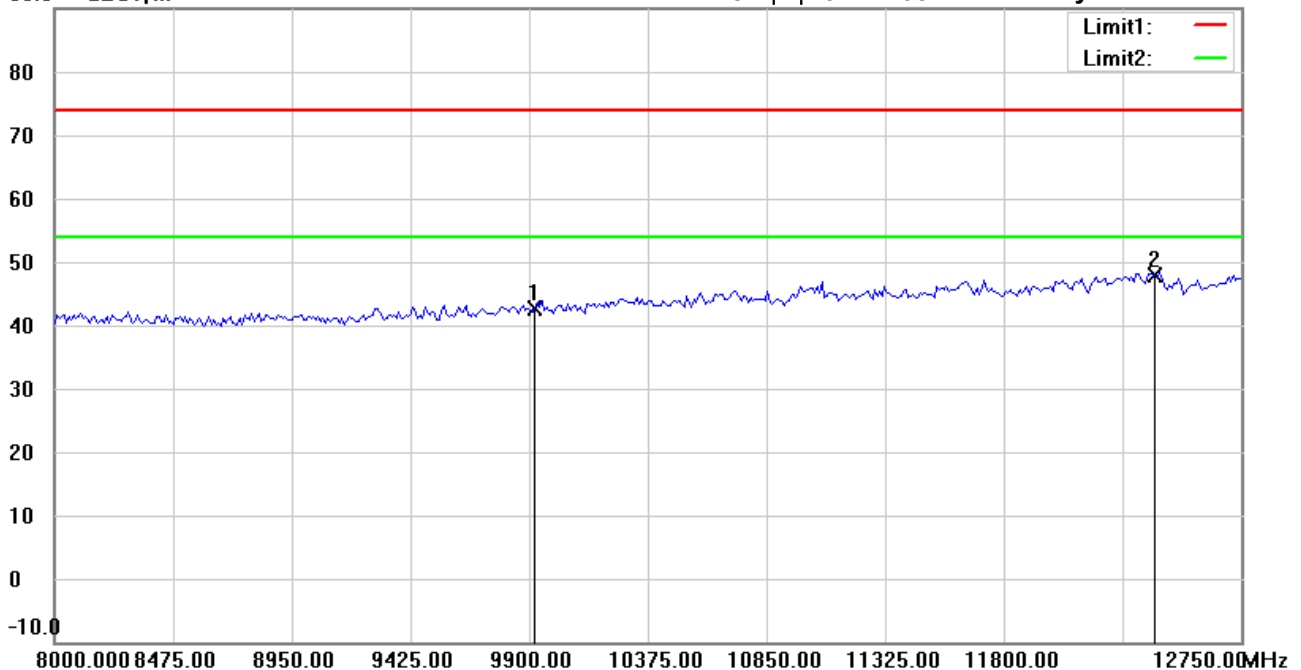

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	9920.000	35.12	peak	7.54	42.66	74.00	150	43	-31.34	
*	12400.000	34.13	peak	13.71	47.84	74.00	150	107	-26.16	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#4


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:12:22

Humidity:72.9 %

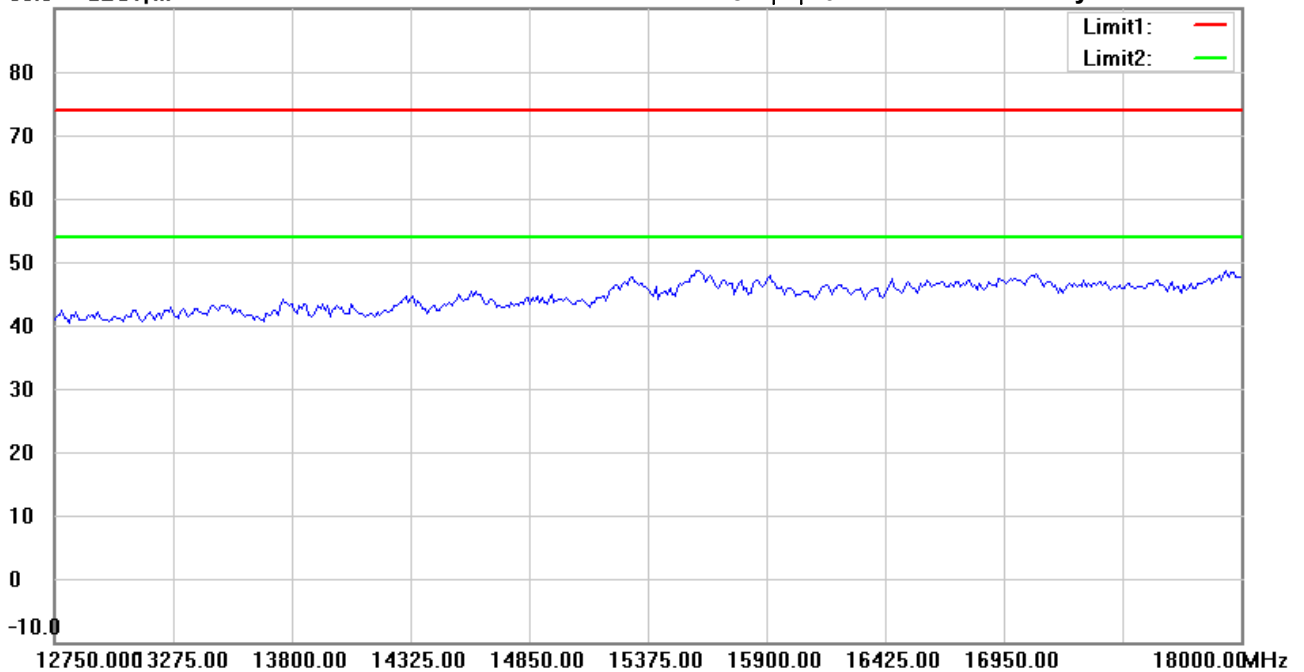

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#9


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:17:22

Humidity:72.9 %

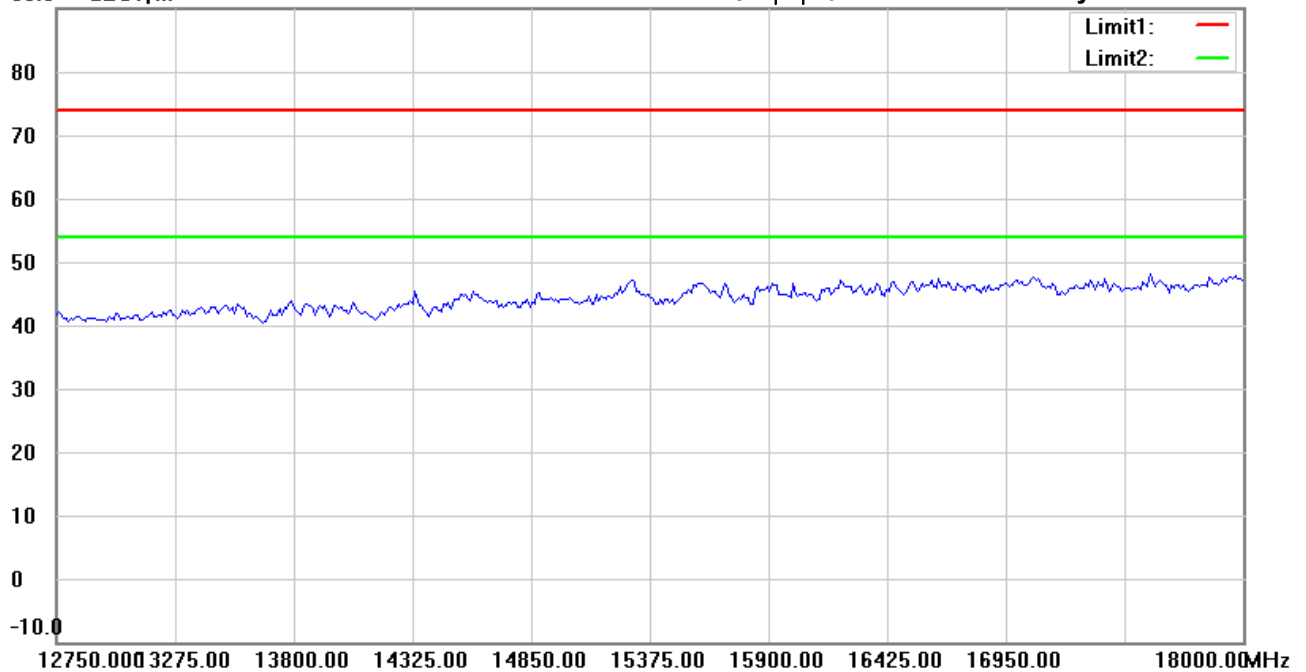

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#5


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:12:32

Humidity:72.9 %

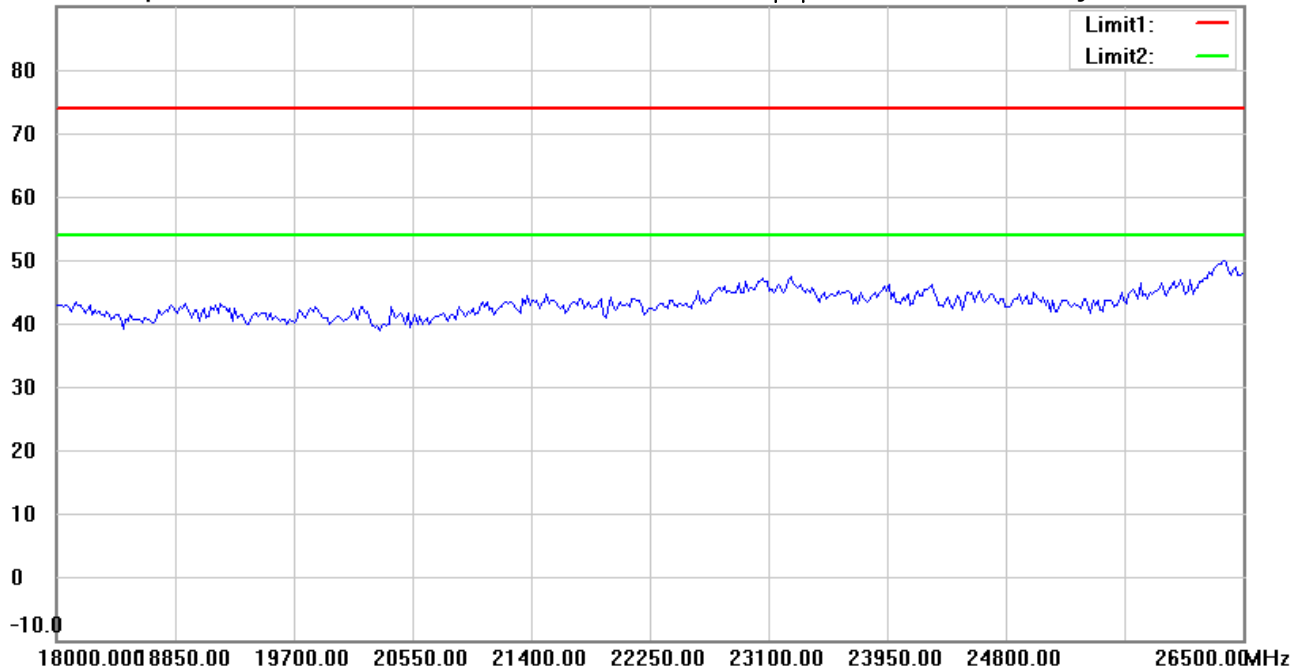

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8879

Radiated Emission Measurement

Operator: Sky

File :3

Data :#10


Date: 2023/2/24

Temperature:21.4 °C

90.0 dBuV/m

Time: 下午 07:17:32

Humidity:72.9 %

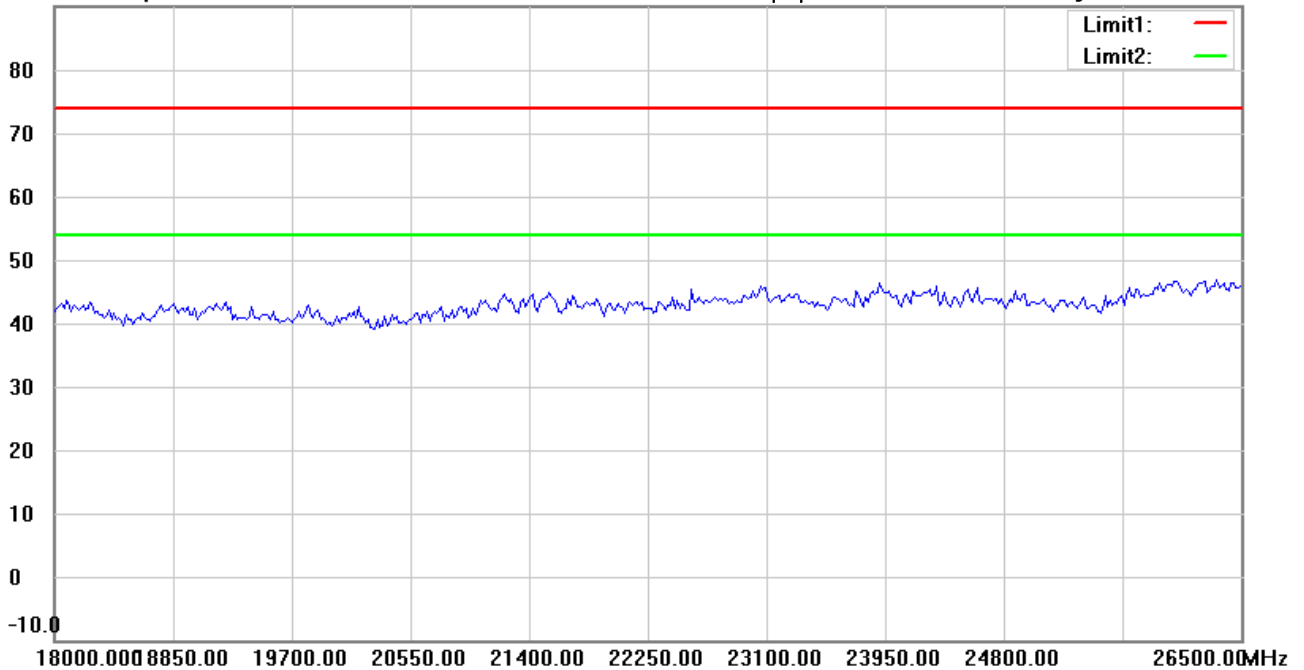

Site : Chamber

Condition : FCC_part 15 RE-Class C_Above 1GHz_PK

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
-----	-----------------	----------------	----------	---------------------	-----------------	----------------	--------------	----------------	-------------	---------

*:Maximum data x:Over limit !:over margin



Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#1


Date: 2023/2/24

Temperature:21.4 °C

120.0 dBuV/m

Time: 下午 08:03:09

Humidity:72.9 %

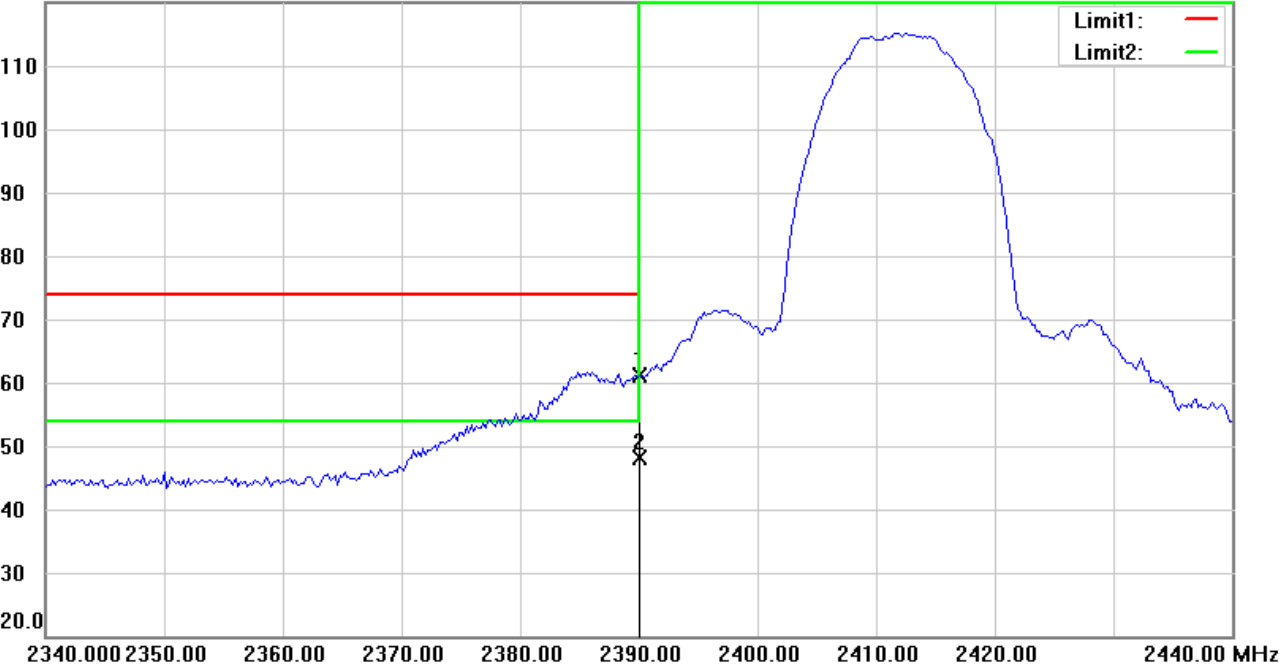

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	23.99	peak	37.11	61.10	74.00	150	99	-12.90	
*	2390.000	11.09	AVG	37.11	48.20	54.00	150	99	-5.80	



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#2


Date: 2023/2/24

Temperature:21.4 °C

120.0 dBuV/m

Time: 下午 08:06:06

Humidity:72.9 %

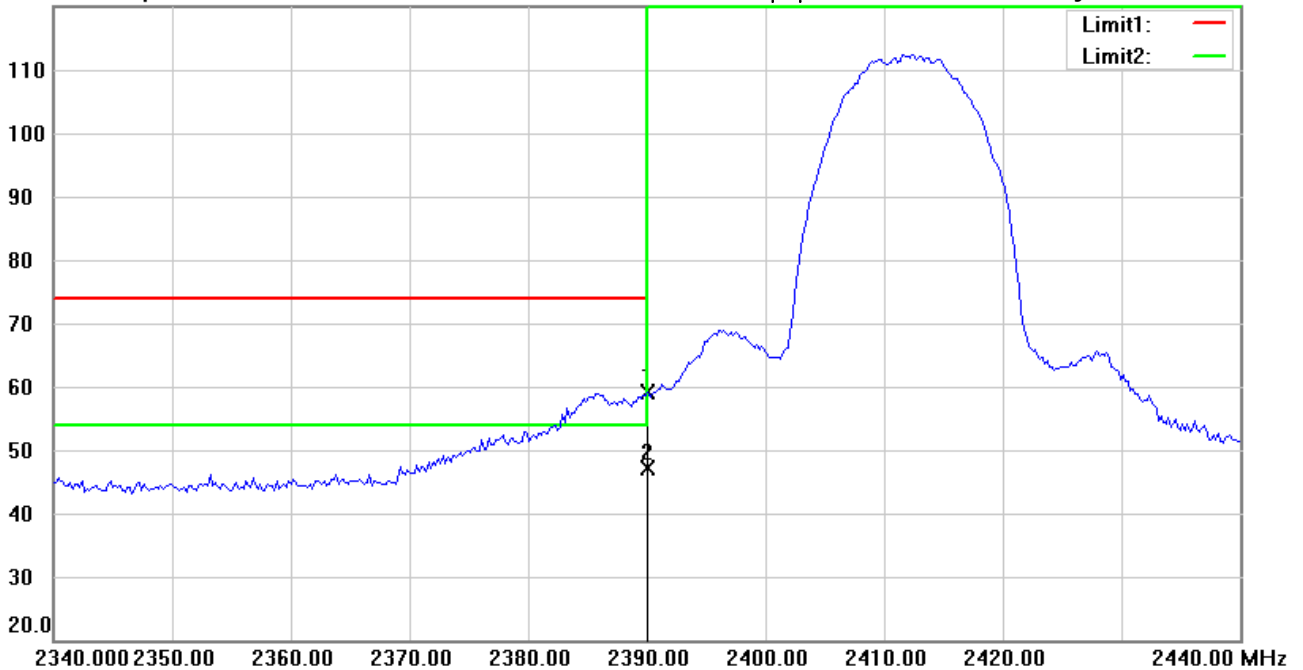

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH1

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	22.01	peak	37.11	59.12	74.00	190	359	-14.88	
*	2390.000	9.94	AVG	37.11	47.05	54.00	190	359	-6.95	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 2023/2/24

Temperature: 21.4 °C

120.0 dBuV/m

Time: 下午 09:09:25

Humidity: 72.9 %

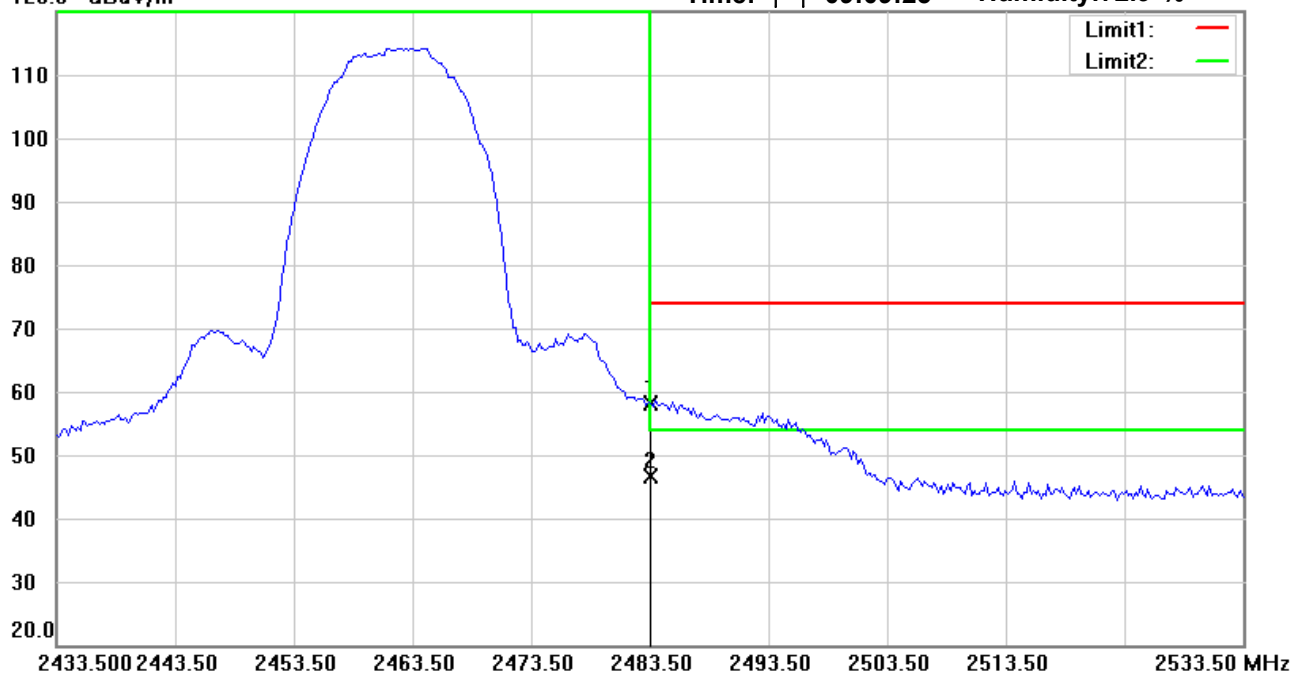

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	19.96	peak	38.14	58.10	74.00	150	110	-15.90	
*	2483.500	8.55	AVG	38.14	46.69	54.00	150	110	-7.31	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#2


Date: 2023/2/24

Temperature:21.4 °C

120.0 dBuV/m

Time: 下午 09:13:07

Humidity:72.9 %

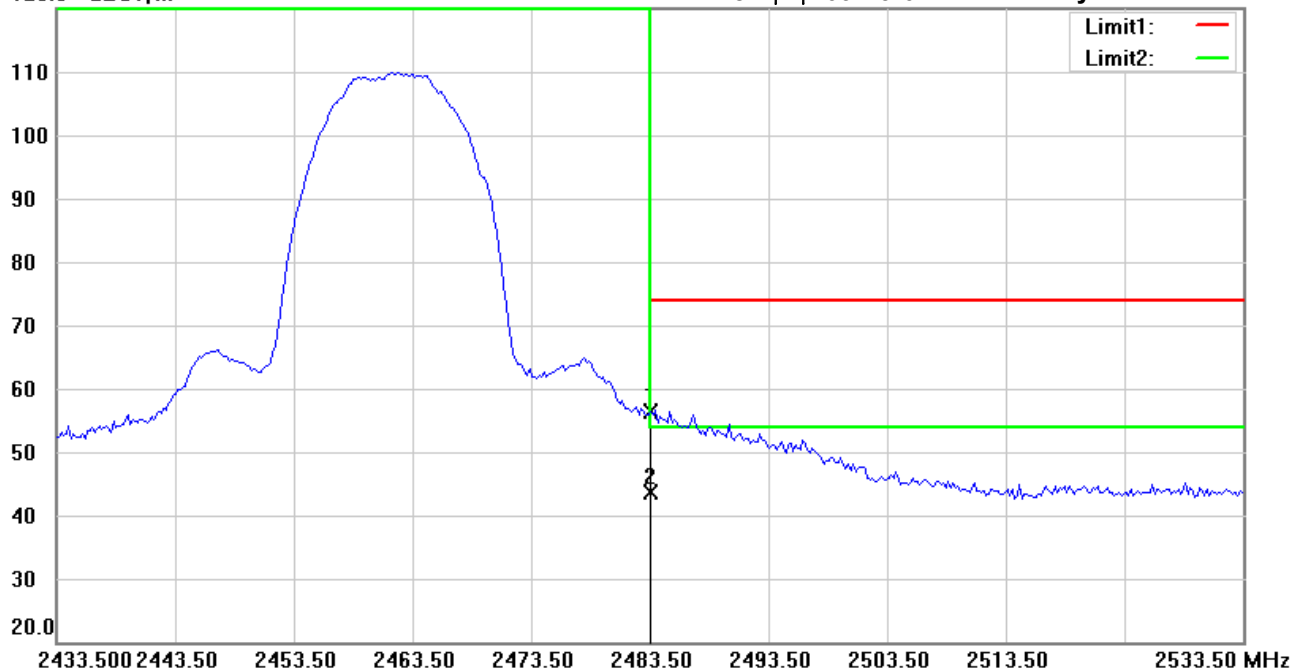

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11b CH11

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	18.36	peak	38.14	56.50	74.00	220	359	-17.50	
*	2483.500	5.37	AVG	38.14	43.51	54.00	220	359	-10.49	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 2023/2/24

Temperature: 21.4 °C

120.0 dBuV/m

Time: 下午 08:21:12

Humidity: 72.9 %

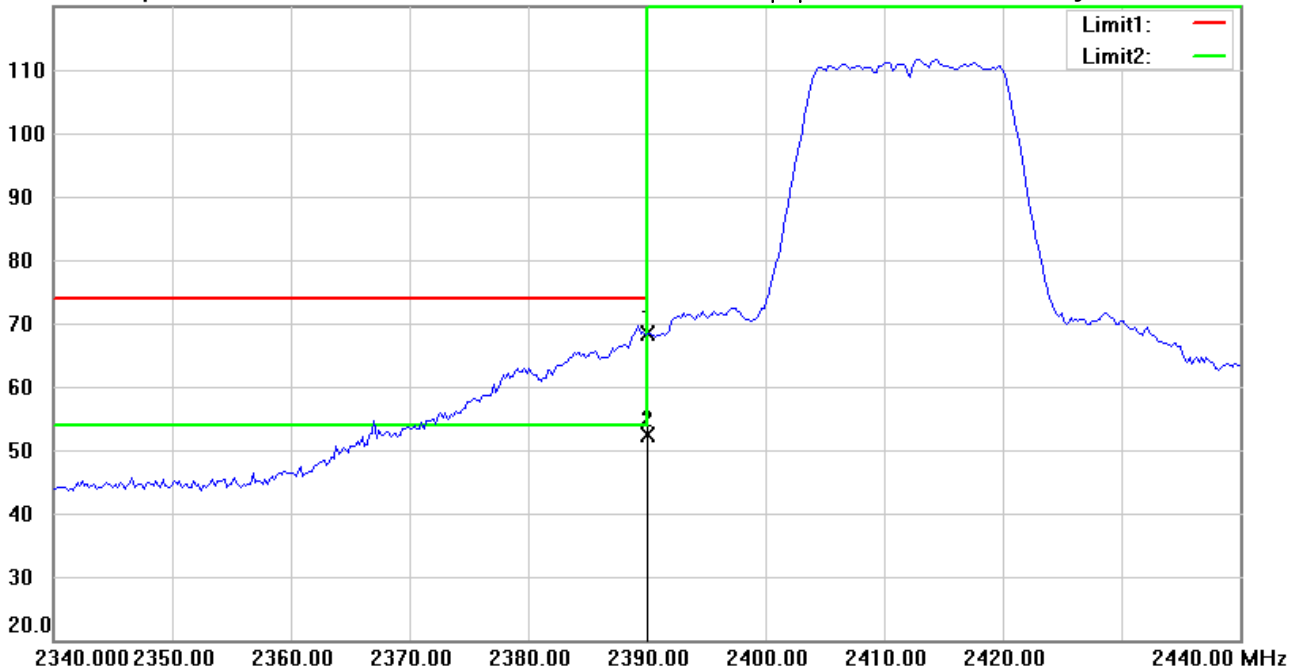

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	31.22	peak	37.11	68.33	74.00	150	55	-5.67	
*	2390.000	15.28	AVG	37.11	52.39	54.00	150	55	-1.61	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #2


Date: 2023/2/24

Temperature: 21.4 °C

120.0 dBuV/m

Time: 下午 08:17:13

Humidity: 72.9 %

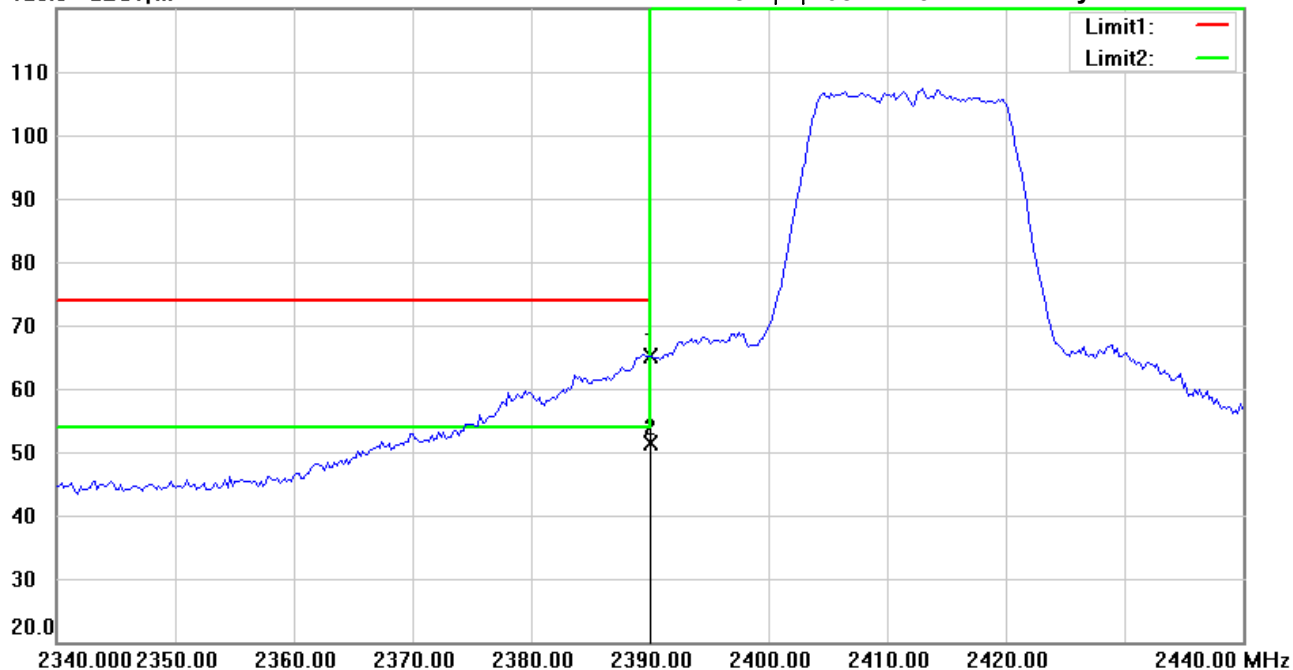

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH1

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	27.95	peak	37.11	65.06	74.00	190	359	-8.94	
*	2390.000	14.20	AVG	37.11	51.31	54.00	190	359	-2.69	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#1


Date: 2023/2/24

Temperature:21.4 °C

120.0 dBuV/m

Time: 下午 09:18:05

Humidity:72.9 %

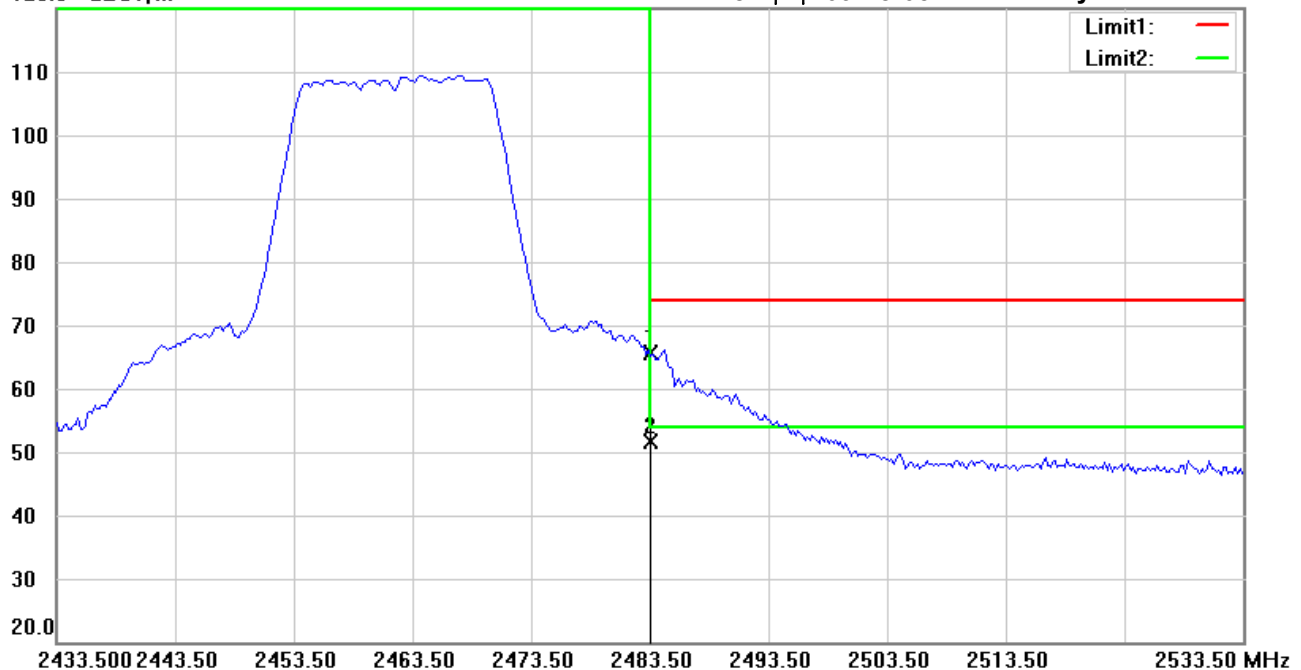

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	27.54	peak	38.14	65.68	74.00	150	110	-8.32	
*	2483.500	13.50	AVG	38.14	51.64	54.00	150	110	-2.36	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#2


Date: 2023/2/24

Temperature:21.4 °C

120.0 dBuV/m

Time: 下午 09:22:34

Humidity:72.9 %

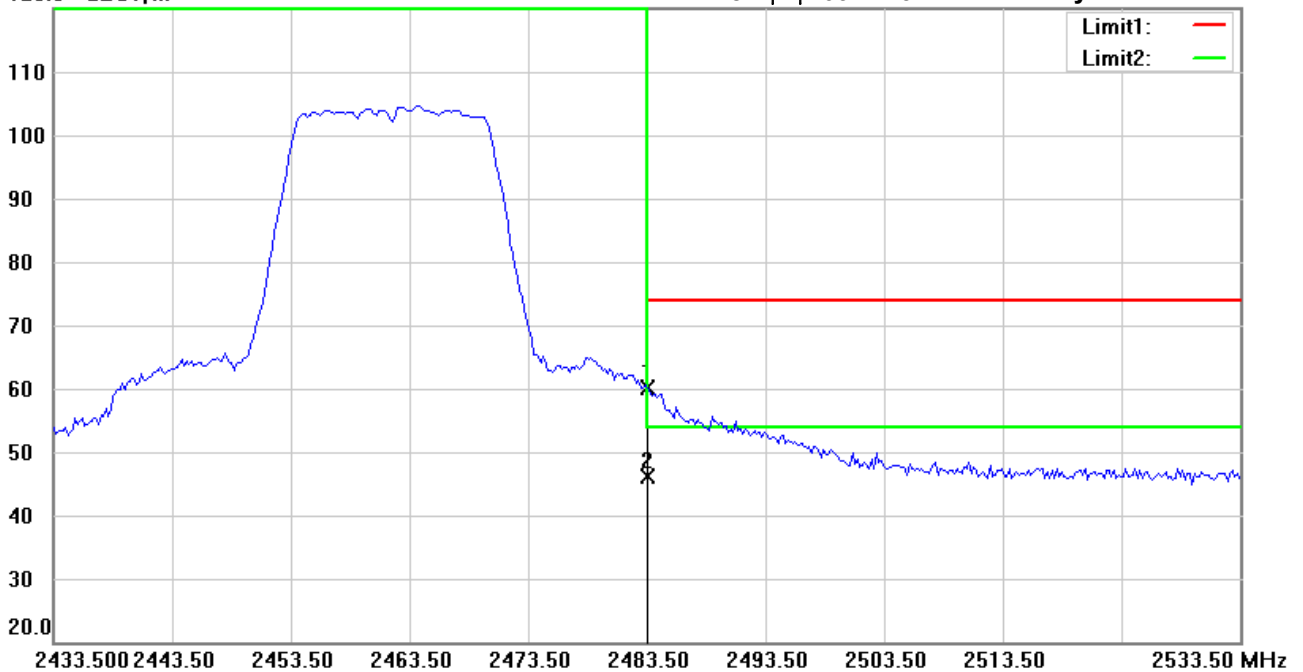

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11g CH11

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	21.97	peak	38.14	60.11	74.00	270	0	-13.89	
*	2483.500	7.89	AVG	38.14	46.03	54.00	270	0	-7.97	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 2023/2/24

Temperature: 21.4 °C

120.0 dBuV/m

Time: 下午 08:39:46

Humidity: 72.9 %

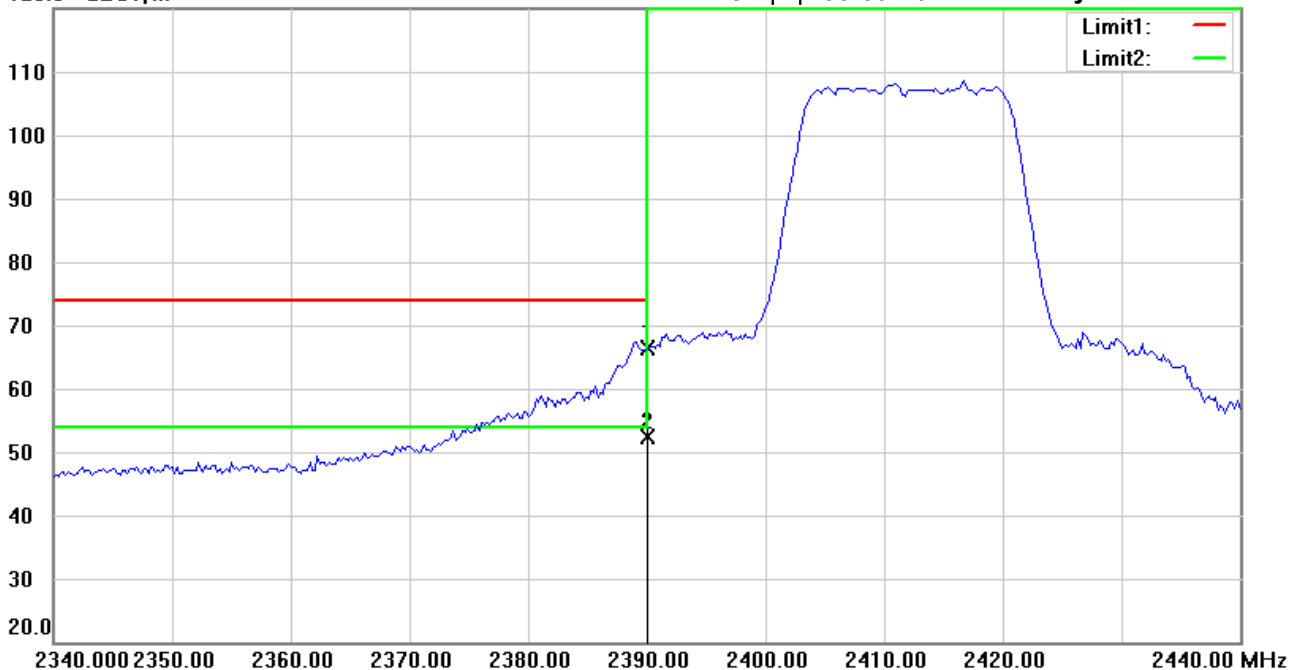

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH1

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	29.35	peak	37.11	66.46	74.00	150	100	-7.54	
*	2390.000	15.21	AVG	37.11	52.32	54.00	150	100	-1.68	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #2


Date: 2023/2/24

Temperature: 21.4 °C

120.0 dBuV/m

Time: 下午 08:43:06

Humidity: 72.9 %

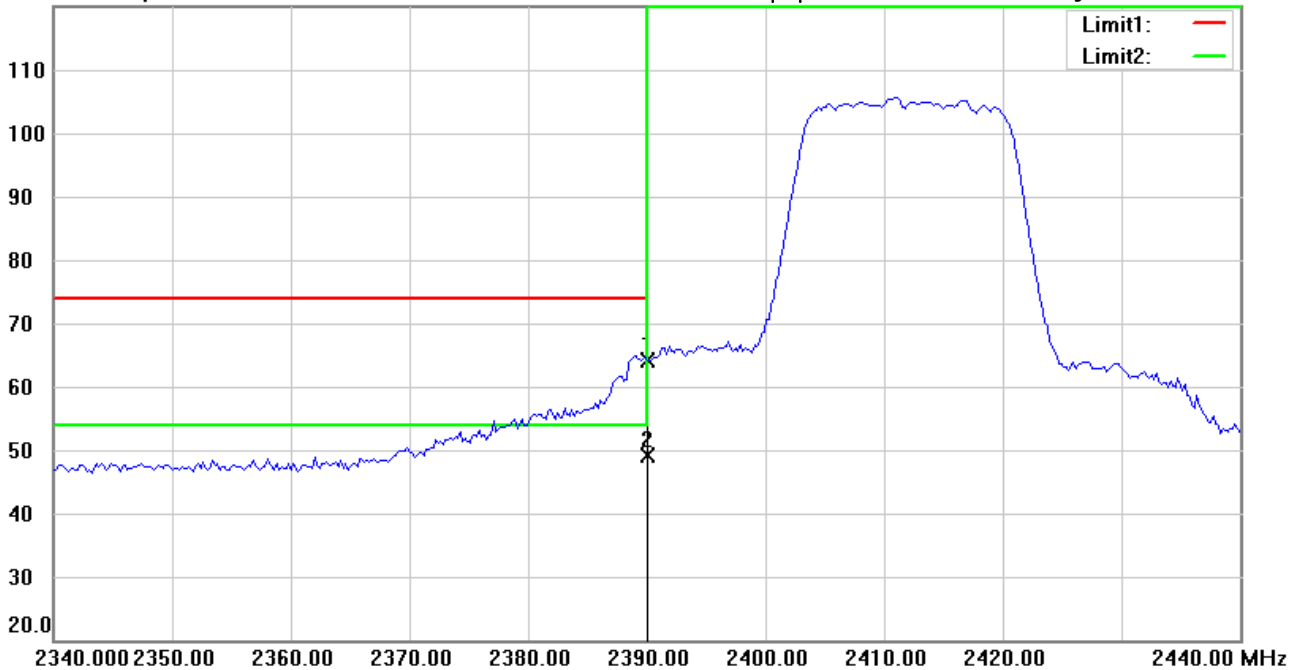

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH1

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	26.92	peak	37.11	64.03	74.00	185	359	-9.97	
*	2390.000	11.95	AVG	37.11	49.06	54.00	185	359	-4.94	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 2023/2/24

Temperature: 21.4 °C

120.0 dBuV/m

Time: 下午 09:27:02

Humidity: 72.9 %

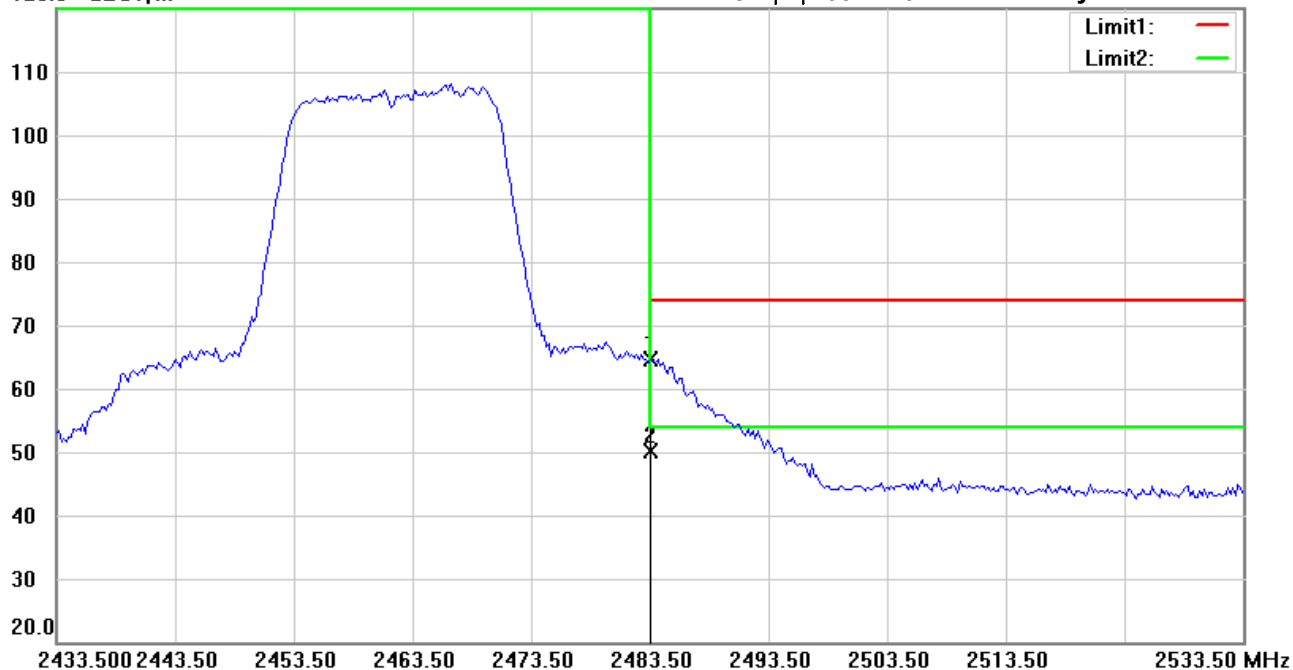

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH11

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	26.44	peak	38.14	64.58	74.00	150	110	-9.42	
*	2483.500	12.01	AVG	38.14	50.15	54.00	150	110	-3.85	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#2


Date: 2023/2/24

Temperature:21.4 °C

120.0 dBuV/m

Time: 下午 09:28:42

Humidity:72.9 %

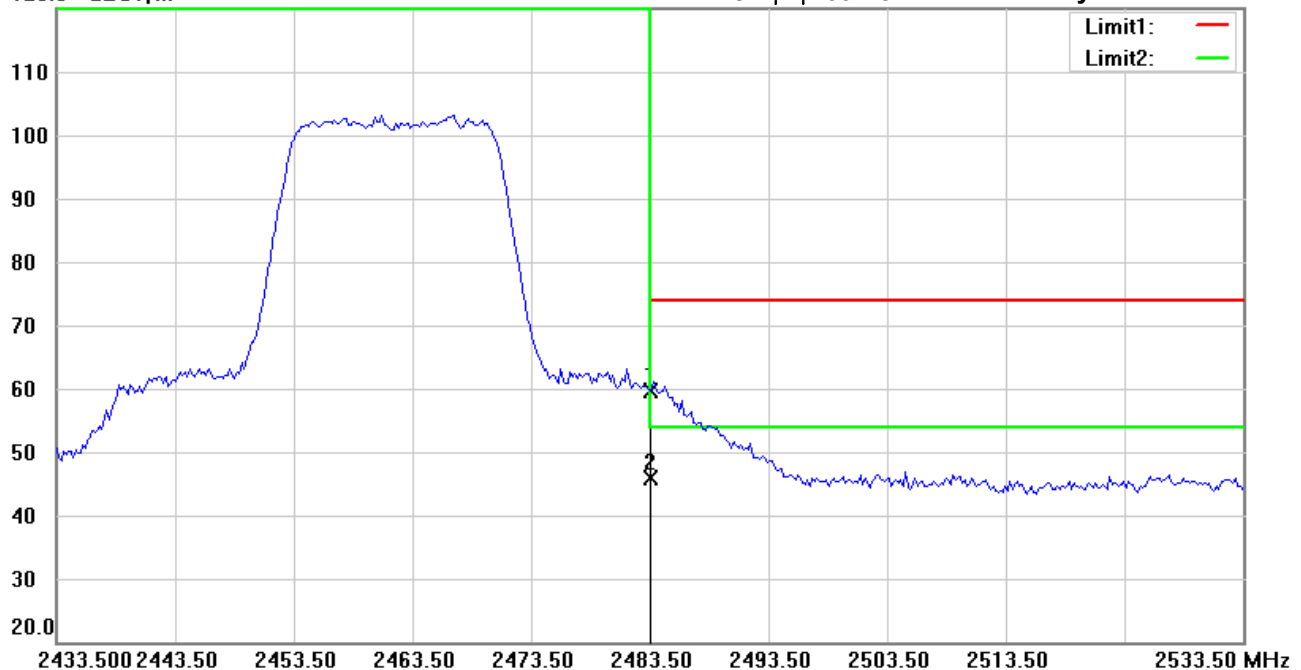

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n20 CH11

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	21.61	peak	38.14	59.75	74.00	220	0	-14.25	
*	2483.500	7.64	AVG	38.14	45.78	54.00	220	0	-8.22	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#1


Date: 2023/2/24

Temperature:21.4 °C

120.0 dBuV/m

Time: 下午 08:52:11

Humidity:72.9 %

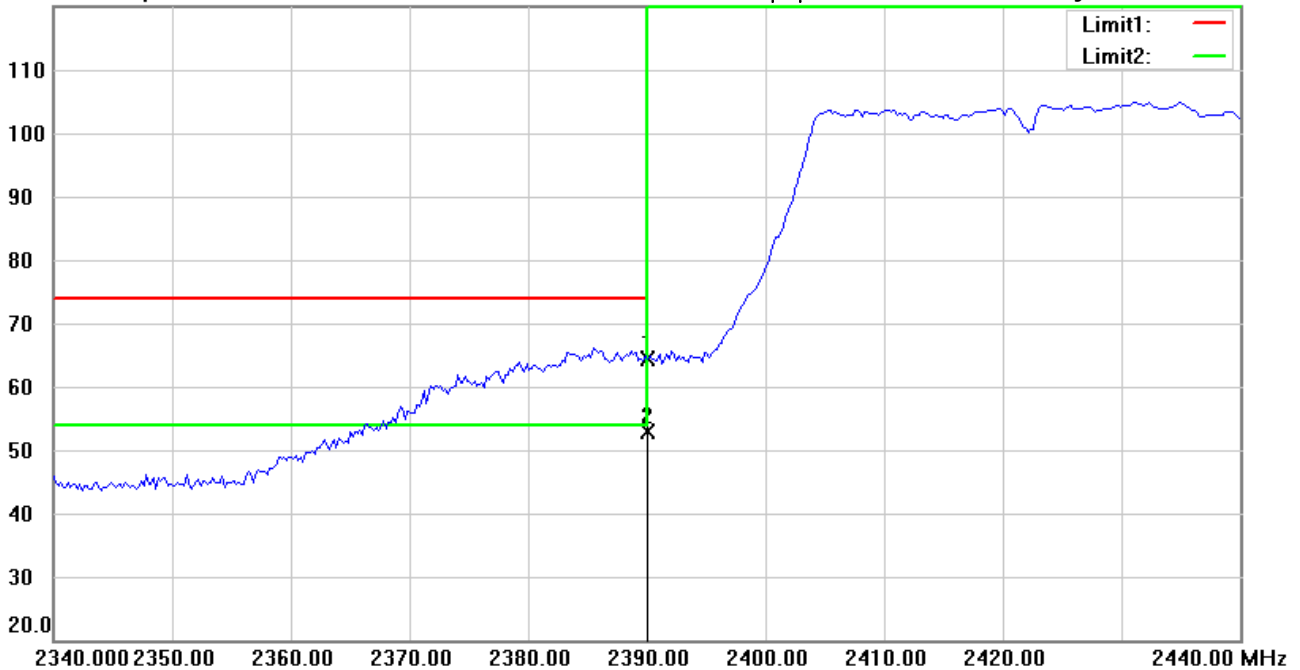

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH1

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	27.38	peak	37.11	64.49	74.00	150	100	-9.51	
*	2390.000	15.82	AVG	37.11	52.93	54.00	150	100	-1.07	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#2


Date: 2023/2/24

Temperature:21.4 °C

120.0 dBuV/m

Time: 下午 08:55:13

Humidity:72.9 %

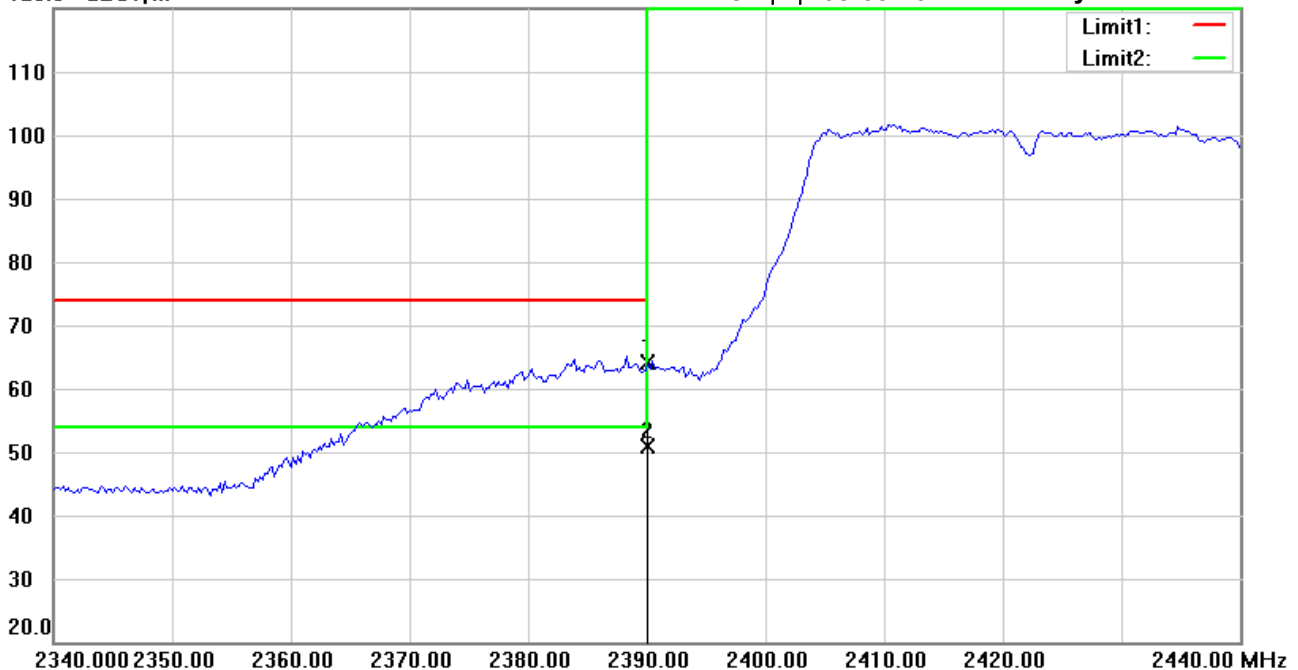

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH1

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	26.93	peak	37.11	64.04	74.00	270	359	-9.96	
*	2390.000	13.88	AVG	37.11	50.99	54.00	270	359	-3.01	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#1


Date: 2023/2/24

Temperature:21.4 °C

120.0 dBuV/m

Time: 下午 09:33:08

Humidity:72.9 %

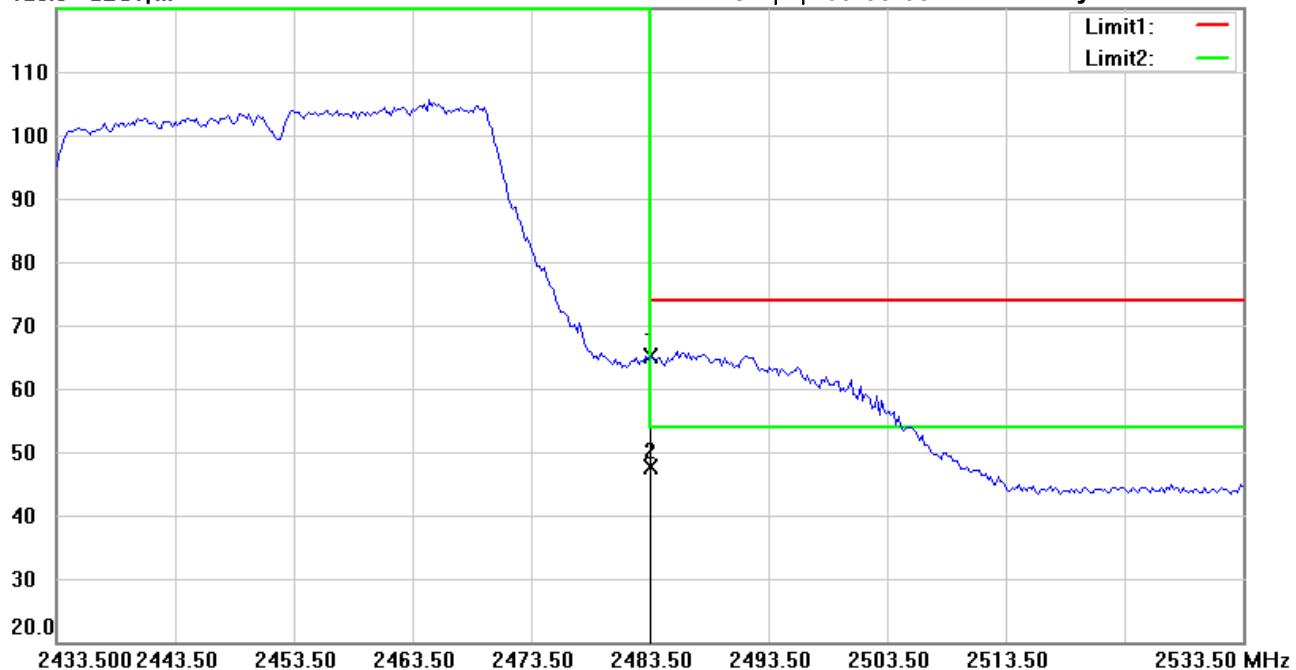

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH7

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	26.94	peak	38.14	65.08	74.00	150	109	-8.92	
*	2483.500	9.45	AVG	38.14	47.59	54.00	150	109	-6.41	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#2


Date: 2023/2/24

Temperature:21.4 °C

120.0 dBuV/m

Time: 下午 09:45:58

Humidity:72.9 %

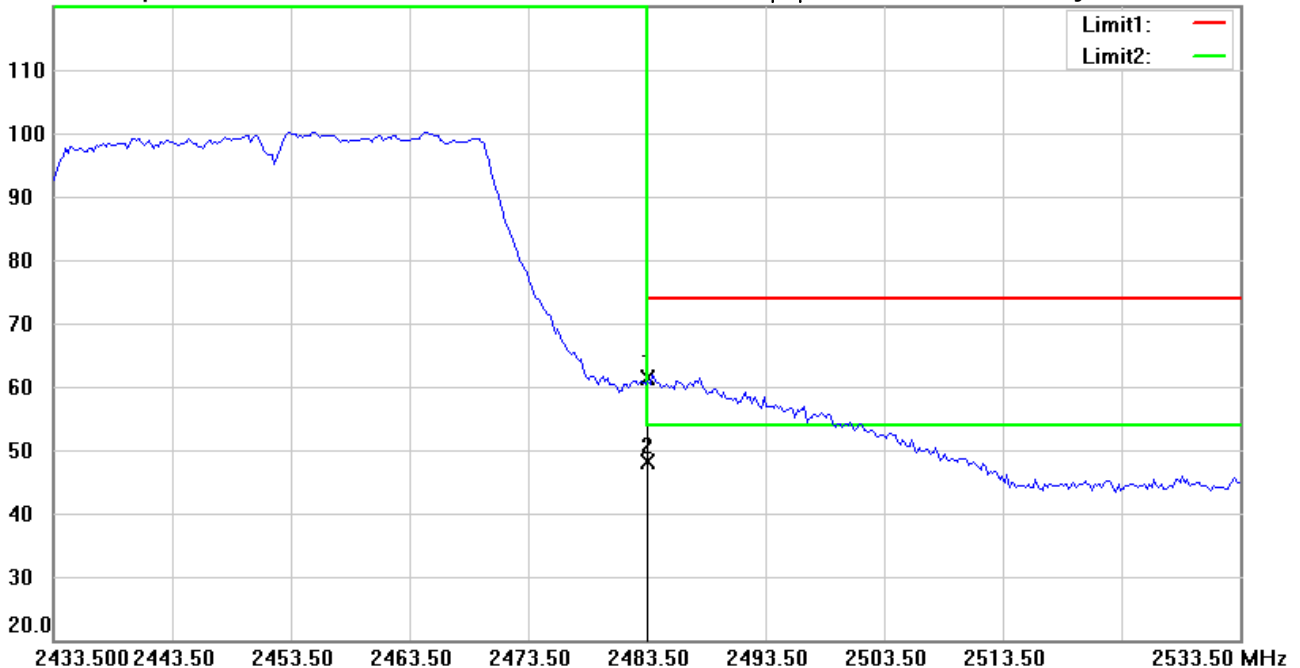

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 802.11n40 CH7

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	23.13	peak	38.14	61.27	74.00	220	359	-12.73	
*	2483.500	10.09	AVG	38.14	48.23	54.00	220	359	-5.77	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
 Tel: +886-2-6606-8877
 Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Gino

File : Bandedge

Data : #1


Date: 2023/2/24

Temperature: 21.4 °C

120.0 dBuV/m

Time: 下午 03:25:31

Humidity: 72.9 %

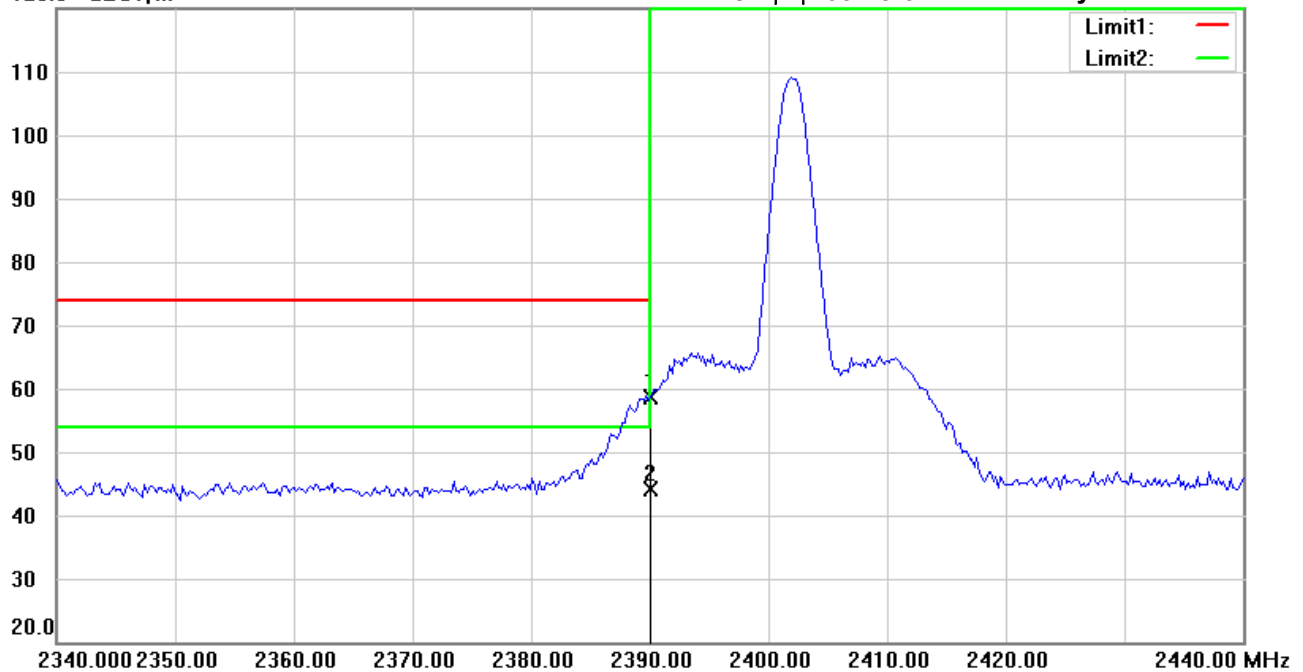

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

Polarization: *Horizontal*

EUT : W6M22301-22427

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2402 MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	21.50	peak	37.11	58.61	74.00	150	278	-15.39	
*	2390.000	7.04	AVG	37.11	44.15	54.00	150	278	-9.85	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Gino

File : Bandedge

Data : #2


Date: 2023/2/24

Temperature: 21.4 °C

120.0 dBuV/m

Time: 下午 03:28:35

Humidity: 72.9 %

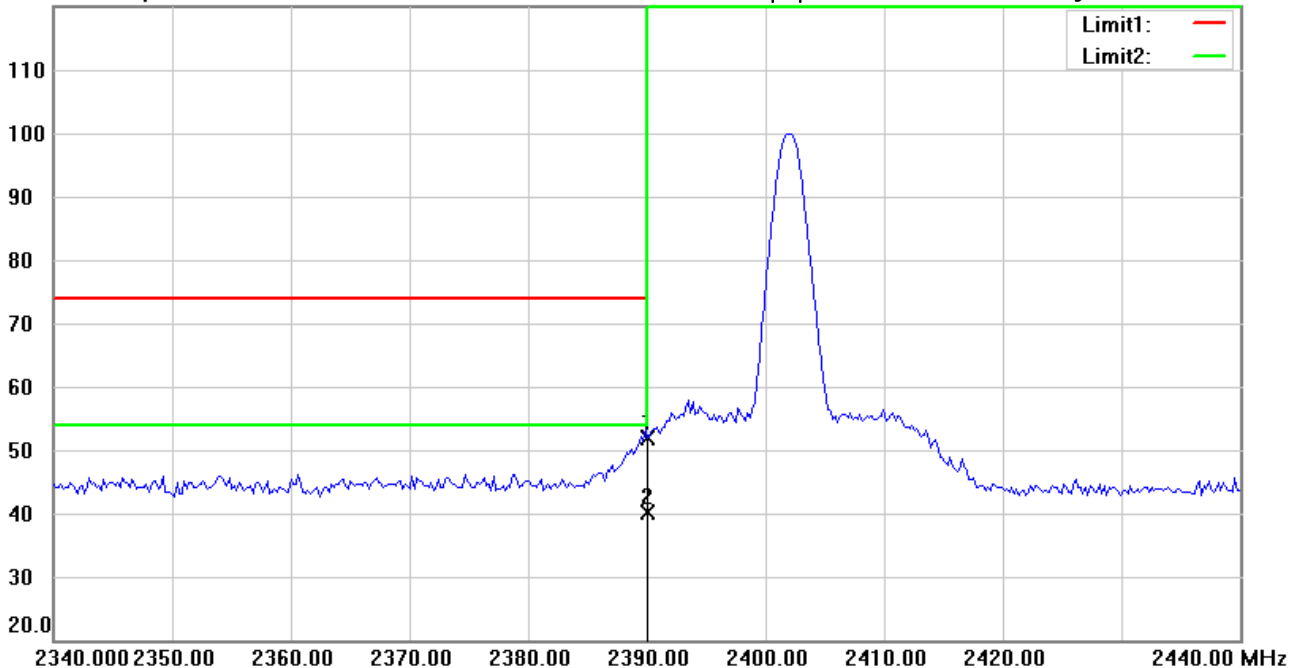

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	14.71	peak	37.11	51.82	74.00	190	200	-22.18	
*	2390.000	3.12	AVG	37.11	40.23	54.00	190	200	-13.77	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Gino

File : Bandedge

Data : #1


Date: 2023/2/24

Temperature: 21.4 °C

120.0 dBuV/m

Time: 下午 02:55:28

Humidity: 72.9 %

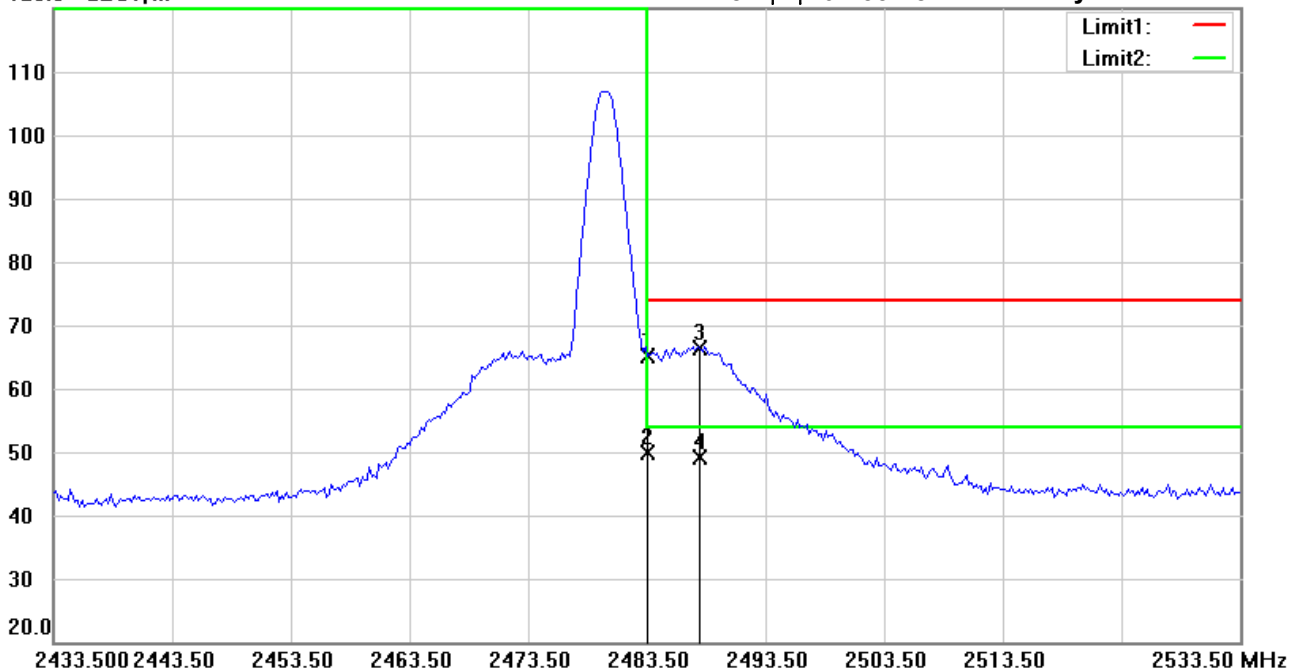

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Horizontal**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	26.94	peak	38.14	65.08	74.00	150	280	-8.92	
*	2483.500	11.74	AVG	38.14	49.88	54.00	150	280	-4.12	
	2487.809	28.13	peak	38.19	66.32	74.00	150	280	-7.68	
	2487.809	10.98	AVG	38.19	49.17	54.00	150	280	-4.83	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Gino

File :Bandedge

Data :#2


Date: 2023/2/24

Temperature:21.4 °C

120.0 dBuV/m

Time: 下午 03:11:20

Humidity:72.9 %

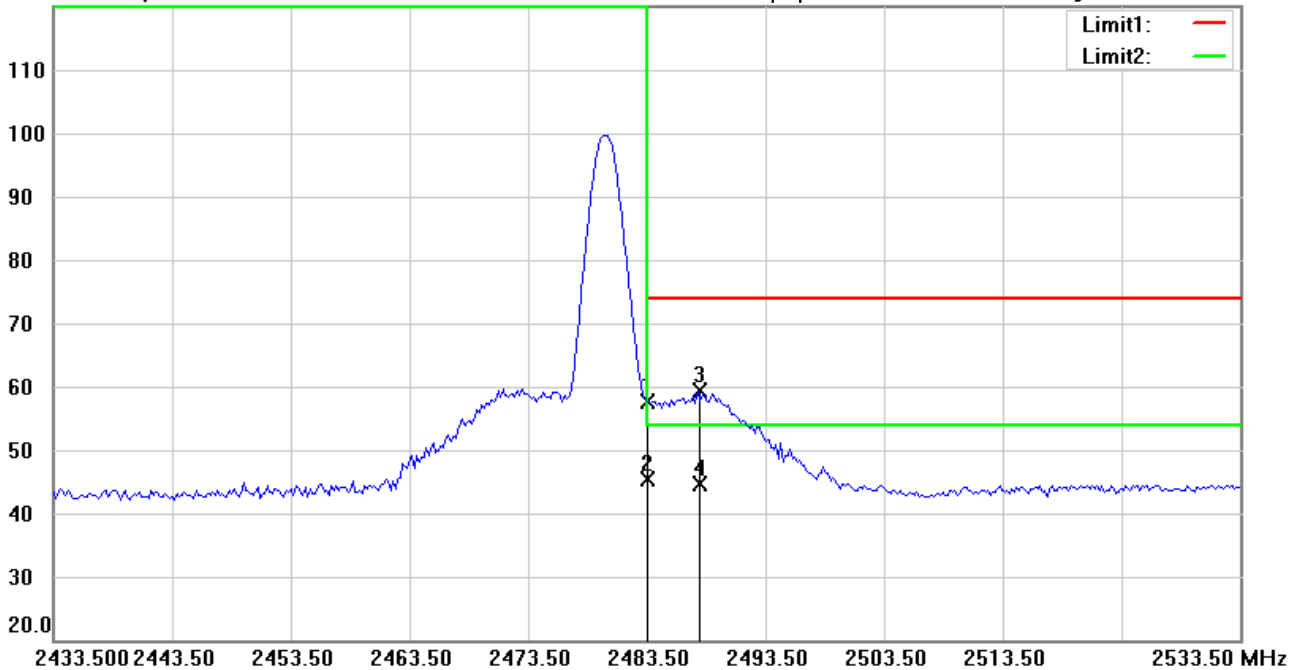

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	19.39	peak	38.14	57.53	74.00	203	48	-16.47	
*	2483.500	7.29	AVG	38.14	45.43	54.00	203	48	-8.57	
	2487.809	21.24	peak	38.19	59.43	74.00	203	48	-14.57	
	2487.809	6.45	AVG	38.19	44.64	54.00	203	48	-9.36	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Eason

File :Bandedge

Data :#1


Date: 2023/2/24

Temperature:21.4 °C

120.0 dBuV/m

Time: 下午 03:38:54

Humidity:72.9 %

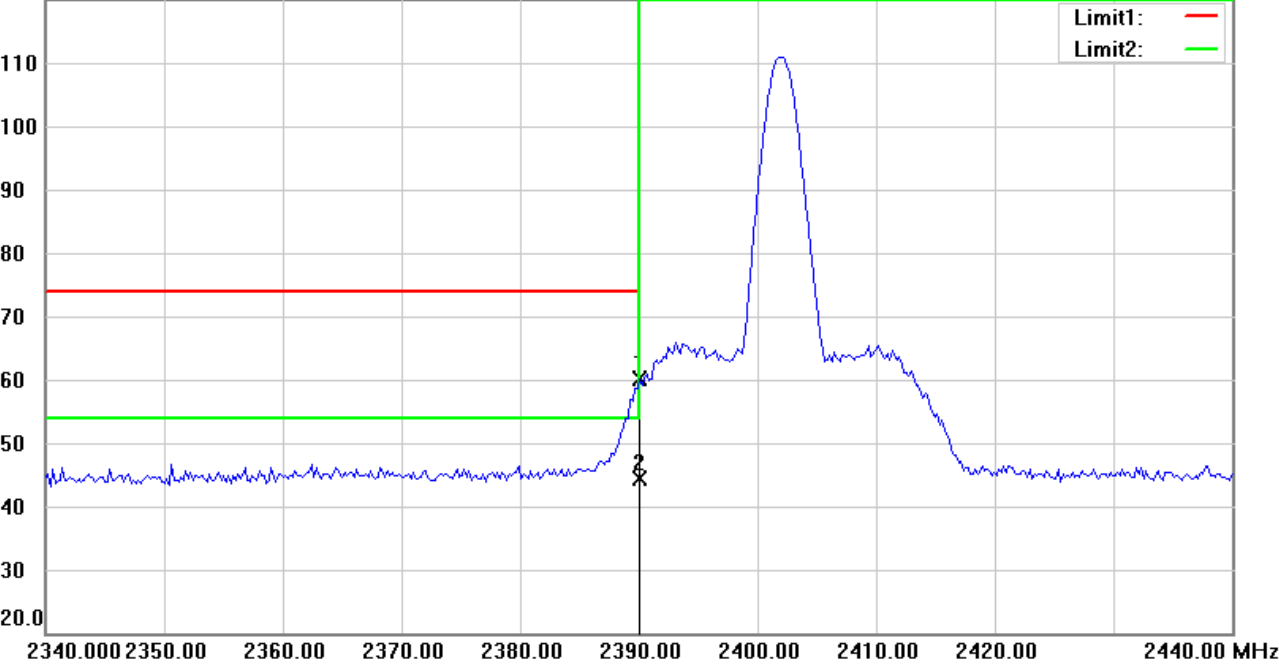

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Horizontal

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	22.91	peak	37.11	60.02	74.00	150	278	-13.98	
*	2390.000	7.20	AVG	37.11	44.31	54.00	150	278	-9.69	



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Eason

File : Bandedge

Data : #2


Date: 2023/2/24

Temperature: 21.4 °C

120.0 dBuV/m

Time: 下午 03:45:35

Humidity: 72.9 %

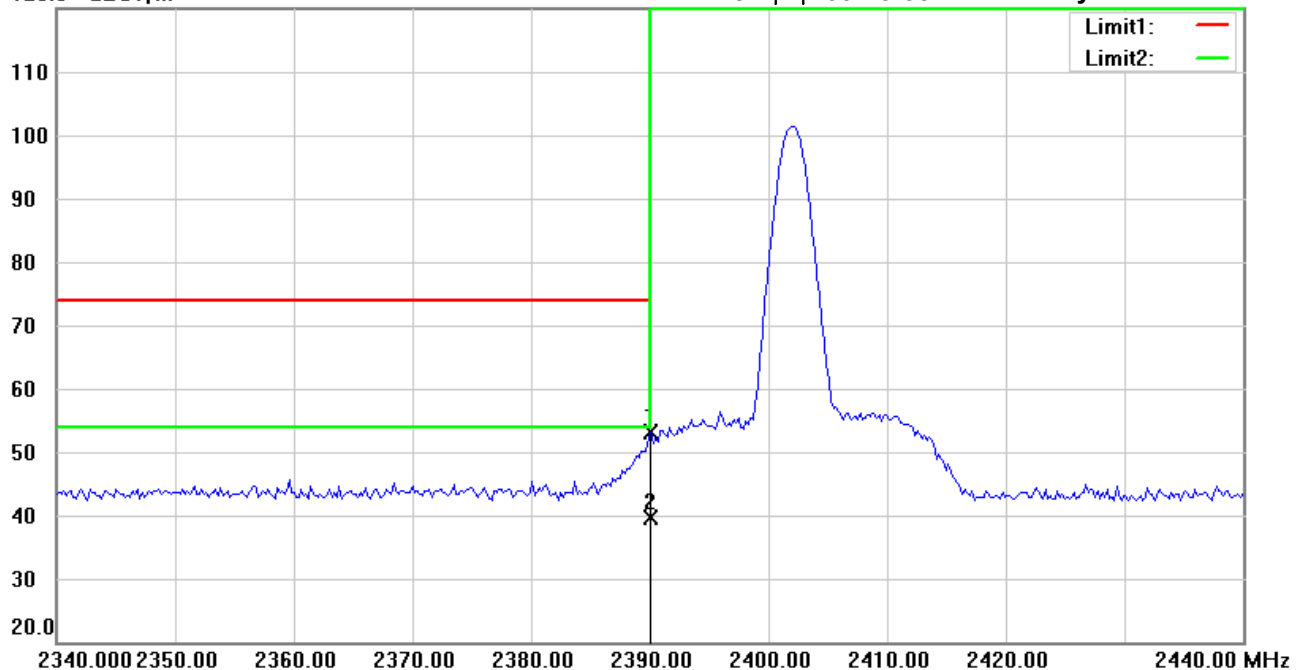

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: **Vertical**

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	15.94	peak	37.11	53.05	74.00	235	195	-20.95	
*	2390.000	2.59	AVG	37.11	39.70	54.00	235	195	-14.30	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Eason

File : Bandedge

Data : #1


Date: 2023/2/24

Temperature: 21.4 °C

120.0 dBuV/m

Time: 下午 05:25:17

Humidity: 72.9 %

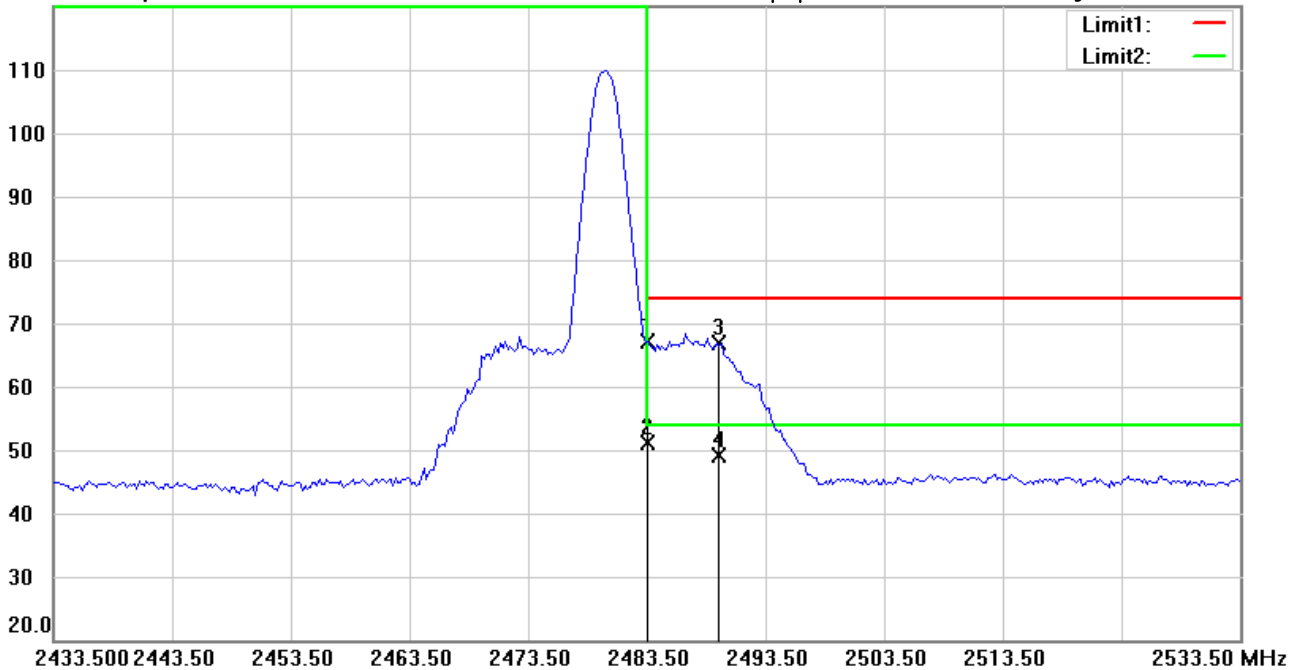

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: *Horizontal*

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	28.90	peak	38.14	67.04	74.00	150	276	-6.96	
*	2483.500	12.89	AVG	38.14	51.03	54.00	150	276	-2.97	
	2489.412	28.78	peak	38.21	66.99	74.00	150	276	-7.01	
	2489.412	10.91	AVG	38.21	49.12	54.00	150	276	-4.88	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, Neihu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Eason

File : Bandedge

Data : #2


Date: 2023/2/24

Temperature: 21.4 °C

120.0 dBuV/m

Time: 下午 05:33:27

Humidity: 72.9 %

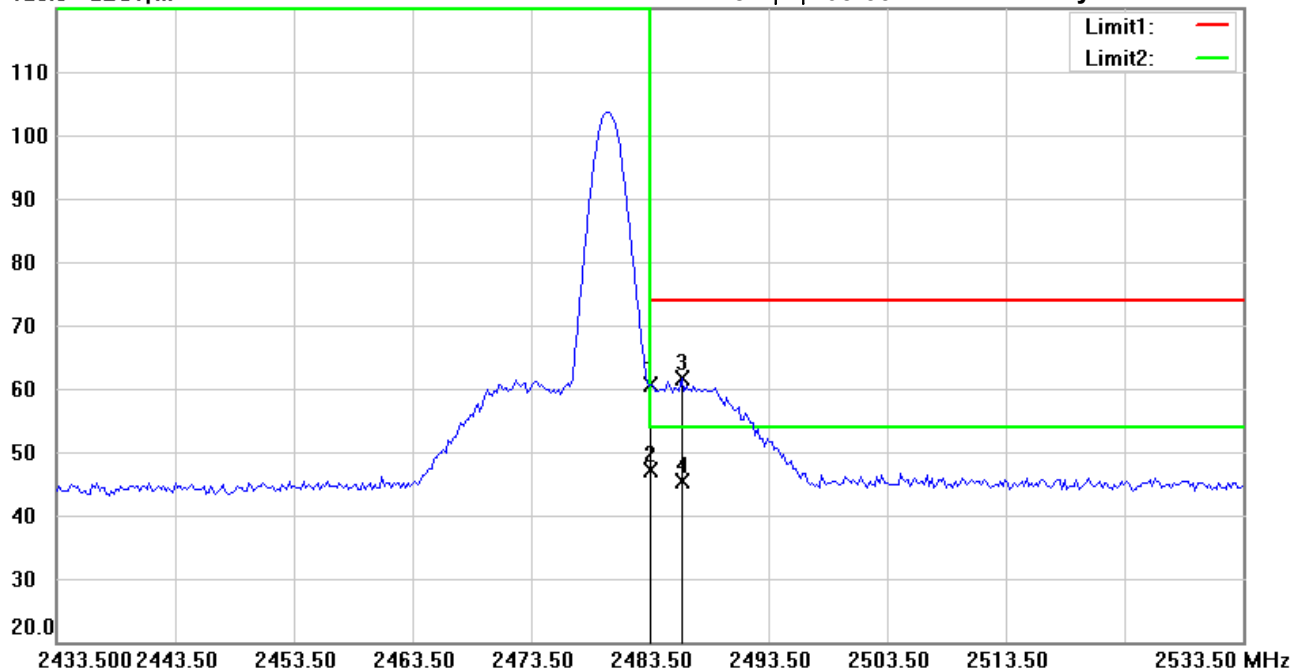

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 2480 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	22.44	peak	38.14	60.58	74.00	216	349	-13.42	
*	2483.500	9.02	AVG	38.14	47.16	54.00	216	349	-6.84	
	2486.205	23.54	peak	38.17	61.71	74.00	216	349	-12.29	
	2486.205	7.18	AVG	38.17	45.35	54.00	216	349	-8.65	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875


Radiated Emission Measurement

Operator: Sky
Temperature:21.4 °C
Humidity:72.9 %

File :Bandedge
120.0 dBuV/m

Data :#1

Date: 2023/2/24
Time: 下午 05:46:27

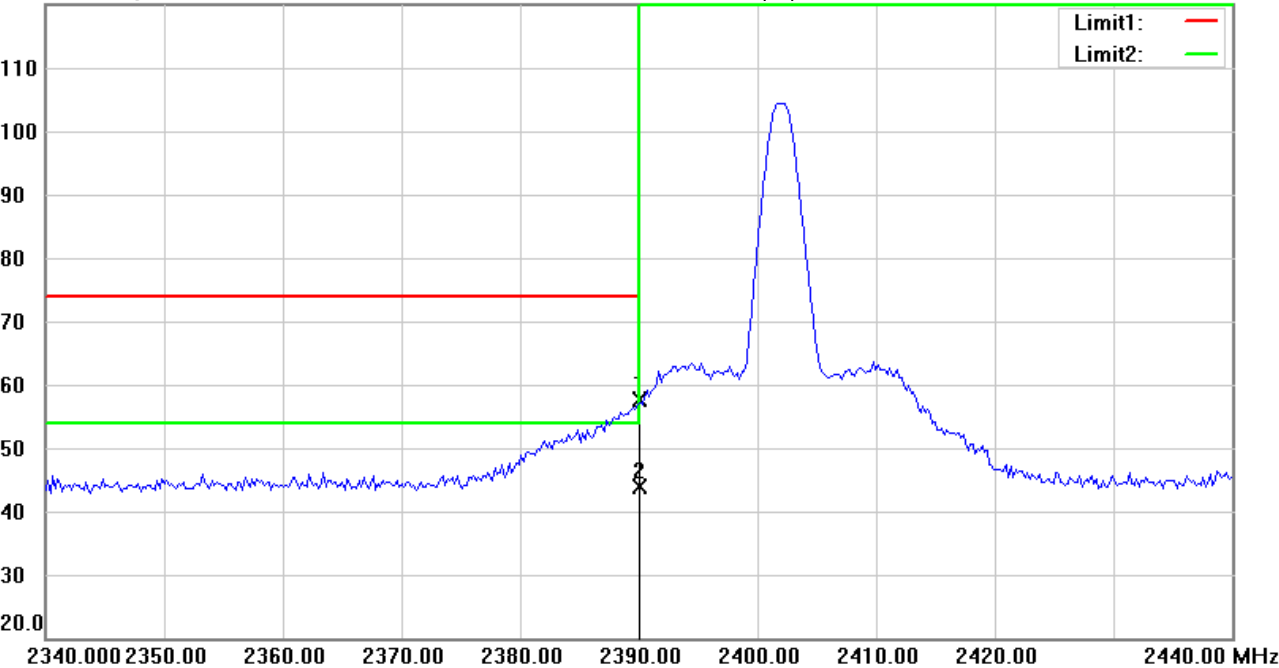

Site : Chamber
Condition : FCC 15.247 PK (Bandedge)
EUT : W6M22301-22427
M/N:
Test Mode : TX 2402 MHz
Note :

Polarization: Horizontal
Power : 120 Va.c.
Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	20.48	peak	37.11	57.59	74.00	150	100	-16.41	
*	2390.000	6.85	AVG	37.11	43.96	54.00	150	100	-10.04	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#2


Date: 2023/2/24

Temperature:21.4 °C

120.0 dBuV/m

Time: 下午 05:49:42

Humidity:72.9 %

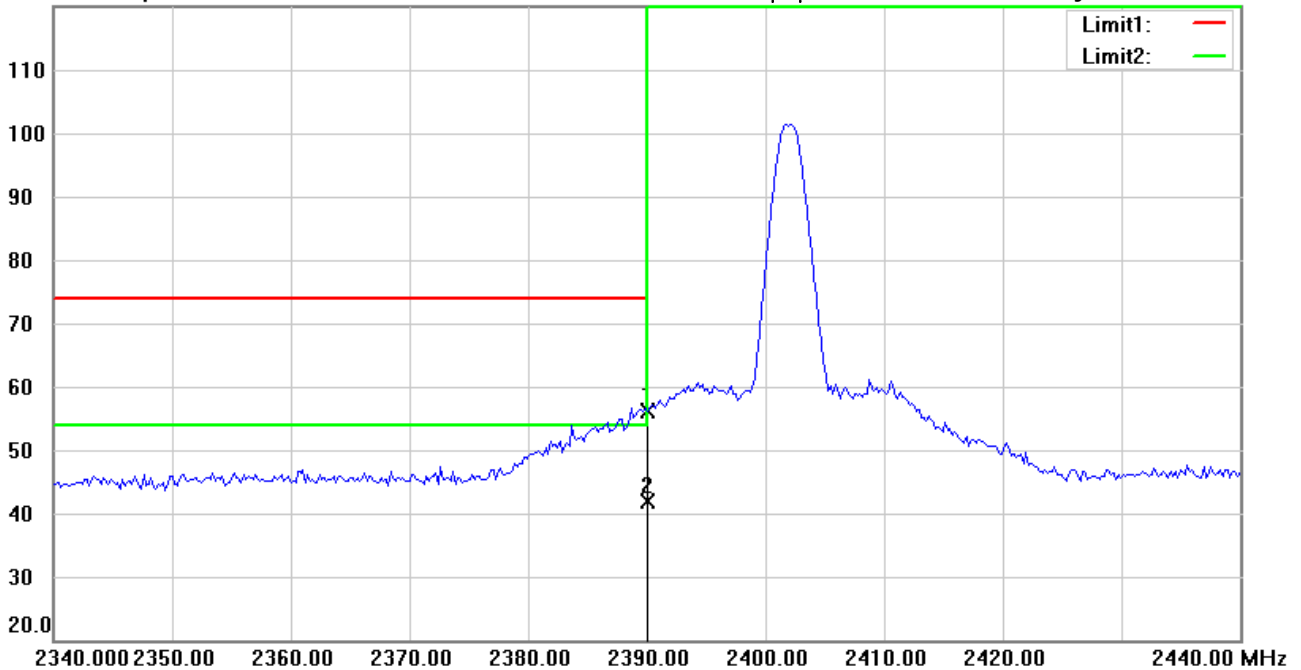

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

EUT : W6M22301-22427

M/N:

Test Mode : TX 2402 MHz

Note :

Polarization: Vertical

Power : 120 Va.c.

Distance: 3m

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2390.000	19.05	peak	37.11	56.16	74.00	225	359	-17.84	
*	2390.000	4.77	AVG	37.11	41.88	54.00	225	359	-12.12	

*:Maximum data x:Over limit !:over margin



Address: 6F., No. 58, Ln 188, Ruey Kuang Rd, NeiHu, Taipei
Tel: +886-2-6606-8877
Fax: +886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File : Bandedge

Data : #1


Date: 2023/2/24

Temperature: 21.4 °C

120.0 dBuV/m

Time: 下午 05:54:28

Humidity: 72.9 %

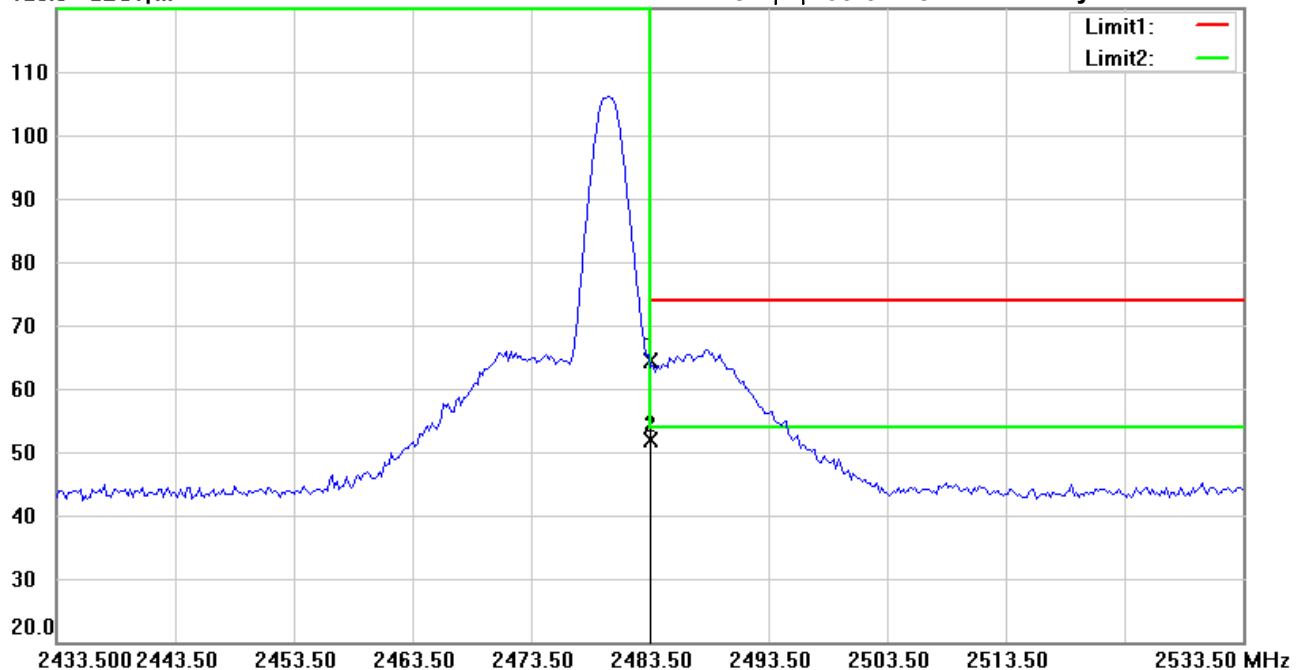

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

Polarization: Horizontal

EUT : W6M22301-22427

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2480 MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	26.14	peak	38.14	64.28	74.00	150	110	-9.72	
*	2483.500	13.68	AVG	38.14	51.82	54.00	150	110	-2.18	

*:Maximum data x:Over limit !:over margin



Address:6F.,No.58,Ln 188,Ruey Kuang Rd,Neihu,Taipei
Tel:+886-2-6606-8877
Fax:+886-2-6606-8875

Radiated Emission Measurement

Operator: Sky

File :Bandedge

Data :#2


Date: 2023/2/24

Temperature:21.4 °C

120.0 dBuV/m

Time: 下午 05:58:01

Humidity:72.9 %

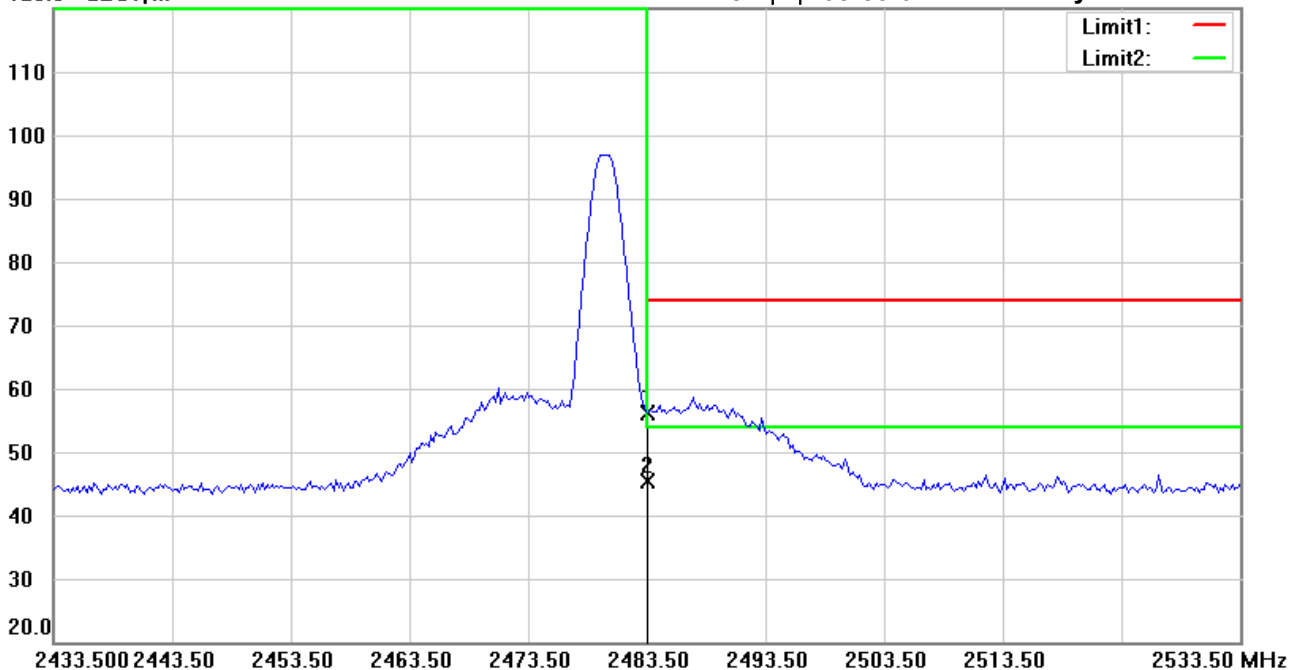

Site : Chamber

Condition : FCC 15.247 PK (Bandedge)

Polarization: Vertical

EUT : W6M22301-22427

Power : 120 Va.c.

M/N:

Distance: 3m

Test Mode : TX 2480 MHz

Note :

Mk.	Frequency (MHz)	Reading (dBuV)	Detector	Corr. factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Ant.Pos (cm)	Tab.Pos (deg.)	Margin (dB)	Comment
	2483.500	18.09	peak	38.14	56.23	74.00	180	200	-17.77	
*	2483.500	7.16	AVG	38.14	45.30	54.00	180	200	-8.70	

*:Maximum data x:Over limit !:over margin