

RF Test Data for Bluetooth (BR+EDR) (Conducted Measurements)

General Description of EUT	
EUT Name:	Smart earphone
Model:	DK56-TWS
Sample ID:	HC-C-202502-0078-02-02-2#
Test Standard:	FCC Part 15.247
Environmental Conditions	
Ambient Temperature:	24.1℃
Ambient Humidity:	43%RH
Test Power Supply:	DC 3.7V
Test Engineer:	ZKN ZHOU
Note: For a more detailed features description, please refer to the report TBR-C-202502-0078-4	

Contents



1: 20dB Emission Bandwidth	3
1.1 Test Result	3
1.2 Test Graphs	4
2: Occupied Channel Bandwidth	5
2.1 Test Result	5
2.2 Test Graphs	6
3: Maximum conducted output power	7
3.1 Test Result Peak	7
3.2 Test Graphs	8
4: Carrier frequency separation	9
4.1 Test Result	9
4.2 Test Graphs	10
5: Time of occupancy	11
5.1 Test Result	11
5.2 Test Graphs	12
6: Number of hopping channels	14
6.1 Test Result	14
6.2 Test Graphs	15
7: Band edge measurements	16
7.1 Test Result	16
7.2 Test Graphs	17
8: Conducted Spurious Emission	19
8.1 Test Result	19
8.2 Test Graphs	20
9: Duty Cycle	23
9.1 Test Result	23
9.2 Test Graphs	24
10: Emissions in Restricted Bands	25
10.1 Test Result	25
10.2 Test Graphs	26

1: 20dB Emission Bandwidth


1.1 Test Result

Test Mode	Antenna	Frequency[MHz]	20dB EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.99	2401.49	2402.48	---	---
DH5	Ant1	2441	1.04	2440.47	2441.51	---	---
DH5	Ant1	2480	1.05	2479.47	2480.52	---	---
2DH5	Ant1	2402	1.36	2401.32	2402.68	---	---
2DH5	Ant1	2441	1.33	2440.33	2441.66	---	---
2DH5	Ant1	2480	1.32	2479.34	2480.67	---	---


1.2 Test Graphs

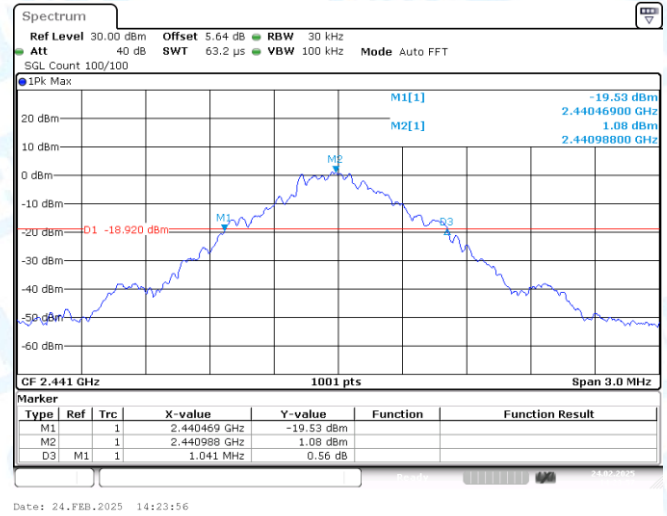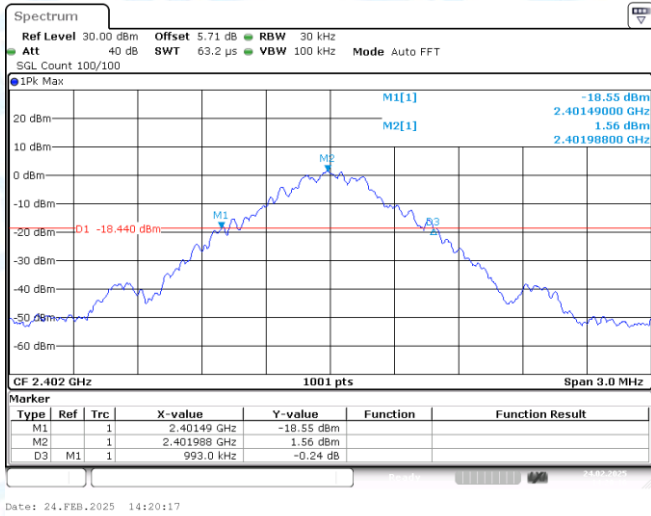

DH5-Ant1-2402


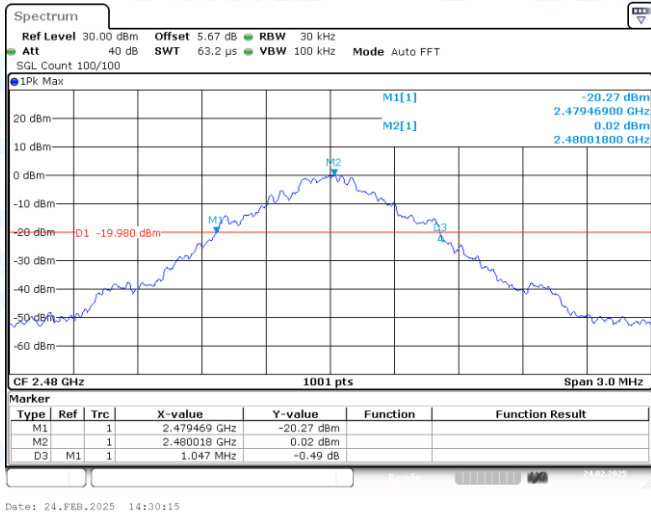


DH5-Ant1-2441

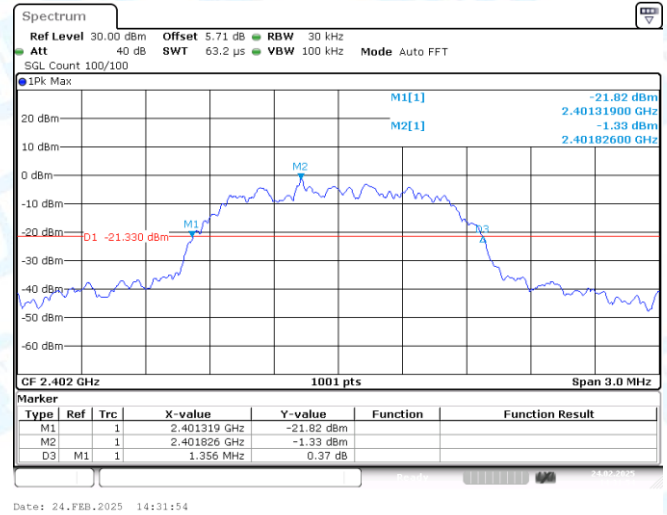

DH5-Ant1-2480

2DH5-Ant1-2402

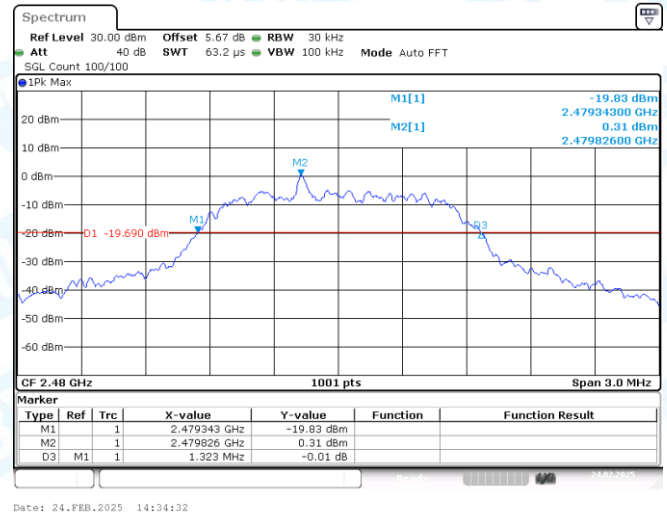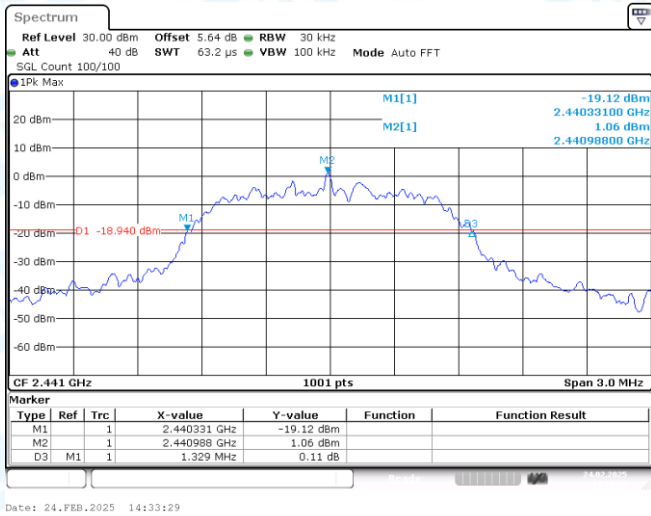

2DH5-Ant1-2441


2DH5-Ant1-2480

2: Occupied Channel Bandwidth


2.1 Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.914	2401.5355	2402.4496	---	---
DH5	Ant1	2441	0.929	2440.5205	2441.4496	---	---
DH5	Ant1	2480	0.965	2479.5055	2480.4705	---	---
2DH5	Ant1	2402	1.211	2401.3886	2402.5994	---	---
2DH5	Ant1	2441	1.22	2440.3856	2441.6054	---	---
2DH5	Ant1	2480	1.262	2479.3706	2480.6324	---	---


2.2 Test Graphs

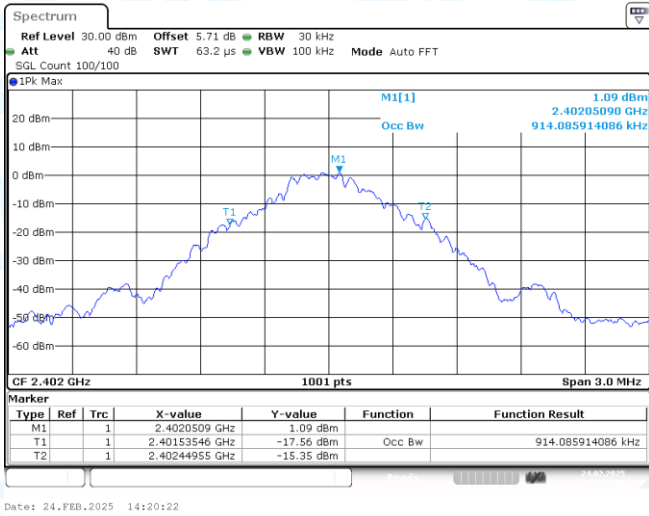


DH5-Ant1-2402

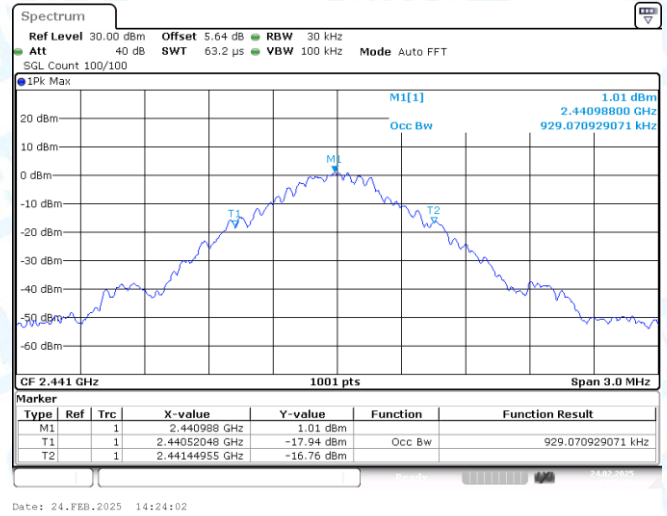


DH5-Ant1-2441

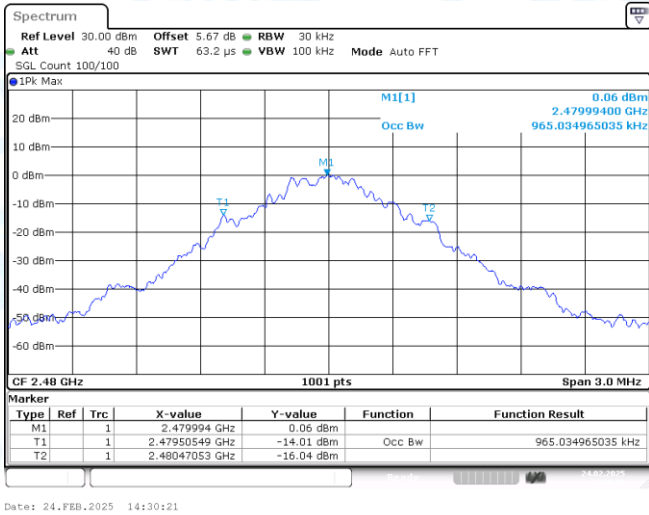


DH5-Ant1-2480

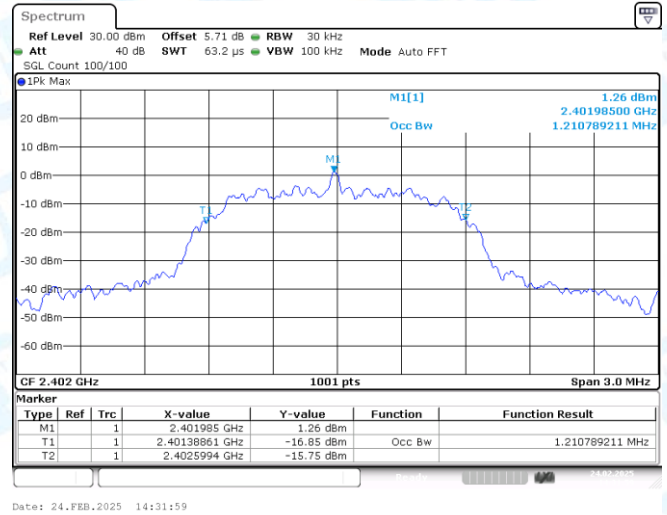

2DH5-Ant1-2402

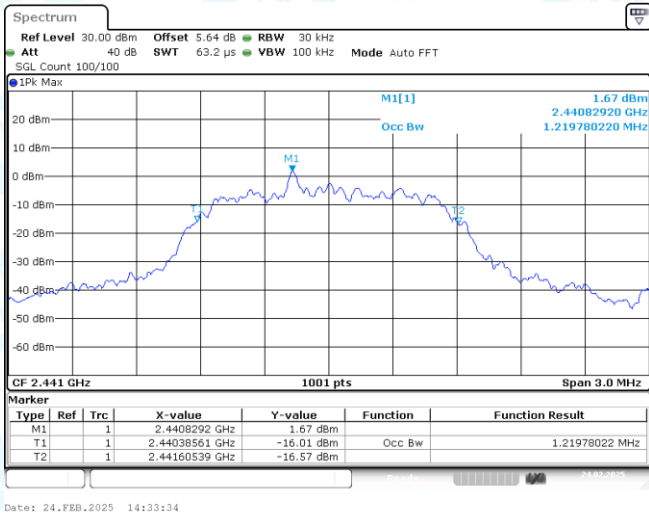

2DH5-Ant1-2441

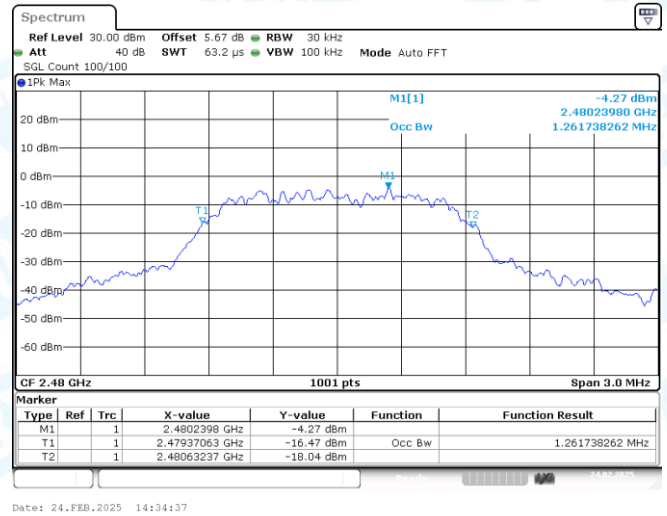


2DH5-Ant1-2480

3: Maximum conducted output power


3.1 Test Result Peak

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	4.24	≤21	PASS
DH5	Ant1	2441	4.37	≤21	PASS
DH5	Ant1	2480	3.62	≤21	PASS
2DH5	Ant1	2402	4.87	≤21	PASS
2DH5	Ant1	2441	4.87	≤21	PASS
2DH5	Ant1	2480	3.85	≤21	PASS


3.2 Test Graphs

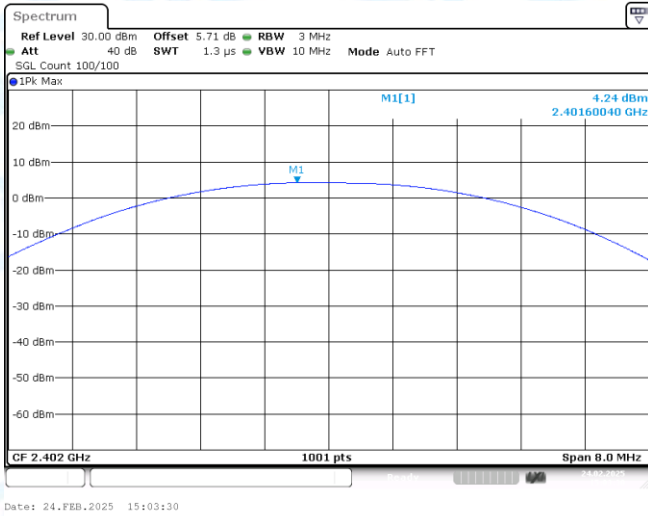


DH5-Ant1-2402-PASS

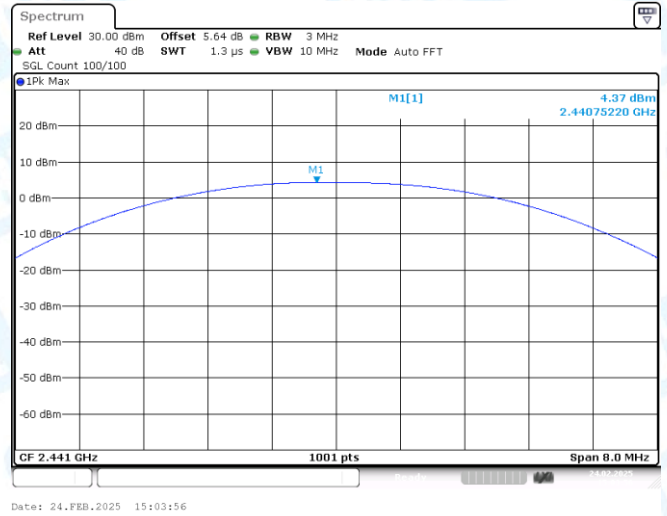


DH5-Ant1-2441-PASS

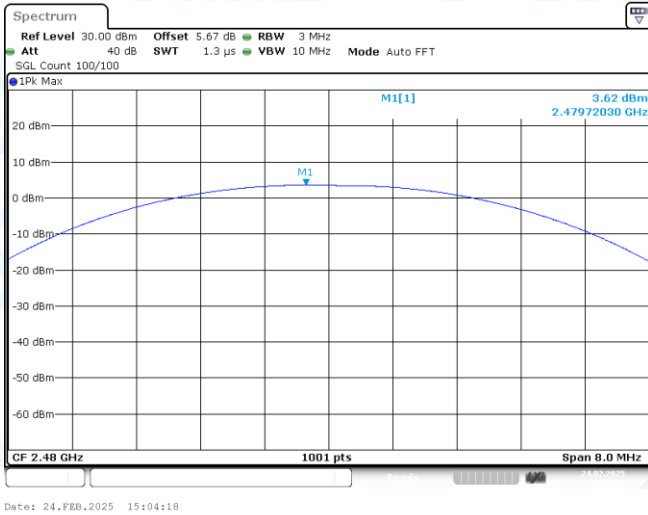


DH5-Ant1-2480-PASS

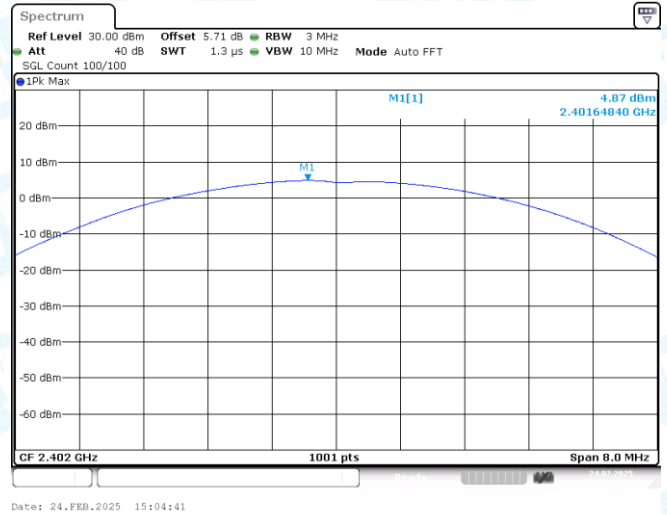

2DH5-Ant1-2402-PASS

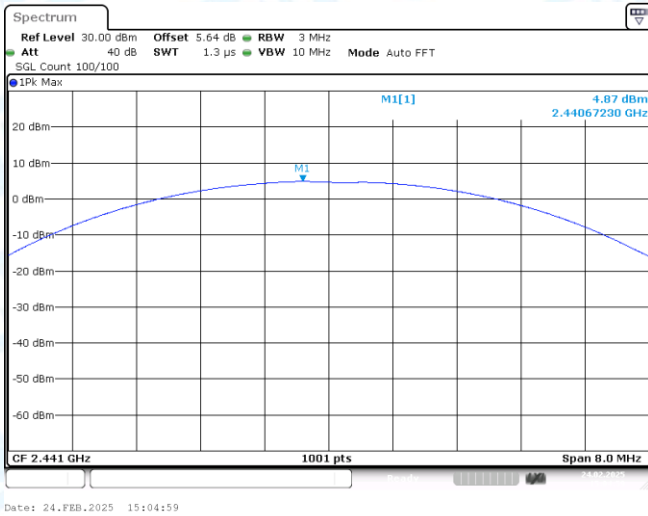

2DH5-Ant1-2441-PASS

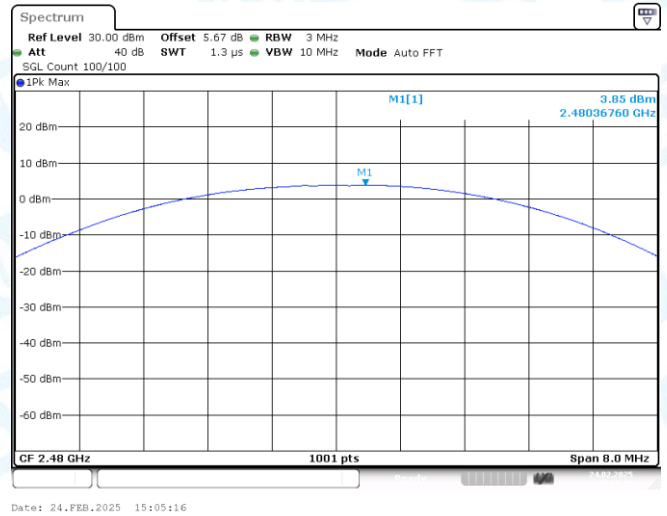


2DH5-Ant1-2480-PASS

4: Carrier frequency separation

4.1 Test Result

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.035	≥ 0.700	PASS
2DH5	Ant1	Hop	0.939	≥ 0.907	PASS

4.2 Test Graphs

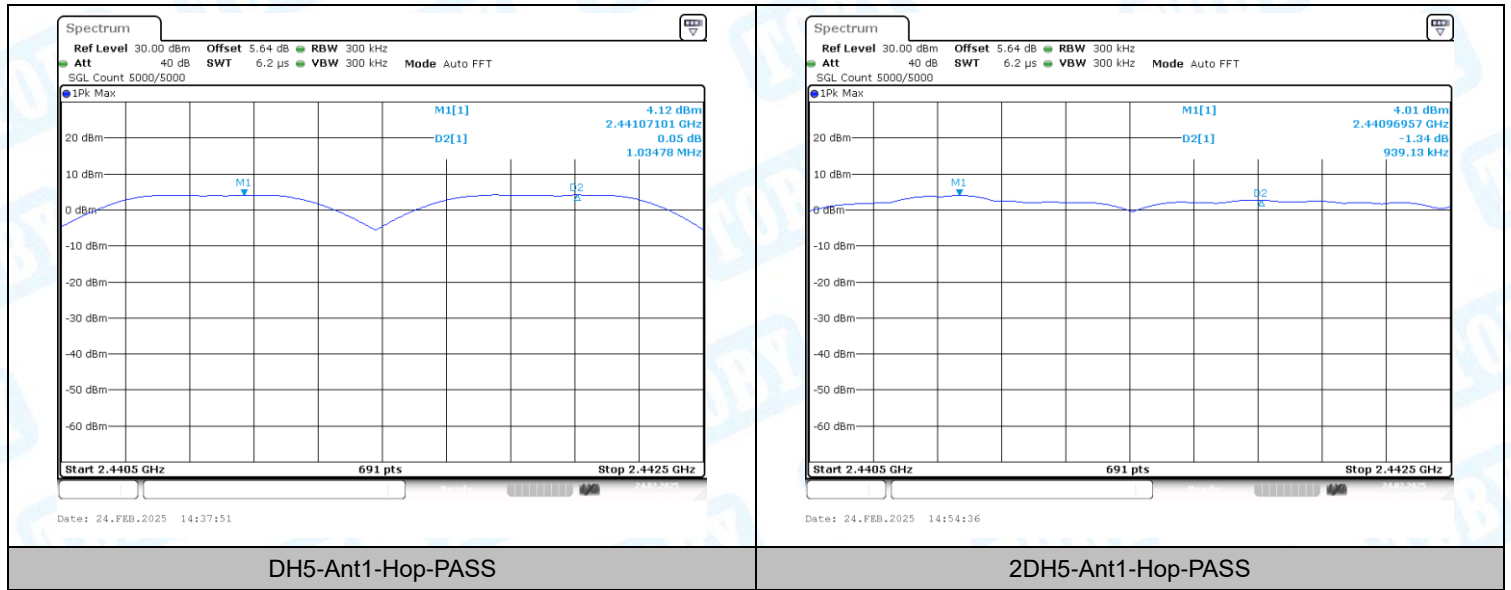



5: Time of occupancy

5.1 Test Result

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.379	320	0.121	≤0.4	PASS
DH3	Ant1	Hop	1.628	160	0.26	≤0.4	PASS
DH5	Ant1	Hop	2.867	100	0.287	≤0.4	PASS
2DH1	Ant1	Hop	0.388	320	0.124	≤0.4	PASS
2DH3	Ant1	Hop	1.631	170	0.277	≤0.4	PASS
2DH5	Ant1	Hop	2.873	80	0.23	≤0.4	PASS


5.2 Test Graphs

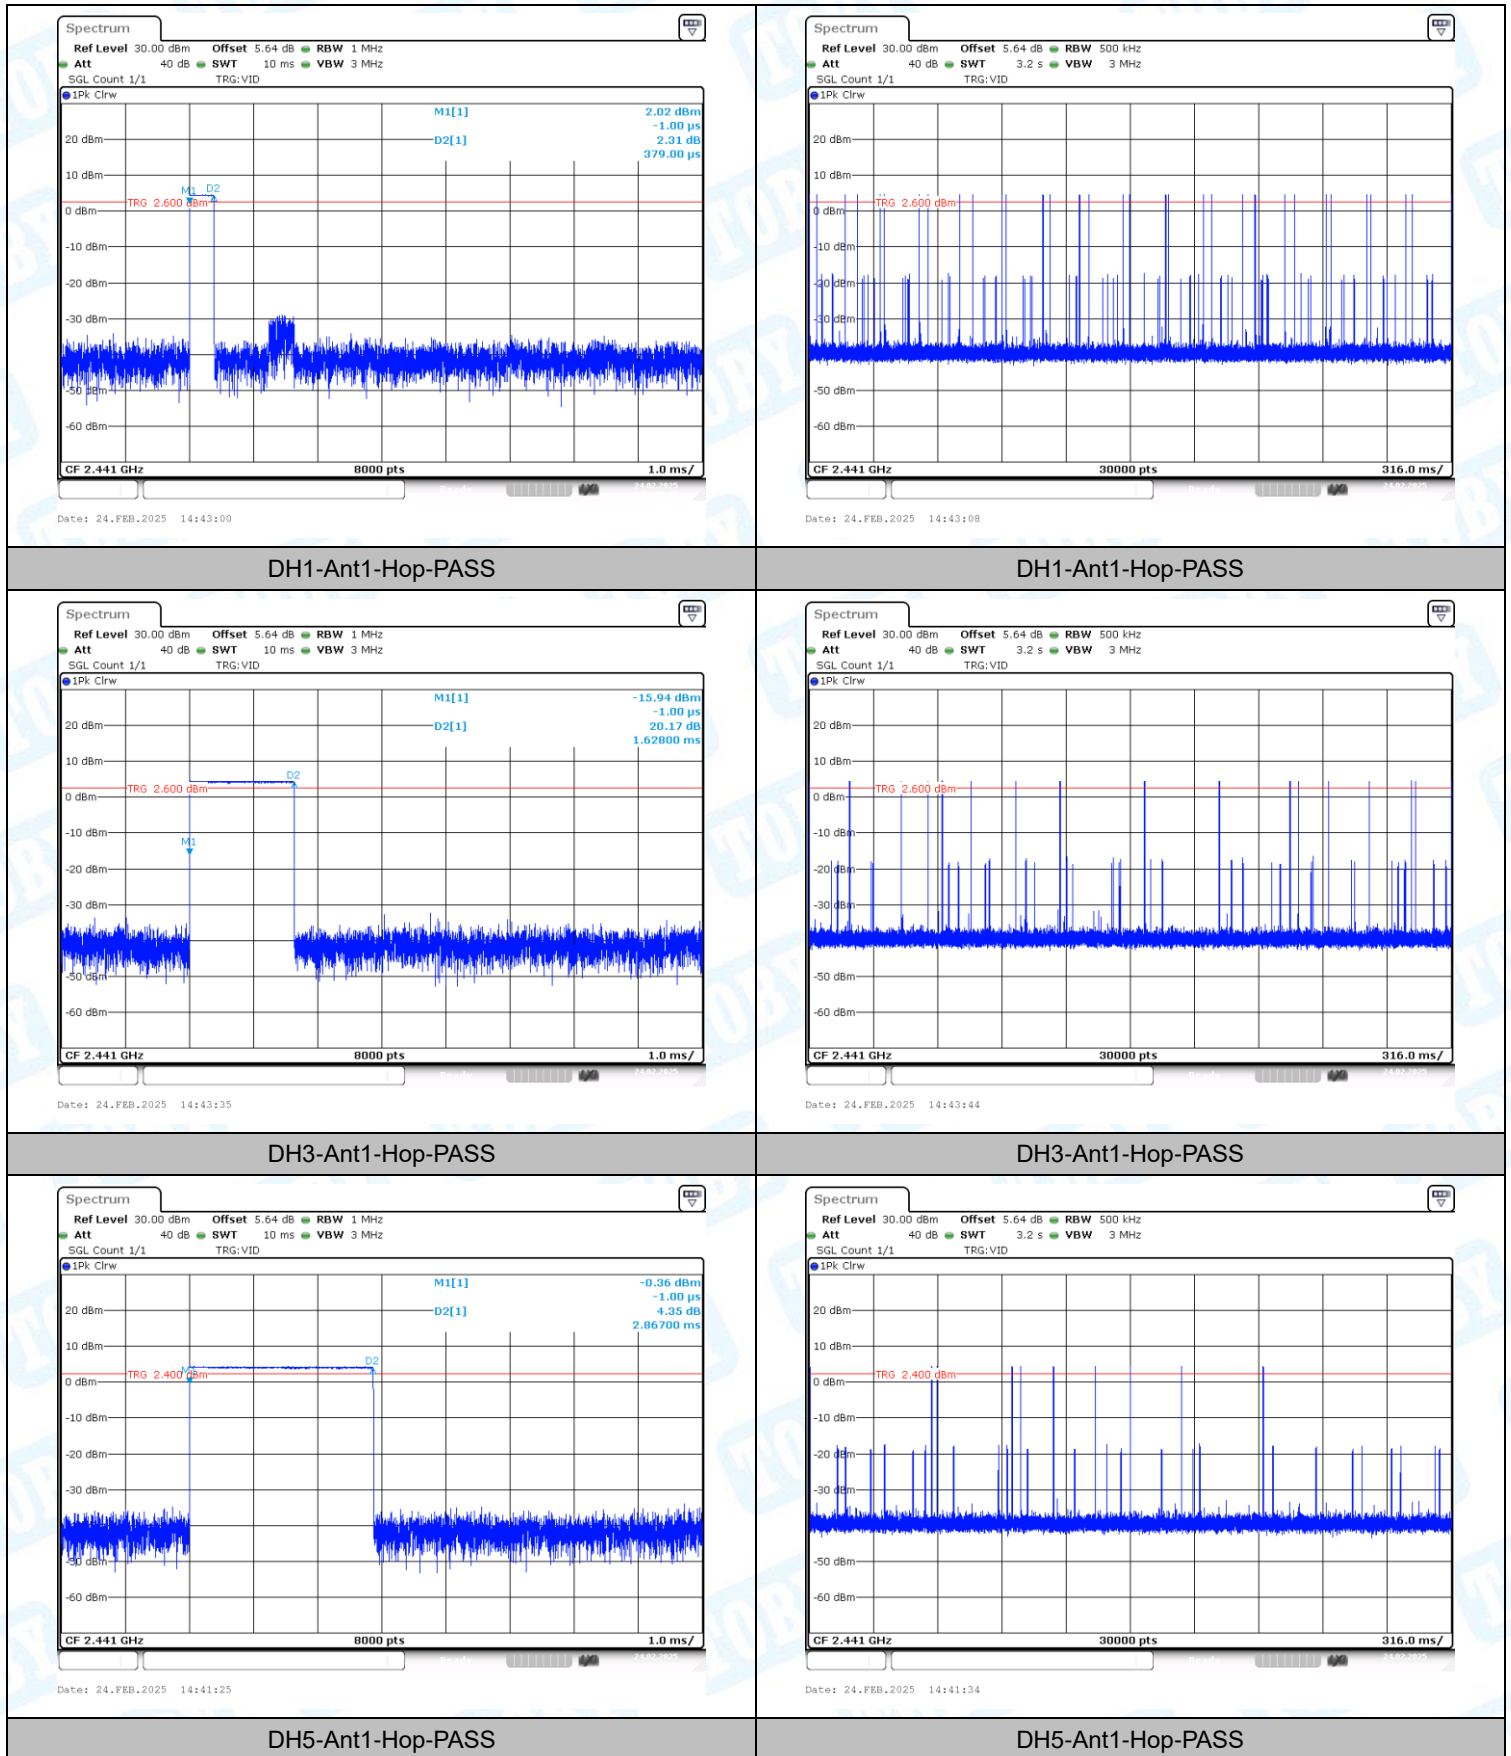

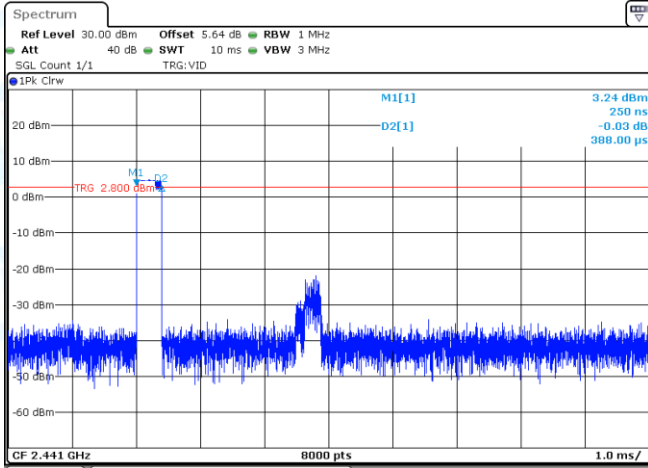


Date: 24.FEB.2025 14:58:25

2DH1-Ant1-Hop-PASS

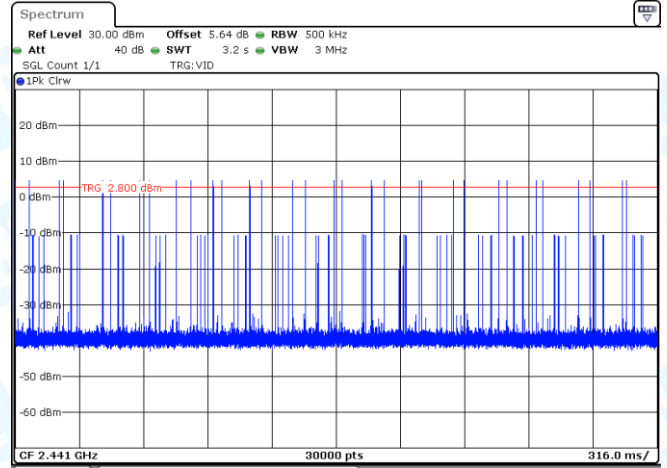


Date: 24.FEB.2025 14:59:33

2DH1-Ant1-Hop-PASS

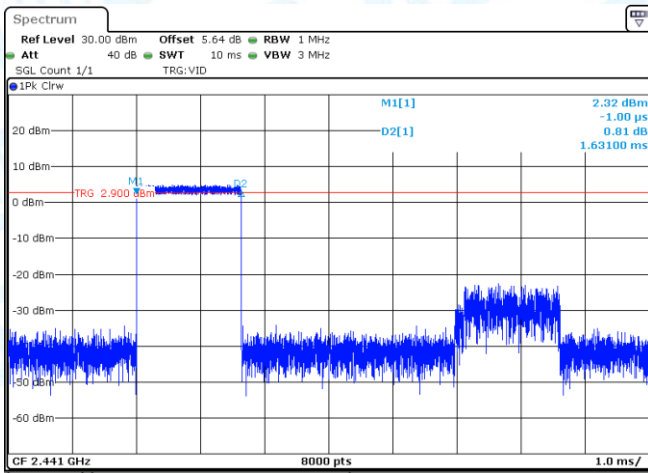


Date: 24.FEB.2025 14:59:15

2DH3-Ant1-Hop-PASS

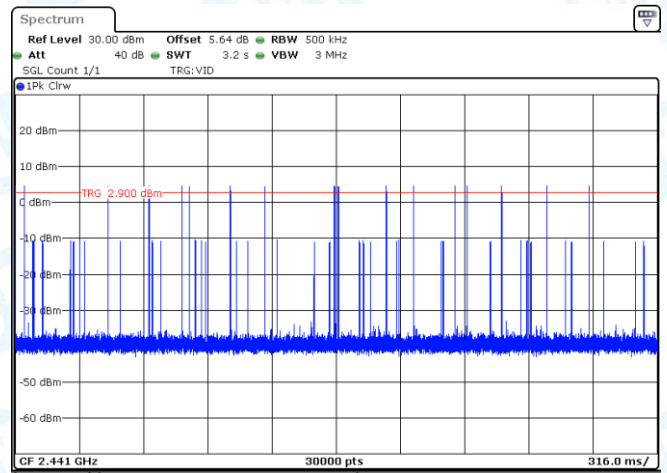


Date: 24.FEB.2025 14:59:23

2DH3-Ant1-Hop-PASS

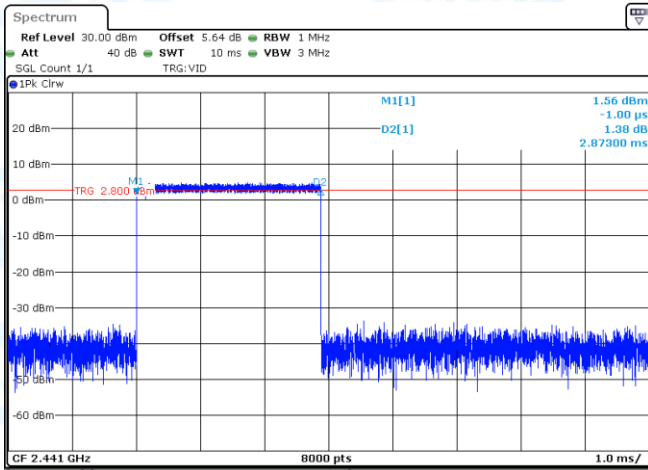

Date: 24.FEB.2025 15:01:01

2DH5-Ant1-Hop-PASS

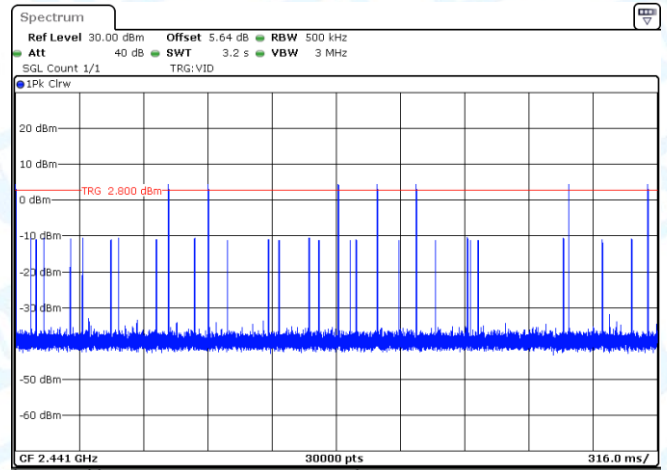

Date: 24.FEB.2025 15:01:09


2DH5-Ant1-Hop-PASS

6: Number of hopping channels

6.1 Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS

6.2 Test Graphs


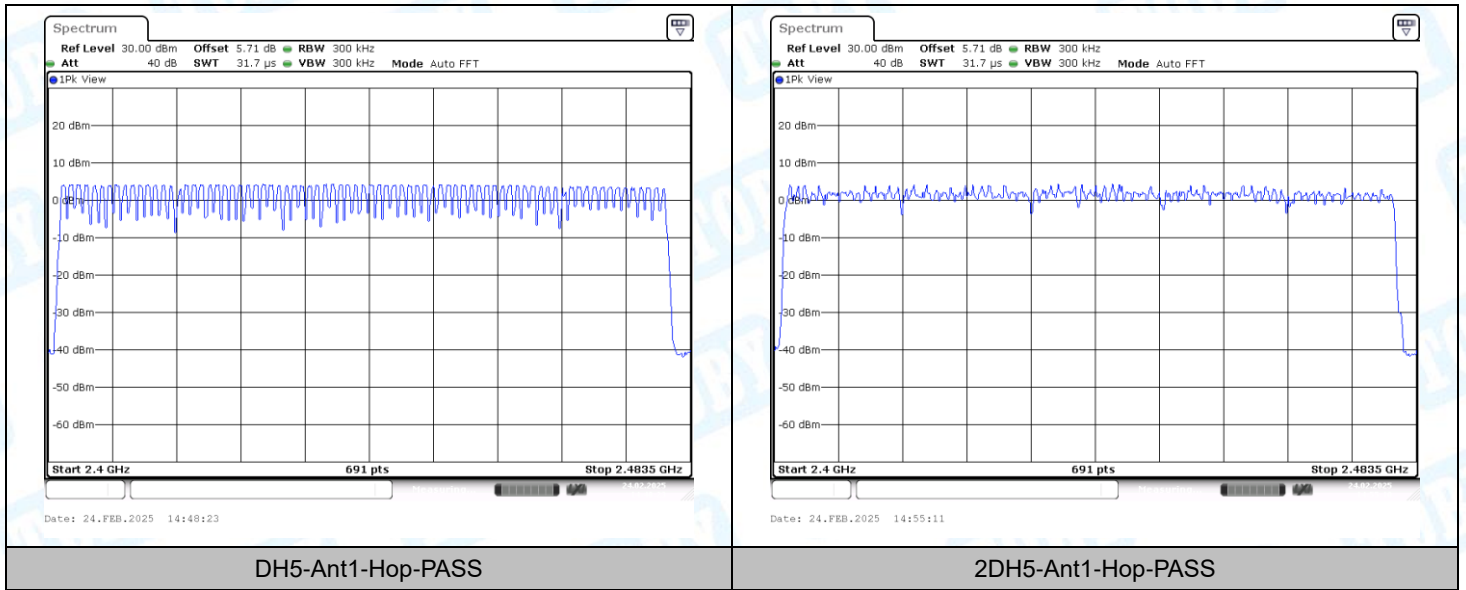


7: Band edge measurements

7.1 Test Result



TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	3.44	-49.93	≤-16.56	PASS
DH5	Ant1	High	2480	3.14	-49.08	≤-16.86	PASS
DH5	Ant1	Low	Hop_2402	3.30	-49.91	≤-16.7	PASS
DH5	Ant1	High	Hop_2480	3.17	-50.24	≤-16.83	PASS
2DH5	Ant1	Low	2402	4.10	-49.5	≤-15.9	PASS
2DH5	Ant1	High	2480	3.24	-49.85	≤-16.76	PASS
2DH5	Ant1	Low	Hop_2402	2.28	-48.67	≤-17.72	PASS
2DH5	Ant1	High	Hop_2480	1.66	-50.77	≤-18.34	PASS

7.2 Test Graphs

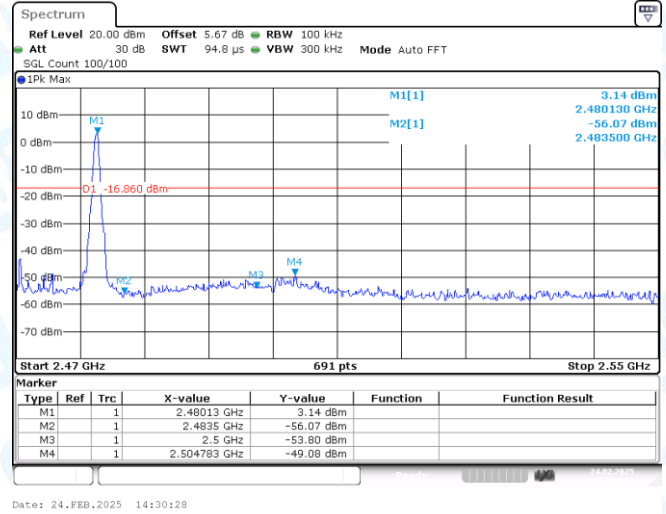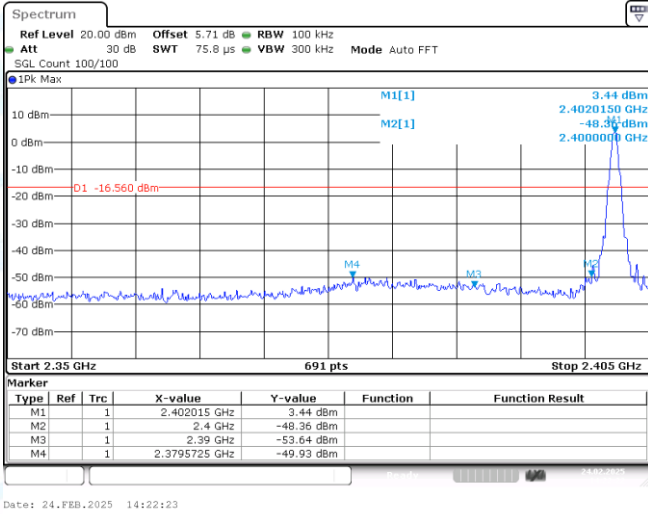



DH5-Ant1-2402-PASS

DH5-Ant1-2480-PASS

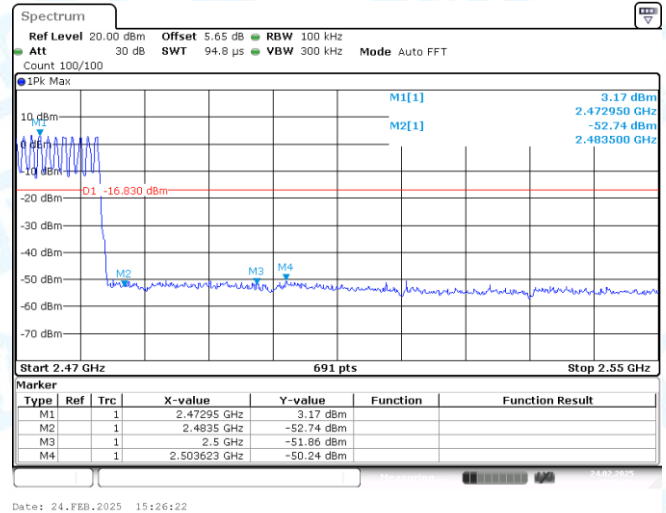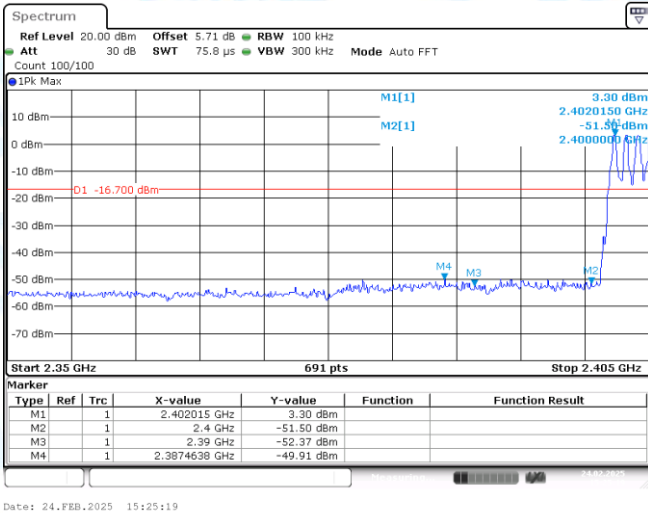


DH5-Ant1-Hop_2402-PASS

DH5-Ant1-Hop_2480-PASS

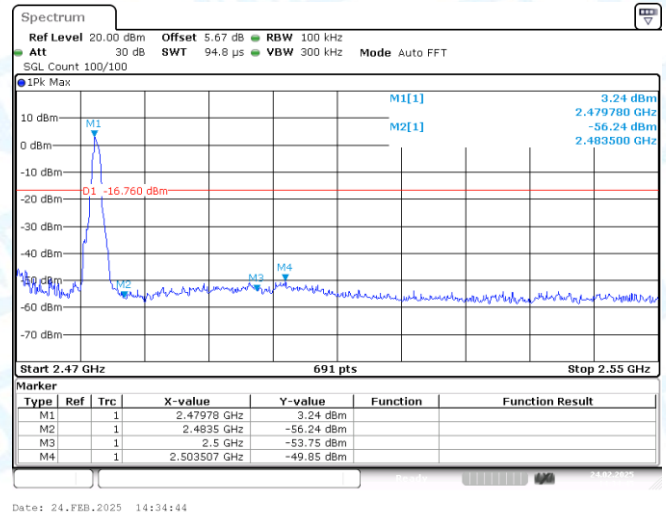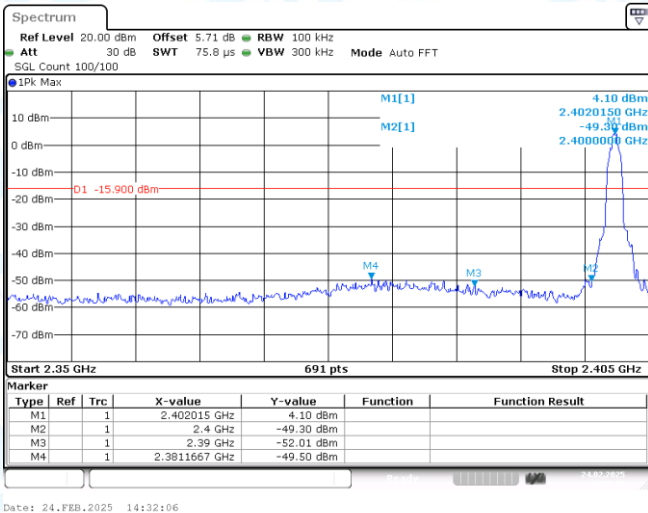


2DH5-Ant1-2402-PASS

2DH5-Ant1-2480-PASS

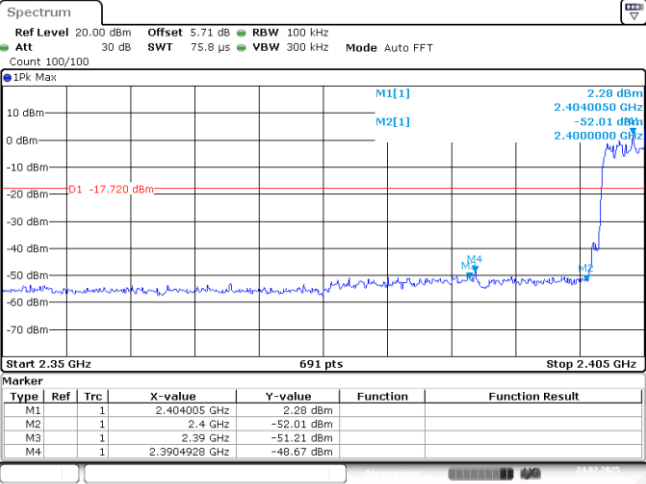

2DH5-Ant1-Hop_2402-PASS

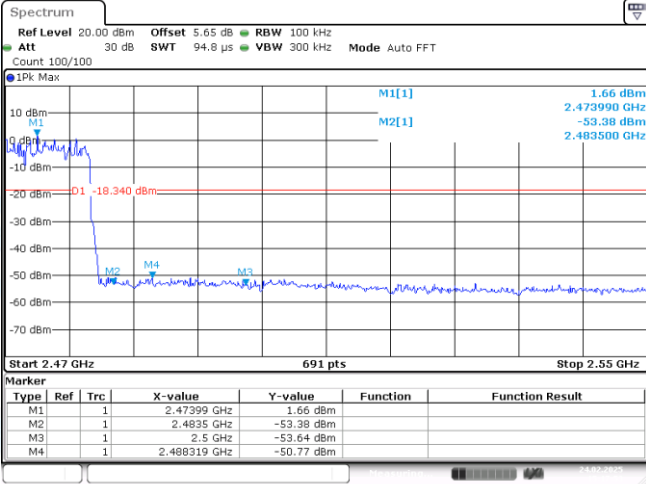


2DH5-Ant1-Hop_2480-PASS

8: Conducted Spurious Emission


8.1 Test Result

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	3.13	3.13	---	PASS
DH5	Ant1	2402	30~1000	3.13	-62.15	≤-16.87	PASS
DH5	Ant1	2402	1000~26500	3.13	-42.25	≤-16.87	PASS
DH5	Ant1	2441	0~Reference	2.85	2.85	---	PASS
DH5	Ant1	2441	30~1000	2.85	-61.19	≤-17.15	PASS
DH5	Ant1	2441	1000~26500	2.85	-41.44	≤-17.15	PASS
DH5	Ant1	2480	0~Reference	2.63	2.63	---	PASS
DH5	Ant1	2480	30~1000	2.63	-61.76	≤-17.37	PASS
DH5	Ant1	2480	1000~26500	2.63	-40.78	≤-17.37	PASS
2DH5	Ant1	2402	0~Reference	-1.57	-1.57	---	PASS
2DH5	Ant1	2402	30~1000	-1.57	-61.5	≤-21.57	PASS
2DH5	Ant1	2402	1000~26500	-1.57	-42.54	≤-21.57	PASS
2DH5	Ant1	2441	0~Reference	-0.36	-0.36	---	PASS
2DH5	Ant1	2441	30~1000	-0.36	-61.82	≤-20.36	PASS
2DH5	Ant1	2441	1000~26500	-0.36	-42.08	≤-20.36	PASS
2DH5	Ant1	2480	0~Reference	1.13	1.13	---	PASS
2DH5	Ant1	2480	30~1000	1.13	-61.98	≤-18.87	PASS
2DH5	Ant1	2480	1000~26500	1.13	-43.12	≤-18.87	PASS


8.2 Test Graphs

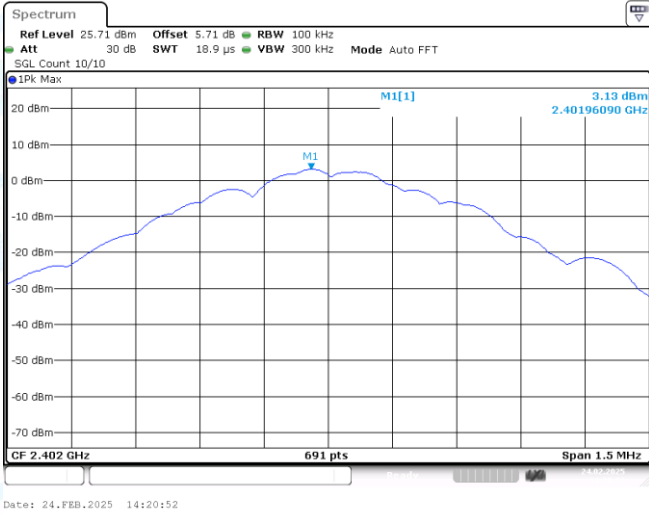


DH5-Ant1-2402-0~Reference-PASS

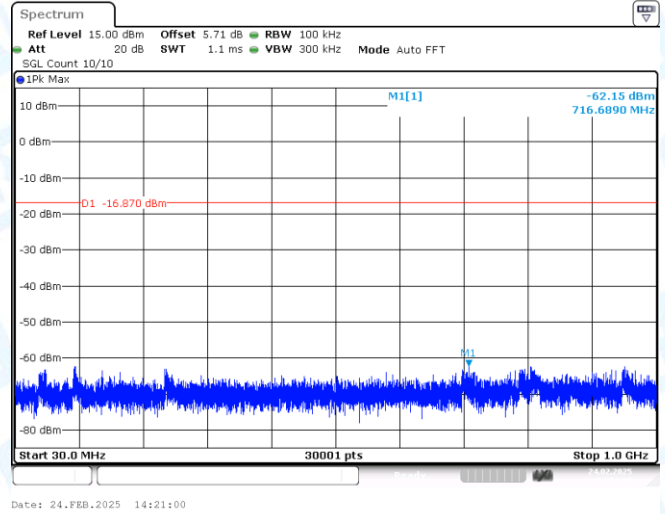


DH5-Ant1-2402-30~1000-PASS

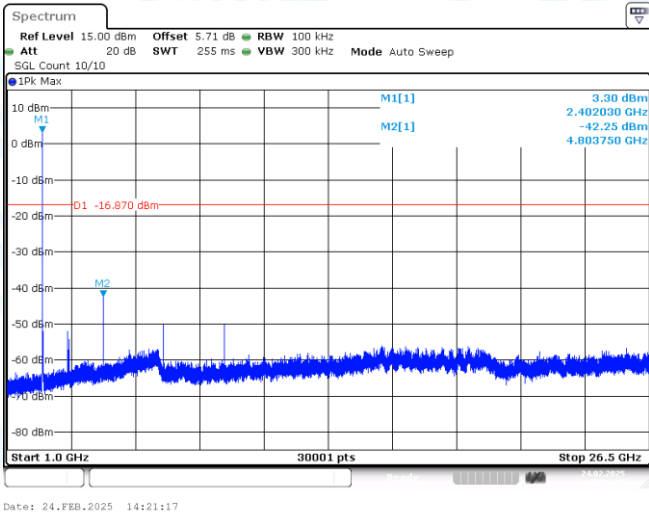


DH5-Ant1-2402-1000~26500-PASS

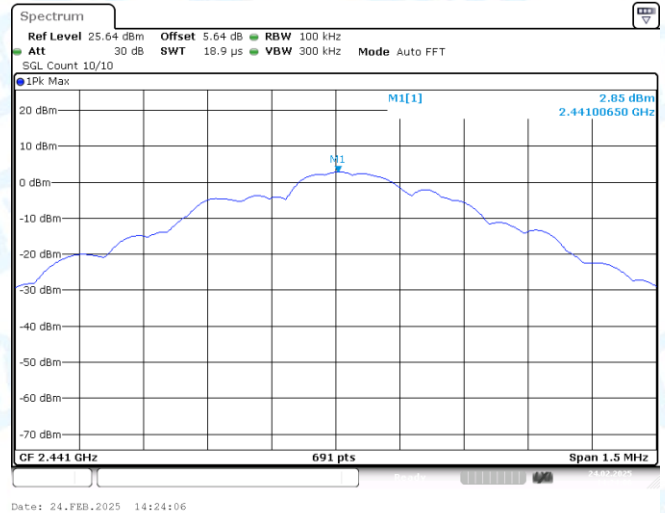



DH5-Ant1-2441-0~Reference-PASS

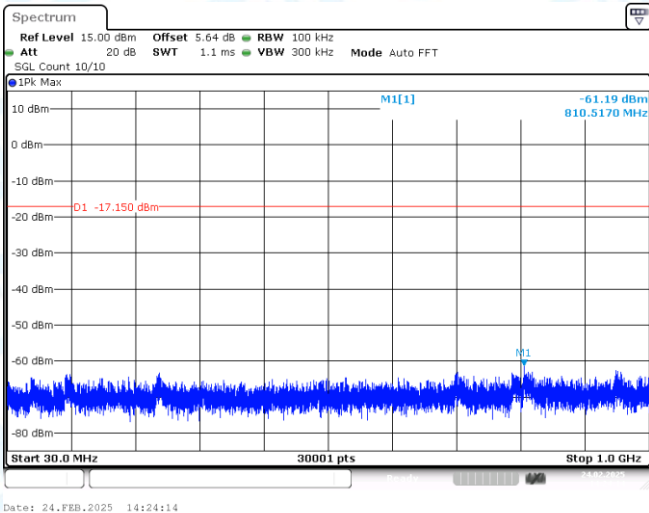

DH5-Ant1-2441-30~1000-PASS


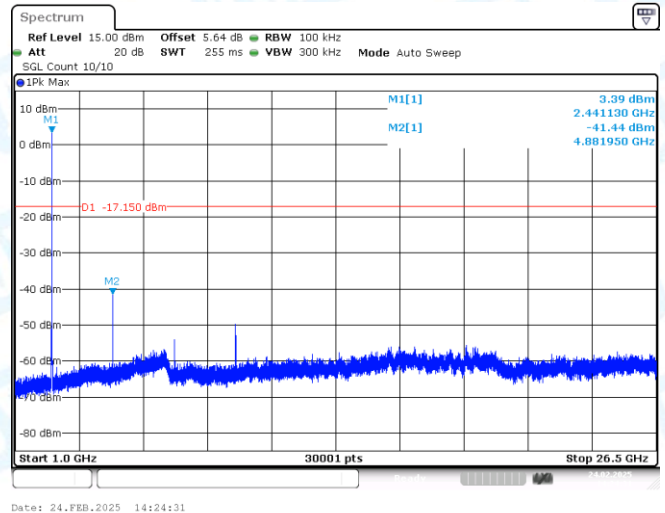


DH5-Ant1-2441-1000~26500-PASS

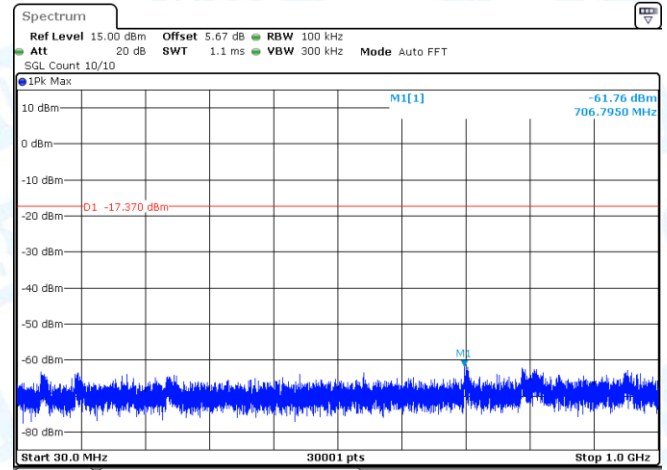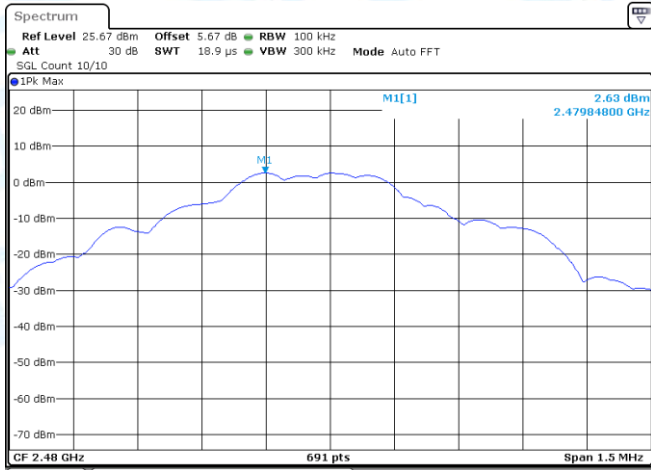



DH5-Ant1-2480-0~Reference-PASS

DH5-Ant1-2480-30~1000-PASS

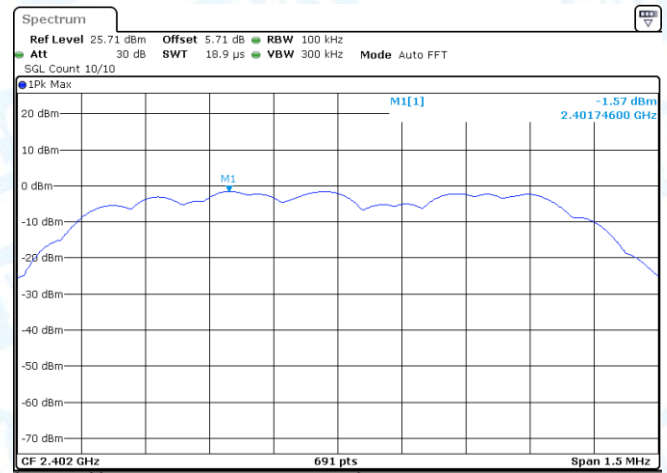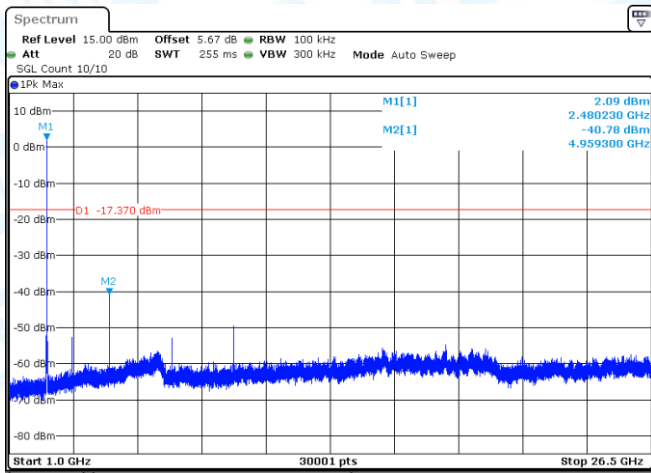



DH5-Ant1-2480-1000~26500-PASS

2DH5-Ant1-2402-0~Reference-PASS

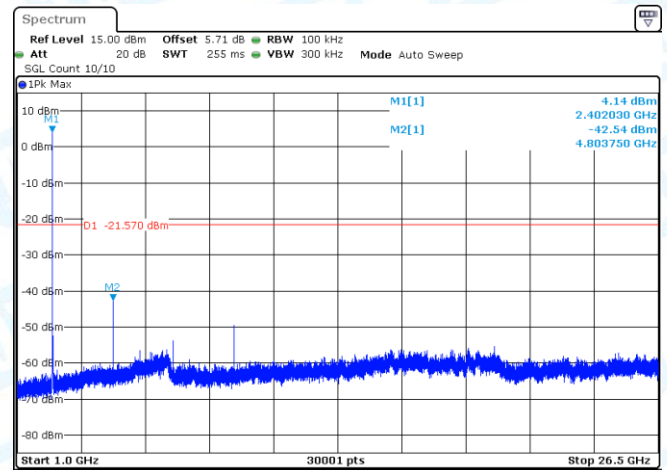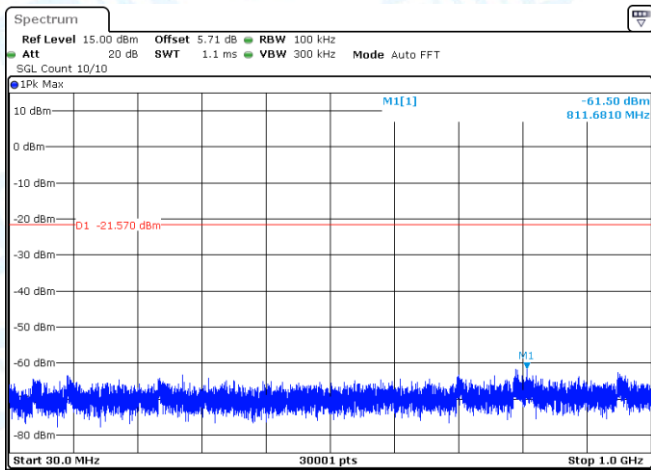



2DH5-Ant1-2402-30~1000-PASS

2DH5-Ant1-2402-1000~26500-PASS

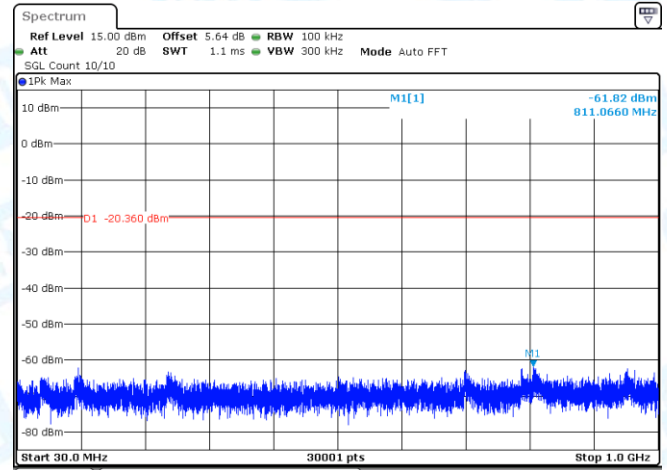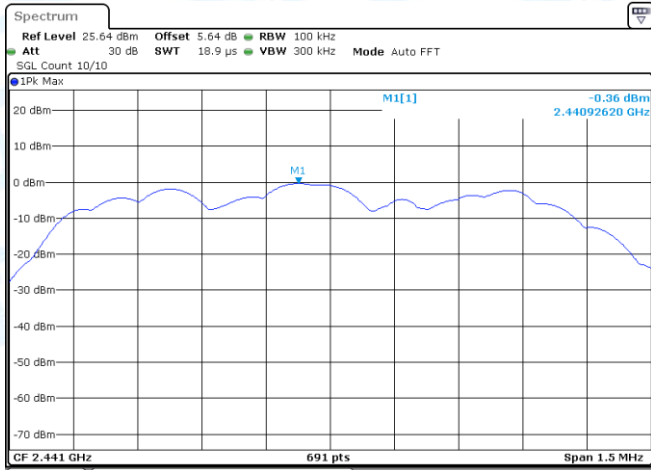



2DH5-Ant1-2441-0~Reference-PASS

2DH5-Ant1-2441-30~1000-PASS

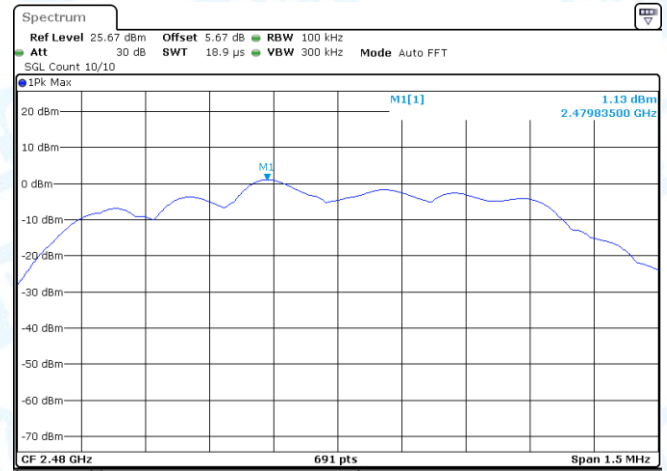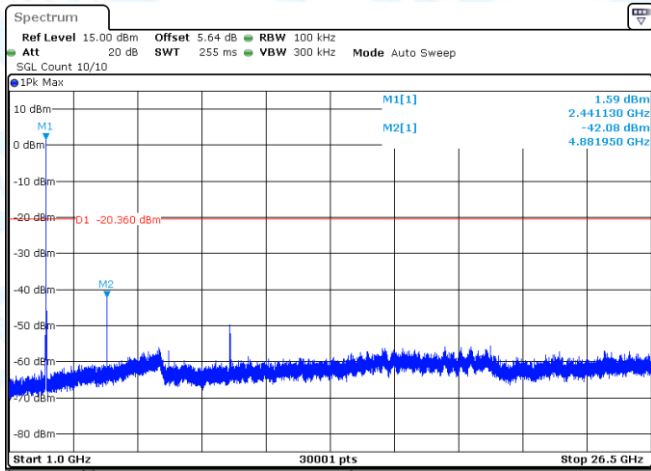

2DH5-Ant1-2441-1000~26500-PASS

2DH5-Ant1-2480-0~Reference-PASS

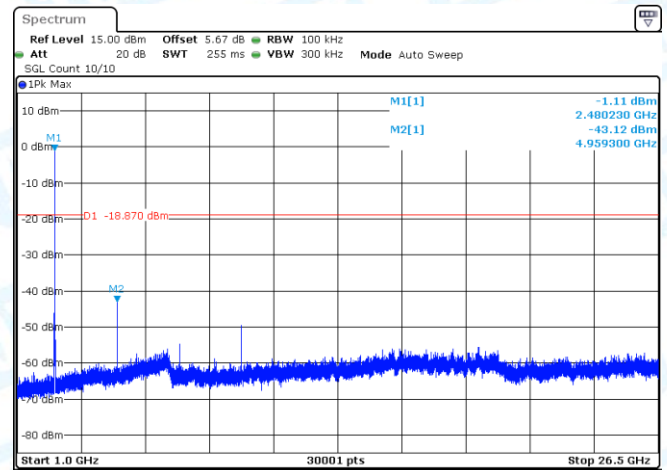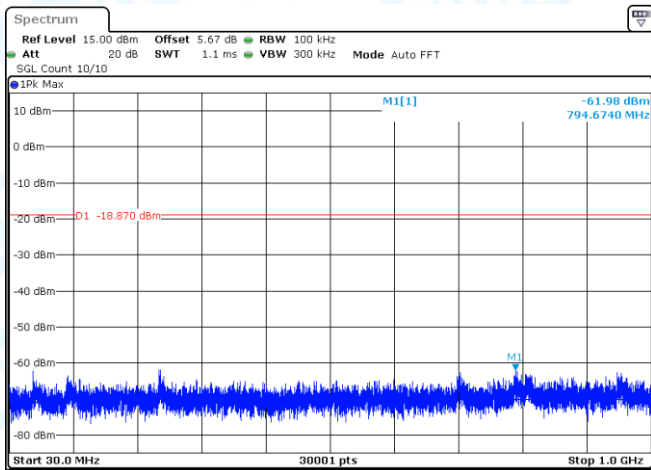

2DH5-Ant1-2480-30~1000-PASS

2DH5-Ant1-2480-1000~26500-PASS

9: Duty Cycle

9.1 Test Result


TestMode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	DC Factory	1/T [kHz]
DH5	Ant1	2402	2.90	3.76	77.13	1.13	0.34
DH5	Ant1	2441	2.90	3.76	77.13	1.13	0.34
DH5	Ant1	2480	2.89	3.75	77.07	1.13	0.35
2DH5	Ant1	2402	2.90	3.76	77.13	1.13	0.34
2DH5	Ant1	2441	2.90	3.75	77.33	1.12	0.34
2DH5	Ant1	2480	2.90	3.76	77.13	1.13	0.34

Note: 1, Duty Cycle= Transmission Duration/ Transmission Period


2, DC Factory=10*Log₁₀(1/Duty Cycle)

3, 1/T=1/ Transmission Duration


9.2 Test Graphs

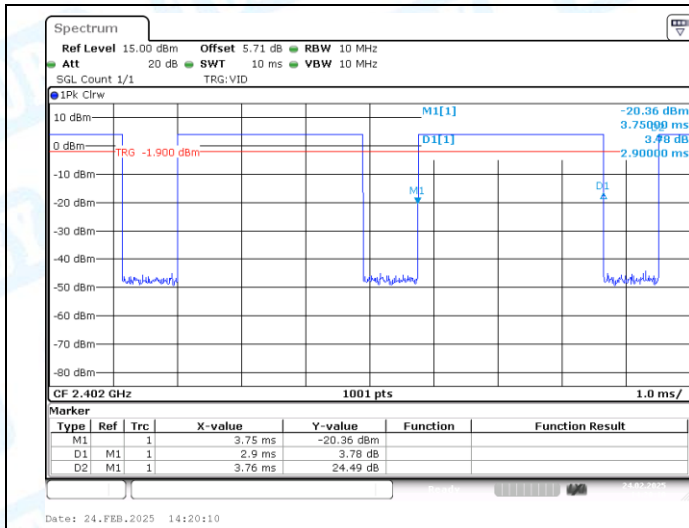


NTNV-DH5-Ant1-2402

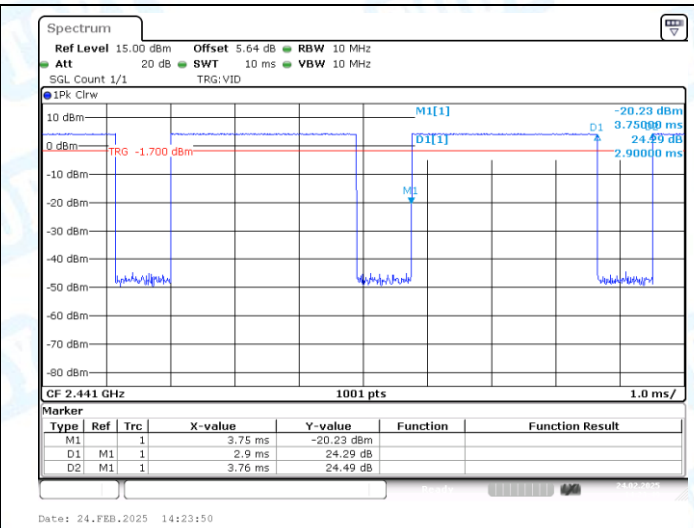


NTNV-DH5-Ant1-2441

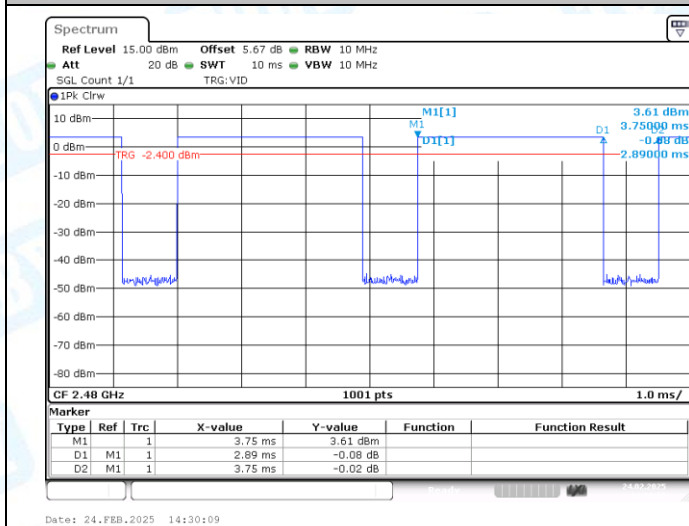


NTNV-DH5-Ant1-2480

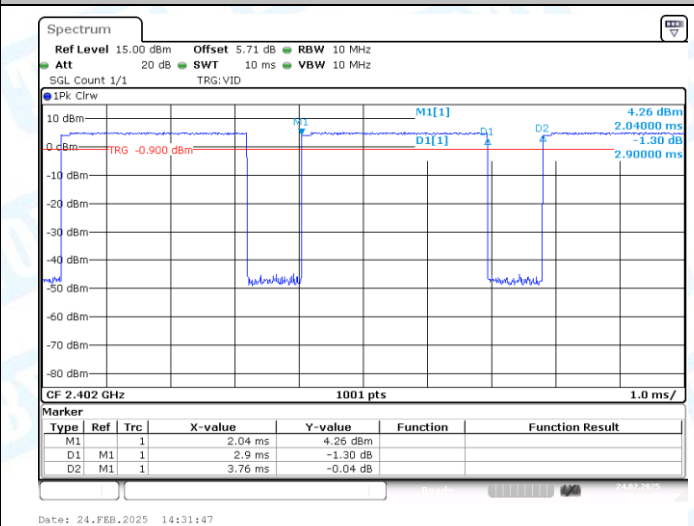

NTNV-2DH5-Ant1-2402

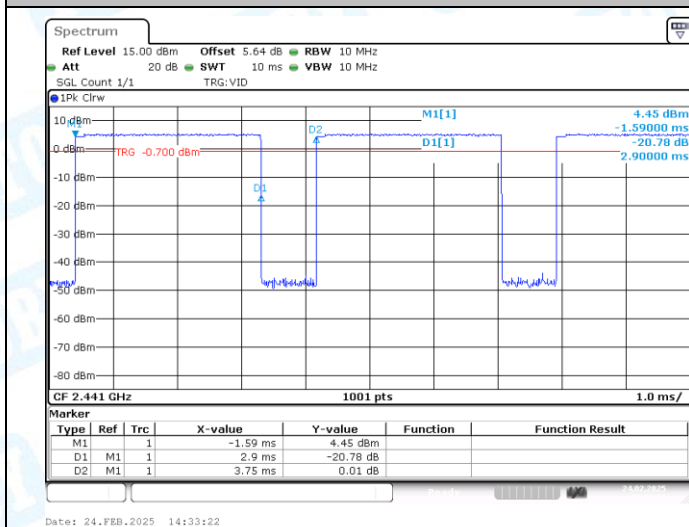

NTNV-2DH5-Ant1-2441

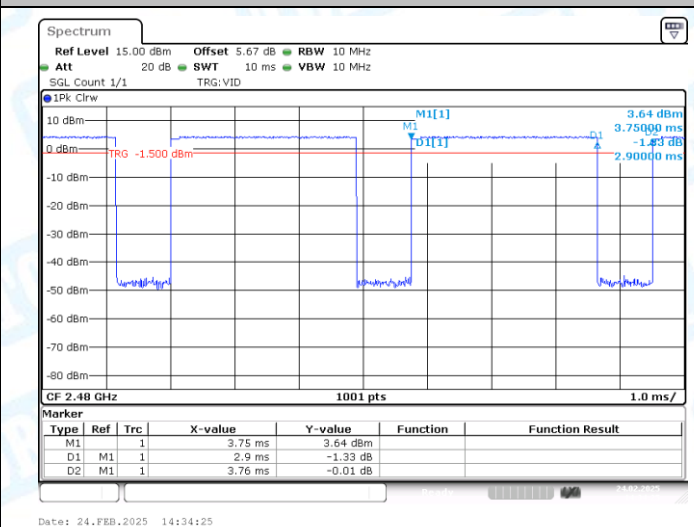

NTNV-2DH5-Ant1-2480

10: Emissions in Restricted Bands



10.1 Test Result

Test Mode	Antenna	ChName	Frequency [MHz]	Detector	Freq [MHz]	Result [dBm]	Limit [dBm]	Result [dBuV/m]	Limit [dBuV/m]	Verdict
DH5	Ant1	Low	2402	Peak	2390.000	-43.6	≤-21.20	51.60	≤74	PASS
DH5	Ant1	Low	2402	Peak	2310.000	-55.14	≤-21.20	40.06	≤74	PASS
DH5	Ant1	Low	2402	Peak	2387.652	-40.61	≤-21.20	54.59	≤74	PASS
DH5	Ant1	Low	2402	AV	2390.000	-52.21	≤-41.20	42.99	≤54	PASS
DH5	Ant1	Low	2402	AV	2310.000	-63.06	≤-41.20	32.14	≤54	PASS
DH5	Ant1	Low	2402	AV	2383.696	-50.55	≤-41.20	44.65	≤54	PASS
DH5	Ant1	High	2480	Peak	2483.500	-49.97	≤-21.20	45.23	≤74	PASS
DH5	Ant1	High	2480	Peak	2500.000	-42.91	≤-21.20	52.29	≤74	PASS
DH5	Ant1	High	2480	Peak	2499.913	-42.67	≤-21.20	52.53	≤74	PASS
DH5	Ant1	High	2480	AV	2483.500	-56.01	≤-41.20	39.19	≤54	PASS
DH5	Ant1	High	2480	AV	2500.000	-52.26	≤-41.20	42.94	≤54	PASS
DH5	Ant1	High	2480	AV	2494.928	-51.48	≤-41.20	43.72	≤54	PASS
2DH5	Ant1	Low	2402	Peak	2390.000	-45.29	≤-21.20	49.91	≤74	PASS
2DH5	Ant1	Low	2402	Peak	2310.000	-55.43	≤-21.20	39.77	≤74	PASS
2DH5	Ant1	Low	2402	Peak	2379.587	-40.2	≤-21.20	55.00	≤74	PASS
2DH5	Ant1	Low	2402	AV	2390.000	-52.81	≤-41.20	42.39	≤54	PASS
2DH5	Ant1	Low	2402	AV	2310.000	-62.98	≤-41.20	32.22	≤54	PASS
2DH5	Ant1	Low	2402	AV	2381.565	-49.04	≤-41.20	46.16	≤54	PASS
2DH5	Ant1	High	2480	Peak	2483.500	-51.51	≤-21.20	43.69	≤74	PASS
2DH5	Ant1	High	2480	Peak	2500.000	-41.89	≤-21.20	53.31	≤74	PASS
2DH5	Ant1	High	2480	Peak	2499.797	-41.64	≤-21.20	53.56	≤74	PASS
2DH5	Ant1	High	2480	AV	2483.500	-56.7	≤-41.20	38.50	≤54	PASS
2DH5	Ant1	High	2480	AV	2500.000	-51.33	≤-41.20	43.87	≤54	PASS
2DH5	Ant1	High	2480	AV	2494.348	-51.01	≤-41.20	44.19	≤54	PASS

Note:



- The Antenna Gain is compensated in the graph.
- The limit in dBm for average detector is conversion from 54dBuV/m, according to 15.209(a). The limit in dBm for peak detector is 20dB above the limit of average detector in dBm.

10.2 Test Graphs

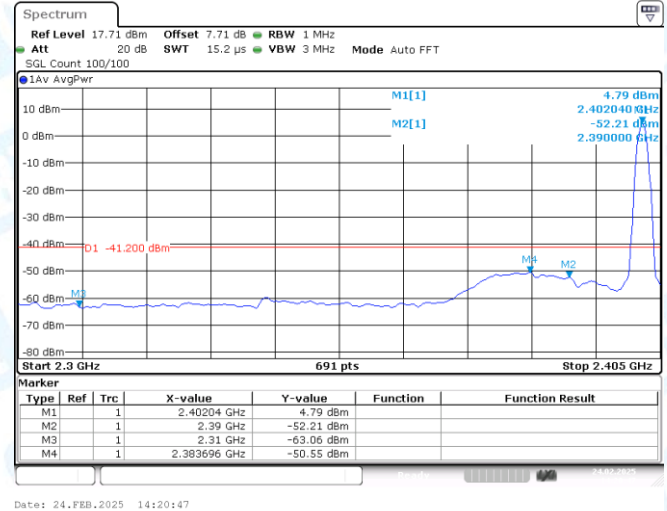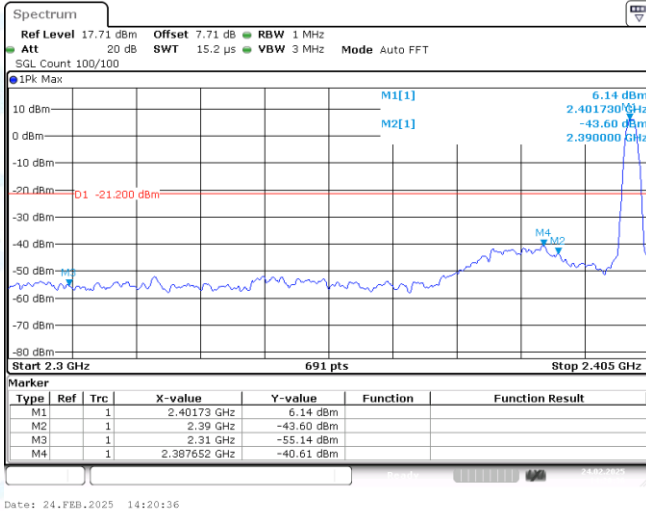



DH5-Ant1-2402-PASS

DH5-Ant1-2402-PASS

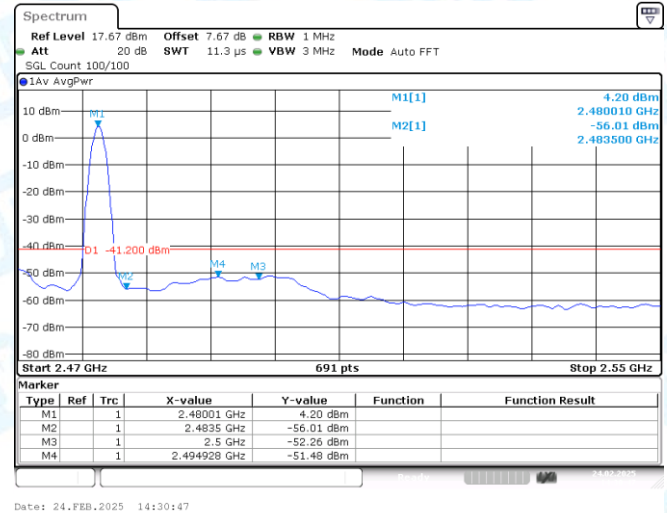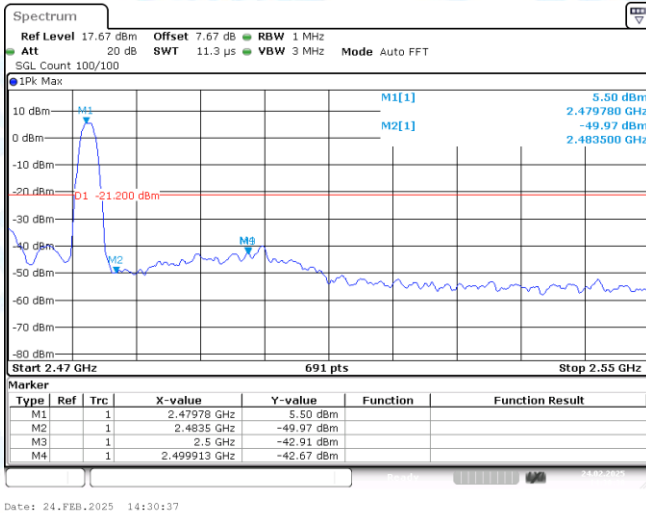


DH5-Ant1-2480-PASS

DH5-Ant1-2480-PASS

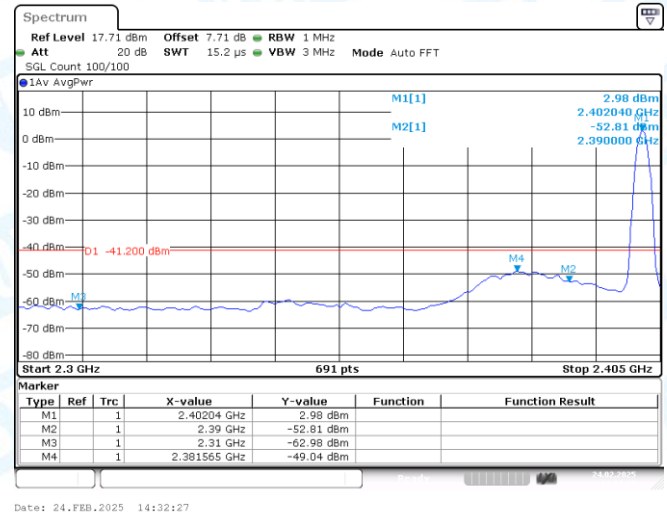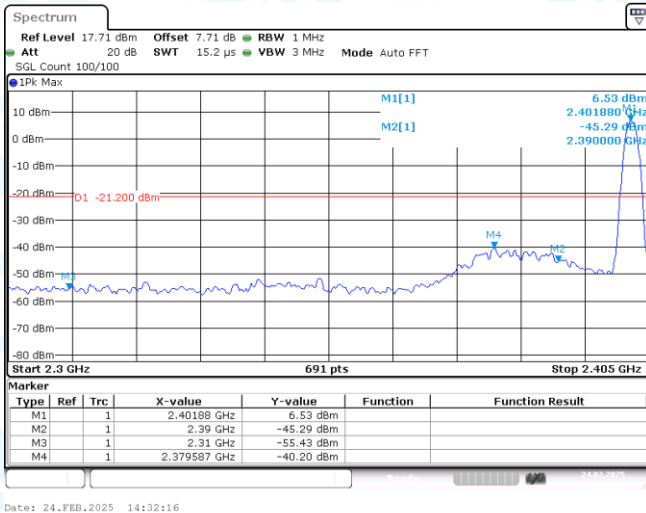


2DH5-Ant1-2402-PASS

2DH5-Ant1-2402-PASS

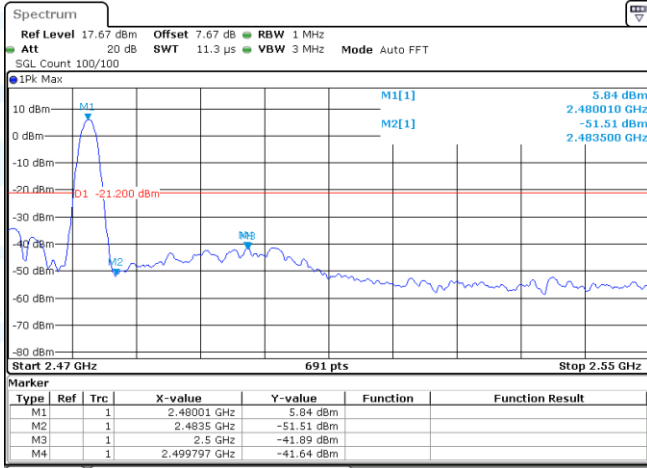

2DH5-Ant1-2480-PASS

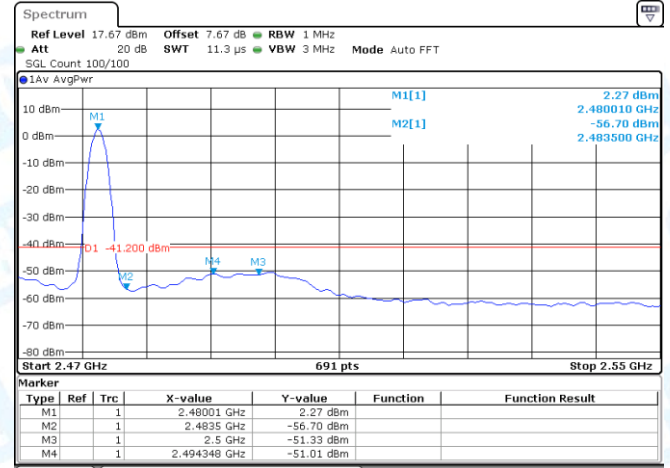

2DH5-Ant1-2480-PASS

-----END OF THE REPORT-----