



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																			
ANT	802.11n HT40 CH09 2452MHz - R																																			
1	Horizontal	Fundamental																																		
<p>Peak</p>	<p>Site : 030905-K5 Condition : FCC PART 15C 3m 3117 00218652 HORIZONTAL Project : FR1N0920 Mode : Z1 Plane : Z Power : Full-directivity IPE1 : #1 PowerSetting : 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>67.52</td> <td>-6.48</td> <td>74.00</td> <td>66.23</td> <td>30.86</td> <td>7.25</td> <td>36.82</td> <td>106</td> <td>173 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg			1	2483.68	67.52	-6.48	74.00	66.23	30.86	7.25	36.82	106	173 Peak	HORIZONTAL	<p>Left blank</p>
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																										
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg																												
1	2483.68	67.52	-6.48	74.00	66.23	30.86	7.25	36.82	106	173 Peak	HORIZONTAL																									
<p>Avg.</p>	<p>Site : 030905-K5 Condition : FCC PART 15C (Ave) 3m 3117 00218652 HORIZONTAL Project : FR1N0920 Mode : Z1 Plane : Z Power : Full-directivity IPE1 : #1 PowerSetting : 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>50.58</td> <td>-3.42</td> <td>54.00</td> <td>49.29</td> <td>30.86</td> <td>7.25</td> <td>36.82</td> <td>106</td> <td>173 Average</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg			1	2483.50	50.58	-3.42	54.00	49.29	30.86	7.25	36.82	106	173 Average	HORIZONTAL	<p>Left blank</p>
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																										
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg																												
1	2483.50	50.58	-3.42	54.00	49.29	30.86	7.25	36.82	106	173 Average	HORIZONTAL																									



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																					
ANT	802.11n HT40 CH09 2452MHz - L																																																																					
1	Vertical	Fundamental																																																																				
Peak	<p>Site : 030905-K5 Condition : FCC PART 15C 3m 3117 00218652 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR1N0920 Mode : Z Plane : E Full-directivity IMEI : #1 Powersetting : 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.92</td> <td>51.82</td> <td>-22.18</td> <td>74.00</td> <td>51.08</td> <td>30.50</td> <td>7.10</td> <td>36.86</td> <td>343</td> <td>231 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg			1	2385.92	51.82	-22.18	74.00	51.08	30.50	7.10	36.86	343	231 Peak	VERTICAL	<p>Site : 030905-K5 Condition : FCC PART 15C 3m 3117 00218652 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR1N0920 Mode : Z Plane : E Full-directivity IMEI : #1 Powersetting : 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2448.00</td> <td>104.72</td> <td>30.72</td> <td>74.00</td> <td>103.66</td> <td>30.71</td> <td>7.19</td> <td>36.84</td> <td>343</td> <td>231 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg			1	2448.00	104.72	30.72	74.00	103.66	30.71	7.19	36.84	343	231 Peak	VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg																																																														
1	2385.92	51.82	-22.18	74.00	51.08	30.50	7.10	36.86	343	231 Peak	VERTICAL																																																											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg																																																														
1	2448.00	104.72	30.72	74.00	103.66	30.71	7.19	36.84	343	231 Peak	VERTICAL																																																											
Avg.	<p>Site : 030905-K5 Condition : FCC PART 15C (AVG) 3m 3117 00218652 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR1N0920 Mode : Z Plane : E Full-directivity IMEI : #1 Powersetting : 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>40.70</td> <td>-13.30</td> <td>54.00</td> <td>39.96</td> <td>30.50</td> <td>7.10</td> <td>36.86</td> <td>343</td> <td>231 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg			1	2389.95	40.70	-13.30	54.00	39.96	30.50	7.10	36.86	343	231 Average	VERTICAL	<p>Site : 030905-K5 Condition : FCC PART 15C (AVG) 3m 3117 00218652 VERTICAL Economic & Technical Development Zone, Jiangsu China Project : FR1N0920 Mode : Z Plane : E Full-directivity IMEI : #1 Powersetting : 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2450.00</td> <td>94.80</td> <td>42.80</td> <td>54.00</td> <td>95.74</td> <td>30.71</td> <td>7.19</td> <td>36.84</td> <td>343</td> <td>231 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg			1	2450.00	94.80	42.80	54.00	95.74	30.71	7.19	36.84	343	231 Average	VERTICAL
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg																																																														
1	2389.95	40.70	-13.30	54.00	39.96	30.50	7.10	36.86	343	231 Average	VERTICAL																																																											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																												
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg																																																														
1	2450.00	94.80	42.80	54.00	95.74	30.71	7.19	36.84	343	231 Average	VERTICAL																																																											



WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																			
ANT	802.11n HT40 CH09 2452MHz - R																																			
1	Vertical	Fundamental																																		
<p>Peak</p>	<p>Site : 030905-K5 Condition : FCC PART 15C 3m 3117 00218652 VERTICAL Emission : Emission & Technical Development Zone, Jiangsu China Project : FR1N0920 Mode : Z1 Plane : Z Power : Full-directivity IPE1 : #1 PowerSetting : 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>63.78</td> <td>-10.22</td> <td>74.00</td> <td>62.49</td> <td>30.86</td> <td>7.25</td> <td>36.82</td> <td>343</td> <td>231 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg			1	2483.50	63.78	-10.22	74.00	62.49	30.86	7.25	36.82	343	231 Peak	VERTICAL	<p>Left blank</p>
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																										
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg																												
1	2483.50	63.78	-10.22	74.00	62.49	30.86	7.25	36.82	343	231 Peak	VERTICAL																									
<p>Avg.</p>	<p>Site : 030905-K5 Condition : FCC PART 15C (AVG) 3m 3117 00218652 VERTICAL Emission : Emission & Technical Development Zone, Jiangsu China Project : FR1N0920 Mode : Z1 Plane : Z Power : Full-directivity IPE1 : #1 PowerSetting : 11</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBV/m</th> <th>dB</th> <th>dBV/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>46.34</td> <td>-7.66</td> <td>54.00</td> <td>45.05</td> <td>30.86</td> <td>7.25</td> <td>36.82</td> <td>343</td> <td>231 Average</td> <td>VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg			1	2483.50	46.34	-7.66	54.00	45.05	30.86	7.25	36.82	343	231 Average	VERTICAL	<p>Left blank</p>
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																										
MHz	dBV/m	dB	dBV/m	dB	dB	dB	cm	deg																												
1	2483.50	46.34	-7.66	54.00	45.05	30.86	7.25	36.82	343	231 Average	VERTICAL																									



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																														
ANT	802.11b CH01 2412MHz																																																																														
1	Horizontal	Vertical																																																																													
Peak Avg.	<p>Site : 03C805-E5 Condition : FCC PART 15C In 3117 00210602 HORIZONTAL Project : RW 1000,000KHZ VEW 3000,000KHZ SPT Auto File : 07010920B Plane : X Pull-directivity : X IRE1 : 0 Powersetting : 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>52.58</td> <td>-21.58</td> <td>74.00</td> <td>72.86</td> <td>34.63</td> <td>11.21</td> <td>65.38</td> <td>186</td> <td>79 Peak HORIZONTAL</td> </tr> <tr> <td>2</td> <td>4824.00</td> <td>46.52</td> <td>-17.18</td> <td>54.00</td> <td>62.38</td> <td>34.63</td> <td>11.21</td> <td>65.38</td> <td>186</td> <td>79 Average HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	52.58	-21.58	74.00	72.86	34.63	11.21	65.38	186	79 Peak HORIZONTAL	2	4824.00	46.52	-17.18	54.00	62.38	34.63	11.21	65.38	186	79 Average HORIZONTAL	<p>Site : 03C805-E5 Condition : FCC PART 15C In 3117 00210602 VERTICAL Project : RW 1000,000KHZ VEW 3000,000KHZ SPT Auto File : 07010920B Plane : X Pull-directivity : X IRE1 : 0 Powersetting : 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>49.45</td> <td>-24.55</td> <td>74.00</td> <td>69.81</td> <td>34.63</td> <td>11.21</td> <td>65.38</td> <td>300</td> <td>360 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	49.45	-24.55	74.00	69.81	34.63	11.21	65.38	300	360 Peak VERTICAL
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	4824.00	52.58	-21.58	74.00	72.86	34.63	11.21	65.38	186	79 Peak HORIZONTAL																																																																					
2	4824.00	46.52	-17.18	54.00	62.38	34.63	11.21	65.38	186	79 Average HORIZONTAL																																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	4824.00	49.45	-24.55	74.00	69.81	34.63	11.21	65.38	300	360 Peak VERTICAL																																																																					
	<p>Site : 03C805-E5 Condition : FCC PART 15C In 3117 00210602 HORIZONTAL Project : RW 1000,000KHZ VEW 3000,000KHZ SPT Auto File : 07010920B Plane : X Pull-directivity : X IRE1 : 0 Powersetting : 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>46.52</td> <td>-17.18</td> <td>54.00</td> <td>62.38</td> <td>34.63</td> <td>11.21</td> <td>65.38</td> <td>186</td> <td>79 Average HORIZONTAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	46.52	-17.18	54.00	62.38	34.63	11.21	65.38	186	79 Average HORIZONTAL	<p>Site : 03C805-E5 Condition : FCC PART 15C In 3117 00210602 VERTICAL Project : RW 1000,000KHZ VEW 3000,000KHZ SPT Auto File : 07010920B Plane : X Pull-directivity : X IRE1 : 0 Powersetting : 0</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>49.45</td> <td>-24.55</td> <td>74.00</td> <td>69.81</td> <td>34.63</td> <td>11.21</td> <td>65.38</td> <td>300</td> <td>360 Peak VERTICAL</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	49.45	-24.55	74.00	69.81	34.63	11.21	65.38	300	360 Peak VERTICAL											
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	4824.00	46.52	-17.18	54.00	62.38	34.63	11.21	65.38	186	79 Average HORIZONTAL																																																																					
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	4824.00	49.45	-24.55	74.00	69.81	34.63	11.21	65.38	300	360 Peak VERTICAL																																																																					



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																			
ANT	802.11b CH06 2437MHz																																																																																			
1	Horizontal	Vertical																																																																																		
Peak Avg.	<p>Site : 03CB5-E5 Condition : FCC PART 15C 2m 2117 00218052 HORIZONTAL REW 1000.000MHz YEW 3000.000MHz SPT Auto Project : (F5) UN9020 Mode : 11 Plane : X Pull-directivity : IMEI : Powersetting : G</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4872.00</td> <td>48.58</td> <td>-25.59</td> <td>74.00</td> <td>67.95</td> <td>34.69</td> <td>11.29</td> <td>65.42</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>46.38</td> <td>-27.75</td> <td>74.00</td> <td>62.79</td> <td>36.68</td> <td>12.72</td> <td>65.91</td> <td>300</td> <td>0 Peak HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	dB	cm	deg	1	4872.00	48.58	-25.59	74.00	67.95	34.69	11.29	65.42	300	0 Peak HORIZONTAL	2	7311.00	46.38	-27.75	74.00	62.79	36.68	12.72	65.91	300	0 Peak HORIZONTAL	<p>Site : 03CB5-E5 Condition : FCC PART 15C 2m 2117 00218052 VERTICAL REW 1000.000MHz YEW 3000.000MHz SPT Auto Project : (F5) UN9020 Mode : 11 Plane : X Pull-directivity : IMEI : Powersetting : G</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4872.00</td> <td>49.44</td> <td>-24.56</td> <td>74.00</td> <td>68.89</td> <td>34.69</td> <td>11.29</td> <td>65.42</td> <td>300</td> <td>368 Peak VERTICAL</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>47.49</td> <td>-26.51</td> <td>74.00</td> <td>64.00</td> <td>36.68</td> <td>12.72</td> <td>65.91</td> <td>300</td> <td>368 Peak VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	Limit	Level	Factor	Loss	Factor	dB	cm	deg	1	4872.00	49.44	-24.56	74.00	68.89	34.69	11.29	65.42	300	368 Peak VERTICAL	2	7311.00	47.49	-26.51	74.00	64.00	36.68	12.72	65.91	300	368 Peak VERTICAL
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																											
Freq	Level	Limit	Level	Factor	Loss	Factor	dB	cm	deg																																																																											
1	4872.00	48.58	-25.59	74.00	67.95	34.69	11.29	65.42	300	0 Peak HORIZONTAL																																																																										
2	7311.00	46.38	-27.75	74.00	62.79	36.68	12.72	65.91	300	0 Peak HORIZONTAL																																																																										
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																												
Freq	Level	Limit	Level	Factor	Loss	Factor	dB	cm	deg																																																																											
1	4872.00	49.44	-24.56	74.00	68.89	34.69	11.29	65.42	300	368 Peak VERTICAL																																																																										
2	7311.00	47.49	-26.51	74.00	64.00	36.68	12.72	65.91	300	368 Peak VERTICAL																																																																										



WIFI	2.4GHz 2400~2483.5MHz Harmonic @ 3m																																																																																																											
ANT	802.11b CH11 2462MHz																																																																																																											
1	Horizontal	Vertical																																																																																																										
Peak Avg.	<p>Site : 03CBIS-E5 Condition : FCC PART 15C 2m 2117 00218052 HORIZONTAL REW 1000.000000 YEW 3000.000000 SPT Auto Project : (F5) UN9000 Mode : 13 Plane : X Full-directivity : IMEI : Powersetting : G</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4926.00</td> <td>53.93</td> <td>-20.99</td> <td>74.00</td> <td>72.34</td> <td>34.77</td> <td>11.35</td> <td>65.45</td> <td>116</td> <td>153 Peak</td> <td>HORIZONTAL</td> </tr> <tr> <td>2</td> <td>4926.00</td> <td>47.78</td> <td>-16.38</td> <td>54.00</td> <td>67.87</td> <td>34.77</td> <td>11.35</td> <td>65.45</td> <td>116</td> <td>150 Average</td> <td>HORIZONTAL</td> </tr> <tr> <td>3</td> <td>7386.00</td> <td>49.23</td> <td>-24.77</td> <td>74.00</td> <td>64.95</td> <td>36.64</td> <td>13.88</td> <td>66.16</td> <td>300</td> <td>0 Peak</td> <td>HORIZONTAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	4926.00	53.93	-20.99	74.00	72.34	34.77	11.35	65.45	116	153 Peak	HORIZONTAL	2	4926.00	47.78	-16.38	54.00	67.87	34.77	11.35	65.45	116	150 Average	HORIZONTAL	3	7386.00	49.23	-24.77	74.00	64.95	36.64	13.88	66.16	300	0 Peak	HORIZONTAL	<p>Site : 03CBIS-E5 Condition : FCC PART 15C 2m 2117 00218052 VERTICAL REW 1000.000000 YEW 3000.000000 SPT Auto Project : (F5) UN9000 Mode : 13 Plane : X Full-directivity : IMEI : Powersetting : G</p> <table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Pol/Phas</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4926.00</td> <td>64.44</td> <td>-19.56</td> <td>74.00</td> <td>73.77</td> <td>34.77</td> <td>11.35</td> <td>65.45</td> <td>360</td> <td>243 Peak</td> <td>VERTICAL</td> </tr> <tr> <td>2</td> <td>4926.00</td> <td>66.99</td> <td>-19.93</td> <td>54.00</td> <td>66.32</td> <td>34.77</td> <td>11.35</td> <td>65.45</td> <td>360</td> <td>243 Average</td> <td>VERTICAL</td> </tr> <tr> <td>3</td> <td>7386.00</td> <td>58.52</td> <td>-23.48</td> <td>74.00</td> <td>66.24</td> <td>36.64</td> <td>13.88</td> <td>66.16</td> <td>300</td> <td>360 Peak</td> <td>VERTICAL</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas	Freq	Level	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	4926.00	64.44	-19.56	74.00	73.77	34.77	11.35	65.45	360	243 Peak	VERTICAL	2	4926.00	66.99	-19.93	54.00	66.32	34.77	11.35	65.45	360	243 Average	VERTICAL	3	7386.00	58.52	-23.48	74.00	66.24	36.64	13.88	66.16	300	360 Peak	VERTICAL
	Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																				
Freq	Level	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																				
1	4926.00	53.93	-20.99	74.00	72.34	34.77	11.35	65.45	116	153 Peak	HORIZONTAL																																																																																																	
2	4926.00	47.78	-16.38	54.00	67.87	34.77	11.35	65.45	116	150 Average	HORIZONTAL																																																																																																	
3	7386.00	49.23	-24.77	74.00	64.95	36.64	13.88	66.16	300	0 Peak	HORIZONTAL																																																																																																	
Over	Limit	ReadAntenna	Cable Preamp	A/Pos	T/Pos	Remark	Pol/Phas																																																																																																					
Freq	Level	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																																				
1	4926.00	64.44	-19.56	74.00	73.77	34.77	11.35	65.45	360	243 Peak	VERTICAL																																																																																																	
2	4926.00	66.99	-19.93	54.00	66.32	34.77	11.35	65.45	360	243 Average	VERTICAL																																																																																																	
3	7386.00	58.52	-23.48	74.00	66.24	36.64	13.88	66.16	300	360 Peak	VERTICAL																																																																																																	



Emission below 1GHz
2.4GHz WIFI 802.11g (LF)


WIFI	2.4GHz 2400~2483.5MHz																																																																																																																																																																																																	
ANT	802.11g LF																																																																																																																																																																																																	
1	Horizontal	Vertical																																																																																																																																																																																																
QP / Peak	<p>Site : 000002-E2 Condition : FCC PART 15C 2m CEL 6111D 5991J VERTICAL Project : XFW 100.000MHz YFW 300.000MHz SFT Auto Mode : 1J Plane : 1J Full-directivity : #1</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Reddntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBm/100m</th> <th>dB</th> <th>dBm/100m</th> <th>dBm/100m</th> <th>dBm/100m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.97</td> <td>20.33</td> <td>-19.67</td> <td>46.00</td> <td>27.67</td> <td>24.70</td> <td>0.76</td> <td>32.28</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>2</td> <td>167.74</td> <td>23.29</td> <td>-20.21</td> <td>45.50</td> <td>38.81</td> <td>15.50</td> <td>1.88</td> <td>32.18</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>3</td> <td>480.30</td> <td>27.65</td> <td>-18.25</td> <td>46.00</td> <td>34.85</td> <td>22.86</td> <td>3.80</td> <td>32.03</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>4</td> <td>497.54</td> <td>33.66</td> <td>-12.34</td> <td>46.00</td> <td>39.16</td> <td>23.75</td> <td>3.34</td> <td>32.39</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>5</td> <td>640.13</td> <td>35.95</td> <td>-10.05</td> <td>46.00</td> <td>38.16</td> <td>26.30</td> <td>3.73</td> <td>32.22</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>6</td> <td>788.78</td> <td>27.39</td> <td>-18.61</td> <td>46.00</td> <td>27.42</td> <td>28.10</td> <td>4.17</td> <td>32.30</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Over	Limit	Reddntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas		MHz	dBm/100m	dB	dBm/100m	dBm/100m	dBm/100m	dB	dB	cm	deg		1	30.97	20.33	-19.67	46.00	27.67	24.70	0.76	32.28	---	---	Peak VERTICAL	2	167.74	23.29	-20.21	45.50	38.81	15.50	1.88	32.18	---	---	Peak VERTICAL	3	480.30	27.65	-18.25	46.00	34.85	22.86	3.80	32.03	---	---	Peak VERTICAL	4	497.54	33.66	-12.34	46.00	39.16	23.75	3.34	32.39	---	---	Peak VERTICAL	5	640.13	35.95	-10.05	46.00	38.16	26.30	3.73	32.22	---	---	Peak VERTICAL	6	788.78	27.39	-18.61	46.00	27.42	28.10	4.17	32.30	---	---	Peak VERTICAL	<p>Site : 000002-E2 Condition : FCC PART 15C 2m CEL 6111D 5991J VERTICAL Project : XFW 100.000MHz YFW 300.000MHz SFT Auto Mode : 1J Plane : 1J Full-directivity : #1</p> <table border="1"> <thead> <tr> <th>IMEI</th> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>Reddntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> <th>Poi/Phas</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBm/100m</th> <th>dB</th> <th>dBm/100m</th> <th>dBm/100m</th> <th>dBm/100m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>30.00</td> <td>21.48</td> <td>-18.60</td> <td>46.00</td> <td>28.04</td> <td>24.80</td> <td>0.76</td> <td>32.28</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>2</td> <td>167.74</td> <td>23.17</td> <td>-20.33</td> <td>45.50</td> <td>37.89</td> <td>15.50</td> <td>1.88</td> <td>32.18</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>3</td> <td>353.77</td> <td>31.27</td> <td>-24.73</td> <td>46.00</td> <td>31.22</td> <td>28.00</td> <td>2.22</td> <td>32.17</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>4</td> <td>480.30</td> <td>28.82</td> <td>-17.38</td> <td>46.00</td> <td>35.82</td> <td>22.86</td> <td>3.80</td> <td>32.28</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>5</td> <td>499.51</td> <td>33.62</td> <td>-12.38</td> <td>46.00</td> <td>39.10</td> <td>23.77</td> <td>3.14</td> <td>32.39</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> <tr> <td>6</td> <td>640.13</td> <td>35.84</td> <td>-10.16</td> <td>46.00</td> <td>38.85</td> <td>26.30</td> <td>3.71</td> <td>32.22</td> <td>---</td> <td>---</td> <td>Peak VERTICAL</td> </tr> </tbody> </table>	IMEI	Freq	Level	Over	Limit	Reddntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas		MHz	dBm/100m	dB	dBm/100m	dBm/100m	dBm/100m	dB	dB	cm	deg		1	30.00	21.48	-18.60	46.00	28.04	24.80	0.76	32.28	---	---	Peak VERTICAL	2	167.74	23.17	-20.33	45.50	37.89	15.50	1.88	32.18	---	---	Peak VERTICAL	3	353.77	31.27	-24.73	46.00	31.22	28.00	2.22	32.17	---	---	Peak VERTICAL	4	480.30	28.82	-17.38	46.00	35.82	22.86	3.80	32.28	---	---	Peak VERTICAL	5	499.51	33.62	-12.38	46.00	39.10	23.77	3.14	32.39	---	---	Peak VERTICAL	6	640.13	35.84	-10.16	46.00	38.85	26.30	3.71	32.22	---	---	Peak VERTICAL
	IMEI	Freq	Level	Over	Limit	Reddntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																																																																																																																																						
	MHz	dBm/100m	dB	dBm/100m	dBm/100m	dBm/100m	dB	dB	cm	deg																																																																																																																																																																																								
1	30.97	20.33	-19.67	46.00	27.67	24.70	0.76	32.28	---	---	Peak VERTICAL																																																																																																																																																																																							
2	167.74	23.29	-20.21	45.50	38.81	15.50	1.88	32.18	---	---	Peak VERTICAL																																																																																																																																																																																							
3	480.30	27.65	-18.25	46.00	34.85	22.86	3.80	32.03	---	---	Peak VERTICAL																																																																																																																																																																																							
4	497.54	33.66	-12.34	46.00	39.16	23.75	3.34	32.39	---	---	Peak VERTICAL																																																																																																																																																																																							
5	640.13	35.95	-10.05	46.00	38.16	26.30	3.73	32.22	---	---	Peak VERTICAL																																																																																																																																																																																							
6	788.78	27.39	-18.61	46.00	27.42	28.10	4.17	32.30	---	---	Peak VERTICAL																																																																																																																																																																																							
IMEI	Freq	Level	Over	Limit	Reddntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Poi/Phas																																																																																																																																																																																							
	MHz	dBm/100m	dB	dBm/100m	dBm/100m	dBm/100m	dB	dB	cm	deg																																																																																																																																																																																								
1	30.00	21.48	-18.60	46.00	28.04	24.80	0.76	32.28	---	---	Peak VERTICAL																																																																																																																																																																																							
2	167.74	23.17	-20.33	45.50	37.89	15.50	1.88	32.18	---	---	Peak VERTICAL																																																																																																																																																																																							
3	353.77	31.27	-24.73	46.00	31.22	28.00	2.22	32.17	---	---	Peak VERTICAL																																																																																																																																																																																							
4	480.30	28.82	-17.38	46.00	35.82	22.86	3.80	32.28	---	---	Peak VERTICAL																																																																																																																																																																																							
5	499.51	33.62	-12.38	46.00	39.10	23.77	3.14	32.39	---	---	Peak VERTICAL																																																																																																																																																																																							
6	640.13	35.84	-10.16	46.00	38.85	26.30	3.71	32.22	---	---	Peak VERTICAL																																																																																																																																																																																							



Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	100	-	-	10Hz
802.11n HT20	100	-	-	10Hz
802.11n HT40	100	-	-	10Hz


802.11b

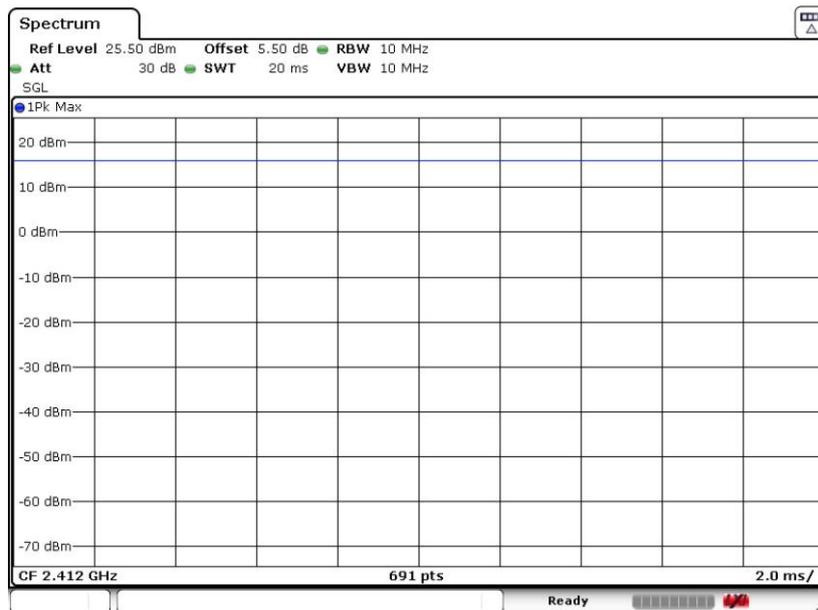

Date: 30.NOV.2021 16:46:31




802.11g

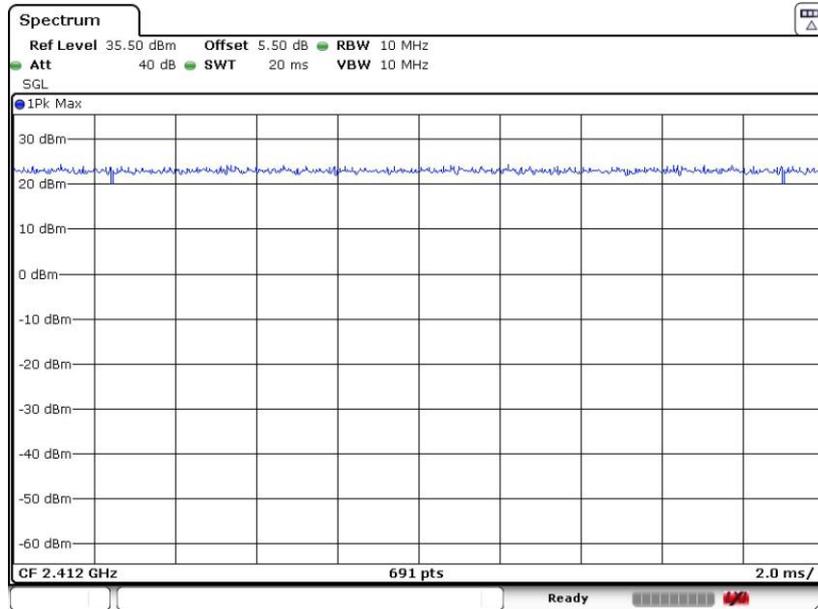

Date: 30.NOV.2021 16:49:27


802.11n HT20

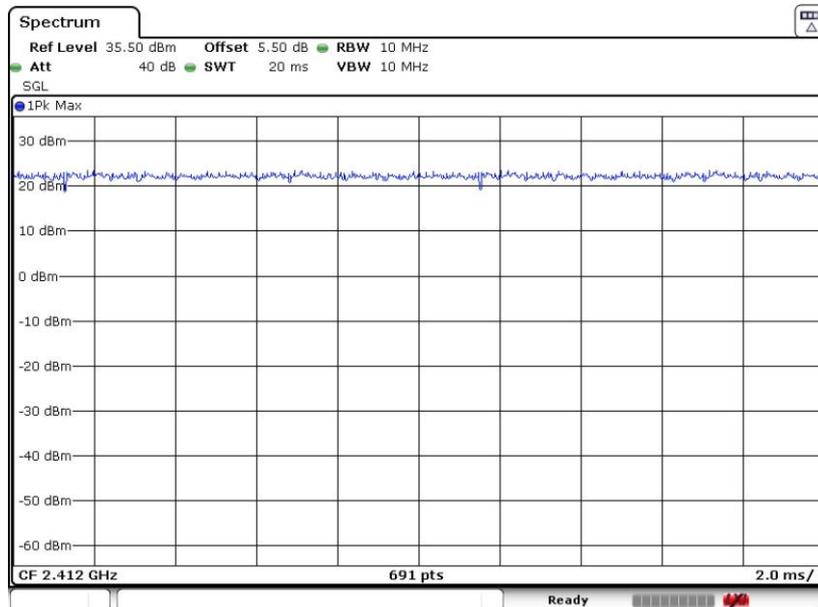

Date: 30.NOV.2021 16:52:00



802.11n HT40

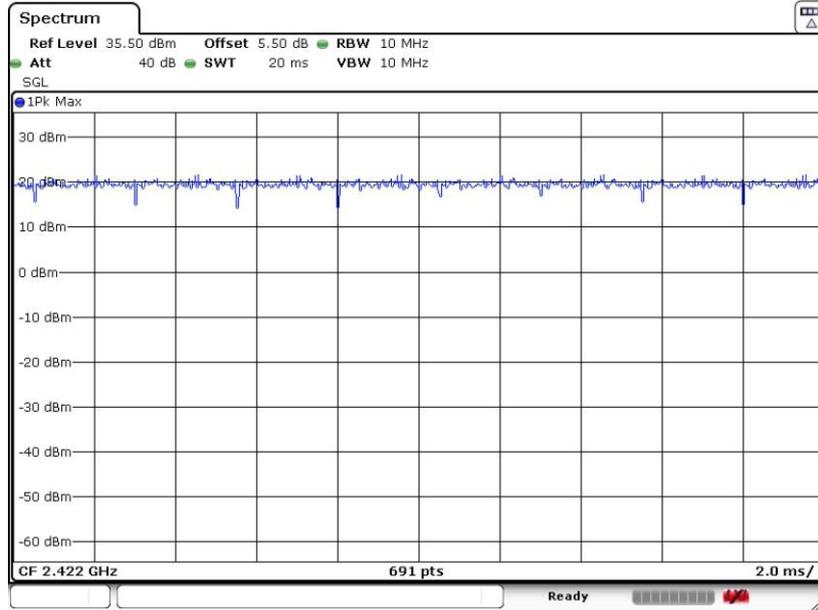

Date: 30.NOV.2021 16:53:31