



5350 MHz to 5460 MHz Upper Band Edge Channel 52

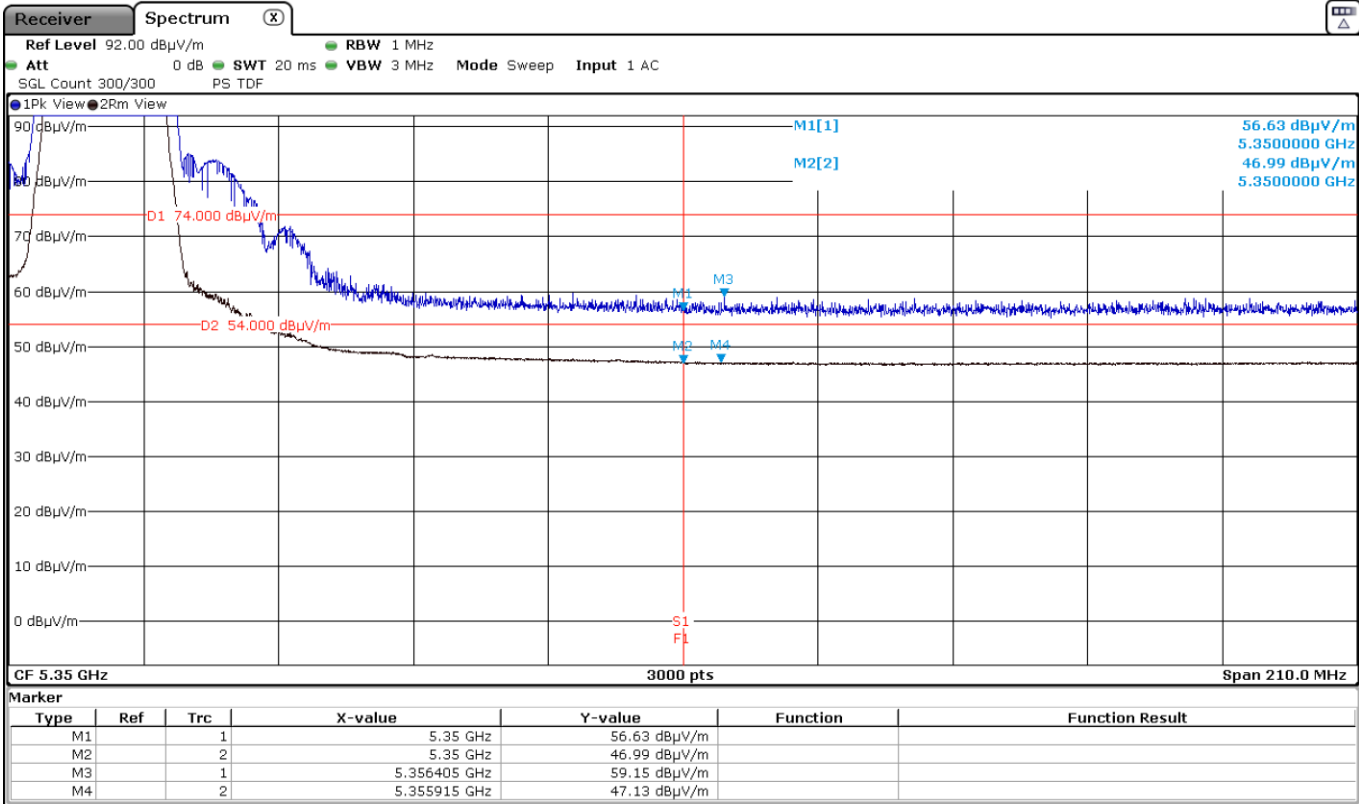

5350 MHz to 5460 MHz Upper Band Edge Channel 64

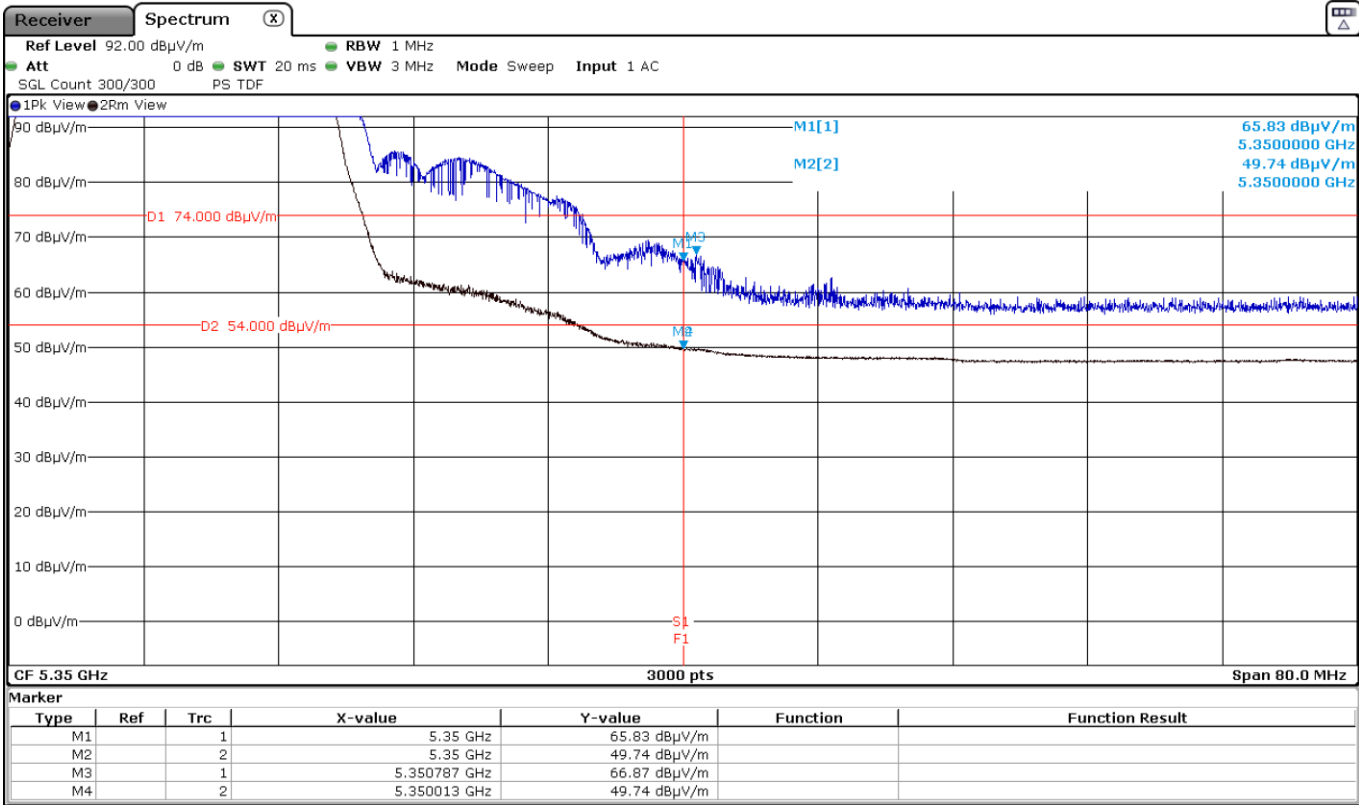

Results for Mode: 802.11n HT20 – TxBF - 20 MHz – MIMO - Core 0+Core 2

Results: Peak / Channel 52

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	57.40	74	16.60	<± 3.05	PASS
5435.645	Vertical	59.21	74	14.79	<± 3.05	PASS

Results: Average / Channel 52

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	46.62	0.11	46.73	54	7.27	<± 3.0	PASS
5448.455	Vertical	47.21	0.11	47.32	54	6.68	<± 3.05	PASS


Results: Peak / Channel 64

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350.013	Vertical	62.24	74	11.76	<± 3.05	PASS


Results: Average / Channel 64

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	47.47	0.11	47.58	54	6.42	<± 3.05	PASS
5356.120	Vertical	47.78	0.11	47.89	54	6.11	<± 3.05	PASS

5350 MHz to 5460 MHz Upper Band Edge Channel 52

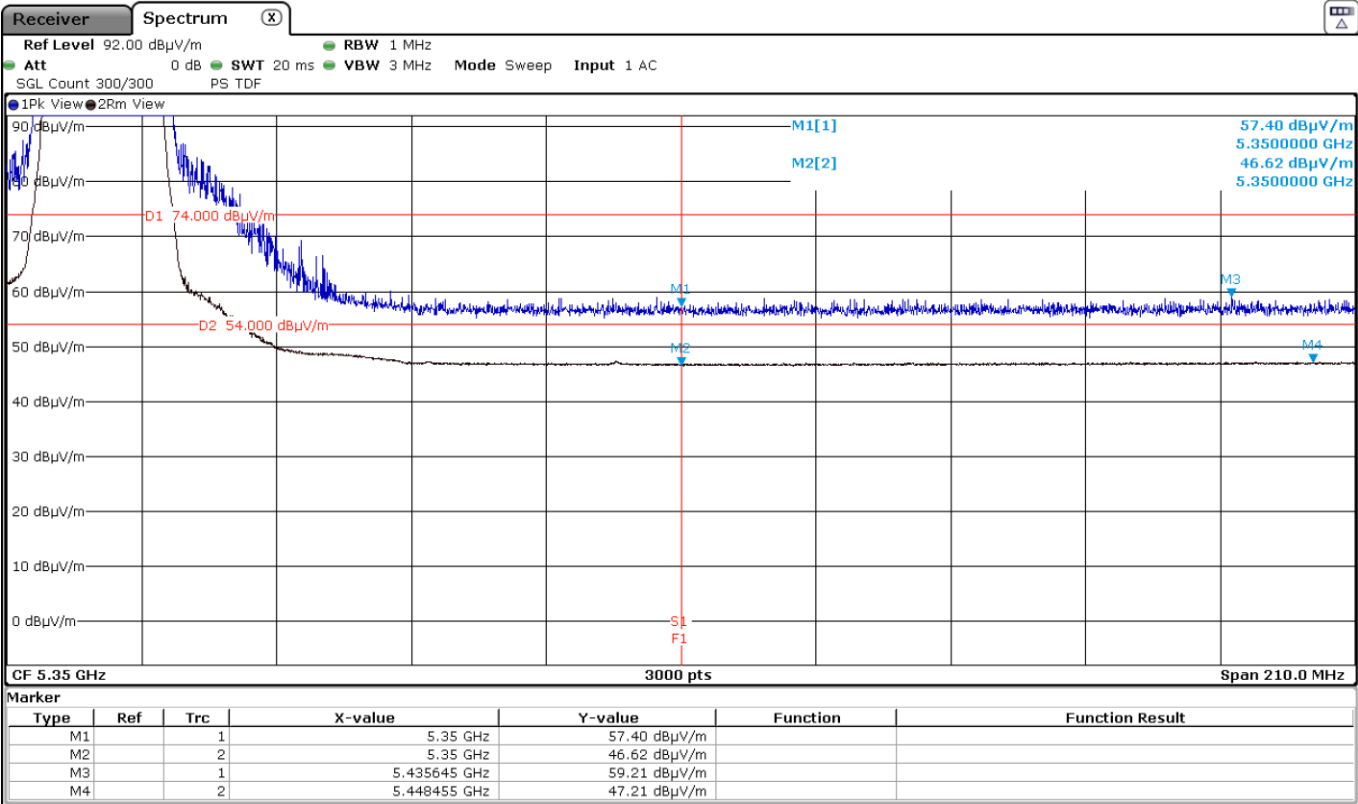

5350 MHz to 5460 MHz Upper Band Edge Channel 64

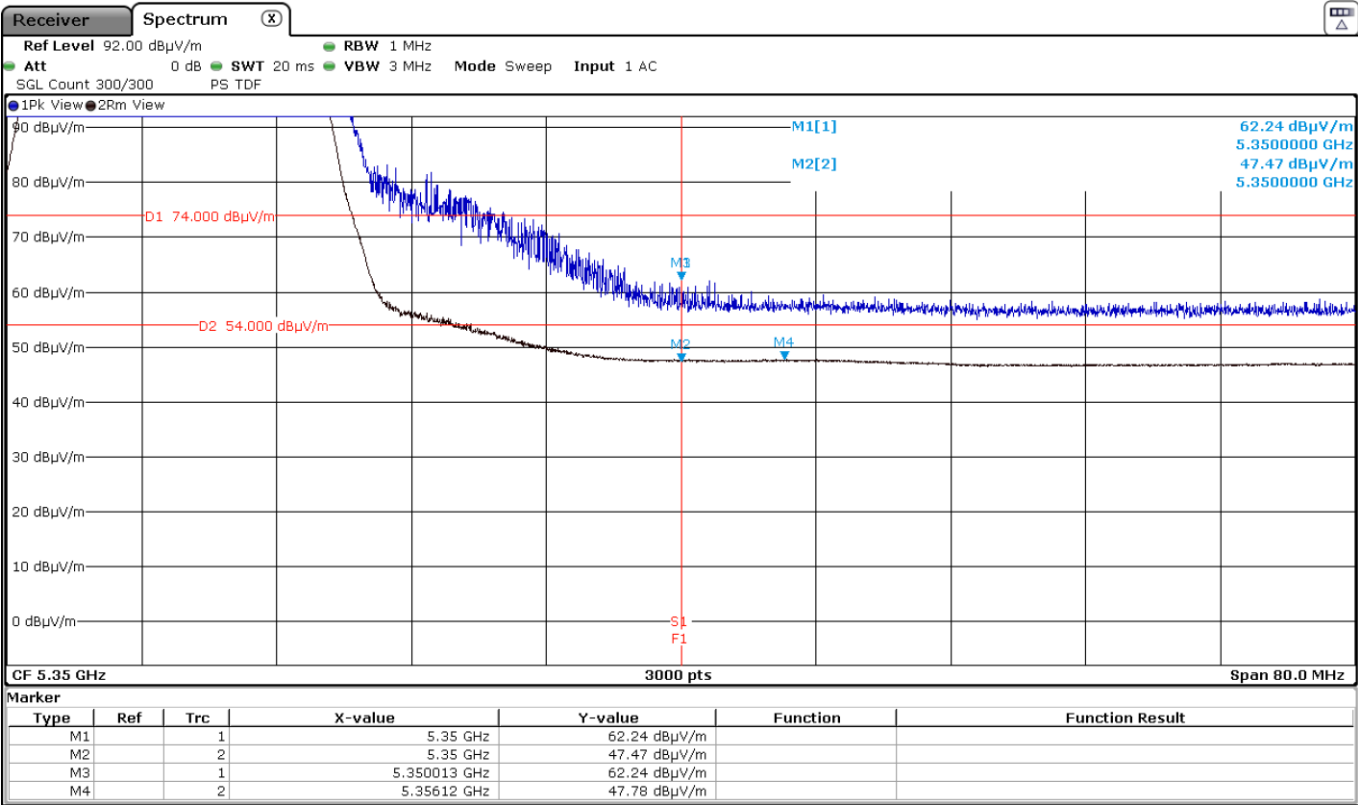

Results for Mode: 802.11n HT20 – CDD- MIMO - Core 0 + Core 1 + Core 2

Results: Peak / Channel 52

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Horizontal	56.48	74	17.52	<± 3.05	PASS
5402.605	Horizontal	58.85	74	15.15	<± 3.05	PASS

Results: Average / Channel 52

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Horizontal	46.61	54	7.39	<± 3.05	PASS
5441.735	Horizontal	46.88	54	7.12	<± 3.05	PASS


Results: Peak / Channel 64

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	63.96	74	10.04	<± 3.05	PASS
5350.573	Vertical	66.68	74	7.32	<± 3.05	PASS


Results: Average / Channel 64

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	47.66	54	6.34	<± 3.05	PASS
5351.000	Vertical	48.01	54	5.99	<± 3.05	PASS

5350 MHz to 5460 MHz Upper Band Edge Channel 52

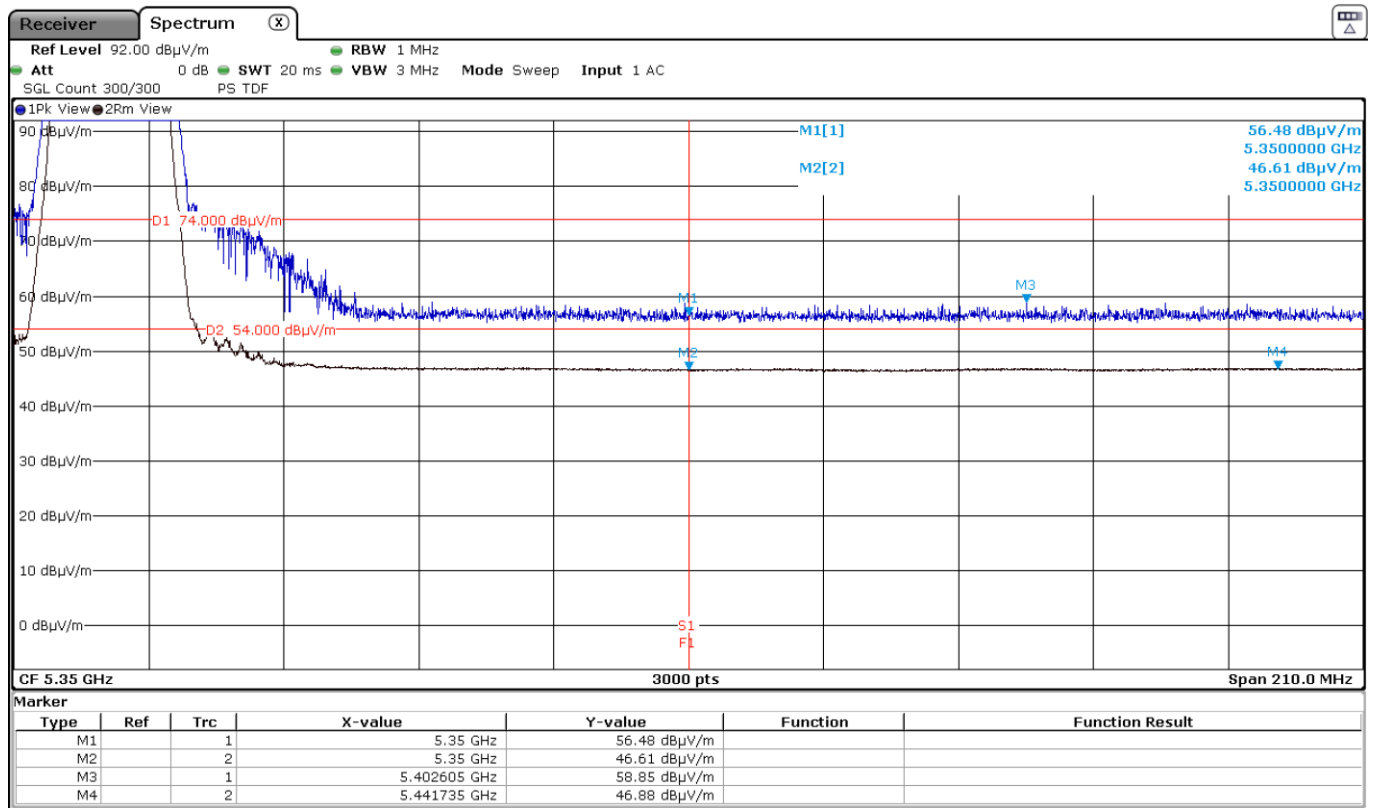

5350 MHz to 5460 MHz Upper Band Edge Channel 64

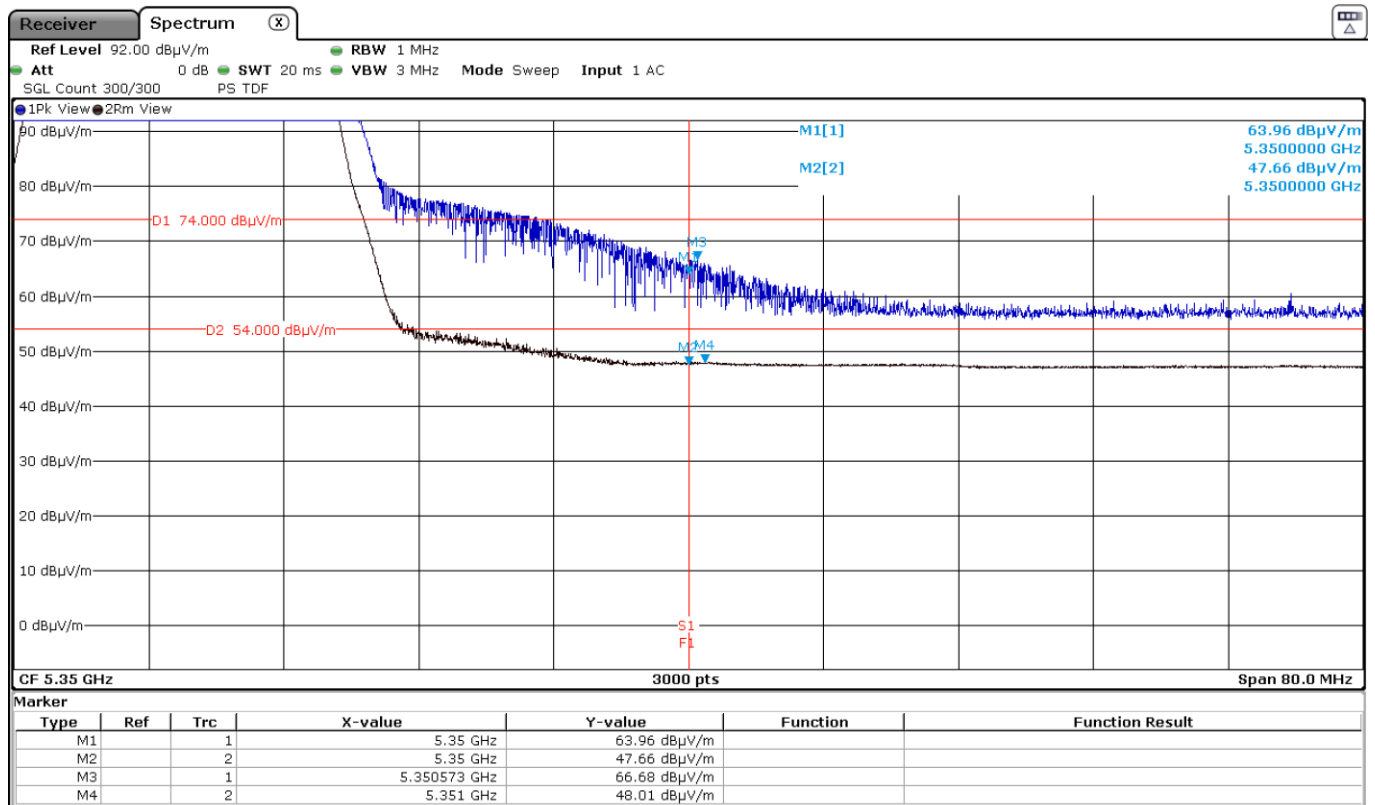

Results for Mode: 802.11n HT20 – SDM - 20 MHz – MIMO - Core 0+Core 1+Core 2

Results: Peak / Channel 52

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	56.80	74	17.20	<± 3.05	PASS
5383.775	Vertical	59.11	74	14.89	<± 3.05	PASS

Results: Average / Channel 52

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	46.70	0.11	46.81	54	7.19	<± 3.05	PASS
5445.725	Vertical	47.02	0.11	47.13	54	6.87	<± 3.05	PASS


Results: Peak / Channel 64

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350.093	Vertical	60.49	74	13.51	<± 3.05	PASS


Results: Average / Channel 64

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	47.88	0.11	47.99	54	6.01	<± 3.05	PASS
5351.080	Vertical	48.30	0.11	48.41	54	5.59	<± 3.05	PASS

5350 MHz to 5460 MHz Upper Band Edge Channel 52

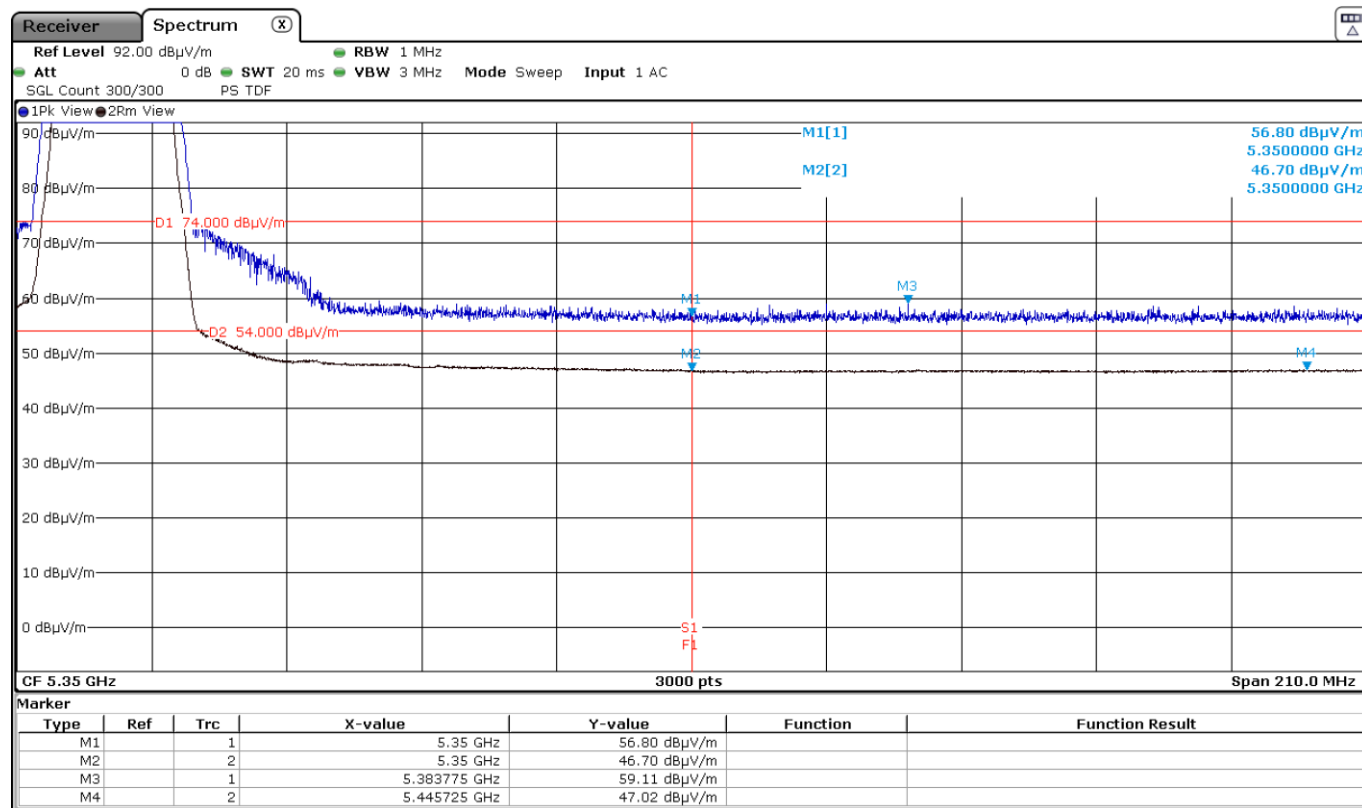

5350 MHz to 5460 MHz Upper Band Edge Channel 64

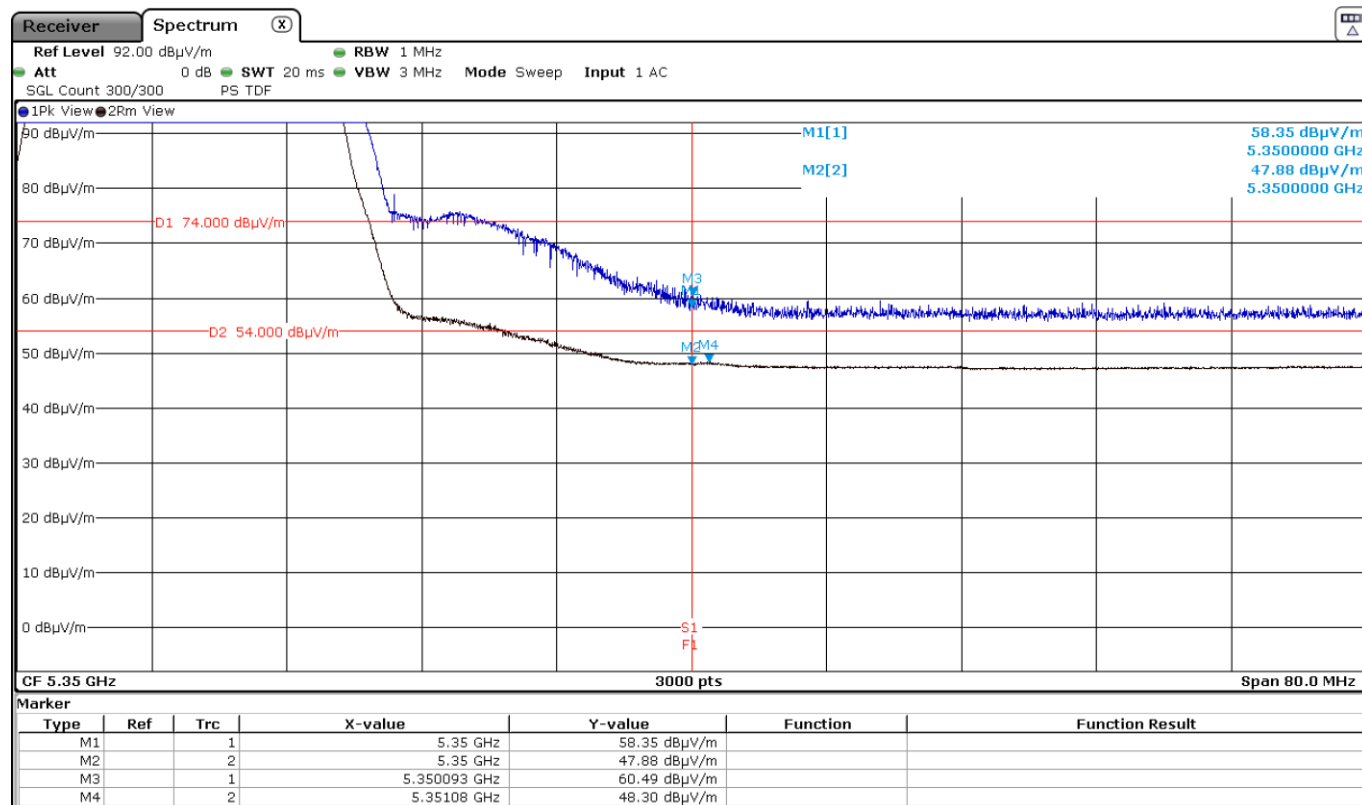

Results for: 802.11n HT20 – TxBF- 20 MHz – MIMO - Core 0+Core 1+Core 2

Results: Peak / Channel 52

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	56.81	74	17.19	<± 3.05	PASS
5453.705	Vertical	59.07	74	14.93	<± 3.05	PASS

Results: Average / Channel 52

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	46.49	0.14	46.63	54	7.37	<± 3.05	PASS
5450.835	Vertical	46.89	0.14	47.03	54	6.97	<± 3.05	PASS


Results: Peak / Channel 64

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	57.27	74	16.73	<± 3.05	PASS
5354.813	Vertical	58.88	74	15.12	<± 3.05	PASS


Results: Average / Channel 64

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	46.85	0.14	46.99	54	7.01	<± 3.05	PASS
5355.160	Vertical	47.08	0.14	47.22	54	6.78	<± 3.05	PASS

5350 MHz to 5460 MHz Upper Band Edge Channel 52

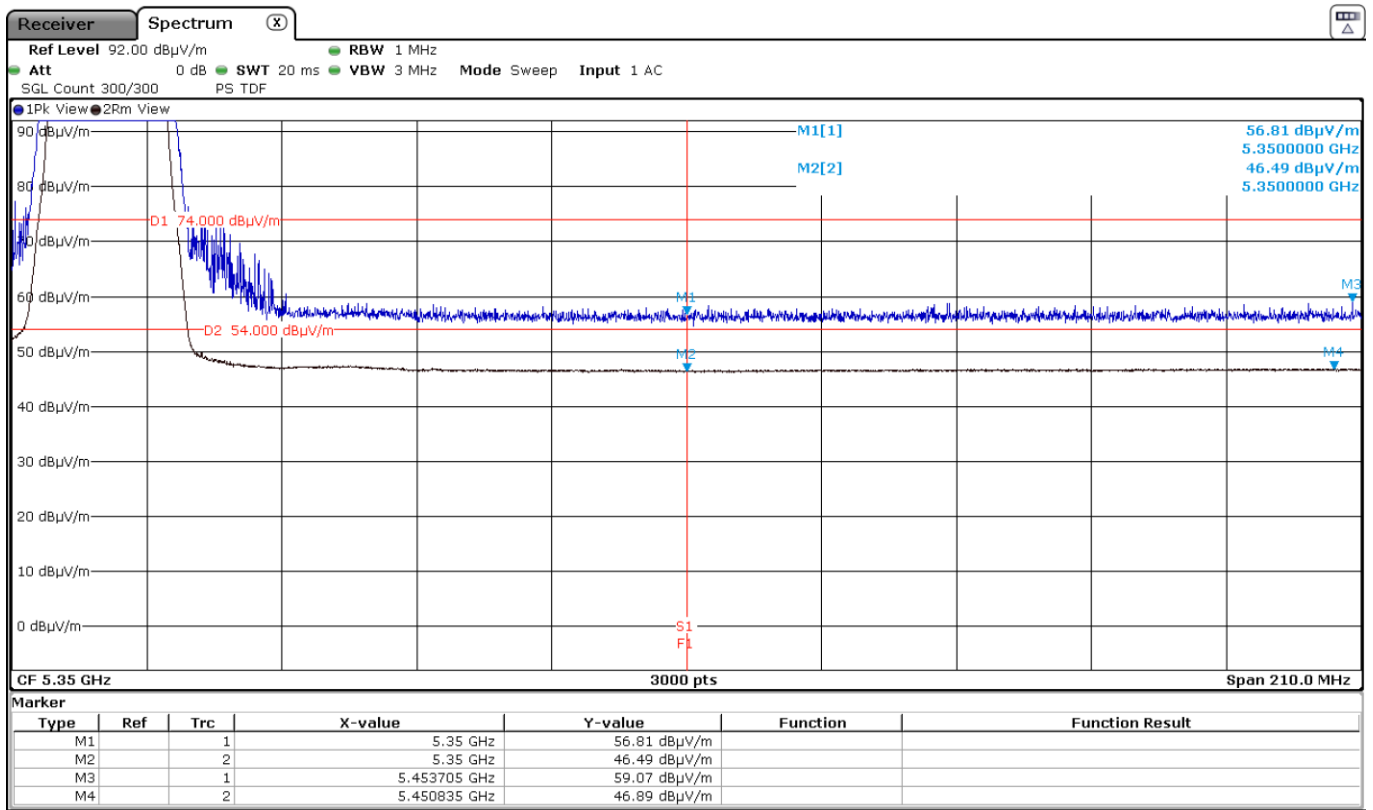

5350 MHz to 5460 MHz Upper Band Edge Channel 64

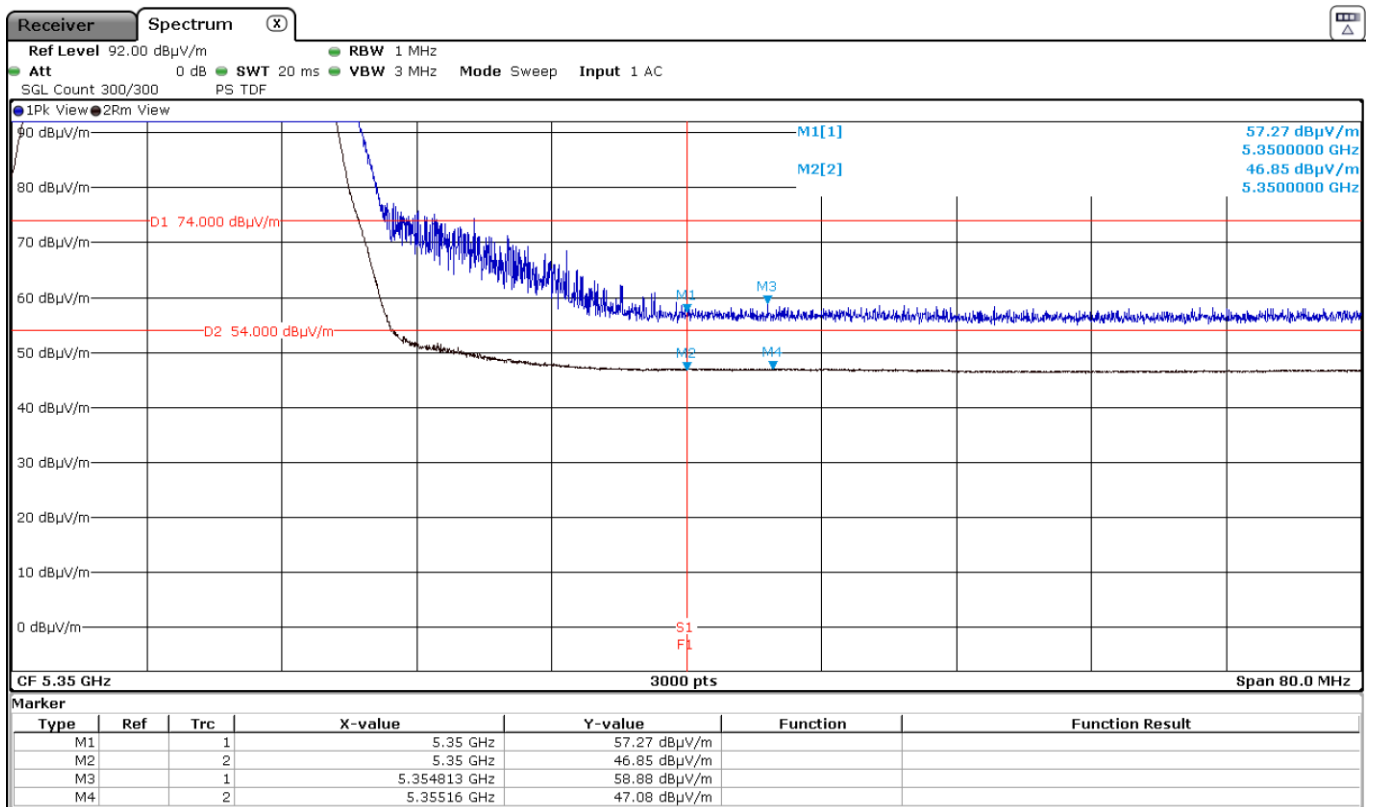

Results for Mode: 802.11n HT40 - 40 MHz – SISO - Core 2

Results: Peak / Channel 54

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	57.12	74	16.88	<± 3.05	PASS
5140.382	Vertical	59.11	74	14.89	<± 3.05	PASS
5350	Vertical	63.49	74	10.51	<± 3.05	PASS

Results: Average / Channel 54

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	47.70	0.10	47.80	54	6.20	<± 3.05	PASS
5149.275	Vertical	47.79	0.10	47.89	54	6.11	<± 3.05	PASS
5350	Vertical	49.62	0.10	49.72	54	4.28	<± 3.05	PASS


Results: Peak / Channel 62

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	56.36	74	17.64	<± 3.05	PASS
5382.500	Vertical	59.21	74	14.79	<± 3.05	PASS


Results: Average / Channel 62

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	47.33	0.10	47.43	54	6.57	<± 3.05	PASS
5352.100	Vertical	47.44	0.10	47.54	54	6.46	<± 3.05	PASS


4500 MHz to 5150 MHz Lower Band Edge Channel 54

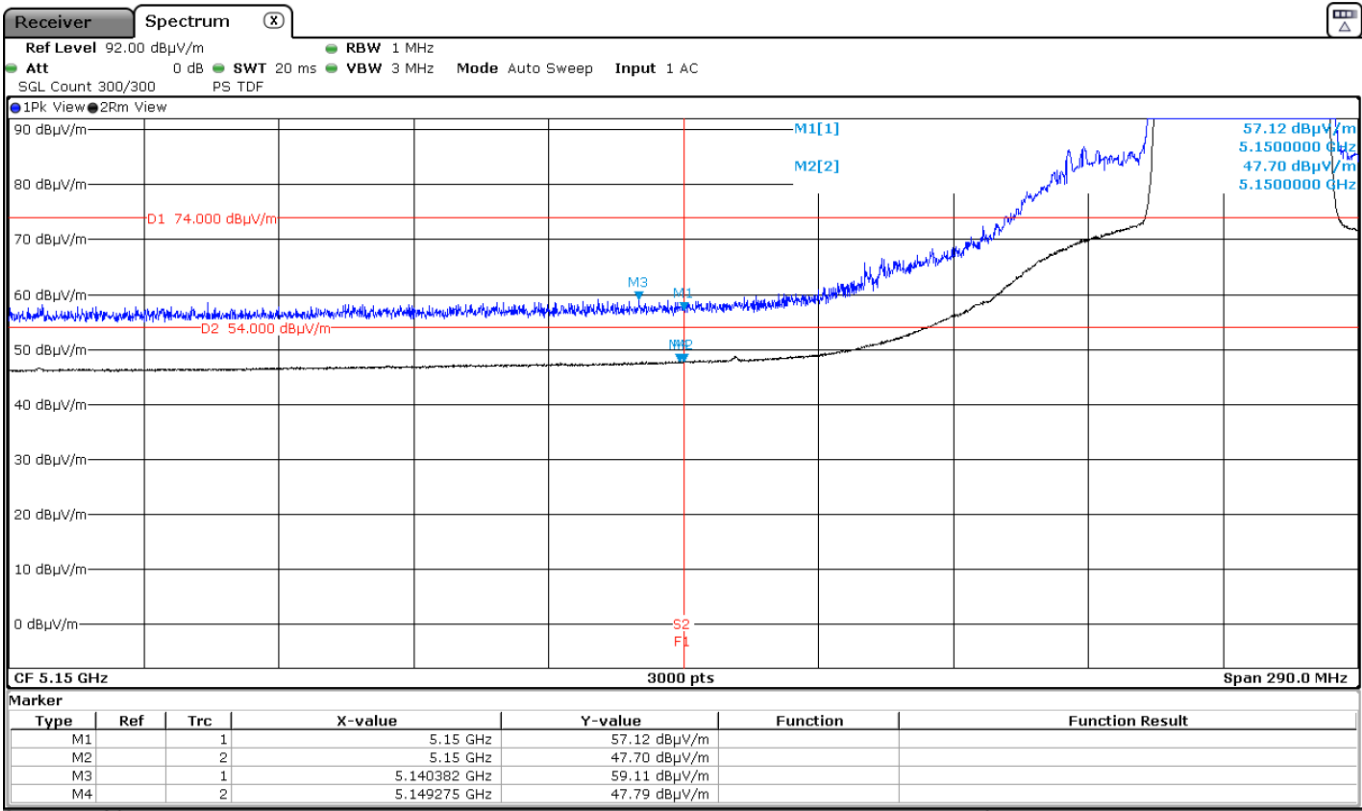

5350 MHz to 5460 MHz Upper Band Edge Channel 54

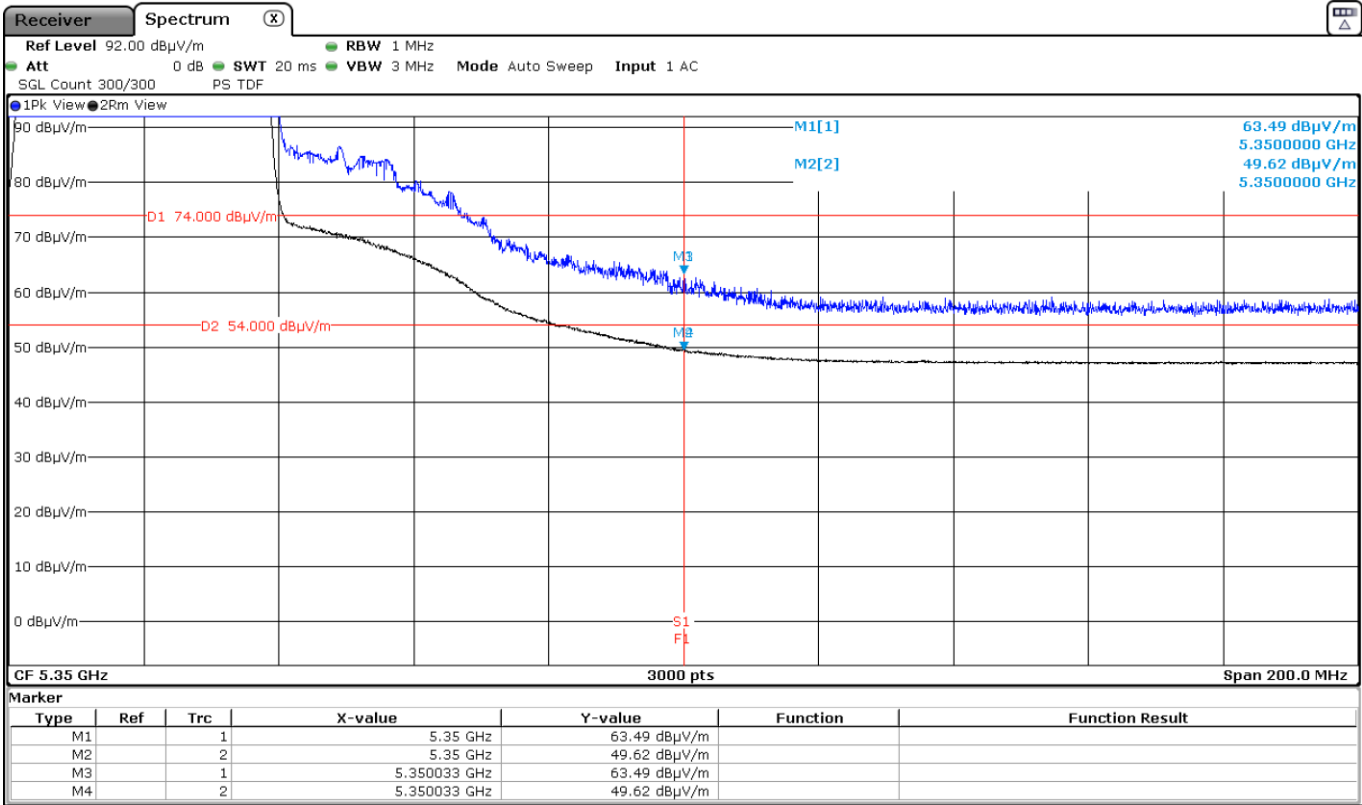

5350 MHz to 5460 MHz Upper Band Edge Channel 62

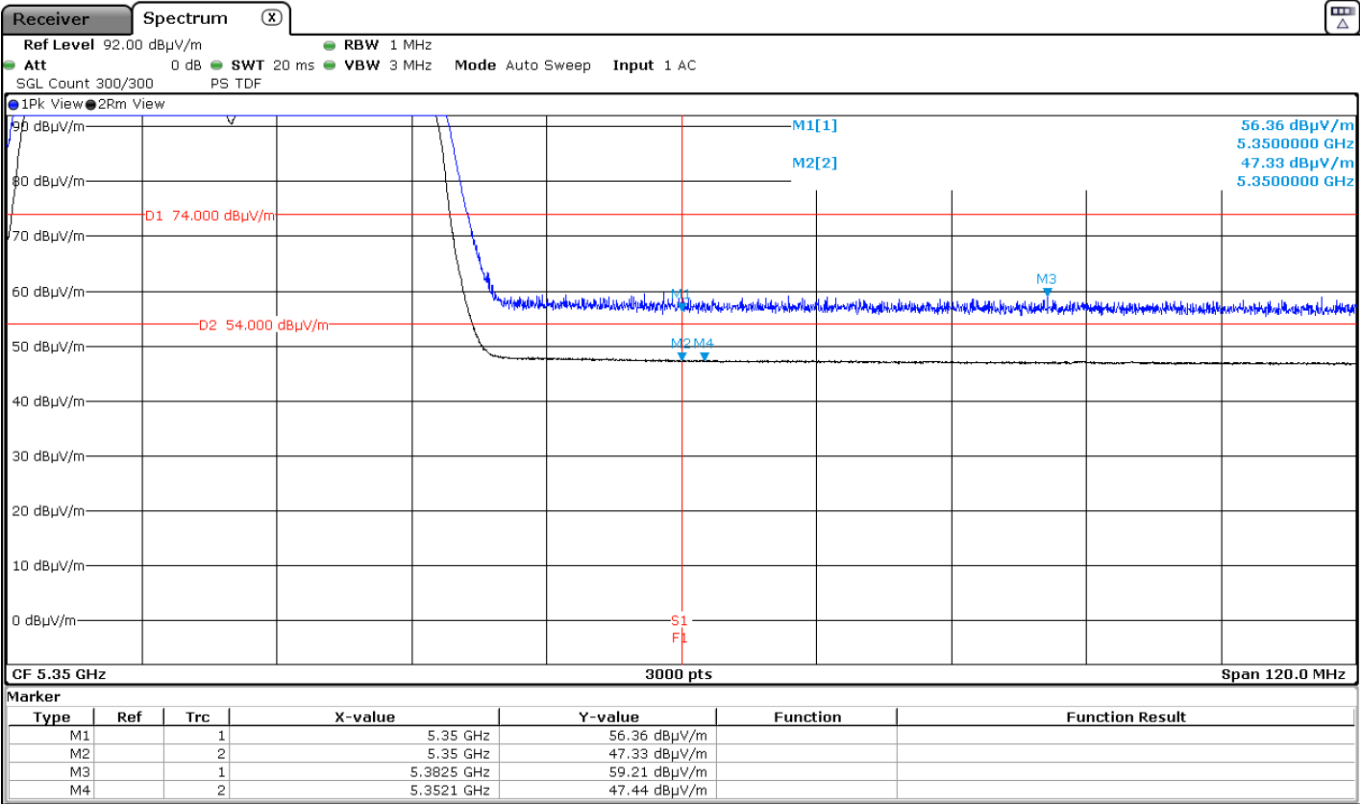

Results for Mode: 802.11n HT40 – CDD - 40 MHz – MIMO - Core 0+Core 2

Results: Peak / Channel 54

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	56.74	74	17.26	<± 3.05	PASS
5119.115	Vertical	58.74	74	15.26	<± 3.05	PASS
5350	Vertical	58.22	74	15.78	<± 3.05	PASS
5411.767	Vertical	59.27	74	14.73	<± 3.05	PASS

Results: Average / Channel 54

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5149.082	Vertical	47.23	0.09	47.32	54	6.68	<± 3.05	PASS
5350.100	Vertical	47.86	0.09	47.95	54	6.05	<± 3.05	PASS


Results: Peak / Channel 62

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	57.40	74	16.60	<± 3.05	PASS
5394.540	Vertical	58.83	74	15.17	<± 3.05	PASS


Results: Average / Channel 62

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350.100	Vertical	47.12	0.09	47.21	54	6.79	<± 3.05	PASS


4500 MHz to 5150 MHz Lower Band Edge Channel 54

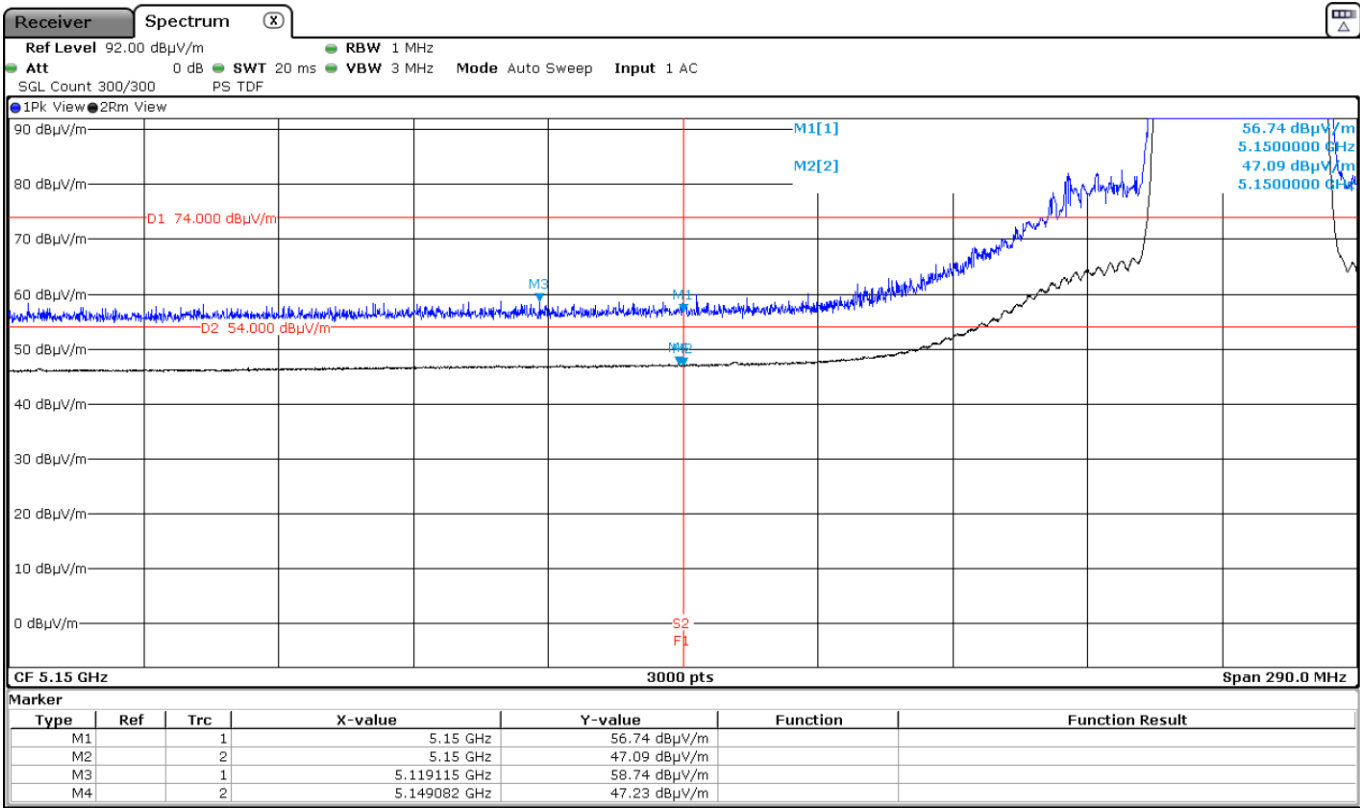

5350 MHz to 5460 MHz Upper Band Edge Channel 54

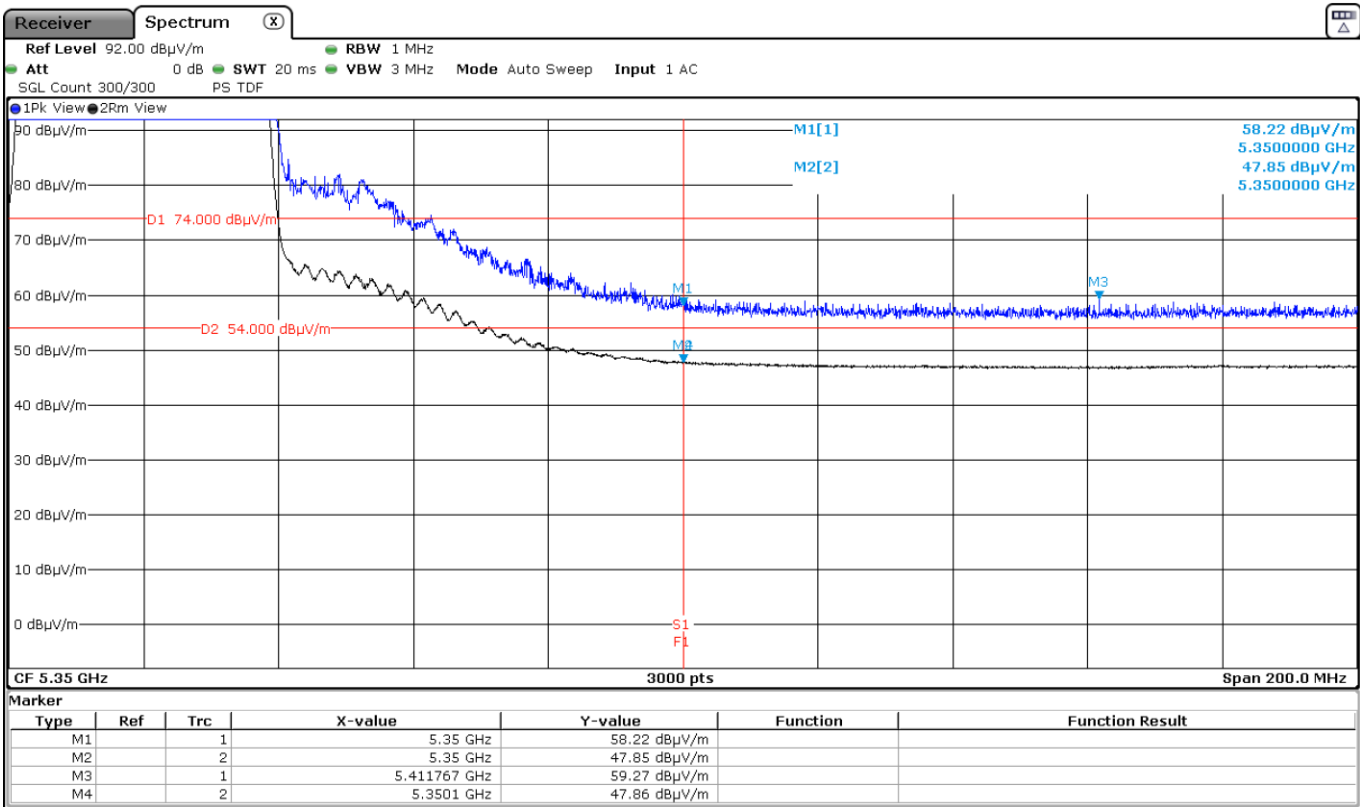

5350 MHz to 5460 MHz Upper Band Edge Channel 62

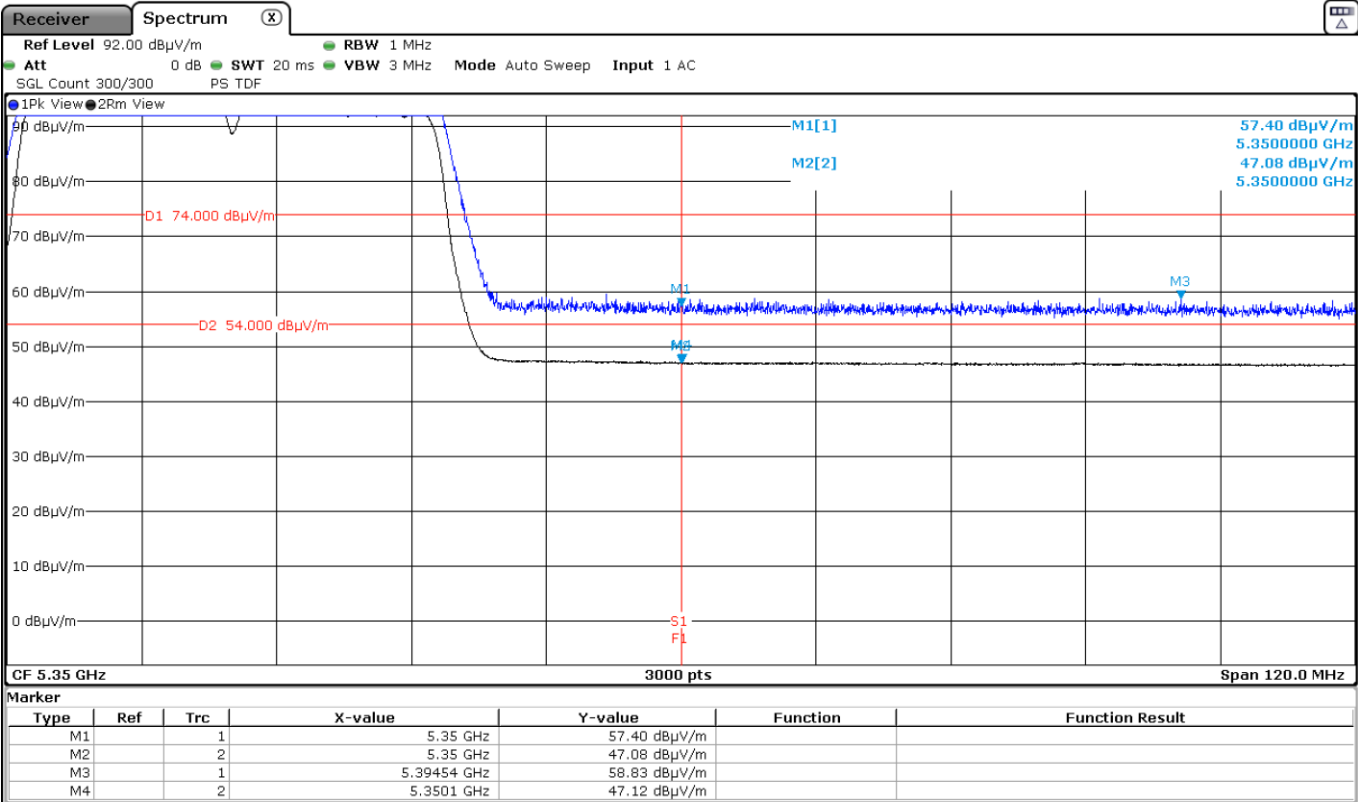

Results for Mode: 802.11n HT40 – SDM - 40 MHz – MIMO - Core 0+ Core 2

Results: Peak / Channel 54

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	56.66	74	17.34	<± 3.05	PASS
5141.638	Vertical	59.33	74	14.67	<± 3.05	PASS
5350.100	Vertical	61.65	74	12.35	<± 3.05	PASS

Results: Average / Channel 54

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5149.855	Vertical	47.23	0.14	47.37	54	6.63	<± 3.05	PASS
5350.500	Vertical	48.28	0.14	48.42	54	5.58	<± 3.05	PASS


Results: Peak / Channel 62

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	56.46	74	17.54	<± 3.05	PASS
5405.780	Vertical	59.21	74	14.79	<± 3.05	PASS


Results: Average / Channel 62

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	47.13	0.14	47.27	54	6.73	<± 3.05	PASS
5352.220	Vertical	47.24	0.14	47.38	54	6.62	<± 3.05	PASS


4500 MHz to 5150 MHz Lower Band Edge Channel 54

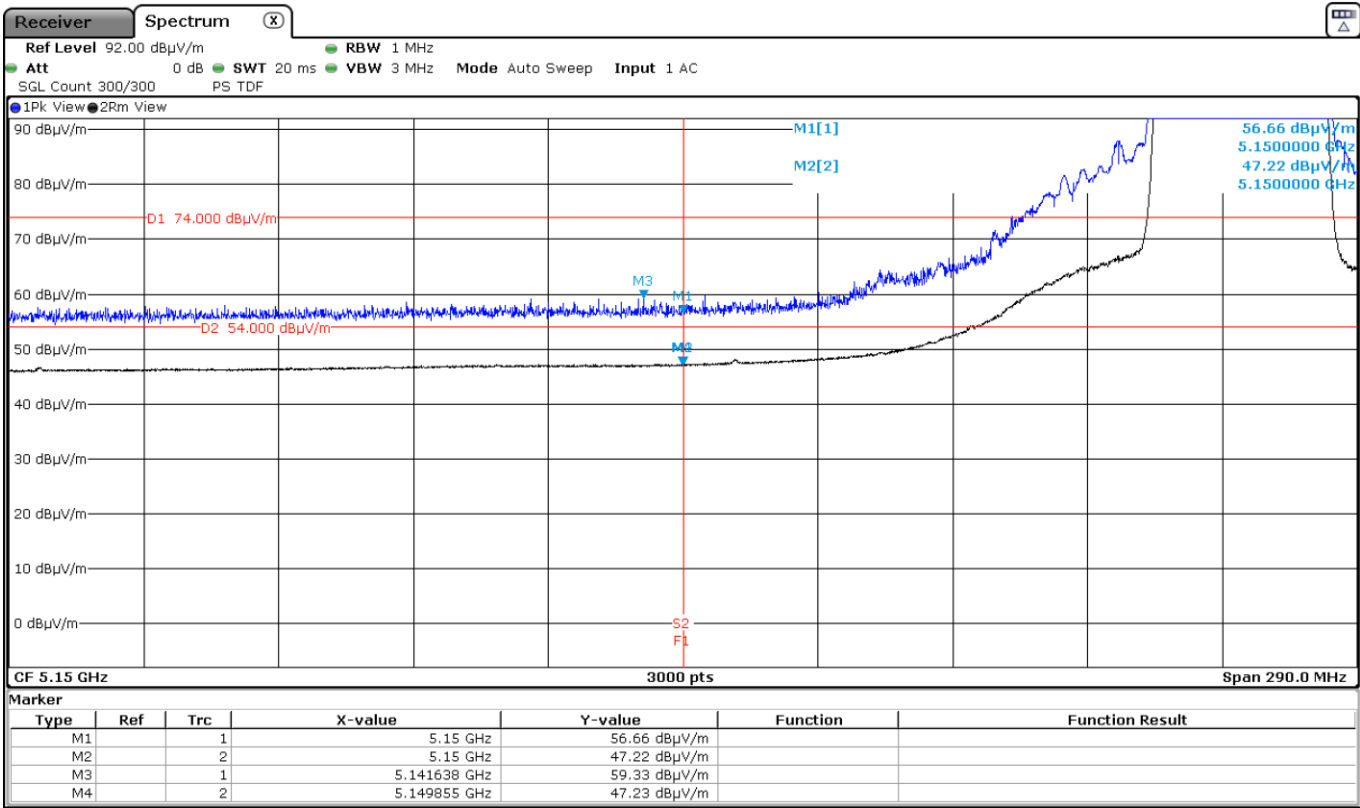

5350 MHz to 5460 MHz Upper Band Edge Channel 54

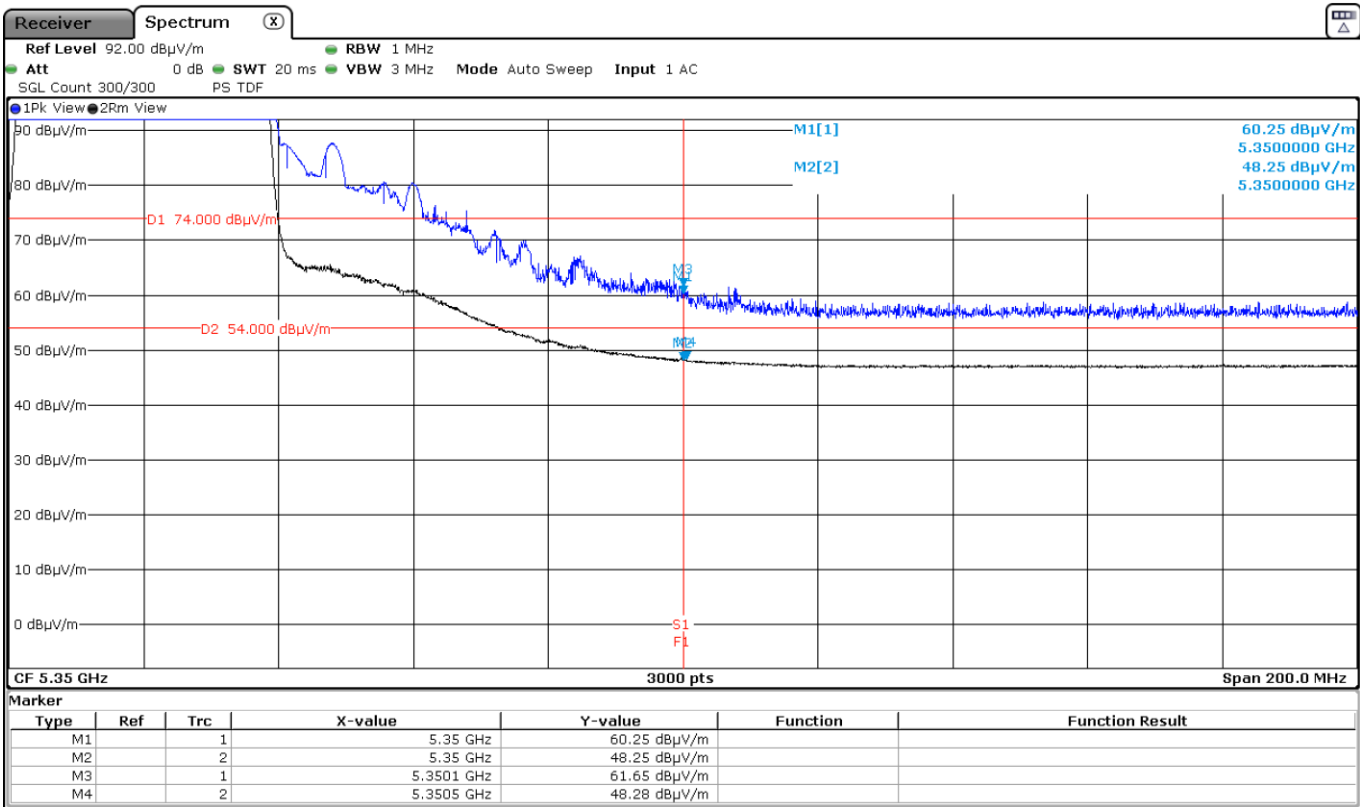

5350 MHz to 5460 MHz Upper Band Edge Channel 62

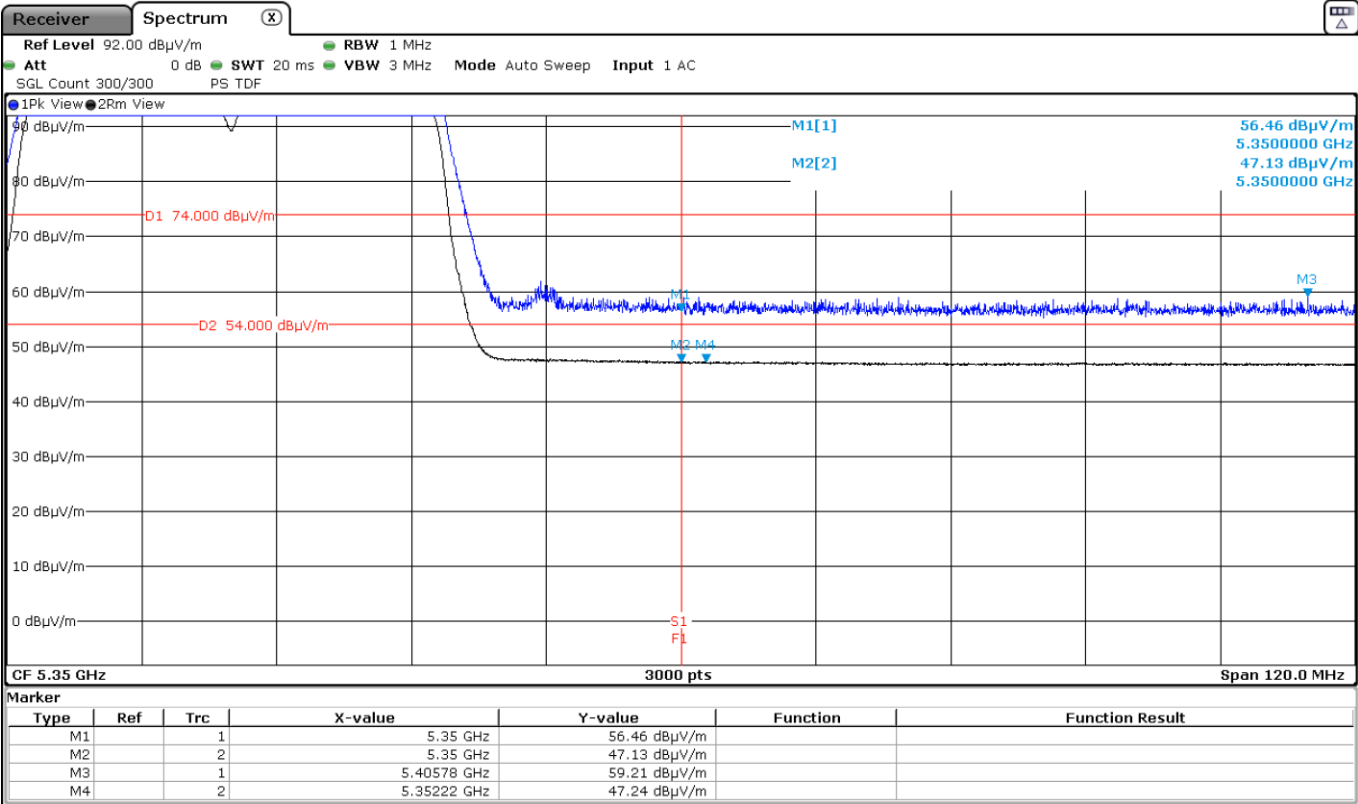

Results for Mode: 802.11n HT40 – TxBF - 40 MHz - MIMO - Core 0+Core 2

Results: Peak / Channel 54

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	57.00	74	17.00	<± 3.05	PASS
5098.525	Vertical	58.78	74	15.22	<± 3.05	PASS
5351.500	Vertical	61.90	74	12.10	<± 3.05	PASS

Results: Average / Channel 54

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	46.85	0.13	46.98	54	7.02	<± 3.05	PASS
5146.858	Vertical	47.02	0.13	47.15	54	6.85	<± 3.05	PASS
5350.033	Vertical	47.61	0.13	47.74	54	6.26	<± 3.05	PASS


Results: Peak / Channel 62

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	56.83	74	17.17	<± 3.05	PASS
5358.660	Vertical	59.00	74	15.00	<± 3.05	PASS


Results: Average / Channel 62

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	46.53	0.13	46.66	54	7.34	<± 3.05	PASS
5385.100	Vertical	46.76	0.13	46.89	54	7.11	<± 3.05	PASS


4500 MHz to 5150 MHz Lower Band Edge Channel 54

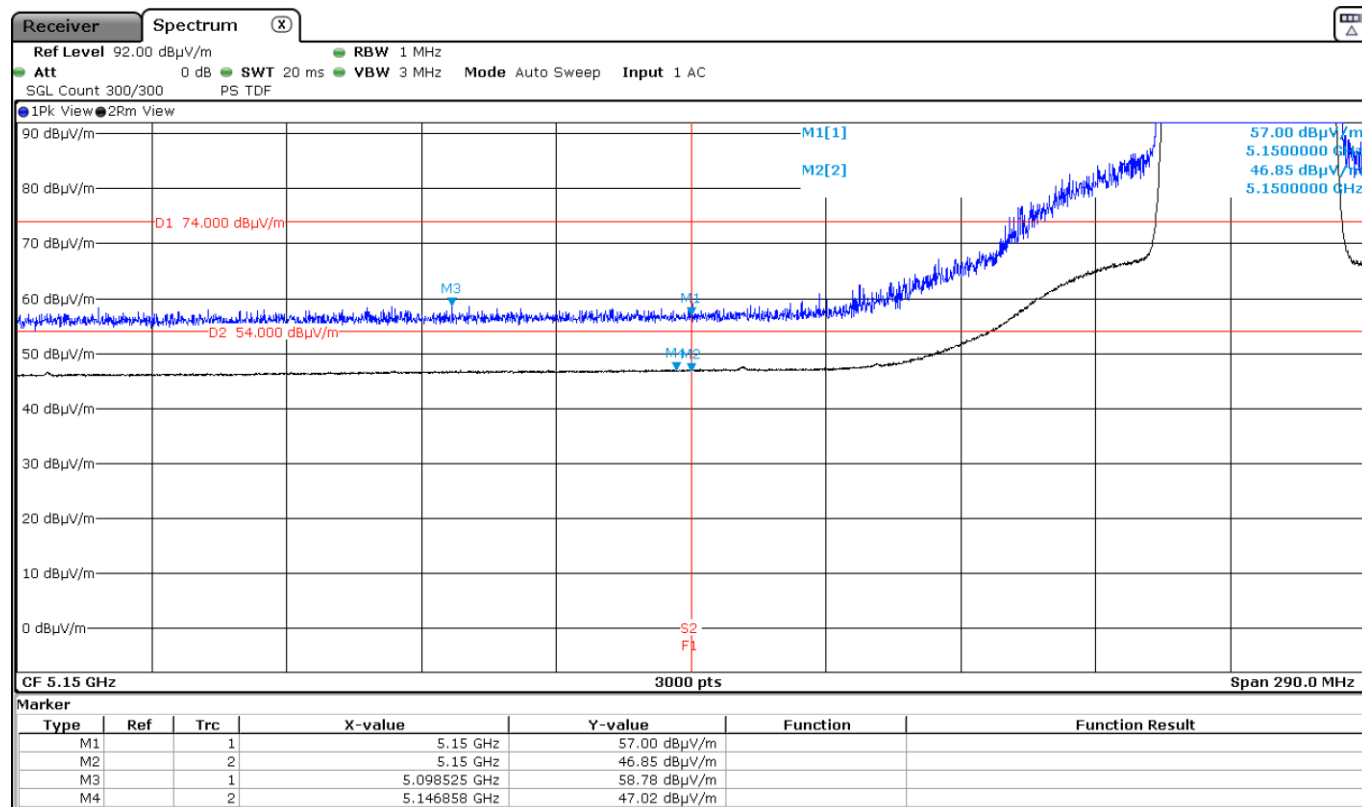

5350 MHz to 5460 MHz Upper Band Edge Channel 54

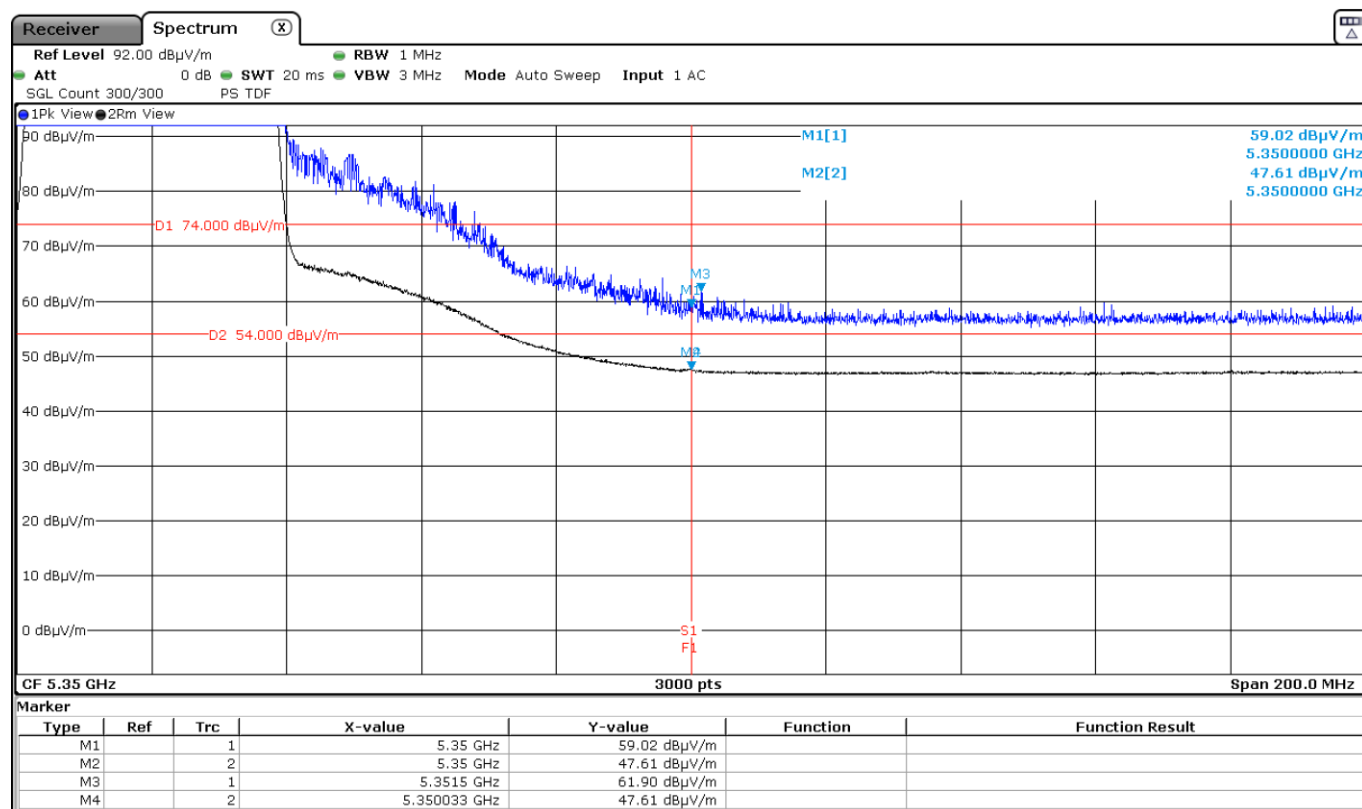

5350 MHz to 5460 MHz Upper Band Edge Channel 62

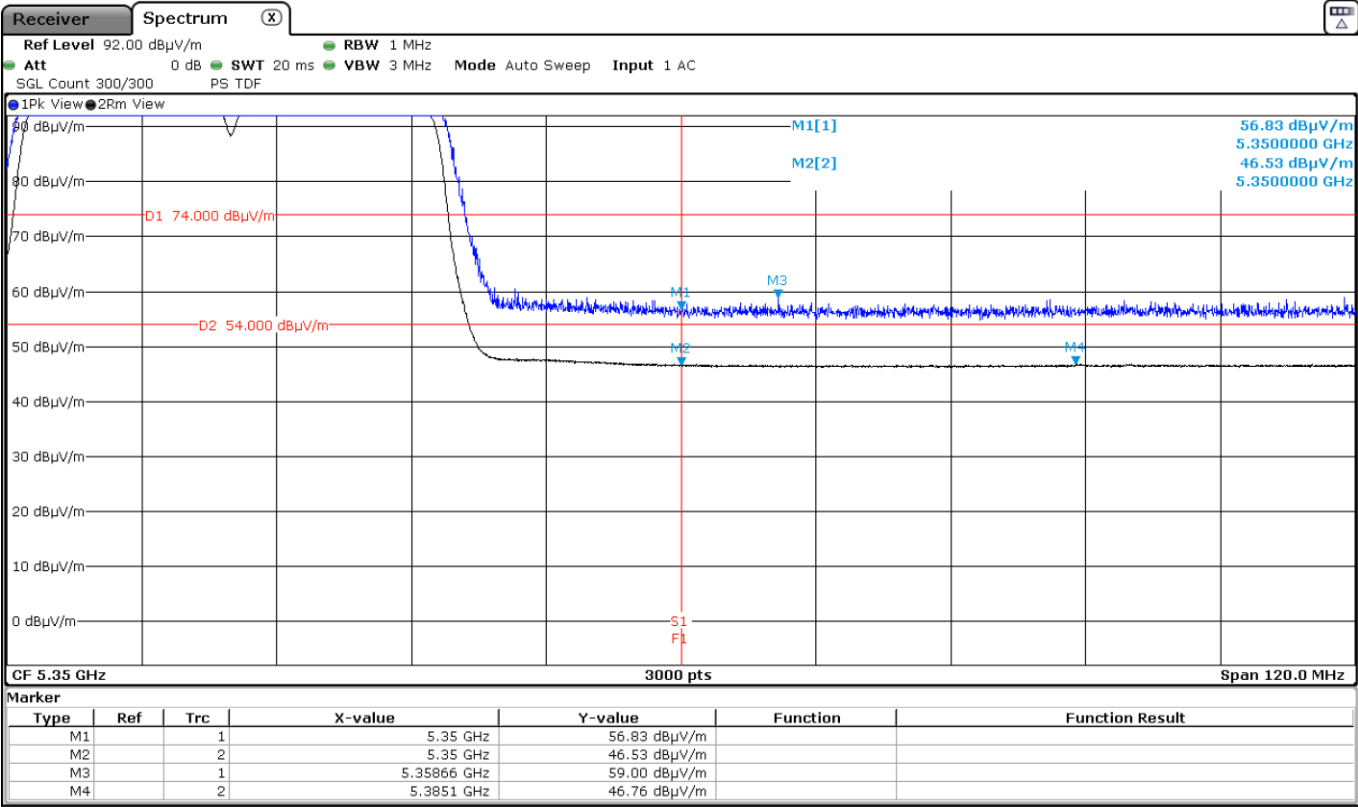

Results for Mode: 802.11n HT40 – CDD - 40 MHz – MIMO - Core 0 + Core 1+ Core 2

Results: Peak / Channel 54

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Horizontal	58.23	74	15.77	<± 3.05	PASS
5096.592	Horizontal	58.98	74	15.02	<± 3.05	PASS
5350	Horizontal	58.64	74	15.36	<± 3.05	PASS
5376.233	Horizontal	61.10	74	12.90	<± 3.05	PASS

Results: Average / Channel 54

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Horizontal	46.99	54	7.01	<± 3.05	PASS
5148.792	Horizontal	47.03	54	6.97	<± 3.05	PASS
5350.633	Horizontal	48.90	54	5.10	<± 3.05	PASS


Results: Peak / Channel 62

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Horizontal	59.39	74	14.61	<± 3.05	PASS
5351.140	Horizontal	60.93	74	13.07	<± 3.05	PASS


Results: Average / Channel 62

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Horizontal	48.62	54	5.38	<± 3.05	PASS
5351.660	Horizontal	48.72	54	5.28	<± 3.05	PASS


4500 MHz to 5150 MHz Lower Band Edge Channel 54

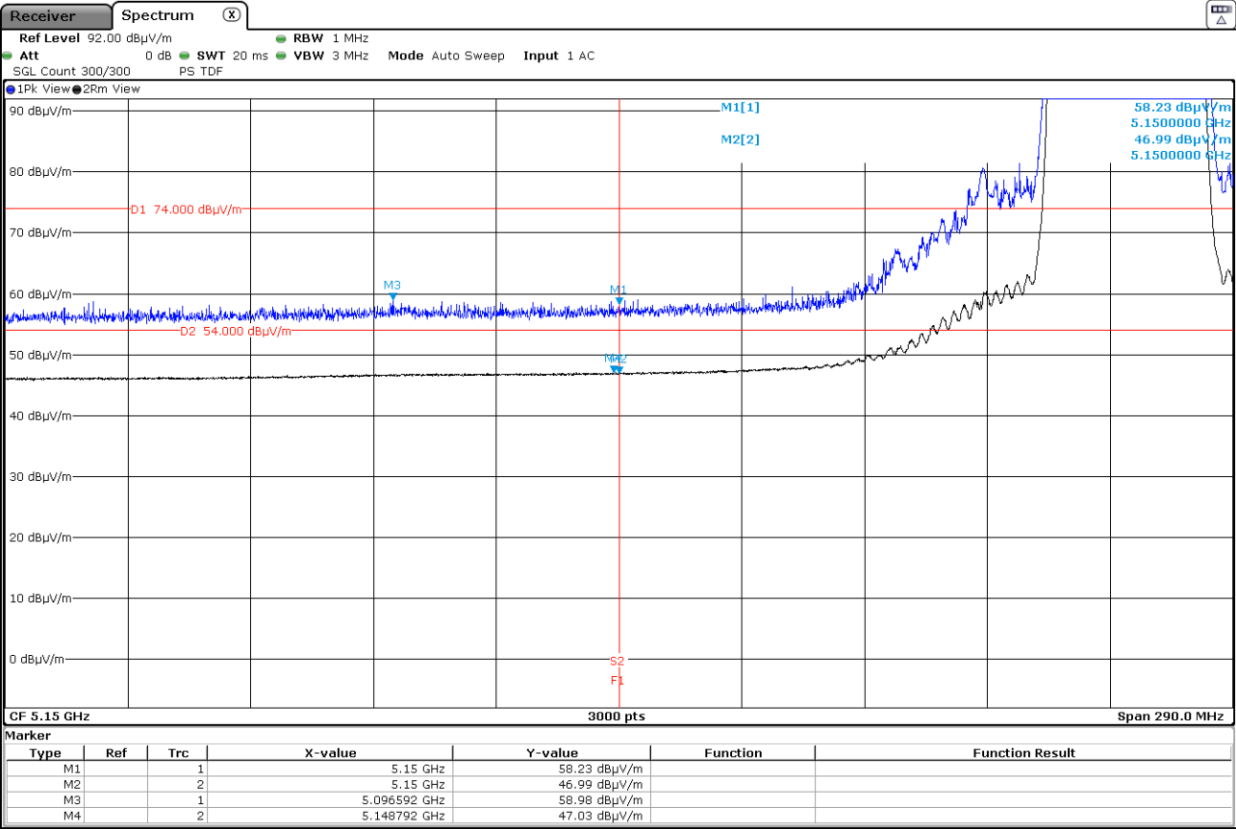

5350 MHz to 5460 MHz Upper Band Edge Channel 54

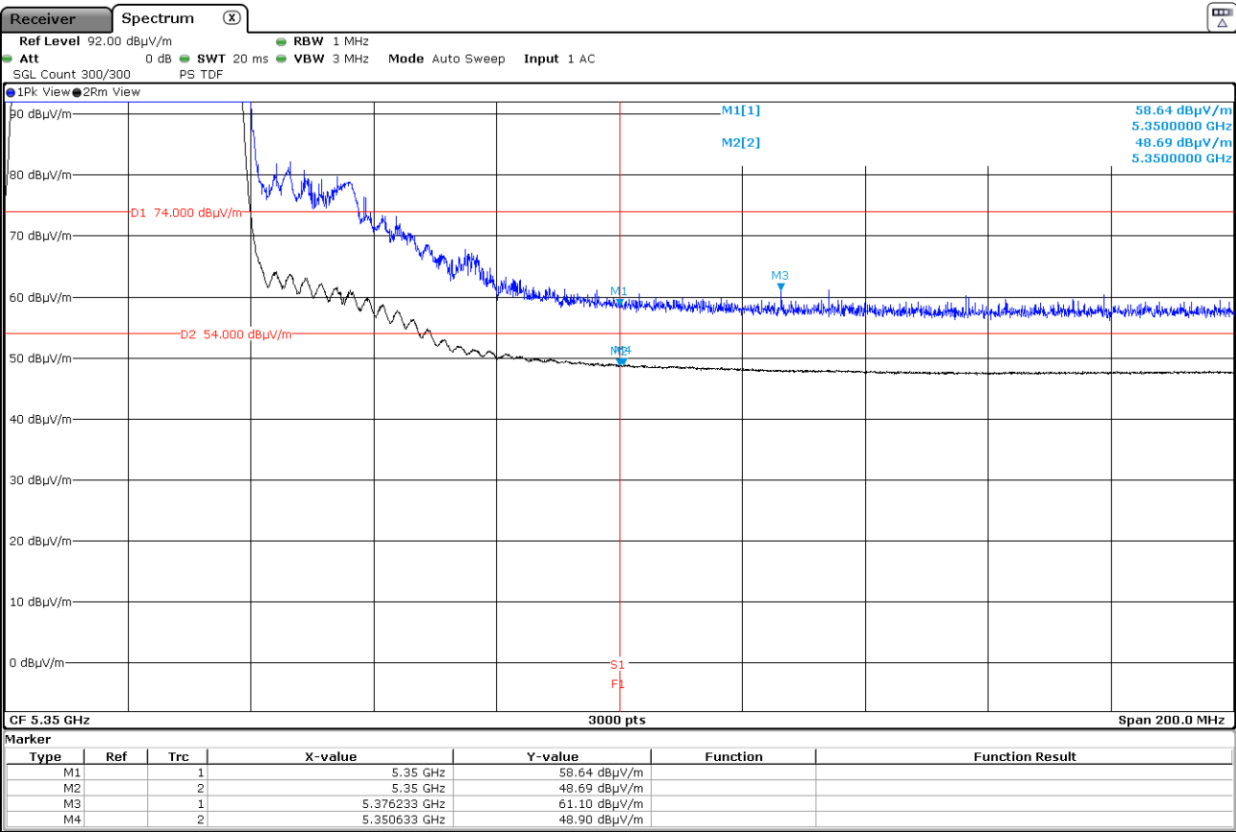

5350 MHz to 5460 MHz Upper Band Edge Channel 62

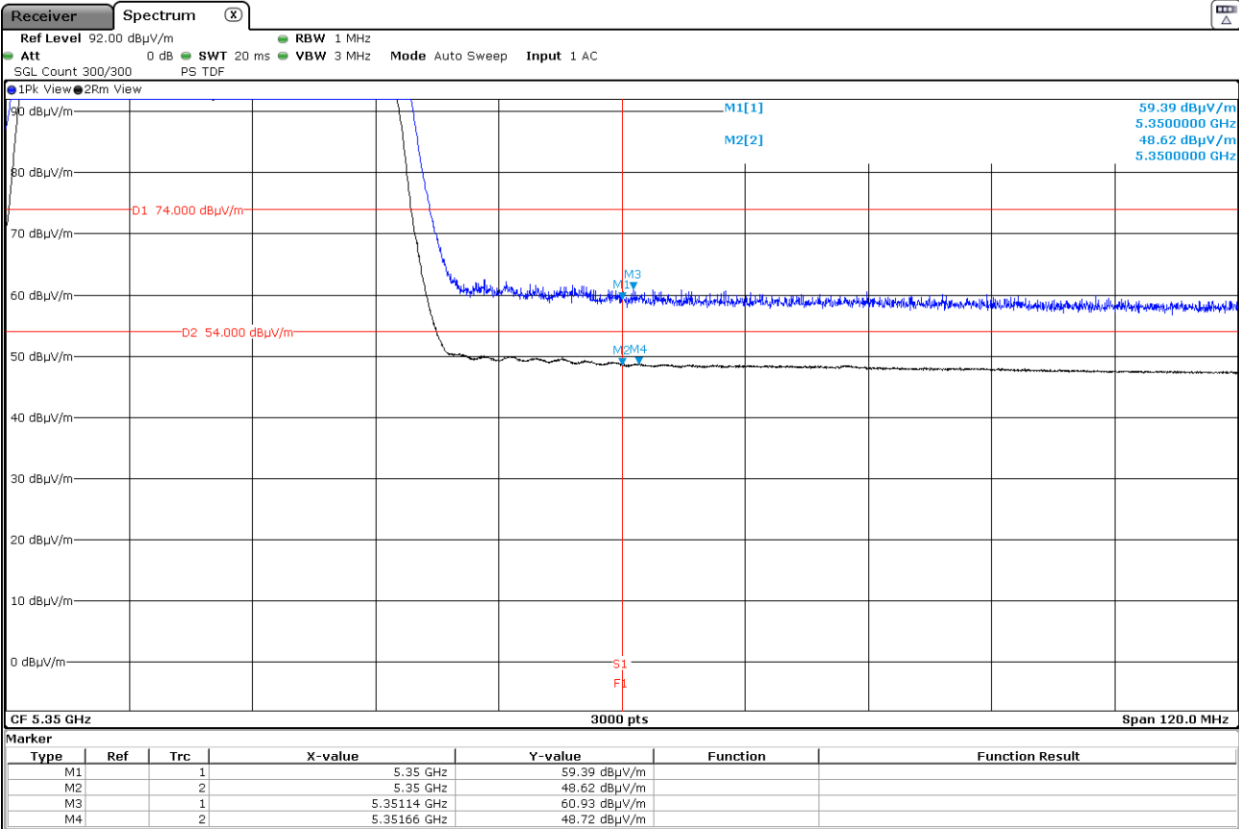

Results for Mode: 802.11n HT40 – SDM - 40 MHz - MIMO - Core 0 + Core 1+ Core 2

Results: Peak / Channel 54

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	57.03	74	16.97	<± 3.05	PASS
5137.868	Vertical	58.93	74	15.07	<± 3.05	PASS
5350	Vertical	56.77	74	17.23	<± 3.05	PASS
5402.100	Vertical	58.98	74	15.02	<± 3.05	PASS

Results: Average / Channel 54

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5149.952	Vertical	47.08	0.22	47.30	54	6.70	<± 3.05	PASS
5350.367	Vertical	47.61	0.22	47.83	54	6.17	<± 3.05	PASS


Results: Peak / Channel 62

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	56.95	74	17.05	<± 3.05	PASS
5385.020	Vertical	59.52	74	14.48	<± 3.05	PASS


Results: Average / Channel 62

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	47.17	0.22	47.39	54	6.61	<± 3.05	PASS
5352.140	Vertical	47.36	0.22	47.36	54	6.41	<± 3.05	PASS


4500 MHz to 5150 MHz Lower Band Edge Channel 54

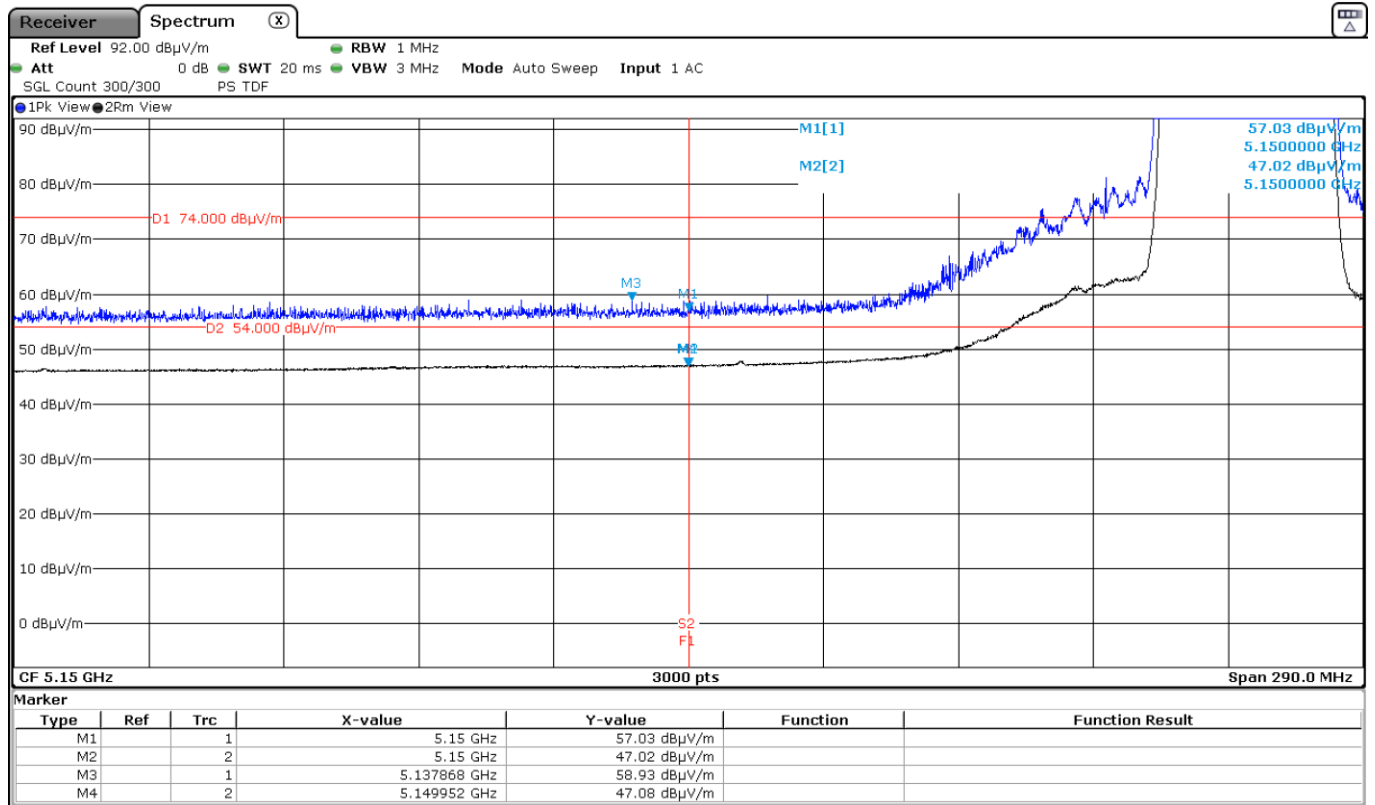

5350 MHz to 5460 MHz Upper Band Edge Channel 54

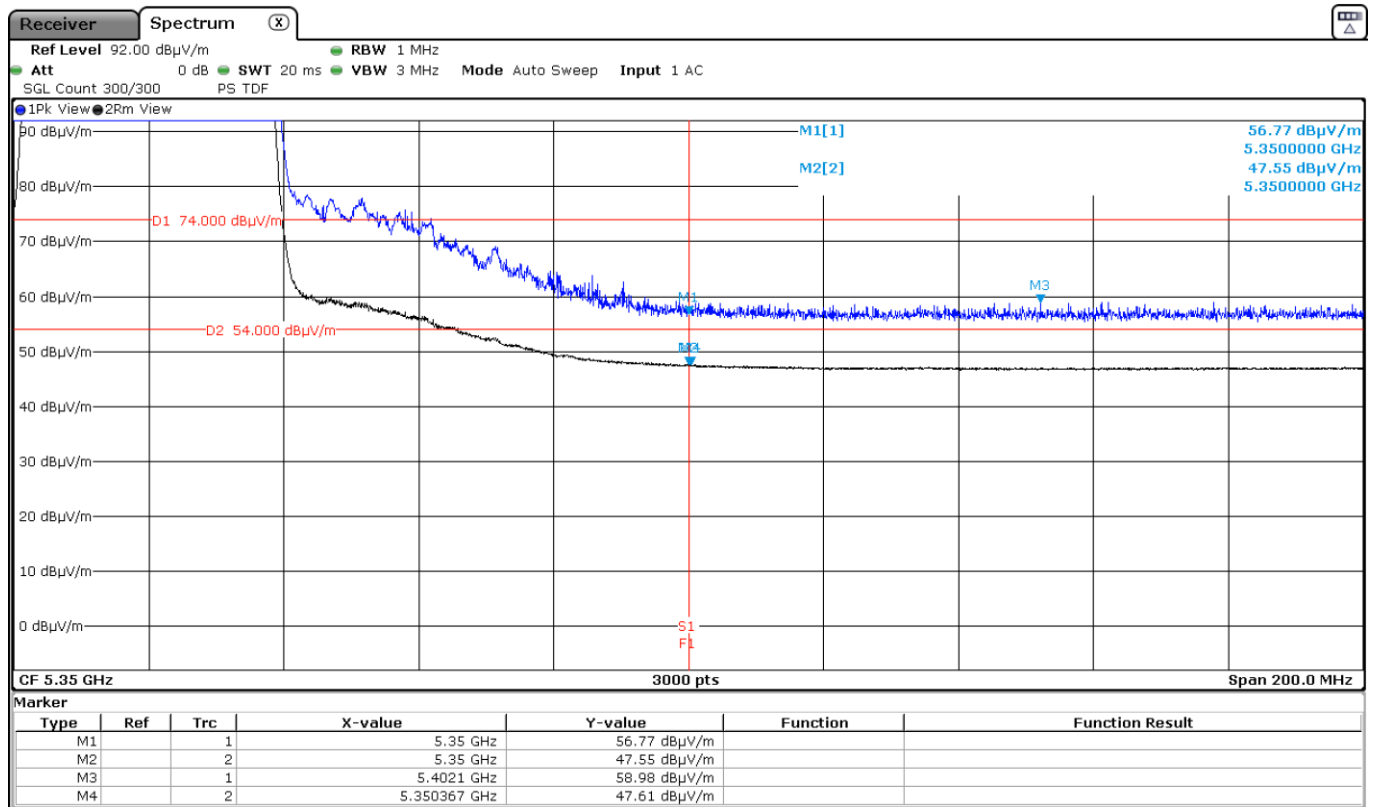

5350 MHz to 5460 MHz Upper Band Edge Channel 62

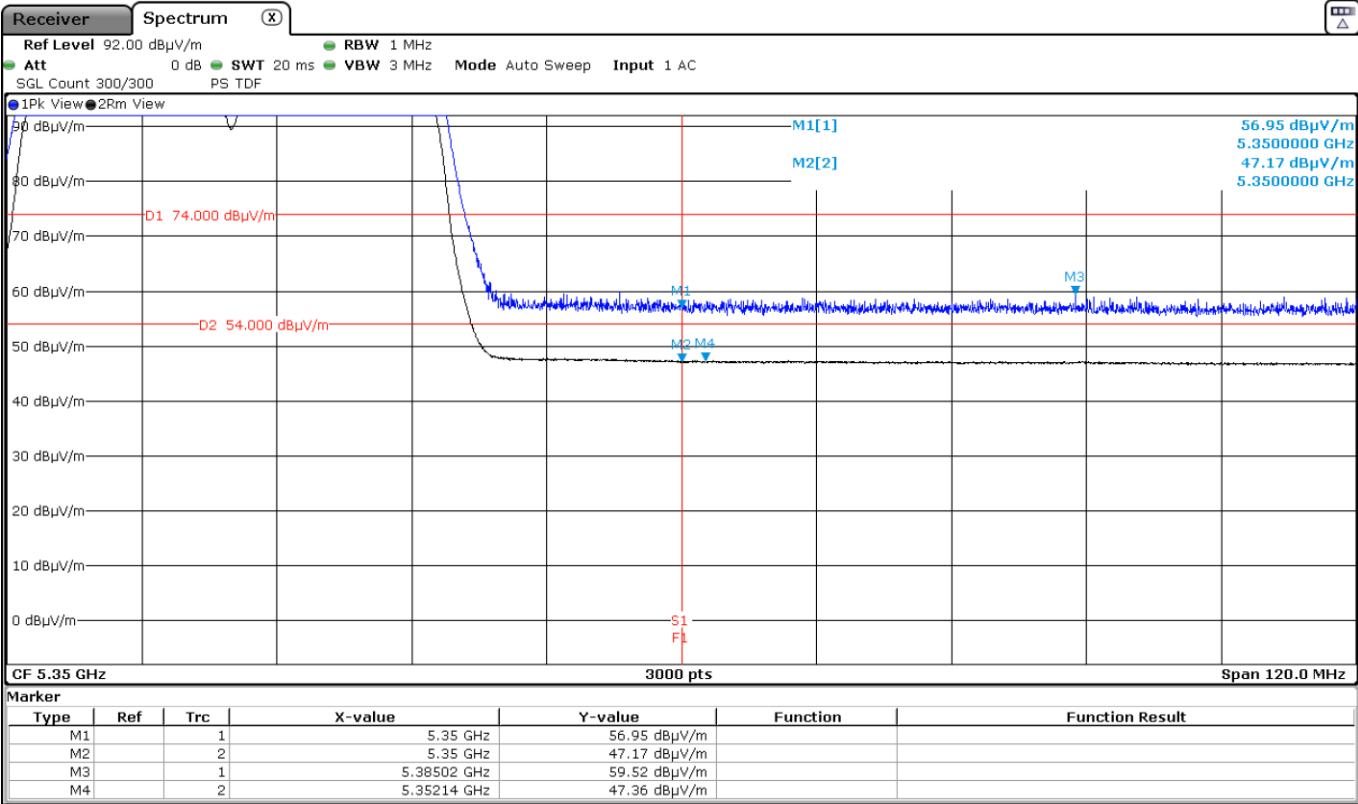

Results for Mode: 802.11n HT40 – TxBF - 40 MHz – MIMO - Core 0+ Core 1+ Core 2

Results: Peak / Channel 54

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Horizontal	56.84	74	17.16	<± 3.05	PASS
5139.802	Horizontal	58.84	74	15.16	<± 3.05	PASS
5350	Vertical	56.75	74	17.25	<± 3.05	PASS
5368.367	Vertical	59.35	74	14.65	<± 3.05	PASS

Results: Average / Channel 54

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Horizontal	46.63	0.13	46.76	54	7.24	<± 3.05	PASS
5118.052	Horizontal	46.74	0.13	46.87	54	7.13	<± 3.05	PASS
5350	Vertical	46.89	0.13	47.02	54	6.98	<± 3.05	PASS
5444.567	Vertical	46.93	0.13	47.06	54	6.94	<± 3.05	PASS


Results: Peak / Channel 62

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350	Vertical	56.58	74	17.42	<± 3.05	PASS
5356.340	Vertical	59.16	74	14.84	<± 3.05	PASS


Results: Average / Channel 62

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5350.260	Vertical	46.75	0.13	46.88	54	7.12	<± 3.05	PASS


4500 MHz to 5150 MHz Lower Band Edge Channel 54

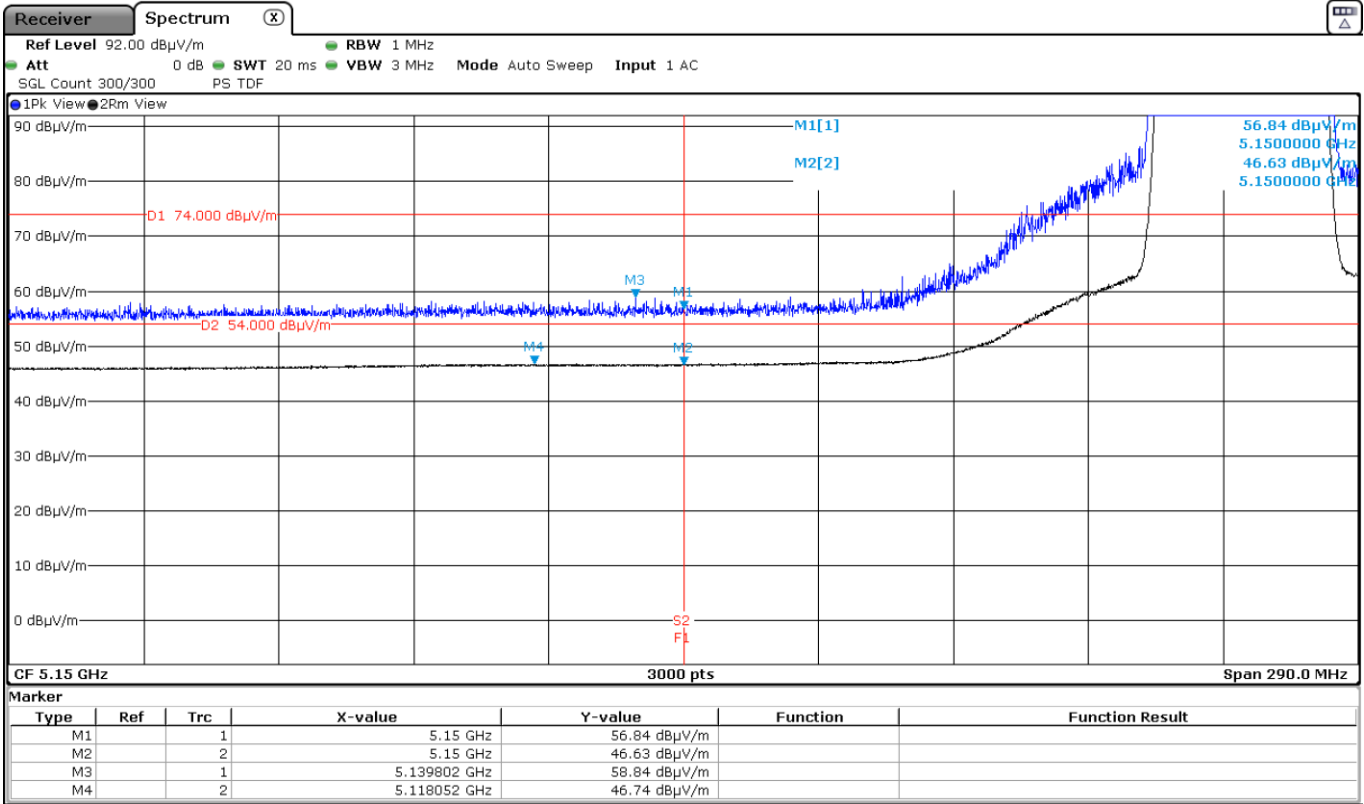

5350 MHz to 5460 MHz Upper Band Edge Channel 54

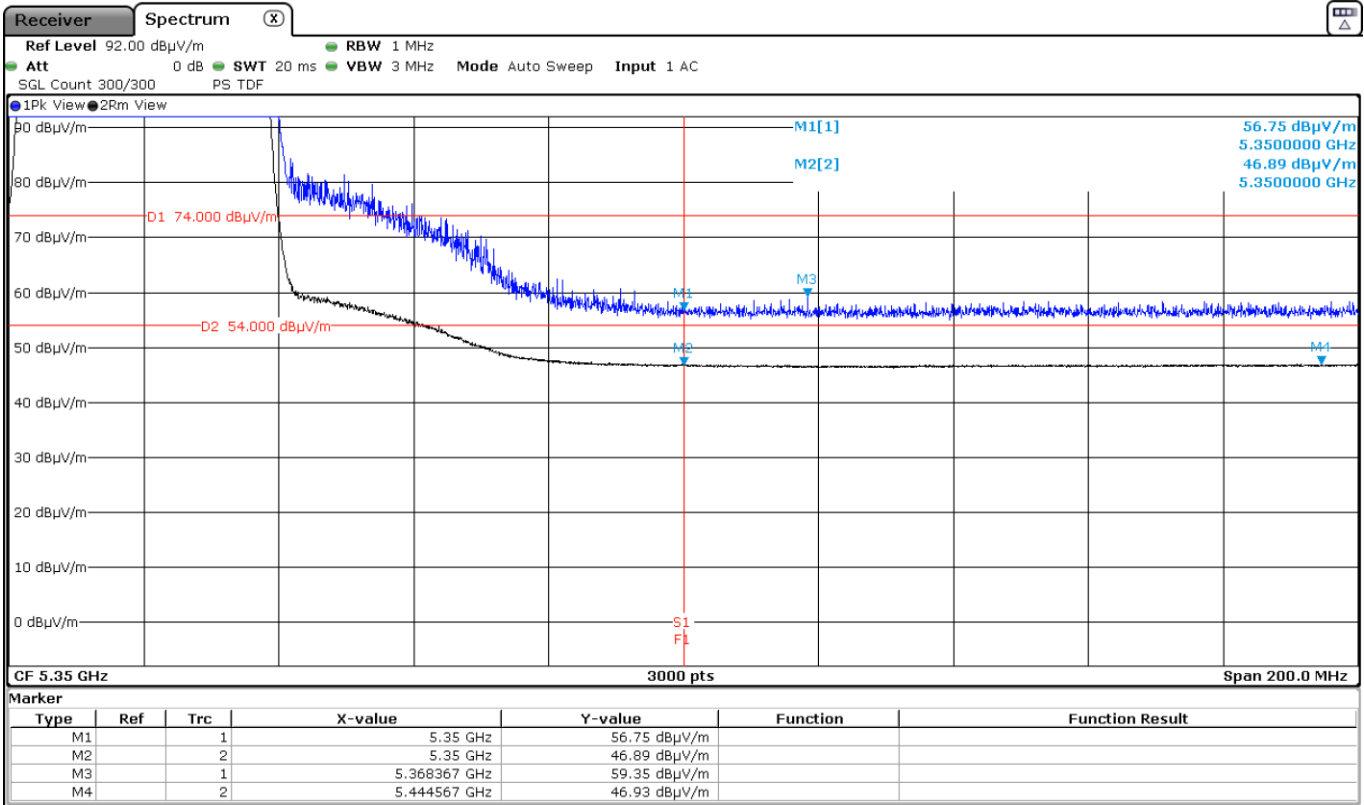

5350 MHz to 5460 MHz Upper Band Edge Channel 62

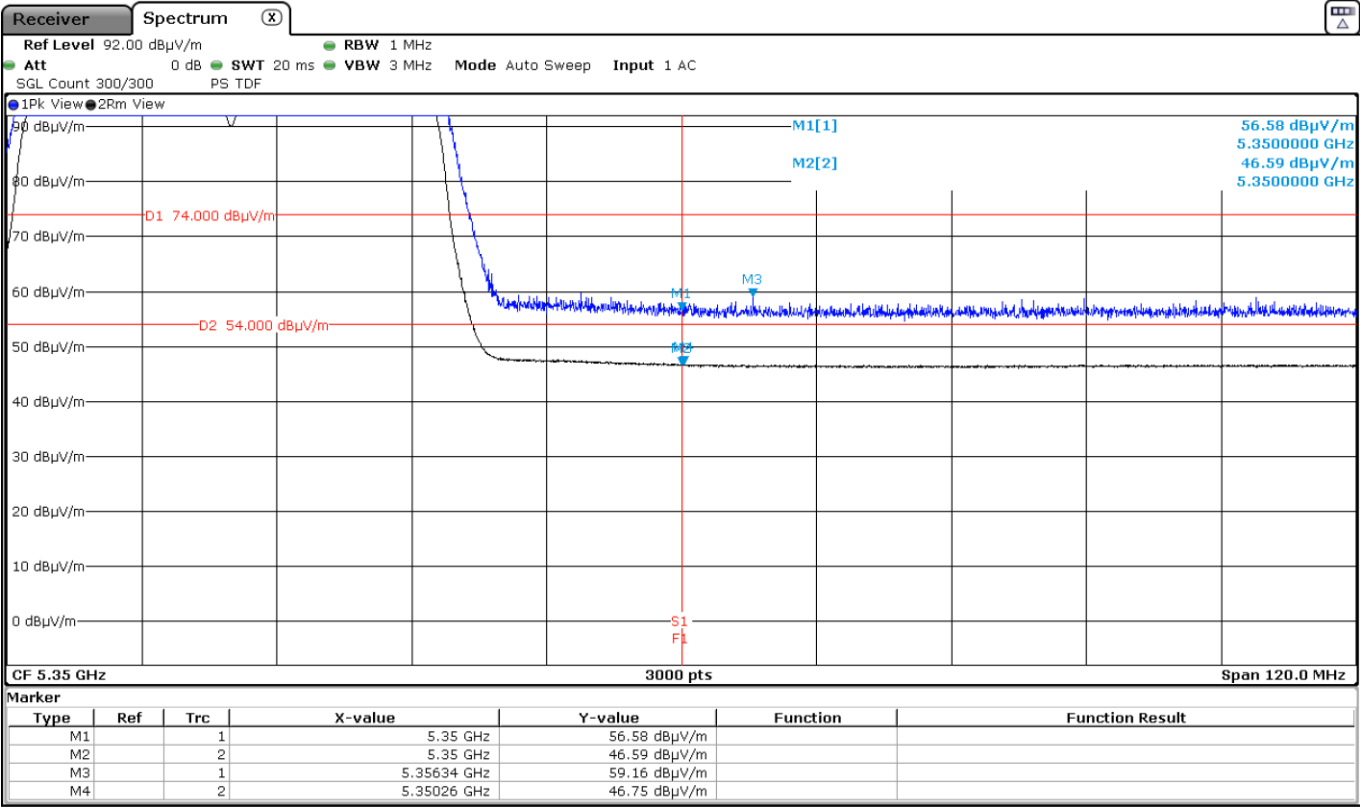

Results for Mode: 802.11ac VHT80 - 80 MHz - SISO - Core 2


Results: Peak / Channel 58

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	56.78	74	17.22	<± 3.05	PASS
5102.660	Vertical	59.27	74	14.73	<± 3.05	PASS
5350	Vertical	60.05	74	13.95	<± 3.05	PASS
5362.833	Vertical	65.54	74	8.46	<± 3.05	PASS


Results: Average / Channel 58

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	46.50	0.15	46.65	54	7.35	<± 3.05	PASS
5141.300	Vertical	46.56	0.15	46.71	54	7.29	<± 3.05	PASS
5350	Vertical	48.17	0.15	48.32	54	5.68	<± 3.05	PASS
5350.500	Vertical	48.40	0.15	48.55	54	5.45	<± 3.05	PASS

4500 MHz to 5150 MHz Lower Band Edge Channel 58

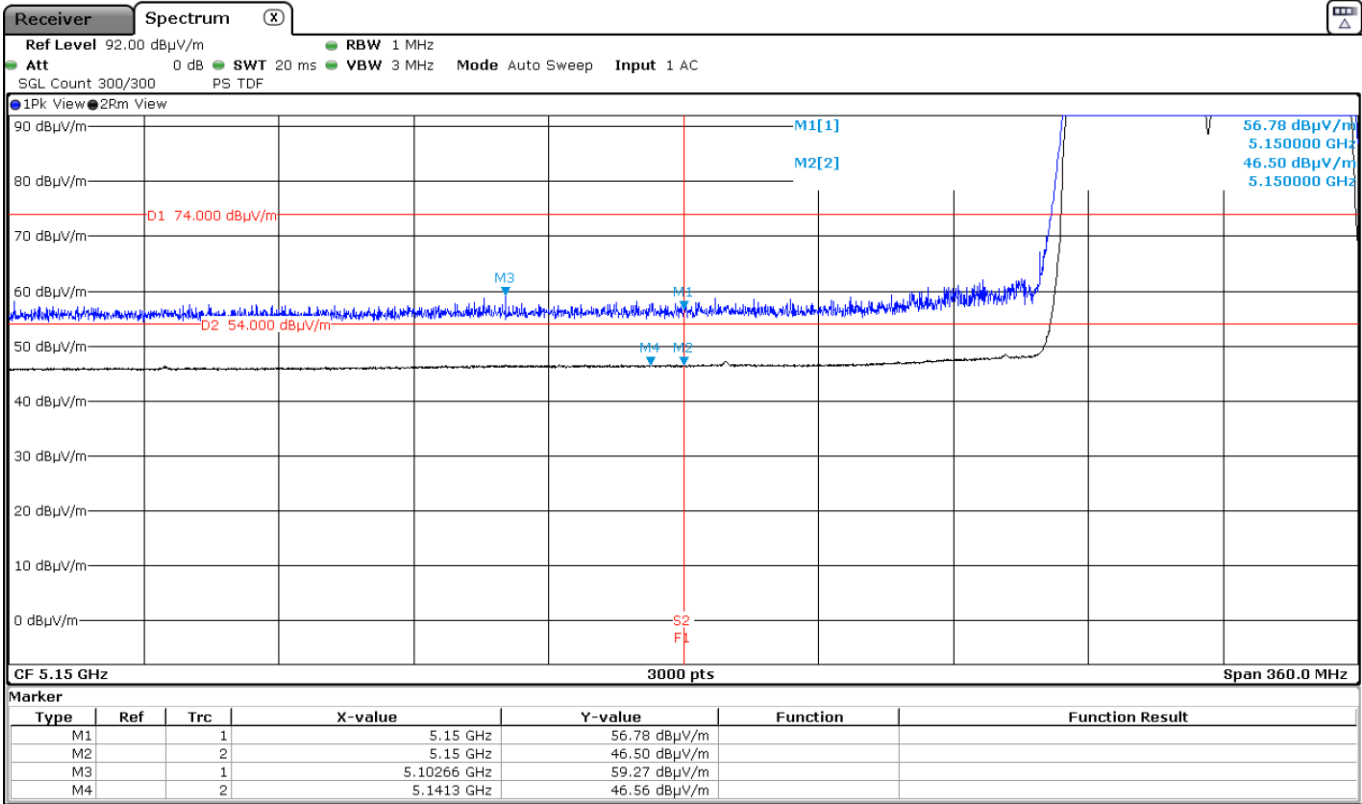

5350 MHz to 5460 MHz Upper Band Edge Channel 58

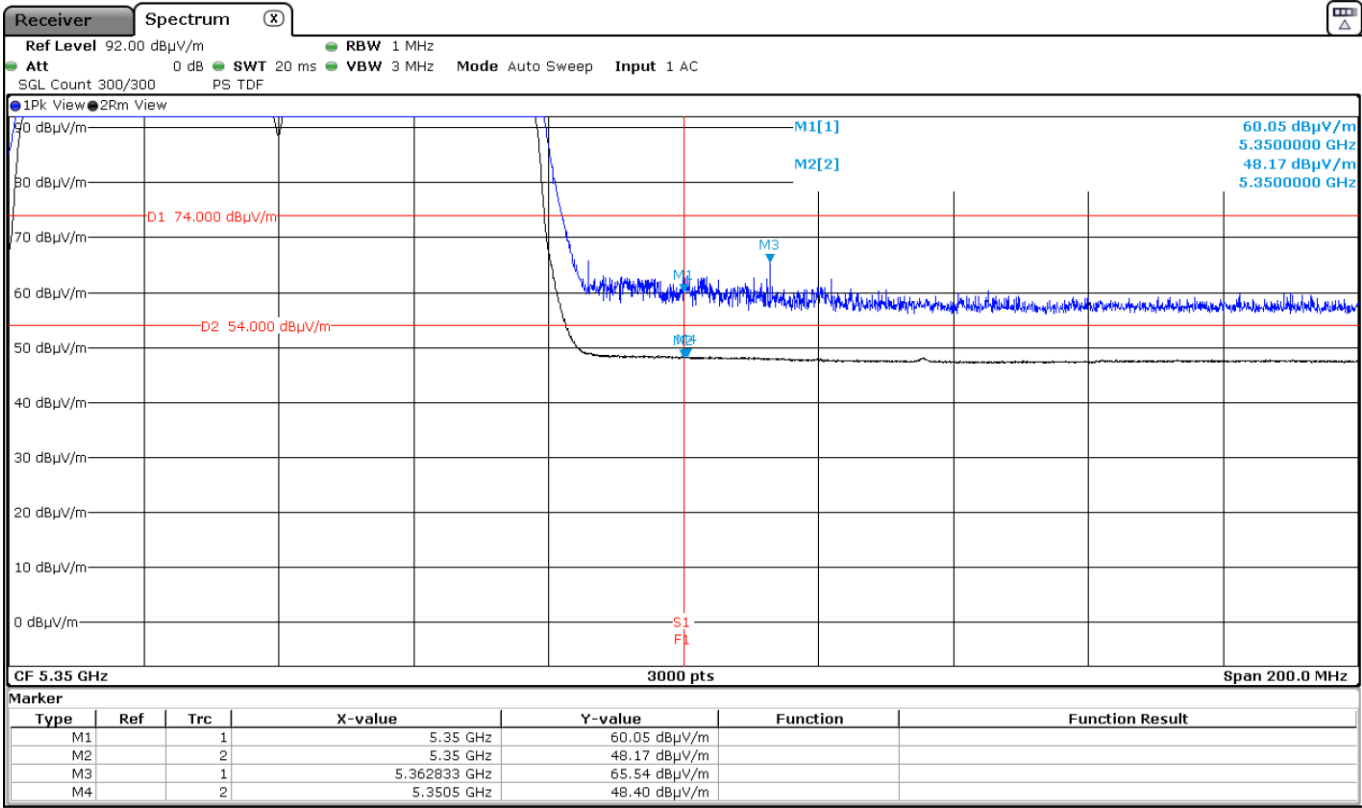

Results for Mode: 802.11ac VHT80 – CDD - 80 MHz – MIMO - Core 0+Core 2


Results: Peak / Channel 58

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	56.47	74	17.53	<± 3.05	PASS
5135.660	Vertical	58.91	74	15.09	<± 3.05	PASS
5350	Vertical	56.93	74	17.07	<± 3.05	PASS
5418.967	Vertical	60.15	74	13.85	<± 3.05	PASS


Results: Average / Channel 58

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5149.220	Vertical	46.65	0.16	46.81	54	7.19	<± 3.05	PASS
5350	Vertical	46.81	0.16	46.97	54	7.03	<± 3.05	PASS
5366.500	Vertical	47.06	0.16	47.22	54	6.78	<± 3.05	PASS

4500 MHz to 5150 MHz Lower Band Edge Channel 58

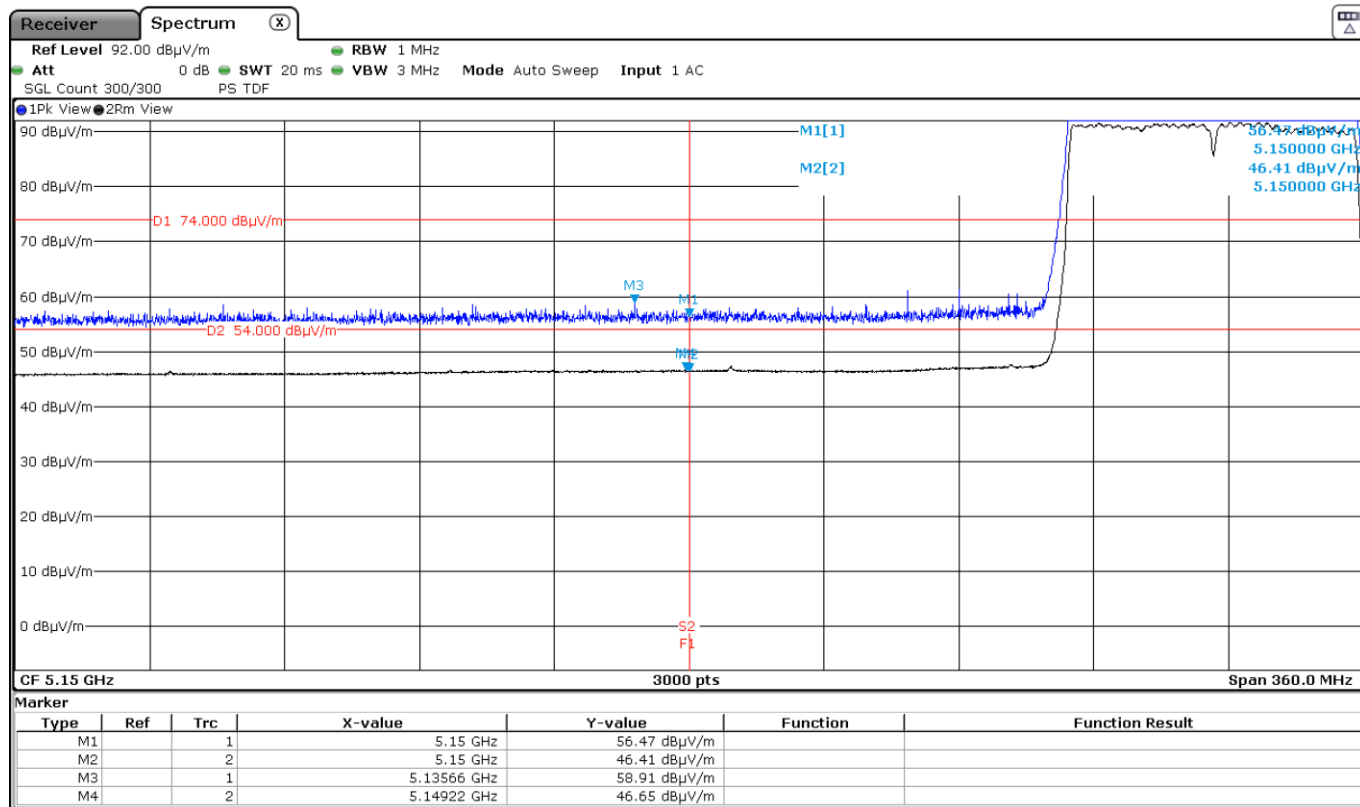

5350 MHz to 5460 MHz Upper Band Edge Channel 58

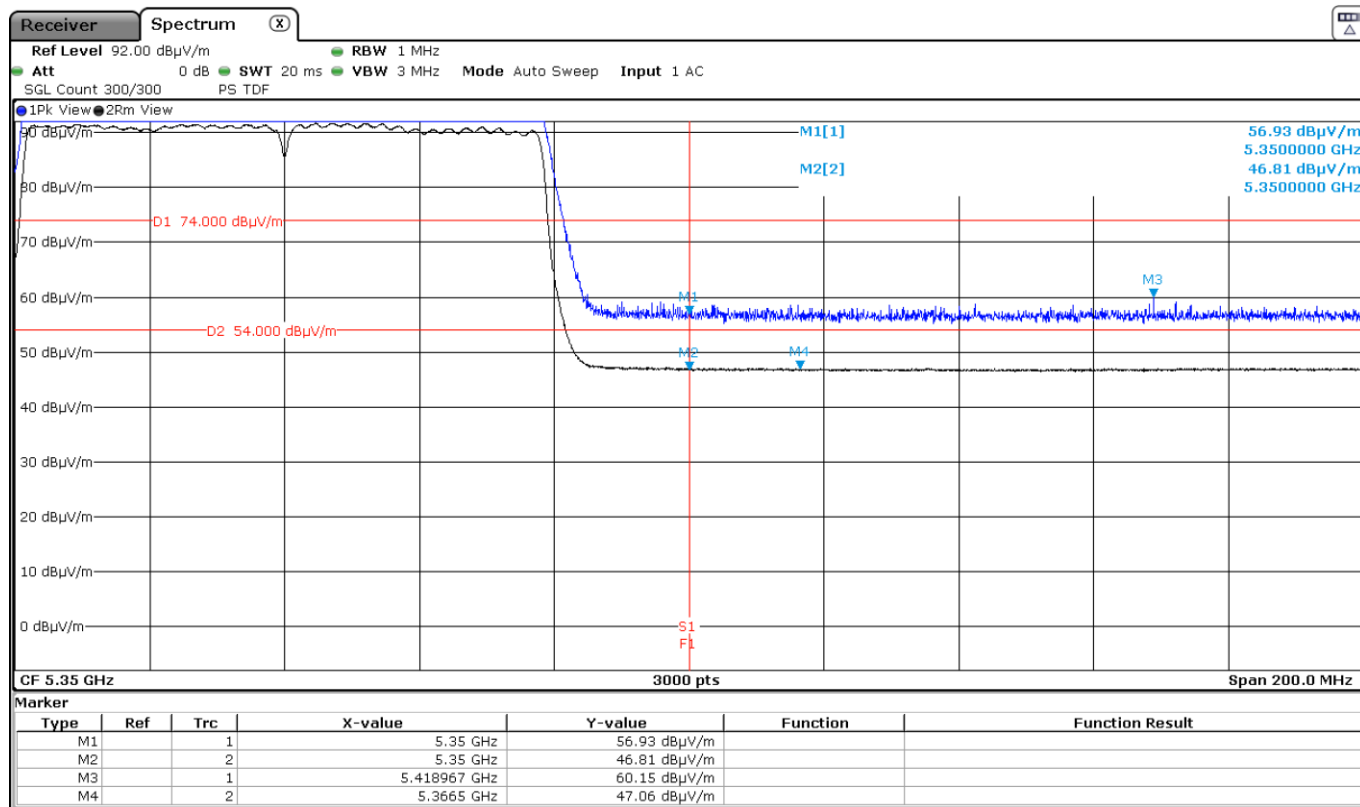

Results for Mode: 802.11ac VHT80 – SDM - 80 MHz - MIMO - Core 0+Core 2


Results: Peak / Channel 58

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	56.25	74	17.75	<± 3.05	PASS
5062.940	Vertical	58.26	74	15.74	<± 3.05	PASS
5350	Vertical	56.62	74	17.38	<± 3.05	PASS
5364.700	Vertical	59.88	74	14.12	<± 3.05	PASS


Results: Average / Channel 58

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	46.44	0.29	46.73	54	7.27	<± 3.05	PASS
5114.300	Vertical	46.49	0.29	46.78	54	7.22	<± 3.05	PASS
5350.367	Vertical	47.15	0.29	47.44	54	6.56	<± 3.05	PASS

4500 MHz to 5150 MHz Lower Band Edge Channel 58

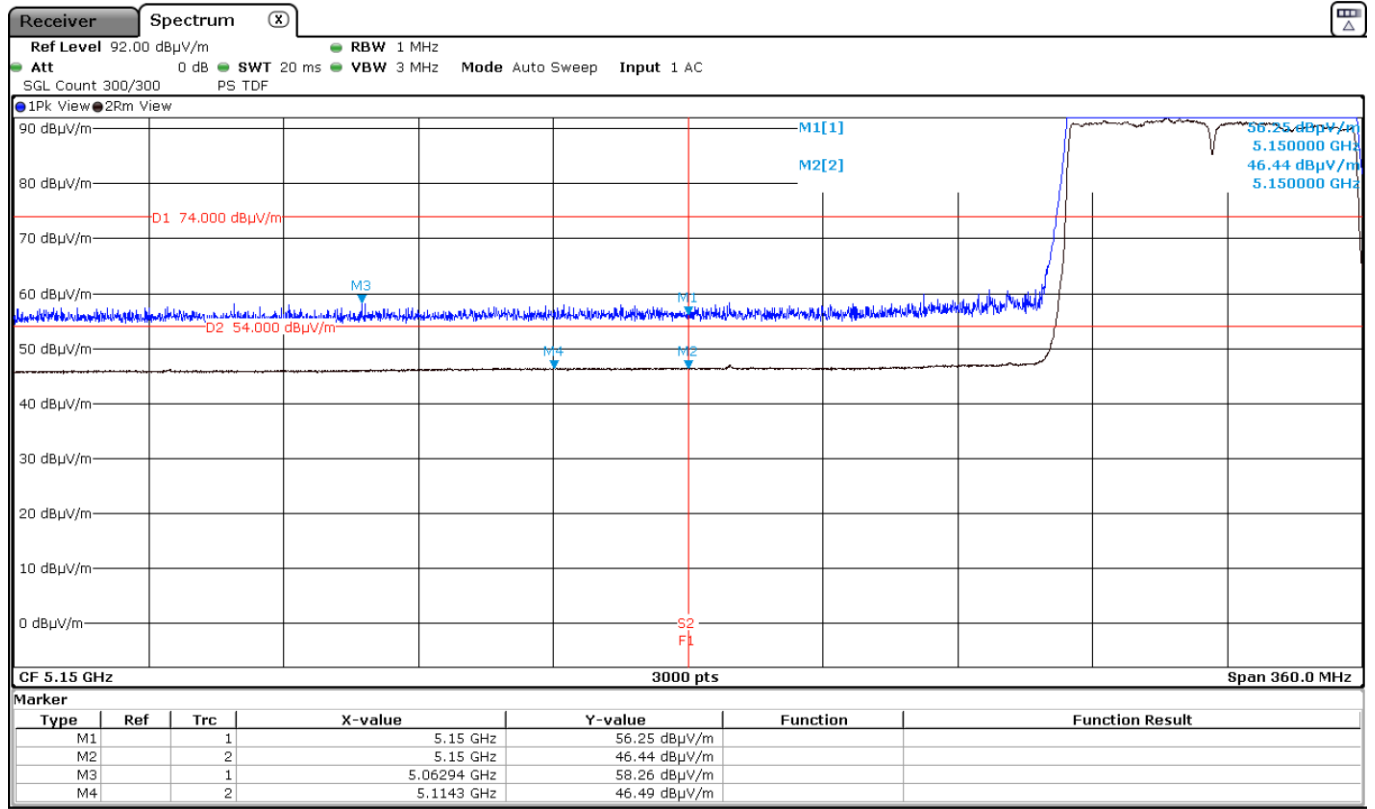

5350 MHz to 5460 MHz Upper Band Edge Channel 58

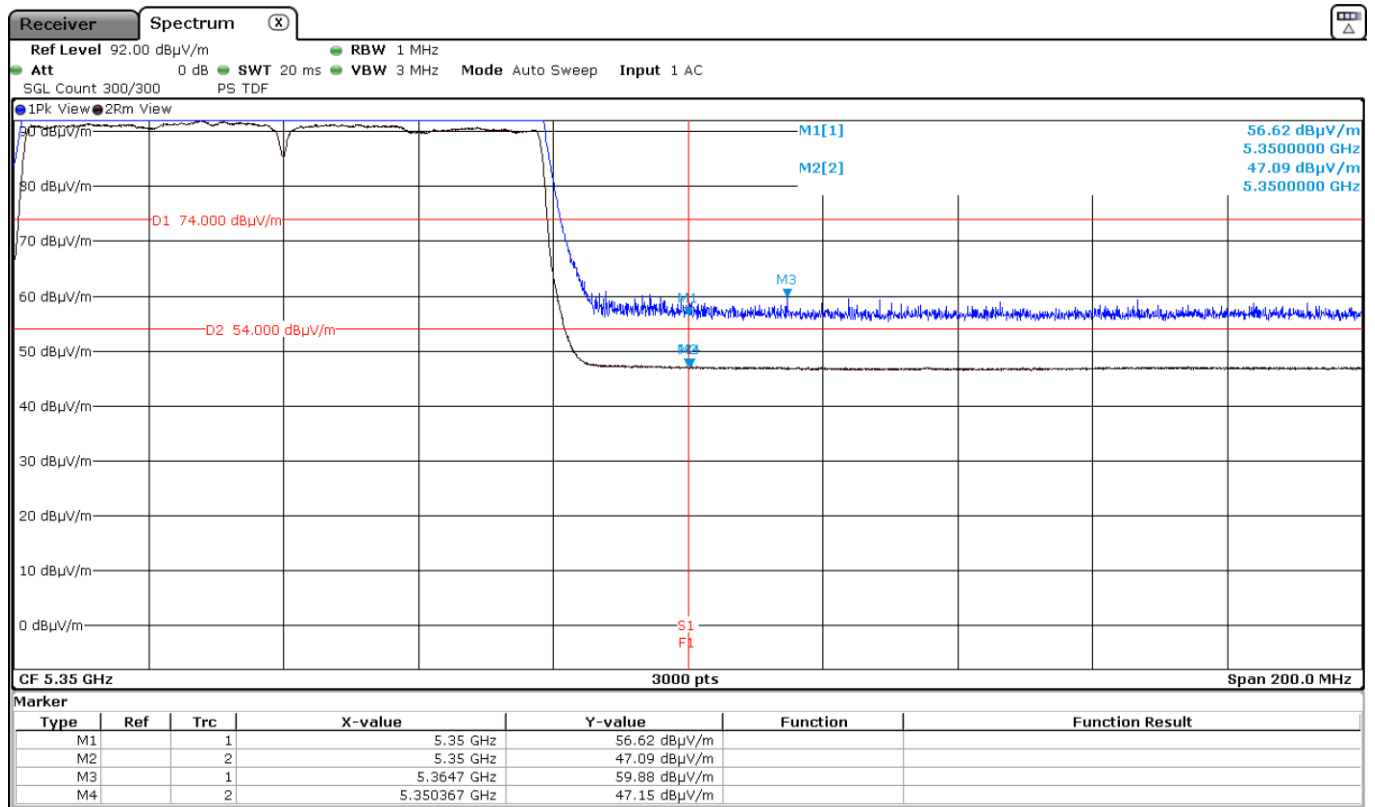

Results for Mode: 802.11ac VHT80 – TxBF - 80 MHz – MIMO - Core 0+Core 2


Results: Peak / Channel 58

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	57.29	74	16.71	<± 3.05	PASS
5095.940	Vertical	58.29	74	15.71	<± 3.05	PASS
5351.300	Vertical	62.46	74	11.54	<± 3.05	PASS


Results: Average / Channel 58

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	46.21	0.11	46.32	54	7.68	<± 3.05	PASS
5100.620	Vertical	46.45	0.11	46.56	54	7.44	<± 3.05	PASS
5350.567	Vertical	46.95	0.11	47.06	54	6.94	<± 3.05	PASS

4500 MHz to 5150 MHz Lower Band Edge Channel 58

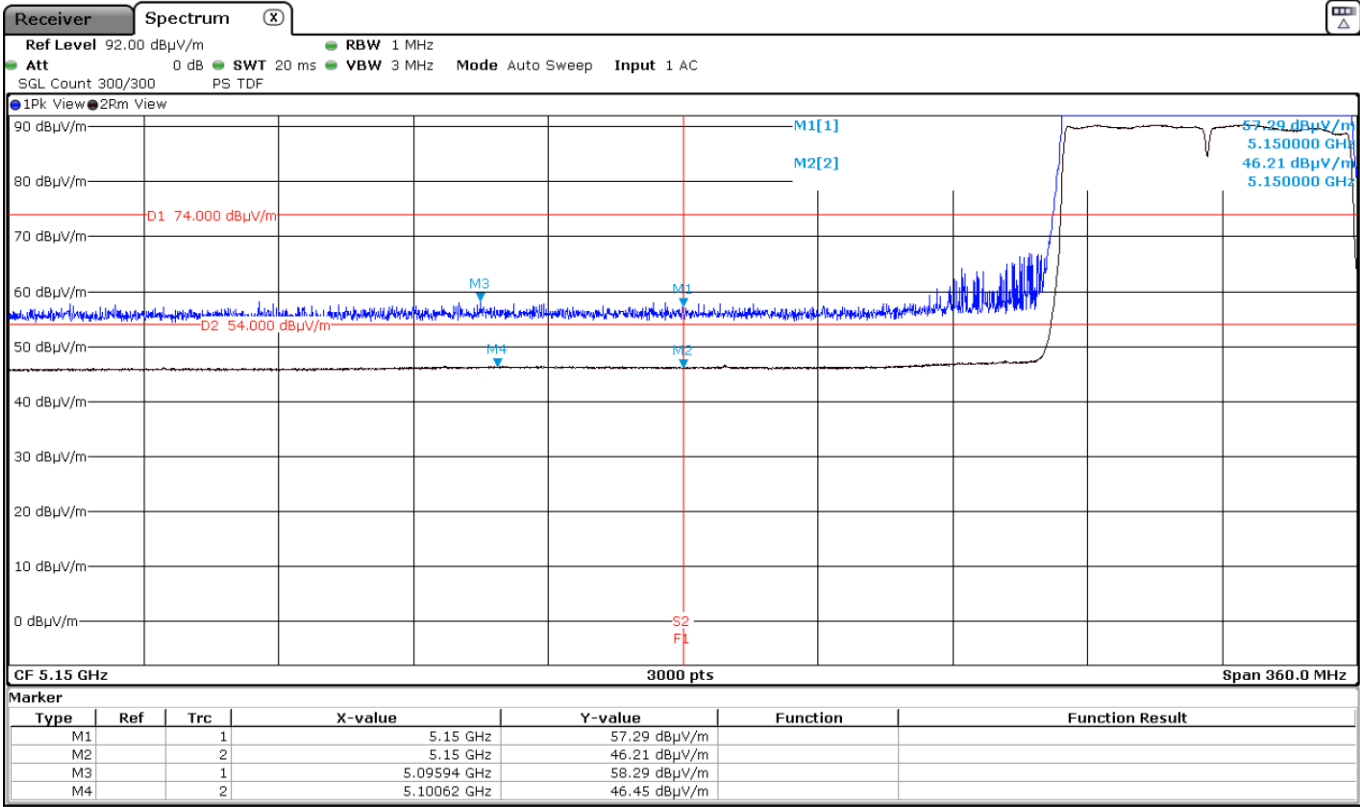

5350 MHz to 5460 MHz Upper Band Edge Channel 58

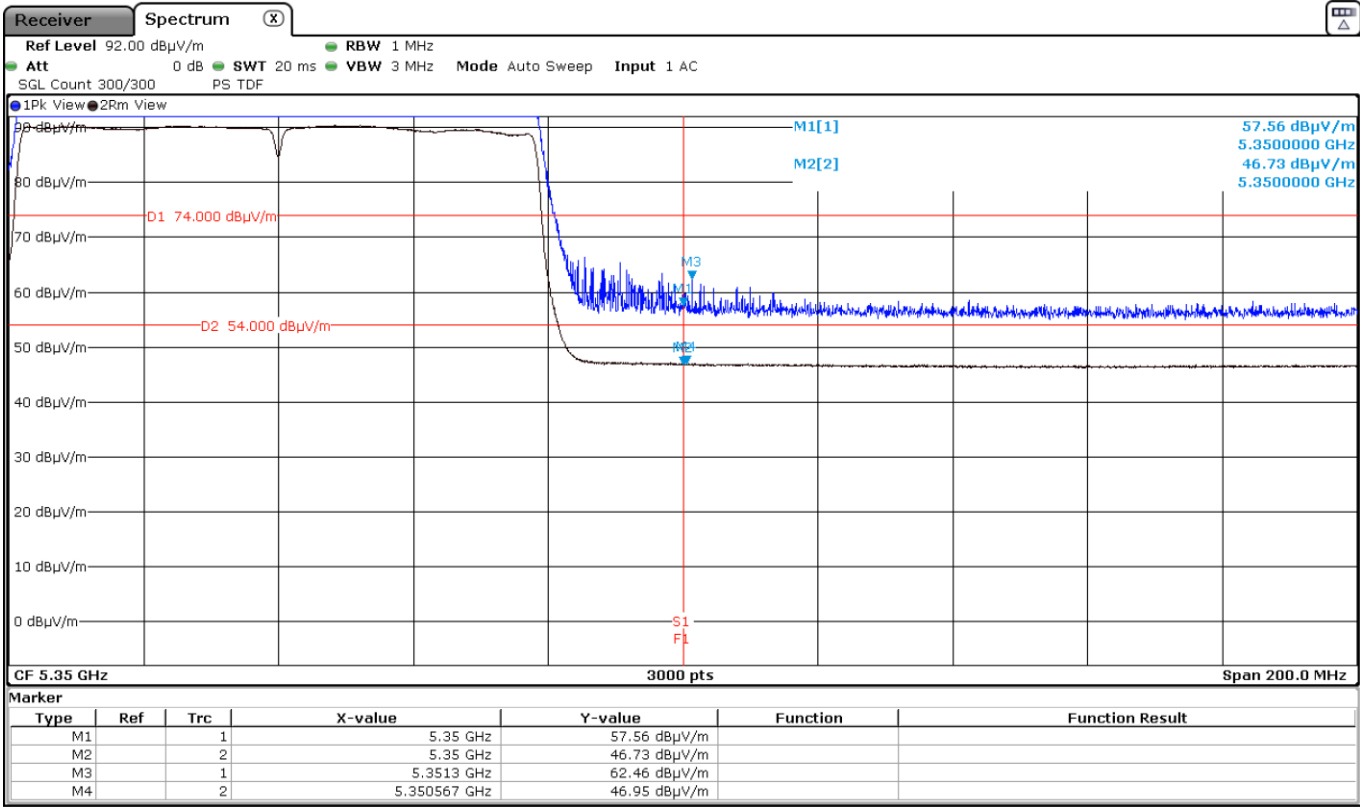

Results for Mode: 802.11ac VHT80 – CDD - 80 MHz – MIMO - Core 0+Core 1+Core 2


Results: Peak / Channel 58

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	57.94	74	16.06	<± 3.05	PASS
5122.940	Vertical	58.45	74	15.55	<± 3.05	PASS
5350	Vertical	59.67	74	14.33	<± 3.05	PASS
5360.367	Vertical	63.75	74	10.25	<± 3.05	PASS


Results: Average / Channel 58

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	46.56	0.18	46.74	54	7.26	<± 3.05	PASS
5127.020	Vertical	46.56	0.18	46.74	54	7.26	<± 3.05	PASS
5350	Vertical	47.37	0.18	47.55	54	6.45	<± 3.05	PASS
5352.033	Vertical	47.80	0.18	47.98	54	6.02	<± 3.05	PASS

4500 MHz to 5150 MHz Lower Band Edge Channel 58

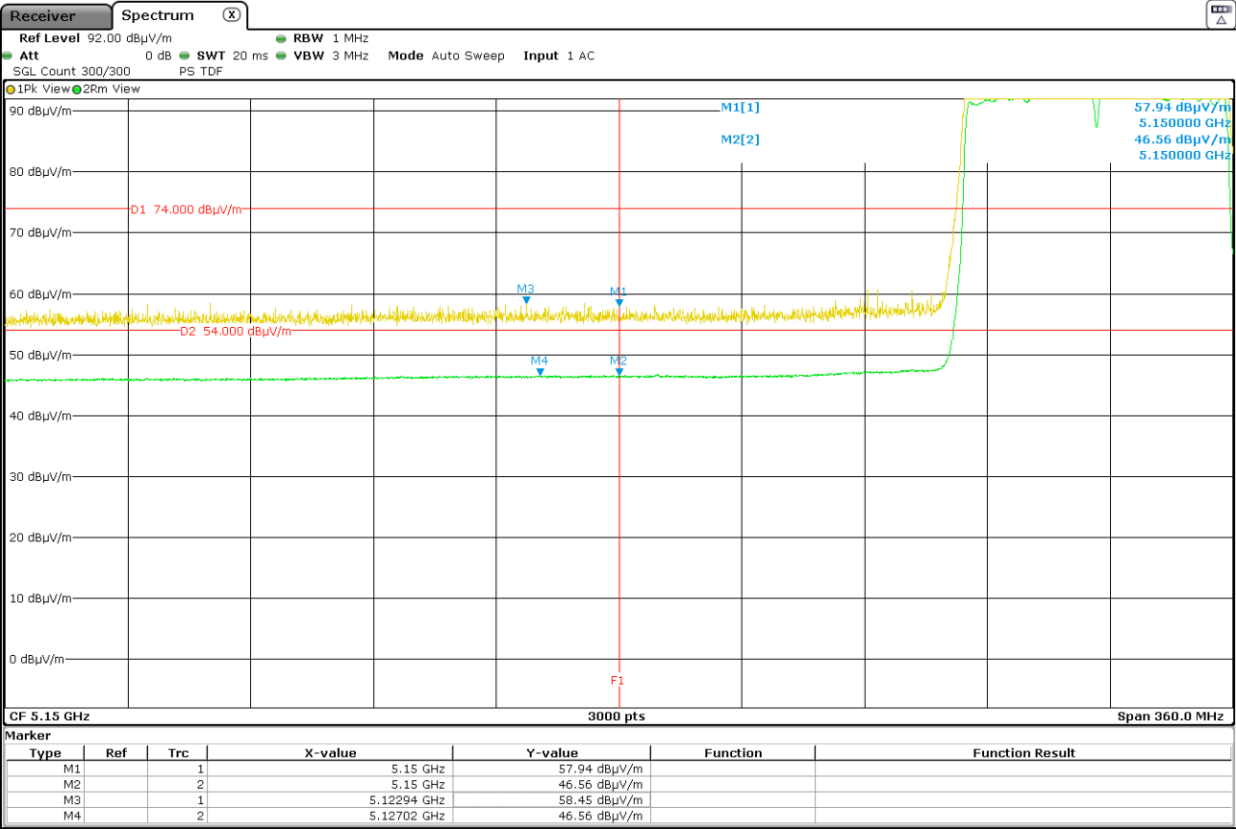

5350 MHz to 5460 MHz Upper Band Edge Channel 58

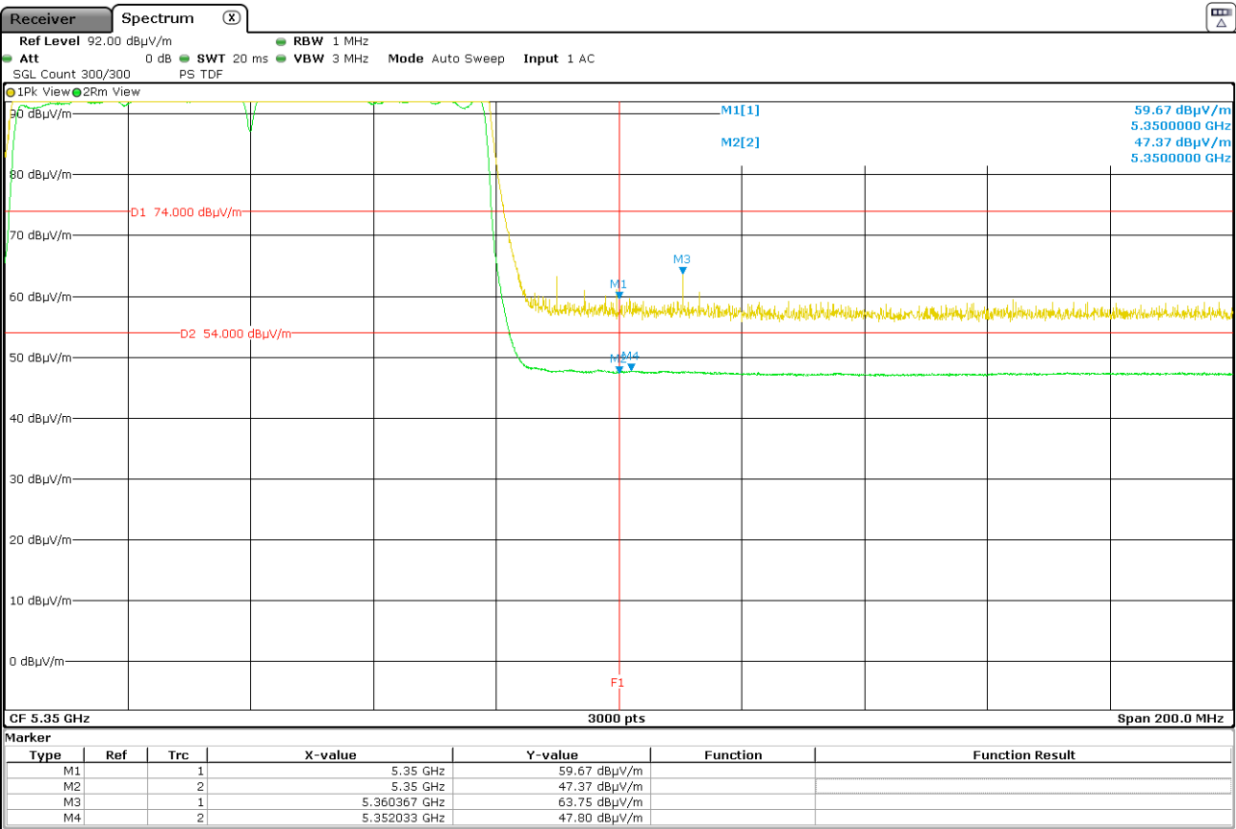

Results for Mode: 802.11ac VHT80 – SDM - 80 MHz – MIMO - Core 0+Core 1+Core 2


Results: Peak / Channel 58

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	56.91	74	17.09	<± 3.05	PASS
5070.980	Vertical	58.38	74	15.62	<± 3.05	PASS
5350	Vertical	55.89	74	18.11	<± 3.05	PASS
5396.233	Vertical	58.93	74	15.07	<± 3.05	PASS


Results: Average / Channel 58

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	46.20	0.37	46.57	54	7.43	<± 3.05	PASS
5105.300	Vertical	46.42	0.37	46.79	54	7.21	<± 3.05	PASS
5350	Vertical	46.61	0.37	46.98	54	7.02	<± 3.05	PASS
5442.633	Vertical	46.74	0.37	47.11	54	6.89	<± 3.05	PASS

4500 MHz to 5150 MHz Lower Band Edge Channel 58

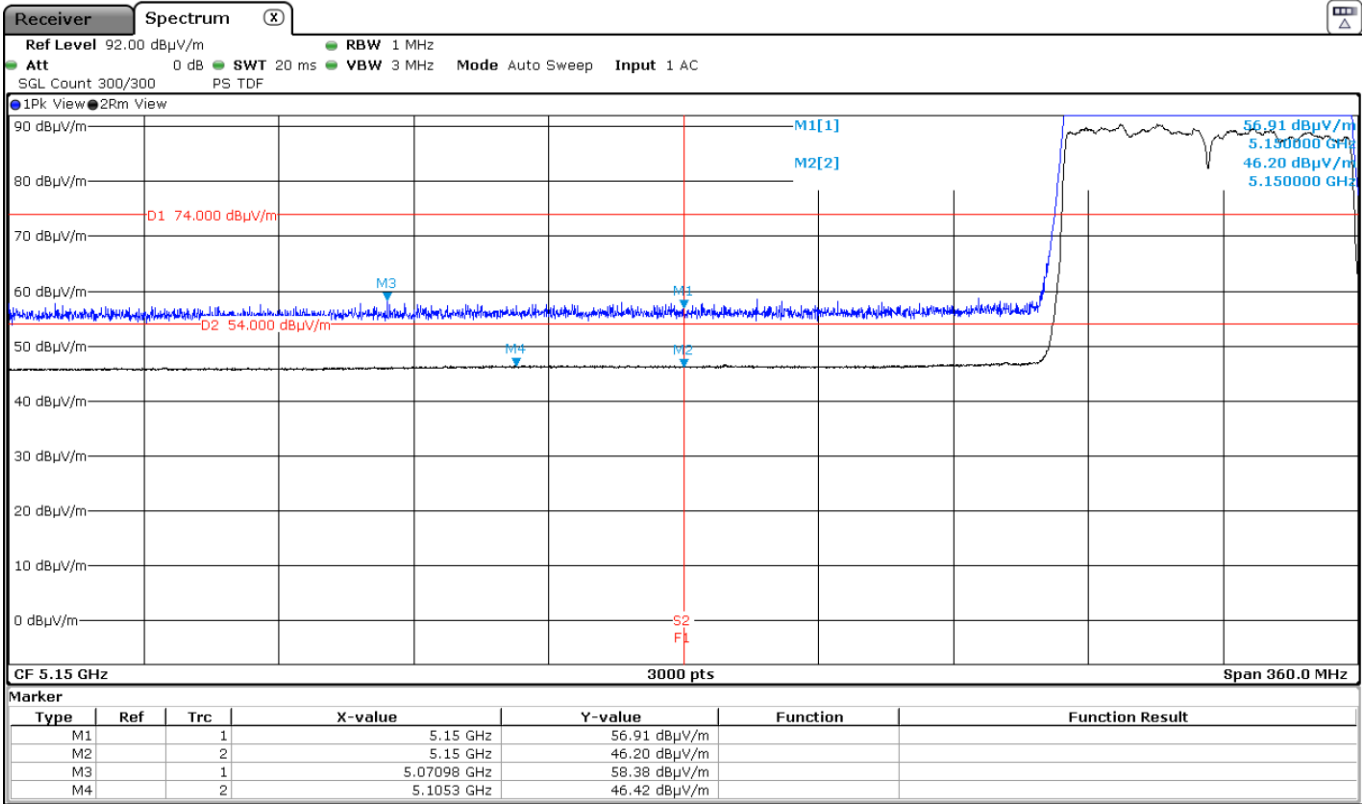

5350 MHz to 5460 MHz Upper Band Edge Channel 58

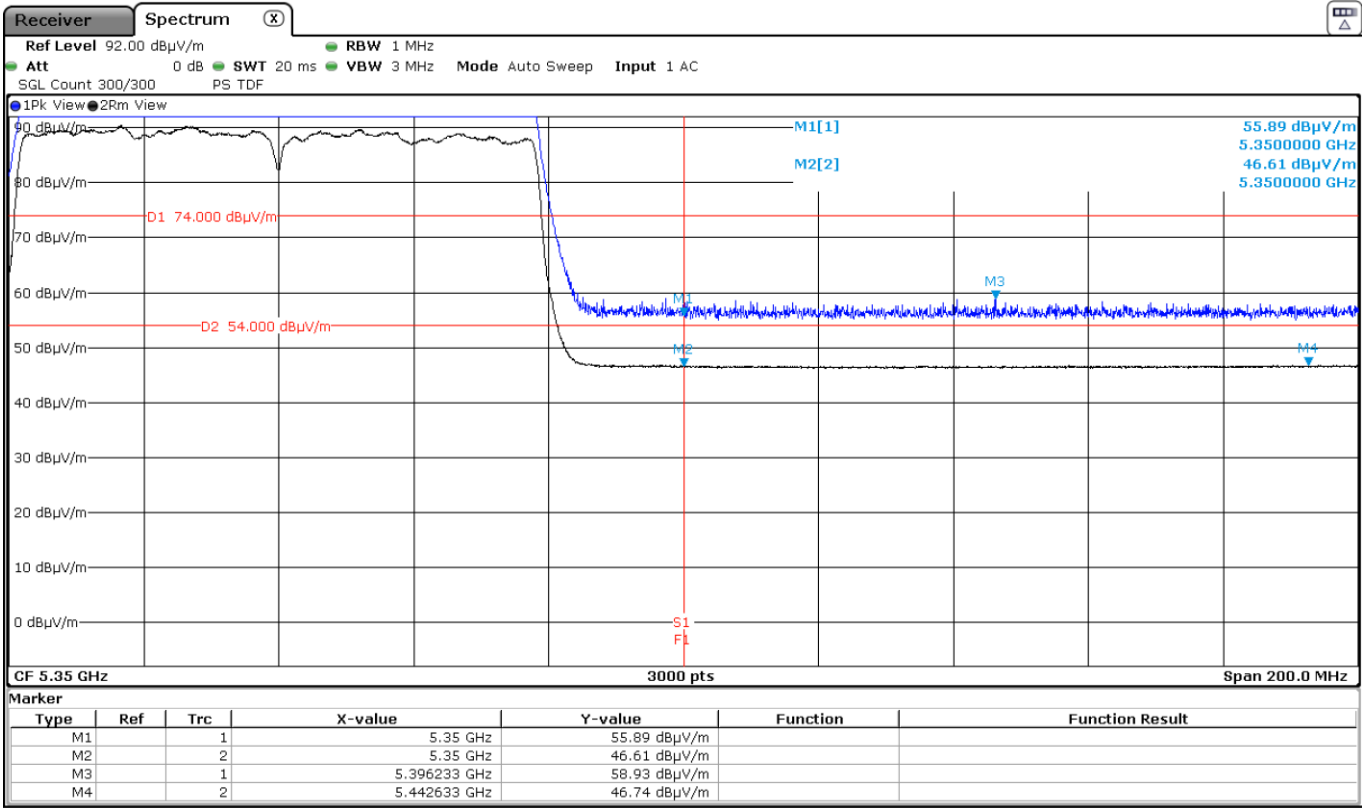

Results for Mode: 802.11ac VHT80 – TxBF - 80 MHz – MIMO - Core 0+Core 1+Core 2


Results: Peak / Channel 58

Frequency (MHz)	Antenna Polarity	Peak Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	56.72	74	17.28	<± 3.05	PASS
4949.980	Vertical	58.01	74	15.99	<± 3.05	PASS
5350	Vertical	59.59	74	14.41	<± 3.05	PASS
5355.833	Vertical	61.43	74	12.57	<± 3.05	PASS


Results: Average / Channel 58

Frequency (MHz)	Antenna Polarity	Average Level (dBuV/m)	Duty Cycle Correction (dB)	Corrected Average Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Measurement uncertainty (dB)	Verdict
5150	Vertical	46.14	0.12	46.26	54	7.74	<± 3.05	PASS
5109.620	Vertical	46.31	0.12	46.43	54	7.57	<± 3.05	PASS
5350	Vertical	46.82	0.12	46.94	54	7.06	<± 3.05	PASS
5351.567	Vertical	46.83	0.12	46.95	54	7.05	<± 3.05	PASS

4500 MHz to 5150 MHz Lower Band Edge Channel 58

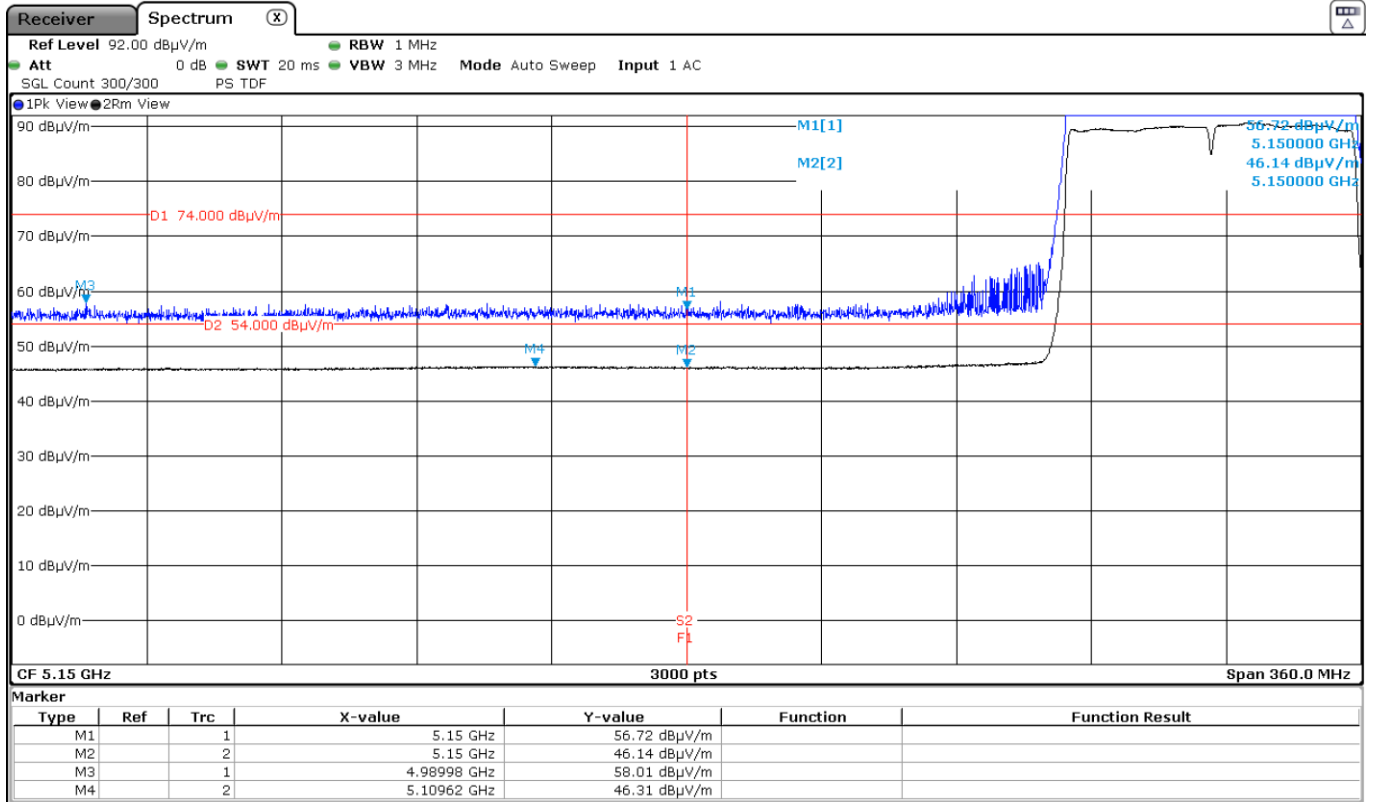

5350 MHz to 5460 MHz Upper Band Edge Channel 58

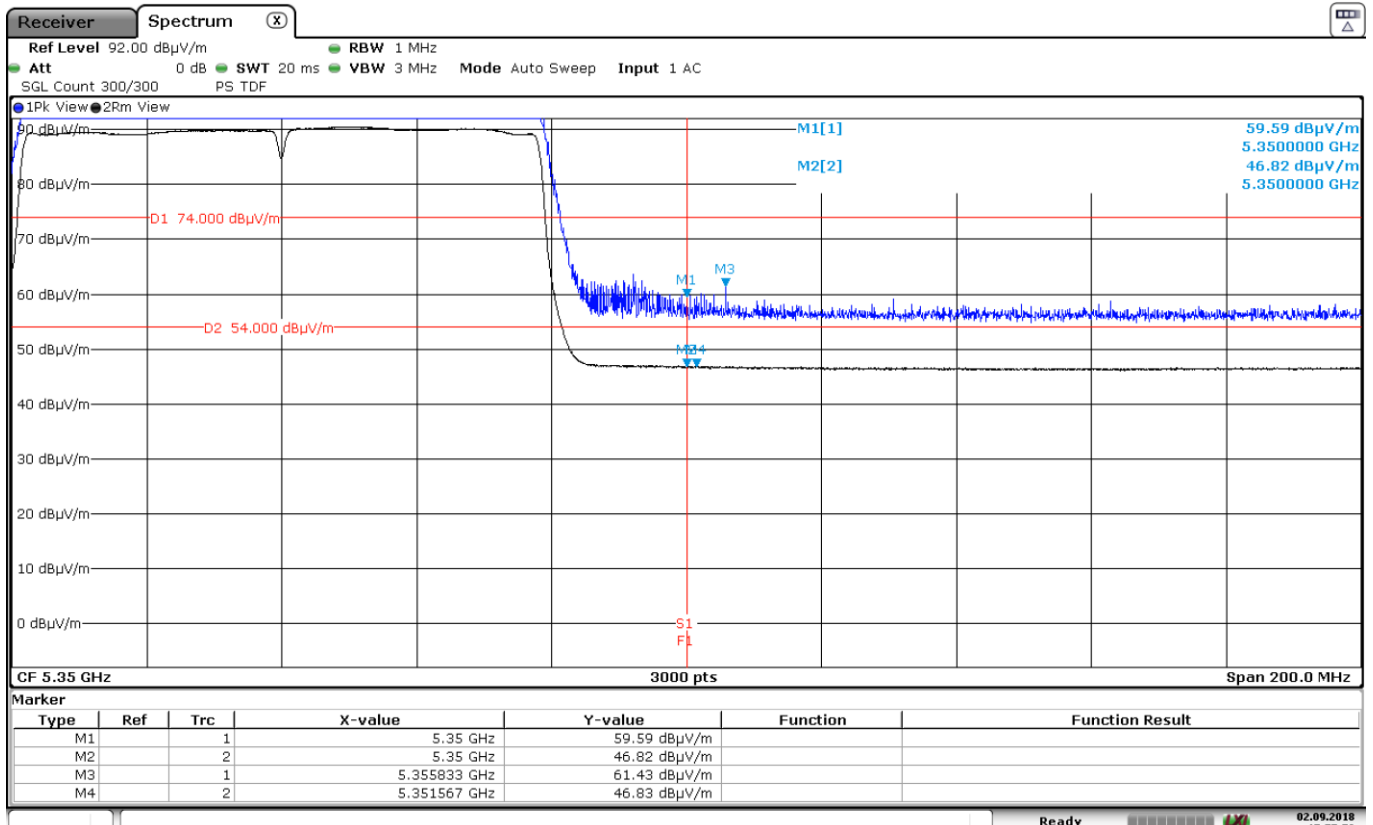

Date: 2 SEP.2018 15:57:53

Ready 02.09.2018 15:57:53