




FREQUENCY RANGE 6.5 GHz to 17 GHz.

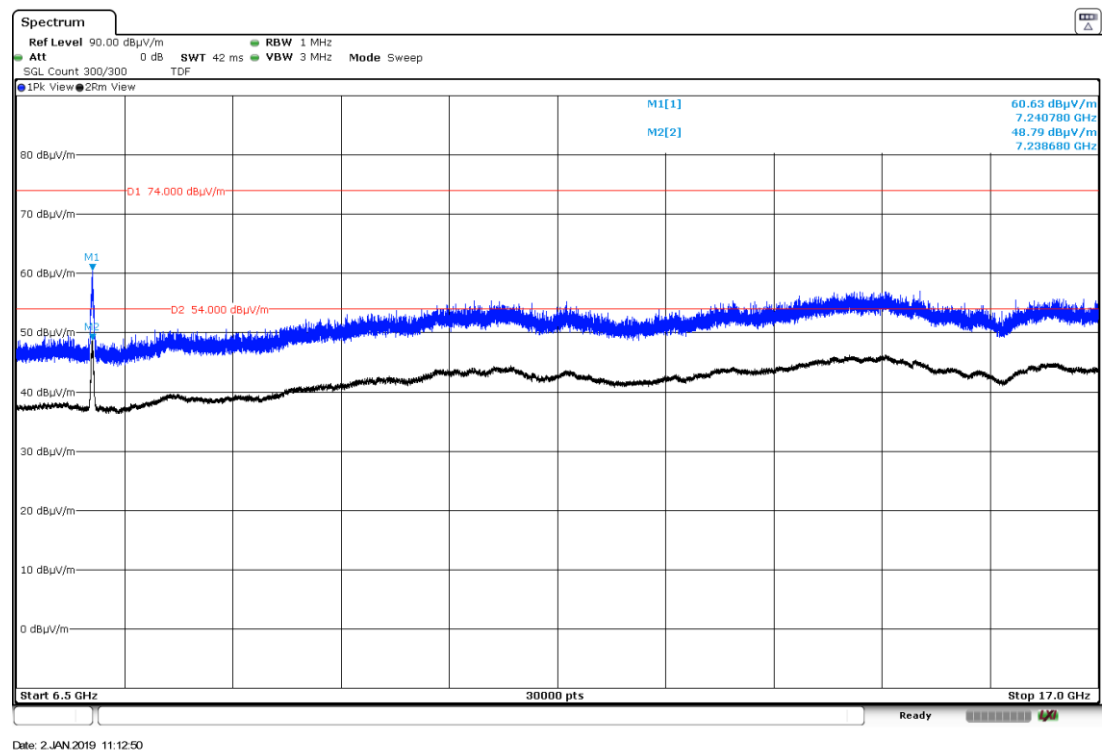

FREQUENCY RANGE 17 GHz to 26 GHz.

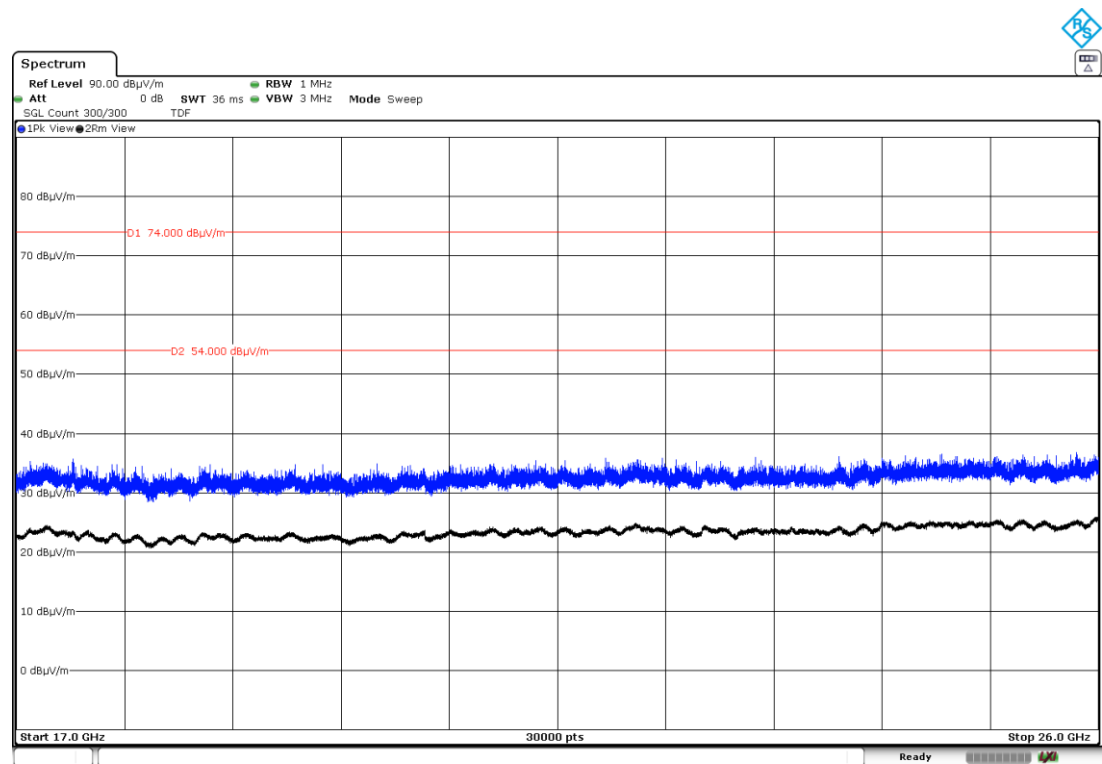

FREQUENCY RANGE 26 GHz to 40 GHz.

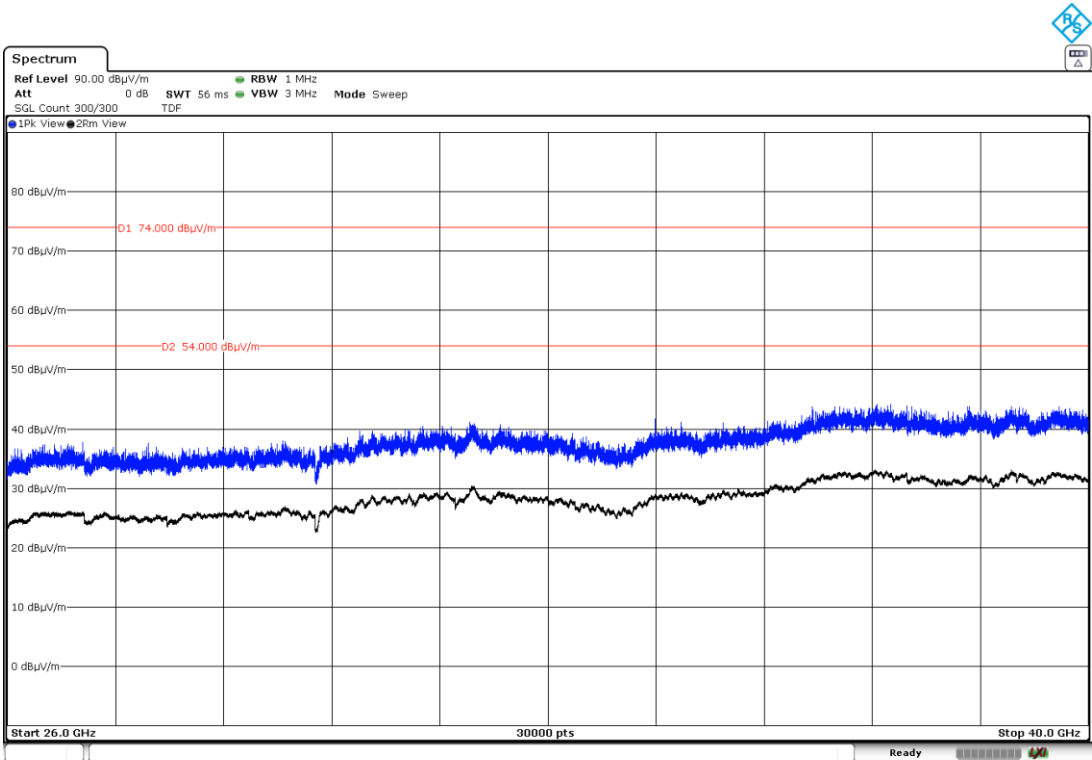

Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (2472MHz), 802.11n HT20 – 20MHz – SISO (5180MHz) and Bluetooth Basic Rate with DH5 (2402)

Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious levels operating (radiated) closest to limit.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
144.412	Horizontal	Quasi-Peak	26.0	43.5	17.5	± 3.88
168.920	Horizontal	Quasi-Peak	34.3	43.5	9.2	± 3.88
191.166	Horizontal	Quasi-Peak	30.2	43.5	13.3	± 3.88
288.683	Horizontal	Quasi-Peak	25.9	46	17.6	± 3.88
361.950	Horizontal	Quasi-Peak	27.2	46	18.8	± 3.88


Frequency range 1 GHz-40 GHz

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
2334.576	Vertical	Peak	53.77	74	20.2	± 3.05
2329.782		Average	44.26	54	9.7	± 3.05


The emission at approximately 7416 MHz is the third harmonic of the 2.4GHz WLAN signal and was therefore not measured.

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

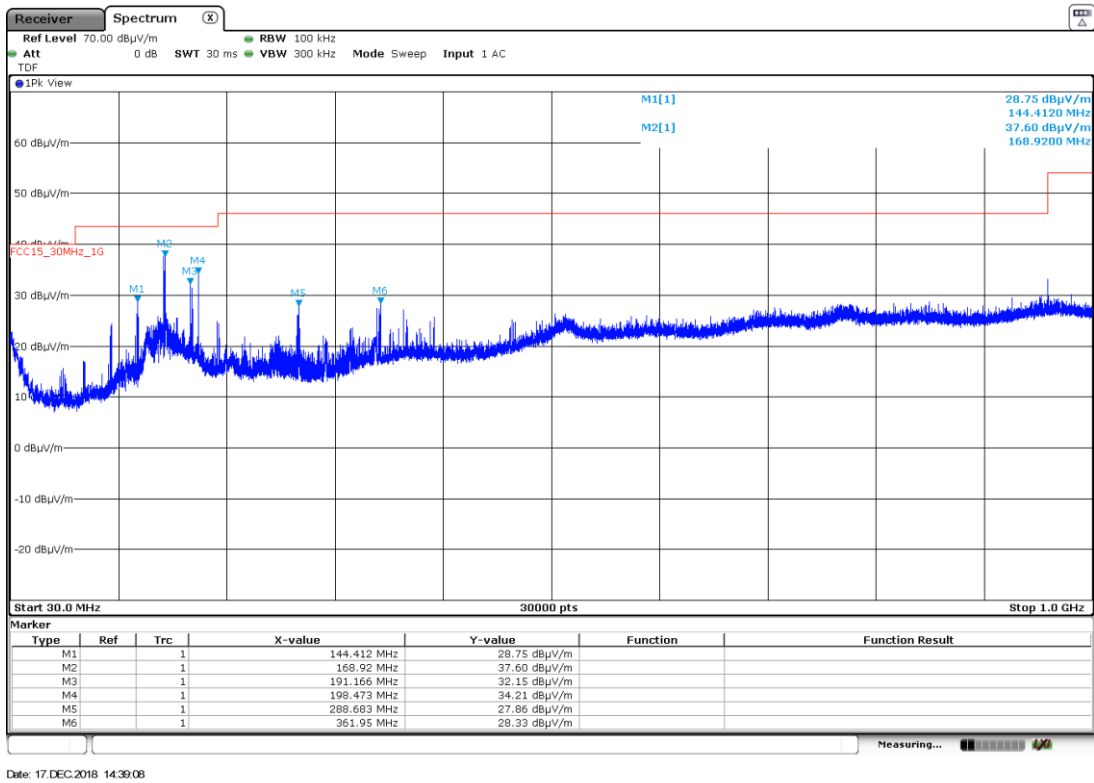


FREQUENCY RANGE 1 GHz to 6.5 GHz.

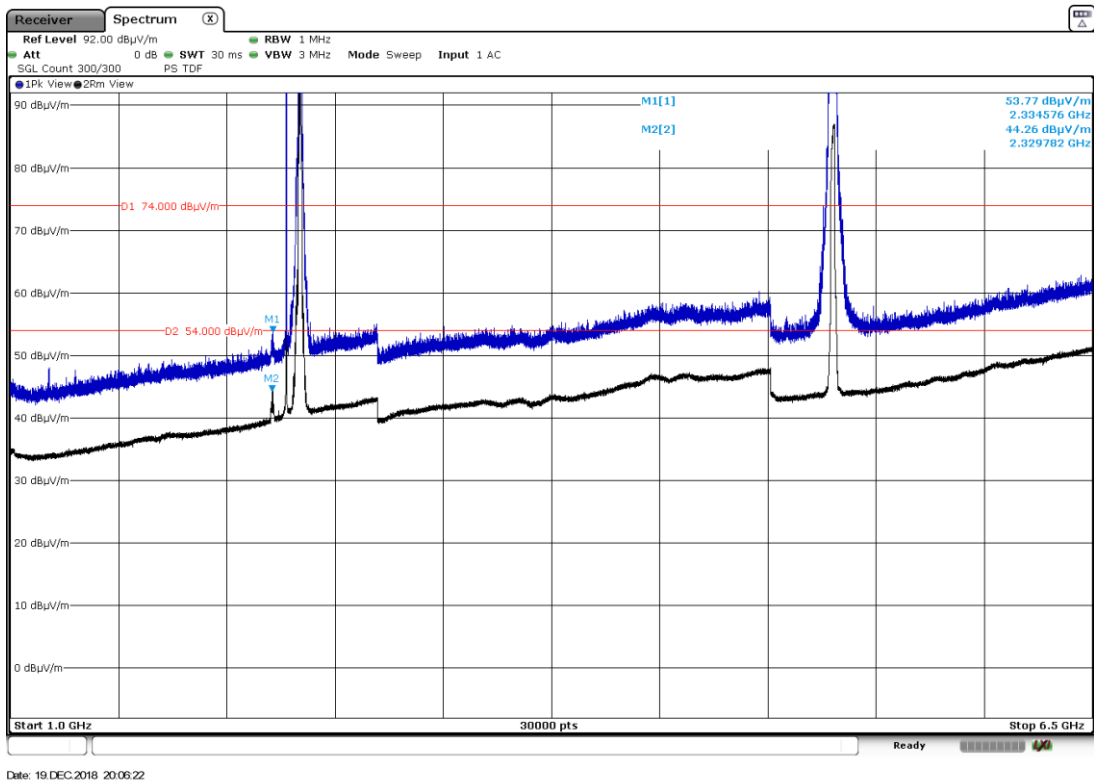


Note: The peaks shown in the plot above the limit are the carrier frequencies.


FREQUENCY RANGE 6.5 GHz to 17 GHz.

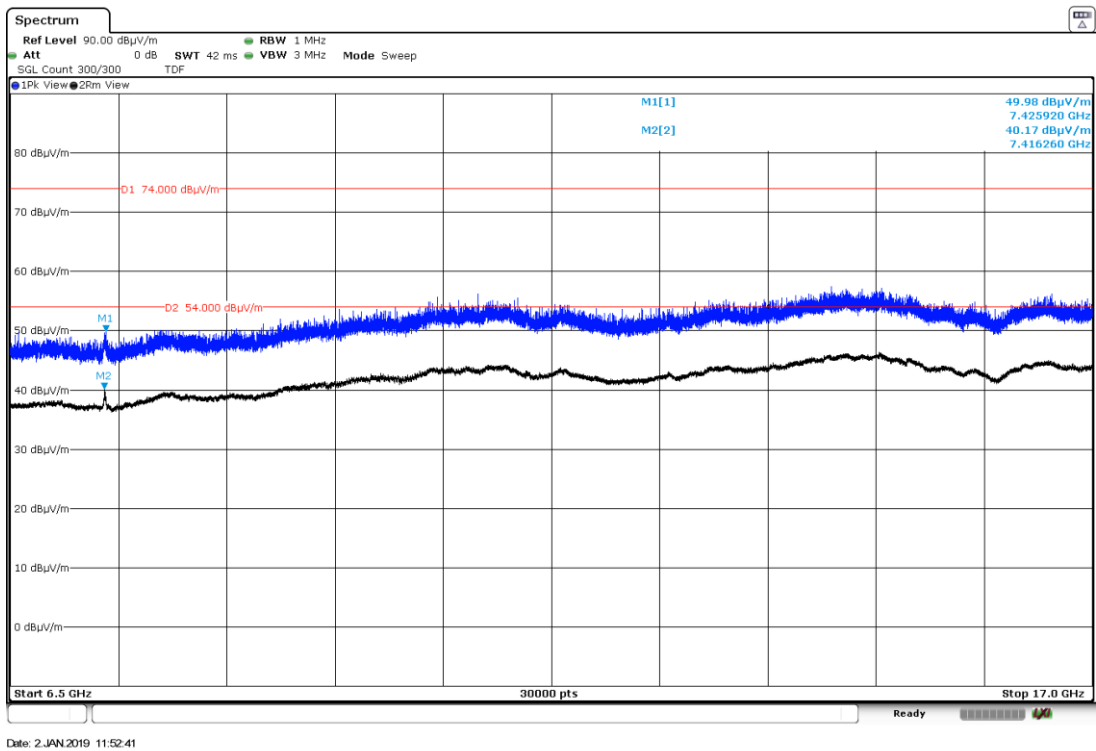

FREQUENCY RANGE 17 GHz to 26 GHz.

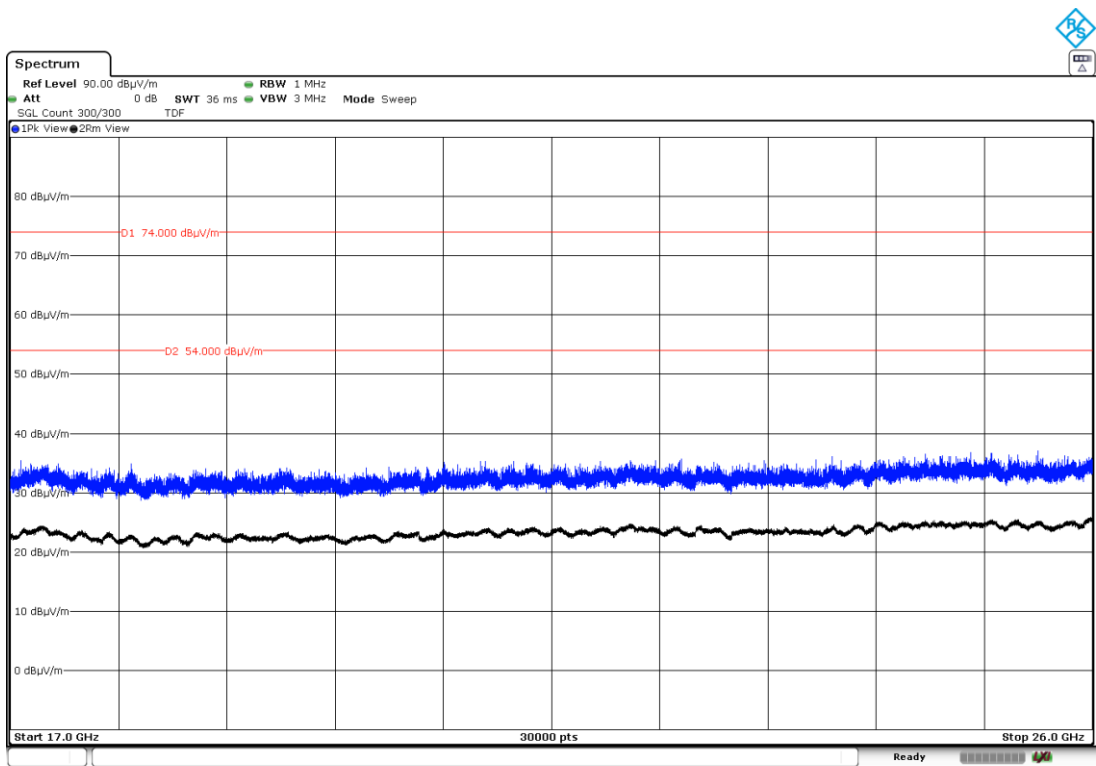

FREQUENCY RANGE 26 GHz to 40 GHz.

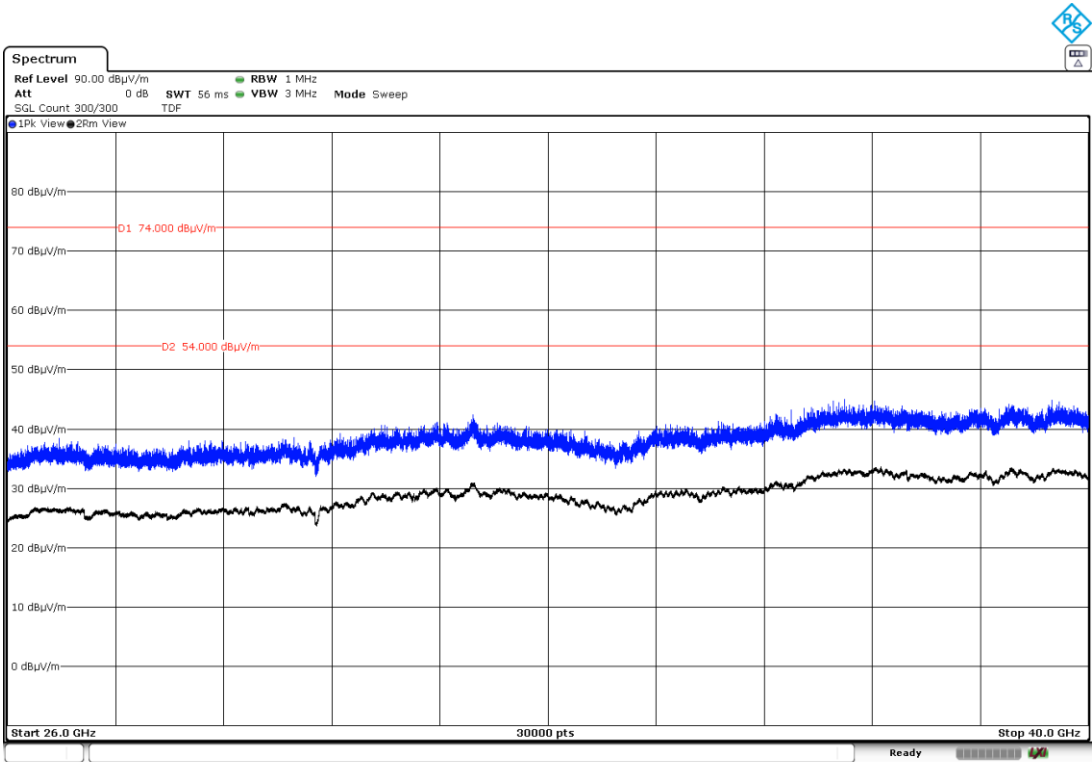

Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (2472MHz), 802.11n HT20 – 20MHz – SISO (5500MHz) and Bluetooth Basic Rate with DH5 (2402)

Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious levels operating (radiated) closest to limit.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Measurement Uncertainty (dB)
144.379	Vertical	Quasi-Peak	16.5	43.5	17.0	± 3.88
168.435	Vertical	Quasi-Peak	35.2	43.5	8.3	± 3.88
191.23	Vertical	Quasi-Peak	29.9	43.5	13.6	± 3.88
288.683	Vertical	Quasi-Peak	29.9	46	16.1	± 3.88
362.015	Vertical	Quasi-Peak	25.6	46	20.4	± 3.88


Frequency range 1 GHz-40 GHz

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Measurement Uncertainty (dB)
2329.621	Vertical	Peak	53.53	74	20.67	± 3.05
2334.413		Average	44.36	54	9.64	± 3.05


The emission at approximately 7416 MHz is the third harmonic of the 2.4GHz WLAN signal and was therefore not measured.

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

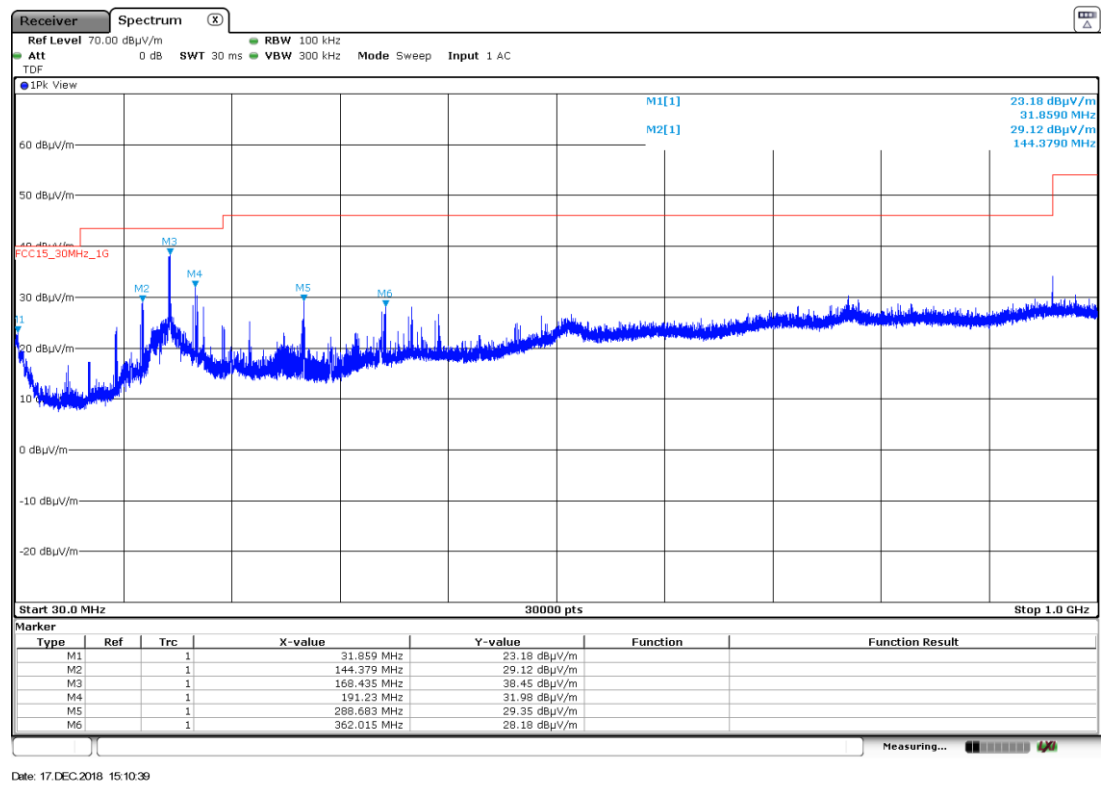


FREQUENCY RANGE 1 GHz to 6.5 GHz.

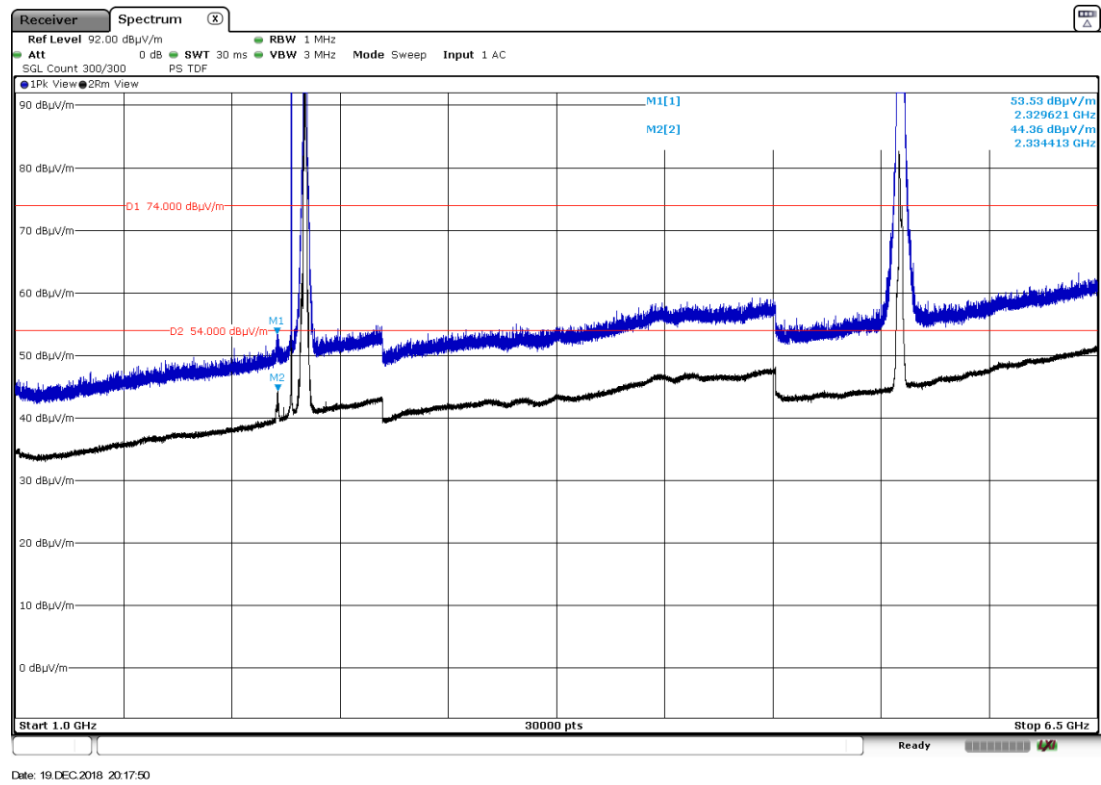


Note: The peaks shown in the plot above the limit are the carrier frequencies.


FREQUENCY RANGE 6.5 GHz to 17 GHz.

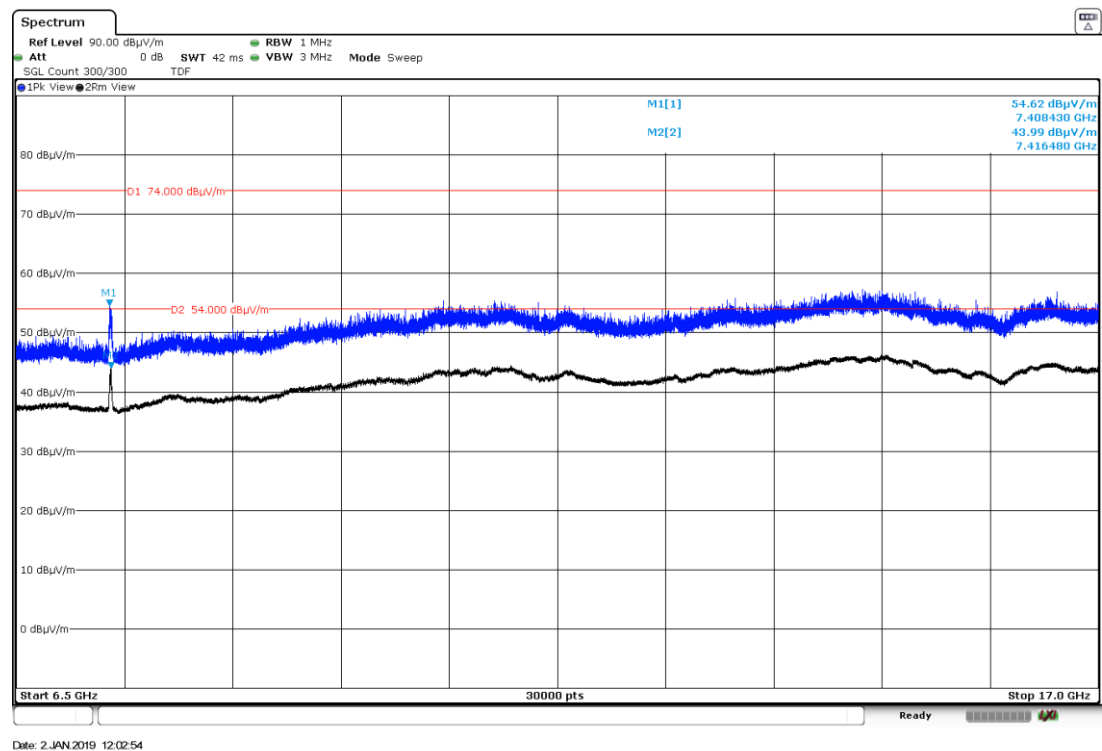

FREQUENCY RANGE 17 GHz to 26 GHz.

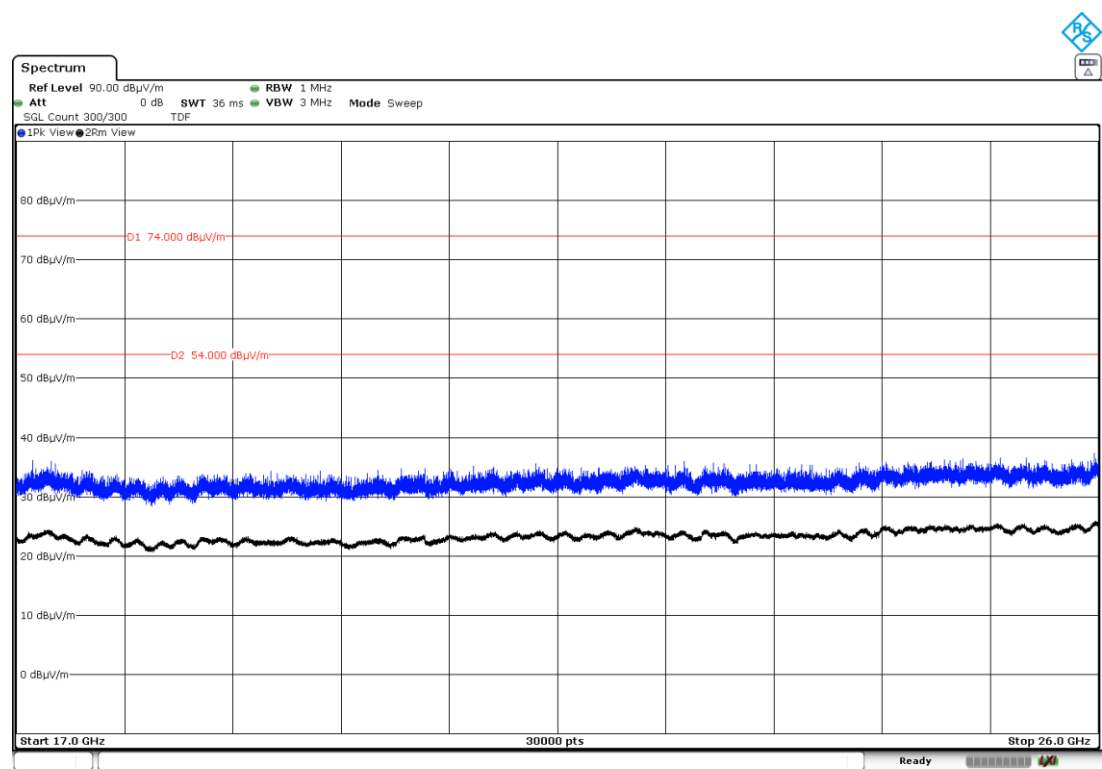

FREQUENCY RANGE 26 GHz to 40 GHz.

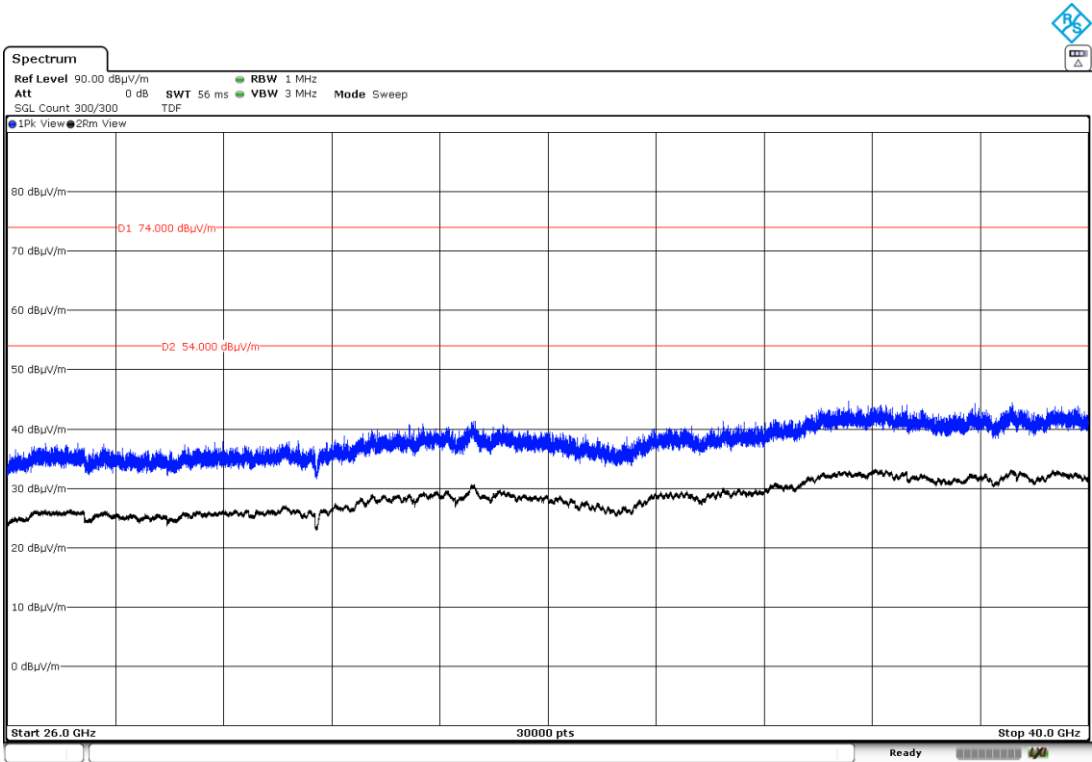

Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (2472MHz), 802.11n HT20 – 20MHz – SISO (5745MHz) and Bluetooth Basic Rate with DH5 (2402)

Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious levels operating (radiated) closest to limit.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement Uncertainty (dB)
96.3	Vertical	Quasi-Peak	18.2	40	21.8	± 3.88
144.767	Vertical	Quasi-Peak	28.3	43.5	15.2	± 3.88
167.304	Vertical	Quasi-Peak	37.5	43.5	6.0	± 3.88
193.073	Vertical	Quasi-Peak	30.5	46	13.0	± 3.88
288.683	Vertical	Quasi-Peak	27.4	46	18.6	± 3.88


Frequency range 1 GHz-40 GHz

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Measurement Uncertainty (dB)
2334.218	Vertical	Peak	53.25	74	20.8	± 3.05
2329.631		Average	44.31	54	9.7	± 3.05


The emission at approximately 7416 MHz is the third harmonic of the 2.4GHz WLAN signal and was therefore not measured.

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

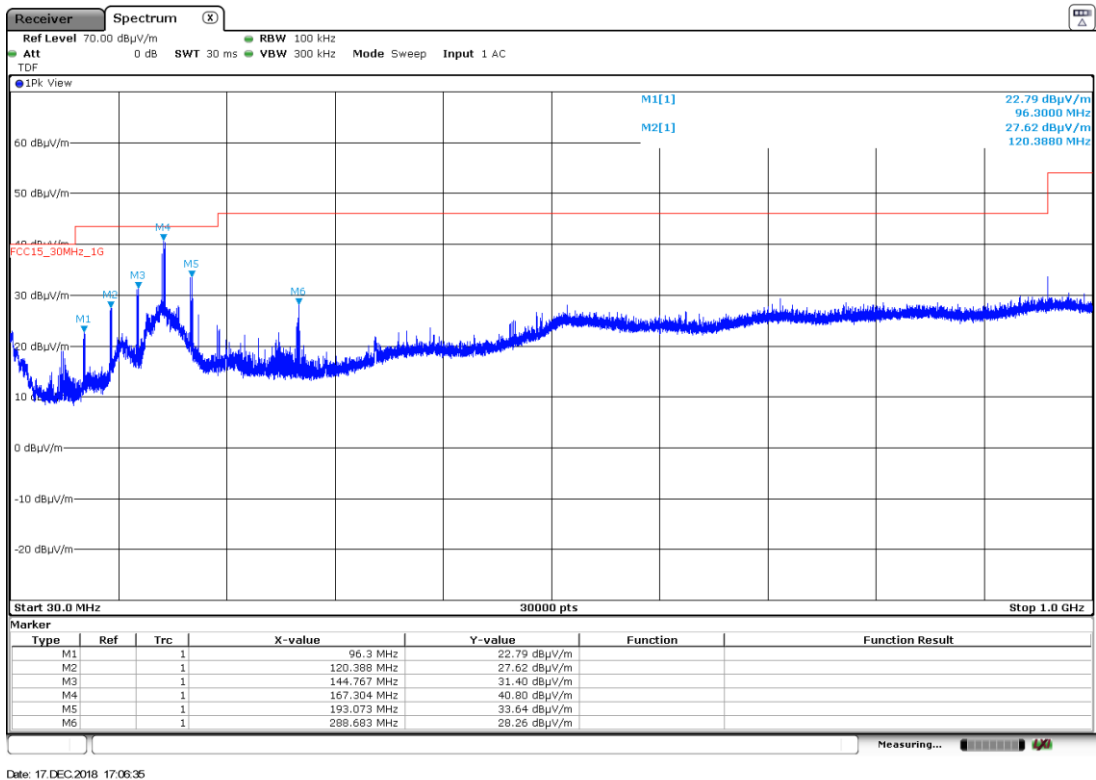


FREQUENCY RANGE 1 GHz to 6.5 GHz.

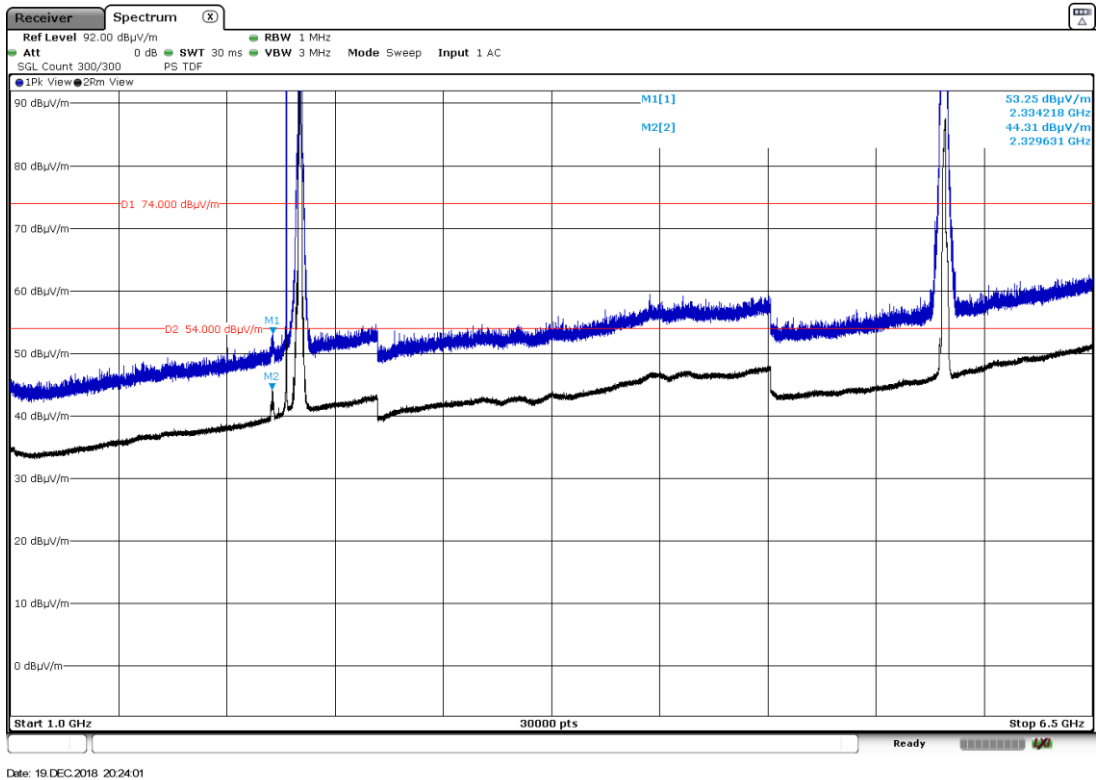


Note: The peaks shown in the plot above the limit are the carrier frequencies.

FREQUENCY RANGE 6.5 GHz to 17 GHz.

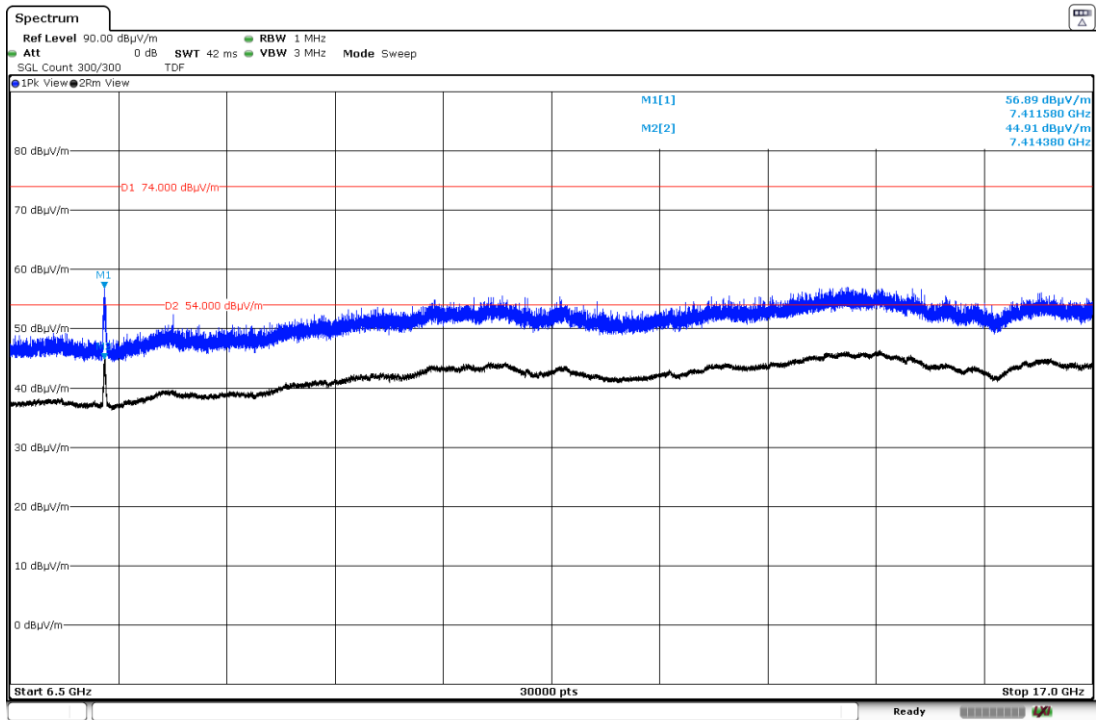


Date: 2 JAN 2019 12:18:06

FREQUENCY RANGE 17 GHz to 26 GHz.

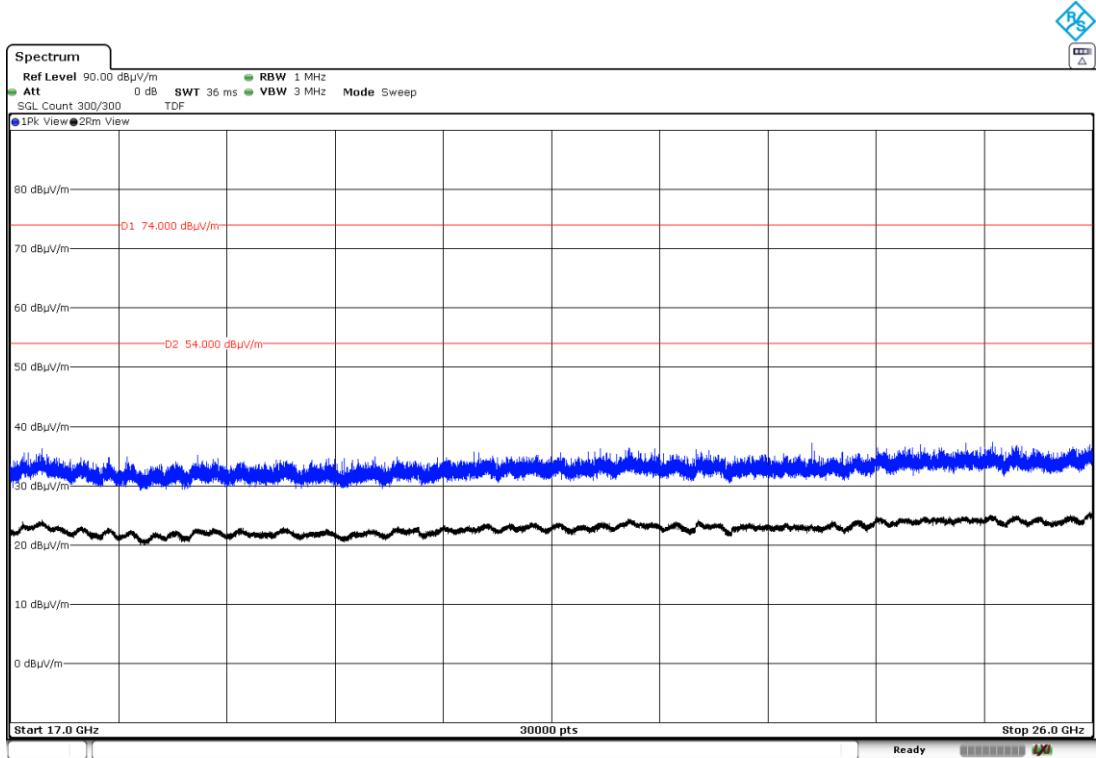

FREQUENCY RANGE 26 GHz to 40 GHz.

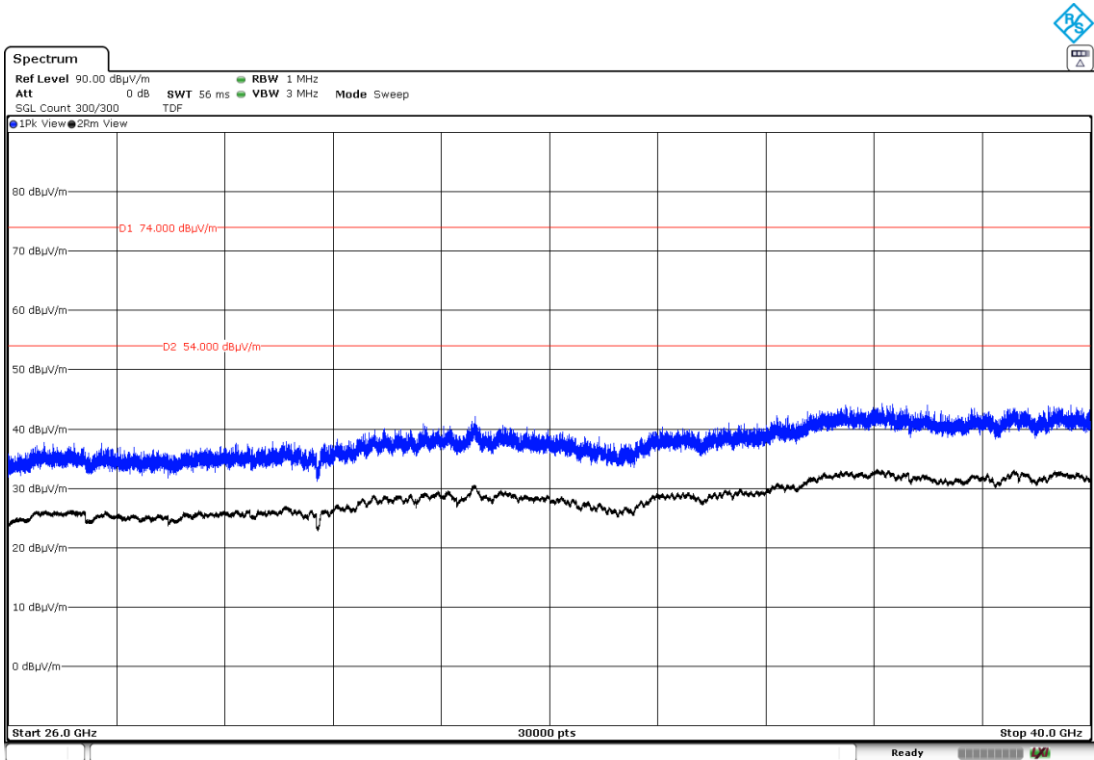

Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (2472MHz), 802.11n HT20 – 20MHz – SISO (5825MHz) and Bluetooth Basic Rate with DH5 (2402)

Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious levels operating (radiated) closest to limit.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
120.388	Horizontal	Quasi-Peak	21.1	43.5	22.4	± 3.88
144.832	Horizontal	Quasi-Peak	26.4	43.5	17.1	± 3.88
167.368	Horizontal	Quasi-Peak	33.8	43.5	9.7	± 3.88
193.106	Horizontal	Quasi-Peak	27.6	43.5	15.9	± 3.88
288.683	Horizontal	Quasi-Peak	25.2	46	20.8	± 3.88


Frequency range 1 GHz-40 GHz

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
2329.643	Vertical	Peak	53.65	74	20.35	± 3.05
2329.962		Average	44.21	54	9.79	± 3.05


The emission at approximately 7416 MHz is the third harmonic of the 2.4GHz WLAN signal and was therefore not measured.

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

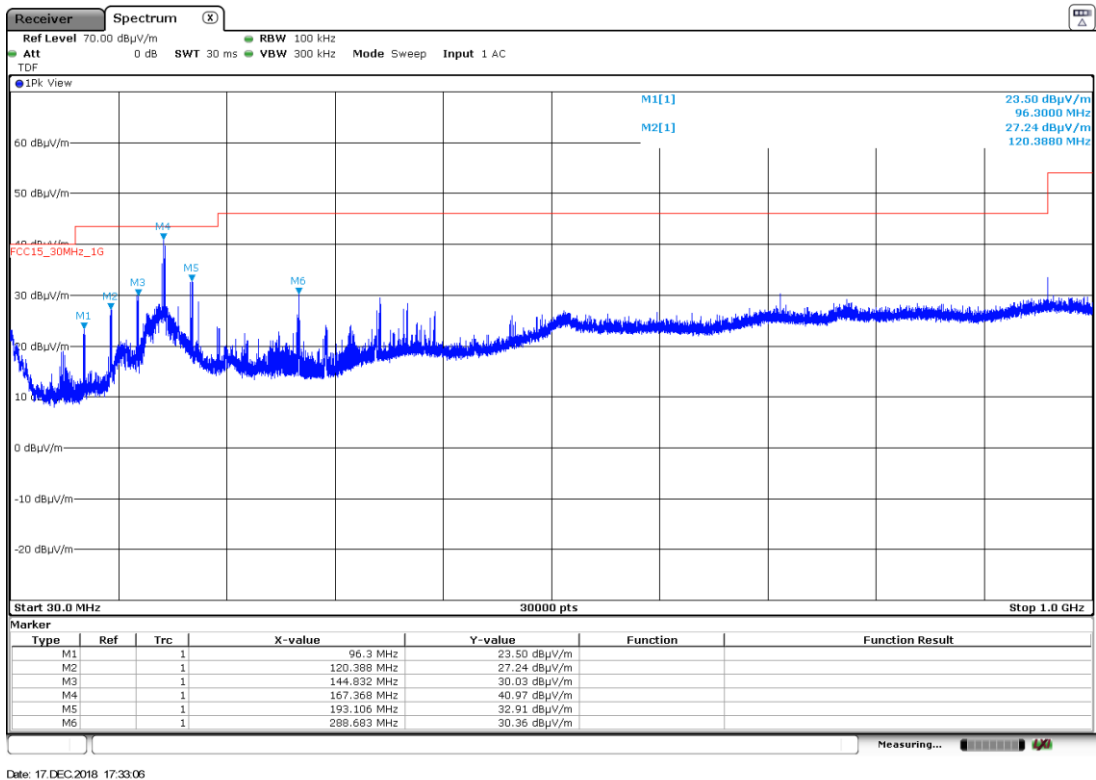


FREQUENCY RANGE 1 GHz to 6.5 GHz.

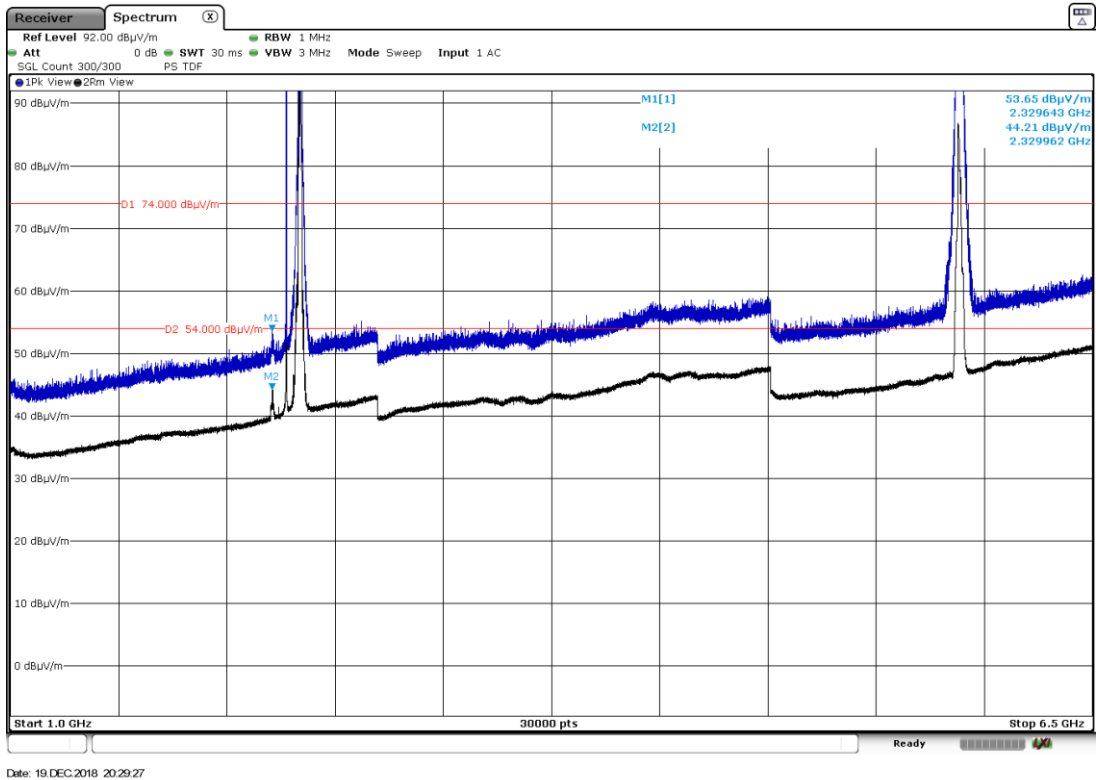


Note: The peaks shown in the plot above the limit are the carrier frequencies.


FREQUENCY RANGE 6.5 GHz to 17 GHz.

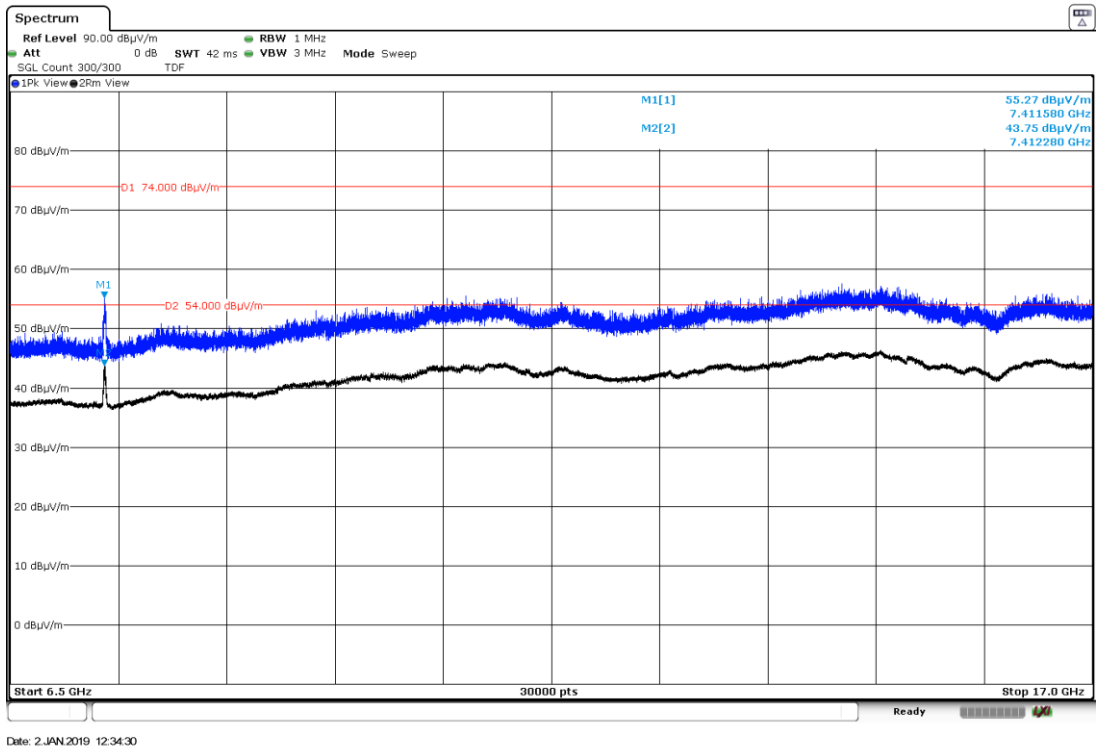

FREQUENCY RANGE 17 GHz to 26 GHz.

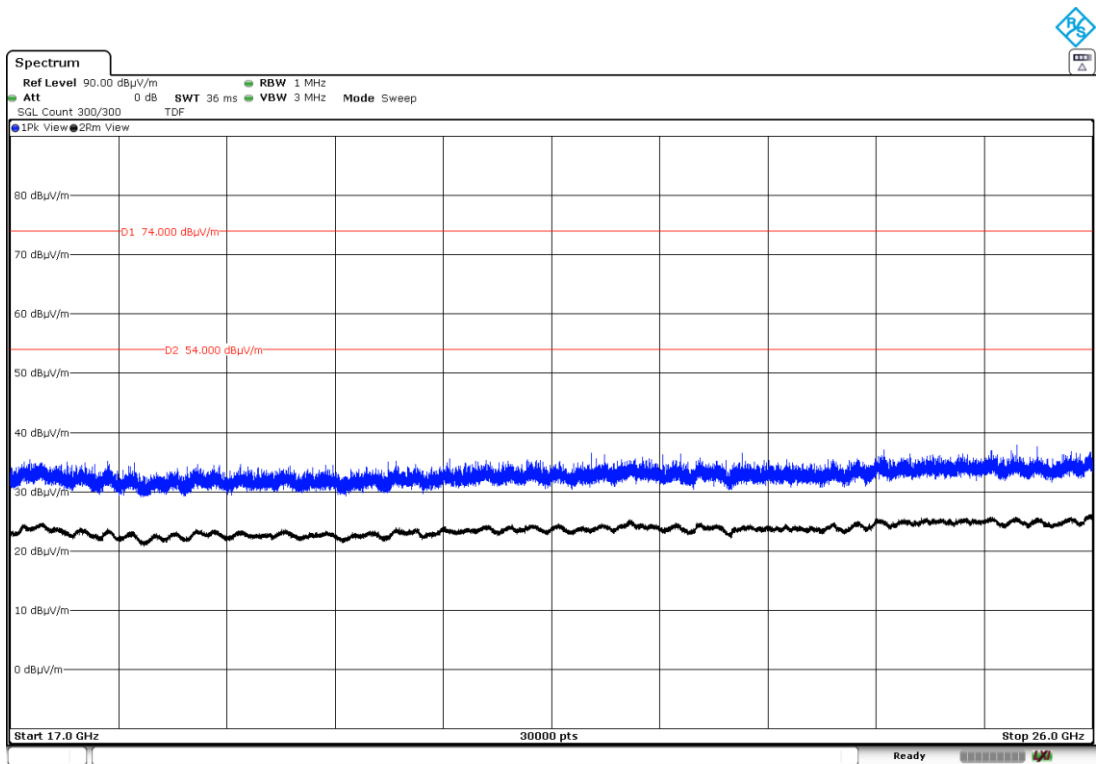

FREQUENCY RANGE 26 GHz to 40 GHz.

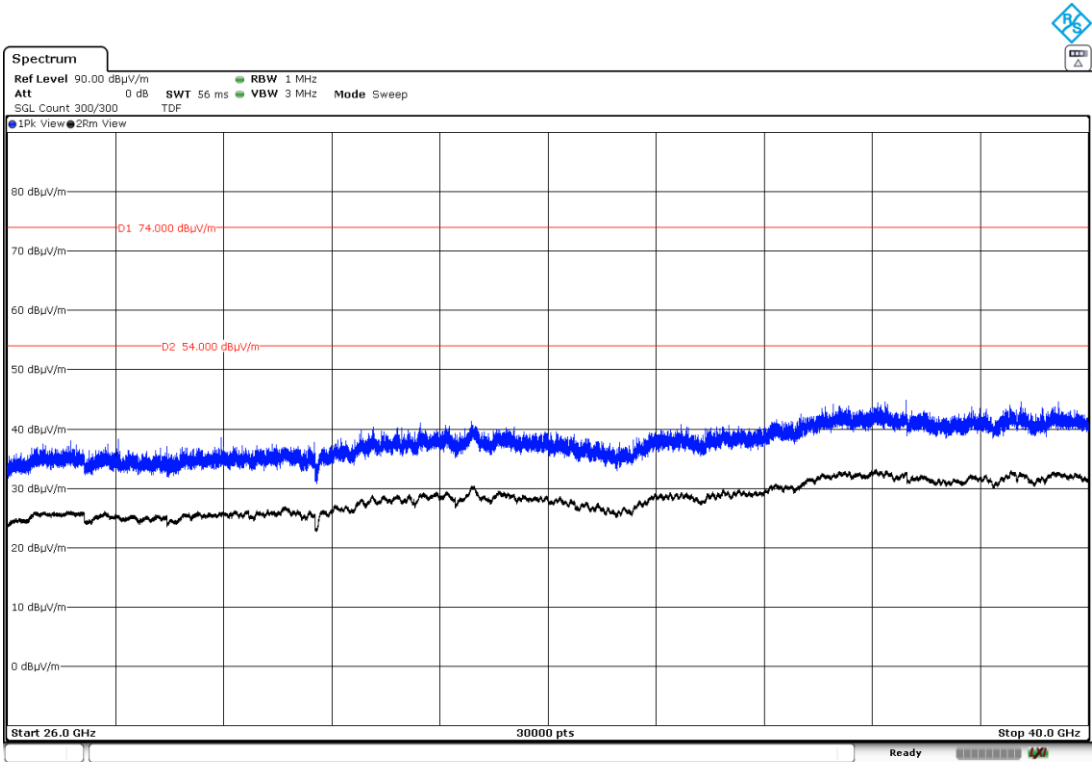

2.4 GHz WLAN, 5 GHz WLAN and Bluetooth Low Energy co-location, with the EUT configured to simultaneously transmit three signals at maximum output power, 2.4GHz WLAN (WIFI main mode) in 802.11n / HT20 / MCS0 / MIMO (CDD), 5GHz WLAN (WIFI aux mode) in 802.11n / HT20 / MCS0 / SISO and the Bluetooth Low Energy with BLE1M.

- Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (2412MHz), 802.11n HT20 – 20MHz – SISO (5180MHz) and Bluetooth Low Energy with BLE1M. (2480).

- Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (2412MHz), 802.11n HT20 – 20MHz – SISO (5825MHz) and Bluetooth Low Energy with BLE1M. (2480).

- Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (2472MHz), 802.11n HT20 – 20MHz – SISO (5180MHz) and Bluetooth Low Energy with BLE1M. (2402).

- Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (2472MHz), 802.11n HT20 – 20MHz – SISO (5825MHz) and Bluetooth Low Energy with BLE1M. (2402).

Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (2412MHz), 802.11n HT20 – 20MHz – SISO (5180MHz) and Bluetooth Low Energy with BLE1M. (2480)

Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious levels operating (radiated) closest to limit.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
144.8	Horizontal	Quasi-Peak	26	43.5	17.5	± 3.88
167.304	Horizontal	Quasi-Peak	35.3	43.5	8.2	± 3.88
191.23	Horizontal	Quasi-Peak	30.3	43.5	13.2	± 3.88
288.683	Horizontal	Quasi-Peak	27.3	46	18.7	± 3.88
361.95	Horizontal	Quasi-Peak	25.3	46	20.7	± 3.88


Frequency range 1 GHz-40 GHz

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
2545.406	Vertical	Peak	58.65	74	15.4	± 3.05
2545.569		Average	48.08	54	5.9	± 3.05


The emission at approximately 7236 MHz is the third harmonic of the 2.4GHz WLAN signal and was therefore not measured.

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

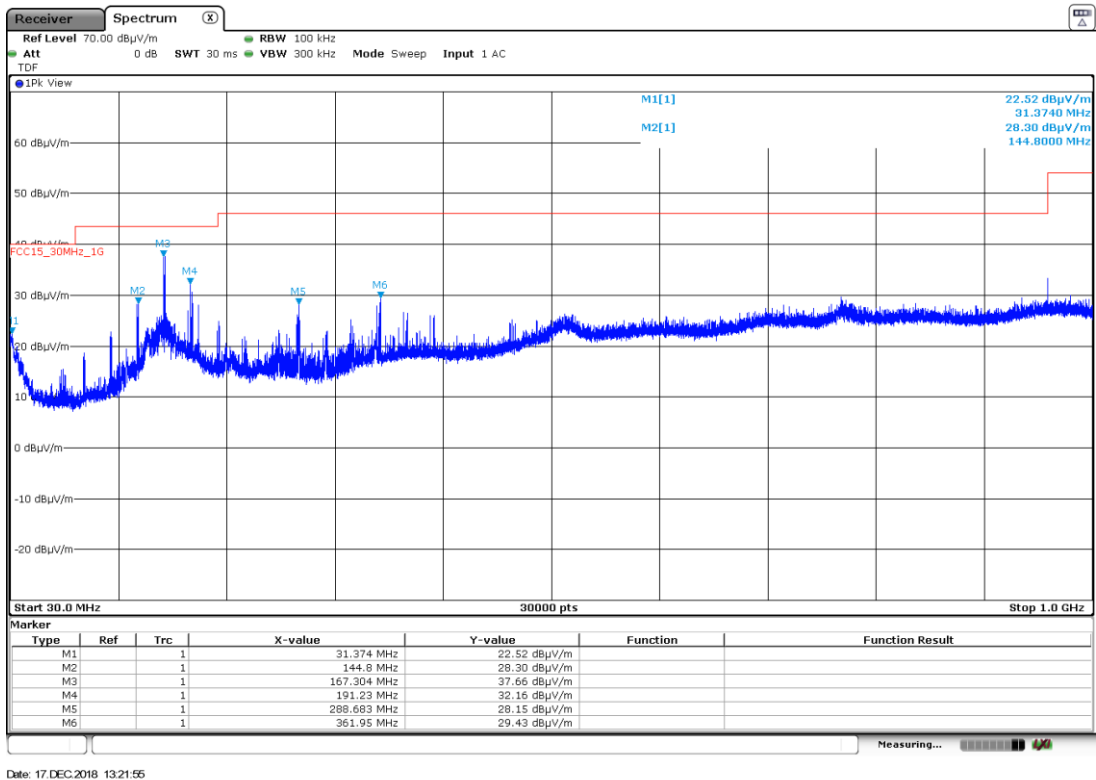


FREQUENCY RANGE 1 GHz to 6.5 GHz.

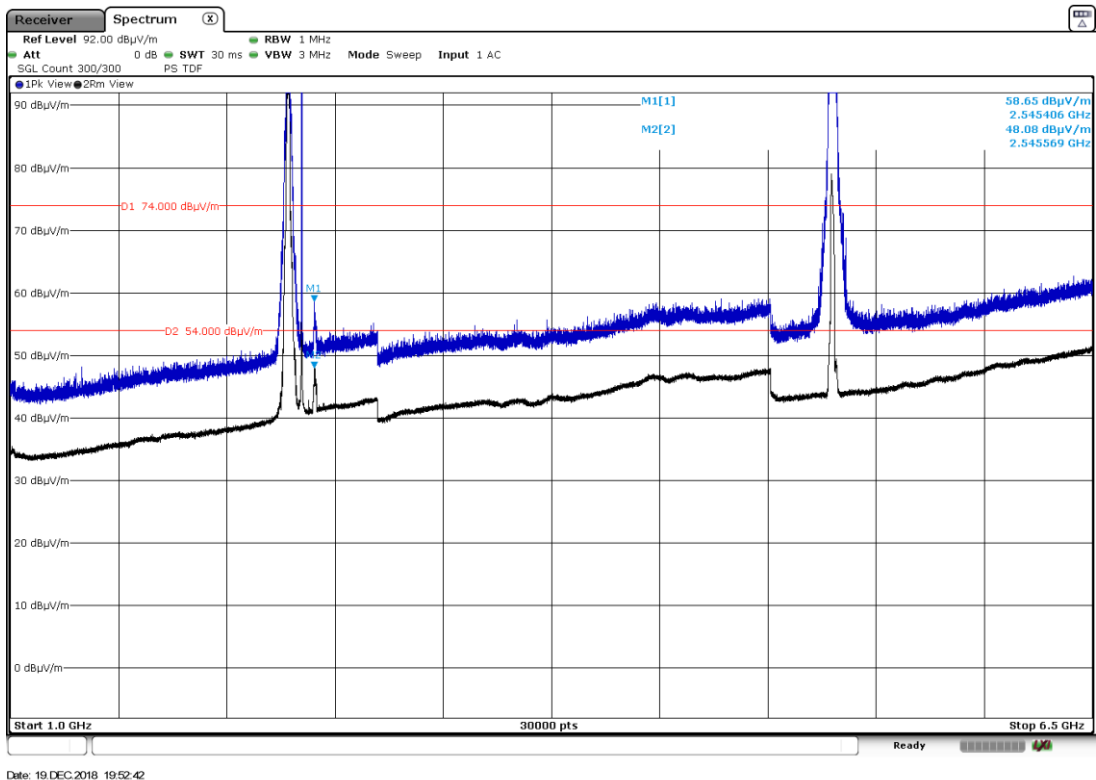


Note: The peaks shown in the plot above the limit are the carrier frequencies.


FREQUENCY RANGE 6.5 GHz to 17 GHz.

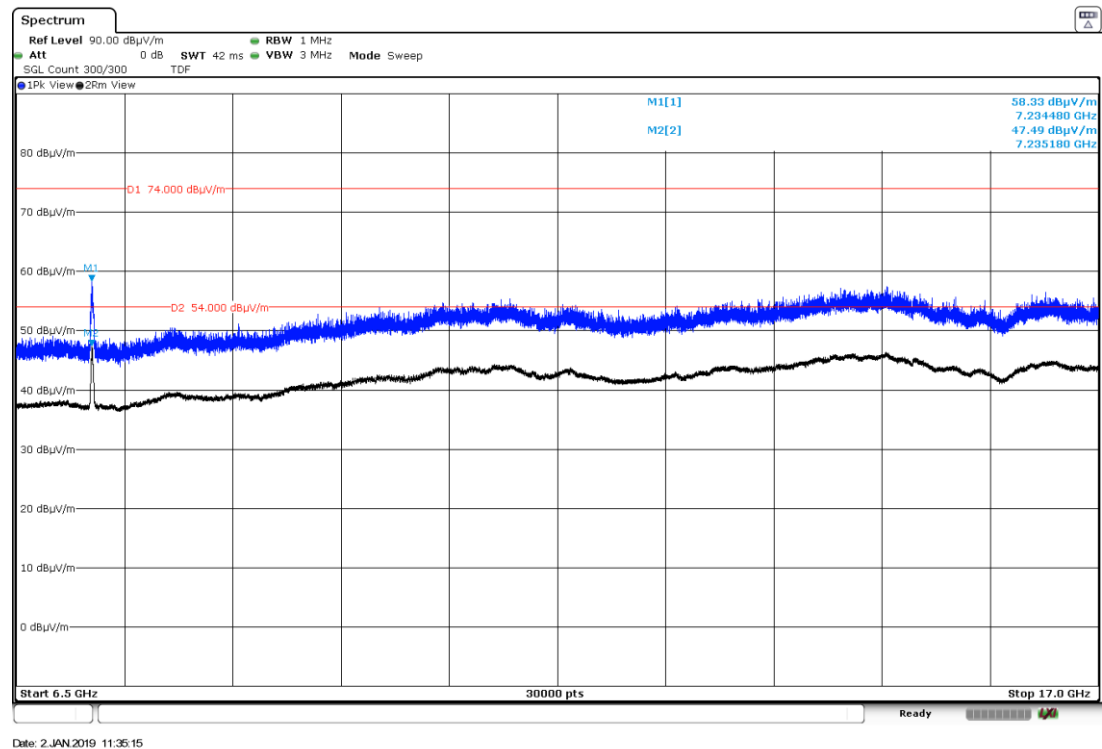

FREQUENCY RANGE 17 GHz to 26 GHz.

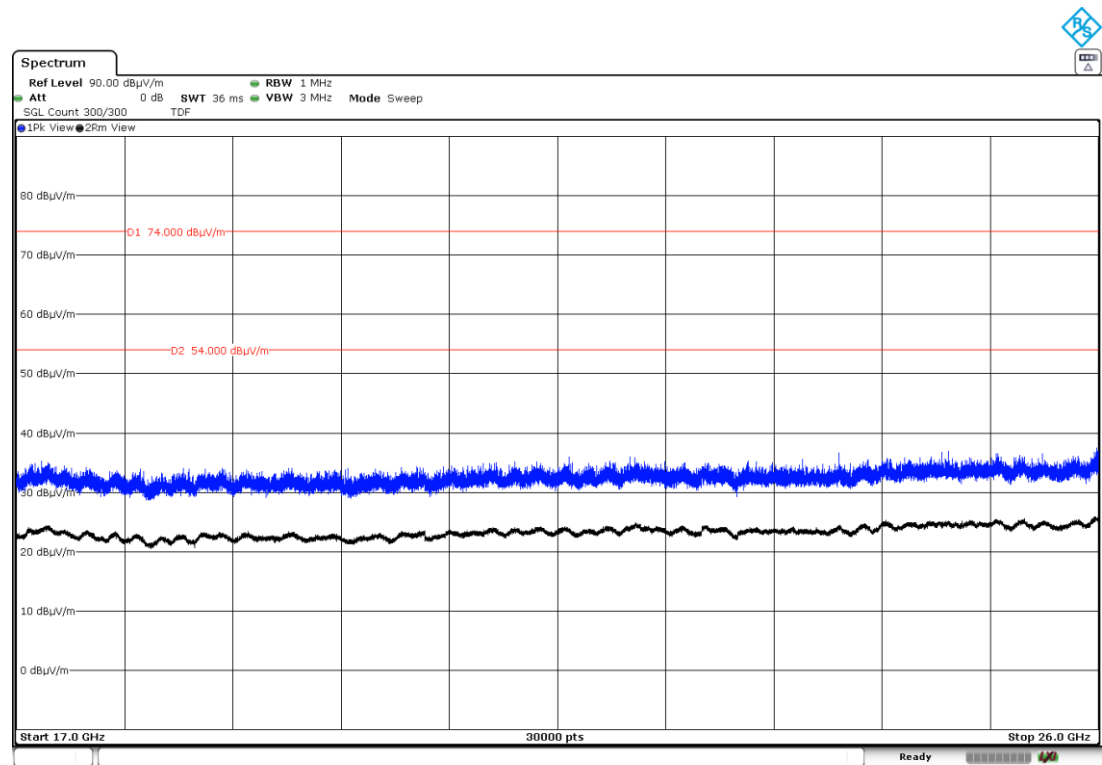

FREQUENCY RANGE 26 GHz to 40 GHz.

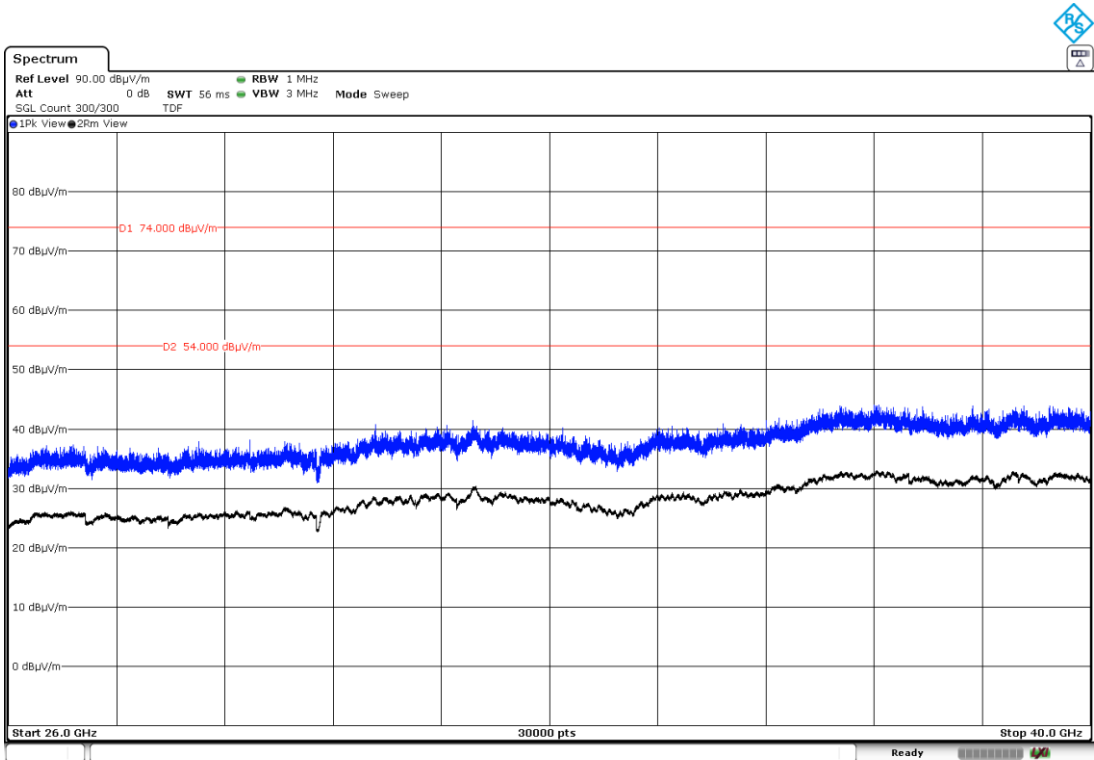

Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (2412MHz), 802.11n HT20 – 20MHz – SISO (5825MHz) and Bluetooth Low Energy with BLE1M. (2480)

Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious levels operating (radiated) closest to limit.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
144.412	Horizontal	Quasi-Peak	26.3	43.5	17.2	± 3.88
167.336	Horizontal	Quasi-Peak	34.6	43.5	8.9	± 3.88
191.198	Horizontal	Quasi-Peak	30.1	43.5	13.4	± 3.88
288.683	Horizontal	Quasi-Peak	27.4	46	18.6	± 3.88
385.069	Horizontal	Quasi-Peak	24.3	46	21.7	± 3.88


Frequency range 1 GHz-40 GHz

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
2545.198	Vertical	Peak	56.50	74	17.5	± 3.05
2549.646		Average	48.13	54	5.87	± 3.05


The emission at approximately 7236 MHz is the third harmonic of the 2.4GHz WLAN signal and was therefore not measured.

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

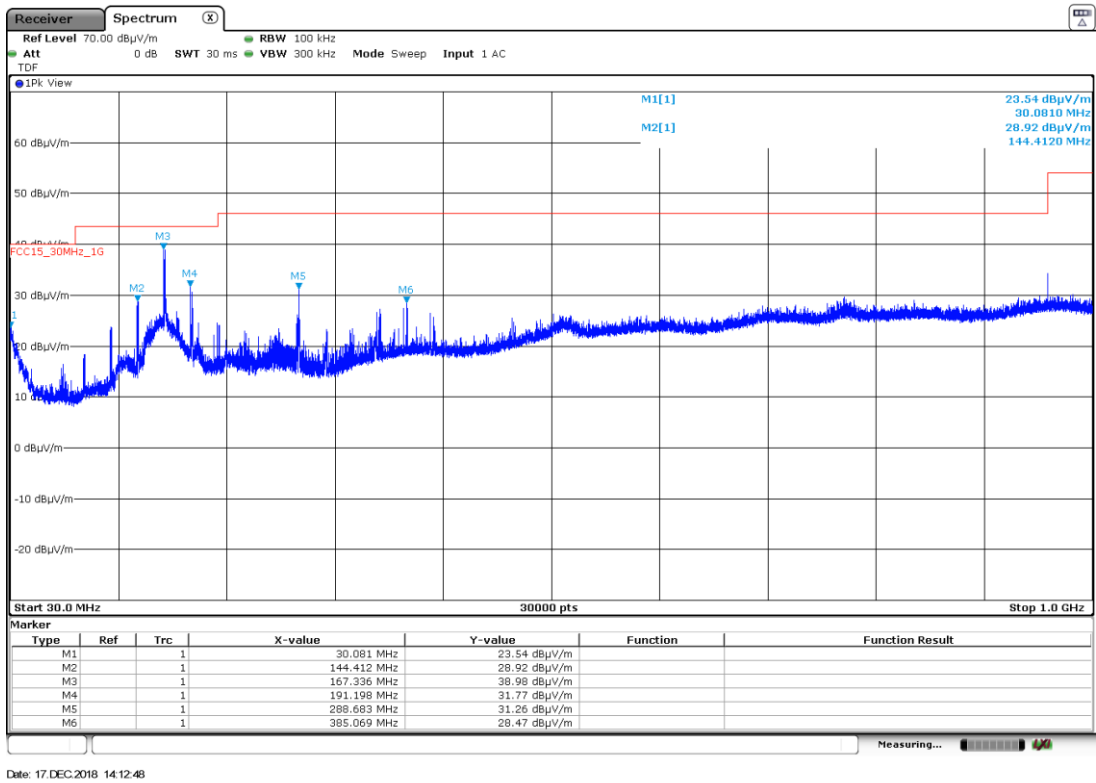


FREQUENCY RANGE 1 GHz to 6.5 GHz.

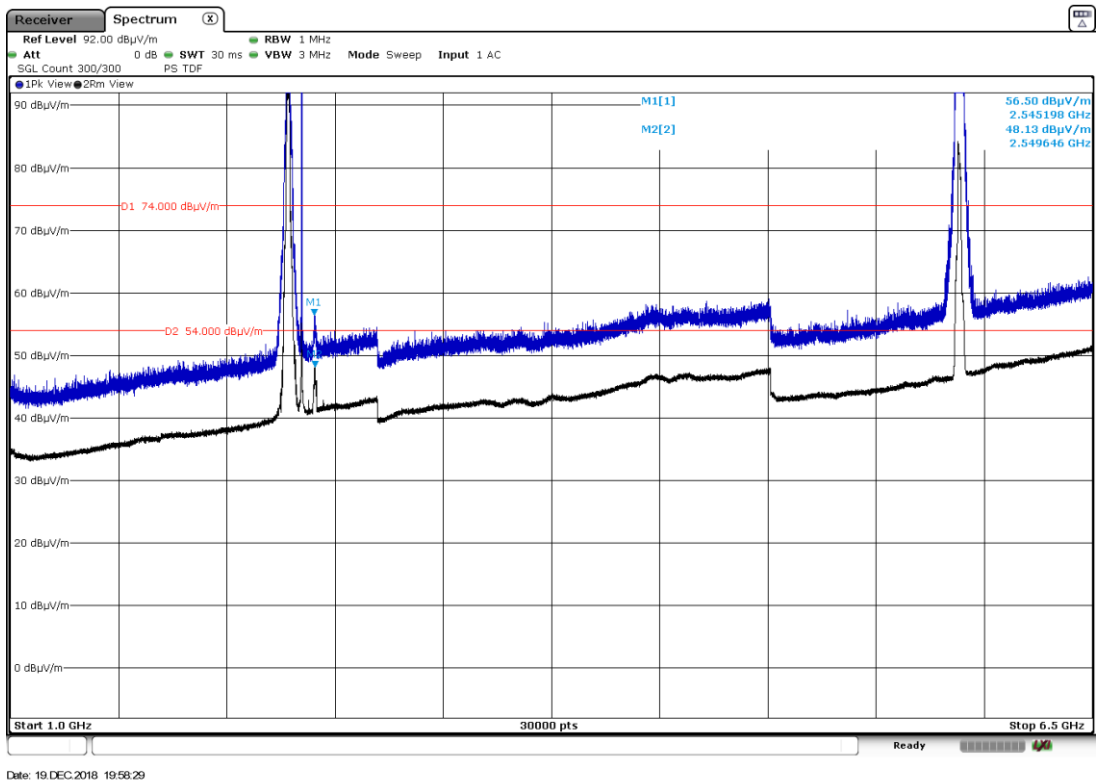


Note: The peak shown in the plot above the limit is the carrier frequencies.

FREQUENCY RANGE 6.5 GHz to 17 GHz.

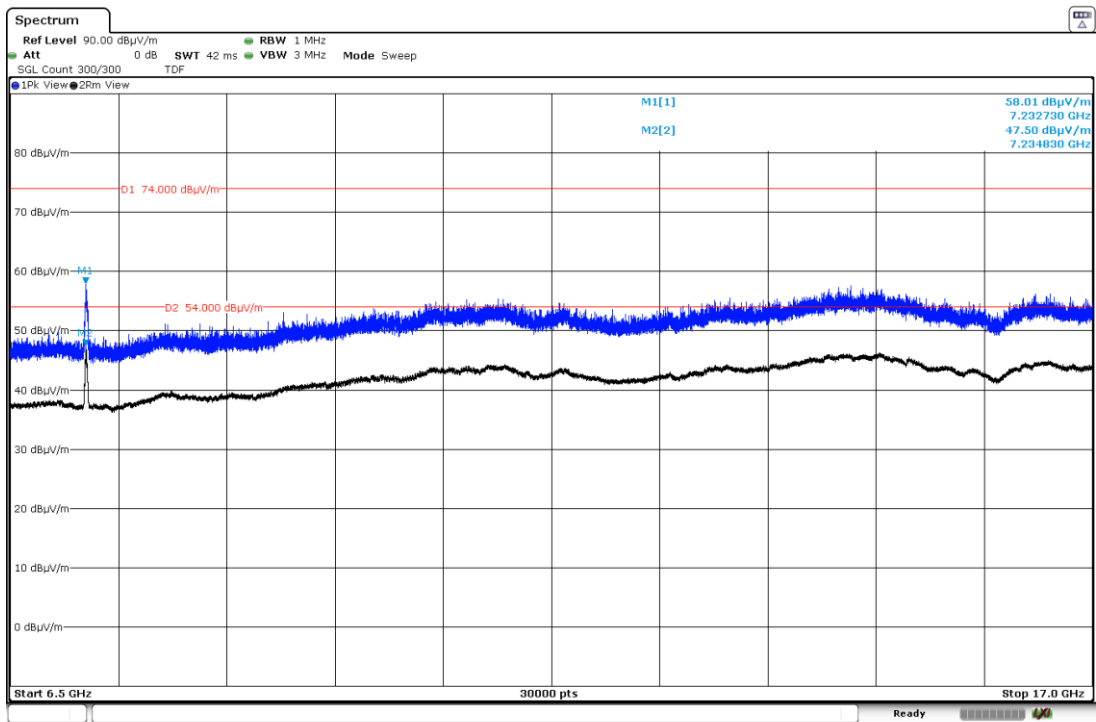


Date: 2 JAN 2019 11:39:22

FREQUENCY RANGE 17 GHz to 26 GHz.

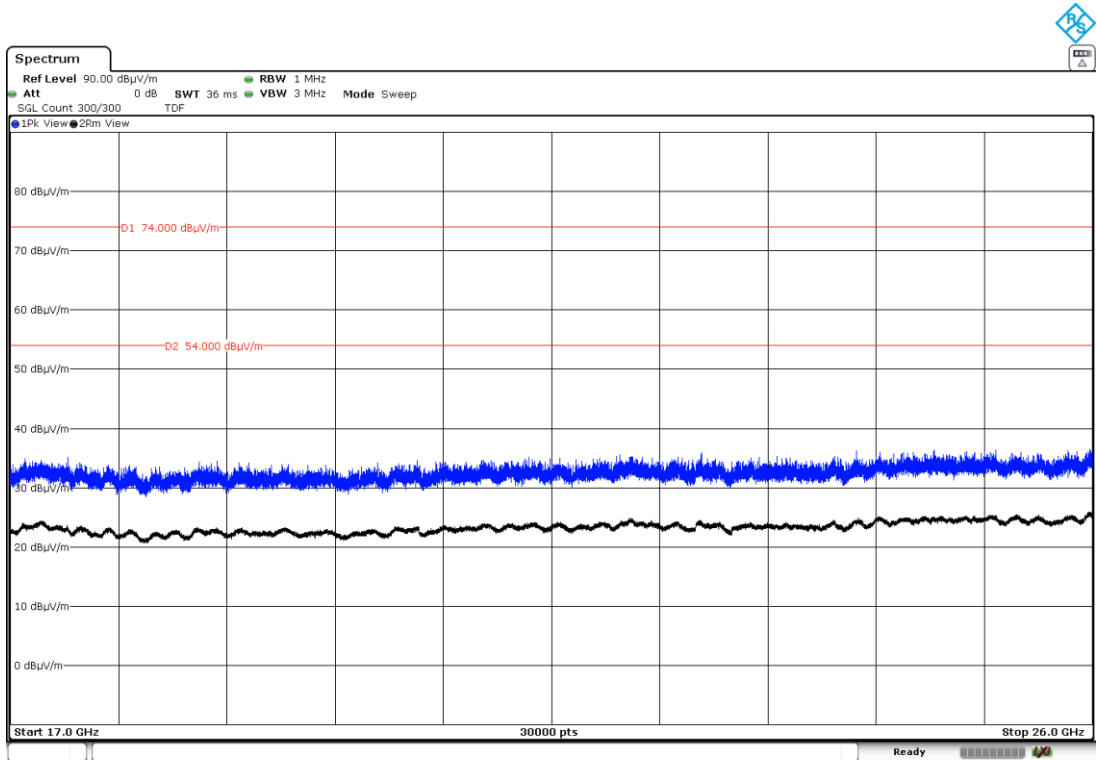

FREQUENCY RANGE 26 GHz to 40 GHz.

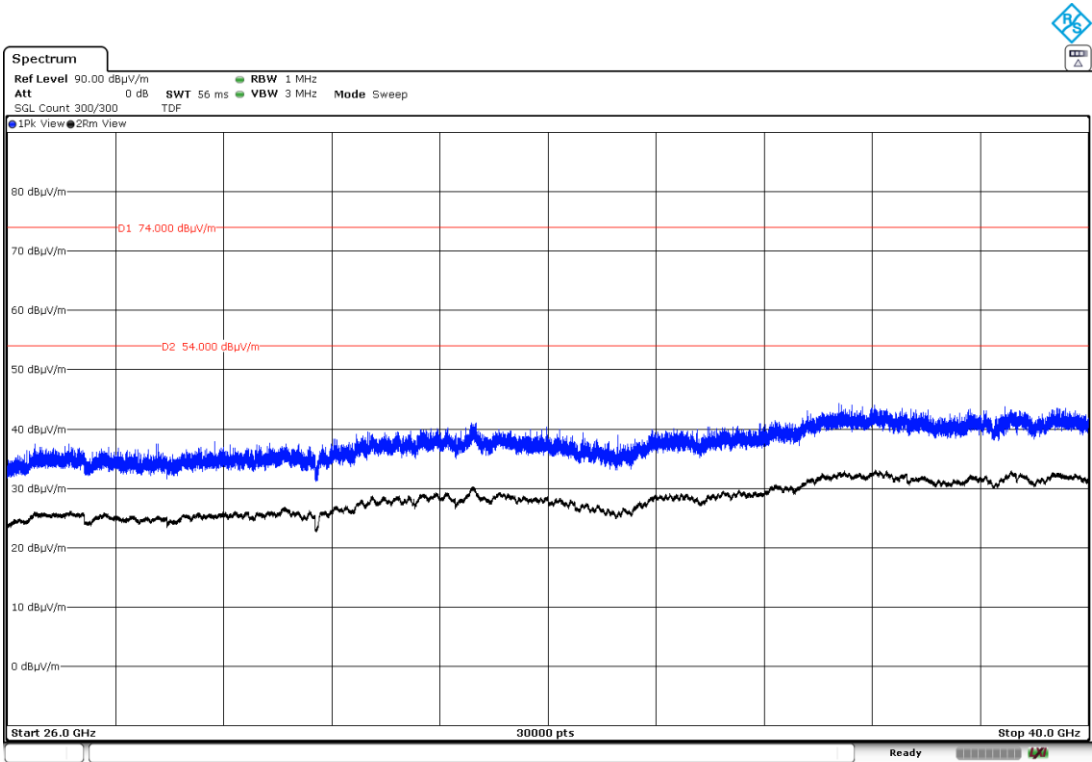

Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (2472MHz), 802.11n HT20 – 20MHz – SISO (5180MHz) and Bluetooth Low Energy with BLE1M. (2402)

Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious levels operating (radiated) closest to limit.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
31.083	Horizontal	Quasi-Peak	18.1	40	21.9	± 3.88
144.8	Horizontal	Quasi-Peak	28.4	43.5	15.1	± 3.88
168.435	Horizontal	Quasi-Peak	36.8	43.5	6.7	± 3.88
191.198	Horizontal	Quasi-Peak	31.9	43.5	11.6	± 3.88
288.683	Horizontal	Quasi-Peak	23.4	46	22.6	± 3.88


Frequency range 1 GHz-40 GHz

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
2334.199	Vertical	Peak	54.26	74	19.74	± 3.05
2329.995		Average	44.17	54	9.83	± 3.05


The emission at approximately 7416 MHz is the third harmonic of the 2.4GHz WLAN signal and was therefore not measured.

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

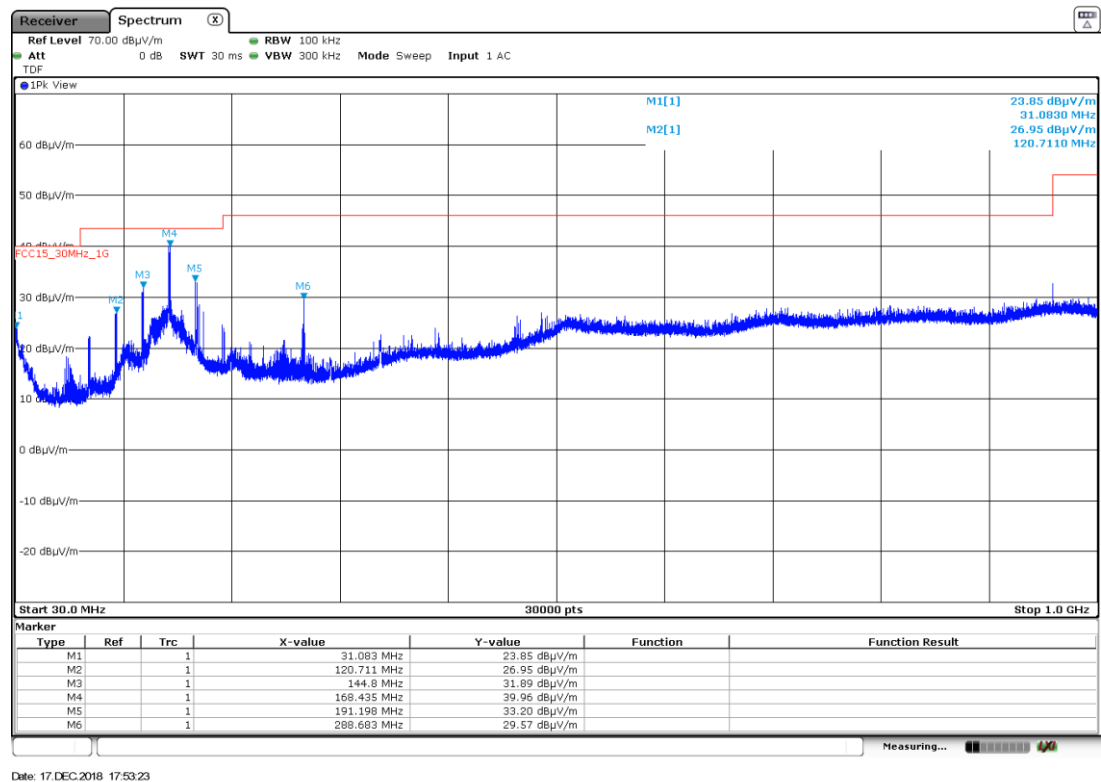


FREQUENCY RANGE 1 GHz to 6.5 GHz.

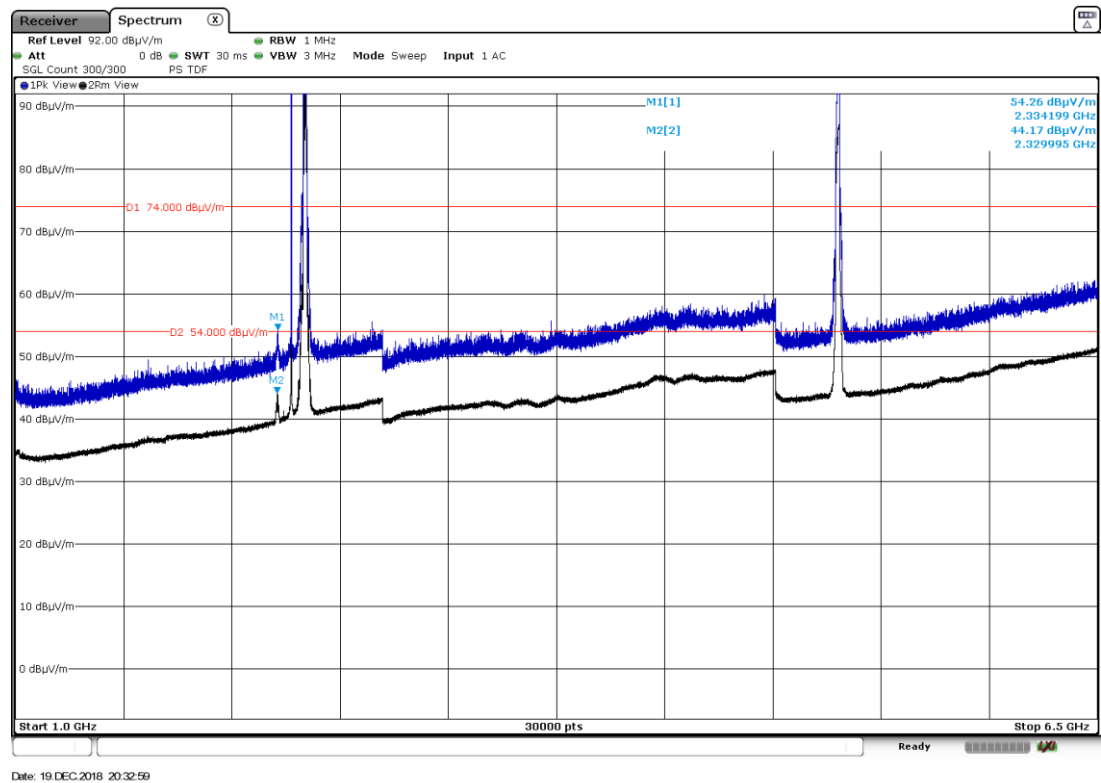


Note: The peak shown in the plot above the limit is the carrier frequencies.


FREQUENCY RANGE 6.5 GHz to 17 GHz.

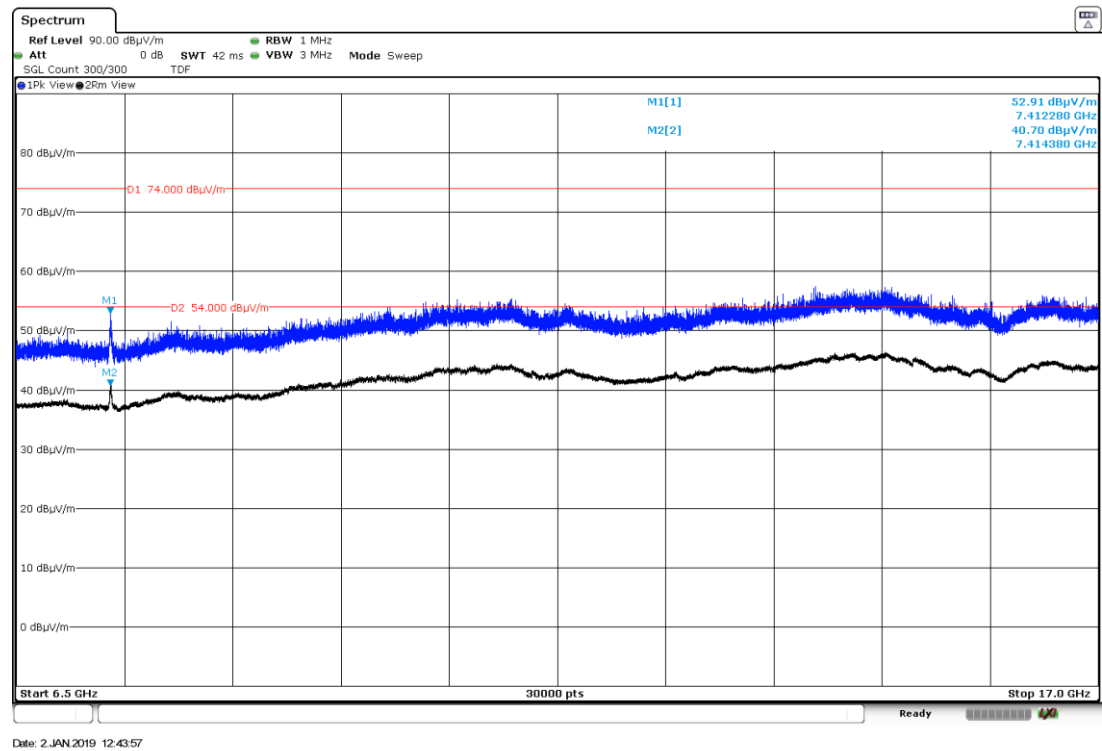

FREQUENCY RANGE 17 GHz to 26 GHz.

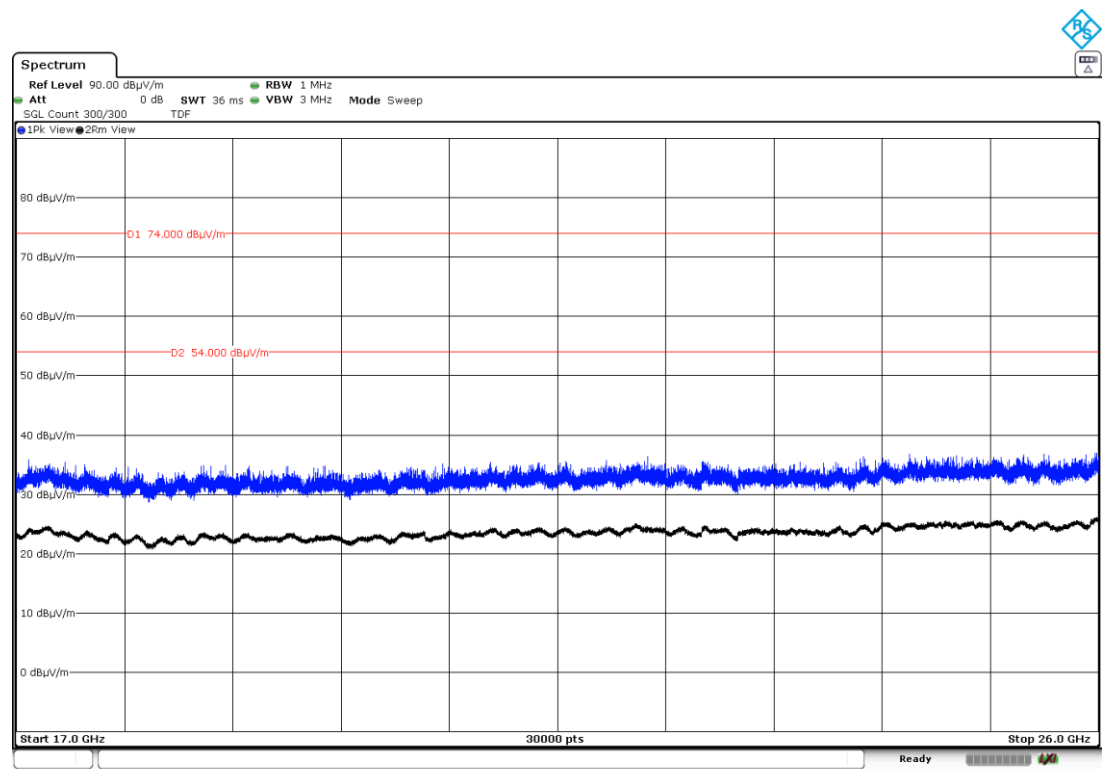

FREQUENCY RANGE 26 GHz to 40 GHz.

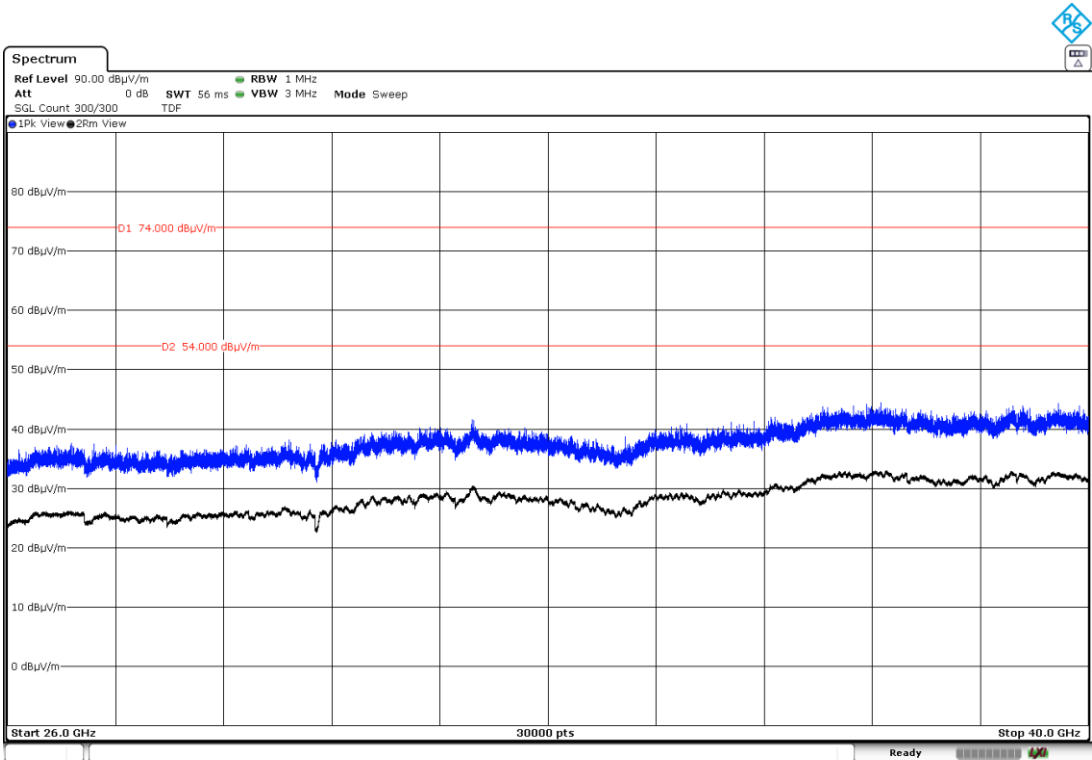

Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (2472MHz), 802.11n HT20 – 20MHz – SISO (5825MHz) and Bluetooth Low Energy with BLE1M (2402).

Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious levels operating (radiated) closest to limit.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
120.646	Horizontal	Quasi-Peak	23.7	43.5	19.8	± 3.88
143.409	Horizontal	Quasi-Peak	28.1	43.5	15.4	± 3.88
168.468	Horizontal	Quasi-Peak	36.8	43.5	6.7	± 3.88
191.198	Horizontal	Quasi-Peak	31.7	43.5	11.8	± 3.88
198.473	Horizontal	Quasi-Peak	23.5	43.5	20	± 3.88


Frequency range 1 GHz-40 GHz

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
2329.444	Vertical	Peak	53.40	74	20.60	± 3.05
2334.389		Average	43.98	54	10.02	± 3.05


The emission at approximately 7416 MHz is the third harmonic of the 2.4GHz WLAN signal and was therefore not measured.

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

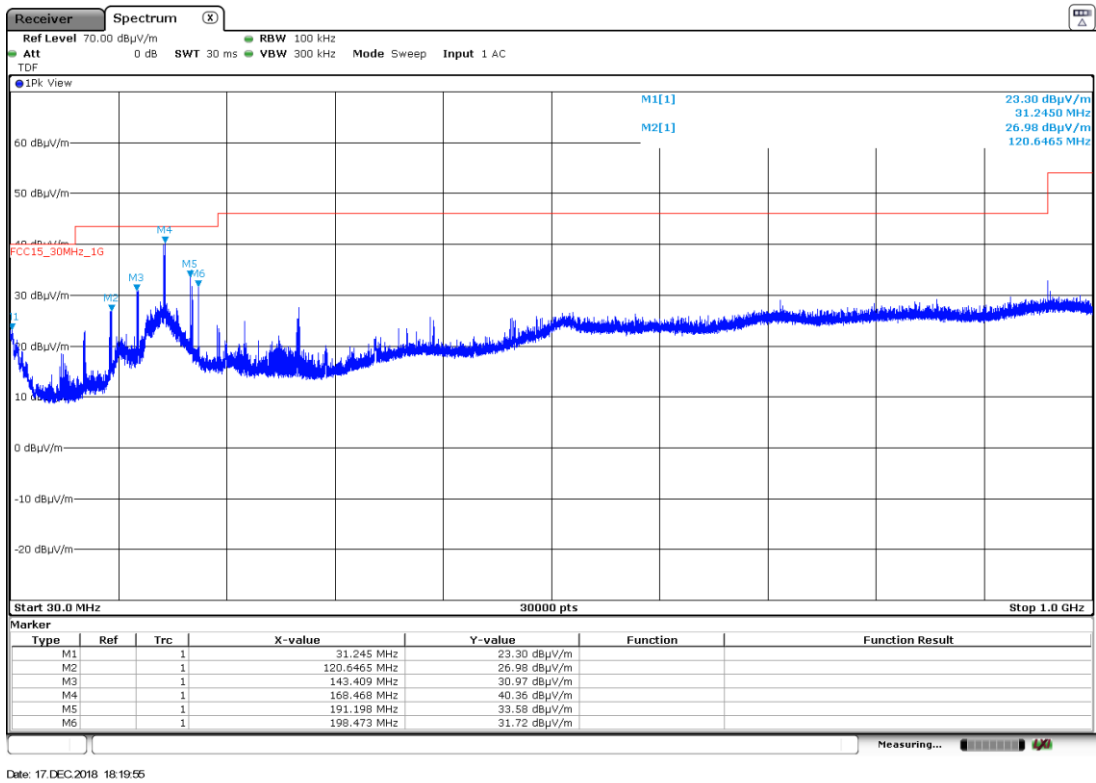


FREQUENCY RANGE 1 GHz to 6.5 GHz.

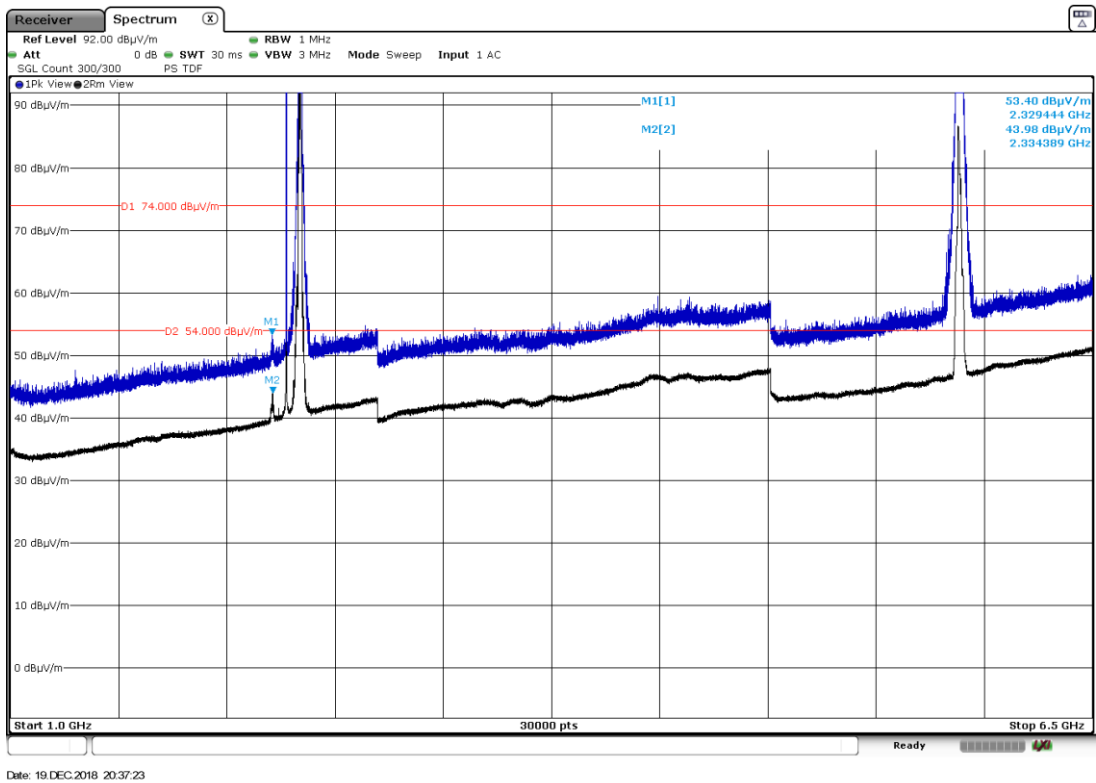


Note: The peaks shown in the plot above the limit are the carrier frequencies.


FREQUENCY RANGE 6.5 GHz to 17 GHz.

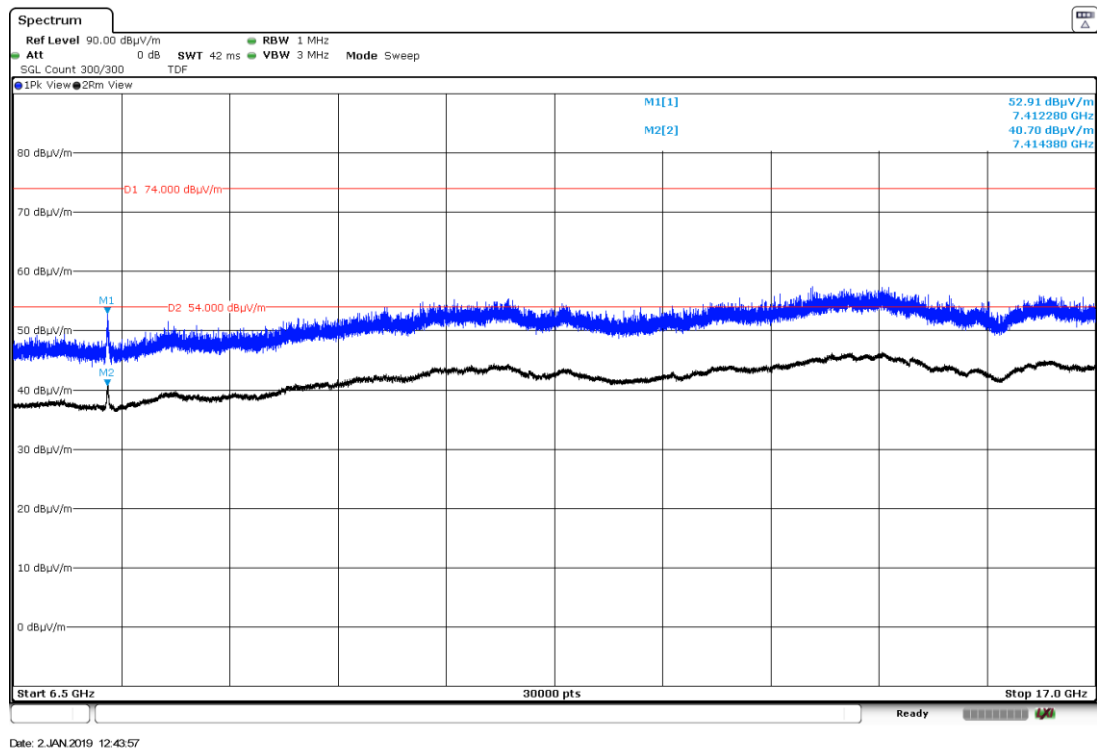

FREQUENCY RANGE 17 GHz to 26 GHz.

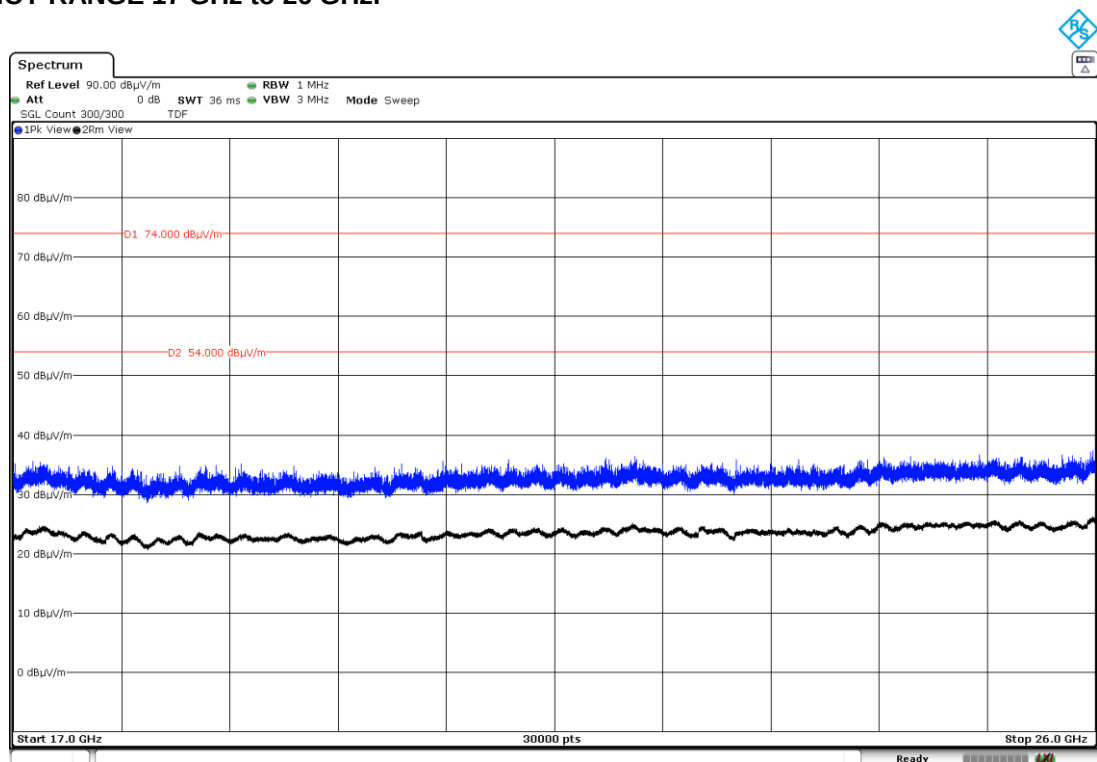

FREQUENCY RANGE 26 GHz to 40 GHz.

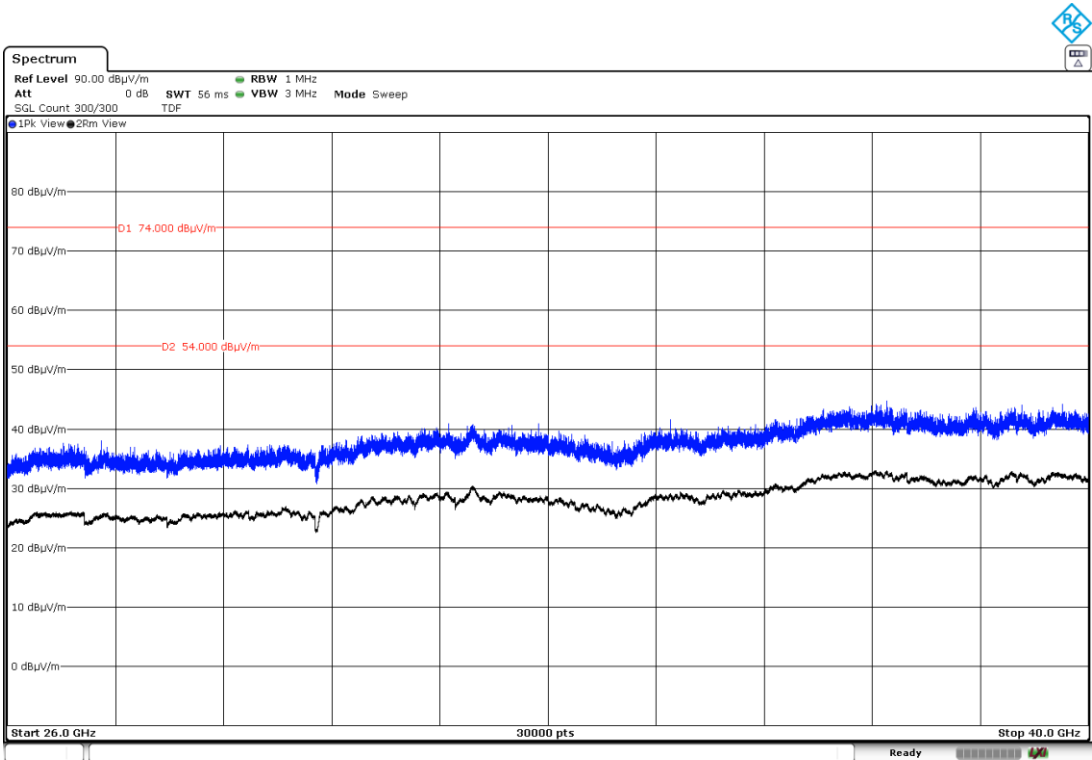

* 5GHz WLAN and 2.4 GHz WLAN co-location, with the EUT configured to simultaneously transmit two signals at maximum output power, 5GHz WLAN (WIFI main mode) in 802.11n / HT20 / MCS0 / MIMO (CDD) and 2.4GHz WLAN (WIFI aux mode) in 802.11n / HT20 / MCS0 / SISO.

- Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (5180MHz), 802.11n – HT20 – SISO (2472MHz).

- Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (5320MHz), 802.11n – HT20 – SISO (2412MHz).

- Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (5500MHz), 802.11n – HT20 – SISO (2472MHz).

- Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (5700MHz), 802.11n – HT20 – SISO (2412MHz).

- Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (5745MHz), 802.11n – HT20 – SISO (2472MHz).

- Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (5825MHz), 802.11n – HT20 – SISO (2412MHz).

- Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (5825MHz), 802.11n – HT20 – SISO (2472MHz).

Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (5180MHz), 802.11n – HT20 – SISO (2472MHz)

Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious levels operating (radiated) closest to limit.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
39.781	Vertical	Quasi-Peak	27.9	40	12.1	± 3.88
74.345	Vertical	Quasi-Peak	28.3	40	11.7	± 3.88
143.377	Horizontal	Quasi-Peak	31.6	43.5	11.9	± 3.88
168.435	Horizontal	Quasi-Peak	37.9	43.5	5.6	± 3.88
193.041	Horizontal	Quasi-Peak	32.4	43.5	11.1	± 3.88


Frequency range 1 GHz-40 GHz

No radiated spurious signals were detected at less than 20 dB respect to the limit.


Measurement Uncertainty (dB) $\leq \pm 3.05$

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

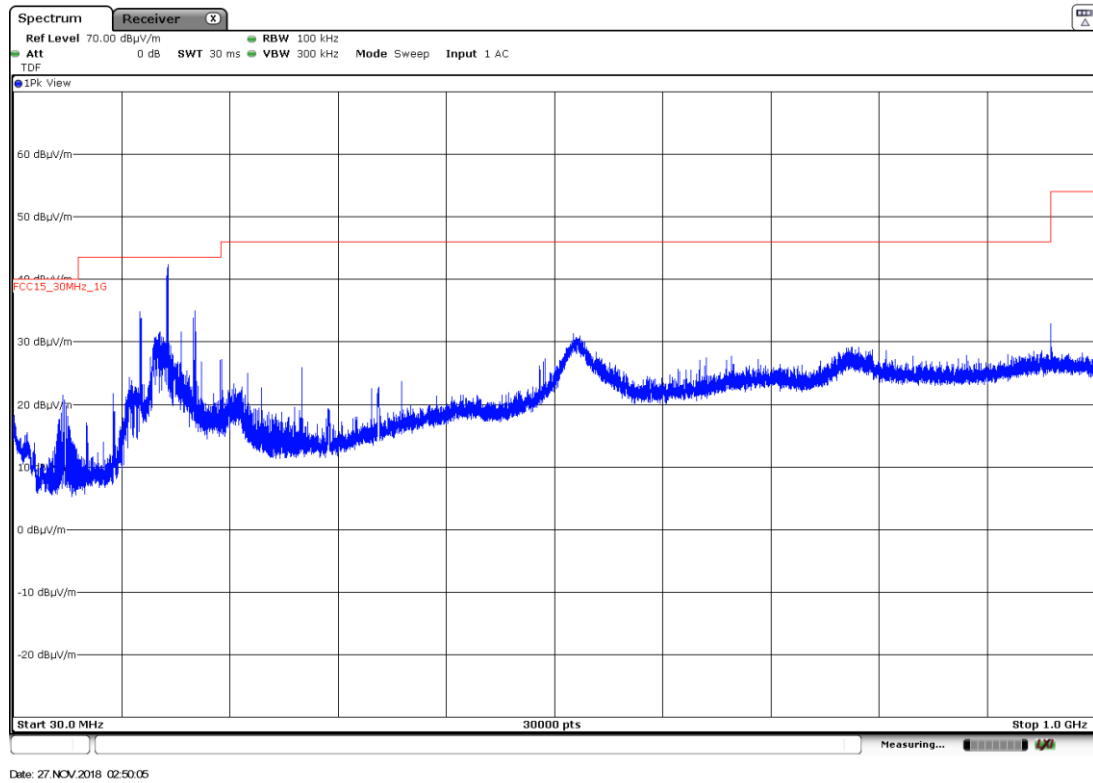


FREQUENCY RANGE 1 GHz to 6.5 GHz.

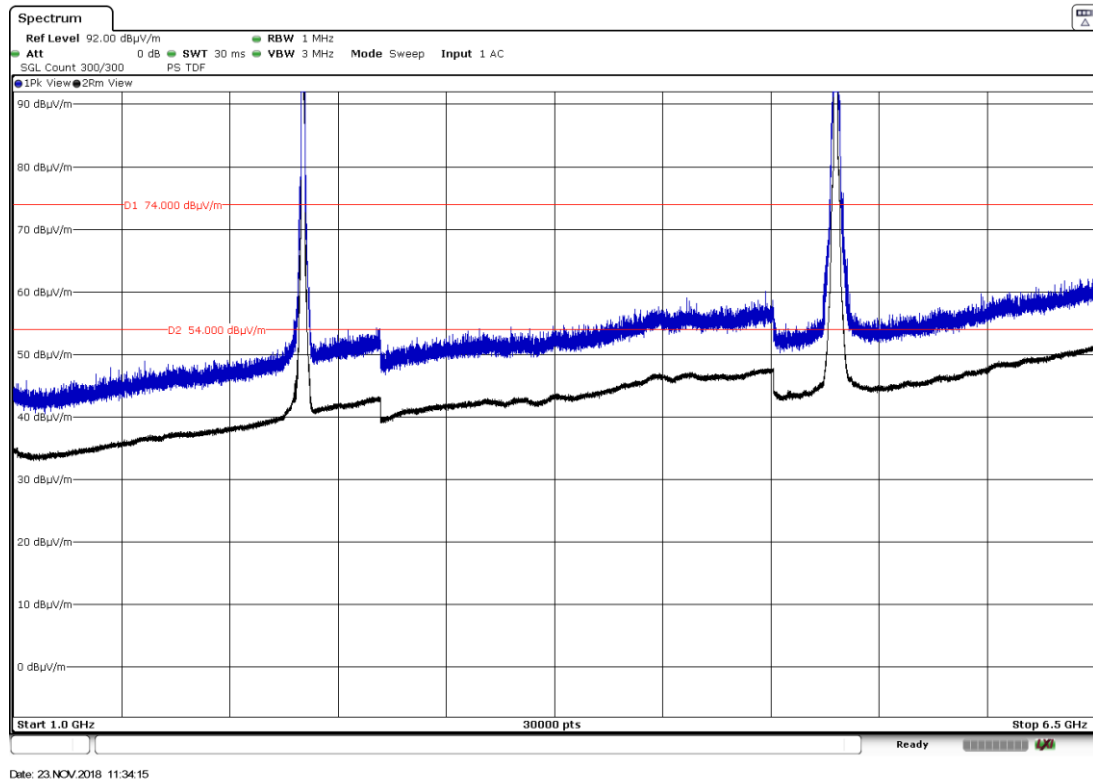


Note: The peaks shown in the plot above the limit are the carrier frequencies.


FREQUENCY RANGE 6.5 GHz to 17 GHz.

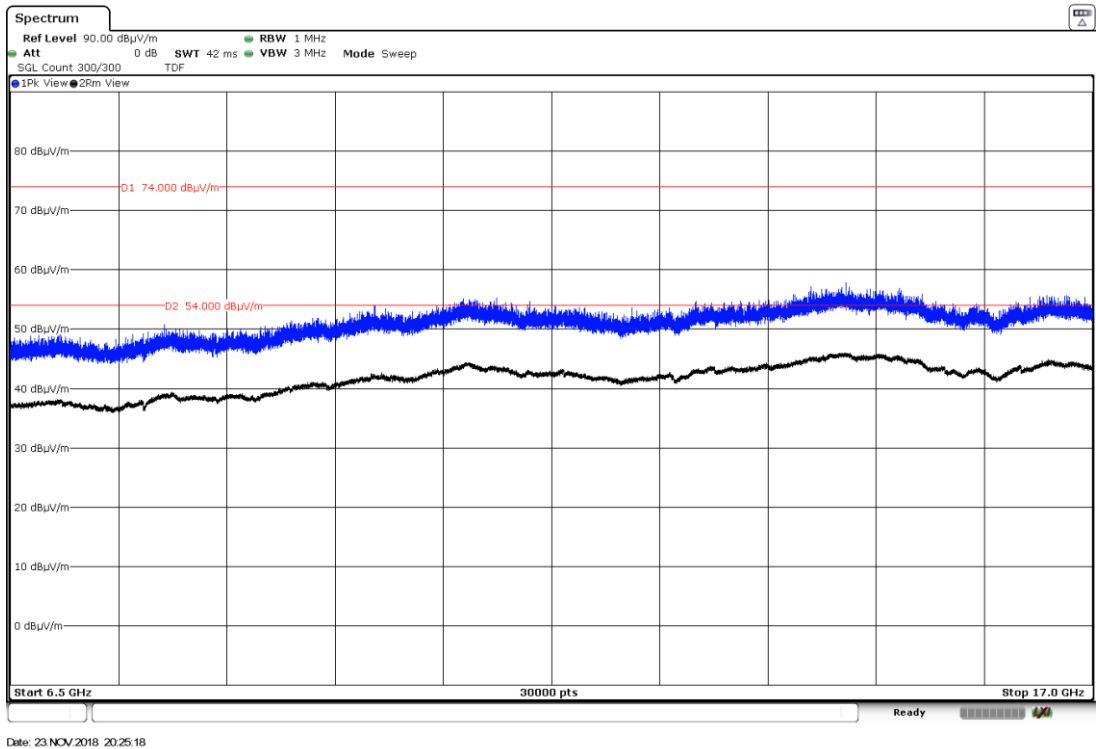

FREQUENCY RANGE 17 GHz to 26 GHz.

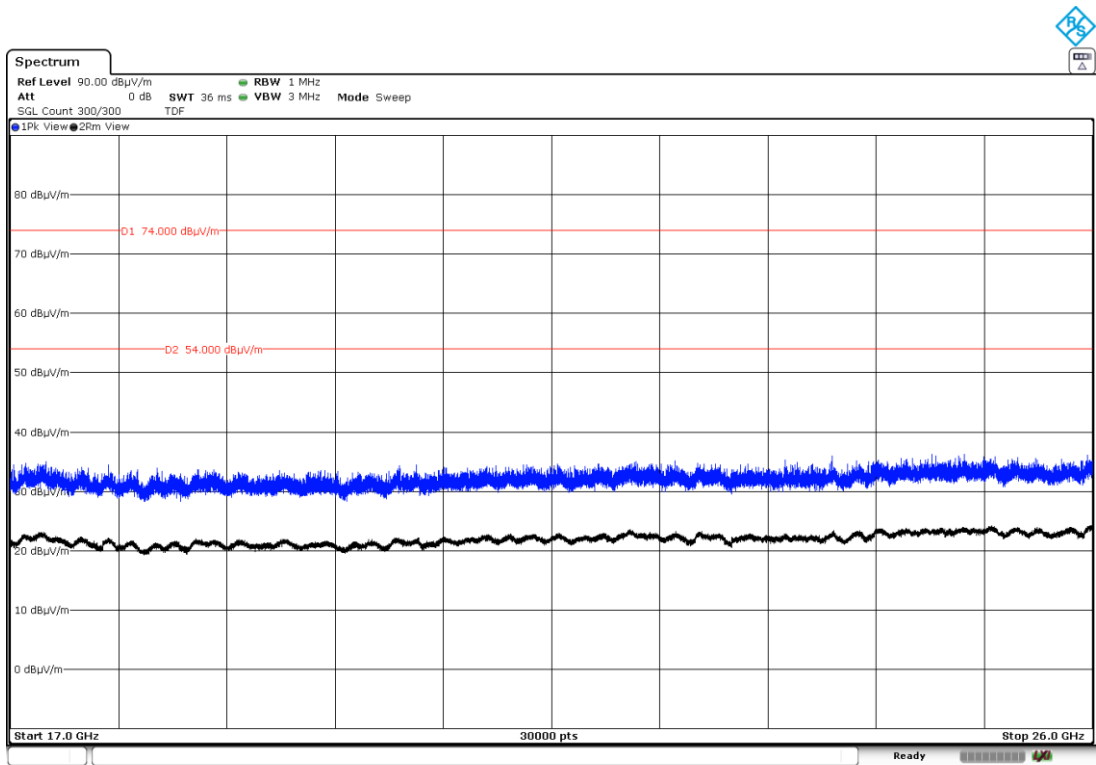

FREQUENCY RANGE 26 GHz to 40 GHz.

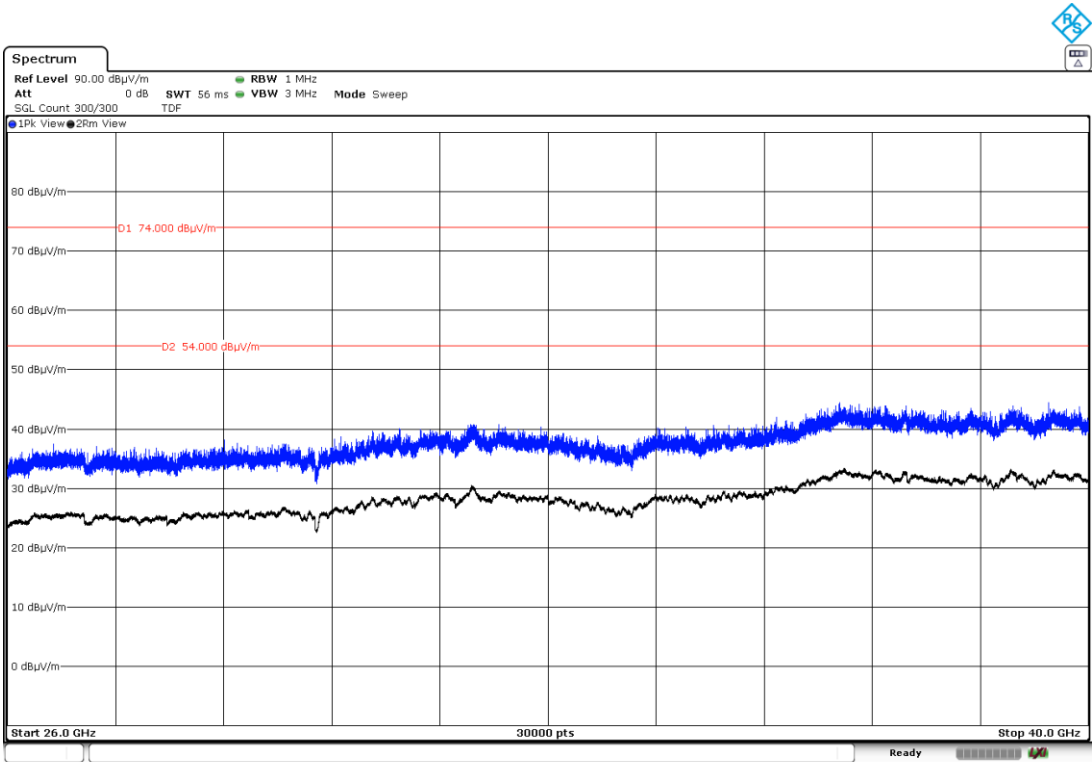

Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (5320MHz), 802.11n – HT20 – SISO (2412MHz)

Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious levels operating (radiated) closest to limit.


Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
36.127	Vertical	Quasi-Peak	25	40	15	± 3.88
77.366	Vertical	Quasi-Peak	24.6	40	15.4	± 3.88
167.336	Vertical	Quasi-Peak	36.9	43.5	6.6	± 3.88
180.431	Horizontal	Quasi-Peak	32.9	43.5	10.6	± 3.88
191.263	Vertical	Quasi-Peak	29	43.5	14.5	± 3.88

Frequency range 1 GHz-40 GHz


Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
5186.685	Vertical	Peak	57.47	74	16.53	± 3.05
5187.044		Average	49	54	5	± 3.05
5586.170	Horizontal	Peak	59.07	74	14.93	± 3.05
5586.347		Average	48.87	54	5.13	± 3.05

Verdict: PASS

FREQUENCY RANGE 30 MHz-1000 MHz.

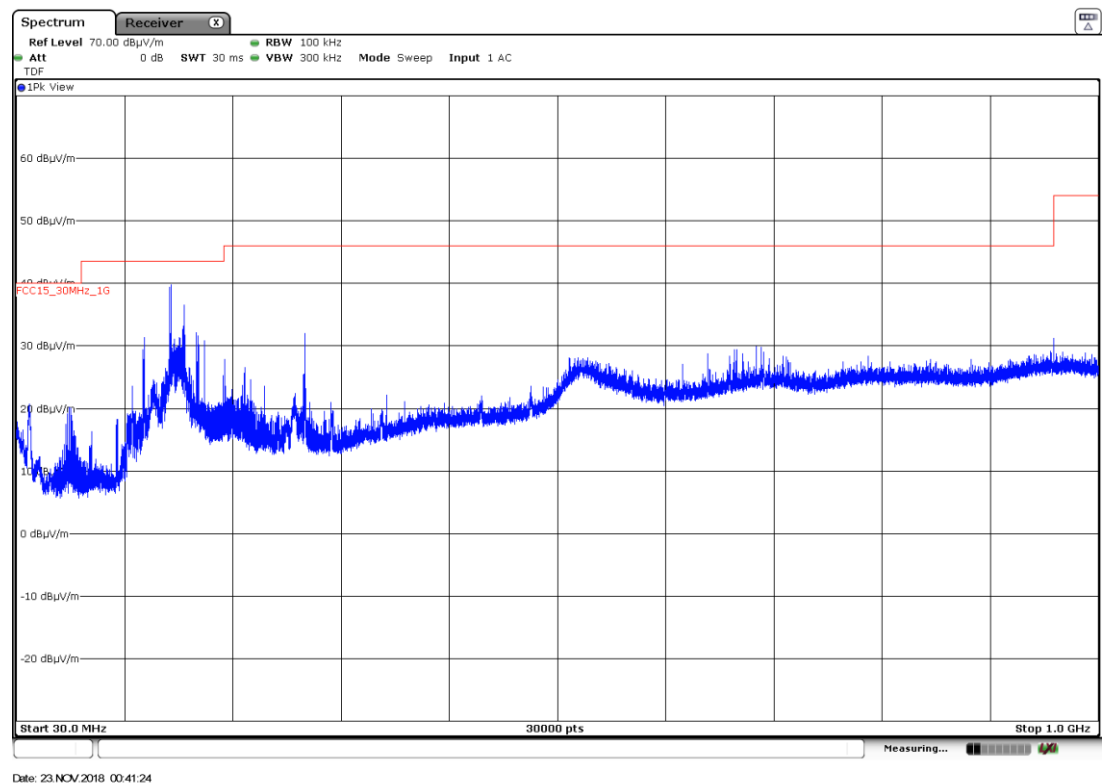


FREQUENCY RANGE 1 GHz to 6.5 GHz.

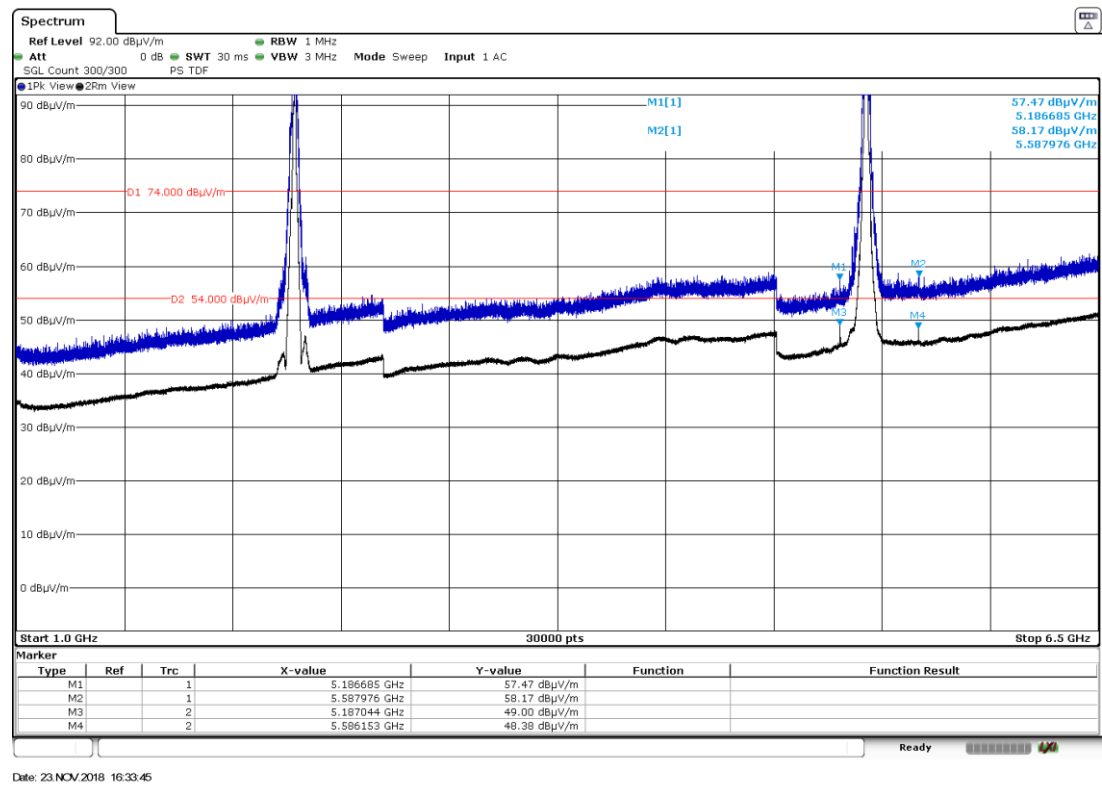


Note: The peaks shown in the plot above the limit are the carrier frequencies.


FREQUENCY RANGE 6.5 GHz to 17 GHz.

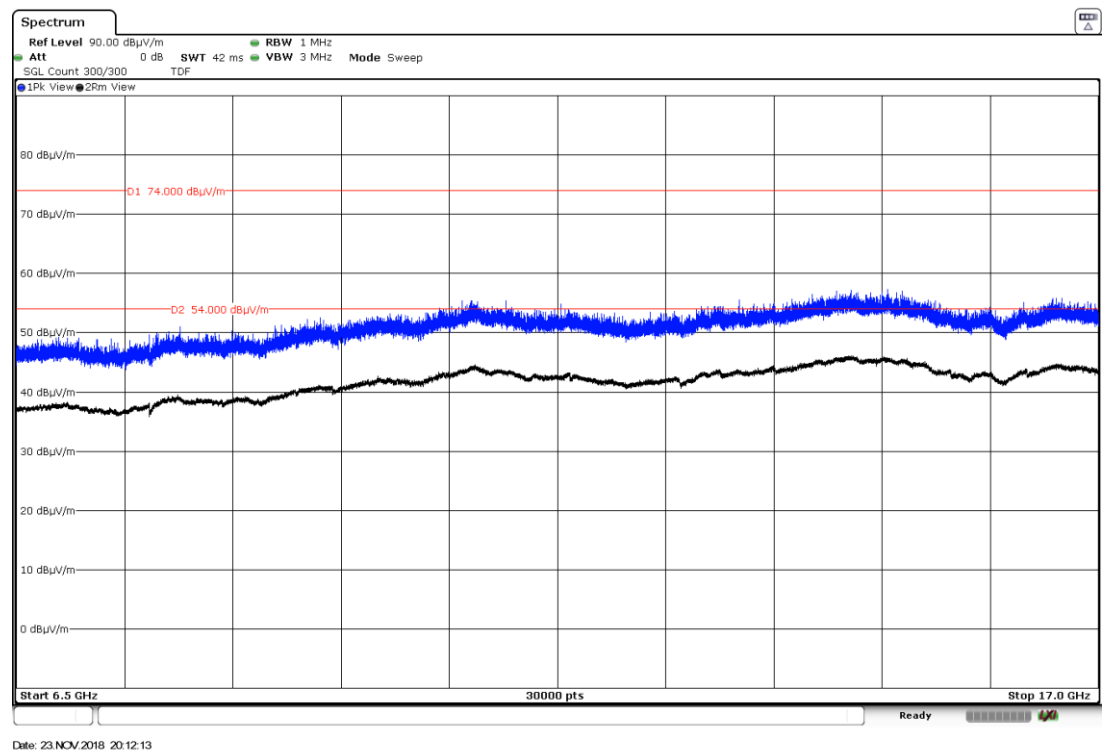

FREQUENCY RANGE 17 GHz to 26 GHz.

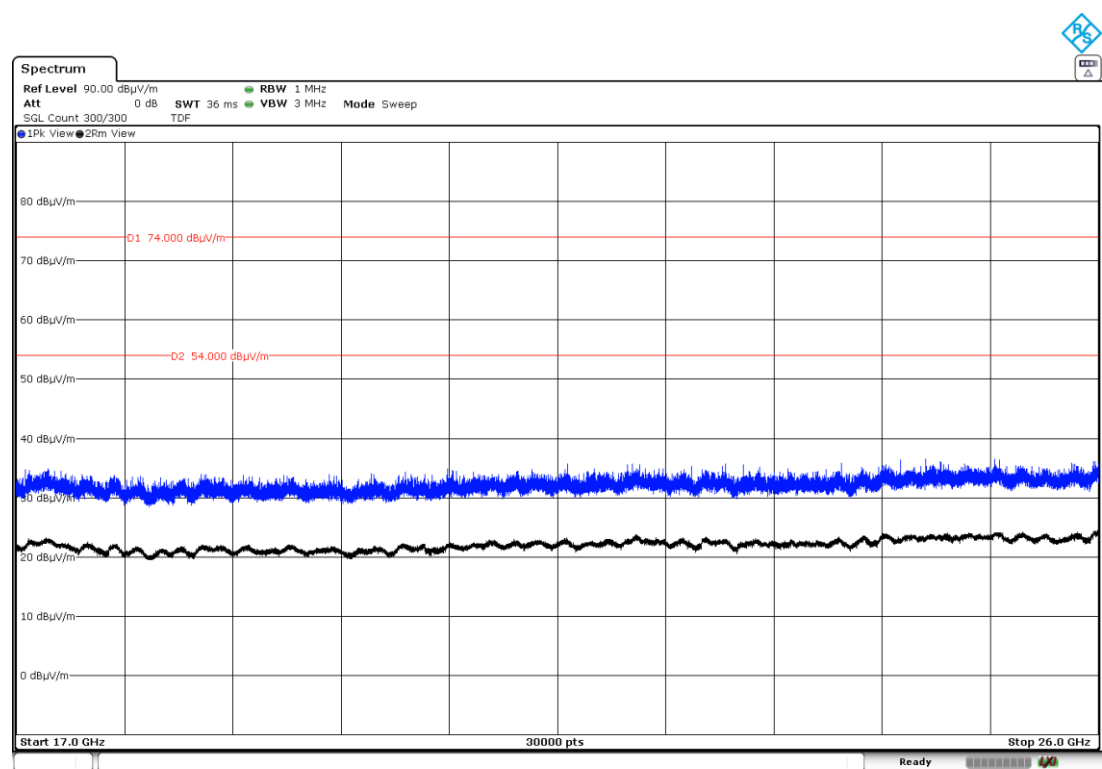

FREQUENCY RANGE 26 GHz to 40 GHz.

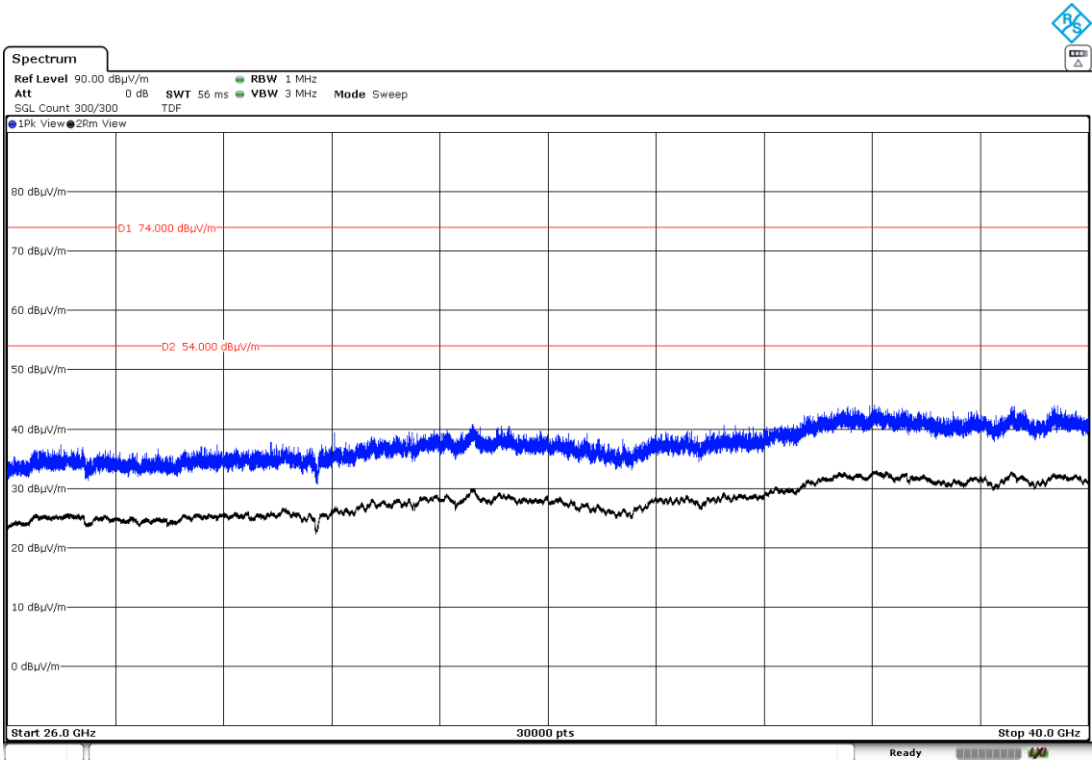

Mode: 802.11n HT20 – CDD – 20MHz – MIMO – CORE 0 & CORE 1 & CORE 2 (5500MHz), 802.11n – HT20 – SISO (2472MHz)

Frequency range 30 MHz-1000 MHz.

Note: The spurious emissions below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious levels operating (radiated) closest to limit.

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
36.677	Vertical	Quasi-Peak	29.2	40	10.8	± 3.88
74.539	Vertical	Quasi-Peak	27.4	40	12.6	± 3.88
143.474	Vertical	Quasi-Peak	28	43.5	15.5	± 3.88
168.500	Horizontal	Quasi-Peak	36.1	43.5	7.4	± 3.88
191.263	Horizontal	Quasi-Peak	31.2	43.5	12.3	± 3.88

Frequency range 1 GHz-40 GHz

Spurious frequency (MHz)	Polarization	Detector	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Measurement Uncertainty (dB)
4461.406	Vertical	Peak	56.73	74	17.27	± 3.05
4456.478		Average	48.37	54	5.63	± 3.05
5279.454	Vertical	Peak	59.09	74	14.91	± 3.05
5270.850		Average	48.73	54	5.27	± 3.05
5704.412	Vertical	Peak	62.79	74	11.21	± 3.05
5720.918		Average	49.51	54	4.49	± 3.05
6176.872	Horizontal	Peak	60.13	74	13.87	± 3.05
6170.449		Average	47.28	54	6.72	± 3.05

Verdict: PASS