

9.2. SPURIOUS EMISSIONS IN-BAND – EMISSION MASK

LIMITS

FCC §15.407 (b)(7)
RSS-248 4.6.2 (b)

(6) For transmitters operating within the 5.925-7.125 GHz bands: power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

TEST PROCEDURE

Per KDB 987594 D02 v01r01, Section J


Note. In case of some of the 20 & 40 MHz bandwidth, test was performed by setting the RBW to 1MHz which is larger than that used for the 26dB bandwidth measurement.
This is a deviation from the procedures but represents a more conservative measurement.

RESULTS

Bands UNII 5 and 7 were tested in standard power and low power indoor mode and UNII 6 and 8 were tested in Low Power Indoor mode.


9.2.1. 802.11be EHT320 MODE 2TX IN THE UNII-5 BAND (LOW GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 4x996T STANDARD POWER

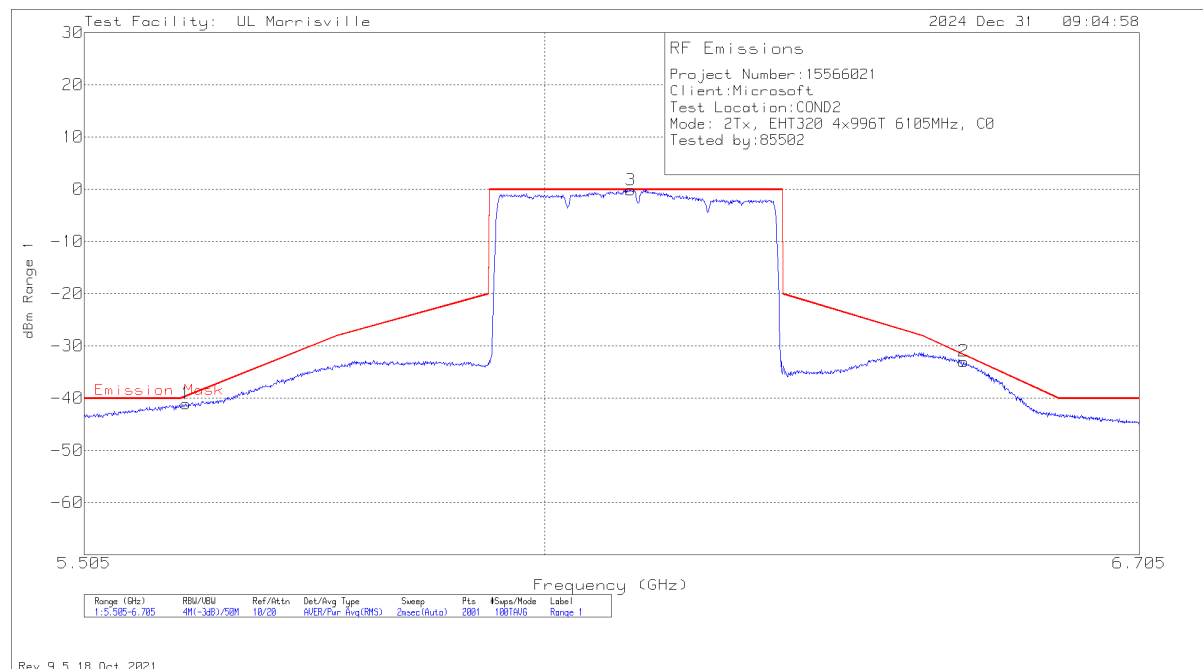


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.6106	-56.36	RMS	13.5	1.8	-41.06	-39.7	-1.36
3	6.0972	-15.86	RMS	13.8	1.9	-.16	-.11	-.05
2	6.4884	-48.87	RMS	13.8	2.1	-32.97	-31.71	-1.26

RMS - RMS detection

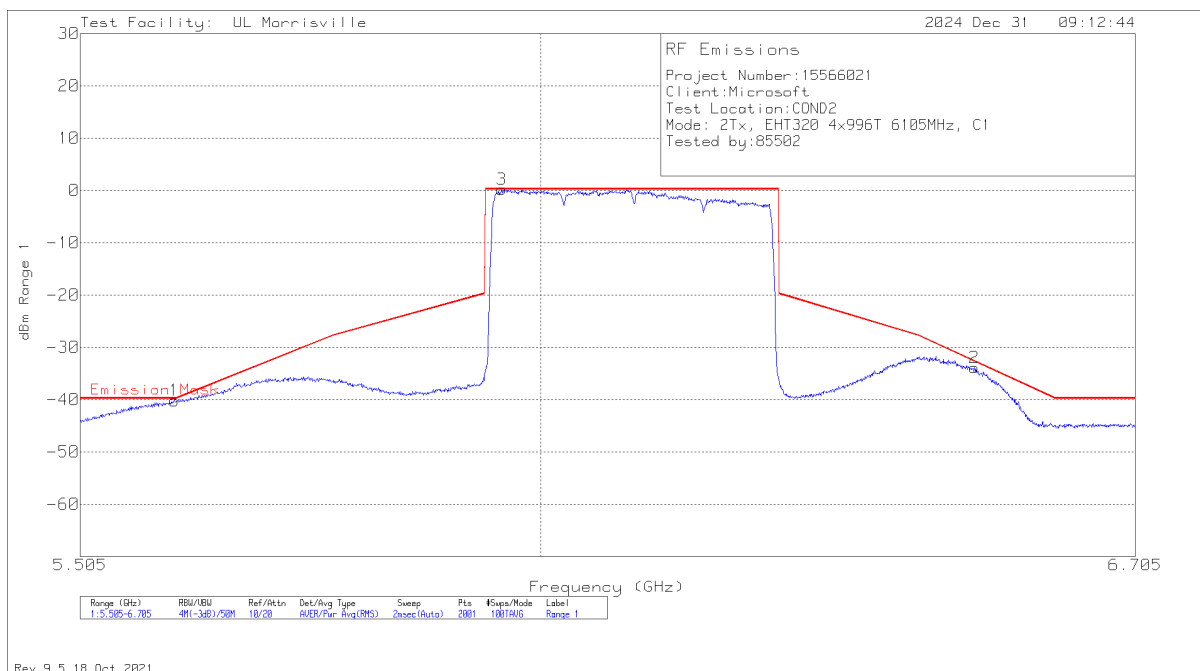


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.6028	-55.47	RMS	13.5	1.8	-40.17	-39.74	-.43
3	5.9562	-15.39	RMS	13.7	1.9	.21	.26	-.05
2	6.5064	-49.78	RMS	13.8	2.1	-33.88	-32.65	-1.23

RMS - RMS detection

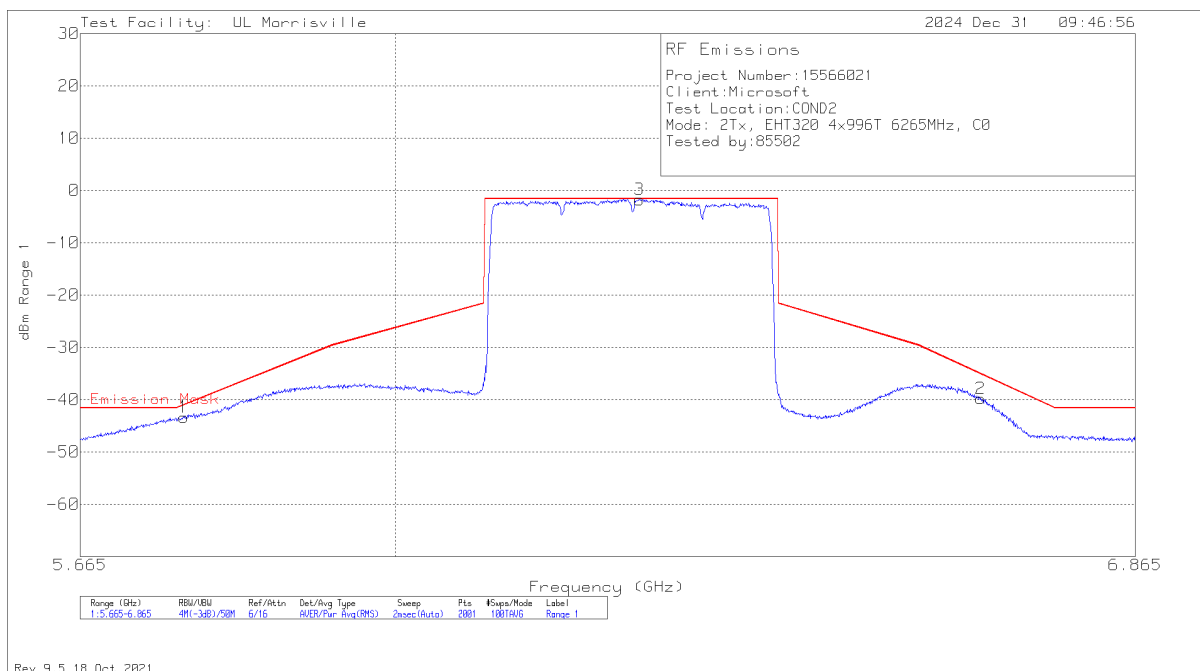

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.773	-58.85	RMS	13.6	1.9	-43.35	-41.01	-2.34
3	6.2722	-17.44	RMS	13.8	1.9	-1.74	-1.6	-.14
2	6.6742	-55.79	RMS	13.9	2.1	-39.79	-35.07	-4.72

RMS - RMS detection

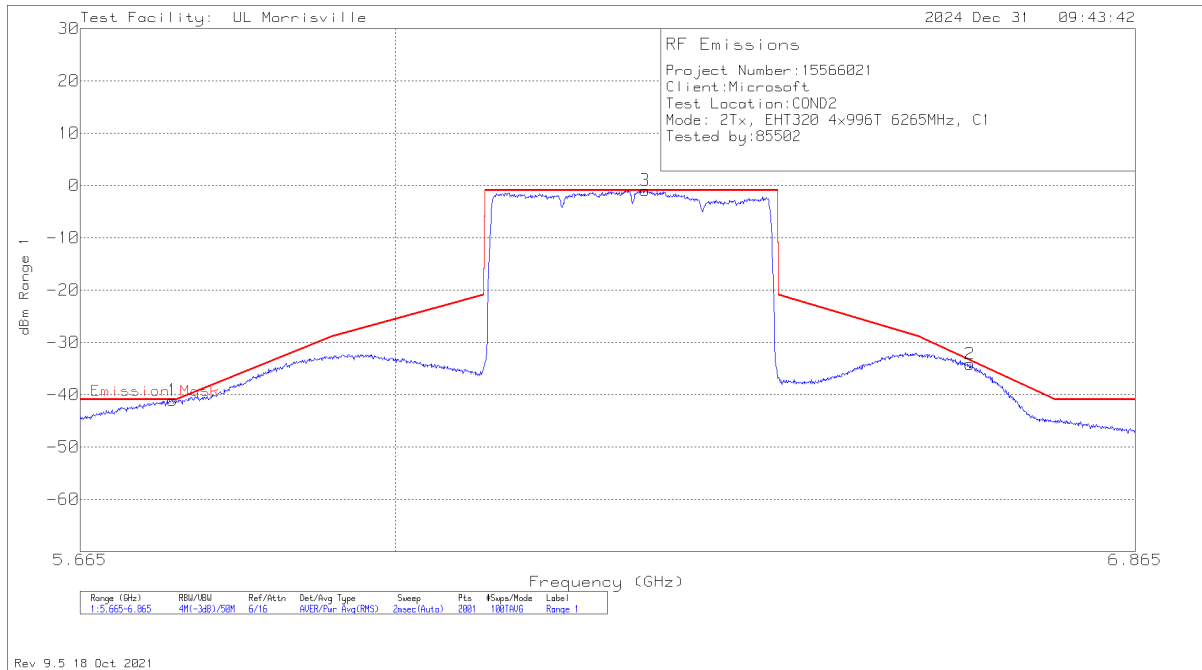


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.761	-56.49	RMS	13.5	1.9	-41.09	-40.93	-.16
3	6.2788	-16.66	RMS	13.8	1.9	-.96	-.93	-.03
2	6.6616	-50.15	RMS	13.9	2.1	-34.15	-33.49	-.66

RMS - RMS detection


9.2.2. 802.11be EHT40 MODE 2TX IN THE UNII-5 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T STANDARD POWER

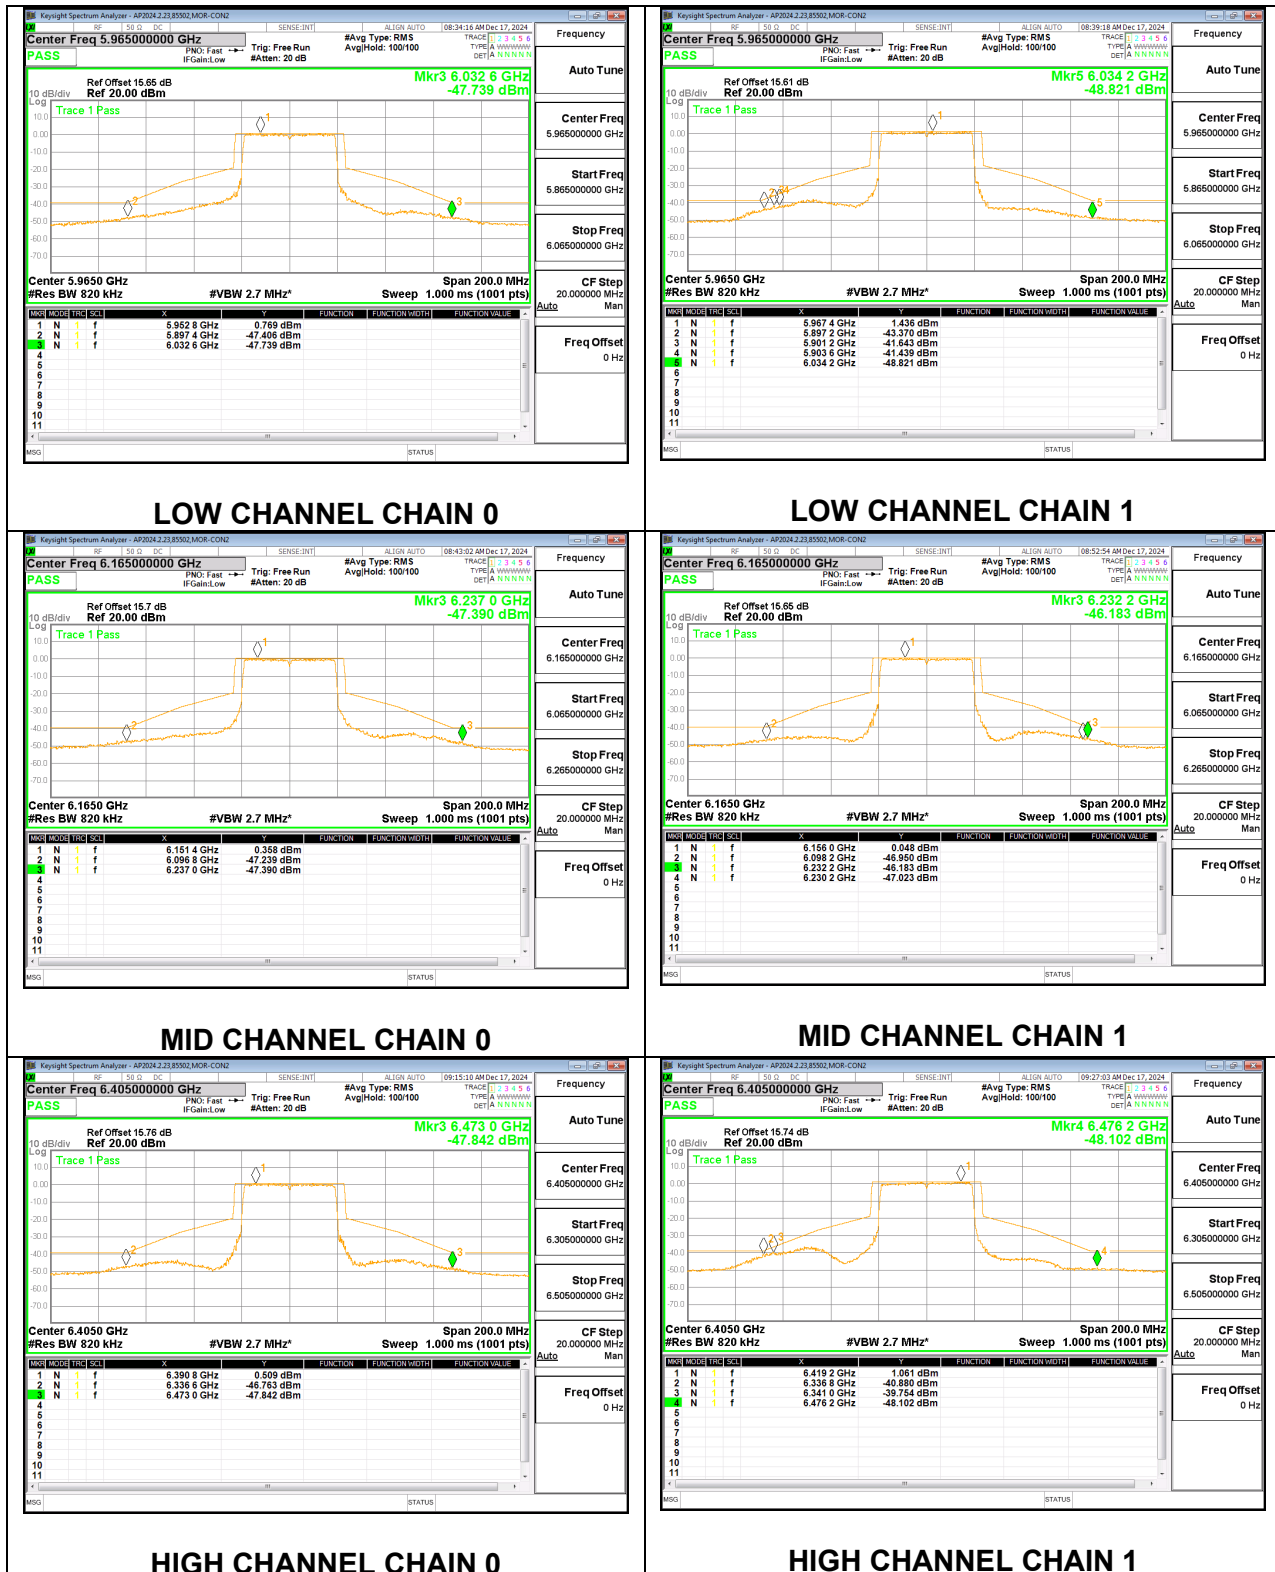


9.2.3. 802.11be EHT80 MODE 2TX IN THE UNII-5 BAND (HIGH GAIN)


2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (CONTIGUOUS) STANDARD POWER

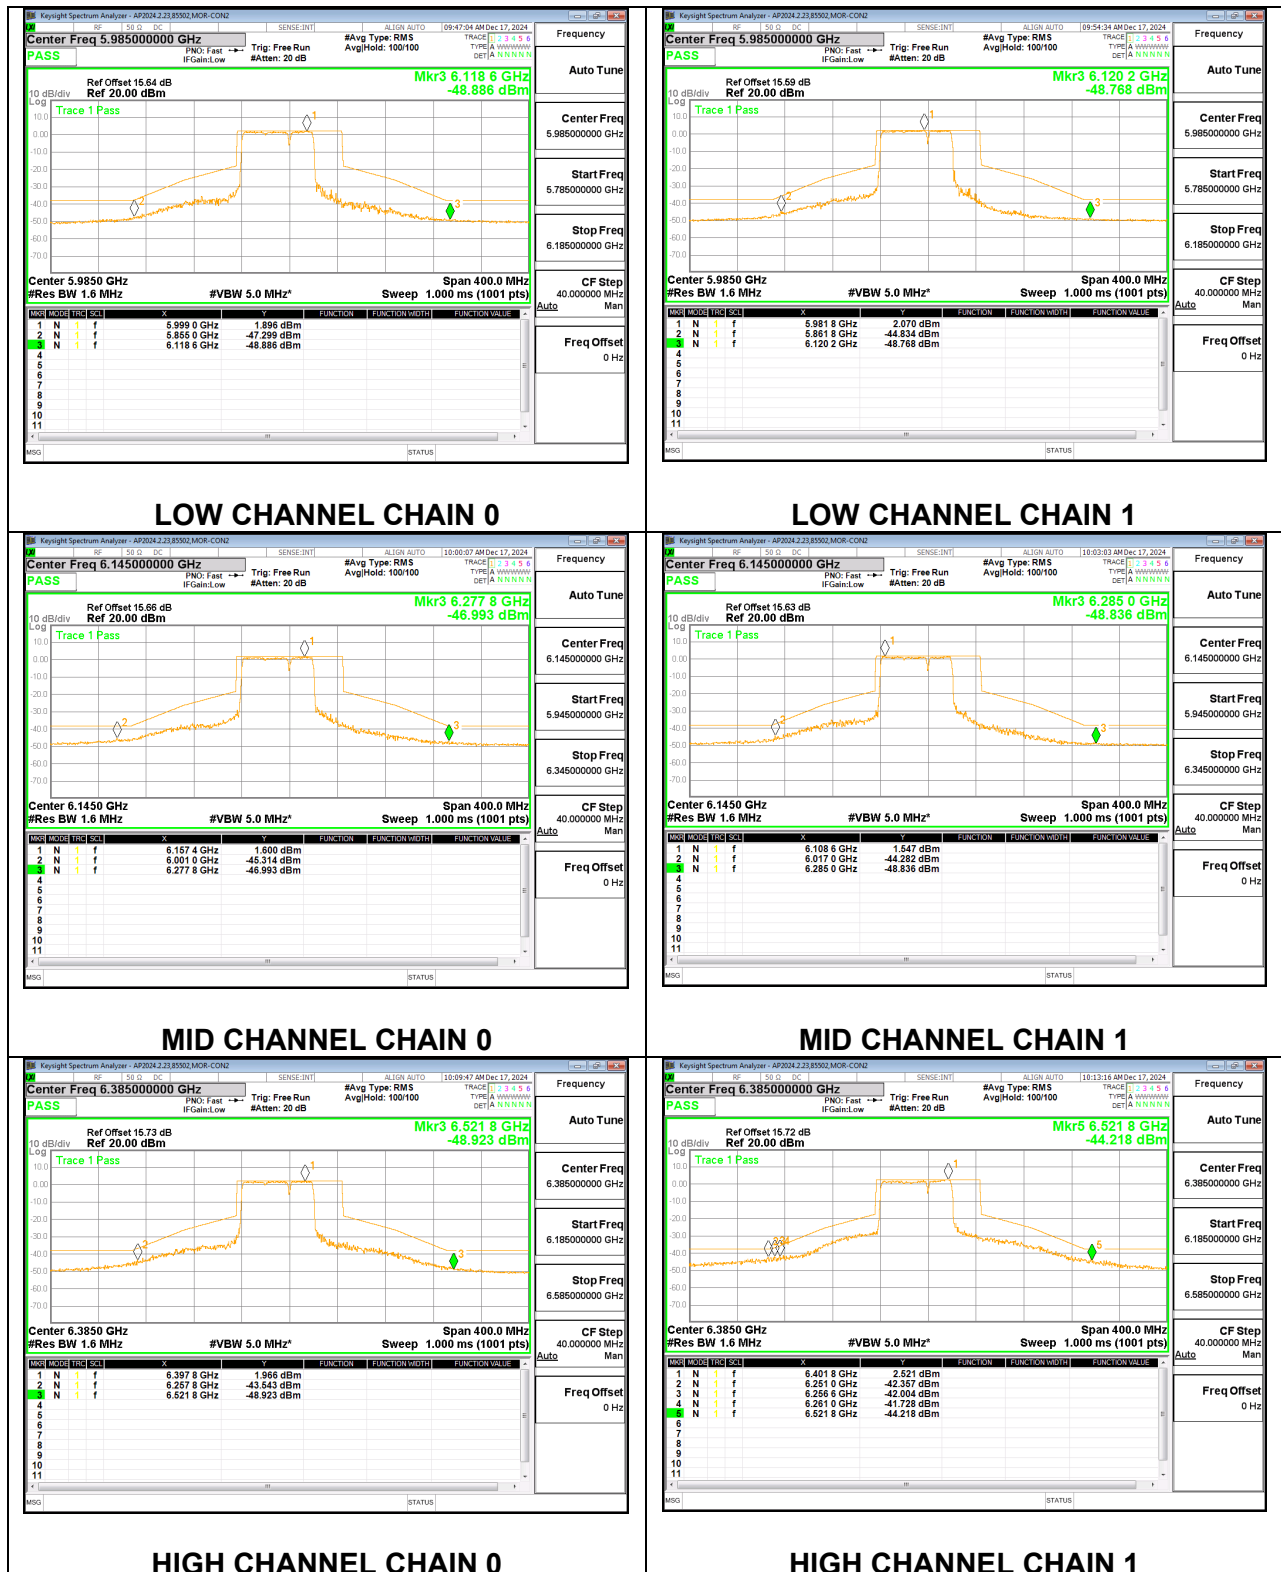


**2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T (NON-CONTIGUOUS) STANDARD
POWER**

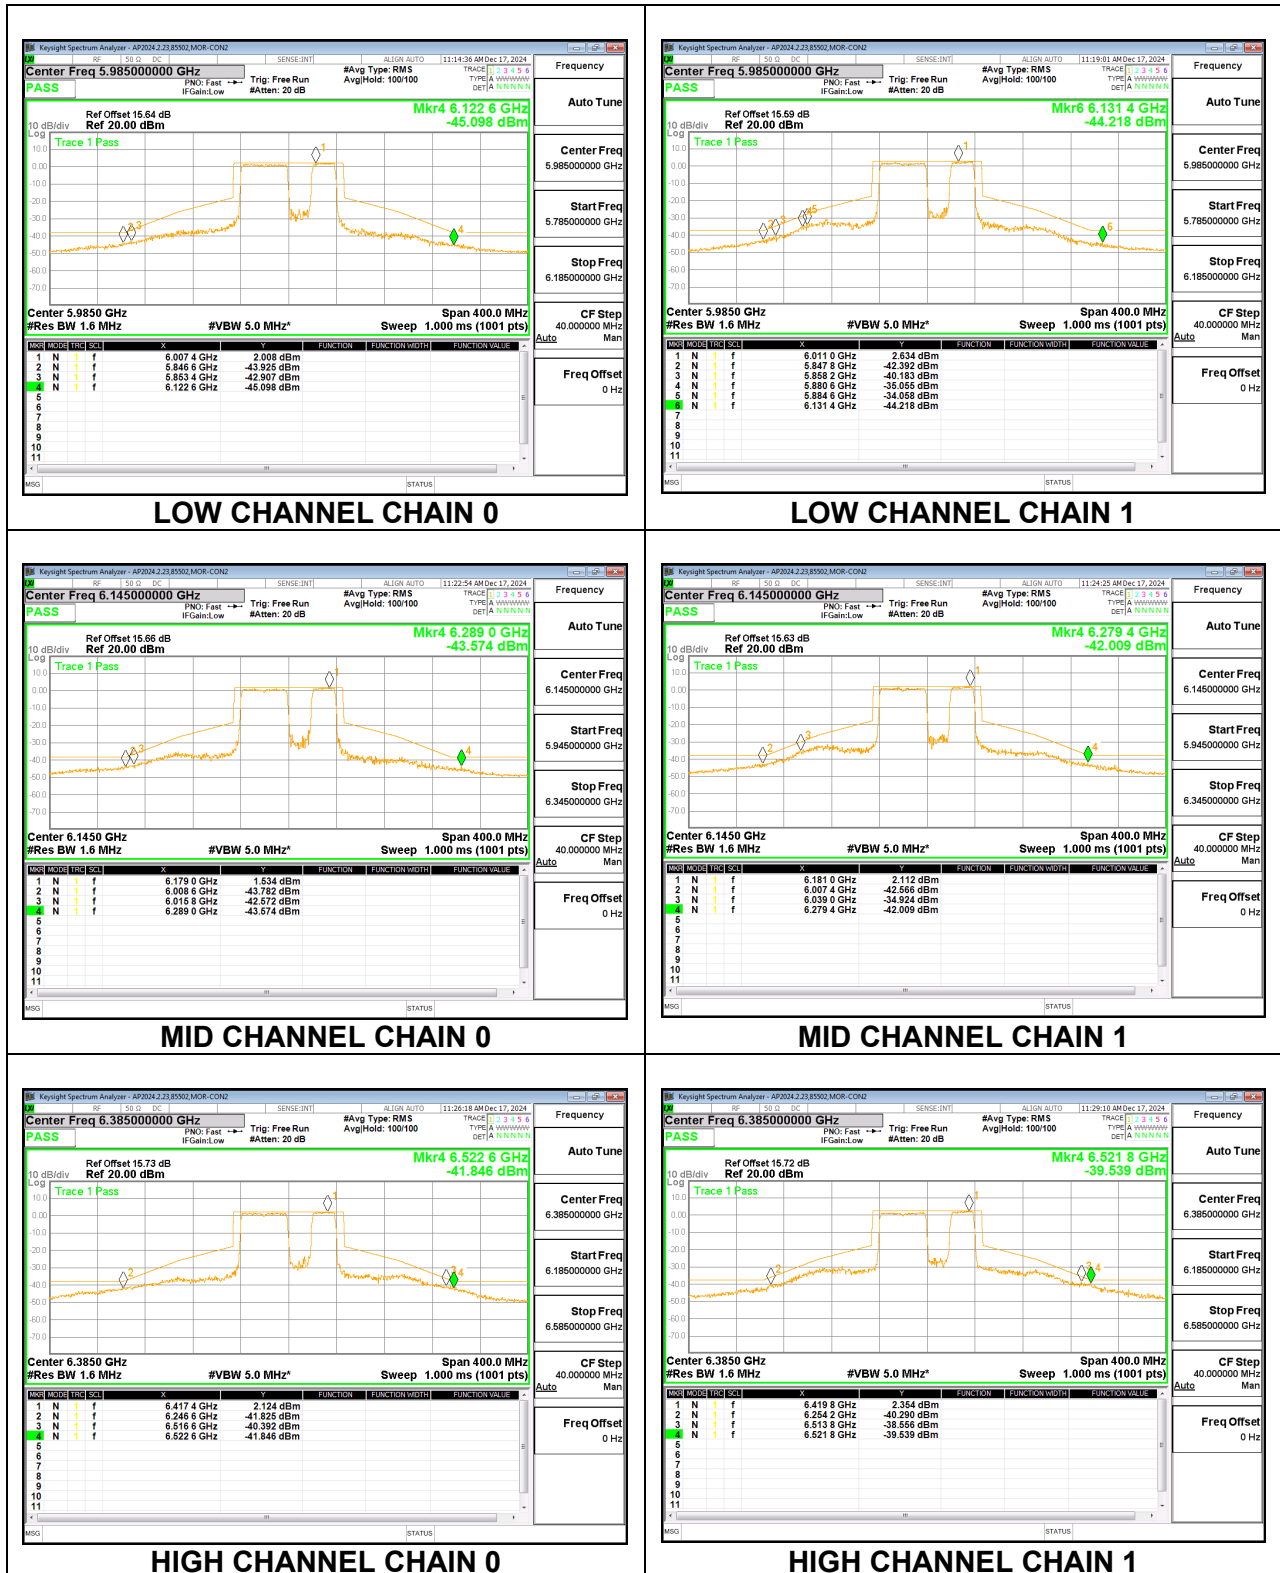

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T (NON-CONTIGUOUS) STANDARD POWER

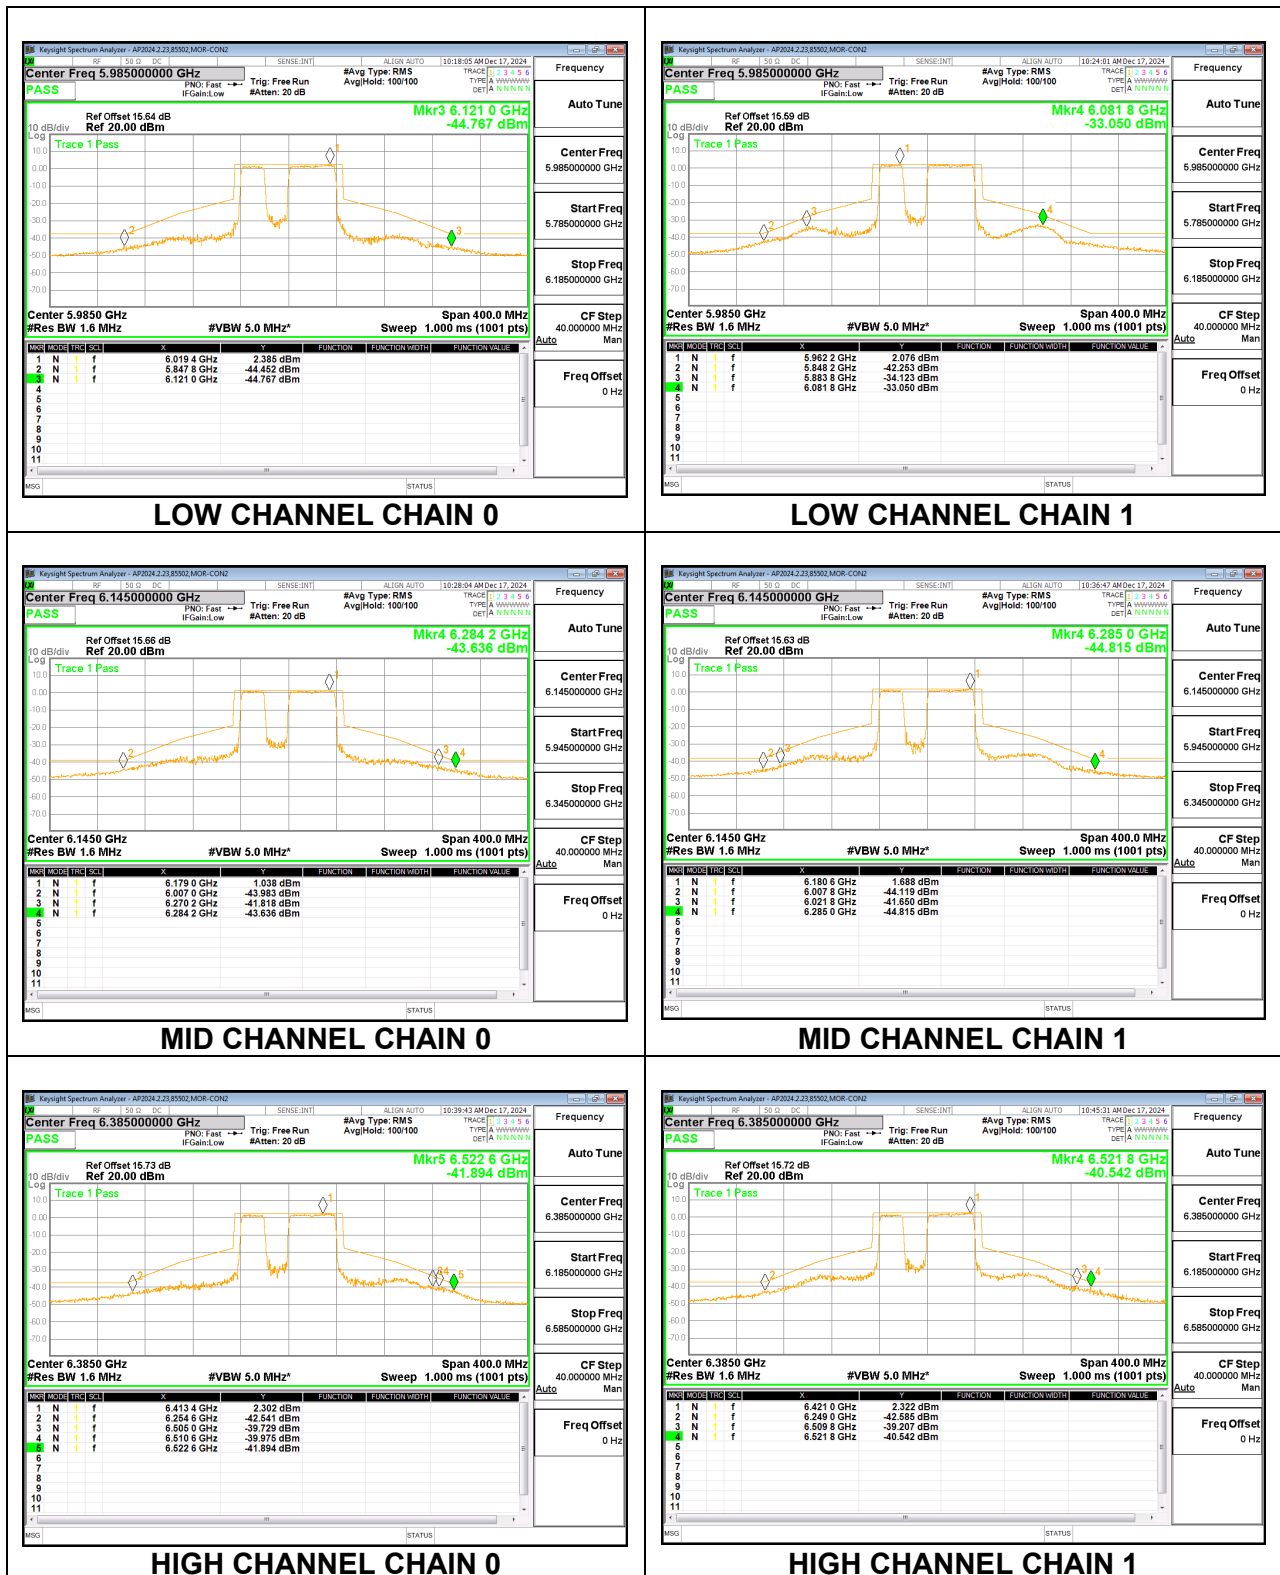


2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T STANDARD POWER

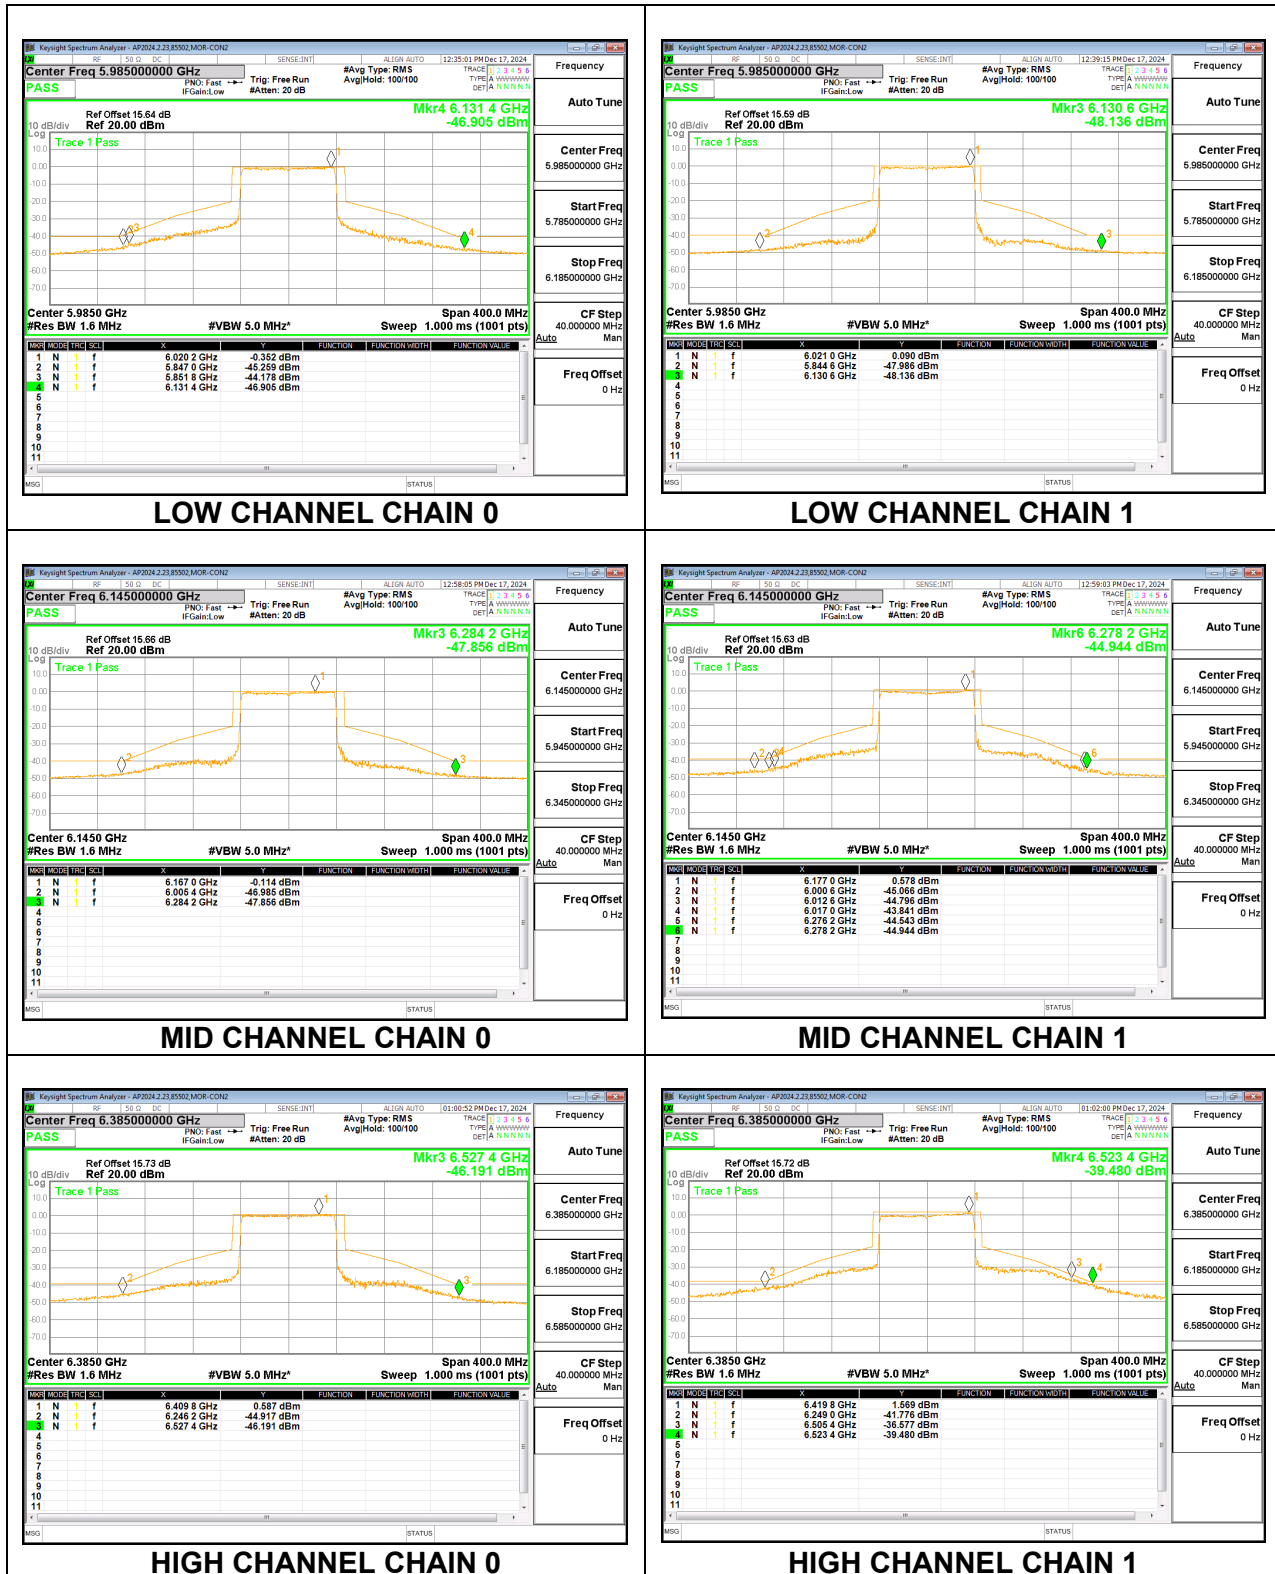


9.2.4. 802.11be EHT160 MODE 2TX IN THE UNII-5 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (CONTIGUOUS) STANDARD POWER

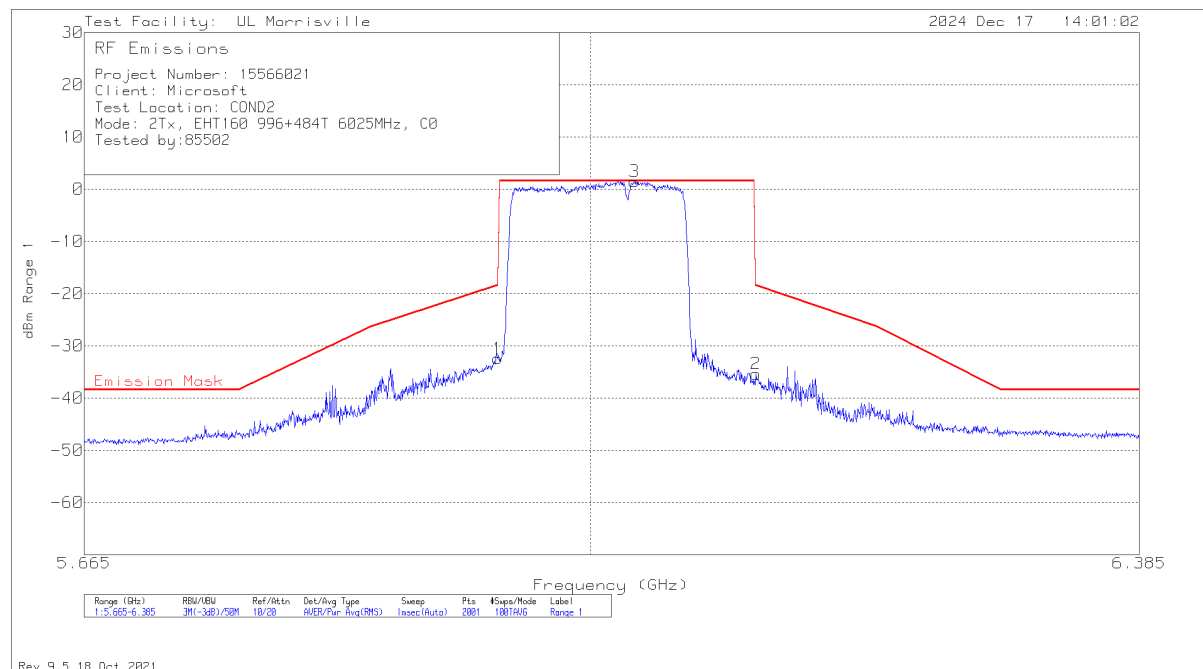


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.9368	-48.03	RMS	13.7	1.9	-32.43	-18.43	-14
2	6.1132	-50.96	RMS	13.7	1.9	-35.36	-18.43	-16.93
3	6.02968	-14.16	RMS	13.7	1.9	1.44	1.59	-15

RMS - RMS detection

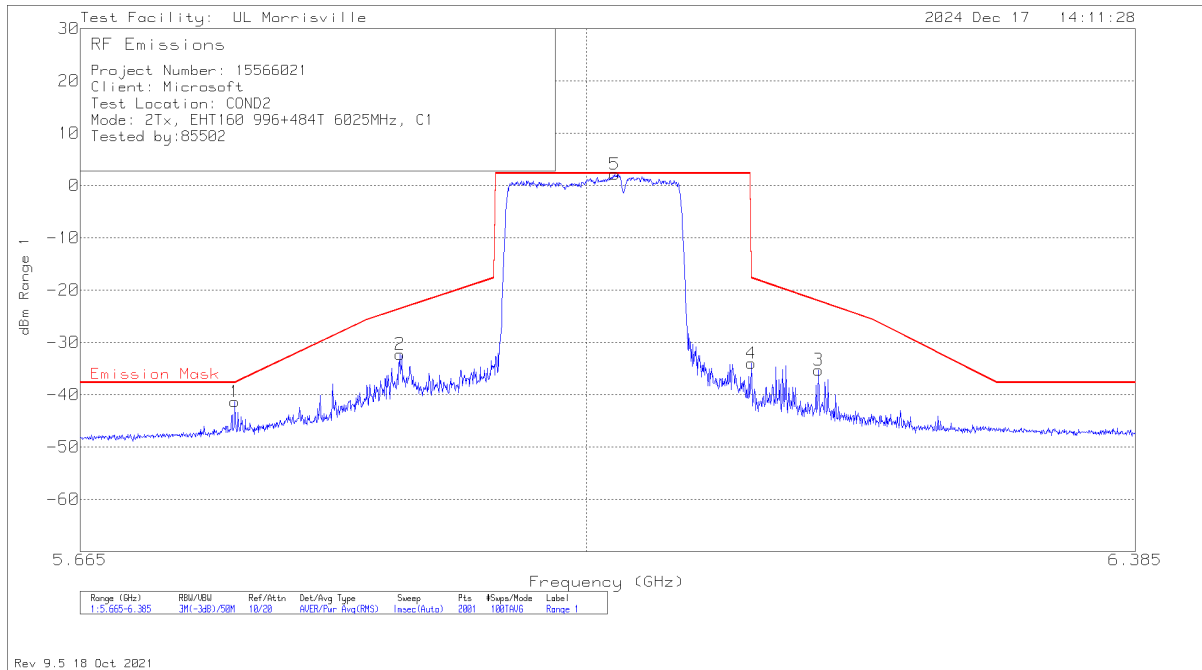


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.76508	-56.75	RMS	13.5	1.9	-41.35	-37.69	-3.66
2	5.87416	-47.77	RMS	13.6	1.9	-32.27	-23.6	-8.67
3	6.15964	-50.89	RMS	13.7	1.9	-35.29	-22.1	-13.19
4	6.11284	-49.61	RMS	13.7	1.9	-34.01	-14.5	-19.51
5	6.01888	-13.47	RMS	13.7	1.9	2.13	2.3	-.17

RMS - RMS detection

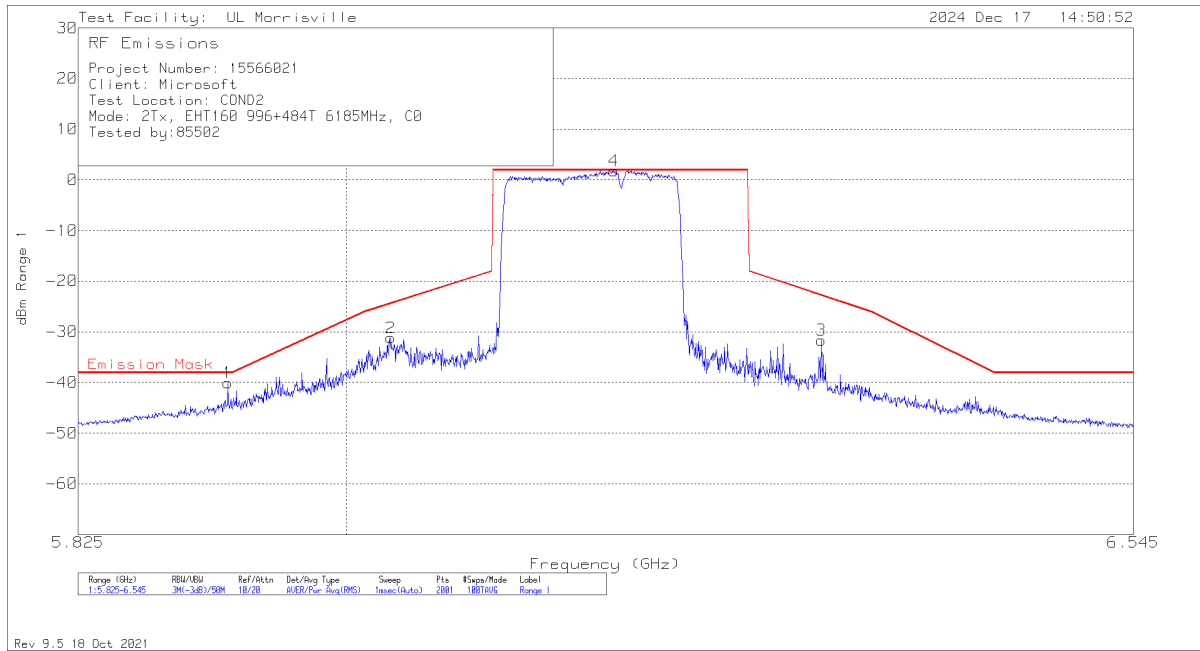


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.9222	-55.62	RMS	13.6	1.9	-40.12	-38.09	-2.03
2	6.02948	-46.82	RMS	13.7	1.9	-31.22	-24.44	-6.78
4	6.17996	-13.94	RMS	13.8	1.9	1.76	1.91	-.15
3	6.32324	-47.44	RMS	13.9	1.9	-31.64	-22.83	-8.81

RMS - RMS detection

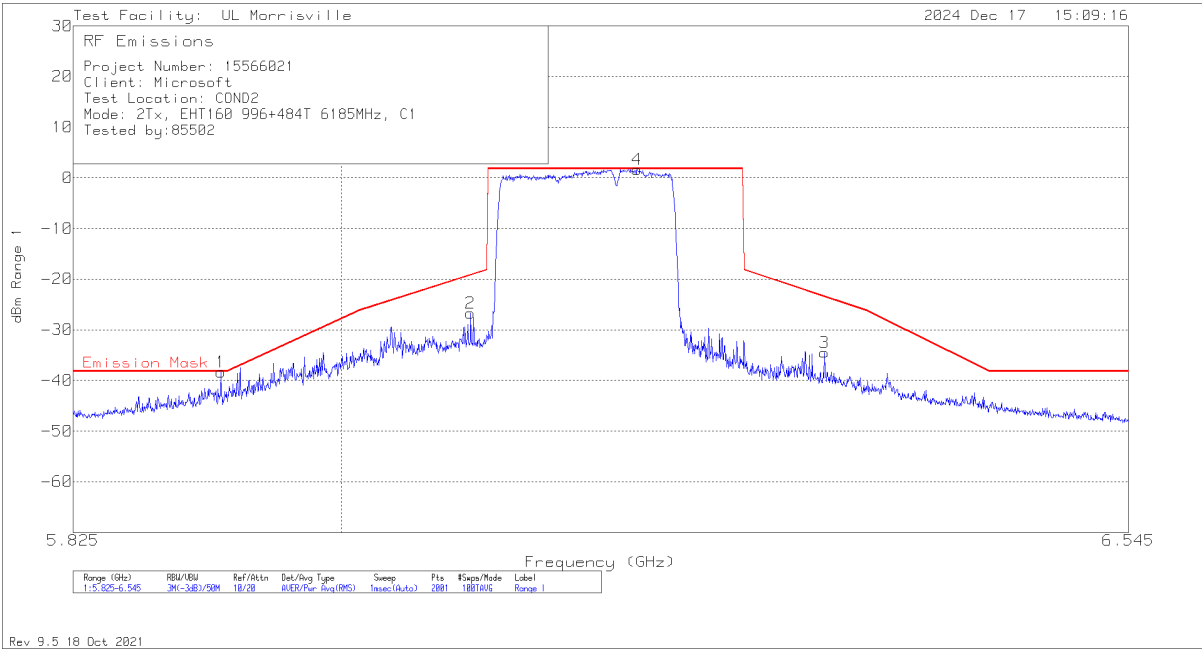


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.92076	-53.79	RMS	13.6	1.9	-38.29	-38.19	-.1
2	6.08636	-42.3	RMS	13.7	1.9	-26.7	-19.19	-7.51
3	6.329	-50.15	RMS	13.8	1.9	-34.45	-23.47	-10.98
4	6.1994	-14.07	RMS	13.8	1.9	1.63	1.81	-.18

RMS - RMS detection

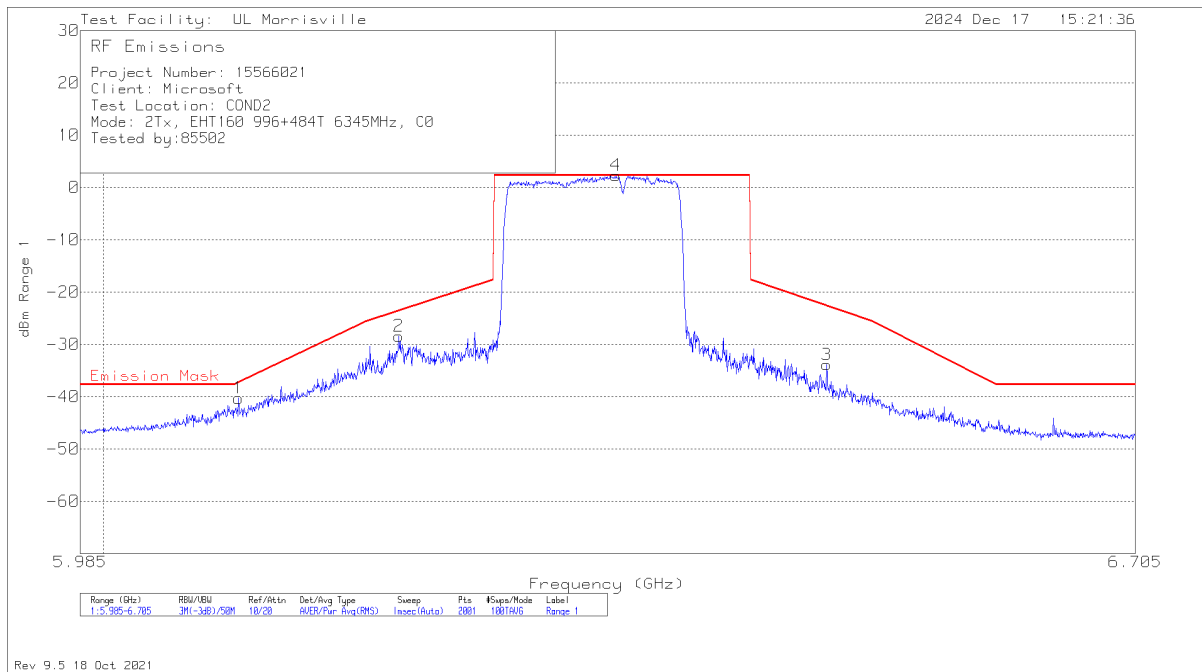

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.08796	-55.91	RMS	13.7	1.9	-40.31	-37.26	-3.05
2	6.1938	-44.12	RMS	13.8	1.9	-28.42	-23.61	-4.81
3	6.48576	-49.8	RMS	13.8	2.1	-33.9	-22.65	-11.25
4	6.34032	-13.38	RMS	13.8	1.9	2.32	2.33	-.01


RMS - RMS detection

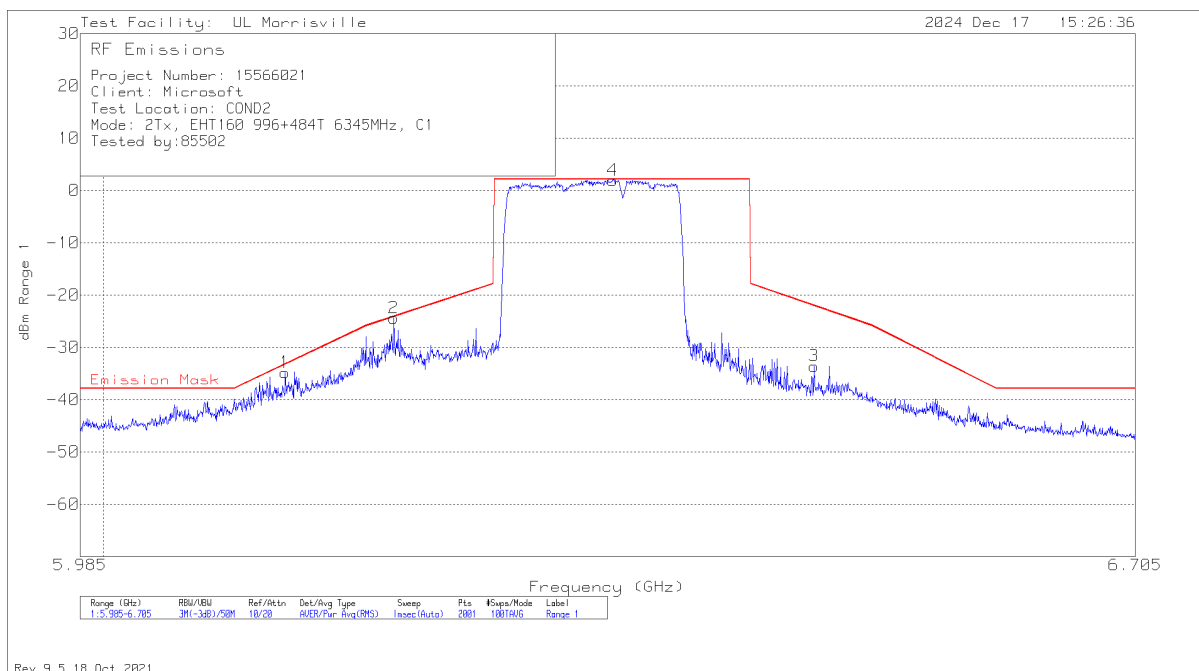

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.11856	-50.4	RMS	13.7	1.9	-34.8	-33.24	-1.56
2	6.19056	-40.09	RMS	13.8	1.9	-24.39	-24.13	-.26
3	6.47712	-49.47	RMS	13.8	2.1	-33.57	-22.06	-11.51
4	6.33816	-13.77	RMS	13.8	1.9	1.93	2.11	-.18


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T (NON-CONTIGUOUS) STANDARD POWER

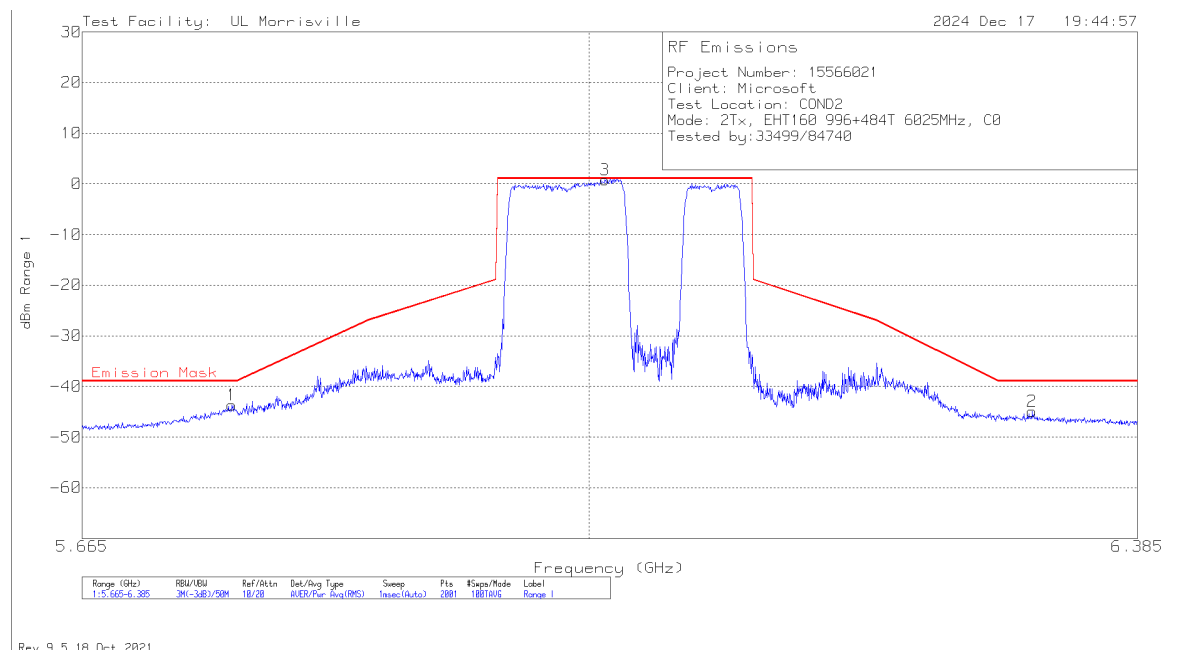


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.76184	-59.14	RMS	13.6	1.9	-43.64	-38.95	-4.69
3	6.01096	-14.82	RMS	13.7	1.9	.78	1.05	-.27
2	6.3094	-60.75	RMS	13.9	1.9	-44.95	-38.95	-6

RMS - RMS detection

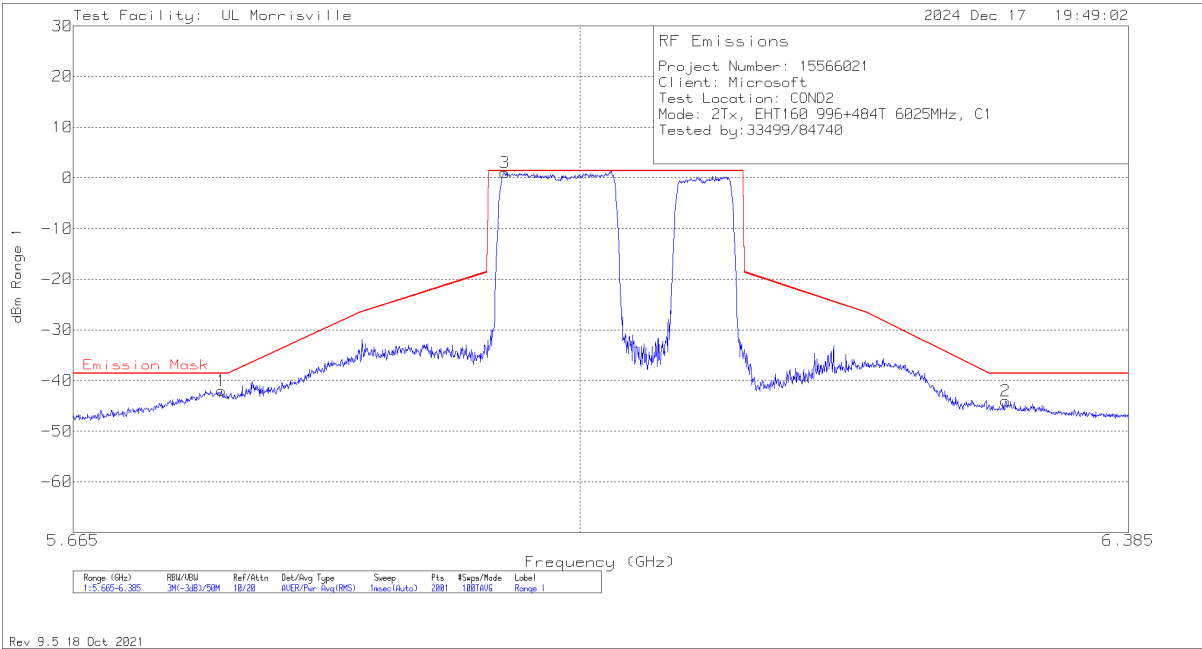


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.76112	-57.4	RMS	13.5	1.9	-42	-38.63	-3.37
3	5.94904	-14.6	RMS	13.7	1.9	1	1.37	-.37
2	6.2968	-59.76	RMS	13.8	1.9	-44.06	-38.63	-5.43

RMS - RMS detection

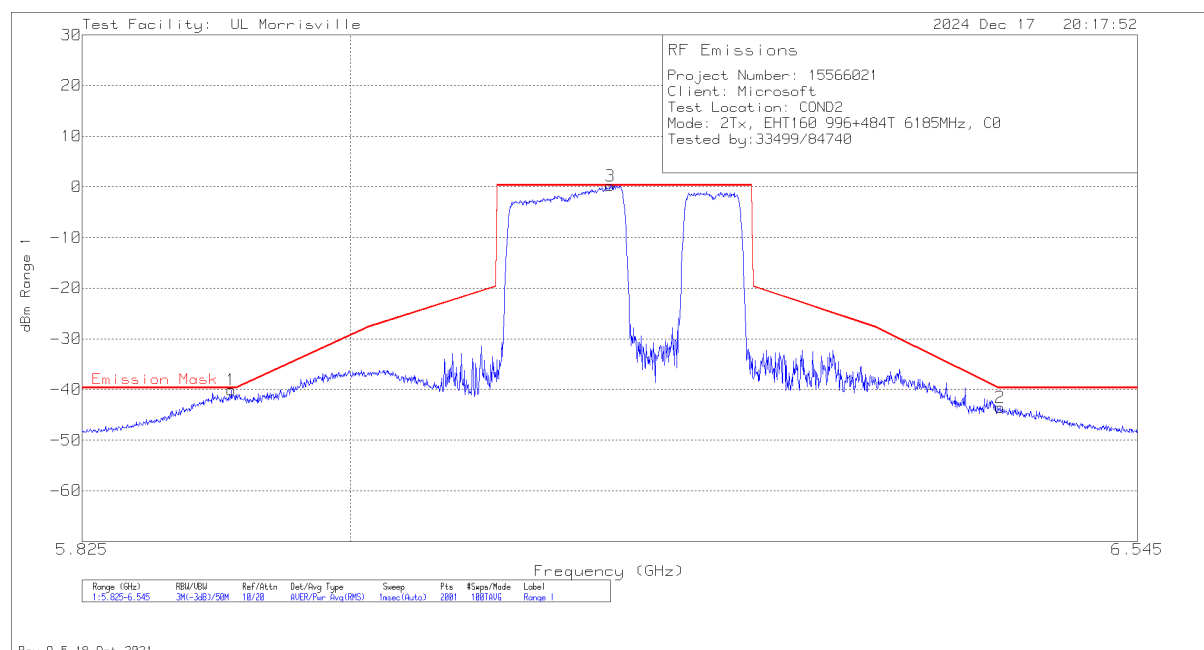


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.92184	-55.59	RMS	13.6	1.9	-40.09	-39.68	-.41
3	6.17492	-15.48	RMS	13.8	1.9	.22	.32	-.1
2	6.44672	-59.55	RMS	13.9	2.1	-43.55	-39.68	-3.87

RMS - RMS detection

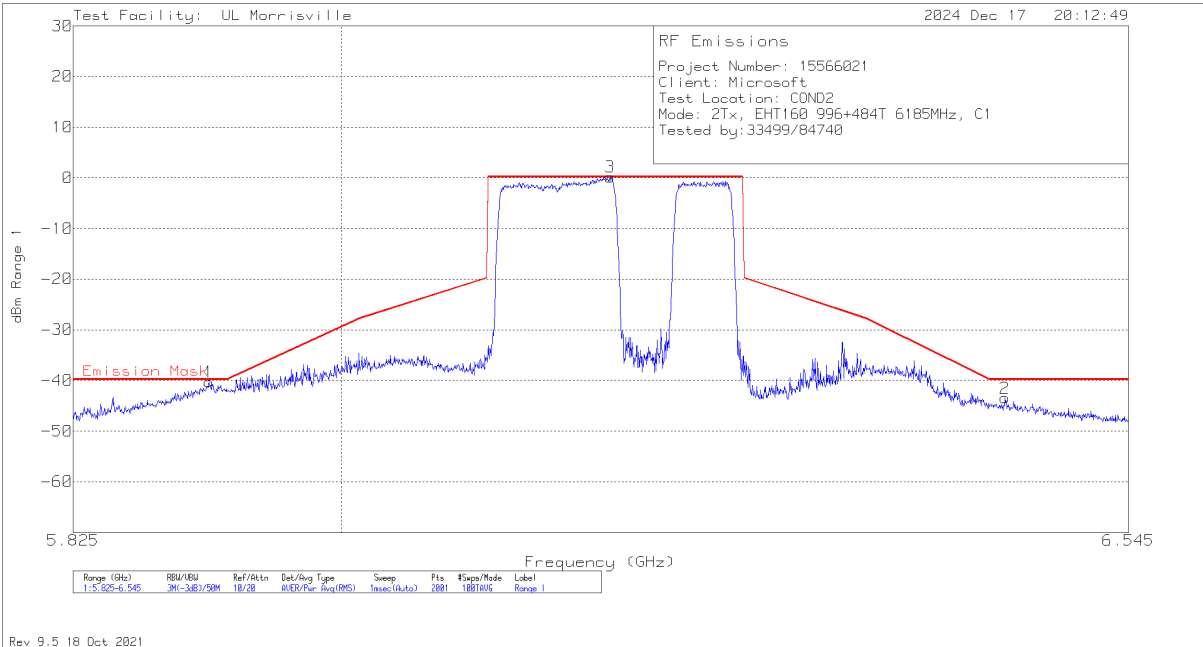


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.9132	-55.77	RMS	13.6	1.9	-40.27	-39.82	-.45
3	6.18068	-15.57	RMS	13.8	1.9	.13	.18	-.05
2	6.45644	-59.48	RMS	13.9	2.1	-43.48	-39.82	-3.66

RMS - RMS detection

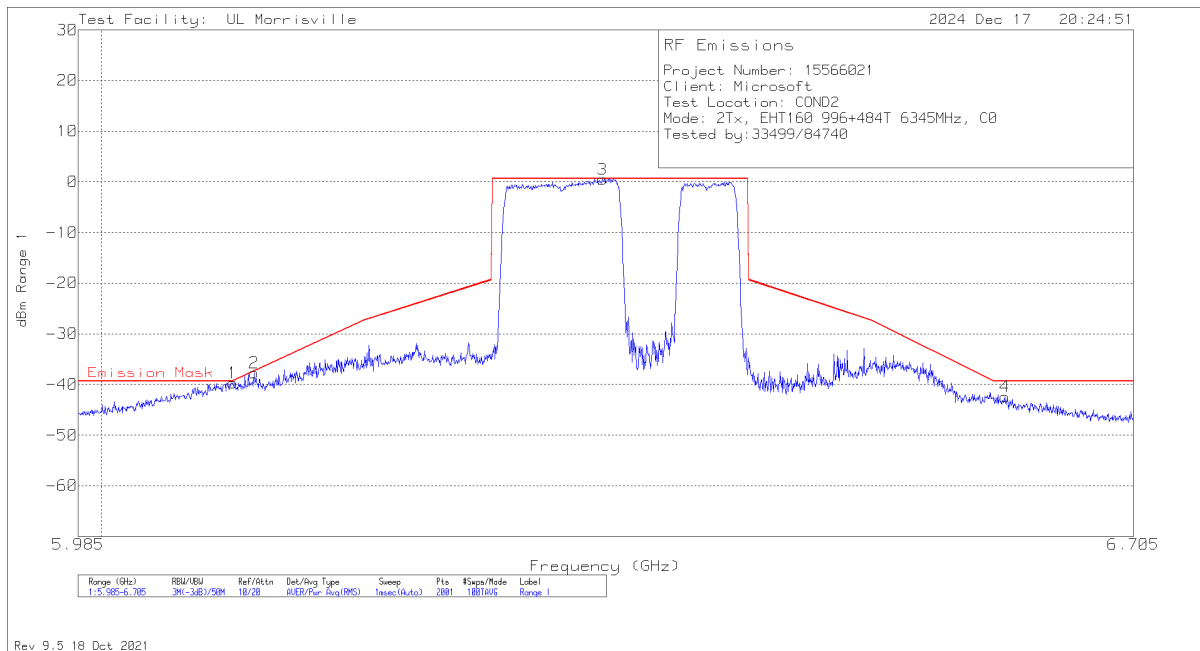

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.08544	-55.32	RMS	13.7	1.9	-39.72	-39.3	-.42
2	6.09948	-53.46	RMS	13.8	1.9	-37.76	-37.35	-.41
3	6.33276	-15.22	RMS	13.8	1.9	.48	.64	-.16
4	6.61284	-58.47	RMS	13.9	2.1	-42.47	-39.36	-3.11


RMS - RMS detection

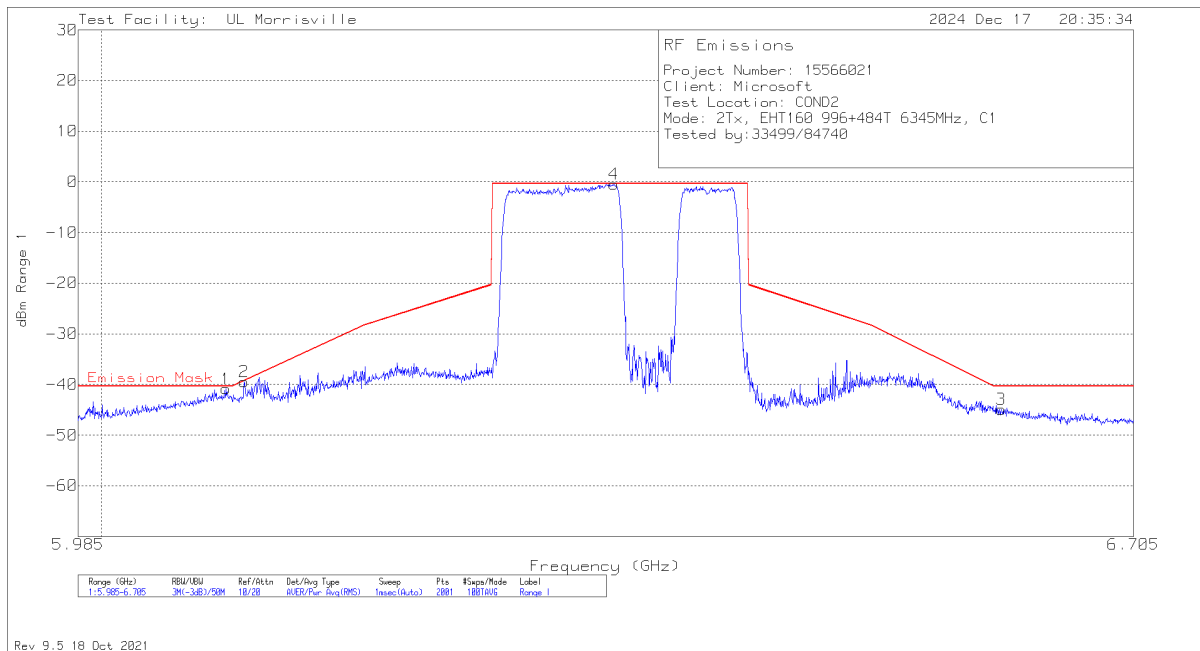

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.08112	-56.47	RMS	13.7	1.9	-40.87	-40.36	-.51
2	6.093	-55.08	RMS	13.7	1.9	-39.48	-39.25	-.23
4	6.34032	-16.19	RMS	13.8	1.9	-.49	-.36	-.13
3	6.61032	-60.89	RMS	13.9	2.1	-44.89	-40.36	-4.53


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+996T (NON-CONTIGUOUS) STANDARD POWER

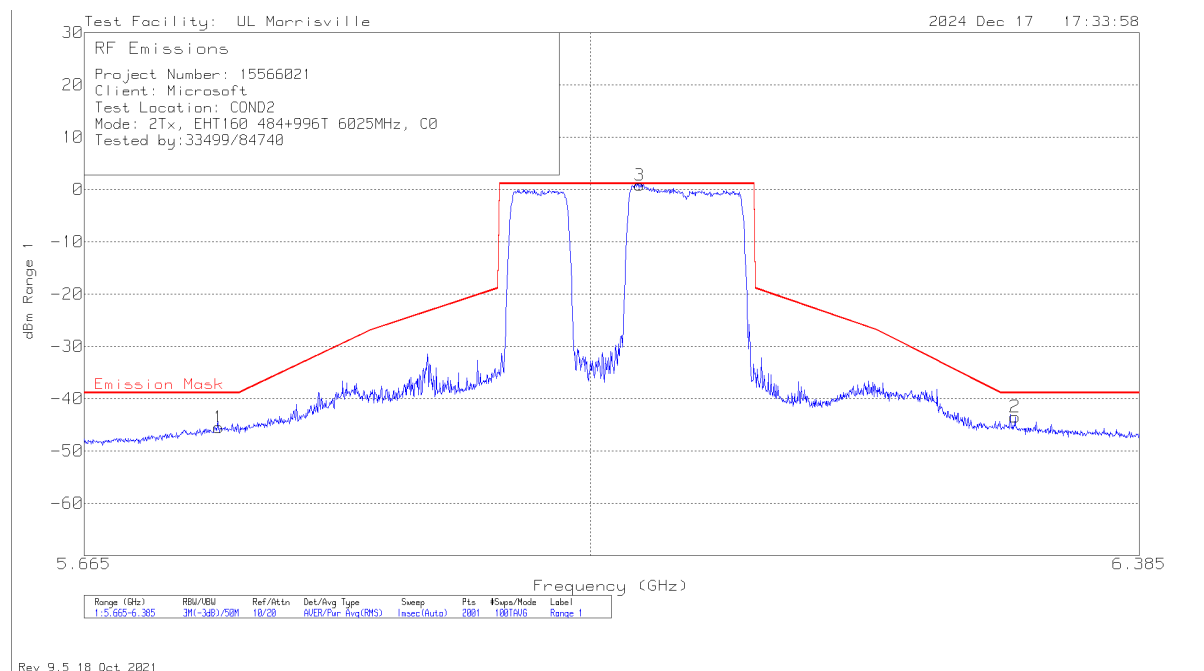


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.75212	-60.88	RMS	13.5	1.9	-45.48	-38.9	-6.58
2	6.29572	-59.27	RMS	13.9	1.9	-43.47	-38.9	-4.57
3	6.03328	-14.8	RMS	13.7	1.9	.8	1.1	-.3

RMS - RMS detection

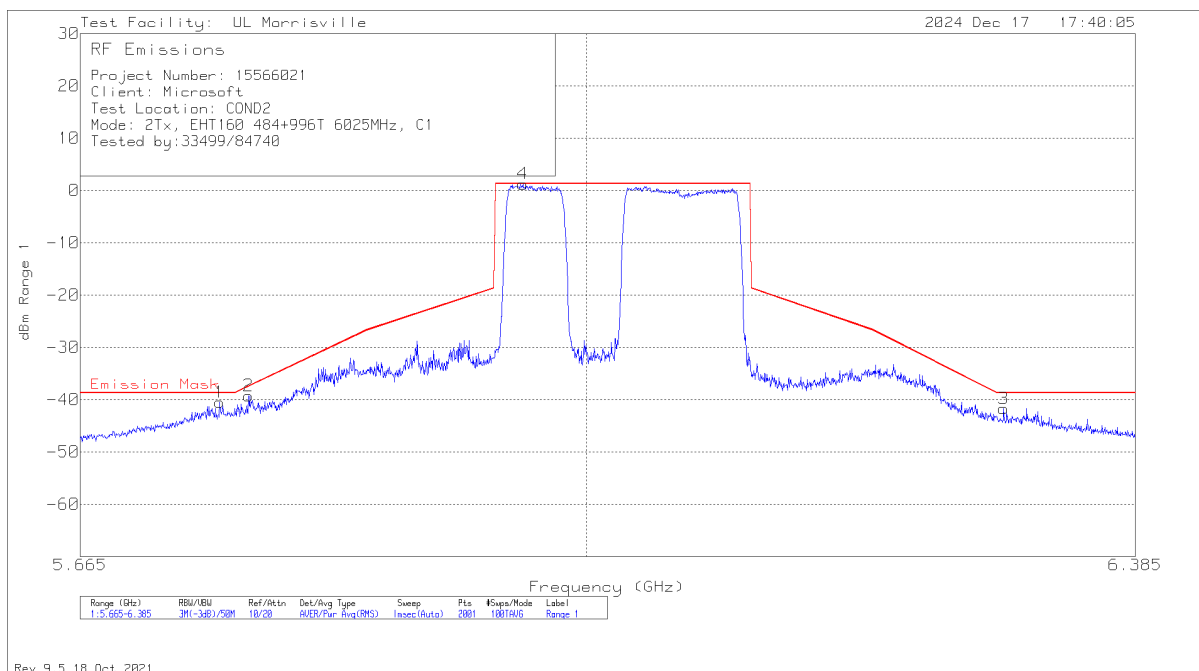

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.75536	-55.93	RMS	13.5	1.9	-40.53	-38.73	-1.8
2	5.77408	-54.76	RMS	13.6	1.9	-39.26	-37.47	-1.79
3	6.29032	-57.42	RMS	13.8	1.9	-41.72	-38.73	-2.99
4	5.9566	-14.36	RMS	13.7	1.9	1.24	1.27	-.03


RMS - RMS detection

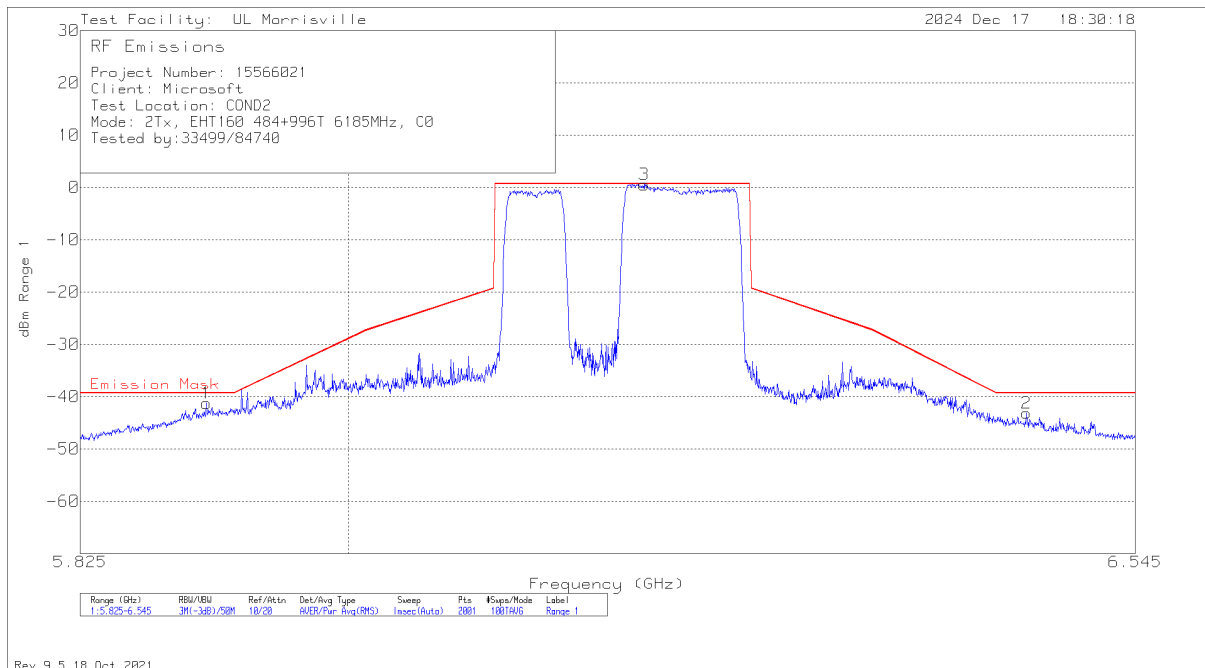

Rev 9.5 18 Oct 2021

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.90672	-56.77	RMS	13.6	1.9	-41.27	-39.33	-1.94
2	6.46688	-59.06	RMS	13.8	2.1	-43.16	-39.33	-3.83
3	6.1994	-15.15	RMS	13.8	1.9	.55	.67	-.12


RMS - RMS detection

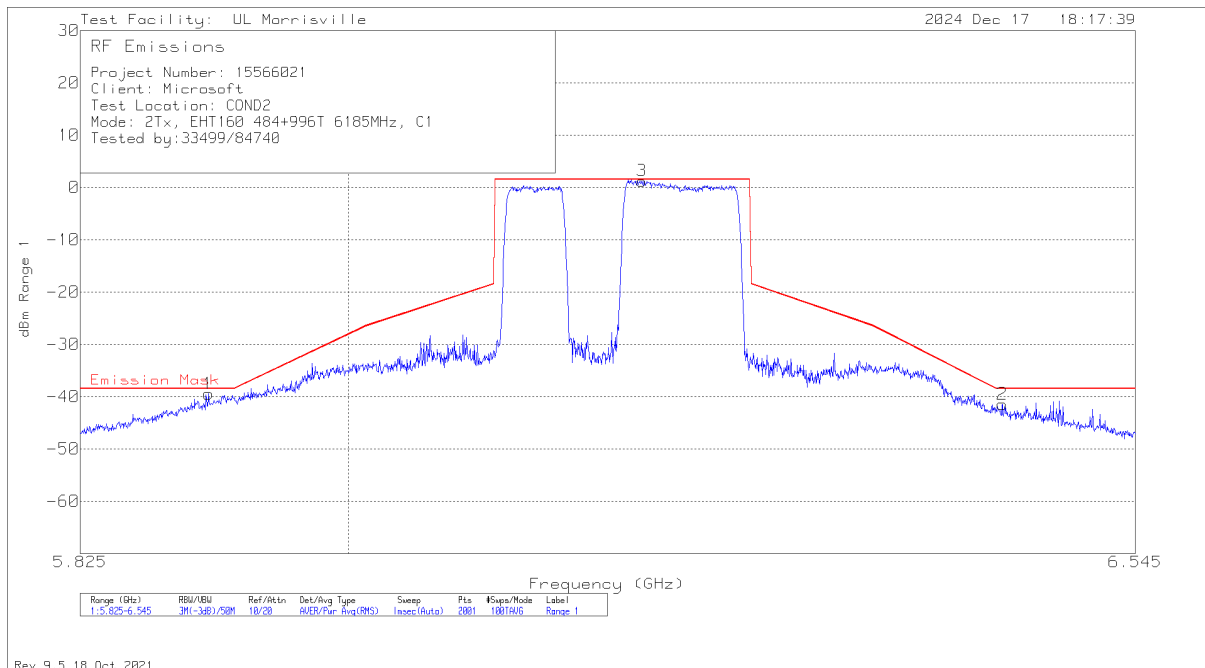

Rev 9.5 18 Oct 2021


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.90816	-54.95	RMS	13.6	1.9	-39.45	-38.5	-.95
2	6.4496	-57.43	RMS	13.9	2.1	-41.43	-38.5	-2.93
3	6.19796	-14.46	RMS	13.8	1.9	1.24	1.5	-.26

RMS - RMS detection

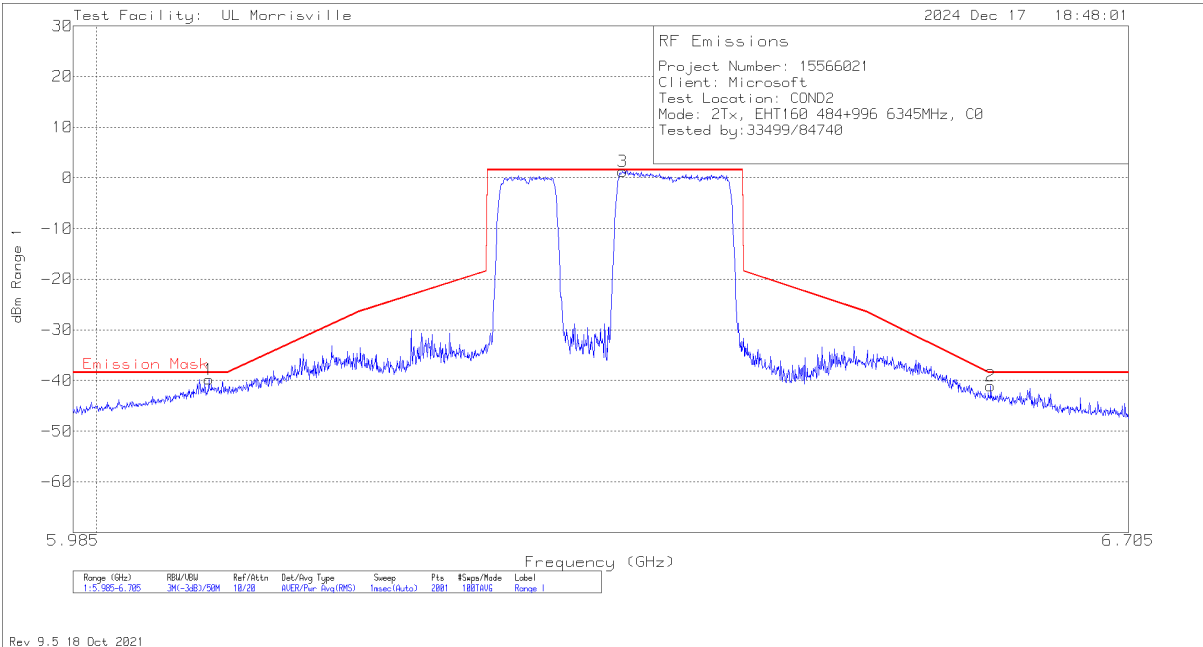

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.0732	-55.37	RMS	13.7	1.9	-39.77	-38.43	-1.34
3	6.34968	-14.43	RMS	13.8	1.9	1.27	1.57	-.3
2	6.60636	-57.06	RMS	13.9	2.1	-41.06	-38.43	-2.63


RMS - RMS detection

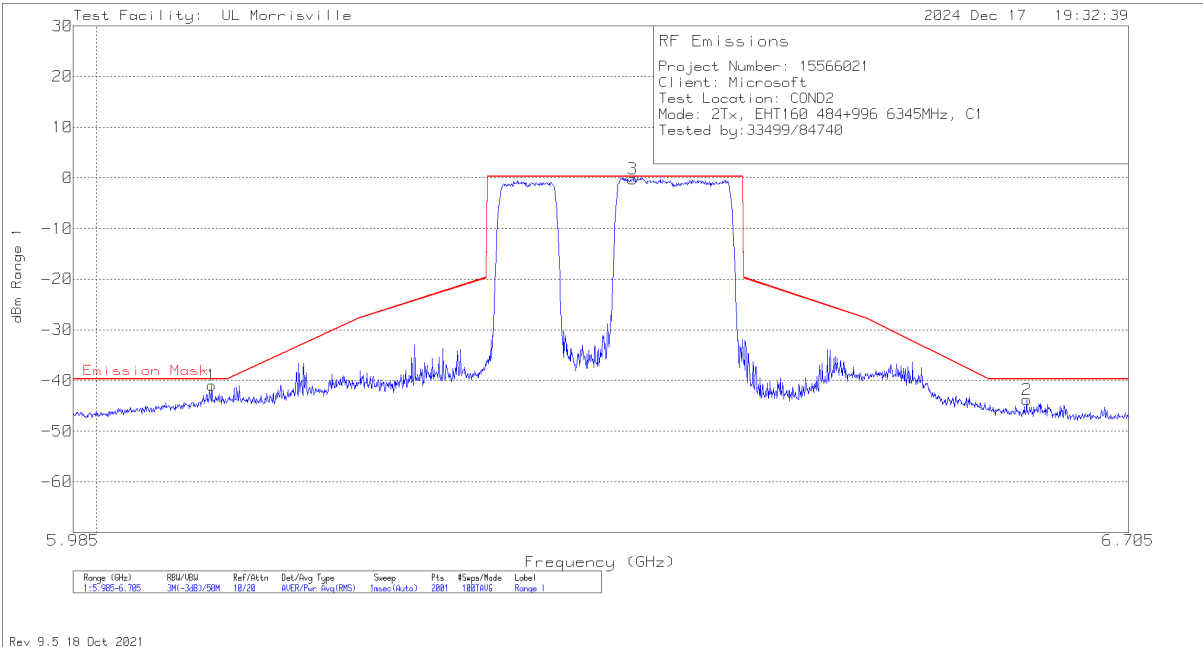

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.075	-56.58	RMS	13.7	1.9	-40.98	-39.74	-1.24
3	6.35652	-15.87	RMS	13.8	1.9	-.17	.26	-.43
2	6.63192	-59.81	RMS	13.9	2.1	-43.81	-39.74	-4.07


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (CONTIGUOUS) STANDARD
POWER

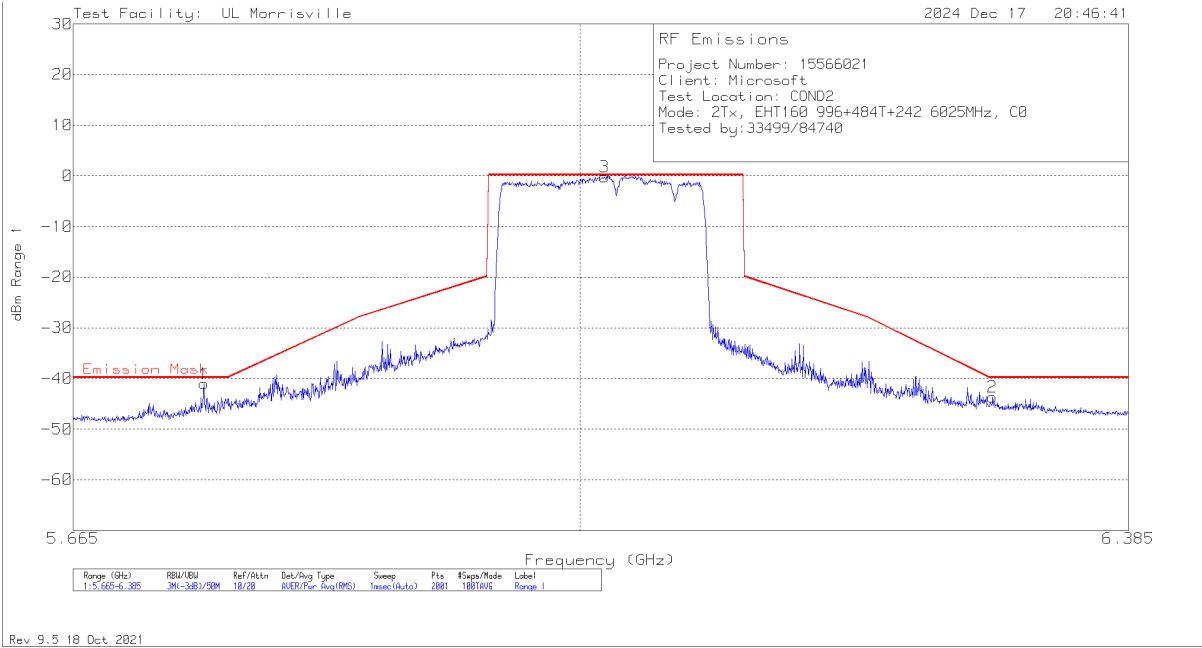


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7496	-56.41	RMS	13.5	1.9	-41.01	-39.84	-1.17
3	6.01672	-15.76	RMS	13.7	1.9	-.16	.16	-.32
2	6.28744	-59.37	RMS	13.8	1.9	-43.67	-39.84	-3.83

RMS - RMS detection

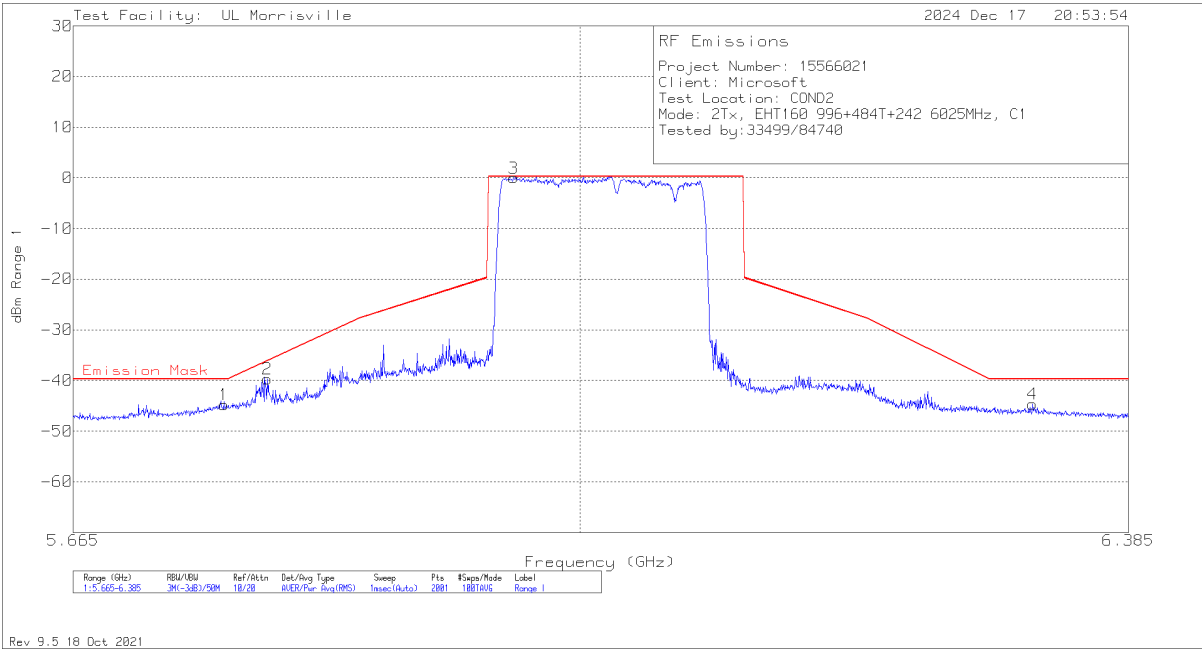


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.76292	-60.21	RMS	13.5	1.9	-44.81	-39.73	-5.08
2	5.791	-55.24	RMS	13.6	1.9	-39.74	-36.12	-3.62
3	5.95516	-15.62	RMS	13.7	1.9	-.02	.27	-.29
4	6.31588	-60.48	RMS	13.9	1.9	-44.68	-39.73	-4.95

RMS - RMS detection

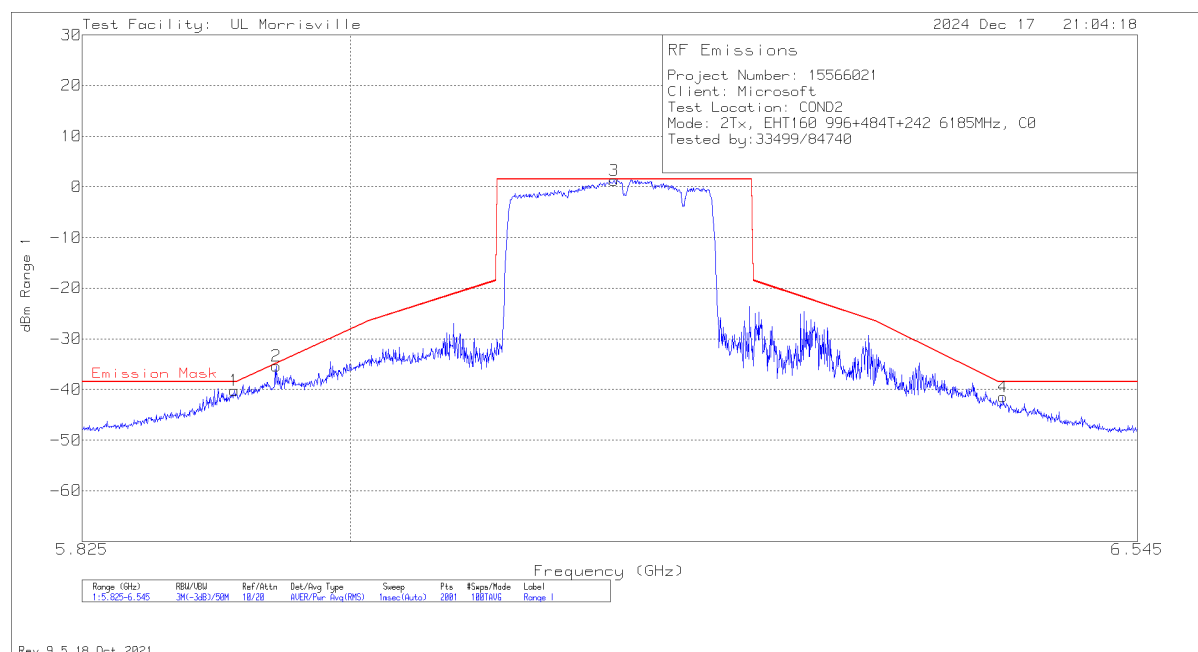


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.92364	-55.66	RMS	13.6	1.9	-40.16	-38.5	-1.66
2	5.95136	-50.98	RMS	13.7	1.9	-35.38	-34.85	-.53
3	6.17744	-14.47	RMS	13.8	1.9	1.23	1.5	-.27
4	6.44852	-57.49	RMS	13.9	2.1	-41.49	-38.5	-2.99

RMS - RMS detection

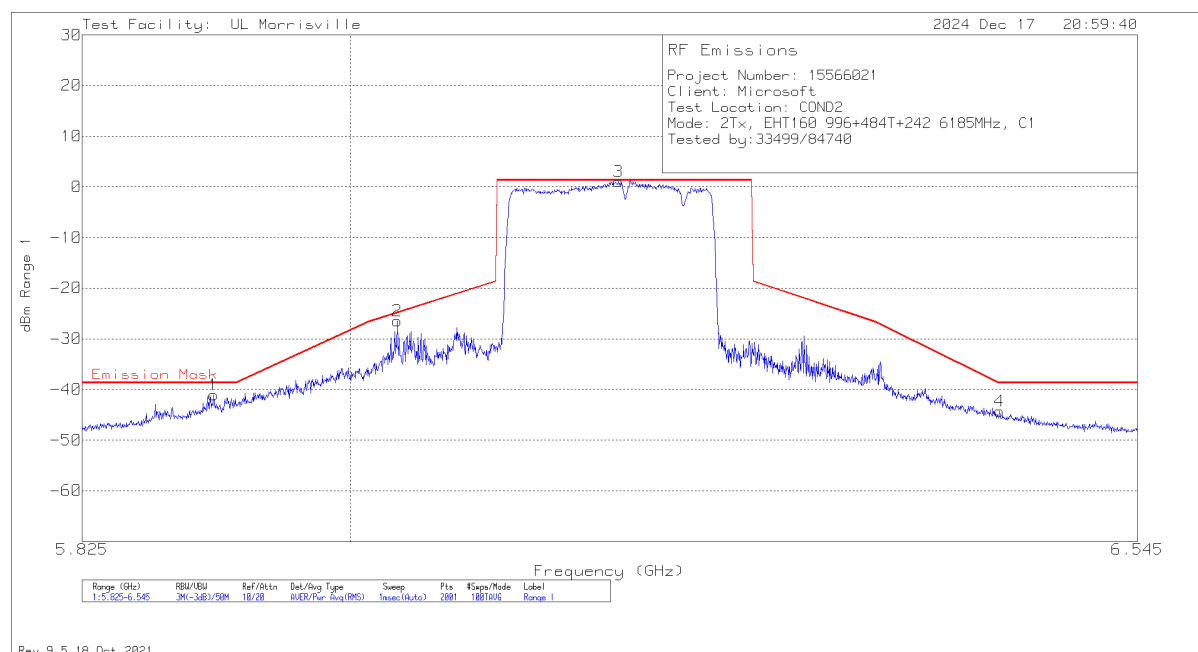


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.91032	-56.6	RMS	13.6	1.9	-41.1	-38.72	-2.38
2	6.03128	-42.06	RMS	13.7	1.9	-26.46	-24.9	-1.56
3	6.18032	-14.62	RMS	13.8	1.9	1.08	1.28	-.2
4	6.446	-60.32	RMS	13.9	2.1	-44.32	-38.72	-5.6

RMS - RMS detection

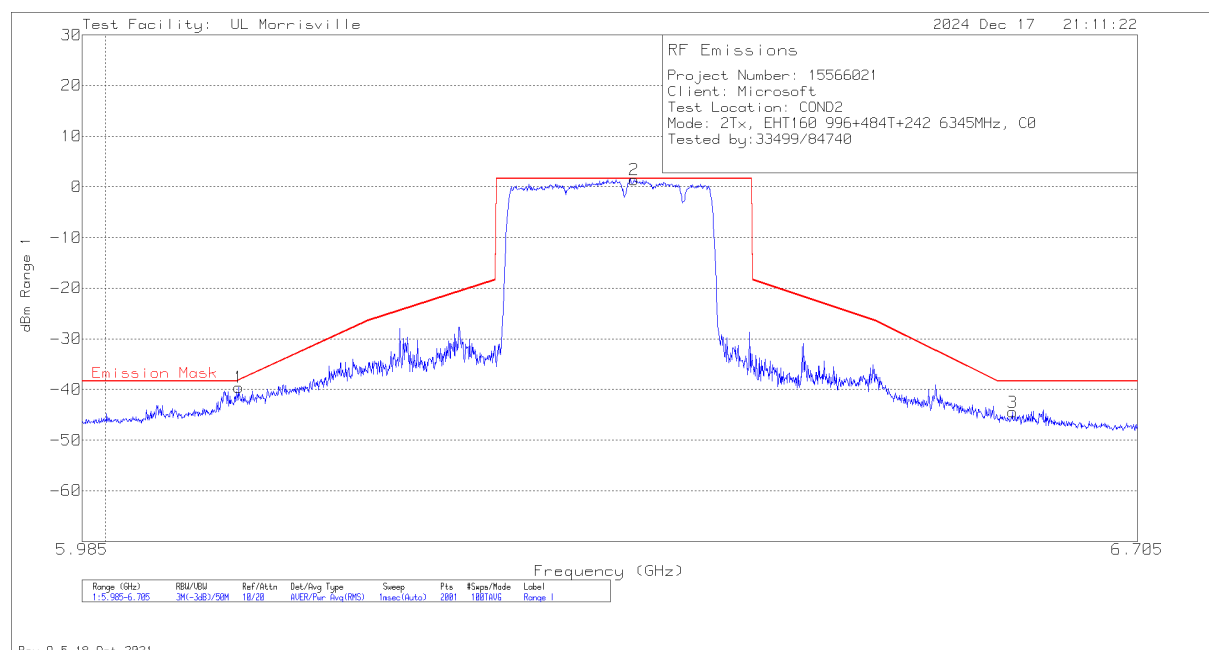

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.08652	-55.14	RMS	13.7	1.9	-39.54	-38.19	-1.35
2	6.35148	-14.33	RMS	13.8	1.9	1.37	1.6	-.23
3	6.61536	-60.47	RMS	13.9	2.1	-44.47	-38.4	-6.07


RMS - RMS detection

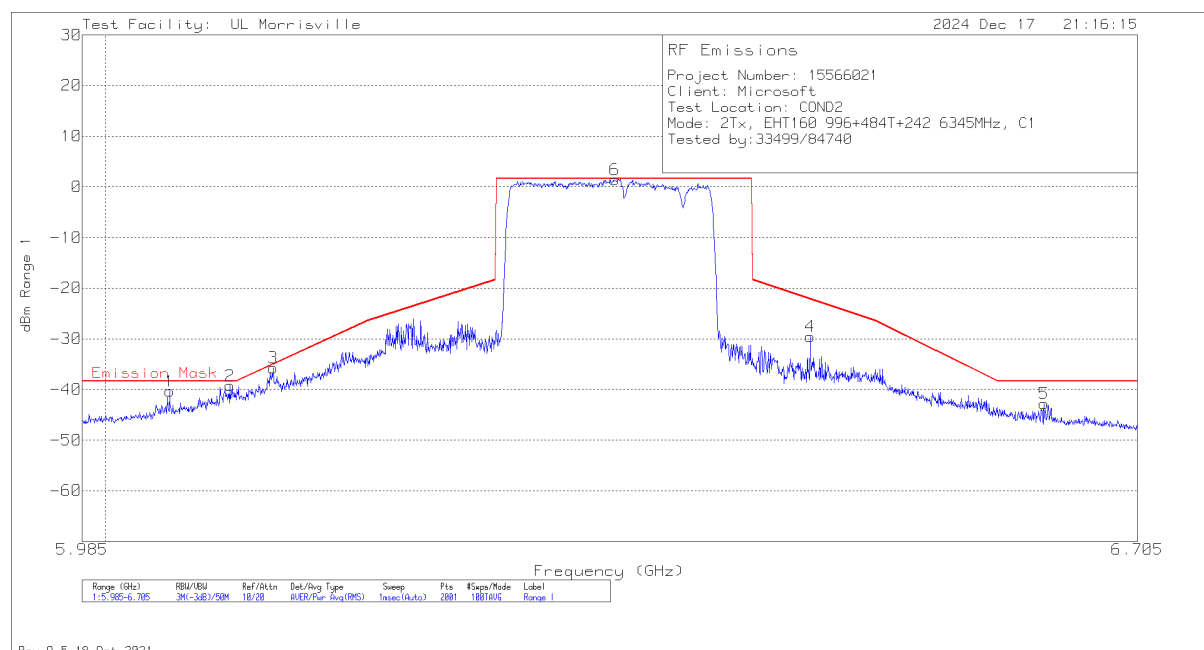

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.04152	-55.98	RMS	13.7	1.9	-40.38	-38.4	-1.98
2	6.08076	-54.87	RMS	13.7	1.9	-39.27	-38.4	-.87
3	6.1092	-51.38	RMS	13.7	1.9	-35.78	-35.04	-.74
6	6.33816	-14.28	RMS	13.8	1.9	1.42	1.6	-.18
4	6.4728	-45.4	RMS	13.8	2.1	-29.5	-22.16	-7.34
5	6.63804	-58.76	RMS	13.9	2.1	-42.76	-38.4	-4.36


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 242T+484T+996T (NON-CONTIGUOUS) STANDARD POWER

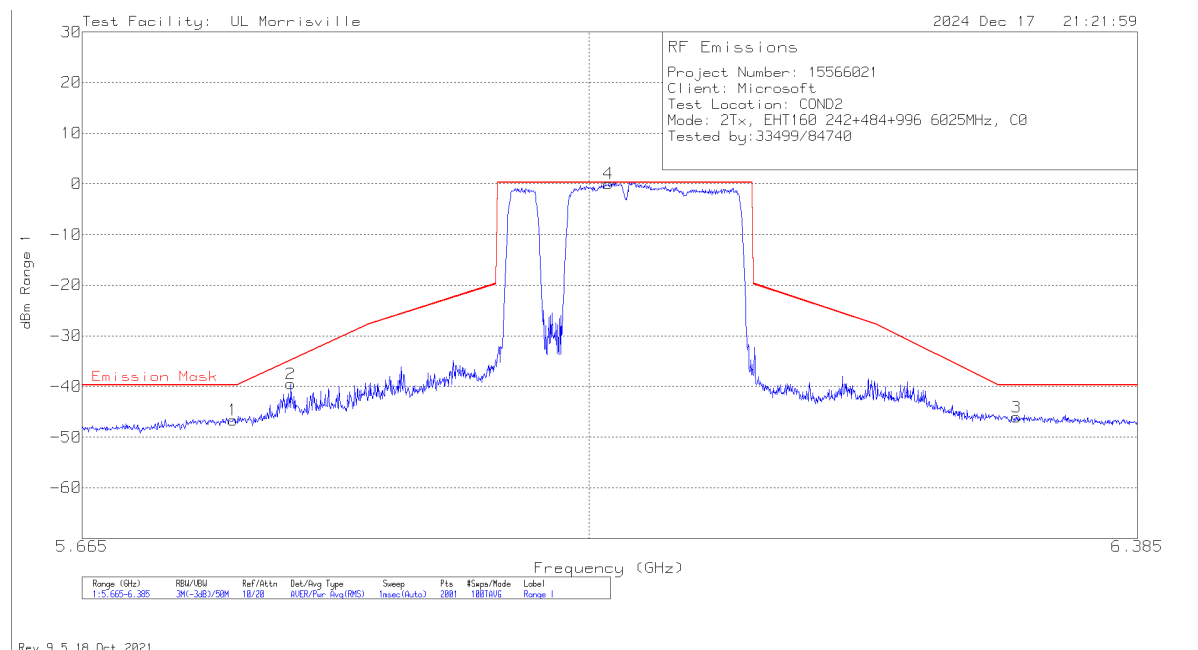


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.76256	-62.1	RMS	13.6	1.9	-46.6	-39.73	-6.87
2	5.80072	-55.01	RMS	13.6	1.9	-39.51	-34.78	-4.73
4	6.01348	-15.6	RMS	13.7	1.9	0	.27	-.27
3	6.29788	-61.87	RMS	13.9	1.9	-46.07	-39.73	-6.34

RMS - RMS detection

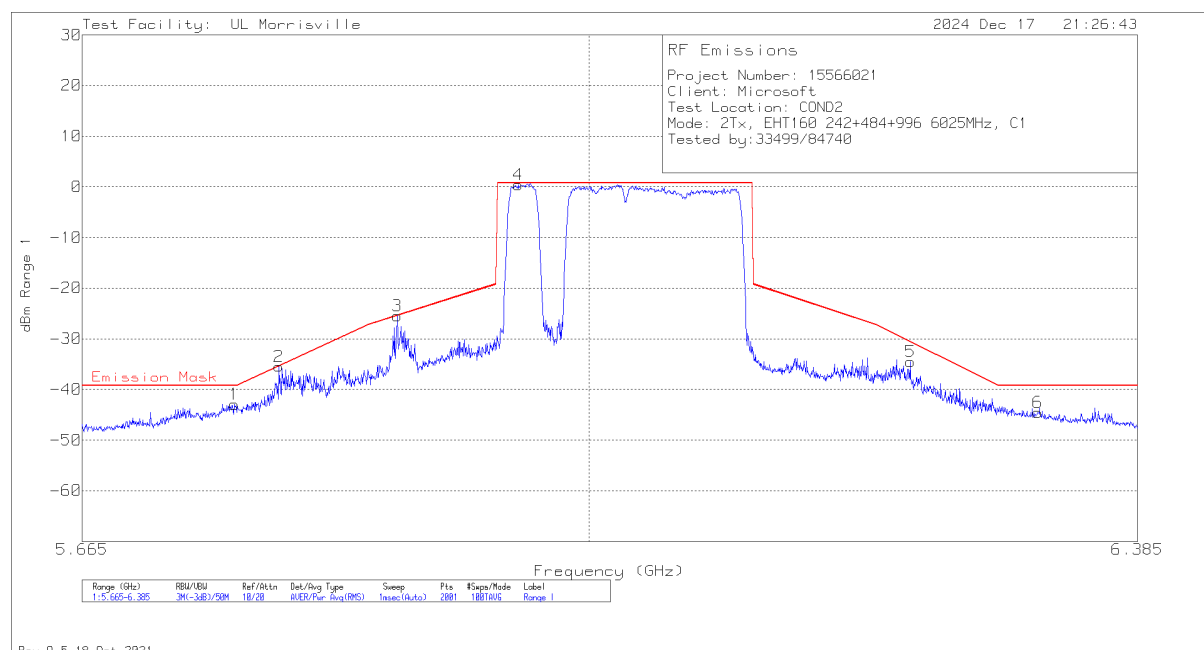


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.76364	-58.36	RMS	13.5	1.9	-42.96	-39.24	-3.72
2	5.7928	-50.94	RMS	13.6	1.9	-35.44	-35.39	-.05
3	5.87092	-40.99	RMS	13.6	1.9	-25.49	-25.45	-.04
4	5.95192	-15.2	RMS	13.7	1.9	.4	.76	-.36
5	6.22264	-50.2	RMS	13.8	1.9	-34.5	-30.66	-3.84
6	6.31336	-60.33	RMS	13.9	1.9	-44.53	-39.24	-5.29

RMS - RMS detection

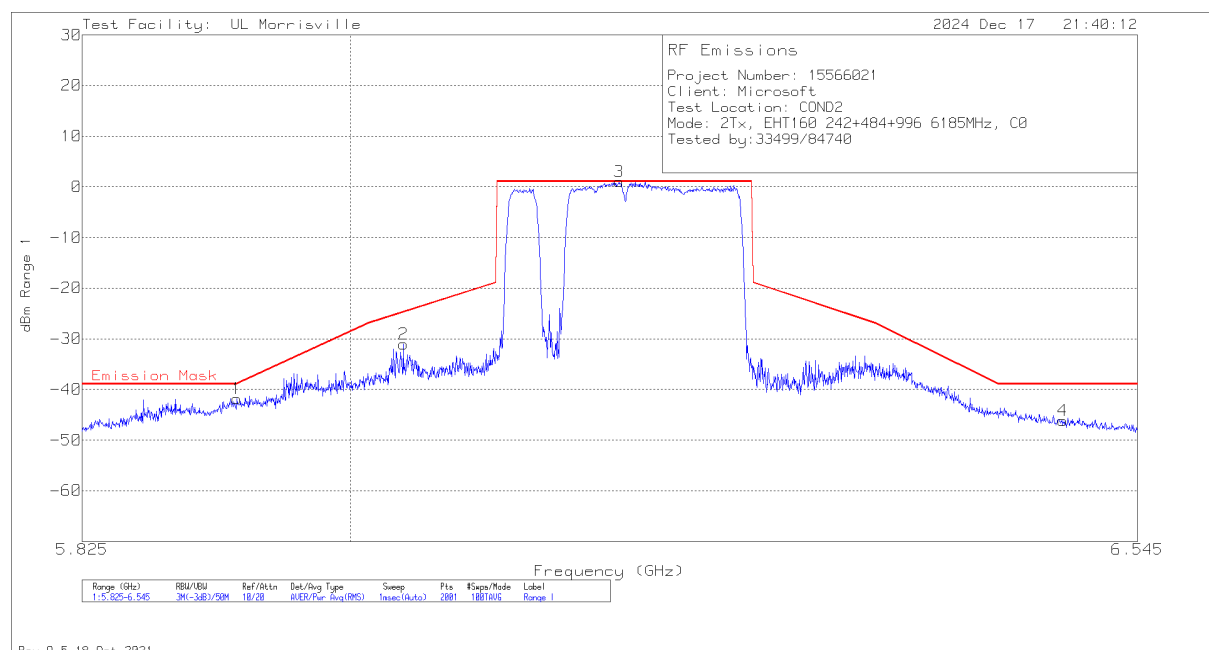


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.92544	-57.28	RMS	13.6	1.9	-41.78	-38.89	-2.89
2	6.03524	-46.64	RMS	13.7	1.9	-31.04	-24.75	-6.29
3	6.18068	-14.67	RMS	13.8	1.9	1.03	1.05	-.02
4	6.49136	-62.02	RMS	13.8	2.1	-46.12	-38.95	-7.17

RMS - RMS detection

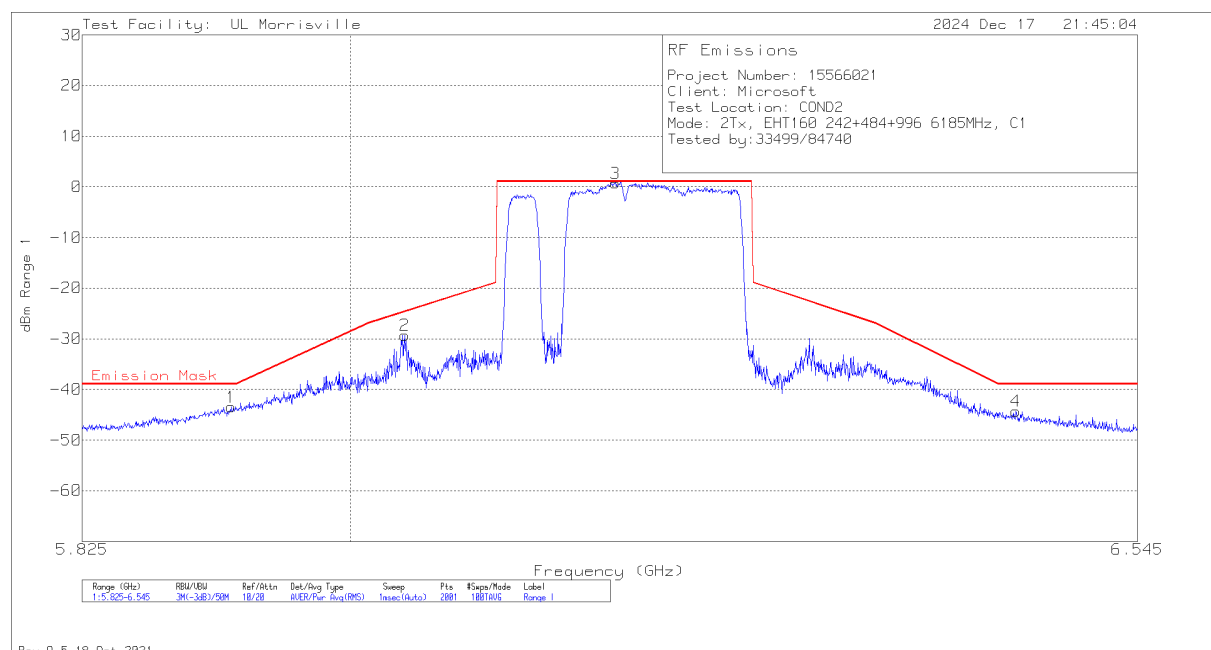

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.92148	-58.98	RMS	13.6	1.9	-43.48	-38.95	-4.53
2	6.03632	-44.91	RMS	13.7	1.9	-29.31	-24.65	-4.66
3	6.17816	-14.98	RMS	13.8	1.9	.72	1.05	-.33
4	6.45788	-60.29	RMS	13.9	2.1	-44.29	-38.95	-5.34


RMS - RMS detection

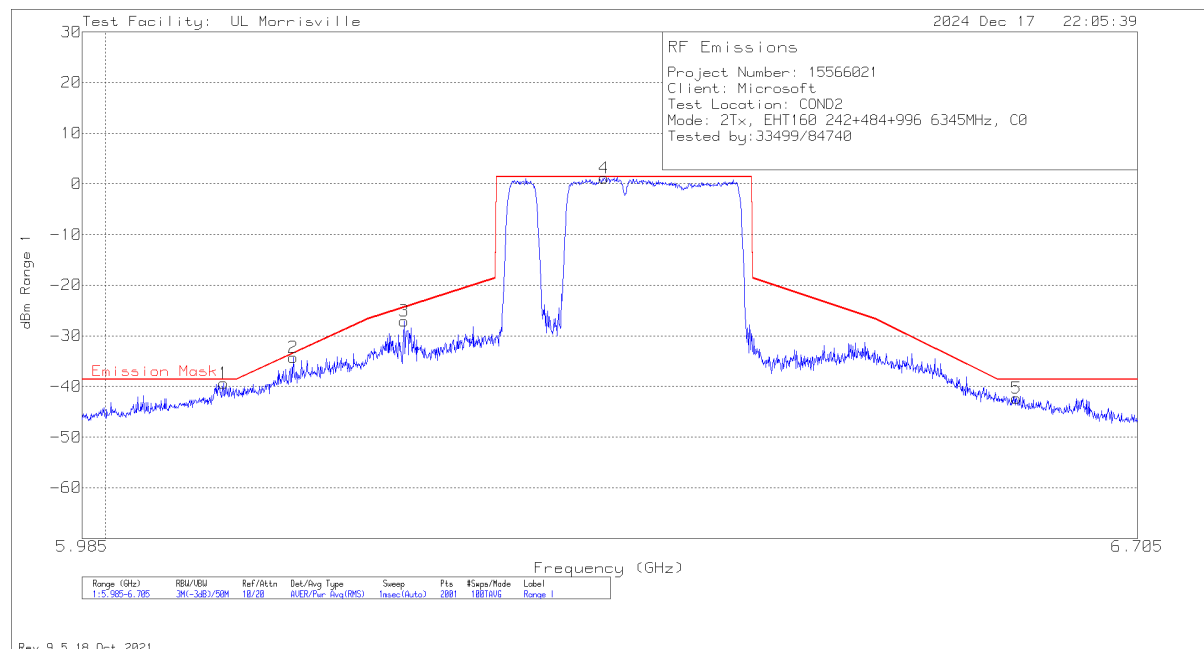

Rev 9.5 18 Oct 2021

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.0768	-54.94	RMS	13.7	1.9	-39.34	-38.65	-.69
2	6.12252	-49.81	RMS	13.7	1.9	-34.21	-33.45	-.76
3	6.19596	-42.75	RMS	13.8	1.9	-27.05	-24.38	-2.67
4	6.33096	-14.55	RMS	13.8	1.9	1.15	1.35	-.2
5	6.61824	-58.34	RMS	13.9	2.1	-42.34	-38.65	-3.69


RMS - RMS detection

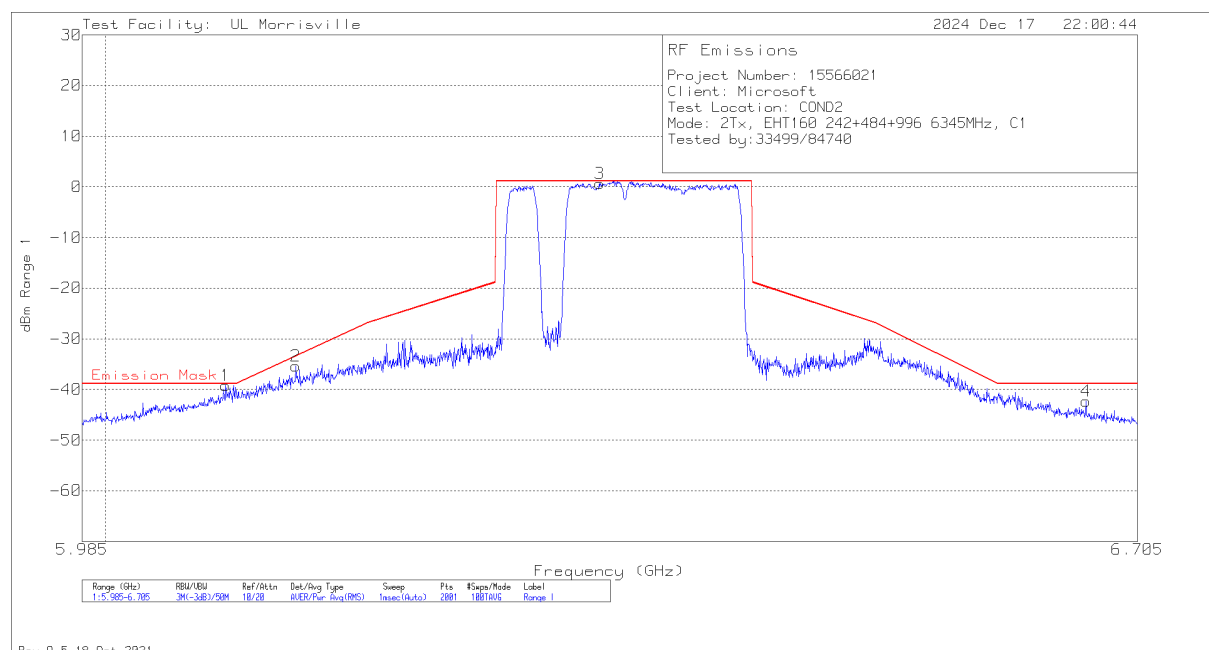

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.07824	-54.79	RMS	13.7	1.9	-39.19	-38.87	-.32
2	6.12432	-50.96	RMS	13.7	1.9	-35.36	-33.43	-1.93
3	6.32772	-15.01	RMS	13.8	1.9	.69	1.13	-.44
4	6.66792	-58.29	RMS	13.9	2.1	-42.29	-38.87	-3.42


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS) STANDARD POWER

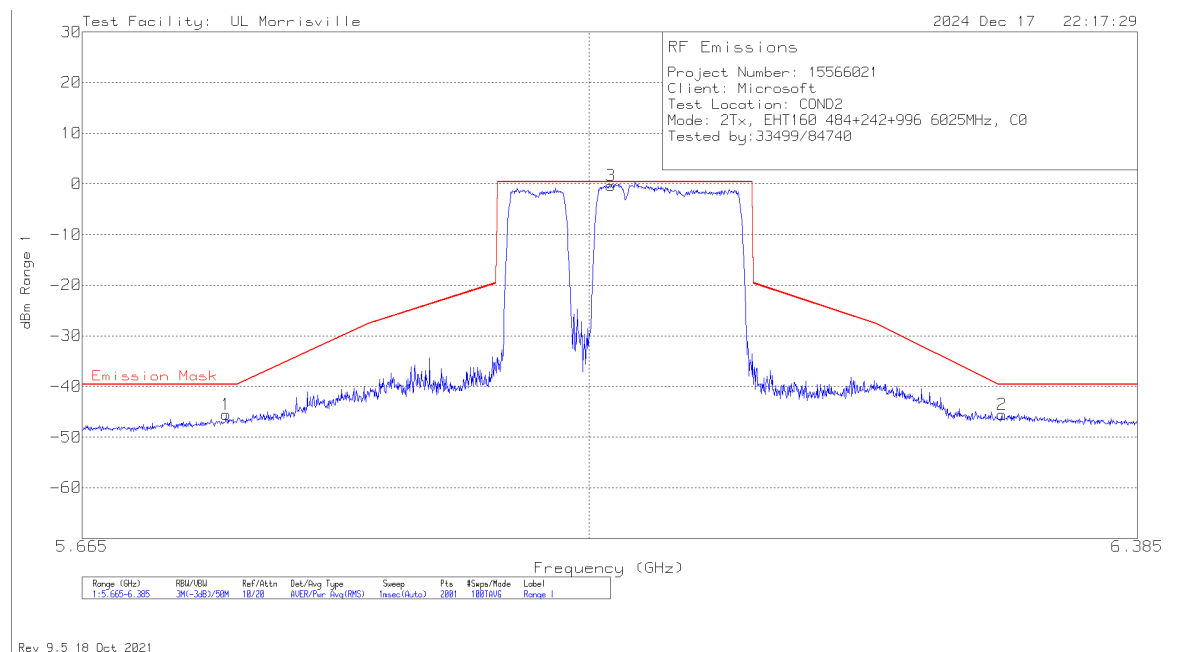


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.75824	-60.88	RMS	13.5	1.9	-45.48	-39.62	-5.86
3	6.01492	-15.97	RMS	13.7	1.9	-.37	.38	-.75
2	6.2878	-61.22	RMS	13.8	1.9	-45.52	-39.62	-5.9

RMS - RMS detection

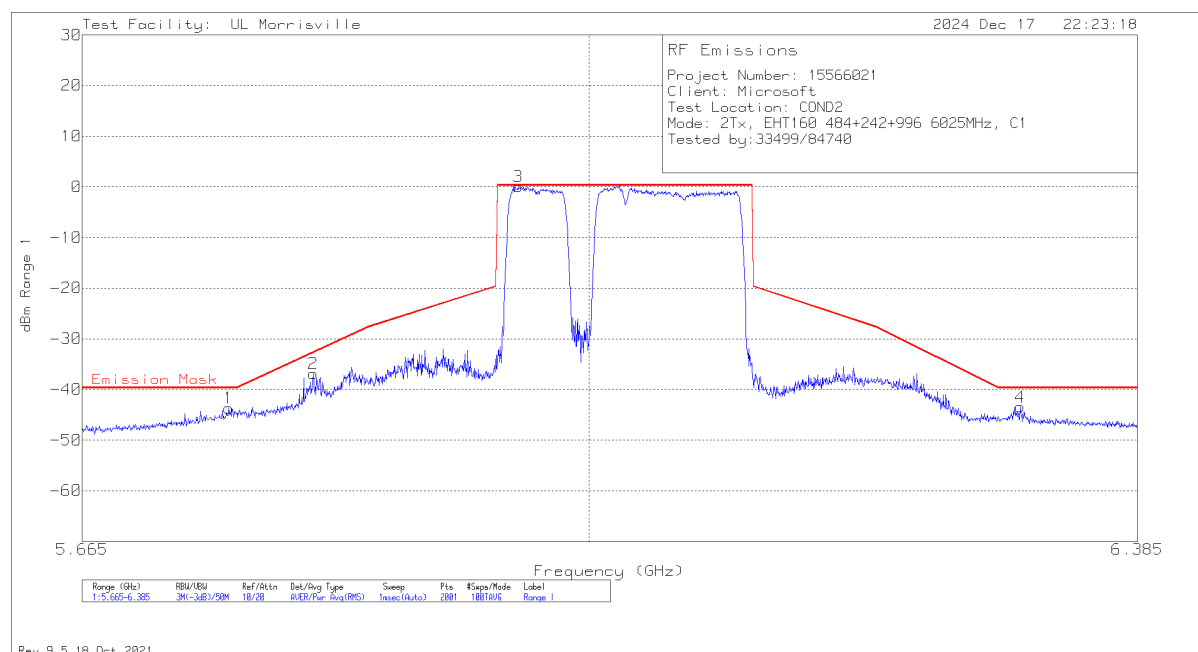


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.76004	-59.11	RMS	13.5	1.9	-43.71	-39.7	-4.01
2	5.81548	-52.36	RMS	13.6	1.9	-36.86	-32.72	-4.14
3	5.95192	-15.51	RMS	13.7	1.9	.09	.3	-.21
4	6.30076	-59.18	RMS	13.8	1.9	-43.48	-39.7	-3.78

RMS - RMS detection

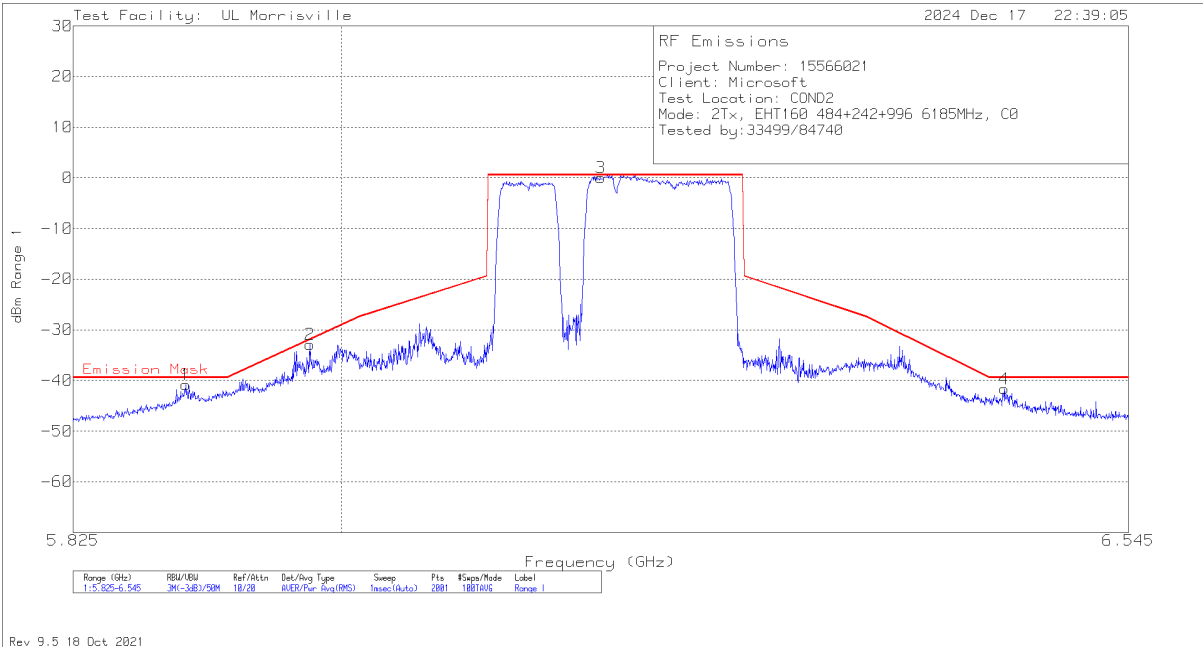


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.89808	-56.32	RMS	13.6	1.9	-40.82	-39.46	-1.36
2	5.97944	-48.48	RMS	13.7	1.9	-32.88	-31.93	-.95
3	6.17456	-15.63	RMS	13.8	1.9	.07	.54	-.47
4	6.45608	-57.63	RMS	13.9	2.1	-41.63	-39.46	-2.17

RMS - RMS detection

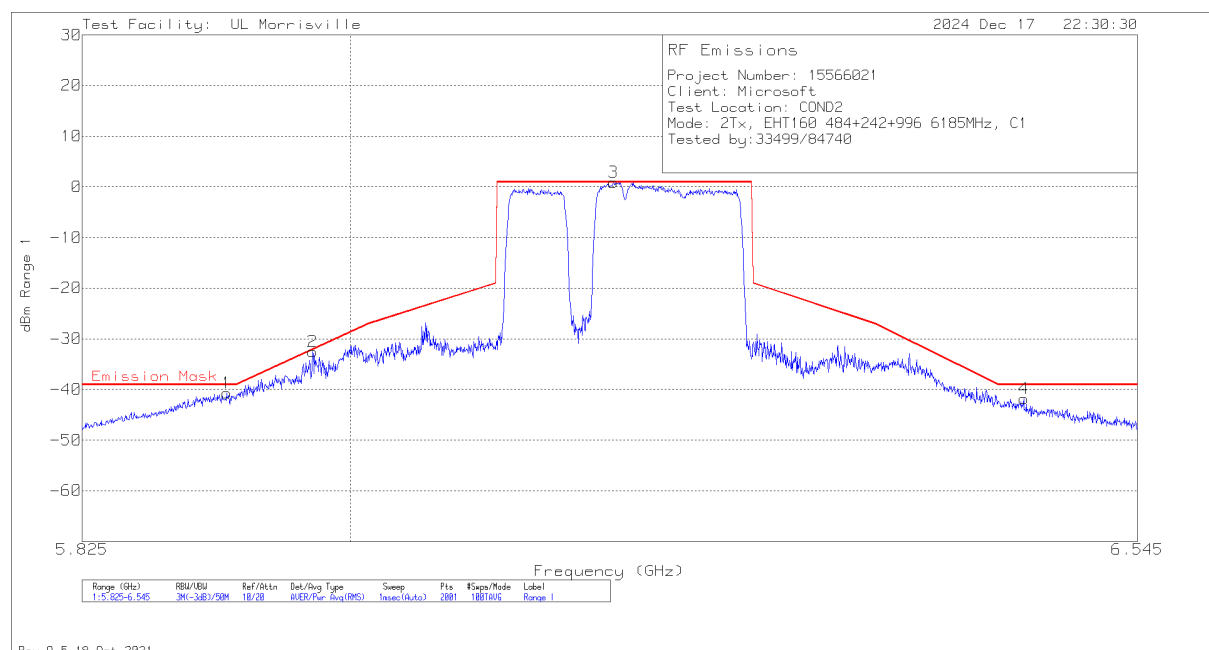


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.9186	-56.18	RMS	13.6	1.9	-40.68	-39.07	-1.61
2	5.97512	-48.07	RMS	13.7	1.9	-32.47	-32.14	-.33
3	6.17708	-14.78	RMS	13.8	1.9	.92	.93	-.01
4	6.46328	-57.7	RMS	13.8	2.1	-41.8	-39.07	-2.73

RMS - RMS detection

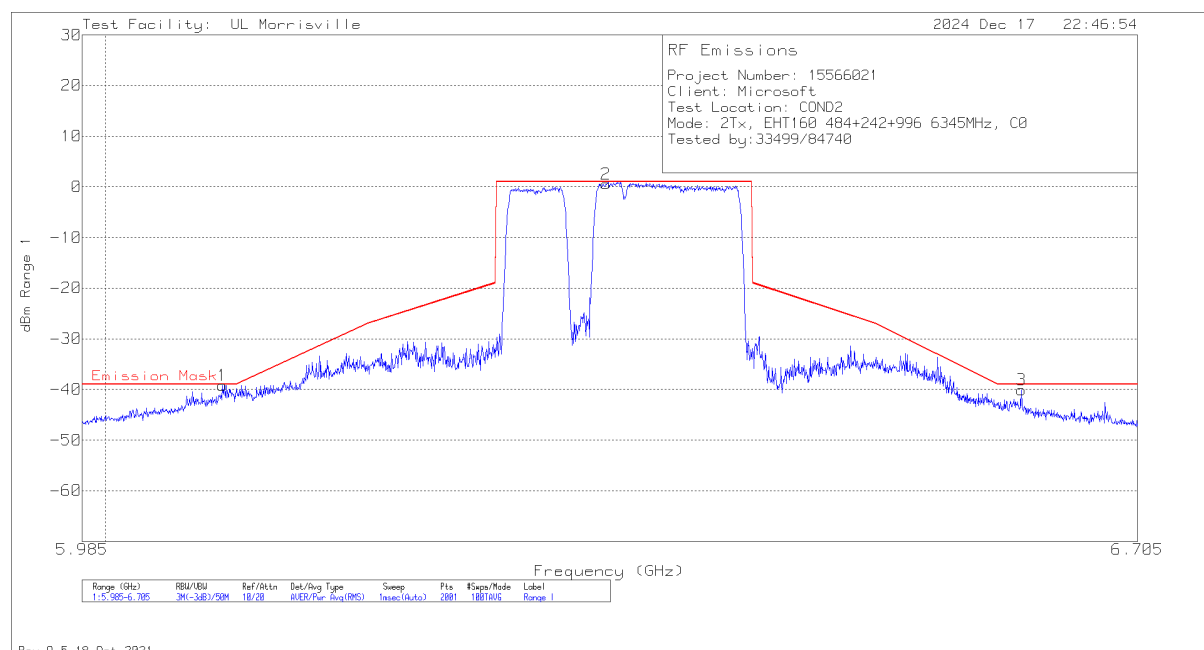

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.07608	-54.79	RMS	13.7	1.9	-39.19	-39	-.19
2	6.33204	-15.11	RMS	13.8	1.9	.59	1	-.41
3	6.62184	-56.07	RMS	13.9	2.1	-40.07	-39	-1.07


RMS - RMS detection

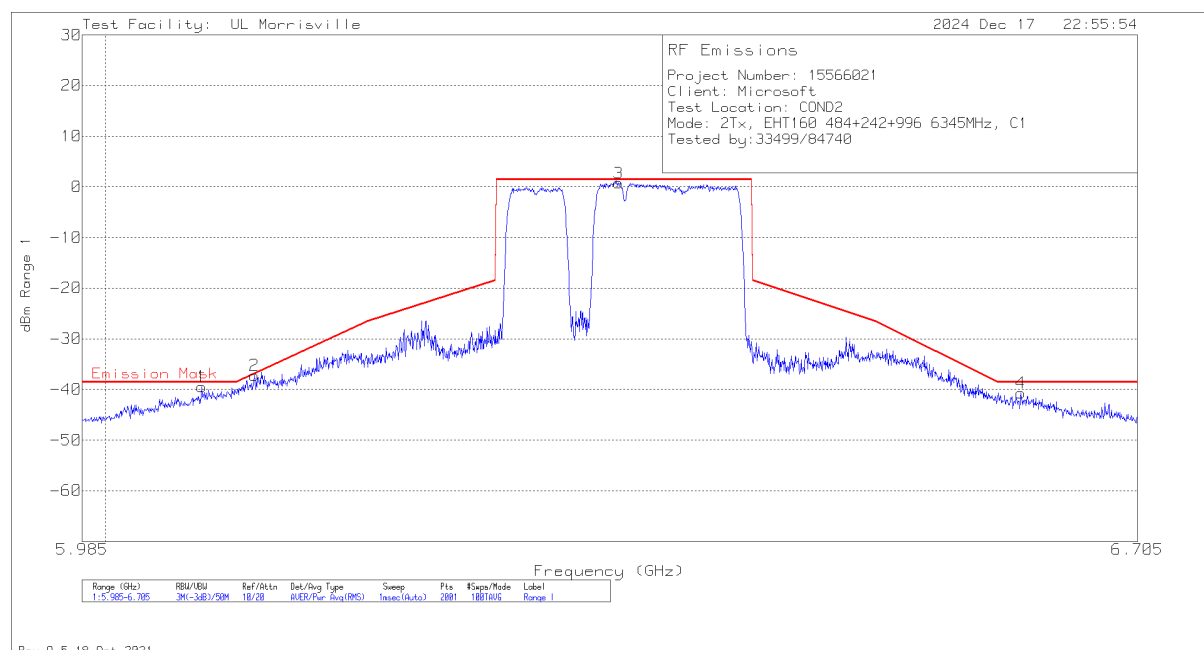

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.0624	-55.01	RMS	13.7	1.9	-39.41	-38.54	-.87
2	6.09696	-52.87	RMS	13.7	1.9	-37.27	-36.88	-.39
3	6.34068	-14.97	RMS	13.8	1.9	.73	1.46	-.73
4	6.62148	-56.72	RMS	13.9	2.1	-40.72	-38.54	-2.18


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+242T+996T (NON-CONTIGUOUS 2) STANDARD POWER

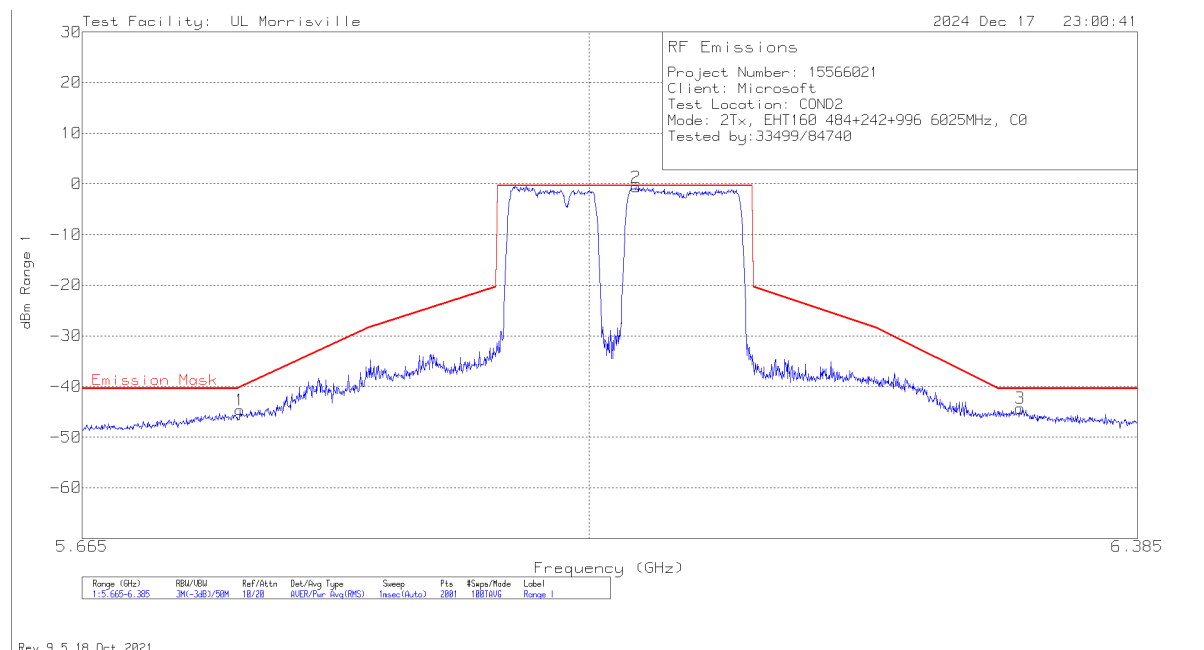


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.76724	-60.1	RMS	13.6	1.9	-44.6	-40.08	-4.52
2	6.0322	-16.24	RMS	13.7	1.9	-.64	-.39	-.25
3	6.30076	-60.08	RMS	13.9	1.9	-44.28	-40.39	-3.89

RMS - RMS detection

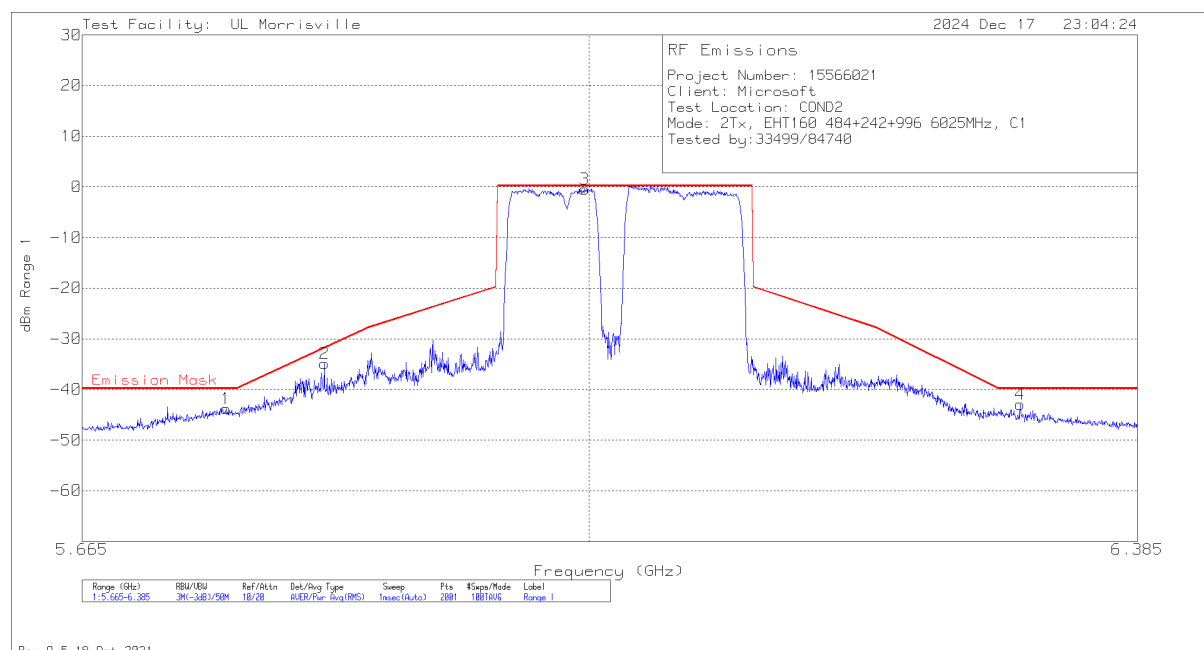


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.75824	-59.16	RMS	13.5	1.9	-43.76	-39.82	-3.94
2	5.82268	-50.34	RMS	13.6	1.9	-34.84	-31.84	-3
3	5.99692	-16.09	RMS	13.7	1.9	-.49	.18	-.67
4	6.30076	-58.61	RMS	13.8	1.9	-42.91	-39.82	-3.09

RMS - RMS detection

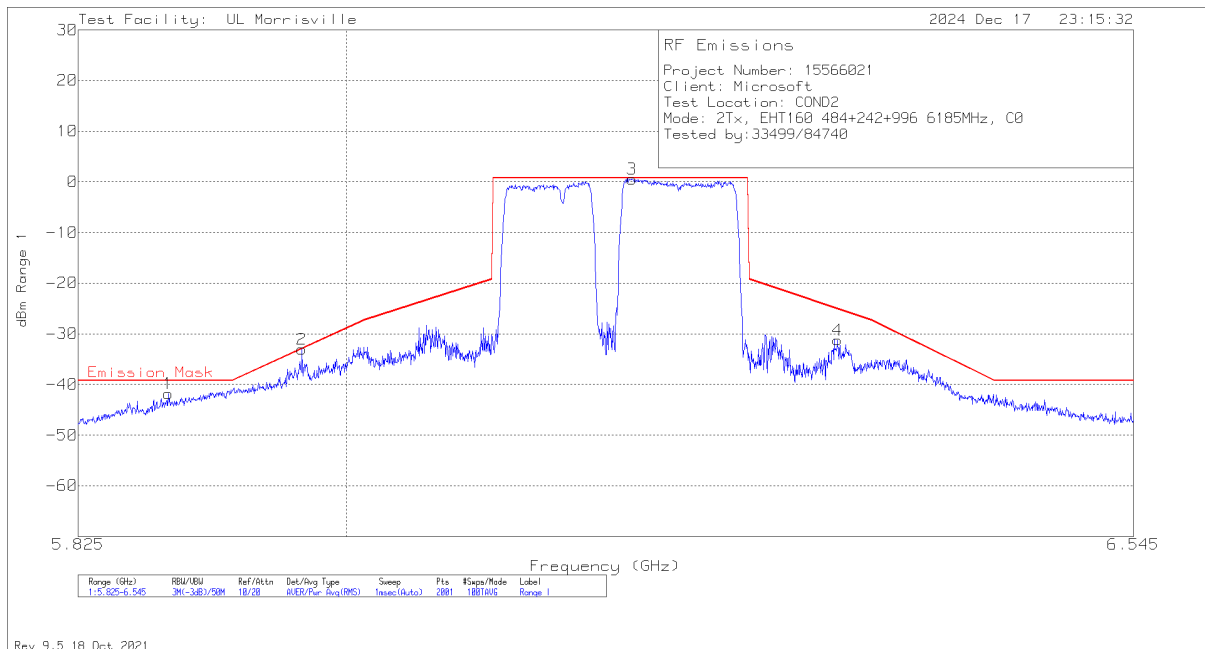


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.88332	-57.27	RMS	13.6	1.9	-41.77	-39.27	-2.5
2	5.9708	-48.77	RMS	13.8	1.9	-33.07	-32.93	-.14
3	6.19256	-15.12	RMS	13.8	1.9	.58	.73	-.15
4	6.33476	-46.93	RMS	13.8	1.9	-31.23	-25.09	-6.14

RMS - RMS detection

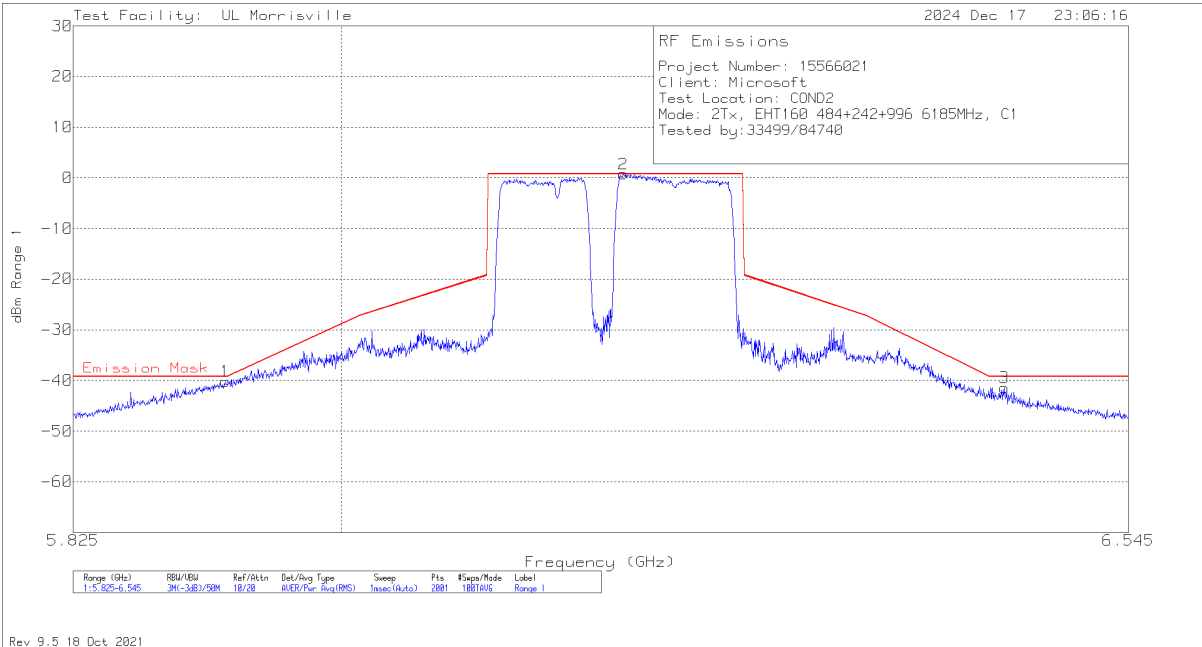


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.92364	-55.67	RMS	13.6	1.9	-40.17	-39.24	-.93
2	6.18968	-14.97	RMS	13.8	1.9	.73	.76	-.03
3	6.45608	-57.41	RMS	13.9	2.1	-41.41	-39.24	-2.17

RMS - RMS detection

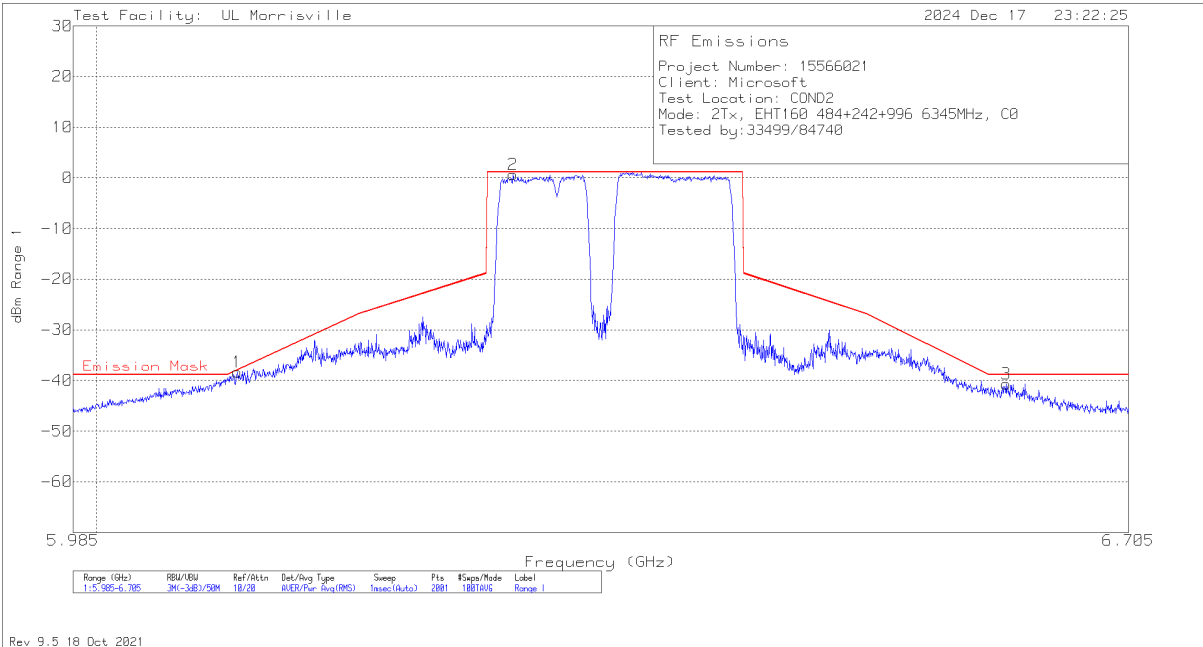

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.09156	-54.03	RMS	13.8	1.9	-38.33	-37.96	-.37
2	6.27516	-15.01	RMS	13.8	1.9	.69	1.13	-.44
3	6.61716	-56.65	RMS	13.9	2.1	-40.65	-38.87	-1.78


RMS - RMS detection

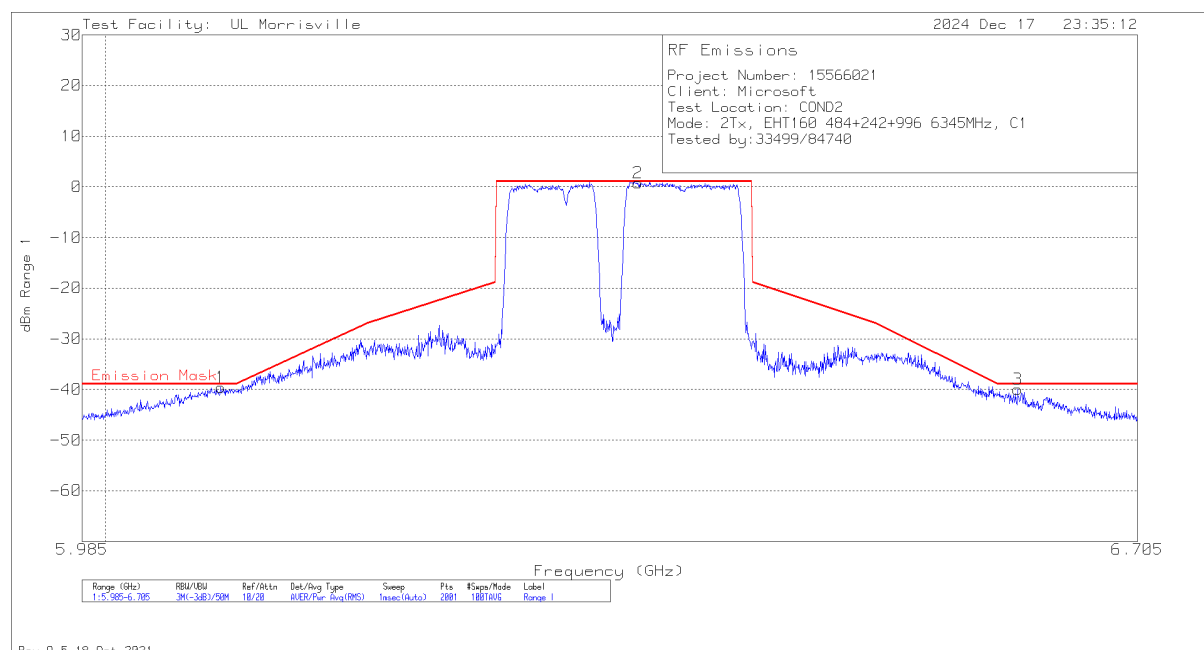

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.075	-55.22	RMS	13.7	1.9	-39.62	-38.91	-.71
2	6.354	-14.88	RMS	13.8	1.9	.82	1.09	-.27
3	6.61896	-55.92	RMS	13.9	2.1	-39.92	-38.91	-1.01


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS) STANDARD POWER

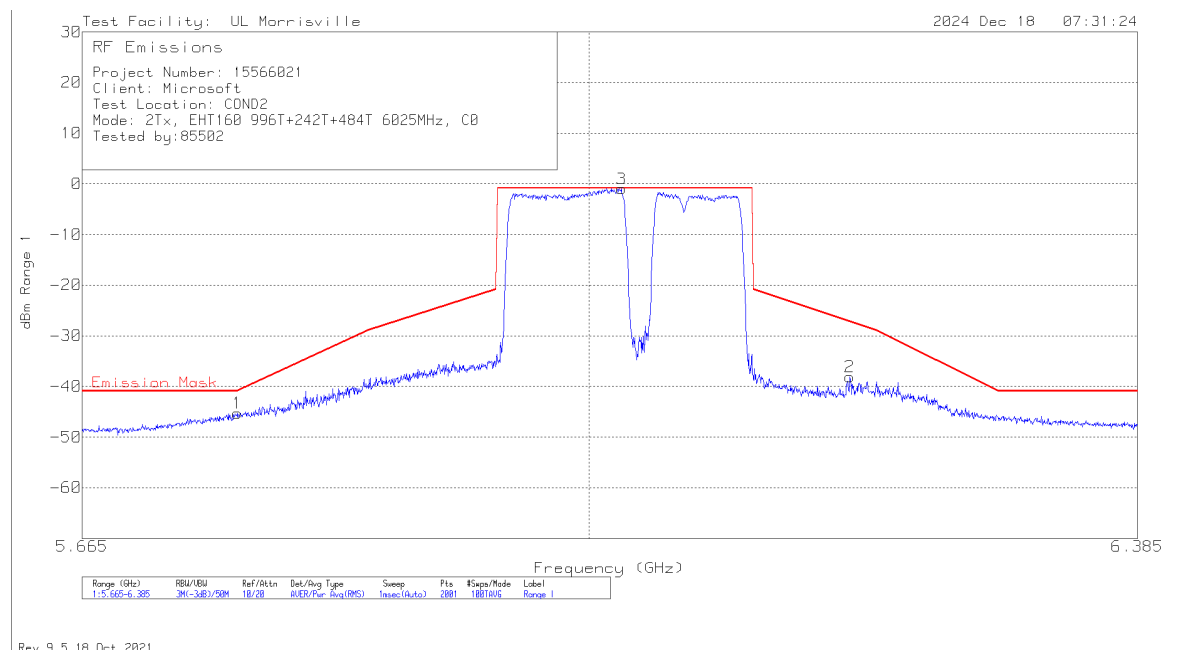


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.76544	-60.82	RMS	13.6	1.9	-45.32	-40.83	-4.49
2	6.18016	-53.75	RMS	13.8	1.9	-38.05	-27.22	-10.83
3	6.02212	-16.6	RMS	13.7	1.9	-1	-.89	-.11

RMS - RMS detection

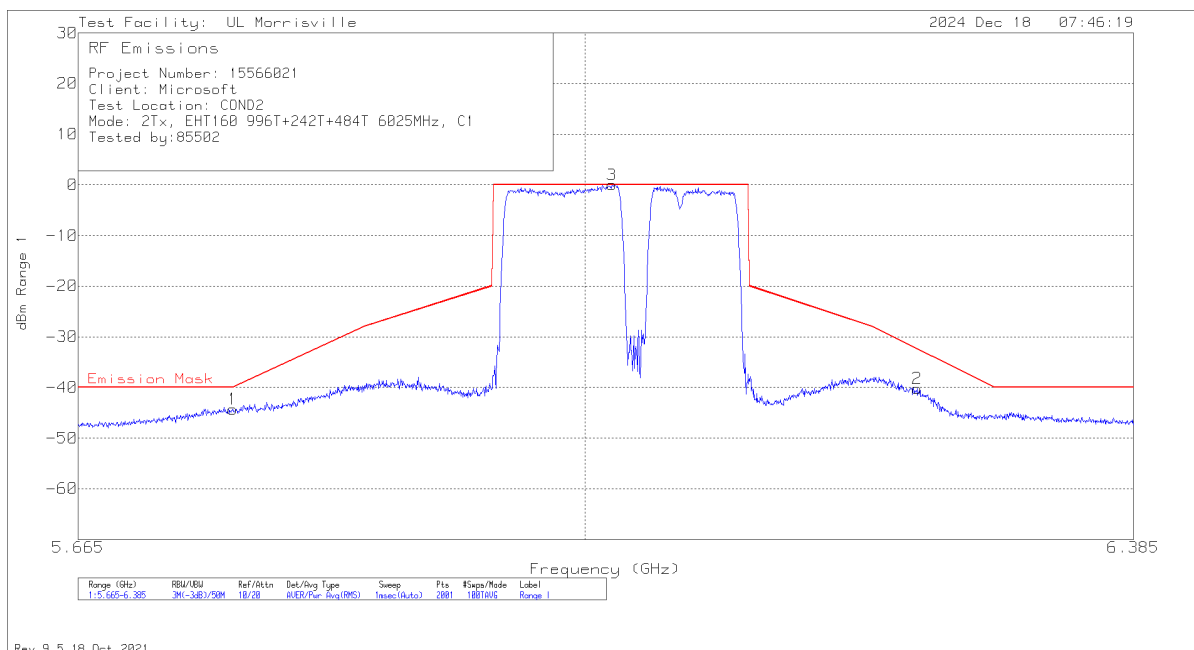


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.76508	-59.69	RMS	13.5	1.9	-44.29	-39.99	-4.3
3	6.01852	-15.61	RMS	13.7	1.9	-.01	0	-.01
2	6.2302	-55.91	RMS	13.8	1.9	-40.21	-32.46	-7.75

RMS - RMS detection

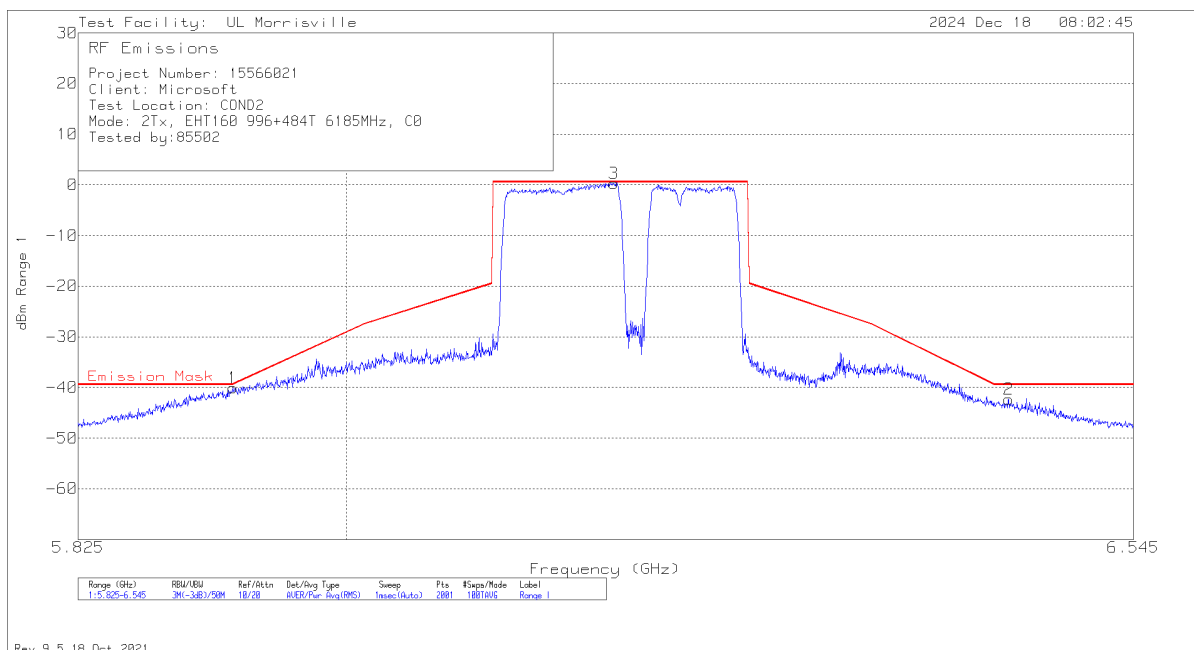


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.92544	-55.54	RMS	13.6	1.9	-40.04	-39.41	-.63
3	6.17996	-15.39	RMS	13.8	1.9	.31	.53	-.22
2	6.45536	-58.27	RMS	13.9	2.1	-42.27	-39.47	-2.8

RMS - RMS detection

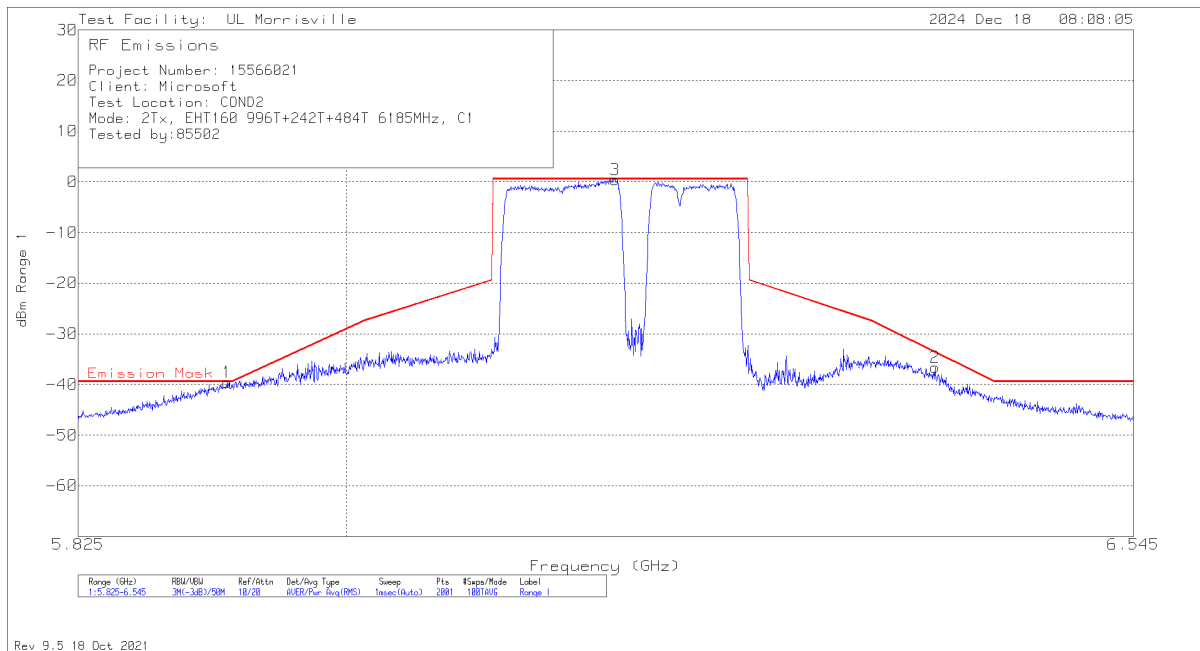


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.92184	-55.06	RMS	13.6	1.9	-39.56	-39.46	-.1
3	6.18068	-15.31	RMS	13.8	1.9	.39	.54	-.15
2	6.40316	-52.27	RMS	13.8	1.9	-36.57	-33.71	-2.86

RMS - RMS detection

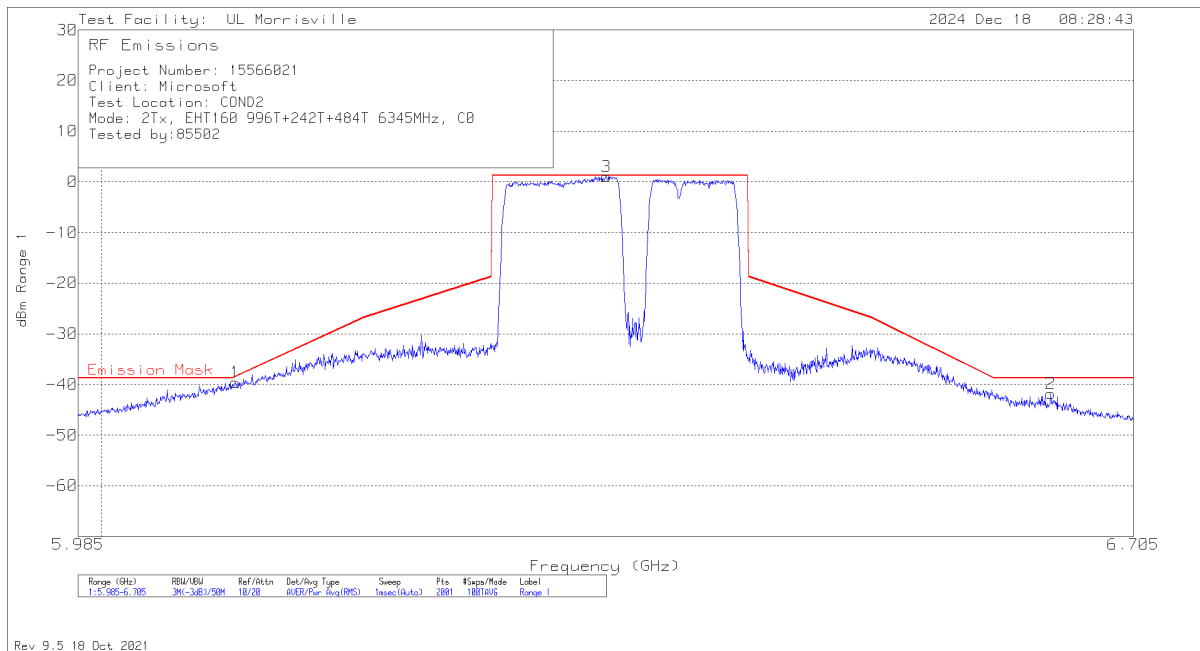

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.08724	-55.13	RMS	13.7	1.9	-39.53	-38.46	-1.07
3	6.33528	-14.67	RMS	13.8	1.9	1.03	1.23	-.2
2	6.6456	-57.78	RMS	13.9	2.1	-41.78	-38.77	-3.01


RMS - RMS detection

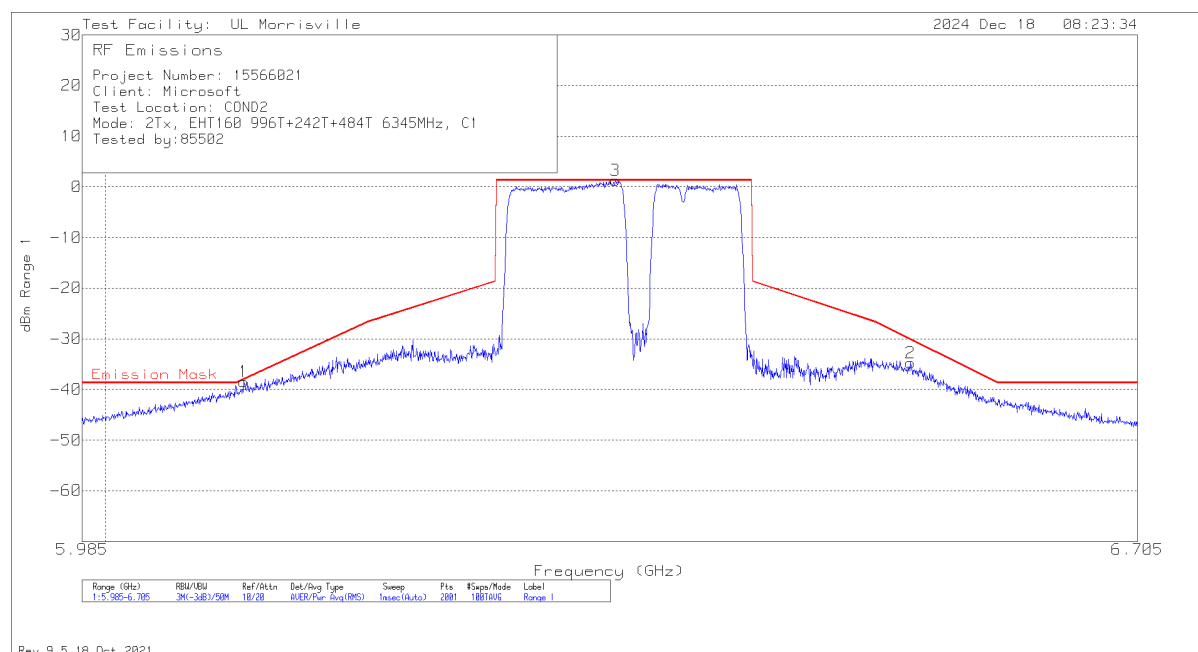

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.09012	-54.05	RMS	13.7	1.9	-38.45	-37.99	-.46
3	6.33852	-14.44	RMS	13.8	1.9	1.26	1.3	-.04
2	6.54336	-50.65	RMS	13.8	2.1	-34.75	-30.21	-4.54


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+242T+484T (NON-CONTIGUOUS 2) STANDARD POWER

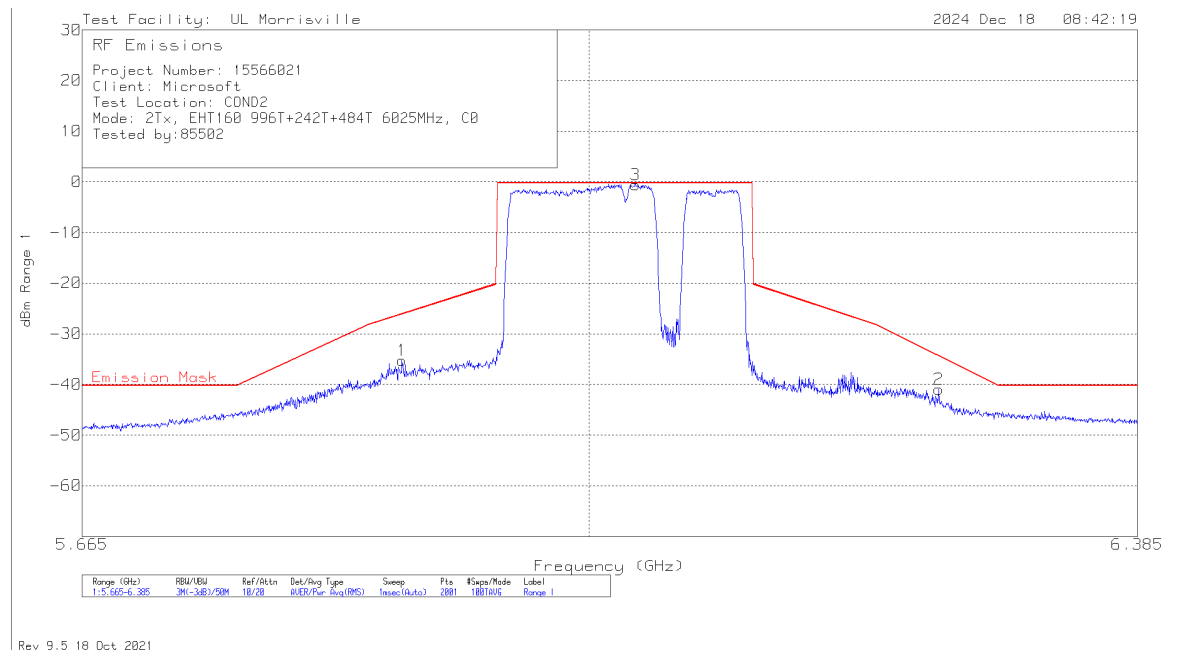


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.87416	-50.77	RMS	13.6	1.9	-35.27	-26.15	-9.12
3	6.03184	-16.2	RMS	13.7	1.9	-.6	-.25	-.35
2	6.2428	-56.64	RMS	13.8	1.9	-40.94	-34.45	-6.49

RMS - RMS detection

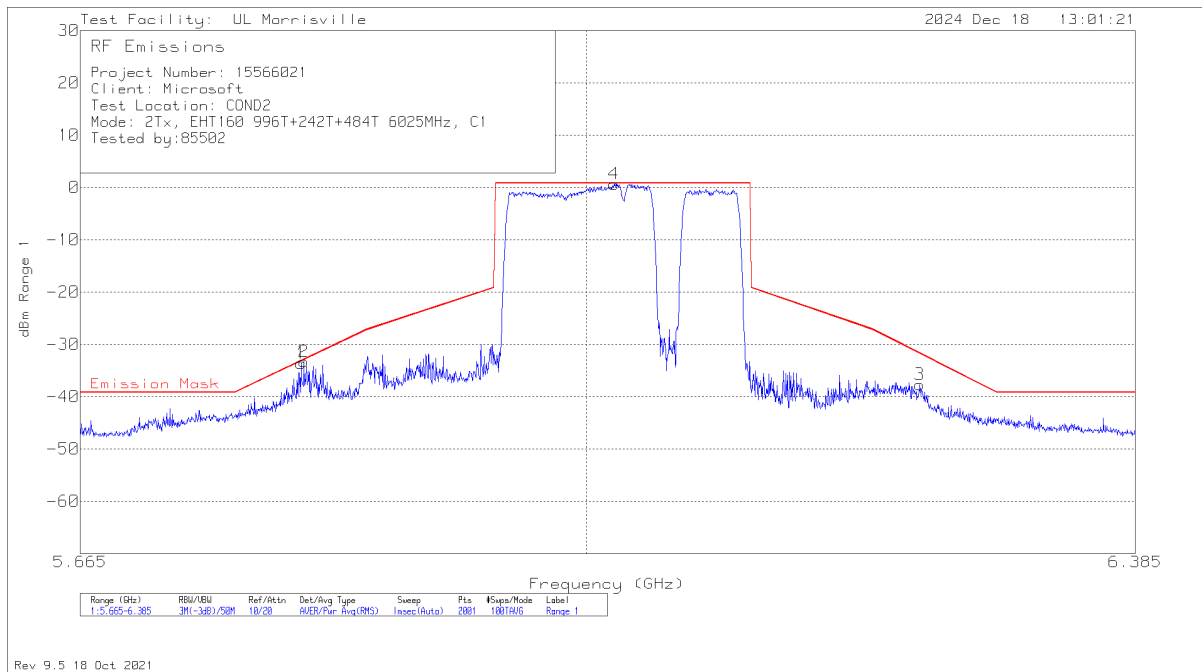


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.80864	-49.12	RMS	13.6	1.9	-33.62	-33.18	-.44
2	5.81044	-48.78	RMS	13.6	1.9	-33.28	-32.93	-.35
4	6.01852	-14.95	RMS	13.7	1.9	.65	.78	-.13
3	6.23092	-53.4	RMS	13.8	1.9	-37.7	-31.78	-5.92

RMS - RMS detection

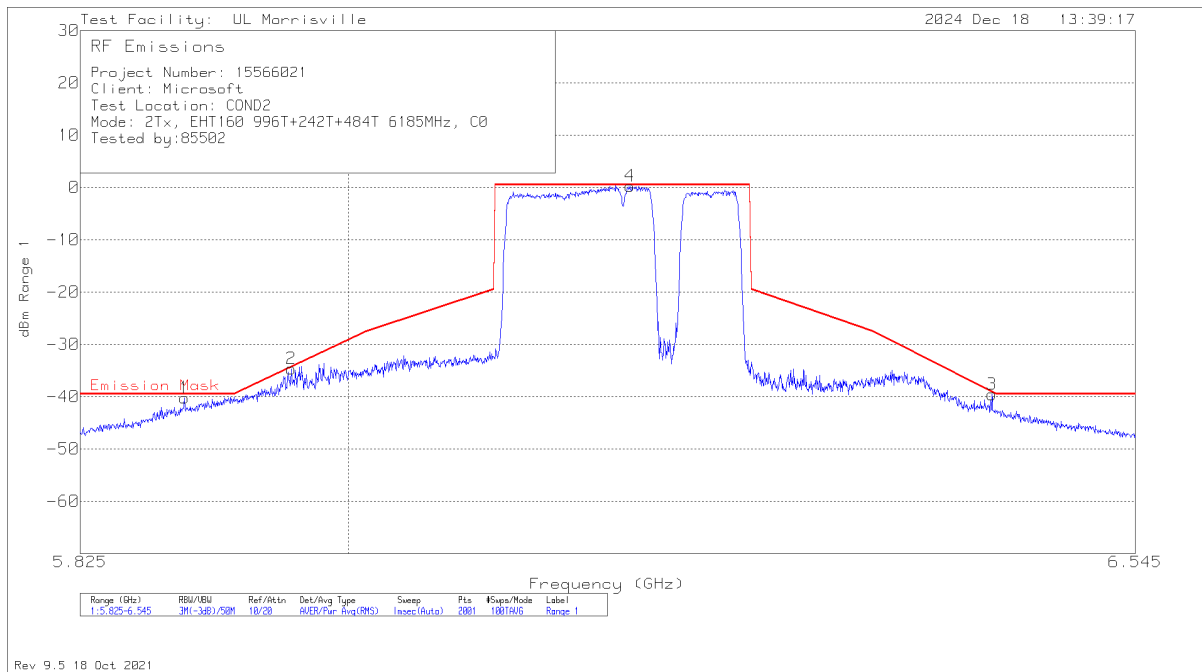


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.89232	-55.75	RMS	13.6	1.9	-40.25	-39.54	-.71
2	5.96252	-50.25	RMS	13.7	1.9	-34.65	-34.34	-.31
4	6.18968	-15.43	RMS	13.8	1.9	.27	.46	-.19
3	6.44204	-55.57	RMS	13.9	2.1	-39.57	-39.13	-.44

RMS - RMS detection

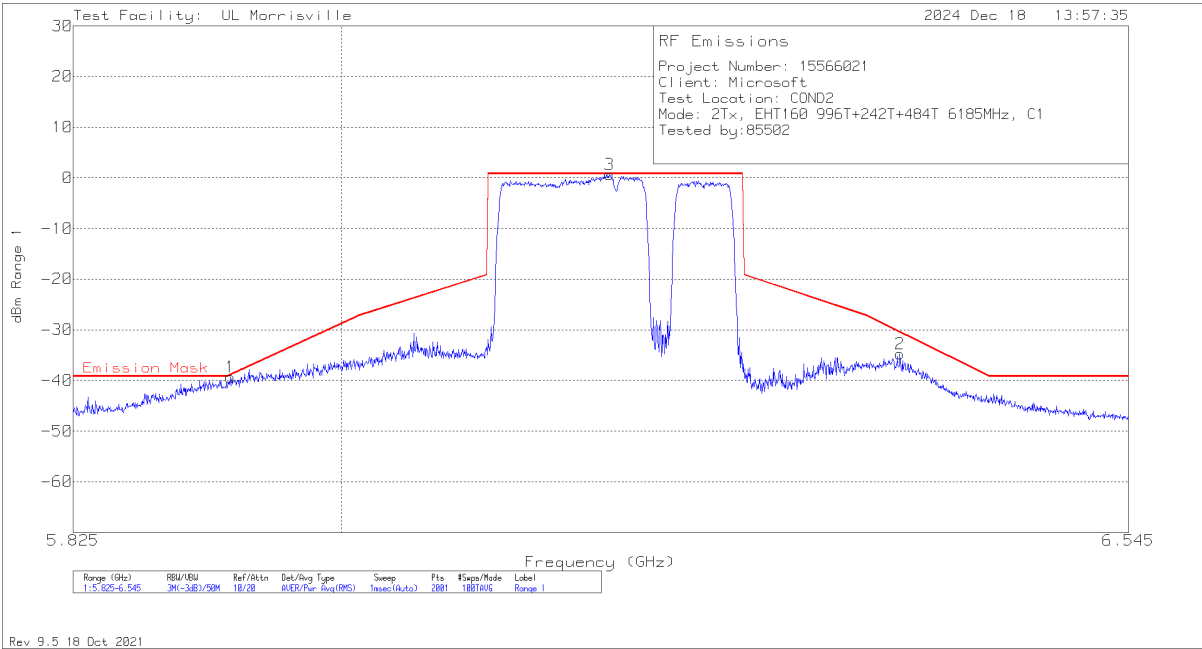


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.92688	-54.82	RMS	13.6	1.9	-39.32	-38.93	-.39
3	6.18032	-15.02	RMS	13.8	1.9	.68	.81	-.13
2	6.38192	-50.42	RMS	13.8	1.9	-34.72	-30.51	-4.21

RMS - RMS detection

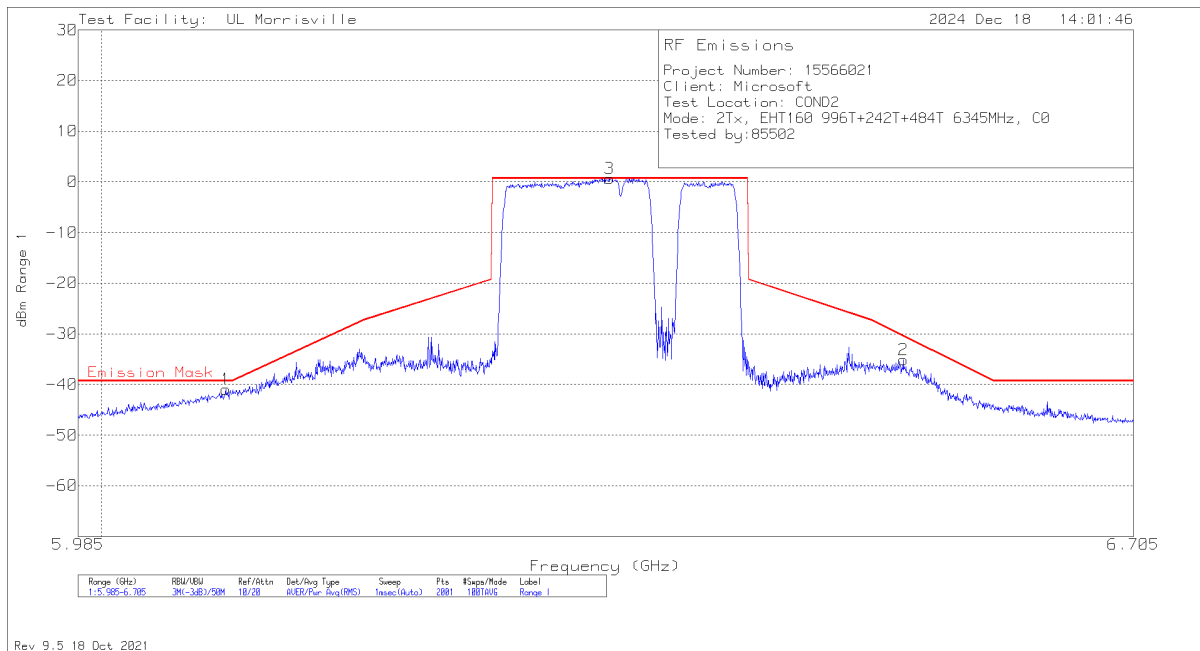

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.08076	-56.54	RMS	13.7	1.9	-40.94	-39.3	-1.64
3	6.33744	-15.02	RMS	13.8	1.9	.68	.7	-.02
2	6.54084	-51.14	RMS	13.9	2.1	-35.14	-30.47	-4.67


RMS - RMS detection

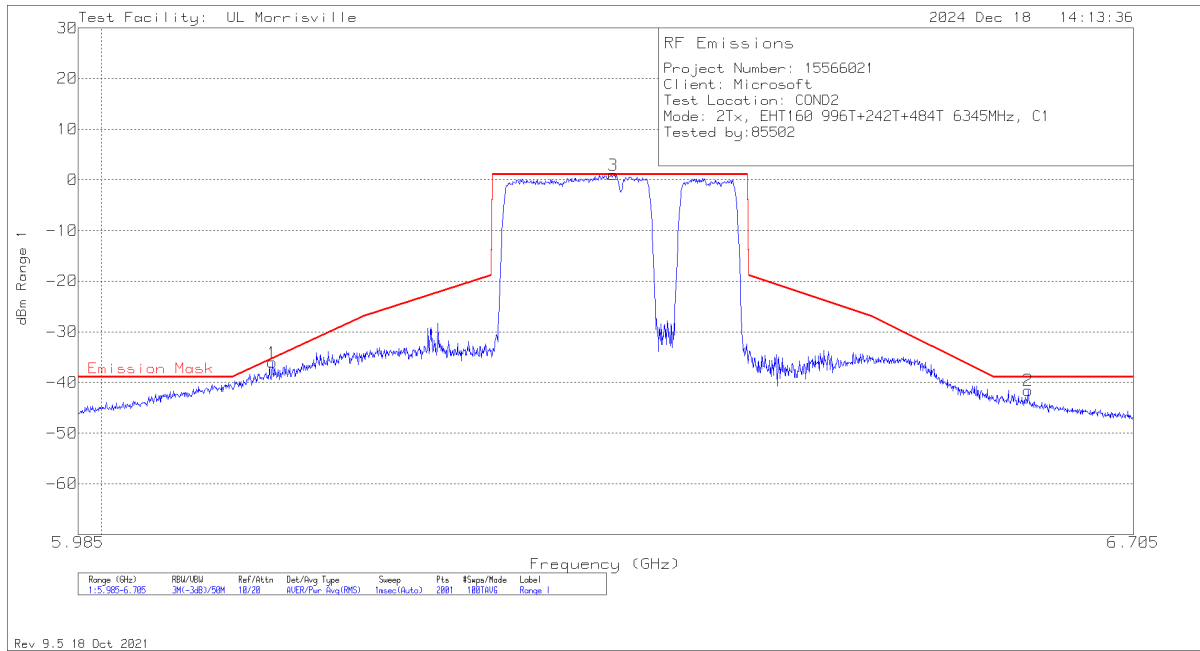

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.11136	-51.65	RMS	13.7	1.9	-36.05	-35.27	-.78
3	6.33996	-14.73	RMS	13.8	1.9	.97	1.08	-.11
2	6.6294	-57.55	RMS	13.9	2.1	-41.55	-38.92	-2.63


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+242T (NON-CONTIGUOUS) STANDARD POWER

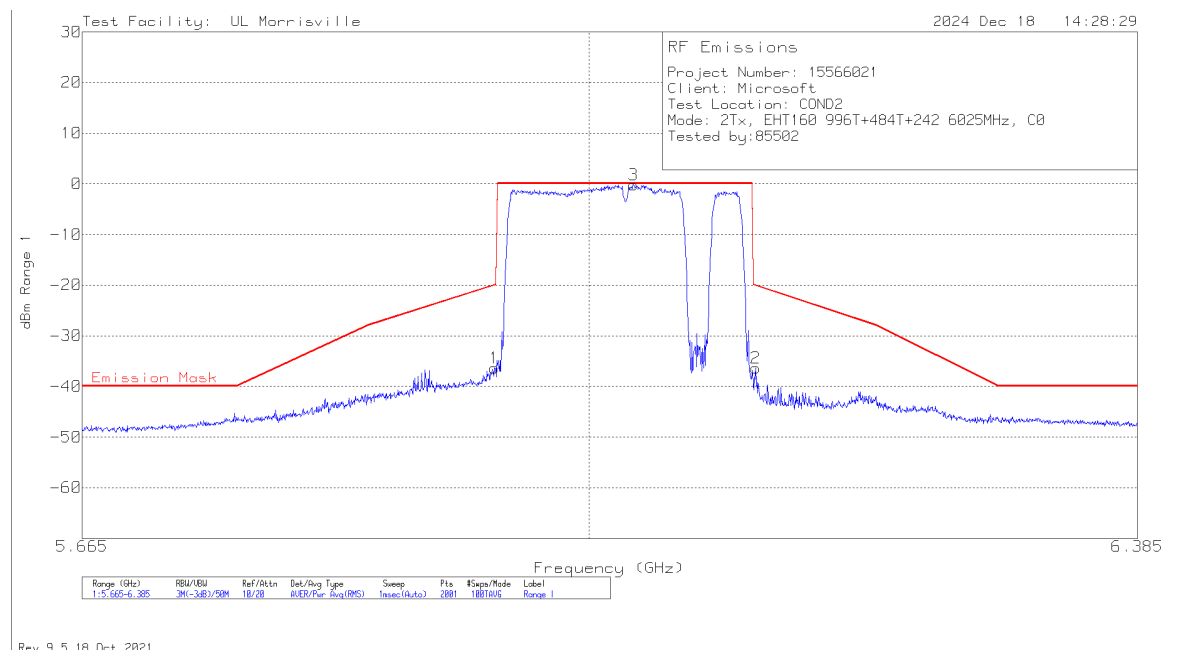


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.93608	-51.98	RMS	13.7	1.9	-36.38	-20.04	-16.34
3	6.0304	-15.8	RMS	13.7	1.9	-.2	.05	-.25
2	6.11464	-51.98	RMS	13.7	1.9	-36.38	-20.11	-16.27

RMS - RMS detection

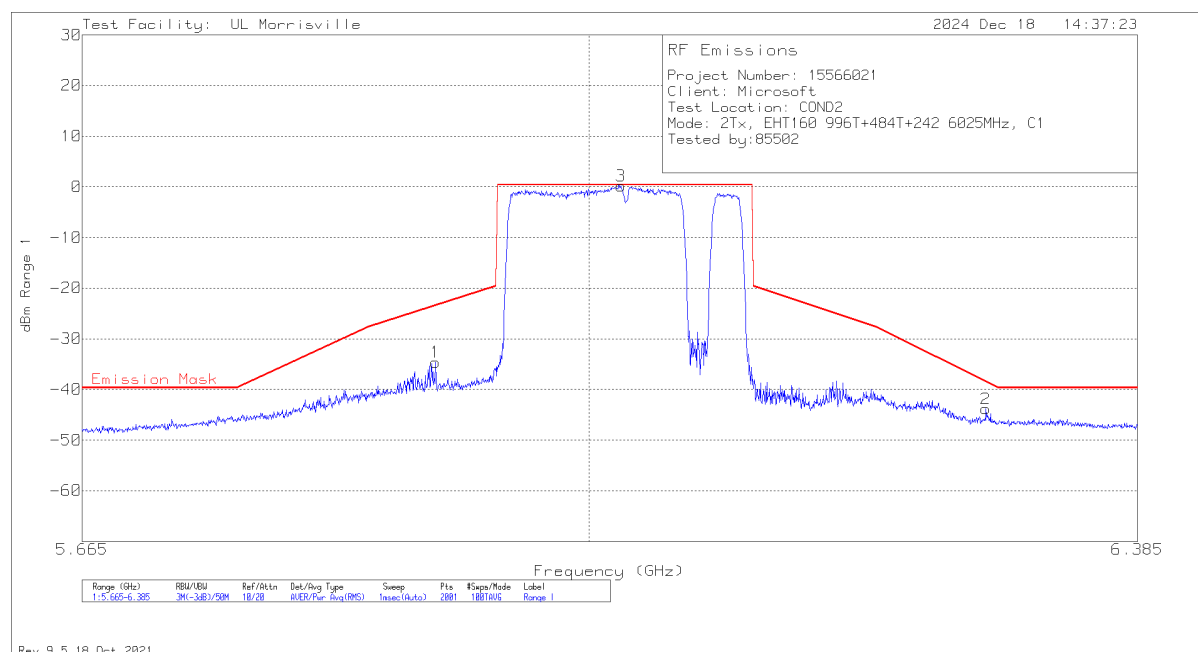


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.89648	-50.12	RMS	13.6	1.9	-34.62	-23.45	-11.17
3	6.02176	-15.46	RMS	13.7	1.9	.14	.35	-.21
2	6.27628	-59.55	RMS	13.8	1.9	-43.85	-38.45	-5.4

RMS - RMS detection

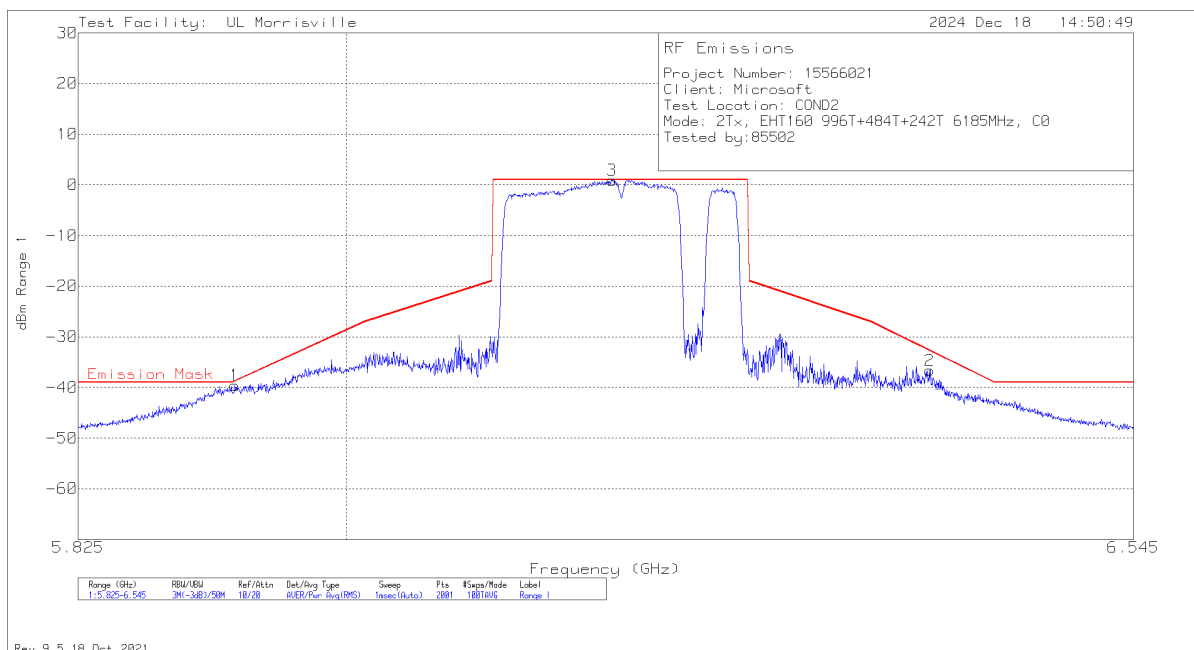


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.92652	-55.11	RMS	13.6	1.9	-39.61	-38.81	-.8
3	6.17888	-14.84	RMS	13.8	1.9	.86	.98	-.12
2	6.3992	-52.46	RMS	13.9	1.9	-36.66	-32.72	-3.94

RMS - RMS detection

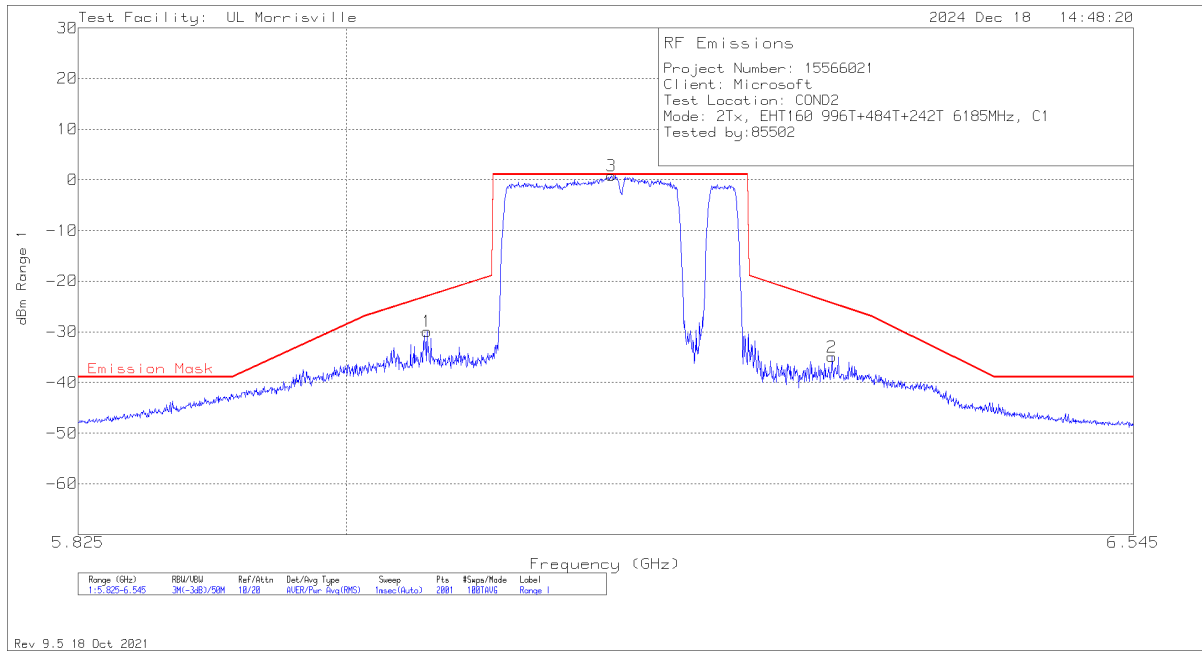


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.05396	-45.48	RMS	13.7	1.9	-29.88	-22.99	-6.89
3	6.17816	-14.86	RMS	13.8	1.9	.84	1.05	-.21
2	6.3308	-50.64	RMS	13.8	1.9	-34.94	-24.4	-10.54

RMS - RMS detection

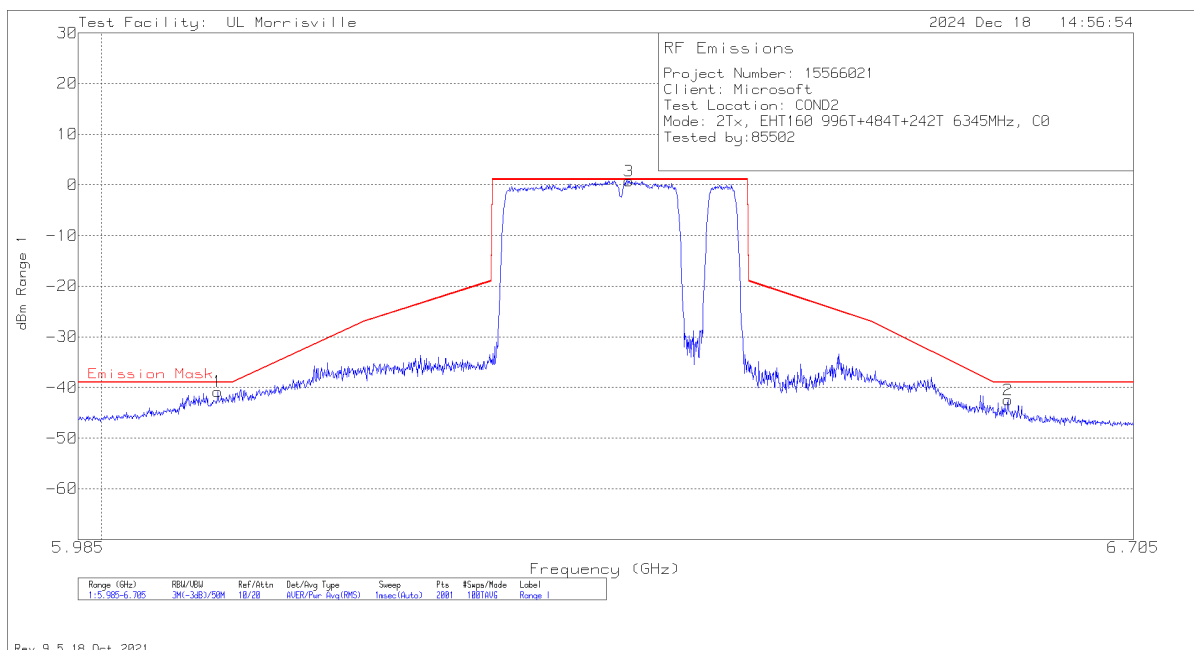

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.07572	-56.39	RMS	13.7	1.9	-40.79	-38.98	-1.81
3	6.3504	-14.97	RMS	13.8	1.9	.73	1.02	-.29
2	6.615	-58.48	RMS	13.9	2.1	-42.48	-38.98	-3.5


RMS - RMS detection

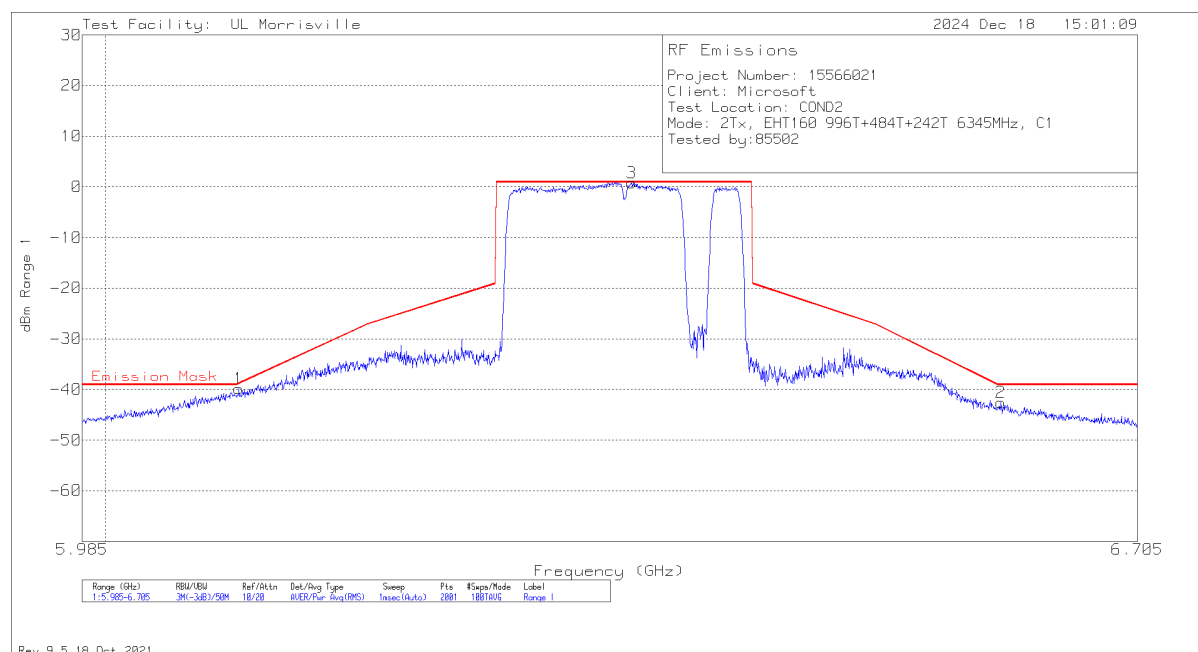

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.08688	-55.4	RMS	13.7	1.9	-39.8	-38.84	-.96
3	6.34968	-14.89	RMS	13.8	1.9	.81	.9	-.09
2	6.60708	-58.53	RMS	13.9	2.1	-42.53	-39.1	-3.43


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T STANDARD POWER

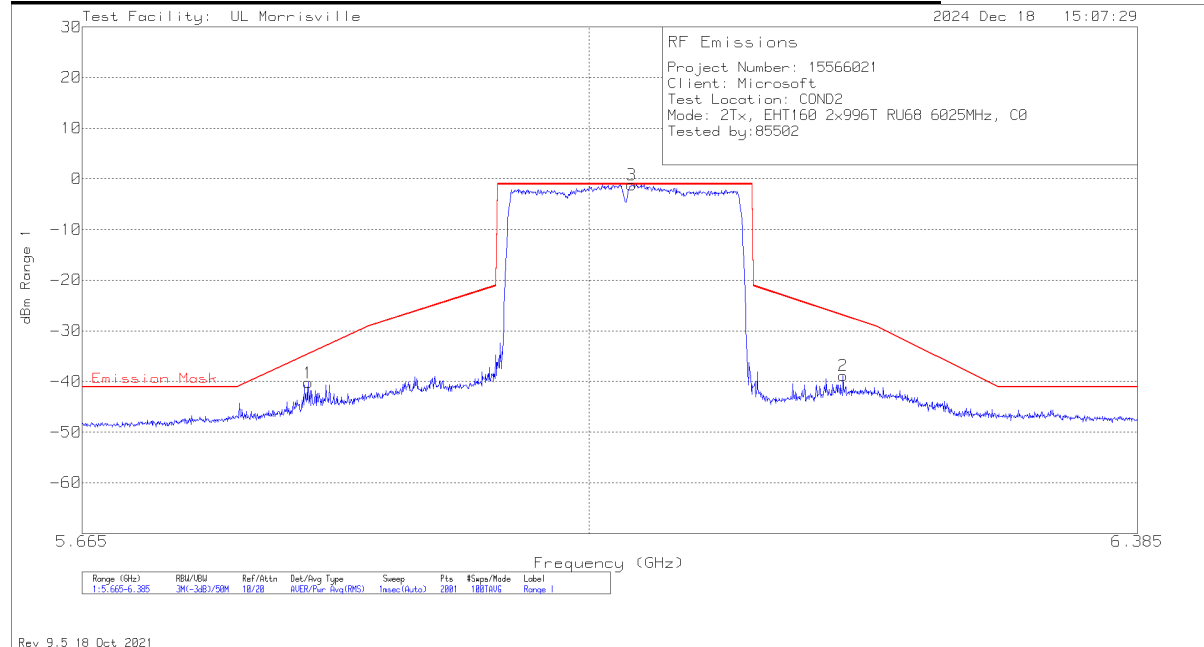


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.81224	-55.76	RMS	13.6	1.9	-40.26	-34.55	-5.71
3	6.02932	-16.8	RMS	13.7	1.9	-1.2	-1.09	-.11
2	6.17548	-54.54	RMS	13.8	1.9	-38.84	-26.98	-11.86

RMS - RMS detection

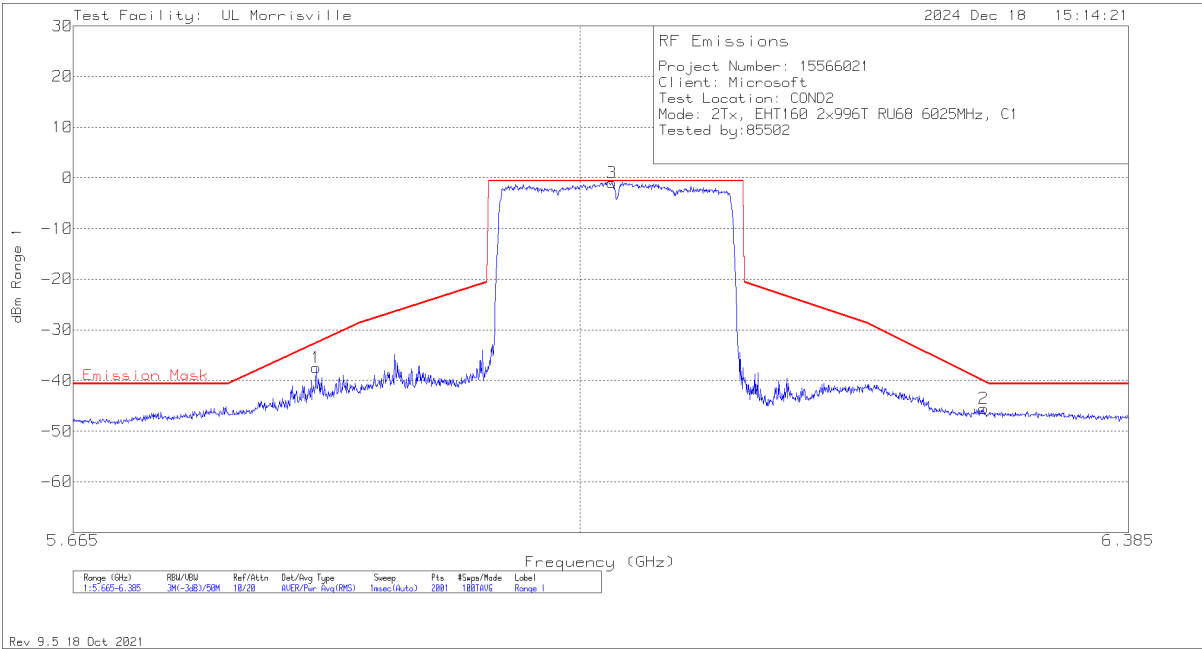


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.8234	-52.97	RMS	13.6	1.9	-37.47	-32.57	-4.9
3	6.02176	-16.55	RMS	13.7	1.9	-.95	-.64	-.31
2	6.28096	-61.23	RMS	13.8	1.9	-45.53	-40.09	-5.44

RMS - RMS detection

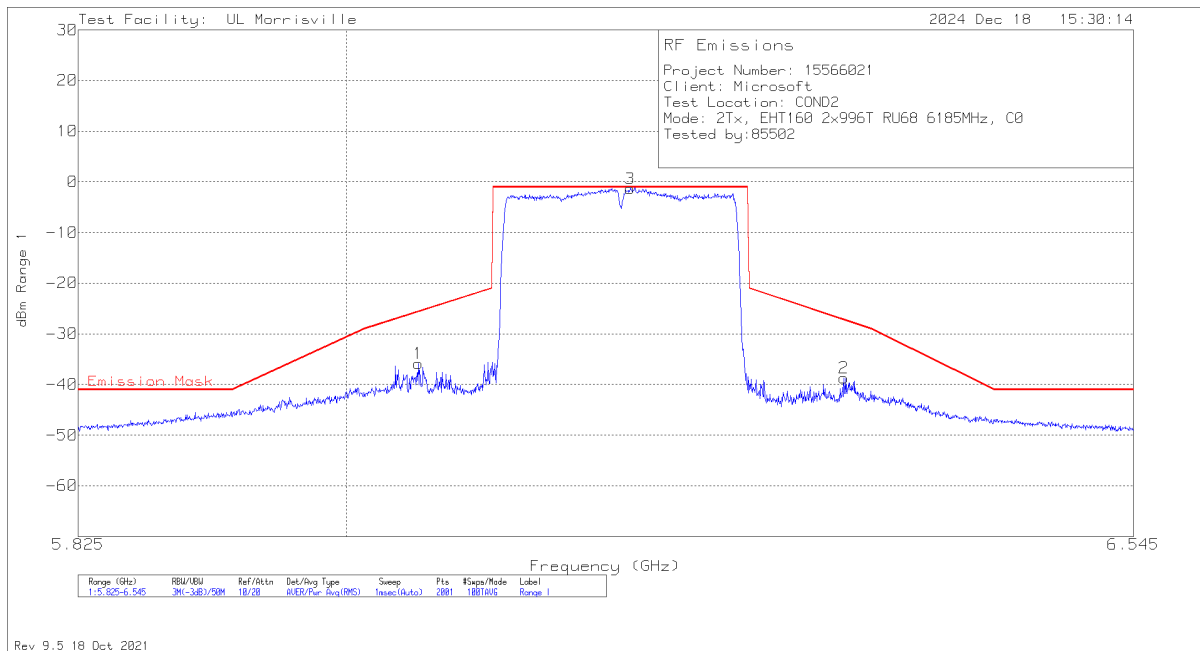

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.04784	-51.49	RMS	13.7	1.9	-35.89	-25.66	-10.23
3	6.19112	-17.07	RMS	13.8	1.9	-1.37	-1.05	-.32
2	6.33908	-54.42	RMS	13.8	1.9	-38.72	-27.28	-11.44

RMS - RMS detection

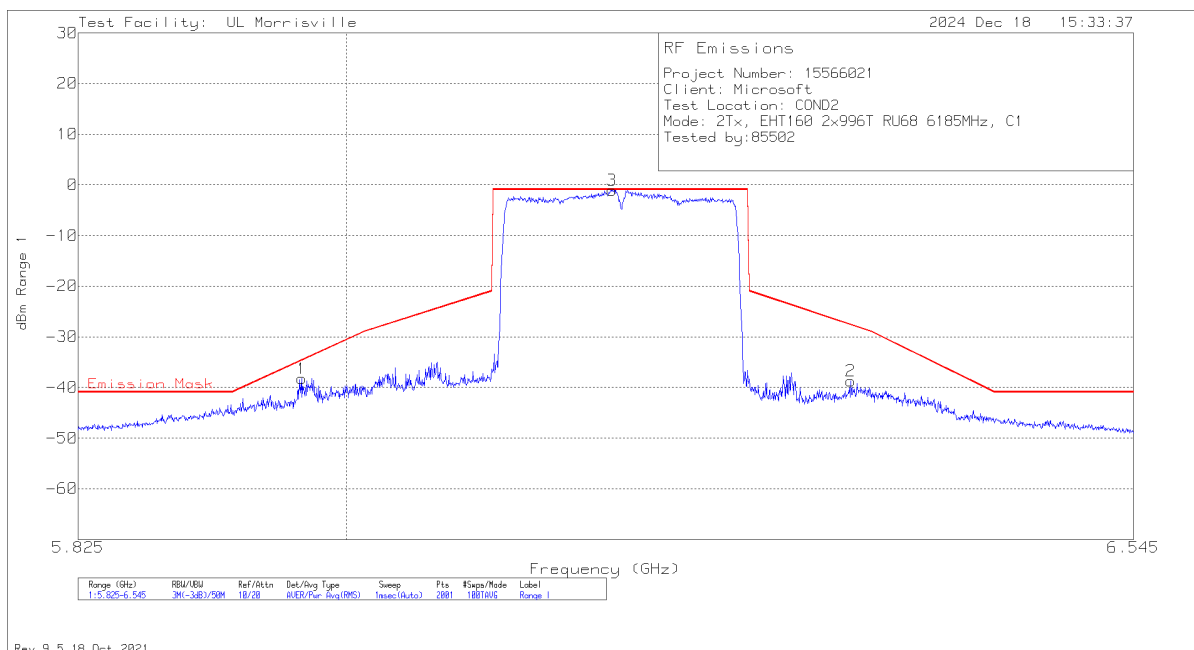


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.9708	-53.87	RMS	13.7	1.9	-38.27	-34.62	-3.65
3	6.17888	-16.81	RMS	13.8	1.9	-1.11	-.96	-.15
2	6.34376	-54.38	RMS	13.8	1.9	-38.68	-27.63	-11.05

RMS - RMS detection


9.2.5. 802.11be EHT320 MODE 2TX IN THE UNII-5 BAND (HIGH GAIN)

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (CONTIGUOUS) STANDARD POWER

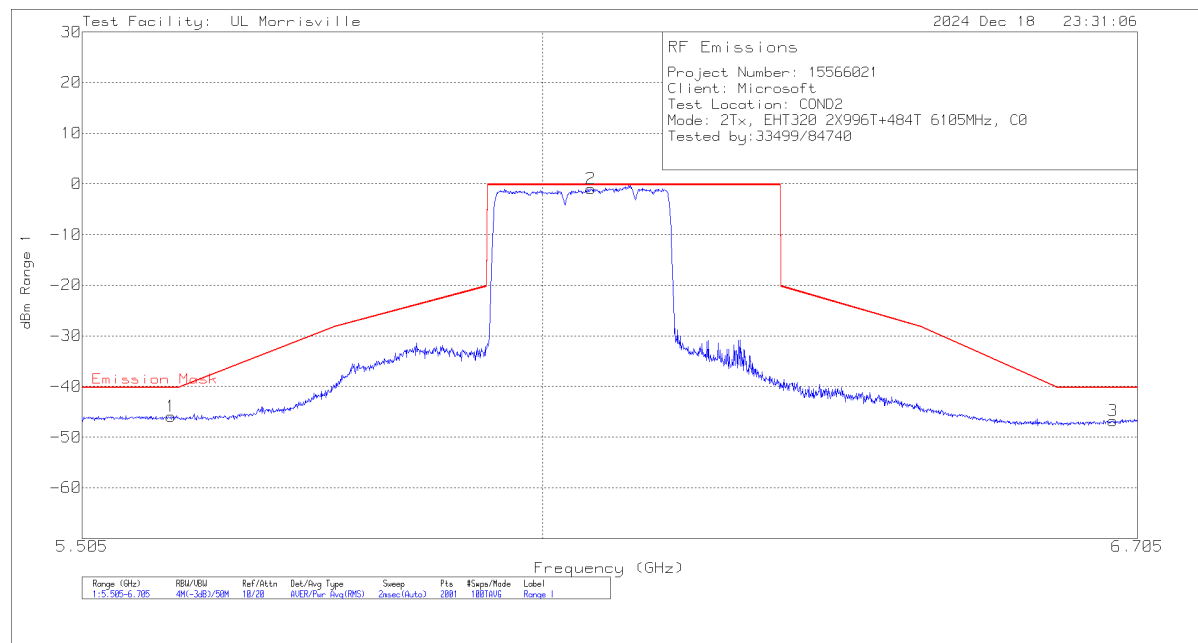


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.5974	-61.17	RMS	1.8	13.5	-45.87	-40.22	-5.65
2	6.054	-16.52	RMS	1.9	13.7	-.92	-.22	-.7
3	6.6744	-62.75	RMS	2.1	13.9	-46.75	-40.22	-6.53

RMS - RMS detection

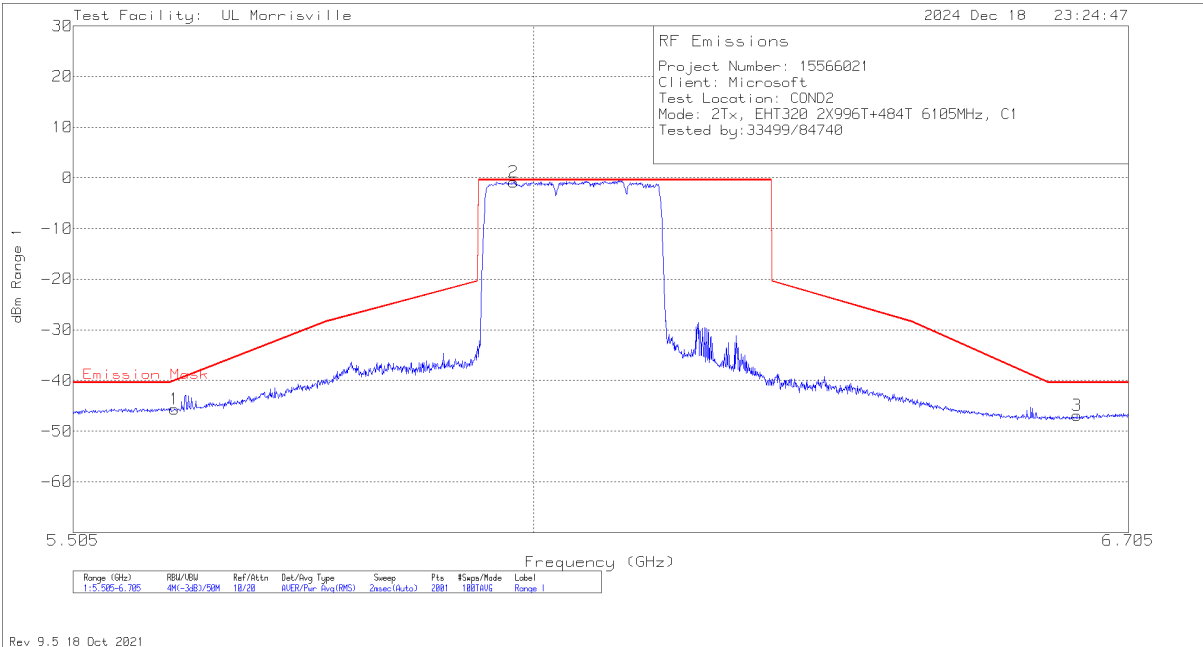


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.61	-60.98	RMS	1.8	13.5	-45.68	-40.08	-5.6
2	5.9772	-16.4	RMS	1.9	13.7	-.8	-.45	-.35
3	6.6408	-62.91	RMS	2.1	13.9	-46.91	-40.45	-6.46

RMS - RMS detection

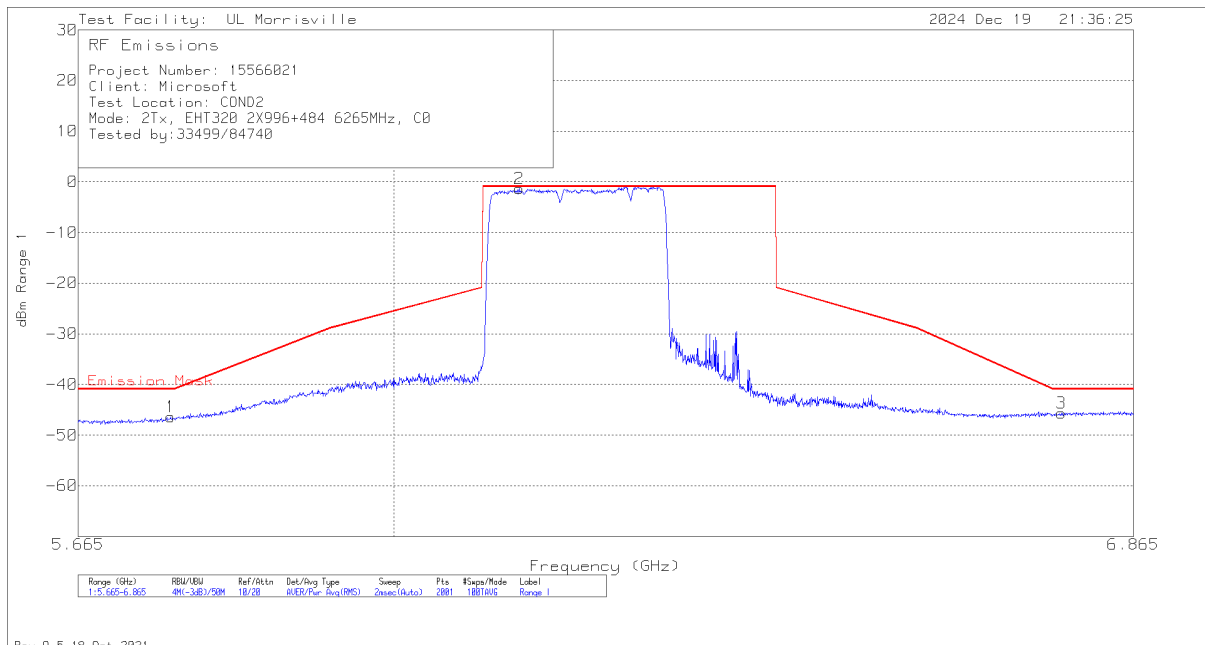

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.761	-61.87	RMS	13.6	1.9	-46.37	-40.94	-5.43
2	6.1384	-16.98	RMS	13.8	1.9	-1.28	-0.94	-.34
3	6.7756	-61.7	RMS	14	2.1	-45.6	-40.94	-4.66


RMS - RMS detection

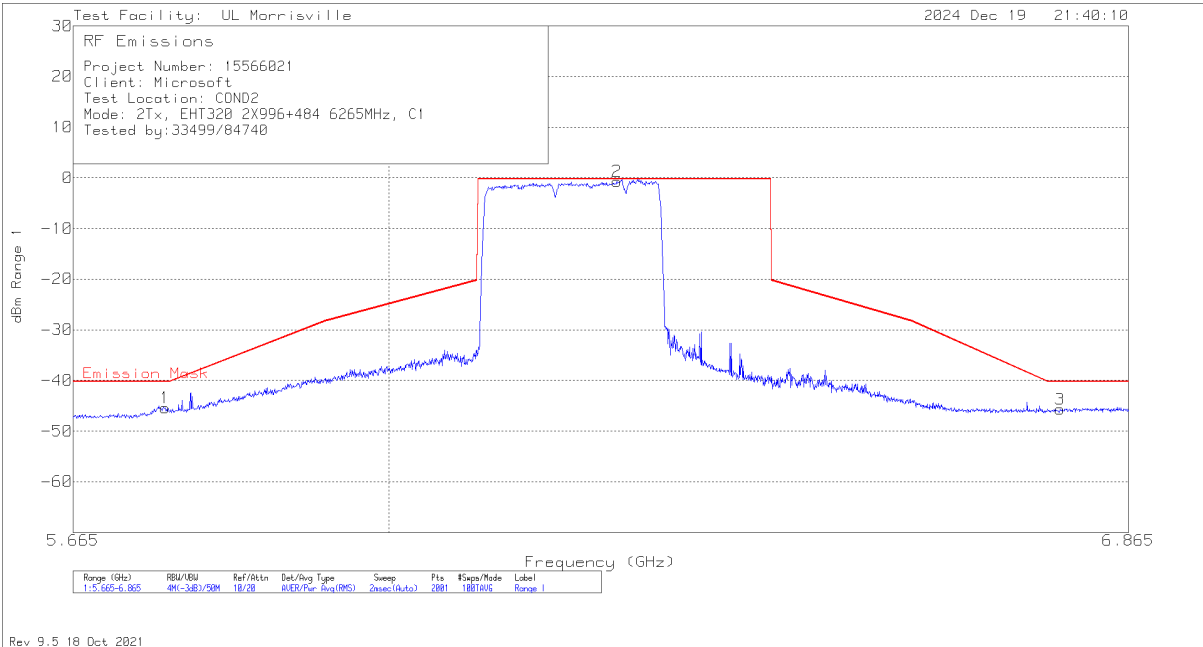

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7604	-60.76	RMS	13.5	1.9	-45.36	-40.26	-5.1
2	6.2548	-16.4	RMS	13.8	1.9	-.7	-.26	-.44
3	6.7798	-61.8	RMS	14	2.1	-45.7	-40.26	-5.44


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T (NON-CONTIGUOUS) STANDARD POWER

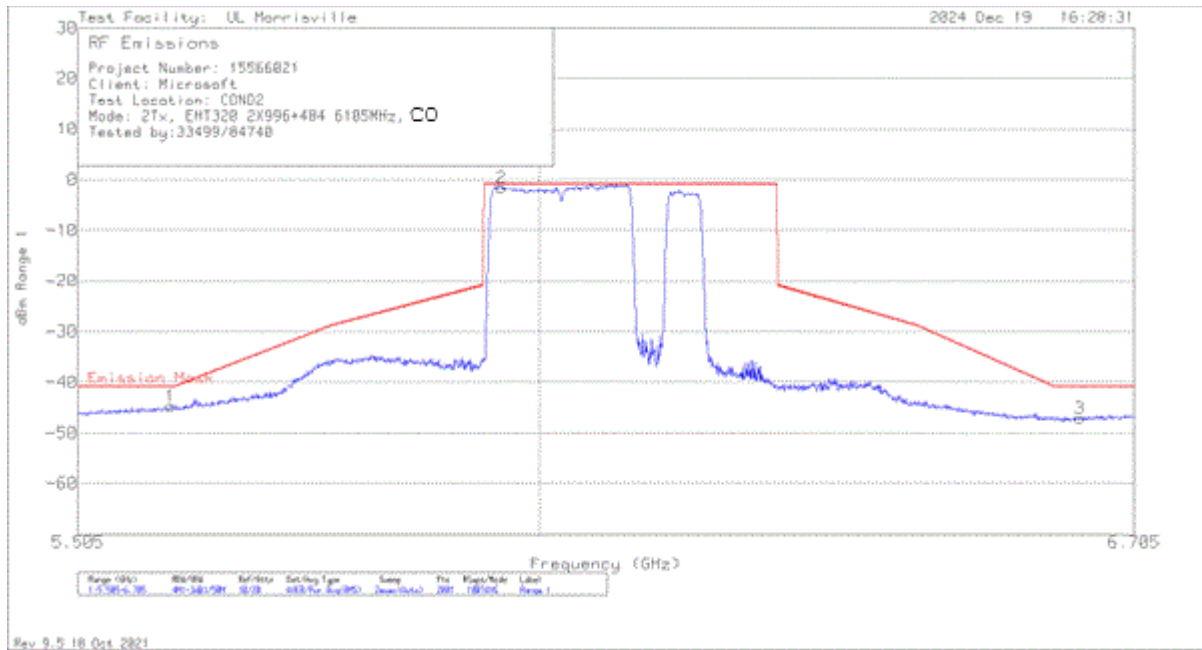


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.601	-59.95	RMS	1.8	13.5	-44.65	-40.86	-3.79
2	5.958	-17.12	RMS	1.9	13.7	-1.52	-.86	-.66
3	6.6372	-62.97	RMS	2.1	13.9	-46.97	-40.86	-6.11

RMS - RMS detection

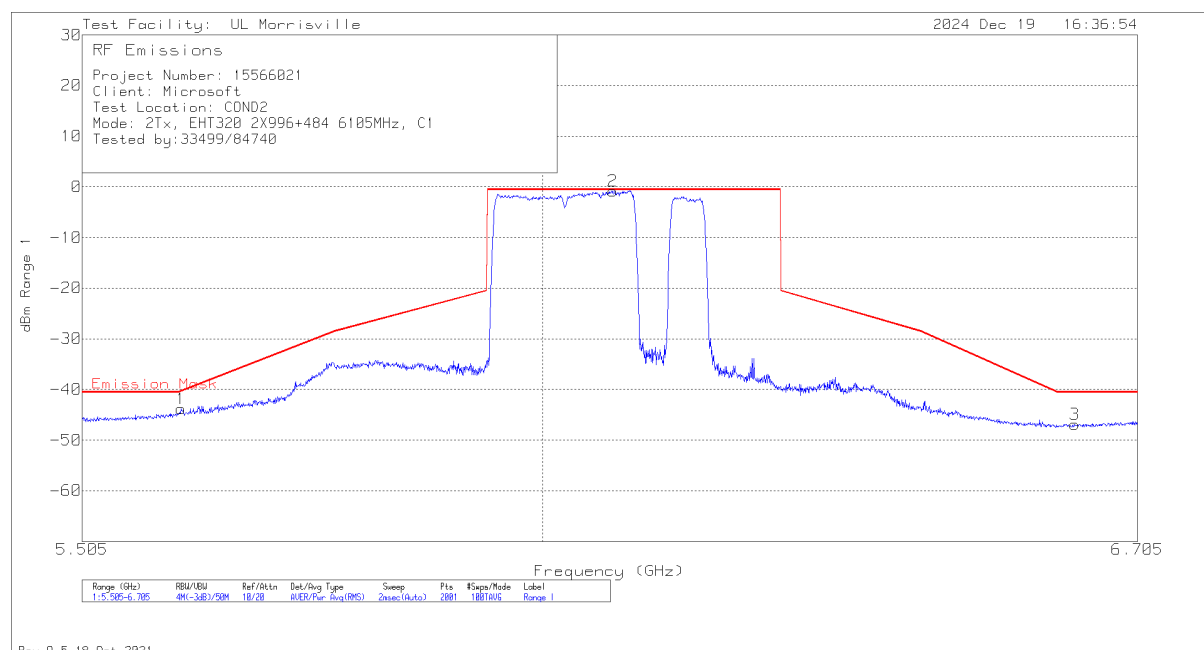


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.6076	-59.14	RMS	1.8	13.5	-43.84	-40.37	-3.47
2	6.0786	-16.42	RMS	1.9	13.7	-.82	-.56	-.26
3	6.627	-62.91	RMS	2.1	13.9	-46.91	-40.56	-6.35

RMS - RMS detection

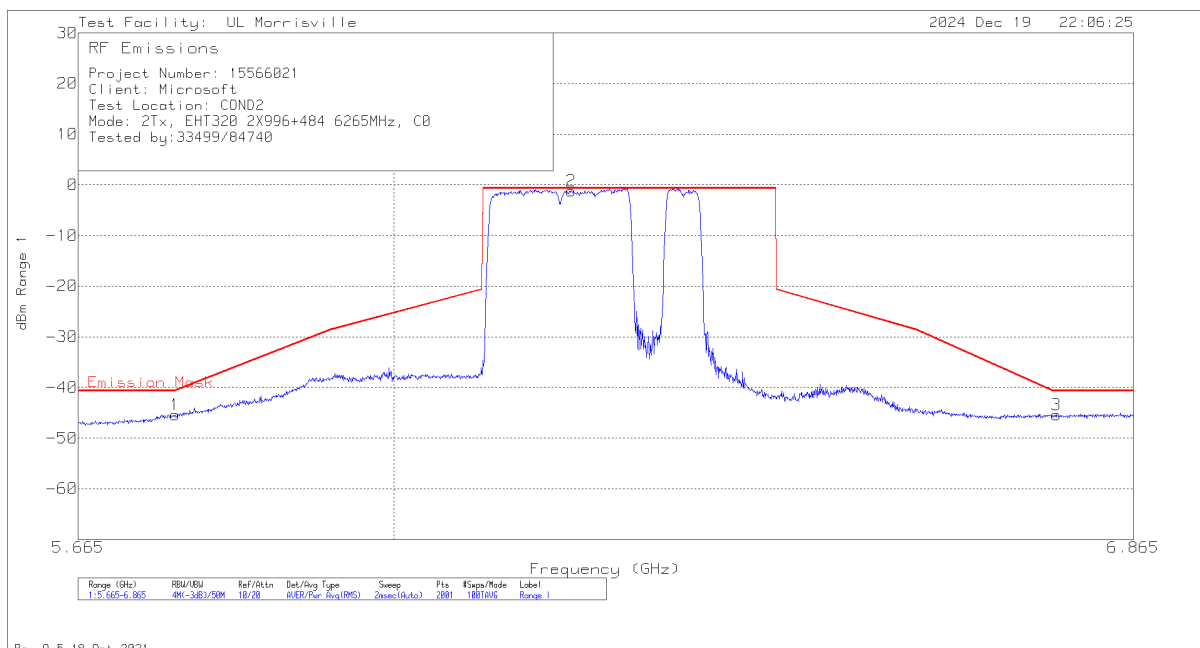

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7658	-60.92	RMS	13.6	1.9	-45.42	-40.61	-4.81
2	6.1972	-16.9	RMS	13.8	1.9	-1.2	-.67	-.53
3	6.7696	-61.54	RMS	14	2.1	-45.44	-40.67	-4.77


RMS - RMS detection

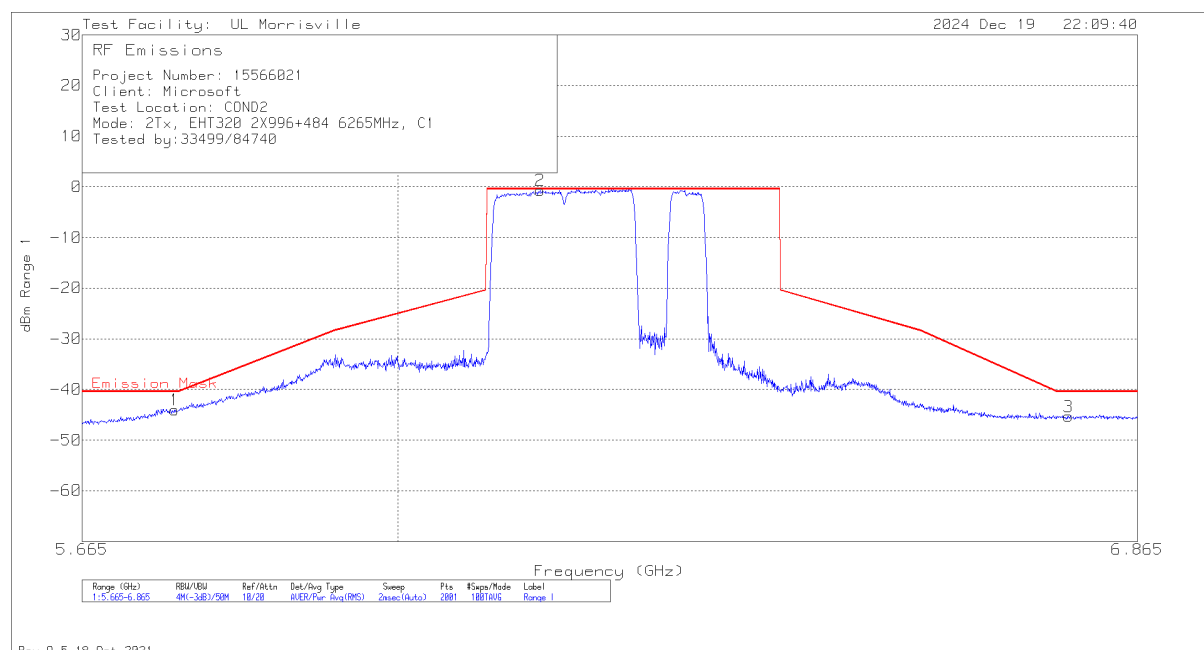

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.761	-59.39	RMS	13.5	1.9	-43.99	-40.45	-3.54
2	6.1576	-16.3	RMS	13.7	1.9	-.7	-.45	-.25
3	6.7792	-61.44	RMS	14	2.1	-45.34	-40.45	-4.89


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+2x996T (NON-CONTIGUOUS) STANDARD POWER

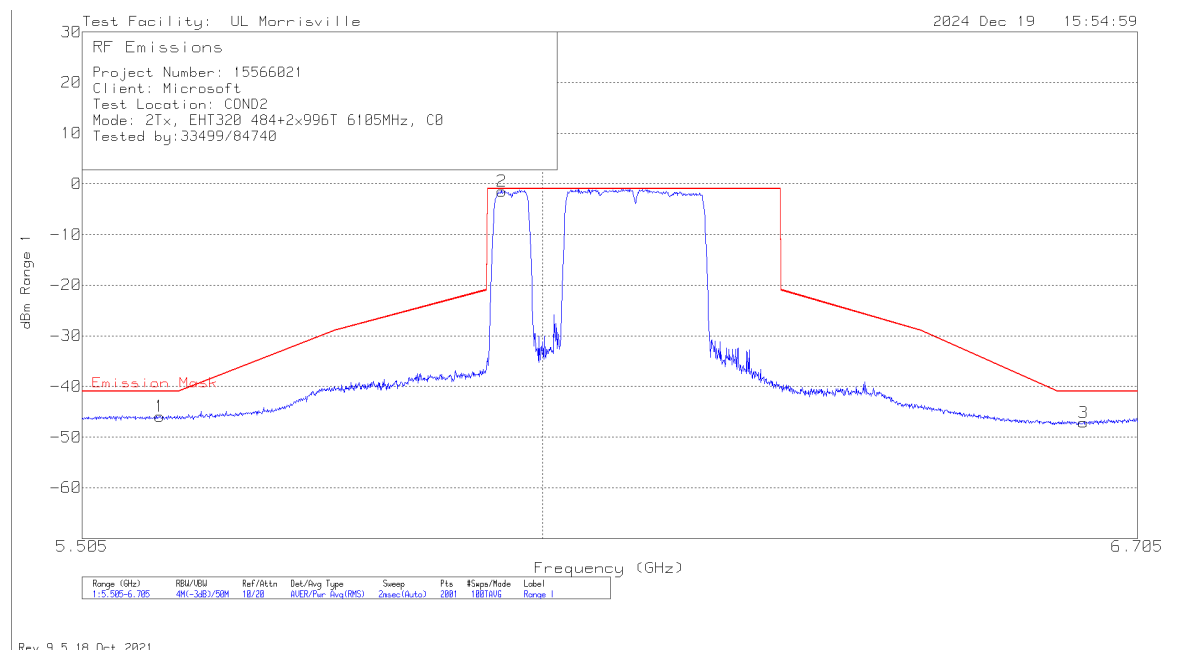


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.5854	-61.22	RMS	1.8	13.5	-45.92	-40.98	-4.94
2	5.9544	-17.04	RMS	1.9	13.7	-1.44	-.98	-.46
3	6.6378	-63.08	RMS	2.1	13.9	-47.08	-40.98	-6.1

RMS - RMS detection

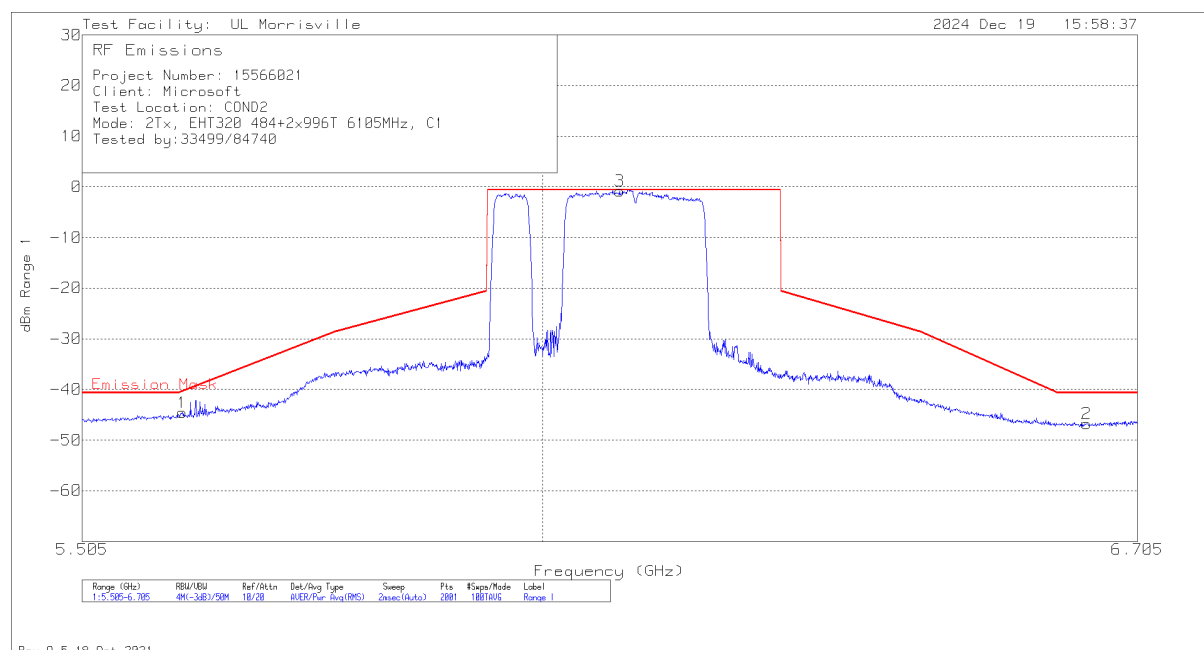


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.6088	-59.89	RMS	1.8	13.5	-44.59	-40.36	-4.23
3	6.0864	-16.47	RMS	1.9	13.7	-.87	-.64	-.23
2	6.6414	-62.74	RMS	2.1	13.9	-46.74	-40.64	-6.1

RMS - RMS detection

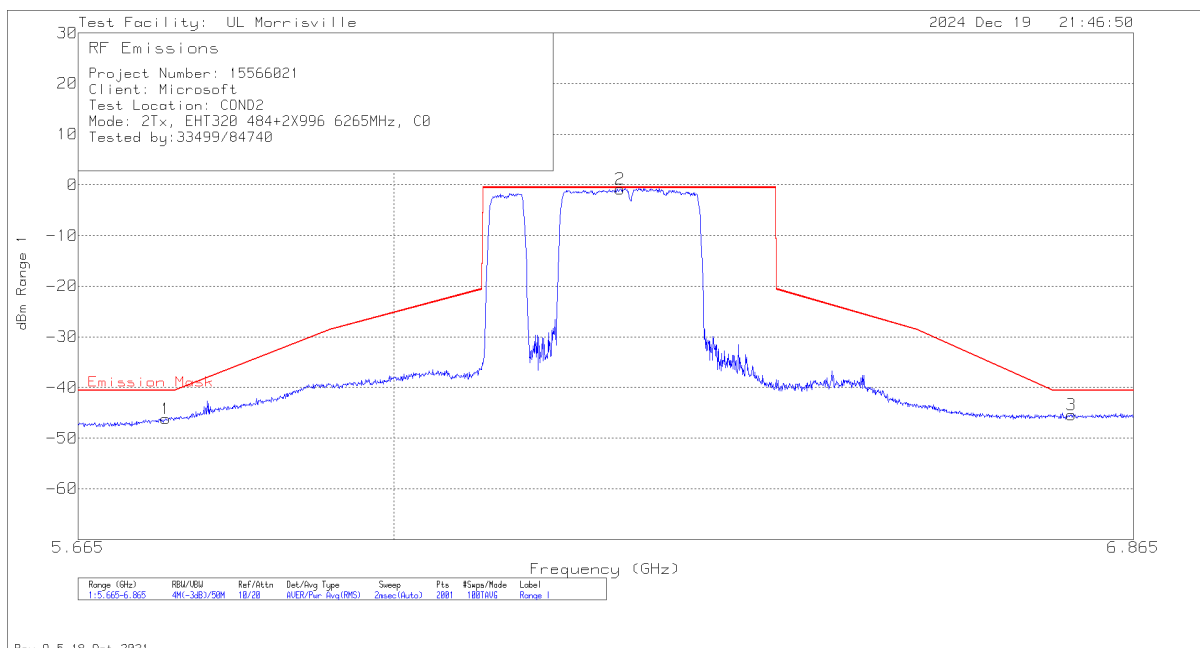

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7562	-61.6	RMS	13.5	1.9	-46.2	-40.59	-5.61
2	6.2524	-16.48	RMS	13.8	1.9	-.78	-.59	-.19
3	6.7882	-61.5	RMS	14	2.1	-45.4	-40.59	-4.81


RMS - RMS detection

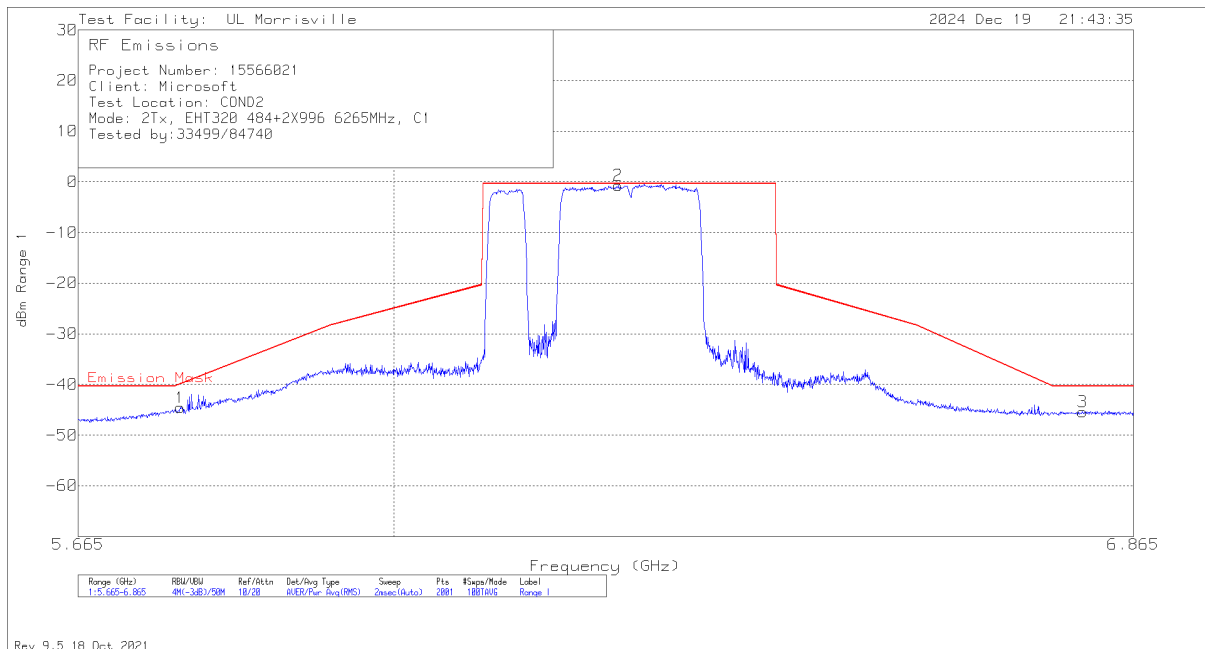

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7712	-60.09	RMS	13.6	1.9	-44.59	-39.92	-4.67
2	6.25	-16.44	RMS	13.8	1.9	-.74	-.37	-.37
3	6.802	-61.54	RMS	14	2.1	-45.44	-40.37	-5.07


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS) STANDARD POWER

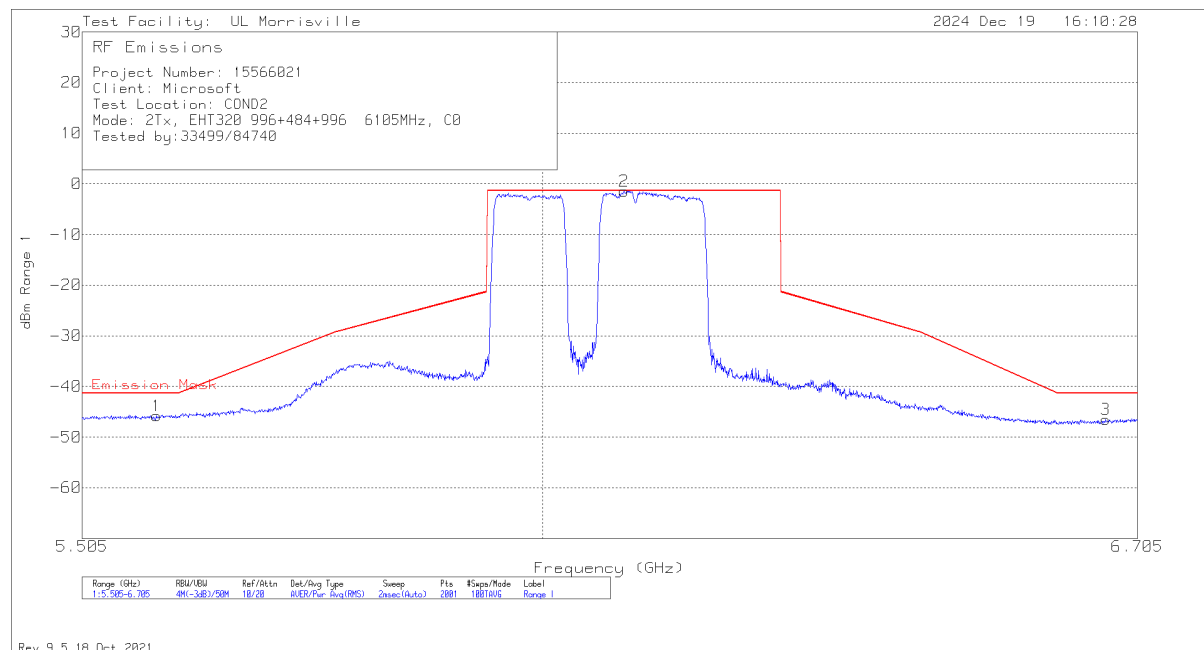


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.5818	-61.12	RMS	1.8	13.5	-45.82	-41.36	-4.46
2	6.0918	-17.15	RMS	1.9	13.8	-1.45	-1.36	-.09
3	6.6654	-62.55	RMS	2.1	13.9	-46.55	-41.36	-5.19

RMS - RMS detection

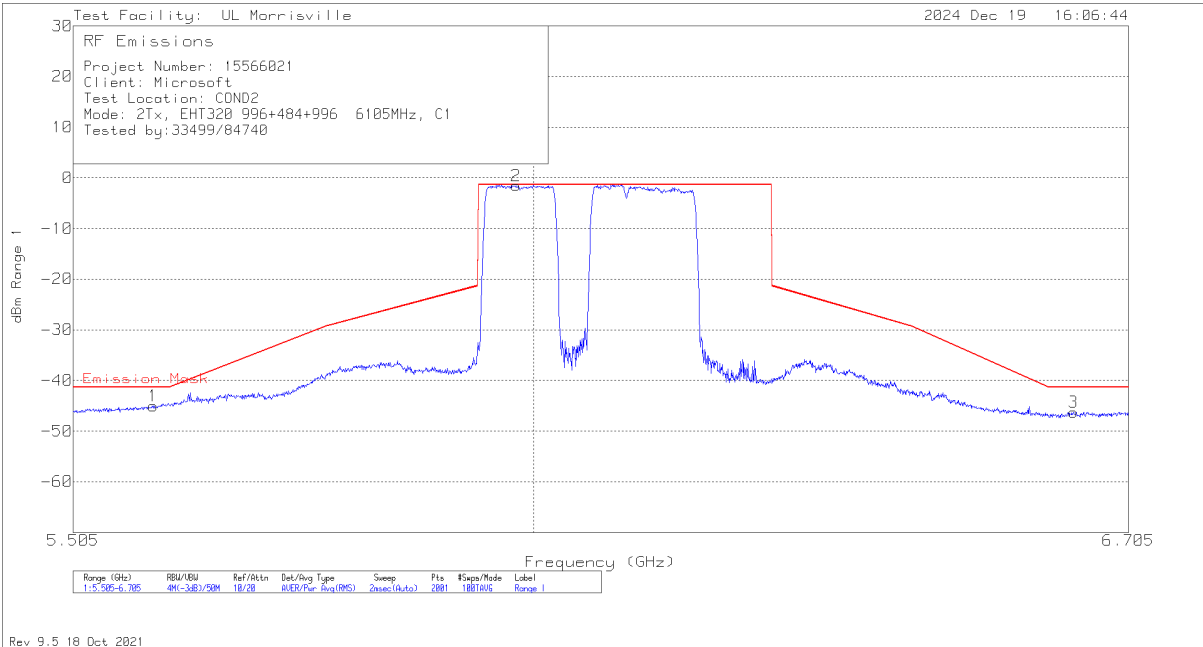


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.5878	-60.29	RMS	1.8	13.5	-44.99	-41.34	-3.65
2	5.9802	-17.11	RMS	1.9	13.7	-1.51	-1.34	-.17
3	6.6366	-62.25	RMS	2.1	13.9	-46.25	-41.34	-4.91

RMS - RMS detection

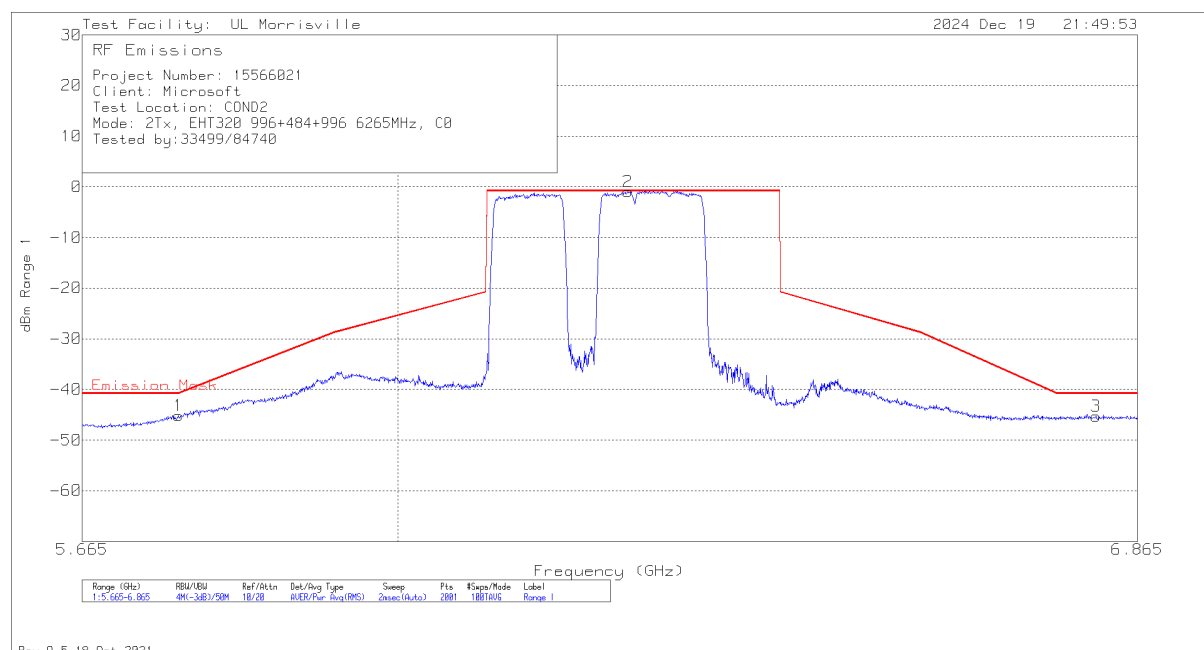

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7652	-60.7	RMS	13.6	1.9	-45.2	-40.81	-4.39
2	6.2566	-16.64	RMS	13.8	1.9	-.94	-.82	-.12
3	6.8134	-61.38	RMS	14	2.1	-45.28	-40.82	-4.46


RMS - RMS detection

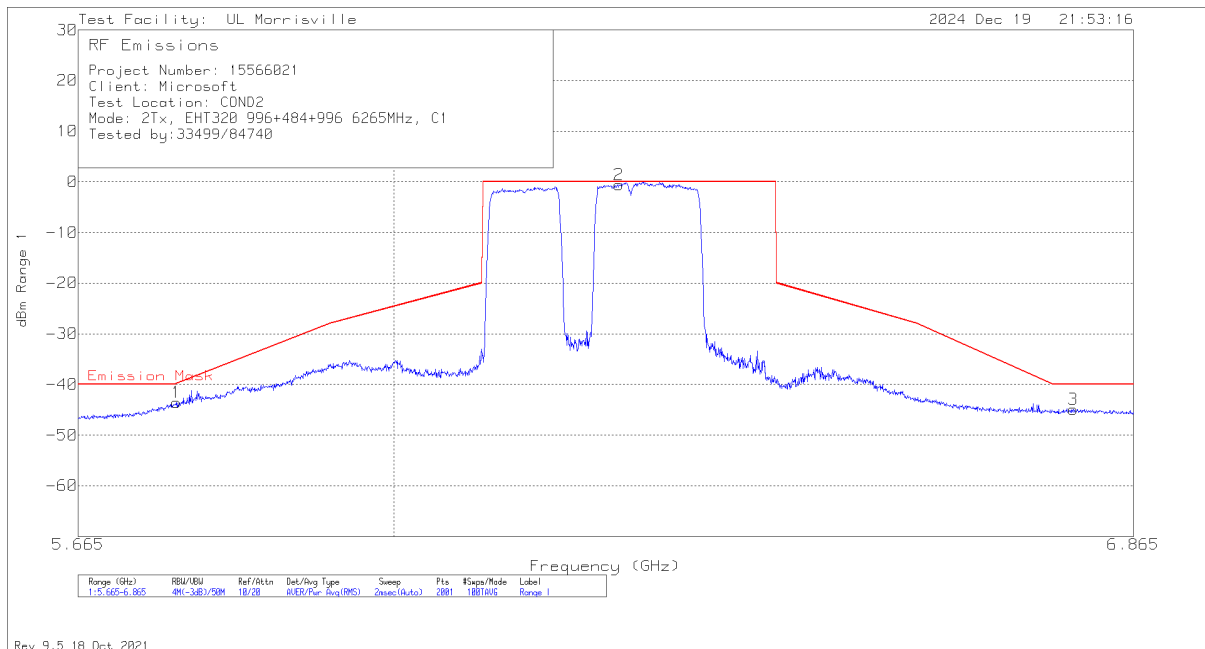

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.767	-58.98	RMS	13.5	1.9	-43.58	-39.83	-3.75
2	6.2512	-16.27	RMS	13.8	1.9	-.57	.02	-.59
3	6.79	-61.04	RMS	14	2.1	-44.94	-39.98	-4.96


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+996T (NON-CONTIGUOUS 2) STANDARD POWER

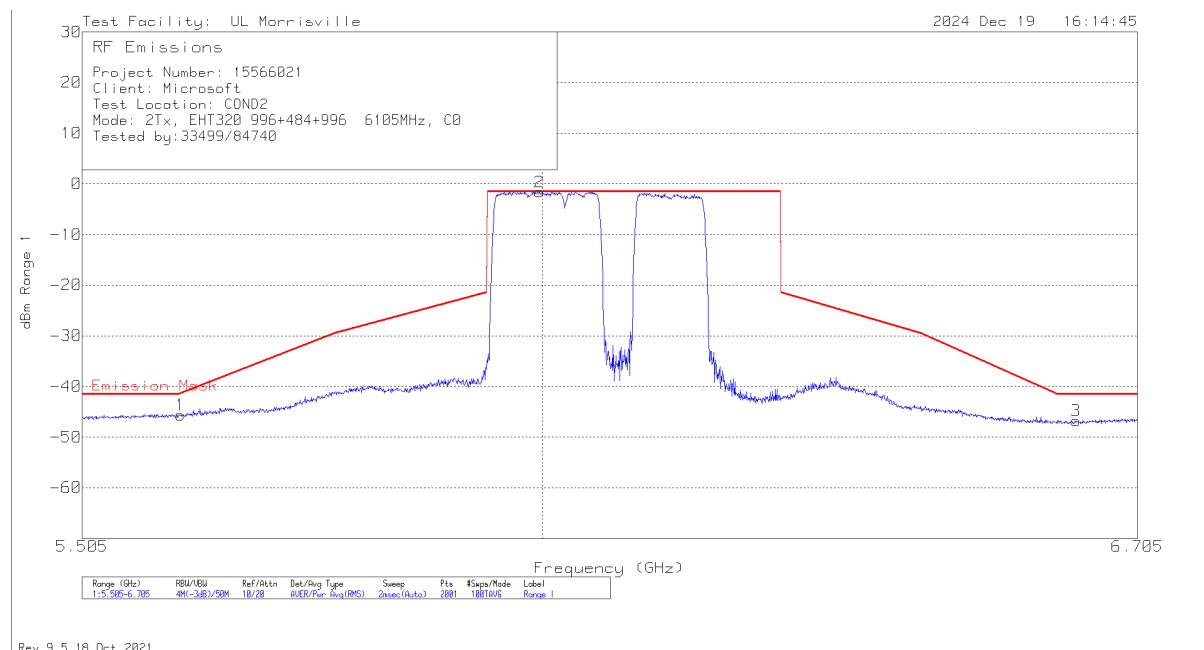


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.6073	-60.94	RMS	1.8	13.5	-45.64	-41.35	-4.29
2	5.9964	-17.22	RMS	1.9	13.7	-1.62	-1.52	-.1
3	6.6282	-62.79	RMS	2.1	13.9	-46.79	-41.52	-5.27

RMS - RMS detection

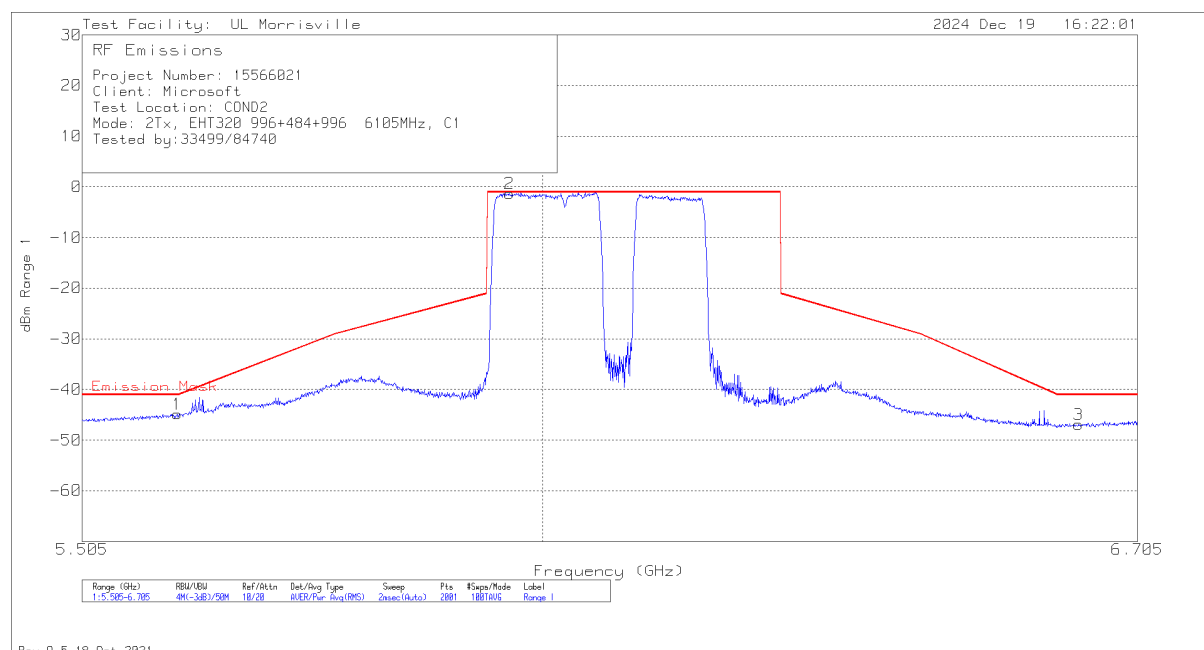


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.6034	-60.15	RMS	1.8	13.5	-44.85	-41.08	-3.77
2	5.9628	-16.94	RMS	1.9	13.7	-1.34	-1.08	-.26
3	6.6318	-62.94	RMS	2.1	13.9	-46.94	-41.08	-5.86

RMS - RMS detection

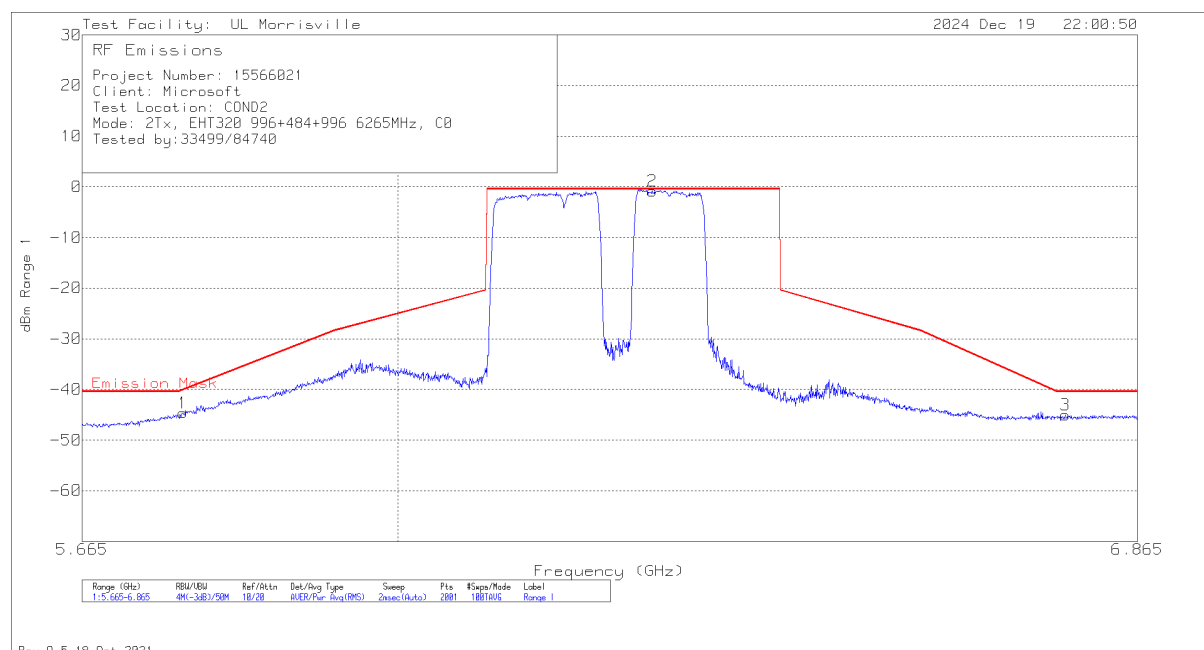

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.77	-60.1	RMS	13.6	1.9	-44.6	-40.06	-4.54
2	6.2848	-16.51	RMS	13.8	1.9	-.81	-.43	-.38
3	6.7756	-61.16	RMS	14	2.1	-45.06	-40.43	-4.63


RMS - RMS detection

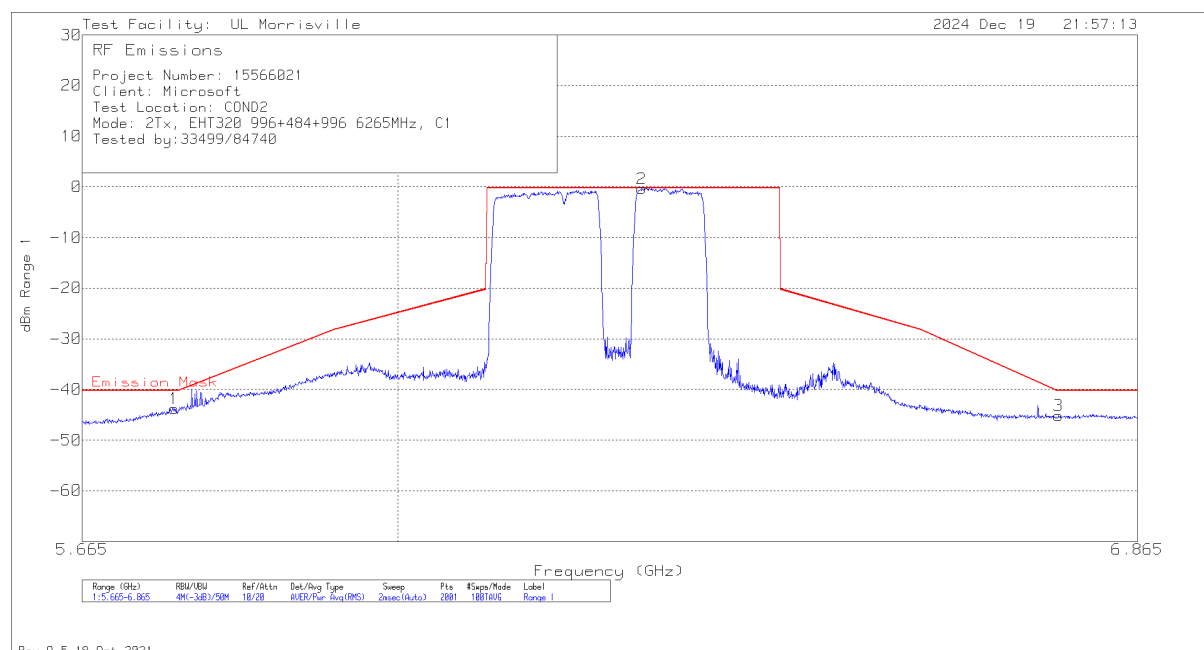

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7604	-59.2	RMS	13.5	1.9	-43.8	-40.24	-3.56
2	6.2728	-16.09	RMS	13.8	1.9	-.39	-.24	-.15
3	6.7672	-61.24	RMS	14	2.1	-45.14	-40.24	-4.9


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (CONTIGUOUS) STANDARD POWER

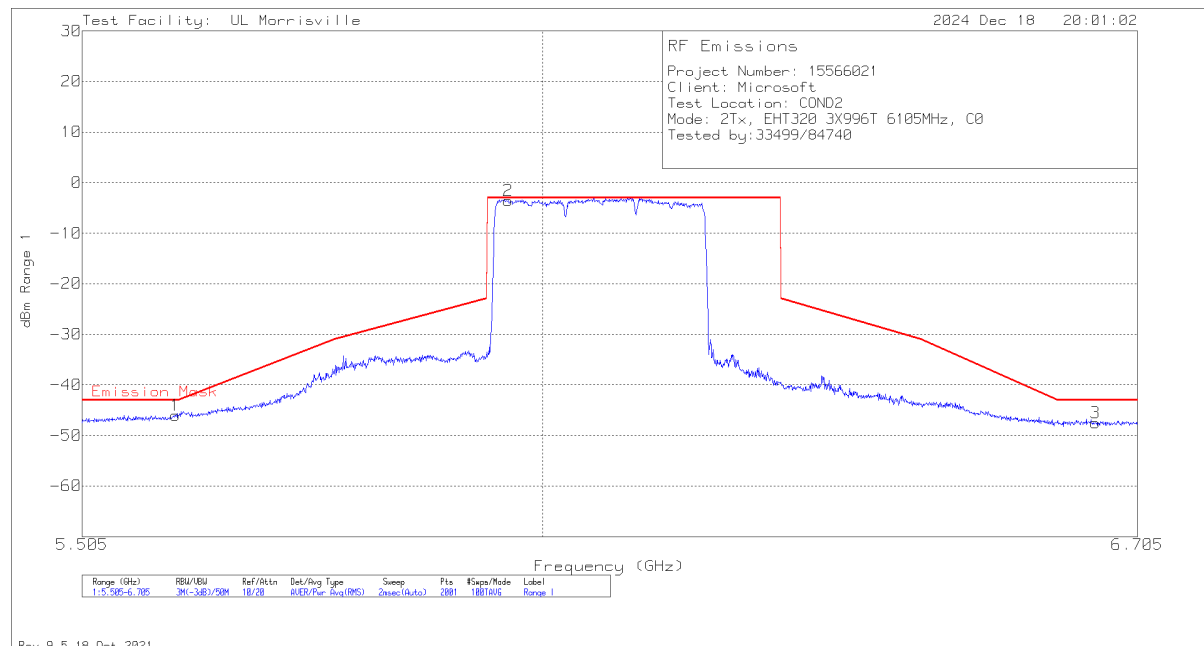


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.6016	-61.31	RMS	1.8	13.5	-46.01	-43	-3.01
2	5.961	-19.1	RMS	1.9	13.7	-3.5	-3	-.5
3	6.6528	-63.46	RMS	2.1	13.9	-47.46	-43	-4.46

RMS - RMS detection

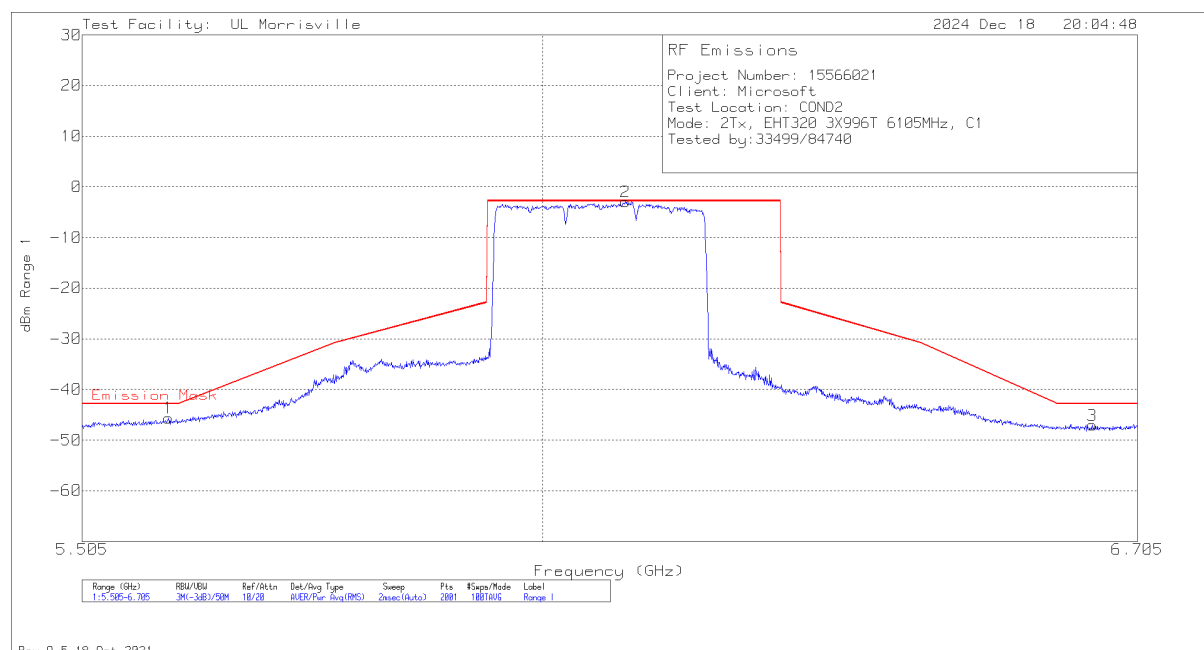


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.5944	-60.94	RMS	1.8	13.5	-45.64	-42.82	-2.82
2	6.093	-18.59	RMS	1.9	13.7	-2.99	-2.82	-.17
3	6.6486	-63.07	RMS	2.1	13.9	-47.07	-42.82	-4.25

RMS - RMS detection

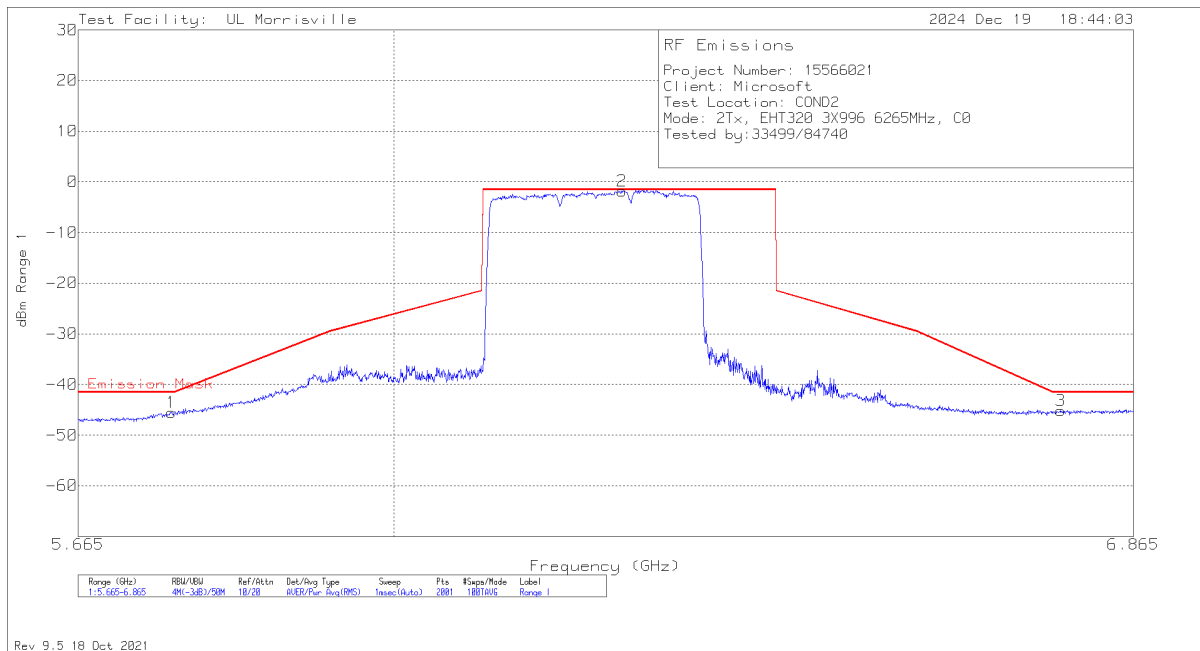

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7622	-60.99	RMS	13.6	1.9	-45.49	-41.56	-3.93
2	6.2548	-17.47	RMS	13.8	1.9	-1.77	-1.56	-.21
3	6.775	-61.3	RMS	14	2.1	-45.2	-41.56	-3.64


RMS - RMS detection

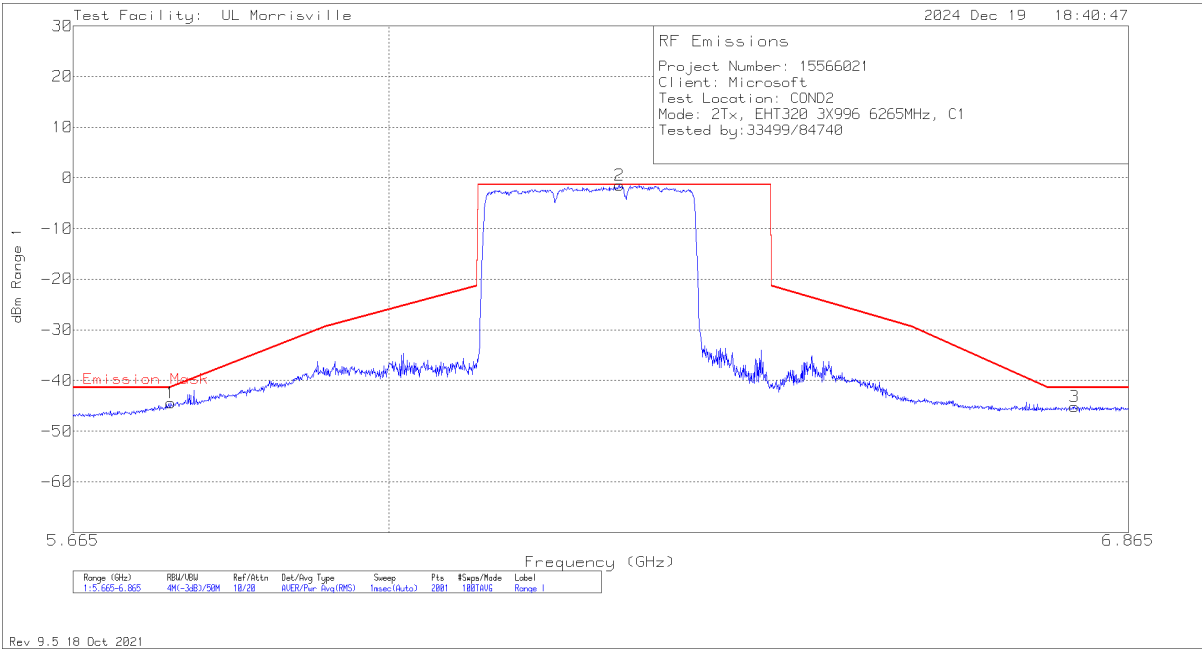

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7664	-59.84	RMS	13.5	1.9	-44.44	-41.28	-3.16
2	6.2578	-17.1	RMS	13.8	1.9	-1.4	-1.38	-.02
3	6.7978	-61.3	RMS	14	2.1	-45.2	-41.38	-3.82


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS) STANDARD POWER

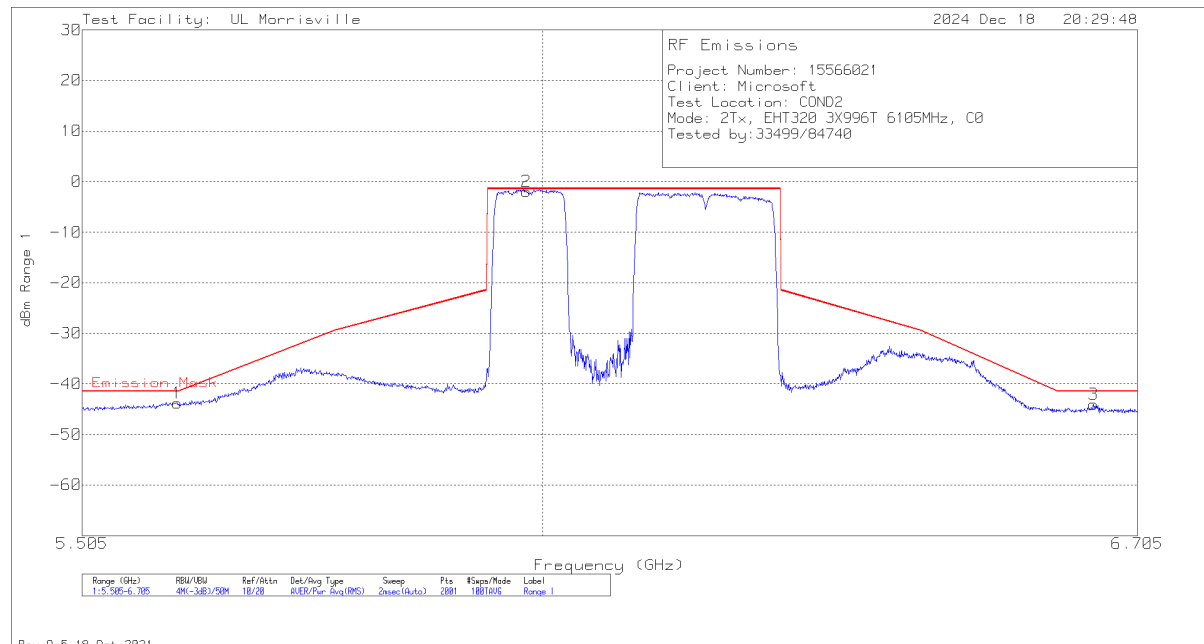


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.6034	-59.07	RMS	1.8	13.5	-43.77	-41.46	-2.31
2	5.9814	-17.49	RMS	1.9	13.7	-1.89	-1.46	-.43
3	6.6504	-60.06	RMS	2.1	13.9	-44.06	-41.46	-2.6

RMS - RMS detection

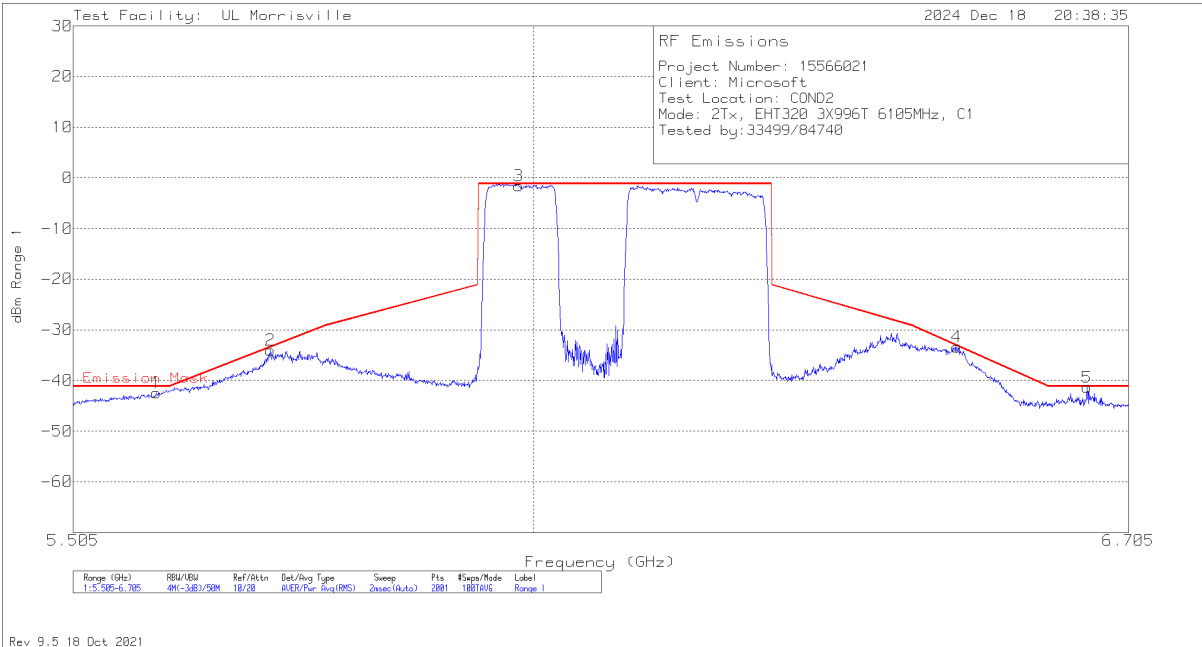


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.5914	-57.75	RMS	1.8	13.5	-42.45	-41.18	-1.27
2	5.712	-49.43	RMS	1.8	13.6	-34.03	-33.41	-.62
3	5.9826	-17.13	RMS	1.9	13.7	-1.53	-1.18	-.35
4	6.4932	-49.25	RMS	2.1	13.8	-33.35	-33.13	-.22
5	6.6534	-57.37	RMS	2.1	13.9	-41.37	-41.18	-.19

RMS - RMS detection

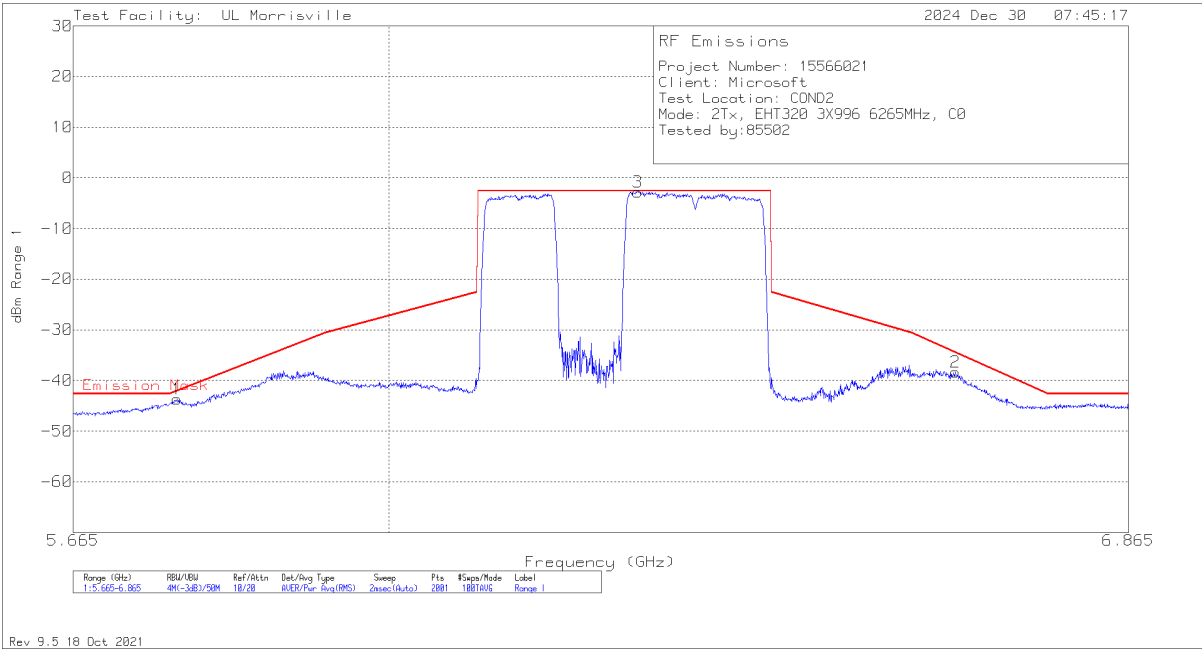

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.773	-59.15	RMS	13.6	1.9	-43.65	-42.03	-1.62
3	6.2782	-18.46	RMS	13.8	1.9	-2.76	-2.62	-.14
2	6.652	-54.35	RMS	13.9	2.1	-38.35	-34.48	-3.87


RMS - RMS detection

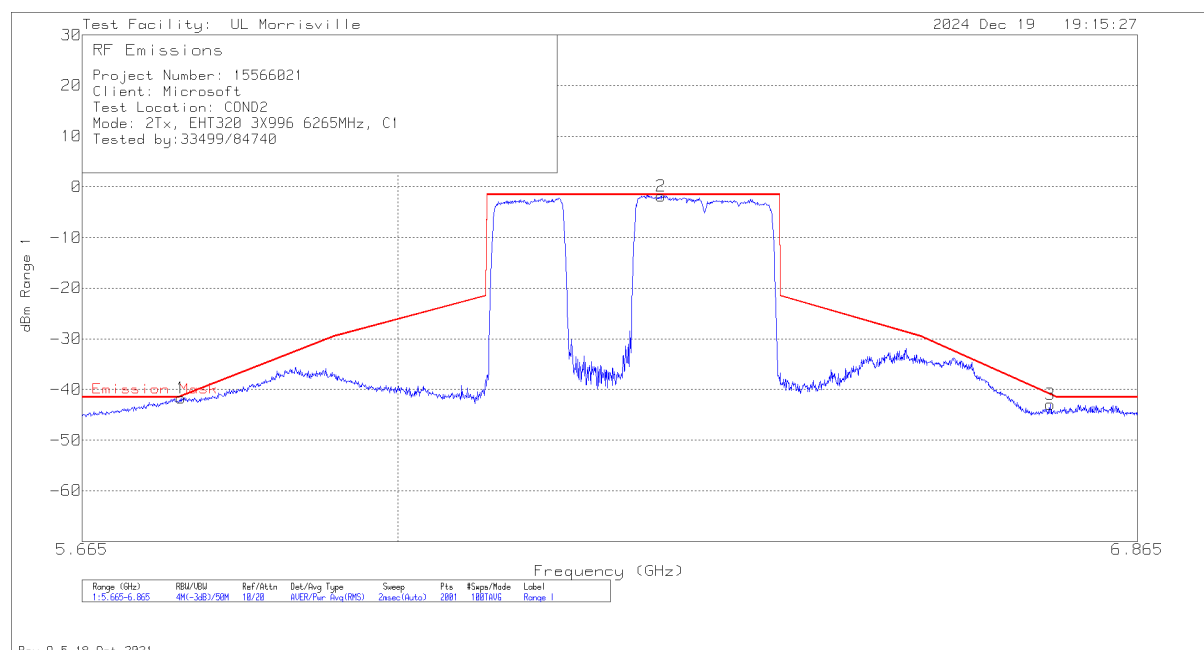

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7676	-57.07	RMS	13.5	1.9	-41.67	-41.37	-.3
2	6.2944	-17.52	RMS	13.8	1.9	-1.82	-1.56	-.26
3	6.757	-59.07	RMS	14	2.1	-42.97	-40.99	-1.98


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS 2) STANDARD POWER

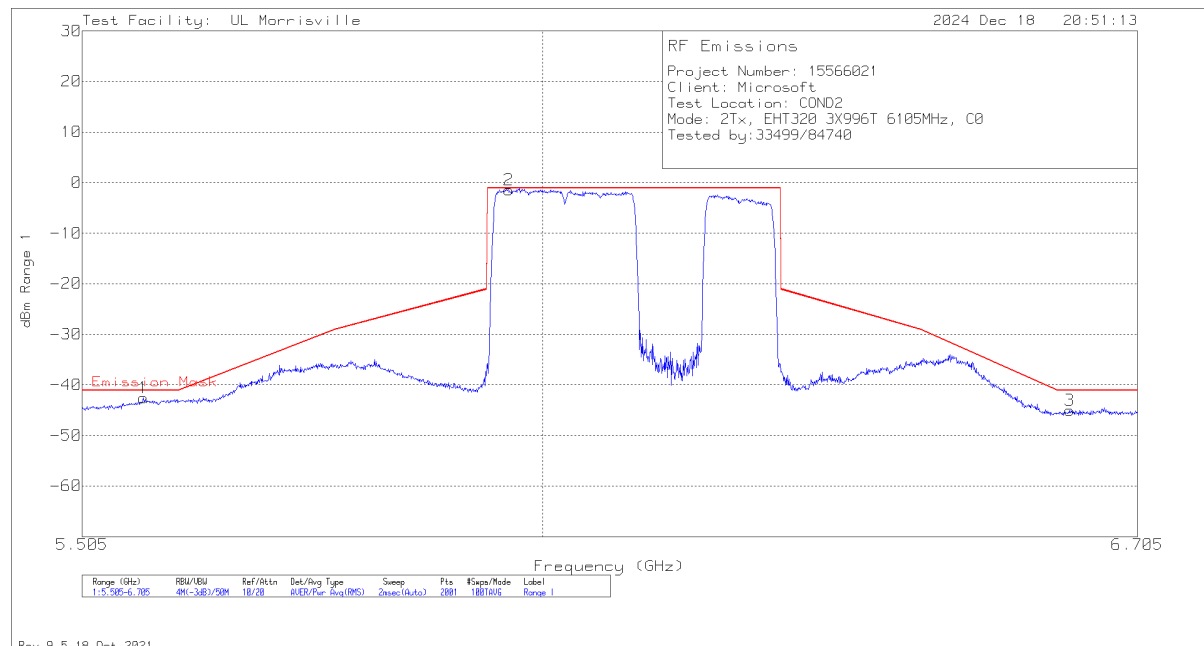


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.5686	-57.9	RMS	1.8	13.6	-42.5	-41.1	-1.4
2	5.9616	-17.08	RMS	1.9	13.7	-1.48	-1.1	-.38
3	6.621	-61.05	RMS	2.1	13.9	-45.05	-41.1	-3.95

RMS - RMS detection

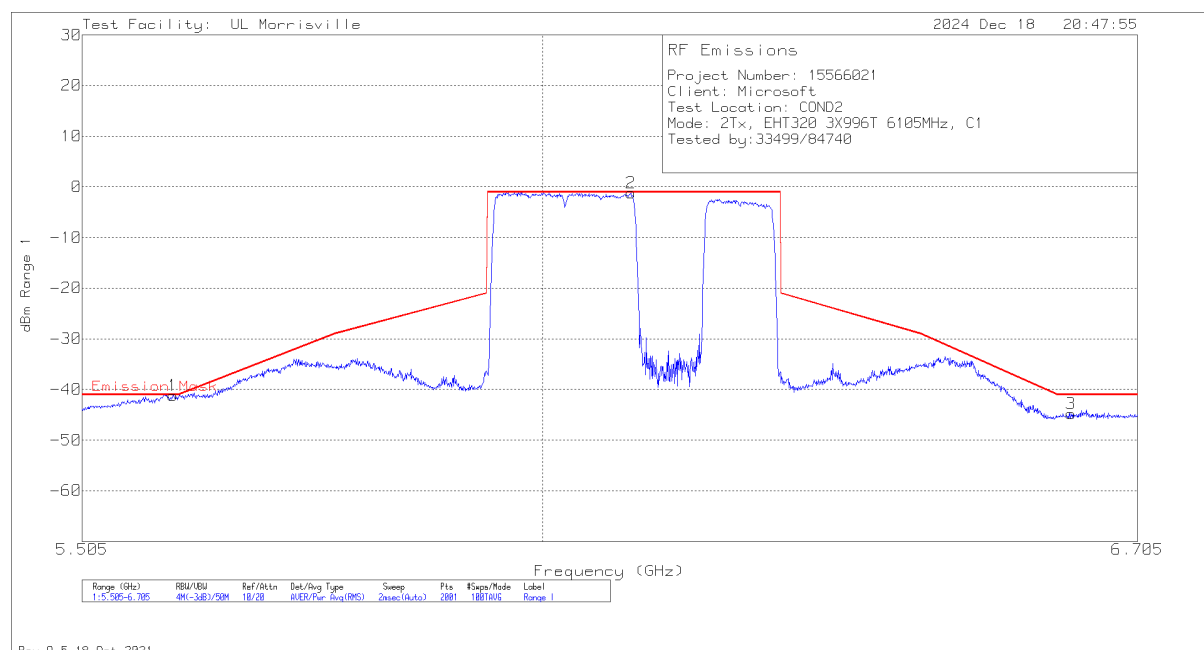


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.5992	-56.45	RMS	1.8	13.5	-41.15	-41.05	-.1
2	6.0996	-16.77	RMS	1.9	13.7	-1.17	-1.05	-.12
3	6.6222	-60.75	RMS	2.1	13.9	-44.75	-41.05	-3.7

RMS - RMS detection

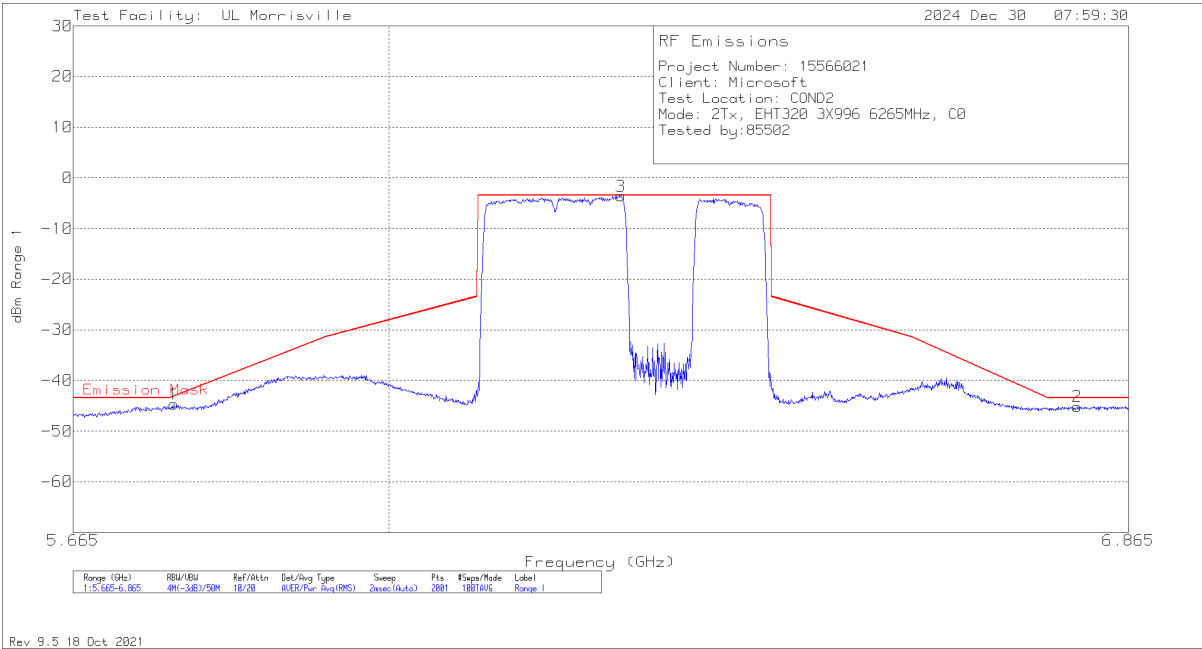

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.77	-60.13	RMS	13.6	1.9	-44.63	-43.1	-1.53
3	6.259	-19.31	RMS	13.8	1.9	-3.61	-3.47	-.14
2	6.8014	-61.23	RMS	14	2.1	-45.13	-43.47	-1.66


RMS - RMS detection

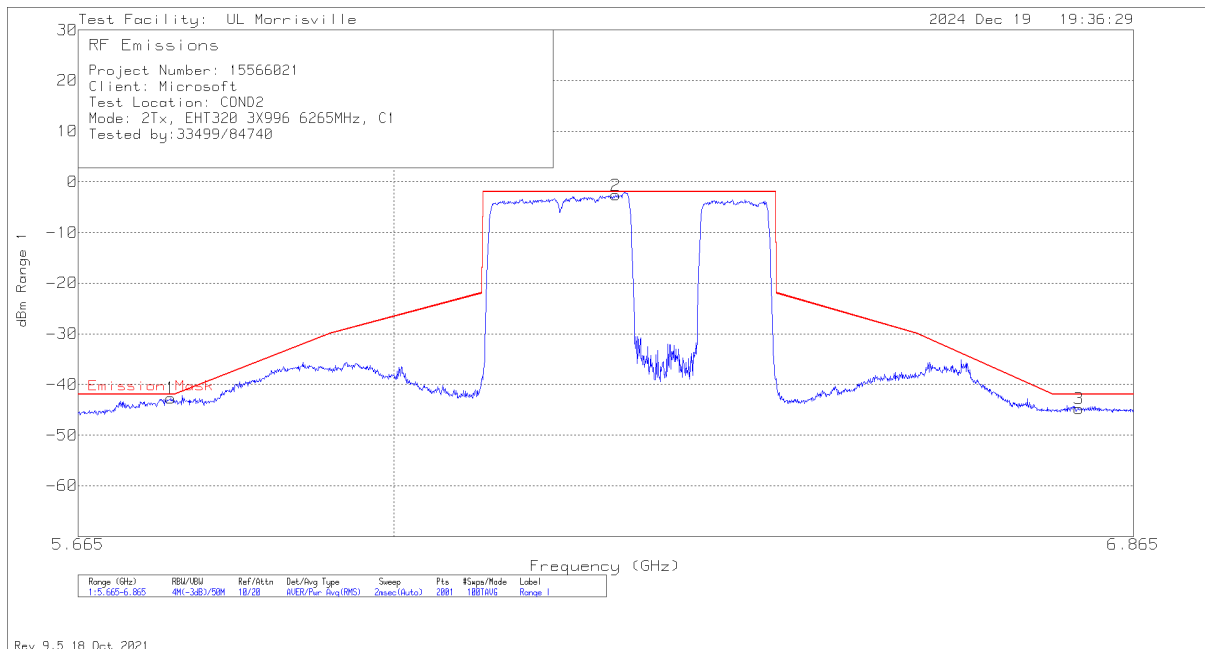

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7616	-58.03	RMS	13.5	1.9	-42.63	-41.96	-.67
2	6.2476	-18.32	RMS	13.8	1.9	-2.62	-1.96	-.66
3	6.7972	-60.85	RMS	14	2.1	-44.75	-41.96	-2.79


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T (NON-CONTIGUOUS 2) LOW POWER INDOOR

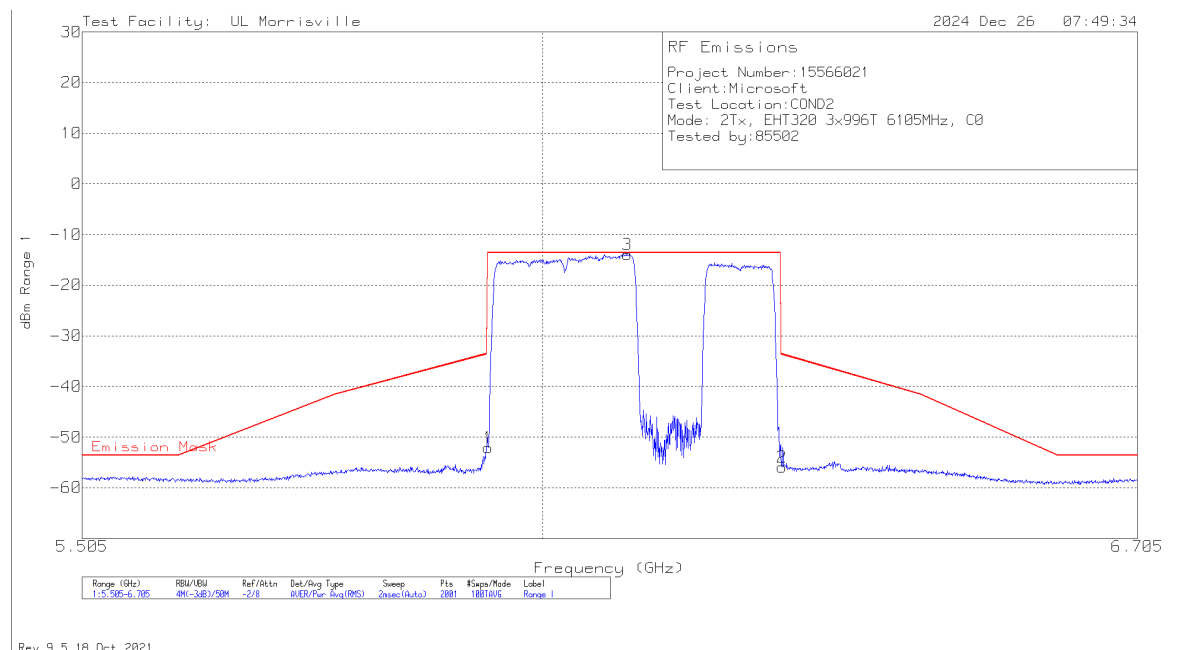


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.9388	-67.73	RMS	13.7	1.9	-52.13	-13.62	-38.51
3	6.0954	-29.61	RMS	13.8	1.9	-13.91	-13.62	-.29
2	6.2742	-71.65	RMS	13.8	1.9	-55.95	-33.68	-22.27

RMS - RMS detection

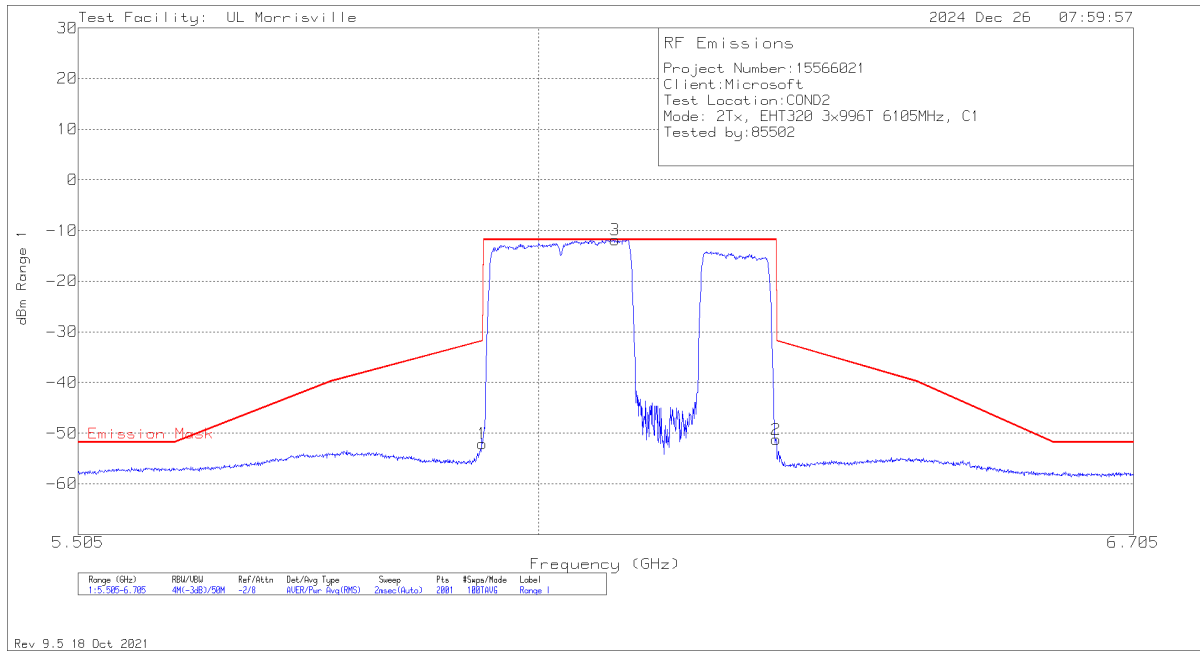


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.937	-67.56	RMS	13.6	1.9	-52.06	-31.81	-20.25
3	6.0858	-27.44	RMS	13.7	1.9	-11.84	-11.81	-.03
2	6.2718	-66.97	RMS	13.8	1.9	-51.27	-11.81	-39.46

RMS - RMS detection

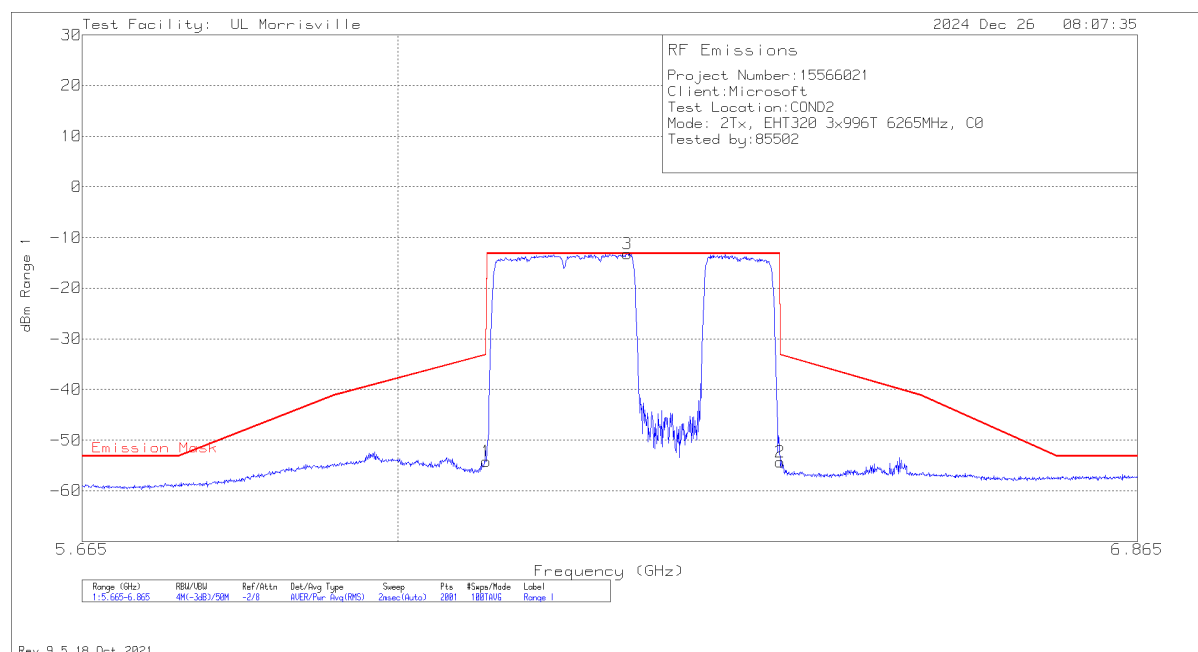

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.0976	-69.86	RMS	13.8	1.9	-54.16	-21.19	-32.97
3	6.256	-28.95	RMS	13.8	1.9	-13.25	-13.19	-.06
2	6.4324	-70.2	RMS	13.9	2	-54.3	-21.19	-33.11


RMS - RMS detection

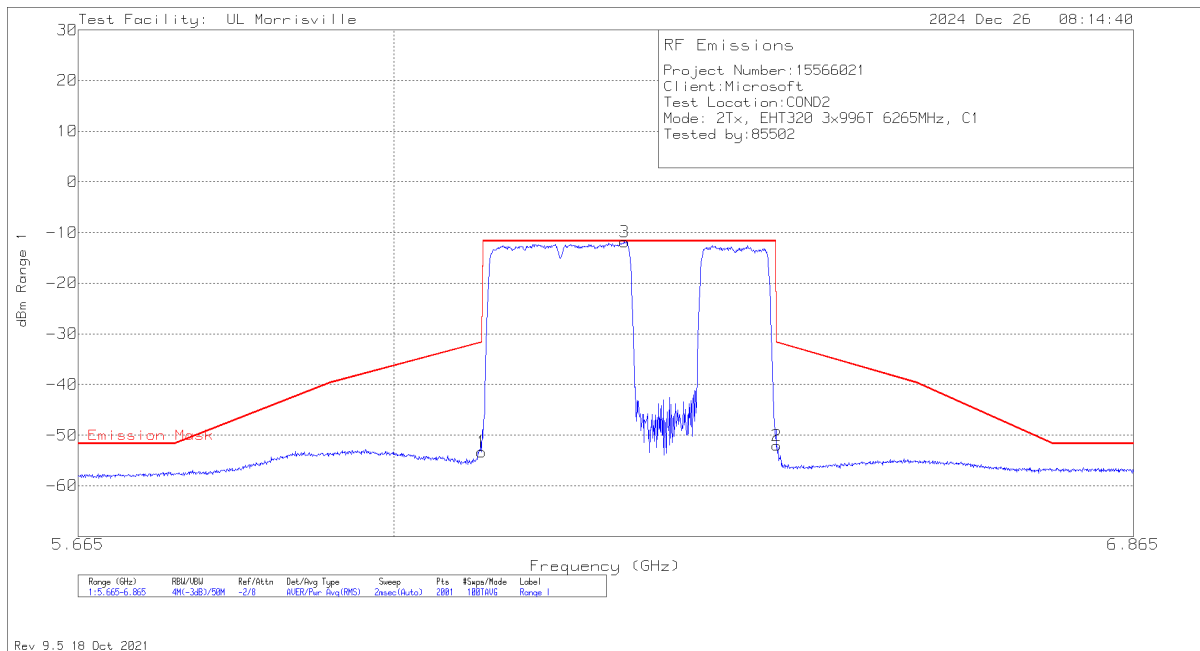

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	6.097	-68.88	RMS	13.7	1.9	-53.28	-31.7	-21.58
3	6.2578	-27.57	RMS	13.8	1.9	-11.87	-11.7	-.17
2	6.4336	-67.93	RMS	13.9	2	-52.03	-31.73	-20.3


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (CONTIGUOUS) STANDARD POWER

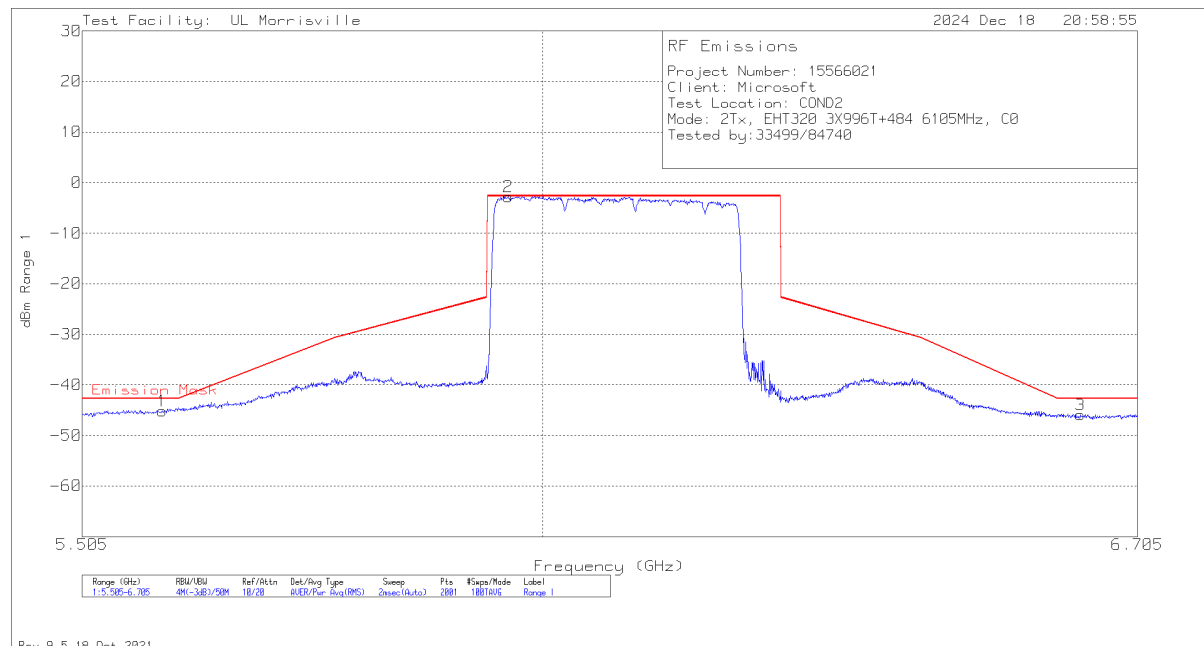


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.5878	-60.42	RMS	1.8	13.5	-45.12	-42.7	-2.42
2	5.961	-18.41	RMS	1.9	13.7	-2.81	-2.7	-.11
3	6.6342	-61.95	RMS	2.1	13.9	-45.95	-42.7	-3.25

RMS - RMS detection

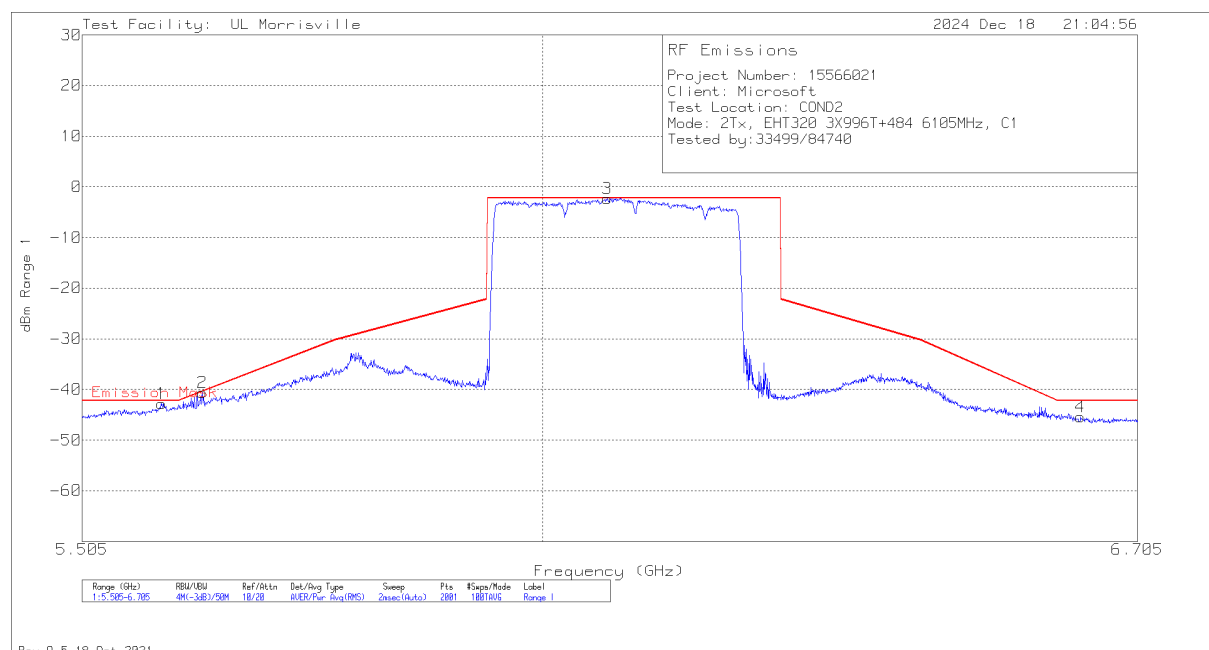


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.5872	-58.09	RMS	1.8	13.5	-42.79	-42.24	-.55
2	5.6298	-55.92	RMS	1.8	13.5	-40.62	-40.42	-.2
3	6.0726	-17.9	RMS	1.9	13.7	-2.3	-2.24	-.06
4	6.6342	-61.45	RMS	2.1	13.9	-45.45	-42.24	-3.21

RMS - RMS detection

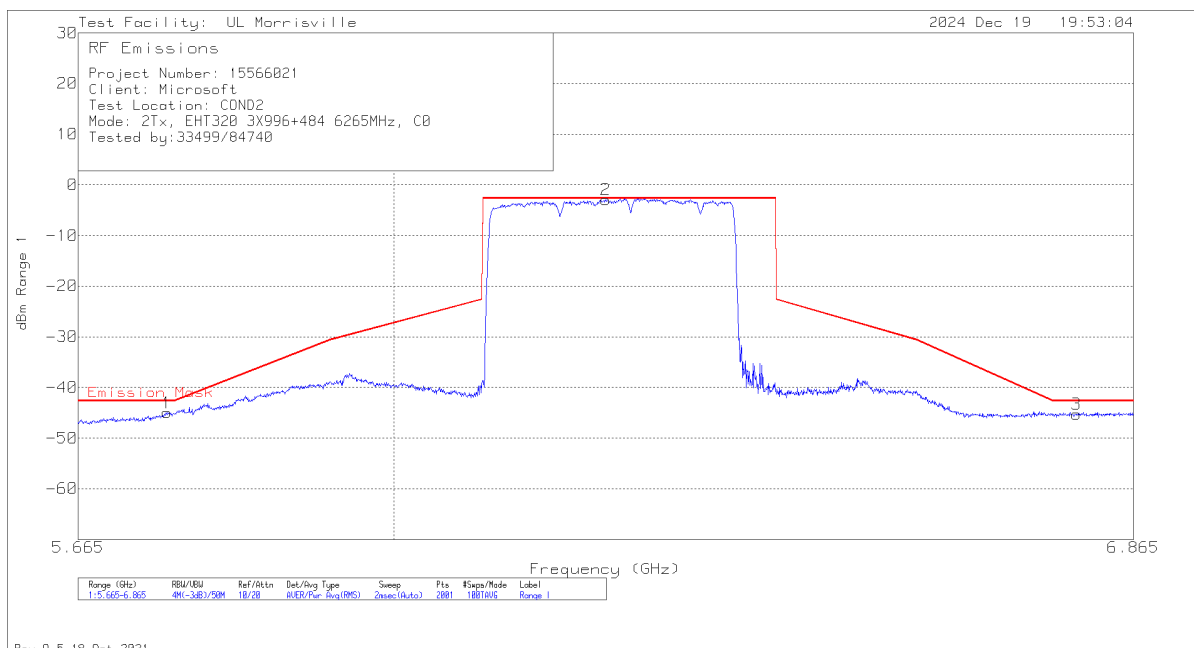

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7574	-60.37	RMS	13.5	1.9	-44.97	-42.67	-2.3
2	6.2362	-18.59	RMS	13.8	1.9	-2.89	-2.67	-.22
3	6.7942	-61.36	RMS	14	2.1	-45.26	-42.67	-2.59


RMS - RMS detection

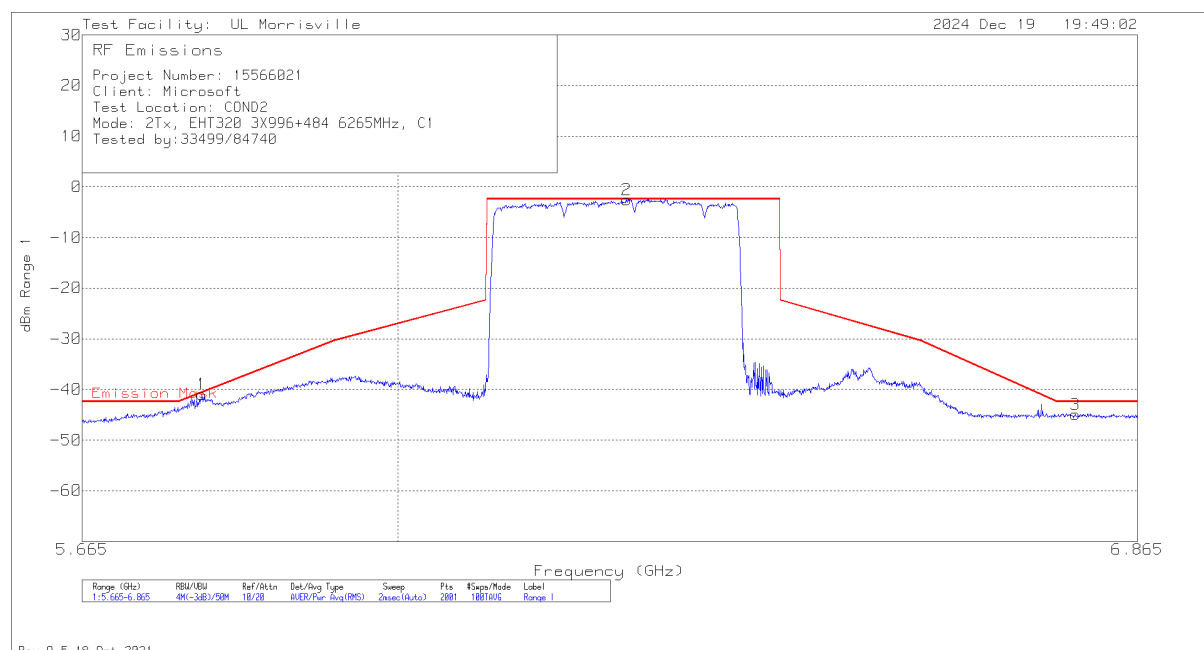

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7898	-56.43	RMS	13.6	1.9	-40.93	-40.61	-.32
2	6.2554	-18.22	RMS	13.8	1.9	-2.52	-2.42	-.1
3	6.7876	-61.06	RMS	14	2.1	-44.96	-42.42	-2.54


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 3x996T+484T (NON-CONTIGUOUS) STANDARD POWER

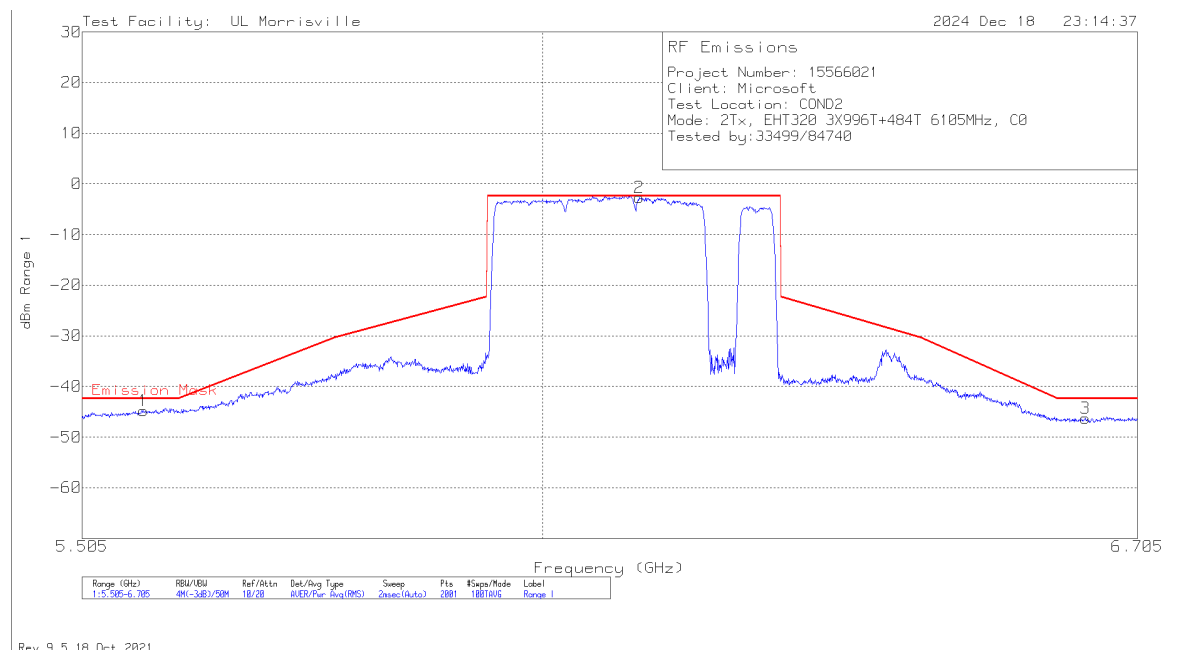

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.5686	-60.18	RMS	1.8	13.6	-44.78	-42.38	-2.4
2	6.1086	-18.23	RMS	1.9	13.7	-2.63	-2.38	-.25
3	6.6402	-62.25	RMS	2.1	13.9	-46.25	-42.38	-3.87


RMS - RMS detection

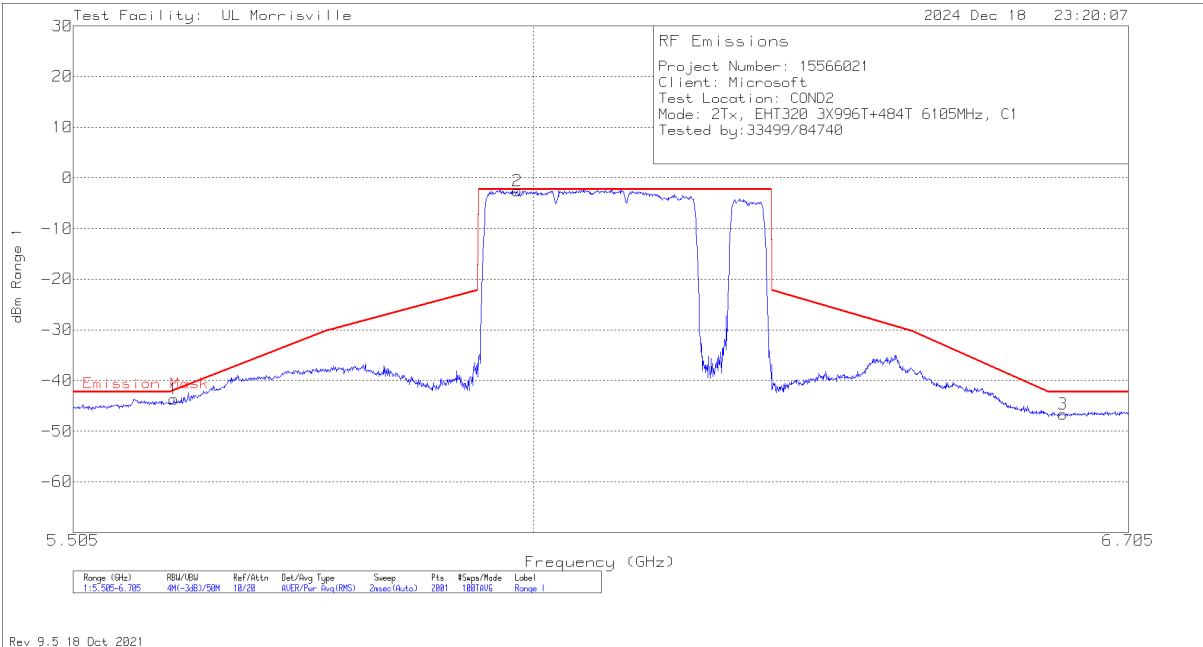

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.6094	-59.01	RMS	1.8	13.5	-43.71	-41.94	-1.77
2	5.9814	-18.19	RMS	1.9	13.7	-2.59	-2.26	-.33
3	6.6234	-62.63	RMS	2.1	13.9	-46.63	-42.26	-4.37


RMS - RMS detection

2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 484T+3X996T (NON-CONTIGUOUS) STANDARD POWER

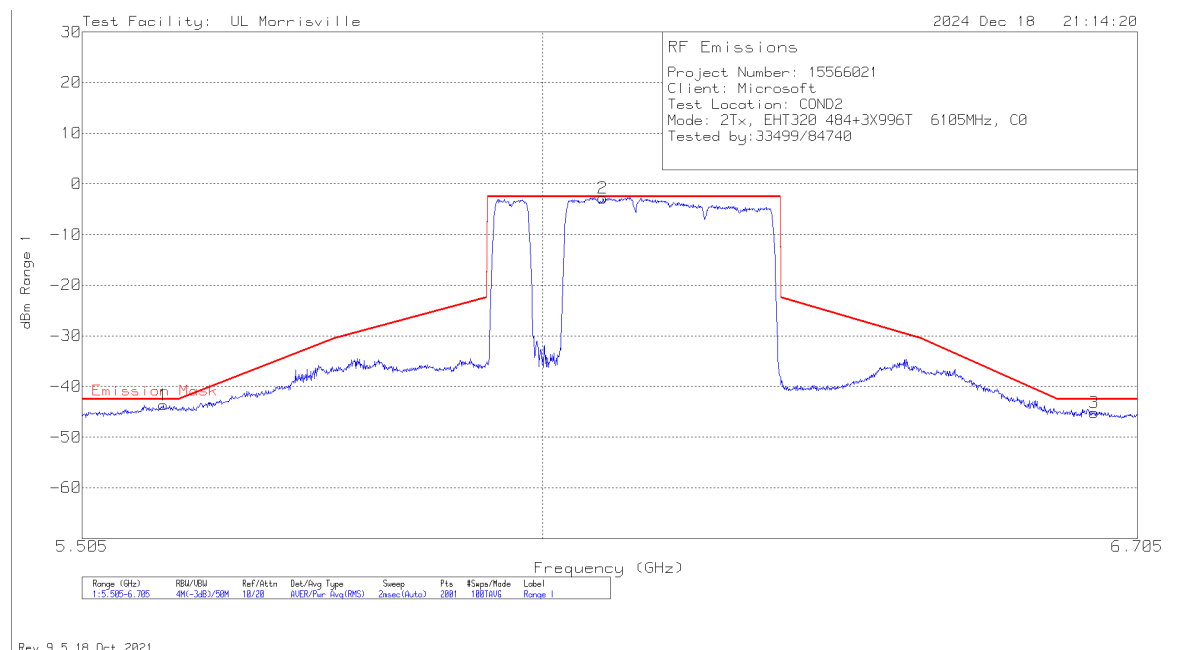


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.589	-58.91	RMS	1.8	13.5	-43.61	-42.51	-1.1
2	6.0678	-18.41	RMS	1.9	13.7	-2.81	-2.51	-.3
3	6.651	-61.14	RMS	2.1	13.9	-45.14	-42.51	-2.63

RMS - RMS detection

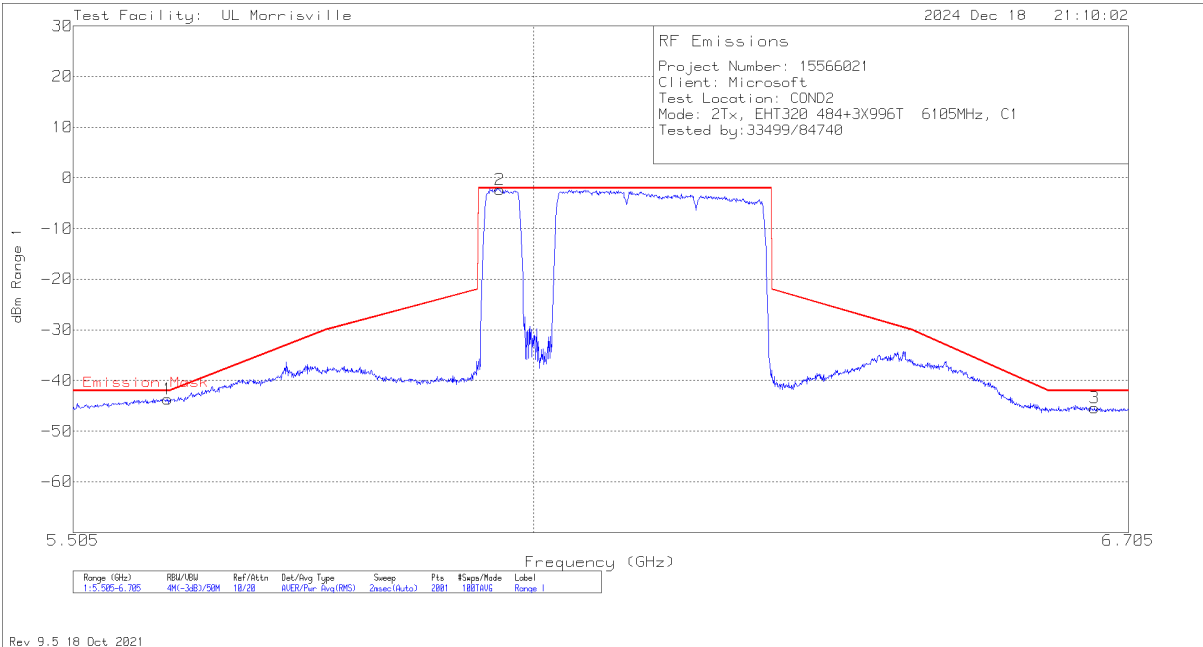


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.6028	-59	RMS	1.8	13.5	-43.7	-42.04	-1.66
2	5.9616	-17.87	RMS	1.9	13.7	-2.27	-2.04	-.23
3	6.6624	-61.42	RMS	2.1	13.9	-45.42	-42.04	-3.38

RMS - RMS detection

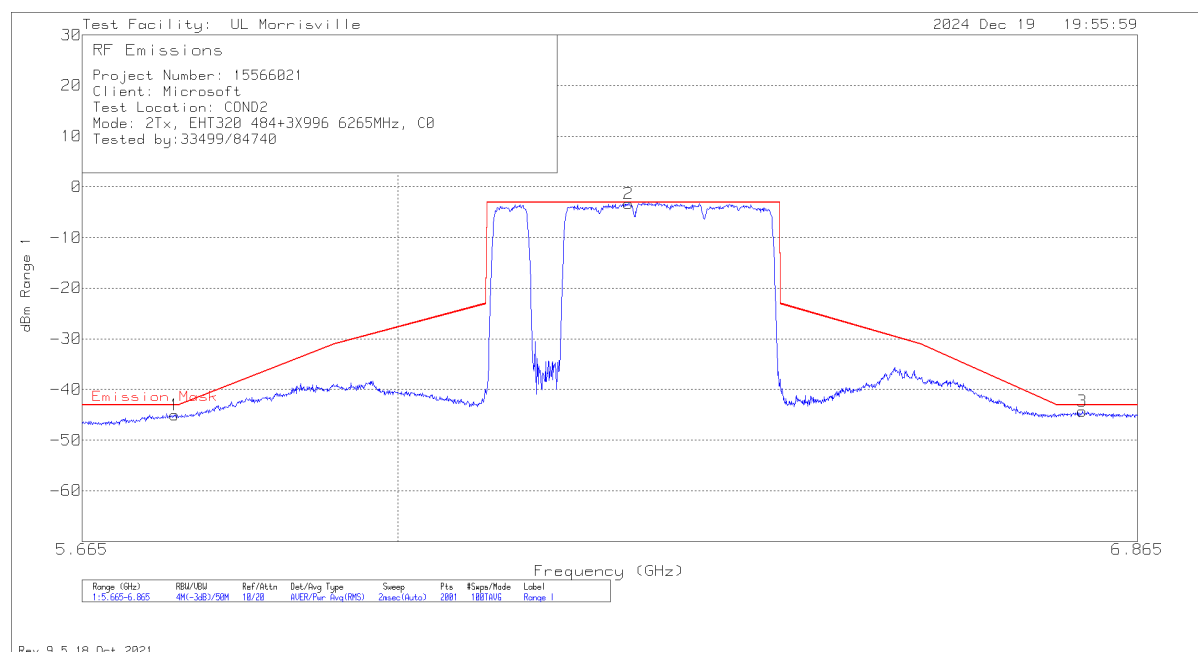

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.761	-60.53	RMS	13.6	1.9	-45.03	-43.09	-1.94
2	6.2578	-18.95	RMS	13.8	1.9	-3.25	-3.09	-.16
3	6.7966	-60.41	RMS	14	2.1	-44.31	-43.09	-1.22


RMS - RMS detection

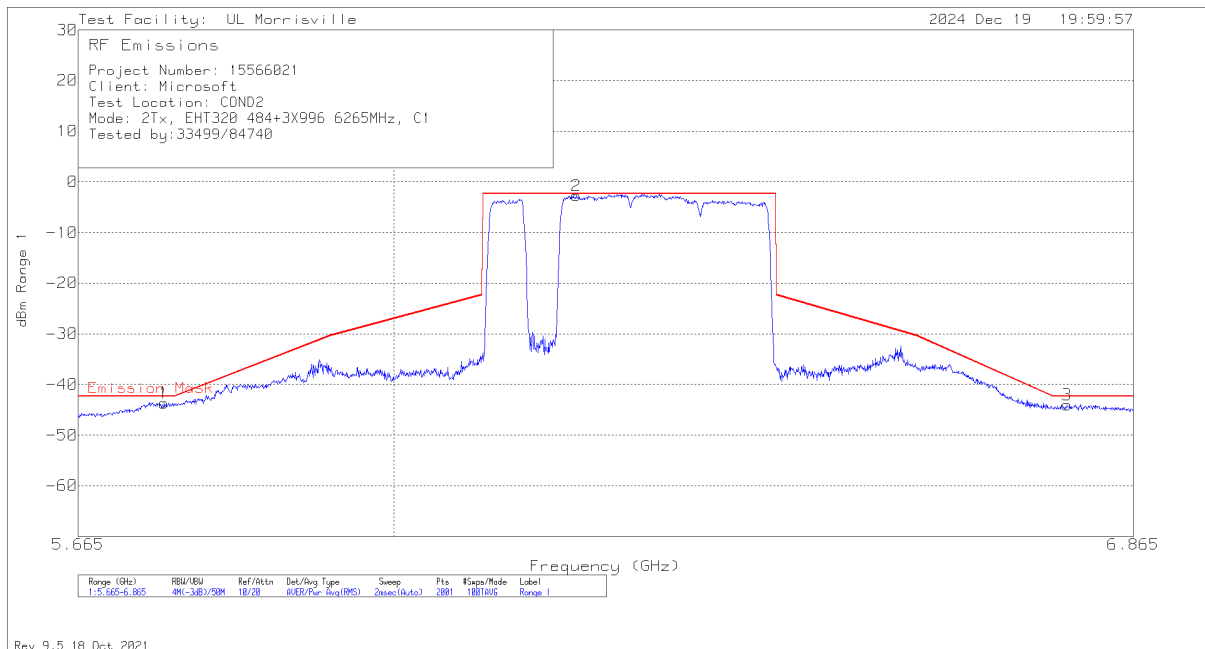

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7544	-59.04	RMS	13.5	1.9	-43.64	-42.36	-1.28
2	6.2026	-18.44	RMS	13.8	1.9	-2.74	-2.36	-.38
3	6.7822	-60.14	RMS	14	2.1	-44.04	-42.36	-1.68


RMS - RMS detection

**2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS)
STANDARD POWER**

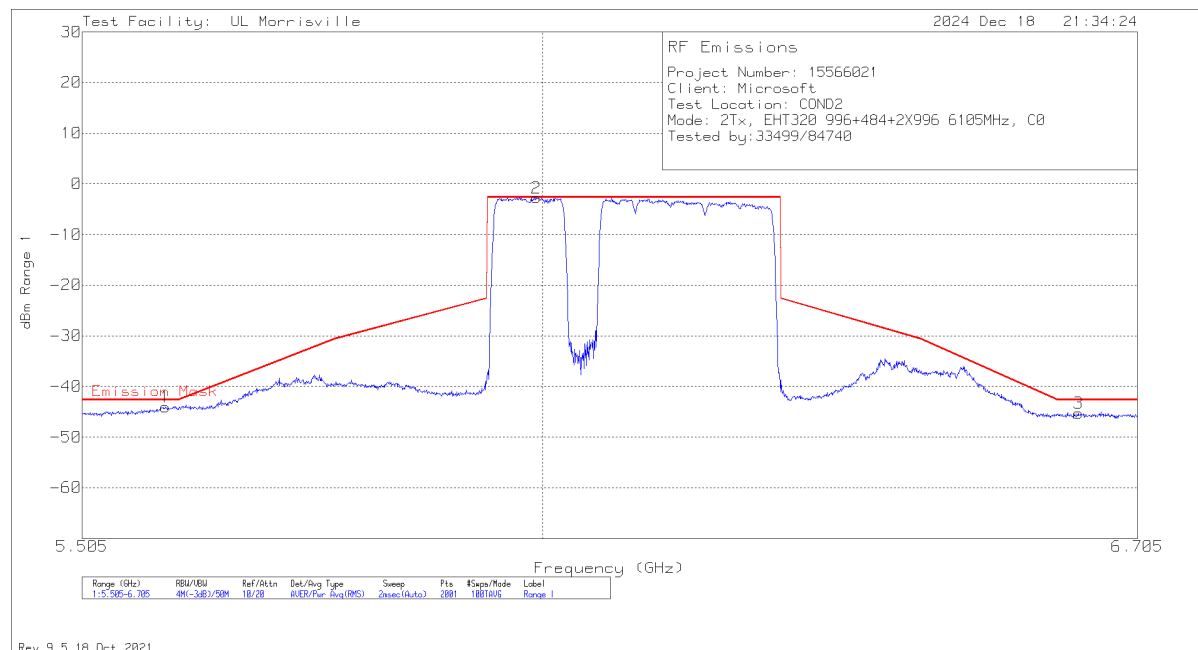


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.5914	-59.35	RMS	1.8	13.5	-44.05	-42.65	-1.4
2	5.9928	-18.35	RMS	1.9	13.7	-2.75	-2.65	-.1
3	6.6312	-61.29	RMS	2.1	13.9	-45.29	-42.65	-2.64

RMS - RMS detection

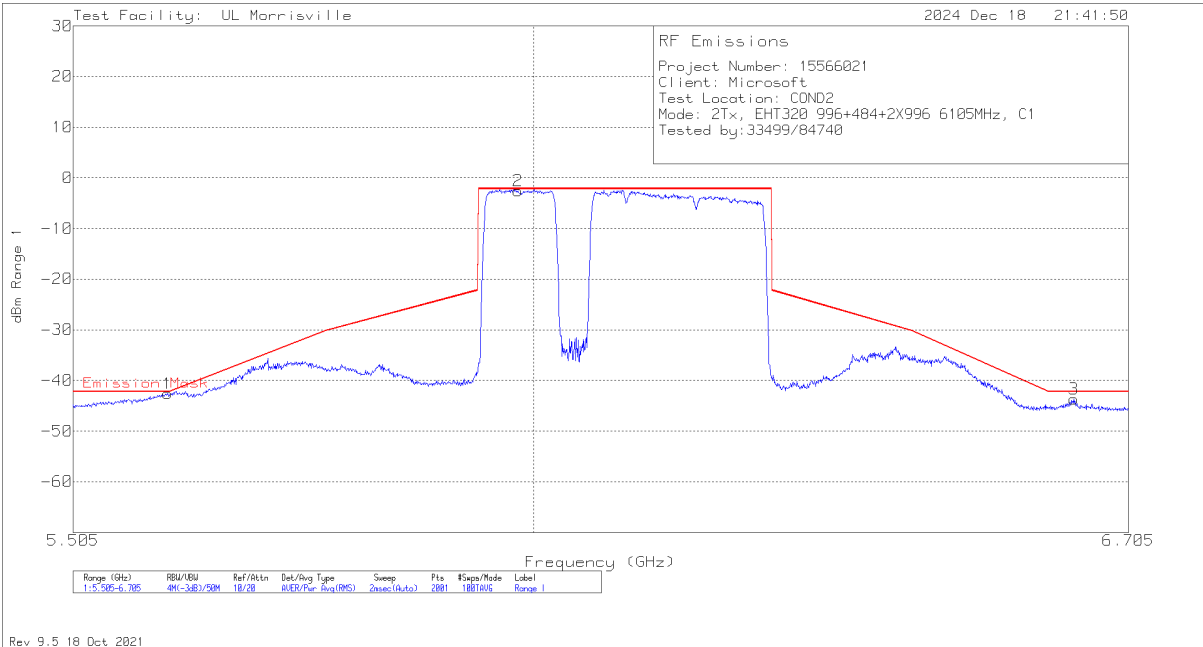


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.6028	-57.91	RMS	1.8	13.5	-42.61	-42.2	-.41
2	5.982	-18.14	RMS	1.9	13.7	-2.54	-2.2	-.34
3	6.6372	-59.69	RMS	2.1	13.9	-43.69	-42.2	-1.49

RMS - RMS detection

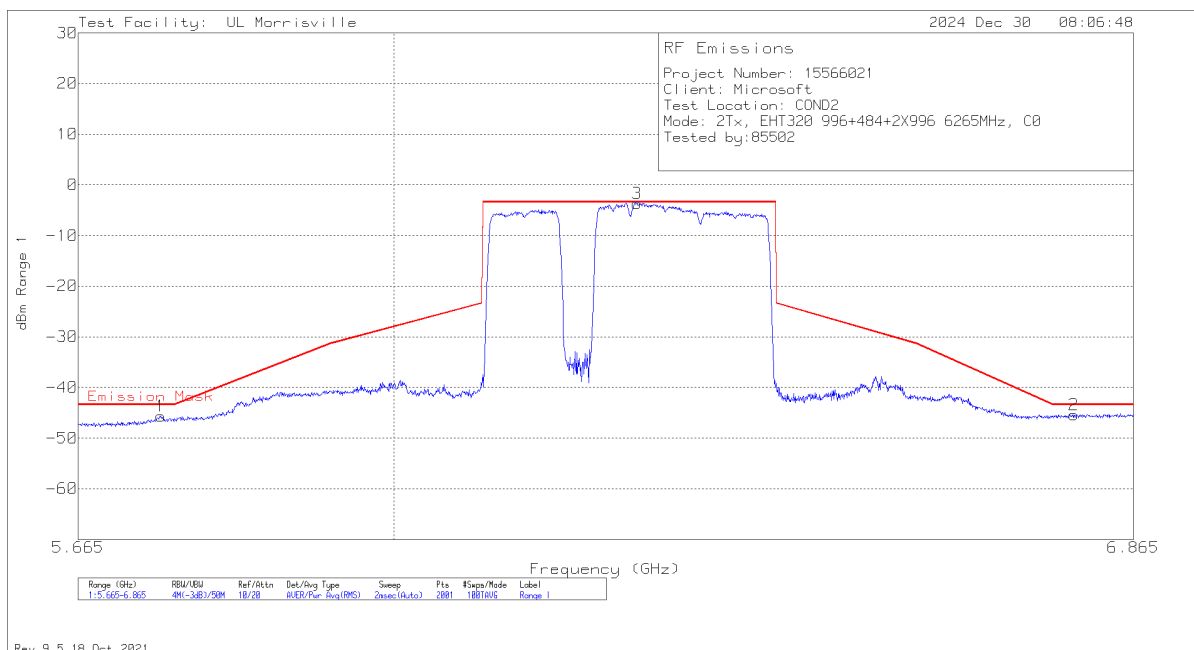

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7508	-61.05	RMS	13.5	1.9	-45.65	-43.42	-2.23
3	6.2716	-19.33	RMS	13.8	1.9	-3.63	-3.42	-.21
2	6.7906	-61.5	RMS	14	2.1	-45.4	-43.42	-1.98


RMS - RMS detection

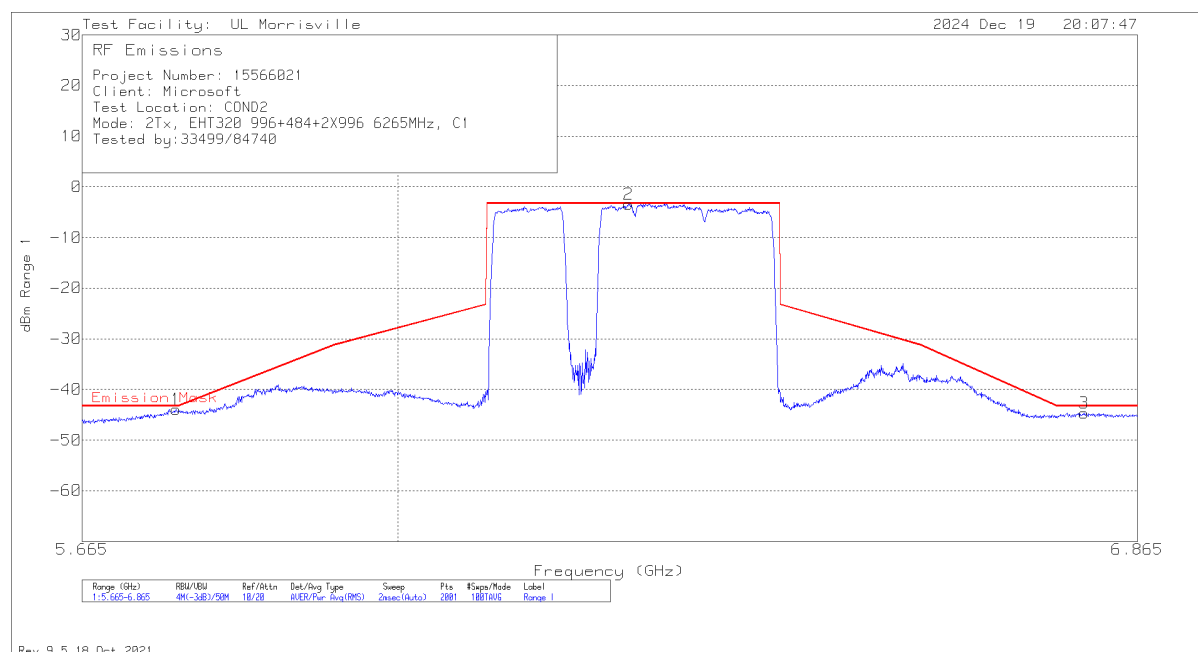

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7628	-59.3	RMS	13.5	1.9	-43.9	-43.28	-.62
2	6.2572	-19.12	RMS	13.8	1.9	-3.42	-3.28	-.14
3	6.7984	-60.8	RMS	14	2.1	-44.7	-43.28	-1.42


RMS - RMS detection

**2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 996T+484T+2x996T (NON-CONTIGUOUS 2)
STANDARD POWER**

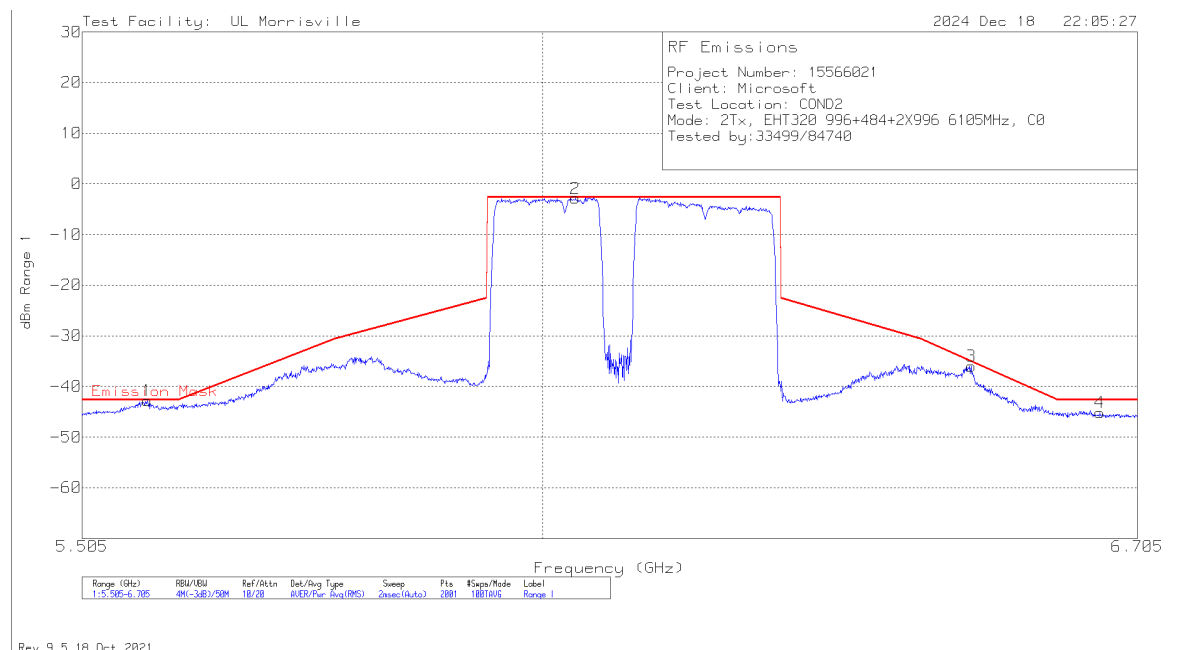


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.5722	-58.13	RMS	1.8	13.5	-42.83	-42.63	-.2
2	6.0366	-18.47	RMS	1.9	13.7	-2.87	-2.63	-.24
3	6.4998	-51.98	RMS	2.1	13.9	-35.98	-35.06	-.92
4	6.6582	-61.18	RMS	2.1	13.9	-45.18	-42.63	-2.55

RMS - RMS detection

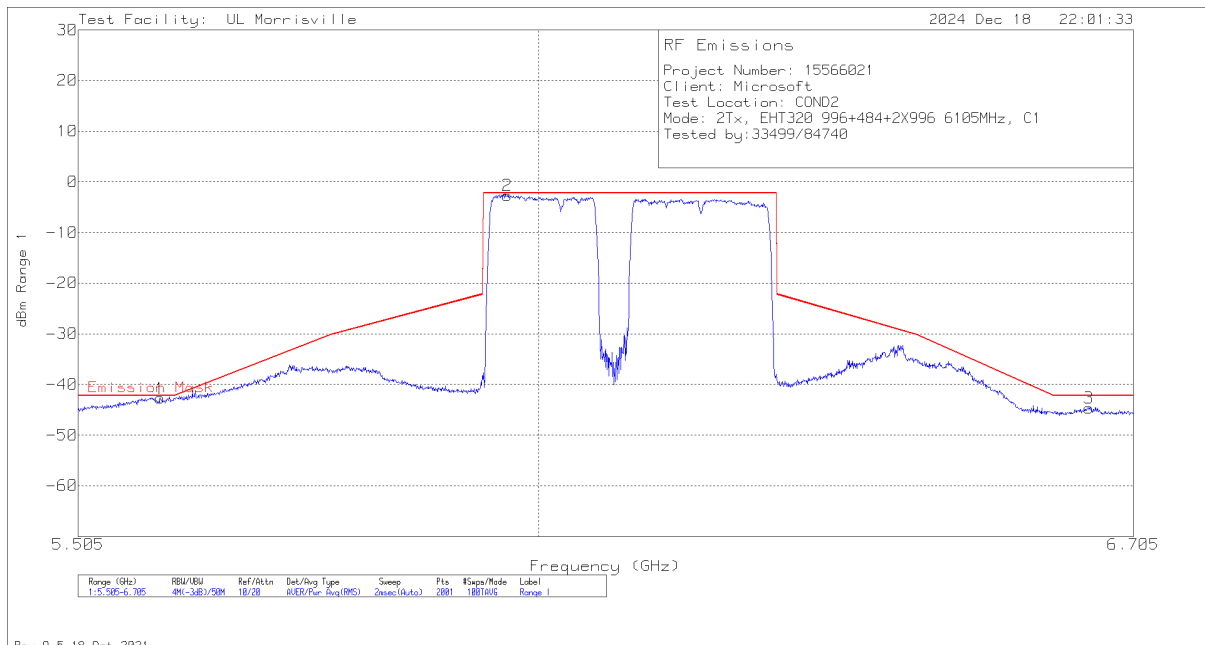


Marker	Frequency (GHz)	Meter Reading (dBm)	Det	EUT CBL BLCK	Atten	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.5902	-58.04	RMS	1.8	13.5	-42.74	-42.23	-.51
2	5.9646	-18.25	RMS	1.9	13.7	-2.65	-2.23	-.42
3	6.6492	-60.61	RMS	2.1	13.9	-44.61	-42.23	-2.38

RMS - RMS detection

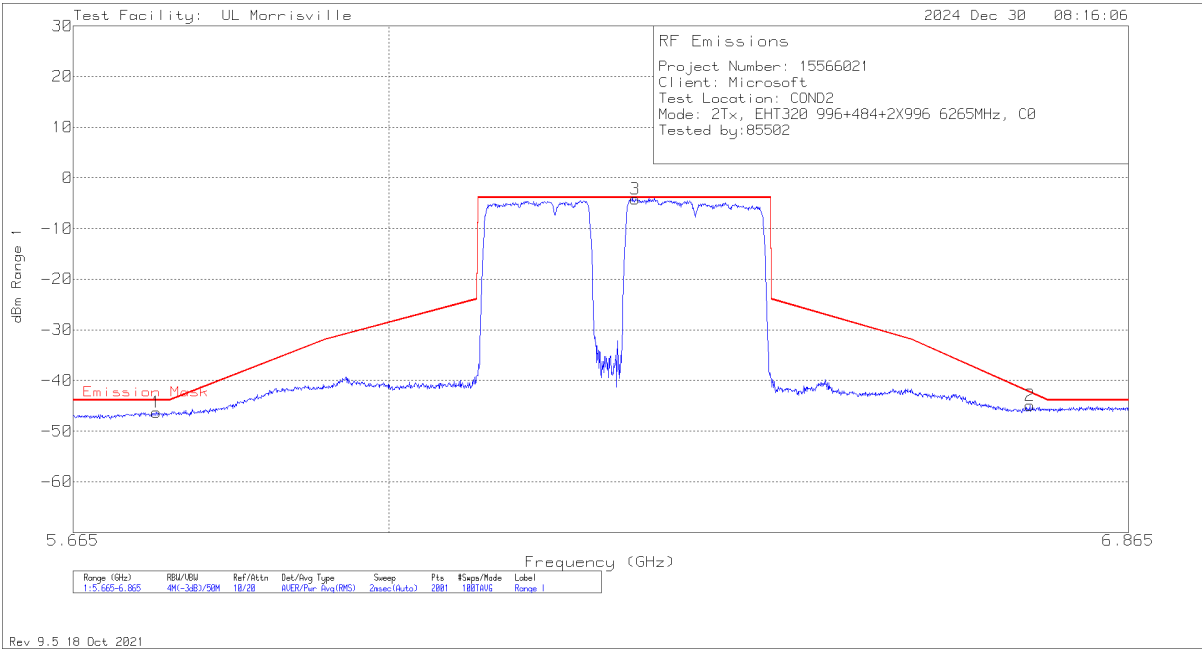

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7514	-61.71	RMS	13.5	1.9	-46.31	-43.93	-2.38
3	6.2752	-19.9	RMS	13.8	1.9	-4.2	-3.93	-.27
2	6.7432	-61	RMS	14	2.1	-44.9	-42.37	-2.53


RMS - RMS detection

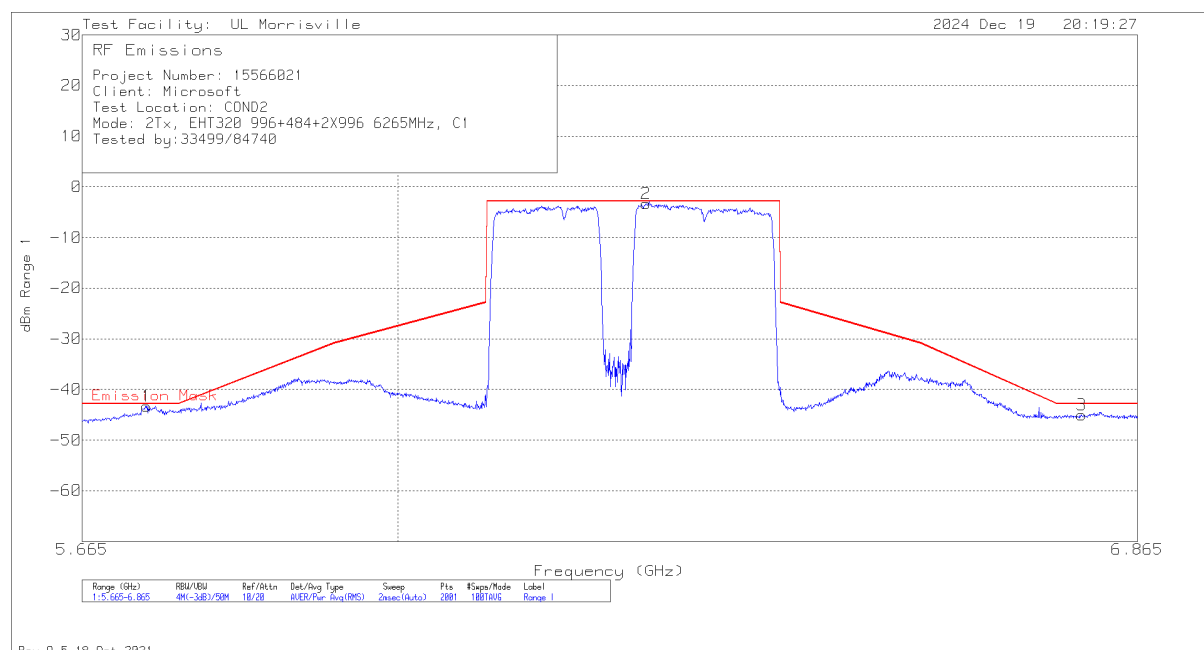

Marker	Frequency (GHz)	Meter Reading (dBm)	Det	Atten	EUT CBL BLCK	Corrected Reading dBm	Emission Mask	Margin (dB)
1	5.7316	-58.58	RMS	13.5	1.8	-43.28	-42.86	-.42
2	6.2776	-18.98	RMS	13.8	1.9	-3.28	-2.86	-.42
3	6.7954	-61.08	RMS	14	2.1	-44.98	-42.86	-2.12

RMS - RMS detection

**2TX CHAIN 0 + CHAIN 1 CDD OFDMA MODE: 2x996T+484T+996T (NON-CONTIGUOUS)
STANDARD POWER**

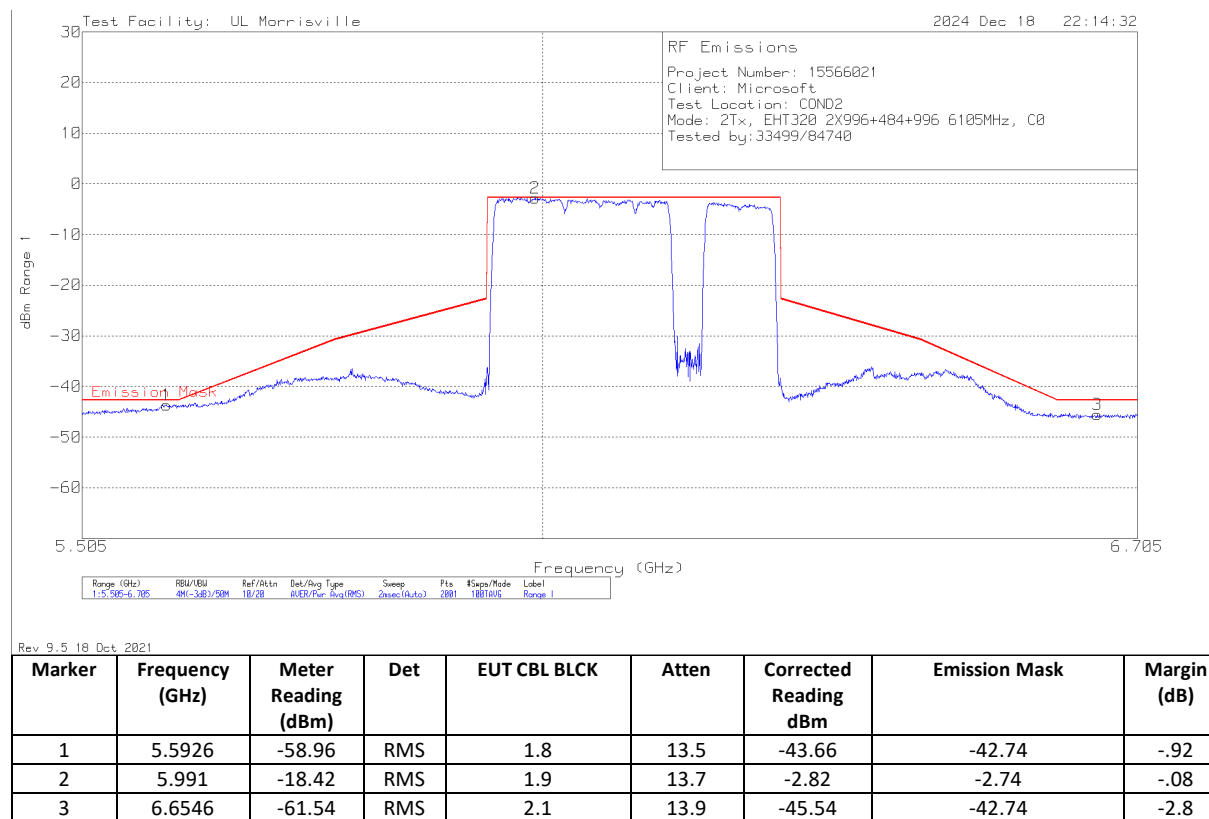

RMS - RMS detection