

Appendix. A Plots of System Verification

The plots for system verification are shown as follows.

Plots of System Verification

Measurement Report S01 System Check_H1900_231125 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,			1900	8.37	1.44	41.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-25	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-25	2023-11-25
psSAR1g [W/kg]	1.89	1.92
psSAR10g [W/kg]	0.989	1.02
Power Drift [dB]	-0.01	0.01

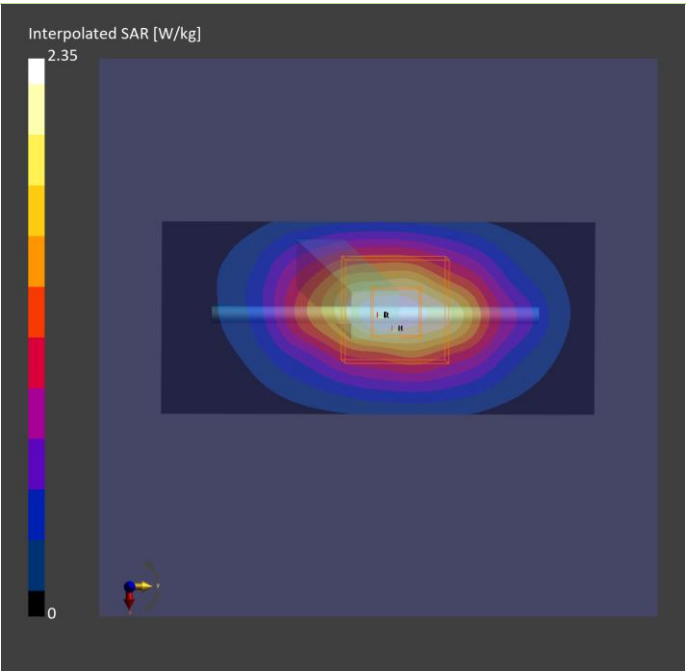

Plots of System Verification

Measurement Report S02 System Check_H1750_231126 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,			1750	9.00	1.37	39.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-26	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-26	2023-11-26
psSAR1g [W/kg]	1.73	1.75
psSAR10g [W/kg]	0.929	0.940
Power Drift [dB]	0.03	0.04

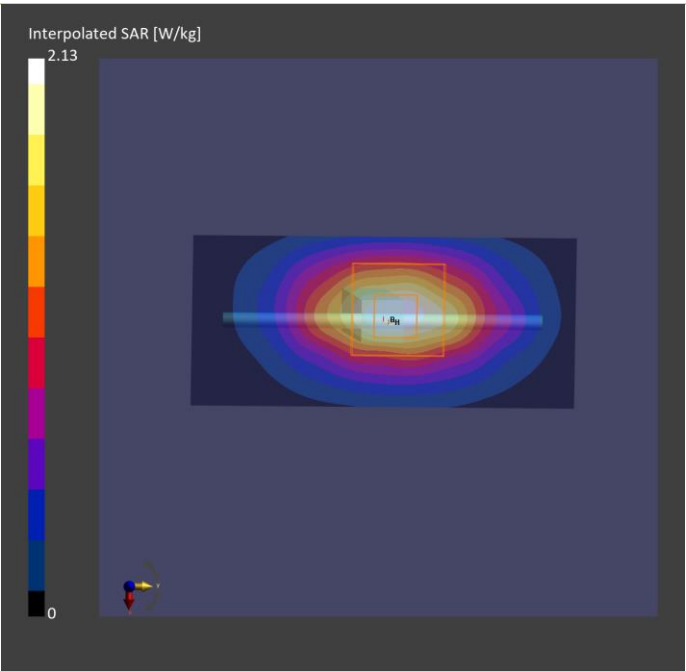

Plots of System Verification

Measurement Report S03 System Check_H835_231130 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole,	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	835.0, 0	10.16	0.971	44.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-30	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-30	2023-11-30
psSAR1g [W/kg]	0.480	0.475
psSAR10g [W/kg]	0.316	0.310
Power Drift [dB]	0.01	0.03

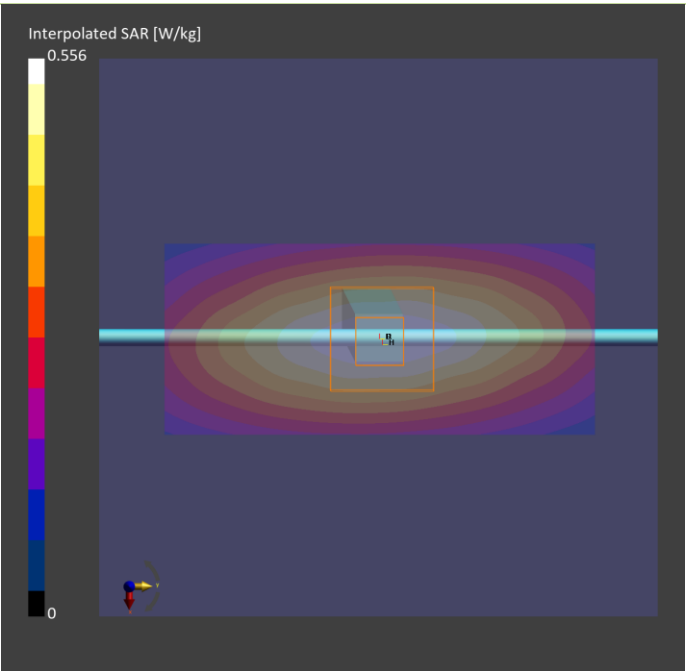

Plots of System Verification

Measurement Report S04 System Check_H1900_231125 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,			1900	8.37	1.44	41.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-25	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-25	2023-11-25
psSAR1g [W/kg]	1.89	1.92
psSAR10g [W/kg]	0.989	1.02
Power Drift [dB]	-0.01	0.01

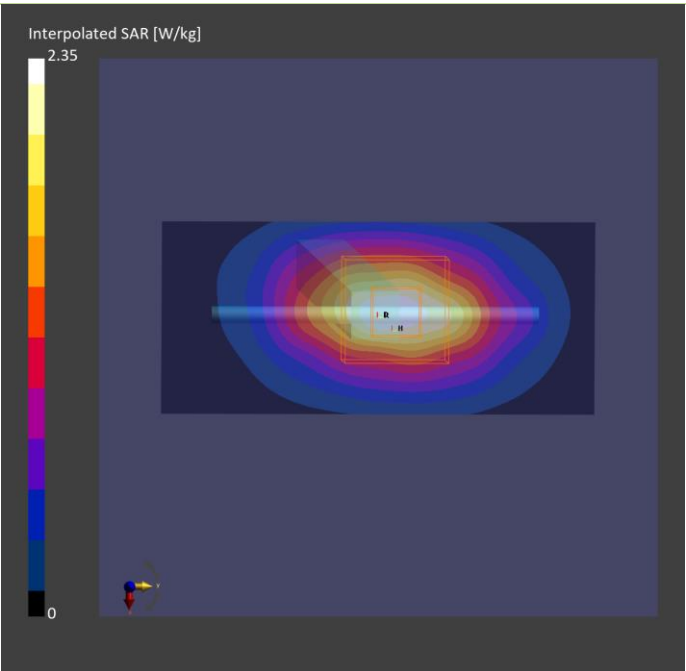

Plots of System Verification

Measurement Report S05 System Check_H1750_231126 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,			1750	9.00	1.37	39.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-26	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-26	2023-11-26
psSAR1g [W/kg]	1.73	1.75
psSAR10g [W/kg]	0.929	0.940
Power Drift [dB]	0.03	0.04

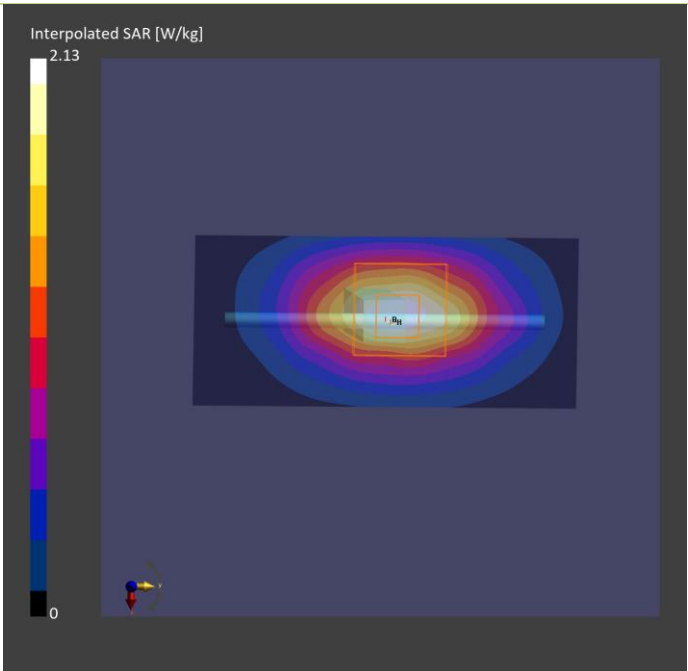

Plots of System Verification

Measurement Report S06 System Check_H835_231130 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole,	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	835.0, 0	10.16	0.971	44.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-30	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-30	2023-11-30
psSAR1g [W/kg]	0.480	0.475
psSAR10g [W/kg]	0.316	0.310
Power Drift [dB]	0.01	0.03

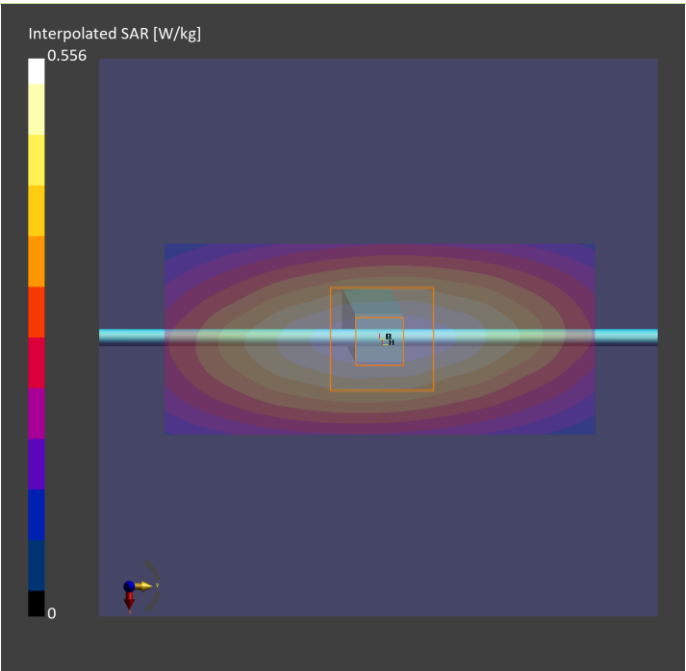

Plots of System Verification

Measurement Report S07 System Check_H2600_231201 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,			2600	7.61	1.91	41.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Dec-01	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 96.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-01	2023-12-01
psSAR1g [W/kg]	2.72	2.76
psSAR10g [W/kg]	1.22	1.26
Power Drift [dB]	0.01	-0.01

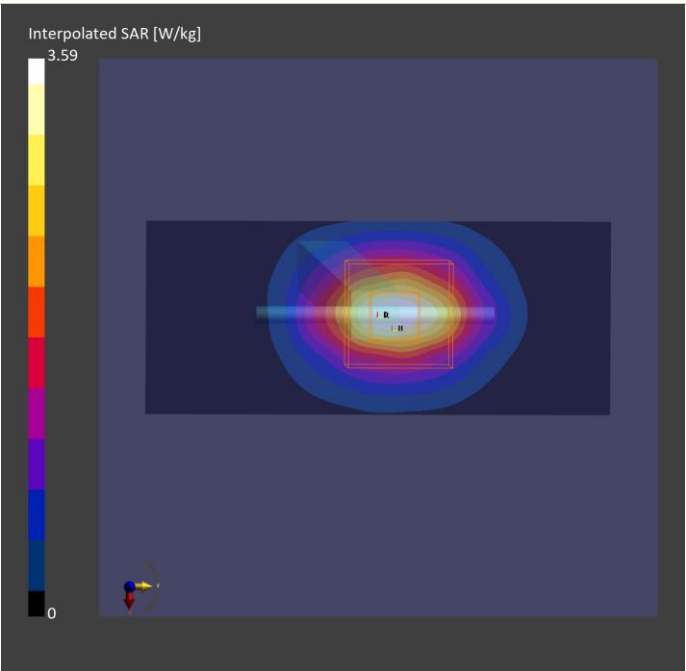

Plots of System Verification

Measurement Report S08 System Check_H750_231202 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,				750.0,	10.35	0.892	42.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Dec-02	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-02	2023-12-02
psSAR1g [W/kg]	0.407	0.409
psSAR10g [W/kg]	0.273	0.277
Power Drift [dB]	0.01	0.02

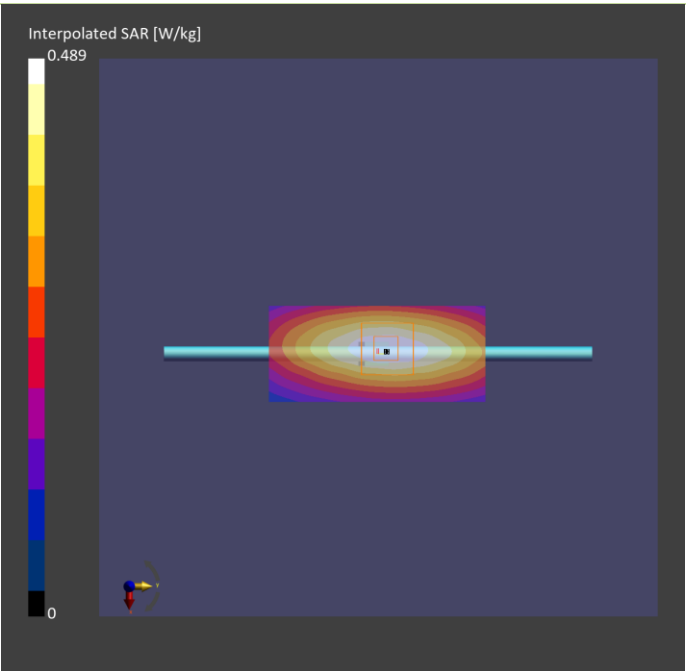

Plots of System Verification

Measurement Report S09 System Check_H750_231202 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,				750.0,	10.35	0.892	42.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Dec-02	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-02	2023-12-02
psSAR1g [W/kg]	0.407	0.409
psSAR10g [W/kg]	0.273	0.277
Power Drift [dB]	0.01	0.02

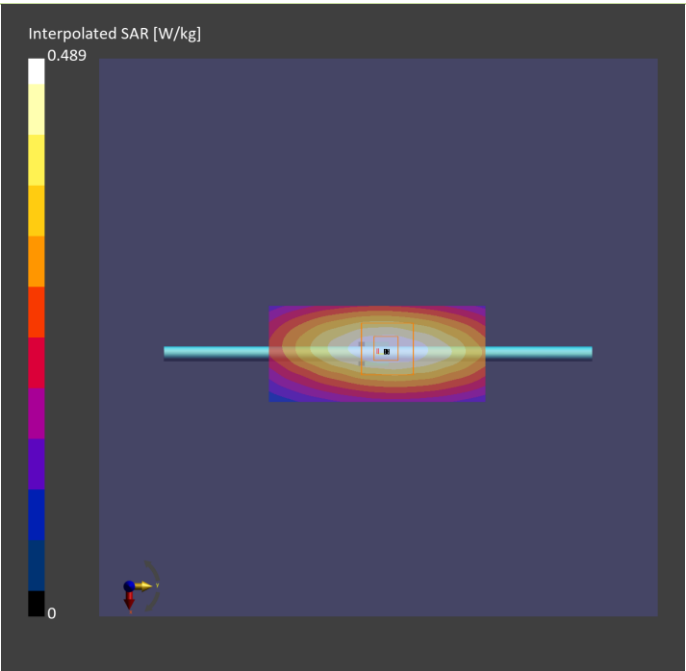

Plots of System Verification

Measurement Report S10 System Check_H750_231202 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,				750.0,	10.35	0.892	42.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Dec-02	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-02	2023-12-02
psSAR1g [W/kg]	0.407	0.409
psSAR10g [W/kg]	0.273	0.277
Power Drift [dB]	0.01	0.02

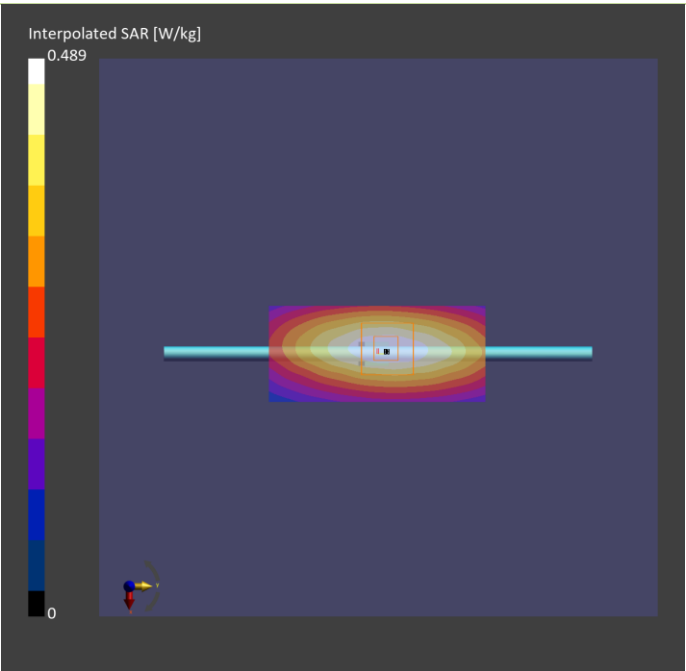

Plots of System Verification

Measurement Report S11 System Check_H750_231202 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,				750.0,	10.35	0.892	42.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Dec-02	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-02	2023-12-02
psSAR1g [W/kg]	0.407	0.409
psSAR10g [W/kg]	0.273	0.277
Power Drift [dB]	0.01	0.02

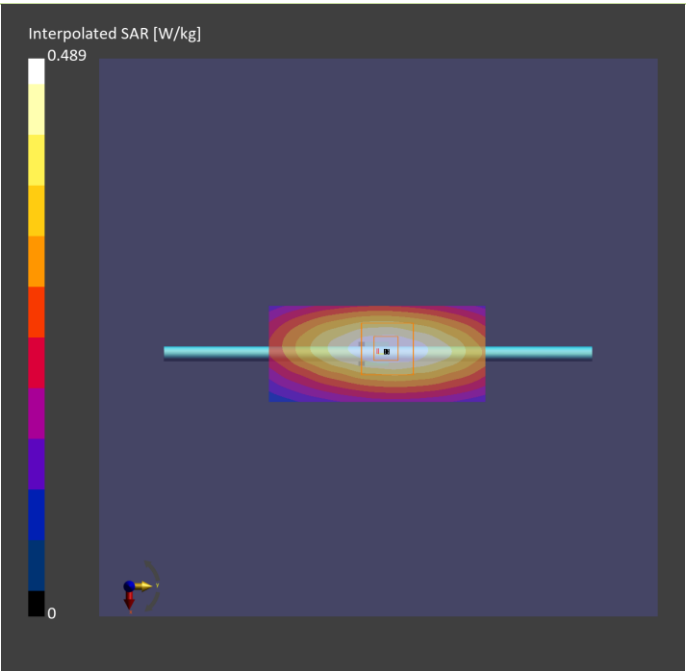

Plots of System Verification

Measurement Report S12 System Check_H1900_231125 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,			1900	8.37	1.44	41.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-25	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-25	2023-11-25
psSAR1g [W/kg]	1.89	1.92
psSAR10g [W/kg]	0.989	1.02
Power Drift [dB]	-0.01	0.01

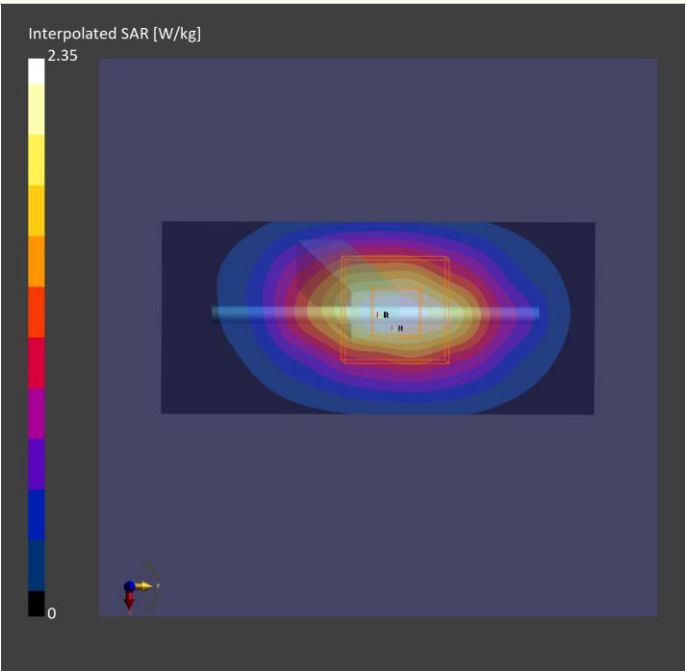

Plots of System Verification

Measurement Report S13 System Check_H835_231130 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole,	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	835.0, 0	10.16	0.971	44.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-30	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-30	2023-11-30
psSAR1g [W/kg]	0.480	0.475
psSAR10g [W/kg]	0.316	0.310
Power Drift [dB]	0.01	0.03

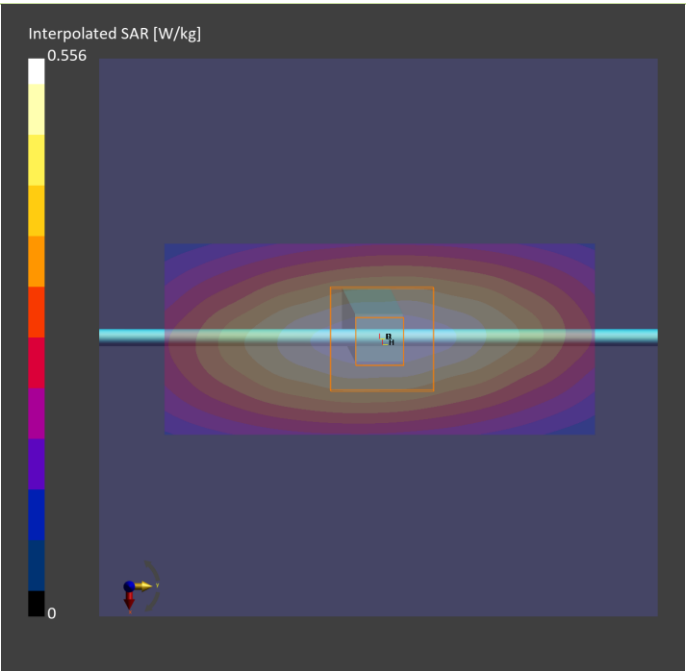

Plots of System Verification

Measurement Report S14 System Check_H2300_231129 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,			2300	8.12	1.79	41.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-29	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 96.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-29	2023-11-29
psSAR1g [W/kg]	2.30	2.35
psSAR10g [W/kg]	1.10	1.14
Power Drift [dB]	0.00	0.03

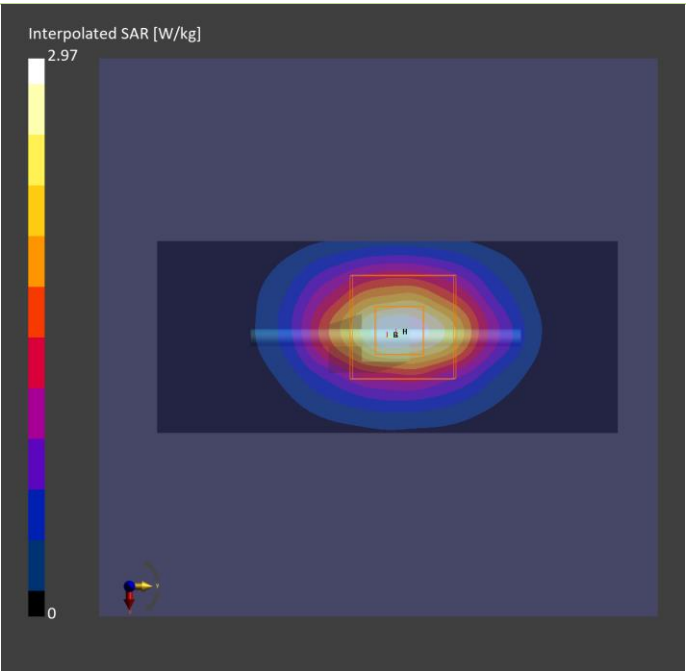

Plots of System Verification

Measurement Report S15 System Check_H2600_231201 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,			2600	7.61	1.91	41.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Dec-01	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 96.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-01	2023-12-01
psSAR1g [W/kg]	2.72	2.76
psSAR10g [W/kg]	1.22	1.26
Power Drift [dB]	0.01	-0.01

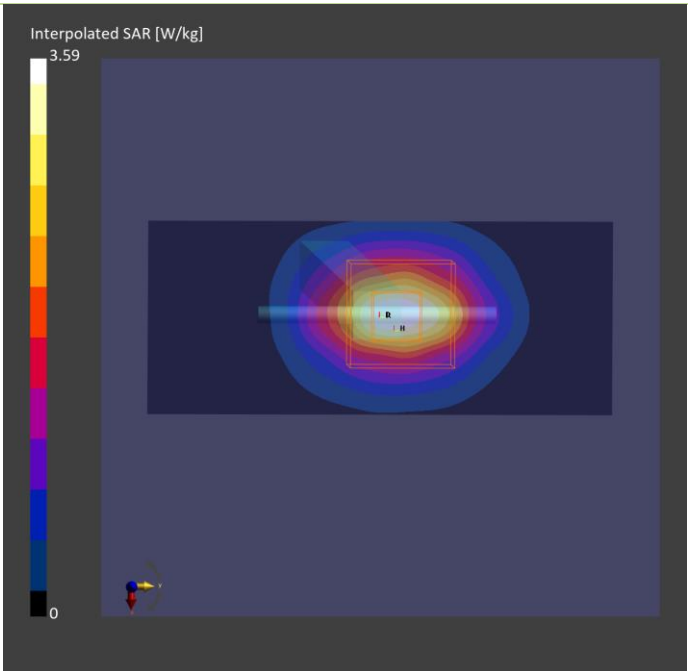

Plots of System Verification

Measurement Report S16 System Check_H2600_231201 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,			2600	7.61	1.91	41.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Dec-01	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 96.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-01	2023-12-01
psSAR1g [W/kg]	2.72	2.76
psSAR10g [W/kg]	1.22	1.26
Power Drift [dB]	0.01	-0.01

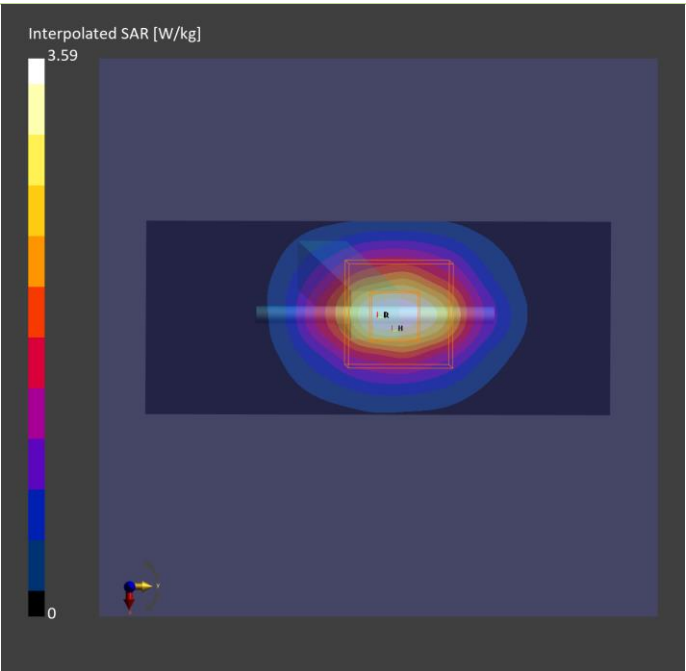

Plots of System Verification

Measurement Report S17a System Check_H3500_231129 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat				3500.0	7.24	2.71	37.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H33T50N9 , 2023-Nov-29	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 96.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-29	2023-11-29
psSAR1g [W/kg]	3.42	3.43
psSAR10g [W/kg]	1.32	1.34
Power Drift [dB]	0.01	0.01

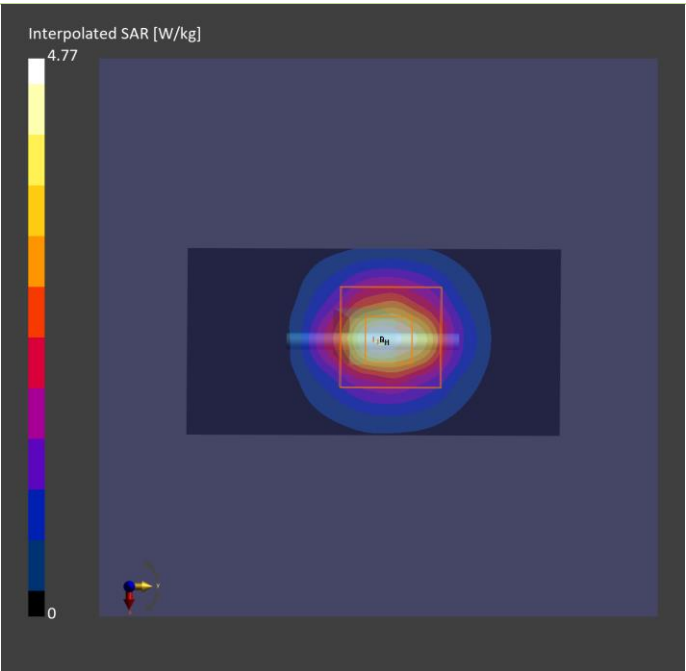

Plots of System Verification

Measurement Report S17b System Check_H3700_231129 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat				3700.0	7.19	2.88	37.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H33T50N9 , 2023-Nov-29	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 96.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-29	2023-11-29
psSAR1g [W/kg]	3.40	3.45
psSAR10g [W/kg]	1.26	1.29
Power Drift [dB]	0.01	0.01

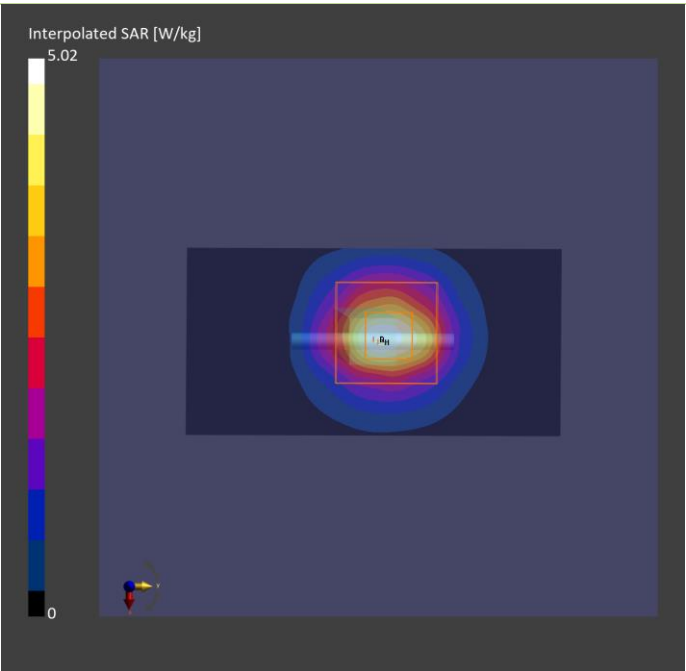

Plots of System Verification

Measurement Report S18 System Check_H1750_231126 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,			1750	9.00	1.37	39.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-26	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-26	2023-11-26
psSAR1g [W/kg]	1.73	1.75
psSAR10g [W/kg]	0.929	0.940
Power Drift [dB]	0.03	0.04

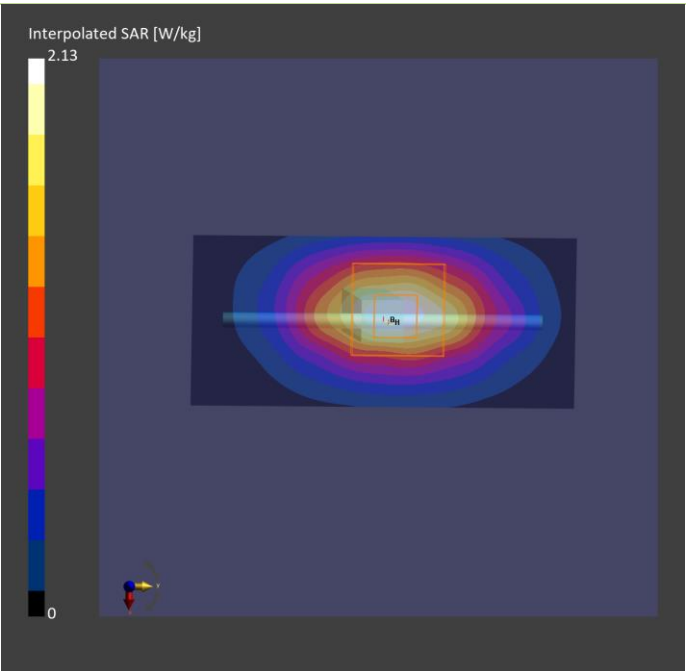

Plots of System Verification

Measurement Report S19 System Check_H750_231129 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,				750.0,	10.35	0.941	44.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-29	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	36.0 x 36.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	6.0 x 6.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-29	2023-11-29
psSAR1g [W/kg]	0.427	0.424
psSAR10g [W/kg]	0.286	0.281
Power Drift [dB]	0.01	0.02

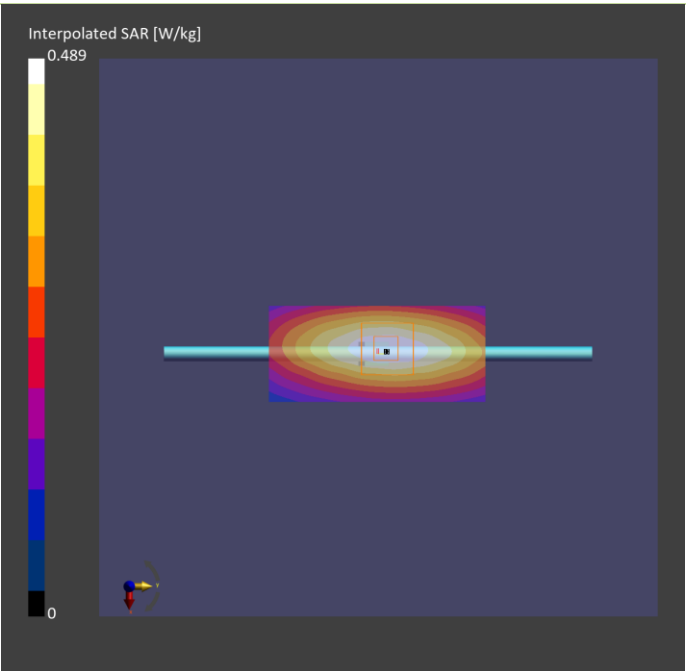

Plots of System Verification

Measurement Report

S20 System Check_H2450_231127

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole,	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	2450.000, 0	7.82	1.89	39.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-27	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 84.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-27	2023-11-27
psSAR1g [W/kg]	2.45	2.51
psSAR10g [W/kg]	1.18	1.17
Power Drift [dB]	0.00	-0.01

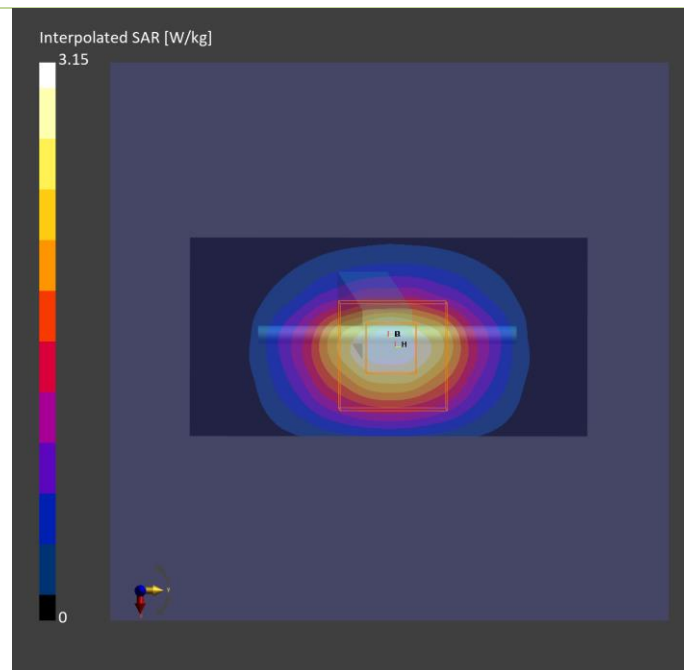

Plots of System Verification

Measurement Report S21 System Check_H5250_231127 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole,	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,		CW, 0--	5250.0, 0	5.92	4.43	34.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H51T72N9 , 2023-Nov-27	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-27	2023-11-27
psSAR1g [W/kg]	3.91	4.13
psSAR10g [W/kg]	1.12	1.19
Power Drift [dB]	0.00	-0.01

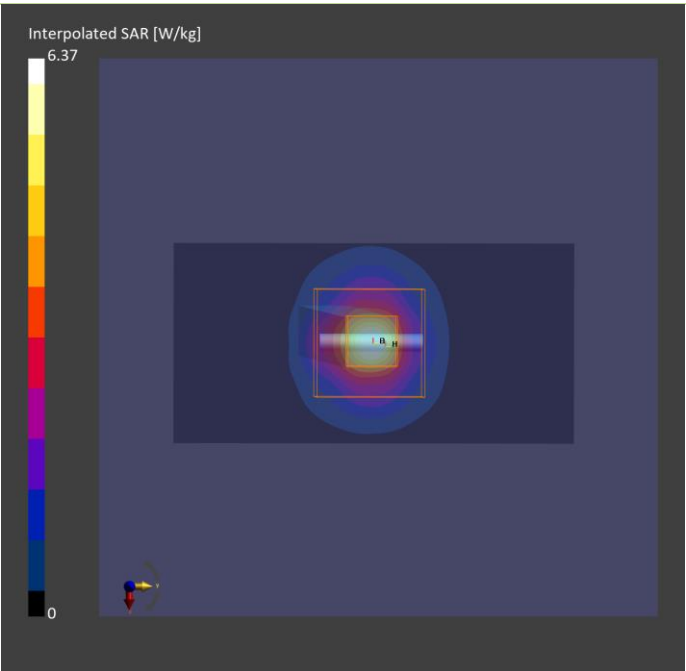

Plots of System Verification

Measurement Report S22 System Check_H5600_231128 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole,	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,		CW, 0--	5600.0, 0	5.04	4.94	35.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H51T72N9 , 2023-Nov-28	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-28	2023-11-28
psSAR1g [W/kg]	4.38	4.38
psSAR10g [W/kg]	1.25	1.30
Power Drift [dB]	-0.04	-0.02

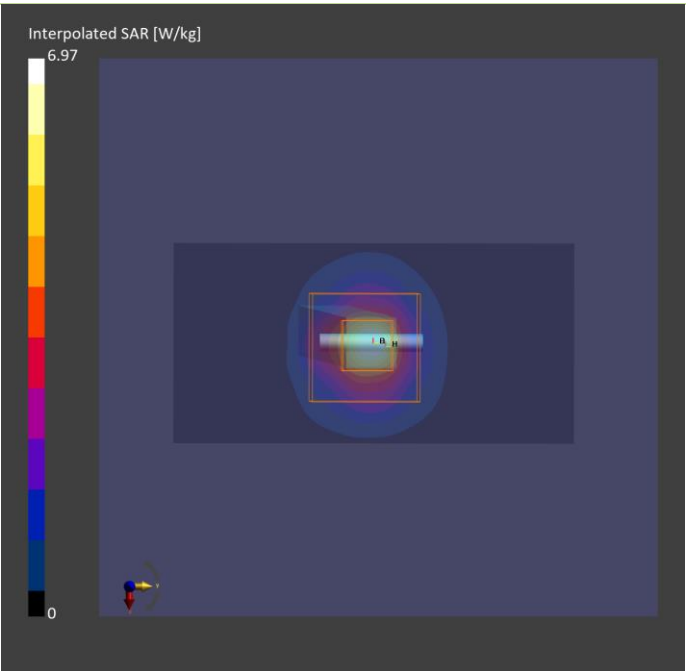

Plots of System Verification

Measurement Report S23 System Check_H5750_231128 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	10.0 x 10.0 x 300.0		Dipole

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,		CW, 0--	5750.0, 0	5.31	5.13	35.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H51T72N9 , 2023-Nov-28	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-28	2023-11-28
psSAR1g [W/kg]	3.81	3.98
psSAR10g [W/kg]	1.09	1.13
Power Drift [dB]	0.01	0.04

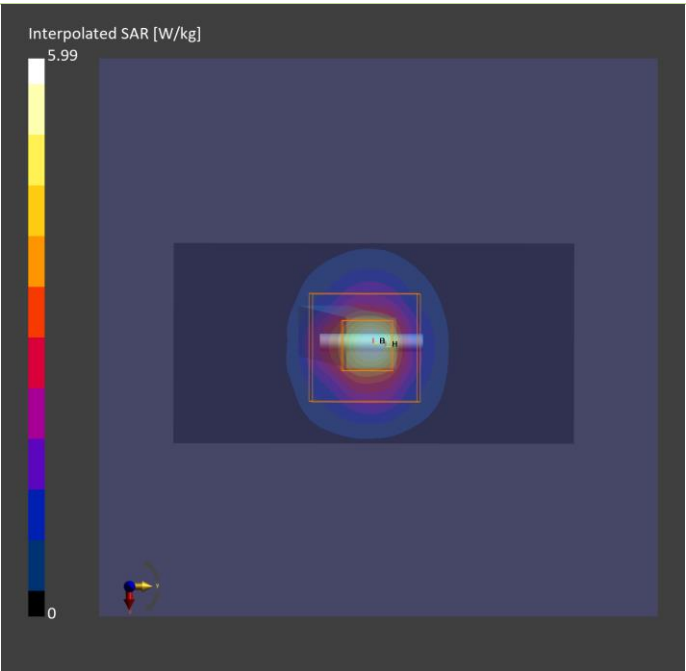

Plots of System Verification

Measurement Report

S24a System Check_H5750_231128

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,		CW, 0--	5750.0, 0	5.31	5.13	35.8

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H51T72N9 , 2023-Nov-28	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	40.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-28	2023-11-28
psSAR1g [W/kg]	3.81	3.98
psSAR10g [W/kg]	1.09	1.13
Power Drift [dB]	0.01	0.04

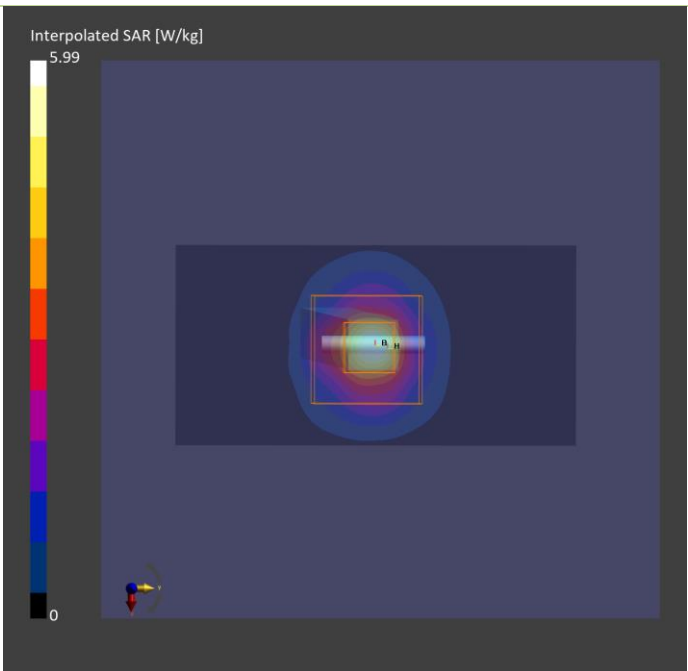

Plots of System Verification

Measurement Report S24b System Check H6.5GHz_231128 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole	50.0 x 10.0 x 8.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat				6500.000	5.70	5.96	33.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H51T72N9 , 2023-Nov-28	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-28	2023-11-28
psSAR1g [W/kg]	25.5	29.7
psSAR10g [W/kg]	5.03	5.45
psPDab (1.0cm2, sq) [W/m2]		299
psPDab (4.0cm2, sq) [W/m2]		134
Power Drift [dB]	0.01	-0.03

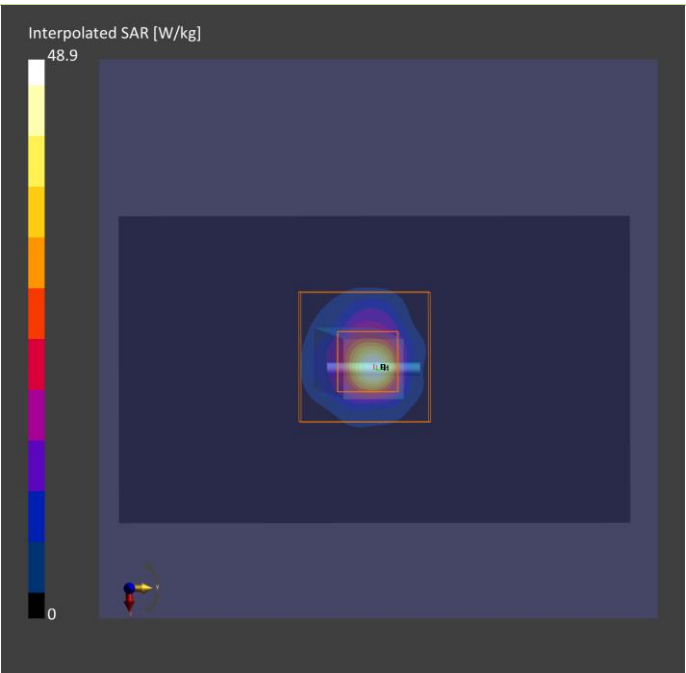

Plots of System Verification

Measurement Report

S25 System Check_H2450_231127

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole,	10.0 x 10.0 x 300.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	,		CW, 0--	2450.000, 0	7.82	1.89	39.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-27	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 84.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-27	2023-11-27
psSAR1g [W/kg]	2.45	2.51
psSAR10g [W/kg]	1.18	1.17
Power Drift [dB]	0.00	-0.01

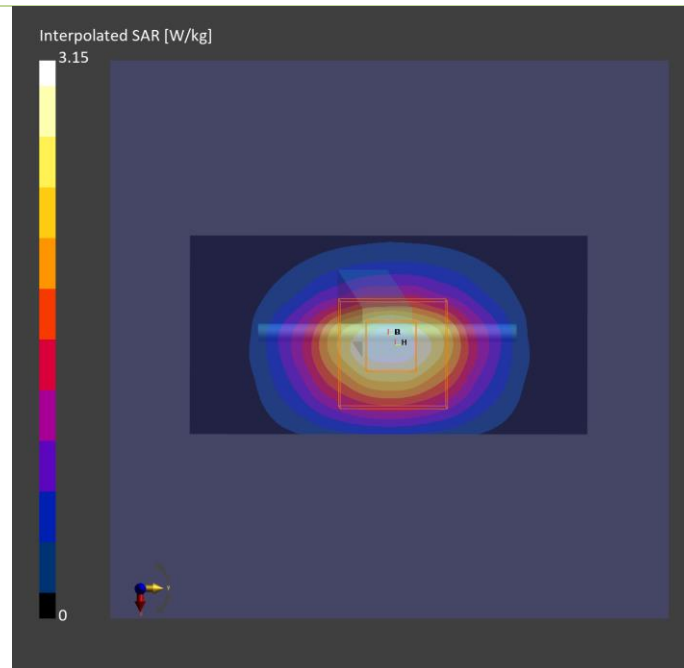

Plots of System Verification

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2023/12/10

S27 System Check_H13MHz_231210

DUT: CLA-13 MHz ;Type: CLA-13 ;SN: 1018

Communication System: UID 0, CW; Frequency: 13 MHz;Duty Cycle: 1:1

Medium: H13_1210 Medium parameters used: $f = 13 \text{ MHz}$; $\sigma = 0.731 \text{ S/m}$; $\epsilon_r = 55.227$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.3 \text{ }^\circ\text{C}$; Liquid Temperature : $21.3 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7720; ConvF(17.02, 17.02, 17.02) @ 13 MHz; Calibrated: 2023/03/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1698; Calibrated: 2023/11/17
- Phantom: ELI_Phantom_1204; Type: QD OVA 002 Ax; Serial: 1204
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (241x241x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0205 W/kg



Zoom Scan (7x7x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 5.167 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0300 W/kg

SAR(1 g) = 0.014 W/kg ; SAR(10 g) = 0.0092 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0203 W/kg

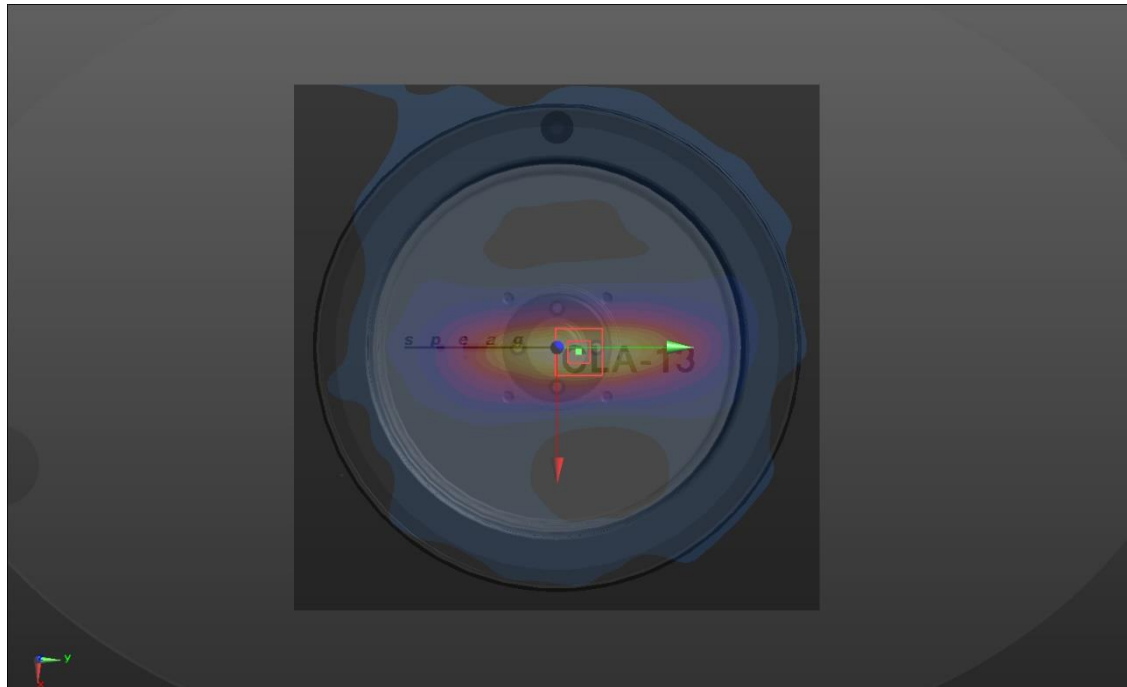

Plots of System Verification

Measurement Report for Device S26 System Check H6.5GHz_231129 Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Dipole,	50.0 x 10.0 x 8.0		

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	,		,	6500.0, 0	5.7	5.95	33.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H51T72N9 , 2023-Nov-29	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	45.0 x 90.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-29	2023-11-29
psSAR1g [W/kg]	25.0	29.1
psSAR10g [W/kg]	5.04	5.39
psPDab (1.0cm2, sq) [W/m2]		291
psPDab (4.0cm2, sq) [W/m2]		131
Power Drift [dB]	-0.08	-0.04

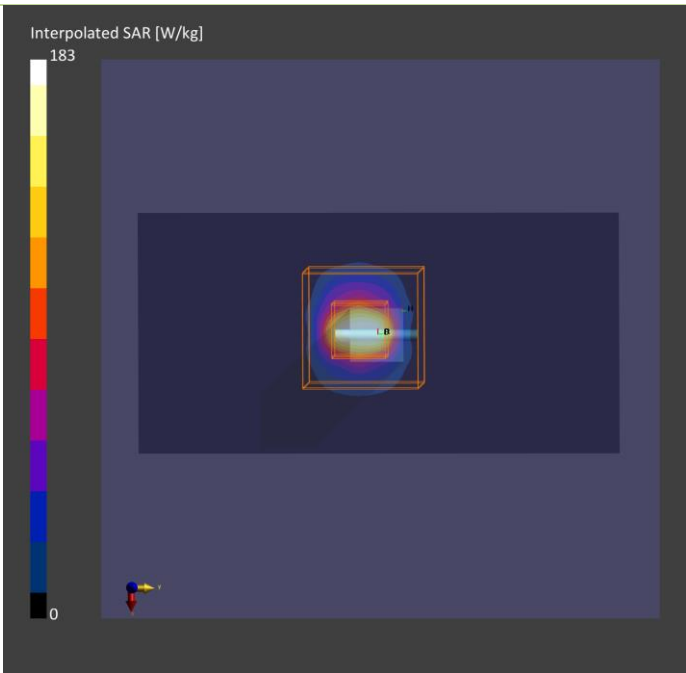

Plots of System Verification

Measurement Report

S26 PD_System Check_10 GHz_2023.11.30

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
SPEAG, 5G Verification Source 10 GHz	100.0 x 100.0 x 170.0	SN: 1025	

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Front Face 10.00	Validation band	CW, 0--	10000.0, 10000	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1030	---Air	EUmmWV4 - SN9615_F1-55GHz, 2023-07-10	DAE4 Sn1589, 2023-05-24

Scan Setup

	5G Scan
Grid Extents [mm]	60.0 x 60.0
Grid Steps [lambda]	0.125 x 0.125
Sensor Surface [mm]	10.0

Measurement Results

	5G Scan
Date	2023-11-30
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	55.1
psPDtot+ [W/m ²]	55.4
psPDmod+ [W/m ²]	55.7
E _{max} [V/m]	150
Power Drift [dB]	-0.05

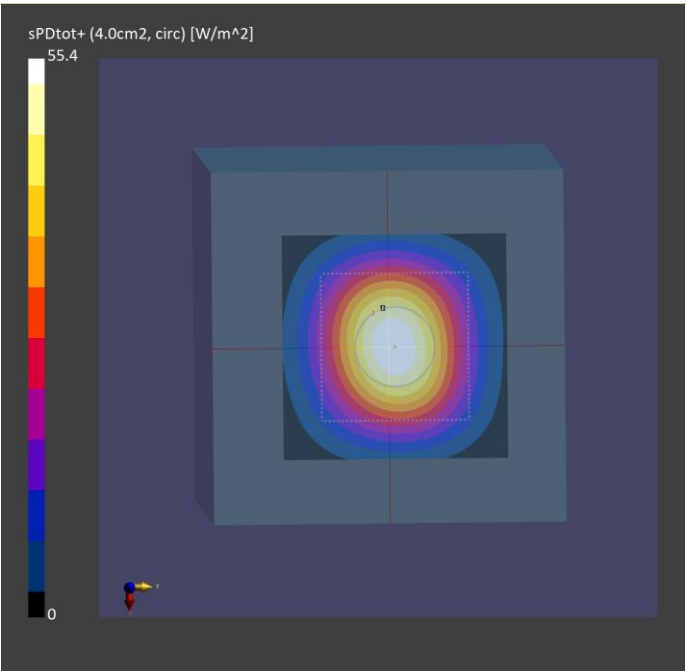

Appendix B. Plots of Measurement

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination are shown as follows.

Plots of Measurement

Measurement Report

P01 WCDMA II_RMC12.2K_Top Side_0mm_Ch9262_Sample Speed_Ant 0_Power Reduction w

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	310.0 x 218.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 2	WCDMA, 10011-CAC	1852.400, 9262	8.37	1.41	41.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-25	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 360.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-25	2023-11-25
sSAR1g [W/kg]	1.06	1.02
psSAR10g [W/kg]	0.523	0.516
Power Drift [dB]	0.05	0.08
M2/M1 [%]		57.4
Dist 3dB Peak [mm]		8.5

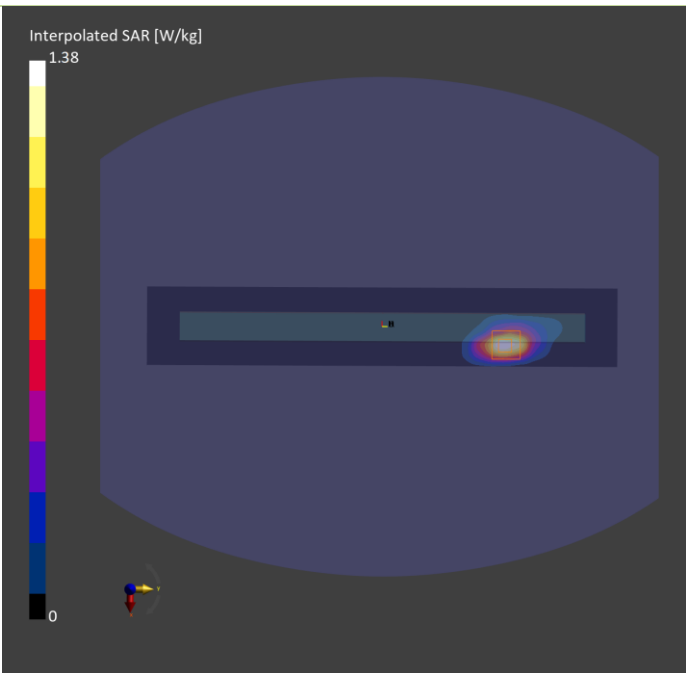

Plots of Measurement

Measurement Report

P02 WCDMA IV_RMC12.2K_Top Side_0mm_Ch1413_Sample Speed_Ant 0_Power Reduction w

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	310.0 x 218.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 4	WCDMA, 10011-CAC	1732.600, 1413	9.0	1.36	39.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-26	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 360.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-26	2023-11-26
psSAR1g [W/kg]	0.899	0.897
psSAR10g [W/kg]	0.452	0.443
Power Drift [dB]	-0.01	0.05
M2/M1 [%]		53.8
Dist 3dB Peak [mm]		8.6

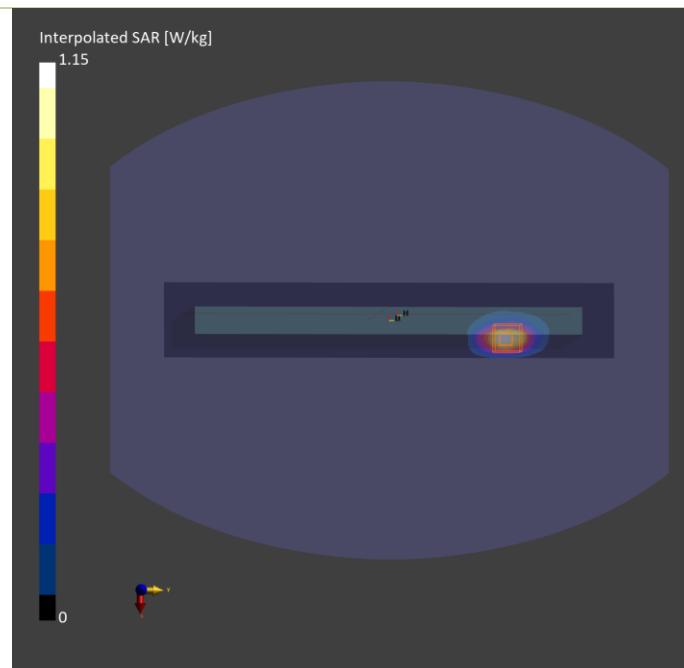

Plots of Measurement

Measurement Report

P03 WCDMA V_RMC12.2K_Top Side_0mm_Ch4182_Sample Speed_Ant 0_Power Rediction w_o

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	310.0 x 218.0 x 22.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side , 0.00	Band 5	WCDMA, 10011-CAC	836.400, 4182	10.16	0.971	44.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-30	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 360.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-30	2023-11-30
psSAR1g [W/kg]	0.501	0.481
psSAR10g [W/kg]	0.202	0.196
Power Drift [dB]	-0.01	0.02
M2/M1 [%]		57.3
Dist 3dB Peak [mm]		8.8

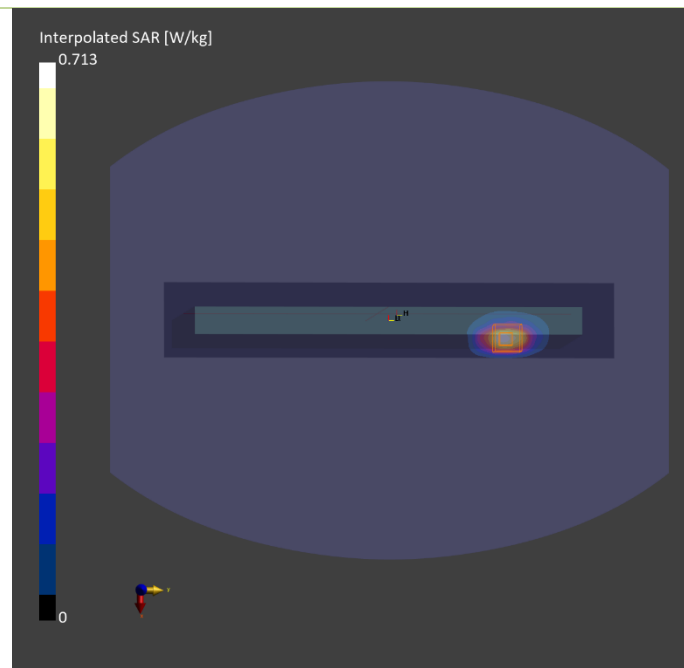

Plots of Measurement

Measurement Report

P04 LTE 2_QPSK20M_Top Side_0mm_Ch18900_1RB_OS0_Sample Speed_Ant 0_Power Reduction w
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 2	LTE-FDD, 10169-CAF	1880.000, 18900	8.37	1.42	41.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-25	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-25	2023-11-25
psSAR1g [W/kg]	0.369	0.486
psSAR10g [W/kg]	0.201	0.235
Power Drift [dB]	0.01	0.01
M2/M1 [%]		52.9
Dist 3dB Peak [mm]		11.0

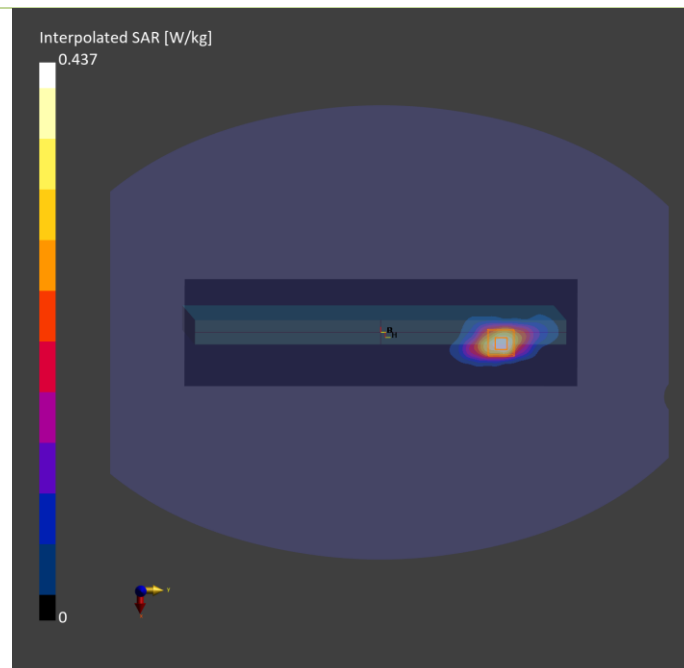

Plots of Measurement

Measurement Report

P05 LTE 4_QPSK20M_Top Side_0mm_Ch20175_1RB_OS0_Sample Speed_Ant 0_Power Reduction w

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 4	LTE-FDD, 10169-CAF	1732.500, 20175	9.0	1.36	39.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-26	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-26	2023-11-26
psSAR1g [W/kg]	0.346	0.428
psSAR10g [W/kg]	0.183	0.209
Power Drift [dB]	0.01	0.01
M2/M1 [%]		53.3
Dist 3dB Peak [mm]		8.0

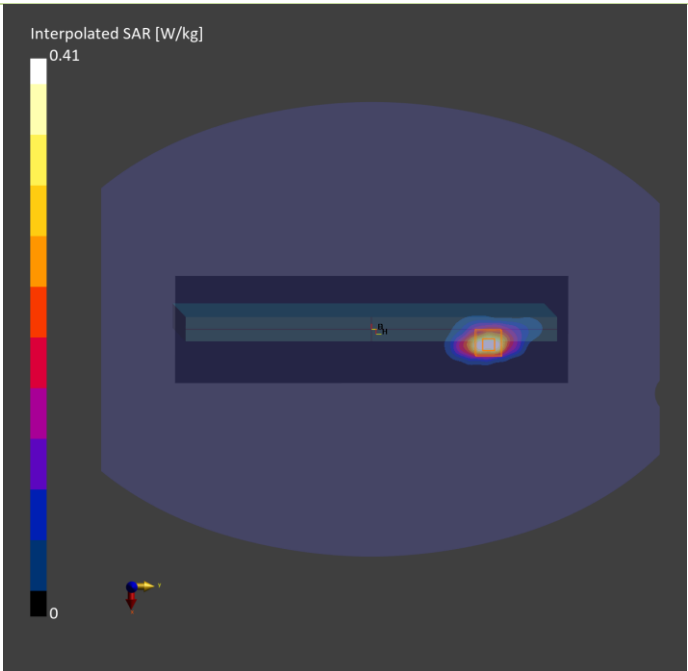

Plots of Measurement

Measurement Report

P06 LTE 5_QPSK10M_Top Side_0mm_Ch20450_1RB_OS0_Sample Speed_Ant 0_Power Reduction w Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 5	LTE-FDD, 10175-CAH	829.000, 20450	10.16	0.968	44.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-30	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-30	2023-11-30
psSAR1g [W/kg]	0.210	0.231
psSAR10g [W/kg]	0.122	0.125
Power Drift [dB]	-0.02	0.05
M2/M1 [%]		59.3
Dist 3dB Peak [mm]		9.6

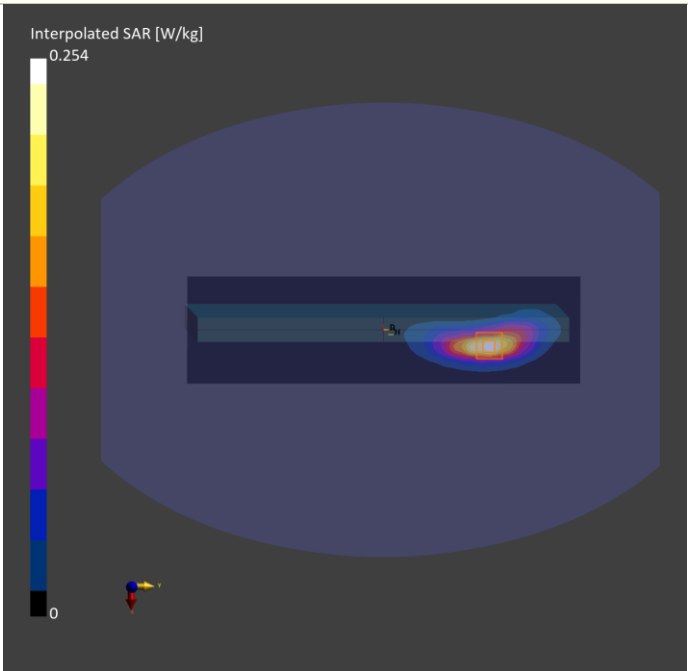

Plots of Measurement

Measurement Report

P07 LTE 7_QPSK20M_Top Side_0mm_Ch21350_1RB_OS0_Sample Speed_Ant 0_Power Reduction w Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 7	LTE-FDD, 10169-CAF	2560.000, 21350	7.61	1.88	41.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Dec-01	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 336.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-01	2023-12-01
psSAR1g [W/kg]	0.234	0.278
psSAR10g [W/kg]	0.105	0.111
Power Drift [dB]	0.00	-0.02
M2/M1 [%]		45.1
Dist 3dB Peak [mm]		6.1

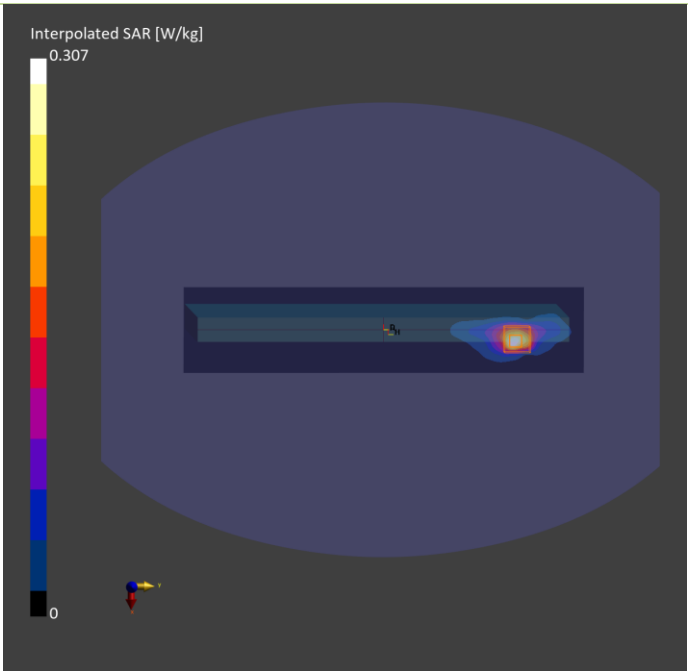

Plots of Measurement

Measurement Report

P08 LTE 12_QPSK10M_Top Side_0mm_Ch23060_1RB_OS0_Sample Speed_Ant 0_Power Reduction w Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 12	LTE-FDD, 10175-CAH	704.000, 23060	10.35	0.875	42.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Dec-02	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-02	2023-12-02
psSAR1g [W/kg]	0.152	0.167
psSAR10g [W/kg]	0.091	0.091
Power Drift [dB]	0.00	-0.01
M2/M1 [%]		58.5
Dist 3dB Peak [mm]		9.6

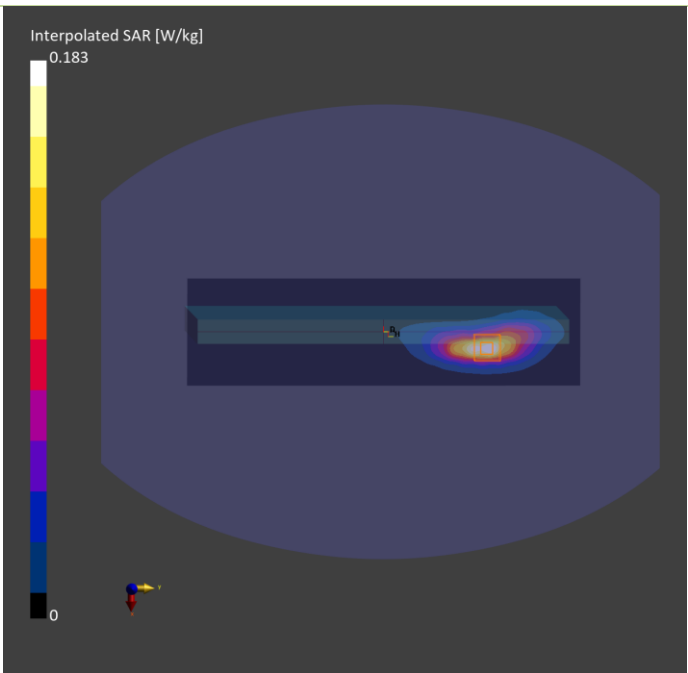

Plots of Measurement

Measurement Report

P09 LTE 13_QPSK10M_Top Side_0mm_Ch23230_1RB_OS0_Sample Speed_Ant 0_Power Reduction w Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 13	LTE-FDD, 10175-CAH	782.000, 23230	10.35	0.904	42.3

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Dec-02	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-02	2023-12-02
psSAR1g [W/kg]	0.104	0.116
psSAR10g [W/kg]	0.062	0.063
Power Drift [dB]	0.00	0.01
M2/M1 [%]		59.6
Dist 3dB Peak [mm]		9.6

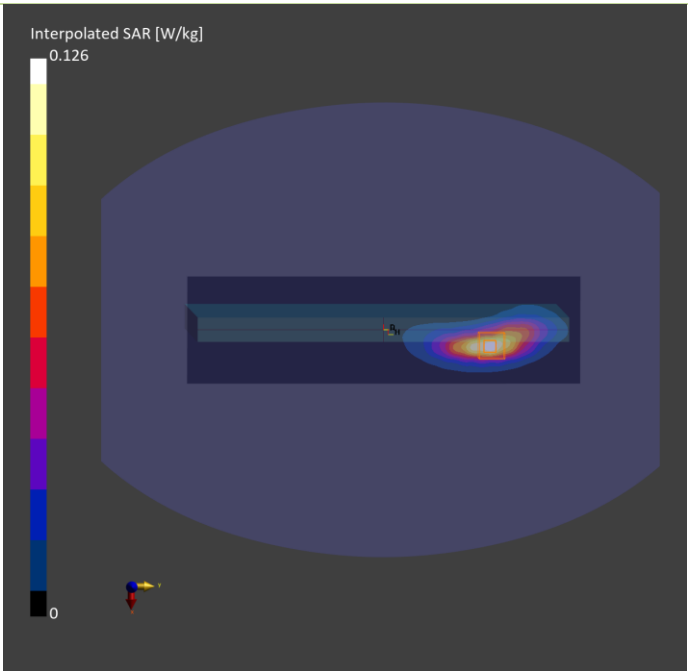

Plots of Measurement

Measurement Report

P10 LTE 14_QPSK10M_Top Side_0mm_Ch23330_1RB_OS0_Sample Speed_Ant 0_Power Reduction w Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 14	LTE-FDD, 10175-CAH	793.000, 23330	10.35	0.908	42.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Dec-02	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-02	2023-12-02
psSAR1g [W/kg]	0.098	0.108
psSAR10g [W/kg]	0.057	0.059
Power Drift [dB]	0.02	-0.01
M2/M1 [%]		59.0
Dist 3dB Peak [mm]		9.6

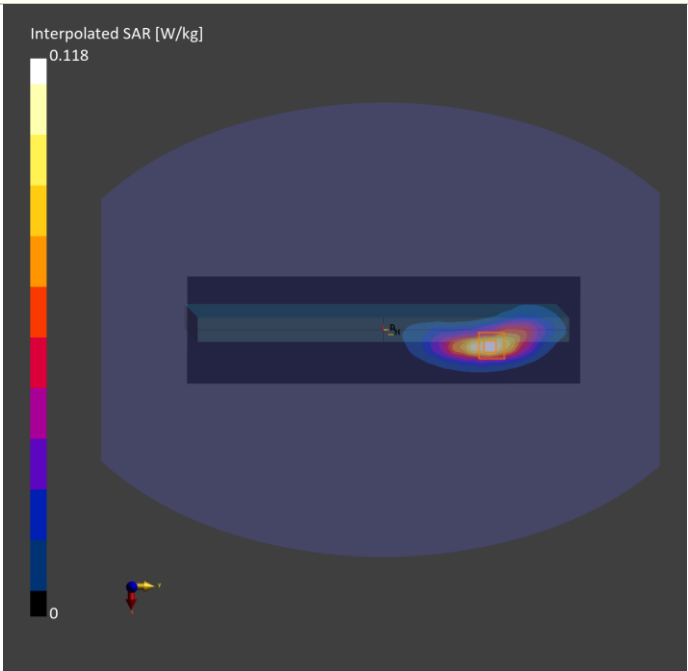

Plots of Measurement

Measurement Report

P11 LTE 17_QPSK10M_Top Side_0mm_Ch23790_1RB_OS0_Sample Speed_Ant 0_Power Reduction w Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 17	LTE-FDD, 10175-CAH	710.000, 23790	10.35	0.877	42.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Dec-02	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-02	2023-12-02
psSAR1g [W/kg]	0.160	0.176
psSAR10g [W/kg]	0.095	0.096
Power Drift [dB]	0.05	-0.03
M2/M1 [%]		58.9
Dist 3dB Peak [mm]		9.6

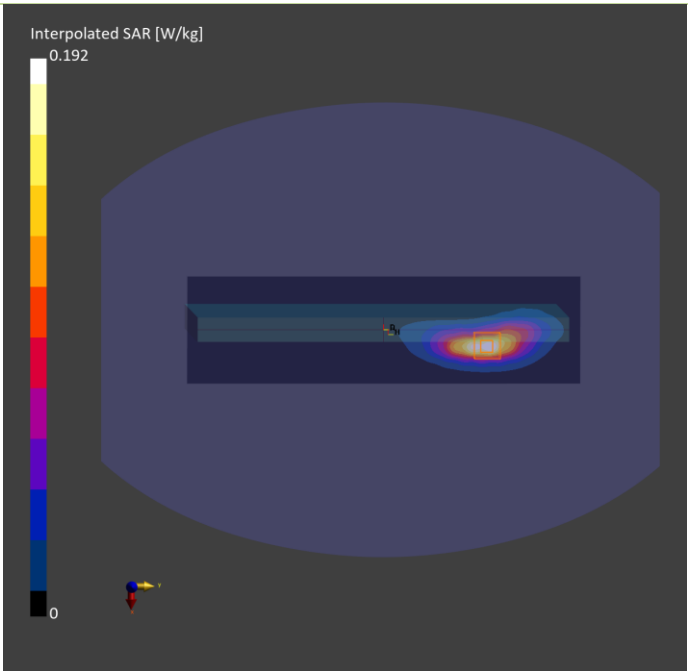

Plots of Measurement

Measurement Report

P12 LTE 25_QPSK20M_Top Side_0mm_Ch26140_1RB_OS0_Sample Speed_Ant 0_Power Reduction w Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 25	LTE-FDD, 10169-CAF	1860.000, 26140	8.37	1.41	41.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-25	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-25	2023-11-25
psSAR1g [W/kg]	0.404	0.526
psSAR10g [W/kg]	0.220	0.253
Power Drift [dB]	-0.01	0.02
M2/M1 [%]		52.9
Dist 3dB Peak [mm]		10.6

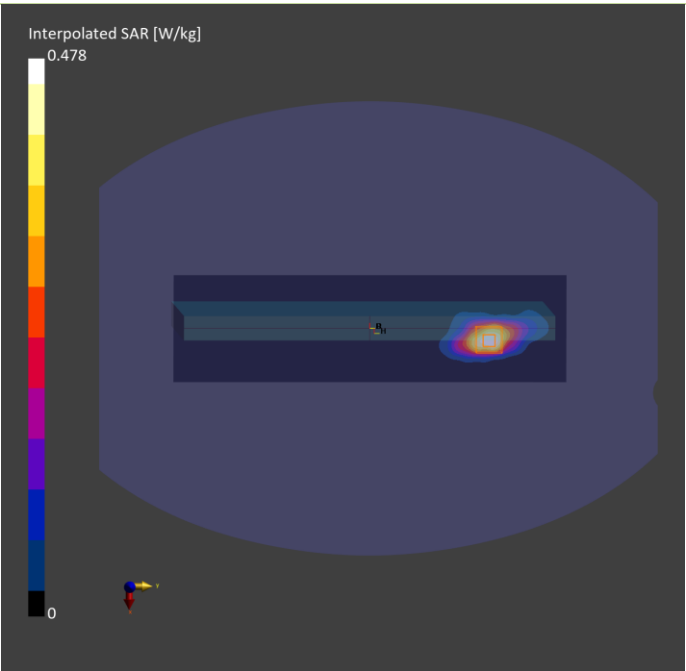

Plots of Measurement

Measurement Report

P13 LTE 26_QPSK15M_Top Side_0mm_Ch26865_1RB_OS0_Sample Speed_Ant 0_Power Reduction w Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 26	LTE-FDD, 10181-CAF	831.500, 26865	10.16	0.969	44.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-30	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-30	2023-11-30
psSAR1g [W/kg]	0.227	0.252
psSAR10g [W/kg]	0.132	0.136
Power Drift [dB]	0.00	0.01
M2/M1 [%]		59.2
Dist 3dB Peak [mm]		9.6

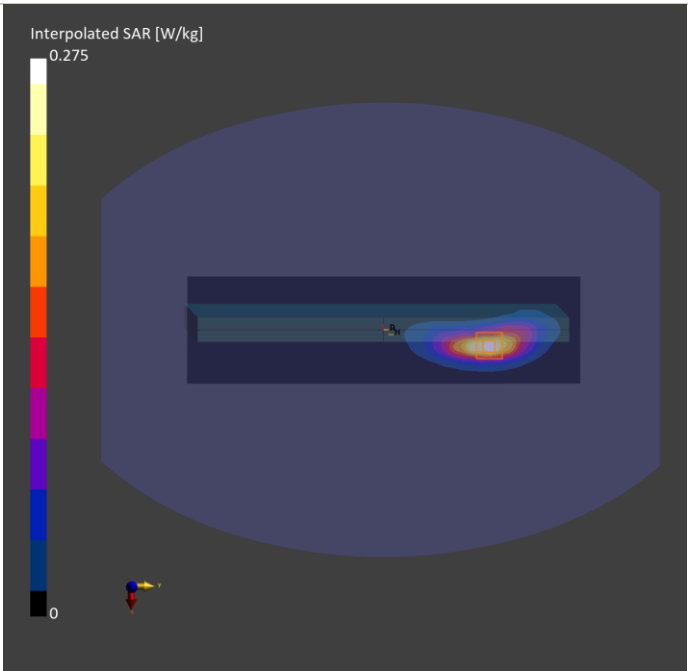

Plots of Measurement

Measurement Report

P14 LTE 30_QPSK10M_Top Side_0mm_Ch27710_1RB_OS0_Sample Speed_Ant 0_Power Reduction w Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 30	LTE-FDD, 10175-CAH	2310.000, 27710	8.12	1.80	41.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-29	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 336.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-29	2023-11-29
psSAR1g [W/kg]	0.755	0.756
psSAR10g [W/kg]	0.342	0.363
Power Drift [dB]	0.00	-0.01
M2/M1 [%]		47.9
Dist 3dB Peak [mm]		6.8

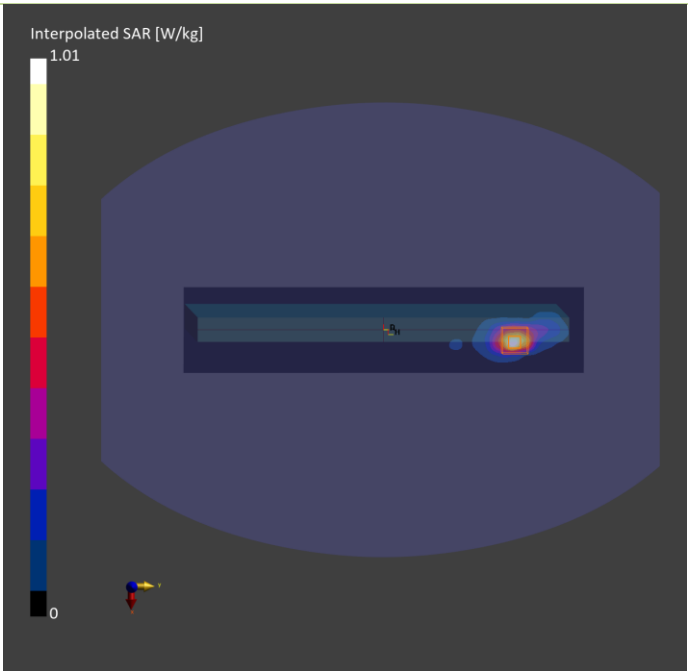

Plots of Measurement

Measurement Report

P15 LTE 38_QPSK20M_Top Side_0mm_Ch38150_1RB_OS0_Sample Speed_Ant 0_Power Reduction w
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 38	LTE-TDD, 10172-CAH	2610.000, 38150	7.61	1.92	41.6

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Dec-01	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 336.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-01	2023-12-01
psSAR1g [W/kg]	0.278	0.335
psSAR10g [W/kg]	0.124	0.132
Power Drift [dB]	-0.01	0.01
M2/M1 [%]		44.9
Dist 3dB Peak [mm]		6.1

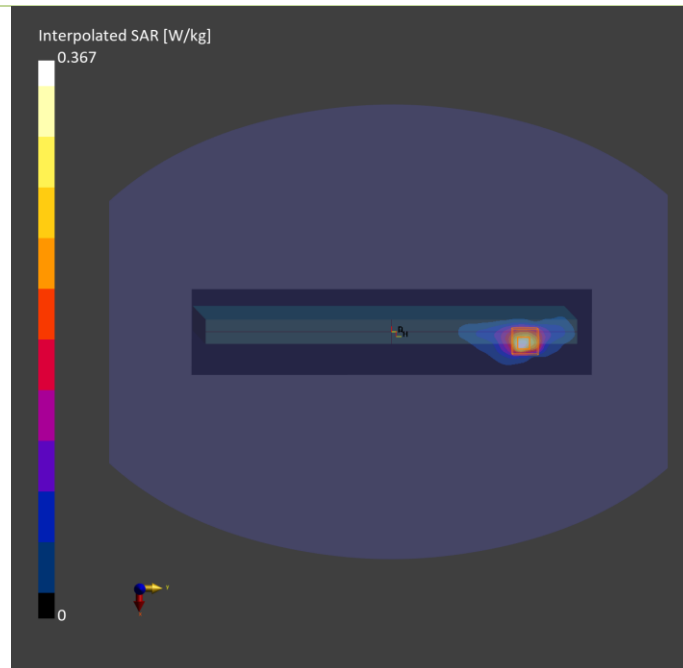

Plots of Measurement

Measurement Report

P16 LTE 41_QPSK20M_Top Side_0mm_Ch41490_1RB_OS0_Sample Speed_Ant 0_Power Reduction w
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 41	LTE-TDD, 10172-CAH	2680.000, 41490	7.61	1.97	41.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Dec-01	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 336.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-12-01	2023-12-01
psSAR1g [W/kg]	0.349	0.431
psSAR10g [W/kg]	0.151	0.163
Power Drift [dB]	0.14	0.01
M2/M1 [%]		44.9
Dist 3dB Peak [mm]		6.1

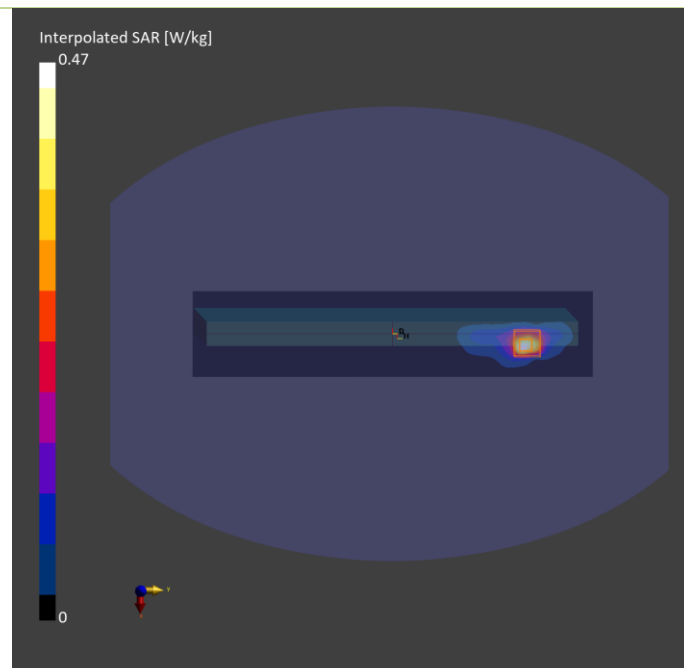

Plots of Measurement

Measurement Report

P17 LTE 48_QPSK20M_Top Side_0mm_Ch56640_1RB_OS0_Sample Speed_Ant 0_Power Reduction w Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 48	LTE-TDD, 10172-CAH	3690.000, 56640	7.19	2.88	37.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H33T50N9 , 2023-Nov-29	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 336.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-29	2023-11-29
psSAR1g [W/kg]	0.629	0.889
psSAR10g [W/kg]	0.214	0.255
Power Drift [dB]	-0.10	-0.01
M2/M1 [%]		61.0
Dist 3dB Peak [mm]		5.9

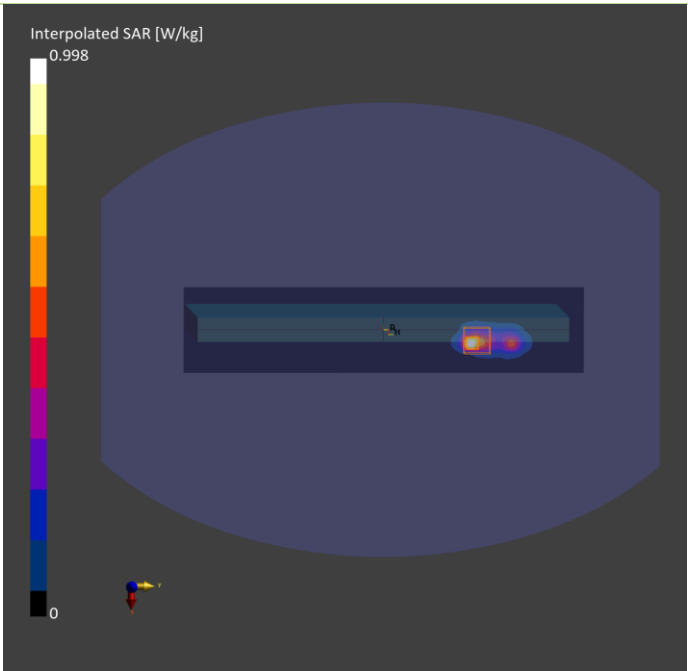

Plots of Measurement

Measurement Report

P18 LTE 66_QPSK20M_Top Side_0mm_Ch132322_1RB_OS0_Sample Speed_Ant 0_Power Reduction w Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 66	LTE-FDD, 10169-CAF	1745.000, 132322	9.0	1.37	39.9

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-26	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-26	2023-11-26
psSAR1g [W/kg]	0.358	0.440
psSAR10g [W/kg]	0.188	0.215
Power Drift [dB]	0.02	-0.01
M2/M1 [%]		55.1
Dist 3dB Peak [mm]		8.8

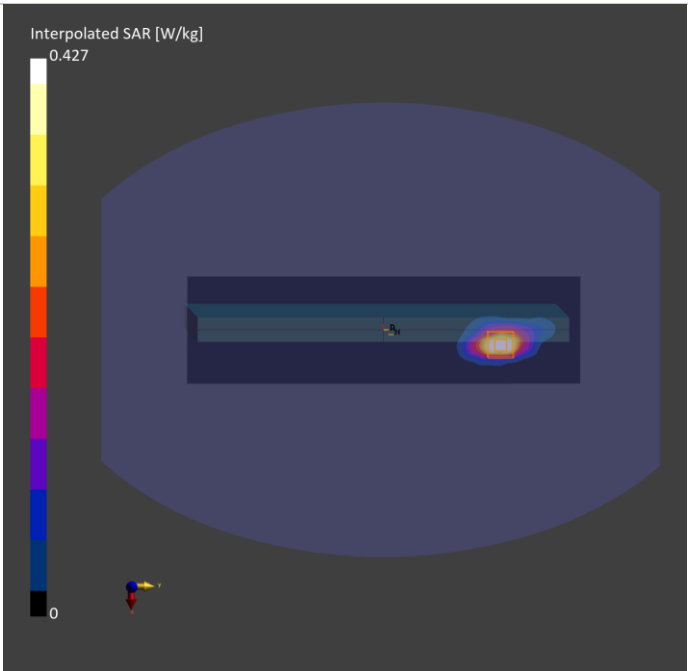

Plots of Measurement

Measurement Report

P19 LTE 71_QPSK20M_Top Side_0mm_Ch133222_1RB_OS0_Sample Speed_Ant 0_Power Reduction w Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 20.5 x 222.0		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Top Side, 0.00	Band 71	LTE-FDD, 10169-CAF	673.000, 133222	10.35	0.913	44.7

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-29	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 330.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-29	2023-11-29
psSAR1g [W/kg]	0.351	0.391
psSAR10g [W/kg]	0.209	0.212
Power Drift [dB]	0.00	0.02
M2/M1 [%]		58.4
Dist 3dB Peak [mm]		9.6

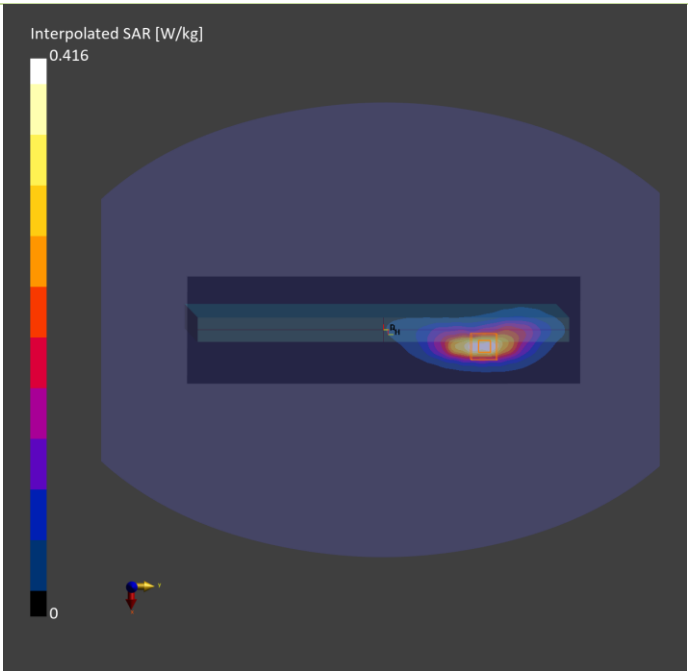

Plots of Measurement

Measurement Report

P20 WLAN2.4G_802.11n HT40_Bottom for Laptop_0mm_Ch6_Sample Speed_Ant 0+1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 222.0 x 20.5		Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Bottom for Laptop, 0.00	WLAN 2.4GHz	WLAN, 10599-AAD	2437.000, 6	7.82	1.88	39.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-27	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 336.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-27	2023-11-27
psSAR1g [W/kg]	0.704	0.812
psSAR10g [W/kg]	0.333	0.345
Power Drift [dB]	-0.02	-0.02
M2/M1 [%]		49.6
Dist 3dB Peak [mm]		8.0

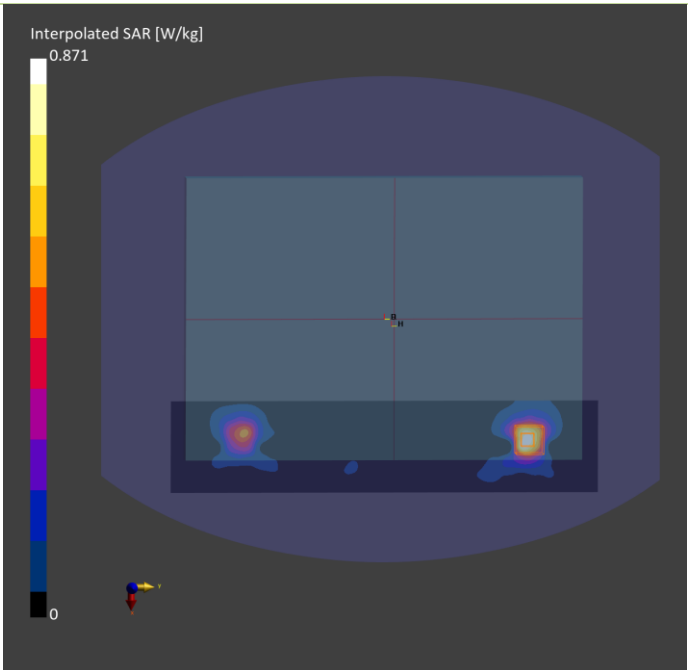

Plots of Measurement

Measurement Report

P21 WLAN5.3G_802.11ac VHT160_Rear Face_0mm_Ch50_Sample Speed_Ant 0+1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 222.0 x 20.5		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Rear Face, 0.00	WLAN 5GHz	WLAN, 10554-AAE	5250.000, 50	5.92	4.43	34.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H51T72N9 , 2023-Nov-27	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 340.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-27	2023-11-27
psSAR1g [W/kg]	0.670	0.751
psSAR10g [W/kg]	0.204	0.214
Power Drift [dB]	-0.02	0.02
M2/M1 [%]		63.6
Dist 3dB Peak [mm]		6.4

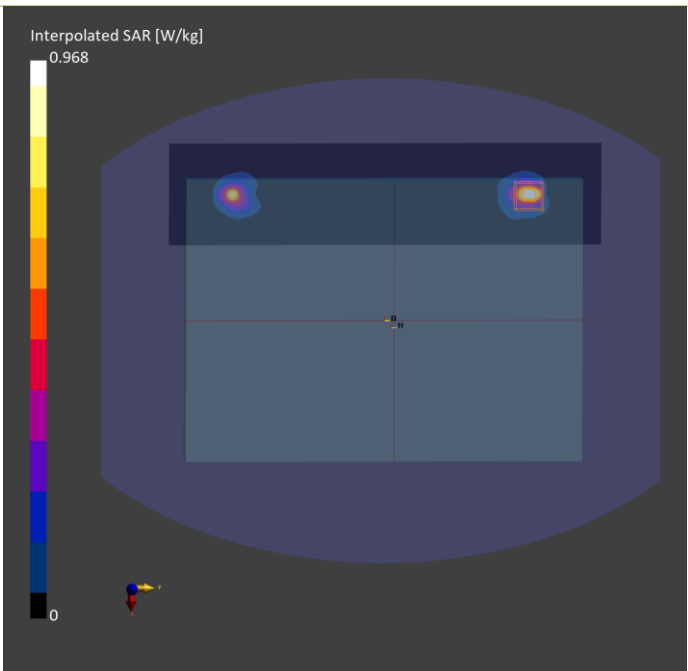

Plots of Measurement

Measurement Report

P22 WLAN5.6G_802.11ac VHT160_Rear Face_0mm_Ch114_Sample Speed_Ant 0

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 222.0 x 20.5		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Rear Face, 0.00	WLAN 5GHz	WLAN, 10554-AAE	5570.000, 114	5.04	4.91	35.4

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H51T72N9 , 2023-Nov-28	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 340.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-28	2023-11-28
psSAR1g [W/kg]	0.819	0.813
psSAR10g [W/kg]	0.232	0.238
Power Drift [dB]	-0.07	-0.13
M2/M1 [%]		61.6
Dist 3dB Peak [mm]		6.5

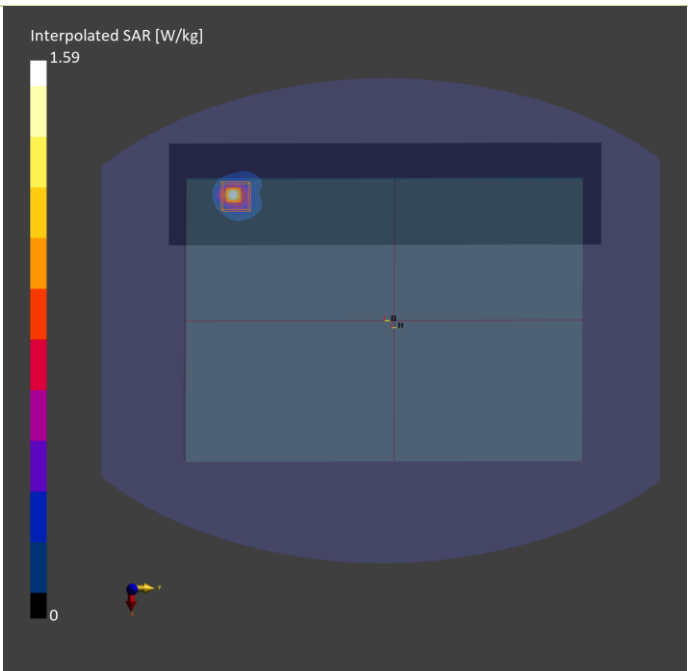

Plots of Measurement

Measurement Report

P23 WLAN5.8G_802.11ac VHT80_Rear Face_0mm_Ch155_Sample Speed_Ant 0+1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 222.0 x 20.5		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Rear Face, 0.00	WLAN 5GHz	WLAN, 10544-AAD	5775.000, 155	5.31	5.14	35.1

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H51T72N9 , 2023-Nov-28	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 340.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-28	2023-11-28
psSAR1g [W/kg]	0.803	0.806
psSAR10g [W/kg]	0.174	0.167
Power Drift [dB]	-0.04	-0.01
M2/M1 [%]		60.0
Dist 3dB Peak [mm]		5.9

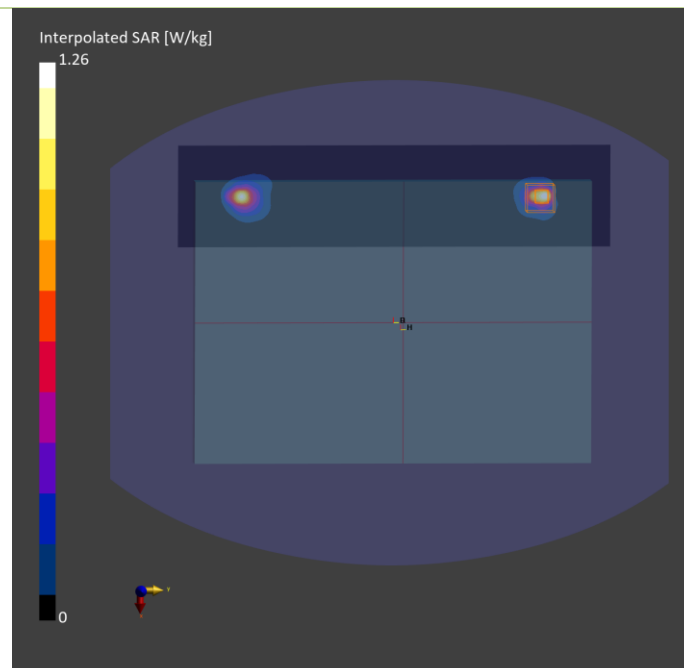

Plots of Measurement

Measurement Report

P24 WLAN5.9G_802.11ac VHT160_Rear Face_0mm_Ch163_Sample Speed_Ant 0+1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666	312.0 x 222.0 x 20.5		Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Rear Face, 0.00	WLAN 5GHz	WLAN, 10554-AAE	5815.000, 163	5.31	5.18	35.0

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H51T72N9 , 2023-Nov-28	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 340.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-28	2023-11-28
psSAR1g [W/kg]	0.709	0.779
psSAR10g [W/kg]	0.195	0.194
Power Drift [dB]	-0.09	-0.05
M2/M1 [%]		57.4
Dist 3dB Peak [mm]		5.9

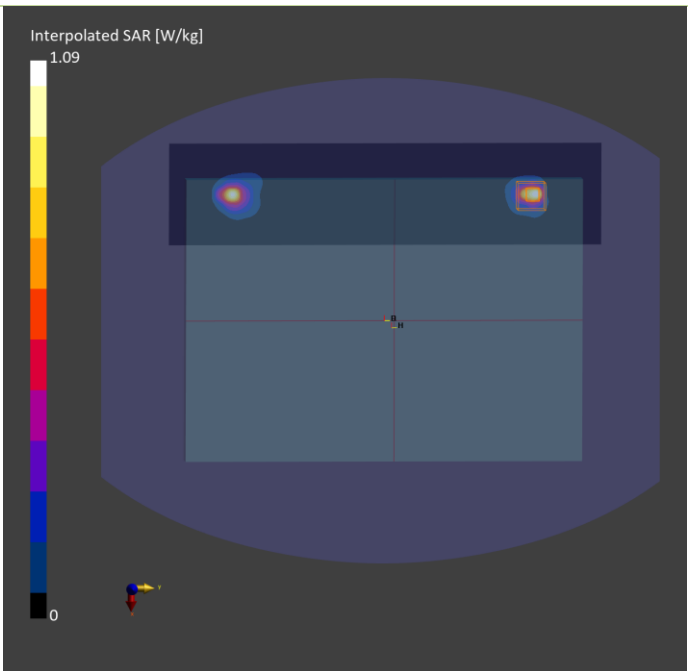

Plots of Measurement

Measurement Report

P25 BT_BDR_Bottom for Laptop_0mm_Ch39_Sample Speed_Ant 1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666,	312.0 x 222.0 x 20.5		Laptop

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Bottom for Laptop, 0.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2441.000, 39	7.82	1.88	39.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H06T27N9 , 2023-Nov-27	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 336.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-27	2023-11-27
psSAR1g [W/kg]	0.277	0.327
psSAR10g [W/kg]	0.130	0.135
Power Drift [dB]	0.02	0.07
M2/M1 [%]		48.1
Dist 3dB Peak [mm]		8.1

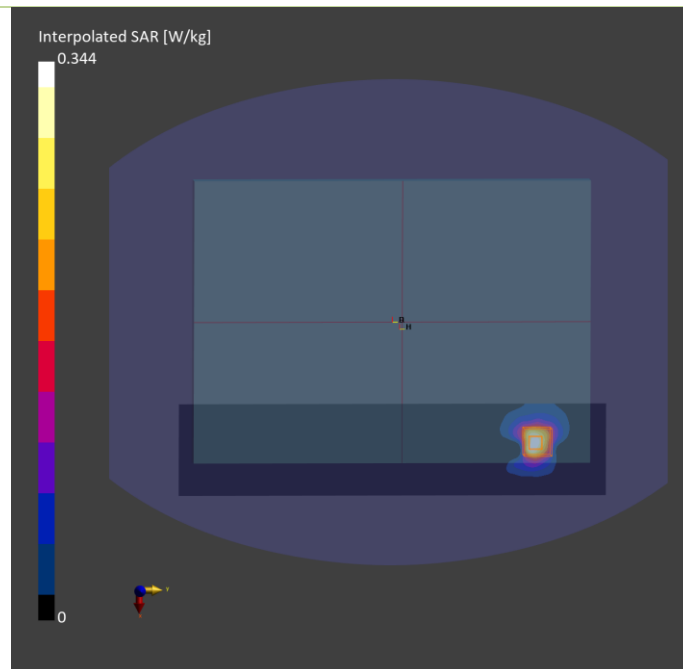

Plots of Measurement

Test Laboratory: Bureau Veritas ADT SAR/HAC Testing Lab

Date: 2023/12/10

P27 RFID_ASK_Bottom for Laptop_0mm_Frequency13.56

DUT: BEDW-WTW-P23090666

Communication System: UID 0, CW; Frequency: 13.56 MHz; Duty Cycle: 1:1

Medium: H13_1210 Medium parameters used (interpolated): $f = 13.56$ MHz; $\sigma = 0.731$ S/m; $\epsilon_r = 55.12$; $\rho = 1000$ kg/m³


Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7720; ConvF(17.02, 17.02, 17.02) @ 13.56 MHz; Calibrated: 2023/03/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1698; Calibrated: 2023/11/17
- Phantom: ELI_Phantom_1204; Type: QD OVA 002 Ax; Serial: 1204
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (261x361x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0 W/kg

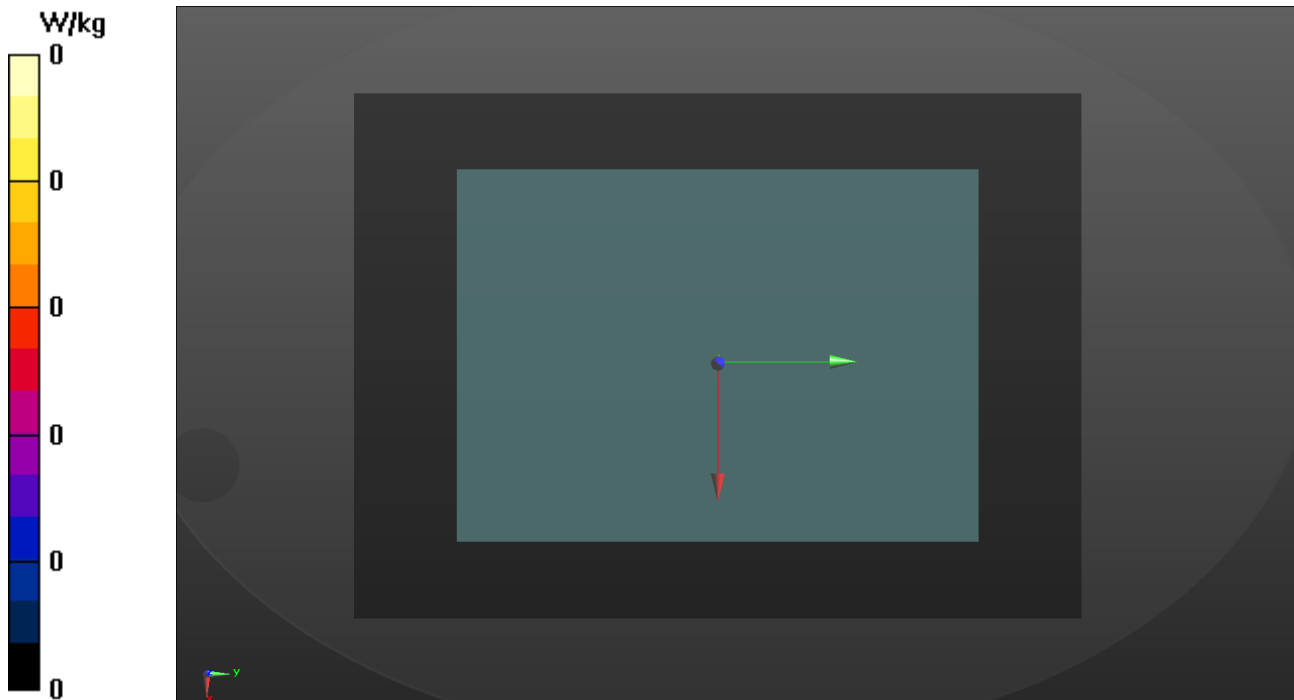

Plots of Measurement

Measurement Report

P26 UNII-8_802.11be HE320_Rear Face_0mm_Ch191_Sample Speed_Ant 0+1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666	312.0 x 222.0 x 20.5		Tablet

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat,	Rear Face, 0.00	U-NII-8	WLAN, 11026-AAA	6905.000, 191	5.7	6.37	33.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2188	H51T72N9 , 2023-Nov-29	EX3DV4 - SN7472, 2023-10-23	DAE4 Sn1590, 2023-09-14

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	75.0 x 330.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	7.5 x 7.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4

Measurement Results

	Area Scan	Zoom Scan
Date	2023-11-29	2023-11-29
psSAR1g [W/kg]	0.683	0.774
psSAR10g [W/kg]	0.162	0.167
psAPD (1.0cm2, sq) [W/m2]		7.74
psAPD (4.0cm2, sq) [W/m2]		4.00
Power Drift [dB]	-0.06	-0.19
M2/M1 [%]		47.2
Dist 3dB Peak [mm]		4.9

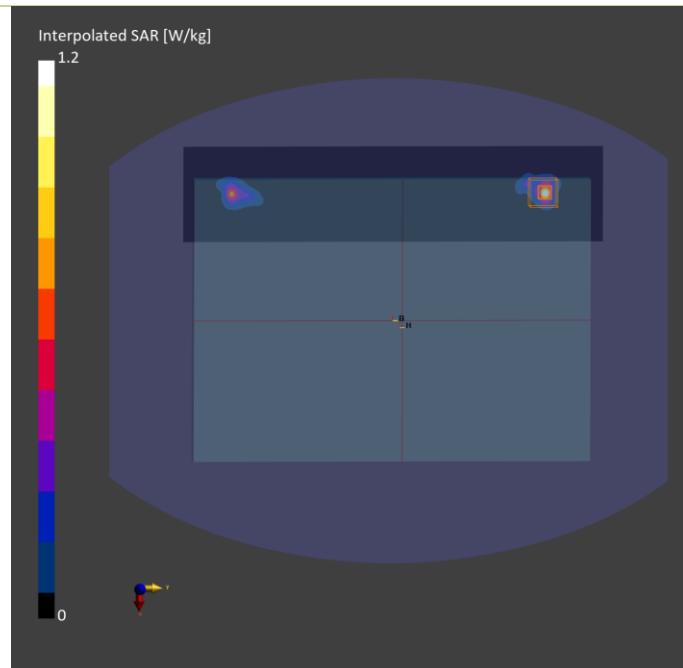

Plots of Measurement

Measurement Report

P26 UNII-8_802.11be HE320_Rear Face_0mm_Ch191_Sample Speed_Ant 0+1

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
BEDW-WTW-P23090666	312.0 x 222.0 x 20.5		Tablet

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G Air	Rear Face, 0.00	U-NII-8	WLAN, 11026-AAA	6905.0, 191	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave- 1030	---Air	EUmmWV4 - SN9615_F1-55GHz, 2023-07-10	DAE4 Sn1589, 2023-05-24

Scan Setup

	5G Scan
Grid Extents [mm]	87.0 x 87.0
Grid Steps [lambda]	0.0575 x 0.0575
Sensor Surface [mm]	2.0
MAIA	Y

Measurement Results

	5G Scan
Date	2023-11-30
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.61
psPDtot+ [W/m ²]	3.23
psPDmod+ [W/m ²]	5.93
E _{max} [V/m]	62.3
Power Drift [dB]	0.07

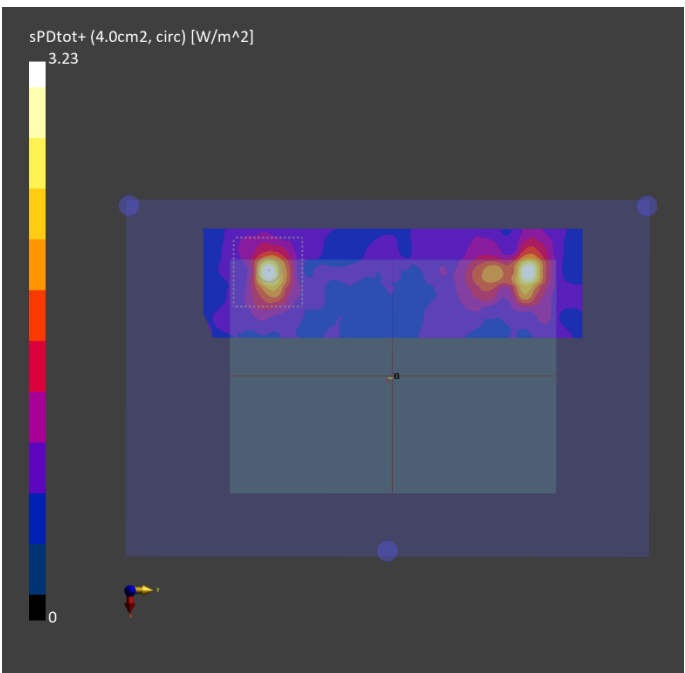

Appendix C. Tissue & System Verification

The measuring results for tissue simulating liquid and system check are shown as below.

Note:

1. For Section 4.3, the dielectric properties of the tissue simulating liquid have been measured within 24 hours before the SAR testing and within ± 10 % of the target values. Liquid temperature during the SAR testing has kept within ± 2 °C.
2. For Section 4.4, The SAR measurement system was validated according to procedures in FCC KDB 865664 D0. The validation status in tabulated summary is as below.
3. For Section 4.5, Comparing to the reference SAR value provided by SPEAG in dipole calibration certificate, the deviation of system check results is within its specification of 10 %. The result indicates the system check can meet the variation criterion and the plots please refer to Appendix A of this report.

Tissue Verification									Validation for CW			Validation for Modulation				System Check					Note			
Plot No.	Frequency (MHz)	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Targeted Conductivity (σ)	Targeted Permittivity (ε _r)	Deviation Conductivity (σ)	Deviation Permittivity (ε _r)	Sensitivity Range	Probe Linearity	Probe Isotropy	Modulation Type	Duty Factor	PAR	Date	Frequency (MHz)	Targeted 1g SAR (W/kg)	Measured 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N	Output Power (dBm)
S01	1900	21.7	1.44	41.4	1.4	40	2.86	3.50	Pass	Pass	Pass	N/A	N/A	N/A	Nov. 25, 2023	1900	39.30	1.92	38.31	-2.52	5d036	7472	1590	17
S02	1750	21.6	1.37	39.9	1.37	40.1	0.00	-0.50	Pass	Pass	Pass	N/A	N/A	N/A	Nov. 26, 2023	1750	36.30	1.75	34.92	-3.81	1055	7472	1590	17
S03	835	21.5	0.971	44	0.9	41.5	7.89	6.02	Pass	Pass	Pass	N/A	N/A	N/A	Nov. 30, 2023	835	9.72	0.475	9.48	-2.49	4d121	7472	1590	17
S04	1900	21.7	1.44	41.4	1.4	40	2.86	3.50	Pass	Pass	Pass	N/A	N/A	N/A	Nov. 25, 2023	1900	39.30	1.92	38.31	-2.52	5d036	7472	1590	17
S05	1750	21.6	1.37	39.9	1.37	40.1	0.00	-0.50	Pass	Pass	Pass	N/A	N/A	N/A	Nov. 26, 2023	1750	36.30	1.75	34.92	-3.81	1055	7472	1590	17
S06	835	21.5	0.971	44	0.9	41.5	7.89	6.02	Pass	Pass	Pass	N/A	N/A	N/A	Nov. 30, 2023	835	9.72	0.475	9.48	-2.49	4d121	7472	1590	17
S07	2600	21.5	1.91	41.6	1.96	39	-2.55	6.67	Pass	Pass	Pass	N/A	N/A	N/A	Dec. 01, 2023	2600	55.90	2.76	55.07	-1.49	1020	7472	1590	17
S08	750	21.3	0.892	42.4	0.9	42	-0.89	0.95	Pass	Pass	Pass	N/A	N/A	N/A	Dec. 02, 2023	750	8.56	0.409	8.16	-4.67	1013	7472	1590	17
S09	750	21.3	0.892	42.4	0.9	42	-0.89	0.95	Pass	Pass	Pass	N/A	N/A	N/A	Dec. 02, 2023	750	8.56	0.409	8.16	-4.67	1013	7472	1590	17
S10	750	21.3	0.892	42.4	0.9	42	-0.89	0.95	Pass	Pass	Pass	N/A	N/A	N/A	Dec. 02, 2023	750	8.56	0.409	8.16	-4.67	1013	7472	1590	17
S11	750	21.3	0.892	42.4	0.9	42	-0.89	0.95	Pass	Pass	Pass	N/A	N/A	N/A	Dec. 02, 2023	750	8.56	0.409	8.16	-4.67	1013	7472	1590	17
S12	1900	21.7	1.44	41.4	1.4	40	2.86	3.50	Pass	Pass	Pass	N/A	N/A	N/A	Nov. 25, 2023	1900	39.30	1.92	38.31	-2.52	5d036	7472	1590	17
S13	835	21.5	0.971	44	0.9	41.5	7.89	6.02	Pass	Pass	Pass	N/A	N/A	N/A	Nov. 30, 2023	835	9.72	0.475	9.48	-2.49	4d121	7472	1590	17
S14	2300	21.4	1.79	41.2	1.67	39.5	7.19	4.30	Pass	Pass	Pass	N/A	N/A	N/A	Nov. 29, 2023	2300	48.70	2.35	46.89	-3.72	1004	7472	1590	17
S15	2600	21.5	1.91	41.6	1.96	39	-2.55	6.67	Pass	Pass	Pass	N/A	N/A	N/A	Dec. 01, 2023	2600	55.90	2.76	55.07	-1.49	1020	7472	1590	17
S16	2600	21.5	1.91	41.6	1.96	39	-2.55	6.67	Pass	Pass	Pass	N/A	N/A	N/A	Dec. 01, 2023	2600	55.90	2.76	55.07	-1.49	1020	7472	1590	17
S17a	3500	21.4	2.71	37.5	2.91	37.9	-6.87	-1.06	Pass	Pass	Pass	N/A	N/A	N/A	Nov. 29, 2023	3500	66.80	3.43	68.44	2.45	1007	7472	1590	17
S17b	3700	21.4	2.88	37.2	3.12	37.7	-7.69	-1.33	Pass	Pass	Pass	N/A	N/A	N/A	Nov. 29, 2023	3700	65.10	3.45	68.84	5.74	1017	7472	1590	17
S18	1750	21.6	1.37	39.9	1.37	40.1	0.00	-0.50	Pass	Pass	Pass	N/A	N/A	N/A	Nov. 26, 2023	1750	36.30	1.75	34.92	-3.81	1055	7472	1590	17
S19	750	21.4	0.941	44.5	0.9	42	4.56	5.95	Pass	Pass	Pass	N/A	N/A	N/A	Nov. 29, 2023	750	8.56	0.424	8.46	-1.17	1013	7472	1590	17
S20	2450	21.5	1.89	39.5	1.8	39.2	5.00	0.77	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 27, 2023	2450	50.40	2.51	50.08	-0.63	737	7472	1590	17
S21	5250	21.5	4.43	34.5	4.71	35.9	-5.94	-3.90	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 27, 2023	5250	80.10	4.13	82.40	2.88	1019	7472	1590	17
S22	5600	21.6	4.94	35.3	5.07	35.5	-2.56	-0.56	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 28, 2023	5600	83.00	4.38	87.39	5.29	1019	7472	1590	17
S23	5750	21.6	5.13	35.8	5.22	35.4	-1.72	1.13	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 28, 2023	5750	77.90	3.98	79.41	1.94	1145	7472	1590	17
S24a	5750	21.6	5.13	35.8	5.22	35.4	-1.72	1.13	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 28, 2023	5750	77.90	3.98	79.41	1.94	1145	7472	1590	17
S24b	6500	21.6	5.96	33.9	6.07	34.5	-1.81	-1.74	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 28, 2023	6500	292.00	29.7	297.00	1.71	1008	7472	1590	20
S25	2450	21.5	1.89	39.5	1.8	39.2	5.00	0.77	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 27, 2023	2450	50.40	2.51	50.08	-0.63	737	7472	1590	17
S27	13	21.3	0.731	55.227	0.75	55	-2.53	0.41	Pass	Pass	Pass	N/A	N/A	N/A	Dec. 10, 2023	13	0.54	0.014	0.56	3.60	1018	7720	1698	14
S26	6500	21.4	5.95	33.5	6.07	34.5	-1.98	-2.90	Pass	Pass	Pass	OFDM	N/A	Pass	Nov. 29, 2023	6500	292.00	29.1	291.00	-0.34	1008	7472	1590	20



System Performance Check for Incident Power Density Measurement

Plot No.	Test Date	Frequency [GHz]	mmWave Probe S/N	Verification Source S/N	Averaging Area [cm ²]	Distance [mm]	Target Power Density [W/m ²]	Measured Power Density [W/m ²]	Deviation [%]
S26	Nov. 30, 2023	10	9615	1025	4	10.0	53.6	55.4	3.36%

Appendix D. Maximum Target Conducted Power

The maximum conducted average power (Unit: dBm) including tune-up tolerance is shown as below.

WCDMA Max. Tune-up Power (Full)		
Mode	RMC 12.2K	HSDPA DC-HSDPA HSUPA
	Maximum Target Power	Maximum Target Power
WCDMA Band II	24.5	24.5
WCDMA Band IV	24.5	24.5
WCDMA Band V	24.5	24.5

LTE Max. Tune-up Power (Full)			
Mode	QPSK	16QAM	64QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power
LTE 2	24.0	23.0	22.0
LTE 4	24.0	23.0	22.0
LTE 5	24.5	23.5	22.5
LTE 7	24.0	23.0	22.0
LTE 12	24.5	23.5	22.5
LTE 13	24.5	23.5	22.5
LTE 14	24.5	23.5	22.5
LTE 17	24.5	23.5	22.5
LTE 25	24.0	23.0	22.0
LTE 26	24.5	23.5	22.5
LTE 30	23.0	22.0	21.0
LTE 38	24.0	23.0	22.0
LTE 41	24.0	23.0	22.0
LTE 48	22.0	21.0	20.0
LTE 66	24.0	23.0	22.0
LTE 71	24.0	23.0	22.0

Tune-up Power (Full)							
WLAN 2.4GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	14.0	14.0			
	6	2437	14.0	14.0			
	11	2462	14.0	14.0			
	12	2467	14.0	14.0			
	13	2472	14.0	14.0			
802.11g	1	2412	14.0	14.0			
	6	2437	14.0	14.0			
	11	2462	14.0	14.0			
	12	2467	14.0	14.0			
	13	2472	14.0	14.0			
802.11n HT20	1	2412	14.0	14.0	14.0	14.0	17.0
	6	2437	14.0	14.0	14.0	14.0	17.0
	11	2462	14.0	14.0	14.0	14.0	17.0
	12	2467	14.0	14.0	14.0	14.0	17.0
	13	2472	14.0	14.0	14.0	14.0	17.0
802.11n HT40	3	2422	14.0	14.0	14.0	14.0	17.0
	6	2437	14.0	14.0	14.0	14.0	17.0
	9	2452	14.0	14.0	14.0	14.0	17.0
	10	2457	14.0	14.0	14.0	14.0	17.0
	11	2462	14.0	14.0	14.0	14.0	17.0
802.11ax HE20	1	2412	14.0	14.0	14.0	14.0	17.0
	6	2437	14.0	14.0	14.0	14.0	17.0
	11	2462	14.0	14.0	14.0	14.0	17.0
	12	2467	14.0	14.0	14.0	14.0	17.0
	13	2472	14.0	14.0	14.0	14.0	17.0
802.11ax HE40	3	2422	14.0	14.0	14.0	14.0	17.0
	6	2437	14.0	14.0	14.0	14.0	17.0
	9	2452	14.0	14.0	14.0	14.0	17.0
	10	2457	14.0	14.0	14.0	14.0	17.0
	11	2462	14.0	14.0	14.0	14.0	17.0
802.11be HE20	1	2412	14.0	14.0	14.0	14.0	17.0
	6	2437	14.0	14.0	14.0	14.0	17.0
	11	2462	14.0	14.0	14.0	14.0	17.0
	12	2467	14.0	14.0	14.0	14.0	17.0
	13	2472	14.0	14.0	14.0	14.0	17.0
802.11be HE40	3	2422	14.0	14.0	14.0	14.0	17.0
	6	2437	14.0	14.0	14.0	14.0	17.0
	9	2452	14.0	14.0	14.0	14.0	17.0
	10	2457	14.0	14.0	14.0	14.0	17.0
	11	2462	14.0	14.0	14.0	14.0	17.0



Tune-up Power (Full)					
Bluetooth					
Mode	Channel	Frequency		Ant 1 Max Tune-up	
BR / EDR	0	2402		11.0	
	39	2441		11.0	
	78	2480		11.0	
LE	0	2402		7.0	
	19	2440		7.0	
	39	2480		7.0	

Tune-up Power (Full)							
WLAN 5.2GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	36	5180	10.5	10.5			
	40	5200	10.5	10.5			
	44	5220	10.5	10.5			
	48	5240	10.5	10.5			
802.11n HT20	36	5180	10.5	10.5	10.5	10.5	13.5
	40	5200	10.5	10.5	10.5	10.5	13.5
	44	5220	10.5	10.5	10.5	10.5	13.5
	48	5240	10.5	10.5	10.5	10.5	13.5
802.11n HT40	38	5190	10.5	10.5	10.5	10.5	13.5
	46	5230	10.5	10.5	10.5	10.5	13.5
802.11ac VHT80	42	5210	10.5	10.5	10.5	10.5	13.5
802.11ax HE20	36	5180	10.5	10.5	10.5	10.5	13.5
	40	5200	10.5	10.5	10.5	10.5	13.5
	44	5220	10.5	10.5	10.5	10.5	13.5
	48	5240	10.5	10.5	10.5	10.5	13.5
802.11ax HE40	38	5190	10.5	10.5	10.5	10.5	13.5
	46	5230	10.5	10.5	10.5	10.5	13.5
802.11ax HE80	42	5210	10.5	10.5	10.5	10.5	13.5
802.11be HE20	36	5180	10.5	10.5	10.5	10.5	13.5
	40	5200	10.5	10.5	10.5	10.5	13.5
	44	5220	10.5	10.5	10.5	10.5	13.5
	48	5240	10.5	10.5	10.5	10.5	13.5
802.11be HE40	38	5190	10.5	10.5	10.5	10.5	13.5
	46	5230	10.5	10.5	10.5	10.5	13.5
802.11be HE80	42	5210	10.5	10.5	10.5	10.5	13.5

Tune-up Power (Full)							
WLAN 5.3GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	52	5260	10.5	10.5			
	56	5280	10.5	10.5			
	60	5300	10.5	10.5			
	64	5320	10.5	10.5			
802.11n HT20	52	5260	10.5	10.5	10.5	10.5	13.5
	56	5280	10.5	10.5	10.5	10.5	13.5
	60	5300	10.5	10.5	10.5	10.5	13.5
	64	5320	10.5	10.5	10.5	10.5	13.5
802.11n HT40	54	5270	10.5	10.5	10.5	10.5	13.5
	62	5310	10.5	10.5	10.5	10.5	13.5
802.11ac VHT80	58	5290	10.5	10.5	10.5	10.5	13.5
802.11ac VHT160	50	5250	10.5	10.5	10.5	10.5	13.5
802.11ax HE20	52	5260	10.5	10.5	10.5	10.5	13.5
	56	5280	10.5	10.5	10.5	10.5	13.5
	60	5300	10.5	10.5	10.5	10.5	13.5
	64	5320	10.5	10.5	10.5	10.5	13.5
802.11ax HE40	54	5270	10.5	10.5	10.5	10.5	13.5
	62	5310	10.5	10.5	10.5	10.5	13.5
802.11ax HE80	58	5290	10.5	10.5	10.5	10.5	13.5
802.11ax HE160	50	5250	10.5	10.5	10.5	10.5	13.5
802.11be HE20	52	5260	10.5	10.5	10.5	10.5	13.5
	56	5280	10.5	10.5	10.5	10.5	13.5
	60	5300	10.5	10.5	10.5	10.5	13.5
	64	5320	10.5	10.5	10.5	10.5	13.5
802.11be HE40	54	5270	10.5	10.5	10.5	10.5	13.5
	62	5310	10.5	10.5	10.5	10.5	13.5
802.11be HE80	58	5290	10.5	10.5	10.5	10.5	13.5
802.11be HE160	50	5250	10.5	10.5	10.5	10.5	13.5

Tune-up Power (Full)							
WLAN 5.6GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	100	5500	11.0	11.0			
	116	5580	11.0	11.0			
	120	5600	11.0	11.0			
	124	5620	11.0	11.0			
	132	5660	11.0	11.0			
	140	5700	11.0	11.0			
	144	5720	11.0	11.0			
802.11n HT20	100	5500	11.0	11.0	11.0	11.0	14.0
	116	5580	11.0	11.0	11.0	11.0	14.0
	120	5600	11.0	11.0	11.0	11.0	14.0
	124	5620	11.0	11.0	11.0	11.0	14.0
	132	5660	11.0	11.0	11.0	11.0	14.0
	140	5700	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0
802.11n HT40	102	5510	11.0	11.0	11.0	11.0	14.0
	110	5550	11.0	11.0	11.0	11.0	14.0
	118	5590	11.0	11.0	11.0	11.0	14.0
	126	5630	11.0	11.0	11.0	11.0	14.0
	134	5670	11.0	11.0	11.0	11.0	14.0
	142	5710	11.0	11.0	11.0	11.0	14.0
802.11ac VHT80	106	5530	11.0	11.0	11.0	11.0	14.0
	122	5610	11.0	11.0	11.0	11.0	14.0
	138	5690	11.0	11.0	11.0	11.0	14.0
802.11ac VHT160	114	5570	11.0	11.0	11.0	11.0	14.0
802.11ax HE20	100	5500	11.0	11.0	11.0	11.0	14.0
	116	5580	11.0	11.0	11.0	11.0	14.0
	120	5600	11.0	11.0	11.0	11.0	14.0
	124	5620	11.0	11.0	11.0	11.0	14.0
	132	5660	11.0	11.0	11.0	11.0	14.0
	140	5700	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0
802.11ax HE40	102	5510	11.0	11.0	11.0	11.0	14.0
	110	5550	11.0	11.0	11.0	11.0	14.0
	118	5590	11.0	11.0	11.0	11.0	14.0
	126	5630	11.0	11.0	11.0	11.0	14.0
	134	5670	11.0	11.0	11.0	11.0	14.0
	142	5710	11.0	11.0	11.0	11.0	14.0
802.11ax HE80	106	5530	11.0	11.0	11.0	11.0	14.0
	122	5610	11.0	11.0	11.0	11.0	14.0
	138	5690	11.0	11.0	11.0	11.0	14.0
802.11ax HE160	114	5570	11.0	11.0	11.0	11.0	14.0
802.11be HE20	100	5500	11.0	11.0	11.0	11.0	14.0
	116	5580	11.0	11.0	11.0	11.0	14.0
	120	5600	11.0	11.0	11.0	11.0	14.0
	124	5620	11.0	11.0	11.0	11.0	14.0
	132	5660	11.0	11.0	11.0	11.0	14.0
	140	5700	11.0	11.0	11.0	11.0	14.0
	144	5720	11.0	11.0	11.0	11.0	14.0



Tune-up Power (Full)							
802.11be HE40	102	5510	11.0	11.0	11.0	11.0	14.0
	110	5550	11.0	11.0	11.0	11.0	14.0
	118	5590	11.0	11.0	11.0	11.0	14.0
	126	5630	11.0	11.0	11.0	11.0	14.0
	134	5670	11.0	11.0	11.0	11.0	14.0
	142	5710	11.0	11.0	11.0	11.0	14.0
802.11be HE80	106	5530	11.0	11.0	11.0	11.0	14.0
	122	5610	11.0	11.0	11.0	11.0	14.0
	138	5690	11.0	11.0	11.0	11.0	14.0
802.11be HE160	114	5570	11.0	11.0	11.0	11.0	14.0

Tune-up Power (Full)							
WLAN 5.8GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	149	5745	11.5	11.5			
	153	5765	11.5	11.5			
	157	5785	11.5	11.5			
	161	5805	11.5	11.5			
	165	5825	11.5	11.5			
802.11n HT20	149	5745	11.5	11.5	11.5	11.5	14.5
	153	5765	11.5	11.5	11.5	11.5	14.5
	157	5785	11.5	11.5	11.5	11.5	14.5
	161	5805	11.5	11.5	11.5	11.5	14.5
	165	5825	11.5	11.5	11.5	11.5	14.5
802.11n HT40	151	5755	11.5	11.5	11.5	11.5	14.5
	159	5795	11.5	11.5	11.5	11.5	14.5
802.11ac VHT80	155	5775	11.5	11.5	11.5	11.5	14.5
802.11ax HE20	149	5745	11.5	11.5	11.5	11.5	14.5
	153	5765	11.5	11.5	11.5	11.5	14.5
	157	5785	11.5	11.5	11.5	11.5	14.5
	161	5805	11.5	11.5	11.5	11.5	14.5
	165	5825	11.5	11.5	11.5	11.5	14.5
802.11ax HE40	151	5755	11.5	11.5	11.5	11.5	14.5
	159	5795	11.5	11.5	11.5	11.5	14.5
802.11ax HE80	155	5775	11.5	11.5	11.5	11.5	14.5
802.11be HE20	149	5745	11.5	11.5	11.5	11.5	14.5
	153	5765	11.5	11.5	11.5	11.5	14.5
	157	5785	11.5	11.5	11.5	11.5	14.5
	161	5805	11.5	11.5	11.5	11.5	14.5
	165	5825	11.5	11.5	11.5	11.5	14.5
802.11be HE40	151	5755	11.5	11.5	11.5	11.5	14.5
	159	5795	11.5	11.5	11.5	11.5	14.5
802.11be HE80	155	5775	11.5	11.5	11.5	11.5	14.5

Tune-up Power (Full)							
WLAN 5.9GHz							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11a	169	5845	12.0	12.0			
	173	5865	12.0	12.0			
	177	5885	12.0	12.0			
802.11n HT20	169	5845	12.0	12.0	12.0	12.0	15.0
	173	5865	12.0	12.0	12.0	12.0	15.0
	177	5885	12.0	12.0	12.0	12.0	15.0
802.11n HT40	167	5835	12.0	12.0	12.0	12.0	15.0
	175	5875	12.0	12.0	12.0	12.0	15.0
802.11ac VHT80	171	5855	12.0	12.0	12.0	12.0	15.0
802.11ac VHT160	163	5815	12.0	12.0	12.0	12.0	15.0
802.11ax HE20	169	5845	12.0	12.0	12.0	12.0	15.0
	173	5865	12.0	12.0	12.0	12.0	15.0
	177	5885	12.0	12.0	12.0	12.0	15.0
802.11ax HE40	167	5835	12.0	12.0	12.0	12.0	15.0
	175	5875	12.0	12.0	12.0	12.0	15.0
802.11ax HE80	171	5855	12.0	12.0	12.0	12.0	15.0
802.11ax HE160	163	5815	12.0	12.0	12.0	12.0	15.0
802.11be HE20	169	5845	12.0	12.0	12.0	12.0	15.0
	173	5865	12.0	12.0	12.0	12.0	15.0
	177	5885	12.0	12.0	12.0	12.0	15.0
802.11be HE40	167	5835	12.0	12.0	12.0	12.0	15.0
	175	5875	12.0	12.0	12.0	12.0	15.0
802.11be HE80	171	5855	12.0	12.0	12.0	12.0	15.0
802.11be HE160	163	5815	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Full)							
UNII-5							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	1	5955	12.0	12.0	12.0	12.0	15.0
	5	5975	12.0	12.0	12.0	12.0	15.0
	9	5995	12.0	12.0	12.0	12.0	15.0
	13	6015	12.0	12.0	12.0	12.0	15.0
	17	6035	12.0	12.0	12.0	12.0	15.0
	21	6055	12.0	12.0	12.0	12.0	15.0
	25	6075	12.0	12.0	12.0	12.0	15.0
	29	6095	12.0	12.0	12.0	12.0	15.0
	33	6115	12.0	12.0	12.0	12.0	15.0
	37	6135	12.0	12.0	12.0	12.0	15.0
	41	6155	12.0	12.0	12.0	12.0	15.0
	45	6175	12.0	12.0	12.0	12.0	15.0
	49	6195	12.0	12.0	12.0	12.0	15.0
	53	6215	12.0	12.0	12.0	12.0	15.0
	57	6235	12.0	12.0	12.0	12.0	15.0
	61	6255	12.0	12.0	12.0	12.0	15.0
	65	6275	12.0	12.0	12.0	12.0	15.0
	69	6295	12.0	12.0	12.0	12.0	15.0
	73	6315	12.0	12.0	12.0	12.0	15.0
	77	6335	12.0	12.0	12.0	12.0	15.0
	81	6355	12.0	12.0	12.0	12.0	15.0
	85	6375	12.0	12.0	12.0	12.0	15.0
	89	6395	12.0	12.0	12.0	12.0	15.0
	93	6415	12.0	12.0	12.0	12.0	15.0
802.11be HE20	1	5955	12.0	12.0	12.0	12.0	15.0
	5	5975	12.0	12.0	12.0	12.0	15.0
	9	5995	12.0	12.0	12.0	12.0	15.0
	13	6015	12.0	12.0	12.0	12.0	15.0
	17	6035	12.0	12.0	12.0	12.0	15.0
	21	6055	12.0	12.0	12.0	12.0	15.0
	25	6075	12.0	12.0	12.0	12.0	15.0
	29	6095	12.0	12.0	12.0	12.0	15.0
	33	6115	12.0	12.0	12.0	12.0	15.0
	37	6135	12.0	12.0	12.0	12.0	15.0
	41	6155	12.0	12.0	12.0	12.0	15.0
	45	6175	12.0	12.0	12.0	12.0	15.0
	49	6195	12.0	12.0	12.0	12.0	15.0
	53	6215	12.0	12.0	12.0	12.0	15.0
	57	6235	12.0	12.0	12.0	12.0	15.0
	61	6255	12.0	12.0	12.0	12.0	15.0
	65	6275	12.0	12.0	12.0	12.0	15.0
	69	6295	12.0	12.0	12.0	12.0	15.0
	73	6315	12.0	12.0	12.0	12.0	15.0
	77	6335	12.0	12.0	12.0	12.0	15.0
	81	6355	12.0	12.0	12.0	12.0	15.0
	85	6375	12.0	12.0	12.0	12.0	15.0
	89	6395	12.0	12.0	12.0	12.0	15.0
	93	6415	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Full)							
UNII-5							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE40	3	5965	12.0	12.0	12.0	12.0	15.0
	11	6005	12.0	12.0	12.0	12.0	15.0
	19	6045	12.0	12.0	12.0	12.0	15.0
	27	6085	12.0	12.0	12.0	12.0	15.0
	35	6125	12.0	12.0	12.0	12.0	15.0
	43	6165	12.0	12.0	12.0	12.0	15.0
	51	6205	12.0	12.0	12.0	12.0	15.0
	59	6245	12.0	12.0	12.0	12.0	15.0
	67	6285	12.0	12.0	12.0	12.0	15.0
	75	6325	12.0	12.0	12.0	12.0	15.0
	83	6365	12.0	12.0	12.0	12.0	15.0
	91	6405	12.0	12.0	12.0	12.0	15.0
802.11ax HE80	7	5985	12.0	12.0	12.0	12.0	15.0
	23	6065	12.0	12.0	12.0	12.0	15.0
	39	6145	12.0	12.0	12.0	12.0	15.0
	55	6225	12.0	12.0	12.0	12.0	15.0
	71	6305	12.0	12.0	12.0	12.0	15.0
	87	6385	12.0	12.0	12.0	12.0	15.0
802.11ax HE160	15	6025	12.0	12.0	12.0	12.0	15.0
	47	6185	12.0	12.0	12.0	12.0	15.0
	79	6345	12.0	12.0	12.0	12.0	15.0
802.11be HE40	3	5965	12.0	12.0	12.0	12.0	15.0
	11	6005	12.0	12.0	12.0	12.0	15.0
	19	6045	12.0	12.0	12.0	12.0	15.0
	27	6085	12.0	12.0	12.0	12.0	15.0
	35	6125	12.0	12.0	12.0	12.0	15.0
	43	6165	12.0	12.0	12.0	12.0	15.0
	51	6205	12.0	12.0	12.0	12.0	15.0
	59	6245	12.0	12.0	12.0	12.0	15.0
	67	6285	12.0	12.0	12.0	12.0	15.0
	75	6325	12.0	12.0	12.0	12.0	15.0
	83	6365	12.0	12.0	12.0	12.0	15.0
	91	6405	12.0	12.0	12.0	12.0	15.0
802.11be HE80	7	5985	12.0	12.0	12.0	12.0	15.0
	23	6065	12.0	12.0	12.0	12.0	15.0
	39	6145	12.0	12.0	12.0	12.0	15.0
	55	6225	12.0	12.0	12.0	12.0	15.0
	71	6305	12.0	12.0	12.0	12.0	15.0
	87	6385	12.0	12.0	12.0	12.0	15.0
802.11be HE160	15	6025	12.0	12.0	12.0	12.0	15.0
	47	6185	12.0	12.0	12.0	12.0	15.0
	79	6345	12.0	12.0	12.0	12.0	15.0
802.11be HE320	31	6105	12.0	12.0	12.0	12.0	15.0
	63	6265	12.0	12.0	12.0	12.0	15.0
	95	6425	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Full)							
UNII-6							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	97	6435	12.0	12.0	12.0	12.0	15.0
	101	6455	12.0	12.0	12.0	12.0	15.0
	105	6475	12.0	12.0	12.0	12.0	15.0
	109	6495	12.0	12.0	12.0	12.0	15.0
	113	6515	12.0	12.0	12.0	12.0	15.0
802.11ax HE40	99	6445	12.0	12.0	12.0	12.0	15.0
	107	6485	12.0	12.0	12.0	12.0	15.0
	115	6525	12.0	12.0	12.0	12.0	15.0
802.11ax HE80	103	6465	12.0	12.0	12.0	12.0	15.0
	119	6545	12.0	12.0	12.0	12.0	15.0
802.11ax HE160	111	6505	12.0	12.0	12.0	12.0	15.0
802.11be HE20	97	6435	12.0	12.0	12.0	12.0	15.0
	101	6455	12.0	12.0	12.0	12.0	15.0
	105	6475	12.0	12.0	12.0	12.0	15.0
	109	6495	12.0	12.0	12.0	12.0	15.0
	113	6515	12.0	12.0	12.0	12.0	15.0
802.11be HE40	99	6445	12.0	12.0	12.0	12.0	15.0
	107	6485	12.0	12.0	12.0	12.0	15.0
	115	6525	12.0	12.0	12.0	12.0	15.0
802.11be HE80	103	6465	12.0	12.0	12.0	12.0	15.0
	119	6545	12.0	12.0	12.0	12.0	15.0
802.11be HE160	111	6505	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Full)							
UNII-7							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	117	6535	12.0	12.0	12.0	12.0	15.0
	121	6555	12.0	12.0	12.0	12.0	15.0
	125	6575	12.0	12.0	12.0	12.0	15.0
	129	6595	12.0	12.0	12.0	12.0	15.0
	133	6615	12.0	12.0	12.0	12.0	15.0
	137	6635	12.0	12.0	12.0	12.0	15.0
	141	6655	12.0	12.0	12.0	12.0	15.0
	145	6675	12.0	12.0	12.0	12.0	15.0
	149	6695	12.0	12.0	12.0	12.0	15.0
	153	6715	12.0	12.0	12.0	12.0	15.0
	157	6735	12.0	12.0	12.0	12.0	15.0
	161	6755	12.0	12.0	12.0	12.0	15.0
	165	6775	12.0	12.0	12.0	12.0	15.0
	169	6795	12.0	12.0	12.0	12.0	15.0
	173	6815	12.0	12.0	12.0	12.0	15.0
	177	6835	12.0	12.0	12.0	12.0	15.0
802.11ax HE40	181	6855	12.0	12.0	12.0	12.0	15.0
	185	6875	12.0	12.0	12.0	12.0	15.0
	123	6565	12.0	12.0	12.0	12.0	15.0
	131	6605	12.0	12.0	12.0	12.0	15.0
	139	6645	12.0	12.0	12.0	12.0	15.0
	147	6685	12.0	12.0	12.0	12.0	15.0
	155	6725	12.0	12.0	12.0	12.0	15.0
	163	6765	12.0	12.0	12.0	12.0	15.0
802.11ax HE80	171	6805	12.0	12.0	12.0	12.0	15.0
	179	6845	12.0	12.0	12.0	12.0	15.0
	187	6885	12.0	12.0	12.0	12.0	15.0
	135	6625	12.0	12.0	12.0	12.0	15.0
802.11ax HE160	151	6705	12.0	12.0	12.0	12.0	15.0
	167	6785	12.0	12.0	12.0	12.0	15.0
	183	6865	12.0	12.0	12.0	12.0	15.0
802.11be HE20	143	6665	12.0	12.0	12.0	12.0	15.0
	175	6825	12.0	12.0	12.0	12.0	15.0
	117	6535	12.0	12.0	12.0	12.0	15.0
	121	6555	12.0	12.0	12.0	12.0	15.0
	125	6575	12.0	12.0	12.0	12.0	15.0
	129	6595	12.0	12.0	12.0	12.0	15.0
	133	6615	12.0	12.0	12.0	12.0	15.0
	137	6635	12.0	12.0	12.0	12.0	15.0
	141	6655	12.0	12.0	12.0	12.0	15.0
	145	6675	12.0	12.0	12.0	12.0	15.0
	149	6695	12.0	12.0	12.0	12.0	15.0
	153	6715	12.0	12.0	12.0	12.0	15.0
	157	6735	12.0	12.0	12.0	12.0	15.0
	161	6755	12.0	12.0	12.0	12.0	15.0
	165	6775	12.0	12.0	12.0	12.0	15.0
	169	6795	12.0	12.0	12.0	12.0	15.0
	173	6815	12.0	12.0	12.0	12.0	15.0
	177	6835	12.0	12.0	12.0	12.0	15.0
	181	6855	12.0	12.0	12.0	12.0	15.0
	185	6875	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Full)							
802.11be HE40	123	6565	12.0	12.0	12.0	12.0	15.0
	131	6605	12.0	12.0	12.0	12.0	15.0
	139	6645	12.0	12.0	12.0	12.0	15.0
	147	6685	12.0	12.0	12.0	12.0	15.0
	155	6725	12.0	12.0	12.0	12.0	15.0
	163	6765	12.0	12.0	12.0	12.0	15.0
	171	6805	12.0	12.0	12.0	12.0	15.0
	179	6845	12.0	12.0	12.0	12.0	15.0
	187	6885	12.0	12.0	12.0	12.0	15.0
802.11be HE80	135	6625	12.0	12.0	12.0	12.0	15.0
	151	6705	12.0	12.0	12.0	12.0	15.0
	167	6785	12.0	12.0	12.0	12.0	15.0
	183	6865	12.0	12.0	12.0	12.0	15.0
802.11be HE160	143	6665	12.0	12.0	12.0	12.0	15.0
	175	6825	12.0	12.0	12.0	12.0	15.0
802.11be HE320	127	6585	12.0	12.0	12.0	12.0	15.0
	159	6745	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Full)							
UNII-8							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	189	6895	12.0	12.0	12.0	12.0	15.0
	193	6915	12.0	12.0	12.0	12.0	15.0
	197	6935	12.0	12.0	12.0	12.0	15.0
	201	6955	12.0	12.0	12.0	12.0	15.0
	205	6975	12.0	12.0	12.0	12.0	15.0
	209	6995	12.0	12.0	12.0	12.0	15.0
	213	7015	12.0	12.0	12.0	12.0	15.0
	217	7035	12.0	12.0	12.0	12.0	15.0
	221	7055	12.0	12.0	12.0	12.0	15.0
	225	7075	12.0	12.0	12.0	12.0	15.0
	229	7095	12.0	12.0	12.0	12.0	15.0
	233	7115	12.0	12.0	12.0	12.0	15.0
802.11ax HE40	195	6925	12.0	12.0	12.0	12.0	15.0
	203	6965	12.0	12.0	12.0	12.0	15.0
	211	7005	12.0	12.0	12.0	12.0	15.0
	219	7045	12.0	12.0	12.0	12.0	15.0
	227	7085	12.0	12.0	12.0	12.0	15.0
802.11ax HE80	199	6945	12.0	12.0	12.0	12.0	15.0
	215	7025	12.0	12.0	12.0	12.0	15.0
802.11ax HE160	207	6985	12.0	12.0	12.0	12.0	15.0
802.11be HE20	189	6895	12.0	12.0	12.0	12.0	15.0
	193	6915	12.0	12.0	12.0	12.0	15.0
	197	6935	12.0	12.0	12.0	12.0	15.0
	201	6955	12.0	12.0	12.0	12.0	15.0
	205	6975	12.0	12.0	12.0	12.0	15.0
	209	6995	12.0	12.0	12.0	12.0	15.0
	213	7015	12.0	12.0	12.0	12.0	15.0
	217	7035	12.0	12.0	12.0	12.0	15.0
	221	7055	12.0	12.0	12.0	12.0	15.0
	225	7075	12.0	12.0	12.0	12.0	15.0
	229	7095	12.0	12.0	12.0	12.0	15.0
	233	7115	12.0	12.0	12.0	12.0	15.0
802.11be HE40	195	6925	12.0	12.0	12.0	12.0	15.0
	203	6965	12.0	12.0	12.0	12.0	15.0
	211	7005	12.0	12.0	12.0	12.0	15.0
	219	7045	12.0	12.0	12.0	12.0	15.0
	227	7085	12.0	12.0	12.0	12.0	15.0
802.11be HE80	199	6945	12.0	12.0	12.0	12.0	15.0
	215	7025	12.0	12.0	12.0	12.0	15.0
802.11be HE160	207	6985	12.0	12.0	12.0	12.0	15.0
802.11be HE320	191	6905	12.0	12.0	12.0	12.0	15.0

Tune-up Power (Tablet Mode)

WLAN 2.4GHz

Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11b	1	2412	15.5	15.5			
	6	2437	15.5	15.5			
	11	2462	15.5	15.5			
	12	2467	15.5	15.5			
	13	2472	15.5	15.5			
802.11g	1	2412	15.5	15.5			
	6	2437	15.5	15.5			
	11	2462	15.5	15.5			
	12	2467	15.5	15.5			
	13	2472	15.5	15.5			
802.11n HT20	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11n HT40	3	2422	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	9	2452	15.5	15.5	15.5	15.5	18.5
	10	2457	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
802.11ax HE20	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11ax HE40	3	2422	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	9	2452	15.5	15.5	15.5	15.5	18.5
	10	2457	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
802.11be HE20	1	2412	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5
	12	2467	15.5	15.5	15.5	15.5	18.5
	13	2472	15.5	15.5	15.5	15.5	18.5
802.11be HE40	3	2422	15.5	15.5	15.5	15.5	18.5
	6	2437	15.5	15.5	15.5	15.5	18.5
	9	2452	15.5	15.5	15.5	15.5	18.5
	10	2457	15.5	15.5	15.5	15.5	18.5
	11	2462	15.5	15.5	15.5	15.5	18.5

Tune-up Power (LPI)							
UNII-5							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	1	5955	5.8	5.8	2.8	2.8	5.8
	5	5975	5.8	5.8	2.8	2.8	5.8
	9	5995	5.8	5.8	2.8	2.8	5.8
	13	6015	5.8	5.8	2.8	2.8	5.8
	17	6035	5.8	5.8	2.8	2.8	5.8
	21	6055	5.8	5.8	2.8	2.8	5.8
	25	6075	5.8	5.8	2.8	2.8	5.8
	29	6095	5.8	5.8	2.8	2.8	5.8
	33	6115	5.8	5.8	2.8	2.8	5.8
	37	6135	5.8	5.8	2.8	2.8	5.8
	41	6155	5.8	5.8	2.8	2.8	5.8
	45	6175	5.8	5.8	2.8	2.8	5.8
	49	6195	5.8	5.8	2.8	2.8	5.8
	53	6215	5.8	5.8	2.8	2.8	5.8
	57	6235	5.8	5.8	2.8	2.8	5.8
	61	6255	5.8	5.8	2.8	2.8	5.8
	65	6275	5.8	5.8	2.8	2.8	5.8
	69	6295	5.8	5.8	2.8	2.8	5.8
	73	6315	5.8	5.8	2.8	2.8	5.8
	77	6335	5.8	5.8	2.8	2.8	5.8
	81	6355	5.8	5.8	2.8	2.8	5.8
	85	6375	5.8	5.8	2.8	2.8	5.8
	89	6395	5.8	5.8	2.8	2.8	5.8
	93	6415	5.8	5.8	2.8	2.8	5.8
802.11ax HE40	3	5965	8.7	8.7	5.7	5.7	8.7
	11	6005	8.7	8.7	5.7	5.7	8.7
	19	6045	8.7	8.7	5.7	5.7	8.7
	27	6085	8.7	8.7	5.7	5.7	8.7
	35	6125	8.7	8.7	5.7	5.7	8.7
	43	6165	8.7	8.7	5.7	5.7	8.7
	51	6205	8.7	8.7	5.7	5.7	8.7
	59	6245	8.7	8.7	5.7	5.7	8.7
	67	6285	8.7	8.7	5.7	5.7	8.7
	75	6325	8.7	8.7	5.7	5.7	8.7
	83	6365	8.7	8.7	5.7	5.7	8.7
	91	6405	8.7	8.7	5.7	5.7	8.7
802.11ax HE80	7	5985	11.8	11.8	8.8	8.8	11.8
	23	6065	11.8	11.8	8.8	8.8	11.8
	39	6145	11.8	11.8	8.8	8.8	11.8
	55	6225	11.8	11.8	8.8	8.8	11.8
	71	6305	11.8	11.8	8.8	8.8	11.8
	87	6385	11.8	11.8	8.8	8.8	11.8
802.11ax HE160	15	6025	12.0	12.0	12.0	12.0	15.0
	47	6185	12.0	12.0	12.0	12.0	15.0
	79	6345	12.0	12.0	12.0	12.0	15.0

Tune-up Power (LPI)							
802.11be HE20	1	5955	5.8	5.8	2.8	2.8	5.8
	5	5975	5.8	5.8	2.8	2.8	5.8
	9	5995	5.8	5.8	2.8	2.8	5.8
	13	6015	5.8	5.8	2.8	2.8	5.8
	17	6035	5.8	5.8	2.8	2.8	5.8
	21	6055	5.8	5.8	2.8	2.8	5.8
	25	6075	5.8	5.8	2.8	2.8	5.8
	29	6095	5.8	5.8	2.8	2.8	5.8
	33	6115	5.8	5.8	2.8	2.8	5.8
	37	6135	5.8	5.8	2.8	2.8	5.8
	41	6155	5.8	5.8	2.8	2.8	5.8
	45	6175	5.8	5.8	2.8	2.8	5.8
	49	6195	5.8	5.8	2.8	2.8	5.8
	53	6215	5.8	5.8	2.8	2.8	5.8
	57	6235	5.8	5.8	2.8	2.8	5.8
	61	6255	5.8	5.8	2.8	2.8	5.8
	65	6275	5.8	5.8	2.8	2.8	5.8
	69	6295	5.8	5.8	2.8	2.8	5.8
	73	6315	5.8	5.8	2.8	2.8	5.8
	77	6335	5.8	5.8	2.8	2.8	5.8
	81	6355	5.8	5.8	2.8	2.8	5.8
802.11be HE40	85	6375	5.8	5.8	2.8	2.8	5.8
	89	6395	5.8	5.8	2.8	2.8	5.8
	93	6415	5.8	5.8	2.8	2.8	5.8
	3	5965	8.7	8.7	5.7	5.7	8.7
	11	6005	8.7	8.7	5.7	5.7	8.7
	19	6045	8.7	8.7	5.7	5.7	8.7
	27	6085	8.7	8.7	5.7	5.7	8.7
	35	6125	8.7	8.7	5.7	5.7	8.7
	43	6165	8.7	8.7	5.7	5.7	8.7
	51	6205	8.7	8.7	5.7	5.7	8.7
802.11be HE80	59	6245	8.7	8.7	5.7	5.7	8.7
	67	6285	8.7	8.7	5.7	5.7	8.7
	75	6325	8.7	8.7	5.7	5.7	8.7
	83	6365	8.7	8.7	5.7	5.7	8.7
	91	6405	8.7	8.7	5.7	5.7	8.7
	7	5985	11.8	11.8	8.8	8.8	11.8
802.11be HE160	23	6065	11.8	11.8	8.8	8.8	11.8
	39	6145	11.8	11.8	8.8	8.8	11.8
	55	6225	11.8	11.8	8.8	8.8	11.8
802.11be HE320	71	6305	11.8	11.8	8.8	8.8	11.8
	87	6385	11.8	11.8	8.8	8.8	11.8
	15	6025	12.0	12.0	12.0	12.0	15.0
	47	6185	12.0	12.0	12.0	12.0	15.0
	79	6345	12.0	12.0	12.0	12.0	15.0
	31	6105	12.0	12.0	12.0	12.0	15.0
	63	6265	12.0	12.0	12.0	12.0	15.0
	95	6425	12.0	12.0	12.0	12.0	15.0

Tune-up Power (LPI)							
UNII-6							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	97	6435	5.7	5.7	2.7	2.7	5.7
	101	6455	5.7	5.7	2.7	2.7	5.7
	105	6475	5.7	5.7	2.7	2.7	5.7
	109	6495	5.7	5.7	2.7	2.7	5.7
	113	6515	5.7	5.7	2.7	2.7	5.7
802.11ax HE40	99	6445	8.6	8.6	5.6	5.6	8.6
	107	6485	8.6	8.6	5.6	5.6	8.6
	115	6525	8.6	8.6	5.6	5.6	8.6
802.11ax HE80	103	6465	11.7	11.7	8.7	8.7	11.7
	119	6545	11.7	11.7	8.7	8.7	11.7
802.11ax HE160	111	6505	12.0	12.0	12.0	12.0	15.0
802.11be HE20	97	6435	5.7	5.7	2.7	2.7	5.7
	101	6455	5.7	5.7	2.7	2.7	5.7
	105	6475	5.7	5.7	2.7	2.7	5.7
	109	6495	5.7	5.7	2.7	2.7	5.7
	113	6515	5.7	5.7	2.7	2.7	5.7
802.11be HE40	99	6445	8.6	8.6	5.6	5.6	8.6
	107	6485	8.6	8.6	5.6	5.6	8.6
	115	6525	8.6	8.6	5.6	5.6	8.6
802.11be HE80	103	6465	11.7	11.7	8.7	8.7	11.7
	119	6545	11.7	11.7	8.7	8.7	11.7
802.11be HE160	111	6505	12.0	12.0	12.0	12.0	15.0

Tune-up Power (LPI)							
UNII-7							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	117	6535	5.6	5.6	2.6	2.6	5.6
	121	6555	5.6	5.6	2.6	2.6	5.6
	125	6575	5.6	5.6	2.6	2.6	5.6
	129	6595	5.6	5.6	2.6	2.6	5.6
	133	6615	5.6	5.6	2.6	2.6	5.6
	137	6635	5.6	5.6	2.6	2.6	5.6
	141	6655	5.6	5.6	2.6	2.6	5.6
	145	6675	5.6	5.6	2.6	2.6	5.6
	149	6695	5.6	5.6	2.6	2.6	5.6
	153	6715	5.6	5.6	2.6	2.6	5.6
	157	6735	5.6	5.6	2.6	2.6	5.6
	161	6755	5.6	5.6	2.6	2.6	5.6
	165	6775	5.6	5.6	2.6	2.6	5.6
	169	6795	5.6	5.6	2.6	2.6	5.6
	173	6815	5.6	5.6	2.6	2.6	5.6
	177	6835	5.6	5.6	2.6	2.6	5.6
	181	6855	5.6	5.6	2.6	2.6	5.6
	185	6875	5.6	5.6	2.6	2.6	5.6
802.11ax HE40	123	6565	8.7	8.7	5.7	5.7	8.7
	131	6605	8.7	8.7	5.7	5.7	8.7
	139	6645	8.7	8.7	5.7	5.7	8.7
	147	6685	8.7	8.7	5.7	5.7	8.7
	155	6725	8.7	8.7	5.7	5.7	8.7
	163	6765	8.7	8.7	5.7	5.7	8.7
	171	6805	8.7	8.7	5.7	5.7	8.7
	179	6845	8.7	8.7	5.7	5.7	8.7
802.11ax HE80	187	6885	8.7	8.7	5.7	5.7	8.7
	135	6625	11.8	11.8	8.8	8.8	11.8
	151	6705	11.8	11.8	8.8	8.8	11.8
	167	6785	11.8	11.8	8.8	8.8	11.8
802.11ax HE160	183	6865	11.8	11.8	8.8	8.8	11.8
	143	6665	12.0	12.0	12.0	12.0	15.0
802.11be HE20	175	6825	12.0	12.0	12.0	12.0	15.0
	117	6535	5.6	5.6	2.6	2.6	5.6
	121	6555	5.6	5.6	2.6	2.6	5.6
	125	6575	5.6	5.6	2.6	2.6	5.6
	129	6595	5.6	5.6	2.6	2.6	5.6
	133	6615	5.6	5.6	2.6	2.6	5.6
	137	6635	5.6	5.6	2.6	2.6	5.6
	141	6655	5.6	5.6	2.6	2.6	5.6
	145	6675	5.6	5.6	2.6	2.6	5.6
	149	6695	5.6	5.6	2.6	2.6	5.6
	153	6715	5.6	5.6	2.6	2.6	5.6
	157	6735	5.6	5.6	2.6	2.6	5.6
	161	6755	5.6	5.6	2.6	2.6	5.6
	165	6775	5.6	5.6	2.6	2.6	5.6
	169	6795	5.6	5.6	2.6	2.6	5.6
	173	6815	5.6	5.6	2.6	2.6	5.6
	177	6835	5.6	5.6	2.6	2.6	5.6
	181	6855	5.6	5.6	2.6	2.6	5.6
	185	6875	5.6	5.6	2.6	2.6	5.6

Tune-up Power (LPI)							
802.11be HE40	123	6565	8.7	8.7	5.7	5.7	8.7
	131	6605	8.7	8.7	5.7	5.7	8.7
	139	6645	8.7	8.7	5.7	5.7	8.7
	147	6685	8.7	8.7	5.7	5.7	8.7
	155	6725	8.7	8.7	5.7	5.7	8.7
	163	6765	8.7	8.7	5.7	5.7	8.7
	171	6805	8.7	8.7	5.7	5.7	8.7
	179	6845	8.7	8.7	5.7	5.7	8.7
	187	6885	8.7	8.7	5.7	5.7	8.7
802.11be HE80	135	6625	11.8	11.8	8.8	8.8	11.8
	151	6705	11.8	11.8	8.8	8.8	11.8
	167	6785	11.8	11.8	8.8	8.8	11.8
	183	6865	11.8	11.8	8.8	8.8	11.8
802.11be HE160	143	6665	12.0	12.0	12.0	12.0	15.0
	175	6825	12.0	12.0	12.0	12.0	15.0
802.11be HE320	127	6585	12.0	12.0	12.0	12.0	15.0
	159	6745	12.0	12.0	12.0	12.0	15.0

Tune-up Power (LPI)							
UNII-8							
Mode	Channel	Frequency	SISO Ant 0 Max Tune up	SISO Ant 1 Max Tune up	MIMO Ant 0 Tune up	MIMO Ant 1 Tune up	MIMO Ant 0+1 Max Tune up
802.11ax HE20	189	6895	5.7	5.7	2.7	2.7	5.7
	193	6915	5.7	5.7	2.7	2.7	5.7
	197	6935	5.7	5.7	2.7	2.7	5.7
	201	6955	5.7	5.7	2.7	2.7	5.7
	205	6975	5.7	5.7	2.7	2.7	5.7
	209	6995	5.7	5.7	2.7	2.7	5.7
	213	7015	5.7	5.7	2.7	2.7	5.7
	217	7035	5.7	5.7	2.7	2.7	5.7
	221	7055	5.7	5.7	2.7	2.7	5.7
	225	7075	5.7	5.7	2.7	2.7	5.7
	229	7095	5.7	5.7	2.7	2.7	5.7
	233	7115	5.7	5.7	2.7	2.7	5.7
802.11ax HE40	195	6925	8.8	8.8	5.8	5.8	8.8
	203	6965	8.8	8.8	5.8	5.8	8.8
	211	7005	8.8	8.8	5.8	5.8	8.8
	219	7045	8.8	8.8	5.8	5.8	8.8
	227	7085	8.8	8.8	5.8	5.8	8.8
802.11ax HE80	199	6945	12.0	12.0	9.0	9.0	12.0
	215	7025	12.0	12.0	9.0	9.0	12.0
802.11ax HE160	207	6985	12.0	12.0	12.0	12.0	15.0
802.11be HE20	189	6895	5.7	5.7	2.7	2.7	5.7
	193	6915	5.7	5.7	2.7	2.7	5.7
	197	6935	5.7	5.7	2.7	2.7	5.7
	201	6955	5.7	5.7	2.7	2.7	5.7
	205	6975	5.7	5.7	2.7	2.7	5.7
	209	6995	5.7	5.7	2.7	2.7	5.7
	213	7015	5.7	5.7	2.7	2.7	5.7
	217	7035	5.7	5.7	2.7	2.7	5.7
	221	7055	5.7	5.7	2.7	2.7	5.7
	225	7075	5.7	5.7	2.7	2.7	5.7
	229	7095	5.7	5.7	2.7	2.7	5.7
	233	7115	5.7	5.7	2.7	2.7	5.7
802.11be HE40	195	6925	8.8	8.8	5.8	5.8	8.8
	203	6965	8.8	8.8	5.8	5.8	8.8
	211	7005	8.8	8.8	5.8	5.8	8.8
	219	7045	8.8	8.8	5.8	5.8	8.8
	227	7085	8.8	8.8	5.8	5.8	8.8
802.11be HE80	199	6945	12.0	12.0	12.0	12.0	15.0
	215	7025	12.0	12.0	12.0	12.0	15.0
802.11be HE160	207	6985	12.0	12.0	12.0	12.0	15.0
802.11be HE320	191	6905	12.0	12.0	12.0	12.0	15.0

WCDMA Max. Tune-up Power (Reduction)		
Mode	RMC 12.2K	HSDPA DC-HSDPA HSUPA
	Maximum Target Power	Maximum Target Power
WCDMA Band II	18.5	18.5
WCDMA Band IV	18.5	18.5

LTE Max. Tune-up Power (Reduction)			
Mode	QPSK	16QAM	64QAM
	Maximum Target Power	Maximum Target Power	Maximum Target Power
LTE 2	16.5	15.5	14.5
LTE 4	16.0	15.0	14.0
LTE 5	22.0	21.0	20.0
LTE 7	19.0	18.0	17.0
LTE 12	21.5	20.5	19.5
LTE 13	20.5	19.5	18.5
LTE 14	20.5	19.5	18.5
LTE 17	21.5	20.5	19.5
LTE 25	16.5	15.5	14.5
LTE 26	22.0	21.0	20.0
LTE 30	20.5	19.5	18.5
LTE 38	21.0	20.0	19.0
LTE 41	21.0	20.0	19.0
LTE 48	21.5	20.5	19.5
LTE 66	16.0	15.0	14.0
LTE 71	23.5	22.5	21.5

Appendix E. Measured Conducted Power Result

The measuring conducted power (Unit: dBm) are shown as below.

WCDMA Conducted Power (Full)									
Band	WCDMA II			WCDMA IV			WCDMA V		
TX Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233
Rx Channel	9662	9800	9938	1537	1638	1738	4357	4407	4458
Frequency	1852.4	1880	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6
RMC 12.2K	24.12	24.19	24.17	24.12	24.20	24.16	24.30	24.11	23.97
HSDPA Subtest-1	23.15	23.31	23.52	23.07	23.10	23.21	23.12	23.11	23.10
HSDPA Subtest-2	23.12	23.30	23.47	23.05	23.12	23.19	23.13	23.10	23.06
HSDPA Subtest-3	22.63	22.86	22.81	22.56	22.67	22.67	22.62	22.52	22.51
HSDPA Subtest-4	22.57	22.79	22.79	22.62	22.65	22.57	22.59	22.59	22.54
DC-HSDPA Subtest-1	23.05	23.16	23.33	22.87	22.90	23.04	23.00	22.92	22.92
DC-HSDPA Subtest-2	22.92	23.16	23.30	22.88	22.92	23.04	22.97	22.98	22.90
DC-HSDPA Subtest-3	22.46	22.68	22.66	22.44	22.47	22.57	22.45	22.36	22.38
DC-HSDPA Subtest-4	22.47	22.60	22.67	22.42	22.50	22.40	22.41	22.48	22.36
HSUPA Subtest-1	23.07	23.10	23.15	23.05	23.07	23.10	23.45	23.37	23.42
HSUPA Subtest-2	21.19	21.16	21.19	21.01	21.03	21.11	21.46	21.45	21.41
HSUPA Subtest-3	22.01	22.07	22.07	21.96	21.91	21.98	22.33	22.29	22.25
HSUPA Subtest-4	21.11	21.10	21.15	21.05	21.05	21.12	21.47	21.45	21.37
HSUPA Subtest-5	22.99	23.00	23.02	22.99	23.02	23.02	23.37	23.30	23.37
HSPA+ Subtest-1	20.66	20.50	20.69	20.49	20.41	20.58	20.98	20.89	20.76

LTE Conducted Power (Full)							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	23.47	23.71	23.51	0
		1	50	23.42	23.69	23.45	0
		1	99	23.25	23.61	23.26	0
		50	0	22.47	22.85	22.53	1
		50	25	22.45	22.83	22.49	1
		50	50	22.33	22.80	22.36	1
		100	0	22.55	22.82	22.55	1
20M	16QAM	1	0	22.66	22.91	22.67	1
		1	50	22.44	22.77	22.46	1
		1	99	22.49	22.85	22.59	1
		50	0	21.46	21.89	21.47	2
		50	25	21.23	21.85	21.29	2
		50	50	21.57	21.86	21.67	2
		100	0	21.35	21.80	21.40	2
20M	64QAM	1	0	20.41	20.85	20.50	2
		1	50	21.33	21.91	21.42	2
		1	99	21.51	21.89	21.56	2
		50	0	20.59	20.86	20.67	3
		50	25	20.57	20.89	20.65	3
		50	50	20.63	20.80	20.63	3
		100	0	20.56	20.87	20.57	3
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	23.44	23.66	23.47	0
		1	37	23.34	23.62	23.40	0
		1	74	23.17	23.60	23.22	0
		36	0	22.42	22.75	22.53	1
		36	19	22.38	22.79	22.43	1
		36	39	22.28	22.72	22.28	1
		75	0	22.45	22.73	22.50	1
15M	16QAM	1	0	22.62	22.88	22.58	1
		1	37	22.42	22.68	22.38	1
		1	74	22.42	22.77	22.55	1
		36	0	21.40	21.80	21.37	2
		36	19	21.13	21.84	21.21	2
		36	39	21.47	21.77	21.66	2
		75	0	21.34	21.73	21.34	2
15M	64QAM	1	0	20.35	20.81	20.42	2
		1	37	21.28	21.90	21.37	2
		1	74	21.48	21.80	21.55	2
		36	0	20.57	20.77	20.59	3
		36	19	20.54	20.85	20.60	3
		36	39	20.54	20.74	20.57	3
		75	0	20.52	20.84	20.47	3

LTE Conducted Power (Full)							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	23.33	23.64	23.46	0
		1	24	23.24	23.62	23.30	0
		1	49	23.00	23.48	23.02	0
		25	0	22.25	22.69	22.38	1
		25	12	22.26	22.75	22.33	1
		25	25	22.15	22.68	22.24	1
		50	0	22.34	22.70	22.43	1
10M	16QAM	1	0	22.49	22.82	22.46	1
		1	24	22.26	22.62	22.30	1
		1	49	22.48	22.74	22.50	1
		25	0	21.41	21.70	21.25	2
		25	12	21.00	21.70	21.13	2
		25	25	21.44	21.61	21.59	2
		50	0	21.22	21.63	21.29	2
10M	64QAM	1	0	20.20	20.70	20.42	2
		1	24	21.18	21.86	21.34	2
		1	49	21.40	21.69	21.46	2
		25	0	20.55	20.78	20.60	3
		25	12	20.42	20.87	20.55	3
		25	25	20.46	20.71	20.45	3
		50	0	20.49	20.77	20.57	3
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	23.39	23.65	23.25	0
		1	12	23.34	23.68	23.28	0
		1	24	23.19	23.44	23.13	0
		12	0	22.37	22.65	22.42	1
		12	6	22.21	22.68	22.30	1
		12	13	22.16	22.70	22.16	1
		25	0	22.49	22.66	22.38	1
5M	16QAM	1	0	22.59	22.84	22.65	1
		1	12	22.38	22.66	22.36	1
		1	24	22.36	22.71	22.46	1
		12	0	21.35	21.78	21.22	2
		12	6	21.11	21.72	21.13	2
		12	13	21.53	21.66	21.48	2
		25	0	21.19	21.61	21.36	2
5M	64QAM	1	0	20.24	20.75	20.36	2
		1	12	21.27	21.71	21.35	2
		1	24	21.37	21.74	21.45	2
		12	0	20.54	20.73	20.50	3
		12	6	20.50	20.67	20.54	3
		12	13	20.52	20.67	20.45	3
		25	0	20.33	20.74	20.40	3

LTE Conducted Power (Full)							
LTE Band 2							
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	23.35	23.61	23.34	0
		1	7	23.29	23.57	23.28	0
		1	14	23.04	23.42	23.09	0
		8	0	22.36	22.81	22.41	1
		8	3	22.33	22.78	22.37	1
		8	7	22.18	22.63	22.25	1
		15	0	22.44	22.63	22.40	1
3M	16QAM	1	0	22.57	22.72	22.57	1
		1	7	22.21	22.63	22.35	1
		1	14	22.39	22.75	22.51	1
		8	0	21.37	21.85	21.35	2
		8	3	21.01	21.67	21.17	2
		8	7	21.37	21.72	21.61	2
		15	0	21.33	21.71	21.16	2
3M	64QAM	1	0	20.30	20.77	20.42	2
		1	7	21.18	21.83	21.18	2
		1	14	21.30	21.69	21.46	2
		8	0	20.52	20.73	20.50	3
		8	3	20.44	20.82	20.61	3
		8	7	20.45	20.65	20.54	3
		15	0	20.52	20.74	20.45	3
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		1850.7	1880	1909.3	
1.4M	QPSK	1	0	23.37	23.57	23.32	0
		1	2	23.35	23.54	23.37	0
		1	5	23.16	23.44	23.06	0
		3	0	23.31	23.59	23.34	0
		3	1	23.36	23.67	23.48	0
		3	3	23.28	23.60	23.18	0
		6	0	22.43	22.77	22.46	1
1.4M	16QAM	1	0	22.49	22.70	22.64	1
		1	2	22.37	22.74	22.22	1
		1	5	22.40	22.75	22.39	1
		3	0	22.21	22.72	22.33	1
		3	1	22.11	22.77	22.16	1
		3	3	22.42	22.76	22.58	1
		6	0	21.20	21.61	21.28	2
1.4M	64QAM	1	0	20.39	20.75	20.46	2
		1	2	21.28	21.84	21.21	2
		1	5	21.44	21.81	21.42	2
		3	0	21.54	21.75	21.62	2
		3	1	21.39	21.77	21.48	2
		3	3	21.46	21.60	21.58	2
		6	0	20.35	20.66	20.42	3

LTE Conducted Power (Full)							
LTE Band 4							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	23.41	23.46	23.42	0
		1	50	23.31	23.41	23.39	0
		1	99	23.32	23.36	23.34	0
		50	0	22.48	22.59	22.49	1
		50	25	22.31	22.57	22.35	1
		50	50	22.38	22.49	22.43	1
		100	0	22.48	22.55	22.52	1
20M	16QAM	1	0	22.73	22.79	22.79	1
		1	50	22.55	22.70	22.62	1
		1	99	22.62	22.67	22.65	1
		50	0	21.43	21.57	21.51	2
		50	25	21.40	21.56	21.46	2
		50	50	21.34	21.53	21.43	2
		100	0	21.39	21.49	21.48	2
20M	64QAM	1	0	21.63	21.72	21.71	2
		1	50	21.61	21.69	21.65	2
		1	99	21.59	21.61	21.60	2
		50	0	20.48	20.57	20.51	3
		50	25	20.47	20.55	20.47	3
		50	50	20.39	20.49	20.43	3
		100	0	20.47	20.56	20.49	3
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
15M	QPSK	1	0	23.34	23.40	23.38	0
		1	37	23.23	23.37	23.30	0
		1	74	23.27	23.26	23.29	0
		36	0	22.41	22.54	22.44	1
		36	19	22.44	22.54	22.45	1
		36	39	22.37	22.40	22.34	1
		75	0	22.47	22.50	22.49	1
15M	16QAM	1	0	22.63	22.76	22.78	1
		1	37	22.45	22.65	22.56	1
		1	74	22.54	22.60	22.55	1
		36	0	21.34	21.56	21.50	2
		36	19	21.33	21.48	21.36	2
		36	39	21.27	21.51	21.33	2
		75	0	21.34	21.40	21.41	2
15M	64QAM	1	0	21.59	21.69	21.70	2
		1	37	21.57	21.66	21.62	2
		1	74	21.53	21.53	21.58	2
		36	0	20.42	20.56	20.50	3
		36	19	20.45	20.49	20.45	3
		36	39	20.39	20.49	20.38	3
		75	0	20.40	20.56	20.43	3

LTE Conducted Power (Full)							
LTE Band 4							
BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	23.29	23.33	23.31	0
		1	24	23.26	23.24	23.27	0
		1	49	23.23	23.23	23.29	0
		25	0	22.26	22.41	22.44	1
		25	12	22.40	22.48	22.31	1
		25	25	22.17	22.45	22.26	1
		50	0	22.37	22.35	22.42	1
10M	16QAM	1	0	22.54	22.64	22.73	1
		1	24	22.45	22.54	22.54	1
		1	49	22.52	22.61	22.44	1
		25	0	21.26	21.56	21.32	2
		25	12	21.34	21.45	21.34	2
		25	25	21.27	21.40	21.39	2
		50	0	21.32	21.40	21.35	2
10M	64QAM	1	0	21.42	21.64	21.59	2
		1	24	21.48	21.68	21.47	2
		1	49	21.50	21.50	21.47	2
		25	0	20.37	20.38	20.45	3
		25	12	20.35	20.48	20.27	3
		25	25	20.21	20.49	20.26	3
		50	0	20.27	20.39	20.39	3
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	23.18	23.25	23.23	0
		1	12	23.24	23.33	23.20	0
		1	24	23.22	23.26	23.08	0
		12	0	22.44	22.49	22.26	1
		12	6	22.34	22.45	22.15	1
		12	13	22.24	22.28	22.28	1
		25	0	22.39	22.41	22.35	1
5M	16QAM	1	0	22.57	22.64	22.54	1
		1	12	22.42	22.55	22.52	1
		1	24	22.53	22.66	22.54	1
		12	0	21.20	21.43	21.38	2
		12	6	21.27	21.43	21.39	2
		12	13	21.12	21.40	21.22	2
		25	0	21.20	21.39	21.32	2
5M	64QAM	1	0	21.53	21.64	21.61	2
		1	12	21.44	21.57	21.46	2
		1	24	21.49	21.45	21.52	2
		12	0	20.39	20.37	20.41	3
		12	6	20.32	20.47	20.34	3
		12	13	20.34	20.37	20.25	3
		25	0	20.36	20.42	20.39	3

LTE Conducted Power (Full)							
LTE Band 4							
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	23.27	23.33	23.35	0
		1	7	23.26	23.29	23.21	0
		1	14	23.20	23.29	23.31	0
		8	0	22.44	22.50	22.30	1
		8	3	22.36	22.56	22.41	1
		8	7	22.21	22.31	22.39	1
		15	0	22.28	22.34	22.35	1
3M	16QAM	1	0	22.62	22.63	22.63	1
		1	7	22.49	22.55	22.52	1
		1	14	22.53	22.57	22.61	1
		8	0	21.30	21.43	21.39	2
		8	3	21.19	21.46	21.26	2
		8	7	21.25	21.43	21.27	2
		15	0	21.17	21.37	21.39	2
3M	64QAM	1	0	21.58	21.64	21.55	2
		1	7	21.42	21.51	21.46	2
		1	14	21.50	21.37	21.38	2
		8	0	20.46	20.34	20.28	3
		8	3	20.41	20.32	20.37	3
		8	7	20.22	20.39	20.28	3
		15	0	20.34	20.41	20.38	3
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
		Frequency (MHz)		1710.7	1732.5	1754.3	
1.4M	QPSK	1	0	23.33	23.32	23.35	0
		1	2	23.14	23.28	23.27	0
		1	5	23.22	23.23	23.19	0
		3	0	23.38	23.42	23.40	0
		3	1	23.38	23.42	23.40	0
		3	3	23.21	23.28	23.35	0
		6	0	22.35	22.34	22.30	1
1.4M	16QAM	1	0	22.56	22.69	22.71	1
		1	2	22.52	22.62	22.47	1
		1	5	22.43	22.49	22.52	1
		3	0	22.30	22.45	22.44	1
		3	1	22.24	22.35	22.34	1
		3	3	22.12	22.51	22.37	1
		6	0	21.30	21.44	21.35	2
1.4M	64QAM	1	0	21.53	21.56	21.58	2
		1	2	21.46	21.49	21.57	2
		1	5	21.47	21.41	21.53	2
		3	0	21.25	21.35	21.43	2
		3	1	21.41	21.35	21.35	2
		3	3	21.15	21.42	21.33	2
		6	0	20.28	20.39	20.37	3

LTE Conducted Power (Full)							
LTE Band 5							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600	
		Frequency (MHz)		829	836.5	844	
10M	QPSK	1	0	23.92	23.72	23.62	0
		1	24	23.82	23.66	23.56	0
		1	49	23.69	23.64	23.59	0
		25	0	22.90	22.79	22.64	1
		25	12	22.80	22.70	22.55	1
		25	25	22.73	22.61	22.57	1
		50	0	22.77	22.67	22.56	1
10M	16QAM	1	0	23.27	23.13	23.05	1
		1	24	23.12	22.97	22.82	1
		1	49	22.90	22.78	22.65	1
		25	0	21.91	21.85	21.81	2
		25	12	21.80	21.76	21.67	2
		25	25	21.77	21.72	21.72	2
		50	0	21.82	21.79	21.63	2
10M	64QAM	1	0	22.09	21.93	21.77	2
		1	24	21.97	21.96	21.75	2
		1	49	21.90	21.89	21.79	2
		25	0	20.92	20.88	20.75	3
		25	12	20.89	20.74	20.66	3
		25	25	20.77	20.60	20.50	3
		50	0	20.81	20.70	20.70	3
BW	MCS Index	Channel		20425	20525	20625	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	QPSK	1	0	23.88	23.67	23.53	0
		1	12	23.82	23.63	23.50	0
		1	24	23.62	23.61	23.50	0
		12	0	22.87	22.79	22.64	1
		12	6	22.70	22.69	22.51	1
		12	13	22.69	22.55	22.51	1
		25	0	22.68	22.64	22.47	1
5M	16QAM	1	0	23.20	23.04	23.04	1
		1	12	23.08	22.96	22.72	1
		1	24	22.86	22.68	22.62	1
		12	0	21.89	21.84	21.75	2
		12	6	21.72	21.72	21.66	2
		12	13	21.67	21.65	21.72	2
		25	0	21.78	21.79	21.58	2
5M	64QAM	1	0	22.09	21.85	21.75	2
		1	12	21.91	21.86	21.69	2
		1	24	21.89	21.85	21.75	2
		12	0	20.92	20.88	20.66	3
		12	6	20.86	20.72	20.58	3
		12	13	20.70	20.56	20.44	3
		25	0	20.76	20.69	20.69	3

LTE Conducted Power (Full)							
LTE Band 5							
BW	MCS Index	Channel		20415	20525	20635	3GPP MPR
		Frequency (MHz)		825.5	836.5	847.5	
3M	QPSK	1	0	23.86	23.68	23.61	0
		1	7	23.75	23.64	23.51	0
		1	14	23.64	23.58	23.50	0
		8	0	22.87	22.78	22.61	1
		8	3	22.76	22.69	22.53	1
		8	7	22.64	22.58	22.50	1
		15	0	22.74	22.65	22.54	1
3M	16QAM	1	0	23.25	23.03	22.98	1
		1	7	23.06	22.91	22.73	1
		1	14	22.86	22.75	22.62	1
		8	0	21.82	21.77	21.71	2
		8	3	21.76	21.71	21.65	2
		8	7	21.75	21.64	21.67	2
		15	0	21.77	21.72	21.53	2
3M	64QAM	1	0	22.07	21.89	21.67	2
		1	7	21.95	21.86	21.72	2
		1	14	21.87	21.87	21.77	2
		8	0	20.92	20.83	20.65	3
		8	3	20.82	20.68	20.59	3
		8	7	20.72	20.51	20.43	3
		15	0	20.73	20.64	20.67	3
BW	MCS Index	Channel		20407	20525	20643	3GPP MPR
		Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	23.79	23.70	23.48	0
		1	2	23.63	23.57	23.34	0
		1	5	23.51	23.60	23.53	0
		3	0	22.78	22.76	22.51	0
		3	1	22.70	22.68	22.46	0
		3	3	22.61	22.56	22.54	0
		6	0	22.74	22.56	22.47	1
1.4M	16QAM	1	0	23.22	23.09	23.03	1
		1	2	23.03	22.95	22.72	1
		1	5	22.82	22.71	22.54	1
		3	0	21.73	21.85	21.74	1
		3	1	21.78	21.66	21.53	1
		3	3	21.77	21.54	21.57	1
		6	0	21.72	21.66	21.49	2
1.4M	64QAM	1	0	21.99	21.79	21.72	2
		1	2	21.77	21.80	21.63	2
		1	5	21.80	21.88	21.62	2
		3	0	20.75	20.74	20.56	2
		3	1	20.75	20.62	20.48	2
		3	3	20.57	20.46	20.47	2
		6	0	20.57	20.69	20.51	3

LTE Conducted Power (Full)							
LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	23.50	23.52	23.55	0
		1	50	23.27	23.37	23.42	0
		1	99	23.33	23.41	23.47	0
		50	0	22.61	22.66	22.67	1
		50	25	22.49	22.56	22.65	1
		50	50	22.48	22.57	22.57	1
		100	0	22.55	22.59	22.66	1
20M	16QAM	1	0	22.75	22.77	22.77	1
		1	50	22.54	22.62	22.72	1
		1	99	22.55	22.57	22.67	1
		50	0	21.52	21.56	21.66	2
		50	25	21.59	21.62	21.65	2
		50	50	21.49	21.49	21.59	2
		100	0	21.50	21.55	21.62	2
20M	64QAM	1	0	21.57	21.62	21.66	2
		1	50	21.55	21.61	21.63	2
		1	99	21.53	21.59	21.61	2
		50	0	20.66	20.71	20.77	3
		50	25	20.52	20.60	20.69	3
		50	50	20.39	20.47	20.52	3
		100	0	20.50	20.52	20.59	3
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	23.42	23.49	23.50	0
		1	37	23.21	23.28	23.37	0
		1	74	23.23	23.31	23.38	0
		36	0	22.61	22.63	22.58	1
		36	19	22.47	22.47	22.57	1
		36	39	22.39	22.49	22.55	1
		75	0	22.54	22.49	22.58	1
15M	16QAM	1	0	22.70	22.71	22.68	1
		1	37	22.48	22.56	22.67	1
		1	74	22.50	22.48	22.57	1
		36	0	21.47	21.46	21.63	2
		36	19	21.55	21.60	21.64	2
		36	39	21.41	21.43	21.51	2
		75	0	21.43	21.55	21.59	2
15M	64QAM	1	0	21.49	21.60	21.56	2
		1	37	21.52	21.59	21.57	2
		1	74	21.47	21.50	21.61	2
		36	0	20.58	20.61	20.72	3
		36	19	20.42	20.55	20.63	3
		36	39	20.37	20.38	20.47	3
		75	0	20.45	20.51	20.55	3

LTE Conducted Power (Full)							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	23.30	23.46	23.34	0
		1	24	23.12	23.23	23.30	0
		1	49	23.18	23.29	23.34	0
		25	0	22.50	22.51	22.51	1
		25	12	22.44	22.43	22.43	1
		25	25	22.34	22.54	22.49	1
		50	0	22.44	22.44	22.47	1
10M	16QAM	1	0	22.59	22.64	22.68	1
		1	24	22.44	22.53	22.70	1
		1	49	22.40	22.40	22.51	1
		25	0	21.52	21.41	21.49	2
		25	12	21.34	21.45	21.45	2
		25	25	21.40	21.38	21.53	2
		50	0	21.28	21.38	21.43	2
10M	64QAM	1	0	21.52	21.43	21.57	2
		1	24	21.41	21.53	21.44	2
		1	49	21.42	21.46	21.58	2
		25	0	20.53	20.60	20.58	3
		25	12	20.49	20.48	20.63	3
		25	25	20.21	20.32	20.36	3
		50	0	20.42	20.29	20.44	3
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	23.30	23.41	23.27	0
		1	12	23.12	23.19	23.36	0
		1	24	23.10	23.33	23.40	0
		12	0	22.45	22.53	22.44	1
		12	6	22.41	22.51	22.45	1
		12	13	22.42	22.47	22.37	1
		25	0	22.34	22.43	22.49	1
5M	16QAM	1	0	22.69	22.59	22.62	1
		1	12	22.38	22.37	22.66	1
		1	24	22.48	22.50	22.57	1
		12	0	21.45	21.45	21.52	2
		12	6	21.52	21.46	21.50	2
		12	13	21.40	21.42	21.56	2
		25	0	21.45	21.42	21.44	2
5M	64QAM	1	0	21.46	21.48	21.45	2
		1	12	21.50	21.52	21.49	2
		1	24	21.48	21.42	21.37	2
		12	0	20.58	20.56	20.67	3
		12	6	20.27	20.52	20.57	3
		12	13	20.33	20.22	20.45	3
		25	0	20.33	20.52	20.52	3

LTE Conducted Power (Full)							
LTE Band 12							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130	
		Frequency (MHz)		704	707.5	711	
10M	QPSK	1	0	24.15	24.39	24.42	0
		1	24	24.09	24.36	24.37	0
		1	49	24.02	24.29	24.39	0
		25	0	22.37	22.53	22.59	1
		25	12	22.35	22.51	22.56	1
		25	25	22.37	22.49	22.57	1
		50	0	22.41	22.56	22.61	1
10M	16QAM	1	0	22.51	22.62	22.72	1
		1	24	22.62	22.67	22.69	1
		1	49	22.61	22.73	22.80	1
		25	0	21.33	21.54	21.63	2
		25	12	21.41	21.55	21.59	2
		25	25	21.33	21.53	21.62	2
		50	0	21.45	21.56	21.57	2
10M	64QAM	1	0	21.41	21.55	21.56	2
		1	24	21.33	21.52	21.59	2
		1	49	21.53	21.71	21.77	2
		25	0	20.42	20.57	20.59	3
		25	12	20.49	20.61	20.66	3
		25	25	20.37	20.60	20.67	3
		50	0	20.39	20.57	20.65	3
BW	MCS Index	Channel		23035	23095	23155	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	QPSK	1	0	24.15	24.31	24.40	0
		1	12	24.01	24.26	24.31	0
		1	24	23.93	24.23	24.36	0
		12	0	22.36	22.48	22.51	1
		12	6	22.32	22.41	22.56	1
		12	13	22.32	22.39	22.49	1
		25	0	22.41	22.52	22.55	1
5M	16QAM	1	0	22.51	22.53	22.65	1
		1	12	22.56	22.67	22.62	1
		1	24	22.54	22.70	22.74	1
		12	0	21.32	21.53	21.55	2
		12	6	21.36	21.53	21.56	2
		12	13	21.28	21.45	21.57	2
		25	0	21.44	21.46	21.47	2
5M	64QAM	1	0	21.31	21.49	21.48	2
		1	12	21.30	21.46	21.49	2
		1	24	21.52	21.63	21.74	2
		12	0	20.37	20.57	20.59	3
		12	6	20.40	20.58	20.63	3
		12	13	20.33	20.51	20.63	3
		25	0	20.39	20.51	20.55	3

LTE Conducted Power (Full)							
LTE Band 12							
BW	MCS Index	Channel		23025	23095	23165	3GPP MPR
		Frequency (MHz)		700.5	707.5	714.5	
3M	QPSK	1	0	23.98	24.31	24.39	0
		1	7	23.96	24.29	24.29	0
		1	14	23.96	24.07	24.25	0
		8	0	22.23	22.51	22.44	1
		8	3	22.25	22.33	22.41	1
		8	7	22.27	22.44	22.38	1
		15	0	22.22	22.38	22.53	1
3M	16QAM	1	0	22.36	22.49	22.57	1
		1	7	22.49	22.57	22.62	1
		1	14	22.39	22.61	22.64	1
		8	0	21.17	21.44	21.52	2
		8	3	21.33	21.41	21.57	2
		8	7	21.20	21.46	21.55	2
		15	0	21.40	21.44	21.45	2
3M	64QAM	1	0	21.21	21.37	21.36	2
		1	7	21.19	21.36	21.55	2
		1	14	21.42	21.54	21.66	2
		8	0	20.39	20.36	20.44	3
		8	3	20.46	20.56	20.63	3
		8	7	20.22	20.51	20.53	3
		15	0	20.25	20.56	20.53	3
BW	MCS Index	Channel		23017	23095	23173	3GPP MPR
		Frequency (MHz)		699.7	707.5	715.3	
1.4M	QPSK	1	0	23.98	24.21	24.41	0
		1	2	23.89	24.25	24.19	0
		1	5	23.88	24.16	24.35	0
		3	0	23.32	23.41	23.51	0
		3	1	23.18	23.36	23.47	0
		3	3	23.32	23.39	23.35	0
		6	0	22.36	22.42	22.53	1
1.4M	16QAM	1	0	22.37	22.51	22.59	1
		1	2	22.45	22.53	22.48	1
		1	5	22.37	22.55	22.62	1
		3	0	22.29	22.45	22.60	1
		3	1	22.31	22.38	22.43	1
		3	3	22.29	22.50	22.41	1
		6	0	21.39	21.36	21.41	2
1.4M	64QAM	1	0	21.28	21.46	21.45	2
		1	2	21.21	21.49	21.46	2
		1	5	21.39	21.57	21.60	2
		3	0	21.33	21.43	21.44	2
		3	1	21.49	21.52	21.48	2
		3	3	21.21	21.43	21.53	2
		6	0	20.26	20.47	20.57	3

LTE Conducted Power (Full)							
LTE Band 13							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23230		
		Frequency (MHz)			782		
10M	QPSK	1	0		24.25		0
		1	24		24.22		0
		1	49		24.21		0
		25	0		23.40		1
		25	12		23.32		1
		25	25		23.27		1
		50	0		23.35		1
10M	16QAM	1	0		23.32		1
		1	24		23.37		1
		1	49		23.42		1
		25	0		22.39		2
		25	12		22.35		2
		25	25		22.29		2
		50	0		22.32		2
10M	64QAM	1	0		22.42		2
		1	24		22.41		2
		1	49		22.39		2
		25	0		21.37		3
		25	12		21.40		3
		25	25		21.25		3
		50	0		21.33		3
BW	MCS Index	Channel		23205	23230	23255	3GPP MPR
		Frequency (MHz)		779.5	782	784.5	
5M	QPSK	1	0	24.09	24.16	24.17	0
		1	12	24.03	24.15	24.08	0
		1	24	24.05	24.16	24.17	0
		12	0	23.23	23.38	23.32	1
		12	6	23.16	23.22	23.22	1
		12	13	23.11	23.25	23.13	1
		25	0	23.20	23.28	23.26	1
5M	16QAM	1	0	23.16	23.27	23.13	1
		1	12	23.26	23.36	23.25	1
		1	24	23.27	23.34	23.32	1
		12	0	22.20	22.30	22.33	2
		12	6	22.21	22.25	22.30	2
		12	13	22.05	22.20	22.14	2
		25	0	22.25	22.29	22.18	2
5M	64QAM	1	0	22.21	22.37	22.37	2
		1	12	22.25	22.31	22.29	2
		1	24	22.26	22.39	22.29	2
		12	0	21.17	21.35	21.21	3
		12	6	21.26	21.35	21.32	3
		12	13	21.14	21.22	21.10	3
		25	0	21.19	21.30	21.21	3

LTE Conducted Power (Full)							
LTE Band 14							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		24.29		0
		1	24		24.25		0
		1	49		24.26		0
		25	0		23.37		1
		25	12		23.35		1
		25	25		23.32		1
		50	0		23.36		1
10M	16QAM	1	0		23.42		1
		1	24		23.40		1
		1	49		23.39		1
		25	0		22.40		2
		25	12		22.39		2
		25	25		22.32		2
		50	0		22.35		2
10M	64QAM	1	0		22.41		2
		1	24		22.39		2
		1	49		22.40		2
		25	0		21.41		3
		25	12		21.33		3
		25	25		21.30		3
		50	0		21.35		3
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	24.11	24.22	24.12	0
		1	12	24.11	24.24	24.16	0
		1	24	24.16	24.22	24.23	0
		12	0	23.17	23.30	23.20	1
		12	6	23.17	23.35	23.25	1
		12	13	23.26	23.26	23.26	1
		25	0	23.18	23.28	23.24	1
5M	16QAM	1	0	23.33	23.34	23.33	1
		1	12	23.30	23.35	23.23	1
		1	24	23.25	23.37	23.28	1
		12	0	22.19	22.32	22.25	2
		12	6	22.21	22.31	22.23	2
		12	13	22.19	22.23	22.28	2
		25	0	22.13	22.35	22.17	2
5M	64QAM	1	0	22.27	22.32	22.31	2
		1	12	22.30	22.37	22.22	2
		1	24	22.26	22.38	22.36	2
		12	0	21.21	21.35	21.23	3
		12	6	21.22	21.23	21.21	3
		12	13	21.12	21.26	21.13	3
		25	0	21.20	21.26	21.18	3

LTE Conducted Power (Full)							
LTE Band 17							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23780	23790	23800	
		Frequency (MHz)		709	710	711	
10M	QPSK	1	0	24.35	24.42	24.41	0
		1	24	24.30	24.41	24.34	0
		1	49	24.30	24.39	24.31	0
		25	0	22.58	22.72	22.67	1
		25	12	22.39	22.59	22.49	1
		25	25	22.54	22.65	22.64	1
		50	0	22.47	22.57	22.54	1
10M	16QAM	1	0	22.61	22.77	22.68	1
		1	24	22.67	22.75	22.74	1
		1	49	22.73	22.83	22.76	1
		25	0	21.67	21.72	21.67	2
		25	12	21.65	21.69	21.68	2
		25	25	21.54	21.63	21.55	2
		50	0	21.37	21.56	21.47	2
10M	64QAM	1	0	21.61	21.72	21.63	2
		1	24	21.64	21.71	21.70	2
		1	49	21.80	21.83	21.80	2
		25	0	20.57	20.67	20.58	3
		25	12	20.51	20.61	20.51	3
		25	25	20.56	20.69	20.60	3
		50	0	20.50	20.56	20.51	3
BW	MCS Index	Channel		23755	23790	23825	3GPP MPR
		Frequency (MHz)		706.5	710	713.5	
5M	QPSK	1	0	24.35	24.34	24.40	0
		1	12	24.28	24.31	24.33	0
		1	24	24.26	24.29	24.28	0
		12	0	22.49	22.66	22.63	1
		12	6	22.30	22.56	22.42	1
		12	13	22.47	22.61	22.60	1
		25	0	22.37	22.50	22.53	1
5M	16QAM	1	0	22.60	22.77	22.62	1
		1	12	22.64	22.73	22.69	1
		1	24	22.65	22.76	22.73	1
		12	0	21.64	21.68	21.60	2
		12	6	21.56	21.68	21.64	2
		12	13	21.52	21.63	21.53	2
		25	0	21.36	21.49	21.45	2
5M	64QAM	1	0	21.53	21.65	21.57	2
		1	12	21.56	21.68	21.69	2
		1	24	21.77	21.80	21.70	2
		12	0	20.57	20.64	20.57	3
		12	6	20.42	20.53	20.47	3
		12	13	20.53	20.68	20.60	3
		25	0	20.49	20.49	20.41	3

LTE Conducted Power (Full)							
LTE Band 25							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590	
		Frequency (MHz)		1860	1882.5	1905	
20M	QPSK	1	0	23.51	23.42	23.32	0
		1	50	23.46	23.41	23.29	0
		1	99	23.47	23.36	23.27	0
		50	0	22.69	22.59	22.47	1
		50	25	22.57	22.56	22.40	1
		50	50	22.59	22.55	22.36	1
		100	0	22.64	22.57	22.41	1
20M	16QAM	1	0	22.76	22.70	22.52	1
		1	50	22.85	22.77	22.65	1
		1	99	22.65	22.62	22.52	1
		50	0	21.67	21.57	21.48	2
		50	25	21.73	21.62	21.56	2
		50	50	21.75	21.65	21.52	2
		100	0	21.67	21.61	21.49	2
20M	64QAM	1	0	21.72	21.67	21.52	2
		1	50	21.83	21.73	21.55	2
		1	99	21.77	21.69	21.69	2
		50	0	20.70	20.56	20.55	3
		50	25	20.73	20.59	20.46	3
		50	50	20.69	20.61	20.50	3
		100	0	20.66	20.57	20.51	3
BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	23.42	23.38	23.29	0
		1	37	23.42	23.40	23.23	0
		1	74	23.43	23.27	23.23	0
		36	0	22.68	22.50	22.47	1
		36	19	22.55	22.47	22.36	1
		36	39	22.49	22.49	22.28	1
		75	0	22.58	22.47	22.31	1
15M	16QAM	1	0	22.66	22.68	22.50	1
		1	37	22.76	22.71	22.63	1
		1	74	22.57	22.53	22.46	1
		36	0	21.67	21.47	21.46	2
		36	19	21.71	21.54	21.55	2
		36	39	21.65	21.62	21.43	2
		75	0	21.64	21.51	21.46	2
15M	64QAM	1	0	21.63	21.60	21.44	2
		1	37	21.80	21.65	21.50	2
		1	74	21.69	21.69	21.60	2
		36	0	20.60	20.49	20.55	3
		36	19	20.65	20.59	20.36	3
		36	39	20.60	20.53	20.49	3
		75	0	20.58	20.54	20.43	3

LTE Conducted Power (Full)							
LTE Band 25							
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	QPSK	1	0	23.38	23.31	23.24	0
		1	24	23.29	23.30	23.10	0
		1	49	23.29	23.16	23.20	0
		25	0	22.55	22.43	22.39	1
		25	12	22.52	22.53	22.37	1
		25	25	22.52	22.31	22.28	1
		50	0	22.56	22.53	22.28	1
10M	16QAM	1	0	22.71	22.62	22.39	1
		1	24	22.76	22.63	22.56	1
		1	49	22.46	22.53	22.42	1
		25	0	21.59	21.44	21.39	2
		25	12	21.59	21.48	21.51	2
		25	25	21.57	21.49	21.37	2
		50	0	21.49	21.43	21.41	2
10M	64QAM	1	0	21.47	21.53	21.49	2
		1	24	21.63	21.56	21.47	2
		1	49	21.61	21.51	21.58	2
		25	0	20.64	20.44	20.35	3
		25	12	20.70	20.43	20.31	3
		25	25	20.52	20.47	20.37	3
		50	0	20.52	20.44	20.45	3
BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	23.28	23.39	23.16	0
		1	12	23.35	23.32	22.99	0
		1	24	23.31	23.16	23.08	0
		12	0	22.54	22.45	22.31	1
		12	6	22.55	22.46	22.17	1
		12	13	22.43	22.36	22.12	1
		25	0	22.52	22.47	22.22	1
5M	16QAM	1	0	22.71	22.58	22.32	1
		1	12	22.70	22.69	22.46	1
		1	24	22.55	22.47	22.42	1
		12	0	21.67	21.41	21.28	2
		12	6	21.54	21.53	21.35	2
		12	13	21.73	21.54	21.41	2
		25	0	21.51	21.44	21.42	2
5M	64QAM	1	0	21.57	21.64	21.40	2
		1	12	21.70	21.71	21.44	2
		1	24	21.60	21.58	21.48	2
		12	0	20.59	20.38	20.52	3
		12	6	20.62	20.40	20.26	3
		12	13	20.53	20.55	20.32	3
		25	0	20.57	20.42	20.39	3

LTE Conducted Power (Full)							
LTE Band 25							
BW	MCS Index	Channel		26055	26365	26675	3GPP MPR
		Frequency (MHz)		1851.5	1882.5	1913.5	
3M	QPSK	1	0	23.45	23.31	23.14	0
		1	7	23.40	23.25	23.14	0
		1	14	23.35	23.22	23.07	0
		8	0	22.57	22.48	22.30	1
		8	3	22.34	22.32	22.32	1
		8	7	22.58	22.41	22.21	1
		15	0	22.49	22.41	22.29	1
3M	16QAM	1	0	22.60	22.45	22.37	1
		1	7	22.69	22.60	22.57	1
		1	14	22.52	22.47	22.38	1
		8	0	21.58	21.47	21.38	2
		8	3	21.66	21.53	21.36	2
		8	7	21.64	21.57	21.43	2
		15	0	21.60	21.42	21.44	2
3M	64QAM	1	0	21.64	21.58	21.47	2
		1	7	21.70	21.60	21.38	2
		1	14	21.63	21.50	21.52	2
		8	0	20.60	20.36	20.36	3
		8	3	20.68	20.36	20.29	3
		8	7	20.61	20.50	20.37	3
		15	0	20.60	20.39	20.42	3
BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		1850.7	1882.5	1914.3	
1.4M	QPSK	1	0	23.38	23.27	23.23	0
		1	2	23.28	23.31	23.10	0
		1	5	23.29	23.20	23.06	0
		3	0	23.31	23.39	23.31	0
		3	1	23.43	23.27	23.33	0
		3	3	23.41	23.41	23.26	0
		6	0	22.42	22.42	22.30	1
1.4M	16QAM	1	0	22.58	22.54	22.36	1
		1	2	22.70	22.77	22.58	1
		1	5	22.48	22.46	22.40	1
		3	0	22.47	22.43	22.32	1
		3	1	22.57	22.55	22.44	1
		3	3	22.66	22.52	22.37	1
		6	0	21.63	21.54	21.38	2
1.4M	64QAM	1	0	21.56	21.54	21.33	2
		1	2	21.68	21.55	21.45	2
		1	5	21.72	21.66	21.59	2
		3	0	21.53	21.40	21.39	2
		3	1	21.53	21.38	21.32	2
		3	3	21.67	21.45	21.34	2
		6	0	20.42	20.48	20.43	3

LTE Conducted Power (Full)							
LTE Band 26							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	23.89	23.90	23.77	0
		1	37	23.79	23.73	23.69	0
		1	74	23.72	23.63	23.54	0
		36	0	22.82	22.89	22.84	1
		36	19	22.87	22.77	22.77	1
		36	39	22.85	22.85	22.82	1
		75	0	22.86	22.87	22.73	1
15M	16QAM	1	0	23.16	23.12	23.02	1
		1	37	23.09	23.05	22.95	1
		1	74	23.00	22.92	22.88	1
		36	0	21.92	21.86	21.78	2
		36	19	21.87	21.83	21.81	2
		36	39	21.83	21.77	21.71	2
		75	0	21.86	21.80	21.77	2
15M	64QAM	1	0	21.92	21.90	21.84	2
		1	37	21.99	21.91	21.81	2
		1	74	21.92	21.87	21.85	2
		36	0	20.97	20.87	20.81	3
		36	19	20.92	20.91	20.83	3
		36	39	20.89	20.84	20.77	3
		75	0	20.86	20.82	20.82	3
BW	MCS Index	Channel		26740	26865	26990	3GPP MPR
		Frequency (MHz)		819	831.5	844	
10M	QPSK	1	0	23.89	23.85	23.76	0
		1	24	23.71	23.65	23.66	0
		1	49	23.63	23.54	23.51	0
		25	0	22.78	22.85	22.67	1
		25	12	22.87	22.77	22.71	1
		25	25	22.76	22.76	22.79	1
		50	0	22.85	22.80	22.64	1
10M	16QAM	1	0	23.12	23.06	22.94	1
		1	24	23.08	22.99	22.91	1
		1	49	22.98	22.87	22.79	1
		25	0	21.83	21.86	21.76	2
		25	12	21.84	21.73	21.73	2
		25	25	21.77	21.75	21.67	2
		50	0	21.80	21.78	21.69	2
10M	64QAM	1	0	21.86	21.88	21.80	2
		1	24	21.93	21.86	21.73	2
		1	49	21.85	21.80	21.82	2
		25	0	20.97	20.80	20.73	3
		25	12	20.87	20.89	20.75	3
		25	25	20.82	20.79	20.73	3
		50	0	20.81	20.75	20.82	3

LTE Conducted Power (Full)							
LTE Band 26							
BW	MCS Index	Channel		26715	26865	27015	3GPP MPR
		Frequency (MHz)		816.5	831.5	846.5	
5M	QPSK	1	0	23.74	23.76	23.54	0
		1	12	23.67	23.60	23.63	0
		1	24	23.67	23.39	23.38	0
		12	0	22.86	22.60	22.62	1
		12	6	22.74	22.70	22.67	1
		12	13	22.79	22.82	22.67	1
		25	0	22.80	22.67	22.53	1
5M	16QAM	1	0	22.97	23.03	22.86	1
		1	12	22.96	22.94	22.79	1
		1	24	22.83	22.81	22.72	1
		12	0	21.82	21.75	21.67	2
		12	6	21.68	21.75	21.66	2
		12	13	21.75	21.67	21.60	2
		25	0	21.73	21.76	21.67	2
5M	64QAM	1	0	21.81	21.76	21.69	2
		1	12	21.78	21.72	21.57	2
		1	24	21.84	21.65	21.73	2
		12	0	20.80	20.80	20.81	3
		12	6	20.87	20.78	20.77	3
		12	13	20.78	20.78	20.66	3
		25	0	20.80	20.61	20.57	3
BW	MCS Index	Channel		26705	26865	27025	3GPP MPR
		Frequency (MHz)		815.5	831.5	847.5	
3M	QPSK	1	0	23.91	23.83	23.60	0
		1	7	23.65	23.69	23.42	0
		1	14	23.53	23.53	23.33	0
		8	0	22.78	22.84	22.45	1
		8	3	22.66	22.77	22.63	1
		8	7	22.73	22.68	22.56	1
		15	0	22.74	22.59	22.39	1
3M	16QAM	1	0	22.99	22.99	22.99	1
		1	7	22.95	23.00	22.74	1
		1	14	22.99	22.77	22.74	1
		8	0	21.79	21.65	21.62	2
		8	3	21.82	21.61	21.73	2
		8	7	21.67	21.64	21.58	2
		15	0	21.83	21.70	21.68	2
3M	64QAM	1	0	21.78	21.79	21.77	2
		1	7	21.88	21.87	21.71	2
		1	14	21.79	21.79	21.78	2
		8	0	20.81	20.70	20.61	3
		8	3	20.89	20.86	20.70	3
		8	7	20.79	20.78	20.66	3
		15	0	20.76	20.80	20.67	3

LTE Conducted Power (Full)							
LTE Band 26							
BW	MCS Index	Channel		26697	26865	27033	3GPP MPR
		Frequency (MHz)		814.7	831.5	848.3	
1.4M	QPSK	1	0	23.80	23.73	23.58	0
		1	2	23.72	23.64	23.57	0
		1	5	23.67	23.41	23.36	0
		3	0	23.88	23.68	23.58	0
		3	1	23.66	23.71	23.67	0
		3	3	23.76	23.73	23.68	0
		6	0	22.74	22.69	22.64	1
1.4M	16QAM	1	0	22.99	23.05	22.92	1
		1	2	22.96	22.95	22.80	1
		1	5	22.94	22.88	22.79	1
		3	0	22.79	22.66	22.61	1
		3	1	22.79	22.61	22.63	1
		3	3	22.70	22.66	22.55	1
		6	0	21.71	21.65	21.69	2
1.4M	64QAM	1	0	21.78	21.69	21.70	2
		1	2	21.87	21.76	21.71	2
		1	5	21.84	21.72	21.77	2
		3	0	21.81	21.78	21.71	2
		3	1	21.85	21.72	21.79	2
		3	3	21.85	21.75	21.55	2
		6	0	20.70	20.64	20.64	3

LTE Conducted Power (Full)							
LTE Band 30							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			27710		
		Frequency (MHz)			2310		
10M	QPSK	1	0		22.57		0
		1	24		22.50		0
		1	49		22.49		0
		25	0		21.56		1
		25	12		21.55		1
		25	25		21.52		1
		50	0		21.57		1
10M	16QAM	1	0		21.81		1
		1	24		21.79		1
		1	49		21.82		1
		25	0		20.62		2
		25	12		20.56		2
		25	25		20.57		2
		50	0		20.59		2
10M	64QAM	1	0		20.75		2
		1	24		20.69		2
		1	49		20.66		2
		25	0		19.62		3
		25	12		19.56		3
		25	25		19.61		3
		50	0		19.53		3
BW	MCS Index	Channel		27685	27710	27735	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	QPSK	1	0	22.47	22.49	22.45	0
		1	12	22.34	22.47	22.41	0
		1	24	22.40	22.41	22.44	0
		12	0	21.38	21.49	21.42	1
		12	6	21.41	21.54	21.50	1
		12	13	21.42	21.46	21.48	1
		25	0	21.41	21.51	21.46	1
5M	16QAM	1	0	21.64	21.77	21.75	1
		1	12	21.64	21.78	21.63	1
		1	24	21.66	21.81	21.69	1
		12	0	20.53	20.62	20.53	2
		12	6	20.35	20.50	20.43	2
		12	13	20.41	20.49	20.44	2
		25	0	20.49	20.56	20.50	2
5M	64QAM	1	0	20.69	20.68	20.70	2
		1	12	20.56	20.64	20.56	2
		1	24	20.53	20.63	20.54	2
		12	0	19.48	19.61	19.52	3
		12	6	19.39	19.56	19.43	3
		12	13	19.45	19.59	19.44	3
		25	0	19.43	19.44	19.45	3

LTE Conducted Power (Full)							
LTE Band 38							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	23.40	23.49	23.62	0
		1	50	23.33	23.46	23.51	0
		1	99	23.38	23.45	23.55	0
		50	0	22.58	22.70	22.72	1
		50	25	22.53	22.68	22.71	1
		50	50	22.47	22.57	22.66	1
		100	0	22.62	22.71	22.75	1
20M	16QAM	1	0	22.85	22.87	22.87	1
		1	50	22.60	22.72	22.79	1
		1	99	22.55	22.70	22.77	1
		50	0	21.65	21.75	21.76	2
		50	25	21.58	21.73	21.77	2
		50	50	21.53	21.58	21.67	2
		100	0	21.73	21.73	21.75	2
20M	64QAM	1	0	21.42	21.54	21.63	2
		1	50	21.38	21.47	21.52	2
		1	99	21.44	21.49	21.56	2
		50	0	20.52	20.70	20.72	3
		50	25	20.69	20.72	20.75	3
		50	50	20.51	20.60	20.63	3
		100	0	20.51	20.63	20.71	3
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	23.32	23.39	23.55	0
		1	37	23.23	23.45	23.46	0
		1	74	23.30	23.35	23.54	0
		36	0	22.55	22.66	22.62	1
		36	19	22.63	22.65	22.63	1
		36	39	22.46	22.47	22.63	1
		75	0	22.56	22.63	22.65	1
15M	16QAM	1	0	22.82	22.81	22.84	1
		1	37	22.57	22.70	22.71	1
		1	74	22.51	22.70	22.69	1
		36	0	21.57	21.67	21.66	2
		36	19	21.57	21.70	21.70	2
		36	39	21.45	21.58	21.60	2
		75	0	21.68	21.68	21.65	2
15M	64QAM	1	0	21.41	21.52	21.55	2
		1	37	21.31	21.44	21.43	2
		1	74	21.43	21.46	21.48	2
		36	0	20.43	20.62	20.68	3
		36	19	20.66	20.63	20.70	3
		36	39	20.46	20.51	20.53	3
		75	0	20.50	20.61	20.65	3

LTE Conducted Power (Full)							
LTE Band 38							
BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	23.25	23.48	23.44	0
		1	24	23.10	23.40	23.32	0
		1	49	23.20	23.31	23.48	0
		25	0	22.42	22.52	22.63	1
		25	12	22.55	22.55	22.60	1
		25	25	22.27	22.49	22.47	1
		50	0	22.50	22.50	22.62	1
10M	16QAM	1	0	22.74	22.80	22.73	1
		1	24	22.49	22.57	22.58	1
		1	49	22.45	22.56	22.71	1
		25	0	21.59	21.61	21.74	2
		25	12	21.49	21.56	21.63	2
		25	25	21.32	21.51	21.44	2
		50	0	21.61	21.69	21.66	2
10M	64QAM	1	0	21.35	21.33	21.38	2
		1	24	21.21	21.25	21.44	2
		1	49	21.44	21.30	21.49	2
		25	0	20.32	20.60	20.51	3
		25	12	20.51	20.57	20.64	3
		25	25	20.30	20.48	20.50	3
		50	0	20.32	20.57	20.67	3
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	23.28	23.30	23.34	0
		1	12	23.16	23.38	23.37	0
		1	24	23.28	23.37	23.31	0
		12	0	22.45	22.53	22.49	1
		12	6	22.52	22.57	22.50	1
		12	13	22.36	22.48	22.38	1
		25	0	22.49	22.58	22.60	1
5M	16QAM	1	0	22.74	22.74	22.74	1
		1	12	22.43	22.65	22.69	1
		1	24	22.46	22.46	22.66	1
		12	0	21.51	21.56	21.66	2
		12	6	21.44	21.58	21.63	2
		12	13	21.36	21.45	21.58	2
		25	0	21.64	21.61	21.60	2
5M	64QAM	1	0	21.30	21.36	21.39	2
		1	12	21.36	21.32	21.35	2
		1	24	21.23	21.34	21.33	2
		12	0	20.42	20.50	20.57	3
		12	6	20.58	20.57	20.55	3
		12	13	20.30	20.44	20.55	3
		25	0	20.40	20.62	20.58	3

LTE Conducted Power (Full)

LTE Band 41

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490	
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	23.33	23.26	23.35	23.47	23.39	0
		1	50	23.20	23.07	23.27	23.35	23.35	0
		1	99	23.17	23.11	23.26	23.31	23.30	0
		50	0	22.39	22.20	22.48	22.56	22.48	1
		50	25	22.18	22.14	22.45	22.35	22.31	1
		50	50	22.25	22.16	22.35	22.47	22.39	1
		100	0	22.52	22.38	22.49	22.57	22.55	1
20M	16QAM	1	0	22.30	22.28	22.30	22.71	22.66	1
		1	50	22.23	22.13	22.33	22.59	22.53	1
		1	99	22.12	22.09	22.21	22.56	22.50	1
		50	0	21.42	21.32	21.48	21.60	21.60	2
		50	25	21.52	21.39	21.52	21.56	21.55	2
		50	50	21.38	21.28	21.39	21.50	21.50	2
		100	0	21.43	21.26	21.52	21.57	21.47	2
20M	64QAM	1	0	21.26	21.14	21.36	21.50	21.40	2
		1	50	21.20	21.18	21.28	21.32	21.24	2
		1	99	21.25	21.19	21.26	21.37	21.34	2
		50	0	20.44	20.41	20.45	20.59	20.54	3
		50	25	20.41	20.28	20.49	20.65	20.58	3
		50	50	20.20	20.16	20.29	20.47	20.43	3
		100	0	20.48	20.35	20.50	20.60	20.52	3
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	23.32	23.20	23.28	23.40	23.33	0
		1	37	23.12	23.07	23.23	23.31	23.34	0
		1	74	23.10	23.10	23.16	23.27	23.28	0
		36	0	22.34	22.11	22.46	22.48	22.45	1
		36	19	22.41	22.44	22.44	22.45	22.51	1
		36	39	22.25	22.15	22.30	22.46	22.34	1
		75	0	22.43	22.38	22.46	22.51	22.50	1
15M	16QAM	1	0	22.22	22.22	22.26	22.66	22.37	1
		1	37	22.14	22.06	22.32	22.59	22.25	1
		1	74	22.08	22.03	22.19	22.55	22.23	1
		36	0	21.37	21.29	21.40	21.53	21.44	2
		36	19	21.49	21.38	21.46	21.54	21.45	2
		36	39	21.33	21.25	21.32	21.41	21.32	2
		75	0	21.34	21.20	21.51	21.50	21.53	2
15M	64QAM	1	0	21.25	21.08	21.32	21.40	21.30	2
		1	37	21.13	21.15	21.21	21.32	21.30	2
		1	74	21.15	21.15	21.20	21.33	21.23	2
		36	0	20.44	20.37	20.44	20.58	20.41	3
		36	19	20.36	20.20	20.41	20.64	20.49	3
		36	39	20.14	20.12	20.29	20.46	20.30	3
		75	0	20.38	20.33	20.49	20.53	20.46	3

LTE Conducted Power (Full)

LTE Band 41

BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	23.19	23.17	23.21	23.40	23.36	0
		1	24	23.07	22.95	23.08	23.25	23.28	0
		1	49	23.08	23.09	23.14	23.18	23.16	0
		25	0	22.38	22.14	22.35	22.49	22.35	1
		25	12	22.33	22.30	22.50	22.44	22.43	1
		25	25	22.15	21.98	22.20	22.41	22.34	1
		50	0	22.47	22.31	22.38	22.55	22.40	1
10M	16QAM	1	0	22.25	22.19	22.17	22.40	22.35	1
		1	24	22.07	21.93	22.08	22.27	22.27	1
		1	49	22.04	22.06	22.18	22.18	22.11	1
		25	0	21.39	21.17	21.34	21.44	21.31	2
		25	12	21.34	21.29	21.50	21.41	21.37	2
		25	25	21.22	21.04	21.25	21.32	21.29	2
		50	0	21.50	21.22	21.46	21.47	21.35	2
10M	64QAM	1	0	21.21	21.18	21.20	21.44	21.30	2
		1	24	21.14	20.95	21.16	21.18	21.35	2
		1	49	21.10	21.02	21.20	21.17	21.18	2
		25	0	20.30	20.14	20.30	20.40	20.39	3
		25	12	20.37	20.30	20.49	20.45	20.38	3
		25	25	20.16	20.04	20.20	20.39	20.28	3
		50	0	20.47	20.23	20.38	20.53	20.35	3
BW	MCS Index	Channel		39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	23.22	23.19	23.33	23.40	23.33	0
		1	12	23.08	22.98	23.09	23.25	23.24	0
		1	24	23.11	22.97	23.15	23.28	23.24	0
		12	0	22.31	22.15	22.37	22.48	22.33	1
		12	6	22.29	22.35	22.39	22.46	22.44	1
		12	13	22.21	21.97	22.22	22.39	22.28	1
		25	0	22.45	22.33	22.36	22.54	22.55	1
5M	16QAM	1	0	22.23	22.16	22.27	22.45	22.33	1
		1	12	22.07	21.94	22.17	22.33	22.19	1
		1	24	22.14	21.96	22.12	22.24	22.27	1
		12	0	21.29	21.13	21.31	21.50	21.34	2
		12	6	21.35	21.40	21.43	21.46	21.40	2
		12	13	21.15	21.06	21.25	21.41	21.30	2
		25	0	21.44	21.28	21.35	21.52	21.53	2
5M	64QAM	1	0	21.22	21.16	21.34	21.38	21.23	2
		1	12	21.07	20.96	21.17	21.26	21.24	2
		1	24	21.08	21.00	21.12	21.24	21.22	2
		12	0	20.28	20.14	20.39	20.41	20.31	3
		12	6	20.35	20.33	20.41	20.48	20.42	3
		12	13	20.21	20.05	20.25	20.39	20.29	3
		25	0	20.41	20.34	20.38	20.54	20.50	3

LTE Conducted Power (Full)

LTE Band 48

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	High	3GPP MPR (dB)
		Channel		55340	55780	56210	56640	
		Frequency (MHz)		3560	3603	3647	3690	
20M	QPSK	1	0	21.77	21.80	21.92	21.91	0
		1	50	21.72	21.79	21.90	21.89	0
		1	99	21.60	21.66	21.89	21.81	0
		50	0	20.71	20.73	20.93	20.90	1
		50	25	20.67	20.64	20.92	20.87	1
		50	50	20.59	20.62	20.89	20.79	1
		100	0	20.75	20.79	20.90	20.87	1
20M	16QAM	1	0	20.27	20.31	20.42	20.42	1
		1	50	20.09	20.18	20.35	20.34	1
		1	99	20.12	20.12	20.32	20.31	1
		50	0	18.94	19.00	19.19	19.14	2
		50	25	18.90	18.95	19.20	19.11	2
		50	50	18.95	18.96	19.15	19.13	2
		100	0	18.96	19.01	19.16	19.11	2
20M	64QAM	1	0	18.89	18.94	19.16	19.13	2
		1	50	18.79	18.85	19.09	19.00	2
		1	99	18.88	18.90	19.07	19.07	2
		50	0	17.84	17.88	18.09	18.05	3
		50	25	17.80	17.88	18.07	18.05	3
		50	50	17.85	17.87	18.02	17.93	3
		100	0	17.85	17.90	18.05	18.05	3
BW	MCS Index	Channel		55315	55765	56215	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5	
15M	QPSK	1	0	21.70	21.79	21.85	21.83	0
		1	37	21.68	21.76	21.88	21.82	0
		1	74	21.57	21.60	21.85	21.71	0
		36	0	20.71	20.64	20.83	20.90	1
		36	19	20.57	20.66	20.89	20.77	1
		36	39	20.57	20.56	20.83	20.74	1
		75	0	20.75	20.74	20.89	20.87	1
15M	16QAM	1	0	20.21	20.24	20.41	20.42	1
		1	37	20.07	20.18	20.25	20.32	1
		1	74	20.11	20.06	20.30	20.31	1
		36	0	18.92	18.97	19.16	19.09	2
		36	19	18.83	18.94	19.17	19.07	2
		36	39	18.89	18.92	19.08	19.10	2
		75	0	18.93	18.96	19.15	19.04	2
15M	64QAM	1	0	18.82	18.84	19.06	19.12	2
		1	37	18.78	18.85	19.09	18.94	2
		1	74	18.80	18.86	19.02	18.99	2
		36	0	17.81	17.81	18.06	17.98	3
		36	19	17.79	17.87	18.01	17.98	3
		36	39	17.79	17.87	17.94	17.88	3
		75	0	17.76	17.80	18.01	17.95	3

LTE Conducted Power (Full)

LTE Band 48

BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR
		Frequency (MHz)		3555	3601	3648	3695	
10M	QPSK	1	0	21.65	21.62	21.89	21.84	0
		1	24	21.55	21.65	21.80	21.77	0
		1	49	21.45	21.56	21.78	21.69	0
		25	0	20.58	20.65	20.86	20.84	1
		25	12	20.57	20.56	20.77	20.77	1
		25	25	20.45	20.59	20.74	20.68	1
		50	0	20.63	20.74	20.74	20.84	1
10M	16QAM	1	0	20.71	20.63	20.86	20.83	1
		1	24	20.56	20.66	20.83	20.74	1
		1	49	20.50	20.55	20.72	20.68	1
		25	0	19.56	19.60	19.85	19.82	2
		25	12	19.56	19.62	19.87	19.81	2
		25	25	19.49	19.54	19.74	19.77	2
		50	0	19.64	19.73	19.78	19.83	2
10M	64QAM	1	0	19.65	19.61	19.84	19.76	2
		1	24	19.56	19.70	19.86	19.73	2
		1	49	19.52	19.60	19.72	19.63	2
		25	0	18.60	18.66	18.91	18.80	3
		25	12	18.52	18.64	18.82	18.84	3
		25	25	18.47	18.55	18.77	18.74	3
		50	0	18.60	18.76	18.80	18.75	3
BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
		Frequency (MHz)		3552.5	3600.5	3649.5	3697.5	
5M	QPSK	1	0	21.57	21.70	21.73	21.83	0
		1	12	21.55	21.75	21.81	21.72	0
		1	24	21.48	21.52	21.83	21.64	0
		12	0	20.69	20.55	20.83	20.82	1
		12	6	20.57	20.66	20.81	20.77	1
		12	13	20.52	20.48	20.75	20.64	1
		25	0	20.62	20.64	20.80	20.71	1
5M	16QAM	1	0	20.67	20.73	20.77	20.79	1
		1	12	20.56	20.75	20.81	20.74	1
		1	24	20.49	20.57	20.77	20.70	1
		12	0	19.63	19.54	19.77	19.75	2
		12	6	19.66	19.64	19.80	19.76	2
		12	13	19.51	19.52	19.83	19.62	2
		25	0	19.65	19.62	19.73	19.73	2
5M	64QAM	1	0	19.65	19.70	19.83	19.85	2
		1	12	19.57	19.69	19.80	19.74	2
		1	24	19.50	19.50	19.81	19.71	2
		12	0	18.69	18.55	18.75	18.83	3
		12	6	18.61	18.63	18.80	18.71	3
		12	13	18.48	18.53	18.84	18.63	3
		25	0	18.66	18.64	18.80	18.73	3

LTE Conducted Power (Full)							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	23.19	23.41	23.37	0
		1	50	23.17	23.39	23.31	0
		1	99	23.06	23.32	23.25	0
		50	0	22.19	22.37	22.32	1
		50	25	22.08	22.35	22.28	1
		50	50	22.10	22.32	22.32	1
		100	0	22.20	22.36	22.31	1
20M	16QAM	1	0	22.40	22.59	22.52	1
		1	50	22.53	22.72	22.63	1
		1	99	22.54	22.69	22.68	1
		50	0	21.16	21.41	21.32	2
		50	25	21.30	21.39	21.36	2
		50	50	21.27	21.47	21.42	2
		100	0	21.20	21.40	21.39	2
20M	64QAM	1	0	21.28	21.57	21.47	2
		1	50	21.38	21.69	21.62	2
		1	99	21.40	21.61	21.60	2
		50	0	20.39	20.47	20.46	3
		50	25	20.23	20.45	20.40	3
		50	50	20.24	20.41	20.35	3
		100	0	20.19	20.37	20.37	3
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	23.11	23.37	23.28	0
		1	37	23.09	23.35	23.25	0
		1	74	23.01	23.29	23.19	0
		36	0	22.12	22.33	22.29	1
		36	19	22.00	22.27	22.28	1
		36	39	22.10	22.32	22.27	1
		75	0	22.20	22.29	22.30	1
15M	16QAM	1	0	22.40	22.56	22.44	1
		1	37	22.53	22.72	22.53	1
		1	74	22.51	22.69	22.66	1
		36	0	21.15	21.31	21.24	2
		36	19	21.20	21.29	21.35	2
		36	39	21.22	21.43	21.35	2
		75	0	21.11	21.33	21.36	2
15M	64QAM	1	0	21.21	21.53	21.42	2
		1	37	21.30	21.69	21.62	2
		1	74	21.38	21.61	21.60	2
		36	0	20.29	20.45	20.42	3
		36	19	20.15	20.35	20.31	3
		36	39	20.21	20.34	20.35	3
		75	0	20.12	20.34	20.37	3

LTE Conducted Power (Full)							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	23.06	23.19	23.26	0
		1	24	23.10	23.32	23.10	0
		1	49	22.96	23.26	23.05	0
		25	0	21.98	22.27	22.17	1
		25	12	22.02	22.27	22.16	1
		25	25	22.05	22.15	22.17	1
		50	0	22.05	22.14	22.22	1
10M	16QAM	1	0	22.33	22.40	22.37	1
		1	24	22.39	22.63	22.52	1
		1	49	22.46	22.51	22.53	1
		25	0	21.09	21.30	21.27	2
		25	12	21.17	21.25	21.31	2
		25	25	21.12	21.32	21.24	2
		50	0	21.08	21.27	21.21	2
10M	64QAM	1	0	21.18	21.48	21.39	2
		1	24	21.25	21.55	21.45	2
		1	49	21.27	21.49	21.37	2
		25	0	20.30	20.34	20.42	3
		25	12	20.05	20.33	20.33	3
		25	25	20.16	20.22	20.22	3
		50	0	19.96	20.29	20.21	3
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	23.14	23.29	23.17	0
		1	12	23.13	23.22	23.07	0
		1	24	22.93	23.12	23.15	0
		12	0	22.08	22.22	22.15	1
		12	6	21.90	22.25	22.01	1
		12	13	22.00	22.15	22.13	1
		25	0	22.01	22.15	22.20	1
5M	16QAM	1	0	22.28	22.47	22.45	1
		1	12	22.42	22.61	22.43	1
		1	24	22.45	22.52	22.57	1
		12	0	20.98	21.20	21.17	2
		12	6	21.22	21.29	21.19	2
		12	13	21.10	21.26	21.27	2
		25	0	21.13	21.23	21.24	2
5M	64QAM	1	0	21.10	21.55	21.37	2
		1	12	21.27	21.54	21.41	2
		1	24	21.26	21.45	21.45	2
		12	0	20.20	20.27	20.35	3
		12	6	20.07	20.26	20.31	3
		12	13	20.17	20.35	20.16	3
		25	0	20.03	20.17	20.22	3

LTE Conducted Power (Full)							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	22.98	23.24	23.24	0
		1	7	22.99	23.23	23.14	0
		1	14	23.01	23.17	23.23	0
		8	0	22.01	22.16	22.24	1
		8	3	21.90	22.26	22.17	1
		8	7	22.01	22.26	22.12	1
		15	0	22.06	22.24	22.15	1
3M	16QAM	1	0	22.22	22.36	22.38	1
		1	7	22.38	22.53	22.54	1
		1	14	22.47	22.49	22.55	1
		8	0	21.00	21.22	21.13	2
		8	3	21.13	21.36	21.32	2
		8	7	21.19	21.26	21.32	2
		15	0	21.02	21.25	21.29	2
3M	64QAM	1	0	21.16	21.35	21.35	2
		1	7	21.23	21.57	21.47	2
		1	14	21.23	21.52	21.59	2
		8	0	20.17	20.41	20.34	3
		8	3	20.14	20.24	20.21	3
		8	7	20.16	20.27	20.33	3
		15	0	19.97	20.34	20.23	3
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		1710.7	1745	1779.3	
1.4M	QPSK	1	0	23.10	23.27	23.33	0
		1	2	23.00	23.14	23.17	0
		1	5	22.91	23.21	23.09	0
		3	0	23.03	23.19	23.18	0
		3	1	22.91	23.16	23.05	0
		3	3	22.89	23.23	23.16	0
		6	0	22.11	22.22	22.16	1
1.4M	16QAM	1	0	22.16	22.43	22.36	1
		1	2	22.39	22.61	22.62	1
		1	5	22.46	22.60	22.56	1
		3	0	21.94	22.21	22.19	1
		3	1	22.19	22.29	22.24	1
		3	3	22.09	22.44	22.25	1
		6	0	21.16	21.29	21.22	2
1.4M	64QAM	1	0	21.23	21.42	21.39	2
		1	2	21.30	21.58	21.54	2
		1	5	21.22	21.46	21.41	2
		3	0	21.20	21.43	21.39	2
		3	1	21.16	21.27	21.20	2
		3	3	21.01	21.30	21.12	2
		6	0	20.03	20.23	20.29	3

LTE Conducted Power (Full)							
LTE Band 71							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		133222	133297	133372	
		Frequency (MHz)		673	680.5	688	
20M	QPSK	1	0	23.52	23.57	23.32	0
		1	50	23.26	23.29	23.19	0
		1	99	23.14	23.22	23.01	0
		50	0	22.31	22.37	22.25	1
		50	25	22.25	22.30	22.16	1
		50	50	22.13	22.22	22.05	1
		100	0	22.23	22.31	22.11	1
20M	16QAM	1	0	22.80	22.83	22.78	1
		1	50	22.40	22.47	22.20	1
		1	99	22.39	22.45	22.27	1
		50	0	21.36	21.37	21.32	2
		50	25	21.27	21.30	21.14	2
		50	50	21.13	21.22	21.08	2
		100	0	21.20	21.27	21.03	2
20M	64QAM	1	0	21.57	21.61	21.44	2
		1	50	21.36	21.42	21.23	2
		1	99	21.39	21.39	21.24	2
		50	0	20.29	20.37	20.18	3
		50	25	20.29	20.30	20.20	3
		50	50	20.23	20.25	20.17	3
		100	0	20.28	20.29	20.20	3
BW	MCS Index	Channel		133197	133297	133397	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	QPSK	1	0	23.46	23.50	23.27	0
		1	37	23.16	23.19	23.18	0
		1	74	23.10	23.16	23.00	0
		36	0	22.25	22.34	22.22	1
		36	19	22.25	22.24	22.10	1
		36	39	22.09	22.17	22.01	1
		75	0	22.17	22.26	22.07	1
15M	16QAM	1	0	22.72	22.77	22.76	1
		1	37	22.31	22.44	22.10	1
		1	74	22.33	22.40	22.26	1
		36	0	21.36	21.28	21.24	2
		36	19	21.22	21.30	21.11	2
		36	39	21.04	21.20	21.08	2
		75	0	21.19	21.23	20.99	2
15M	64QAM	1	0	21.54	21.54	21.36	2
		1	37	21.36	21.36	21.13	2
		1	74	21.38	21.33	21.21	2
		36	0	20.23	20.34	20.18	3
		36	19	20.23	20.23	20.12	3
		36	39	20.15	20.20	20.11	3
		75	0	20.26	20.27	20.11	3

LTE Conducted Power (Full)							
LTE Band 71							
BW	MCS Index	Channel		133172	133297	133422	3GPP MPR
		Frequency (MHz)		668	680.5	693	
10M	QPSK	1	0	23.32	23.40	23.28	0
		1	24	23.04	23.19	23.04	0
		1	49	22.98	23.15	22.90	0
		25	0	22.15	22.28	22.21	1
		25	12	22.22	22.16	21.96	1
		25	25	22.06	22.10	21.93	1
		50	0	22.10	22.25	22.10	1
10M	16QAM	1	0	22.57	22.75	22.78	1
		1	24	22.26	22.39	22.11	1
		1	49	22.29	22.38	22.18	1
		25	0	21.26	21.21	21.30	2
		25	12	21.12	21.25	21.07	2
		25	25	21.04	21.08	21.00	2
		50	0	20.96	21.07	20.91	2
10M	64QAM	1	0	21.36	21.50	21.24	2
		1	24	21.26	21.24	21.10	2
		1	49	21.32	21.20	21.04	2
		25	0	20.18	20.22	20.02	3
		25	12	20.09	20.17	19.95	3
		25	25	20.08	20.09	20.10	3
		50	0	20.21	20.25	20.02	3
BW	MCS Index	Channel		133147	133297	133447	3GPP MPR
		Frequency (MHz)		665.5	680.5	695.5	
5M	QPSK	1	0	23.33	23.47	23.08	0
		1	12	23.09	23.18	22.92	0
		1	24	22.97	23.09	22.79	0
		12	0	22.17	22.26	21.92	1
		12	6	22.08	22.18	21.87	1
		12	13	22.06	22.15	21.86	1
		25	0	22.07	22.15	21.86	1
5M	16QAM	1	0	22.76	22.71	22.68	1
		1	12	22.38	22.33	22.03	1
		1	24	22.19	22.26	22.09	1
		12	0	21.21	21.27	21.24	2
		12	6	21.10	21.22	21.04	2
		12	13	21.11	20.99	21.04	2
		25	0	21.00	21.21	20.80	2
5M	64QAM	1	0	21.55	21.44	21.34	2
		1	12	21.25	21.29	21.16	2
		1	24	21.17	21.28	20.99	2
		12	0	20.28	20.32	20.07	3
		12	6	20.11	20.20	20.06	3
		12	13	20.17	20.14	20.13	3
		25	0	20.22	20.13	20.09	3

Conducted Power (Full)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	13.87
	6	2437	13.96
	11	2462	13.85
	12	2467	13.95
	13	2472	13.92
802.11g	1	2412	13.76
	6	2437	13.84
	11	2462	13.77
	12	2467	13.76
	13	2472	13.8
802.11n HT20	1	2412	13.85
	6	2437	13.76
	11	2462	13.83
	12	2467	13.85
	13	2472	13.84
802.11n HT40	3	2422	13.78
	6	2437	13.83
	9	2452	13.84
	10	2457	13.79
	11	2462	13.85
802.11ax HE20	1	2412	13.75
	6	2437	13.81
	11	2462	13.76
	12	2467	13.77
	13	2472	13.79
802.11ax HE40	3	2422	13.78
	6	2437	13.8
	9	2452	13.76
	10	2457	13.77
	11	2462	13.83
802.11be HE20	1	2412	13.78
	6	2437	13.78
	11	2462	13.84
	12	2467	13.84
	13	2472	13.84
802.11be HE40	3	2422	13.76
	6	2437	13.75
	9	2452	13.79
	10	2457	13.72
	11	2462	13.71

Conducted Power (Full)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	13.91
	6	2437	13.99
	11	2462	13.95
	12	2467	13.93
	13	2472	13.88
802.11g	1	2412	13.83
	6	2437	13.83
	11	2462	13.81
	12	2467	13.79
	13	2472	13.75
802.11n HT20	1	2412	13.78
	6	2437	13.76
	11	2462	13.76
	12	2467	13.82
	13	2472	13.75
802.11n HT40	3	2422	13.77
	6	2437	13.76
	9	2452	13.79
	10	2457	13.75
	11	2462	13.8
802.11ax HE20	1	2412	13.78
	6	2437	13.79
	11	2462	13.78
	12	2467	13.84
	13	2472	13.85
802.11ax HE40	3	2422	13.81
	6	2437	13.79
	9	2452	13.78
	10	2457	13.78
	11	2462	13.76
802.11be HE20	1	2412	13.75
	6	2437	13.79
	11	2462	13.82
	12	2467	13.78
	13	2472	13.79
802.11be HE40	3	2422	13.76
	6	2437	13.78
	9	2452	13.84
	10	2457	13.75
	11	2462	13.72

Conducted Power (Full)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11g	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11n HT20	1	2412	13.76	13.78	16.78
	6	2437	13.8	13.85	16.84
	11	2462	13.85	13.78	16.83
	12	2467	13.75	13.81	16.79
	13	2472	13.78	13.83	16.82
802.11n HT40	3	2422	13.91	13.95	16.94
	6	2437	13.95	13.96	16.97
	9	2452	13.94	13.92	16.94
	10	2457	13.92	13.91	16.93
	11	2462	13.81	13.92	16.88
802.11ax HE20	1	2412	13.75	13.79	16.78
	6	2437	13.81	13.8	16.82
	11	2462	13.8	13.78	16.80
	12	2467	13.83	13.82	16.84
	13	2472	13.85	13.77	16.82
802.11ax HE40	3	2422	13.81	13.84	16.84
	6	2437	13.77	13.8	16.80
	9	2452	13.85	13.83	16.85
	10	2457	13.79	13.8	16.81
	11	2462	13.82	13.8	16.82
802.11be HE20	1	2412	13.78	13.84	16.82
	6	2437	13.84	13.75	16.81
	11	2462	13.75	13.79	16.78
	12	2467	13.82	13.83	16.84
	13	2472	13.8	13.77	16.80
802.11be HE40	3	2422	13.76	13.75	16.77
	6	2437	13.85	13.77	16.82
	9	2452	13.8	13.79	16.81
	10	2457	13.76	13.81	16.80
	11	2462	13.74	13.78	16.77

Conducted Power (Full)			
Bluetooth Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
BR / EDR	0	2402	10.88
	39	2441	10.98
	78	2480	10.9
LE	0	2402	6.83
	19	2440	6.78
	39	2480	6.84

Conducted Power (Full)			
WLAN 5.2GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	36	5180	10.27
	40	5200	10.25
	44	5220	10.35
	48	5240	10.34
802.11n HT20	36	5180	10.3
	40	5200	10.29
	44	5220	10.29
	48	5240	10.27
802.11n HT40	38	5190	10.28
	46	5230	10.31
802.11ac VHT80	42	5210	10.42
802.11ax HE20	36	5180	10.28
	40	5200	10.27
	44	5220	10.32
	48	5240	10.25
802.11ax HE40	38	5190	10.35
	46	5230	10.28
802.11ax HE80	42	5210	10.34
802.11be HE20	36	5180	10.34
	40	5200	10.26
	44	5220	10.27
	48	5240	10.25
802.11be HE40	38	5190	10.3
	46	5230	10.26
802.11be HE80	42	5210	10.33

Conducted Power (Full)			
WLAN 5.2GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	36	5180	10.32
	40	5200	10.33
	44	5220	10.27
	48	5240	10.29
802.11n HT20	36	5180	10.25
	40	5200	10.29
	44	5220	10.31
	48	5240	10.25
802.11n HT40	38	5190	10.28
	46	5230	10.3
802.11ac VHT80	42	5210	10.44
802.11ax HE20	36	5180	10.32
	40	5200	10.26
	44	5220	10.31
	48	5240	10.33
802.11ax HE40	38	5190	10.31
	46	5230	10.35
802.11ax HE80	42	5210	10.32
802.11be HE20	36	5180	10.26
	40	5200	10.27
	44	5220	10.26
	48	5240	10.27
802.11be HE40	38	5190	10.3
	46	5230	10.31
802.11be HE80	42	5210	10.27

Conducted Power (Full)					
WLAN 5.2GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	36	5180			
	40	5200			
	44	5220			
	48	5240			
802.11n HT20	36	5180	10.26	10.28	13.28
	40	5200	10.26	10.26	13.27
	44	5220	10.29	10.32	13.32
	48	5240	10.32	10.28	13.31
802.11n HT40	38	5190	10.26	10.25	13.27
	46	5230	10.3	10.31	13.32
802.11ac VHT80	42	5210	10.4	10.42	13.42
802.11ax HE20	36	5180	10.28	10.34	13.32
	40	5200	10.31	10.35	13.34
	44	5220	10.27	10.35	13.32
	48	5240	10.31	10.3	13.32
802.11ax HE40	38	5190	10.34	10.26	13.31
	46	5230	10.31	10.25	13.29
802.11ax HE80	42	5210	10.27	10.35	13.32
802.11be HE20	36	5180	10.29	10.33	13.32
	40	5200	10.34	10.31	13.34
	44	5220	10.29	10.29	13.3
	48	5240	10.25	10.25	13.26
802.11be HE40	38	5190	10.26	10.27	13.28
	46	5230	10.33	10.33	13.34
802.11be HE80	42	5210	10.28	10.25	13.28

Conducted Power (Full)			
WLAN 5.3GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	52	5260	10.28
	56	5280	10.34
	60	5300	10.26
	64	5320	10.29
802.11n HT20	52	5260	10.31
	56	5280	10.34
	60	5300	10.28
	64	5320	10.27
802.11n HT40	54	5270	10.35
	62	5310	10.27
802.11ac VHT80	58	5290	10.25
802.11ac VHT160	50	5250	10.45
802.11ax HE20	52	5260	10.32
	56	5280	10.35
	60	5300	10.34
	64	5320	10.31
802.11ax HE40	54	5270	10.26
	62	5310	10.28
802.11ax HE80	58	5290	10.35
802.11ax HE160	50	5250	10.26
802.11be HE20	52	5260	10.33
	56	5280	10.27
	60	5300	10.35
	64	5320	10.29
802.11be HE40	54	5270	10.28
	62	5310	10.29
802.11be HE80	58	5290	10.27
802.11be HE160	50	5250	10.34

Conducted Power (Full)			
WLAN 5.3GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	52	5260	10.29
	56	5280	10.34
	60	5300	10.28
	64	5320	10.29
802.11n HT20	52	5260	10.25
	56	5280	10.33
	60	5300	10.33
	64	5320	10.29
802.11n HT40	54	5270	10.31
	62	5310	10.33
802.11ac VHT80	58	5290	10.31
802.11ac VHT160	50	5250	10.48
802.11ax HE20	52	5260	10.25
	56	5280	10.27
	60	5300	10.32
	64	5320	10.31
802.11ax HE40	54	5270	10.25
	62	5310	10.25
802.11ax HE80	58	5290	10.35
802.11ax HE160	50	5250	10.26
802.11be HE20	52	5260	10.34
	56	5280	10.34
	60	5300	10.31
	64	5320	10.31
802.11be HE40	54	5270	10.33
	62	5310	10.35
802.11be HE80	58	5290	10.25
802.11be HE160	50	5250	10.3

Conducted Power (Full)					
WLAN 5.3GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	52	5260			
	56	5280			
	60	5300			
	64	5320			
802.11n HT20	52	5260	10.29	10.31	13.31
	56	5280	10.26	10.32	13.3
	60	5300	10.33	10.29	13.32
	64	5320	10.33	10.32	13.34
802.11n HT40	54	5270	10.26	10.27	13.28
	62	5310	10.31	10.25	13.29
802.11ac VHT80	58	5290	10.27	10.33	13.31
802.11ac VHT160	50	5250	10.42	10.39	13.42
802.11ax HE20	52	5260	10.33	10.3	13.33
	56	5280	10.26	10.35	13.32
	60	5300	10.31	10.34	13.34
	64	5320	10.3	10.35	13.34
802.11ax HE40	54	5270	10.27	10.34	13.32
	62	5310	10.31	10.29	13.31
802.11ax HE80	58	5290	10.27	10.33	13.31
802.11ax HE160	50	5250	10.3	10.3	13.31
802.11be HE20	52	5260	10.3	10.32	13.32
	56	5280	10.32	10.3	13.32
	60	5300	10.26	10.28	13.28
	64	5320	10.3	10.25	13.29
802.11be HE40	54	5270	10.26	10.27	13.28
	62	5310	10.31	10.32	13.33
802.11be HE80	58	5290	10.3	10.32	13.32
802.11be HE160	50	5250	10.27	10.35	13.32

Conducted Power (Full)			
WLAN 5.6GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	100	5500	10.78
	116	5580	10.83
	120	5600	10.75
	124	5620	10.78
	132	5660	10.79
	140	5700	10.83
	144	5720	10.76
802.11n HT20	100	5500	10.75
	116	5580	10.76
	120	5600	10.76
	124	5620	10.75
	132	5660	10.75
	140	5700	10.85
	144	5720	10.85
802.11n HT40	102	5510	10.85
	110	5550	10.75
	118	5590	10.8
	126	5630	10.75
	134	5670	10.84
	142	5710	10.75
802.11ac VHT80	106	5530	10.97
	122	5610	10.89
	138	5690	10.92
802.11ac VHT160	114	5570	10.95
802.11ax HE20	100	5500	10.84
	116	5580	10.84
	120	5600	10.82
	124	5620	10.75
	132	5660	10.8
	140	5700	10.8
	144	5720	10.83
802.11ax HE40	102	5510	10.75
	110	5550	10.77
	118	5590	10.84
	126	5630	10.79
	134	5670	10.83
	142	5710	10.76
802.11ax HE80	106	5530	10.79
	122	5610	10.82
	138	5690	10.85
802.11ax HE160	114	5570	10.77
802.11be HE20	100	5500	10.78
	116	5580	10.77
	120	5600	10.85
	124	5620	10.81
	132	5660	10.85
	140	5700	10.83
	144	5720	10.76
802.11be HE40	102	5510	10.79
	110	5550	10.8
	118	5590	10.8
	126	5630	10.77
	134	5670	10.81
	142	5710	10.77

Conducted Power (Full)			
802.11be HE80	106	5530	10.83
	122	5610	10.84
	138	5690	10.84
802.11be HE160	114	5570	10.76

Conducted Power (Full)			
WLAN 5.6GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	100	5500	10.78
	116	5580	10.79
	120	5600	10.78
	124	5620	10.76
	132	5660	10.84
	140	5700	10.81
	144	5720	10.79
802.11n HT20	100	5500	10.83
	116	5580	10.76
	120	5600	10.75
	124	5620	10.79
	132	5660	10.85
	140	5700	10.77
	144	5720	10.76
802.11n HT40	102	5510	10.79
	110	5550	10.8
	118	5590	10.78
	126	5630	10.81
	134	5670	10.84
	142	5710	10.78
802.11ac VHT80	106	5530	10.98
	122	5610	10.91
	138	5690	10.94
802.11ac VHT160	114	5570	10.95
802.11ax HE20	100	5500	10.75
	116	5580	10.84
	120	5600	10.77
	124	5620	10.81
	132	5660	10.85
	140	5700	10.77
	144	5720	10.77
802.11ax HE40	102	5510	10.85
	110	5550	10.84
	118	5590	10.82
	126	5630	10.85
	134	5670	10.85
	142	5710	10.77
802.11ax HE80	106	5530	10.84
	122	5610	10.77
	138	5690	10.83
802.11ax HE160	114	5570	10.83
802.11be HE20	100	5500	10.81
	116	5580	10.79
	120	5600	10.85
	124	5620	10.79
	132	5660	10.77
	140	5700	10.85
	144	5720	10.81
802.11be HE40	102	5510	10.84
	110	5550	10.77
	118	5590	10.82
	126	5630	10.81
	134	5670	10.82
	142	5710	10.83



BUREAU
VERITAS

Conducted Power (Full)			
802.11be HE80	106	5530	10.82
	122	5610	10.84
	138	5690	10.83
802.11be HE160	114	5570	10.78

Conducted Power (Full)					
WLAN 5.6GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	100	5500			
	116	5580			
	120	5600			
	124	5620			
	132	5660			
	140	5700			
	144	5720			
802.11n HT20	100	5500	10.81	10.79	13.81
	116	5580	10.81	10.83	13.83
	120	5600	10.81	10.84	13.84
	124	5620	10.83	10.84	13.85
	132	5660	10.83	10.79	13.82
	140	5700	10.78	10.85	13.83
	144	5720	10.82	10.84	13.84
802.11n HT40	102	5510	10.75	10.79	13.78
	110	5550	10.75	10.76	13.77
	118	5590	10.82	10.82	13.83
	126	5630	10.78	10.81	13.81
	134	5670	10.78	10.82	13.81
	142	5710	10.77	10.79	13.79
802.11ac VHT80	106	5530	10.97	10.99	13.99
	122	5610	10.92	10.97	13.96
	138	5690	10.84	10.98	13.92
802.11ac VHT160	114	5570	10.92	10.93	13.94
802.11ax HE20	100	5500	10.78	10.78	13.79
	116	5580	10.75	10.83	13.8
	120	5600	10.82	10.78	13.81
	124	5620	10.83	10.81	13.83
	132	5660	10.79	10.76	13.79
	140	5700	10.75	10.85	13.81
	144	5720	10.81	10.78	13.81
802.11ax HE40	102	5510	10.76	10.79	13.79
	110	5550	10.76	10.76	13.77
	118	5590	10.8	10.85	13.84
	126	5630	10.79	10.78	13.8
	134	5670	10.82	10.8	13.82
	142	5710	10.76	10.81	13.8
802.11ax HE80	106	5530	10.79	10.79	13.8
	122	5610	10.75	10.8	13.79
	138	5690	10.77	10.78	13.79
802.11ax HE160	114	5570	10.82	10.76	13.8
802.11be HE20	100	5500	10.78	10.85	13.83
	116	5580	10.77	10.82	13.81
	120	5600	10.79	10.81	13.81
	124	5620	10.85	10.78	13.83
	132	5660	10.84	10.82	13.84
	140	5700	10.82	10.84	13.84
	144	5720	10.82	10.85	13.85
802.11be HE40	102	5510	10.81	10.78	13.81
	110	5550	10.82	10.78	13.81
	118	5590	10.78	10.81	13.81
	126	5630	10.85	10.81	13.84
	134	5670	10.78	10.84	13.82
	142	5710	10.75	10.81	13.79

Conducted Power (Full)					
802.11be HE80	106	5530	10.84	10.81	13.84
	122	5610	10.79	10.77	13.79
	138	5690	10.82	10.77	13.81
802.11be HE160	114	5570	10.79	10.85	13.83

Conducted Power (Full)			
WLAN 5.8GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	149	5745	11.28
	153	5765	11.35
	157	5785	11.34
	161	5805	11.29
	165	5825	11.27
802.11n HT20	149	5745	11.3
	153	5765	11.28
	157	5785	11.35
	161	5805	11.26
	165	5825	11.31
802.11n HT40	151	5755	11.32
	159	5795	11.35
802.11ac VHT80	155	5775	11.49
802.11ax HE20	149	5745	11.35
	153	5765	11.34
	157	5785	11.35
	161	5805	11.35
	165	5825	11.31
802.11ax HE40	151	5755	11.27
	159	5795	11.34
802.11ax HE80	155	5775	11.31
802.11be HE20	149	5745	11.3
	153	5765	11.28
	157	5785	11.29
	161	5805	11.29
	165	5825	11.29
802.11be HE40	151	5755	11.28
	159	5795	11.35
802.11be HE80	155	5775	11.34

Conducted Power (Full)			
WLAN 5.8GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	149	5745	11.27
	153	5765	11.27
	157	5785	11.32
	161	5805	11.26
	165	5825	11.33
802.11n HT20	149	5745	11.34
	153	5765	11.32
	157	5785	11.27
	161	5805	11.35
	165	5825	11.3
802.11n HT40	151	5755	11.28
	159	5795	11.25
802.11ac VHT80	155	5775	11.49
802.11ax HE20	149	5745	11.31
	153	5765	11.28
	157	5785	11.3
	161	5805	11.35
	165	5825	11.32
802.11ax HE40	151	5755	11.3
	159	5795	11.32
802.11ax HE80	155	5775	11.33
802.11be HE20	149	5745	11.35
	153	5765	11.32
	157	5785	11.3
	161	5805	11.33
	165	5825	11.29
802.11be HE40	151	5755	11.28
	159	5795	11.27
802.11be HE80	155	5775	11.28

Conducted Power (Full)					
WLAN 5.8GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	149	5745			
	153	5765			
	157	5785			
	161	5805			
	165	5825			
802.11n HT20	149	5745	11.25	11.3	14.29
	153	5765	11.27	11.29	14.29
	157	5785	11.27	11.29	14.29
	161	5805	11.25	11.3	14.29
	165	5825	11.29	11.28	14.3
802.11n HT40	151	5755	11.31	11.25	14.29
	159	5795	11.33	11.29	14.32
802.11ac VHT80	155	5775	11.47	11.49	14.49
802.11ax HE20	149	5745	11.3	11.31	14.32
	153	5765	11.28	11.28	14.29
	157	5785	11.31	11.34	14.34
	161	5805	11.34	11.35	14.36
	165	5825	11.33	11.3	14.33
802.11ax HE40	151	5755	11.27	11.35	14.32
	159	5795	11.35	11.28	14.33
802.11ax HE80	155	5775	11.29	11.29	14.3
802.11be HE20	149	5745	11.34	11.29	14.33
	153	5765	11.35	11.28	14.33
	157	5785	11.35	11.33	14.35
	161	5805	11.31	11.3	14.32
	165	5825	11.26	11.3	14.29
802.11be HE40	151	5755	11.33	11.3	14.33
	159	5795	11.32	11.31	14.33
802.11be HE80	155	5775	11.32	11.33	14.34

Conducted Power (Full)			
WLAN 5.9GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11a	169	5845	11.84
	173	5865	11.75
	177	5885	11.76
802.11n HT20	169	5845	11.78
	173	5865	11.8
	177	5885	11.85
802.11n HT40	167	5835	11.81
	175	5875	11.79
802.11ac VHT80	171	5855	11.84
802.11ac VHT160	163	5815	11.95
802.11ax HE20	169	5845	11.83
	173	5865	11.78
	177	5885	11.82
802.11ax HE40	167	5835	11.79
	175	5875	11.75
802.11ax HE80	171	5855	11.78
802.11ax HE160	163	5815	11.83
802.11be HE20	169	5845	11.78
	173	5865	11.78
	177	5885	11.81
802.11be HE40	167	5835	11.85
	175	5875	11.85
802.11be HE80	171	5855	11.84
802.11be HE160	163	5815	11.8

Conducted Power (Full)			
WLAN 5.9GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11a	169	5845	11.8
	173	5865	11.83
	177	5885	11.77
802.11n HT20	169	5845	11.82
	173	5865	11.85
	177	5885	11.85
802.11n HT40	167	5835	11.85
	175	5875	11.82
802.11ac VHT80	171	5855	11.79
802.11ac VHT160	163	5815	11.88
802.11ax HE20	169	5845	11.78
	173	5865	11.77
	177	5885	11.77
802.11ax HE40	167	5835	11.81
	175	5875	11.8
802.11ax HE80	171	5855	11.79
802.11ax HE160	163	5815	11.8
802.11be HE20	169	5845	11.78
	173	5865	11.8
	177	5885	11.84
802.11be HE40	167	5835	11.77
	175	5875	11.75
802.11be HE80	171	5855	11.84
802.11be HE160	163	5815	11.78

Conducted Power (Full)					
WLAN 5.9GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11a	169	5845			
	173	5865			
	177	5885			
802.11n HT20	169	5845	11.79	11.85	14.83
	173	5865	11.81	11.82	14.83
	177	5885	11.78	11.76	14.78
802.11n HT40	167	5835	11.83	11.79	14.82
	175	5875	11.84	11.82	14.84
802.11ac VHT80	171	5855	11.8	11.75	14.79
802.11ac VHT160	163	5815	11.96	11.93	14.96
802.11ax HE20	169	5845	11.85	11.81	14.84
	173	5865	11.82	11.75	14.8
	177	5885	11.8	11.83	14.83
802.11ax HE40	167	5835	11.8	11.83	14.83
	175	5875	11.84	11.76	14.81
802.11ax HE80	171	5855	11.82	11.75	14.8
802.11ax HE160	163	5815	11.85	11.77	14.82
802.11be HE20	169	5845	11.76	11.77	14.78
	173	5865	11.82	11.78	14.81
	177	5885	11.75	11.8	14.79
802.11be HE40	167	5835	11.81	11.84	14.84
	175	5875	11.77	11.76	14.78
802.11be HE80	171	5855	11.78	11.84	14.82
802.11be HE160	163	5815	11.76	11.79	14.79

Conducted Power (Full)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	1	5955	11.8
	5	5975	11.78
	9	5995	11.75
	13	6015	11.81
	17	6035	11.85
	21	6055	11.81
	25	6075	11.8
	29	6095	11.84
	33	6115	11.85
	37	6135	11.8
	41	6155	11.85
	45	6175	11.82
	49	6195	11.82
	53	6215	11.77
	57	6235	11.78
	61	6255	11.81
	65	6275	11.85
	69	6295	11.82
	73	6315	11.75
	77	6335	11.77
802.11be HE20	81	6355	11.79
	85	6375	11.75
	89	6395	11.81
	93	6415	11.78
	1	5955	11.75
	5	5975	11.77
	9	5995	11.83
	13	6015	11.81
	17	6035	11.8
	21	6055	11.77
	25	6075	11.76
	29	6095	11.8
	33	6115	11.81
	37	6135	11.83
	41	6155	11.76
	45	6175	11.8
	49	6195	11.78
	53	6215	11.77
	57	6235	11.8
	61	6255	11.8
	65	6275	11.83
	69	6295	11.85
	73	6315	11.75
	77	6335	11.8
	81	6355	11.83
	85	6375	11.82
	89	6395	11.77
	93	6415	11.79

Conducted Power (Full)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	1	5955	11.78
	5	5975	11.78
	9	5995	11.79
	13	6015	11.83
	17	6035	11.84
	21	6055	11.79
	25	6075	11.82
	29	6095	11.77
	33	6115	11.78
	37	6135	11.83
	41	6155	11.84
	45	6175	11.79
	49	6195	11.82
	53	6215	11.83
	57	6235	11.8
	61	6255	11.75
	65	6275	11.77
	69	6295	11.75
	73	6315	11.79
	77	6335	11.78
802.11be HE20	81	6355	11.75
	85	6375	11.85
	89	6395	11.79
	93	6415	11.78
	1	5955	11.8
	5	5975	11.79
	9	5995	11.82
	13	6015	11.79
	17	6035	11.76
	21	6055	11.81
	25	6075	11.8
	29	6095	11.83
	33	6115	11.85
	37	6135	11.83
	41	6155	11.78
	45	6175	11.75
	49	6195	11.82
	53	6215	11.84
	57	6235	11.84
	61	6255	11.85
	65	6275	11.77
	69	6295	11.78
	73	6315	11.8
	77	6335	11.82
	81	6355	11.79
	85	6375	11.82
	89	6395	11.83
	93	6415	11.8

Conducted Power (Full)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	1	5955	11.76	11.84	14.81
	5	5975	11.78	11.79	14.80
	9	5995	11.8	11.81	14.82
	13	6015	11.84	11.78	14.82
	17	6035	11.75	11.77	14.77
	21	6055	11.84	11.79	14.83
	25	6075	11.8	11.82	14.82
	29	6095	11.83	11.81	14.83
	33	6115	11.81	11.8	14.82
	37	6135	11.85	11.84	14.86
	41	6155	11.82	11.85	14.85
	45	6175	11.79	11.76	14.79
	49	6195	11.79	11.81	14.81
	53	6215	11.76	11.85	14.82
	57	6235	11.79	11.81	14.81
	61	6255	11.79	11.76	14.79
	65	6275	11.79	11.75	14.78
	69	6295	11.77	11.81	14.80
	73	6315	11.84	11.78	14.82
	77	6335	11.79	11.84	14.83
802.11be HE20	81	6355	11.78	11.83	14.82
	85	6375	11.83	11.81	14.83
	89	6395	11.84	11.78	14.82
	93	6415	11.79	11.79	14.80
	1	5955	11.79	11.77	14.79
	5	5975	11.84	11.84	14.85
	9	5995	11.78	11.75	14.78
	13	6015	11.82	11.8	14.82
	17	6035	11.81	11.82	14.83
	21	6055	11.81	11.76	14.80
	25	6075	11.83	11.82	14.84
	29	6095	11.81	11.83	14.83
	33	6115	11.8	11.82	14.82
	37	6135	11.81	11.8	14.82
	41	6155	11.78	11.79	14.80
	45	6175	11.85	11.84	14.86
	49	6195	11.79	11.75	14.78
	53	6215	11.76	11.76	14.77
	57	6235	11.85	11.82	14.85
	61	6255	11.81	11.84	14.84
	65	6275	11.77	11.82	14.81
	69	6295	11.8	11.75	14.79
	73	6315	11.81	11.79	14.81
	77	6335	11.75	11.84	14.81
	81	6355	11.84	11.77	14.82
	85	6375	11.82	11.81	14.83
	89	6395	11.75	11.82	14.80
	93	6415	11.77	11.79	14.79

Conducted Power (Full)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE40	3	5965	11.85
	11	6005	11.85
	19	6045	11.79
	27	6085	11.8
	35	6125	11.75
	43	6165	11.77
	51	6205	11.77
	59	6245	11.8
	67	6285	11.84
	75	6325	11.76
	83	6365	11.83
	91	6405	11.83
802.11ax HE80	7	5985	11.77
	23	6065	11.76
	39	6145	11.77
	55	6225	11.75
	71	6305	11.78
	87	6385	11.82
802.11ax HE160	15	6025	11.82
	47	6185	11.75
	79	6345	11.74
802.11be HE40	3	5965	11.82
	11	6005	11.75
	19	6045	11.84
	27	6085	11.79
	35	6125	11.83
	43	6165	11.84
	51	6205	11.77
	59	6245	11.85
	67	6285	11.8
	75	6325	11.76
	83	6365	11.78
	91	6405	11.82
802.11be HE80	7	5985	11.75
	23	6065	11.76
	39	6145	11.78
	55	6225	11.83
	71	6305	11.83
	87	6385	11.78
	15	6025	11.81
802.11be HE160	47	6185	11.76
	79	6345	11.82
802.11be HE320	31	6105	11.93
	63	6265	11.98
	95	6425	11.97

Conducted Power (Full)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE40	3	5965	11.79
	11	6005	11.76
	19	6045	11.82
	27	6085	11.75
	35	6125	11.76
	43	6165	11.78
	51	6205	11.85
	59	6245	11.82
	67	6285	11.79
	75	6325	11.81
	83	6365	11.81
	91	6405	11.79
802.11ax HE80	7	5985	11.78
	23	6065	11.79
	39	6145	11.77
	55	6225	11.78
	71	6305	11.83
	87	6385	11.77
802.11ax HE160	15	6025	11.85
	47	6185	11.74
	79	6345	11.41
802.11be HE40	3	5965	11.84
	11	6005	11.83
	19	6045	11.75
	27	6085	11.84
	35	6125	11.82
	43	6165	11.78
	51	6205	11.81
	59	6245	11.82
	67	6285	11.81
	75	6325	11.8
	83	6365	11.79
	91	6405	11.76
802.11be HE80	7	5985	11.77
	23	6065	11.77
	39	6145	11.79
	55	6225	11.82
	71	6305	11.81
	87	6385	11.82
802.11be HE160	15	6025	11.78
	47	6185	11.78
	79	6345	11.77
802.11be HE320	31	6105	11.88
	63	6265	11.96
	95	6425	11.87

Conducted Power (Full)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE40	3	5965	11.8	11.76	14.79
	11	6005	11.81	11.85	14.84
	19	6045	11.78	11.81	14.81
	27	6085	11.77	11.84	14.82
	35	6125	11.82	11.79	14.82
	43	6165	11.81	11.75	14.79
	51	6205	11.85	11.79	14.83
	59	6245	11.79	11.85	14.83
	67	6285	11.79	11.81	14.81
	75	6325	11.75	11.85	14.81
	83	6365	11.78	11.81	14.81
	91	6405	11.76	11.75	14.77
802.11ax HE80	7	5985	11.78	11.8	14.8
	23	6065	11.82	11.84	14.84
	39	6145	11.8	11.75	14.79
	55	6225	11.82	11.82	14.83
	71	6305	11.79	11.85	14.83
	87	6385	11.85	11.81	14.84
802.11ax HE160	15	6025	11.79	11.77	14.79
	47	6185	11.85	11.81	14.84
	79	6345	11.83	11.83	14.84
802.11be HE40	3	5965	11.78	11.75	14.78
	11	6005	11.84	11.83	14.85
	19	6045	11.75	11.77	14.77
	27	6085	11.8	11.77	14.8
	35	6125	11.77	11.84	14.82
	43	6165	11.8	11.83	14.83
	51	6205	11.85	11.8	14.84
	59	6245	11.82	11.84	14.84
	67	6285	11.75	11.77	14.77
	75	6325	11.83	11.85	14.85
	83	6365	11.77	11.78	14.79
	91	6405	11.84	11.82	14.84
802.11be HE80	7	5985	11.84	11.81	14.84
	23	6065	11.84	11.78	14.82
	39	6145	11.81	11.85	14.84
	55	6225	11.83	11.85	14.85
	71	6305	11.84	11.81	14.84
	87	6385	11.84	11.85	14.86
	15	6025	11.79	11.78	14.8
802.11be HE160	47	6185	11.79	11.84	14.83
	79	6345	11.82	11.75	14.8
	31	6105	11.97	11.91	14.95
802.11be HE320	63	6265	11.95	11.96	14.97
	95	6425	11.92	11.85	14.9

Conducted Power (Full)			
UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	97	6435	11.78
	101	6455	11.8
	105	6475	11.77
	109	6495	11.79
	113	6515	11.76
802.11ax HE40	99	6445	11.77
	107	6485	11.83
	115	6525	11.79
802.11ax HE80	103	6465	11.77
	119	6545	11.77
802.11ax HE160	111	6505	11.92
802.11be HE20	97	6435	11.84
	101	6455	11.82
	105	6475	11.8
	109	6495	11.8
	113	6515	11.79
802.11be HE40	99	6445	11.75
	107	6485	11.81
	115	6525	11.85
802.11be HE80	103	6465	11.78
	119	6545	11.81
802.11be HE160	111	6505	11.75

Conducted Power (Full)			
UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	97	6435	11.82
	101	6455	11.81
	105	6475	11.82
	109	6495	11.76
	113	6515	11.75
802.11ax HE40	99	6445	11.76
	107	6485	11.77
	115	6525	11.79
802.11ax HE80	103	6465	11.76
	119	6545	11.83
802.11ax HE160	111	6505	11.92
802.11be HE20	97	6435	11.85
	101	6455	11.77
	105	6475	11.84
	109	6495	11.84
	113	6515	11.84
802.11be HE40	99	6445	11.85
	107	6485	11.76
	115	6525	11.8
802.11be HE80	103	6465	11.79
	119	6545	11.76
802.11be HE160	111	6505	11.82

Conducted Power (Full)					
UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	97	6435	11.79	11.8	14.81
	101	6455	11.78	11.78	14.79
	105	6475	11.81	11.83	14.83
	109	6495	11.76	11.83	14.81
	113	6515	11.79	11.85	14.83
802.11ax HE40	99	6445	11.76	11.78	14.78
	107	6485	11.77	11.84	14.82
	115	6525	11.75	11.83	14.8
802.11ax HE80	103	6465	11.77	11.75	14.77
	119	6545	11.82	11.76	14.8
802.11ax HE160	111	6505	11.87	11.97	14.93
802.11be HE20	97	6435	11.75	11.77	14.77
	101	6455	11.78	11.84	14.82
	105	6475	11.77	11.82	14.81
	109	6495	11.8	11.85	14.84
	113	6515	11.76	11.77	14.78
802.11be HE40	99	6445	11.76	11.84	14.81
	107	6485	11.76	11.81	14.8
	115	6525	11.82	11.77	14.81
802.11be HE80	103	6465	11.82	11.76	14.8
	119	6545	11.77	11.83	14.81
802.11be HE160	111	6505	11.78	11.81	14.81

Conducted Power (Full)			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	117	6535	11.78
	121	6555	11.79
	125	6575	11.82
	129	6595	11.77
	133	6615	11.79
	137	6635	11.75
	141	6655	11.76
	145	6675	11.75
	149	6695	11.79
	153	6715	11.75
	157	6735	11.76
	161	6755	11.85
	165	6775	11.76
	169	6795	11.83
	173	6815	11.83
	177	6835	11.76
	181	6855	11.83
	185	6875	11.84
802.11ax HE40	123	6565	11.78
	131	6605	11.8
	139	6645	11.8
	147	6685	11.79
	155	6725	11.82
	163	6765	11.76
	171	6805	11.81
	179	6845	11.76
802.11ax HE80	187	6885	11.78
	135	6625	11.84
	151	6705	11.82
	167	6785	11.78
802.11ax HE160	183	6865	11.77
	143	6665	11.82
	175	6825	11.77
802.11be HE20	117	6535	11.81
	121	6555	11.81
	125	6575	11.79
	129	6595	11.8
	133	6615	11.82
	137	6635	11.75
	141	6655	11.79
	145	6675	11.81
	149	6695	11.83
	153	6715	11.77
	157	6735	11.79
	161	6755	11.79
	165	6775	11.81
	169	6795	11.82
	173	6815	11.85
	177	6835	11.79
	181	6855	11.84
	185	6875	11.82

Conducted Power (Full)			
802.11be HE40	123	6565	11.8
	131	6605	11.76
	139	6645	11.76
	147	6685	11.75
	155	6725	11.78
	163	6765	11.8
	171	6805	11.82
	179	6845	11.83
	187	6885	11.77
802.11be HE80	135	6625	11.84
	151	6705	11.76
	167	6785	11.84
	183	6865	11.82
802.11be HE160	143	6665	11.8
	175	6825	11.83
802.11be HE320	127	6585	11.94
	159	6745	11.95

Conducted Power (Full)			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	117	6535	11.82
	121	6555	11.77
	125	6575	11.82
	129	6595	11.82
	133	6615	11.79
	137	6635	11.75
	141	6655	11.76
	145	6675	11.79
	149	6695	11.81
	153	6715	11.76
	157	6735	11.75
	161	6755	11.84
	165	6775	11.82
	169	6795	11.79
	173	6815	11.81
	177	6835	11.79
	181	6855	11.79
	185	6875	11.79
802.11ax HE40	123	6565	11.78
	131	6605	11.78
	139	6645	11.85
	147	6685	11.75
	155	6725	11.84
	163	6765	11.79
	171	6805	11.8
	179	6845	11.82
802.11ax HE80	187	6885	11.83
	135	6625	11.76
	151	6705	11.81
	167	6785	11.77
802.11ax HE160	183	6865	11.85
	143	6665	11.8
	175	6825	11.84
802.11be HE20	117	6535	11.79
	121	6555	11.76
	125	6575	11.84
	129	6595	11.79
	133	6615	11.76
	137	6635	11.76
	141	6655	11.76
	145	6675	11.84
	149	6695	11.78
	153	6715	11.82
	157	6735	11.84
	161	6755	11.82
	165	6775	11.82
	169	6795	11.76
	173	6815	11.78
	177	6835	11.78
	181	6855	11.8
	185	6875	11.76

Conducted Power (Full)			
802.11be HE40	123	6565	11.75
	131	6605	11.81
	139	6645	11.79
	147	6685	11.77
	155	6725	11.77
	163	6765	11.81
	171	6805	11.82
	179	6845	11.77
	187	6885	11.82
802.11be HE80	135	6625	11.82
	151	6705	11.77
	167	6785	11.85
	183	6865	11.75
802.11be HE160	143	6665	11.79
	175	6825	11.82
802.11be HE320	127	6585	11.87
	159	6745	11.91

Conducted Power (Full)					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	117	6535	11.85	11.79	-
	121	6555	11.8	11.81	14.82
	125	6575	11.82	11.84	14.84
	129	6595	11.84	11.76	14.81
	133	6615	11.83	11.79	14.82
	137	6635	11.77	11.85	14.82
	141	6655	11.78	11.76	14.78
	145	6675	11.78	11.84	14.82
	149	6695	11.84	11.81	14.84
	153	6715	11.79	11.78	14.8
	157	6735	11.76	11.8	14.79
	161	6755	11.85	11.85	14.86
	165	6775	11.85	11.75	14.81
	169	6795	11.75	11.82	14.8
	173	6815	11.82	11.83	14.84
	177	6835	11.81	11.8	14.82
	181	6855	11.8	11.77	14.8
	185	6875	11.82	11.78	14.81
802.11ax HE40	123	6565	11.85	11.77	14.82
	131	6605	11.8	11.75	14.79
	139	6645	11.83	11.75	14.8
	147	6685	11.78	11.8	14.8
	155	6725	11.77	11.81	14.8
	163	6765	11.8	11.76	14.79
	171	6805	11.84	11.79	14.83
	179	6845	11.83	11.8	14.83
802.11ax HE80	187	6885	11.75	11.84	14.81
	135	6625	11.76	11.77	14.78
	151	6705	11.82	11.82	14.83
	167	6785	11.76	11.85	14.82
802.11ax HE160	183	6865	11.77	11.84	14.82
	143	6665	11.77	11.85	14.82
802.11be HE20	175	6825	11.76	11.75	14.77
	117	6535	11.8	11.83	14.83
	121	6555	11.84	11.75	14.81
	125	6575	11.75	11.76	14.77
	129	6595	11.77	11.79	14.79
	133	6615	11.82	11.77	14.81
	137	6635	11.75	11.77	14.77
	141	6655	11.81	11.84	14.84
	145	6675	11.84	11.83	14.85
	149	6695	11.76	11.81	14.8
	153	6715	11.75	11.77	14.77
	157	6735	11.79	11.8	14.81
	161	6755	11.77	11.81	14.8
	165	6775	11.77	11.76	14.78
	169	6795	11.8	11.82	14.82
	173	6815	11.78	11.75	14.78
	177	6835	11.79	11.75	14.78
	181	6855	11.79	11.76	14.79
	185	6875	11.82	11.76	14.8

Conducted Power (Full)					
802.11be HE40	123	6565	11.8	11.79	14.81
	131	6605	11.76	11.83	14.81
	139	6645	11.85	11.8	14.84
	147	6685	11.75	11.75	14.76
	155	6725	11.82	11.83	14.84
	163	6765	11.8	11.8	14.81
	171	6805	11.84	11.79	14.83
	179	6845	11.83	11.84	14.85
	187	6885	11.75	11.81	14.79
802.11be HE80	135	6625	11.84	11.79	14.83
	151	6705	11.85	11.82	14.85
	167	6785	11.8	11.8	14.81
	183	6865	11.84	11.81	14.84
802.11be HE160	143	6665	11.76	11.75	14.77
	175	6825	11.83	11.84	14.85
802.11be HE320	127	6585	11.96	11.84	14.91
	159	6745	11.92	11.91	14.93

Conducted Power (Full)			
UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	189	6895	11.81
	193	6915	11.8
	197	6935	11.77
	201	6955	11.76
	205	6975	11.77
	209	6995	11.76
	213	7015	11.84
	217	7035	11.85
	221	7055	11.84
	225	7075	11.79
	229	7095	11.84
	233	7115	11.77
802.11ax HE40	195	6925	11.76
	203	6965	11.75
	211	7005	11.85
	219	7045	11.76
	227	7085	11.78
802.11ax HE80	199	6945	11.84
802.11ax HE160	215	7025	11.77
802.11be HE20	207	6985	11.82
	189	6895	11.82
	193	6915	11.8
	197	6935	11.77
	201	6955	11.78
	205	6975	11.84
	209	6995	11.83
	213	7015	11.75
	217	7035	11.76
	221	7055	11.84
	225	7075	11.81
	229	7095	11.85
802.11be HE40	233	7115	11.84
	195	6925	11.77
	203	6965	11.81
	211	7005	11.82
	219	7045	11.81
802.11be HE80	227	7085	11.81
	199	6945	11.79
	215	7025	11.82
802.11be HE160	207	6985	11.82
802.11be HE320	191	6905	11.96

Conducted Power (Full)			
UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	189	6895	11.83
	193	6915	11.84
	197	6935	11.81
	201	6955	11.84
	205	6975	11.82
	209	6995	11.81
	213	7015	11.84
	217	7035	11.83
	221	7055	11.75
	225	7075	11.75
	229	7095	11.76
	233	7115	11.75
802.11ax HE40	195	6925	11.76
	203	6965	11.83
	211	7005	11.78
	219	7045	11.83
	227	7085	11.84
802.11ax HE80	199	6945	11.77
802.11ax HE160	215	7025	11.75
802.11be HE20	207	6985	11.84
	189	6895	11.76
	193	6915	11.83
	197	6935	11.8
	201	6955	11.84
	205	6975	11.8
	209	6995	11.76
	213	7015	11.79
	217	7035	11.8
	221	7055	11.82
	225	7075	11.76
	229	7095	11.84
802.11be HE40	233	7115	11.84
	195	6925	11.83
	203	6965	11.78
	211	7005	11.79
	219	7045	11.76
802.11be HE80	227	7085	11.84
	199	6945	11.77
	215	7025	11.81
802.11be HE160	207	6985	11.8
802.11be HE320	191	6905	11.95

Conducted Power (Full)					
UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	189	6895	11.8	11.84	14.83
	193	6915	11.82	11.78	14.81
	197	6935	11.79	11.82	14.82
	201	6955	11.75	11.83	14.8
	205	6975	11.8	11.8	14.81
	209	6995	11.84	11.8	14.83
	213	7015	11.84	11.81	14.84
	217	7035	11.77	11.81	14.8
	221	7055	11.82	11.83	14.84
	225	7075	11.75	11.78	14.78
	229	7095	11.81	11.82	14.83
	233	7115	11.77	11.78	14.79
802.11ax HE40	195	6925	11.85	11.78	14.83
	203	6965	11.79	11.76	14.79
	211	7005	11.84	11.75	14.81
	219	7045	11.76	11.77	14.78
	227	7085	11.82	11.85	14.85
802.11ax HE80	199	6945	11.83	11.85	14.85
802.11ax HE160	215	7025	11.83	11.77	14.81
802.11be HE20	207	6985	11.82	11.76	14.8
	189	6895	11.84	11.81	14.84
	193	6915	11.81	11.84	14.84
	197	6935	11.81	11.76	14.8
	201	6955	11.84	11.81	14.84
	205	6975	11.8	11.77	14.8
	209	6995	11.77	11.81	14.8
	213	7015	11.75	11.78	14.78
	217	7035	11.85	11.84	14.86
	221	7055	11.82	11.83	14.84
	225	7075	11.85	11.84	14.86
	229	7095	11.81	11.77	14.8
802.11be HE40	233	7115	11.78	11.77	14.79
	195	6925	11.79	11.8	14.81
	203	6965	11.85	11.75	14.81
	211	7005	11.85	11.8	14.84
	219	7045	11.82	11.75	14.8
802.11be HE80	227	7085	11.83	11.8	14.83
	199	6945	11.85	11.79	14.83
802.11be HE160	215	7025	11.83	11.77	14.81
802.11be HE160	207	6985	11.76	11.75	14.77
802.11be HE320	191	6905	11.91	11.91	14.92

Conducted Power (Tablet Mode)			
WLAN2.4GHz Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11b	1	2412	15.39
	6	2437	15.45
	11	2462	15.44
	12	2467	14.42
	13	2472	15.39
802.11g	1	2412	15.32
	6	2437	15.25
	11	2462	15.27
	12	2467	15.29
	13	2472	15.25
802.11n HT20	1	2412	15.3
	6	2437	15.32
	11	2462	15.3
	12	2467	15.25
	13	2472	15.32
802.11n HT40	3	2422	15.35
	6	2437	15.25
	9	2452	15.27
	10	2457	15.35
	11	2462	15.27
802.11ax HE20	1	2412	15.31
	6	2437	15.28
	11	2462	15.35
	12	2467	15.31
	13	2472	15.25
802.11ax HE40	3	2422	15.35
	6	2437	15.26
	9	2452	15.32
	10	2457	15.31
	11	2462	15.25
802.11be HE20	1	2412	15.35
	6	2437	15.34
	11	2462	15.29
	12	2467	15.28
	13	2472	15.34
802.11be HE40	3	2422	15.35
	6	2437	15.28
	9	2452	15.29
	10	2457	15.31
	11	2462	15.25

Conducted Power (Tablet Mode)			
WLAN2.4GHz Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11b	1	2412	15.43
	6	2437	15.47
	11	2462	15.41
	12	2467	15.43
	13	2472	15.42
802.11g	1	2412	15.35
	6	2437	15.25
	11	2462	15.3
	12	2467	15.25
	13	2472	15.27
802.11n HT20	1	2412	15.26
	6	2437	15.34
	11	2462	15.27
	12	2467	15.27
	13	2472	15.34
802.11n HT40	3	2422	15.32
	6	2437	15.31
	9	2452	15.33
	10	2457	15.25
	11	2462	15.28
802.11ax HE20	1	2412	15.33
	6	2437	15.26
	11	2462	15.29
	12	2467	15.31
	13	2472	15.26
802.11ax HE40	3	2422	15.28
	6	2437	15.3
	9	2452	15.29
	10	2457	15.32
	11	2462	15.27
802.11be HE20	1	2412	15.25
	6	2437	15.25
	11	2462	15.35
	12	2467	15.32
	13	2472	15.35
802.11be HE40	3	2422	15.3
	6	2437	15.26
	9	2452	15.28
	10	2457	15.27
	11	2462	15.26

Conducted Power (Tablet Mode)					
WLAN2.4GHz Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11b	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11g	1	2412			
	6	2437			
	11	2462			
	12	2467			
	13	2472			
802.11n HT20	1	2412	15.28	15.32	18.31
	6	2437	15.31	15.35	18.34
	11	2462	15.34	15.27	18.32
	12	2467	15.25	15.31	18.29
	13	2472	15.32	15.29	18.32
802.11n HT40	3	2422	15.42	15.45	18.45
	6	2437	15.48	15.43	18.44
	9	2452	15.43	15.43	18.42
	10	2457	15.39	15.42	18.42
	11	2462	15.29	15.33	18.32
802.11ax HE20	1	2412	15.3	15.27	18.30
	6	2437	15.31	15.35	18.34
	11	2462	15.3	15.35	18.34
	12	2467	15.32	15.31	18.33
	13	2472	15.26	15.29	18.29
802.11ax HE40	3	2422	15.3	15.29	18.31
	6	2437	15.33	15.31	18.33
	9	2452	15.33	15.28	18.32
	10	2457	15.28	15.28	18.29
	11	2462	15.33	15.35	18.35
802.11be HE20	1	2412	15.28	15.25	18.28
	6	2437	15.27	15.25	18.27
	11	2462	15.29	15.25	18.28
	12	2467	15.31	15.32	18.33
	13	2472	15.35	15.35	18.36
802.11be HE40	3	2422	15.35	15.32	18.35
	6	2437	15.3	15.33	18.33
	9	2452	15.34	15.33	18.35
	10	2457	15.31	15.26	18.30
	11	2462	15.27	15.29	18.29

Conducted Power (LPI)			
UNII-5 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	1	5955	5.6
	5	5975	5.55
	9	5995	5.51
	13	6015	5.67
	17	6035	5.54
	21	6055	5.54
	25	6075	5.61
	29	6095	5.69
	33	6115	5.66
	37	6135	5.63
	41	6155	5.66
	45	6175	5.71
	49	6195	5.68
	53	6215	5.65
	57	6235	5.52
	61	6255	5.49
	65	6275	5.62
	69	6295	5.57
	73	6315	5.68
	77	6335	5.52
802.11ax HE40	81	6355	5.53
	85	6375	5.53
	89	6395	5.58
	93	6415	5.45
	3	5965	8.56
	11	6005	8.46
	19	6045	8.51
	27	6085	8.48
	35	6125	8.48
	43	6165	8.61
802.11ax HE80	51	6205	8.47
	59	6245	8.59
	67	6285	8.56
	75	6325	8.46
	83	6365	8.54
	91	6405	8.5
802.11ax HE160	7	5985	11.54
	23	6065	11.74
	39	6145	11.52
	55	6225	11.54
	71	6305	11.65
	87	6385	11.75
	15	6025	11.82
	47	6185	11.75
	79	6345	11.74

Conducted Power (LPI)			
802.11be HE20	1	5955	5.6
	5	5975	5.5
	9	5995	5.44
	13	6015	5.6
	17	6035	5.58
	21	6055	5.4
	25	6075	5.45
	29	6095	5.49
	33	6115	5.36
	37	6135	5.55
	41	6155	5.59
	45	6175	5.71
	49	6195	5.58
	53	6215	5.42
	57	6235	5.54
	61	6255	5.54
	65	6275	5.5
	69	6295	5.55
	73	6315	5.58
	77	6335	5.54
802.11be HE40	81	6355	5.47
	85	6375	5.57
	89	6395	5.4
	93	6415	5.45
	3	5965	8.56
	11	6005	8.46
	19	6045	8.44
	27	6085	8.49
	35	6125	8.43
	43	6165	8.61
	51	6205	8.41
	59	6245	8.37
802.11be HE80	67	6285	8.37
	75	6325	8.35
	83	6365	8.43
	91	6405	8.5
	7	5985	11.54
	23	6065	11.51
802.11be HE160	39	6145	11.52
	55	6225	11.41
	71	6305	11.59
	87	6385	11.75
802.11be HE320	15	6025	11.81
	47	6185	11.76
	79	6345	11.82
	31	6105	11.93
	63	6265	11.98
	95	6425	11.97

Conducted Power (LPI)			
UNII-5 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	1	5955	5.51
	5	5975	5.5
	9	5995	5.39
	13	6015	5.53
	17	6035	5.5
	21	6055	5.46
	25	6075	5.39
	29	6095	5.51
	33	6115	5.44
	37	6135	5.51
	41	6155	5.49
	45	6175	5.56
	49	6195	5.46
	53	6215	5.51
	57	6235	5.48
	61	6255	5.42
	65	6275	5.51
	69	6295	5.45
	73	6315	5.35
	77	6335	5.39
802.11ax HE40	81	6355	5.37
	85	6375	5.48
	89	6395	5.54
	93	6415	5.38
	3	5965	8.43
	11	6005	8.39
	19	6045	8.35
	27	6085	8.54
	35	6125	8.35
	43	6165	8.57
802.11ax HE80	51	6205	8.3
	59	6245	8.47
	67	6285	8.53
	75	6325	8.41
	83	6365	8.37
	91	6405	8.32
802.11ax HE160	7	5985	11.5
	23	6065	11.45
	39	6145	11.55
	55	6225	11.46
	71	6305	11.52
	87	6385	11.55
	15	6025	11.85
	47	6185	11.75
	79	6345	11.85

Conducted Power (LPI)			
802.11be HE20	1	5955	5.51
	5	5975	5.42
	9	5995	5.25
	13	6015	5.45
	17	6035	5.29
	21	6055	5.45
	25	6075	5.41
	29	6095	5.43
	33	6115	5.25
	37	6135	5.26
	41	6155	5.42
	45	6175	5.56
	49	6195	5.28
	53	6215	5.27
	57	6235	5.3
	61	6255	5.28
	65	6275	5.43
	69	6295	5.33
	73	6315	5.45
	77	6335	5.29
802.11be HE40	81	6355	5.36
	85	6375	5.44
	89	6395	5.25
	93	6415	5.38
	3	5965	8.43
	11	6005	8.28
	19	6045	8.31
	27	6085	8.4
	35	6125	8.29
	43	6165	8.57
	51	6205	8.32
	59	6245	8.36
802.11be HE80	67	6285	8.4
	75	6325	8.39
	83	6365	8.28
	91	6405	8.32
	7	5985	11.5
	23	6065	11.43
802.11be HE160	39	6145	11.55
	55	6225	11.37
	71	6305	11.36
	87	6385	11.55
802.11be HE320	15	6025	11.78
	47	6185	11.78
	79	6345	11.77
	31	6105	11.88
	63	6265	11.96
	95	6425	11.87

Conducted Power (LPI)					
UNII-5 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	1	5955	2.46	2.55	5.52
	5	5975	2.44	2.35	5.41
	9	5995	2.38	2.47	5.44
	13	6015	2.32	2.51	5.43
	17	6035	2.44	2.39	5.43
	21	6055	2.44	2.28	5.37
	25	6075	2.41	2.36	5.4
	29	6095	2.42	2.26	5.35
	33	6115	2.4	2.43	5.43
	37	6135	2.4	2.38	5.4
	41	6155	2.33	2.41	5.38
	45	6175	2.6	2.33	5.48
	49	6195	2.42	2.47	5.46
	53	6215	2.41	2.25	5.34
	57	6235	2.32	2.27	5.31
	61	6255	2.37	2.42	5.41
	65	6275	2.37	2.3	5.35
	69	6295	2.44	2.31	5.39
	73	6315	2.32	2.33	5.34
	77	6335	2.35	2.32	5.35
802.11ax HE40	81	6355	2.36	2.25	5.32
	85	6375	2.43	2.27	5.36
	89	6395	2.37	2.34	5.37
	93	6415	2.38	2.47	5.44
	3	5965	5.34	5.03	8.2
	11	6005	5.29	4.87	8.1
	19	6045	5.41	4.74	8.1
	27	6085	5.35	4.75	8.07
	35	6125	5.32	4.78	8.07
	43	6165	5.45	4.61	8.06
802.11ax HE80	51	6205	5.26	4.74	8.02
	59	6245	5.44	4.98	8.23
	67	6285	5.4	4.71	8.08
	75	6325	5.25	4.7	7.99
	83	6365	5.43	4.77	8.12
	91	6405	5.27	4.87	8.08
802.11ax HE160	7	5985	8.58	8.6	11.6
	23	6065	8.55	8.5	11.54
	39	6145	8.65	8.54	11.61
	55	6225	8.79	8.48	11.65
	71	6305	8.73	8.47	11.61
	87	6385	8.82	8.43	11.64
802.11ax HE160	15	6025	11.79	11.77	14.79
	47	6185	11.85	11.81	14.84
	79	6345	11.83	11.83	14.84

Conducted Power (LPI)					
802.11be HE20	1	5955	2.46	2.55	5.52
	5	5975	2.34	2.41	5.39
	9	5995	2.22	2.4	5.32
	13	6015	2.33	2.41	5.38
	17	6035	2.31	2.28	5.31
	21	6055	2.28	2.28	5.29
	25	6075	2.3	2.42	5.37
	29	6095	2.28	2.43	5.37
	33	6115	2.31	2.33	5.33
	37	6135	2.35	2.43	5.4
	41	6155	2.29	2.36	5.34
	45	6175	2.6	2.33	5.48
	49	6195	2.42	2.47	5.46
	53	6215	2.29	2.35	5.33
	57	6235	2.29	2.32	5.32
	61	6255	2.23	2.25	5.25
	65	6275	2.28	2.43	5.37
	69	6295	2.25	2.29	5.28
	73	6315	2.32	2.37	5.36
	77	6335	2.28	2.35	5.33
	81	6355	2.22	2.34	5.29
	85	6375	2.33	2.39	5.37
	89	6395	2.32	2.25	5.3
	93	6415	2.38	2.47	5.44
802.11be HE40	3	5965	5.34	5.03	8.2
	11	6005	5.29	4.84	8.08
	19	6045	5.32	4.77	8.06
	27	6085	5.17	4.73	7.97
	35	6125	5.28	4.75	8.03
	43	6165	5.45	4.61	8.06
	51	6205	5.17	4.76	7.98
	59	6245	5.29	4.76	8.04
	67	6285	5.32	4.77	8.06
	75	6325	5.27	4.76	8.03
	83	6365	5.24	4.77	8.02
	91	6405	5.27	4.87	8.08
802.11be HE80	7	5985	8.58	8.6	11.6
	23	6065	8.64	8.45	11.56
	39	6145	8.65	8.54	11.61
	55	6225	8.62	8.43	11.54
	71	6305	8.56	8.44	11.51
	87	6385	8.82	8.43	11.64
802.11be HE160	15	6025	11.79	11.78	14.8
	47	6185	11.79	11.84	14.83
	79	6345	11.82	11.75	14.8
802.11be HE320	31	6105	11.97	11.91	14.95
	63	6265	11.95	11.96	14.97
	95	6425	11.92	11.85	14.9

Conducted Power (LPI)			
UNII-6 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	97	6435	5.18
	101	6455	5.48
	105	6475	5.46
	109	6495	5.38
	113	6515	5.64
802.11ax HE40	99	6445	8.47
	107	6485	8.59
	115	6525	8.44
802.11ax HE80	103	6465	11.49
	119	6545	11.68
802.11ax HE160	111	6505	11.75
802.11be HE20	97	6435	5.18
	101	6455	5.2
	105	6475	5.46
	109	6495	5.21
	113	6515	5.64
802.11be HE40	99	6445	8.47
	107	6485	8.59
	115	6525	8.44
802.11be HE80	103	6465	11.49
	119	6545	11.68
802.11be HE160	111	6505	11.92

Conducted Power (LPI)			
UNII-6 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	97	6435	5.43
	101	6455	5.47
	105	6475	5.39
	109	6495	5.36
	113	6515	5.41
802.11ax HE40	99	6445	8.56
	107	6485	8.54
	115	6525	8.47
802.11ax HE80	103	6465	11.55
	119	6545	11.58
802.11ax HE160	111	6505	11.82
802.11be HE20	97	6435	5.43
	101	6455	5.38
	105	6475	5.39
	109	6495	5.45
	113	6515	5.41
802.11be HE40	99	6445	8.56
	107	6485	8.54
	115	6525	8.47
802.11be HE80	103	6465	11.55
	119	6545	11.58
802.11be HE160	111	6505	11.92

Conducted Power (LPI)					
UNII-6 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	97	6435	2.3	2.43	5.38
	101	6455	2.42	2.5	5.47
	105	6475	2.4	2.32	5.37
	109	6495	2.39	2.55	5.48
	113	6515	2.47	2.63	5.56
802.11ax HE40	99	6445	5.45	5.46	8.47
	107	6485	5.3	4.8	8.07
	115	6525	5.48	4.82	8.17
802.11ax HE80	103	6465	8.62	8.56	11.6
	119	6545	8.81	8.48	11.66
802.11ax HE160	111	6505	11.78	11.81	14.81
802.11be HE20	97	6435	2.3	2.43	5.38
	101	6455	2.36	2.36	5.37
	105	6475	2.4	2.32	5.37
	109	6495	2.18	2.51	5.36
	113	6515	2.47	2.63	5.56
802.11be HE40	99	6445	5.45	5.46	8.47
	107	6485	5.3	4.8	8.07
	115	6525	5.48	4.82	8.17
802.11be HE80	103	6465	8.62	8.56	11.6
	119	6545	8.81	8.48	11.66
802.11be HE160	111	6505	11.87	11.97	14.93

Conducted Power (LPI)			
UNII-7 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	117	6535	5.58
	121	6555	5.44
	125	6575	5.41
	129	6595	5.36
	133	6615	5.35
	137	6635	5.48
	141	6655	5.54
	145	6675	5.37
	149	6695	5.56
	153	6715	5.55
	157	6735	5.35
	161	6755	5.41
	165	6775	5.51
	169	6795	5.46
	173	6815	5.38
	177	6835	5.54
	181	6855	5.54
	185	6875	5.37
802.11ax HE40	123	6565	8.55
	131	6605	8.4
	139	6645	8.46
	147	6685	8.45
	155	6725	8.49
	163	6765	8.6
	171	6805	8.41
	179	6845	8.65
802.11ax HE80	187	6885	8.53
	135	6625	11.53
	151	6705	11.64
	167	6785	11.66
802.11ax HE160	183	6865	11.36
	143	6665	11.82
	175	6825	11.77
802.11be HE20	117	6535	5.24
	121	6555	5.3
	125	6575	5.38
	129	6595	5.36
	133	6615	5.43
	137	6635	5.43
	141	6655	5.45
	145	6675	5.47
	149	6695	5.56
	153	6715	5.37
	157	6735	5.29
	161	6755	5.37
	165	6775	5.39
	169	6795	5.29
	173	6815	5.27
	177	6835	5.4
	181	6855	5.54
	185	6875	5.37

Conducted Power (LPI)			
802.11be HE40	123	6565	8.41
	131	6605	8.39
	139	6645	8.41
	147	6685	8.45
	155	6725	8.51
	163	6765	8.33
	171	6805	8.33
	179	6845	8.65
	187	6885	8.53
802.11be HE80	135	6625	11.53
	151	6705	11.49
	167	6785	11.66
	183	6865	11.36
802.11be HE160	143	6665	11.8
	175	6825	11.83
802.11be HE320	127	6585	11.94
	159	6745	11.95

Conducted Power (LPI)			
UNII-7 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	117	6535	
	121	6555	5.36
	125	6575	5.37
	129	6595	5.39
	133	6615	5.41
	137	6635	5.38
	141	6655	5.38
	145	6675	5.41
	149	6695	5.49
	153	6715	5.48
	157	6735	5.41
	161	6755	5.37
	165	6775	5.41
	169	6795	5.36
	173	6815	5.47
	177	6835	5.45
	181	6855	5.39
	185	6875	5.33
802.11ax HE40	123	6565	8.37
	131	6605	8.39
	139	6645	8.41
	147	6685	8.47
	155	6725	8.41
	163	6765	8.36
	171	6805	8.44
	179	6845	8.37
802.11ax HE80	187	6885	8.52
	135	6625	11.53
	151	6705	11.71
	167	6785	11.72
802.11ax HE160	183	6865	11.36
	143	6665	11.8
	175	6825	11.84
802.11be HE20	117	6535	5.31
	121	6555	5.29
	125	6575	5.32
	129	6595	5.29
	133	6615	5.33
	137	6635	5.33
	141	6655	5.37
	145	6675	5.35
	149	6695	5.49
	153	6715	5.31
	157	6735	5.28
	161	6755	5.36
	165	6775	5.27
	169	6795	5.34
	173	6815	5.37
	177	6835	5.38
	181	6855	5.39
	185	6875	5.33

Conducted Power (LPI)			
802.11be HE40	123	6565	8.42
	131	6605	8.42
	139	6645	8.51
	147	6685	8.47
	155	6725	8.41
	163	6765	8.51
	171	6805	8.47
	179	6845	8.37
	187	6885	8.52
802.11be HE80	135	6625	11.53
	151	6705	11.56
	167	6785	11.72
	183	6865	11.36
802.11be HE160	143	6665	11.79
	175	6825	11.82
802.11be HE320	127	6585	11.87
	159	6745	11.91

Conducted Power (LPI)					
UNII-7 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	117	6535	2.34	2.46	5.41
	121	6555	2.42	2.5	5.47
	125	6575	2.43	2.47	5.46
	129	6595	2.27	2.34	5.32
	133	6615	2.42	2.44	5.44
	137	6635	2.36	2.42	5.4
	141	6655	2.38	2.36	5.38
	145	6675	2.31	2.38	5.36
	149	6695	2.33	2.52	5.44
	153	6715	2.27	2.32	5.31
	157	6735	2.4	2.44	5.43
	161	6755	2.27	2.47	5.38
	165	6775	2.37	2.5	5.45
	169	6795	2.39	2.33	5.37
	173	6815	2.34	2.42	5.39
	177	6835	2.35	2.35	5.36
	181	6855	2.45	2.51	5.49
	185	6875	2.38	2.4	5.4
802.11ax HE40	123	6565	5.5	5.52	8.52
	131	6605	5.46	5.41	8.45
	139	6645	5.56	5.68	8.63
	147	6685	5.67	5.42	8.56
	155	6725	5.46	5.42	8.45
	163	6765	5.56	5.36	8.47
	171	6805	5.57	5.46	8.53
	179	6845	5.55	5.7	8.64
802.11ax HE80	187	6885	5.5	5.43	8.48
	135	6625	8.51	8.56	11.55
	151	6705	8.65	8.63	11.65
	167	6785	8.75	8.66	11.72
802.11ax HE160	183	6865	8.68	8.54	11.62
	143	6665	11.77	11.85	14.82
802.11be HE20	175	6825	11.76	11.75	14.77
	117	6535	2.37	2.27	5.33
	121	6555	2.33	2.32	5.34
	125	6575	2.27	2.29	5.29
	129	6595	2.26	2.36	5.32
	133	6615	2.33	2.24	5.3
	137	6635	2.24	2.4	5.33
	141	6655	2.34	2.24	5.3
	145	6675	2.25	2.39	5.33
	149	6695	2.33	2.52	5.44
	153	6715	2.26	2.37	5.33
	157	6735	2.33	2.4	5.38
	161	6755	2.24	2.32	5.29
	165	6775	2.31	2.32	5.33
	169	6795	2.24	2.29	5.28
	173	6815	2.23	2.29	5.27
	177	6835	2.26	2.31	5.3
	181	6855	2.45	2.51	5.49
	185	6875	2.38	2.4	5.4

Conducted Power (LPI)					
802.11be HE40	123	6565	5.38	5.25	8.33
	131	6605	5.42	5.5	8.47
	139	6645	5.35	5.37	8.37
	147	6685	5.67	5.42	8.56
	155	6725	5.38	5.42	8.41
	163	6765	5.43	5.57	8.51
	171	6805	5.54	5.57	8.57
	179	6845	5.55	5.7	8.64
	187	6885	5.5	5.43	8.48
802.11be HE80	135	6625	8.51	8.56	11.55
	151	6705	8.43	8.51	11.48
	167	6785	8.75	8.66	11.72
	183	6865	8.68	8.54	11.62
802.11be HE160	143	6665	11.76	11.75	14.77
	175	6825	11.83	11.84	14.85
802.11be HE320	127	6585	11.96	11.84	14.91
	159	6745	11.92	11.91	14.93

Conducted Power (LPI)			
UNII-8 Ant 0			
Mode	Channel	Frequency	SISO Ant 0 Avg. Power
802.11ax HE20	189	6895	5.54
	193	6915	5.5
	197	6935	5.43
	201	6955	5.44
	205	6975	5.51
	209	6995	5.4
	213	7015	5.56
	217	7035	5.54
	221	7055	5.58
	225	7075	5.45
	229	7095	5.51
	233	7115	5.52
802.11ax HE40	195	6925	8.52
	203	6965	8.55
	211	7005	8.49
	219	7045	8.48
	227	7085	8.6
802.11ax HE80	199	6945	11.84
	215	7025	11.77
802.11ax HE160	207	6985	11.82
802.11be HE20	189	6895	5.59
	193	6915	5.3
	197	6935	5.46
	201	6955	5.44
	205	6975	5.44
	209	6995	5.6
	213	7015	5.46
	217	7035	5.32
	221	7055	5.41
	225	7075	5.39
	229	7095	5.51
	233	7115	5.49
802.11be HE40	195	6925	8.47
	203	6965	8.47
	211	7005	8.35
	219	7045	8.43
	227	7085	8.6
802.11be HE80	199	6945	11.79
	215	7025	11.82
802.11be HE160	207	6985	11.82
802.11be HE320	191	6905	11.96

Conducted Power (LPI)			
UNII-8 Ant 1			
Mode	Channel	Frequency	SISO Ant 1 Avg. Power
802.11ax HE20	189	6895	5.56
	193	6915	5.48
	197	6935	5.49
	201	6955	5.46
	205	6975	5.47
	209	6995	5.59
	213	7015	5.51
	217	7035	5.51
	221	7055	5.58
	225	7075	5.57
	229	7095	5.56
	233	7115	5.47
802.11ax HE40	195	6925	8.69
	203	6965	8.71
	211	7005	8.66
	219	7045	8.67
	227	7085	8.75
802.11ax HE80	199	6945	11.77
	215	7025	11.75
802.11ax HE160	207	6985	11.84
802.11be HE20	189	6895	5.36
	193	6915	5.35
	197	6935	5.39
	201	6955	5.43
	205	6975	5.41
	209	6995	5.59
	213	7015	5.48
	217	7035	5.37
	221	7055	5.39
	225	7075	5.39
	229	7095	5.56
	233	7115	5.35
802.11be HE40	195	6925	8.5
	203	6965	8.61
	211	7005	8.52
	219	7045	8.51
	227	7085	8.75
802.11be HE80	199	6945	11.77
	215	7025	11.81
802.11be HE160	207	6985	11.8
802.11be HE320	191	6905	11.95

Conducted Power (LPI)					
UNII-8 Ant 0+1					
Mode	Channel	Frequency	MIMO Ant 0 Avg. Power	MIMO Ant 1 Avg. Power	MIMO Ant 0+1 Avg. Power
802.11ax HE20	189	6895	2.57	2.45	5.52
	193	6915	2.63	2.4	5.53
	197	6935	2.54	2.38	5.47
	201	6955	2.53	2.37	5.46
	205	6975	2.47	2.42	5.46
	209	6995	2.58	2.43	5.52
	213	7015	2.54	2.37	5.47
	217	7035	2.48	2.45	5.48
	221	7055	2.61	2.43	5.53
	225	7075	2.53	2.41	5.48
	229	7095	2.65	2.47	5.57
	233	7115	2.49	2.4	5.46
802.11ax HE40	195	6925	5.7	5.5	8.61
	203	6965	5.67	5.6	8.65
	211	7005	5.74	5.5	8.63
	219	7045	5.6	5.65	8.64
	227	7085	5.76	5.66	8.72
802.11ax HE80	199	6945	8.83	8.85	11.85
	215	7025	8.86	8.77	11.83
802.11ax HE160	207	6985	11.82	11.76	14.8
802.11be HE20	189	6895	2.38	2.27	5.34
	193	6915	2.38	2.27	5.34
	197	6935	2.35	2.29	5.33
	201	6955	2.38	2.28	5.34
	205	6975	2.49	2.26	5.39
	209	6995	2.58	2.43	5.52
	213	7015	2.49	2.34	5.43
	217	7035	2.45	2.35	5.41
	221	7055	2.5	2.36	5.44
	225	7075	2.42	2.3	5.37
	229	7095	2.65	2.47	5.57
	233	7115	2.36	2.36	5.37
802.11be HE40	195	6925	5.51	5.43	8.48
	203	6965	5.62	5.54	8.59
	211	7005	5.52	5.49	8.52
	219	7045	5.59	5.51	8.56
	227	7085	5.76	5.66	8.72
802.11be HE80	199	6945	11.85	11.79	14.83
	215	7025	11.83	11.77	14.81
802.11be HE160	207	6985	11.76	11.75	14.77
802.11be HE320	191	6905	11.91	11.91	14.92

WCDMA Conducted Power (Reduction)						
Band	WCDMA II			WCDMA IV		
TX Channel	9262	9400	9538	1312	1413	1513
Rx Channel	9662	9800	9938	1537	1638	1738
Frequency	1852.4	1880	1907.6	1712.4	1732.6	1752.6
RMC 12.2K	17.84	17.96	17.92	17.75	17.81	17.62
HSDPA Subtest-1	17.19	17.31	17.27	16.98	17.03	16.85
HSDPA Subtest-2	17.17	17.29	17.25	16.99	17.05	16.87
HSDPA Subtest-3	16.85	16.97	16.93	16.66	16.72	16.54
HSDPA Subtest-4	16.8	16.92	16.88	16.65	16.7	16.52
DC-HSDPA Subtest-1	16.89	16.94	16.87	16.71	16.78	16.64
DC-HSDPA Subtest-2	16.76	16.9	17.05	16.63	16.72	16.58
DC-HSDPA Subtest-3	16.61	16.53	16.70	16.24	16.27	16.26
DC-HSDPA Subtest-4	16.52	16.52	16.44	16.41	16.44	16.18
HSUPA Subtest-1	17.03	17.15	17.11	16.95	17.01	16.83
HSUPA Subtest-2	15.6	15.71	15.67	15.46	15.51	15.34
HSUPA Subtest-3	16.27	16.38	16.34	16.1	16.16	15.98
HSUPA Subtest-4	15.56	15.67	15.63	15.47	15.52	15.36
HSUPA Subtest-5	16.95	17.07	17.03	16.92	16.97	16.79
HSPA+ Subtest-1	15.11	15.09	15.13	14.91	14.88	14.73

LTE Conducted Power (Reduction)							
LTE Band 2							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		18700	18900	19100	
		Frequency (MHz)		1860	1880	1900	
20M	QPSK	1	0	16.39	16.49	16.43	0
		1	50	16.38	16.48	16.42	0
		1	99	16.37	16.47	16.41	0
		50	0	15.38	15.48	15.42	1
		50	25	15.35	15.45	15.39	1
		50	50	15.34	15.44	15.38	1
		100	0	15.32	15.42	15.36	1
20M	16QAM	1	0	15.27	15.37	15.31	1
		1	50	15.26	15.36	15.30	1
		1	99	15.25	15.35	15.29	1
		50	0	14.33	14.42	14.36	2
		50	25	14.31	14.40	14.34	2
		50	50	14.30	14.39	14.33	2
		100	0	14.28	14.37	14.31	2
20M	64QAM	1	0	14.33	14.42	14.36	2
		1	50	14.32	14.41	14.35	2
		1	99	14.31	14.40	14.34	2
		50	0	13.11	13.19	13.14	3
		50	25	13.38	13.47	13.42	3
		50	50	13.33	13.42	13.37	3
		100	0	13.39	13.48	13.43	3
BW	MCS Index	Channel		18675	18900	19125	3GPP MPR
		Frequency (MHz)		1857.5	1880	1902.5	
15M	QPSK	1	0	16.36	16.46	16.40	0
		1	37	16.35	16.45	16.39	0
		1	74	16.34	16.44	16.38	0
		36	0	15.35	15.45	15.39	1
		36	19	15.32	15.42	15.36	1
		36	39	15.31	15.41	15.35	1
		75	0	15.29	15.39	15.33	1
15M	16QAM	1	0	15.24	15.34	15.28	1
		1	37	15.23	15.33	15.27	1
		1	74	15.22	15.32	15.26	1
		36	0	14.30	14.39	14.33	2
		36	19	14.28	14.37	14.31	2
		36	39	14.27	14.36	14.30	2
		75	0	14.25	14.34	14.28	2
15M	64QAM	1	0	14.30	14.39	14.33	2
		1	37	14.29	14.38	14.32	2
		1	74	14.28	14.37	14.31	2
		36	0	13.08	13.16	13.11	3
		36	19	13.35	13.44	13.39	3
		36	39	13.30	13.39	13.34	3
		75	0	13.36	13.45	13.40	3

LTE Conducted Power (Reduction)							
LTE Band 2							
BW	MCS Index	Channel		18650	18900	19150	3GPP MPR
		Frequency (MHz)		1855	1880	1905	
10M	QPSK	1	0	16.34	16.44	16.38	0
		1	24	16.33	16.43	16.37	0
		1	49	16.32	16.42	16.36	0
		25	0	15.33	15.43	15.37	1
		25	12	15.30	15.40	15.34	1
		25	25	15.29	15.39	15.33	1
		50	0	15.27	15.37	15.31	1
10M	16QAM	1	0	15.22	15.32	15.26	1
		1	24	15.21	15.31	15.25	1
		1	49	15.20	15.30	15.24	1
		25	0	14.28	14.37	14.31	2
		25	12	14.26	14.35	14.29	2
		25	25	14.25	14.34	14.28	2
		50	0	14.23	14.32	14.26	2
10M	64QAM	1	0	14.28	14.37	14.31	2
		1	24	14.27	14.36	14.30	2
		1	49	14.26	14.35	14.29	2
		25	0	13.06	13.14	13.09	3
		25	12	13.33	13.42	13.37	3
		25	25	13.28	13.37	13.32	3
		50	0	13.34	13.43	13.38	3
BW	MCS Index	Channel		18625	18900	19175	3GPP MPR
		Frequency (MHz)		1852.5	1880	1907.5	
5M	QPSK	1	0	16.30	16.40	16.34	0
		1	12	16.29	16.39	16.33	0
		1	24	16.28	16.38	16.32	0
		12	0	15.29	15.39	15.33	1
		12	6	15.26	15.36	15.30	1
		12	13	15.25	15.35	15.29	1
		25	0	15.23	15.33	15.27	1
5M	16QAM	1	0	15.18	15.28	15.22	1
		1	12	15.17	15.27	15.21	1
		1	24	15.16	15.26	15.20	1
		12	0	14.24	14.33	14.27	2
		12	6	14.22	14.31	14.25	2
		12	13	14.21	14.30	14.24	2
		25	0	14.19	14.28	14.22	2
5M	64QAM	1	0	14.24	14.33	14.27	2
		1	12	14.23	14.32	14.26	2
		1	24	14.22	14.31	14.25	2
		12	0	13.02	13.10	13.05	3
		12	6	13.29	13.38	13.33	3
		12	13	13.24	13.33	13.28	3
		25	0	13.30	13.39	13.34	3

LTE Conducted Power (Reduction)							
LTE Band 2							
BW	MCS Index	Channel		18615	18900	19185	3GPP MPR
		Frequency (MHz)		1851.5	1880	1908.5	
3M	QPSK	1	0	16.26	16.36	16.30	0
		1	7	16.25	16.35	16.29	0
		1	14	16.24	16.34	16.28	0
		8	0	15.25	15.35	15.29	1
		8	3	15.22	15.32	15.26	1
		8	7	15.21	15.31	15.25	1
		15	0	15.19	15.29	15.23	1
3M	16QAM	1	0	15.14	15.24	15.18	1
		1	7	15.13	15.23	15.17	1
		1	14	15.12	15.22	15.16	1
		8	0	14.20	14.29	14.23	2
		8	3	14.18	14.27	14.21	2
		8	7	14.17	14.26	14.20	2
		15	0	14.15	14.24	14.18	2
3M	64QAM	1	0	14.20	14.29	14.23	2
		1	7	14.19	14.28	14.22	2
		1	14	14.18	14.27	14.21	2
		8	0	12.98	13.06	13.01	3
		8	3	13.25	13.34	13.29	3
		8	7	13.20	13.29	13.24	3
		15	0	13.26	13.35	13.30	3
BW	MCS Index	Channel		18607	18900	19193	3GPP MPR
		Frequency (MHz)		185-0.7	1880	1909.3	
1.4M	QPSK	1	0	16.22	16.32	16.26	0
		1	2	16.21	16.31	16.25	0
		1	5	16.20	16.30	16.24	0
		3	0	16.11	16.21	16.15	0
		3	1	16.08	16.18	16.12	0
		3	3	16.07	16.17	16.11	0
		6	0	15.15	15.25	15.19	1
1.4M	16QAM	1	0	15.10	15.20	15.14	1
		1	2	15.09	15.19	15.13	1
		1	5	15.08	15.18	15.12	1
		3	0	14.16	14.25	14.19	1
		3	1	14.14	14.23	14.17	1
		3	3	14.13	14.22	14.16	1
		6	0	14.11	14.20	14.14	2
1.4M	64QAM	1	0	14.16	14.25	14.19	2
		1	2	14.15	14.24	14.18	2
		1	5	14.14	14.23	14.17	2
		3	0	12.94	13.02	12.97	2
		3	1	13.21	13.30	13.25	2
		3	3	13.16	13.25	13.20	2
		6	0	13.22	13.31	13.26	3

LTE Conducted Power (Reduction)							
LTE Band 4							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20050	20175	20300	
		Frequency (MHz)		1720	1732.5	1745	
20M	QPSK	1	0	15.39	15.52	15.46	0
		1	50	15.38	15.51	15.44	0
		1	99	15.34	15.47	15.4	0
		50	0	14.44	14.57	14.5	1
		50	25	14.42	14.55	14.48	1
		50	50	14.4	14.53	14.46	1
		100	0	14.43	14.56	14.49	1
20M	16QAM	1	0	14.71	14.84	14.77	1
		1	50	14.7	14.83	14.76	1
		1	99	14.66	14.79	14.72	1
		50	0	13.8	13.93	13.86	2
		50	25	13.78	13.91	13.84	2
		50	50	13.76	13.89	13.82	2
		100	0	13.79	13.92	13.85	2
20M	64QAM	1	0	13.56	13.69	13.62	2
		1	50	13.55	13.68	13.61	2
		1	99	13.51	13.64	13.57	2
		50	0	12.72	12.85	12.78	3
		50	25	12.7	12.83	12.76	3
		50	50	12.68	12.81	12.74	3
		100	0	12.71	12.84	12.77	3
BW	MCS Index	Channel		20025	20175	20325	3GPP MPR
		Frequency (MHz)		1717.5	1732.5	1747.5	
15M	QPSK	1	0	15.36	15.49	15.43	0
		1	37	15.35	15.48	15.41	0
		1	74	15.31	15.44	15.37	0
		36	0	14.41	14.54	14.47	1
		36	19	14.39	14.52	14.45	1
		36	39	14.37	14.50	14.43	1
		75	0	14.40	14.53	14.46	1
15M	16QAM	1	0	14.68	14.81	14.74	1
		1	37	14.67	14.80	14.73	1
		1	74	14.63	14.76	14.69	1
		36	0	13.77	13.90	13.83	2
		36	19	13.75	13.88	13.81	2
		36	39	13.73	13.86	13.79	2
		75	0	13.76	13.89	13.82	2
15M	64QAM	1	0	13.53	13.66	13.59	2
		1	37	13.52	13.65	13.58	2
		1	74	13.48	13.61	13.54	2
		36	0	12.69	12.82	12.75	3
		36	19	12.67	12.80	12.73	3
		36	39	12.65	12.78	12.71	3
		75	0	12.68	12.81	12.74	3

LTE Conducted Power (Reduction)							
LTE Band 4							
BW	MCS Index	Channel		20000	20175	20350	3GPP MPR
		Frequency (MHz)		1715	1732.5	1750	
10M	QPSK	1	0	15.34	15.47	15.41	0
		1	24	15.33	15.46	15.39	0
		1	49	15.29	15.42	15.35	0
		25	0	14.39	14.52	14.45	1
		25	12	14.37	14.50	14.43	1
		25	25	14.35	14.48	14.41	1
		50	0	14.38	14.51	14.44	1
10M	16QAM	1	0	14.66	14.79	14.72	1
		1	24	14.65	14.78	14.71	1
		1	49	14.61	14.74	14.67	1
		25	0	13.75	13.88	13.81	2
		25	12	13.73	13.86	13.79	2
		25	25	13.71	13.84	13.77	2
		50	0	13.74	13.87	13.80	2
10M	64QAM	1	0	13.51	13.64	13.57	2
		1	24	13.50	13.63	13.56	2
		1	49	13.46	13.59	13.52	2
		25	0	12.67	12.80	12.73	3
		25	12	12.65	12.78	12.71	3
		25	25	12.63	12.76	12.69	3
		50	0	12.66	12.79	12.72	3
BW	MCS Index	Channel		19975	20175	20375	3GPP MPR
		Frequency (MHz)		1712.5	1732.5	1752.5	
5M	QPSK	1	0	15.30	15.43	15.37	0
		1	12	15.29	15.42	15.35	0
		1	24	15.25	15.38	15.31	0
		12	0	14.35	14.48	14.41	1
		12	6	14.33	14.46	14.39	1
		12	13	14.31	14.44	14.37	1
		25	0	14.34	14.47	14.40	1
5M	16QAM	1	0	14.62	14.75	14.68	1
		1	12	14.61	14.74	14.67	1
		1	24	14.57	14.70	14.63	1
		12	0	13.71	13.84	13.77	2
		12	6	13.69	13.82	13.75	2
		12	13	13.67	13.80	13.73	2
		25	0	13.70	13.83	13.76	2
5M	64QAM	1	0	13.47	13.60	13.53	2
		1	12	13.46	13.59	13.52	2
		1	24	13.42	13.55	13.48	2
		12	0	12.63	12.76	12.69	3
		12	6	12.61	12.74	12.67	3
		12	13	12.59	12.72	12.65	3
		25	0	12.62	12.75	12.68	3

LTE Conducted Power (Reduction)							
LTE Band 4							
BW	MCS Index	Channel		19965	20175	20385	3GPP MPR
		Frequency (MHz)		1711.5	1732.5	1753.5	
3M	QPSK	1	0	15.26	15.39	15.33	0
		1	7	15.25	15.38	15.31	0
		1	14	15.21	15.34	15.27	0
		8	0	14.31	14.44	14.37	1
		8	3	14.29	14.42	14.35	1
		8	7	14.27	14.40	14.33	1
		15	0	14.30	14.43	14.36	1
3M	16QAM	1	0	14.58	14.71	14.64	1
		1	7	14.57	14.70	14.63	1
		1	14	14.53	14.66	14.59	1
		8	0	13.67	13.80	13.73	2
		8	3	13.65	13.78	13.71	2
		8	7	13.63	13.76	13.69	2
		15	0	13.66	13.79	13.72	2
3M	64QAM	1	0	13.43	13.56	13.49	2
		1	7	13.42	13.55	13.48	2
		1	14	13.38	13.51	13.44	2
		8	0	12.59	12.72	12.65	3
		8	3	12.57	12.70	12.63	3
		8	7	12.55	12.68	12.61	3
		15	0	12.58	12.71	12.64	3
BW	MCS Index	Channel		19957	20175	20393	3GPP MPR
		Frequency (MHz)		171-0.7	1732.5	1754.3	
1.4M	QPSK	1	0	15.22	15.35	15.29	0
		1	2	15.21	15.34	15.27	0
		1	5	15.17	15.30	15.23	0
		3	0	15.17	15.30	15.23	0
		3	1	15.15	15.28	15.21	0
		3	3	15.13	15.26	15.19	0
		6	0	14.26	14.39	14.32	1
1.4M	16QAM	1	0	14.54	14.67	14.60	1
		1	2	14.53	14.66	14.59	1
		1	5	14.49	14.62	14.55	1
		3	0	13.63	13.76	13.69	1
		3	1	13.61	13.74	13.67	1
		3	3	13.59	13.72	13.65	1
		6	0	13.62	13.75	13.68	2
1.4M	64QAM	1	0	13.39	13.52	13.45	2
		1	2	13.38	13.51	13.44	2
		1	5	13.34	13.47	13.40	2
		3	0	12.55	12.68	12.61	2
		3	1	12.53	12.66	12.59	2
		3	3	12.51	12.64	12.57	2
		6	0	12.54	12.67	12.60	3

LTE Conducted Power (Reduction)

LTE Band 5

BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20450	20525	20600	
		Frequency (MHz)		829	836.5	844	
10M	QPSK	1	0	21.28	21.16	21.05	0
		1	24	21.22	21.11	21	0
		1	49	21.1	20.99	20.88	0
		25	0	20.26	20.15	20.04	1
		25	12	20.24	20.13	20.02	1
		25	25	20.2	20.09	19.98	1
		50	0	20.23	20.12	20.01	1
10M	16QAM	1	0	20.55	20.44	20.33	1
		1	24	20.5	20.39	20.28	1
		1	49	20.38	20.27	20.16	1
		25	0	19.57	19.46	19.35	2
		25	12	19.55	19.44	19.33	2
		25	25	19.51	19.4	19.29	2
		50	0	19.54	19.43	19.32	2
10M	64QAM	1	0	19.38	19.28	19.17	2
		1	24	19.33	19.23	19.13	2
		1	49	19.22	19.12	19.02	2
		25	0	18.45	18.35	18.25	3
		25	12	18.44	18.34	18.24	3
		25	25	18.4	18.3	18.2	3
		50	0	18.43	18.33	18.23	3
BW	MCS Index	Channel		20425	20525	20625	3GPP MPR
		Frequency (MHz)		826.5	836.5	846.5	
5M	QPSK	1	0	21.19	21.07	20.96	0
		1	12	21.13	21.02	20.91	0
		1	24	21.01	20.90	20.79	0
		12	0	20.17	20.06	19.95	1
		12	6	20.15	20.04	19.93	1
		12	13	20.11	20.00	19.89	1
		25	0	20.14	20.03	19.92	1
5M	16QAM	1	0	20.46	20.35	20.24	1
		1	12	20.41	20.30	20.19	1
		1	24	20.29	20.18	20.07	1
		12	0	19.48	19.37	19.26	2
		12	6	19.46	19.35	19.24	2
		12	13	19.42	19.31	19.20	2
		25	0	19.45	19.34	19.23	2
5M	64QAM	1	0	19.29	19.19	19.08	2
		1	12	19.24	19.14	19.04	2
		1	24	19.13	19.03	18.93	2
		12	0	18.36	18.26	18.16	3
		12	6	18.35	18.25	18.15	3
		12	13	18.31	18.21	18.11	3
		25	0	18.34	18.24	18.14	3

LTE Conducted Power (Reduction)							
LTE Band 5							
BW	MCS Index	Channel		20415	20525	20635	3GPP MPR
		Frequency (MHz)		825.5	836.5	847.5	
3M	QPSK	1	0	21.15	21.03	20.92	0
		1	7	21.09	20.98	20.87	0
		1	14	20.97	20.86	20.75	0
		8	0	20.13	20.02	19.91	1
		8	3	20.11	20.00	19.89	1
		8	7	20.07	19.96	19.85	1
		15	0	20.10	19.99	19.88	1
3M	16QAM	1	0	20.42	20.31	20.20	1
		1	7	20.37	20.26	20.15	1
		1	14	20.25	20.14	20.03	1
		8	0	19.44	19.33	19.22	2
		8	3	19.42	19.31	19.20	2
		8	7	19.38	19.27	19.16	2
		15	0	19.41	19.30	19.19	2
3M	64QAM	1	0	19.25	19.15	19.04	2
		1	7	19.20	19.10	19.00	2
		1	14	19.09	18.99	18.89	2
		8	0	18.32	18.22	18.12	3
		8	3	18.31	18.21	18.11	3
		8	7	18.27	18.17	18.07	3
		15	0	18.30	18.20	18.10	3
BW	MCS Index	Channel		20407	20525	20643	3GPP MPR
		Frequency (MHz)		824.7	836.5	848.3	
1.4M	QPSK	1	0	21.11	20.99	20.88	0
		1	2	21.05	20.94	20.83	0
		1	5	20.93	20.82	20.71	0
		3	0	20.99	20.88	20.77	0
		3	1	20.97	20.86	20.75	0
		3	3	20.93	20.82	20.71	0
		6	0	20.06	19.95	19.84	1
1.4M	16QAM	1	0	20.38	20.27	20.16	1
		1	2	20.33	20.22	20.11	1
		1	5	20.21	20.10	19.99	1
		3	0	19.40	19.29	19.18	1
		3	1	19.38	19.27	19.16	1
		3	3	19.34	19.23	19.12	1
		6	0	19.37	19.26	19.15	2
1.4M	64QAM	1	0	19.21	19.11	19.00	2
		1	2	19.16	19.06	18.96	2
		1	5	19.05	18.95	18.85	2
		3	0	18.28	18.18	18.08	2
		3	1	18.27	18.17	18.07	2
		3	3	18.23	18.13	18.03	2
		6	0	18.26	18.16	18.06	3

LTE Conducted Power (Reduction)							
LTE Band 7							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		20850	21100	21350	
		Frequency (MHz)		2510	2535	2560	
20M	QPSK	1	0	18.25	18.28	18.38	0
		1	50	18.2	18.23	18.33	0
		1	99	18.18	18.21	18.3	0
		50	0	17.3	17.33	17.42	1
		50	25	17.28	17.31	17.4	1
		50	50	17.24	17.27	17.36	1
		100	0	17.25	17.28	17.37	1
20M	16QAM	1	0	17.6	17.63	17.72	1
		1	50	17.55	17.58	17.67	1
		1	99	17.53	17.56	17.65	1
		50	0	16.68	16.71	16.8	2
		50	25	16.66	16.69	16.78	2
		50	50	16.62	16.65	16.74	2
		100	0	16.63	16.66	16.75	2
20M	64QAM	1	0	16.44	16.47	16.56	2
		1	50	16.39	16.42	16.5	2
		1	99	16.37	16.4	16.48	2
		50	0	15.58	15.61	15.69	3
		50	25	15.56	15.59	15.67	3
		50	50	15.53	15.56	15.64	3
		100	0	15.53	15.56	15.64	3
BW	MCS Index	Channel		20825	21100	21375	3GPP MPR
		Frequency (MHz)		2507.5	2535	2562.5	
15M	QPSK	1	0	18.16	18.19	18.29	0
		1	37	18.11	18.14	18.24	0
		1	74	18.09	18.12	18.21	0
		36	0	17.21	17.24	17.33	1
		36	19	17.19	17.22	17.31	1
		36	39	17.15	17.18	17.27	1
		75	0	17.16	17.19	17.28	1
15M	16QAM	1	0	17.51	17.54	17.63	1
		1	37	17.46	17.49	17.58	1
		1	74	17.44	17.47	17.56	1
		36	0	16.59	16.62	16.71	2
		36	19	16.57	16.60	16.69	2
		36	39	16.53	16.56	16.65	2
		75	0	16.54	16.57	16.66	2
15M	64QAM	1	0	16.35	16.38	16.47	2
		1	37	16.30	16.33	16.41	2
		1	74	16.28	16.31	16.39	2
		36	0	15.49	15.52	15.60	3
		36	19	15.47	15.50	15.58	3
		36	39	15.44	15.47	15.55	3
		75	0	15.44	15.47	15.55	3

LTE Conducted Power (Reduction)							
LTE Band 7							
BW	MCS Index	Channel		20800	21100	21400	3GPP MPR
		Frequency (MHz)		2505	2535	2565	
10M	QPSK	1	0	18.12	18.15	18.25	0
		1	24	18.07	18.10	18.20	0
		1	49	18.05	18.08	18.17	0
		25	0	17.17	17.20	17.29	1
		25	12	17.15	17.18	17.27	1
		25	25	17.11	17.14	17.23	1
		50	0	17.12	17.15	17.24	1
10M	16QAM	1	0	17.47	17.50	17.59	1
		1	24	17.42	17.45	17.54	1
		1	49	17.40	17.43	17.52	1
		25	0	16.55	16.58	16.67	2
		25	12	16.53	16.56	16.65	2
		25	25	16.49	16.52	16.61	2
		50	0	16.50	16.53	16.62	2
10M	64QAM	1	0	16.31	16.34	16.43	2
		1	24	16.26	16.29	16.37	2
		1	49	16.24	16.27	16.35	2
		25	0	15.45	15.48	15.56	3
		25	12	15.43	15.46	15.54	3
		25	25	15.40	15.43	15.51	3
		50	0	15.40	15.43	15.51	3
BW	MCS Index	Channel		20775	21100	21425	3GPP MPR
		Frequency (MHz)		2502.5	2535	2567.5	
5M	QPSK	1	0	18.08	18.11	18.21	0
		1	12	18.03	18.06	18.16	0
		1	24	18.01	18.04	18.13	0
		12	0	17.13	17.16	17.25	1
		12	6	17.11	17.14	17.23	1
		12	13	17.07	17.10	17.19	1
		25	0	17.08	17.11	17.20	1
5M	16QAM	1	0	17.43	17.46	17.55	1
		1	12	17.38	17.41	17.50	1
		1	24	17.36	17.39	17.48	1
		12	0	16.51	16.54	16.63	2
		12	6	16.49	16.52	16.61	2
		12	13	16.45	16.48	16.57	2
		25	0	16.46	16.49	16.58	2
5M	64QAM	1	0	16.27	16.30	16.39	2
		1	12	16.22	16.25	16.33	2
		1	24	16.20	16.23	16.31	2
		12	0	15.41	15.44	15.52	3
		12	6	15.39	15.42	15.50	3
		12	13	15.36	15.39	15.47	3
		25	0	15.36	15.39	15.47	3

LTE Conducted Power (Reduction)							
LTE Band 12							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23060	23095	23130	
		Frequency (MHz)		704	707.5	711	
10M	QPSK	1	0	20.65	20.77	20.81	0
		1	24	20.63	20.75	20.78	0
		1	49	20.61	20.73	20.76	0
		25	0	19.8	19.92	19.95	1
		25	12	19.72	19.84	19.87	1
		25	25	19.7	19.82	19.85	1
		50	0	19.75	19.87	19.9	1
10M	16QAM	1	0	19.99	20.11	20.14	1
		1	24	19.97	20.09	20.12	1
		1	49	19.95	20.07	20.1	1
		25	0	19.16	19.28	19.31	2
		25	12	19.08	19.2	19.23	2
		25	25	19.07	19.19	19.22	2
		50	0	19.11	19.23	19.26	2
10M	64QAM	1	0	18.76	18.87	18.9	2
		1	24	18.74	18.85	18.88	2
		1	49	18.72	18.83	18.86	2
		25	0	17.98	18.09	18.12	3
		25	12	17.91	18.02	18.05	3
		25	25	17.89	18	18.03	3
		50	0	17.94	18.05	18.08	3
BW	MCS Index	Channel		23035	23095	23155	3GPP MPR
		Frequency (MHz)		701.5	707.5	713.5	
5M	QPSK	1	0	20.56	20.68	20.72	0
		1	12	20.54	20.66	20.69	0
		1	24	20.52	20.64	20.67	0
		12	0	19.71	19.83	19.86	1
		12	6	19.63	19.75	19.78	1
		12	13	19.61	19.73	19.76	1
		25	0	19.66	19.78	19.81	1
5M	16QAM	1	0	19.90	20.02	20.05	1
		1	12	19.88	20.00	20.03	1
		1	24	19.86	19.98	20.01	1
		12	0	19.07	19.19	19.22	2
		12	6	18.99	19.11	19.14	2
		12	13	18.98	19.10	19.13	2
		25	0	19.02	19.14	19.17	2
5M	64QAM	1	0	18.67	18.78	18.81	2
		1	12	18.65	18.76	18.79	2
		1	24	18.63	18.74	18.77	2
		12	0	17.89	18.00	18.03	3
		12	6	17.82	17.93	17.96	3
		12	13	17.80	17.91	17.94	3
		25	0	17.85	17.96	17.99	3

LTE Conducted Power (Reduction)							
LTE Band 12							
BW	MCS Index	Channel		23025	23095	23165	3GPP MPR
		Frequency (MHz)		70-0.5	707.5	714.5	
3M	QPSK	1	0	20.52	20.64	20.68	0
		1	7	20.50	20.62	20.65	0
		1	14	20.48	20.60	20.63	0
		8	0	19.67	19.79	19.82	1
		8	3	19.59	19.71	19.74	1
		8	7	19.57	19.69	19.72	1
		15	0	19.62	19.74	19.77	1
3M	16QAM	1	0	19.86	19.98	20.01	1
		1	7	19.84	19.96	19.99	1
		1	14	19.82	19.94	19.97	1
		8	0	19.03	19.15	19.18	2
		8	3	18.95	19.07	19.10	2
		8	7	18.94	19.06	19.09	2
		15	0	18.98	19.10	19.13	2
3M	64QAM	1	0	18.63	18.74	18.77	2
		1	7	18.61	18.72	18.75	2
		1	14	18.59	18.70	18.73	2
		8	0	17.85	17.96	17.99	3
		8	3	17.78	17.89	17.92	3
		8	7	17.76	17.87	17.90	3
		15	0	17.81	17.92	17.95	3
BW	MCS Index	Channel		23017	23095	23173	3GPP MPR
		Frequency (MHz)		699.7	707.5	715.3	
1.4M	QPSK	1	0	20.48	20.60	20.64	0
		1	2	20.46	20.58	20.61	0
		1	5	20.44	20.56	20.59	0
		3	0	19.72	19.84	19.87	0
		3	1	19.64	19.76	19.79	0
		3	3	19.62	19.74	19.77	0
		6	0	19.58	19.70	19.73	1
1.4M	16QAM	1	0	19.82	19.94	19.97	1
		1	2	19.80	19.92	19.95	1
		1	5	19.78	19.90	19.93	1
		3	0	18.99	19.11	19.14	1
		3	1	18.91	19.03	19.06	1
		3	3	18.90	19.02	19.05	1
		6	0	18.94	19.06	19.09	2
1.4M	64QAM	1	0	18.59	18.70	18.73	2
		1	2	18.57	18.68	18.71	2
		1	5	18.55	18.66	18.69	2
		3	0	17.81	17.92	17.95	2
		3	1	17.74	17.85	17.88	2
		3	3	17.72	17.83	17.86	2
		6	0	17.77	17.88	17.91	3

LTE Conducted Power (Reduction)							
LTE Band 13							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23230		
		Frequency (MHz)			782		
10M	QPSK	1	0		20.28		0
		1	24		20.27		0
		1	49		20.23		0
		25	0		19.42		1
		25	12		19.40		1
		25	25		19.35		1
		50	0		19.40		1
10M	16QAM	1	0		19.34		1
		1	24		19.33		1
		1	49		19.29		1
		25	0		18.41		2
		25	12		18.4		2
		25	25		18.35		2
		50	0		18.4		2
10M	64QAM	1	0		18.35		2
		1	24		18.34		2
		1	49		18.3		2
		25	0		17.46		3
		25	12		17.44		3
		25	25		17.39		3
		50	0		17.44		3
BW	MCS Index	Channel		23205	23230	23255	3GPP MPR
		Frequency (MHz)		779.5	782	784.5	
5M	QPSK	1	0	20.11	20.20	20.14	0
		1	12	20.10	20.19	20.13	0
		1	24	20.06	20.15	20.09	0
		12	0	19.25	19.34	19.28	1
		12	6	19.23	19.32	19.26	1
		12	13	19.18	19.27	19.21	1
		25	0	19.23	19.32	19.26	1
5M	16QAM	1	0	19.17	19.26	19.20	1
		1	12	19.16	19.25	19.19	1
		1	24	19.12	19.21	19.15	1
		12	0	18.24	18.33	18.27	2
		12	6	18.23	18.32	18.26	2
		12	13	18.18	18.27	18.21	2
		25	0	18.23	18.32	18.26	2
5M	64QAM	1	0	18.18	18.27	18.21	2
		1	12	18.17	18.26	18.20	2
		1	24	18.13	18.22	18.16	2
		12	0	17.29	17.38	17.32	3
		12	6	17.27	17.36	17.30	3
		12	13	17.22	17.31	17.25	3
		25	0	17.27	17.36	17.30	3

LTE Conducted Power (Reduction)							
LTE Band 14							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			23330		
		Frequency (MHz)			793		
10M	QPSK	1	0		20.35		0
		1	24		20.31		0
		1	49		20.27		0
		25	0		19.45		1
		25	12		19.41		1
		25	25		19.39		1
		50	0		19.41		1
10M	16QAM	1	0		19.49		1
		1	24		19.45		1
		1	49		19.41		1
		25	0		18.42		2
		25	12		18.38		2
		25	25		18.37		2
		50	0		18.38		2
10M	64QAM	1	0		18.36		2
		1	24		18.32		2
		1	49		18.28		2
		25	0		17.44		3
		25	12		17.41		3
		25	25		17.39		3
		50	0		17.41		3
BW	MCS Index	Channel		23305	23330	23355	3GPP MPR
		Frequency (MHz)		790.5	793	795.5	
5M	QPSK	1	0	20.18	20.26	20.21	0
		1	12	20.14	20.22	20.17	0
		1	24	20.10	20.18	20.13	0
		12	0	19.28	19.36	19.31	1
		12	6	19.24	19.32	19.27	1
		12	13	19.22	19.30	19.25	1
		25	0	19.24	19.32	19.27	1
5M	16QAM	1	0	19.32	19.40	19.35	1
		1	12	19.28	19.36	19.31	1
		1	24	19.24	19.32	19.27	1
		12	0	18.25	18.33	18.28	2
		12	6	18.21	18.29	18.24	2
		12	13	18.20	18.28	18.23	2
		25	0	18.21	18.29	18.24	2
5M	64QAM	1	0	18.19	18.27	18.22	2
		1	12	18.15	18.23	18.18	2
		1	24	18.11	18.19	18.14	2
		12	0	17.27	17.35	17.30	3
		12	6	17.24	17.32	17.27	3
		12	13	17.22	17.30	17.25	3
		25	0	17.24	17.32	17.27	3

LTE Conducted Power (Reduction)							
LTE Band 17							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		23780	23790	23800	
		Frequency (MHz)		709	710	711	
10M	QPSK	1	0	20.81	20.87	20.85	0
		1	24	20.78	20.84	20.82	0
		1	49	20.74	20.80	20.78	0
		25	0	19.88	19.94	19.92	1
		25	12	19.87	19.93	19.91	1
		25	25	19.84	19.90	19.88	1
		50	0	19.85	19.91	19.89	1
10M	16QAM	1	0	20.13	20.19	20.17	1
		1	24	20.1	20.16	20.14	1
		1	49	20.06	20.12	20.1	1
		25	0	19.23	19.29	19.27	2
		25	12	19.22	19.28	19.26	2
		25	25	19.19	19.25	19.23	2
		50	0	19.2	19.26	19.24	2
10M	64QAM	1	0	18.96	19.02	19	2
		1	24	18.93	18.99	18.97	2
		1	49	18.89	18.95	18.93	2
		25	0	18.11	18.17	18.15	3
		25	12	18.1	18.16	18.14	3
		25	25	18.07	18.13	18.11	3
		50	0	18.08	18.14	18.12	3
BW	MCS Index	Channel		23755	23790	23825	3GPP MPR
		Frequency (MHz)		706.5	710	713.5	
5M	QPSK	1	0	20.64	20.70	20.68	0
		1	12	20.61	20.67	20.65	0
		1	24	20.57	20.63	20.61	0
		12	0	19.71	19.77	19.75	1
		12	6	19.70	19.76	19.74	1
		12	13	19.67	19.73	19.71	1
		25	0	19.68	19.74	19.72	1
5M	16QAM	1	0	19.96	20.02	20.00	1
		1	12	19.93	19.99	19.97	1
		1	24	19.89	19.95	19.93	1
		12	0	19.06	19.12	19.10	2
		12	6	19.05	19.11	19.09	2
		12	13	19.02	19.08	19.06	2
		25	0	19.03	19.09	19.07	2
5M	64QAM	1	0	18.79	18.85	18.83	2
		1	12	18.76	18.82	18.80	2
		1	24	18.72	18.78	18.76	2
		12	0	17.94	18.00	17.98	3
		12	6	17.93	17.99	17.97	3
		12	13	17.90	17.96	17.94	3
		25	0	17.91	17.97	17.95	3

LTE Conducted Power (Reduction)							
LTE Band 25							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26140	26365	26590	
		Frequency (MHz)		1860	1882.5	1905	
20M	QPSK	1	0	16.49	16.45	16.37	0
		1	50	16.47	16.44	16.36	0
		1	99	16.45	16.42	16.34	0
		50	0	15.42	15.39	15.31	1
		50	25	15.41	15.38	15.3	1
		50	50	15.39	15.36	15.28	1
		100	0	15.44	15.41	15.33	1
20M	16QAM	1	0	15.43	15.40	15.32	1
		1	50	15.42	15.39	15.31	1
		1	99	15.4	15.37	15.29	1
		50	0	14.43	14.4	14.32	2
		50	25	14.42	14.39	14.32	2
		50	50	14.4	14.37	14.3	2
		100	0	14.45	14.42	14.34	2
20M	64QAM	1	0	14.32	14.29	14.22	2
		1	50	14.31	14.28	14.21	2
		1	99	14.29	14.26	14.19	2
		50	0	13.39	13.36	13.29	3
		50	25	13.39	13.36	13.29	3
		50	50	13.37	13.34	13.27	3
		100	0	13.41	13.38	13.31	3
BW	MCS Index	Channel		26115	26365	26615	3GPP MPR
		Frequency (MHz)		1857.5	1882.5	1907.5	
15M	QPSK	1	0	16.46	16.42	16.34	0
		1	37	16.44	16.41	16.33	0
		1	74	16.42	16.39	16.31	0
		36	0	15.39	15.36	15.28	1
		36	19	15.38	15.35	15.27	1
		36	39	15.36	15.33	15.25	1
		75	0	15.41	15.38	15.30	1
15M	16QAM	1	0	15.40	15.37	15.29	1
		1	37	15.39	15.36	15.28	1
		1	74	15.37	15.34	15.26	1
		36	0	14.40	14.37	14.29	2
		36	19	14.39	14.36	14.29	2
		36	39	14.37	14.34	14.27	2
		75	0	14.42	14.39	14.31	2
15M	64QAM	1	0	14.29	14.26	14.19	2
		1	37	14.28	14.25	14.18	2
		1	74	14.26	14.23	14.16	2
		36	0	13.36	13.33	13.26	3
		36	19	13.36	13.33	13.26	3
		36	39	13.34	13.31	13.24	3
		75	0	13.38	13.35	13.28	3

LTE Conducted Power (Reduction)							
LTE Band 25							
BW	MCS Index	Channel		26090	26365	26640	3GPP MPR
		Frequency (MHz)		1855	1882.5	1910	
10M	QPSK	1	0	16.44	16.40	16.32	0
		1	24	16.42	16.39	16.31	0
		1	49	16.40	16.37	16.29	0
		25	0	15.37	15.34	15.26	1
		25	12	15.36	15.33	15.25	1
		25	25	15.34	15.31	15.23	1
		50	0	15.39	15.36	15.28	1
10M	16QAM	1	0	15.38	15.35	15.27	1
		1	24	15.37	15.34	15.26	1
		1	49	15.35	15.32	15.24	1
		25	0	14.38	14.35	14.27	2
		25	12	14.37	14.34	14.27	2
		25	25	14.35	14.32	14.25	2
		50	0	14.40	14.37	14.29	2
10M	64QAM	1	0	14.27	14.24	14.17	2
		1	24	14.26	14.23	14.16	2
		1	49	14.24	14.21	14.14	2
		25	0	13.34	13.31	13.24	3
		25	12	13.34	13.31	13.24	3
		25	25	13.32	13.29	13.22	3
		50	0	13.36	13.33	13.26	3
BW	MCS Index	Channel		26065	26365	26665	3GPP MPR
		Frequency (MHz)		1852.5	1882.5	1912.5	
5M	QPSK	1	0	16.40	16.36	16.28	0
		1	12	16.38	16.35	16.27	0
		1	24	16.36	16.33	16.25	0
		12	0	15.33	15.30	15.22	1
		12	6	15.32	15.29	15.21	1
		12	13	15.30	15.27	15.19	1
		25	0	15.35	15.32	15.24	1
5M	16QAM	1	0	15.34	15.31	15.23	1
		1	12	15.33	15.30	15.22	1
		1	24	15.31	15.28	15.20	1
		12	0	14.34	14.31	14.23	2
		12	6	14.33	14.30	14.23	2
		12	13	14.31	14.28	14.21	2
		25	0	14.36	14.33	14.25	2
5M	64QAM	1	0	14.23	14.20	14.13	2
		1	12	14.22	14.19	14.12	2
		1	24	14.20	14.17	14.10	2
		12	0	13.30	13.27	13.20	3
		12	6	13.30	13.27	13.20	3
		12	13	13.28	13.25	13.18	3
		25	0	13.32	13.29	13.22	3

LTE Conducted Power (Reduction)							
LTE Band 25							
BW	MCS Index	Channel		26055	26365	26675	3GPP MPR
		Frequency (MHz)		1851.5	1882.5	1913.5	
3M	QPSK	1	0	16.36	16.32	16.24	0
		1	7	16.34	16.31	16.23	0
		1	14	16.32	16.29	16.21	0
		8	0	15.29	15.26	15.18	1
		8	3	15.28	15.25	15.17	1
		8	7	15.26	15.23	15.15	1
		15	0	15.31	15.28	15.20	1
3M	16QAM	1	0	15.30	15.27	15.19	1
		1	7	15.29	15.26	15.18	1
		1	14	15.27	15.24	15.16	1
		8	0	14.30	14.27	14.19	2
		8	3	14.29	14.26	14.19	2
		8	7	14.27	14.24	14.17	2
		15	0	14.32	14.29	14.21	2
3M	64QAM	1	0	14.19	14.16	14.09	2
		1	7	14.18	14.15	14.08	2
		1	14	14.16	14.13	14.06	2
		8	0	13.26	13.23	13.16	3
		8	3	13.26	13.23	13.16	3
		8	7	13.24	13.21	13.14	3
		15	0	13.28	13.25	13.18	3
BW	MCS Index	Channel		26047	26365	26683	3GPP MPR
		Frequency (MHz)		185-0.7	1882.5	1914.3	
1.4M	QPSK	1	0	16.32	16.28	16.20	0
		1	2	16.30	16.27	16.19	0
		1	5	16.28	16.25	16.17	0
		3	0	16.15	16.12	16.04	0
		3	1	16.14	16.11	16.03	0
		3	3	16.12	16.09	16.01	0
		6	0	15.27	15.24	15.16	1
1.4M	16QAM	1	0	15.26	15.23	15.15	1
		1	2	15.25	15.22	15.14	1
		1	5	15.23	15.20	15.12	1
		3	0	14.26	14.23	14.15	1
		3	1	14.25	14.22	14.15	1
		3	3	14.23	14.20	14.13	1
		6	0	14.28	14.25	14.17	2
1.4M	64QAM	1	0	14.15	14.12	14.05	2
		1	2	14.14	14.11	14.04	2
		1	5	14.12	14.09	14.02	2
		3	0	13.22	13.19	13.12	2
		3	1	13.22	13.19	13.12	2
		3	3	13.20	13.17	13.10	2
		6	0	13.24	13.21	13.14	3

LTE Conducted Power (Reduction)							
LTE Band 26							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		26765	26865	26965	
		Frequency (MHz)		821.5	831.5	841.5	
15M	QPSK	1	0	21.35	21.36	21.24	0
		1	37	21.2	21.15	21.1	0
		1	74	21.14	21.09	21.04	0
		36	0	20.39	20.41	20.29	1
		36	19	20.31	20.26	20.21	1
		36	39	20.22	20.17	20.12	1
		75	0	20.27	20.29	20.17	1
15M	16QAM	1	0	20.6	20.55	20.5	1
		1	37	20.46	20.41	20.36	1
		1	74	20.4	20.35	20.3	1
		36	0	19.68	19.63	19.58	2
		36	19	19.6	19.55	19.5	2
		36	39	19.51	19.46	19.41	2
		75	0	19.56	19.51	19.46	2
15M	64QAM	1	0	19.46	19.41	19.36	2
		1	37	19.33	19.28	19.23	2
		1	74	19.27	19.22	19.17	2
		36	0	18.59	18.54	18.49	3
		36	19	18.52	18.47	18.42	3
		36	39	18.43	18.38	18.33	3
		75	0	18.48	18.43	18.38	3
BW	MCS Index	Channel		26740	26865	26990	3GPP MPR
		Frequency (MHz)		819	831.5	844	
10M	QPSK	1	0	21.30	21.24	21.19	0
		1	24	21.15	21.10	21.05	0
		1	49	21.09	21.04	20.99	0
		25	0	20.34	20.29	20.24	1
		25	12	20.26	20.21	20.16	1
		25	25	20.17	20.12	20.07	1
		50	0	20.22	20.17	20.12	1
10M	16QAM	1	0	20.55	20.50	20.45	1
		1	24	20.41	20.36	20.31	1
		1	49	20.35	20.30	20.25	1
		25	0	19.63	19.58	19.53	2
		25	12	19.55	19.50	19.45	2
		25	25	19.46	19.41	19.36	2
		50	0	19.51	19.46	19.41	2
10M	64QAM	1	0	19.41	19.36	19.31	2
		1	24	19.28	19.23	19.18	2
		1	49	19.22	19.17	19.12	2
		25	0	18.54	18.49	18.44	3
		25	12	18.47	18.42	18.37	3
		25	25	18.38	18.33	18.28	3
		50	0	18.43	18.38	18.33	3

LTE Conducted Power (Reduction)							
LTE Band 26							
BW	MCS Index	Channel		26715	26865	27015	3GPP MPR
		Frequency (MHz)		816.5	831.5	846.5	
5M	QPSK	1	0	21.26	21.20	21.15	0
		1	12	21.11	21.06	21.01	0
		1	24	21.05	21.00	20.95	0
		12	0	20.30	20.25	20.20	1
		12	6	20.22	20.17	20.12	1
		12	13	20.13	20.08	20.03	1
		25	0	20.18	20.13	20.08	1
5M	16QAM	1	0	20.51	20.46	20.41	1
		1	12	20.37	20.32	20.27	1
		1	24	20.31	20.26	20.21	1
		12	0	19.59	19.54	19.49	2
		12	6	19.51	19.46	19.41	2
		12	13	19.42	19.37	19.32	2
		25	0	19.47	19.42	19.37	2
5M	64QAM	1	0	19.37	19.32	19.27	2
		1	12	19.24	19.19	19.14	2
		1	24	19.18	19.13	19.08	2
		12	0	18.50	18.45	18.40	3
		12	6	18.43	18.38	18.33	3
		12	13	18.34	18.29	18.24	3
		25	0	18.39	18.34	18.29	3
BW	MCS Index	Channel		26705	26865	27025	3GPP MPR
		Frequency (MHz)		815.5	831.5	847.5	
3M	QPSK	1	0	21.22	21.16	21.11	0
		1	7	21.07	21.02	20.97	0
		1	14	21.01	20.96	20.91	0
		8	0	20.26	20.21	20.16	1
		8	3	20.18	20.13	20.08	1
		8	7	20.09	20.04	19.99	1
		15	0	20.14	20.09	20.04	1
3M	16QAM	1	0	20.47	20.42	20.37	1
		1	7	20.33	20.28	20.23	1
		1	14	20.27	20.22	20.17	1
		8	0	19.55	19.50	19.45	2
		8	3	19.47	19.42	19.37	2
		8	7	19.38	19.33	19.28	2
		15	0	19.43	19.38	19.33	2
3M	64QAM	1	0	19.33	19.28	19.23	2
		1	7	19.20	19.15	19.10	2
		1	14	19.14	19.09	19.04	2
		8	0	18.46	18.41	18.36	3
		8	3	18.39	18.34	18.29	3
		8	7	18.30	18.25	18.20	3
		15	0	18.35	18.30	18.25	3

LTE Conducted Power (Reduction)							
LTE Band 26							
BW	MCS Index	Channel		26697	26865	27033	3GPP MPR
		Frequency (MHz)		814.7	831.5	848.3	
1.4M	QPSK	1	0	21.18	21.12	21.07	0
		1	2	21.03	20.98	20.93	0
		1	5	20.97	20.92	20.87	0
		3	0	21.12	21.07	21.02	0
		3	1	21.04	20.99	20.94	0
		3	3	20.95	20.90	20.85	0
		6	0	20.10	20.05	20.00	1
1.4M	16QAM	1	0	20.43	20.38	20.33	1
		1	2	20.29	20.24	20.19	1
		1	5	20.23	20.18	20.13	1
		3	0	19.51	19.46	19.41	1
		3	1	19.43	19.38	19.33	1
		3	3	19.34	19.29	19.24	1
		6	0	19.39	19.34	19.29	2
1.4M	64QAM	1	0	19.29	19.24	19.19	2
		1	2	19.16	19.11	19.06	2
		1	5	19.10	19.05	19.00	2
		3	0	18.42	18.37	18.32	2
		3	1	18.35	18.30	18.25	2
		3	3	18.26	18.21	18.16	2
		6	0	18.31	18.26	18.21	3

LTE Conducted Power (Reduction)							
LTE Band 30							
BW	MCS Index	RB Size	RB Offset		Mid		3GPP MPR (dB)
		Channel			27710		
		Frequency (MHz)			2310		
10M	QPSK	1	0		20.29		0
		1	24		20.27		0
		1	49		20.23		0
		25	0		19.37		1
		25	12		19.36		1
		25	25		19.32		1
		50	0		19.40		1
10M	16QAM	1	0		19.49		1
		1	24		19.47		1
		1	49		19.43		1
		25	0		18.6		2
		25	12		18.59		2
		25	25		18.55		2
		50	0		18.63		2
10M	64QAM	1	0		18.47		2
		1	24		18.45		2
		1	49		18.41		2
		25	0		17.63		3
		25	12		17.62		3
		25	25		17.58		3
		50	0		17.65		3
BW	MCS Index	Channel		27685	27710	27735	3GPP MPR
		Frequency (MHz)		2307.5	2310	2312.5	
5M	QPSK	1	0	20.12	20.21	20.17	0
		1	12	20.10	20.19	20.15	0
		1	24	20.06	20.15	20.11	0
		12	0	19.20	19.29	19.25	1
		12	6	19.19	19.28	19.24	1
		12	13	19.15	19.24	19.20	1
		25	0	19.23	19.32	19.28	1
5M	16QAM	1	0	19.32	19.41	19.37	1
		1	12	19.30	19.39	19.35	1
		1	24	19.26	19.35	19.31	1
		12	0	18.43	18.52	18.48	2
		12	6	18.42	18.51	18.47	2
		12	13	18.38	18.47	18.43	2
		25	0	18.46	18.55	18.51	2
5M	64QAM	1	0	18.30	18.39	18.35	2
		1	12	18.28	18.37	18.33	2
		1	24	18.24	18.33	18.29	2
		12	0	17.46	17.55	17.51	3
		12	6	17.45	17.54	17.50	3
		12	13	17.41	17.50	17.46	3
		25	0	17.48	17.57	17.53	3

LTE Conducted Power (Reduction)							
LTE Band 38							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		37850	38000	38150	
		Frequency (MHz)		2580	2595	2610	
20M	QPSK	1	0	20.34	20.37	20.41	0
		1	50	20.32	20.35	20.39	0
		1	99	20.21	20.24	20.27	0
		50	0	19.3	19.33	19.36	1
		50	25	19.28	19.31	19.34	1
		50	50	19.25	19.28	19.31	1
		100	0	19.31	19.34	19.37	1
20M	16QAM	1	0	19.43	19.46	19.49	1
		1	50	19.41	19.44	19.47	1
		1	99	19.3	19.33	19.36	1
		50	0	18.43	18.46	18.49	2
		50	25	18.41	18.44	18.47	2
		50	50	18.38	18.41	18.44	2
		100	0	18.44	18.47	18.5	2
20M	64QAM	1	0	18.12	18.15	18.18	2
		1	50	18.1	18.13	18.16	2
		1	99	18	18.03	18.06	2
		50	0	17.19	17.22	17.25	3
		50	25	17.17	17.2	17.23	3
		50	50	17.14	17.17	17.2	3
		100	0	17.2	17.23	17.26	3
BW	MCS Index	Channel		37825	38000	38175	3GPP MPR
		Frequency (MHz)		2577.5	2595	2612.5	
15M	QPSK	1	0	20.25	20.28	20.32	0
		1	37	20.23	20.26	20.30	0
		1	74	20.12	20.15	20.18	0
		36	0	19.21	19.24	19.27	1
		36	19	19.19	19.22	19.25	1
		36	39	19.16	19.19	19.22	1
		75	0	19.22	19.25	19.28	1
15M	16QAM	1	0	19.34	19.37	19.40	1
		1	37	19.32	19.35	19.38	1
		1	74	19.21	19.24	19.27	1
		36	0	18.34	18.37	18.40	2
		36	19	18.32	18.35	18.38	2
		36	39	18.29	18.32	18.35	2
		75	0	18.35	18.38	18.41	2
15M	64QAM	1	0	18.03	18.06	18.09	2
		1	37	18.01	18.04	18.07	2
		1	74	17.91	17.94	17.97	2
		36	0	17.10	17.13	17.16	3
		36	19	17.08	17.11	17.14	3
		36	39	17.05	17.08	17.11	3
		75	0	17.11	17.14	17.17	3

LTE Conducted Power (Reduction)							
LTE Band 38							
BW	MCS Index	Channel		37800	38000	38200	3GPP MPR
		Frequency (MHz)		2575	2595	2615	
10M	QPSK	1	0	20.21	20.24	20.28	0
		1	24	20.19	20.22	20.26	0
		1	49	20.08	20.11	20.14	0
		25	0	19.17	19.20	19.23	1
		25	12	19.15	19.18	19.21	1
		25	25	19.12	19.15	19.18	1
		50	0	19.18	19.21	19.24	1
10M	16QAM	1	0	19.30	19.33	19.36	1
		1	24	19.28	19.31	19.34	1
		1	49	19.17	19.20	19.23	1
		25	0	18.30	18.33	18.36	2
		25	12	18.28	18.31	18.34	2
		25	25	18.25	18.28	18.31	2
		50	0	18.31	18.34	18.37	2
10M	64QAM	1	0	17.99	18.02	18.05	2
		1	24	17.97	18.00	18.03	2
		1	49	17.87	17.90	17.93	2
		25	0	17.06	17.09	17.12	3
		25	12	17.04	17.07	17.10	3
		25	25	17.01	17.04	17.07	3
		50	0	17.07	17.10	17.13	3
BW	MCS Index	Channel		37775	38000	38225	3GPP MPR
		Frequency (MHz)		2572.5	2595	2617.5	
5M	QPSK	1	0	20.17	20.20	20.24	0
		1	12	20.15	20.18	20.22	0
		1	24	20.04	20.07	20.10	0
		12	0	19.13	19.16	19.19	1
		12	6	19.11	19.14	19.17	1
		12	13	19.08	19.11	19.14	1
		25	0	19.14	19.17	19.20	1
5M	16QAM	1	0	19.26	19.29	19.32	1
		1	12	19.24	19.27	19.30	1
		1	24	19.13	19.16	19.19	1
		12	0	18.26	18.29	18.32	2
		12	6	18.24	18.27	18.30	2
		12	13	18.21	18.24	18.27	2
		25	0	18.27	18.30	18.33	2
5M	64QAM	1	0	17.95	17.98	18.01	2
		1	12	17.93	17.96	17.99	2
		1	24	17.83	17.86	17.89	2
		12	0	17.02	17.05	17.08	3
		12	6	17.00	17.03	17.06	3
		12	13	16.97	17.00	17.03	3
		25	0	17.03	17.06	17.09	3

LTE Conducted Power (Reduction)

LTE Band 41

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	Mid	High	3GPP MPR (dB)
		Channel		39750	40185	40620	41055	41490	
		Frequency (MHz)		2506	2549.5	2593	2636.5	2680	
20M	QPSK	1	0	20.13	20.19	20.31	20.46	20.44	0
		1	50	20.08	20.14	20.26	20.41	20.39	0
		1	99	20.07	20.13	20.25	20.4	20.38	0
		50	0	19.19	19.25	19.36	19.51	19.49	1
		50	25	19.13	19.19	19.3	19.45	19.43	1
		50	50	19.11	19.17	19.28	19.43	19.41	1
		100	0	19.21	19.27	19.38	19.53	19.51	1
20M	16QAM	1	0	19.25	19.31	19.42	19.57	19.55	1
		1	50	19.2	19.26	19.37	19.52	19.5	1
		1	99	19.19	19.25	19.36	19.51	19.49	1
		50	0	18.35	18.41	18.52	18.66	18.64	2
		50	25	18.29	18.35	18.46	18.6	18.58	2
		50	50	18.27	18.33	18.44	18.58	18.56	2
		100	0	18.37	18.43	18.54	18.68	18.66	2
20M	64QAM	1	0	17.97	18.02	18.13	18.27	18.25	2
		1	50	17.92	17.97	18.08	18.22	18.2	2
		1	99	17.91	17.96	18.07	18.21	18.19	2
		50	0	17.13	17.18	17.28	17.42	17.4	3
		50	25	17.07	17.12	17.22	17.36	17.34	3
		50	50	17.06	17.11	17.21	17.35	17.33	3
		100	0	17.14	17.19	17.29	17.43	17.41	3
BW	MCS Index	Channel		39725	40173	40620	41068	41515	3GPP MPR
		Frequency (MHz)		2503.5	2548.3	2593	2637.8	2682.5	
15M	QPSK	1	0	20.04	20.10	20.22	20.37	20.35	0
		1	37	19.99	20.05	20.17	20.32	20.30	0
		1	74	19.98	20.04	20.16	20.31	20.29	0
		36	0	19.10	19.16	19.27	19.42	19.40	1
		36	19	19.04	19.10	19.21	19.36	19.34	1
		36	39	19.02	19.08	19.19	19.34	19.32	1
		75	0	19.12	19.18	19.29	19.44	19.42	1
15M	16QAM	1	0	19.16	19.22	19.33	19.48	19.46	1
		1	37	19.11	19.17	19.28	19.43	19.41	1
		1	74	19.10	19.16	19.27	19.42	19.40	1
		36	0	18.26	18.32	18.43	18.57	18.55	2
		36	19	18.20	18.26	18.37	18.51	18.49	2
		36	39	18.18	18.24	18.35	18.49	18.47	2
		75	0	18.28	18.34	18.45	18.59	18.57	2
15M	64QAM	1	0	17.88	17.93	18.04	18.18	18.16	2
		1	37	17.83	17.88	17.99	18.13	18.11	2
		1	74	17.82	17.87	17.98	18.12	18.10	2
		36	0	17.04	17.09	17.19	17.33	17.31	3
		36	19	16.98	17.03	17.13	17.27	17.25	3
		36	39	16.97	17.02	17.12	17.26	17.24	3
		75	0	17.05	17.10	17.20	17.34	17.32	3

LTE Conducted Power (Reduction)

LTE Band 41

BW	MCS Index	Channel		39700	40160	40620	41080	41540	3GPP MPR
		Frequency (MHz)		2501	2547	2593	2639	2685	
10M	QPSK	1	0	20.00	20.06	20.18	20.33	20.31	0
		1	24	19.95	20.01	20.13	20.28	20.26	0
		1	49	19.94	20.00	20.12	20.27	20.25	0
		25	0	19.06	19.12	19.23	19.38	19.36	1
		25	12	19.00	19.06	19.17	19.32	19.30	1
		25	25	18.98	19.04	19.15	19.30	19.28	1
		50	0	19.08	19.14	19.25	19.40	19.38	1
10M	16QAM	1	0	19.12	19.18	19.29	19.44	19.42	1
		1	24	19.07	19.13	19.24	19.39	19.37	1
		1	49	19.06	19.12	19.23	19.38	19.36	1
		25	0	18.22	18.28	18.39	18.53	18.51	2
		25	12	18.16	18.22	18.33	18.47	18.45	2
		25	25	18.14	18.20	18.31	18.45	18.43	2
		50	0	18.24	18.30	18.41	18.55	18.53	2
10M	64QAM	1	0	17.84	17.89	18.00	18.14	18.12	2
		1	24	17.79	17.84	17.95	18.09	18.07	2
		1	49	17.78	17.83	17.94	18.08	18.06	2
		25	0	17.00	17.05	17.15	17.29	17.27	3
		25	12	16.94	16.99	17.09	17.23	17.21	3
		25	25	16.93	16.98	17.08	17.22	17.20	3
		50	0	17.01	17.06	17.16	17.30	17.28	3
BW	MCS Index	Channel		39675	40148	40620	41093	41565	3GPP MPR
		Frequency (MHz)		2498.5	2545.8	2593	2640.3	2687.5	
5M	QPSK	1	0	19.96	20.02	20.14	20.29	20.27	0
		1	12	19.91	19.97	20.09	20.24	20.22	0
		1	24	19.90	19.96	20.08	20.23	20.21	0
		12	0	19.02	19.08	19.19	19.34	19.32	1
		12	6	18.96	19.02	19.13	19.28	19.26	1
		12	13	18.94	19.00	19.11	19.26	19.24	1
		25	0	19.04	19.10	19.21	19.36	19.34	1
5M	16QAM	1	0	19.08	19.14	19.25	19.40	19.38	1
		1	12	19.03	19.09	19.20	19.35	19.33	1
		1	24	19.02	19.08	19.19	19.34	19.32	1
		12	0	18.18	18.24	18.35	18.49	18.47	2
		12	6	18.12	18.18	18.29	18.43	18.41	2
		12	13	18.10	18.16	18.27	18.41	18.39	2
		25	0	18.20	18.26	18.37	18.51	18.49	2
5M	64QAM	1	0	17.80	17.85	17.96	18.10	18.08	2
		1	12	17.75	17.80	17.91	18.05	18.03	2
		1	24	17.74	17.79	17.90	18.04	18.02	2
		12	0	16.96	17.01	17.11	17.25	17.23	3
		12	6	16.90	16.95	17.05	17.19	17.17	3
		12	13	16.89	16.94	17.04	17.18	17.16	3
		25	0	16.97	17.02	17.12	17.26	17.24	3

LTE Conducted Power (Reduction)

LTE Band 48

BW	MCS Index	RB Size	RB Offset	Low	Mid	Mid	High	3GPP MPR (dB)
		Channel		55340	55780	56210	56640	
		Frequency (MHz)		3560	3603	3647	3690	
20M	QPSK	1	0	20.33	20.59	20.75	20.72	0
		1	50	20.32	20.58	20.74	20.71	0
		1	99	20.31	20.57	20.73	20.7	0
		50	0	19.4	19.65	19.81	19.78	1
		50	25	19.38	19.63	19.79	19.76	1
		50	50	19.36	19.6	19.76	19.73	1
		100	0	19.36	19.61	19.77	19.74	1
20M	16QAM	1	0	19.54	19.79	19.95	19.92	1
		1	50	19.53	19.78	19.94	19.91	1
		1	99	19.52	19.77	19.93	19.9	1
		50	0	18.65	18.89	19.04	19.01	2
		50	25	18.63	18.87	19.02	18.99	2
		50	50	18.6	18.84	18.99	18.96	2
		100	0	18.61	18.85	19	18.97	2
20M	64QAM	1	0	18.25	18.48	18.63	18.6	2
		1	50	18.24	18.47	18.62	18.59	2
		1	99	18.23	18.46	18.61	18.58	2
		50	0	17.42	17.64	17.78	17.75	3
		50	25	17.4	17.62	17.76	17.73	3
		50	50	17.38	17.6	17.74	17.71	3
		100	0	17.39	17.61	17.75	17.72	3
BW	MCS Index	Channel		55315	55765	56215	56665	3GPP MPR
		Frequency (MHz)		3557.5	3602.5	3647.5	3692.5	
15M	QPSK	1	0	20.24	20.50	20.66	20.63	0
		1	37	20.23	20.49	20.65	20.62	0
		1	74	20.22	20.48	20.64	20.61	0
		36	0	19.31	19.56	19.72	19.69	1
		36	19	19.29	19.54	19.70	19.67	1
		36	39	19.27	19.51	19.67	19.64	1
		75	0	19.27	19.52	19.68	19.65	1
15M	16QAM	1	0	19.45	19.70	19.86	19.83	1
		1	37	19.44	19.69	19.85	19.82	1
		1	74	19.43	19.68	19.84	19.81	1
		36	0	18.56	18.80	18.95	18.92	2
		36	19	18.54	18.78	18.93	18.90	2
		36	39	18.51	18.75	18.90	18.87	2
		75	0	18.52	18.76	18.91	18.88	2
15M	64QAM	1	0	18.16	18.39	18.54	18.51	2
		1	37	18.15	18.38	18.53	18.50	2
		1	74	18.14	18.37	18.52	18.49	2
		36	0	17.33	17.55	17.69	17.66	3
		36	19	17.31	17.53	17.67	17.64	3
		36	39	17.29	17.51	17.65	17.62	3
		75	0	17.30	17.52	17.66	17.63	3

LTE Conducted Power (Reduction)

LTE Band 48

BW	MCS Index	Channel		55290	55750	56220	56690	3GPP MPR
		Frequency (MHz)		3555	3601	3648	3695	
10M	QPSK	1	0	20.20	20.46	20.62	20.59	0
		1	24	20.19	20.45	20.61	20.58	0
		1	49	20.18	20.44	20.60	20.57	0
		25	0	19.27	19.52	19.68	19.65	1
		25	12	19.25	19.50	19.66	19.63	1
		25	25	19.23	19.47	19.63	19.60	1
		50	0	19.23	19.48	19.64	19.61	1
10M	16QAM	1	0	19.41	19.66	19.82	19.79	1
		1	24	19.40	19.65	19.81	19.78	1
		1	49	19.39	19.64	19.80	19.77	1
		25	0	18.52	18.76	18.91	18.88	2
		25	12	18.50	18.74	18.89	18.86	2
		25	25	18.47	18.71	18.86	18.83	2
		50	0	18.48	18.72	18.87	18.84	2
10M	64QAM	1	0	18.12	18.35	18.50	18.47	2
		1	24	18.11	18.34	18.49	18.46	2
		1	49	18.10	18.33	18.48	18.45	2
		25	0	17.29	17.51	17.65	17.62	3
		25	12	17.27	17.49	17.63	17.60	3
		25	25	17.25	17.47	17.61	17.58	3
		50	0	17.26	17.48	17.62	17.59	3
BW	MCS Index	Channel		55265	55745	56235	56715	3GPP MPR
		Frequency (MHz)		3552.5	360-0.5	3649.5	3697.5	
5M	QPSK	1	0	20.16	20.42	20.58	20.55	0
		1	12	20.15	20.41	20.57	20.54	0
		1	24	20.14	20.40	20.56	20.53	0
		12	0	19.23	19.48	19.64	19.61	1
		12	6	19.21	19.46	19.62	19.59	1
		12	13	19.19	19.43	19.59	19.56	1
		25	0	19.19	19.44	19.60	19.57	1
5M	16QAM	1	0	19.37	19.62	19.78	19.75	1
		1	12	19.36	19.61	19.77	19.74	1
		1	24	19.35	19.60	19.76	19.73	1
		12	0	18.48	18.72	18.87	18.84	2
		12	6	18.46	18.70	18.85	18.82	2
		12	13	18.43	18.67	18.82	18.79	2
		25	0	18.44	18.68	18.83	18.80	2
5M	64QAM	1	0	18.08	18.31	18.46	18.43	2
		1	12	18.07	18.30	18.45	18.42	2
		1	24	18.06	18.29	18.44	18.41	2
		12	0	17.25	17.47	17.61	17.58	3
		12	6	17.23	17.45	17.59	17.56	3
		12	13	17.21	17.43	17.57	17.54	3
		25	0	17.22	17.44	17.58	17.55	3

LTE Conducted Power (Reduction)							
LTE Band 66							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		132072	132322	132572	
		Frequency (MHz)		1720	1745	1770	
20M	QPSK	1	0	15.09	15.56	15.33	0
		1	50	15	15.47	15.24	0
		1	99	14.97	15.44	15.21	0
		50	0	14.16	14.61	14.39	1
		50	25	14.08	14.52	14.3	1
		50	50	14.06	14.50	14.28	1
		100	0	14.2	14.65	14.43	1
20M	16QAM	1	0	14.07	14.51	14.29	1
		1	50	13.98	14.42	14.2	1
		1	99	13.95	14.39	14.17	1
		50	0	13.2	13.62	13.41	2
		50	25	13.13	13.54	13.33	2
		50	50	13.11	13.52	13.32	2
		100	0	13.24	13.66	13.45	2
20M	64QAM	1	0	13.35	13.77	13.56	2
		1	50	13.27	13.69	13.48	2
		1	99	13.24	13.66	13.45	2
		50	0	12.52	12.92	12.72	3
		50	25	12.45	12.84	12.65	3
		50	50	12.44	12.83	12.64	3
		100	0	12.56	12.96	12.76	3
BW	MCS Index	Channel		132047	132322	132597	3GPP MPR
		Frequency (MHz)		1717.5	1745	1772.5	
15M	QPSK	1	0	15.06	15.53	15.30	0
		1	37	14.97	15.44	15.21	0
		1	74	14.94	15.41	15.18	0
		36	0	14.13	14.58	14.36	1
		36	19	14.05	14.49	14.27	1
		36	39	14.03	14.47	14.25	1
		75	0	14.17	14.62	14.40	1
15M	16QAM	1	0	14.04	14.48	14.26	1
		1	37	13.95	14.39	14.17	1
		1	74	13.92	14.36	14.14	1
		36	0	13.17	13.59	13.38	2
		36	19	13.10	13.51	13.30	2
		36	39	13.08	13.49	13.29	2
		75	0	13.21	13.63	13.42	2
15M	64QAM	1	0	13.32	13.74	13.53	2
		1	37	13.24	13.66	13.45	2
		1	74	13.21	13.63	13.42	2
		36	0	12.49	12.89	12.69	3
		36	19	12.42	12.81	12.62	3
		36	39	12.41	12.80	12.61	3
		75	0	12.53	12.93	12.73	3

LTE Conducted Power (Reduction)							
LTE Band 66							
BW	MCS Index	Channel		132022	132322	132622	3GPP MPR
		Frequency (MHz)		1715	1745	1775	
10M	QPSK	1	0	15.04	15.51	15.28	0
		1	24	14.95	15.42	15.19	0
		1	49	14.92	15.39	15.16	0
		25	0	14.11	14.56	14.34	1
		25	12	14.03	14.47	14.25	1
		25	25	14.01	14.45	14.23	1
		50	0	14.15	14.60	14.38	1
10M	16QAM	1	0	14.02	14.46	14.24	1
		1	24	13.93	14.37	14.15	1
		1	49	13.90	14.34	14.12	1
		25	0	13.15	13.57	13.36	2
		25	12	13.08	13.49	13.28	2
		25	25	13.06	13.47	13.27	2
		50	0	13.19	13.61	13.40	2
10M	64QAM	1	0	13.30	13.72	13.51	2
		1	24	13.22	13.64	13.43	2
		1	49	13.19	13.61	13.40	2
		25	0	12.47	12.87	12.67	3
		25	12	12.40	12.79	12.60	3
		25	25	12.39	12.78	12.59	3
		50	0	12.51	12.91	12.71	3
BW	MCS Index	Channel		131997	132322	132647	3GPP MPR
		Frequency (MHz)		1712.5	1745	1777.5	
5M	QPSK	1	0	15.00	15.47	15.24	0
		1	12	14.91	15.38	15.15	0
		1	24	14.88	15.35	15.12	0
		12	0	14.07	14.52	14.30	1
		12	6	13.99	14.43	14.21	1
		12	13	13.97	14.41	14.19	1
		25	0	14.11	14.56	14.34	1
5M	16QAM	1	0	13.98	14.42	14.20	1
		1	12	13.89	14.33	14.11	1
		1	24	13.86	14.30	14.08	1
		12	0	13.11	13.53	13.32	2
		12	6	13.04	13.45	13.24	2
		12	13	13.02	13.43	13.23	2
		25	0	13.15	13.57	13.36	2
5M	64QAM	1	0	13.26	13.68	13.47	2
		1	12	13.18	13.60	13.39	2
		1	24	13.15	13.57	13.36	2
		12	0	12.43	12.83	12.63	3
		12	6	12.36	12.75	12.56	3
		12	13	12.35	12.74	12.55	3
		25	0	12.47	12.87	12.67	3

LTE Conducted Power (Reduction)							
LTE Band 66							
BW	MCS Index	Channel		131987	132322	132657	3GPP MPR
		Frequency (MHz)		1711.5	1745	1778.5	
3M	QPSK	1	0	14.96	15.43	15.20	0
		1	7	14.87	15.34	15.11	0
		1	14	14.84	15.31	15.08	0
		8	0	14.03	14.48	14.26	1
		8	3	13.95	14.39	14.17	1
		8	7	13.93	14.37	14.15	1
		15	0	14.07	14.52	14.30	1
3M	16QAM	1	0	13.94	14.38	14.16	1
		1	7	13.85	14.29	14.07	1
		1	14	13.82	14.26	14.04	1
		8	0	13.07	13.49	13.28	2
		8	3	13.00	13.41	13.20	2
		8	7	12.98	13.39	13.19	2
		15	0	13.11	13.53	13.32	2
3M	64QAM	1	0	13.22	13.64	13.43	2
		1	7	13.14	13.56	13.35	2
		1	14	13.11	13.53	13.32	2
		8	0	12.39	12.79	12.59	3
		8	3	12.32	12.71	12.52	3
		8	7	12.31	12.70	12.51	3
		15	0	12.43	12.83	12.63	3
BW	MCS Index	Channel		131979	132322	132665	3GPP MPR
		Frequency (MHz)		171-0.7	1745	1779.3	
1.4M	QPSK	1	0	14.92	15.39	15.16	0
		1	2	14.83	15.30	15.07	0
		1	5	14.80	15.27	15.04	0
		3	0	14.89	15.34	15.12	0
		3	1	14.81	15.25	15.03	0
		3	3	14.79	15.23	15.01	0
		6	0	14.03	14.48	14.26	1
1.4M	16QAM	1	0	13.90	14.34	14.12	1
		1	2	13.81	14.25	14.03	1
		1	5	13.78	14.22	14.00	1
		3	0	13.93	14.35	14.14	1
		3	1	13.86	14.27	14.06	1
		3	3	13.84	14.25	14.05	1
		6	0	13.07	13.49	13.28	2
1.4M	64QAM	1	0	13.18	13.60	13.39	2
		1	2	13.10	13.52	13.31	2
		1	5	13.07	13.49	13.28	2
		3	0	13.25	13.65	13.45	2
		3	1	13.18	13.57	13.38	2
		3	3	13.17	13.56	13.37	2
		6	0	12.39	12.79	12.59	3

LTE Conducted Power (Reduction)							
LTE Band 71							
BW	MCS Index	RB Size	RB Offset	Low	Mid	High	3GPP MPR (dB)
		Channel		133222	133297	133372	
		Frequency (MHz)		673	680.5	688	
20M	QPSK	1	0	22.87	22.89	22.67	0
		1	50	22.65	22.68	22.46	0
		1	99	22.56	22.59	22.37	0
		50	0	21.73	21.76	21.54	1
		50	25	21.67	21.70	21.48	1
		50	50	21.58	21.61	21.39	1
		100	0	21.63	21.66	21.44	1
20M	16QAM	1	0	22.13	22.16	21.94	1
		1	50	21.92	21.95	21.73	1
		1	99	21.83	21.86	21.64	1
		50	0	21.03	21.06	20.85	2
		50	25	20.97	21	20.79	2
		50	50	20.89	20.92	20.71	2
		100	0	20.93	20.96	20.75	2
20M	64QAM	1	0	21.03	21.06	20.85	2
		1	50	20.83	20.86	20.65	2
		1	99	20.75	20.78	20.57	2
		50	0	19.99	20.02	19.82	3
		50	25	19.93	19.96	19.76	3
		50	50	19.85	19.88	19.68	3
		100	0	19.89	19.92	19.72	3
BW	MCS Index	Channel		133197	133297	133397	3GPP MPR
		Frequency (MHz)		670.5	680.5	690.5	
15M	QPSK	1	0	22.78	22.80	22.58	0
		1	37	22.56	22.59	22.37	0
		1	74	22.47	22.50	22.28	0
		36	0	21.64	21.67	21.45	1
		36	19	21.58	21.61	21.39	1
		36	39	21.49	21.52	21.30	1
		75	0	21.54	21.57	21.35	1
15M	16QAM	1	0	22.04	22.07	21.85	1
		1	37	21.83	21.86	21.64	1
		1	74	21.74	21.77	21.55	1
		36	0	20.94	20.97	20.76	2
		36	19	20.88	20.91	20.70	2
		36	39	20.80	20.83	20.62	2
		75	0	20.84	20.87	20.66	2
15M	64QAM	1	0	20.94	20.97	20.76	2
		1	37	20.74	20.77	20.56	2
		1	74	20.66	20.69	20.48	2
		36	0	19.90	19.93	19.73	3
		36	19	19.84	19.87	19.67	3
		36	39	19.76	19.79	19.59	3
		75	0	19.80	19.83	19.63	3

LTE Conducted Power (Reduction)							
LTE Band 71							
BW	MCS Index	Channel		133172	133297	133422	3GPP MPR
		Frequency (MHz)		668	68-0.5	693	
10M	QPSK	1	0	22.74	22.76	22.54	0
		1	24	22.52	22.55	22.33	0
		1	49	22.43	22.46	22.24	0
		25	0	21.60	21.63	21.41	1
		25	12	21.54	21.57	21.35	1
		25	25	21.45	21.48	21.26	1
		50	0	21.50	21.53	21.31	1
10M	16QAM	1	0	22.00	22.03	21.81	1
		1	24	21.79	21.82	21.60	1
		1	49	21.70	21.73	21.51	1
		25	0	20.90	20.93	20.72	2
		25	12	20.84	20.87	20.66	2
		25	25	20.76	20.79	20.58	2
		50	0	20.80	20.83	20.62	2
10M	64QAM	1	0	20.90	20.93	20.72	2
		1	24	20.70	20.73	20.52	2
		1	49	20.62	20.65	20.44	2
		25	0	19.86	19.89	19.69	3
		25	12	19.80	19.83	19.63	3
		25	25	19.72	19.75	19.55	3
		50	0	19.76	19.79	19.59	3
BW	MCS Index	Channel		133147	133297	133447	3GPP MPR
		Frequency (MHz)		665.5	68-0.5	695.5	
5M	QPSK	1	0	22.70	22.72	22.50	0
		1	12	22.48	22.51	22.29	0
		1	24	22.39	22.42	22.20	0
		12	0	21.56	21.59	21.37	1
		12	6	21.50	21.53	21.31	1
		12	13	21.41	21.44	21.22	1
		25	0	21.46	21.49	21.27	1
5M	16QAM	1	0	21.96	21.99	21.77	1
		1	12	21.75	21.78	21.56	1
		1	24	21.66	21.69	21.47	1
		12	0	20.86	20.89	20.68	2
		12	6	20.80	20.83	20.62	2
		12	13	20.72	20.75	20.54	2
		25	0	20.76	20.79	20.58	2
5M	64QAM	1	0	20.86	20.89	20.68	2
		1	12	20.66	20.69	20.48	2
		1	24	20.58	20.61	20.40	2
		12	0	19.82	19.85	19.65	3
		12	6	19.76	19.79	19.59	3
		12	13	19.68	19.71	19.51	3
		25	0	19.72	19.75	19.55	3

Appendix F. SAR and Incident Power Density Test Result

SAR Results for Body Exposure Condition.

Note:

1. SAR testing for WLAN / BT was performed on the maximum power mode.
2. SAR testing for LTE was performed on the maximum power mode.
3. The "< 0.001" means there is no SAR value or the SAR is too low to be measured.
4. Per KDB 388624 APPENDIX OVER6G, the minimum of 5 channels to perform IPD across U-NII 5,6,7 and 8. and measured results were scaled by factor 1.545 to reported power density when measurement uncertainty exceed 30%.

Body SAR Test Result

System & Position								DUT Configuration		SAR					
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Power Reduction	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WCDMA II	RMC12.2K	Rear Fcae	0	9400			Speed	w/o	24.50	24.19	1.07	0.07	0.158	0.17
	WCDMA II	RMC12.2K	Left Side	0	9400			Speed	w/o	24.50	24.19	1.07	0	<0.001	0.00
	WCDMA II	RMC12.2K	Right Side	0	9400			Speed	w/o	24.50	24.19	1.07	0.07	0.084	0.09
	WCDMA II	RMC12.2K	Top Side	16	9400			Speed	w/o	24.50	24.19	1.07	0.07	0.114	0.12
	WCDMA II	RMC12.2K	Bottom Side	0	9400			Speed	w/o	24.50	24.19	1.07	0	<0.001	0.00
	WCDMA II	RMC12.2K	Top Side	0	9400			Speed	w/	18.50	17.96	1.13	-0.09	0.863	0.98
1	WCDMA II	RMC12.2K	Top Side	0	9262			Speed	w/	18.50	17.84	1.16	0.08	1.02	1.18
	WCDMA II	RMC12.2K	Top Side	0	9538			Speed	w/	18.50	17.92	1.14	-0.18	0.801	0.91
	WCDMA II	RMC12.2K	Top Side	0	9262			WNC	w/	18.50	17.84	1.16	-0.07	0.993	1.15
	WCDMA II	RMC12.2K	Top Side	0	9262			Auden	w/	18.50	17.84	1.16	0.02	0.958	1.11
	WCDMA II	RMC12.2K	Top Side	0	9400			WNC	w/	18.50	17.96	1.13	-0.01	0.838	0.95
	WCDMA II	RMC12.2K	Top Side	0	9538			WNC	w/	18.50	17.92	1.14	0.06	0.779	0.89
	WCDMA II	RMC12.2K	Top Side	0	9400			Auden	w/	18.50	17.96	1.13	-0.02	0.802	0.91
	WCDMA II	RMC12.2K	Top Side	0	9538			Auden	w/	18.50	17.92	1.14	-0.16	0.743	0.85
	WCDMA II	RMC12.2K	Top Side	0	9262			Speed	w/	18.50	17.84	1.16	-0.09	0.967	1.12
		-								-	-	1		-	-
	WCDMA IV	RMC12.2K	Rear Fcae	0	1413			Speed	w/o	24.50	24.20	1.07	-0.1	0.165	0.18
	WCDMA IV	RMC12.2K	Left Side	0	1413			Speed	w/o	24.50	24.20	1.07	0	<0.001	0.00
	WCDMA IV	RMC12.2K	Right Side	0	1413			Speed	w/o	24.50	24.20	1.07	0.13	0.114	0.12
	WCDMA IV	RMC12.2K	Top Side	16	1413			Speed	w/o	24.50	24.20	1.07	-0.18	0.39	0.42
	WCDMA IV	RMC12.2K	Bottom Side	0	1413			Speed	w/o	24.50	24.20	1.07	-0.17	0.17	0.18
2	WCDMA IV	RMC12.2K	Top Side	0	1413			Speed	w/	18.50	17.81	1.17	0.05	0.897	1.05
	WCDMA IV	RMC12.2K	Top Side	0	1312			Speed	w/	18.50	17.75	1.19	-0.07	0.874	1.04
	WCDMA IV	RMC12.2K	Top Side	0	1513			Speed	w/	18.50	17.62	1.22	0.17	0.842	1.03
	WCDMA IV	RMC12.2K	Top Side	0	1413			WNC	w/	18.50	17.81	1.17	0.08	0.859	1.01
	WCDMA IV	RMC12.2K	Top Side	0	1413			Auden	w/	18.50	17.81	1.17	0.02	0.867	1.01
	WCDMA IV	RMC12.2K	Top Side	0	1312			WNC	w/	18.50	17.75	1.19	-0.14	0.848	1.01
	WCDMA IV	RMC12.2K	Top Side	0	1513			WNC	w/	18.50	17.62	1.22	0.19	0.815	0.99
	WCDMA IV	RMC12.2K	Top Side	0	1312			Auden	w/	18.50	17.75	1.19	0.15	0.813	0.97
	WCDMA IV	RMC12.2K	Top Side	0	1513			Auden	w/	18.50	17.62	1.22	0.16	0.784	0.96
	WCDMA IV	RMC12.2K	Top Side	0	1413			Speed	w/	18.50	17.81	1.17	0.08	0.851	1.00
		-								-	-	1		-	-

Body SAR Test Result

System & Position								DUT Configuration		SAR					
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Power Reduction	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WCDMA V	RMC12.2K	Rear Fcae	0	4132			Speed	w/o	24.50	24.30	1.05	0	<0.001	0.00
	WCDMA V	RMC12.2K	Left Side	0	4132			Speed	w/o	24.50	24.30	1.05	0	<0.001	0.00
	WCDMA V	RMC12.2K	Right Side	0	4132			Speed	w/o	24.50	24.30	1.05	0	<0.001	0.00
	WCDMA V	RMC12.2K	Top Side	0	4132			Speed	w/o	24.50	24.30	1.05	-0.02	0.454	0.48
	WCDMA V	RMC12.2K	Bottom Side	0	4132			Speed	w/o	24.50	24.30	1.05	0	<0.001	0.00
3	WCDMA V	RMC12.2K	Top Side	0	4182			Speed	w/o	24.50	24.11	1.09	0.02	0.481	0.52
	WCDMA V	RMC12.2K	Top Side	0	4233			Speed	w/o	24.50	23.97	1.13	-0.17	0.368	0.42
	WCDMA V	RMC12.2K	Top Side	0	4132			WNC	w/o	24.50	24.30	1.05	0.05	0.459	0.48
	WCDMA V	RMC12.2K	Top Side	0	4132			Auden	w/o	24.50	24.30	1.05	0.13	0.462	0.49
		-								-	-	1		-	-
	LTE 2	QPSK20M	Rear Fcae	0	18900	1	0	Speed	w/o	24.00	23.71	1.07	0.12	0.103	0.11
	LTE 2	QPSK20M	Left Side	0	18900	1	0	Speed	w/o	24.00	23.71	1.07	0	<0.001	0.00
	LTE 2	QPSK20M	Right Side	0	18900	1	0	Speed	w/o	24.00	23.71	1.07	-0.14	0.189	0.20
	LTE 2	QPSK20M	Top Side	16	18900	1	0	Speed	w/o	24.00	23.71	1.07	0.19	0.272	0.29
	LTE 2	QPSK20M	Bottom Side	0	18900	1	0	Speed	w/o	24.00	23.71	1.07	0	<0.001	0.00
	LTE 2	QPSK20M	Rear Fcae	0	18900	50	0	Speed	w/o	23.00	22.85	1.04	0.08	0.086	0.09
	LTE 2	QPSK20M	Left Side	0	18900	50	0	Speed	w/o	23.00	22.85	1.04	0	<0.001	0.00
	LTE 2	QPSK20M	Right Side	0	18900	50	0	Speed	w/o	23.00	22.85	1.04	-0.19	0.175	0.18
	LTE 2	QPSK20M	Top Side	16	18900	50	0	Speed	w/o	23.00	22.85	1.04	-0.18	0.253	0.26
	LTE 2	QPSK20M	Bottom Side	0	18900	50	0	Speed	w/o	23.00	22.85	1.04	0	<0.001	0.00
4	LTE 2	QPSK20M	Top Side	0	18900	1	0	Speed	w/	16.50	16.49	1.00	0.01	0.486	0.49
	LTE 2	QPSK20M	Top Side	0	18900	50	0	Speed	w/	15.50	15.48	1.00	0.04	0.425	0.43
	LTE 2	QPSK20M	Top Side	0	18700	1	0	Speed	w/	16.50	16.39	1.03	-0.09	0.41	0.42
	LTE 2	QPSK20M	Top Side	0	19100	1	0	Speed	w/	16.50	16.43	1.02	-0.05	0.464	0.47
	LTE 2	QPSK20M	Top Side	0	18900	1	0	WNC	w/	16.50	16.49	1.00	-0.08	0.471	0.47
	LTE 2	QPSK20M	Top Side	0	18900	1	0	Auden	w/	16.50	16.49	1.00	0.15	0.456	0.46
		-								-	-	1		-	-
	LTE 4	QPSK20M	Rear Fcae	0	20175	1	0	Speed	w/o	24.00	23.46	1.13	-0.12	0.094	0.11
	LTE 4	QPSK20M	Left Side	0	20175	1	0	Speed	w/o	24.00	23.46	1.13	0	<0.001	0.00
	LTE 4	QPSK20M	Right Side	0	20175	1	0	Speed	w/o	24.00	23.46	1.13	-0.12	0.055	0.06
	LTE 4	QPSK20M	Top Side	16	20175	1	0	Speed	w/o	24.00	23.46	1.13	-0.15	0.209	0.24
	LTE 4	QPSK20M	Bottom Side	0	20175	1	0	Speed	w/o	24.00	23.46	1.13	0	<0.001	0.00
	LTE 4	QPSK20M	Rear Fcae	0	20175	50	0	Speed	w/o	23.00	22.59	1.10	0.17	0.077	0.08
	LTE 4	QPSK20M	Left Side	0	20175	50	0	Speed	w/o	23.00	22.59	1.10	0	<0.001	0.00
	LTE 4	QPSK20M	Right Side	0	20175	50	0	Speed	w/o	23.00	22.59	1.10	0.01	0.051	0.06

Body SAR Test Result

System & Position								DUT Configuration		SAR					
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Power Reduction	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 4	QPSK20M	Top Side	16	20175	50	0	Speed	w/o	23.00	22.59	1.10	-0.14	0.179	0.20
	LTE 4	QPSK20M	Bottom Side	0	20175	50	0	Speed	w/o	23.00	22.59	1.10	0	<0.001	0.00
5	LTE 4	QPSK20M	Top Side	0	20175	1	0	Speed	w/	16.00	15.52	1.12	0.01	0.428	0.48
	LTE 4	QPSK20M	Top Side	0	20175	50	0	Speed	w/	15.00	14.57	1.10	-0.02	0.342	0.38
	LTE 4	QPSK20M	Top Side	0	20050	1	0	Speed	w/	16.00	15.39	1.15	-0.08	0.404	0.46
	LTE 4	QPSK20M	Top Side	0	20300	1	0	Speed	w/	16.00	15.46	1.13	0.14	0.375	0.42
	LTE 4	QPSK20M	Top Side	0	20175	1	0	WNC	w/	16.00	15.52	1.12	-0.12	0.413	0.46
	LTE 4	QPSK20M	Top Side	0	20175	1	0	Auden	w/	16.00	15.52	1.12	0.01	0.408	0.46
		-								-	-	1		-	-
	LTE 5	QPSK10M	Rear Fcae	0	20450	1	0	Speed	w/o	24.50	23.92	1.14	0	<0.001	0.00
	LTE 5	QPSK10M	Left Side	0	20450	1	0	Speed	w/o	24.50	23.92	1.14	0	<0.001	0.00
	LTE 5	QPSK10M	Right Side	0	20450	1	0	Speed	w/o	24.50	23.92	1.14	0	<0.001	0.00
	LTE 5	QPSK10M	Top Side	16	20450	1	0	Speed	w/o	24.50	23.92	1.14	0.14	0.05	0.06
	LTE 5	QPSK10M	Bottom Side	0	20450	1	0	Speed	w/o	24.50	23.92	1.14	0	<0.001	0.00
	LTE 5	QPSK10M	Rear Fcae	0	20450	25	0	Speed	w/o	23.50	22.90	1.15	0	<0.001	0.00
	LTE 5	QPSK10M	Left Side	0	20450	25	0	Speed	w/o	23.50	22.90	1.15	0	<0.001	0.00
	LTE 5	QPSK10M	Right Side	0	20450	25	0	Speed	w/o	23.50	22.90	1.15	0	<0.001	0.00
	LTE 5	QPSK10M	Top Side	16	20450	25	0	Speed	w/o	23.50	22.90	1.15	-0.08	0.043	0.05
	LTE 5	QPSK10M	Bottom Side	0	20450	25	0	Speed	w/o	23.50	22.90	1.15	0	<0.001	0.00
6	LTE 5	QPSK10M	Top Side	0	20450	1	0	Speed	w/	22.00	21.28	1.18	0.05	0.231	0.27
	LTE 5	QPSK10M	Top Side	0	20450	25	0	Speed	w/	21.00	20.26	1.19	0.11	0.174	0.21
	LTE 5	QPSK10M	Top Side	0	20525	1	0	Speed	w/	22.00	21.16	1.21	0.01	0.211	0.26
	LTE 5	QPSK10M	Top Side	0	20600	1	0	Speed	w/	22.00	21.05	1.24	-0.03	0.192	0.24
	LTE 5	QPSK10M	Top Side	0	20450	1	0	WNC	w/	22.00	21.28	1.18	-0.05	0.206	0.24
	LTE 5	QPSK10M	Top Side	0	20450	1	0	Auden	w/	22.00	21.28	1.18	-0.02	0.218	0.26
		-								-	-	1		-	-
	LTE 7	QPSK20M	Rear Fcae	0	21350	1	0	Speed	w/o	24.00	23.55	1.11	-0.05	0.04	0.04
	LTE 7	QPSK20M	Left Side	0	21350	1	0	Speed	w/o	24.00	23.55	1.11	0	<0.001	0.00
	LTE 7	QPSK20M	Right Side	0	21350	1	0	Speed	w/o	24.00	23.55	1.11	0.05	0.101	0.11
	LTE 7	QPSK20M	Top Side	16	21350	1	0	Speed	w/o	24.00	23.55	1.11	-0.09	0.058	0.06
	LTE 7	QPSK20M	Bottom Side	0	21350	1	0	Speed	w/o	24.00	23.55	1.11	0	<0.001	0.00
	LTE 7	QPSK20M	Rear Fcae	0	21350	50	0	Speed	w/o	23.00	22.67	1.08	-0.02	0.034	0.04
	LTE 7	QPSK20M	Left Side	0	21350	50	0	Speed	w/o	23.00	22.67	1.08	0	<0.001	0.00
	LTE 7	QPSK20M	Right Side	0	21350	50	0	Speed	w/o	23.00	22.67	1.08	0.03	0.107	0.12
	LTE 7	QPSK20M	Top Side	16	21350	50	0	Speed	w/o	23.00	22.67	1.08	0.11	0.027	0.03

Body SAR Test Result

System & Position								DUT Configuration		SAR					
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Power Reduction	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
7	LTE 7	QPSK20M	Bottom Side	0	21350	50	0	Speed	w/o	23.00	22.67	1.08	0	<0.001	0.00
	LTE 7	QPSK20M	Top Side	0	21350	1	0	Speed	w/	19.00	18.38	1.15	-0.02	0.278	0.32
	LTE 7	QPSK20M	Top Side	0	21350	50	0	Speed	w/	18.00	17.42	1.14	0.02	0.264	0.30
	LTE 7	QPSK20M	Top Side	0	20850	1	0	Speed	w/	19.00	18.25	1.19	-0.1	0.134	0.16
	LTE 7	QPSK20M	Top Side	0	21100	1	0	Speed	w/	19.00	18.28	1.18	-0.02	0.141	0.17
	LTE 7	QPSK20M	Top Side	0	21350	1	0	WNC	w/	19.00	18.38	1.15	-0.1	0.268	0.31
	LTE 7	QPSK20M	Top Side	0	21350	1	0	Auden	w/	19.00	18.38	1.15	-0.11	0.253	0.29
		-								-	-	1		-	-
8	LTE 12	QPSK10M	Rear Fcae	0	23130	1	0	Speed	w/o	24.50	24.42	1.02	0	<0.001	0.00
	LTE 12	QPSK10M	Left Side	0	23130	1	0	Speed	w/o	24.50	24.42	1.02	0	<0.001	0.00
	LTE 12	QPSK10M	Right Side	0	23130	1	0	Speed	w/o	24.50	24.42	1.02	0	<0.001	0.00
	LTE 12	QPSK10M	Top Side	16	23130	1	0	Speed	w/o	24.50	24.42	1.02	0	<0.001	0.00
	LTE 12	QPSK10M	Bottom Side	0	23130	1	0	Speed	w/o	24.50	24.42	1.02	0	<0.001	0.00
	LTE 12	QPSK10M	Rear Fcae	0	23130	25	0	Speed	w/o	23.50	22.59	1.23	0	<0.001	0.00
	LTE 12	QPSK10M	Left Side	0	23130	25	0	Speed	w/o	23.50	22.59	1.23	0	<0.001	0.00
	LTE 12	QPSK10M	Right Side	0	23130	25	0	Speed	w/o	23.50	22.59	1.23	0	<0.001	0.00
	LTE 12	QPSK10M	Top Side	16	23130	25	0	Speed	w/o	23.50	22.59	1.23	0	<0.001	0.00
	LTE 12	QPSK10M	Bottom Side	0	23130	25	0	Speed	w/o	23.50	22.59	1.23	0	<0.001	0.00
	LTE 12	QPSK10M	Top Side	0	23130	1	0	Speed	w/	21.50	20.81	1.17	-0.13	0.161	0.19
	LTE 12	QPSK10M	Top Side	0	23130	25	0	Speed	w/	20.50	19.95	1.14	0.19	0.127	0.14
	LTE 12	QPSK10M	Top Side	0	23060	1	0	Speed	w/	21.50	20.65	1.22	-0.01	0.167	0.20
	LTE 12	QPSK10M	Top Side	0	23095	1	0	Speed	w/	21.50	20.77	1.18	-0.15	0.165	0.19
	LTE 12	QPSK10M	Top Side	0	23060	1	0	WNC	w/	21.50	20.65	1.22	-0.14	0.158	0.19
	LTE 12	QPSK10M	Top Side	0	23060	1	0	Auden	w/	21.50	20.65	1.22	0.19	0.161	0.20
	LTE 13	QPSK10M	Rear Fcae	0	23230	1	0	Speed	w/o	24.50	24.25	1.06	0	<0.001	0.00
	LTE 13	QPSK10M	Left Side	0	23230	1	0	Speed	w/o	24.50	24.25	1.06	0	<0.001	0.00
	LTE 13	QPSK10M	Right Side	0	23230	1	0	Speed	w/o	24.50	24.25	1.06	0	<0.001	0.00
	LTE 13	QPSK10M	Top Side	16	23230	1	0	Speed	w/o	24.50	24.25	1.06	0	<0.001	0.00
	LTE 13	QPSK10M	Bottom Side	0	23230	1	0	Speed	w/o	24.50	24.25	1.06	0	<0.001	0.00
	LTE 13	QPSK10M	Rear Fcae	0	23230	25	0	Speed	w/o	23.50	23.40	1.02	0	<0.001	0.00
	LTE 13	QPSK10M	Left Side	0	23230	25	0	Speed	w/o	23.50	23.40	1.02	0	<0.001	0.00
	LTE 13	QPSK10M	Right Side	0	23230	25	0	Speed	w/o	23.50	23.40	1.02	0	<0.001	0.00
	LTE 13	QPSK10M	Top Side	16	23230	25	0	Speed	w/o	23.50	23.40	1.02	0	<0.001	0.00
	LTE 13	QPSK10M	Bottom Side	0	23230	25	0	Speed	w/o	23.50	23.40	1.02	0	<0.001	0.00

Body SAR Test Result

Body SAR Test Result																
System & Position								DUT Configuration		SAR						
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Power Reduction	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	
9	LTE 13	QPSK10M	Top Side	0	23230	1	0	Speed	w/	20.50	20.28	1.05	0.01	0.116	0.12	
	LTE 13	QPSK10M	Top Side	0	23230	25	0	Speed	w/	19.50	19.42	1.02	0.11	0.095	0.10	
	LTE 13	QPSK10M	Top Side	0	23230	1	0	WNC	w/	20.50	20.28	1.05	0.05	0.105	0.11	
	LTE 13	QPSK10M	Top Side	0	23230	1	0	Auden	w/	20.50	20.28	1.05	-0.03	0.113	0.12	
	LTE 14	QPSK10M	Rear Fcae	0	23330	1	0	Speed	w/o	24.50	24.29	1.05	0	<0.001	0.00	
	LTE 14	QPSK10M	Left Side	0	23330	1	0	Speed	w/o	24.50	24.29	1.05	0	<0.001	0.00	
	LTE 14	QPSK10M	Right Side	0	23330	1	0	Speed	w/o	24.50	24.29	1.05	0.04	0.054	0.06	
	LTE 14	QPSK10M	Top Side	16	23330	1	0	Speed	w/o	24.50	24.29	1.05	0	<0.001	0.00	
	LTE 14	QPSK10M	Bottom Side	0	23330	1	0	Speed	w/o	24.50	24.29	1.05	0	<0.001	0.00	
	LTE 14	QPSK10M	Rear Fcae	0	23330	25	0	Speed	w/o	23.50	23.37	1.03	0	<0.001	0.00	
	LTE 14	QPSK10M	Left Side	0	23330	25	0	Speed	w/o	23.50	23.37	1.03	0	<0.001	0.00	
	LTE 14	QPSK10M	Right Side	0	23330	25	0	Speed	w/o	23.50	23.37	1.03	0	<0.001	0.00	
	LTE 14	QPSK10M	Top Side	16	23330	25	0	Speed	w/o	23.50	23.37	1.03	0	<0.001	0.00	
	LTE 14	QPSK10M	Bottom Side	0	23330	25	0	Speed	w/o	23.50	23.37	1.03	0	<0.001	0.00	
10	LTE 14	QPSK10M	Top Side	0	23330	1	0	Speed	w/	20.50	20.35	1.04	-0.01	0.108	0.11	
	LTE 14	QPSK10M	Top Side	0	23330	25	0	Speed	w/	19.50	19.45	1.01	-0.18	0.085	0.09	
	LTE 14	QPSK10M	Top Side	0	23330	1	0	WNC	w/	20.50	20.35	1.04	-0.04	0.096	0.10	
	LTE 14	QPSK10M	Top Side	0	23330	1	0	Auden	w/	20.50	20.35	1.04	0.08	0.102	0.11	
	LTE 17	QPSK10M	Rear Fcae	0	23790	1	0	Speed	w/o	24.50	24.42	1.02	0	<0.001	0.00	
	LTE 17	QPSK10M	Left Side	0	23790	1	0	Speed	w/o	24.50	24.42	1.02	0	<0.001	0.00	
	LTE 17	QPSK10M	Right Side	0	23790	1	0	Speed	w/o	24.50	24.42	1.02	0	<0.001	0.00	
	LTE 17	QPSK10M	Top Side	16	23790	1	0	Speed	w/o	24.50	24.42	1.02	0	<0.001	0.00	
	LTE 17	QPSK10M	Bottom Side	0	23790	1	0	Speed	w/o	24.50	24.42	1.02	0	<0.001	0.00	
	LTE 17	QPSK10M	Rear Fcae	0	23790	25	0	Speed	w/o	23.50	22.72	1.20	0	<0.001	0.00	
	LTE 17	QPSK10M	Left Side	0	23790	25	0	Speed	w/o	23.50	22.72	1.20	0	<0.001	0.00	
	LTE 17	QPSK10M	Right Side	0	23790	25	0	Speed	w/o	23.50	22.72	1.20	0	<0.001	0.00	
	LTE 17	QPSK10M	Top Side	16	23790	25	0	Speed	w/o	23.50	22.72	1.20	0	<0.001	0.00	
	LTE 17	QPSK10M	Bottom Side	0	23790	25	0	Speed	w/o	23.50	22.72	1.20	0	<0.001	0.00	
11	LTE 17	QPSK10M	Top Side	0	23790	1	0	Speed	w/	21.50	20.87	1.16	-0.03	0.176	0.20	
	LTE 17	QPSK10M	Top Side	0	23790	25	0	Speed	w/	20.50	19.94	1.14	0.05	0.137	0.16	
	LTE 17	QPSK10M	Top Side	0	23780	1	0	Speed	w/	21.50	20.81	1.17	0.03	0.163	0.19	
	LTE 17	QPSK10M	Top Side	0	23800	1	0	Speed	w/	21.50	20.85	1.16	-0.13	0.165	0.19	
	LTE 17	QPSK10M	Top Side	0	23790	1	0	WNC	w/	21.50	20.87	1.16	-0.16	0.161	0.19	

Body SAR Test Result

System & Position								DUT Configuration		SAR					
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Power Reduction	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 17	QPSK10M	Top Side	0	23790	1	0	Auden	w/	21.50	20.87	1.16	-0.11	0.156	0.18
	LTE 25	QPSK20M	Rear Fcae	0	26140	1	0	Speed	w/o	24.00	23.51	1.12	0.05	0.127	0.14
	LTE 25	QPSK20M	Left Side	0	26140	1	0	Speed	w/o	24.00	23.51	1.12	0	<0.001	0.00
	LTE 25	QPSK20M	Right Side	0	26140	1	0	Speed	w/o	24.00	23.51	1.12	0.04	0.329	0.37
	LTE 25	QPSK20M	Top Side	16	26140	1	0	Speed	w/o	24.00	23.51	1.12	-0.05	0.336	0.38
	LTE 25	QPSK20M	Bottom Side	0	26140	1	0	Speed	w/o	24.00	23.51	1.12	0	<0.001	0.00
	LTE 25	QPSK20M	Rear Fcae	0	26140	50	0	Speed	w/o	23.00	22.69	1.07	-0.08	0.082	0.09
	LTE 25	QPSK20M	Left Side	0	26140	50	0	Speed	w/o	23.00	22.69	1.07	0	<0.001	0.00
	LTE 25	QPSK20M	Right Side	0	26140	50	0	Speed	w/o	23.00	22.69	1.07	-0.01	0.267	0.29
	LTE 25	QPSK20M	Top Side	16	26140	50	0	Speed	w/o	23.00	22.69	1.07	-0.03	0.253	0.27
	LTE 25	QPSK20M	Bottom Side	0	26140	50	0	Speed	w/o	23.00	22.69	1.07	0	<0.001	0.00
12	LTE 25	QPSK20M	Top Side	0	26140	1	0	Speed	w/	16.50	16.49	1.00	0.02	0.526	0.53
	LTE 25	QPSK20M	Top Side	0	26140	50	0	Speed	w/	15.50	15.42	1.02	0.07	0.486	0.50
	LTE 25	QPSK20M	Top Side	0	26365	1	0	Speed	w/	16.50	16.45	1.01	-0.01	0.464	0.47
	LTE 25	QPSK20M	Top Side	0	26590	1	0	Speed	w/	16.50	16.37	1.03	0.18	0.426	0.44
	LTE 25	QPSK20M	Top Side	0	26140	1	0	WNC	w/	16.50	16.49	1.00	-0.09	0.494	0.49
	LTE 25	QPSK20M	Top Side	0	26140	1	0	Auden	w/	16.50	16.49	1.00	0.09	0.512	0.51
	LTE 26	QPSK15M	Rear Fcae	0	26865	1	0	Speed	w/o	24.50	23.90	1.15	0	<0.001	0.00
	LTE 26	QPSK15M	Left Side	0	26865	1	0	Speed	w/o	24.50	23.90	1.15	0	<0.001	0.00
	LTE 26	QPSK15M	Right Side	0	26865	1	0	Speed	w/o	24.50	23.90	1.15	0	<0.001	0.00
	LTE 26	QPSK15M	Top Side	16	26865	1	0	Speed	w/o	24.50	23.90	1.15	0	<0.001	0.00
	LTE 26	QPSK15M	Bottom Side	0	26865	1	0	Speed	w/o	24.50	23.90	1.15	0	<0.001	0.00
	LTE 26	QPSK15M	Rear Fcae	0	26865	36	0	Speed	w/o	23.50	22.89	1.15	0	<0.001	0.00
	LTE 26	QPSK15M	Left Side	0	26865	36	0	Speed	w/o	23.50	22.89	1.15	0	<0.001	0.00
	LTE 26	QPSK15M	Right Side	0	26865	36	0	Speed	w/o	23.50	22.89	1.15	0	<0.001	0.00
	LTE 26	QPSK15M	Top Side	16	26865	36	0	Speed	w/o	23.50	22.89	1.15	0	<0.001	0.00
	LTE 26	QPSK15M	Bottom Side	0	26865	36	0	Speed	w/o	23.50	22.89	1.15	0	<0.001	0.00
13	LTE 26	QPSK15M	Top Side	0	26865	1	0	Speed	w/	22.00	21.36	1.16	0.01	0.252	0.29
	LTE 26	QPSK15M	Top Side	0	26865	36	0	Speed	w/	21.00	20.41	1.15	-0.08	0.196	0.23
	LTE 26	QPSK15M	Top Side	0	26765	1	0	Speed	w/	22.00	21.35	1.16	0.13	0.224	0.26
	LTE 26	QPSK15M	Top Side	0	26965	1	0	Speed	w/	22.00	21.24	1.19	-0.06	0.236	0.28
	LTE 26	QPSK15M	Top Side	0	26865	1	0	WNC	w/	22.00	21.36	1.16	-0.08	0.229	0.27
	LTE 26	QPSK15M	Top Side	0	26865	1	0	Auden	w/	22.00	21.36	1.16	-0.01	0.244	0.28

Body SAR Test Result

System & Position								DUT Configuration		SAR					
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Power Reduction	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 30	QPSK10M	Rear Fcae	0	27710	1	0	Speed	w/o	23.00	22.57	1.10	0.14	0.1	0.11
	LTE 30	QPSK10M	Left Side	0	27710	1	0	Speed	w/o	23.00	22.57	1.10	0	<0.001	0.00
	LTE 30	QPSK10M	Right Side	0	27710	1	0	Speed	w/o	23.00	22.57	1.10	0.16	0.202	0.22
	LTE 30	QPSK10M	Top Side	16	27710	1	0	Speed	w/o	23.00	22.57	1.10	0.13	0.133	0.15
	LTE 30	QPSK10M	Bottom Side	0	27710	1	0	Speed	w/o	23.00	22.57	1.10	0	<0.001	0.00
	LTE 30	QPSK10M	Rear Fcae	0	27710	25	0	Speed	w/o	22.00	21.56	1.11	0.02	0.089	0.10
	LTE 30	QPSK10M	Left Side	0	27710	25	0	Speed	w/o	22.00	21.56	1.11	0	<0.001	0.00
	LTE 30	QPSK10M	Right Side	0	27710	25	0	Speed	w/o	22.00	21.56	1.11	-0.14	0.195	0.22
	LTE 30	QPSK10M	Top Side	16	27710	25	0	Speed	w/o	22.00	21.56	1.11	0.04	0.132	0.15
	LTE 30	QPSK10M	Bottom Side	0	27710	25	0	Speed	w/o	22.00	21.56	1.11	0	<0.001	0.00
14	LTE 30	QPSK10M	Top Side	0	27710	1	0	Speed	w/	20.50	20.29	1.05	-0.01	0.756	0.79
	LTE 30	QPSK10M	Top Side	0	27710	25	0	Speed	w/	19.50	19.37	1.03	0.17	0.592	0.61
	LTE 30	QPSK10M	Top Side	0	27710	1	0	WNC	w/	20.50	20.29	1.05	0.01	0.733	0.77
	LTE 30	QPSK10M	Top Side	0	27710	1	0	Auden	w/	20.50	20.29	1.05	0.17	0.726	0.76
	LTE 38	QPSK20M	Rear Fcae	0	38150	1	0	Speed	w/o	24.00	23.62	1.09	0	<0.001	0.00
	LTE 38	QPSK20M	Left Side	0	38150	1	0	Speed	w/o	24.00	23.62	1.09	0	<0.001	0.00
	LTE 38	QPSK20M	Right Side	0	38150	1	0	Speed	w/o	24.00	23.62	1.09	-0.13	0.138	0.15
	LTE 38	QPSK20M	Top Side	16	38150	1	0	Speed	w/o	24.00	23.62	1.09	-0.13	0.053	0.06
	LTE 38	QPSK20M	Bottom Side	0	38150	1	0	Speed	w/o	24.00	23.62	1.09	0	<0.001	0.00
	LTE 38	QPSK20M	Rear Fcae	0	38150	50	0	Speed	w/o	23.00	22.72	1.07	0	<0.001	0.00
	LTE 38	QPSK20M	Left Side	0	38150	50	0	Speed	w/o	23.00	22.72	1.07	0	<0.001	0.00
	LTE 38	QPSK20M	Right Side	0	38150	50	0	Speed	w/o	23.00	22.72	1.07	0.19	0.142	0.15
	LTE 38	QPSK20M	Top Side	16	38150	50	0	Speed	w/o	23.00	22.72	1.07	0.07	0.044	0.05
	LTE 38	QPSK20M	Bottom Side	0	38150	50	0	Speed	w/o	23.00	22.72	1.07	0	<0.001	0.00
15	LTE 38	QPSK20M	Top Side	0	38150	1	0	Speed	w/	21.00	20.41	1.15	0.01	0.335	0.39
	LTE 38	QPSK20M	Top Side	0	38150	50	0	Speed	w/	20.00	19.36	1.16	0.09	0.266	0.31
	LTE 38	QPSK20M	Top Side	0	37850	1	0	Speed	w/	21.00	20.34	1.16	-0.07	0.301	0.35
	LTE 38	QPSK20M	Top Side	0	38000	1	0	Speed	w/	21.00	20.37	1.16	-0.08	0.318	0.37
	LTE 38	QPSK20M	Top Side	0	38150	1	0	WNC	w/	21.00	20.41	1.15	-0.14	0.312	0.36
	LTE 38	QPSK20M	Top Side	0	38150	1	0	Auden	w/	21.00	20.41	1.15	-0.09	0.303	0.35

Body SAR Test Result

System & Position								DUT Configuration		SAR					
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Power Reduction	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 41	QPSK20M	Rear Fcae	0	41055	1	0	Speed	w/o	24.00	23.47	1.13	0	<0.001	0.00
	LTE 41	QPSK20M	Left Side	0	41055	1	0	Speed	w/o	24.00	23.47	1.13	0	<0.001	0.00
	LTE 41	QPSK20M	Right Side	0	41055	1	0	Speed	w/o	24.00	23.47	1.13	-0.14	0.152	0.17
	LTE 41	QPSK20M	Top Side	16	41055	1	0	Speed	w/o	24.00	23.47	1.13	0.15	0.041	0.05
	LTE 41	QPSK20M	Bottom Side	0	41055	1	0	Speed	w/o	24.00	23.47	1.13	0	<0.001	0.00
	LTE 41	QPSK20M	Rear Fcae	0	41055	50	0	Speed	w/o	23.00	22.56	1.11	0	<0.001	0.00
	LTE 41	QPSK20M	Left Side	0	41055	50	0	Speed	w/o	23.00	22.56	1.11	0	<0.001	0.00
	LTE 41	QPSK20M	Right Side	0	41055	50	0	Speed	w/o	23.00	22.56	1.11	0.04	0.138	0.15
	LTE 41	QPSK20M	Top Side	16	41055	50	0	Speed	w/o	23.00	22.56	1.11	-0.16	0.038	0.04
	LTE 41	QPSK20M	Bottom Side	0	41055	50	0	Speed	w/o	23.00	22.56	1.11	0	<0.001	0.00
	LTE 41	QPSK20M	Top Side	0	41055	1	0	Speed	w/	21.00	20.46	1.13	0.12	0.412	0.47
	LTE 41	QPSK20M	Top Side	0	41055	50	0	Speed	w/	20.00	19.51	1.12	0.18	0.33	0.37
	LTE 41	QPSK20M	Top Side	0	39750	1	0	Speed	w/	21.00	20.13	1.22	-0.03	0.266	0.32
	LTE 41	QPSK20M	Top Side	0	40185	1	0	Speed	w/	21.00	20.19	1.21	-0.01	0.296	0.36
	LTE 41	QPSK20M	Top Side	0	40620	1	0	Speed	w/	21.00	20.31	1.17	0.03	0.353	0.41
16	LTE 41	QPSK20M	Top Side	0	41490	1	0	Speed	w/	21.00	20.44	1.14	0.01	0.431	0.49
	LTE 41	QPSK20M	Top Side	0	41490	1	0	WNC	w/	21.00	20.44	1.14	0.11	0.414	0.47
	LTE 41	QPSK20M	Top Side	0	41490	1	0	Auden	w/	21.00	20.44	1.14	-0.03	0.405	0.46
	LTE 48	QPSK20M	Rear Fcae	0	56210	1	0	Speed	w/o	22.00	21.92	1.02	0	<0.001	0.00
	LTE 48	QPSK20M	Left Side	0	56210	1	0	Speed	w/o	22.00	21.92	1.02	0	<0.001	0.00
	LTE 48	QPSK20M	Right Side	0	56210	1	0	Speed	w/o	22.00	21.92	1.02	0	<0.001	0.00
	LTE 48	QPSK20M	Top Side	16	56210	1	0	Speed	w/o	22.00	21.92	1.02	-0.16	0.058	0.06
	LTE 48	QPSK20M	Bottom Side	0	56210	1	0	Speed	w/o	22.00	21.92	1.02	0	<0.001	0.00
	LTE 48	QPSK20M	Rear Fcae	0	56210	50	0	Speed	w/o	21.00	20.93	1.02	0	<0.001	0.00
	LTE 48	QPSK20M	Left Side	0	56210	50	0	Speed	w/o	21.00	20.93	1.02	0	<0.001	0.00
	LTE 48	QPSK20M	Right Side	0	56210	50	0	Speed	w/o	21.00	20.93	1.02	0	<0.001	0.00
	LTE 48	QPSK20M	Top Side	16	56210	50	0	Speed	w/o	21.00	20.93	1.02	0.15	0.049	0.05
	LTE 48	QPSK20M	Bottom Side	0	56210	50	0	Speed	w/o	21.00	20.93	1.02	0	<0.001	0.00
	LTE 48	QPSK20M	Top Side	0	56210	1	0	Speed	w/	21.50	20.75	1.19	-0.19	0.589	0.70
	LTE 48	QPSK20M	Top Side	0	56210	50	0	Speed	w/	20.50	19.81	1.17	-0.19	0.407	0.48
	LTE 48	QPSK20M	Top Side	0	55340	1	0	Speed	w/	21.50	20.33	1.31	0.15	0.332	0.43
	LTE 48	QPSK20M	Top Side	0	55780	1	0	Speed	w/	21.50	20.59	1.23	-0.05	0.344	0.42
17	LTE 48	QPSK20M	Top Side	0	56640	1	0	Speed	w/	21.50	20.72	1.20	-0.01	0.889	1.07
	LTE 48	QPSK20M	Top Side	0	56640	1	0	WNC	w/	21.50	20.72	1.20	0.05	0.866	1.04

Body SAR Test Result

System & Position								DUT Configuration		SAR					
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Power Reduction	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	LTE 48	QPSK20M	Top Side	0	56640	1	0	Auden	w/	21.50	20.72	1.20	0.12	0.854	1.02
	LTE 48	QPSK20M	Top Side	0	56210	1	0	WNC	w/	21.50	20.75	1.19	-0.08	0.572	0.68
	LTE 48	QPSK20M	Top Side	0	55340	1	0	WNC	w/	21.50	20.33	1.31	0.05	0.322	0.42
	LTE 48	QPSK20M	Top Side	0	55780	1	0	WNC	w/	21.50	20.59	1.23	-0.03	0.336	0.41
	LTE 48	QPSK20M	Top Side	0	56210	1	0	Auden	w/	21.50	20.75	1.19	-0.15	0.564	0.67
	LTE 48	QPSK20M	Top Side	0	55340	1	0	Auden	w/	21.50	20.33	1.31	0.09	0.317	0.42
	LTE 48	QPSK20M	Top Side	0	55780	1	0	Auden	w/	21.50	20.59	1.23	-0.02	0.332	0.41
	LTE 48	QPSK20M	Top Side	0	56640	1	0	Speed	w/	21.50	20.72	1.20	0.03	0.875	1.05
	LTE 66	QPSK20M	Rear Fcae	0	132322	1	0	Speed	w/o	24.00	23.41	1.15	-0.06	0.101	0.12
	LTE 66	QPSK20M	Left Side	0	132322	1	0	Speed	w/o	24.00	23.41	1.15	0	<0.001	0.00
	LTE 66	QPSK20M	Right Side	0	132322	1	0	Speed	w/o	24.00	23.41	1.15	-0.19	0.076	0.09
	LTE 66	QPSK20M	Top Side	16	132322	1	0	Speed	w/o	24.00	23.41	1.15	-0.03	0.235	0.27
	LTE 66	QPSK20M	Bottom Side	0	132322	1	0	Speed	w/o	24.00	23.41	1.15	0	<0.001	0.00
	LTE 66	QPSK20M	Rear Fcae	0	132322	50	0	Speed	w/o	23.00	22.37	1.16	-0.02	0.078	0.09
	LTE 66	QPSK20M	Left Side	0	132322	50	0	Speed	w/o	23.00	22.37	1.16	0	<0.001	0.00
	LTE 66	QPSK20M	Right Side	0	132322	50	0	Speed	w/o	23.00	22.37	1.16	0.08	0.053	0.06
	LTE 66	QPSK20M	Top Side	16	132322	50	0	Speed	w/o	23.00	22.37	1.16	0.11	0.167	0.19
	LTE 66	QPSK20M	Bottom Side	0	132322	50	0	Speed	w/o	23.00	22.37	1.16	0	<0.001	0.00
18	LTE 66	QPSK20M	Top Side	0	132322	1	0	Speed	w/	16.00	15.56	1.11	-0.01	0.44	0.49
	LTE 66	QPSK20M	Top Side	0	132322	50	0	Speed	w/	15.00	14.61	1.09	0.12	0.347	0.38
	LTE 66	QPSK20M	Top Side	0	132072	1	0	Speed	w/	16.00	15.09	1.23	0.19	0.377	0.46
	LTE 66	QPSK20M	Top Side	0	132572	1	0	Speed	w/	16.00	15.33	1.17	-0.02	0.404	0.47
	LTE 66	QPSK20M	Top Side	0	132322	1	0	WNC	w/	16.00	15.56	1.11	0.03	0.4	0.44
	LTE 66	QPSK20M	Top Side	0	132322	1	0	Auden	w/	16.00	15.56	1.11	0.05	0.427	0.47

Body SAR Test Result

Body SAR Test Result																
System & Position								DUT Configuration		SAR						
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	RB#	RB offset	Sample	Power Reduction	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	
	LTE 71	QPSK20M	Rear Fcae	0	133297	1	0	Speed	w/o	24.00	23.57	1.10	0	<0.001	0.00	
	LTE 71	QPSK20M	Left Side	0	133297	1	0	Speed	w/o	24.00	23.57	1.10	0	<0.001	0.00	
	LTE 71	QPSK20M	Right Side	0	133297	1	0	Speed	w/o	24.00	23.57	1.10	0	<0.001	0.00	
	LTE 71	QPSK20M	Top Side	16	133297	1	0	Speed	w/o	24.00	23.57	1.10	0	<0.001	0.00	
	LTE 71	QPSK20M	Bottom Side	0	133297	1	0	Speed	w/o	24.00	23.57	1.10	0	<0.001	0.00	
	LTE 71	QPSK20M	Rear Fcae	0	133297	50	0	Speed	w/o	23.00	22.37	1.16	0	<0.001	0.00	
	LTE 71	QPSK20M	Left Side	0	133297	50	0	Speed	w/o	23.00	22.37	1.16	0	<0.001	0.00	
	LTE 71	QPSK20M	Right Side	0	133297	50	0	Speed	w/o	23.00	22.37	1.16	0	<0.001	0.00	
	LTE 71	QPSK20M	Top Side	16	133297	50	0	Speed	w/o	23.00	22.37	1.16	0	<0.001	0.00	
	LTE 71	QPSK20M	Bottom Side	0	133297	50	0	Speed	w/o	23.00	22.37	1.16	0	<0.001	0.00	
	LTE 71	QPSK20M	Top Side	0	133297	1	0	Speed	w/	23.50	22.89	1.15	-0.07	0.357	0.41	
	LTE 71	QPSK20M	Top Side	0	133297	50	0	Speed	w/	22.50	21.76	1.19	0.15	0.279	0.33	
19	LTE 71	QPSK20M	Top Side	0	133222	1	0	Speed	w/	23.50	22.87	1.16	0.02	0.391	0.45	
	LTE 71	QPSK20M	Top Side	0	133372	1	0	Speed	w/	23.50	22.67	1.21	-0.16	0.296	0.36	
	LTE 71	QPSK20M	Top Side	0	133222	1	0	WNC	w/	23.50	22.87	1.16	-0.03	0.361	0.42	
	LTE 71	QPSK20M	Top Side	0	133222	1	0	Auden	w/	23.50	22.87	1.16	-0.02	0.376	0.44	

Body SAR Test Result

System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN2.4G	802.11b	Bottom for Laptop	0	6	Speed	Ant 0	97.00	1.03	14.00	13.96	1.01	-0.09	0.355	0.37
	WLAN2.4G	802.11b	Bottom for Laptop	0	6	Speed	Ant 1	97.10	1.03	14.00	13.99	1.00	0.15	0.744	0.77
20	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	6	Speed	Ant 0+1	98.20	1.02	17.00	16.97	1.01	-0.02	0.812	0.84
	WLAN2.4G	802.11b	Rear Fcae	0	6	Speed	Ant 0	97.00	1.03	15.50	15.45	1.01	0.03	0.477	0.50
	WLAN2.4G	802.11b	Left Side	0	6	Speed	Ant 0	97.00	1.03	15.50	15.45	1.01	-0.05	0.056	0.06
	WLAN2.4G	802.11b	Right Side	0	6	Speed	Ant 0	97.00	1.03	15.50	15.45	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Top Side	0	6	Speed	Ant 0	97.00	1.03	15.50	15.45	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom Side	0	6	Speed	Ant 0	97.00	1.03	15.50	15.45	1.01	-0.12	0.089	0.09
	WLAN2.4G	802.11b	Rear Fcae	0	6	Speed	Ant 1	97.10	1.03	15.50	15.47	1.01	-0.1	0.762	0.79
	WLAN2.4G	802.11b	Left Side	0	6	Speed	Ant 1	97.10	1.03	15.50	15.47	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Right Side	0	6	Speed	Ant 1	97.10	1.03	15.50	15.47	1.01	0.15	0.198	0.21
	WLAN2.4G	802.11b	Top Side	0	6	Speed	Ant 1	97.10	1.03	15.50	15.47	1.01	0	<0.001	0.00
	WLAN2.4G	802.11b	Bottom Side	0	6	Speed	Ant 1	97.10	1.03	15.50	15.47	1.01	0.12	0.257	0.27
	WLAN2.4G	802.11n HT40	Rear Fcae	0	6	Speed	Ant 0+1	98.20	1.02	18.50	18.47	1.01	0.03	0.693	0.71
	WLAN2.4G	802.11n HT40	Left Side	0	6	Speed	Ant 0+1	98.20	1.02	18.50	18.47	1.01	-0.05	0.07	0.07
	WLAN2.4G	802.11n HT40	Right Side	0	6	Speed	Ant 0+1	98.20	1.02	18.50	18.47	1.01	0.05	0.171	0.18
	WLAN2.4G	802.11n HT40	Top Side	0	6	Speed	Ant 0+1	98.20	1.02	18.50	18.47	1.01	0	<0.001	0.00
	WLAN2.4G	802.11n HT40	Bottom Side	0	6	Speed	Ant 0+1	98.20	1.02	18.50	18.47	1.01	0.06	0.302	0.31
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	3	Speed	Ant 0+1	98.20	1.02	17.00	16.94	1.01	-0.01	0.573	0.59
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	9	Speed	Ant 0+1	98.20	1.02	17.00	16.94	1.01	-0.03	0.698	0.72
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	10	Speed	Ant 0+1	98.20	1.02	17.00	16.93	1.02	0.03	0.716	0.74
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	11	Speed	Ant 0+1	98.20	1.02	17.00	16.88	1.03	-0.04	0.704	0.74
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	6	Auden	Ant 0+1	98.20	1.02	17.00	16.97	1.01	-0.18	0.764	0.79
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	6	HB	Ant 0+1	98.20	1.02	17.00	16.97	1.01	-0.19	0.737	0.76
	WLAN2.4G	802.11n HT40	Bottom for Laptop	0	6	Speed	Ant 0+1	98.20	1.02	17.00	16.97	1.01	0.04	0.793	0.82
	WLAN5.3G	802.11ac VHT160	Bottom for Laptop	0	50	Speed	Ant 0	95.30	1.05	10.50	10.45	1.01	-0.11	0.479	0.51
	WLAN5.3G	802.11ac VHT160	Bottom for Laptop	0	50	Speed	Ant 1	94.80	1.05	10.50	10.48	1.00	-0.18	0.597	0.63
	WLAN5.3G	802.11ac VHT160	Bottom for Laptop	0	50	Speed	Ant 0+1	90.20	1.11	13.50	13.42	1.02	0.11	0.554	0.63
	WLAN5.3G	802.11ac VHT160	Rear Fcae	0	50	Speed	Ant 0	95.30	1.05	10.50	10.45	1.01	0.14	0.587	0.62
	WLAN5.3G	802.11ac VHT160	Left Side	0	50	Speed	Ant 0	95.30	1.05	10.50	10.45	1.01	0.06	0.034	0.04
	WLAN5.3G	802.11ac VHT160	Right Side	0	50	Speed	Ant 0	95.30	1.05	10.50	10.45	1.01	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Top Side	0	50	Speed	Ant 0	95.30	1.05	10.50	10.45	1.01	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50	Speed	Ant 0	95.30	1.05	10.50	10.45	1.01	0.06	0.142	0.15

Body SAR Test Result

System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.3G	802.11ac VHT160	Rear Fcae	0	50	Speed	Ant 1	94.80	1.05	10.50	10.48	1.00	-0.19	0.601	0.63
	WLAN5.3G	802.11ac VHT160	Left Side	0	50	Speed	Ant 1	94.80	1.05	10.50	10.48	1.00	-0.02	0.059	0.06
	WLAN5.3G	802.11ac VHT160	Right Side	0	50	Speed	Ant 1	94.80	1.05	10.50	10.48	1.00	0.03	0.086	0.09
	WLAN5.3G	802.11ac VHT160	Top Side	0	50	Speed	Ant 1	94.80	1.05	10.50	10.48	1.00	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50	Speed	Ant 1	94.80	1.05	10.50	10.48	1.00	-0.15	0.376	0.39
21	WLAN5.3G	802.11ac VHT160	Rear Fcae	0	50	Speed	Ant 0+1	90.20	1.11	13.50	13.42	1.02	0.02	0.751	0.85
	WLAN5.3G	802.11ac VHT160	Left Side	0	50	Speed	Ant 0+1	90.20	1.11	13.50	13.42	1.02	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Right Side	0	50	Speed	Ant 0+1	90.20	1.11	13.50	13.42	1.02	0.05	0.076	0.09
	WLAN5.3G	802.11ac VHT160	Top Side	0	50	Speed	Ant 0+1	90.20	1.11	13.50	13.42	1.02	0	<0.001	0.00
	WLAN5.3G	802.11ac VHT160	Bottom Side	0	50	Speed	Ant 0+1	90.20	1.11	13.50	13.42	1.02	0.12	0.337	0.38
	WLAN5.3G	802.11ac VHT160	Rear Fcae	0	50	Auden	Ant 0+1	90.20	1.11	13.50	13.42	1.02	-0.08	0.69	0.78
	WLAN5.3G	802.11ac VHT160	Rear Fcae	0	50	HB	Ant 0+1	90.20	1.11	13.50	13.42	1.02	-0.12	0.715	0.81
	WLAN5.6G	802.11ac VHT160	Bottom for Laptop	0	114	Speed	Ant 0	95.30	1.05	11.00	10.95	1.01	0.19	0.258	0.27
	WLAN5.6G	802.11ac VHT160	Bottom for Laptop	0	114	Speed	Ant 1	94.80	1.05	11.00	10.95	1.01	-0.03	0.241	0.26
	WLAN5.6G	802.11ac VHT160	Bottom for Laptop	0	114	Speed	Ant 0+1	90.20	1.11	14.00	13.94	1.01	0.01	0.283	0.32
22	WLAN5.6G	802.11ac VHT160	Rear Fcae	0	114	Speed	Ant 0	95.30	1.05	11.00	10.95	1.01	-0.13	0.813	0.86
	WLAN5.6G	802.11ac VHT160	Left Side	0	114	Speed	Ant 0	95.30	1.05	11.00	10.95	1.01	0.05	0.04	0.04
	WLAN5.6G	802.11ac VHT160	Right Side	0	114	Speed	Ant 0	95.30	1.05	11.00	10.95	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Top Side	0	114	Speed	Ant 0	95.30	1.05	11.00	10.95	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Bottom Side	0	114	Speed	Ant 0	95.30	1.05	11.00	10.95	1.01	0.01	0.174	0.18
	WLAN5.6G	802.11ac VHT160	Rear Fcae	0	114	Speed	Ant 1	94.80	1.05	11.00	10.95	1.01	0.1	0.305	0.32
	WLAN5.6G	802.11ac VHT160	Left Side	0	114	Speed	Ant 1	94.80	1.05	11.00	10.95	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Right Side	0	114	Speed	Ant 1	94.80	1.05	11.00	10.95	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Top Side	0	114	Speed	Ant 1	94.80	1.05	11.00	10.95	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Bottom Side	0	114	Speed	Ant 1	94.80	1.05	11.00	10.95	1.01	-0.03	0.092	0.10
	WLAN5.6G	802.11ac VHT160	Rear Fcae	0	114	Speed	Ant 0+1	90.20	1.11	14.00	13.94	1.01	-0.19	0.717	0.80
	WLAN5.6G	802.11ac VHT160	Left Side	0	114	Speed	Ant 0+1	90.20	1.11	14.00	13.94	1.01	0.08	0.04	0.04
	WLAN5.6G	802.11ac VHT160	Right Side	0	114	Speed	Ant 0+1	90.20	1.11	14.00	13.94	1.01	-0.12	0.032	0.04
	WLAN5.6G	802.11ac VHT160	Top Side	0	114	Speed	Ant 0+1	90.20	1.11	14.00	13.94	1.01	0	<0.001	0.00
	WLAN5.6G	802.11ac VHT160	Bottom Side	0	114	Speed	Ant 0+1	90.20	1.11	14.00	13.94	1.01	-0.13	0.181	0.20
	WLAN5.6G	802.11ac VHT160	Rear Fcae	0	114	Auden	Ant 0	95.30	1.05	11.00	10.95	1.01	-0.1	0.685	0.73
	WLAN5.6G	802.11ac VHT160	Rear Fcae	0	114	HB	Ant 0	95.30	1.05	11.00	10.95	1.01	0.11	0.778	0.83
	WLAN5.6G	802.11ac VHT160	Rear Fcae	0	114	Speed	Ant 0	95.30	1.05	11.00	10.95	1.01	0.01	0.788	0.84

Body SAR Test Result

Body SAR Test Result															
System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.8G	802.11ac VHT80	Bottom for Laptop	0	155	Speed	Ant 0	97.50	1.03	11.50	11.49	1.00	0.01	0.567	0.58
	WLAN5.8G	802.11ac VHT80	Bottom for Laptop	0	155	Speed	Ant 1	97.20	1.03	11.50	11.49	1.00	-0.19	0.626	0.64
	WLAN5.8G	802.11ac VHT80	Bottom for Laptop	0	155	Speed	Ant 0+1	94.60	1.06	14.50	14.49	1.00	0.06	0.67	0.71
	WLAN5.8G	802.11ac VHT80	Rear Fcae	0	155	Speed	Ant 0	97.50	1.03	11.50	11.49	1.00	-0.13	0.803	0.83
	WLAN5.8G	802.11ac VHT80	Left Side	0	155	Speed	Ant 0	97.50	1.03	11.50	11.49	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Right Side	0	155	Speed	Ant 0	97.50	1.03	11.50	11.49	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Top Side	0	155	Speed	Ant 0	97.50	1.03	11.50	11.49	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom Side	0	155	Speed	Ant 0	97.50	1.03	11.50	11.49	1.00	0.09	0.154	0.16
	WLAN5.8G	802.11ac VHT80	Rear Fcae	0	155	Speed	Ant 1	97.20	1.03	11.50	11.49	1.00	-0.18	0.715	0.74
	WLAN5.8G	802.11ac VHT80	Left Side	0	155	Speed	Ant 1	97.20	1.03	11.50	11.49	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Right Side	0	155	Speed	Ant 1	97.20	1.03	11.50	11.49	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Top Side	0	155	Speed	Ant 1	97.20	1.03	11.50	11.49	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom Side	0	155	Speed	Ant 1	97.20	1.03	11.50	11.49	1.00	-0.08	0.262	0.27
23	WLAN5.8G	802.11ac VHT80	Rear Fcae	0	155	Speed	Ant 0+1	94.60	1.06	14.50	14.49	1.00	-0.01	0.806	0.85
	WLAN5.8G	802.11ac VHT80	Left Side	0	155	Speed	Ant 0+1	94.60	1.06	14.50	14.49	1.00	0.19	0.056	0.06
	WLAN5.8G	802.11ac VHT80	Right Side	0	155	Speed	Ant 0+1	94.60	1.06	14.50	14.49	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Top Side	0	155	Speed	Ant 0+1	94.60	1.06	14.50	14.49	1.00	0	<0.001	0.00
	WLAN5.8G	802.11ac VHT80	Bottom Side	0	155	Speed	Ant 0+1	94.60	1.06	14.50	14.49	1.00	-0.19	0.252	0.27
	WLAN5.8G	802.11ac VHT80	Rear Fcae	0	155	Auden	Ant 0+1	94.60	1.06	14.50	14.49	1.00	0.13	0.749	0.79
	WLAN5.8G	802.11ac VHT80	Rear Fcae	0	155	HB	Ant 0+1	94.60	1.06	14.50	14.49	1.00	0.06	0.776	0.82
	WLAN5.8G	802.11ac VHT80	Rear Fcae	0	155	Speed	Ant 0+1	94.60	1.06	14.50	14.49	1.00	0.13	0.789	0.84
	WLAN5.9G	802.11ac VHT160	Bottom for Laptop	0	163	Speed	Ant 0	95.30	1.05	12.00	11.95	1.01	-0.13	0.53	0.56
	WLAN5.9G	802.11ac VHT160	Bottom for Laptop	0	163	Speed	Ant 1	94.80	1.05	12.00	11.88	1.03	0.01	0.651	0.70
	WLAN5.9G	802.11ac VHT160	Bottom for Laptop	0	163	Speed	Ant 0+1	90.20	1.11	15.00	14.96	1.01	-0.06	0.687	0.77
	WLAN5.9G	802.11ac VHT160	Rear Fcae	0	163	Speed	Ant 0	95.30	1.05	12.00	11.95	1.01	-0.04	0.676	0.72
	WLAN5.9G	802.11ac VHT160	Left Side	0	163	Speed	Ant 0	95.30	1.05	12.00	11.95	1.01	0.03	0.044	0.05
	WLAN5.9G	802.11ac VHT160	Right Side	0	163	Speed	Ant 0	95.30	1.05	12.00	11.95	1.01	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Top Side	0	163	Speed	Ant 0	95.30	1.05	12.00	11.95	1.01	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Bottom Side	0	163	Speed	Ant 0	95.30	1.05	12.00	11.95	1.01	0.02	0.104	0.11

Body SAR Test Result

Body SAR Test Result															
System & Position						DUT Configuration		SAR							
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)
	WLAN5.9G	802.11ac VHT160	Rear Face	0	163	Speed	Ant 1	94.80	1.05	12.00	11.88	1.03	0.15	0.547	0.59
	WLAN5.9G	802.11ac VHT160	Left Side	0	163	Speed	Ant 1	94.80	1.05	12.00	11.88	1.03	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Right Side	0	163	Speed	Ant 1	94.80	1.05	12.00	11.88	1.03	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Top Side	0	163	Speed	Ant 1	94.80	1.05	12.00	11.88	1.03	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Bottom Side	0	163	Speed	Ant 1	94.80	1.05	12.00	11.88	1.03	-0.09	0.251	0.27
24	WLAN5.9G	802.11ac VHT160	Rear Face	0	163	Speed	Ant 0+1	90.20	1.11	15.00	14.96	1.01	-0.05	0.779	0.87
	WLAN5.9G	802.11ac VHT160	Left Side	0	163	Speed	Ant 0+1	90.20	1.11	15.00	14.96	1.01	0.17	0.048	0.05
	WLAN5.9G	802.11ac VHT160	Right Side	0	163	Speed	Ant 0+1	90.20	1.11	15.00	14.96	1.01	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Top Side	0	163	Speed	Ant 0+1	90.20	1.11	15.00	14.96	1.01	0	<0.001	0.00
	WLAN5.9G	802.11ac VHT160	Bottom Side	0	163	Speed	Ant 0+1	90.20	1.11	15.00	14.96	1.01	0.04	0.197	0.22
	WLAN5.9G	802.11ac VHT160	Rear Face	0	163	Auden	Ant 0+1	90.20	1.11	15.00	14.96	1.01	-0.19	0.709	0.79
	WLAN5.9G	802.11ac VHT160	Rear Face	0	163	HB	Ant 0+1	90.20	1.11	15.00	14.96	1.01	0.03	0.682	0.76
25	BT	BDR	Bottom for Laptop	0	39	Speed	Ant 1	76.35	1.31	11.00	10.98	1.00	0.07	0.327	0.43
	BT	BDR	Rear Face	0	39	Speed	Ant 1	76.35	1.31	11.00	10.98	1.00	0.02	0.1	0.13
	BT	BDR	Left Side	0	39	Speed	Ant 1	76.35	1.31	11.00	10.98	1.00	0	<0.001	0.00
	BT	BDR	Right Side	0	39	Speed	Ant 1	76.35	1.31	11.00	10.98	1.00	0.12	0.042	0.06
	BT	BDR	Top Side	0	39	Speed	Ant 1	76.35	1.31	11.00	10.98	1.00	0	<0.001	0.00
	BT	BDR	Bottom Side	0	39	Speed	Ant 1	76.35	1.31	11.00	10.98	1.00	0.04	0.092	0.12
	BT	BDR	Bottom for Laptop	0	0	Speed	Ant 1	76.35	1.31	11.00	10.88	1.03	-0.17	0.306	0.41
	BT	BDR	Bottom for Laptop	0	78	Speed	Ant 1	76.35	1.31	11.00	10.90	1.02	-0.07	0.287	0.38
	BT	BDR	Bottom for Laptop	0	39	Auden	Ant 1	76.35	1.31	11.00	10.98	1.00	0.05	0.28	0.37
	BT	BDR	Bottom for Laptop	0	39	HB	Ant 1	76.35	1.31	11.00	10.98	1.00	0.13	0.316	0.41
27	RFID	ASK	Bottom for Laptop	0	13.56	Speed	-	-	1.00	-	-	1.00	0	<0.001	0.00
	RFID	ASK	Rear Face	0	13.56	Speed	-	-	1.00	-	-	1.00	0	<0.001	0.00
	RFID	ASK	Left Side	0	13.56	Speed	-	-	1.00	-	-	1.00	0	<0.001	0.00
	RFID	ASK	Right Side	0	13.56	Speed	-	-	1.00	-	-	1.00	0	<0.001	0.00
	RFID	ASK	Top Side	0	13.56	Speed	-	-	1.00	-	-	1.00	0	<0.001	0.00
	RFID	ASK	Bottom Side	0	13.56	Speed	-	-	1.00	-	-	1.00	0	<0.001	0.00
	RFID	ASK	Bottom for Laptop	0	13.56	Auden	-	-	1.00	-	-	1.00	0	<0.001	0.00
	RFID	ASK	Bottom for Laptop	0	13.56	HB	-	-	1.00	-	-	1.00	0	<0.001	0.00



BUREAU
VERITAS

SAR and Power Density Test Result																											
System & Position						DUT Configuration			SAR										Power Density								
Plot No.	Band	Mode	Test Position	Separation Distance (mm)	Channel	Sample	Ant Status	Power Status	Duty Cycle	Crest Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaled SAR-1g (W/kg)	Measured APD W/m ² (4cm ²)	Scaled APD W/m ² (4cm ²)	Grid Step [λ]	iPD [W/m2]	Scaling Factor for Measurement Uncertainty	Averaging Area [cm2]	Power Drift [dB]	Normal psPD [W/m2]	Scaled Normal psPD [W/m2]	Total psPD [W/m2]	Scaled Total psPD [W/m2]
	UNII-5	802.11be HE320	Bottom for Laptop	0	63	Speed	Ant 0	-	97.08	1.03	12.00	11.98	1.00	0.08	0.371	0.38	1.91	1.97									
	UNII-5	802.11be HE320	Bottom for Laptop	0	63	Speed	Ant 1	-	98.31	1.02	12.00	11.96	1.01	-0.08	0.289	0.30	1.49	1.53									
	UNII-5	802.11be HE320	Bottom for Laptop	0	63	Speed	Ant 0+1	-	96.70	1.03	15.00	14.97	1.01	-0.14	0.281	0.29	1.45	1.51									
	UNII-5	802.11be HE320	Rear Face	0	63	Speed	Ant 0	-	97.08	1.03	12.00	11.98	1.00	-0.11	0.335	0.35	1.73	1.78									
	UNII-5	802.11be HE320	Left Side	0	63	Speed	Ant 0	-	97.08	1.03	12.00	11.98	1.00	-0.09	0.031	0.03	0.162	0.17									
	UNII-5	802.11be HE320	Right Side	0	63	Speed	Ant 0	-	97.08	1.03	12.00	11.98	1.00	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11be HE320	Top Side	0	63	Speed	Ant 0	-	97.08	1.03	12.00	11.98	1.00	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11be HE320	Bottom Side	0	63	Speed	Ant 0	-	97.08	1.03	12.00	11.98	1.00	0.18	0.03	0.03	0.157	0.16									
	UNII-5	802.11be HE320	Rear Face	0	63	Speed	Ant 1	-	98.31	1.02	12.00	11.96	1.01	-0.01	0.609	0.63	3.14	3.23									
	UNII-5	802.11be HE320	Left Side	0	63	Speed	Ant 1	-	98.31	1.02	12.00	11.96	1.01	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11be HE320	Right Side	0	63	Speed	Ant 1	-	98.31	1.02	12.00	11.96	1.01	-0.11	0.096	0.10	0.498	0.51									
	UNII-5	802.11be HE320	Top Side	0	63	Speed	Ant 1	-	98.31	1.02	12.00	11.96	1.01	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11be HE320	Bottom Side	0	63	Speed	Ant 1	-	98.31	1.02	12.00	11.96	1.01	-0.14	0.21	0.22	1.08	1.11									
	UNII-5	802.11be HE320	Rear Face	0	63	Speed	Ant 0+1	-	96.70	1.03	15.00	14.97	1.01	-0.01	0.748	0.78	3.89	4.05	0.0522	15.82	1.545	4.00	-0.05	2.48	3.95	3.07	4.93
	UNII-5	802.11be HE320	Left Side	0	63	Speed	Ant 0+1	-	96.70	1.03	15.00	14.97	1.01	0.01	0.035	0.04	0.185	0.19									
	UNII-5	802.11be HE320	Right Side	0	63	Speed	Ant 0+1	-	96.70	1.03	15.00	14.97	1.01	-0.03	0.108	0.11	0.562	0.58									
	UNII-5	802.11be HE320	Top Side	0	63	Speed	Ant 0+1	-	96.70	1.03	15.00	14.97	1.01	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11be HE320	Bottom Side	0	63	Speed	Ant 0+1	-	96.70	1.03	15.00	14.97	1.01	0.08	0.255	0.27	1.31	1.36									
	UNII-5	802.11be HE320	Bottom for Laptop	0	63	Speed	Ant 0	LPI	97.08	1.03	12.00	11.98	1.00	-0.07	0.36	0.37	1.86	1.92									
	UNII-5	802.11be HE320	Bottom for Laptop	0	63	Speed	Ant 1	LPI	98.31	1.02	12.00	11.96	1.01	-0.05	0.28	0.29	1.44	1.48									
	UNII-5	802.11be HE320	Bottom for Laptop	0	63	Speed	Ant 0+1	LPI	96.70	1.03	15.00	14.97	1.01	0.04	0.273	0.28	1.41	1.47									
	UNII-5	802.11be HE320	Rear Face	0	63	Speed	Ant 0	LPI	97.08	1.03	12.00	11.98	1.00	-0.15	0.325	0.33	1.67	1.72									
	UNII-5	802.11be HE320	Left Side	0	63	Speed	Ant 0	LPI	97.08	1.03	12.00	11.98	1.00	-0.09	0.03	0.03	0.155	0.16									
	UNII-5	802.11be HE320	Right Side	0	63	Speed	Ant 0	LPI	97.08	1.03	12.00	11.98	1.00	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11be HE320	Top Side	0	63	Speed	Ant 0	LPI	97.08	1.03	12.00	11.98	1.00	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11be HE320	Bottom Side	0	63	Speed	Ant 0	LPI	97.08	1.03	12.00	11.98	1.00	-0.05	0.029	0.03	0.149	0.15									
	UNII-5	802.11be HE320	Rear Face	0	63	Speed	Ant 1	LPI	98.31	1.02	12.00	11.96	1.01	-0.15	0.591	0.61	3.05	3.14									
	UNII-5	802.11be HE320	Left Side	0	63	Speed	Ant 1	LPI	98.31	1.02	12.00	11.96	1.01	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11be HE320	Right Side	0	63	Speed	Ant 1	LPI	98.31	1.02	12.00	11.96	1.01	0.06	0.093	0.10	0.48	0.49									
	UNII-5	802.11be HE320	Top Side	0	63	Speed	Ant 1	LPI	98.31	1.02	12.00	11.96	1.01	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11be HE320	Bottom Side	0	63	Speed	Ant 1	LPI	98.31	1.02	12.00	11.96	1.01	-0.05	0.204	0.21	1.05	1.08									
	UNII-5	802.11be HE320	Rear Face	0	63	Speed	Ant 0+1	LPI	96.70	1.03	15.00	14.97	1.01	-0.09	0.732	0.76	3.78	3.93									
	UNII-5	802.11be HE320	Left Side	0	63	Speed	Ant 0+1	LPI	96.70	1.03	15.00	14.97	1.01	0.17	0.034	0.04	0.175	0.18									
	UNII-5	802.11be HE320	Right Side	0	63	Speed	Ant 0+1	LPI	96.70	1.03	15.00	14.97	1.01	-0.15	0.105	0.11	0.542	0.56									
	UNII-5	802.11be HE320	Top Side	0	63	Speed	Ant 0+1	LPI	96.70	1.03	15.00	14.97	1.01	0	<0.001	0.00	<0.001	0.00									
	UNII-5	802.11be HE320	Bottom Side	0	63	Speed	Ant 0+1	LPI	96.70	1.03	15.00	14.97	1.01	-0.14	0.247	0.26	1.27	1.32									
	UNII-5	802.11be HE320	Rear Face	0	31	Speed	Ant 0+1	-	96.70	1.03	15.00	14.95	1.01	0.07	0.714	0.74	3.69	3.84									
	UNII-5	802.11be HE320	Rear Face	0	95	Speed	Ant 0+1	-	96.70	1.03	15.00	14.90	1.02	-0.13	0.749	0.79	3.97	4.17	0.0535	15.84	1.545	4.00	-0.14	2.52	4.01	3.12	5.06
	UNII-6	802.11ax HE160	Rear Face	0	111	Speed	Ant 0+1	-	96.70	1.03	15.00	14.93	1.02	0.12	0.709	0.74	3.66	3.85									
	UNII-7	802.11be HE320	Rear Face	0	127	Speed	Ant 0+1	-	96.70	1.03	15.00	14.91	1.02	0.04	0.754	0.79	3.89	4.09	0.0549	15.94	1.545	4.00	0.15	2.54	4.04	3.14	5.1
	UNII-7	802.11be HE320	Rear Face	0	159	Speed	Ant 0+1	-	96.70	1.03	15.00	14.93	1.02	-0.03	0.729	0.77	3.76	3.95	0.0562	15.41	1.545	4.00	-0.02	2.45	3.9	3.04	4.93
26	UNII-8	802.11be HE320	Rear Face	0	191	Speed	Ant 0+1	-	96.70	1.03	15.00	14.92	1.02	-0.19	0.774	0.81	4	4.2	0.0575	16.37	1.545	4.00	0.07	2.61	4.15	3.23	5.24
	UNII-8	802.11be HE320	Rear Face	0	191	Auden	Ant 0+1	-	96.70	1.03	15.00	14.92	1.02	-0.15	0.669	0.70	3.45	3.62									
	UNII-8	802.11be HE320	Rear Face	0	191	HB	Ant 0+1	-	96.70	1.03	15.00	14.92	1.02	0.06	0.7353	0.77	3.8	3.99									
									-	1.00	-	-	1		-	-	-	-									

Appendix G. SAR Measurement Variability

SAR repeated measurement are shown as below.

Repeated SAR							
Plot	Band	Mode	Test Position	Ch.	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio
R01	WCDMA II	RMC12.2K	Top Side	9262	1.02	0.967	1.05
R02	WCDMA IV	RMC12.2K	Top Side	1413	0.897	0.851	1.05
R17	LTE 48	QPSK20M	Top Side	56640	0.889	0.875	1.02
R20	WLAN2.4G	802.11n HT40	Bottom for Laptop	6	0.812	0.793	1.02
R22	WLAN5.6G	802.11ac VHT160	Rear Face	114	0.813	0.788	1.03
R23	WLAN5.8G	802.11ac VHT80	Rear Face	155	0.806	0.789	1.02

Appendix H. Analysis of Simultaneous Transmission.

The analysis of simultaneous transmission SAR are shown as below.

<Possibilities of Simultaneous Transmission>

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous TX Combination	Capable Transmit Configurations	Body Exposure Condition
A	WWAN + WLAN 2.4G_Ant 0 + RFID	Yes
B	WWAN + WLAN 2.4G_Ant 1 + RFID	Yes
C	WWAN + WLAN 2.4G_Ant 0+1 + RFID	Yes
D	WWAN + WLAN 5G_Ant 0 + RFID	Yes
E	WWAN + WLAN 5G_Ant 1 + RFID	Yes
F	WWAN + WLAN 5G_Ant 0+1 + RFID	Yes
G	WWAN + BT + RFID	Yes
H	WWAN + WLAN 2.4G_Ant 0+BT_Ant1 + RFID	Yes
I	WWAN + WLAN 5G_Ant 0+BT_Ant1 + RFID	Yes
J	WWAN + WLAN 5G_Ant 0+1+BT_Ant1 + RFID	Yes
K	WWAN + WLAN 6G_Ant 0 + RFID	Yes
L	WWAN + WLAN 6G_Ant 1 + RFID	Yes
M	WWAN + WLAN 6G_Ant 0+1 + RFID	Yes
N	WWAN + WLAN 6G_Ant 0+BT_Ant1 + RFID	Yes
O	WWAN + WLAN 6G_Ant 0+1+BT + RFID	Yes

Notes

1. The WLAN 2.4G and WLAN 5G and WLAN6G cannot transmit simultaneously.
2. Simultaneous Tx Combination A can be covered by H
3. Simultaneous Tx Combination D can be covered by I
4. Simultaneous Tx Combination F can be covered by J
5. Simultaneous Tx Combination G can be covered by H
6. Simultaneous Tx Combination K can be covered by N
7. Simultaneous Tx Combination M can be covered by O

Simultaneous Transmission SAR Evaluation (Body)																						
Band	Position	1	2	3	4	5	6	7	8	9	10	11	12	B(1+3+12)	C(1+4+12)	E(1+6+12)	H(1+2+11+12)	I(1+5+11+12)	J(1+7+11+12)	L(1+9+12)	N(1+8+11+12)	O(1+10+11+12)
		MAX WWAN	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	WLAN 2.4GHz Ant 0+1	Max WLAN 5GHz Ant 0	Max WLAN 5GHz Ant 1	Max WLAN 5GHz Ant 0+1	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	RFID	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
		1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg									
WCDMA II	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
	Rear Fcae	0.17	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.96	0.88	0.91	0.80	1.16	1.17	0.17	0.13	1.07
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04
	Right Side	0.09	0.00	0.21	0.18	0.00	0.09	0.09	0.00	0.10	0.11	0.06	0.00	0.30	0.27	0.18	0.15	0.15	0.24	0.19	0.06	0.26
	Top Side	1.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.18	1.18	1.18	1.18	1.18	1.18	1.18	1.18	1.18
WCDMA IV	Bottom Side	0.00	0.09	0.27	0.31	0.18	0.39	0.38	0.03	0.22	0.27	0.12	0.00	0.27	0.31	0.39	0.21	0.30	0.50	0.22	0.15	0.39
	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
	Rear Fcae	0.18	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.97	0.89	0.92	0.81	1.17	1.18	0.18	0.13	1.08
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04
	Right Side	0.12	0.00	0.21	0.18	0.00	0.09	0.09	0.00	0.10	0.11	0.06	0.00	0.33	0.30	0.21	0.18	0.18	0.27	0.22	0.06	0.29
WCDMA V	Top Side	1.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.05	1.05	1.05	1.05	1.05	1.05	1.05	0.00	1.05
	Bottom Side	0.18	0.09	0.27	0.31	0.18	0.39	0.38	0.03	0.22	0.27	0.12	0.00	0.45	0.49	0.57	0.39	0.48	0.68	0.40	0.15	0.57
	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
	Rear Fcae	0.00	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.79	0.71	0.74	0.63	0.99	1.00	0.00	0.13	0.90
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04
LTE 2	Right Side	0.00	0.00	0.21	0.18	0.00	0.09	0.09	0.00	0.10	0.11	0.06	0.00	0.21	0.18	0.09	0.06	0.06	0.15	0.10	0.06	0.17
	Top Side	0.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.52	0.52	0.52	0.52	0.52	0.52	0.52	0.00	0.52
	Bottom Side	0.00	0.09	0.27	0.31	0.18	0.39	0.38	0.03	0.22	0.27	0.12	0.00	0.27	0.31	0.39	0.21	0.30	0.50	0.22	0.15	0.39
	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
	Rear Fcae	0.11	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.90	0.82	0.85	0.74	1.10	1.11	0.11	0.13	1.01
LTE 4	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04
	Right Side	0.20	0.00	0.21	0.18	0.00	0.09	0.09	0.00	0.10	0.11	0.06	0.00	0.41	0.38	0.29	0.26	0.26	0.35	0.30	0.06	0.37
	Top Side	0.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.00	0.49
	Bottom Side	0.00	0.09	0.27	0.31	0.18	0.39	0.38	0.03	0.22	0.27	0.12	0.00	0.27	0.31	0.39	0.21	0.30	0.50	0.22	0.15	0.39
	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
LTE 5	Rear Fcae	0.11	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.90	0.82	0.85	0.74	1.10	1.11	0.11	0.13	1.01
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04
	Right Side	0.06	0.00	0.21	0.18	0.00	0.09	0.09	0.00	0.10	0.11	0.06	0.00	0.27	0.24	0.15	0.12	0.12	0.21	0.16	0.06	0.23
	Top Side	0.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	0.48	0.48	0.48	0.48	0.48	0.48	0.00	0.48
	Bottom Side	0.00	0.09	0.27	0.31	0.18	0.39	0.38	0.03	0.22	0.27	0.12	0.00	0.27	0.31	0.39	0.21	0.30	0.50	0.22	0.15	0.39
LTE 7	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
	Rear Fcae	0.00	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.79	0.71	0.74	0.63	0.99	1.00	0.00	0.13	0.90
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04
	Right Side	0.00	0.00	0.21	0.18	0.00	0.09	0.09	0.00	0.10	0.11	0.06	0.00	0.21	0.18	0.09	0.06	0.06	0.15	0.10	0.06	0.17
	Top Side	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.27	0.27	0.27	0.27	0.27	0.27	0.00	0.27
LTE 12	Bottom Side	0.00	0.09	0.27	0.31	0.18	0.39	0.38	0.03	0.22	0.27	0.12	0.00	0.27	0.31	0.39	0.21	0.30	0.50	0.22	0.15	0.39
	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
	Rear Fcae	0.00	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.79	0.71	0.74	0.63	0.99	1.00	0.00	0.13	0.90
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04
	Right Side	0.00	0.00	0.21	0.18	0.00	0.09	0.09	0.00	0.10	0.11	0.06	0.00	0.21	0.18	0.09	0.06	0.06	0.15	0.10	0.06	0.17
LTE 13	Top Side	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.00	0.20
	Bottom Side	0.00	0.09	0.27	0.31	0.18	0.39	0.38	0.03	0.22	0.27	0.12	0.00	0.27	0.31	0.39	0.21	0.30	0.50	0.22	0.15	0.39
	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
	Rear Fcae	0.00	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.79	0.71	0.74	0.63	0.99	1.00	0.00	0.13	0.90
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04

Simultaneous Transmission SAR Evaluation (Body)																						
Band	Position	1	2	3	4	5	6	7	8	9	10	11	12	B(1+3+12)	C(1+4+12)	E(1+6+12)	H(1+2+11+12)	I(1+5+11+12)	J(1+7+11+12)	L(1+9+12)	N(1+8+11+12)	O(1+10+11+12)
		MAX WWAN	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	WLAN 2.4GHz Ant 0+1	Max WLAN 5GHz Ant 0	Max WLAN 5GHz Ant 1	Max WLAN 5GHz Ant 0+1	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	RFID	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
		1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg									
LTE 14	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
	Rear Fcae	0.00	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.79	0.71	0.74	0.63	0.99	1.00	0.00	0.13	0.90
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04
	Right Side	0.06	0.00	0.21	0.18	0.00	0.09	0.09	0.00	0.10	0.11	0.06	0.00	0.27	0.24	0.15	0.12	0.12	0.21	0.16	0.06	0.23
	Top Side	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.11	0.11	0.11	0.11	0.11	0.11	0.00	0.11
LTE 17	Bottom Side	0.00	0.09	0.27	0.31	0.18	0.39	0.38	0.03	0.22	0.27	0.12	0.00	0.27	0.31	0.39	0.21	0.30	0.50	0.22	0.15	0.39
	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
	Rear Fcae	0.00	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.79	0.71	0.74	0.63	0.99	1.00	0.00	0.13	0.90
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04
	Right Side	0.00	0.00	0.21	0.18	0.00	0.09	0.09	0.00	0.10	0.11	0.06	0.00	0.21	0.18	0.09	0.06	0.06	0.15	0.10	0.06	0.17
LTE 25	Top Side	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.00	0.20
	Bottom Side	0.00	0.09	0.27	0.31	0.18	0.39	0.38	0.03	0.22	0.27	0.12	0.00	0.27	0.31	0.39	0.21	0.30	0.50	0.22	0.15	0.39
	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
	Rear Fcae	0.14	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.93	0.85	0.88	0.77	1.13	1.14	0.14	0.13	1.04
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04
LTE 26	Right Side	0.37	0.00	0.21	0.18	0.00	0.09	0.09	0.00	0.10	0.11	0.06	0.00	0.58	0.55	0.46	0.43	0.43	0.52	0.47	0.06	0.54
	Top Side	0.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.00	0.53
	Bottom Side	0.00	0.09	0.27	0.31	0.18	0.39	0.38	0.03	0.22	0.27	0.12	0.00	0.27	0.31	0.39	0.21	0.30	0.50	0.22	0.15	0.39
	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
	Rear Fcae	0.00	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.79	0.71	0.74	0.63	0.99	1.00	0.74	0.13	0.90
LTE 30	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04
	Right Side	0.00	0.00	0.21	0.18	0.00	0.09	0.09	0.00	0.10	0.11	0.06	0.00	0.21	0.18	0.09	0.06	0.06	0.15	0.10	0.06	0.17
	Top Side	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	0.29	0.29	0.29	0.29	0.29	0.29	0.00	0.29
	Bottom Side	0.00	0.09	0.27	0.31	0.18	0.39	0.38	0.03	0.22	0.27	0.12	0.00	0.27	0.31	0.39	0.21	0.30	0.50	0.22	0.15	0.39
	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
LTE 38	Rear Fcae	0.11	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.90	0.82	0.85	0.74	1.10	1.11	0.11	0.13	1.01
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04
	Right Side	0.22	0.00	0.21	0.18	0.00	0.09	0.09	0.00	0.10	0.11	0.06	0.00	0.43	0.40	0.31	0.28	0.28	0.37	0.32	0.06	0.39
	Top Side	0.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.79	0.79	0.79	0.79	0.79	0.79	0.79	0.00	0.79
	Bottom Side	0.00	0.09	0.27	0.31	0.18	0.39	0.38	0.03	0.22	0.27	0.12	0.00	0.27	0.31	0.39	0.21	0.30	0.50	0.22	0.15	0.39
LTE 41	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
	Rear Fcae	0.00	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.79	0.71	0.74	0.63	0.99	1.00	0.74	0.13	0.90
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04
	Right Side	0.17	0.00	0.21	0.18	0.00	0.09	0.09	0.00	0.10	0.11	0.06	0.00	0.38	0.35	0.26	0.23	0.23	0.32	0.27	0.06	0.34
	Top Side	0.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.00	0.49
LTE 48	Bottom Side	0.00	0.09	0.27	0.31	0.18	0.39	0.38	0.03	0.22	0.27	0.12	0.00	0.27	0.31	0.39	0.21	0.30	0.50	0.22	0.15	0.39
	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
	Rear Fcae	0.12	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.91	0.83	0.86	0.75	1.11	1.12	0.12	0.13	1.02
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04
	Right Side	0.09	0.00	0.21	0.18	0.00	0.09	0.09	0.00	0.10	0.11	0.06	0.00	0.30	0.27	0.18	0.15	0.15	0.24	0.19	0.06	0.26
LTE 66	Top Side	0.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.49	0.49	0.49	0.49	0.49	0.49	0.49	0.00	0.49
	Bottom Side	0.00	0.09	0.27	0.31	0.18	0.39	0.38	0.03	0.22	0.27	0.12	0.00	0.27	0.31	0.39	0.21	0.30	0.50	0.22	0.15	0.39

Simultaneous Transmission SAR Evaluation (Body)																						
Band	Position	1	2	3	4	5	6	7	8	9	10	11	12	B(1+3+12)	C(1+4+12)	E(1+6+12)	H(1+2+11+12)	I(1+5+11+12)	J(1+7+11+12)	L(1+9+12)	N(1+8+11+12)	O(1+10+11+12)
		MAX WWAN	WLAN 2.4GHz Ant 0	WLAN 2.4GHz Ant 1	WLAN 2.4GHz Ant 0+1	Max WLAN 5GHz Ant 0	Max WLAN 5GHz Ant 1	Max WLAN 5GHz Ant 0+1	Max WLAN 6GHz Ant 0	Max WLAN 6GHz Ant 1	Max WLAN 6GHz Ant 0+1	Max BT Ant 1	RFID	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg	Summing result 1g SAR W/kg
		1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg	1g SAR W/kg										
LTE 71	Bottom for Laptop	0.00	0.37	0.77	0.84	0.58	0.70	0.77	0.38	0.30	0.29	0.43	0.00	0.77	0.84	0.70	0.80	1.01	1.20	0.30	0.81	0.72
	Rear Fcae	0.00	0.50	0.79	0.71	0.86	0.74	0.87	0.00	0.00	0.77	0.13	0.00	0.79	0.71	0.74	0.63	0.99	1.00	0.00	0.13	0.90
	Left Side	0.00	0.06	0.00	0.07	0.05	0.06	0.06	0.03	0.00	0.04	0.00	0.00	0.00	0.07	0.06	0.06	0.05	0.06	0.00	0.03	0.04
	Right Side	0.00	0.00	0.21	0.18	0.00	0.09	0.09	0.00	0.10	0.11	0.06	0.00	0.21	0.18	0.09	0.06	0.06	0.15	0.10	0.06	0.17
	Top Side	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.00	0.45
	Bottom Side	0.00	0.09	0.27	0.31	0.18	0.39	0.38	0.03	0.22	0.27	0.12	0.00	0.27	0.31	0.39	0.21	0.30	0.50	0.22	0.15	0.39