


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Vertical

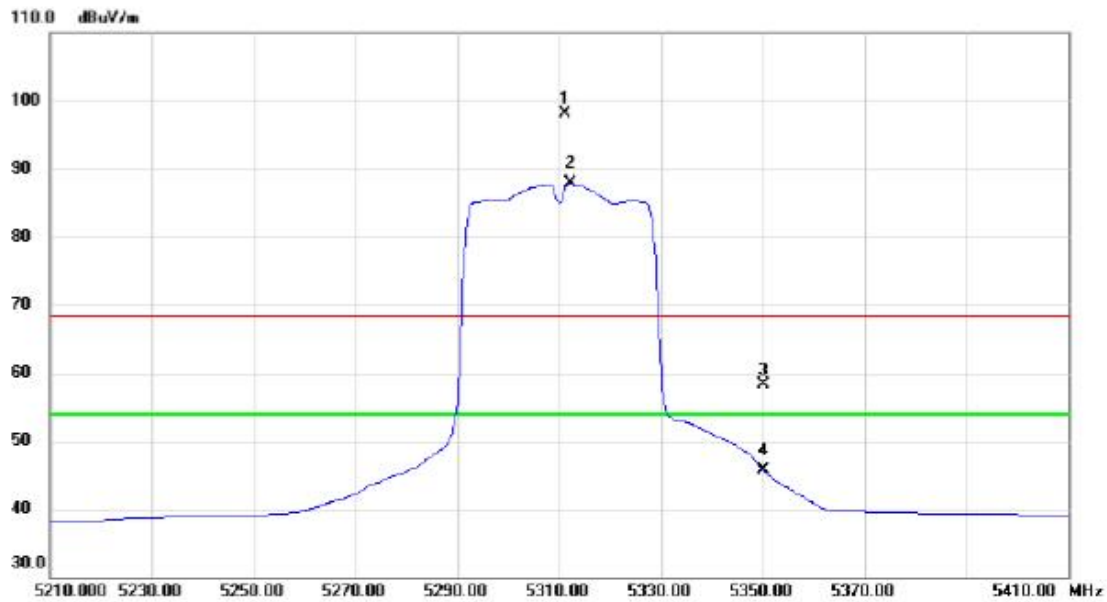

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5311.200	59.42	38.60	98.02	68.30	29.72	peak	No Limit
2	*	5312.200	49.24	38.61	87.85	54.00	33.85	AVG	No Limit
3		5350.000	19.54	38.78	58.32	68.30	-9.98	peak	
4		5350.000	7.01	38.78	45.79	54.00	-8.21	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10520.00	39.85	13.75	53.60	74.30	-20.70	peak	
2	*	15780.00	42.40	18.10	60.50	74.30	-13.80	peak	




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39973.00	46.19	17.54	63.73	74.30	-10.57	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz


Horizontal

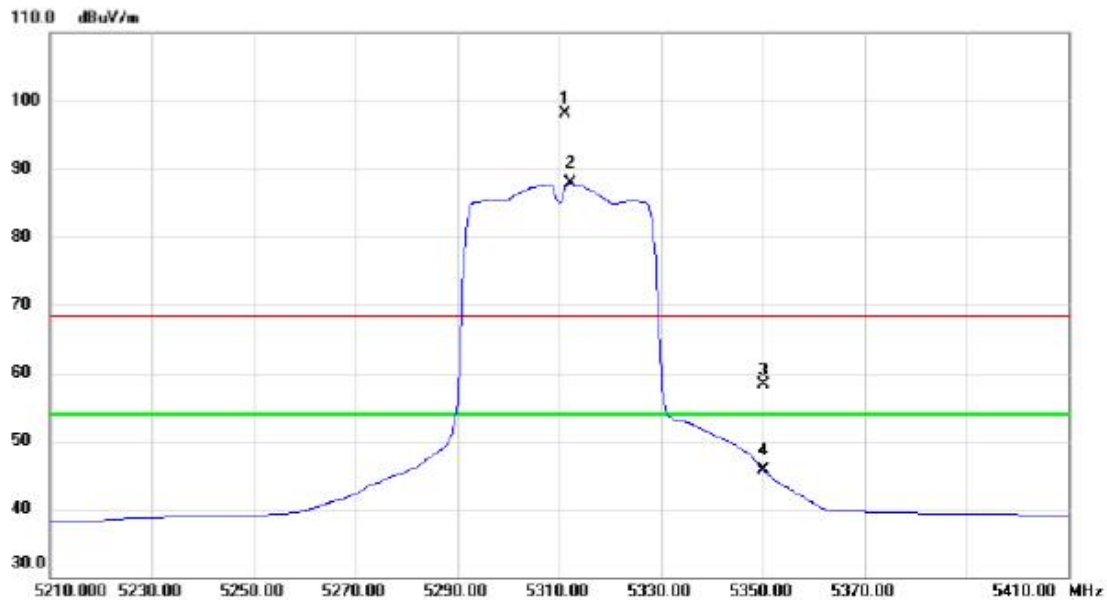


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5311.200	59.42	38.60	98.02	68.30	29.72	peak	No Limit
2	*	5312.200	49.24	38.61	87.85	54.00	33.85	AVG	No Limit
3		5350.000	19.54	38.78	58.32	68.30	-9.98	peak	
4		5350.000	7.01	38.78	45.79	54.00	-8.21	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5260MHz

Horizontal

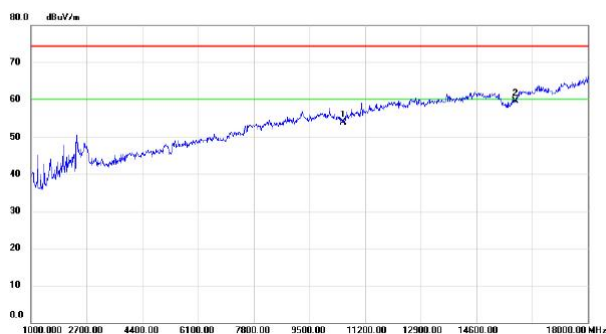

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10520.00	39.99	13.75	53.74	74.30	-20.56	peak	
2	*	15780.00	41.34	18.10	59.44	74.30	-14.86	peak	

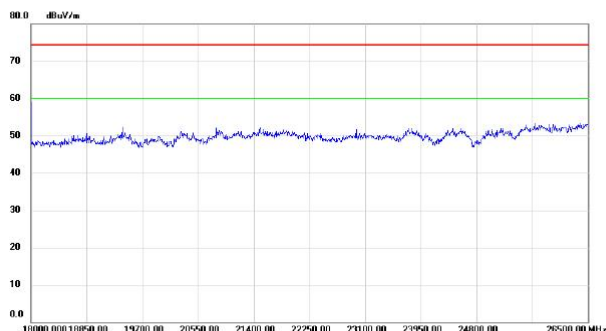


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39973.00	46.16	17.54	63.70	74.30	-10.60	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Vertical

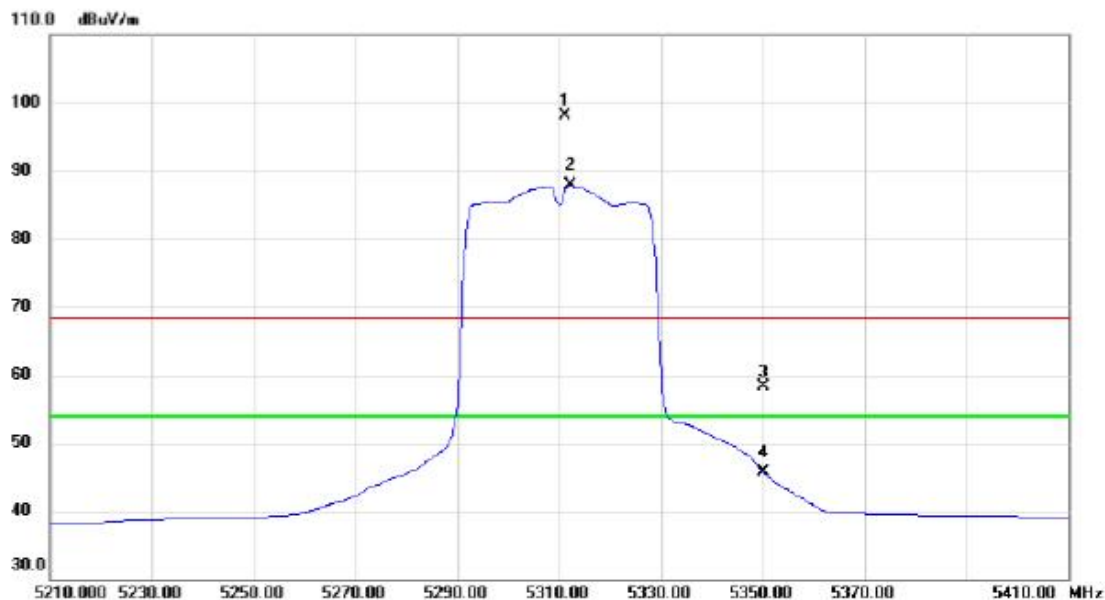

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5311.200	59.42	38.60	98.02	68.30	29.72	peak	No Limit
2	*	5312.200	49.24	38.61	87.85	54.00	33.85	AVG	No Limit
3		5350.000	19.54	38.78	58.32	68.30	-9.98	peak	
4		5350.000	7.01	38.78	45.79	54.00	-8.21	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Vertical

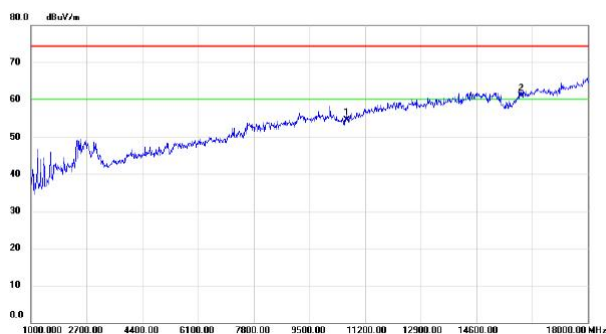

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.00	39.99	14.25	54.24	74.30	-20.06	peak	
2	*	15960.00	41.91	19.04	60.95	74.30	-13.35	peak	




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39973.00	46.50	17.54	64.04	74.30	-10.26	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz


Horizontal

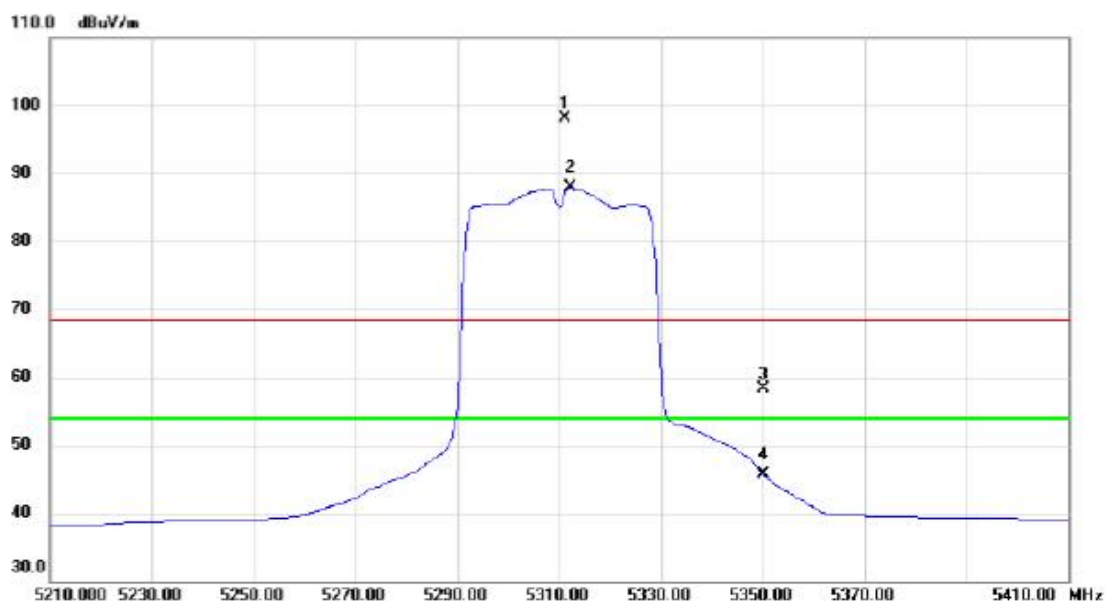


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5311.200	59.42	38.60	98.02	68.30	29.72	peak	No Limit
2	*	5312.200	49.24	38.61	87.85	54.00	33.85	AVG	No Limit
3		5350.000	19.54	38.78	58.32	68.30	-9.98	peak	
4		5350.000	7.01	38.78	45.79	54.00	-8.21	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC20 Mode 5320MHz

Horizontal

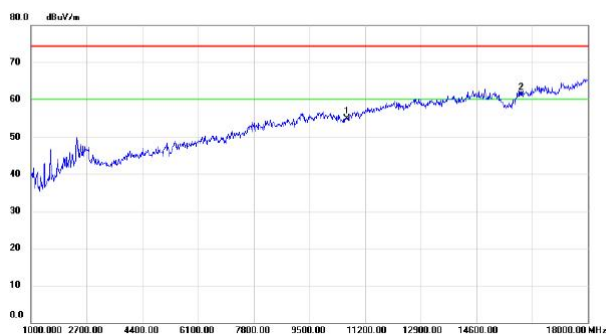

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.00	40.52	14.25	54.77	74.30	-19.53	peak	
2	*	15960.00	42.04	19.04	61.08	74.30	-13.22	peak	

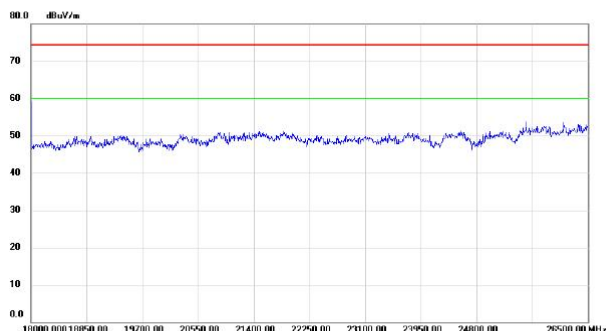


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39986.50	45.45	17.56	63.01	74.30	-11.29	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Vertical

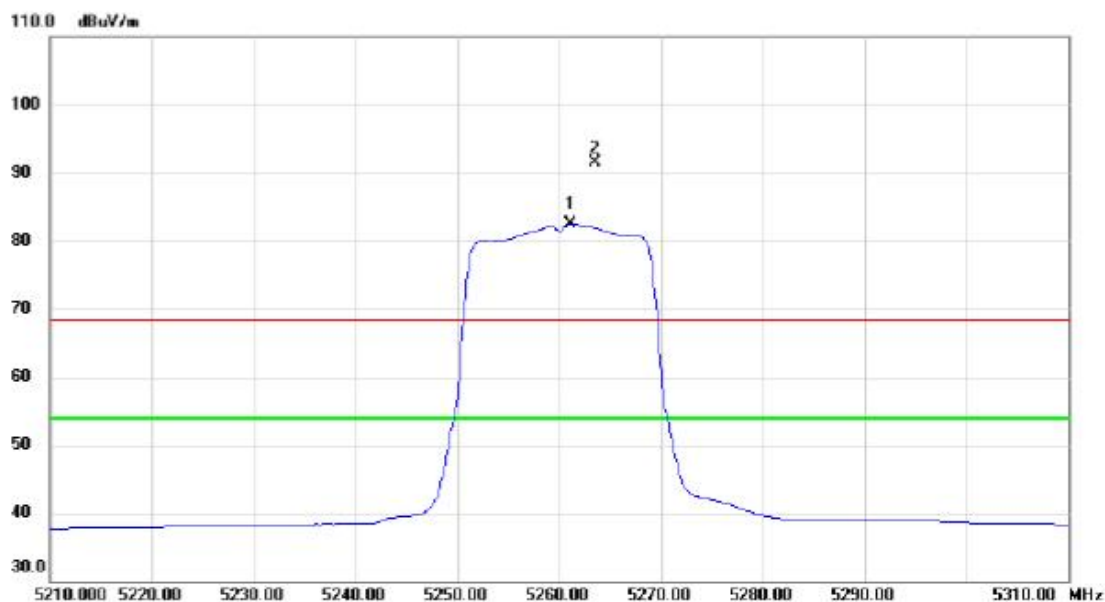

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5261.200	44.20	38.38	82.58	54.00	28.58	AVG	No Limit
2	X	5263.500	53.12	38.39	91.51	68.30	23.21	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10540.00	40.03	13.84	53.87	74.30	-20.43	peak	
2	*	15810.00	41.95	18.25	60.20	74.30	-14.10	peak	




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39973.00	45.58	17.54	63.12	74.30	-11.18	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz



Horizontal

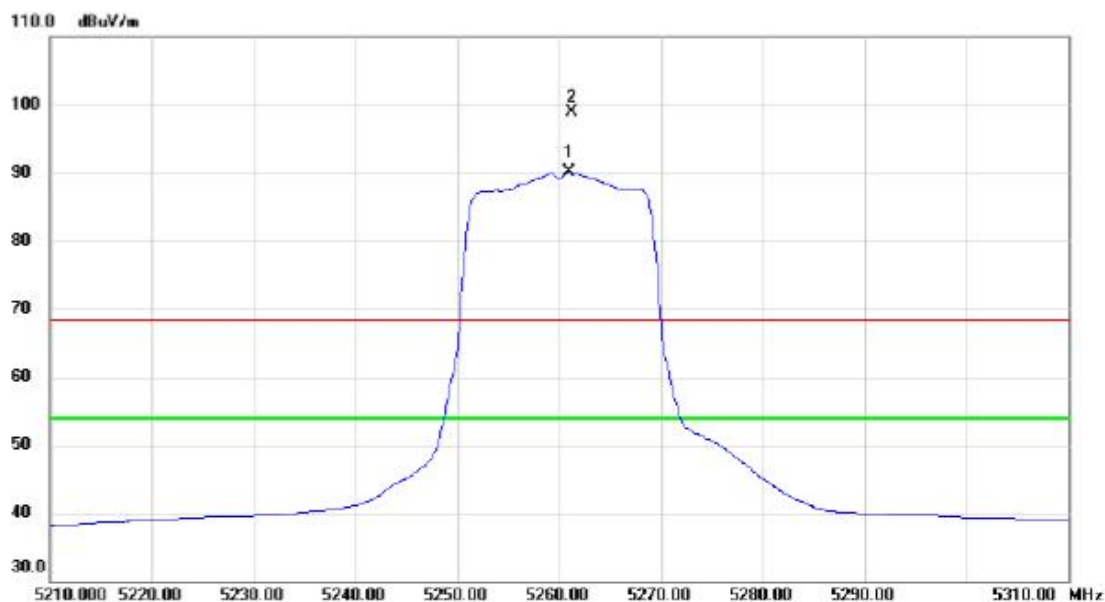

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5261.000	51.68	38.38	90.06	54.00	36.06	AVG	No Limit
2	X	5261.300	60.43	38.38	98.81	68.30	30.51	peak	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5270MHz

Horizontal

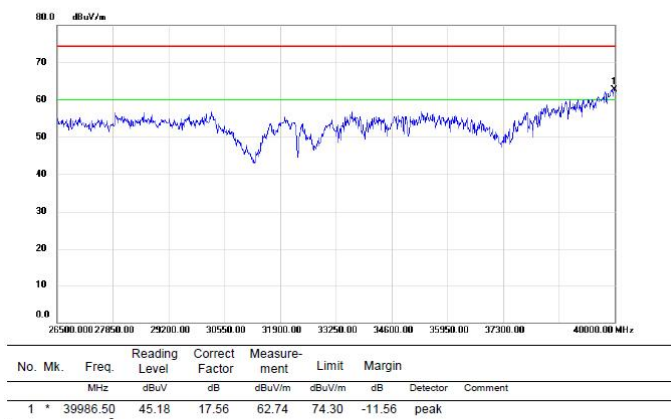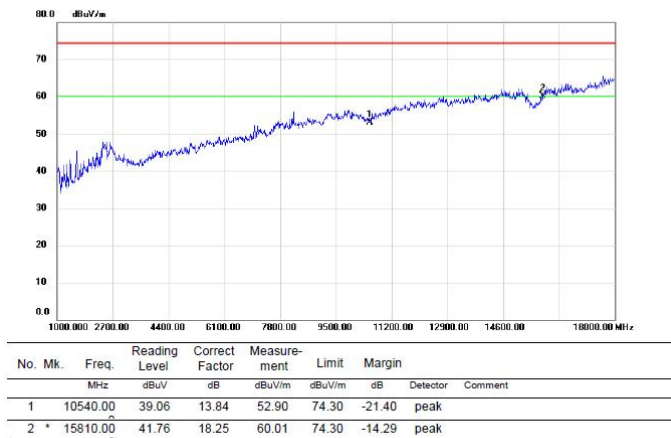

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical

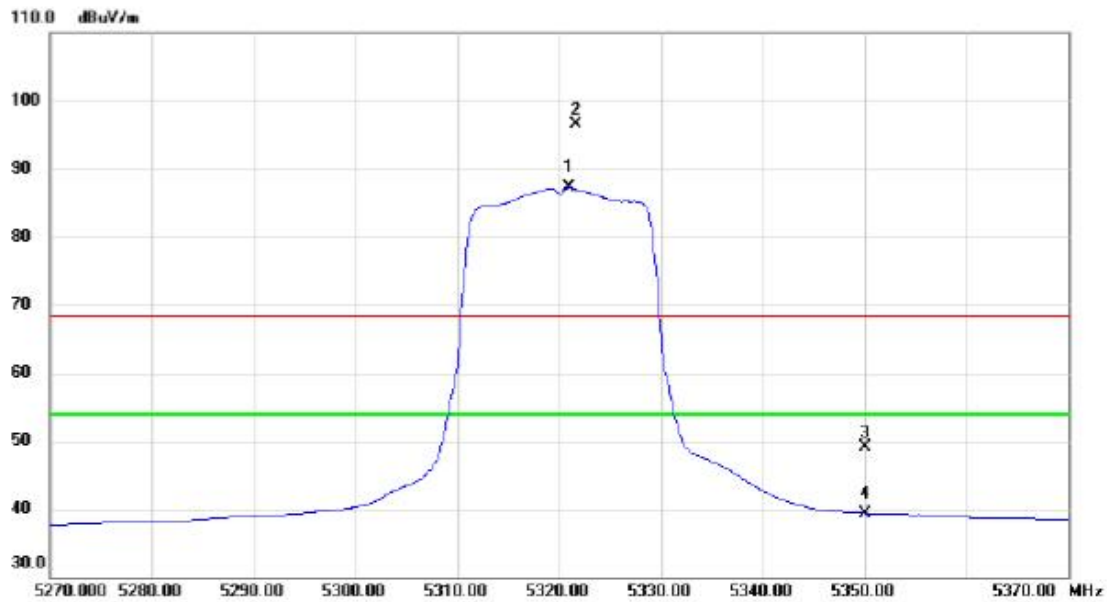


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5321.000	48.59	38.65	87.24	54.00	33.24	AVG	No Limit
2	X	5321.700	57.77	38.65	96.42	68.30	28.12	peak	No Limit
3		5350.000	10.32	38.78	49.10	68.30	-19.20	peak	
4		5350.000	0.62	38.78	39.40	54.00	-14.60	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.00	39.16	14.17	53.33	74.30	-20.97	peak	
2	*	15930.00	42.51	18.89	61.40	74.30	-12.90	peak	

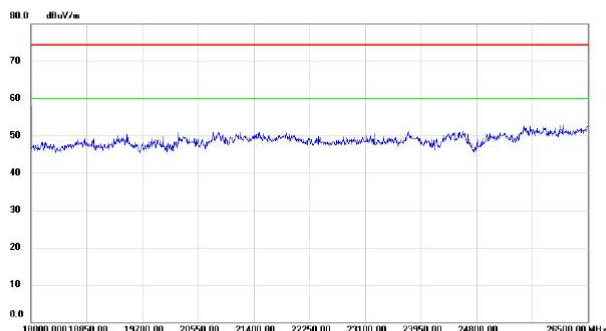


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39932.50	46.86	17.43	64.29	74.30	-10.01	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz


Horizontal

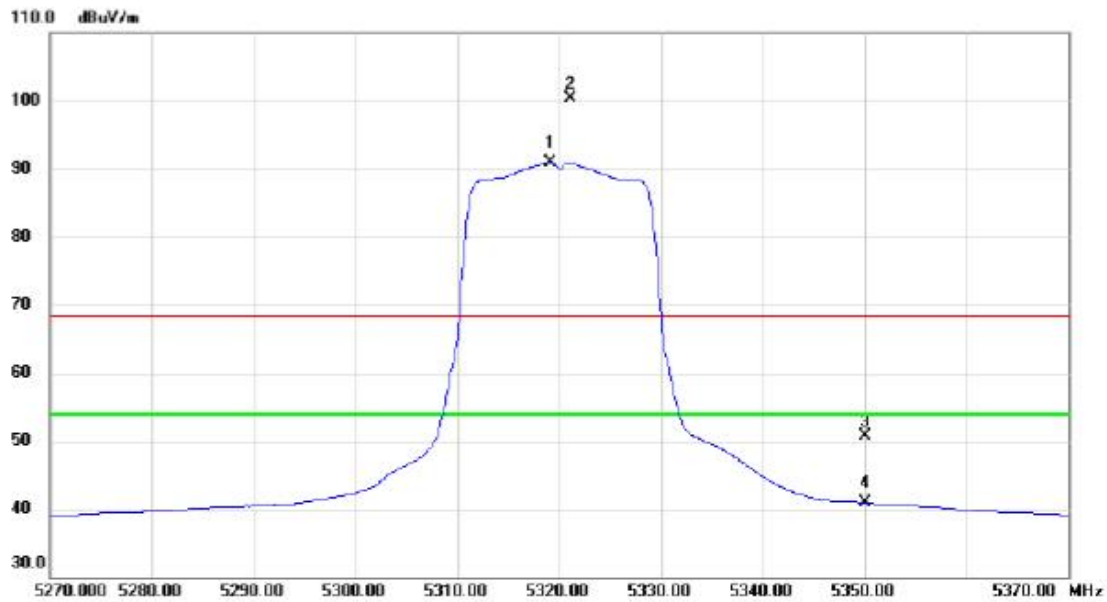


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5319.100	52.33	38.64	90.97	54.00	36.97	AVG	No Limit
2	X	5321.200	61.73	38.65	100.38	68.30	32.08	peak	No Limit
3		5350.000	11.88	38.78	50.66	68.30	-17.64	peak	
4		5350.000	2.15	38.78	40.93	54.00	-13.07	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC40 Mode 5310MHz

Horizontal

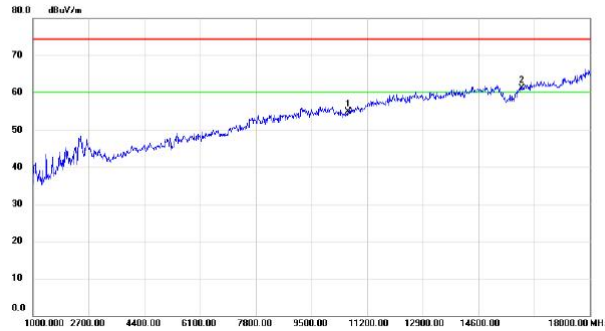

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.00	40.47	14.17	54.64	74.30	-19.66	peak	
2	*	15930.00	42.20	18.89	61.09	74.30	-13.21	peak	

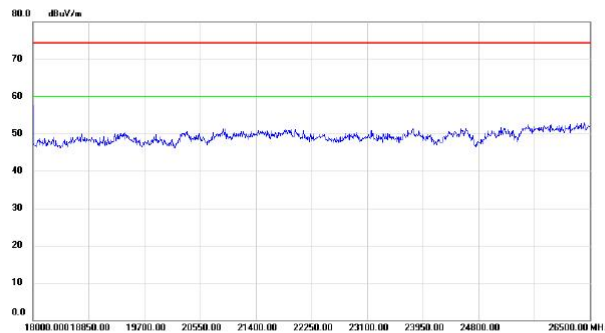


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39986.50	46.40	17.56	63.96	74.30	-10.34	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz


Vertical

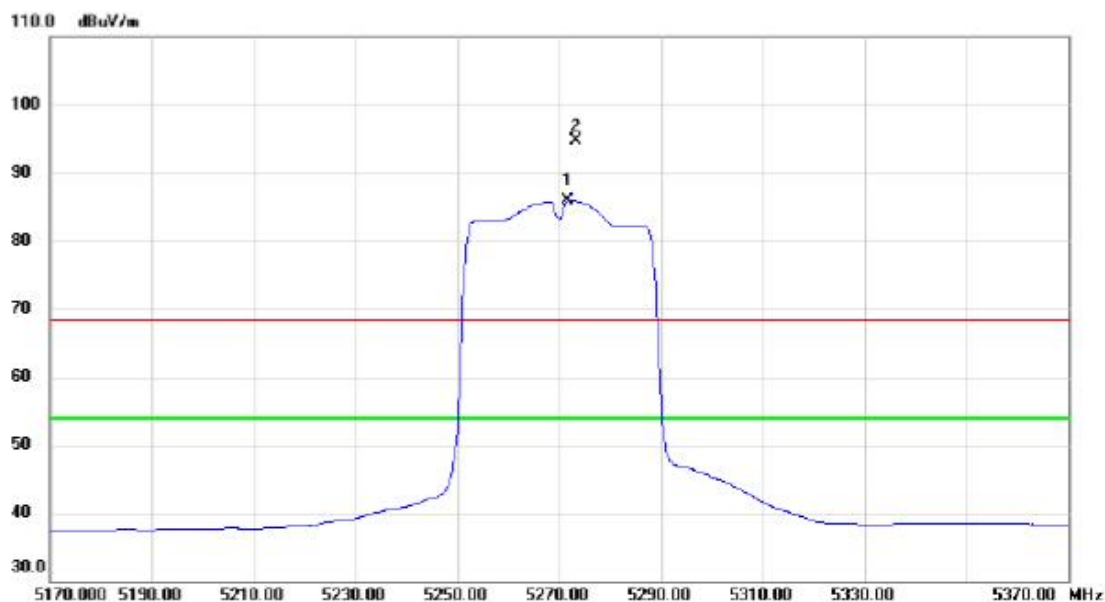


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5271.800	47.56	38.43	85.99	54.00	31.99	AVG	No Limit
2	X	5273.400	56.18	38.44	94.62	68.30	26.32	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Vertical

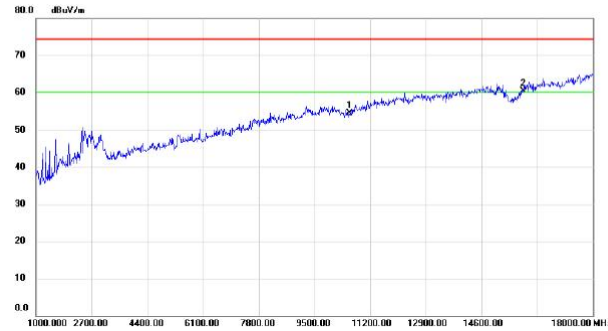

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10580.00	40.23	14.00	54.23	74.30	-20.07	peak	
2	*	15870.00	41.70	18.57	60.27	74.30	-14.03	peak	

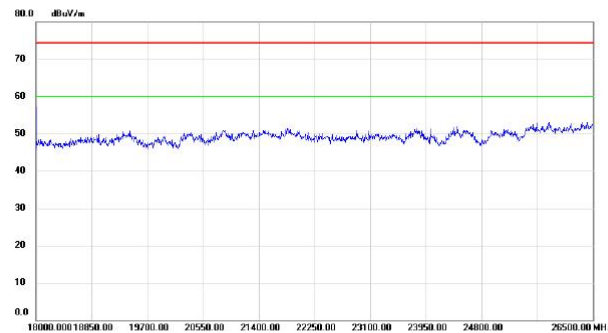


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39973.00	45.54	17.54	63.08	74.30	-11.22	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal

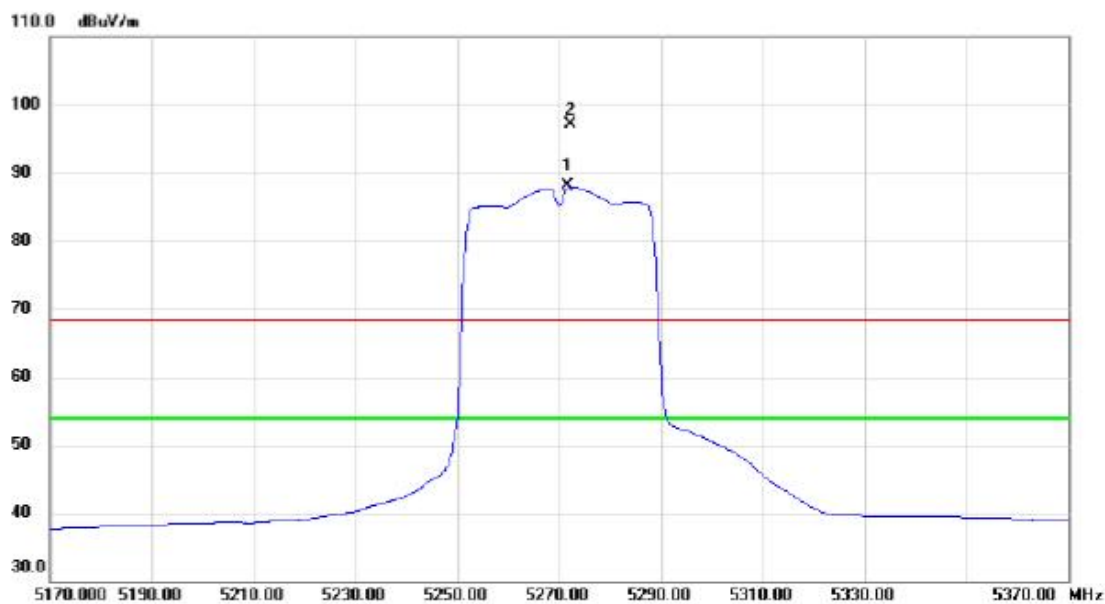

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5271.800	49.61	38.43	88.04	54.00	34.04	AVG	No Limit
2	X	5272.200	58.64	38.43	97.07	68.30	28.77	peak	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2A/ TX AC80 Mode 5290MHz

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10580.00	39.55	14.00	53.55	74.30	-20.75	peak	
2	*	15870.00	42.28	18.57	60.85	74.30	-13.45	peak	




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39932.50	46.58	17.43	64.01	74.30	-10.29	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz



Vertical

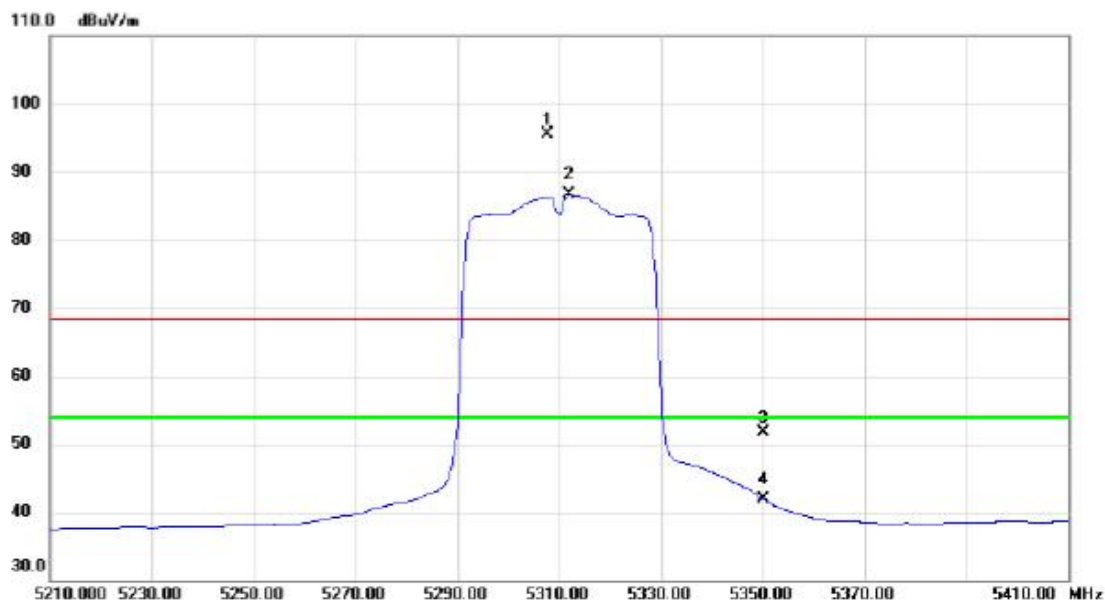

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5307.600	56.92	38.59	95.51	68.30	27.21	peak	No Limit
2	*	5312.000	48.06	38.61	86.67	54.00	32.67	AVG	No Limit
3		5350.000	13.00	38.78	51.78	68.30	-16.52	peak	
4		5350.000	3.21	38.78	41.99	54.00	-12.01	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Vertical

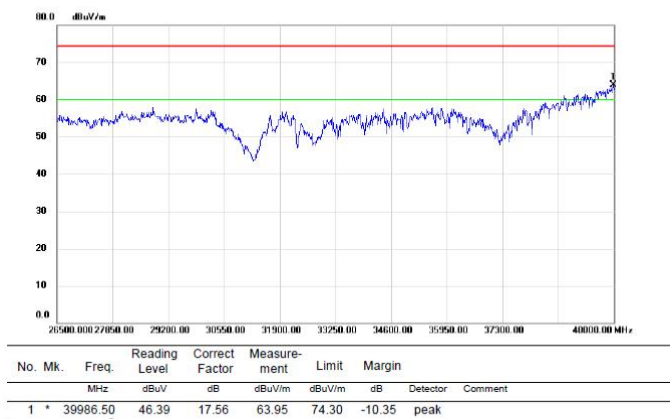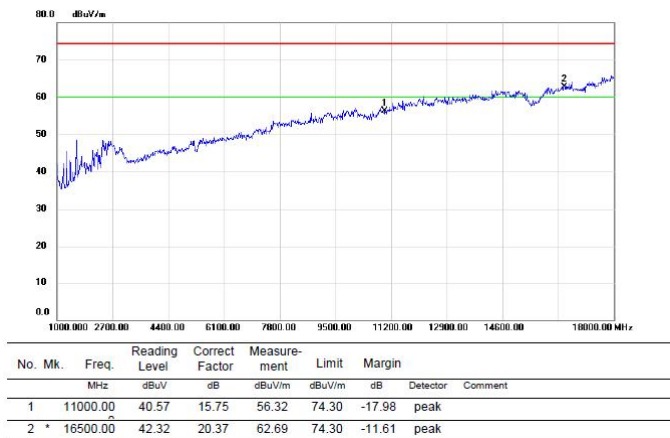

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz




Horizontal

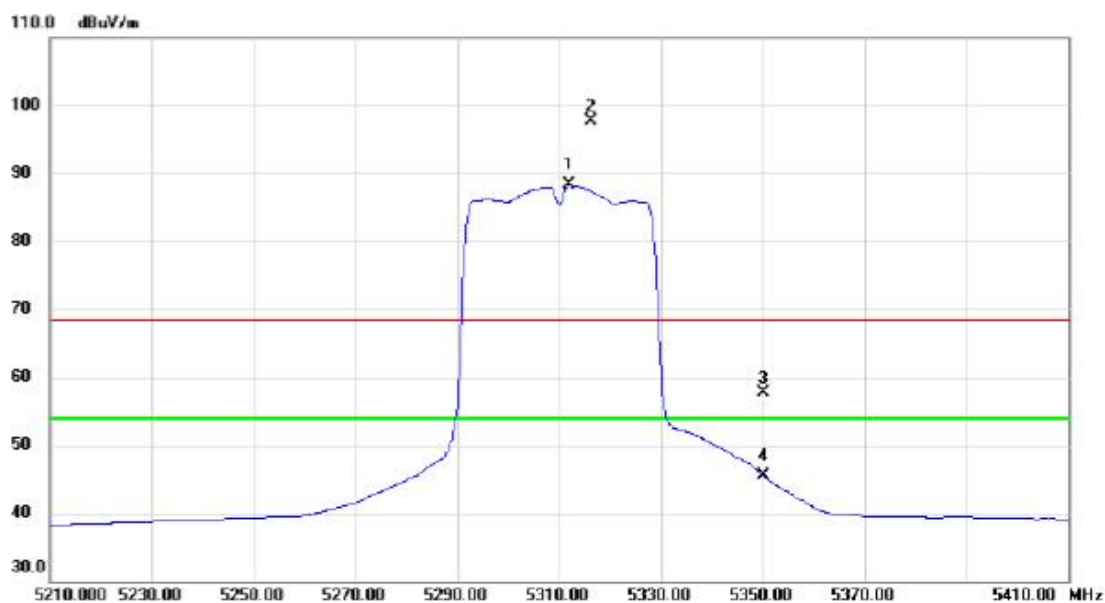

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5312.000	49.64	38.61	88.25	54.00	34.25	AVG	No Limit
2	X	5316.200	59.15	38.63	97.78	68.30	29.48	peak	No Limit
3		5350.000	19.01	38.78	57.79	68.30	-10.51	peak	
4		5350.000	6.78	38.78	45.56	54.00	-8.44	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5500MHz

Horizontal

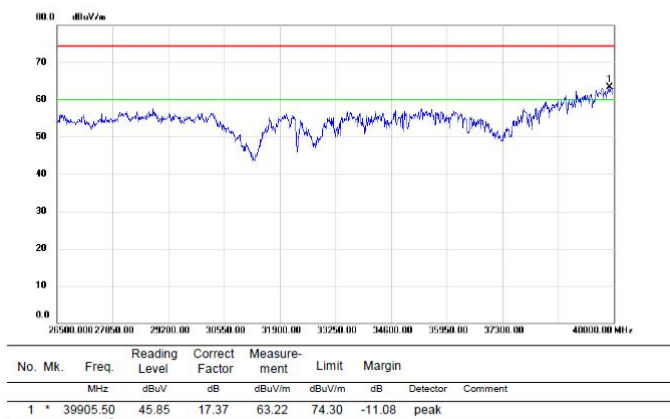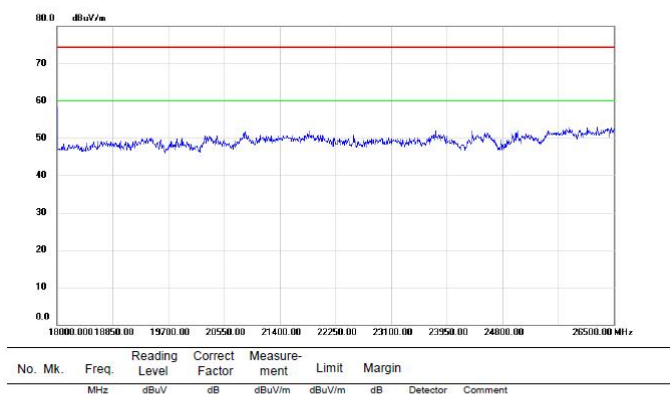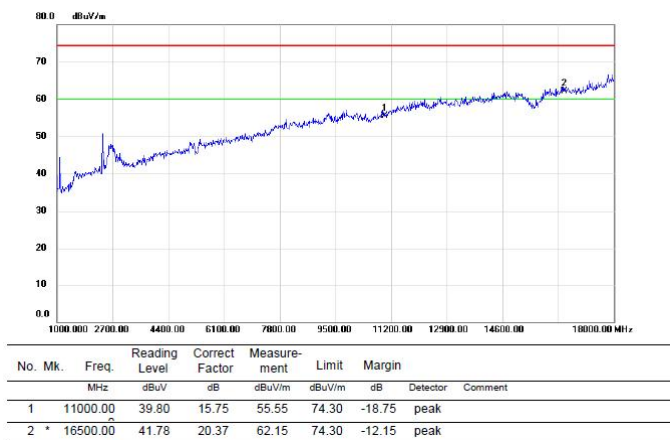

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz


Vertical

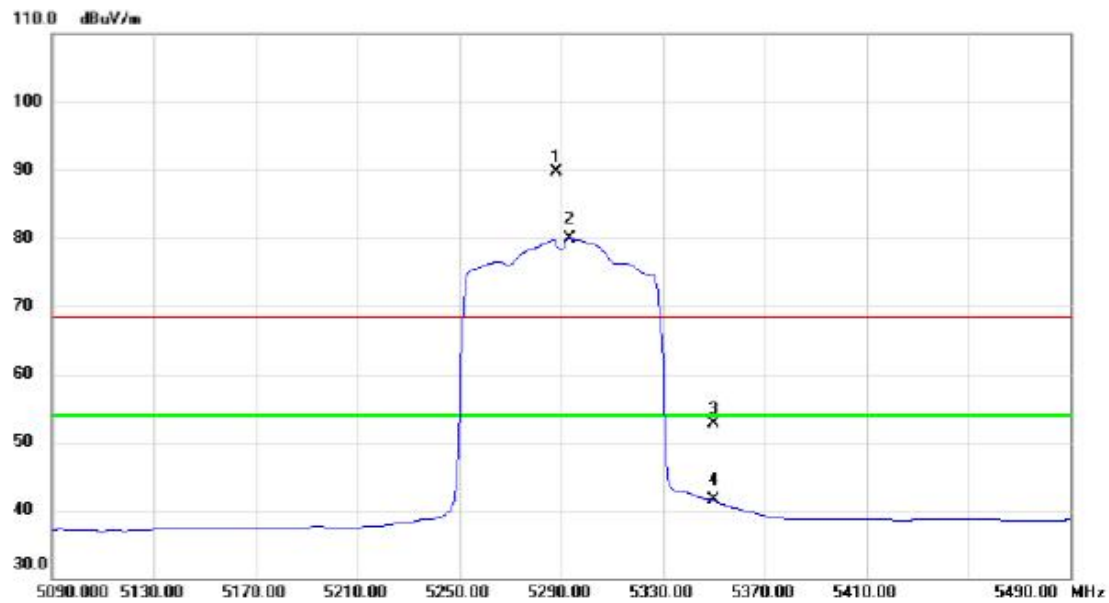


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5288.000	51.11	38.50	89.61	68.30	21.31	peak	No Limit
2	*	5293.600	41.44	38.53	79.97	54.00	25.97	AVG	No Limit
3		5350.000	13.85	38.78	52.63	68.30	-15.67	peak	
4		5350.000	2.64	38.78	41.42	54.00	-12.58	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Vertical

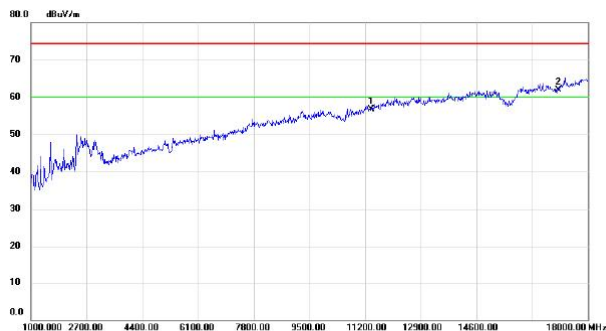

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	40.08	16.70	56.78	74.30	-17.52	peak	
2	*	17100.00	40.75	21.10	61.85	74.30	-12.45	peak	

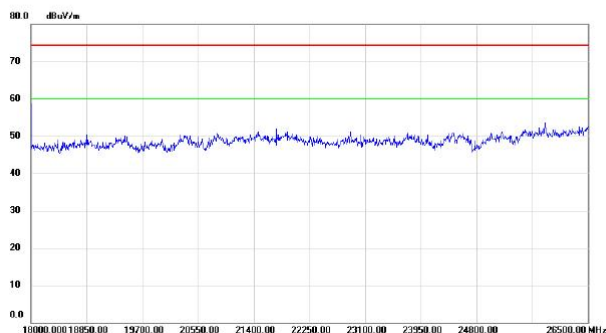


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39932.50	45.45	17.43	62.88	74.30	-11.42	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz




Horizontal

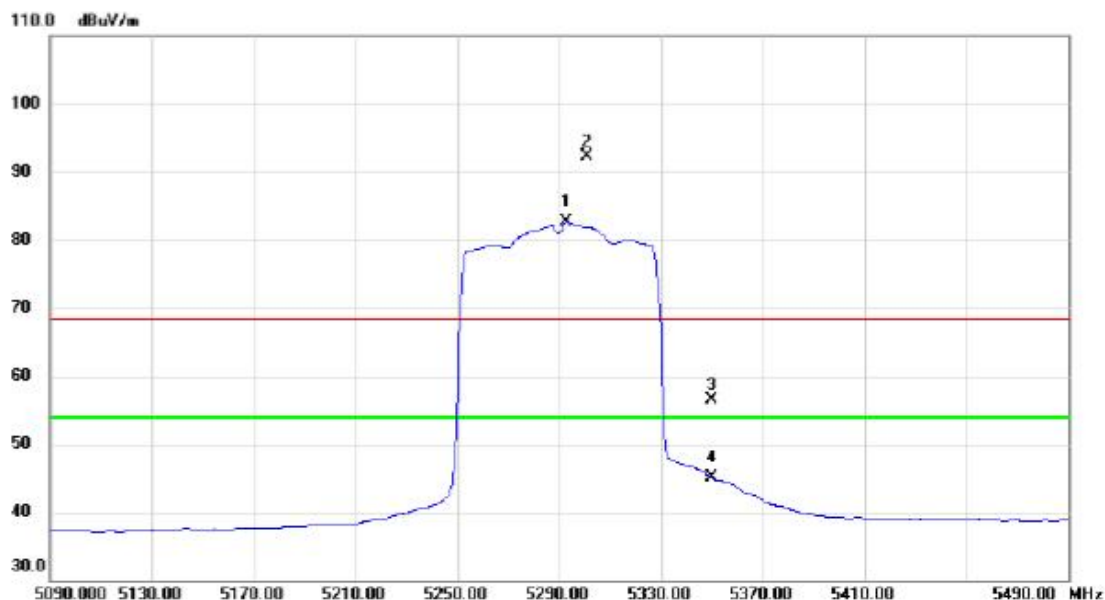

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5293.200	44.15	38.52	82.67	54.00	28.67	AVG	No Limit
2	X	5301.200	53.75	38.56	92.31	68.30	24.01	peak	No Limit
3		5350.000	17.77	38.78	56.55	68.30	-11.75	peak	
4		5350.000	6.27	38.78	45.05	54.00	-8.95	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX A Mode 5700MHz

Horizontal

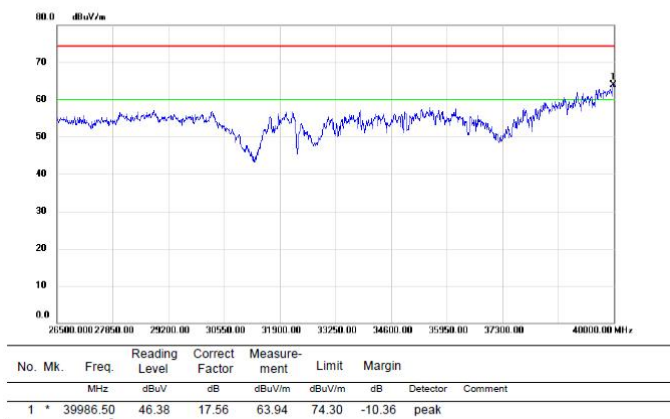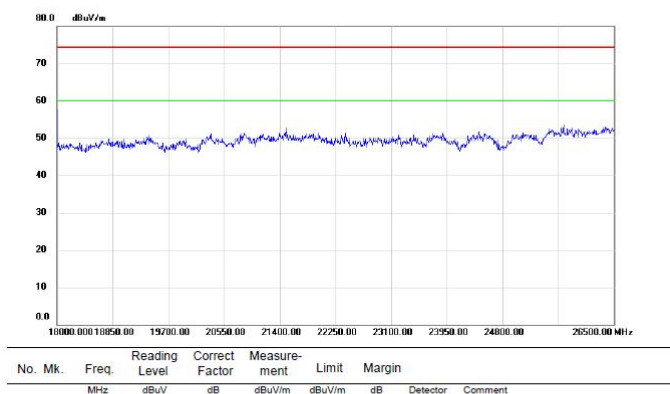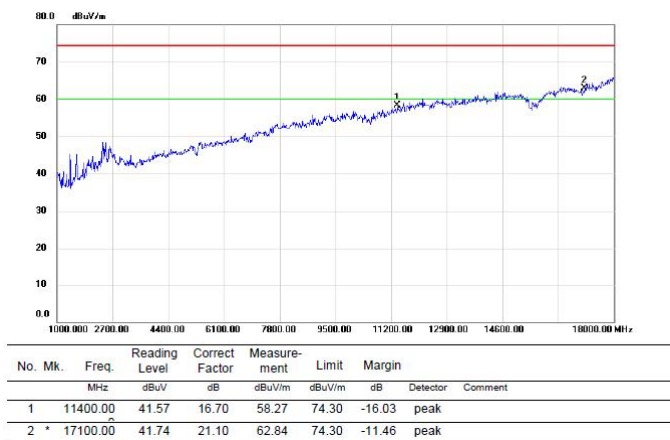

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical

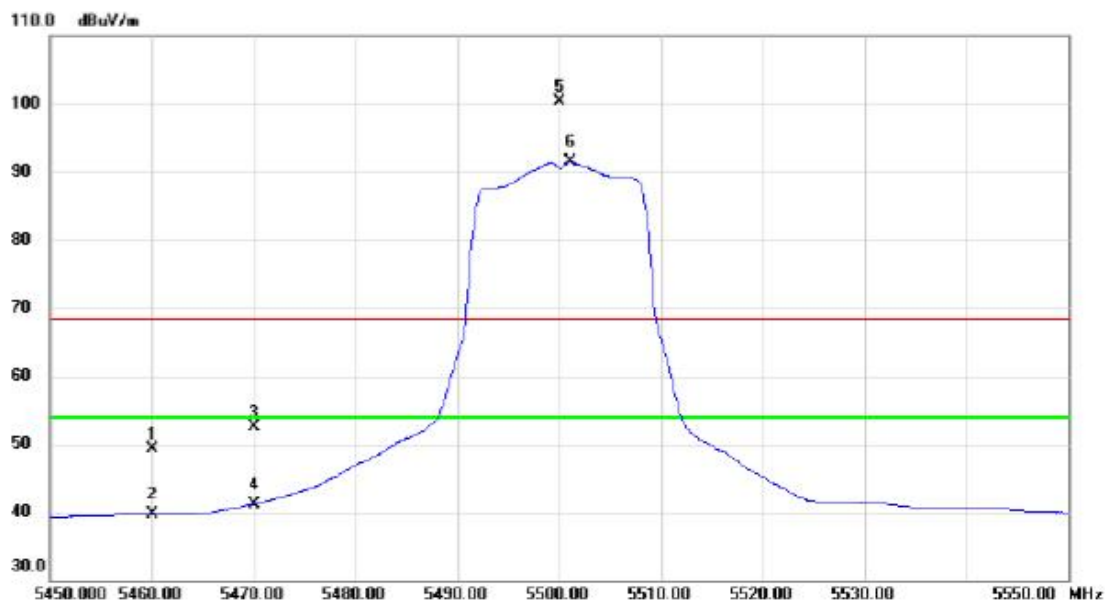

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	10.10	39.27	49.37	68.30	-18.93	peak	
2		5460.000	0.43	39.27	39.70	54.00	-14.30	AVG	
3		5470.000	13.20	39.31	52.51	68.30	-15.79	peak	
4		5470.000	1.87	39.31	41.18	54.00	-12.82	AVG	
5	X	5500.100	60.95	39.44	100.39	68.30	32.09	peak	No Limit
6	*	5501.100	51.99	39.45	91.44	54.00	37.44	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11000.00	40.03	15.75	55.78	74.30	-18.52	peak	
2	*	16500.00	41.46	20.37	61.83	74.30	-12.47	peak	




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	39905.50	46.36	17.37	63.73	74.30	-10.57	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz




Horizontal

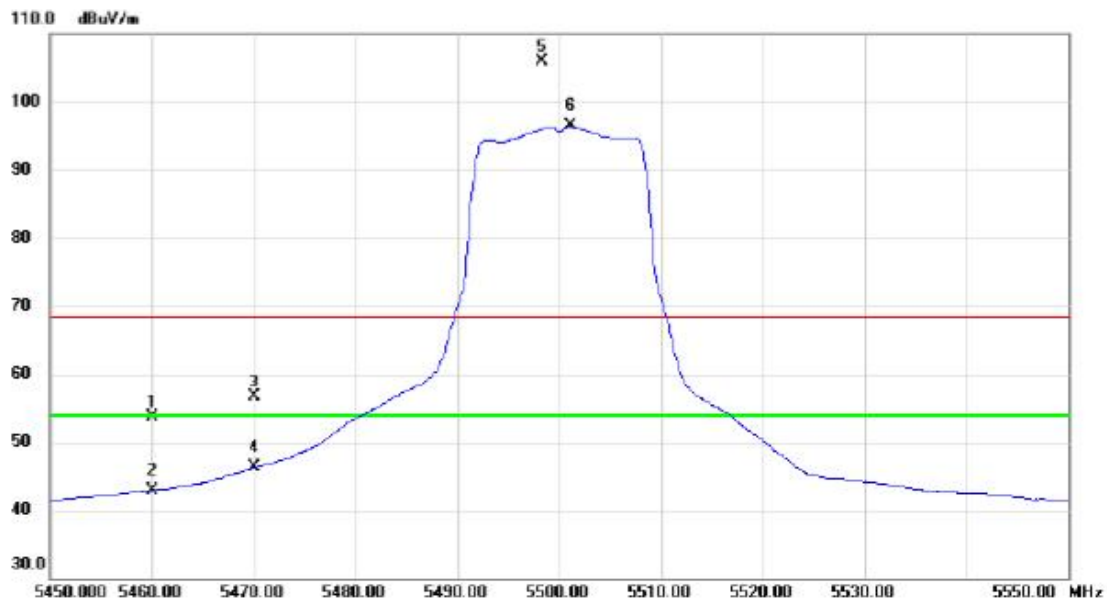

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	14.38	39.27	53.65	68.30	-14.65	peak	
2		5460.000	3.67	39.27	42.94	54.00	-11.06	AVG	
3		5470.000	17.34	39.31	56.65	68.30	-11.65	peak	
4		5470.000	6.95	39.31	46.26	54.00	-7.74	AVG	
5	X	5498.300	66.52	39.43	105.95	68.30	37.65	peak	No Limit
6	*	5501.100	56.97	39.45	96.42	54.00	42.42	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5500MHz

Horizontal

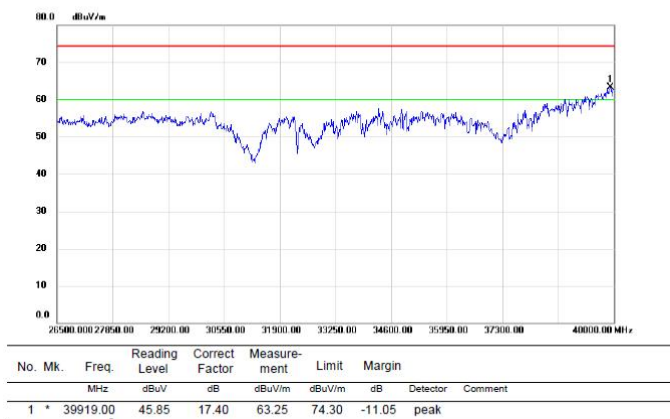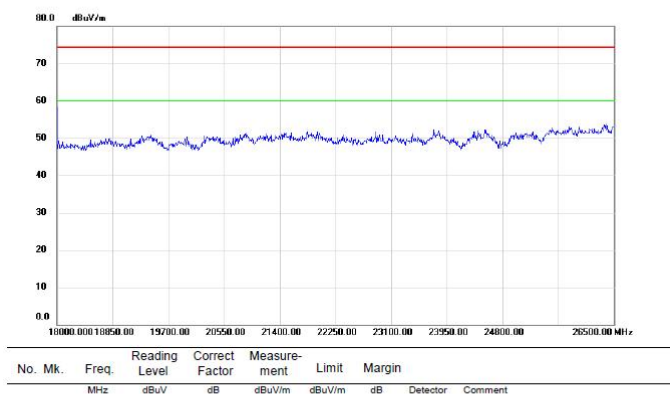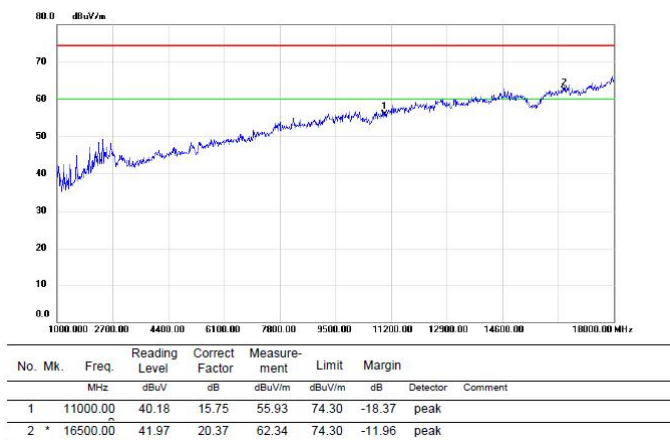

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical

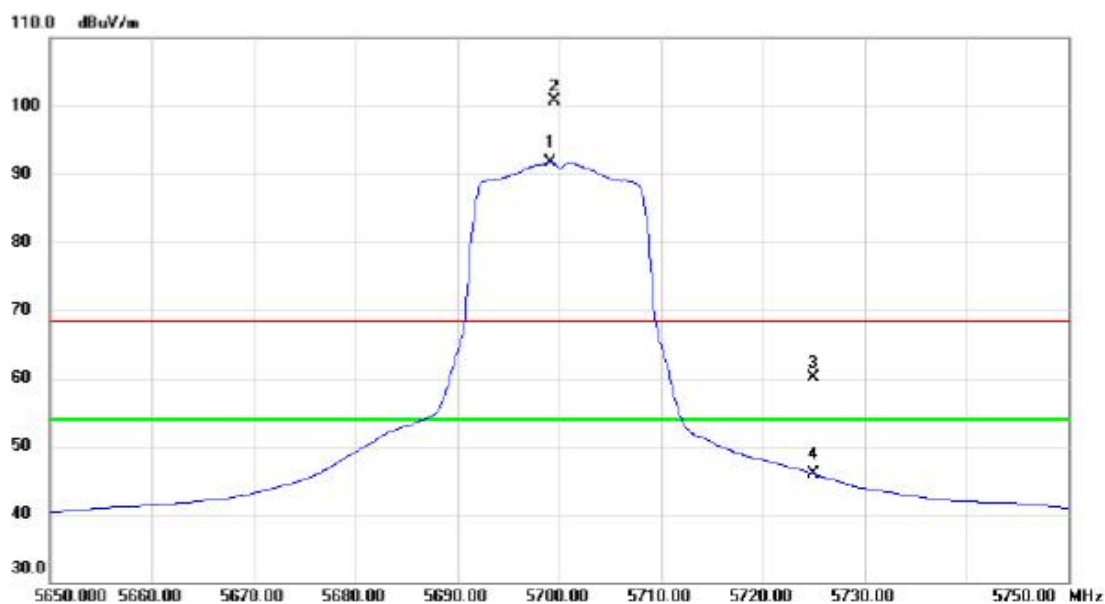

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5699.200	51.34	40.46	91.80	54.00	37.80	AVG	No Limit
2	X	5699.500	60.22	40.46	100.68	68.30	32.38	peak	No Limit
3		5725.000	19.42	40.60	60.02	68.30	-8.28	peak	
4		5725.000	5.36	40.60	45.96	54.00	-8.04	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	40.70	16.70	57.40	74.30	-16.90	peak	
2	*	17100.00	41.17	21.10	62.27	74.30	-12.03	peak	




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39986.50	45.70	17.56	63.26	74.30	-11.04	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz



Horizontal

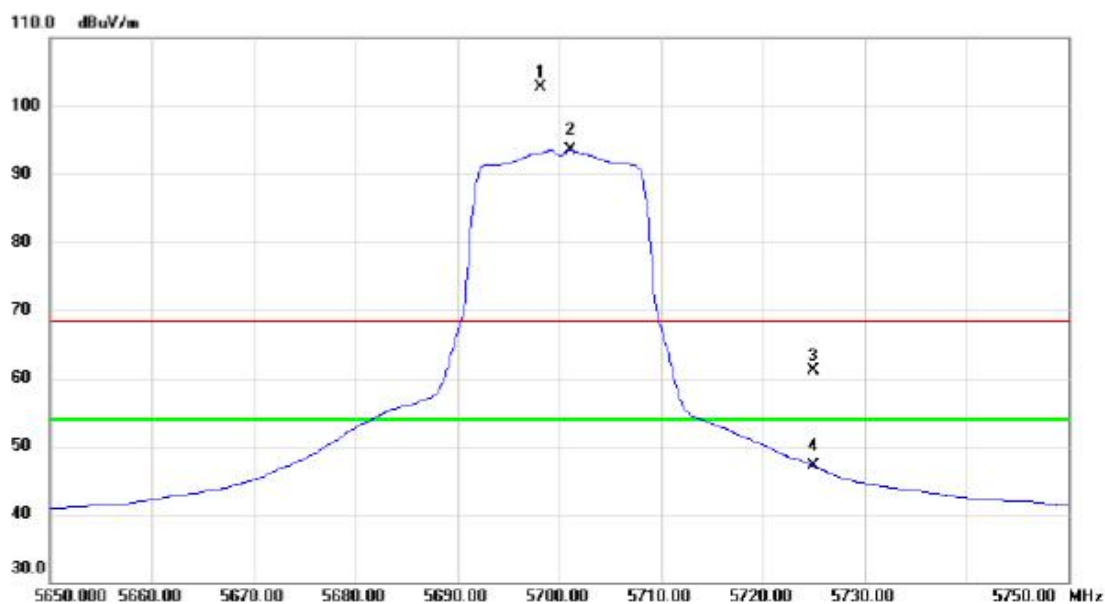

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5698.200	62.33	40.45	102.78	68.30	34.48	peak	No Limit
2	*	5701.100	53.04	40.47	93.51	54.00	39.51	AVG	No Limit
3		5725.000	20.43	40.60	61.03	68.30	-7.27	peak	
4		5725.000	6.51	40.60	47.11	54.00	-6.89	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N20 Mode 5700MHz

Horizontal

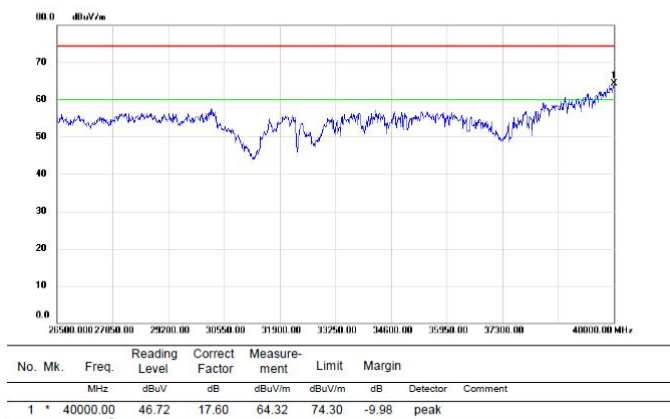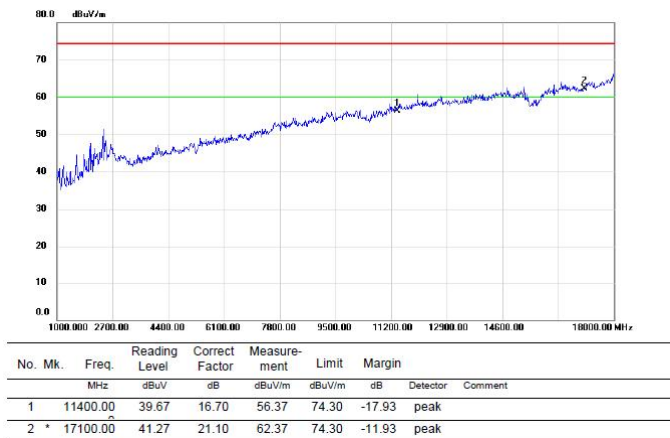

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz



Vertical

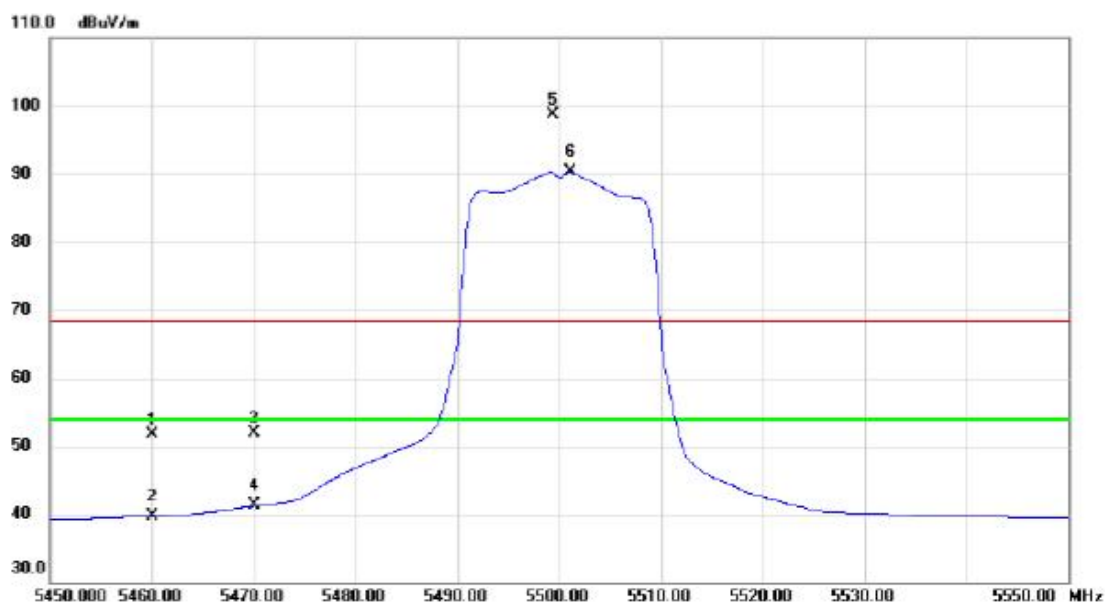

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	12.38	39.27	51.65	68.30	-16.65	peak	
2		5460.000	0.50	39.27	39.77	54.00	-14.23	AVG	
3		5470.000	12.58	39.31	51.89	68.30	-16.41	peak	
4		5470.000	1.90	39.31	41.21	54.00	-12.79	AVG	
5	X	5499.400	59.34	39.44	98.78	68.30	30.48	peak	No Limit
6	*	5501.100	50.80	39.45	90.25	54.00	36.25	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Vertical

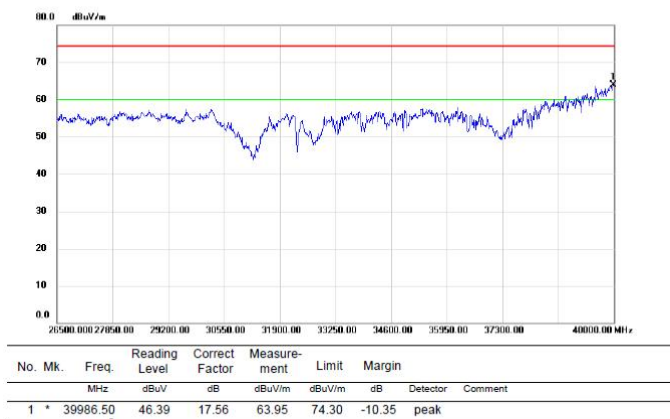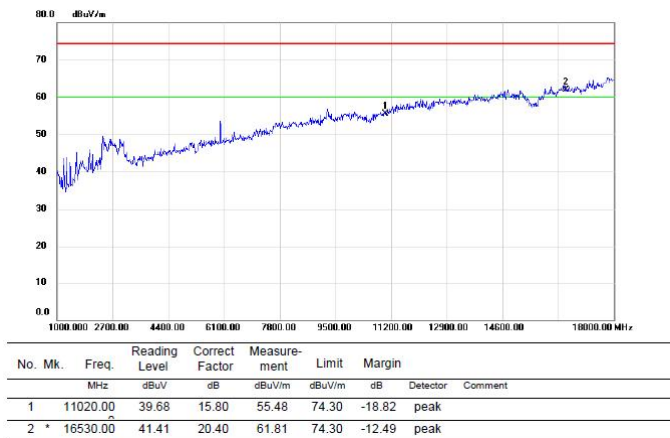

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal

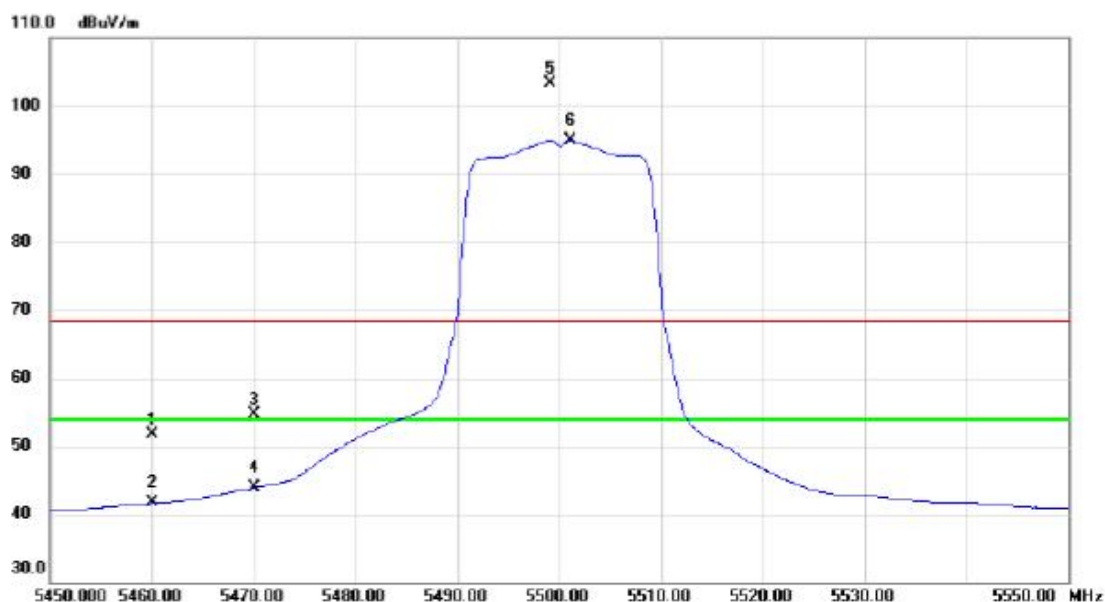


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	12.52	39.27	51.79	68.30	-16.51	peak	
2		5460.000	2.34	39.27	41.61	54.00	-12.39	AVG	
3		5470.000	15.43	39.31	54.74	68.30	-13.56	peak	
4		5470.000	4.64	39.31	43.95	54.00	-10.05	AVG	
5	X	5499.100	63.87	39.44	103.31	68.30	35.01	peak	No Limit
6	*	5501.100	55.53	39.45	94.98	54.00	40.98	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5510MHz

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11020.00	39.71	15.80	55.51	74.30	-18.79	peak	
2	*	16530.00	42.33	20.40	62.73	74.30	-11.57	peak	

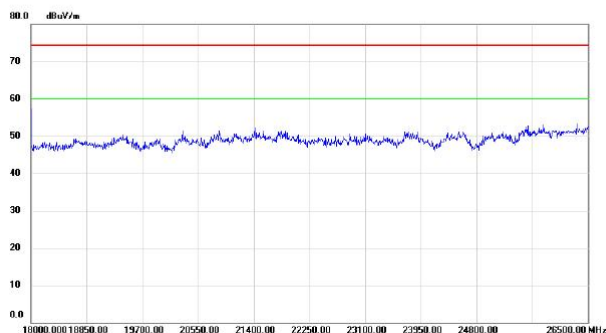


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39919.00	46.21	17.40	63.61	74.30	-10.69	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz



Vertical

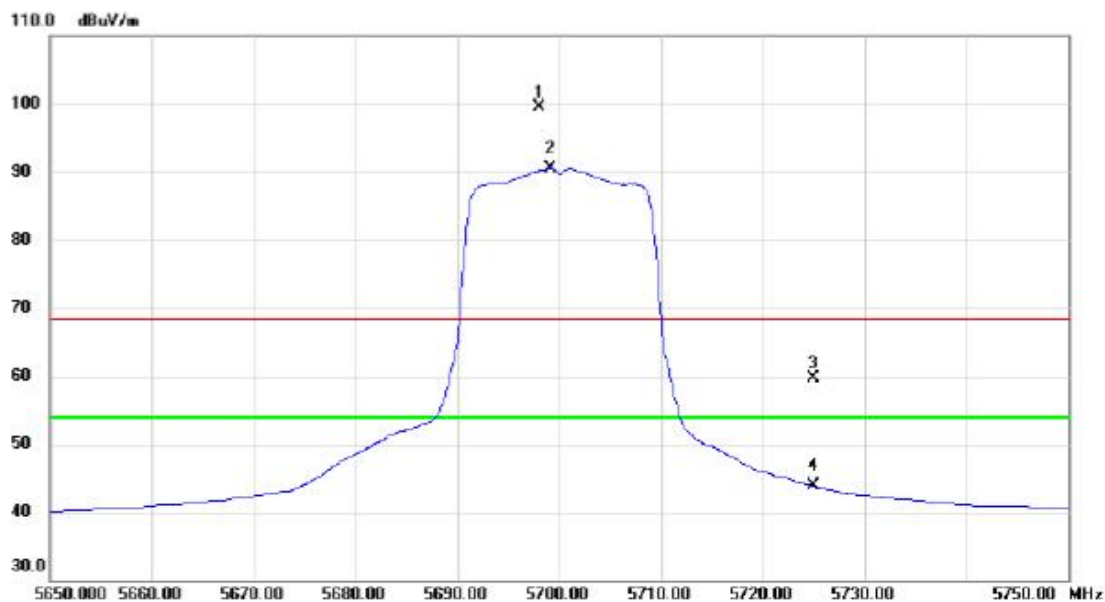

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5698.000	59.10	40.45	99.55	68.30	31.25	peak	No Limit
2	*	5699.200	50.11	40.46	90.57	54.00	36.57	AVG	No Limit
3		5725.000	19.05	40.60	59.65	68.30	-8.65	peak	
4		5725.000	3.30	40.60	43.90	54.00	-10.10	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Vertical

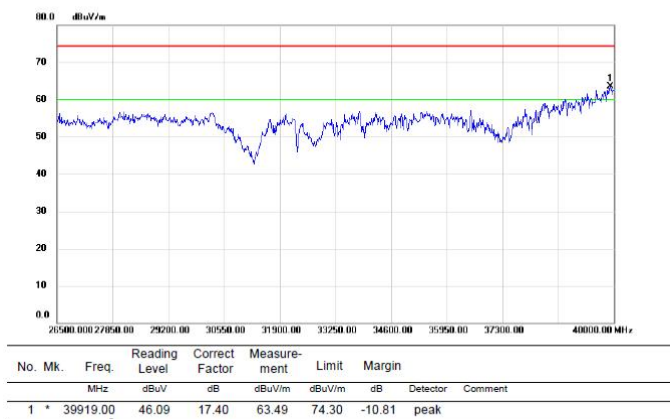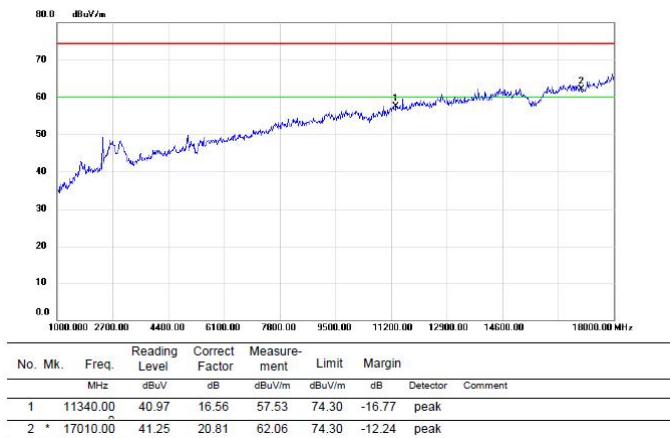

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz


Horizontal

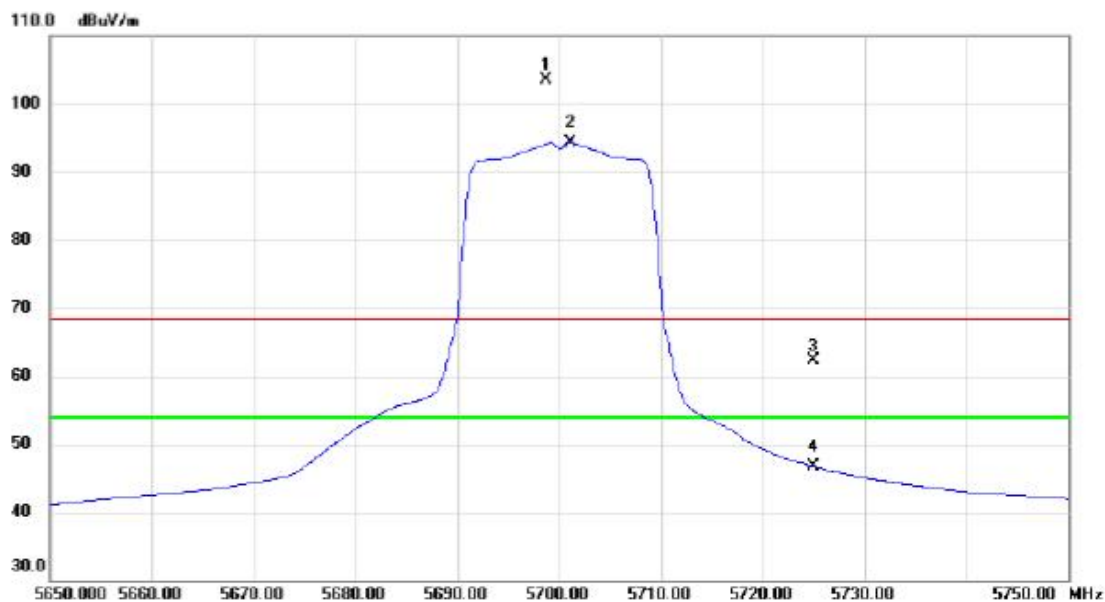

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5698.700	62.96	40.45	103.41	68.30	35.11	peak	No Limit
2	*	5701.100	53.84	40.47	94.31	54.00	40.31	AVG	No Limit
3		5725.000	21.79	40.60	62.39	68.30	-5.91	peak	
4		5725.000	6.16	40.60	46.76	54.00	-7.24	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX N40 Mode 5670MHz

Horizontal

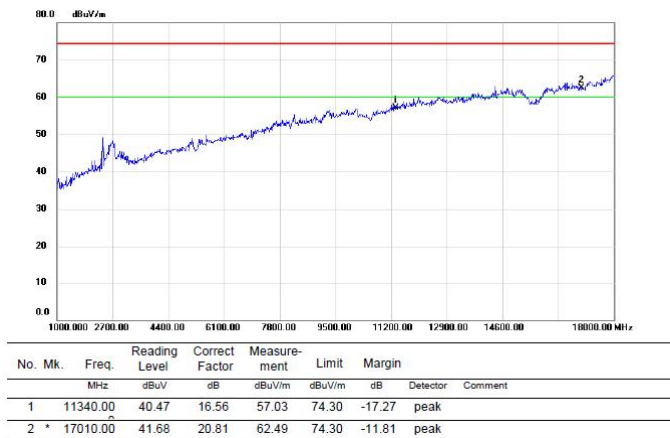

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz



Vertical

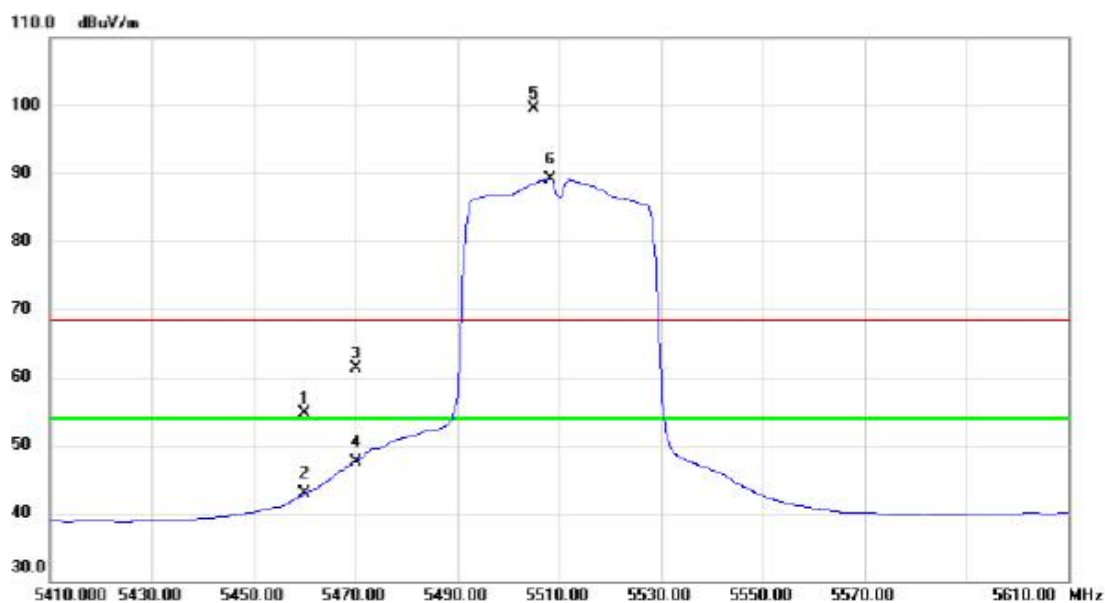

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	15.39	39.27	54.66	68.30	-13.64	peak	
2		5460.000	3.58	39.27	42.85	54.00	-11.15	AVG	
3		5470.000	21.92	39.31	61.23	68.30	-7.07	peak	
4		5470.000	8.27	39.31	47.58	54.00	-6.42	AVG	
5	X	5505.200	59.95	39.46	99.41	68.30	31.11	peak	No Limit
6	*	5508.200	49.67	39.48	89.15	54.00	35.15	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Vertical

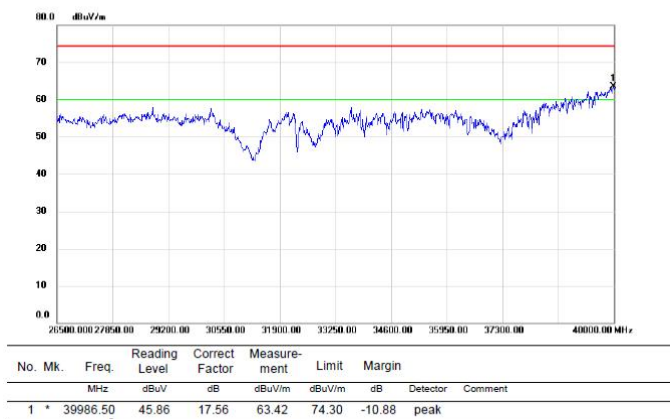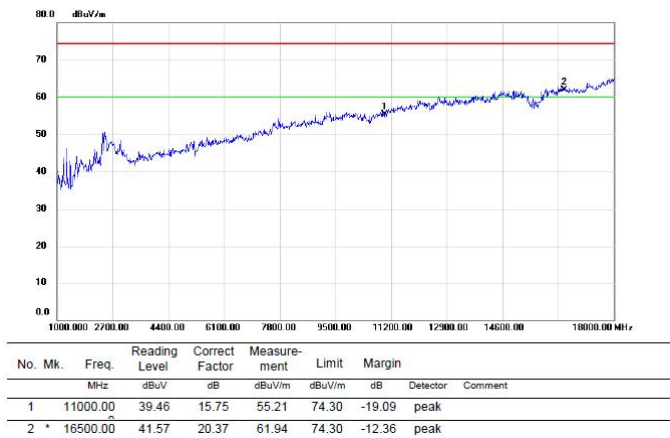

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz



Horizontal

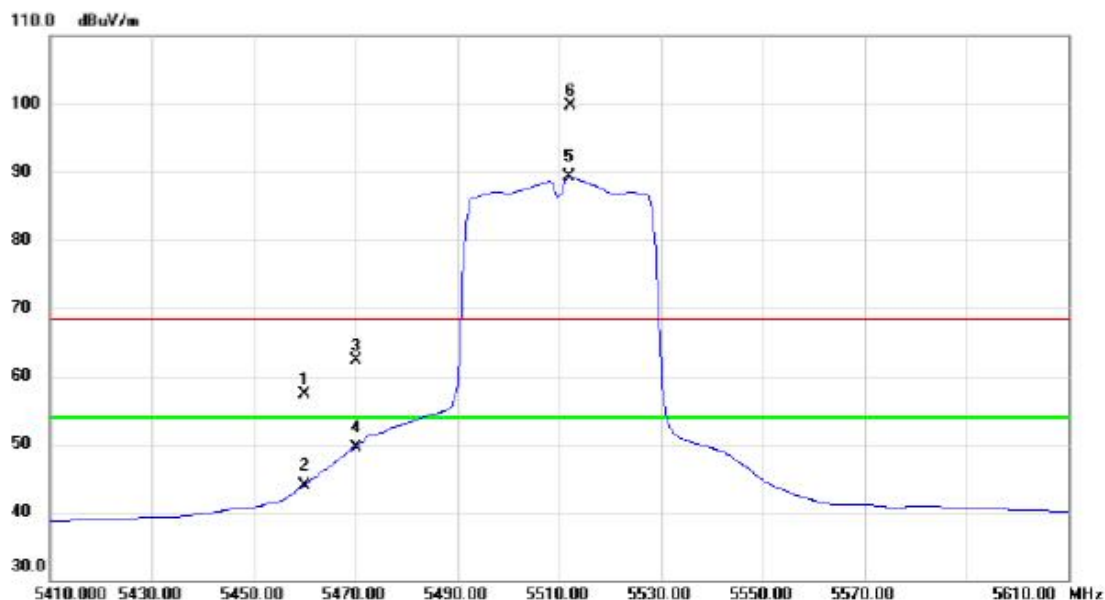

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	17.97	39.27	57.24	68.30	-11.06	peak	
2		5460.000	4.73	39.27	44.00	54.00	-10.00	AVG	
3		5470.000	22.98	39.31	62.29	68.30	-6.01	peak	
4		5470.000	10.27	39.31	49.58	54.00	-4.42	AVG	
5	*	5512.000	49.77	39.51	89.28	54.00	35.28	AVG	No Limit
6	X	5512.400	60.22	39.51	99.73	68.30	31.43	peak	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5500MHz

Horizontal

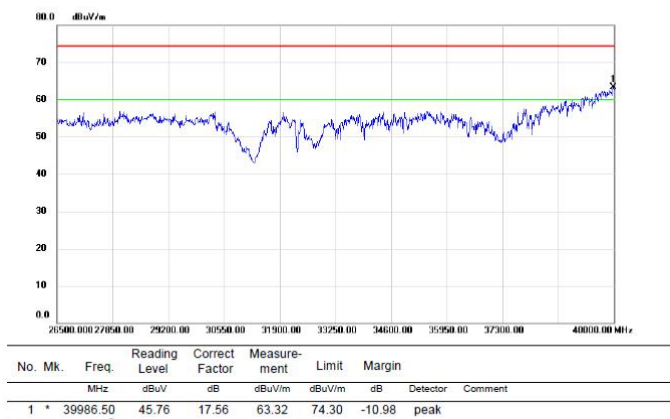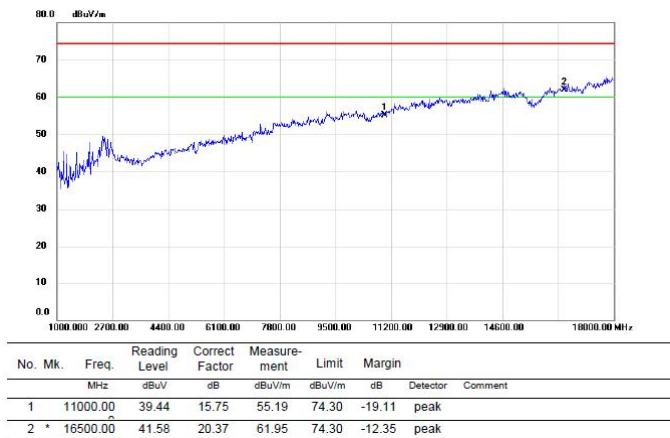

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


Vertical

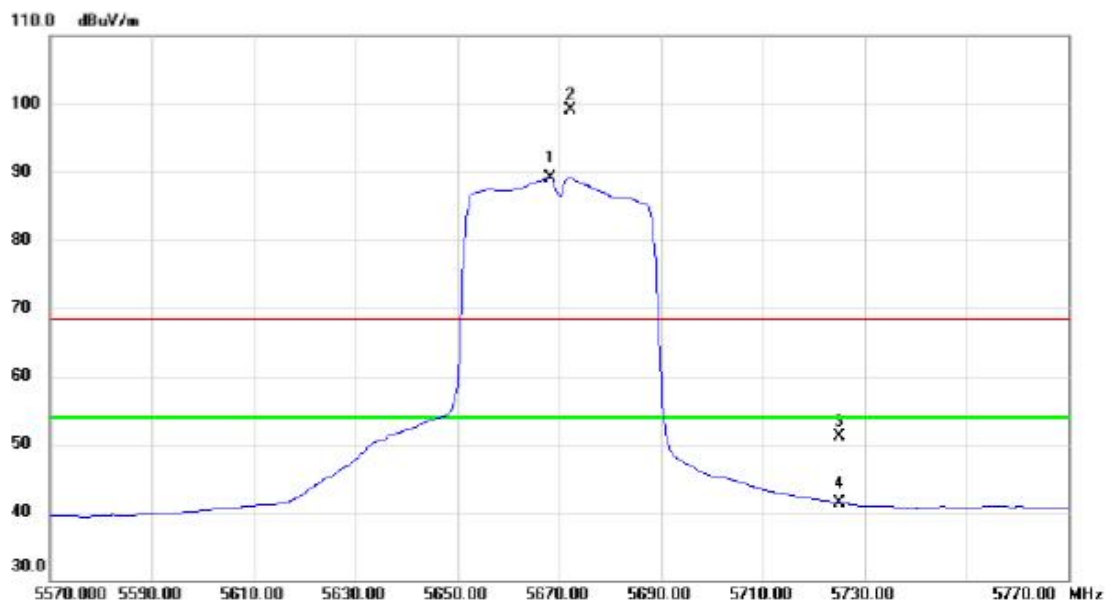

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5668.200	48.88	40.30	89.18	54.00	35.18	AVG	No Limit
2	X	5672.200	58.79	40.32	99.11	68.30	30.81	peak	No Limit
3		5725.000	10.58	40.60	51.18	68.30	-17.12	peak	
4		5725.000	0.76	40.60	41.36	54.00	-12.64	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Vertical

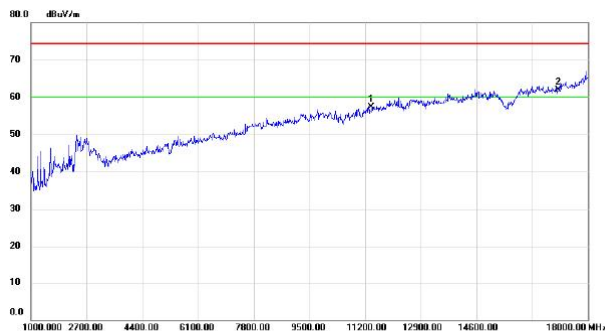

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	40.61	16.70	57.31	74.30	-16.99	peak	
2	*	17100.00	40.85	21.10	61.95	74.30	-12.35	peak	




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39973.00	45.66	17.54	63.20	74.30	-11.10	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz


Horizontal

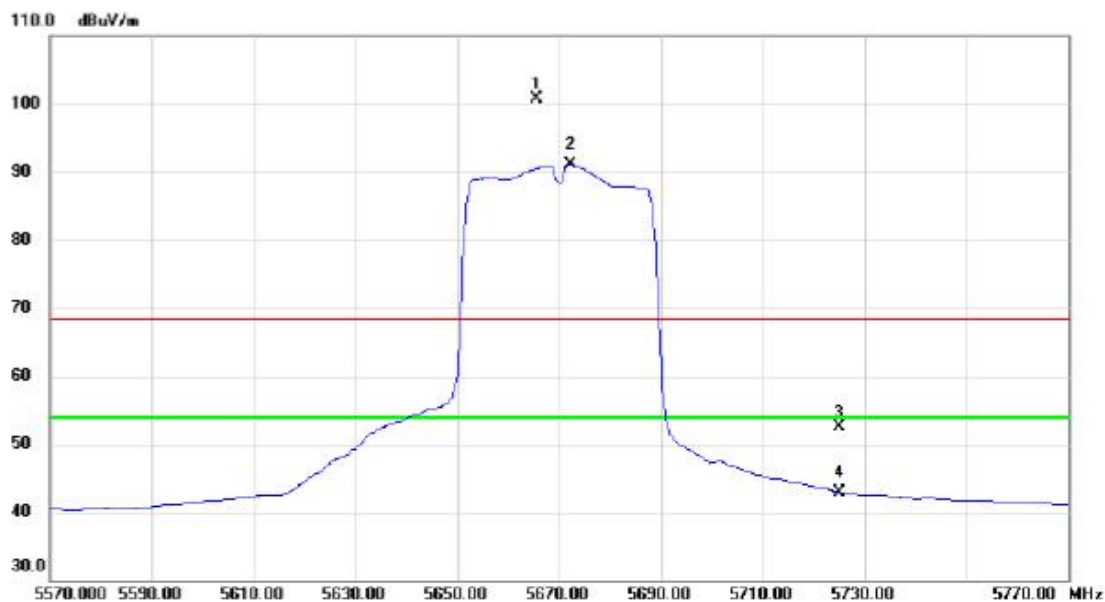

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5665.600	60.45	40.29	100.74	68.30	32.44	peak	No Limit
2	*	5672.400	50.81	40.32	91.13	54.00	37.13	AVG	No Limit
3		5725.000	11.86	40.60	52.46	68.30	-15.84	peak	
4		5725.000	2.34	40.60	42.94	54.00	-11.06	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC20 Mode 5700MHz

Horizontal

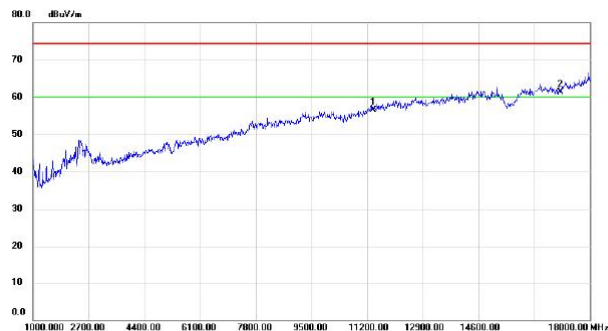

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		11400.00	39.84	16.70	56.54	74.30	-17.76	peak	
2	*	17100.00	40.27	21.10	61.37	74.30	-12.93	peak	




No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	39986.50	46.63	17.56	64.19	74.30	-10.11	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz



Vertical

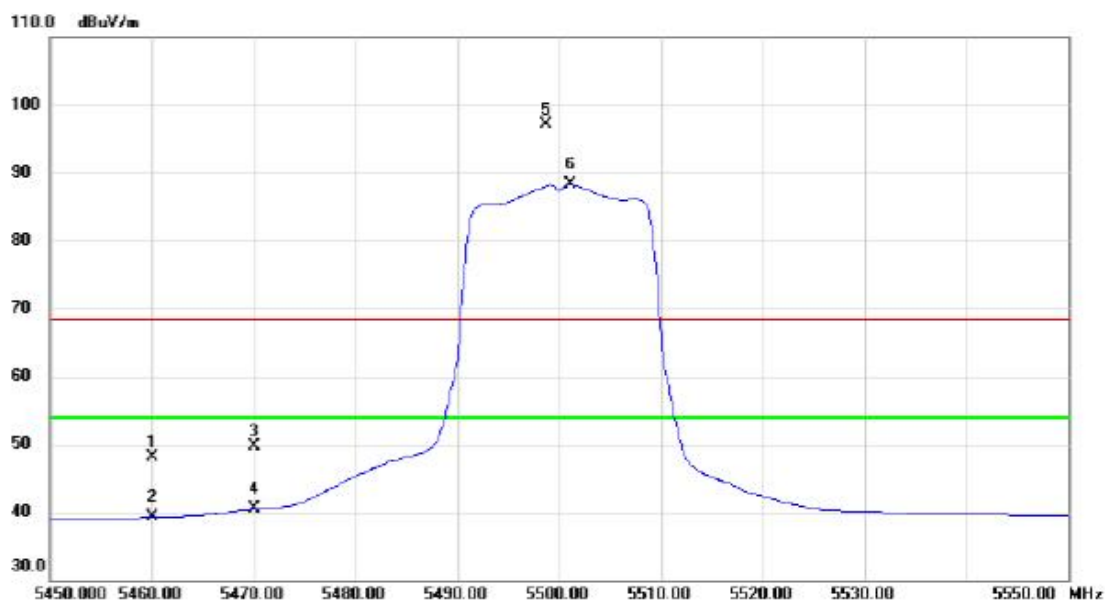

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	8.83	39.27	48.10	68.30	-20.20	peak	
2		5460.000	0.01	39.27	39.28	54.00	-14.72	AVG	
3		5470.000	10.42	39.31	49.73	68.30	-18.57	peak	
4		5470.000	1.12	39.31	40.43	54.00	-13.57	AVG	
5	X	5498.700	57.62	39.44	97.06	68.30	28.76	peak	No Limit
6	*	5501.100	48.88	39.45	88.33	54.00	34.33	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Vertical

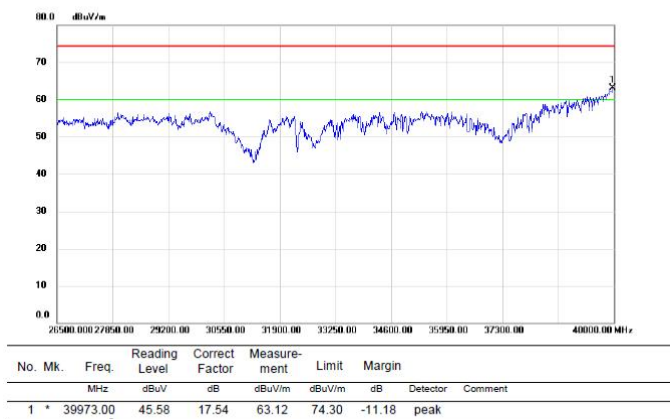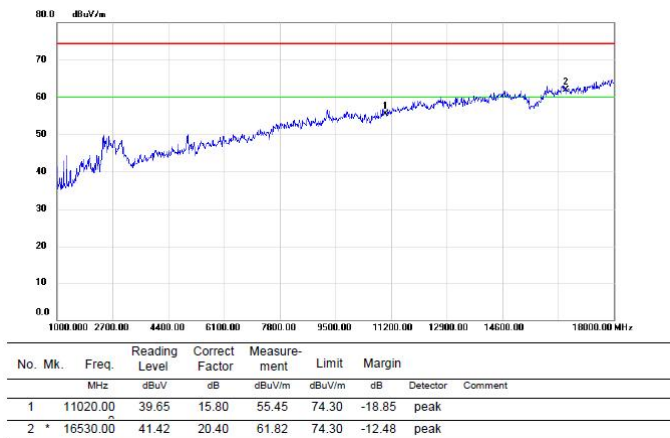

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz



Horizontal

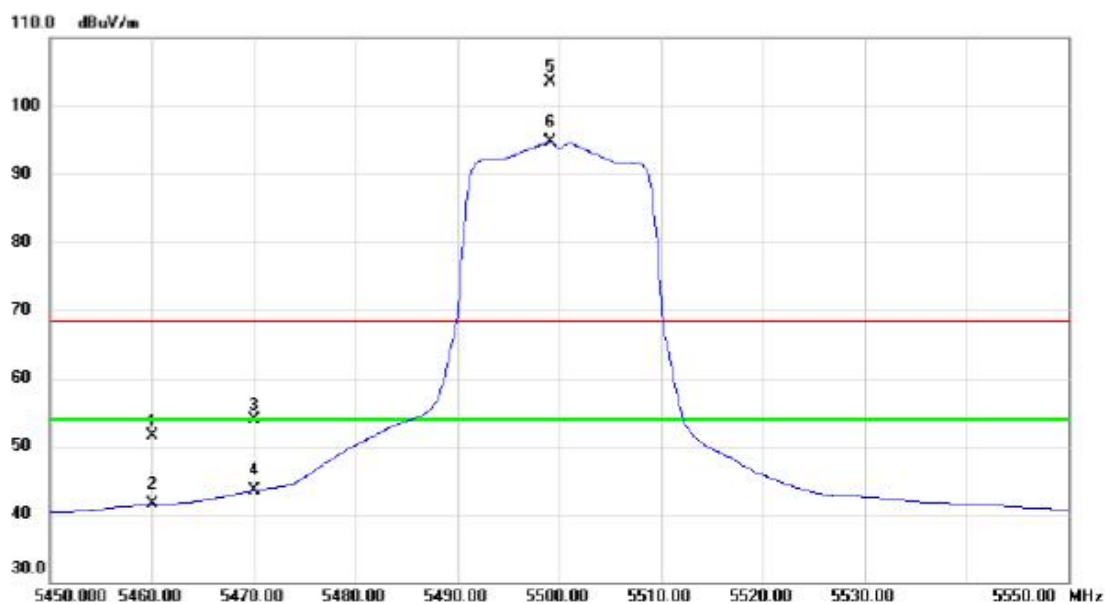

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	12.16	39.27	51.43	68.30	-16.87	peak	
2		5460.000	2.18	39.27	41.45	54.00	-12.55	AVG	
3		5470.000	14.55	39.31	53.86	68.30	-14.44	peak	
4		5470.000	4.17	39.31	43.48	54.00	-10.52	AVG	
5	X	5499.200	64.16	39.44	103.60	68.30	35.30	peak	No Limit
6	*	5499.200	55.22	39.44	94.66	54.00	40.66	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5510MHz

Horizontal

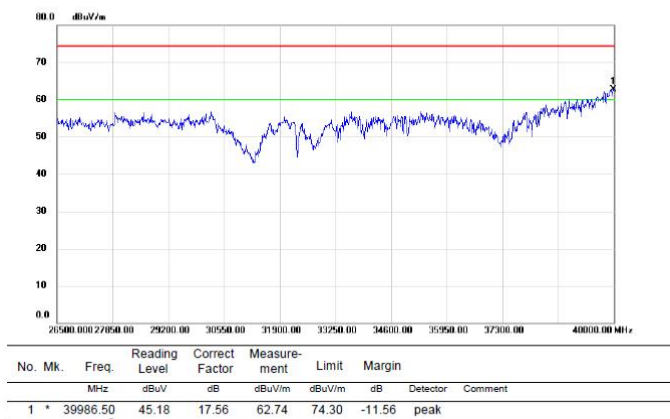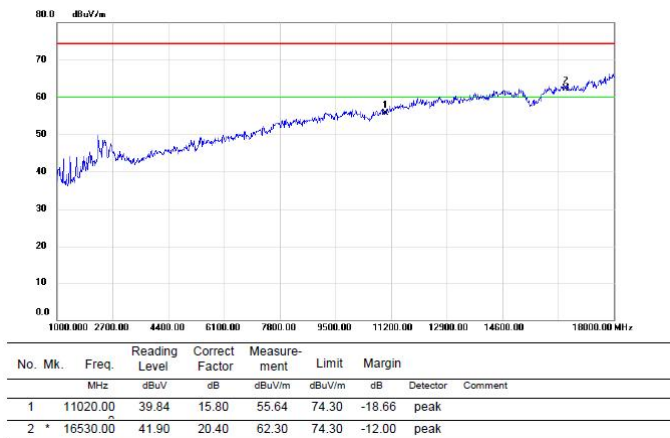

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz


Vertical

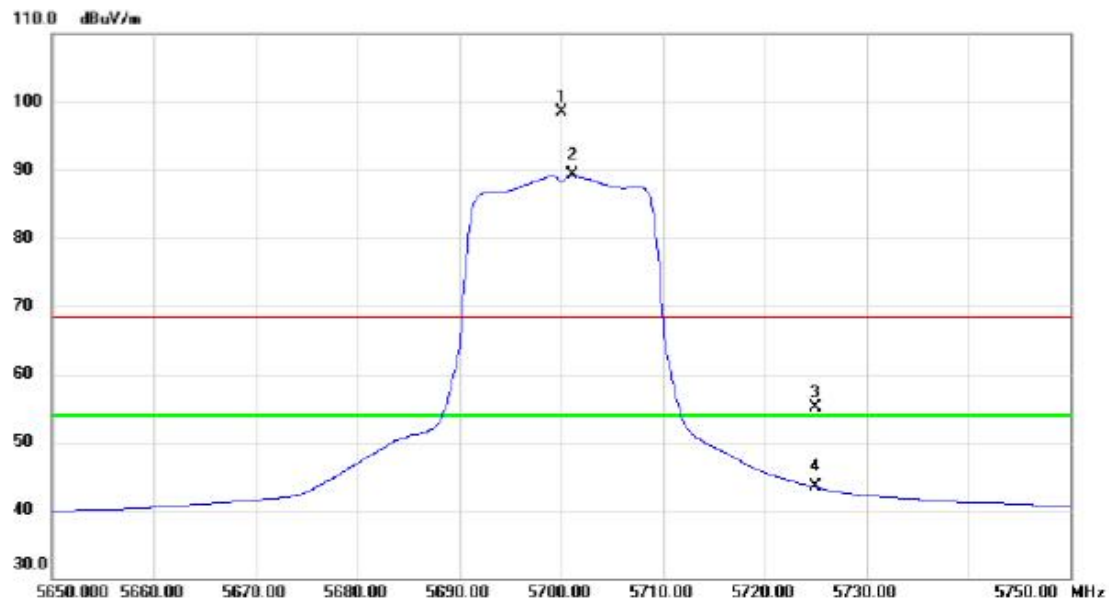

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5700.000	57.98	40.46	98.44	68.30	30.14	peak	No Limit
2	*	5701.100	48.76	40.47	89.23	54.00	35.23	AVG	No Limit
3		5725.000	14.52	40.60	55.12	68.30	-13.18	peak	
4		5725.000	2.83	40.60	43.43	54.00	-10.57	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Vertical

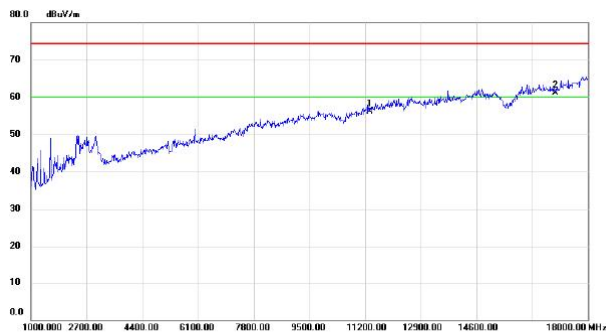

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment			Detector	Comment
1		11340.00	39.57	16.56	56.13	74.30	-18.17	peak	
2	*	17010.00	40.33	20.81	61.14	74.30	-13.16	peak	




No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment			Detector	Comment



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment			Detector	Comment
1	*	39932.50	46.86	17.43	64.29	74.30	-10.01	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal

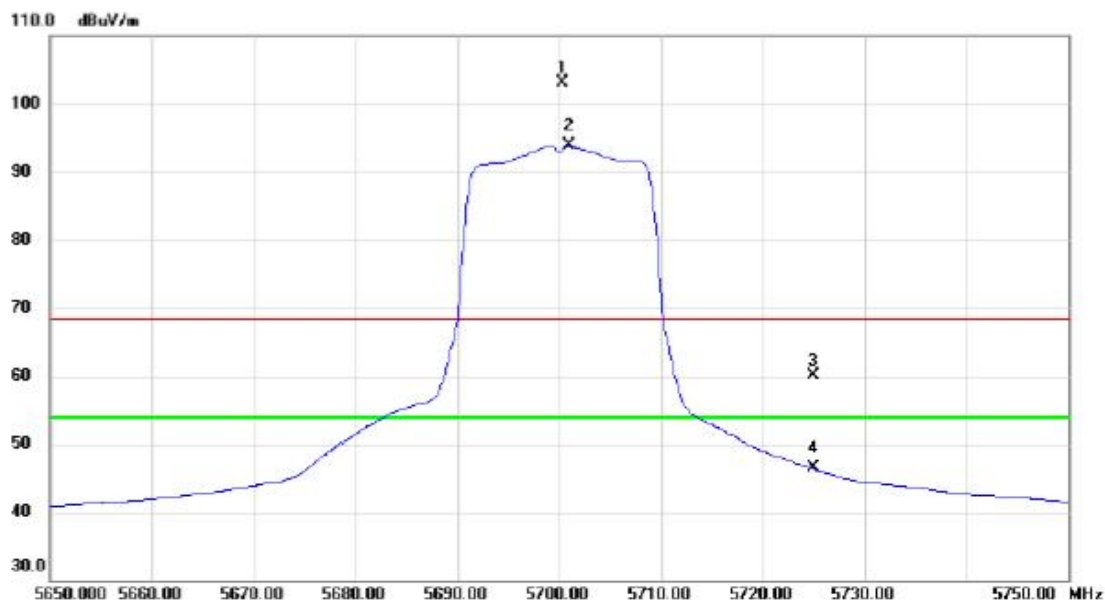


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5700.400	62.60	40.46	103.06	68.30	34.76	peak	No Limit
2	*	5701.000	53.36	40.46	93.82	54.00	39.82	AVG	No Limit
3		5725.000	19.56	40.60	60.16	68.30	-8.14	peak	
4		5725.000	5.83	40.60	46.43	54.00	-7.57	AVG	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC40 Mode 5670MHz

Horizontal



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment			Detector	Comment
1		11340.00	40.47	16.56	57.03	74.30	-17.27	peak	
2	*	17010.00	40.52	20.81	61.33	74.30	-12.97	peak	

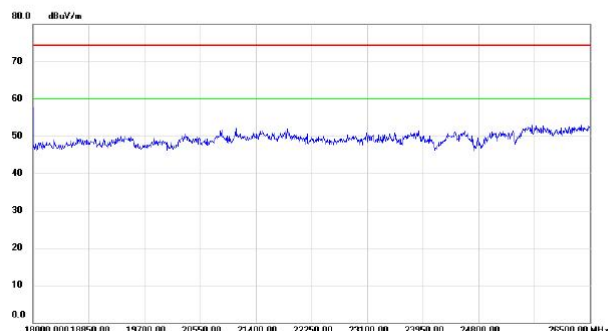


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment			Detector	Comment



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	dBuV	Factor	ment			Detector	Comment
1	*	39986.50	46.40	17.56	63.96	74.30	-10.34	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical

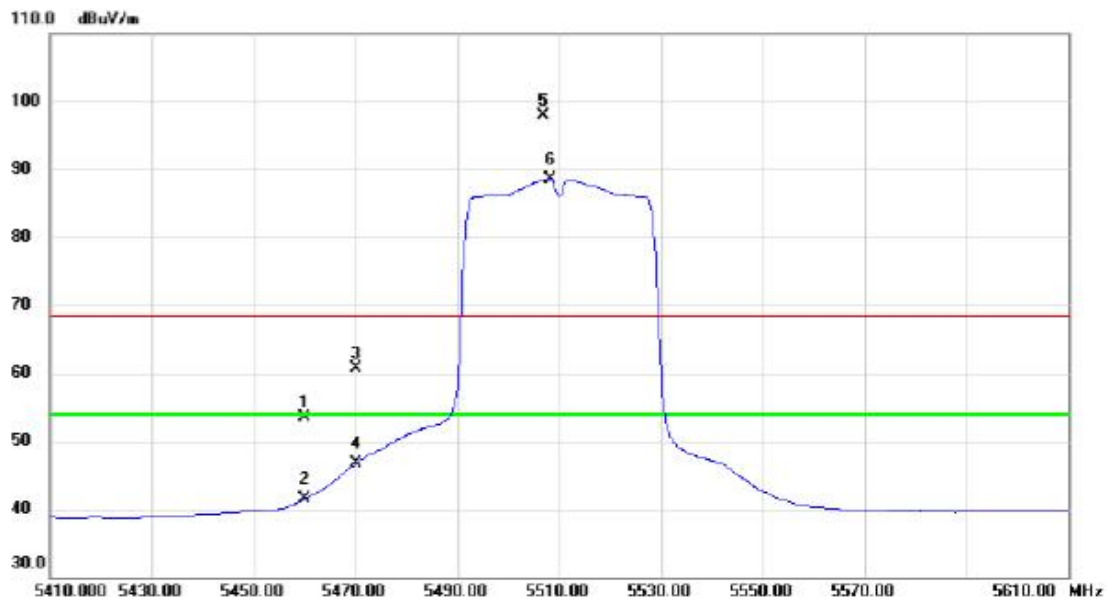

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	14.25	39.27	53.52	68.30	-14.78	peak	
2		5460.000	2.17	39.27	41.44	54.00	-12.56	AVG	
3		5470.000	21.42	39.31	60.73	68.30	-7.57	peak	
4		5470.000	7.30	39.31	46.61	54.00	-7.39	AVG	
5	X	5507.000	58.36	39.47	97.83	68.30	29.53	peak	No Limit
6	*	5508.200	49.12	39.48	88.60	54.00	34.60	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.00	39.15	15.89	55.04	74.30	-19.26	peak	
2	*	16590.00	41.72	20.45	62.17	74.30	-12.13	peak	




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39986.50	45.30	17.56	62.86	74.30	-11.44	peak	

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz



Horizontal

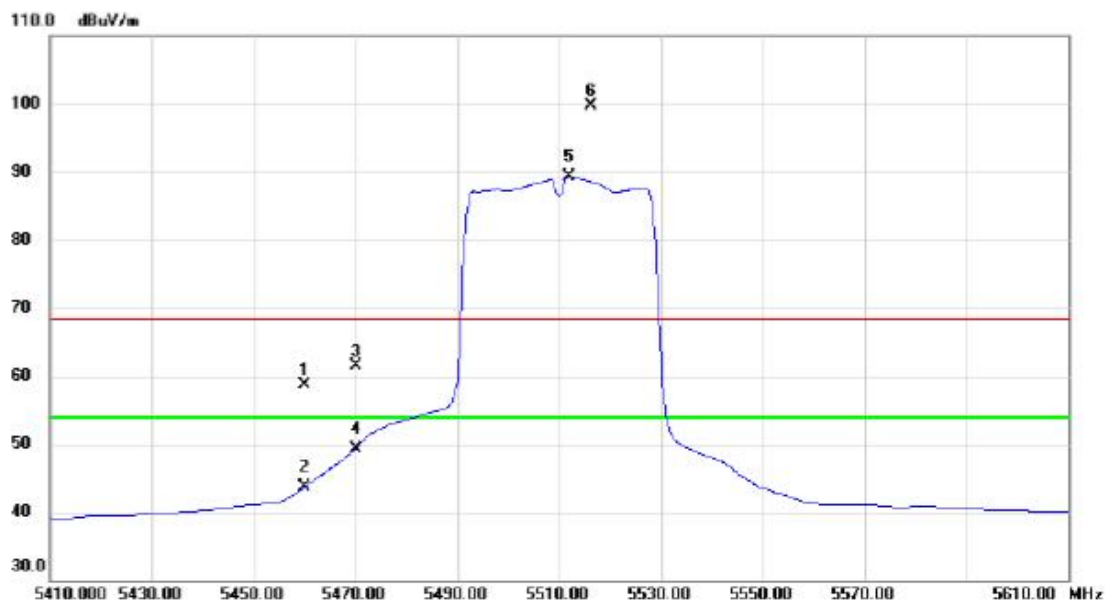

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	19.38	39.27	58.65	68.30	-9.65	peak	
2		5460.000	4.39	39.27	43.66	54.00	-10.34	AVG	
3		5470.000	22.12	39.31	61.43	68.30	-6.87	peak	
4		5470.000	10.08	39.31	49.39	54.00	-4.61	AVG	
5	*	5512.000	49.82	39.51	89.33	54.00	35.33	AVG	No Limit
6	X	5516.400	60.13	39.53	99.66	68.30	31.36	peak	No Limit


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5530MHz

Horizontal

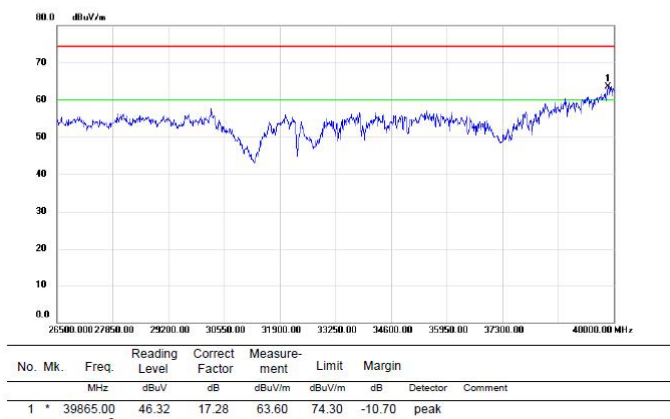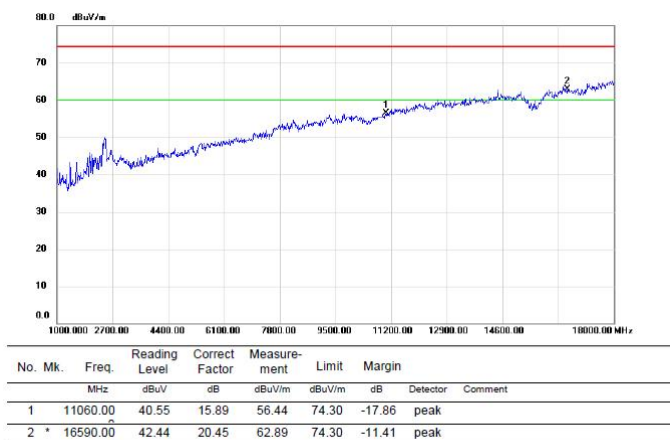

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz



Vertical

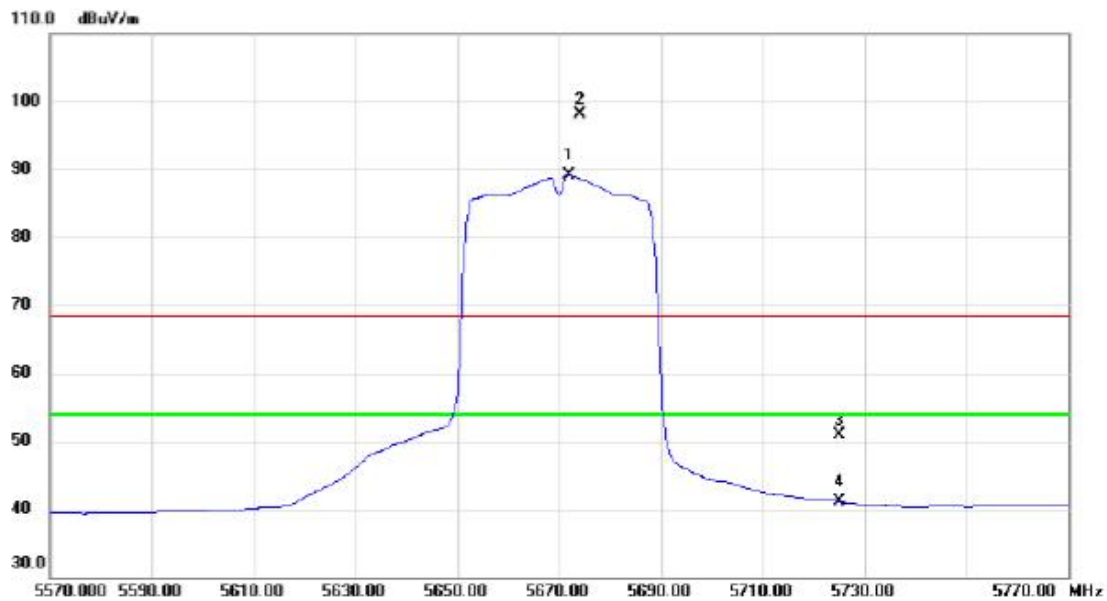

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5672.000	48.81	40.32	89.13	54.00	35.13	AVG	No Limit
2	X	5674.000	57.84	40.33	98.17	68.30	29.87	peak	No Limit
3		5725.000	10.32	40.60	50.92	68.30	-17.38	peak	
4		5725.000	0.52	40.60	41.12	54.00	-12.88	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Vertical

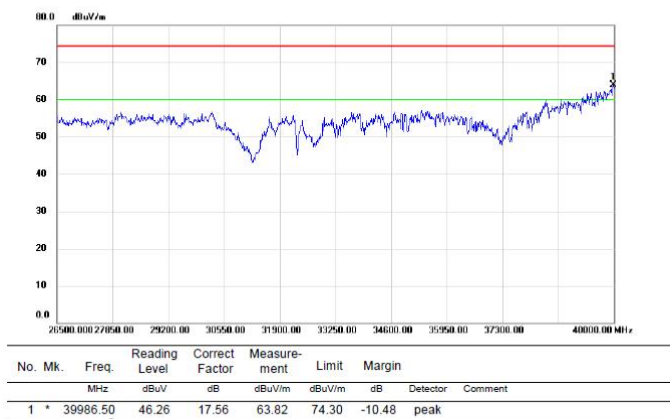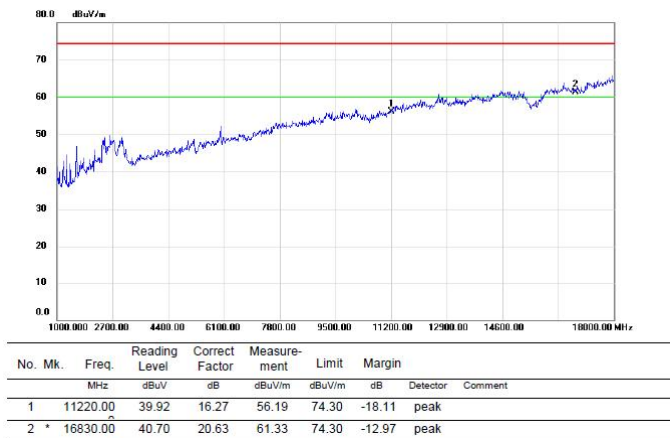

Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz



Horizontal

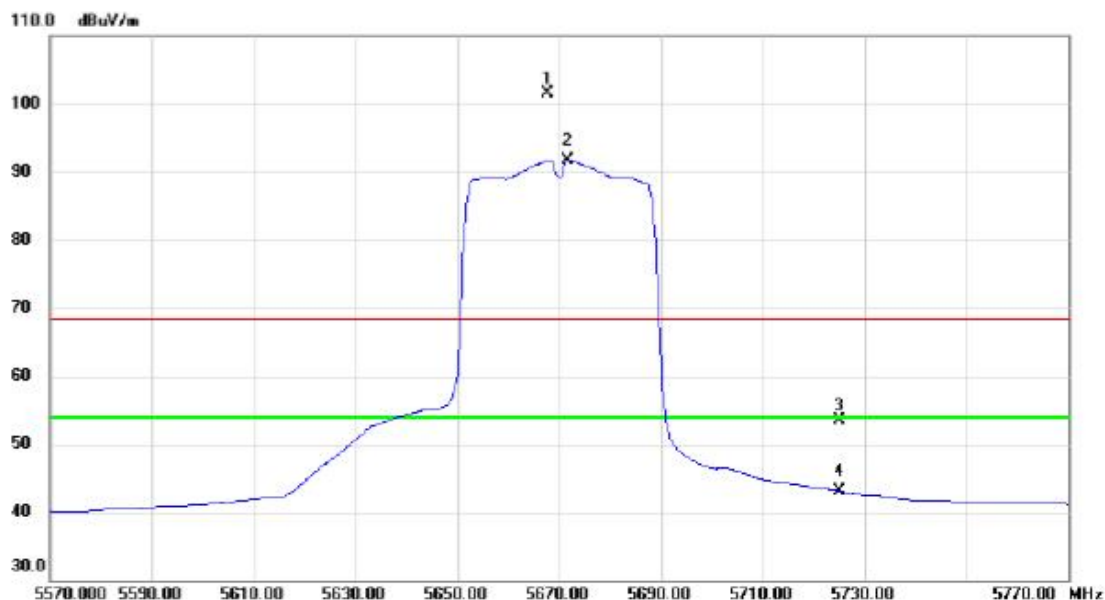

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5667.600	61.13	40.30	101.43	68.30	33.13	peak	No Limit
2	*	5671.800	51.47	40.32	91.79	54.00	37.79	AVG	No Limit
3		5725.000	12.98	40.60	53.58	68.30	-14.72	peak	
4		5725.000	2.50	40.60	43.10	54.00	-10.90	AVG	


Orthogonal Axis :	X
Test Mode :	UNII-2C/ TX AC80 Mode 5610MHz

Horizontal

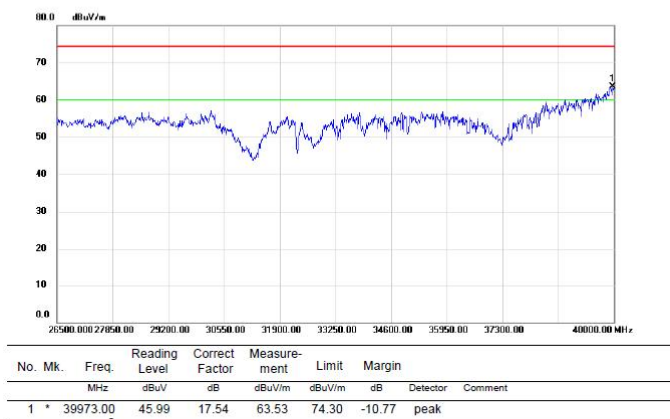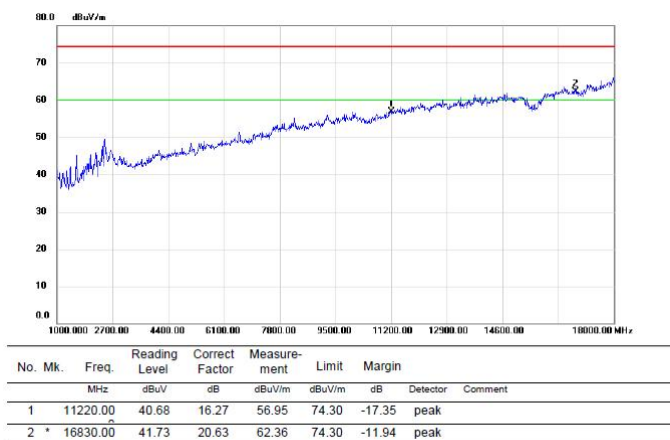

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz


Vertical

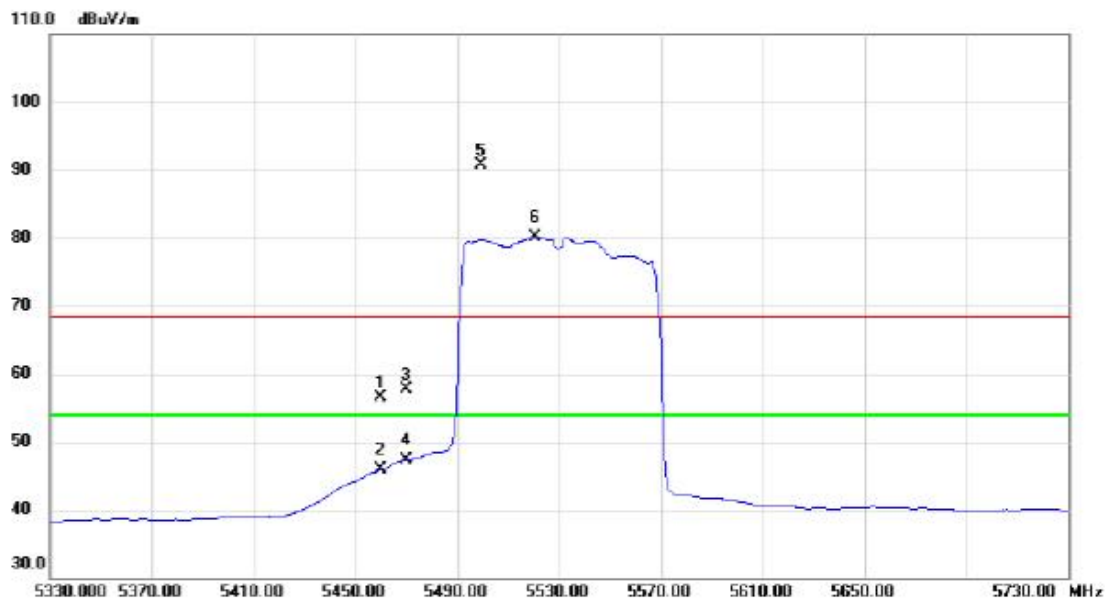


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	17.24	39.27	56.51	68.30	-11.79	peak	
2		5460.000	6.64	39.27	45.91	54.00	-8.09	AVG	
3		5470.000	18.33	39.31	57.64	68.30	-10.66	peak	
4		5470.000	7.90	39.31	47.21	54.00	-6.79	AVG	
5	X	5499.200	51.19	39.44	90.63	68.30	22.33	peak	No Limit
6	*	5520.800	40.59	39.55	80.14	54.00	26.14	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Vertical

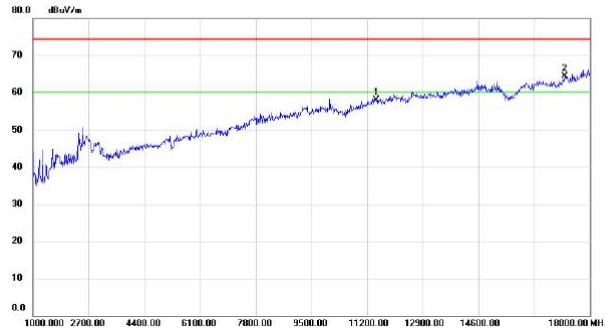

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	40.97	16.91	57.88	74.30	-16.42	peak	
2	*	17235.00	42.84	21.53	64.37	74.30	-9.93	peak	

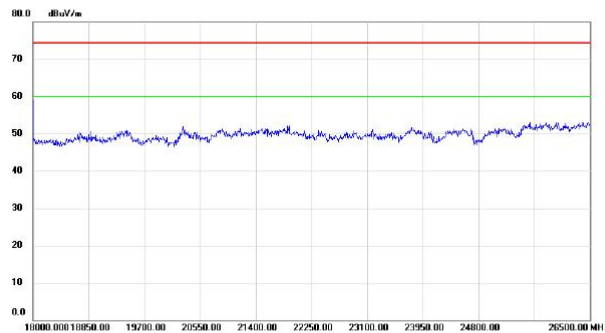


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39973.00	45.61	17.54	63.15	74.30	-11.15	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Horizontal

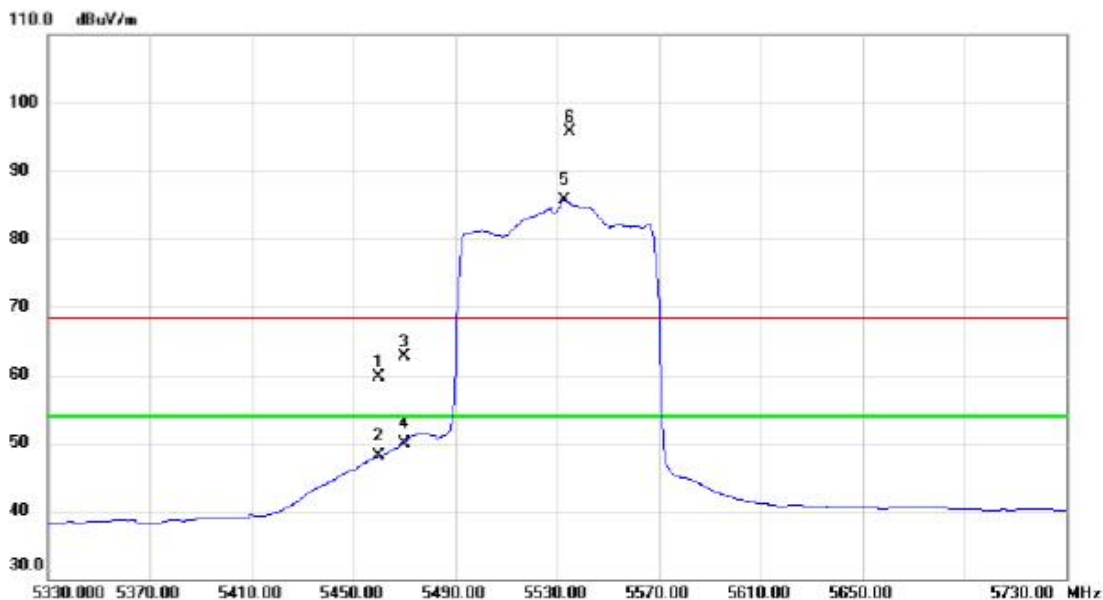


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	20.43	39.27	59.70	68.30	-8.60	peak	
2		5460.000	8.84	39.27	48.11	54.00	-5.89	AVG	
3		5470.000	23.47	39.31	62.78	68.30	-5.52	peak	
4		5470.000	10.64	39.31	49.95	54.00	-4.05	AVG	
5	*	5532.800	46.14	39.61	85.75	54.00	31.75	AVG	No Limit
6	X	5534.800	56.16	39.62	95.78	68.30	27.48	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5745MHz

Horizontal



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11490.00	40.38	16.91	57.29	74.30	-17.01	peak	
2	*	17235.00	41.50	21.53	63.03	74.30	-11.27	peak	

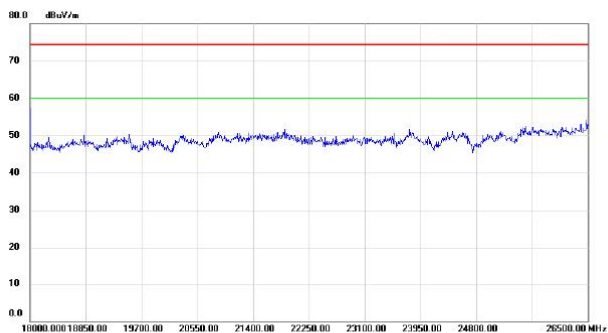


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	40000.00	46.35	17.60	63.95	74.30	-10.35	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Vertical

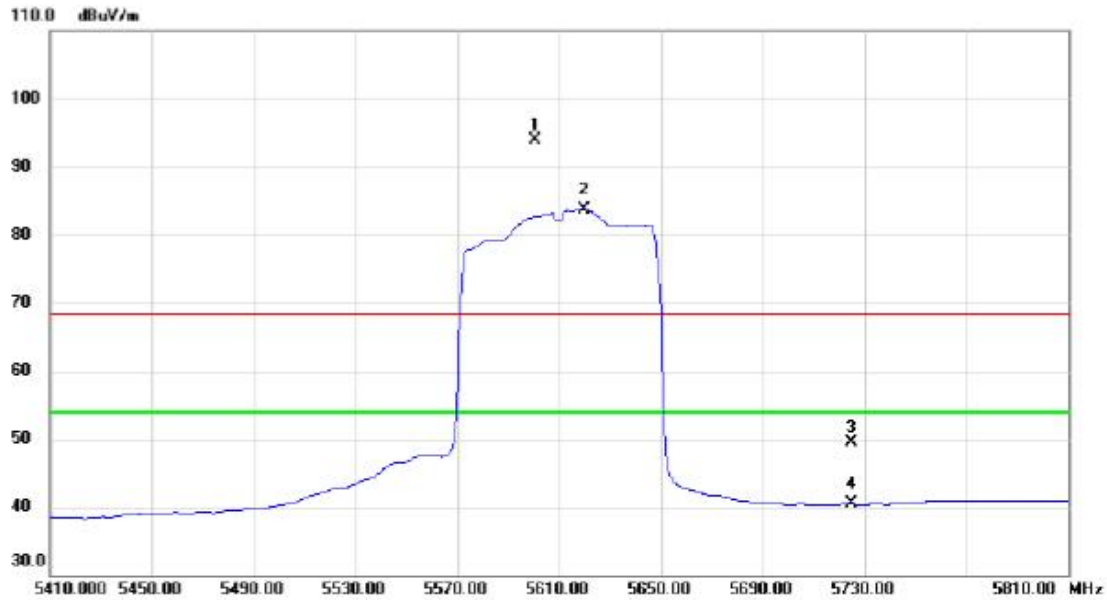


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5600.800	54.02	39.95	93.97	68.30	25.67	peak	No Limit
2	*	5619.600	43.73	40.05	83.78	54.00	29.78	AVG	No Limit
3		5725.000	8.99	40.60	49.59	68.30	-18.71	peak	
4		5725.000	-0.17	40.60	40.43	54.00	-13.57	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Vertical

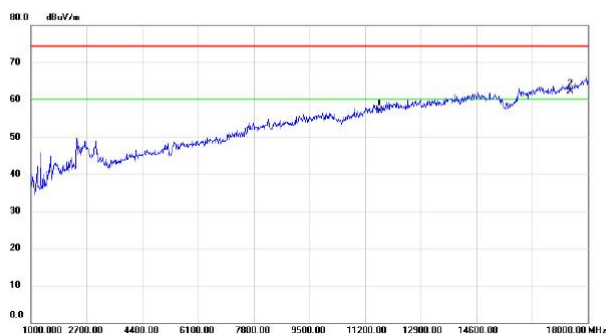

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	39.83	17.17	57.00	74.30	-17.30	peak	
2	*	17475.00	39.90	22.29	62.19	74.30	-12.11	peak	

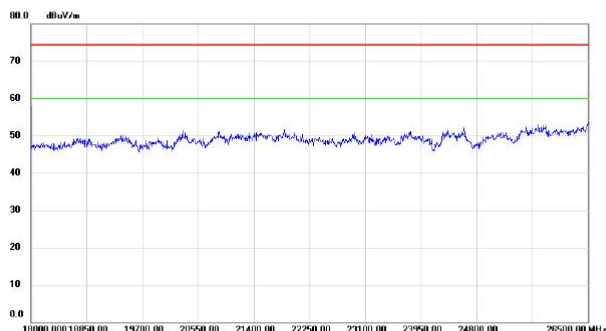


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40000.00	46.21	17.60	63.81	74.30	-10.49	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz


Horizontal

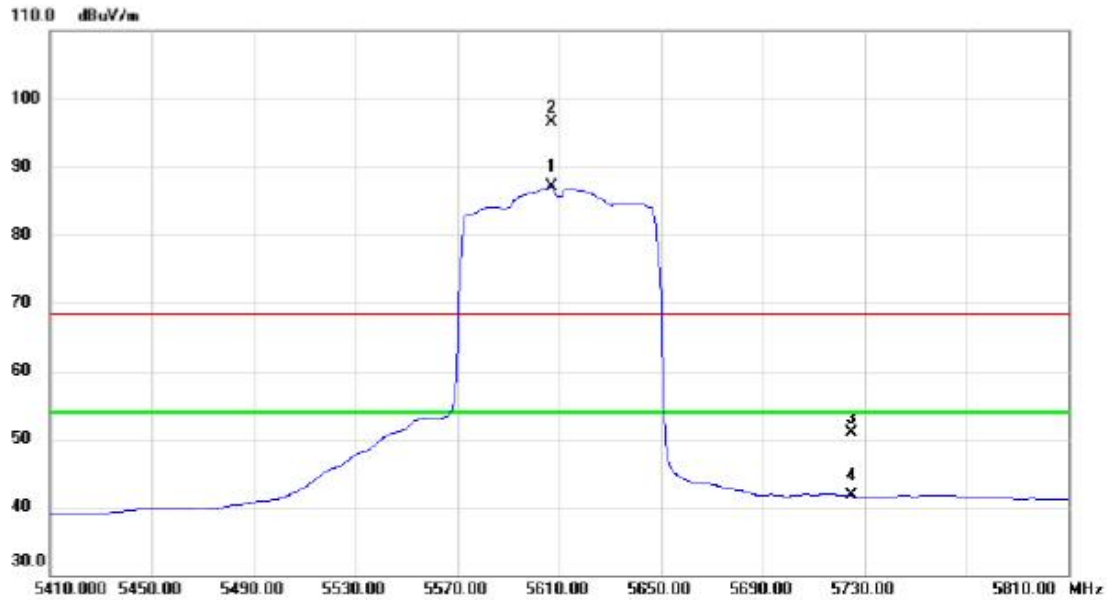


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5606.800	47.04	39.99	87.03	54.00	33.03	AVG	No Limit
2	X	5607.200	56.52	39.99	96.51	68.30	28.21	peak	No Limit
3		5725.000	10.24	40.60	50.84	68.30	-17.46	peak	
4		5725.000	1.00	40.60	41.60	54.00	-12.40	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX A Mode 5825MHz

Horizontal

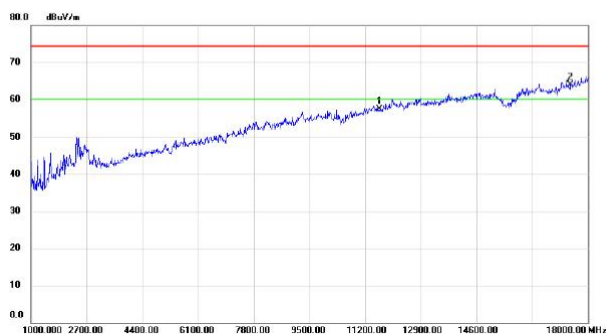

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	40.20	17.17	57.37	74.30	-16.93	peak	
2	*	17475.00	41.70	22.29	63.99	74.30	-10.31	peak	

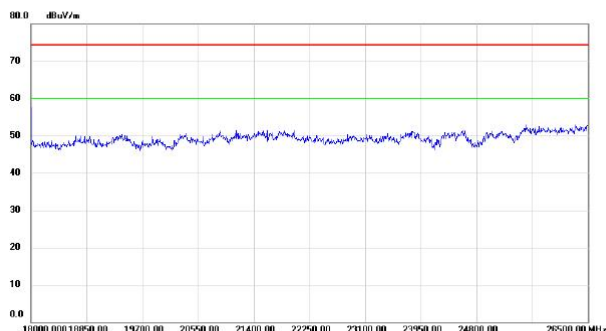


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39973.00	45.31	17.54	62.85	74.30	-11.45	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Vertical

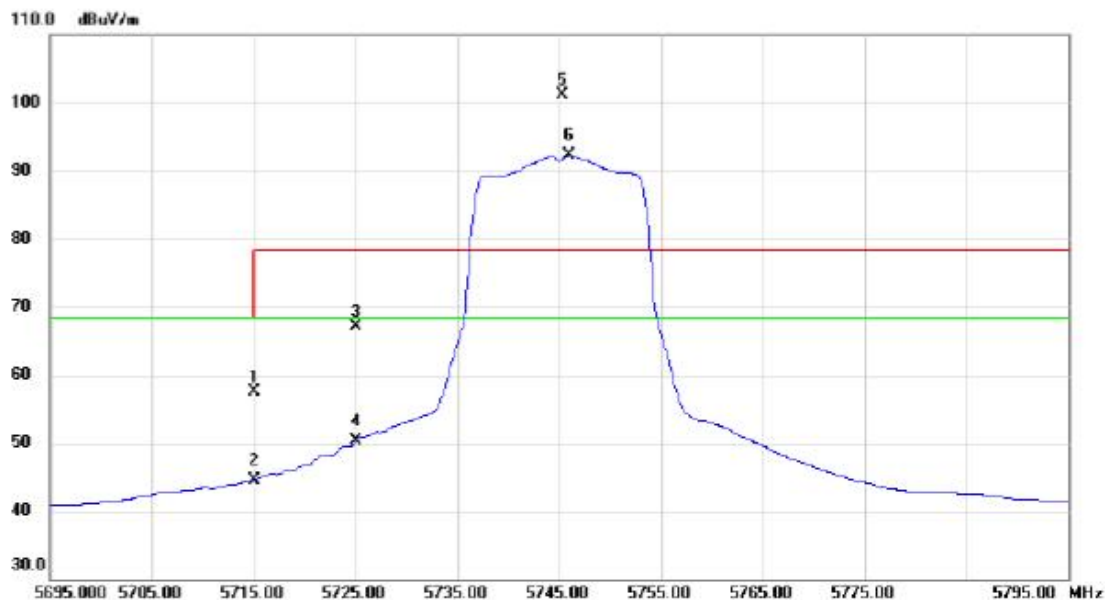


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	16.96	40.54	57.50	68.30	-10.80	peak	
2		5715.000	3.89	40.54	44.43	68.30	-23.87	AVG	
3		5725.000	26.42	40.60	67.02	78.30	-11.28	peak	
4		5725.000	9.64	40.60	50.24	68.30	-18.06	AVG	
5	X	5745.400	60.40	40.70	101.10	78.30	22.80	peak	No Limit
6	*	5746.000	51.57	40.70	92.27	68.30	23.97	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Vertical

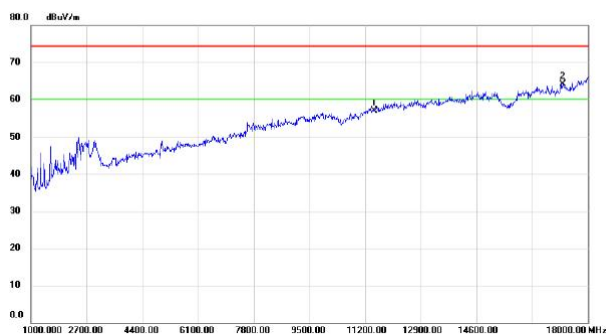

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	39.99	16.91	56.90	74.30	-17.40	peak	
2	*	17235.00	42.66	21.53	64.19	74.30	-10.11	peak	

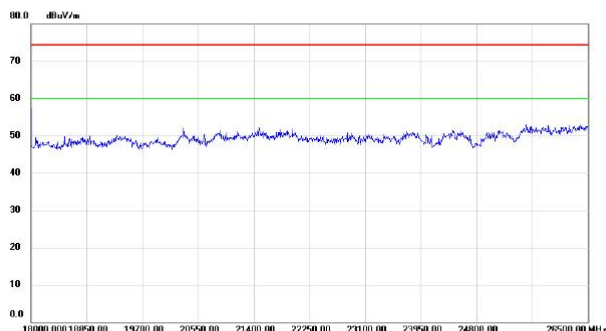


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39986.50	46.31	17.56	63.87	74.30	-10.43	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz


Horizontal

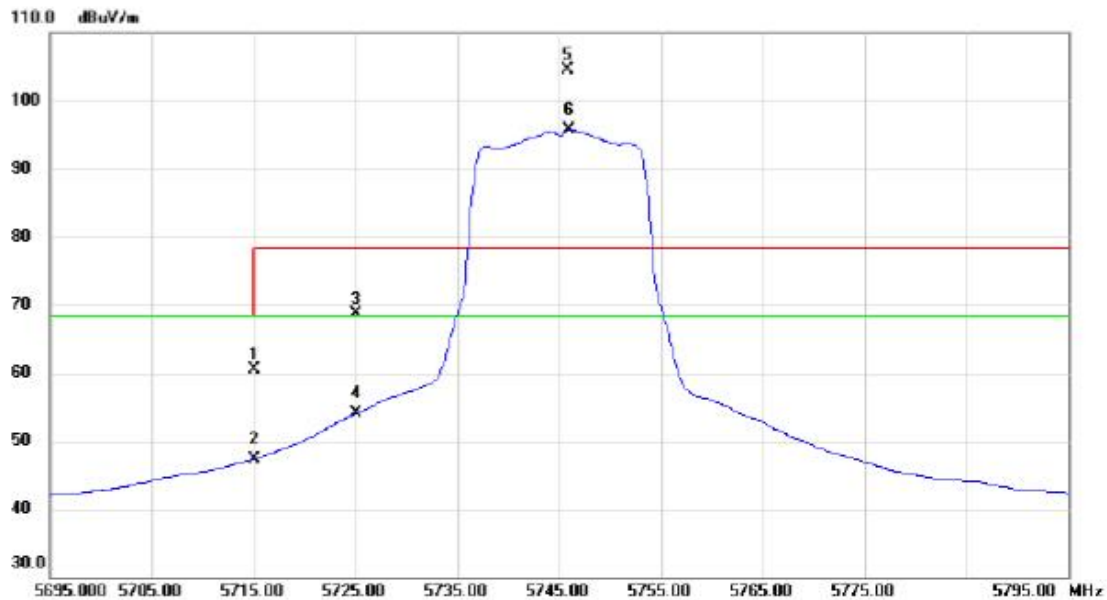

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	20.05	40.54	60.59	68.30	-7.71	peak	
2		5715.000	6.82	40.54	47.36	68.30	-20.94	AVG	
3		5725.000	28.20	40.60	68.80	78.30	-9.50	peak	
4		5725.000	13.54	40.60	54.14	68.30	-14.16	AVG	
5	X	5745.900	63.89	40.70	104.59	78.30	26.29	peak	No Limit
6	*	5746.000	55.06	40.70	95.76	68.30	27.46	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5745MHz

Horizontal

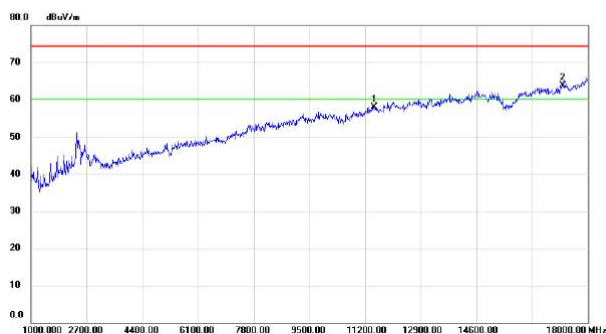

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	40.90	16.91	57.81	74.30	-16.49	peak	
2	*	17235.00	42.08	21.53	63.61	74.30	-10.69	peak	




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		20550.00	45.66	17.60	63.26	74.30	-11.04	peak	



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40000.00	45.66	17.60	63.26	74.30	-11.04	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Vertical

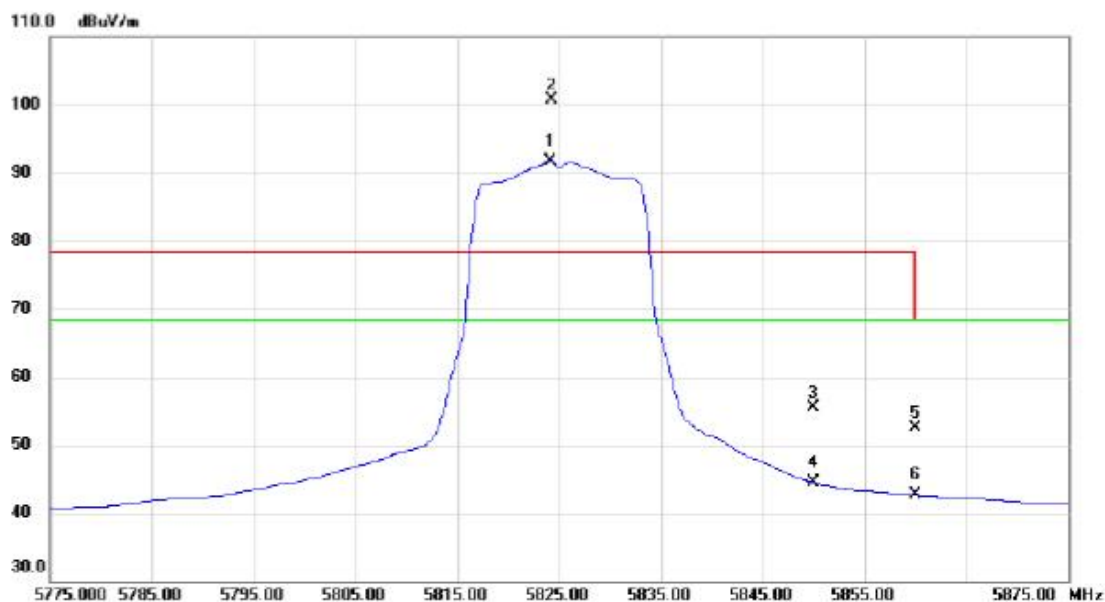

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5824.200	50.51	41.10	91.61	68.30	23.31	AVG	No Limit
2	X	5824.300	59.56	41.10	100.66	78.30	22.36	peak	No Limit
3		5850.000	14.19	41.23	55.42	78.30	-22.88	peak	
4		5850.000	3.31	41.23	44.54	68.30	-23.76	AVG	
5		5860.000	11.31	41.29	52.60	68.30	-15.70	peak	
6		5860.000	1.38	41.29	42.67	68.30	-25.63	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	40.67	17.17	57.84	74.30	-16.46	peak	
2	*	17475.00	40.26	22.29	62.55	74.30	-11.75	peak	




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39865.00	46.23	17.28	63.51	74.30	-10.79	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz


Horizontal

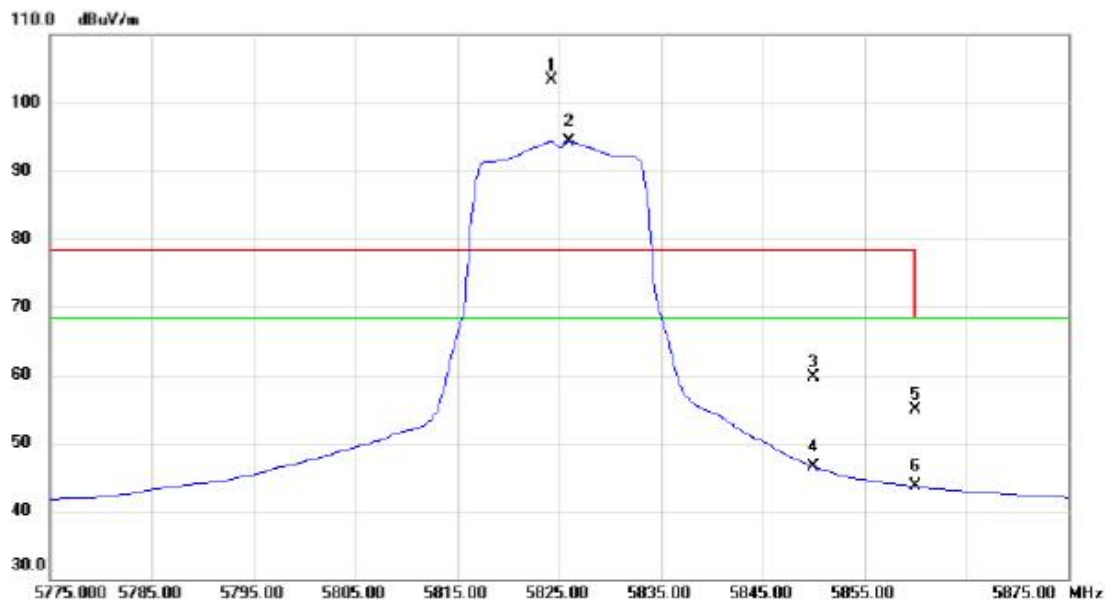


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5824.300	62.26	41.10	103.36	78.30	25.06	peak	No Limit
2	*	5826.000	53.22	41.11	94.33	68.30	26.03	AVG	No Limit
3		5850.000	18.51	41.23	59.74	78.30	-18.56	peak	
4		5850.000	5.36	41.23	46.59	68.30	-21.71	AVG	
5		5860.000	13.53	41.29	54.82	68.30	-13.48	peak	
6		5860.000	2.37	41.29	43.66	68.30	-24.64	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N20 Mode 5825MHz

Horizontal

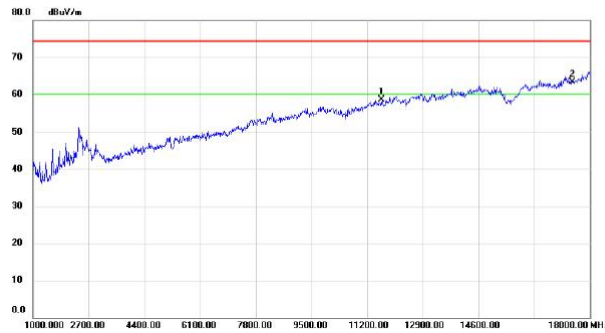

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	41.43	17.17	58.60	74.30	-15.70	peak	
2	*	17475.00	41.11	22.29	63.40	74.30	-10.90	peak	

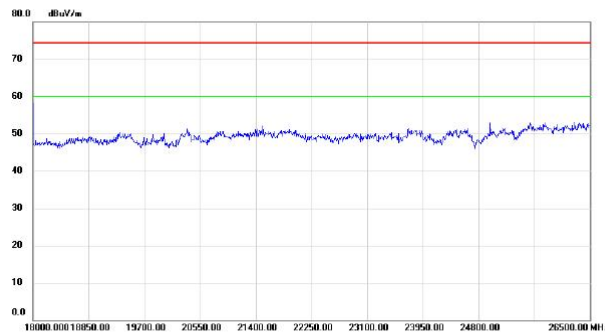


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39973.00	46.81	17.54	64.35	74.30	-9.95	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Vertical

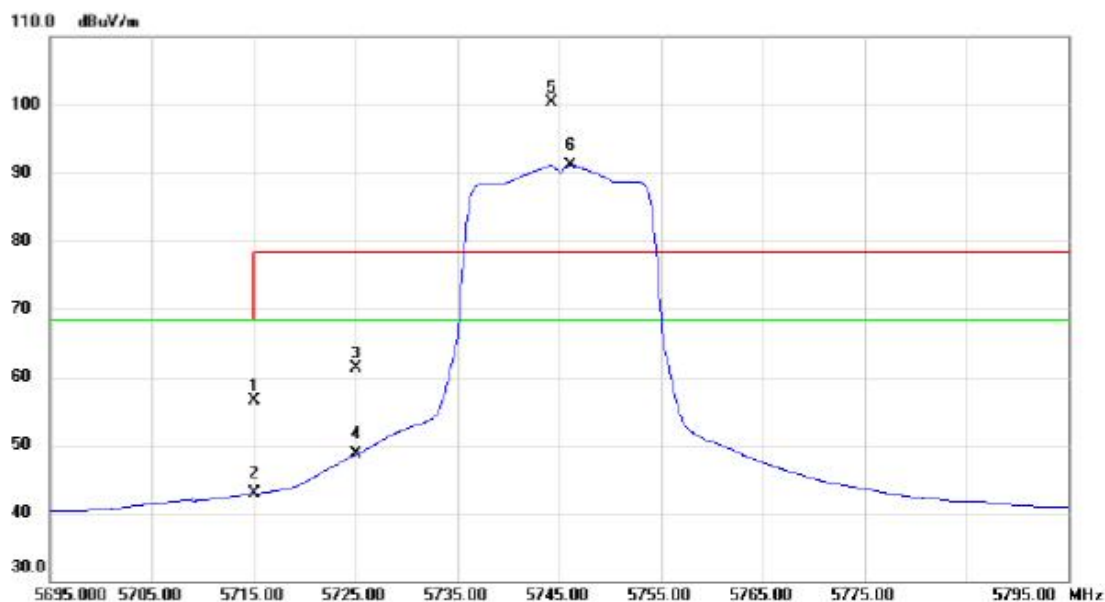

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Vertical



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	39.71	16.96	56.67	74.30	-17.63	peak	
2	*	17265.00	42.14	21.62	63.76	74.30	-10.54	peak	




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39932.50	46.90	17.43	64.33	74.30	-9.97	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Horizontal

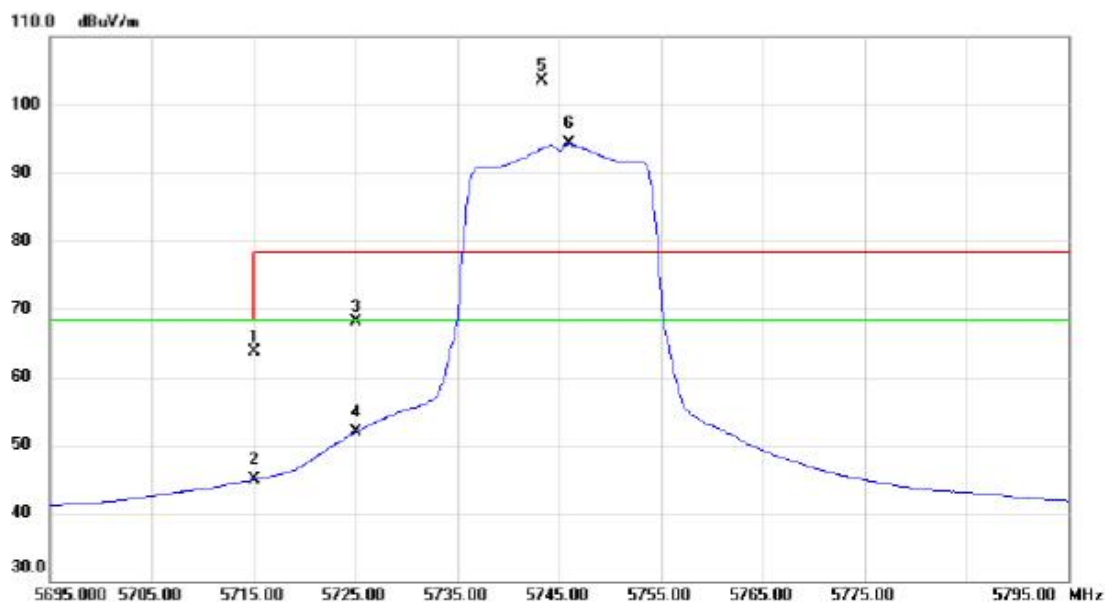


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	23.07	40.54	63.61	68.30	-4.69	peak	
2		5715.000	4.42	40.54	44.96	68.30	-23.34	AVG	
3		5725.000	27.51	40.60	68.11	78.30	-10.19	peak	
4		5725.000	11.27	40.60	51.87	68.30	-16.43	AVG	
5	X	5743.400	62.76	40.69	103.45	78.30	25.15	peak	No Limit
6	*	5746.000	53.53	40.70	94.23	68.30	25.93	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5755MHz

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	41.28	16.96	58.24	74.30	-16.06	peak	
2	*	17265.00	43.06	21.62	64.68	74.30	-9.62	peak	

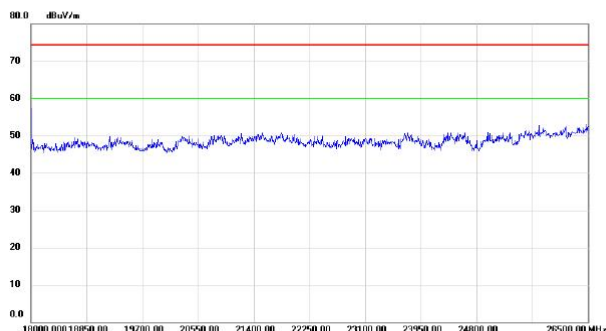


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	40000.00	45.74	17.60	63.34	74.30	-10.96	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz


Vertical

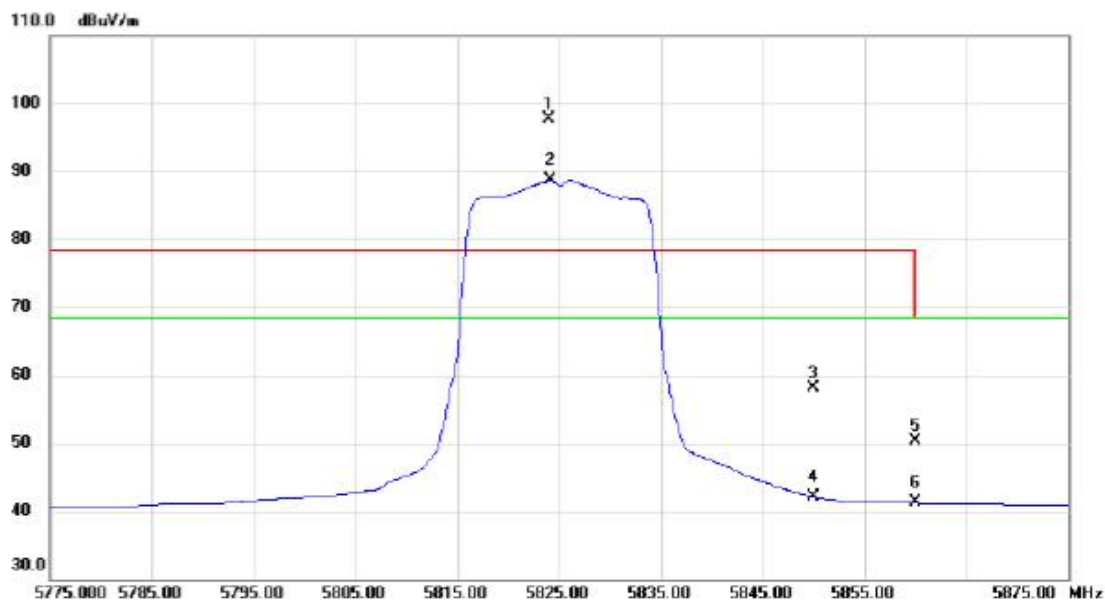


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5824.000	56.65	41.10	97.75	78.30	19.45	peak	No Limit
2	*	5824.100	47.62	41.10	88.72	68.30	20.42	AVG	No Limit
3		5850.000	16.93	41.23	58.16	78.30	-20.14	peak	
4		5850.000	0.86	41.23	42.09	68.30	-26.21	AVG	
5		5860.000	8.95	41.29	50.24	68.30	-18.06	peak	
6		5860.000	-0.05	41.29	41.24	68.30	-27.06	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Vertical

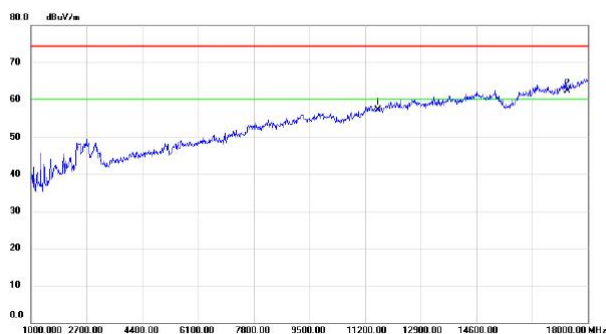

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	40.08	17.08	57.16	74.30	-17.14	peak	
2	*	17385.00	40.28	22.00	62.28	74.30	-12.02	peak	

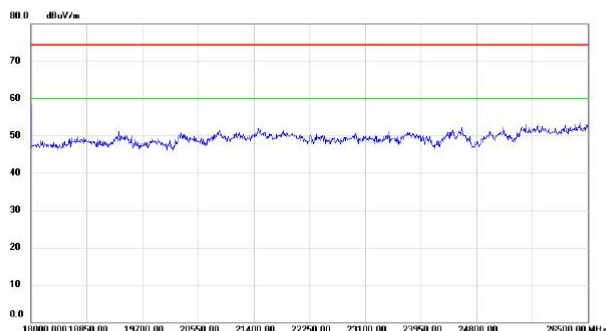


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39986.50	46.43	17.56	63.99	74.30	-10.31	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Horizontal

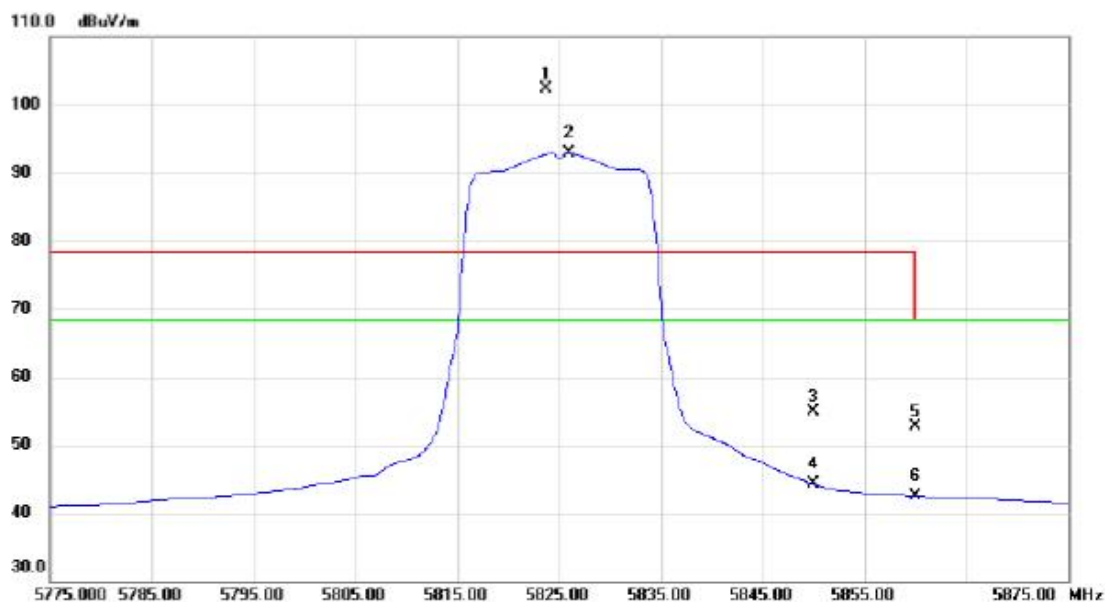

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5823.700	61.23	41.10	102.33	78.30	24.03	peak	No Limit
2	*	5826.000	51.89	41.11	93.00	68.30	24.70	AVG	No Limit
3		5850.000	13.61	41.23	54.84	78.30	-23.46	peak	
4		5850.000	3.02	41.23	44.25	68.30	-24.05	AVG	
5		5860.000	11.36	41.29	52.65	68.30	-15.65	peak	
6		5860.000	1.20	41.29	42.49	68.30	-25.81	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX N40 Mode 5795MHz

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	40.73	17.08	57.81	74.30	-16.49	peak	
2	*	17385.00	41.30	22.00	63.30	74.30	-11.00	peak	




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39959.50	45.77	17.50	63.27	74.30	-11.03	peak	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical

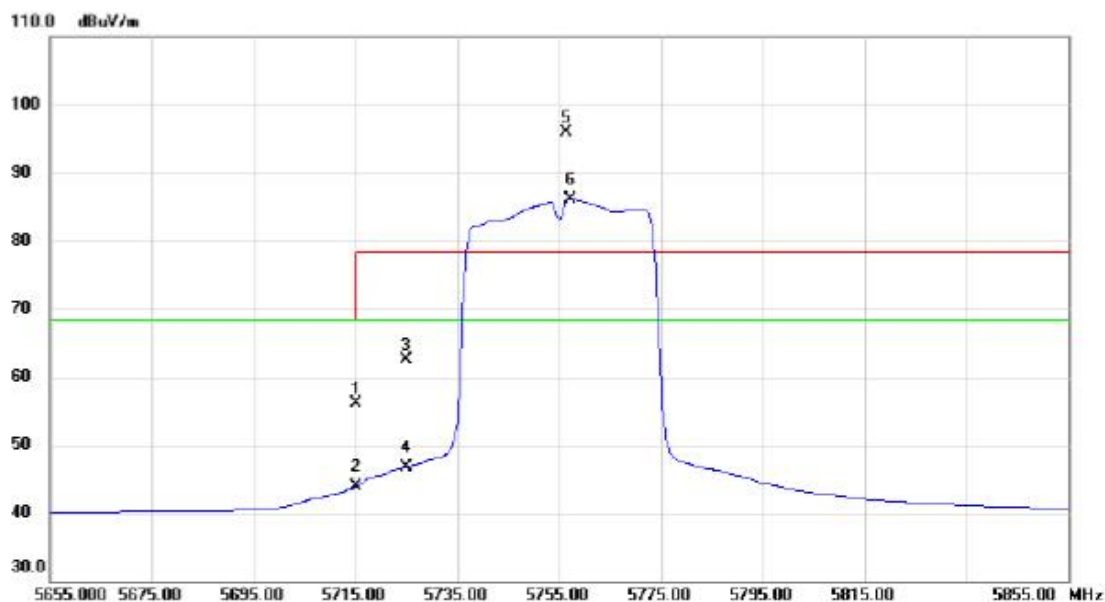

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Vertical

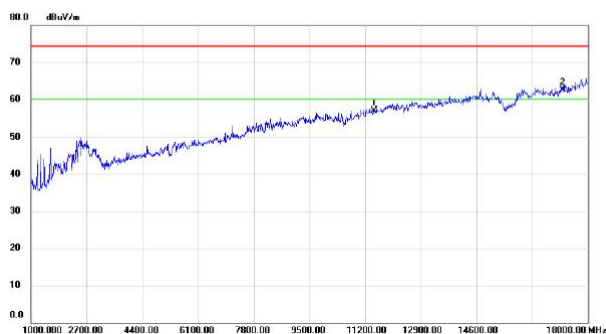

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	40.00	16.91	56.91	74.30	-17.39	peak	
2	*	17235.00	41.06	21.53	62.59	74.30	-11.71	peak	




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39946.00	46.06	17.47	63.53	74.30	-10.77	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Horizontal

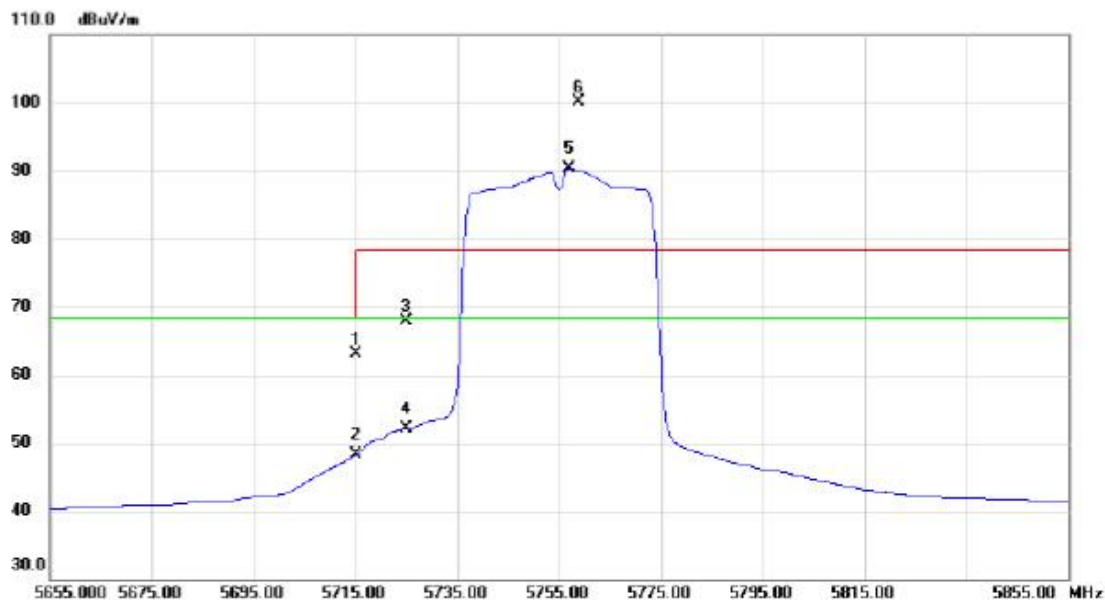

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	22.62	40.54	63.16	68.30	-5.14	peak	
2		5715.000	7.67	40.54	48.21	68.30	-20.09	AVG	
3		5725.000	27.39	40.60	67.99	78.30	-10.31	peak	
4		5725.000	11.47	40.60	52.07	68.30	-16.23	AVG	
5	*	5757.000	49.52	40.75	90.27	68.30	21.97	AVG	No Limit
6	X	5758.800	59.26	40.76	100.02	78.30	21.72	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5745MHz

Horizontal



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	39.96	16.91	56.87	74.30	-17.43	peak	
2	*	17235.00	41.45	21.53	62.98	74.30	-11.32	peak	




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39932.50	47.05	17.43	64.48	74.30	-9.82	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz


Vertical

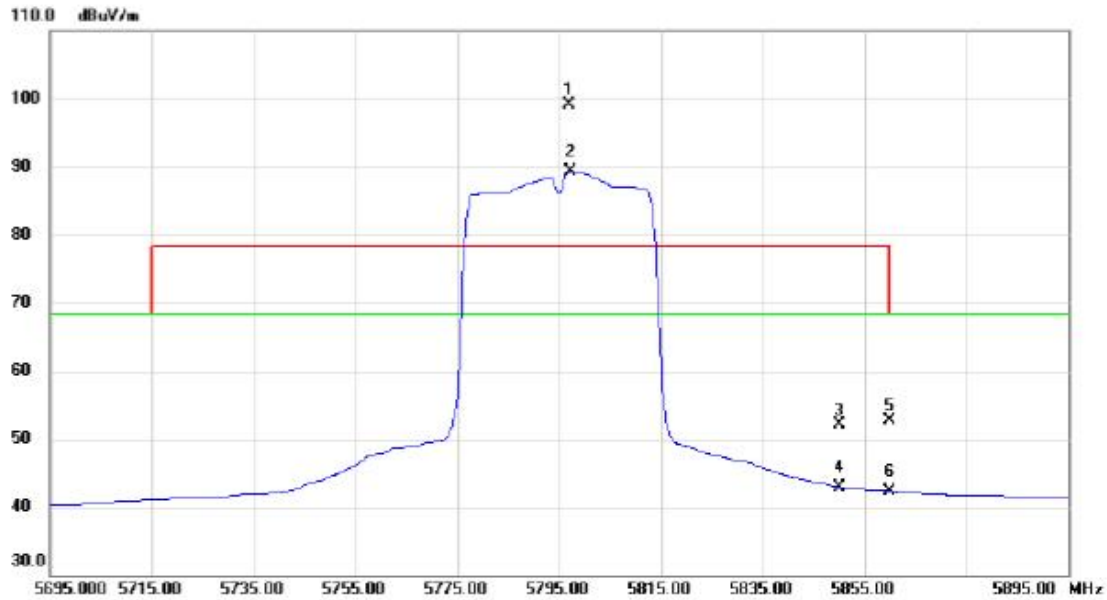

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5797.000	58.19	40.96	99.15	78.30	20.85	peak	No Limit
2	*	5797.400	48.37	40.96	89.33	68.30	21.03	AVG	No Limit
3		5850.000	10.95	41.23	52.18	78.30	-26.12	peak	
4		5850.000	1.71	41.23	42.94	68.30	-25.36	AVG	
5		5860.000	11.35	41.29	52.64	68.30	-15.66	peak	
6		5860.000	1.02	41.29	42.31	68.30	-25.99	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Vertical

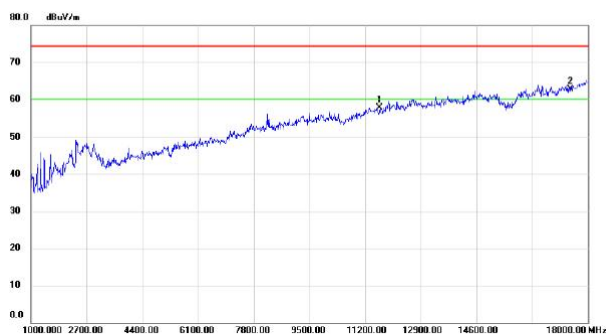

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	40.49	17.17	57.66	74.30	-16.64	peak	
2	*	17475.00	40.37	22.29	62.66	74.30	-11.64	peak	




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39986.50	46.31	17.56	63.87	74.30	-10.43	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz




Horizontal

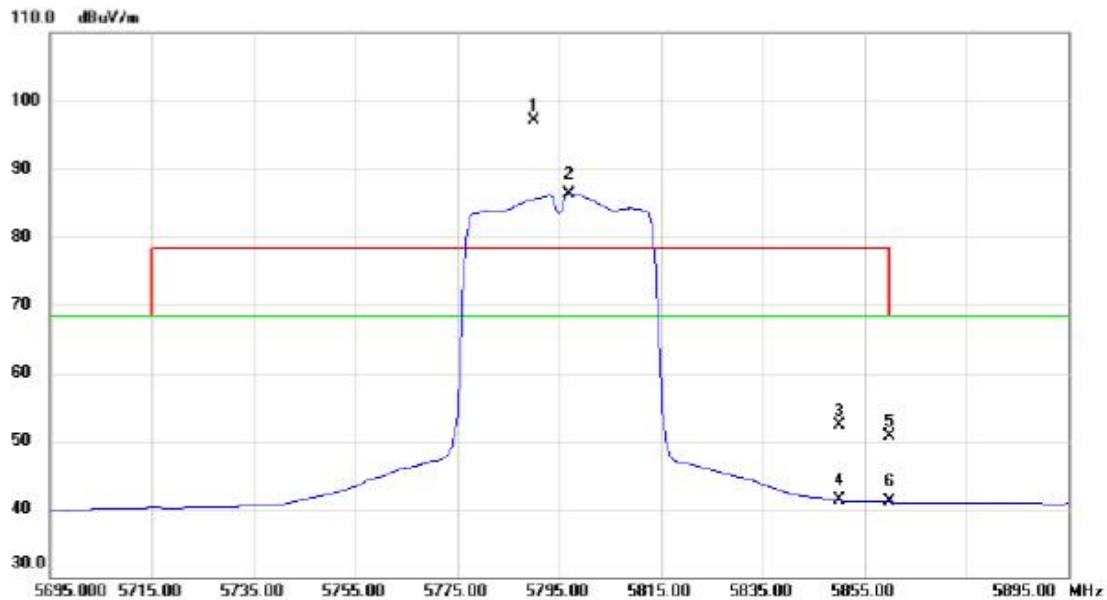

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5790.200	56.18	40.92	97.10	78.30	18.80	peak	No Limit
2	X	5797.000	45.41	40.96	86.37	68.30	18.07	AVG	No Limit
3		5850.000	11.16	41.23	52.39	78.30	-25.91	peak	
4		5850.000	0.00	41.23	41.23	68.30	-27.07	AVG	
5		5860.000	9.35	41.29	50.64	68.30	-17.66	peak	
6		5860.000	-0.28	41.29	41.01	68.30	-27.29	AVG	


Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC20 Mode 5825MHz

Horizontal

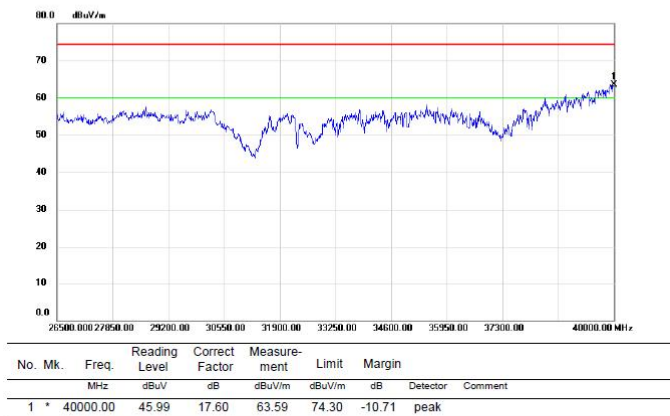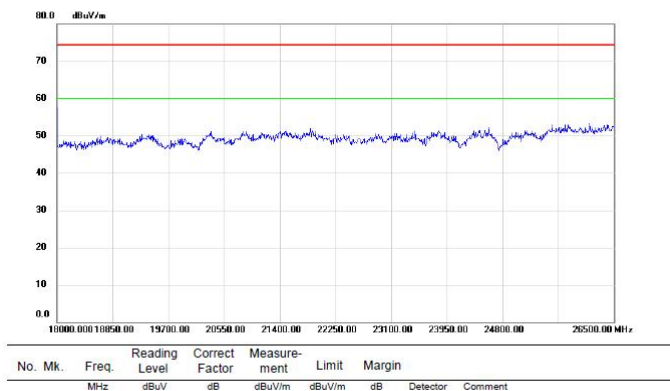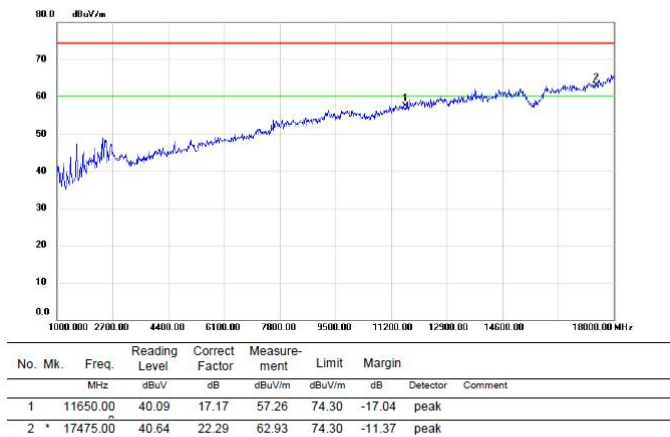

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Vertical

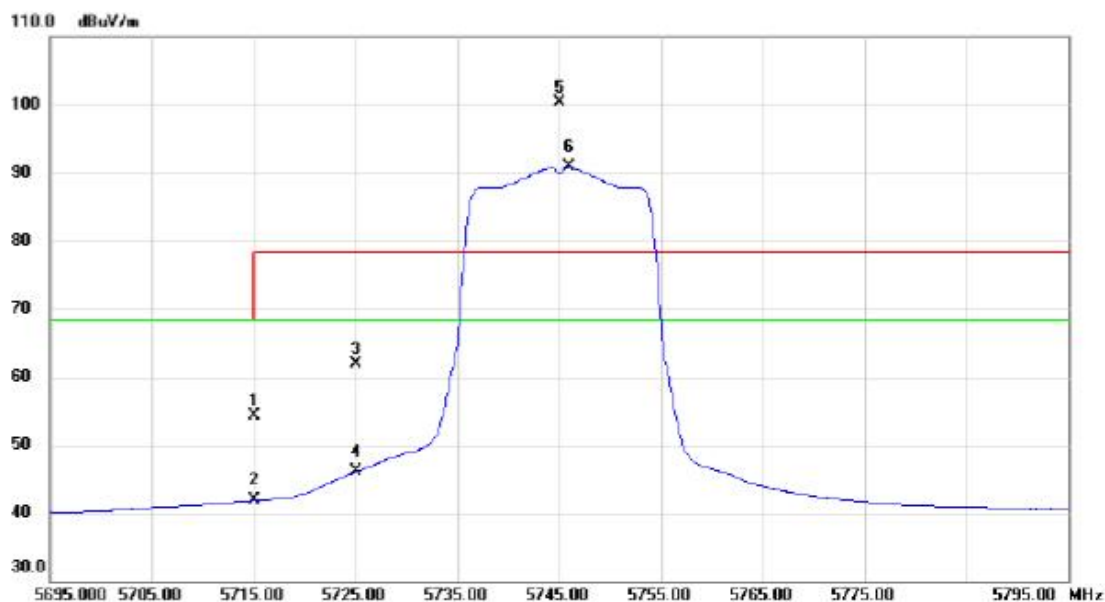


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	13.77	40.54	54.31	68.30	-13.99	peak	
2		5715.000	1.29	40.54	41.83	68.30	-26.47	AVG	
3		5725.000	21.22	40.60	61.82	78.30	-16.48	peak	
4		5725.000	5.44	40.60	46.04	68.30	-22.26	AVG	
5	X	5745.000	59.63	40.70	100.33	78.30	22.03	peak	No Limit
6	*	5746.000	50.14	40.70	90.84	68.30	22.54	AVG	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Vertical

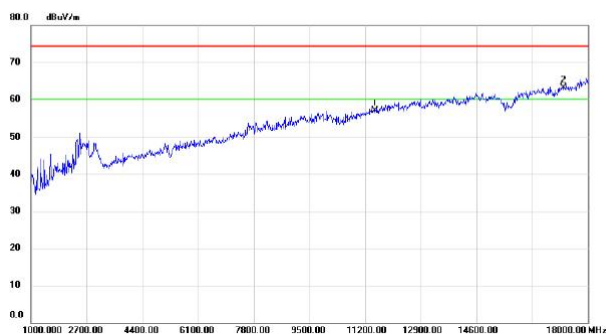

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	40.04	16.96	57.00	74.30	-17.30	peak	
2	*	17265.00	41.47	21.62	63.09	74.30	-11.21	peak	

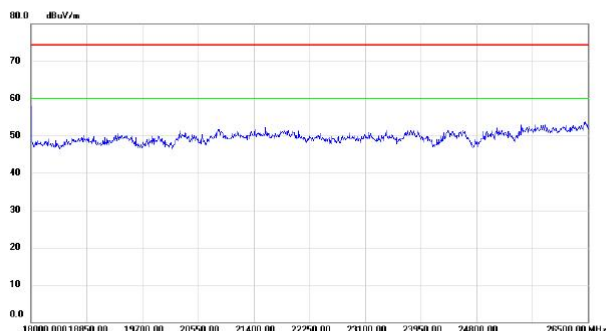


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39986.50	45.33	17.56	62.89	74.30	-11.41	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz


Horizontal

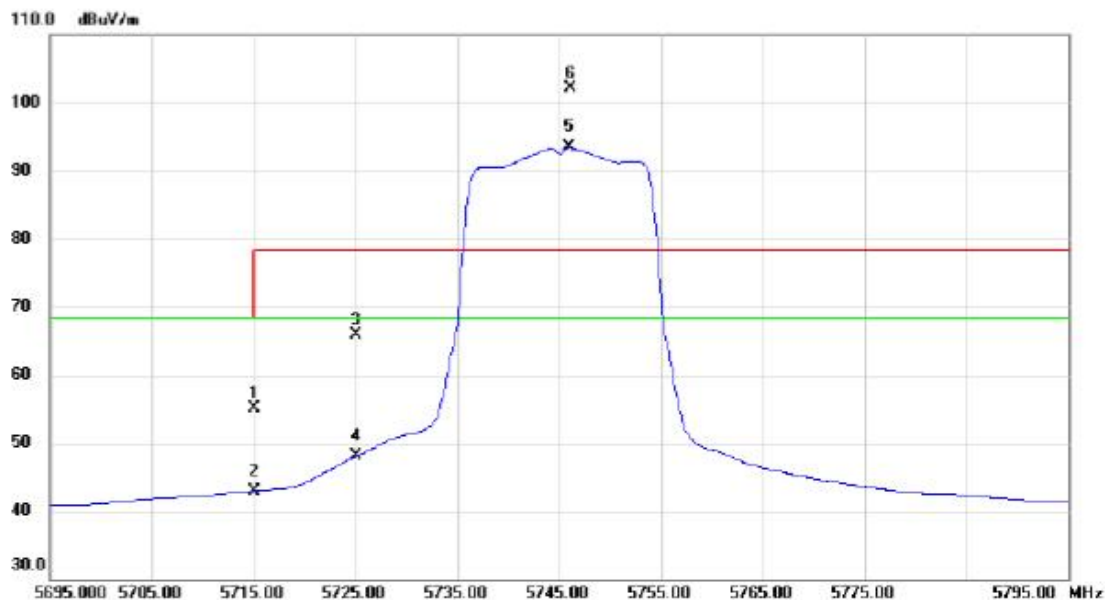


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5715.000	14.64	40.54	55.18	68.30	-13.12	peak	
2	X	5715.000	2.45	40.54	42.99	68.30	-25.31	AVG	
3	X	5725.000	25.37	40.60	65.97	78.30	-12.33	peak	
4	X	5725.000	7.43	40.60	48.03	68.30	-20.27	AVG	
5	*	5746.000	52.72	40.70	93.42	68.30	25.12	AVG	No Limit
6	X	5746.200	61.49	40.70	102.19	78.30	23.89	peak	No Limit

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5755MHz

Horizontal

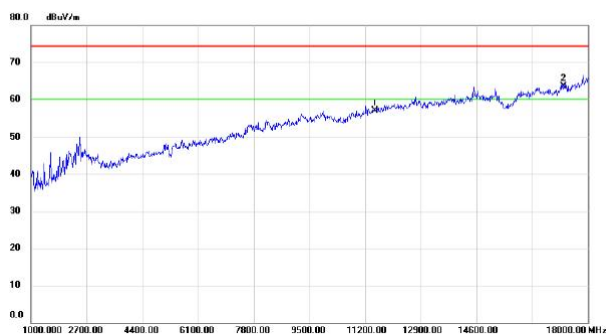

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	39.95	16.96	56.91	74.30	-17.39	peak	
2	*	17265.00	41.92	21.62	63.54	74.30	-10.76	peak	

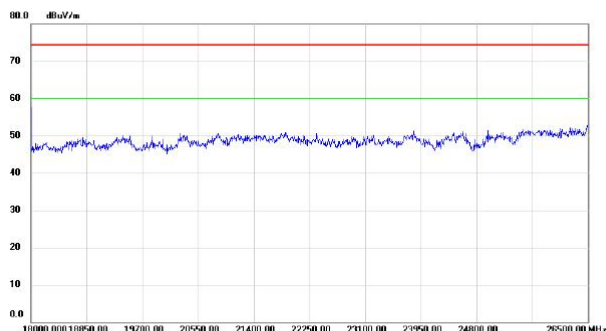


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39932.50	46.04	17.43	63.47	74.30	-10.83	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Vertical

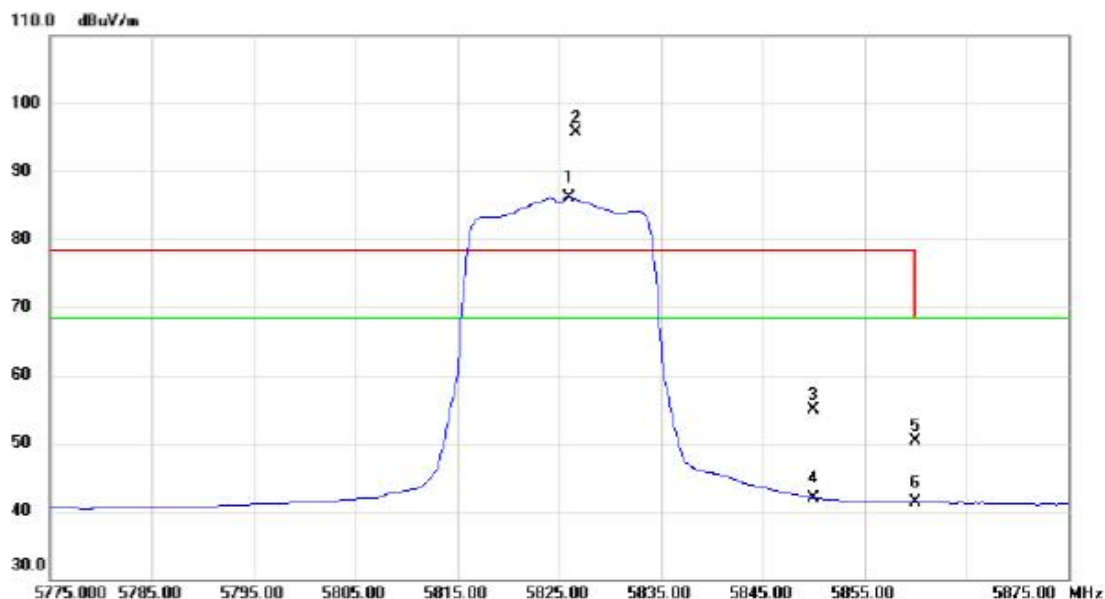


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5826.000	44.97	41.11	86.08	68.30	17.78	AVG	No Limit
2	X	5826.700	54.60	41.11	95.71	78.30	17.41	peak	No Limit
3		5850.000	13.62	41.23	54.85	78.30	-23.45	peak	
4		5850.000	0.75	41.23	41.98	68.30	-26.32	AVG	
5		5860.000	8.92	41.29	50.21	68.30	-18.09	peak	
6		5860.000	0.02	41.29	41.31	68.30	-26.99	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Vertical

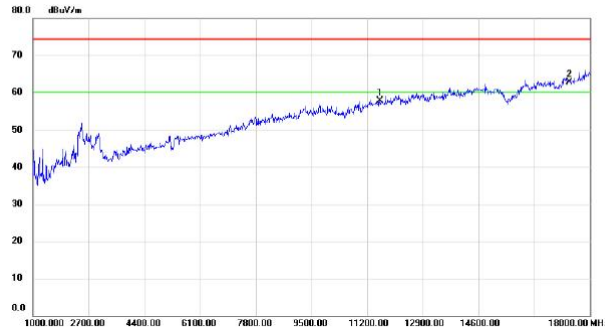

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	40.64	17.08	57.72	74.30	-16.58	peak	
2	*	17385.00	40.67	22.00	62.67	74.30	-11.63	peak	

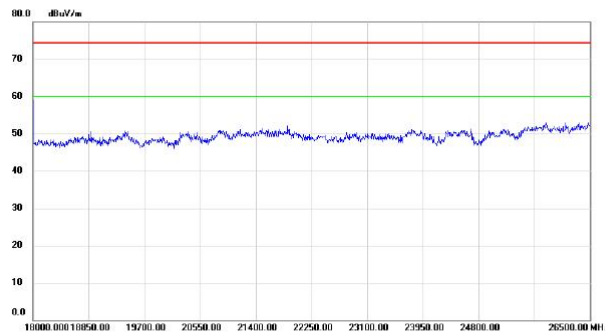


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39932.50	46.18	17.43	63.61	74.30	-10.69	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz


Horizontal

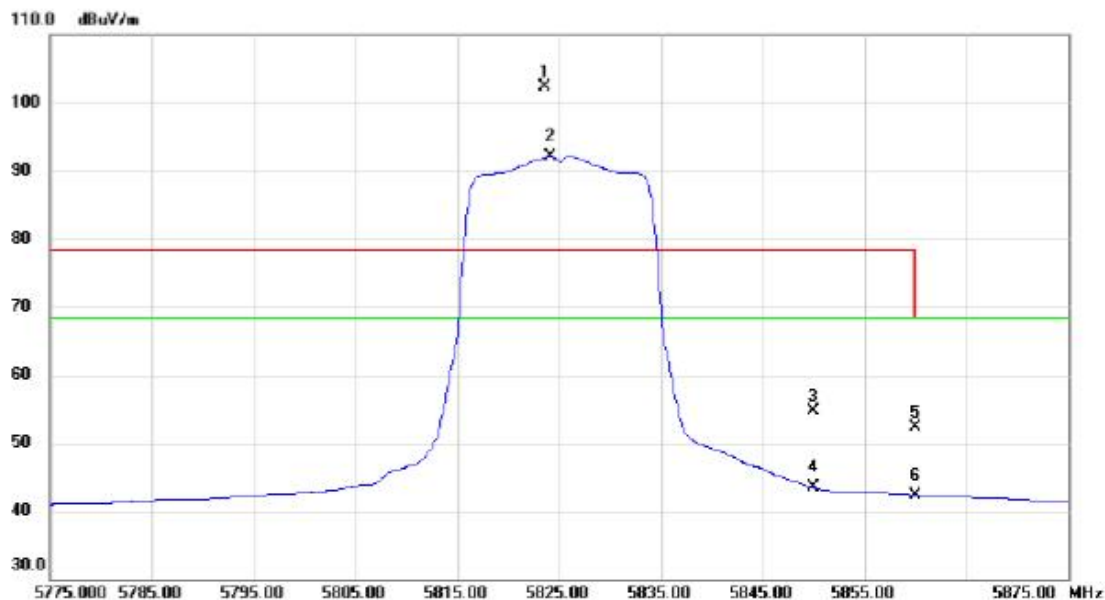

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5823.600	61.16	41.10	102.26	78.30	23.96	peak	No Limit
2	X	5824.200	51.07	41.10	92.17	68.30	23.87	AVG	No Limit
3		5850.000	13.47	41.23	54.70	78.30	-23.60	peak	
4		5850.000	2.24	41.23	43.47	68.30	-24.83	AVG	
5		5860.000	11.02	41.29	52.31	68.30	-15.99	peak	
6		5860.000	1.05	41.29	42.34	68.30	-25.96	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC40 Mode 5795MHz

Horizontal

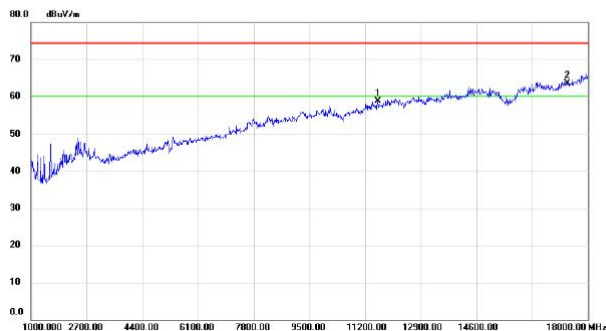

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	41.62	17.08	58.70	74.30	-15.60	peak	
2	*	17385.00	41.50	22.00	63.50	74.30	-10.80	peak	




No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39973.00	46.07	17.54	63.61	74.30	-10.69	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz


Vertical

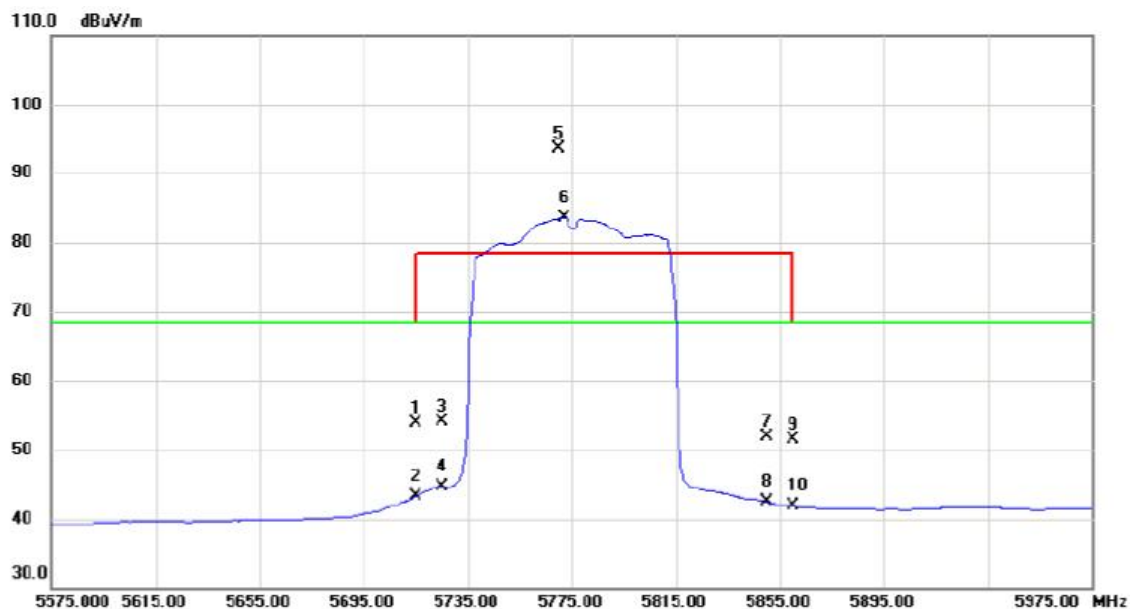


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	13.30	40.54	53.84	68.30	-14.46	peak	
2		5715.000	2.74	40.54	43.28	68.30	-25.02	AVG	
3		5725.000	13.41	40.60	54.01	78.30	-24.29	peak	
4		5725.000	4.11	40.60	44.71	68.30	-23.59	AVG	
5	*	5769.800	52.89	40.82	93.71	78.30	15.41	peak	No Limit
6	X	5771.800	42.74	40.83	83.57	68.30	15.27	AVG	No Limit
7		5850.000	10.70	41.23	51.93	78.30	-26.37	peak	
8		5850.000	1.20	41.23	42.43	68.30	-25.87	AVG	
9		5860.000	10.21	41.29	51.50	68.30	-16.80	peak	
10		5860.000	0.61	41.29	41.90	68.30	-26.40	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Vertical

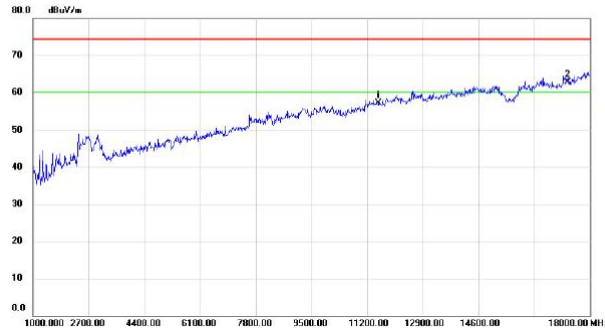

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	40.09	17.02	57.11	74.30	-17.19	peak	
2	*	17325.00	40.92	21.81	62.73	74.30	-11.57	peak	

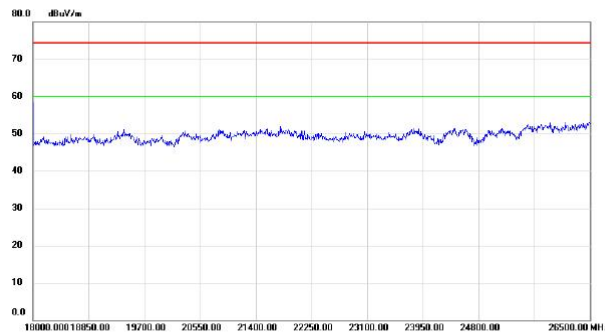


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
-----	-----	--------------	--------------------------	-------------------------	----------------------------	-----------------	--------------	----------	---------



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	39986.50	45.94	17.56	63.50	74.30	-10.80	peak	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

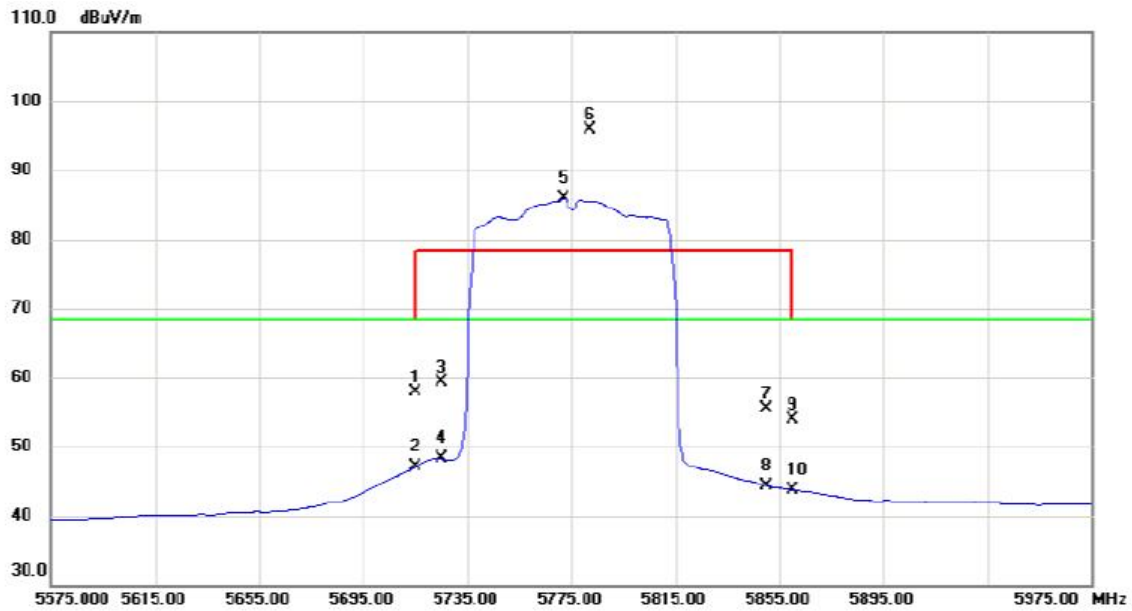

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5715.000	17.35	40.54	57.89	68.30	-10.41	peak	
2		5715.000	6.49	40.54	47.03	68.30	-21.27	AVG	
3		5725.000	18.75	40.60	59.35	78.30	-18.95	peak	
4		5725.000	7.65	40.60	48.25	68.30	-20.05	AVG	
5	X	5771.800	44.99	40.83	85.82	68.30	17.52	AVG	No Limit
6	*	5782.200	55.10	40.89	95.99	78.30	17.69	peak	No Limit
7		5850.000	14.34	41.23	55.57	78.30	-22.73	peak	
8		5850.000	3.12	41.23	44.35	68.30	-23.95	AVG	
9		5860.000	12.71	41.29	54.00	68.30	-14.30	peak	
10		5860.000	2.46	41.29	43.75	68.30	-24.55	AVG	

Orthogonal Axis:	X
Test Mode:	UNII-3/TX AC80 Mode 5775MHz

Horizontal

