

Test & Certification Center (TCC) - Dallas
DTX16051-EN-1.0

FCC ID: QMNRM-124
Test Report: WR1042.002
8-Feb-06

Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

CFR 47 Part 15 Test Report

Test Report Number: WR1042.002

Terminal device:

FCC ID: QMNRM-124 Model: 2855i Type: RM-124 HW: 3201 SW: VR 125_05w21_21.nbr
(Detailed information is listed in section 4).

Originator: Viet Do
Function: TCC - Dallas – EMC
Version/Status: 1.0 Approved
Location: QATrax
Date: 8-Feb-06

Change History:

Version	Date	Status	Handled By	Comments
0.1	2-Feb-06	Draft	Viet Do	
0.2	2-Feb-06	Proposal	Viet Do	
0.3	8-Feb-06	Reviewed	Hai To	
1.0	8-Feb-06	Approved	Hai To	

Testing laboratory:

Test & Certification Center (TCC) Dallas
Nokia Inc
6021 Connection Drive
Irving, Texas 75039
U.S.A.
Tel. 972-894-5000

Client:

Nokia Inc.
San Diego
12278 Script Summit Drive.
San Diego, Ca 92131
USA
Tel. +1858 831 5000
Fax. +1858 8316500

Date and signatures:

8-Feb-06

For the contents:

Viet Do

Hai To

Test Operator

Technical Reviewed

TABLE OF CONTENTS

1. GENERAL	3
1.1 QUALITY SYSTEM	3
1.2 OBJECTIVE	3
1.3 TEST SUMMARY	3
2. STANDARDS BASIS	4
3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS	5
3.1 ABBREVIATIONS	5
3.2 ACRONYMS	5
3.3 TERMS	5
4. EQUIPMENT-UNDER-TEST (EUT)	6
4.1 DESCRIPTION OF TESTED DEVICE(S):	6
5. TEST EQUIPMENT LIST	7
6. AC CONDUCTED EMISSIONS	8
6.1 SETUP	8
6.2 PASS/FAIL CRITERIA	8
6.3 DETAILED TEST RESULTS	8
6.3.1 Ambient Scan	9
6.3.2 FCC Part 15.107	10

© No part of this report shall be reproduced out of the context of the report without the written approval of Nokia Mobile Phones, Inc., Dallas Product Creation, TCC – Dallas.

Test & Certification Center (TCC) - Dallas
DTX16051-EN-1.0

FCC ID: QMNRM-124
Test Report: WR1042.002
8-Feb-06

Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

1. GENERAL

1.1 Quality System

The quality system in place for TCC-Dallas conforms to ISO/IEC 17025 and has been audited to the standard by A2LA (American Association of Laboratory Accreditation). TCC - Dallas has also been audited using the ISO 9000 Quality System, as part of Nokia Mobile Phones, Inc., by ABS (American Bureau of Shipping) Quality Evaluations Inc.

TCC-Dallas is a recognized laboratory with the Federal Communications Commission in filing applications for Certification under Parts 15 and 18, Registration Number 100060, and Industry Canada, Registration Number IC 661N.

1.2 Objective

All tests and measurement data shown was performed to determine whether the selected handset was in compliance as specified in FCC: CFR47 Parts 15.107.

1.3 Test Summary

Test Results: *The test result relates only to those tested devices mentioned in Section 4 of this test report.*

Test Performed	Reference	Section of Report	Complies / Does not comply / Not Tested
AC Conducted Emissions	FCC Part 15.107	6	Complies



2. STANDARDS BASIS

Testing has been carried out in accordance with:

REF.	Code of the standard	Name of the standard
1	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.
2	FCC: CFR 47 Part 15	Code of Federal Regulations (CFR) Title 47, Part 15 – Radio Frequency Devices: Subpart B – Unintentional Radiators and Subpart C – Intentional Radiators
3	CISPR 22 / EN55022	Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement.
4	ICES-003	Digital Apparatus, Industry Canada
5	RSS-132	800 MHz Cellular Telephones Employing New Technologies
6	RSS-133	2 GHz Personal Communications Services, Industry Canada
7	RSS-212	Test Facilities and Test Methods for Radio Equipment, Industry Canada (Provisional)
8	RSP-100	Radio Equipment Certification Procedure

Note: Unless otherwise stated, (by reference to a version number and a publication date), the latest version of the above documents applies.

Deviations:

Not Applicable.

3. LIST OF ABBREVIATIONS, ACRONYMS AND TERMS

3.1 Abbreviations

- dB - decibel
- dBm - decibels per milliwatt (absolute measurement)
- dB μ V - decibel per microvolt
- dB μ V/m - decibel of microvolt per meter
- GHz - gigahertz or 1000000000 hertz
- kHz - kilohertz or 1000 hertz
- MHz - megahertz or 1000000 hertz

3.2 Acronyms

- AMPS - Advanced Mobile Phone System
- BSS - Base Station Simulator
- CDMA - Code Division Multiple Access
- EMC - Electromagnetic Compatibility
- EMI - Electromagnetic Interference
- EUT - Equipment under Test
- GSM - Global System for Mobile communications
- PCS - Personal Communications Services
- RF - Radio Frequency
- TDMA - Time Division Multiple Access

3.3 Terms

Base Station Simulator (BSS) - simulates all the necessary signals that a phone would experience while on a live network. There are many types of base station simulators catering for all current protocols, i.e., GSM, AMPS, TDMA, and CDMA.

Cellular - refers to a frequency in the 800MHz band.

PCS - refers to a frequency in the 1900MHz band.

4. EQUIPMENT-UNDER-TEST (EUT)

The results in this report relate only to the items listed below:

4.1 Description of Tested Device(s):

Test Performed	Mode of Operation	Date of Receipt	Condition of Sample	Item	Identifying Information
FCC Part 15.107	CDMA 800/1900 AMPS USB Data Transfer	2-Jan- 2006	Functional	Phone	FCC ID: QMNRM-124 Type: RM-124 HWID: 3201 SW: VR125_05w21_21.nbr ESN: 033/14216072
FCC Part 15.107	CDMA 800/1900 AMPS USB Data Transfer	N/A	N/A	Battery	Type: BL-6C Other: 3.7vdc
FCC Part 15.107	CDMA 800/1900 AMPS USB Data Transfer	N/A	N/A	Charger	Type: AC-3U
FCC Part 15.107	CDMA 800 USB Data Transfer	N/A	N/A	Headset	Type: HS-9
FCC Part 15.107	CDMA 800/1900 AMPS USB Data Transfer	N/A	N/A	Laptop	Manufacturer: IBM Model: T40 Type: 2373 SN: 99ZVGF9
FCC Part 15.107	CDMA 800/1900 AMPS USB Data Transfer	N/A	N/A	Data cable	Type: DKU-2 SN: JL44083821
FCC Part 15.107	CDMA 800/1900 AMPS USB Data Transfer	N/A	N/A	AC Adapter	Manufacturer: IBM PN: 02K6543



5. TEST EQUIPMENT LIST

The listing below indicates the test equipment utilized for the test (s). Calibration interval on all items listed can be obtained from the Engineering Services Group within NMP, Product Creation - Dallas. Where relevant, measuring equipment is subjected to in-service checks between testing. TCC - Dallas shall notify clients promptly, in writing, of identification of defective measuring equipment that casts doubt on the validity of results given in this report.

Section of Report	NMP#	Test Equipment	Mfr. #	Model #	Calibration Due Date	Calibration Interval
6	03008	LISN	EMCO	3816/2	23-Aug-06	12 Mos
6	02664	EMI Receiver	Hewlett Packard	8546 / 85460A	09-Feb-06	12 Mos
6	03461	Base Station	R&S	CM200	05-Sept-06	12 Mos
6	02680	EMI Analyzer	Agilent	E7405A	01-Jun-06	12 Mos
6	N/A	10dB Attenuator	Weinschel	Model 2	N/A	N/a

6. AC CONDUCTED EMISSIONS

Specification: FCC Part 15.107

6.1 Setup

Testing was performed in accordance with ANSI C63.4, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz.


6.2 Pass/Fail Criteria

Frequency Range	AC Conducted Emission Limits (CISPR 22)	
	Quasi-peak (dBμV)	Average (dBμV)
0.15MHz - 0.5MHz	66 - 56	56 - 46
0.5MHz - 5MHz -	56	46
5MHz - 30MHz	60	50

6.3 Detailed Test Results

Test Technician / Engineer	Viet Do
Date of Measurement	2 Feb. 06
Temperature	22 °C
Humidity	55 %RH
Test Result	Complies with FCC Part 15.107

6.3.1 Ambient Scan

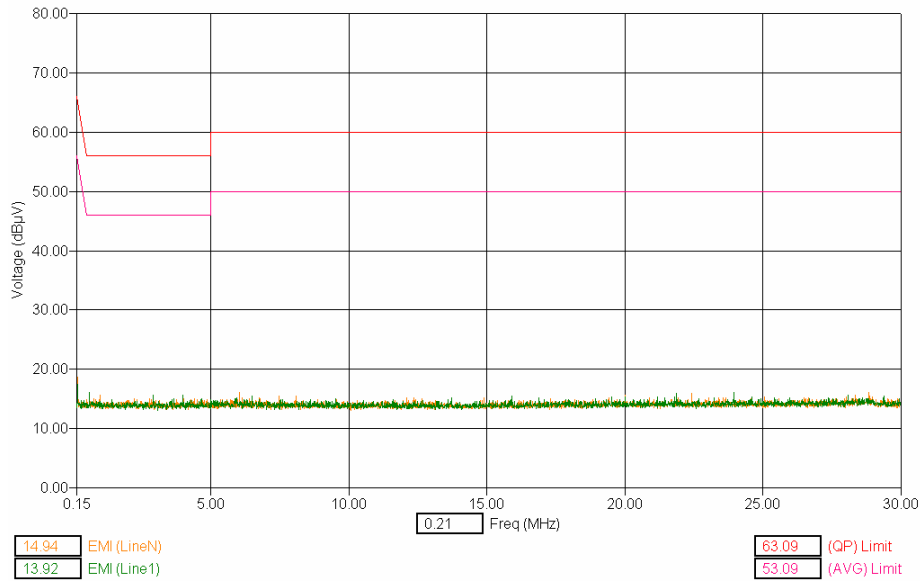

Test & Certification Center (TCC) - Dallas
DTX16051-EN-1.0


FCC ID: QMNRM-124
Test Report: WR1042.002
8-Feb-06

Accredited Laboratory
Certificate Number: 1819-01

Ver 1.0

6.3.2 FCC Part 15.107

CDMA 1900, Channel 600, RM-124 with AC-3U, BL-6C, HS-9 and DKU-2 Cable

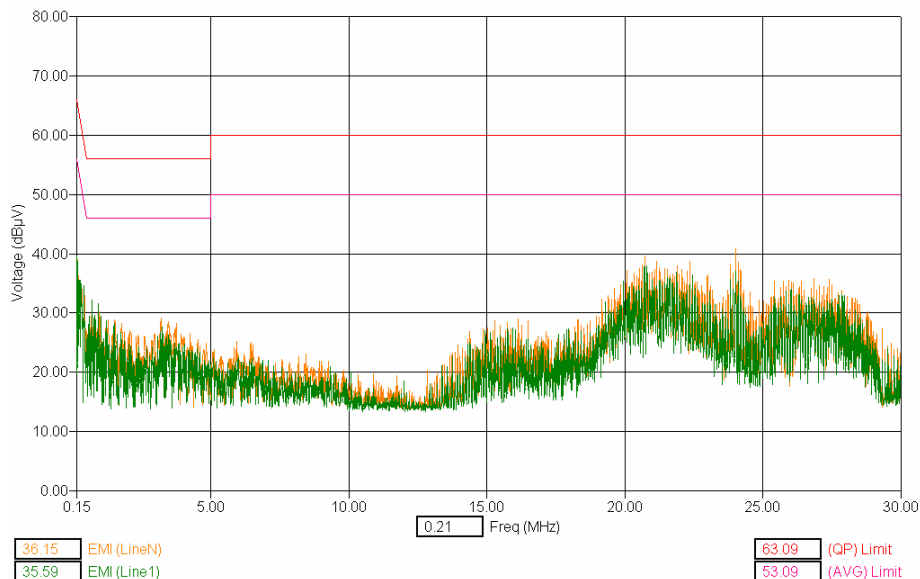

Freq [Max] [MHz]	[AVG] Trace [dBμV]	[QP] Trace [dBμV]	Transducer [dB]	Cable [dB]	Line	[AVG] EMI [dBμV]	[QP] EMI [dBμV]	[AVG] Limit [dBμV]	[QP] Limit [dBμV]
20.70	22.3	33.5	0.5	0.0	N	22.8	34.0	50.0	60.0
20.79	20.1	31.4	0.5	0.0	L1	20.6	31.9	50.0	60.0
21.88	16.6	27.7	0.5	0.0	L1	17.1	28.2	50.0	60.0
22.34	22.5	32.3	0.5	0.0	N	23.1	32.9	50.0	60.0
24.00	28.4	37.9	0.6	0.0	N	29.0	38.5	50.0	60.0
26.02	20.3	29.5	0.6	0.0	L1	21.0	30.2	50.0	60.0


Test & Certification Center (TCC) - Dallas
DTX16051-EN-1.0

FCC ID: QMNRM-124
Test Report: WR1042.002
8-Feb-06

Accredited Laboratory
Certificate Number: 1819-01


Ver 1.0

CDMA 800, Channel 384, RM-124 with AC-3U, BL-6C, HS-9 and DKU-2 Cable

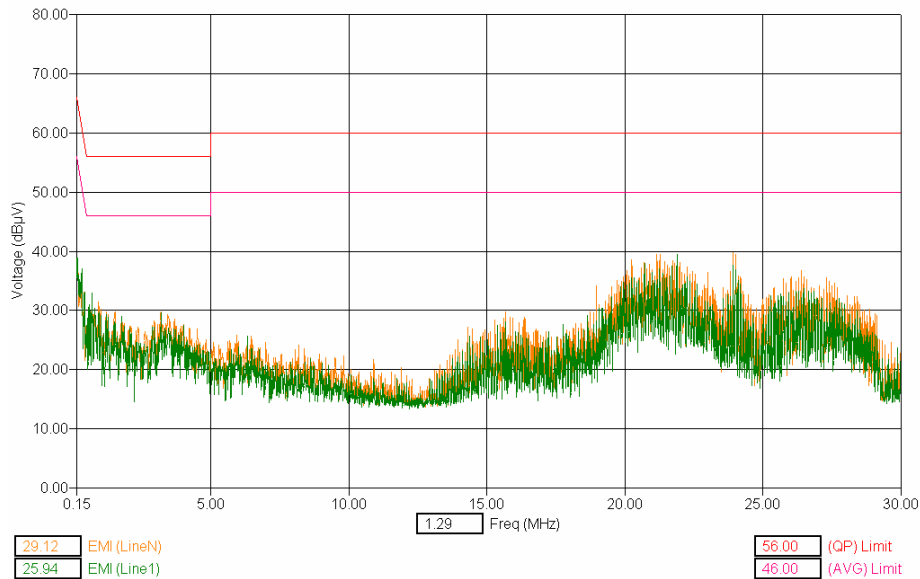

Freq [Max] [MHz]	[AVG] Trace [dBµV]	[QP] Trace [dBµV]	Transducer [dB]	Cable [dB]	Line	[AVG] EMI [dBµV]	[QP] EMI [dBµV]	[QP] Limit [dBµV]	[AVG] Limit [dBµV]
20.70	20.7	31.6	0.5	0.0	L1	21.2	32.1	60.0	50.0
21.15	20.4	31.5	0.5	0.0	N	21.0	32.0	60.0	50.0
21.71	23.3	32.5	0.5	0.0	L1	23.8	33.1	60.0	50.0
21.89	23.3	32.9	0.5	0.0	L1	23.8	33.5	60.0	50.0
23.91	26.9	37.8	0.6	0.0	N	27.5	38.4	60.0	50.0
26.38	22.3	33.0	0.7	0.0	N	22.9	33.7	60.0	50.0

AMPS, Channel 384, RM-124 with AC-3U, BL-6C, HS-9 and DKU-2 Cable

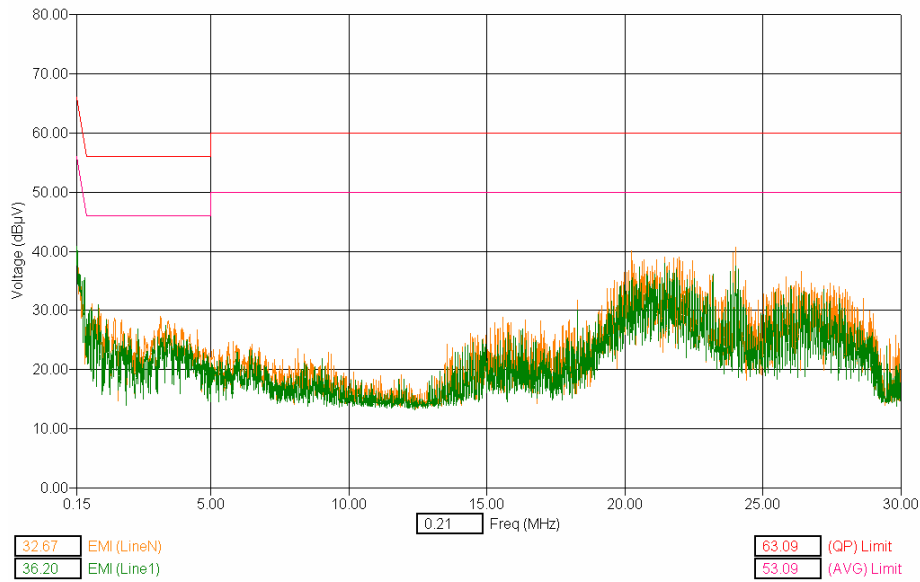

Freq [Max] [MHz]	[AVG] Trace [dBµV]	[QP] Trace [dBµV]	Transducer [dB]	Cable [dB]	Line	[AVG] EMI [dBµV]	[QP] EMI [dBµV]	[AVG] Limit [dBµV]	[QP] Limit [dBµV]
20.242	21.6	33.9	0.5	0.0	N	22.1	34.4	50.0	60.0
20.520	20.5	31.6	0.5	0.0	L1	21.0	32.1	50.0	60.0
21.441	20.6	32.3	0.5	0.0	N	21.1	32.8	50.0	60.0
21.448	17.9	26.9	0.5	0.0	L1	18.5	27.4	50.0	60.0
21.893	23.6	33.5	0.5	0.0	L1	24.2	34.0	50.0	60.0
24.001	28.7	37.5	0.6	0.0	N	29.3	38.1	50.0	60.0