


Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 8:Transmit at 5320MHz by 802.11ax(20MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

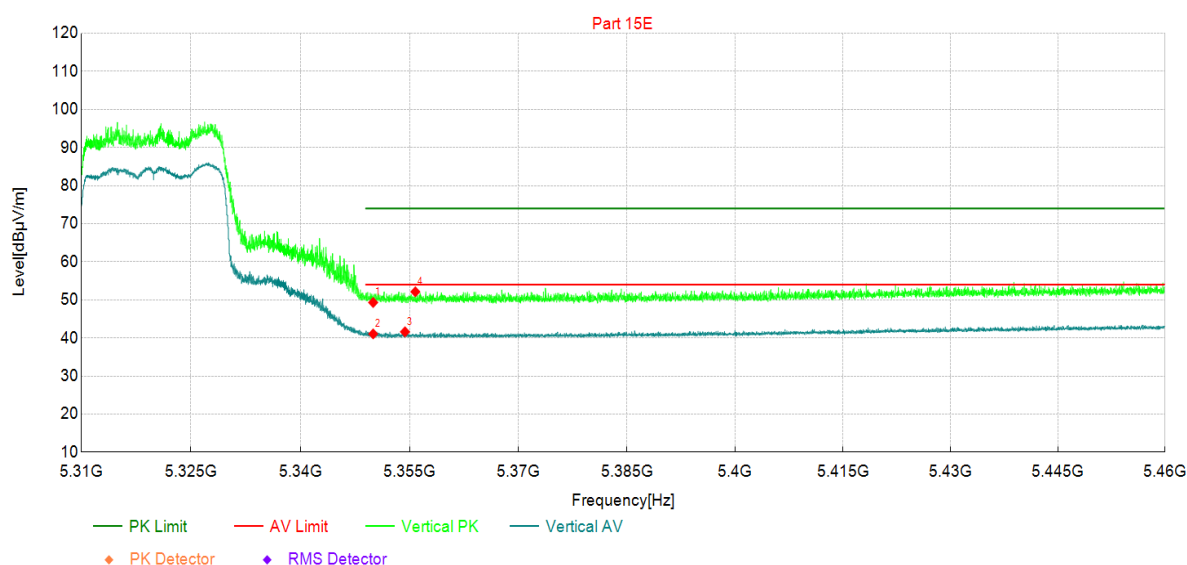


Suspected Data List

NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	33.61	49.32	15.71	74.00	24.68	PK	Vertic	PASS
2	5350	25.35	41.06	15.71	54.00	12.94	AV	Vertic	PASS
3	5354	25.90	41.60	15.70	54.00	12.40	AV	Vertic	PASS
4	5356	36.42	52.12	15.70	74.00	21.88	PK	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

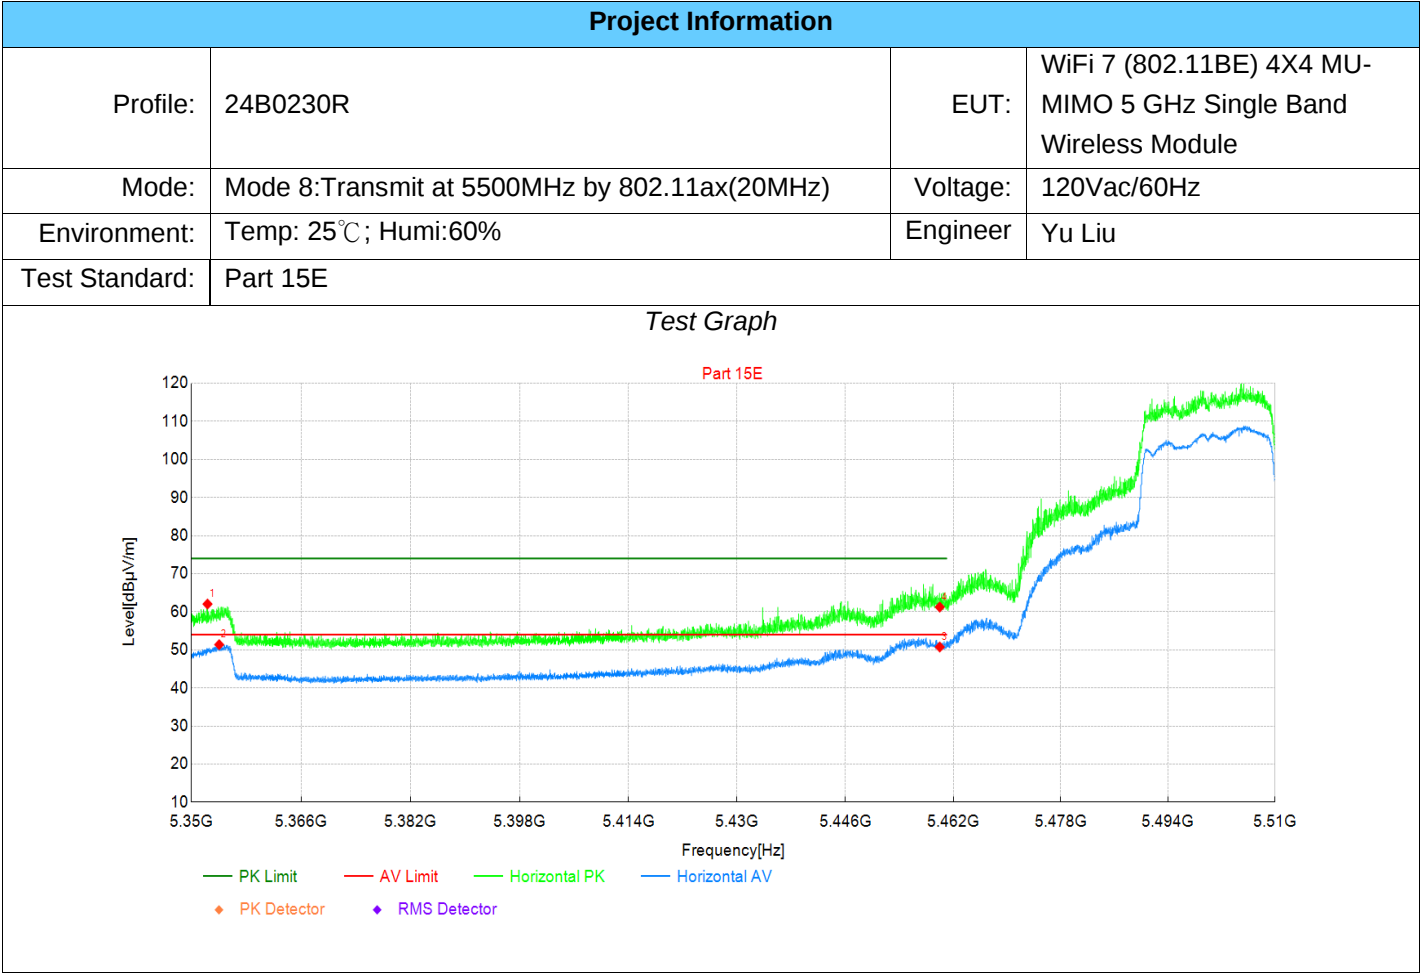

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5352	46.32	62.03	15.71	74.00	11.97	PK	Horizo	PASS
2	5354	35.67	51.37	15.70	54.00	2.63	AV	Horizo	PASS
3	5460	34.41	50.75	16.34	54.00	2.75	AV	Horizo	PASS
4	5460	44.90	61.24	16.34	74.00	12.76	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

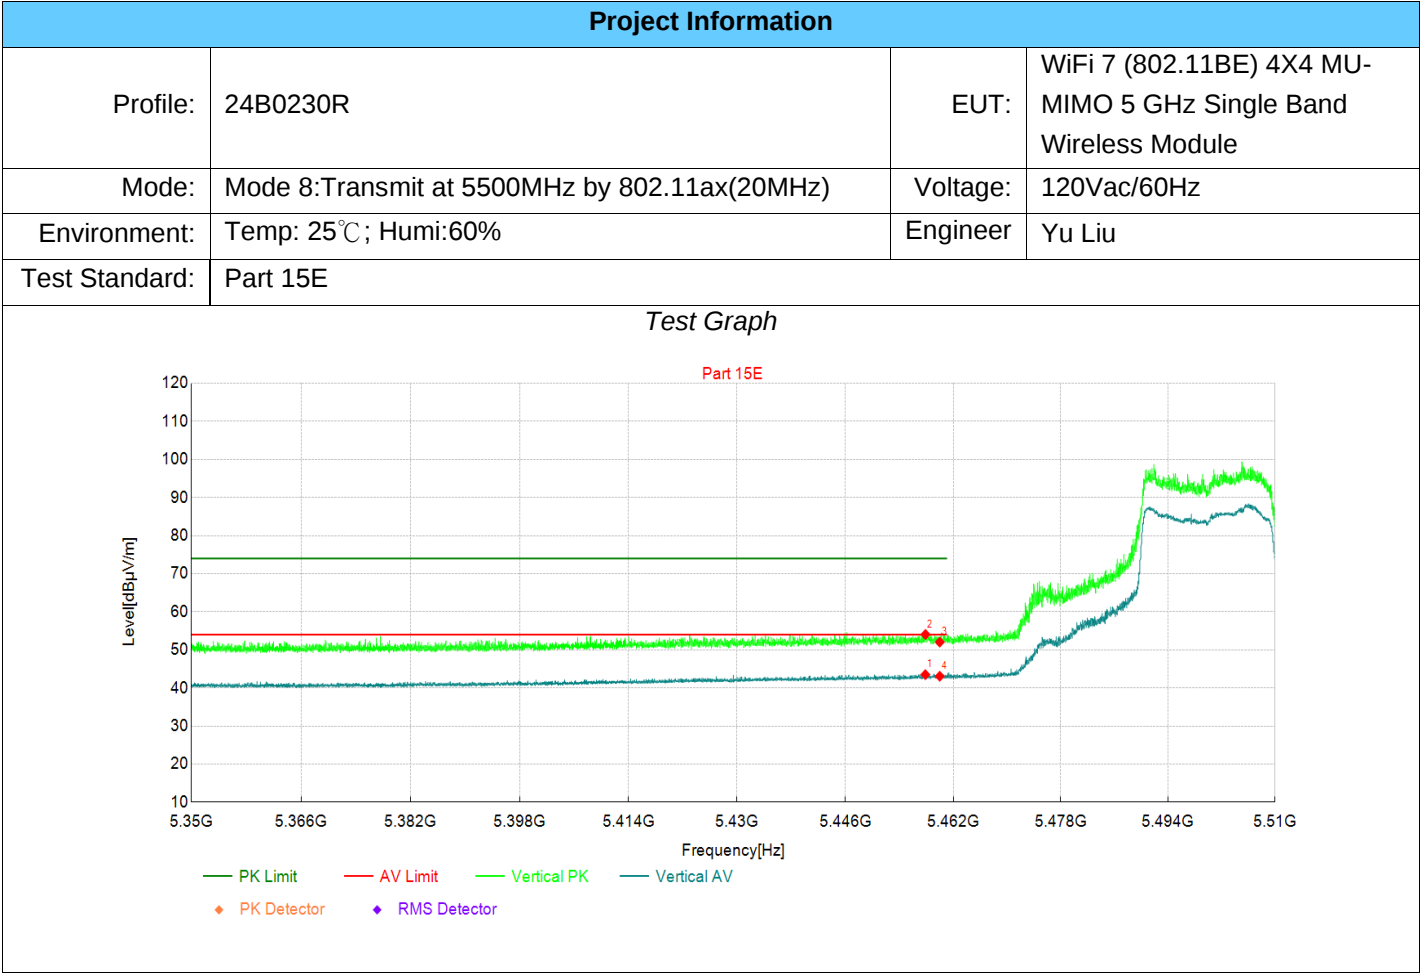

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5458	27.19	43.50	16.31	54.00	10.50	AV	Vertic	PASS
2	5458	37.73	54.04	16.31	74.00	19.96	PK	Vertic	PASS
3	5460	35.70	52.04	16.34	74.00	21.96	PK	Vertic	PASS
4	5460	26.74	43.08	16.34	54.00	10.92	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5190MHz by 802.11ax(40MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

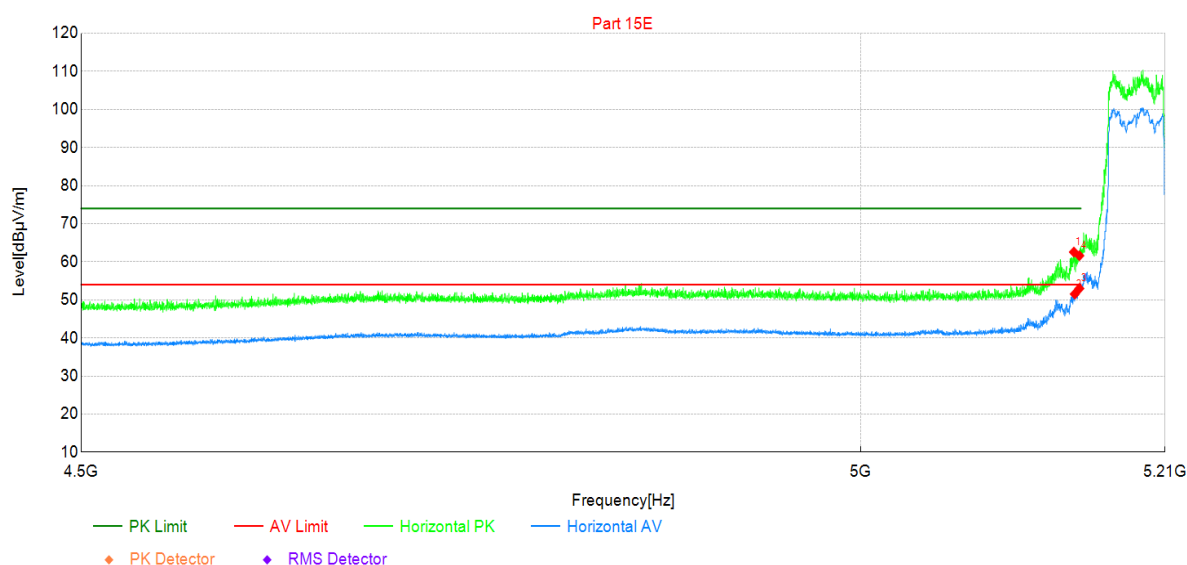

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5146	47.47	62.56	15.09	74.00	11.44	PK	Horizo	PASS
2	5147	36.44	51.53	15.09	54.00	2.47	AV	Horizo	PASS
3	5150	37.87	52.98	15.11	54.00	1.02	AV	Horizo	PASS
4	5150	46.50	61.61	15.11	74.00	12.39	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5190MHz by 802.11ax(40MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

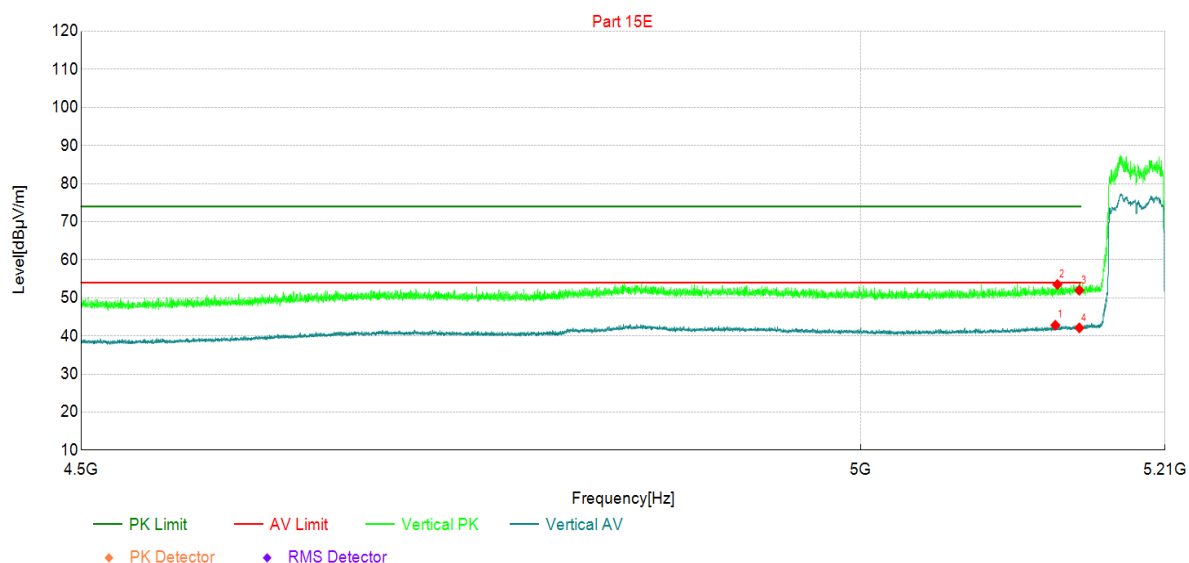


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5133	27.80	42.81	15.01	54.00	11.19	AV	Vertic	PASS
2	5135	38.48	53.50	15.02	74.00	20.50	PK	Vertic	PASS
3	5150	36.89	52.00	15.11	74.00	22.00	PK	Vertic	PASS
4	5150	27.00	42.11	15.11	54.00	11.89	AV	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

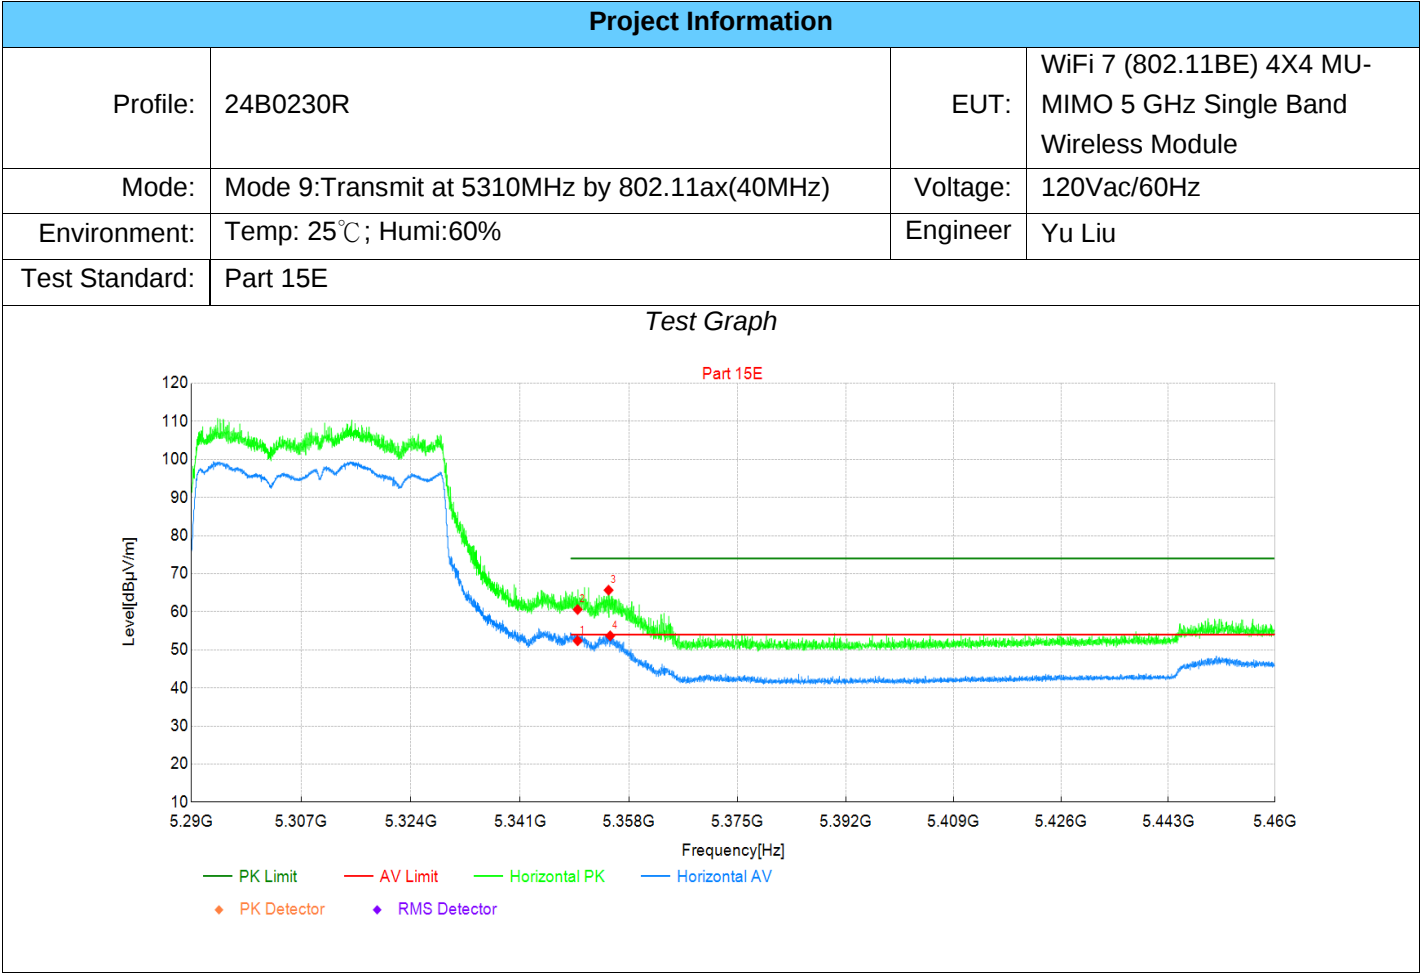

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	36.69	52.40	15.71	54.00	1.60	AV	Horizo	PASS
2	5350	44.89	60.60	15.71	74.00	13.40	PK	Horizo	PASS
3	5355	49.98	65.68	15.70	74.00	8.32	PK	Horizo	PASS
4	5355	37.99	53.69	15.70	54.00	0.31	AV	Horizo	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5310MHz by 802.11ax(40MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

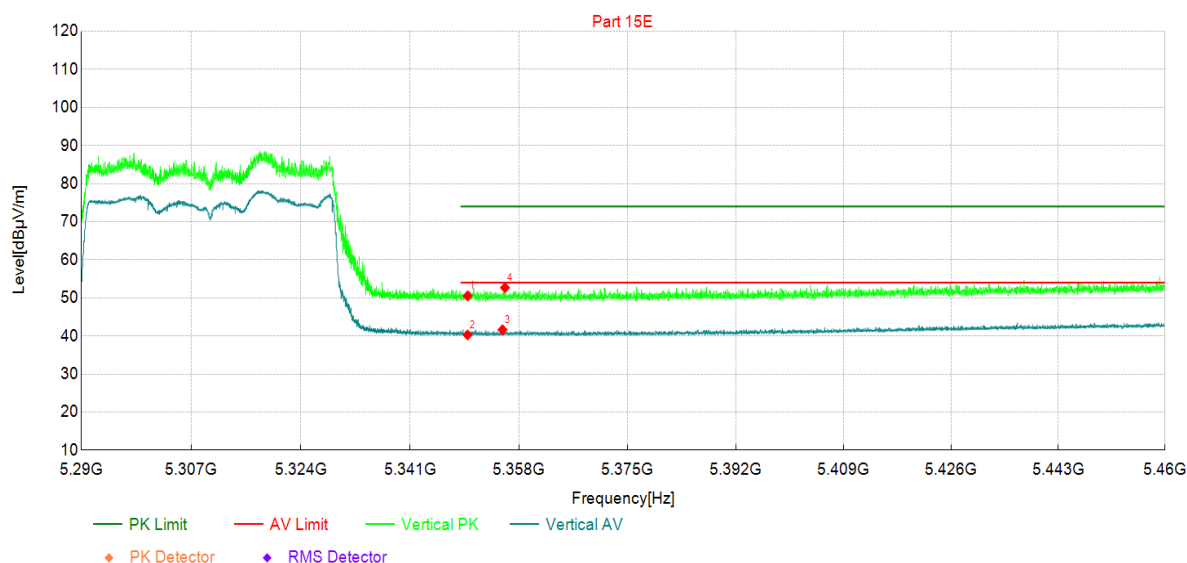

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	34.81	50.52	15.71	74.00	23.48	PK	Vertic	PASS
2	5350	24.54	40.25	15.71	54.00	13.75	AV	Vertic	PASS
3	5355	25.93	41.63	15.70	54.00	12.37	AV	Vertic	PASS
4	5356	36.96	52.66	15.70	74.00	21.34	PK	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 9:Transmit at 5510MHz by 802.11ax(40MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

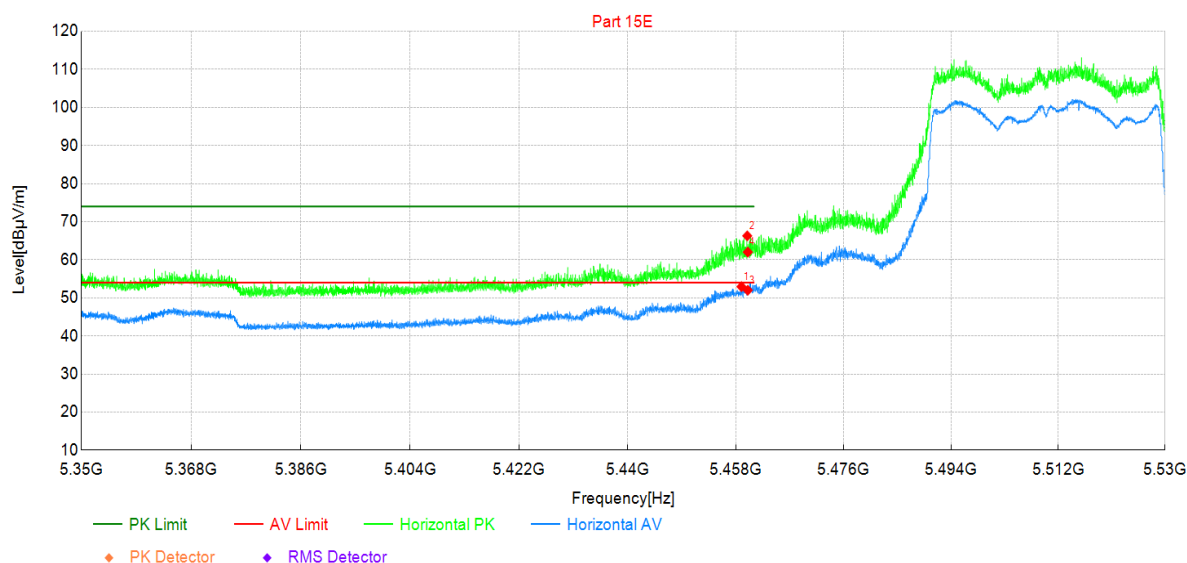


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	36.62	52.95	16.33	54.00	1.05	AV	Horizo	PASS
2	5460	49.94	66.28	16.34	74.00	7.72	PK	Horizo	PASS
3	5460	35.66	52.00	16.34	54.00	2.00	AV	Horizo	PASS
4	5460	45.68	62.02	16.34	74.00	11.98	PK	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

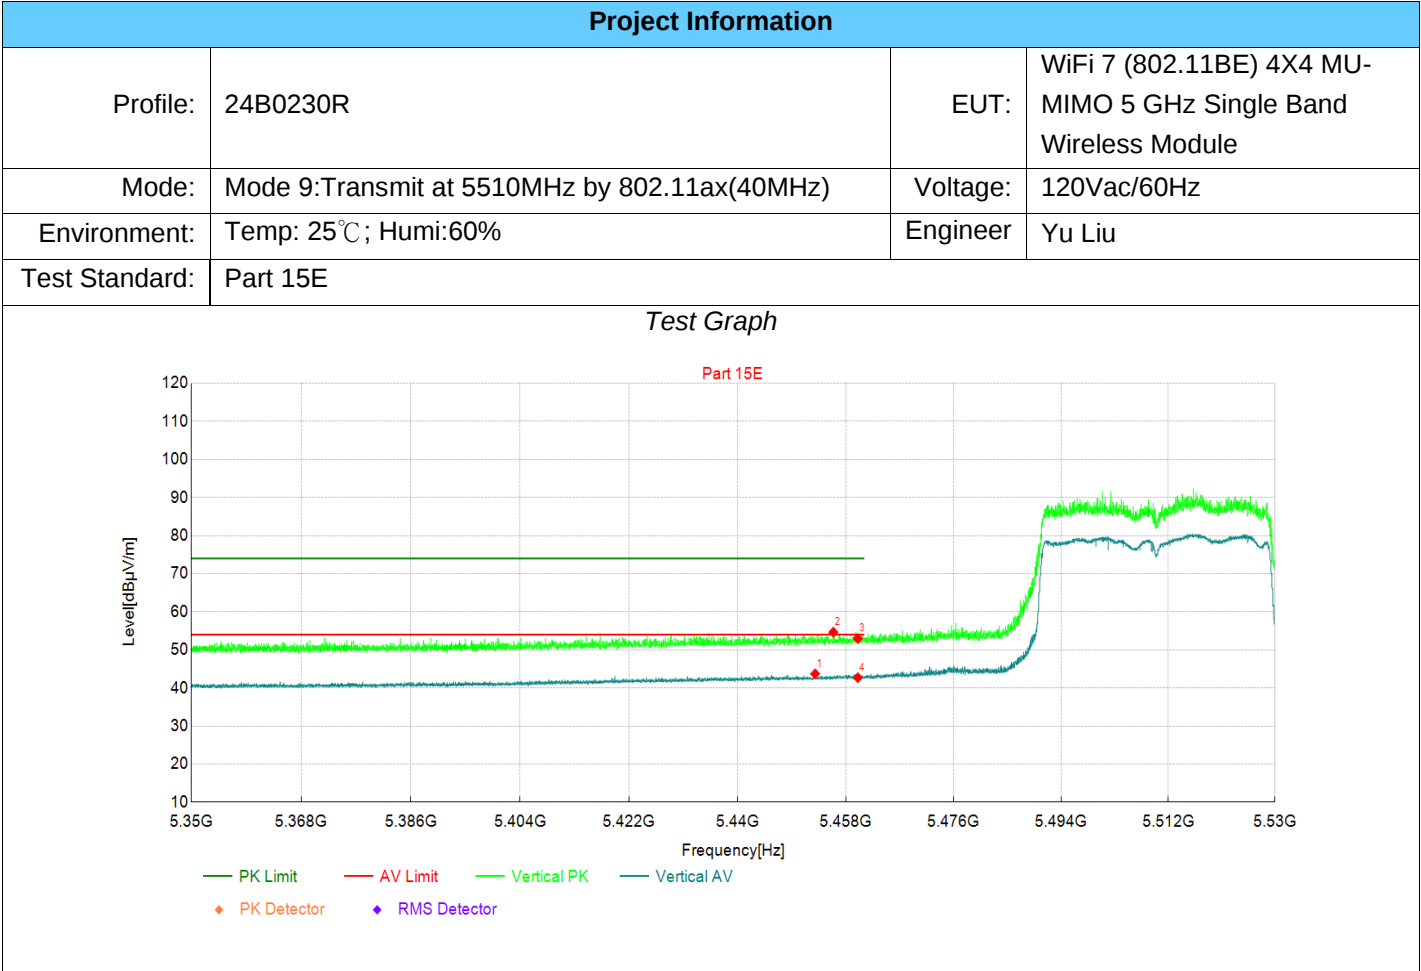

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5453	27.43	43.69	16.26	54.00	10.31	AV	Vertic	PASS
2	5456	38.36	54.65	16.29	74.00	19.35	PK	Vertic	PASS
3	5460	36.62	52.96	16.34	74.00	21.04	PK	Vertic	PASS
4	5460	26.35	42.69	16.34	54.00	11.31	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

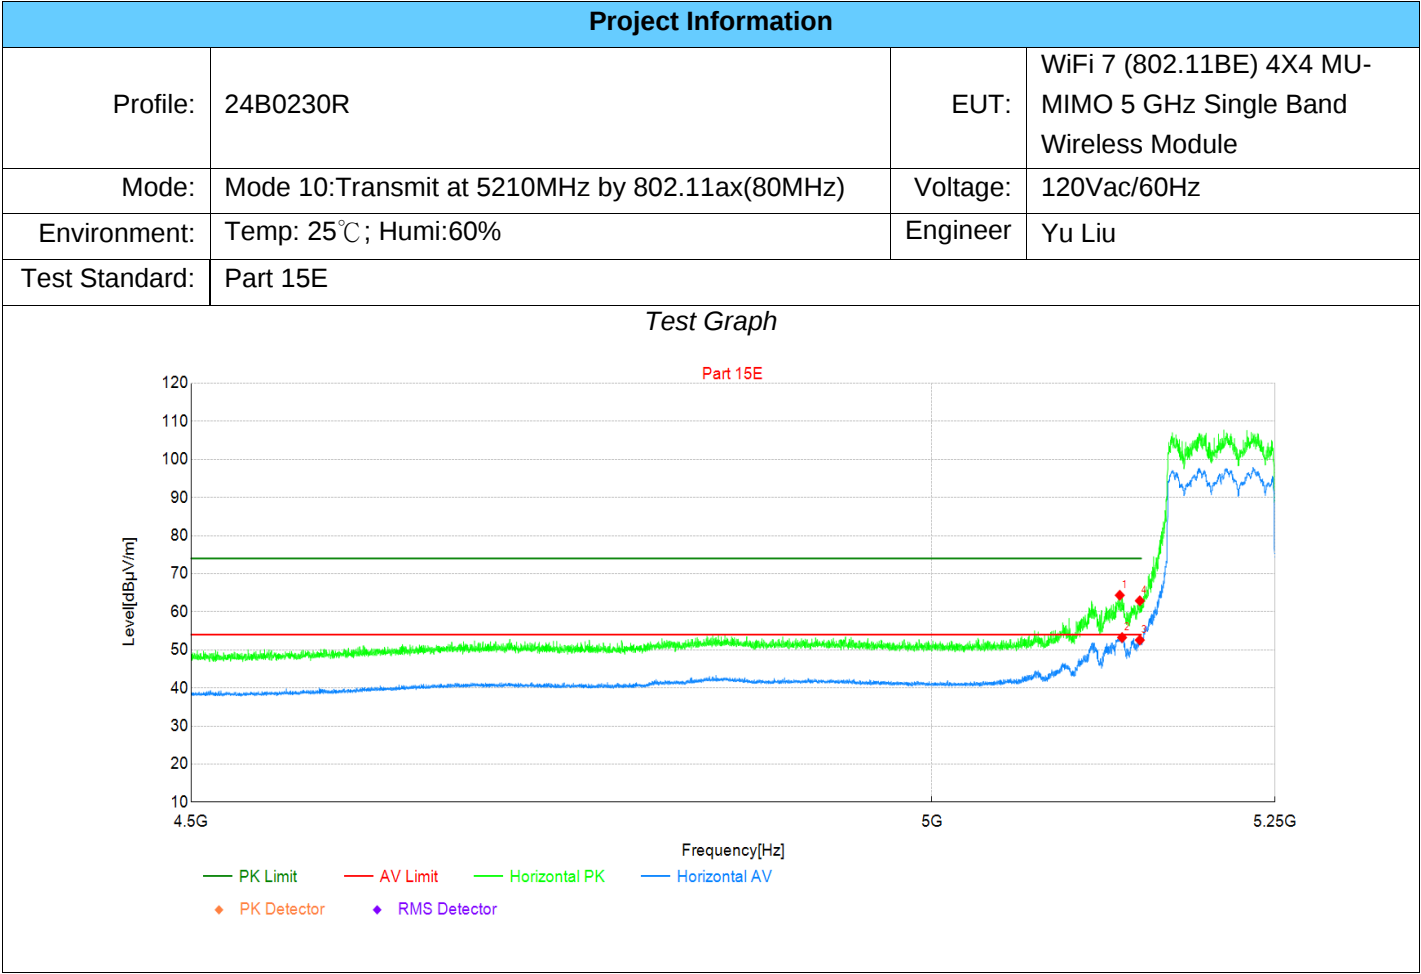

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5135	49.32	64.34	15.02	74.00	9.66	PK	Horizo	PASS
2	5137	38.20	53.23	15.03	54.00	0.77	AV	Horizo	PASS
3	5150	37.46	52.57	15.11	54.00	1.43	AV	Horizo	PASS
4	5150	47.78	62.89	15.11	74.00	11.11	PK	Horizo	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5210MHz by 802.11ax(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

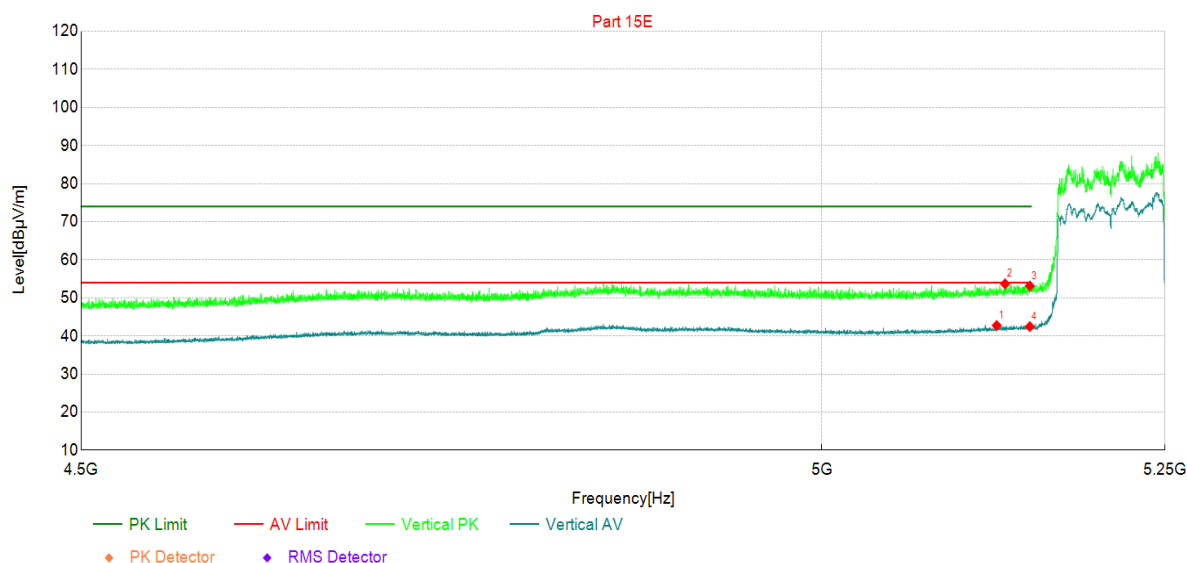

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5126	27.78	42.75	14.97	54.00	11.25	AV	Vertic	PASS
2	5132	38.69	53.69	15.00	74.00	20.31	PK	Vertic	PASS
3	5150	38.02	53.13	15.11	74.00	20.87	PK	Vertic	PASS
4	5150	27.35	42.46	15.11	54.00	11.54	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5290MHz by 802.11ax(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

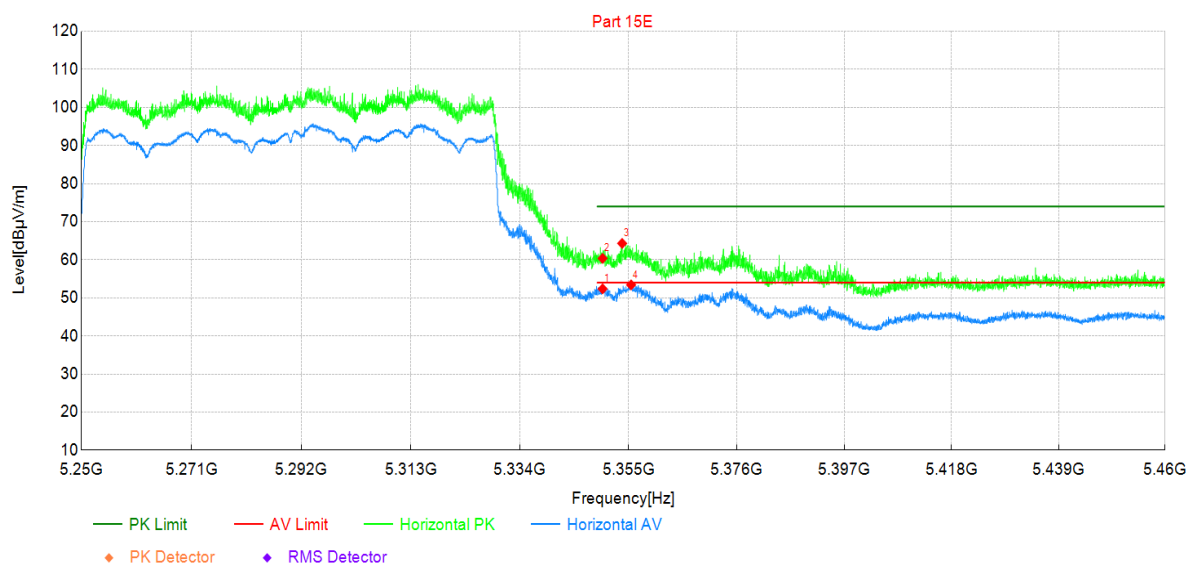

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	36.65	52.36	15.71	54.00	1.64	AV	Horizo	PASS
2	5350	44.66	60.37	15.71	74.00	13.63	PK	Horizo	PASS
3	5354	48.60	64.30	15.70	74.00	9.70	PK	Horizo	PASS
4	5356	37.70	53.40	15.70	54.00	0.60	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5290MHz by 802.11ax(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

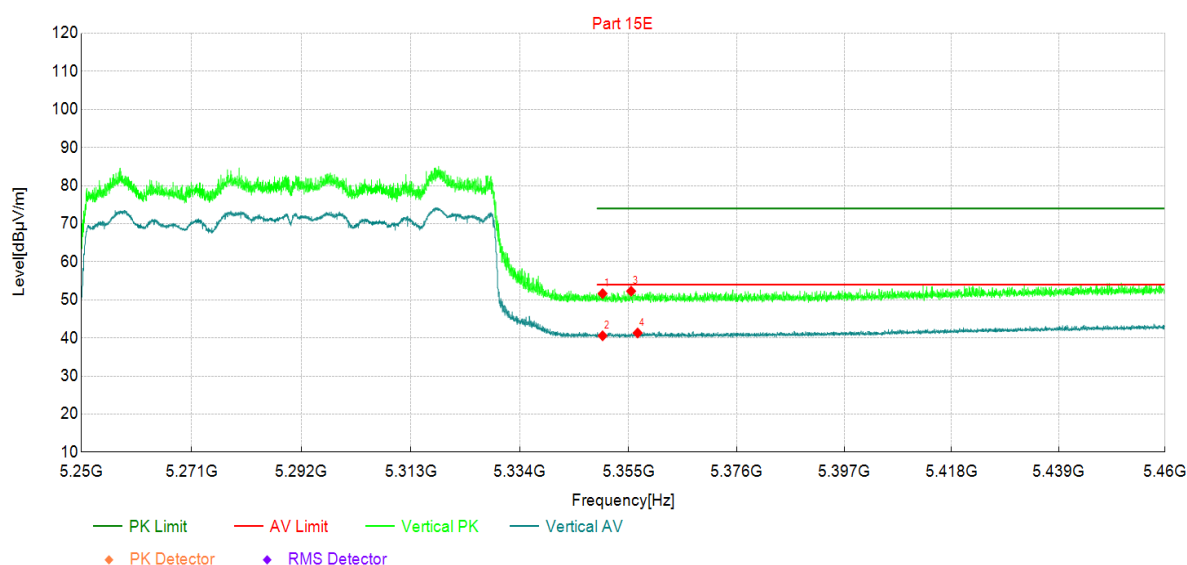


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	35.93	51.64	15.71	74.00	22.36	PK	Vertic	PASS
2	5350	24.85	40.56	15.71	54.00	13.44	AV	Vertic	PASS
3	5356	36.58	52.28	15.70	74.00	21.72	PK	Vertic	PASS
4	5357	25.60	41.30	15.70	54.00	12.70	AV	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

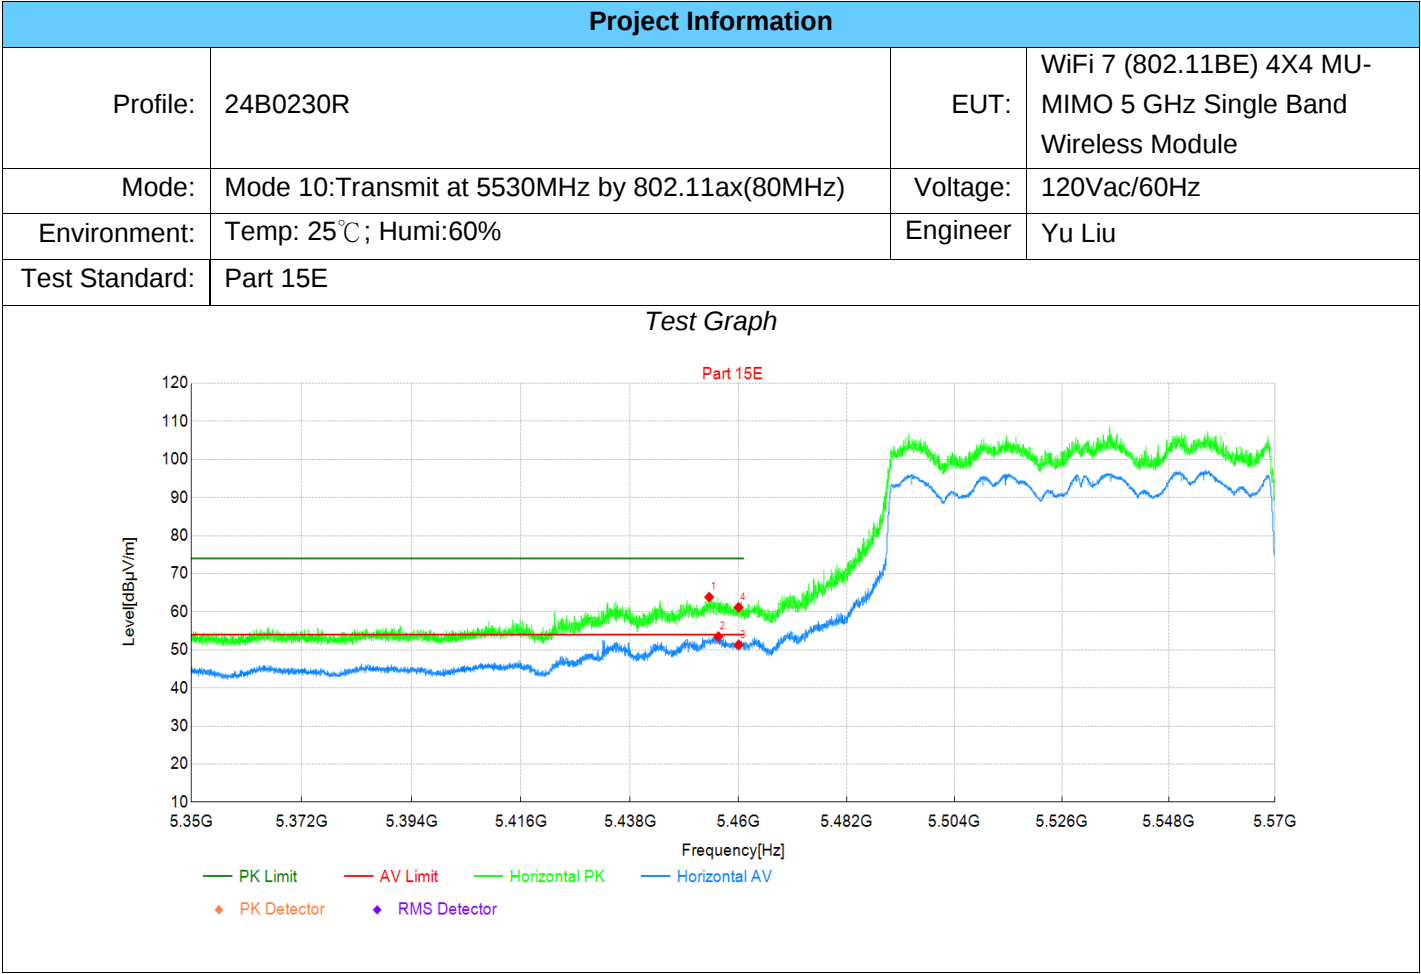

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5454	47.59	63.86	16.27	74.00	10.14	PK	Horizo	PASS
2	5456	37.17	53.46	16.29	54.00	0.54	AV	Horizo	PASS
3	5460	34.97	51.31	16.34	54.00	2.69	AV	Horizo	PASS
4	5460	44.83	61.17	16.34	74.00	12.83	PK	Horizo	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 10:Transmit at 5530MHz by 802.11ax(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

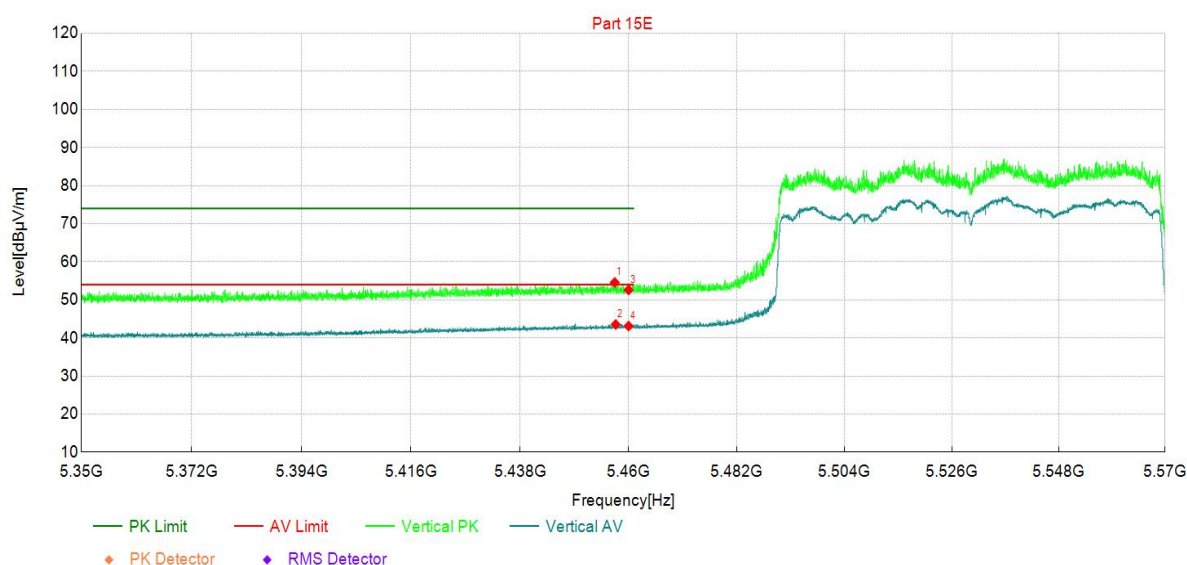


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5457	38.27	54.58	16.31	74.00	19.42	PK	Vertic	PASS
2	5457	27.23	43.54	16.31	54.00	10.46	AV	Vertic	PASS
3	5460	36.24	52.58	16.34	74.00	21.42	PK	Vertic	PASS
4	5460	26.79	43.13	16.34	54.00	10.87	AV	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

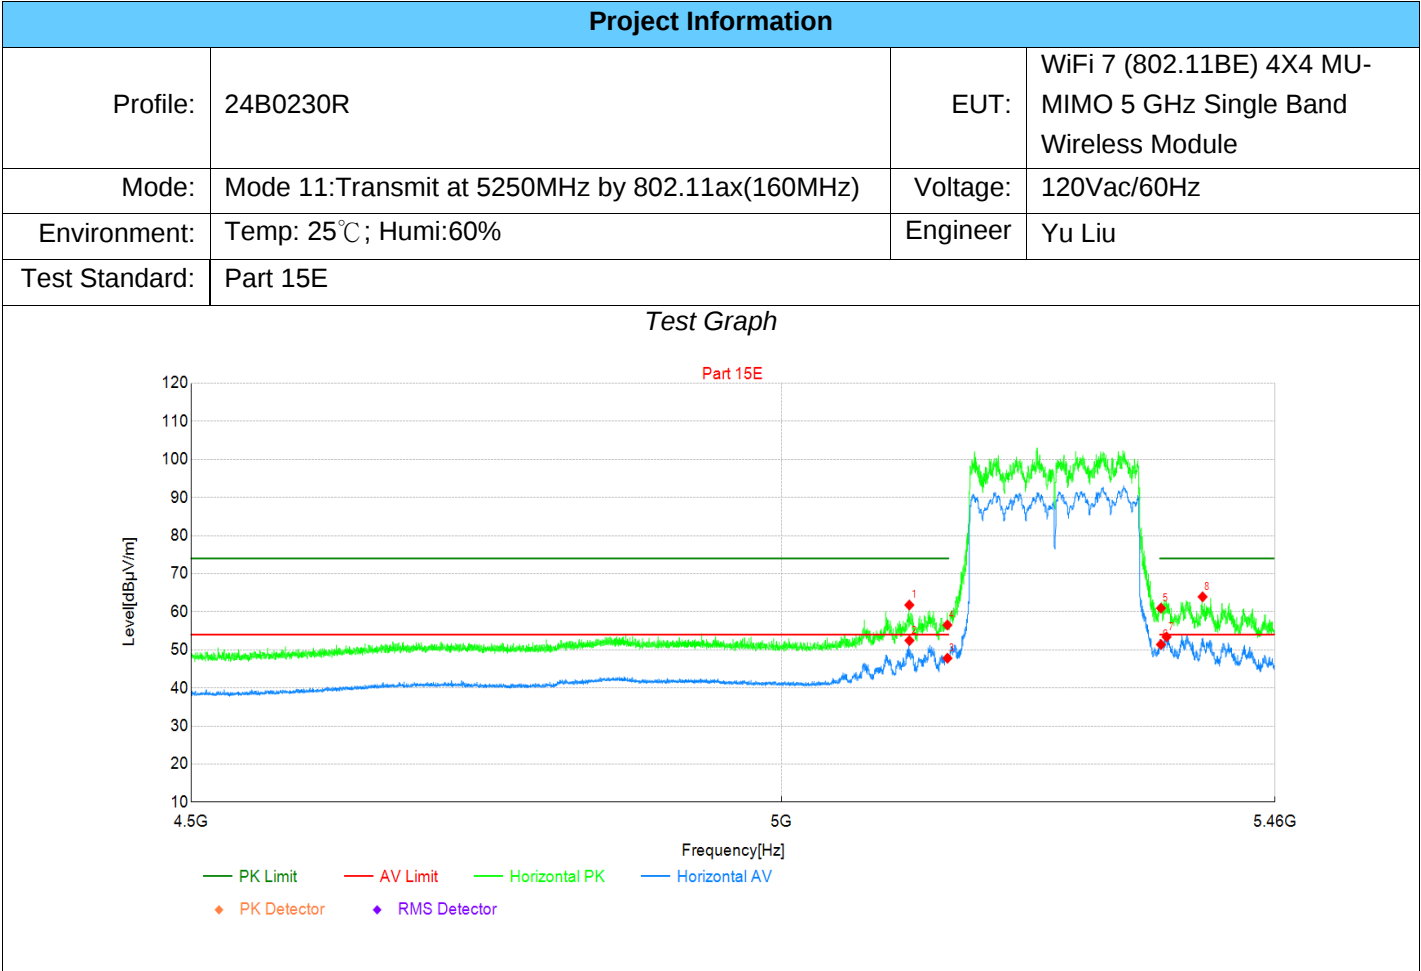

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5115	46.88	61.78	14.90	74.00	12.22	PK	Horizo	PASS
2	5115	37.55	52.45	14.90	54.00	1.55	AV	Horizo	PASS
3	5150	32.69	47.80	15.11	54.00	6.20	AV	Horizo	PASS
4	5150	41.41	56.52	15.11	74.00	17.48	PK	Horizo	PASS
5	5350	45.24	60.95	15.71	74.00	13.05	PK	Horizo	PASS
6	5350	35.69	51.40	15.71	54.00	2.60	AV	Horizo	PASS
7	5355	37.70	53.40	15.70	54.00	0.60	AV	Horizo	PASS
8	5390	48.27	63.93	15.66	74.00	10.07	PK	Horizo	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11:Transmit at 5250MHz by 802.11ax(160MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

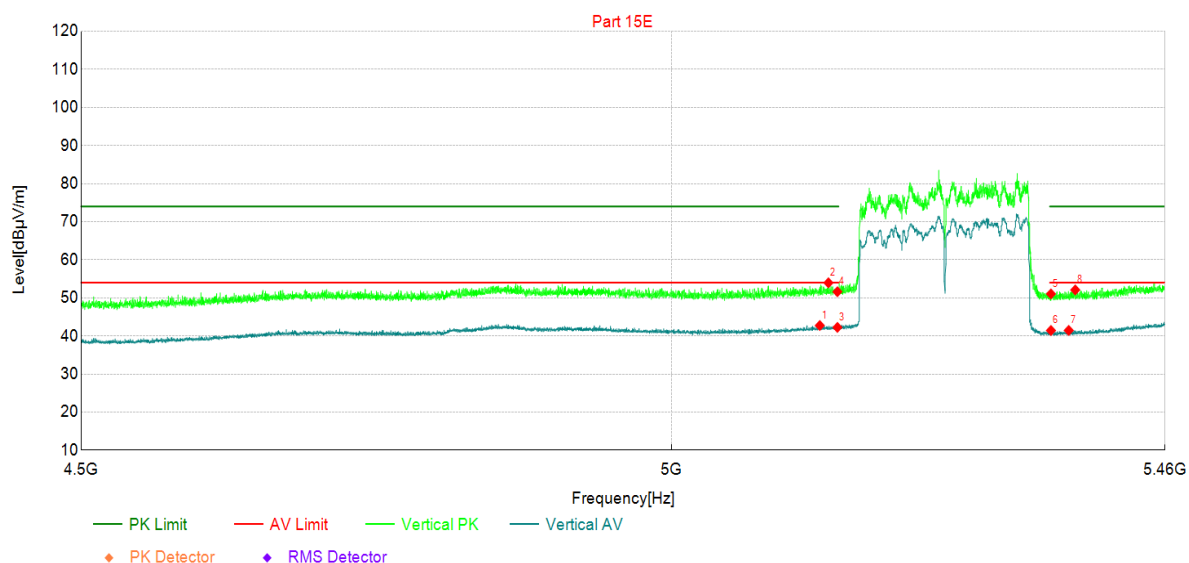

Suspected Data List


NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5134	27.72	42.74	15.02	54.00	11.26	AV	Vertic	PASS
2	5142	38.90	53.96	15.06	74.00	20.04	PK	Vertic	PASS
3	5150	27.14	42.25	15.11	54.00	11.75	AV	Vertic	PASS
4	5150	36.50	51.61	15.11	74.00	22.39	PK	Vertic	PASS
5	5350	35.33	51.04	15.71	74.00	22.96	PK	Vertic	PASS
6	5350	25.73	41.44	15.71	54.00	12.56	AV	Vertic	PASS
7	5367	25.76	41.45	15.69	54.00	12.55	AV	Vertic	PASS
8	5373	36.41	52.09	15.68	74.00	21.91	PK	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

Project Information			
Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 11:Transmit at 5570MHz by 802.11ax(160MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

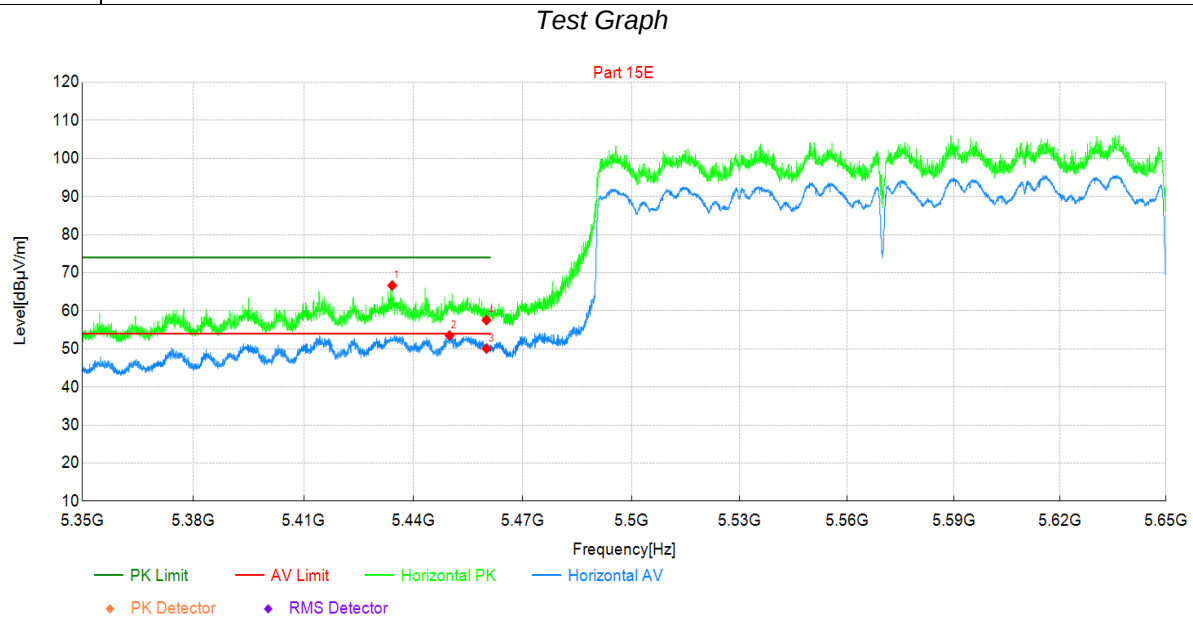


Suspected Data List									
NO	Frequenc y [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdi ct
1	5434	50.59	66.63	16.04	74.00	7.37	PK	Horizo	PASS
2	5450	37.29	53.51	16.22	54.00	0.49	AV	Horizo	PASS
3	5460	33.74	50.08	16.34	54.00	3.92	AV	Horizo	PASS
4	5460	41.22	57.56	16.34	74.00	16.44	PK	Horizo	PASS

Note:(1)Level=Reading+Factor

(2) $\text{Margin} = \text{Limit} - \text{Level}$


Test Report

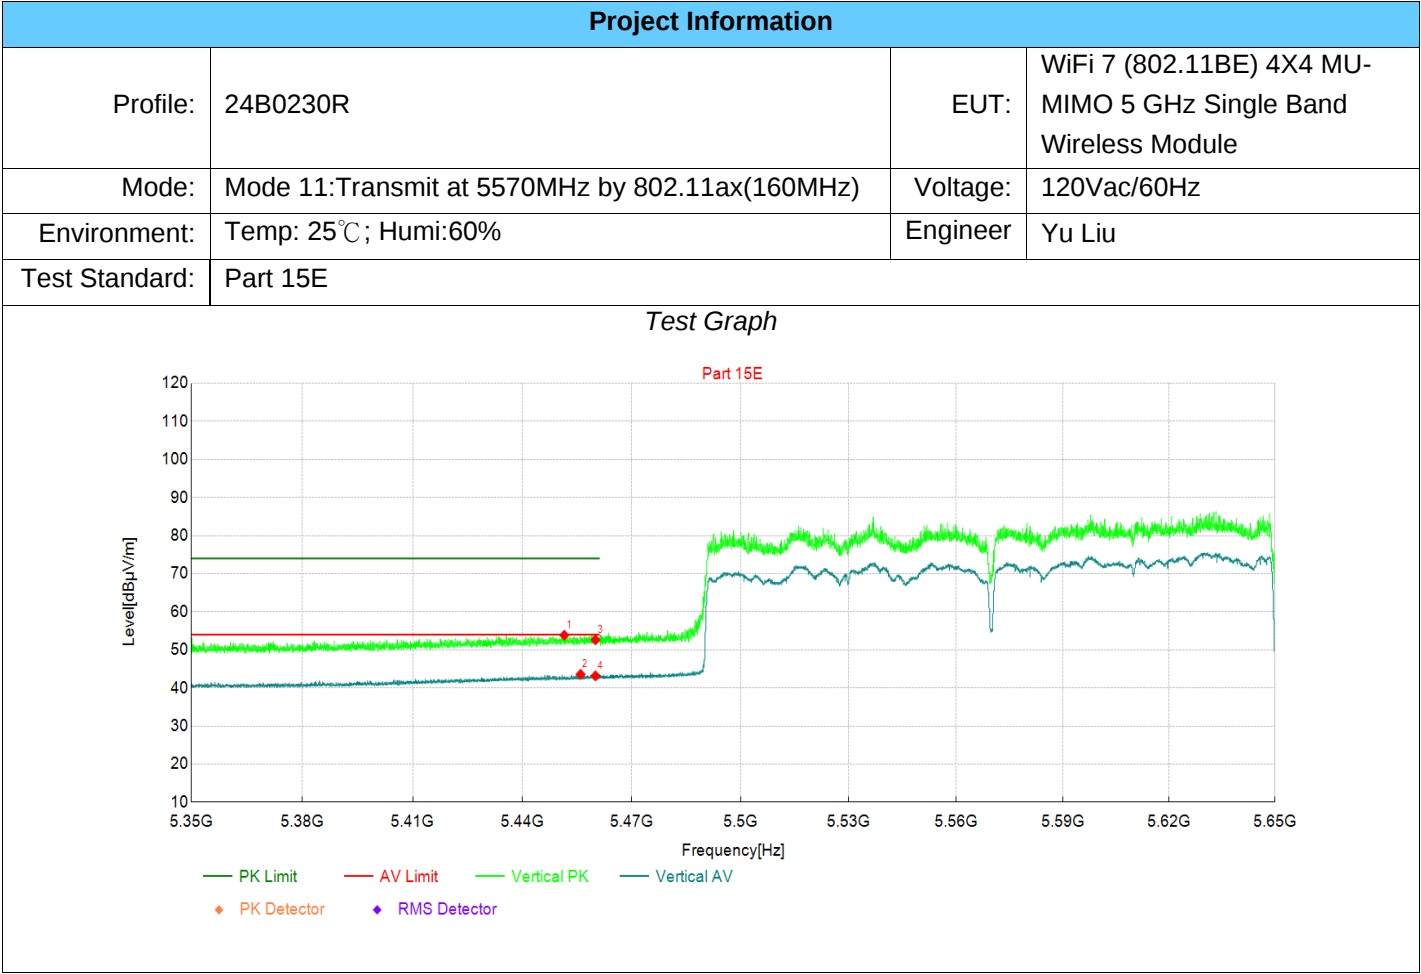

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5451	37.60	53.84	16.24	74.00	20.16	PK	Vertic	PASS
2	5456	27.28	43.57	16.29	54.00	10.43	AV	Vertic	PASS
3	5460	36.30	52.64	16.34	74.00	21.36	PK	Vertic	PASS
4	5460	26.83	43.17	16.34	54.00	10.83	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

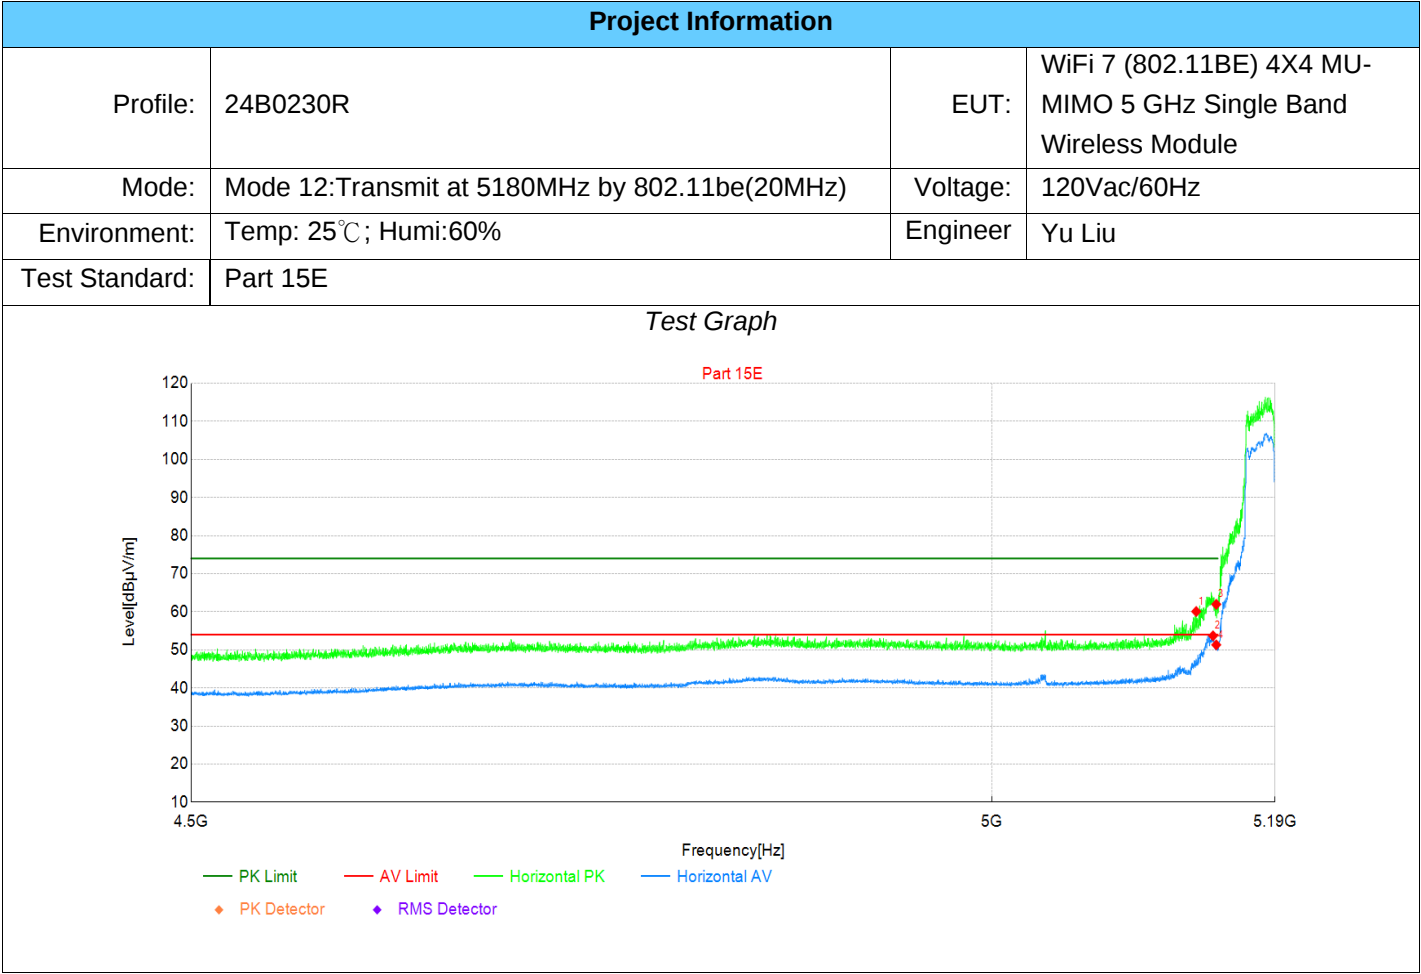

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5136	45.05	60.08	15.03	74.00	13.92	PK	Horizo	PASS
2	5148	38.60	53.70	15.10	54.00	0.30	AV	Horizo	PASS
3	5150	46.85	61.96	15.11	74.00	12.04	PK	Horizo	PASS
4	5150	36.20	51.31	15.11	54.00	2.19	AV	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

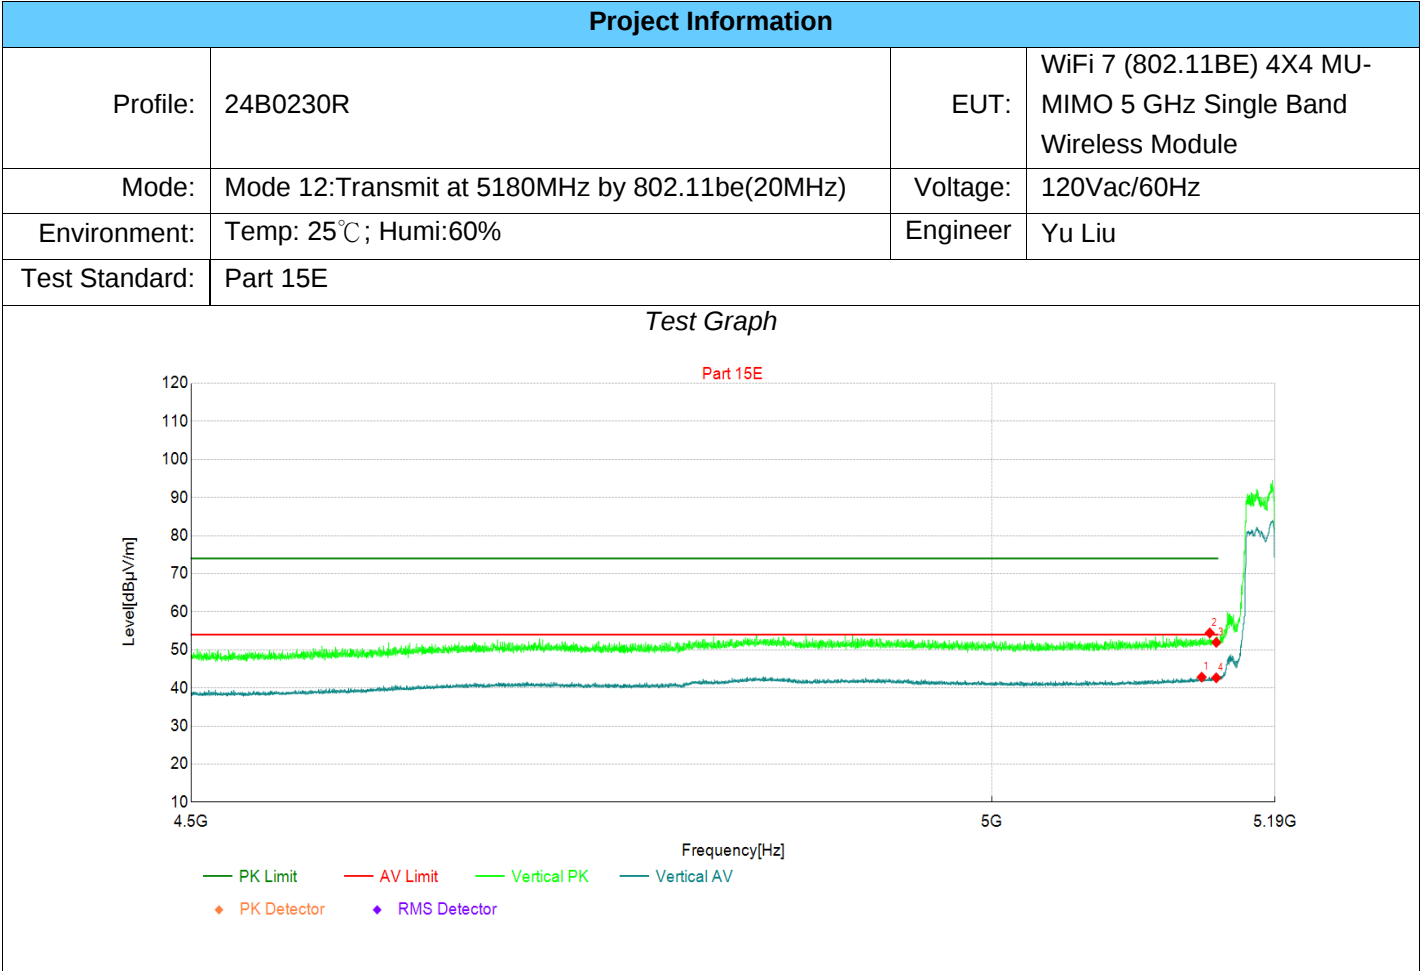

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5140	27.79	42.84	15.05	54.00	11.16	AV	Vertic	PASS
2	5146	39.37	54.45	15.08	74.00	19.55	PK	Vertic	PASS
3	5150	36.84	51.95	15.11	74.00	22.05	PK	Vertic	PASS
4	5150	27.55	42.66	15.11	54.00	11.34	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

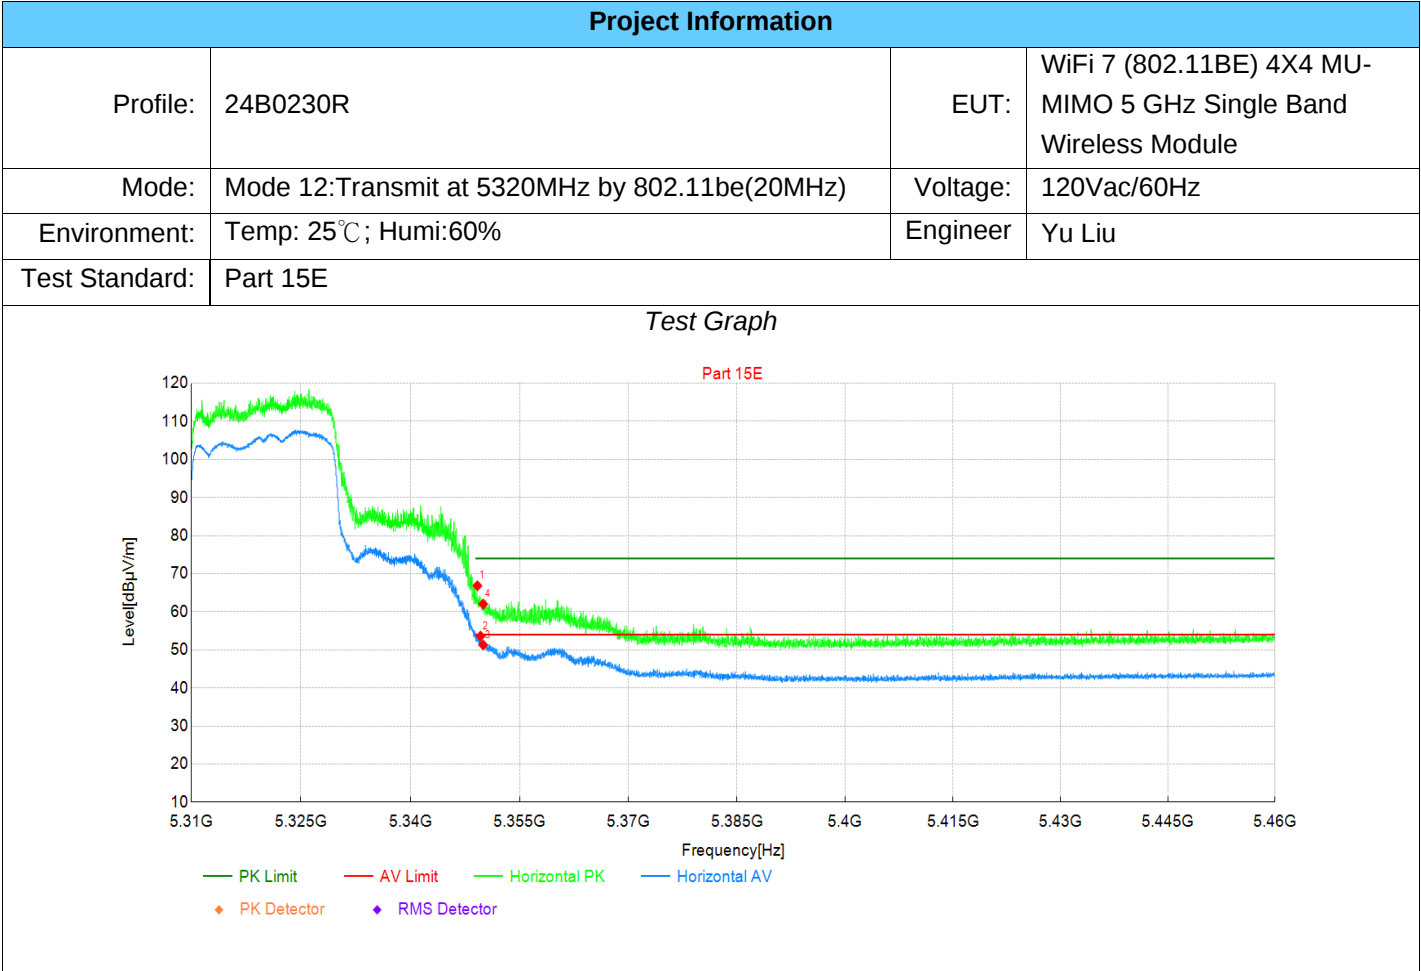

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5349	51.13	66.84	15.71	74.00	7.16	PK	Horizo	PASS
2	5350	37.91	53.62	15.71	54.00	0.38	AV	Horizo	PASS
3	5350	35.58	51.29	15.71	54.00	2.71	AV	Horizo	PASS
4	5350	46.31	62.02	15.71	74.00	11.98	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

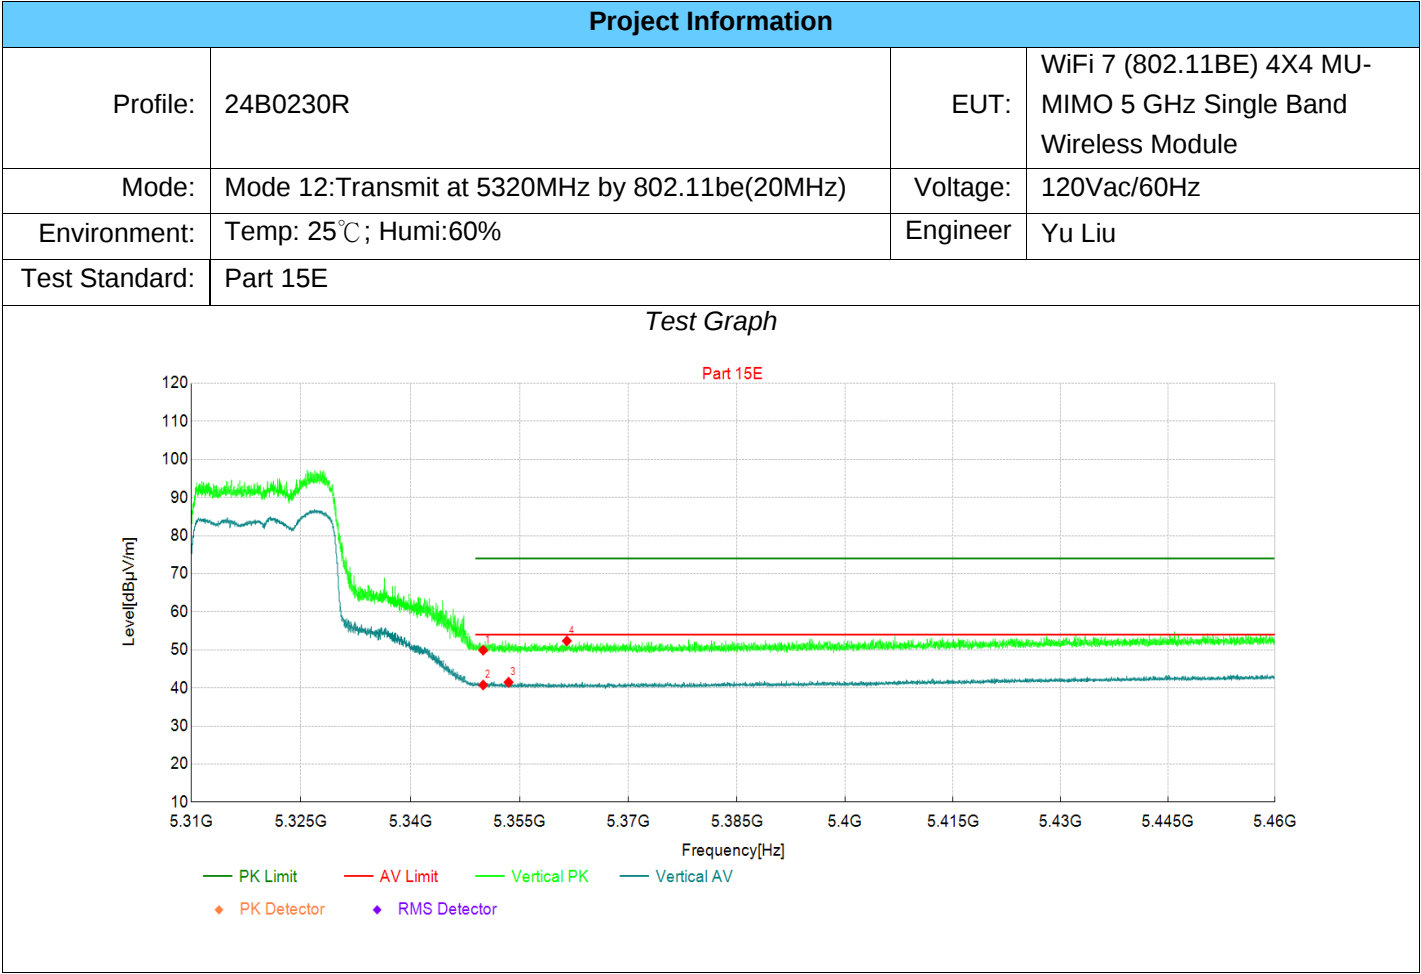

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	34.21	49.92	15.71	74.00	24.08	PK	Vertic	PASS
2	5350	25.06	40.77	15.71	54.00	13.23	AV	Vertic	PASS
3	5354	25.78	41.49	15.71	54.00	12.51	AV	Vertic	PASS
4	5362	36.65	52.34	15.69	74.00	21.66	PK	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

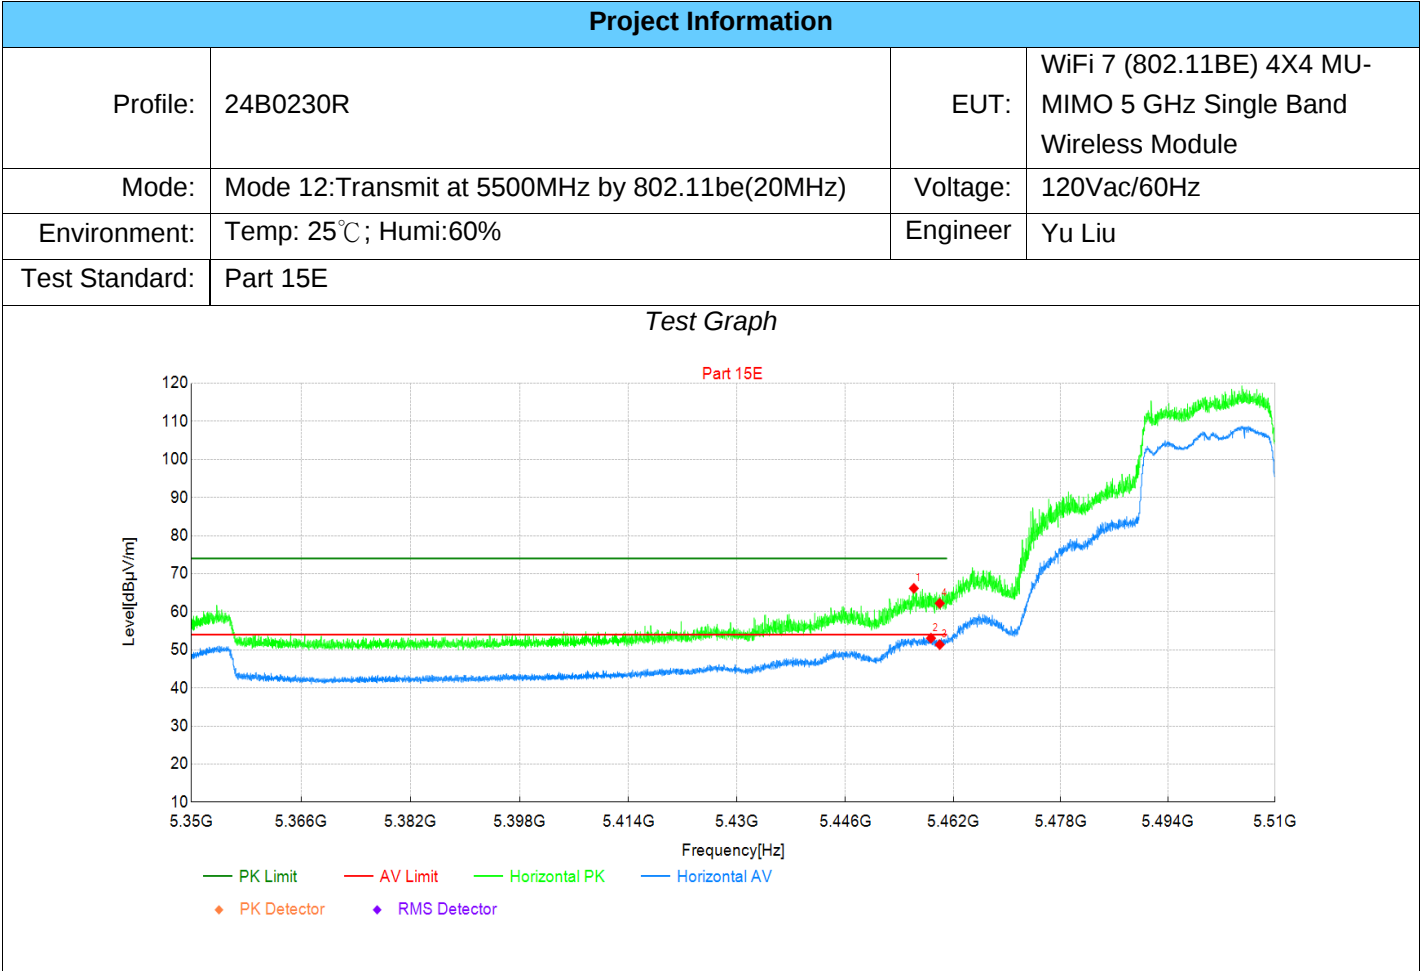

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5456	49.85	66.15	16.30	74.00	7.85	PK	Horizo	PASS
2	5459	36.73	53.06	16.33	54.00	0.94	AV	Horizo	PASS
3	5460	35.04	51.38	16.34	54.00	2.62	AV	Horizo	PASS
4	5460	45.88	62.22	16.34	74.00	11.78	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

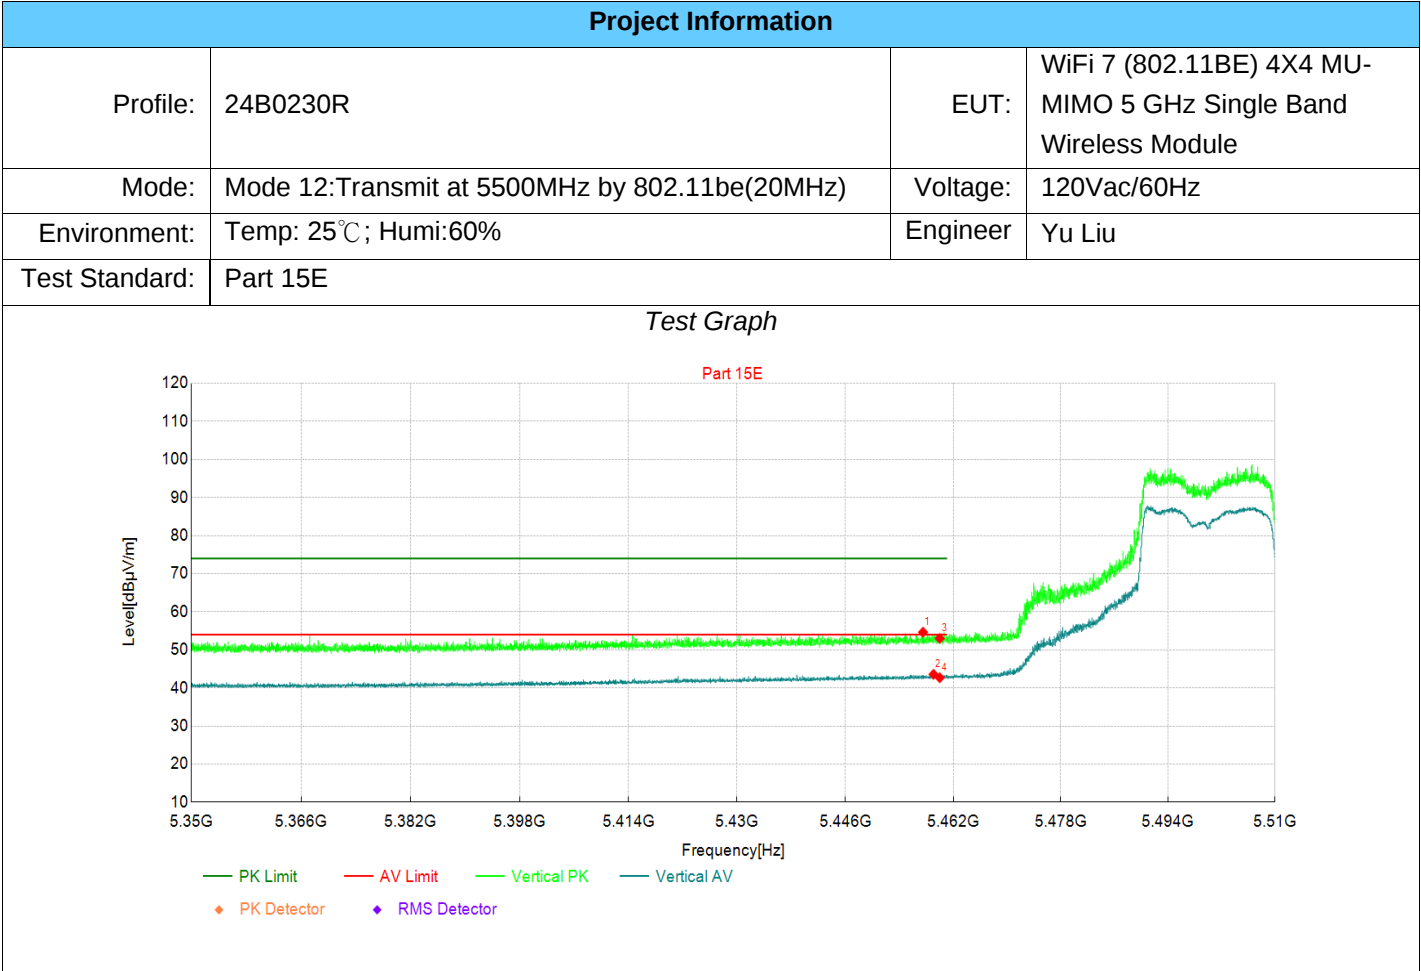

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5458	38.33	54.64	16.31	74.00	19.36	PK	Vertic	PASS
2	5459	27.25	43.58	16.33	54.00	10.42	AV	Vertic	PASS
3	5460	36.66	53.00	16.34	74.00	21.00	PK	Vertic	PASS
4	5460	26.34	42.68	16.34	54.00	11.32	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5190MHz by 802.11be(40MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

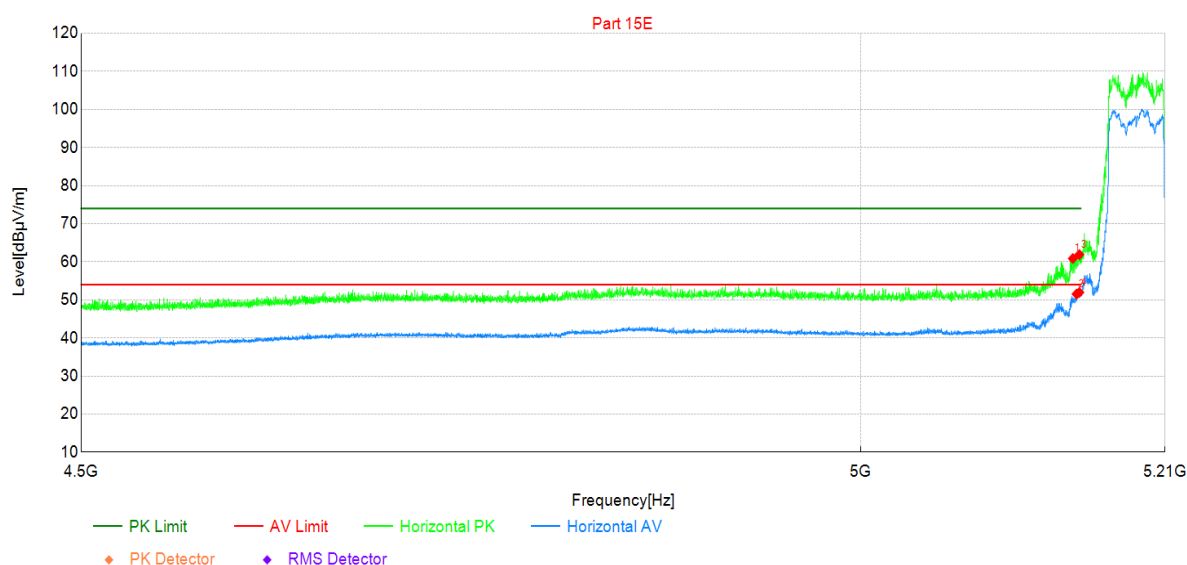


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5145	45.78	60.86	15.08	74.00	13.14	PK	Horizo	PASS
2	5148	36.44	51.54	15.10	54.00	2.46	AV	Horizo	PASS
3	5150	46.78	61.89	15.11	74.00	12.11	PK	Horizo	PASS
4	5150	36.84	51.95	15.11	54.00	2.05	AV	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

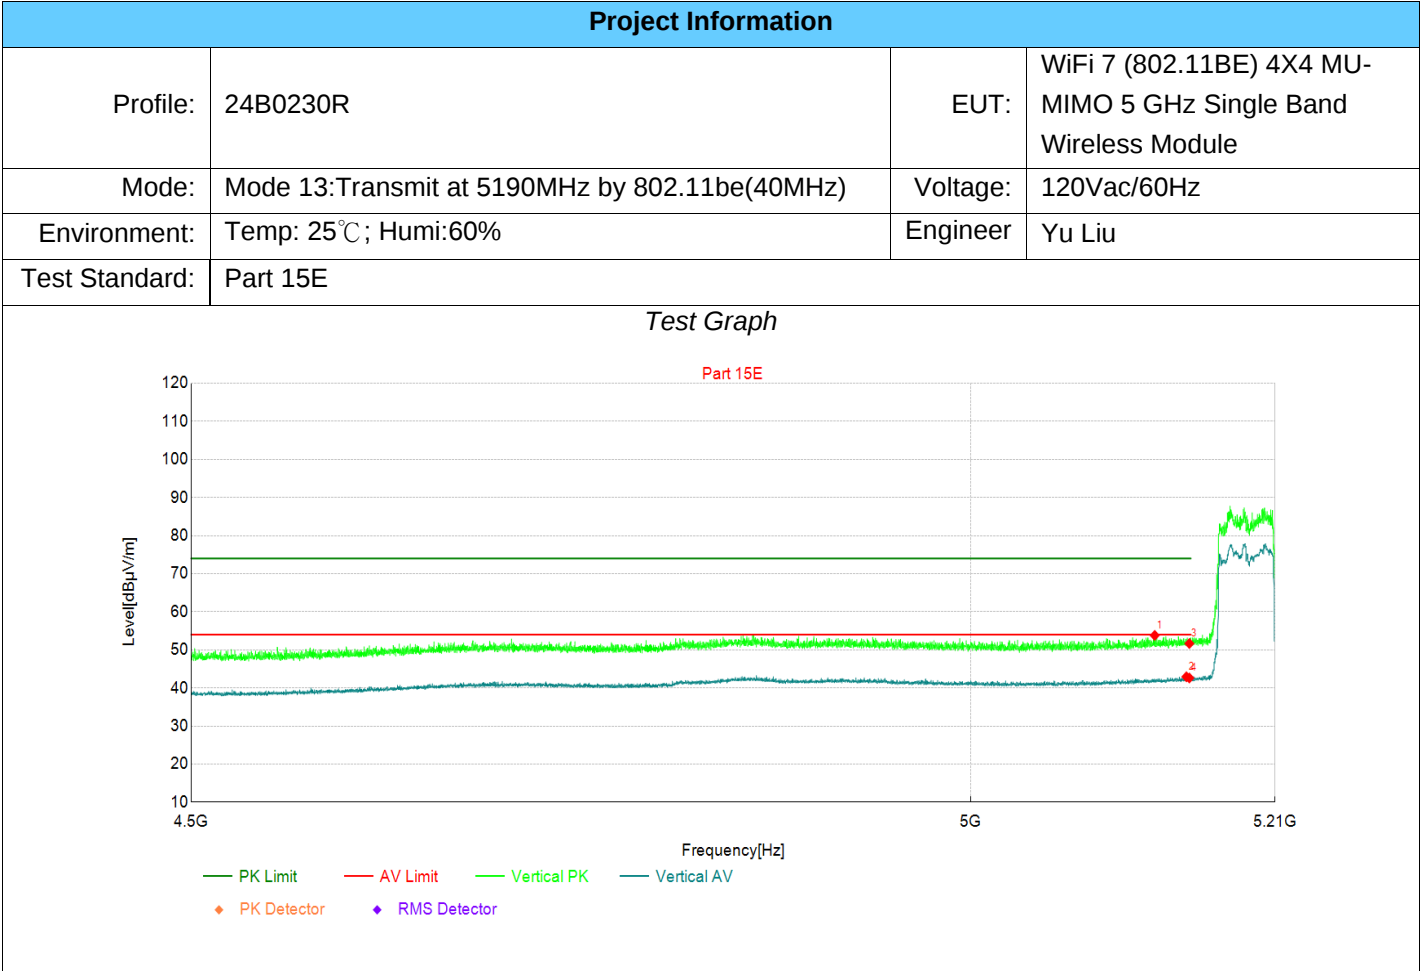

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5126	38.83	53.80	14.97	74.00	20.20	PK	Vertic	PASS
2	5148	27.82	42.92	15.10	54.00	11.08	AV	Vertic	PASS
3	5150	36.55	51.66	15.11	74.00	22.34	PK	Vertic	PASS
4	5150	27.50	42.61	15.11	54.00	11.39	AV	Vertic	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 13:Transmit at 5310MHz by 802.11be(40MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

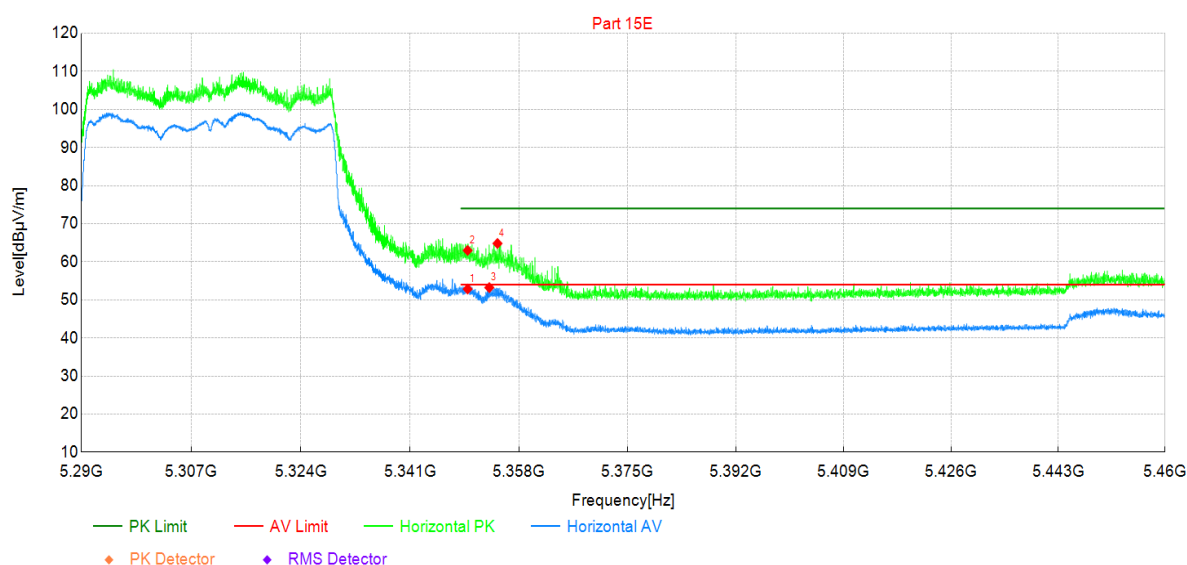


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	37.13	52.84	15.71	54.00	1.16	AV	Horizo	PASS
2	5350	47.28	62.99	15.71	74.00	11.01	PK	Horizo	PASS
3	5353	37.51	53.22	15.71	54.00	0.78	AV	Horizo	PASS
4	5355	49.11	64.81	15.70	74.00	9.19	PK	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

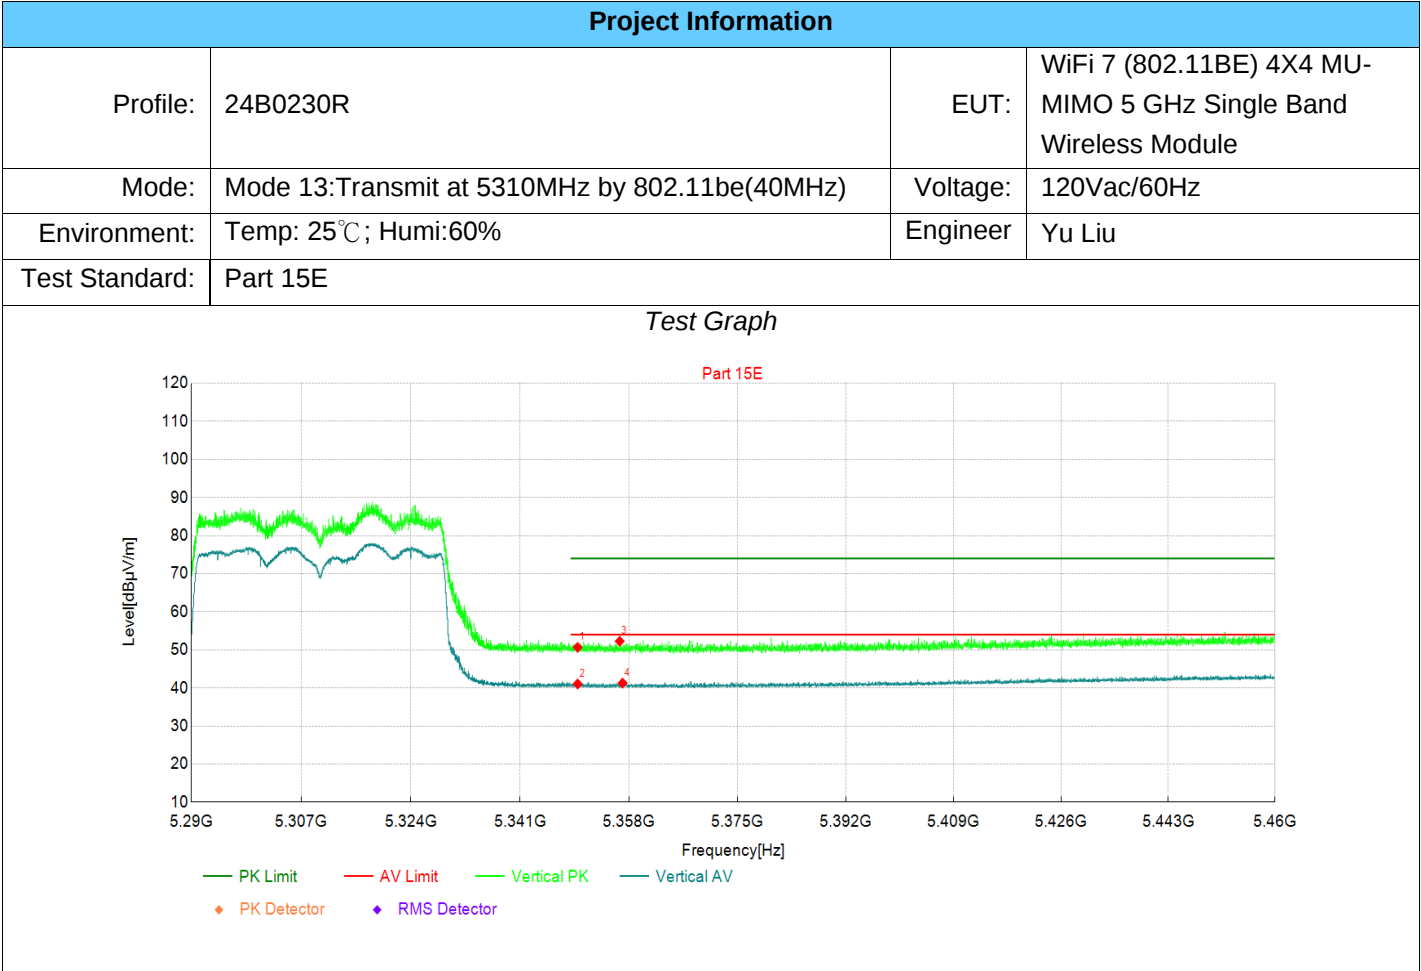

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	34.94	50.65	15.71	74.00	23.35	PK	Vertic	PASS
2	5350	25.33	41.04	15.71	54.00	12.96	AV	Vertic	PASS
3	5357	36.57	52.27	15.70	74.00	21.73	PK	Vertic	PASS
4	5357	25.57	41.27	15.70	54.00	12.73	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

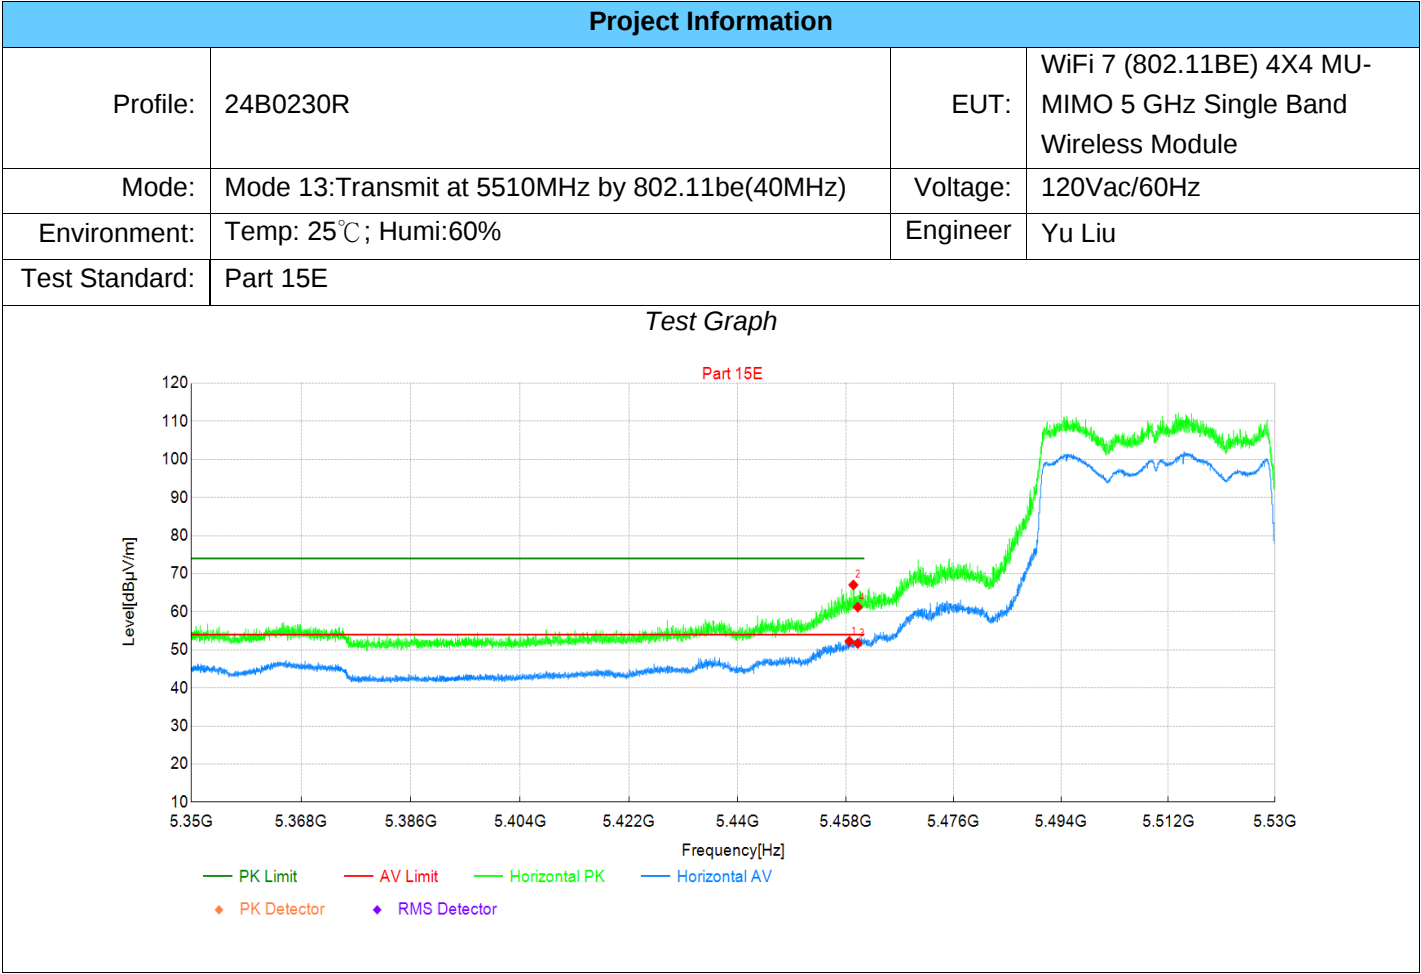

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5459	35.92	52.24	16.32	54.00	1.76	AV	Horizo	PASS
2	5459	50.71	67.05	16.34	74.00	6.95	PK	Horizo	PASS
3	5460	35.34	51.68	16.34	54.00	2.32	AV	Horizo	PASS
4	5460	44.90	61.24	16.34	74.00	12.76	PK	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level


Test Report

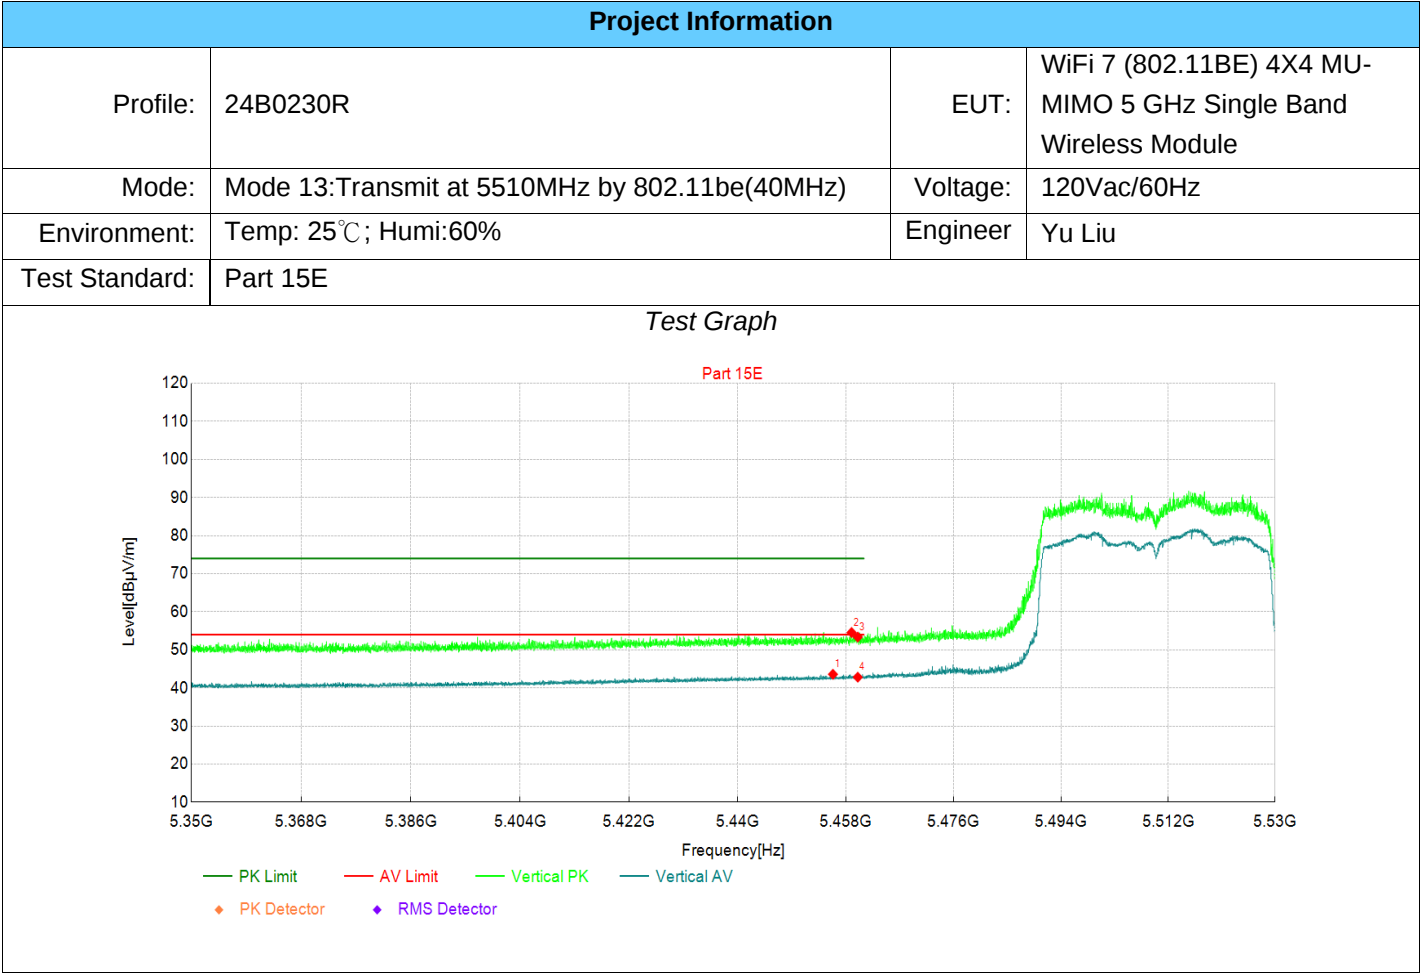

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5456	27.30	43.59	16.29	54.00	10.41	AV	Vertic	PASS
2	5459	38.23	54.56	16.33	74.00	19.44	PK	Vertic	PASS
3	5460	37.02	53.36	16.34	74.00	20.64	PK	Vertic	PASS
4	5460	26.48	42.82	16.34	54.00	11.18	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

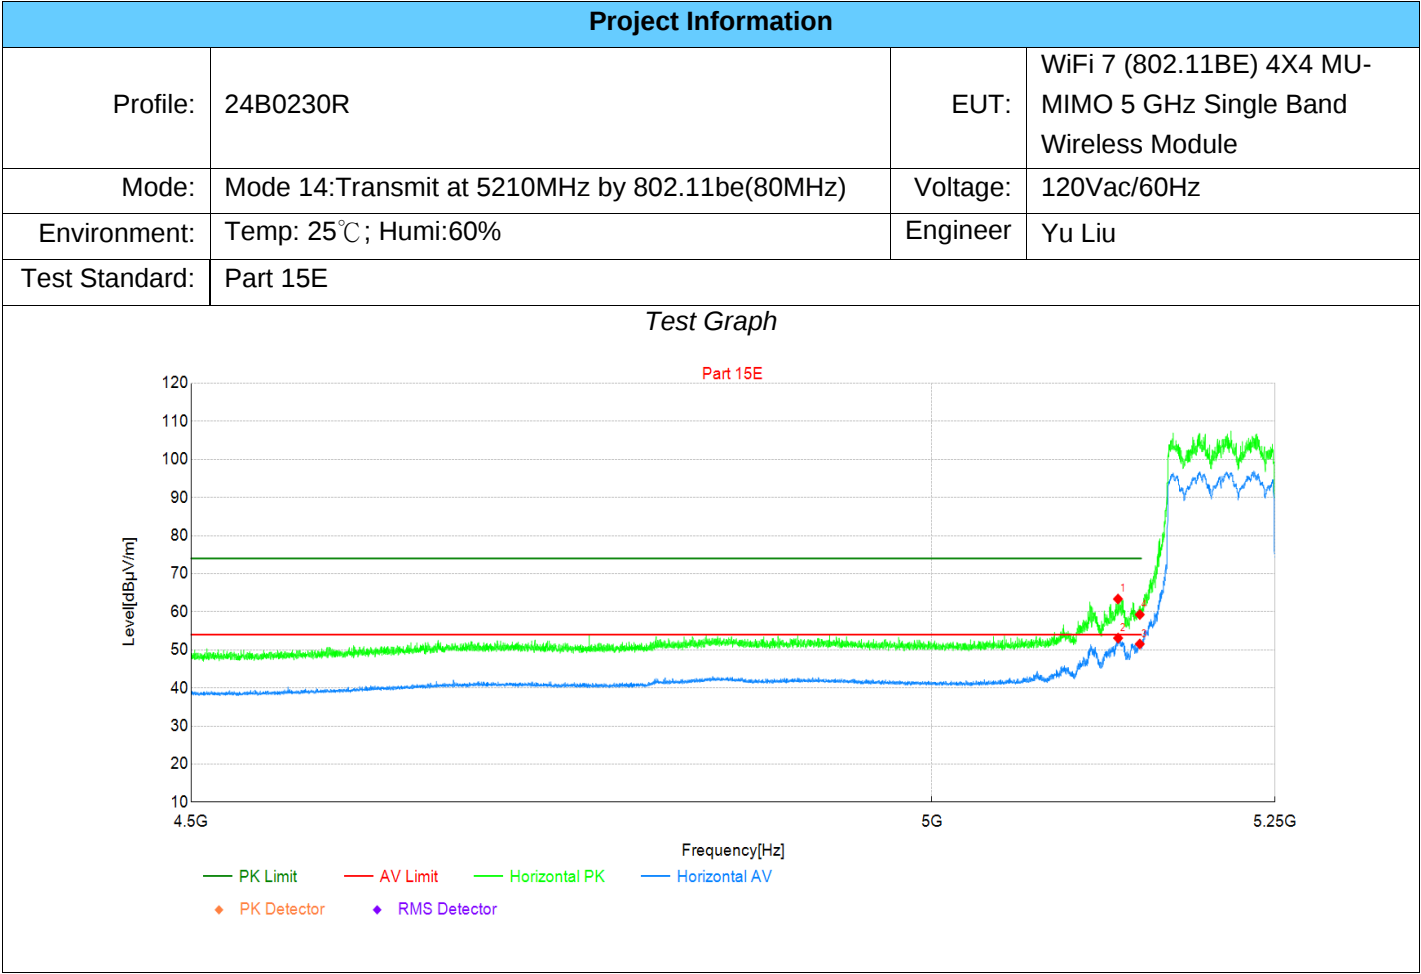

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5134	48.33	63.35	15.02	74.00	10.65	PK	Horizo	PASS
2	5134	38.07	53.09	15.02	54.00	0.91	AV	Horizo	PASS
3	5150	36.44	51.55	15.11	54.00	2.45	AV	Horizo	PASS
4	5150	44.16	59.27	15.11	74.00	14.73	PK	Horizo	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5210MHz by 802.11be(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

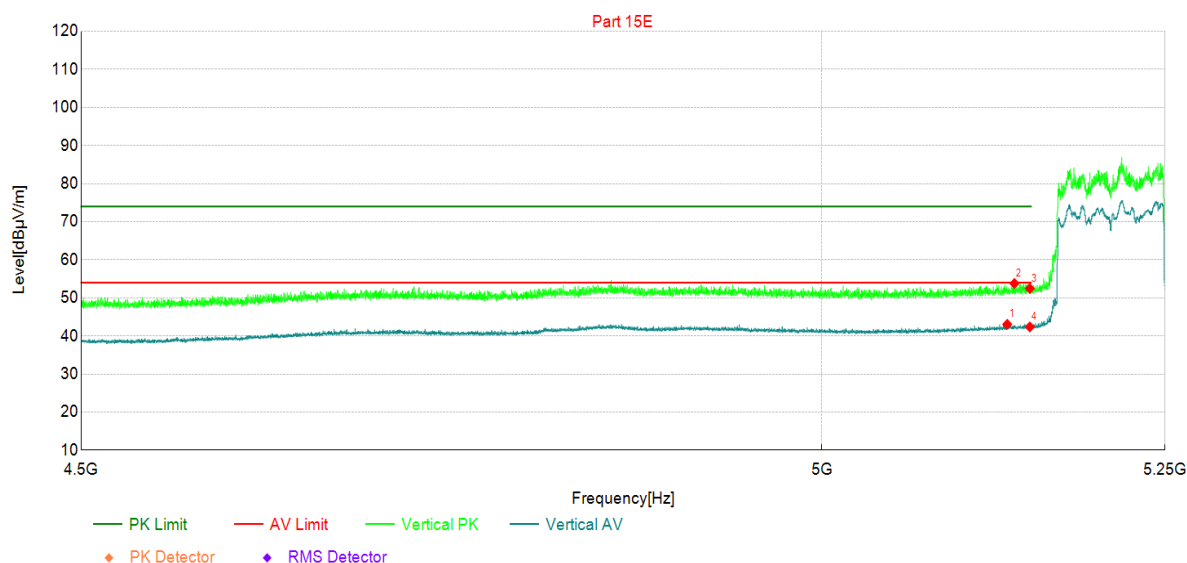

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5133	28.04	43.05	15.01	54.00	10.95	AV	Vertic	PASS
2	5139	38.75	53.79	15.04	74.00	20.21	PK	Vertic	PASS
3	5150	37.34	52.45	15.11	74.00	21.55	PK	Vertic	PASS
4	5150	27.26	42.37	15.11	54.00	11.63	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5290MHz by 802.11be(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

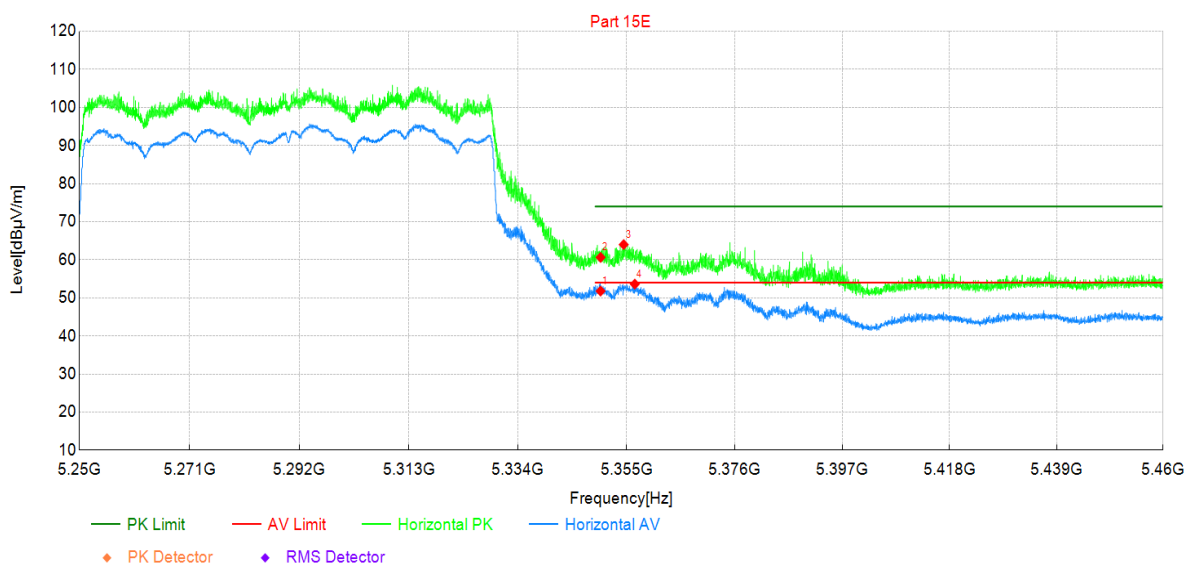

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	36.07	51.78	15.71	54.00	2.22	AV	Horizo	PASS
2	5350	44.92	60.63	15.71	74.00	13.37	PK	Horizo	PASS
3	5354	48.30	64.00	15.70	74.00	10.00	PK	Horizo	PASS
4	5357	37.92	53.62	15.70	54.00	0.38	AV	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5290MHz by 802.11be(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

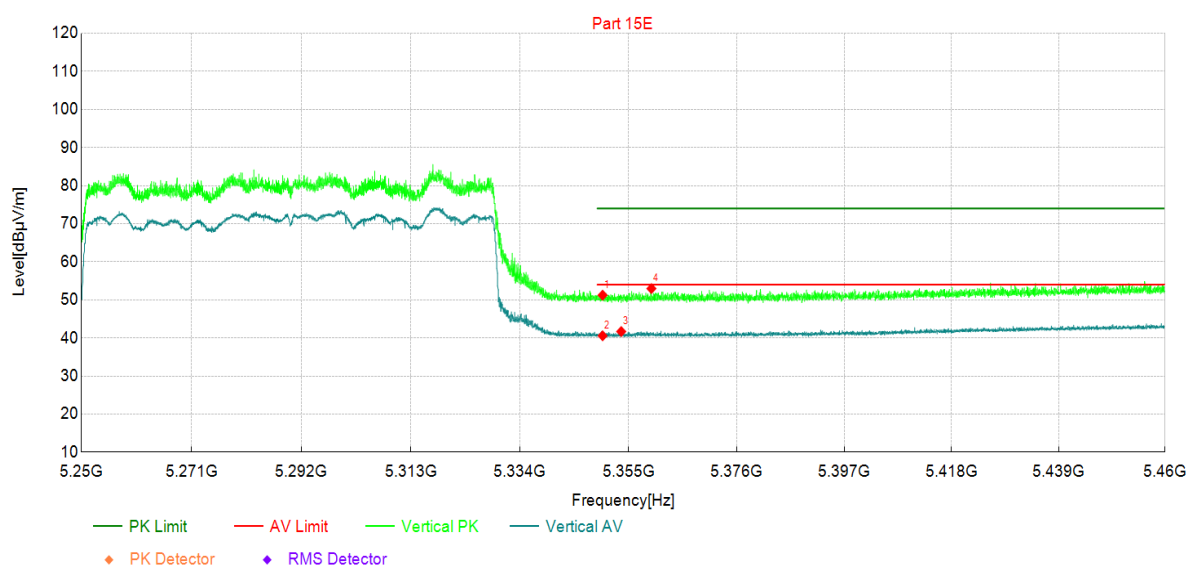


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5350	35.52	51.23	15.71	74.00	22.77	PK	Vertic	PASS
2	5350	24.85	40.56	15.71	54.00	13.44	AV	Vertic	PASS
3	5354	25.98	41.68	15.70	54.00	12.32	AV	Vertic	PASS
4	5359	37.27	52.97	15.70	74.00	21.03	PK	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Test Report

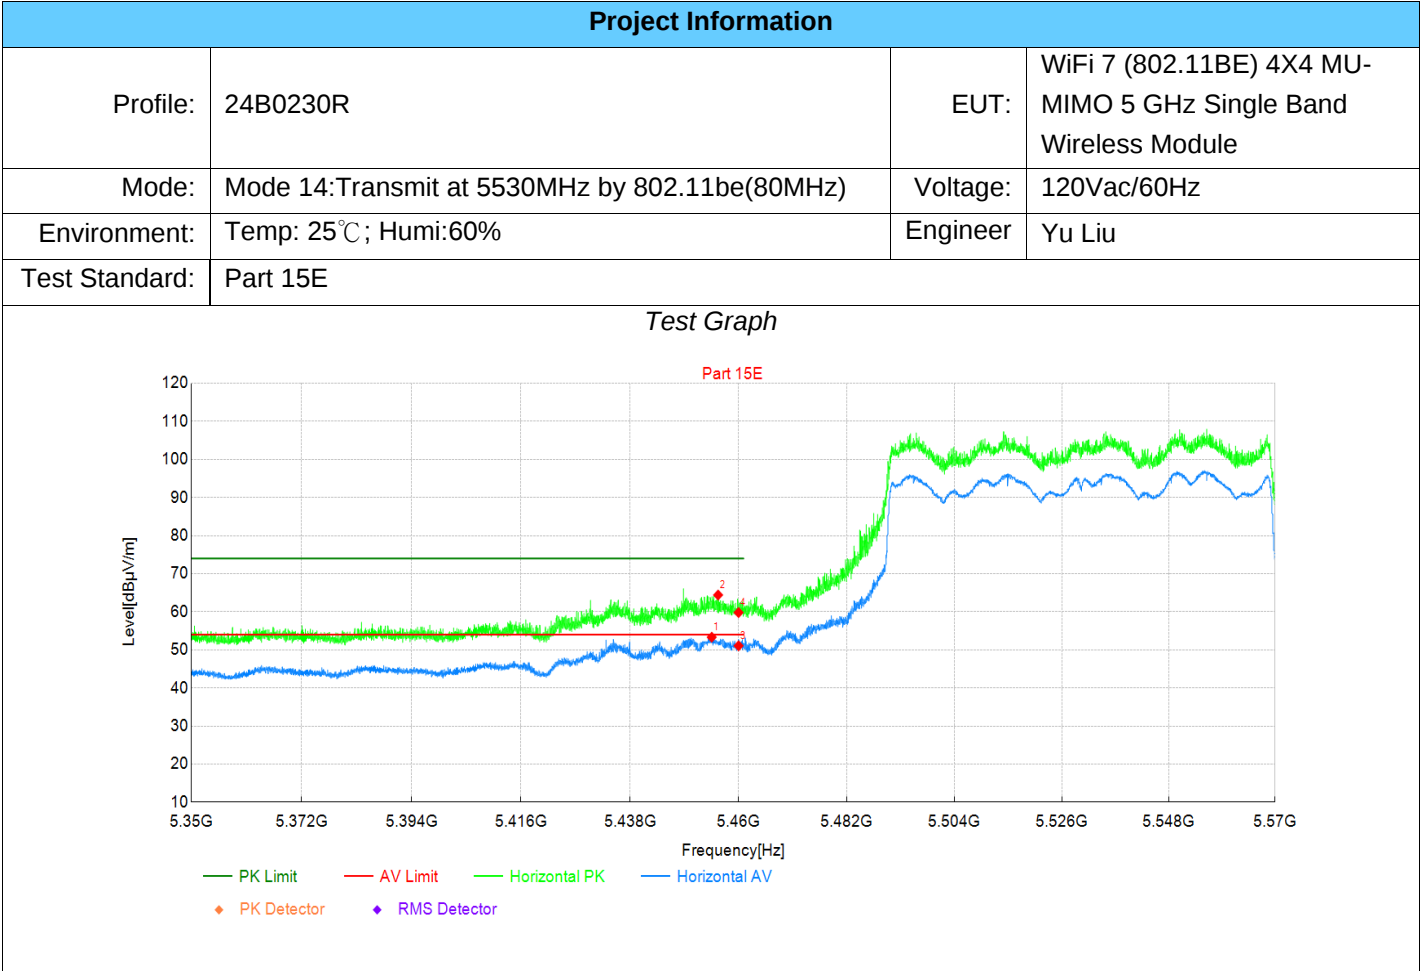

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5455	37.05	53.33	16.28	54.00	0.67	AV	Horizo	PASS
2	5456	48.12	64.41	16.29	74.00	9.59	PK	Horizo	PASS
3	5460	34.73	51.07	16.34	54.00	2.93	AV	Horizo	PASS
4	5460	43.47	59.81	16.34	74.00	14.19	PK	Horizo	PASS


Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 14:Transmit at 5530MHz by 802.11be(80MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

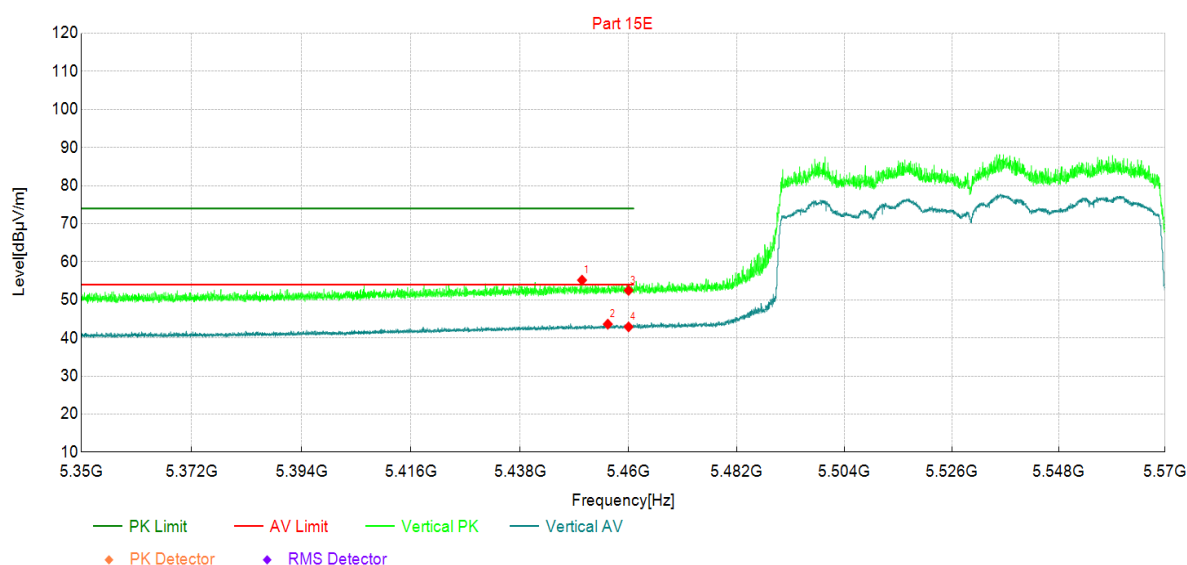

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5451	38.94	55.18	16.24	74.00	18.82	PK	Vertic	PASS
2	5456	27.34	43.63	16.29	54.00	10.37	AV	Vertic	PASS
3	5460	36.13	52.47	16.34	74.00	21.53	PK	Vertic	PASS
4	5460	26.56	42.90	16.34	54.00	11.10	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 15:Transmit at 5250MHz by 802.11be(160MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

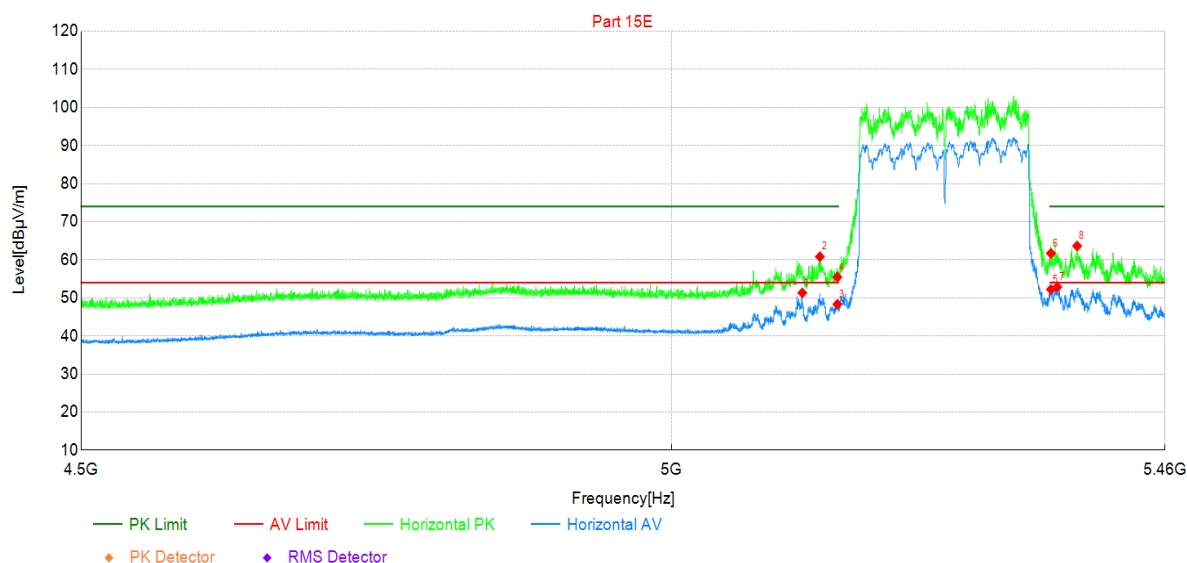

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5118	36.41	51.32	14.91	54.00	2.68	AV	Horizo	PASS
2	5134	45.79	60.81	15.02	74.00	13.19	PK	Horizo	PASS
3	5150	33.22	48.33	15.11	54.00	5.67	AV	Horizo	PASS
4	5150	40.35	55.46	15.11	74.00	18.54	PK	Horizo	PASS
5	5350	36.48	52.19	15.71	54.00	1.81	AV	Horizo	PASS
6	5350	45.98	61.69	15.71	74.00	12.31	PK	Horizo	PASS
7	5356	37.14	52.84	15.70	54.00	1.16	AV	Horizo	PASS
8	5375	47.94	63.61	15.67	74.00	10.39	PK	Horizo	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

Test Report

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 15:Transmit at 5250MHz by 802.11be(160MHz)	Voltage:	120Vac/60Hz
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	Part 15E		

Test Graph

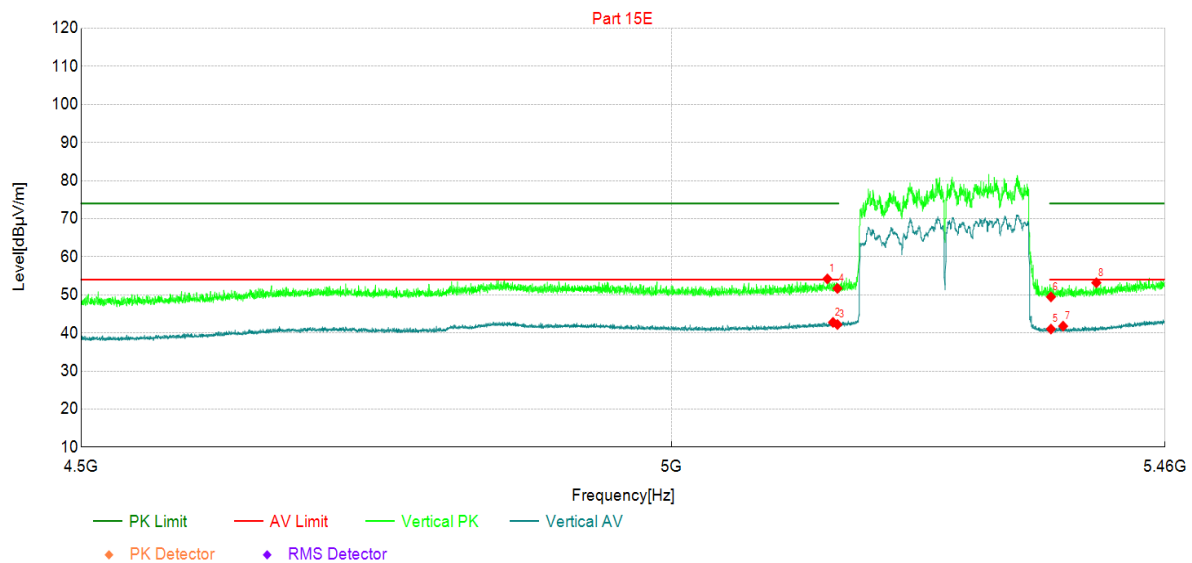


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5141	39.13	54.19	15.06	74.00	19.81	PK	Vertic	PASS
2	5146	27.68	42.77	15.09	54.00	11.23	AV	Vertic	PASS
3	5150	27.10	42.21	15.11	54.00	11.79	AV	Vertic	PASS
4	5150	36.58	51.69	15.11	74.00	22.31	PK	Vertic	PASS
5	5350	25.30	41.01	15.71	54.00	12.99	AV	Vertic	PASS
6	5350	33.75	49.46	15.71	74.00	24.54	PK	Vertic	PASS
7	5362	26.10	41.79	15.69	54.00	12.21	AV	Vertic	PASS
8	5394	37.52	53.18	15.66	74.00	20.82	PK	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


Test Report

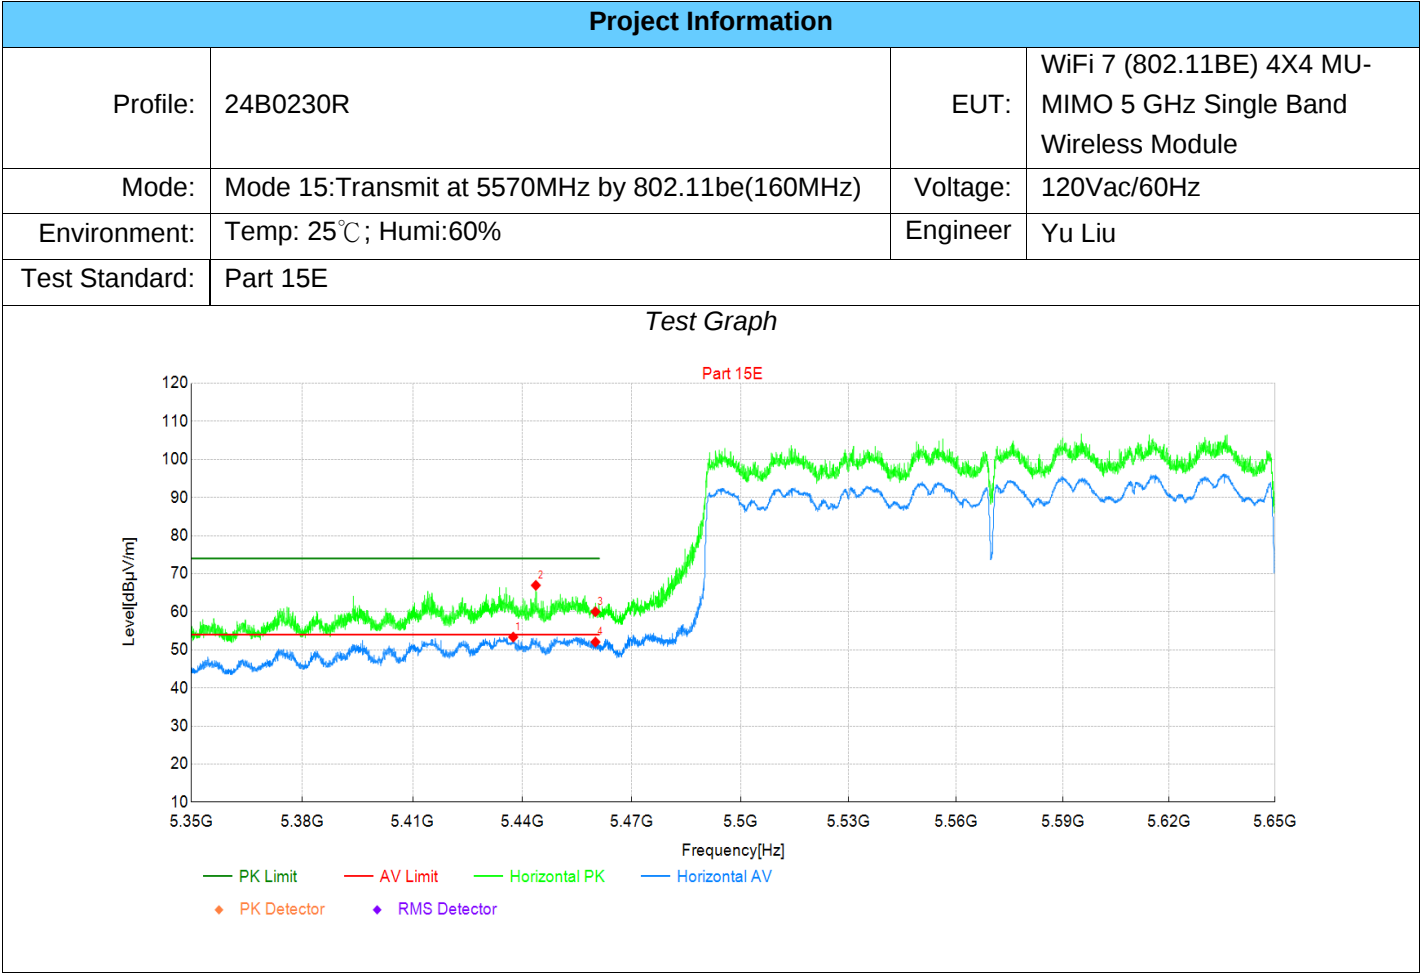

Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5437	37.27	53.35	16.08	54.00	0.65	AV	Horizo	PASS
2	5444	50.80	66.95	16.15	74.00	7.05	PK	Horizo	PASS
3	5460	43.68	60.02	16.34	74.00	13.98	PK	Horizo	PASS
4	5460	35.72	52.06	16.34	54.00	1.94	AV	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Test Report

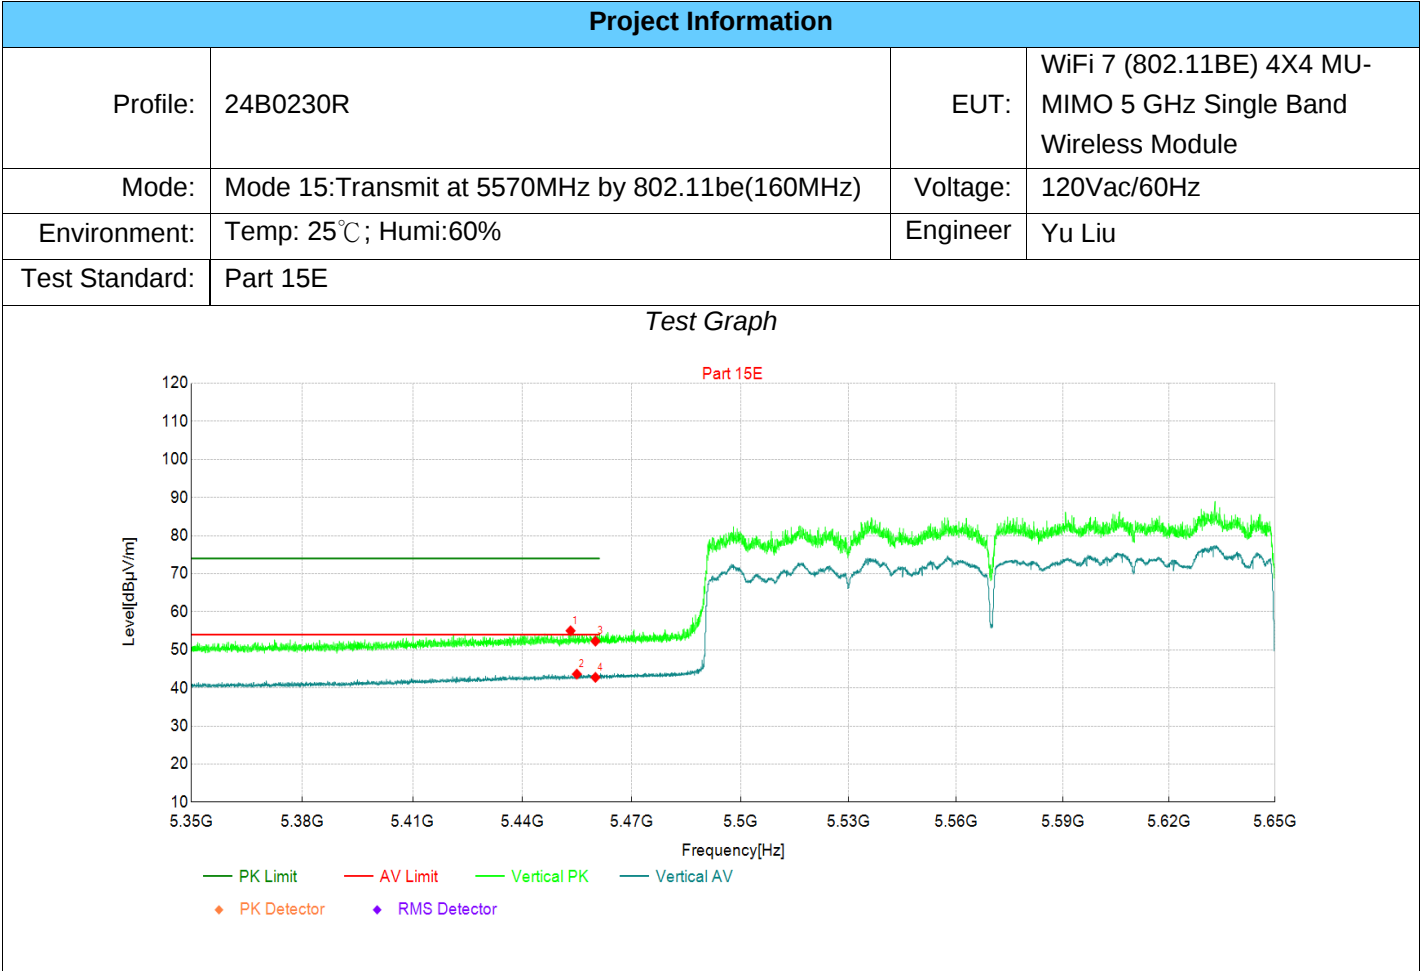


Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	5453	38.75	55.01	16.26	74.00	18.99	PK	Vertic	PASS
2	5455	27.34	43.62	16.28	54.00	10.38	AV	Vertic	PASS
3	5460	35.94	52.28	16.34	74.00	21.72	PK	Vertic	PASS
4	5460	26.44	42.78	16.34	54.00	11.22	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5745MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

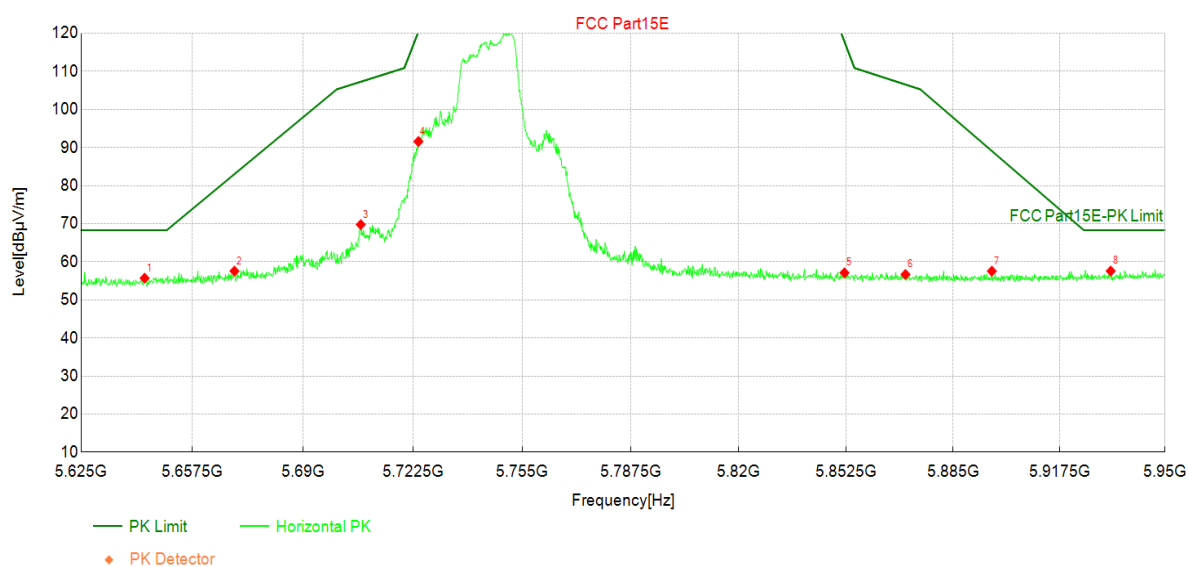

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5644	37.55	55.70	18.15	68.30	12.60	PK	Horizo	PASS
2	5670	39.15	57.56	18.41	83.04	25.48	PK	Horizo	PASS
3	5707	51.07	69.77	18.70	107.29	37.52	PK	Horizo	PASS
4	5724	72.92	91.59	18.67	120.42	28.83	PK	Horizo	PASS
5	5852	38.15	57.11	18.96	117.82	60.71	PK	Horizo	PASS
6	5870	37.58	56.68	19.10	106.56	49.88	PK	Horizo	PASS
7	5897	38.23	57.54	19.31	89.10	31.56	PK	Horizo	PASS
8	5933	37.97	57.57	19.60	68.30	10.73	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5745MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

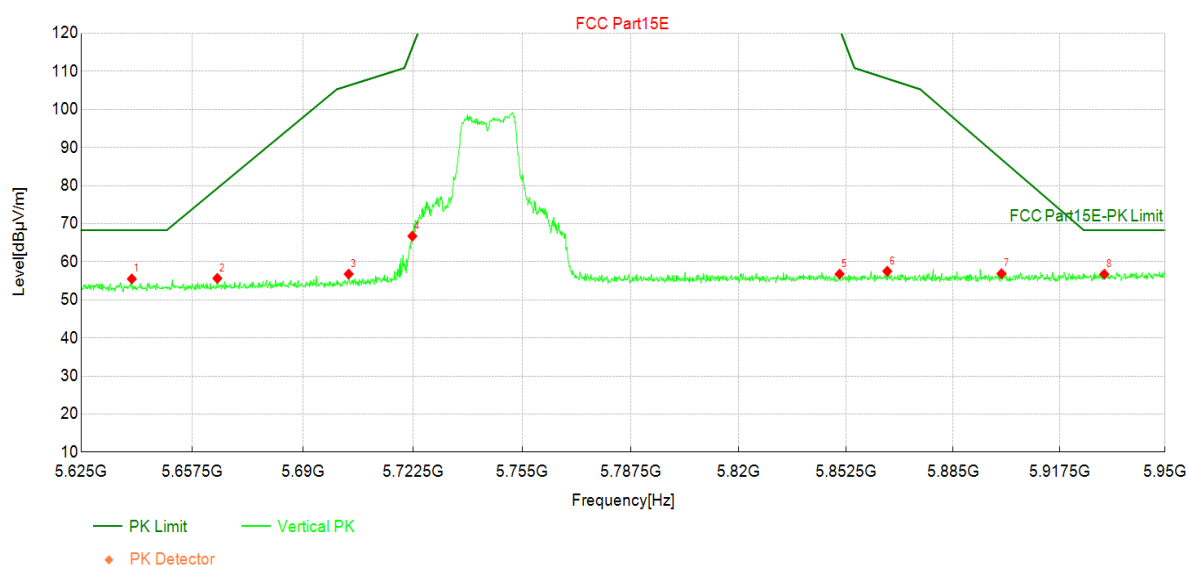

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5640	37.40	55.51	18.11	68.30	12.79	PK	Vertic	PASS
2	5665	37.29	55.65	18.36	79.31	23.66	PK	Vertic	PASS
3	5704	38.08	56.79	18.71	106.29	49.50	PK	Vertic	PASS
4	5722	48.07	66.74	18.67	116.34	49.60	PK	Vertic	PASS
5	5851	37.84	56.79	18.95	121.16	64.37	PK	Vertic	PASS
6	5865	38.45	57.51	19.06	108.11	50.60	PK	Vertic	PASS
7	5900	37.54	56.88	19.34	86.94	30.06	PK	Vertic	PASS
8	5931	37.15	56.73	19.58	68.30	11.57	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5785MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

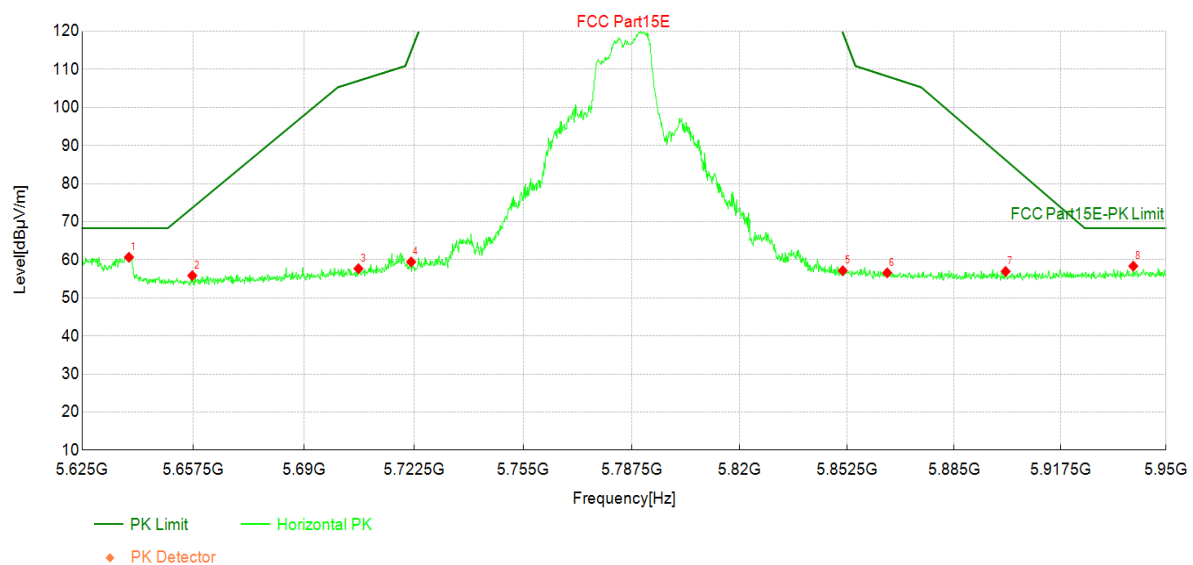

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	42.57	60.67	18.10	68.30	7.63	PK	Horizo	PASS
2	5657	37.56	55.84	18.28	73.64	17.80	PK	Horizo	PASS
3	5706	38.97	57.67	18.70	107.02	49.35	PK	Horizo	PASS
4	5722	40.77	59.44	18.67	114.86	55.42	PK	Horizo	PASS
5	5851	38.19	57.14	18.95	119.68	62.54	PK	Horizo	PASS
6	5865	37.52	56.58	19.06	108.20	51.62	PK	Horizo	PASS
7	5901	37.60	56.94	19.34	86.21	29.27	PK	Horizo	PASS
8	5940	38.70	58.34	19.64	68.30	9.96	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5785MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

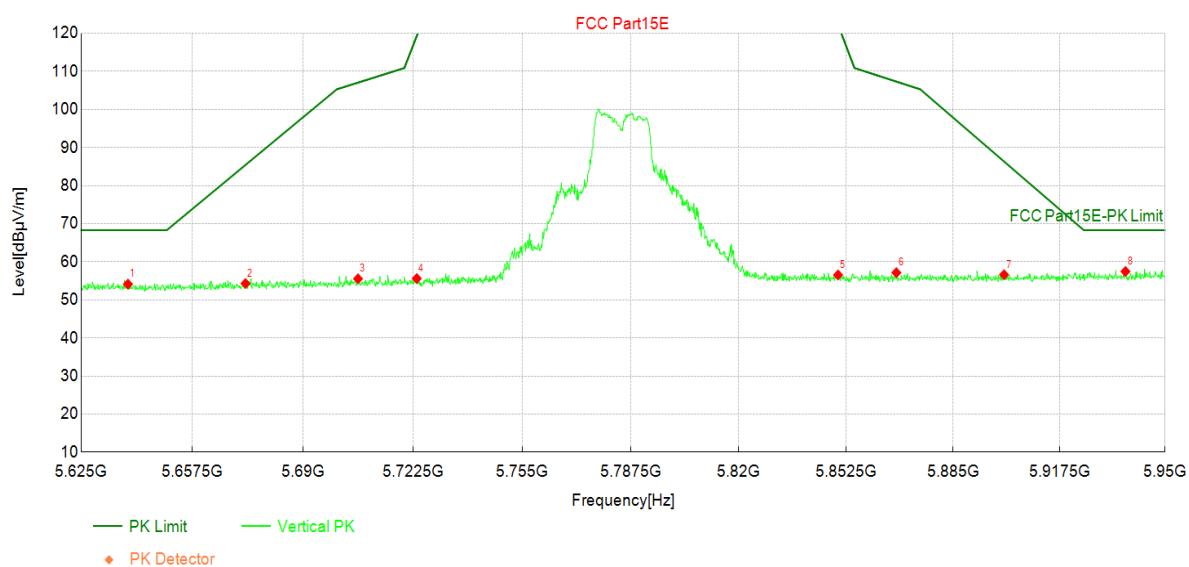

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	36.02	54.12	18.10	68.30	14.18	PK	Vertic	PASS
2	5673	35.85	54.29	18.44	85.45	31.16	PK	Vertic	PASS
3	5706	36.85	55.54	18.69	107.06	51.52	PK	Vertic	PASS
4	5724	36.93	55.60	18.67	119.31	63.71	PK	Vertic	PASS
5	5850	37.59	56.54	18.95	122.27	65.73	PK	Vertic	PASS
6	5868	38.05	57.14	19.09	107.33	50.19	PK	Vertic	PASS
7	5901	37.26	56.60	19.34	86.34	29.74	PK	Vertic	PASS
8	5938	37.83	57.46	19.63	68.30	10.84	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5825MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

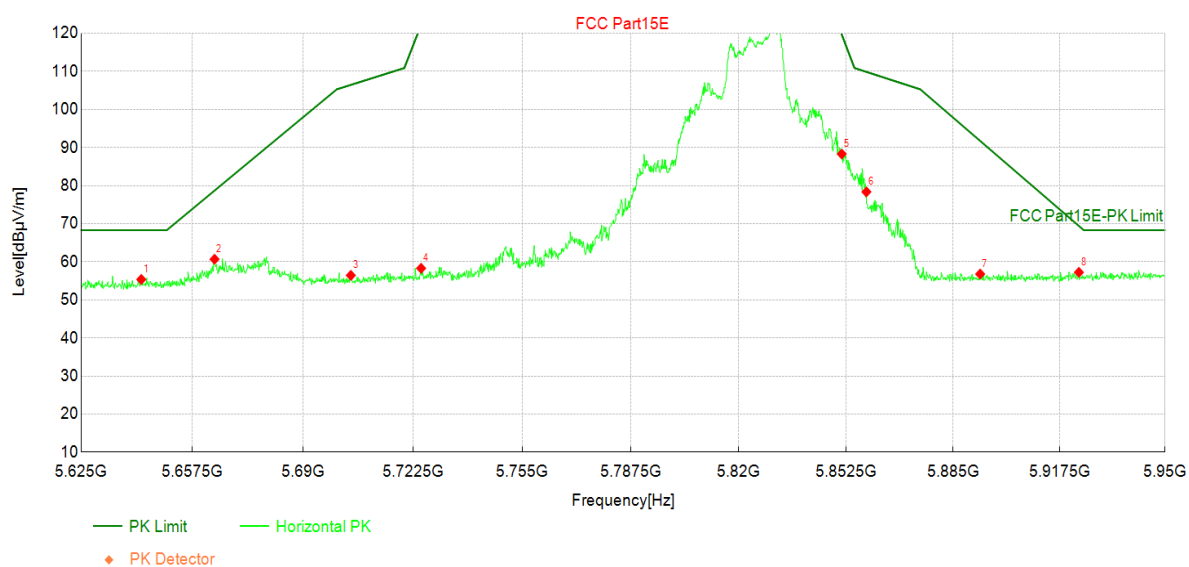

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5643	37.23	55.37	18.14	68.30	12.93	PK	Horizo	PASS
2	5664	42.33	60.68	18.35	78.71	18.03	PK	Horizo	PASS
3	5704	37.73	56.43	18.70	106.47	50.04	PK	Horizo	PASS
4	5725	39.62	58.29	18.67	122.27	63.98	PK	Horizo	PASS
5	5851	69.36	88.31	18.95	119.68	31.37	PK	Horizo	PASS
6	5859	59.37	78.37	19.00	109.88	31.51	PK	Horizo	PASS
7	5893	37.50	56.78	19.28	91.75	34.97	PK	Horizo	PASS
8	5923	37.72	57.23	19.51	69.41	12.18	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 1:Transmit at 5825MHz by 802.11a(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

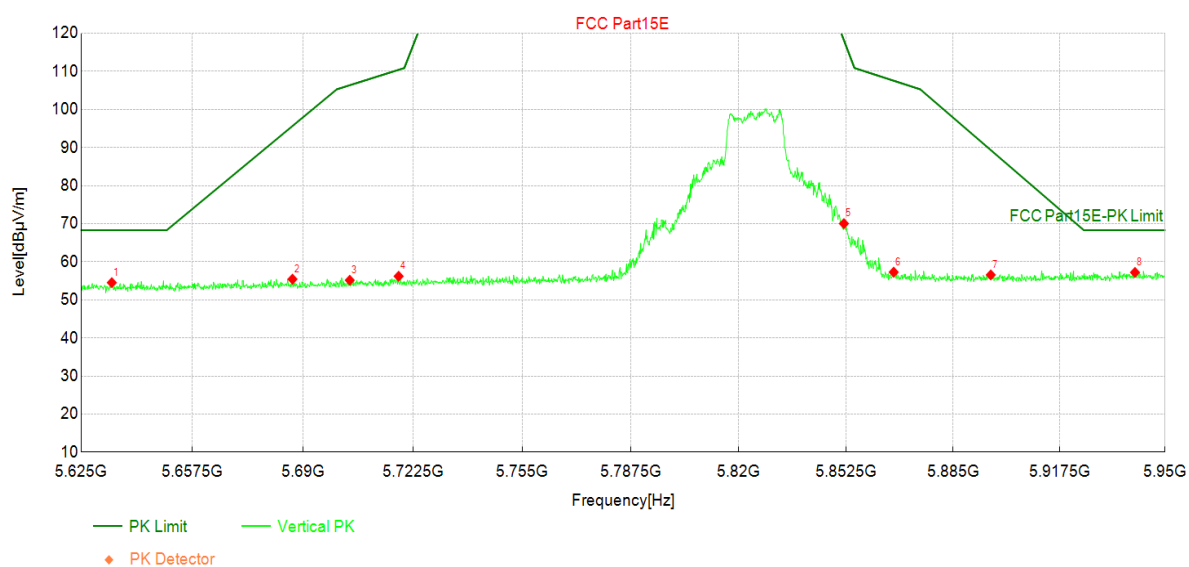

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5634	36.47	54.52	18.05	68.30	13.78	PK	Vertic	PASS
2	5687	36.86	55.44	18.58	95.67	40.23	PK	Vertic	PASS
3	5704	36.46	55.16	18.70	106.38	51.22	PK	Vertic	PASS
4	5718	37.52	56.20	18.68	110.43	54.23	PK	Vertic	PASS
5	5852	51.07	70.03	18.96	118.19	48.16	PK	Vertic	PASS
6	5867	38.21	57.28	19.07	107.56	50.28	PK	Vertic	PASS
7	5897	37.25	56.56	19.31	89.34	32.78	PK	Vertic	PASS
8	5941	37.57	57.22	19.65	68.30	11.08	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5745MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

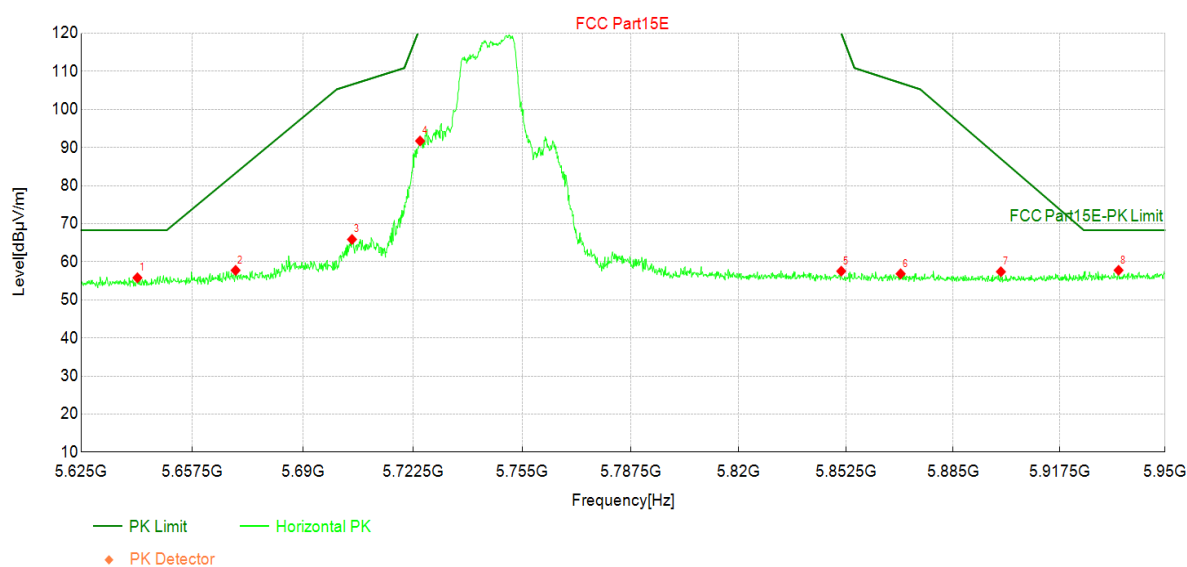

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	37.67	55.80	18.13	68.30	12.50	PK	Horizo	PASS
2	5670	39.34	57.75	18.41	83.29	25.54	PK	Horizo	PASS
3	5705	47.18	65.88	18.70	106.56	40.68	PK	Horizo	PASS
4	5725	73.07	91.74	18.67	121.53	29.79	PK	Horizo	PASS
5	5851	38.58	57.53	18.95	120.05	62.52	PK	Horizo	PASS
6	5869	37.76	56.85	19.09	106.97	50.12	PK	Horizo	PASS
7	5900	38.05	57.39	19.34	87.06	29.67	PK	Horizo	PASS
8	5936	38.16	57.77	19.61	68.30	10.53	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5745MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

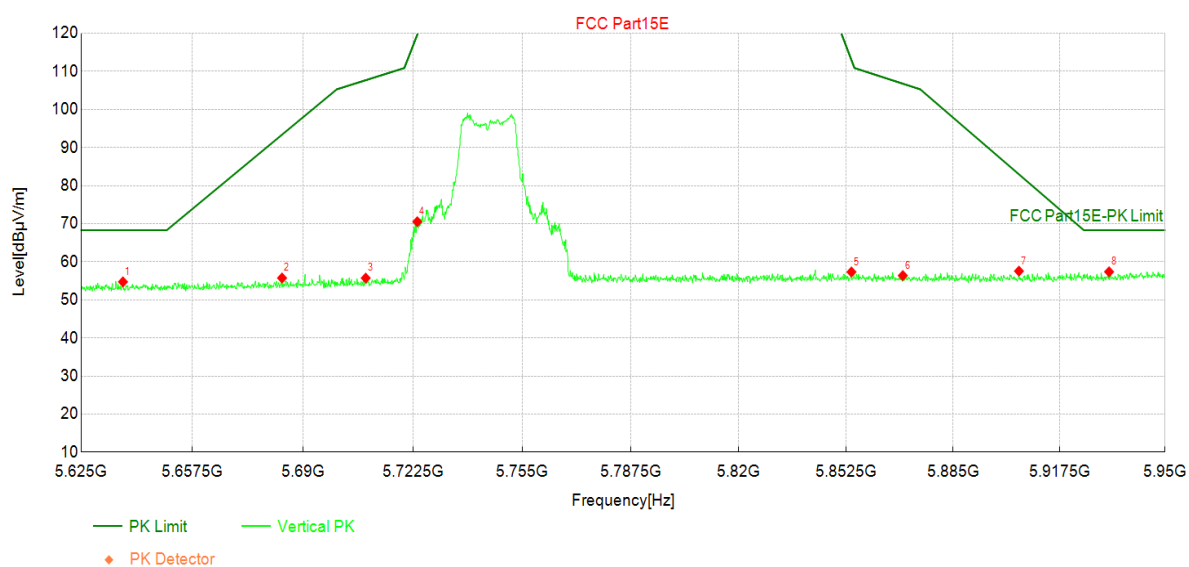

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5637	36.64	54.73	18.09	68.30	13.57	PK	Vertic	PASS
2	5684	37.19	55.74	18.55	93.39	37.65	PK	Vertic	PASS
3	5709	37.02	55.72	18.70	107.70	51.98	PK	Vertic	PASS
4	5724	51.87	70.53	18.66	119.68	49.15	PK	Vertic	PASS
5	5854	38.36	57.33	18.97	113.00	55.67	PK	Vertic	PASS
6	5870	37.28	56.38	19.10	106.79	50.41	PK	Vertic	PASS
7	5905	38.18	57.56	19.38	82.97	25.41	PK	Vertic	PASS
8	5933	37.79	57.38	19.59	68.30	10.92	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5785MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

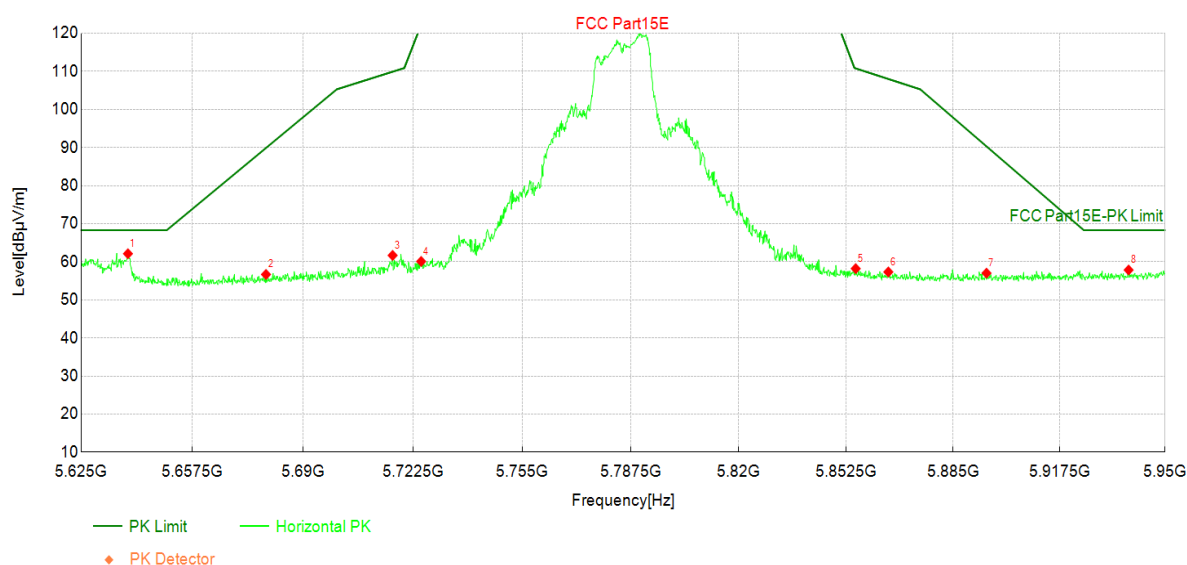

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	44.02	62.12	18.10	68.30	6.18	PK	Horizo	PASS
2	5679	38.18	56.68	18.50	89.90	33.22	PK	Horizo	PASS
3	5717	43.00	61.68	18.68	109.93	48.25	PK	Horizo	PASS
4	5725	41.42	60.09	18.67	122.27	62.18	PK	Horizo	PASS
5	5855	39.22	58.21	18.99	110.79	52.58	PK	Horizo	PASS
6	5865	38.26	57.32	19.06	108.01	50.69	PK	Horizo	PASS
7	5895	37.71	57.01	19.30	90.31	33.30	PK	Horizo	PASS
8	5939	38.20	57.84	19.64	68.30	10.46	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5785MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

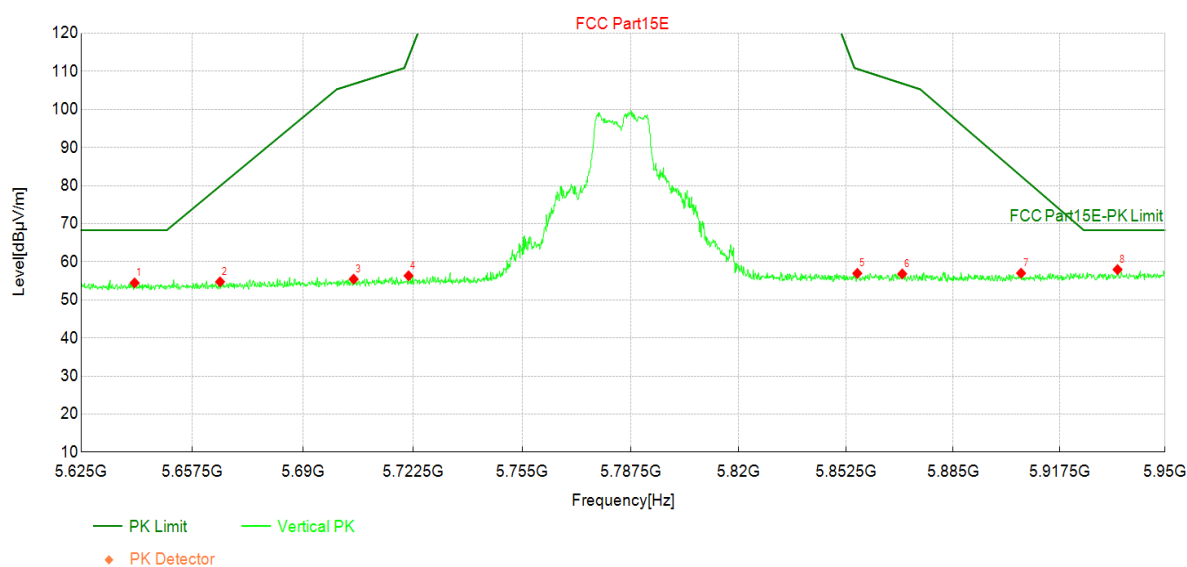

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	36.35	54.46	18.11	68.30	13.84	PK	Vertic	PASS
2	5666	36.38	54.75	18.37	79.91	25.16	PK	Vertic	PASS
3	5705	36.74	55.44	18.70	106.70	51.26	PK	Vertic	PASS
4	5721	37.65	56.33	18.68	113.75	57.42	PK	Vertic	PASS
5	5856	37.98	56.97	18.99	110.66	53.69	PK	Vertic	PASS
6	5870	37.72	56.82	19.10	106.83	50.01	PK	Vertic	PASS
7	5906	37.63	57.01	19.38	82.49	25.48	PK	Vertic	PASS
8	5935	38.35	57.96	19.61	68.30	10.34	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 2:Transmit at 5825MHz by 802.11n(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

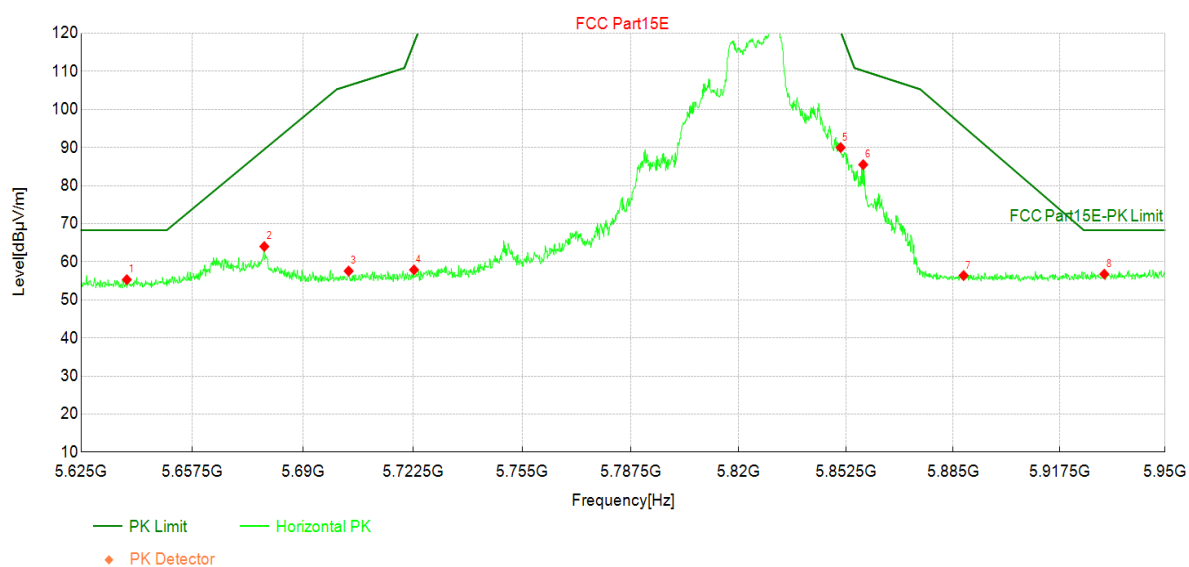


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5638	37.22	55.32	18.10	68.30	12.98	PK	Horizo	PASS
2	5679	45.52	64.02	18.50	89.54	25.52	PK	Horizo	PASS
3	5704	38.86	57.57	18.71	106.29	48.72	PK	Horizo	PASS
4	5723	39.22	57.89	18.67	117.45	59.56	PK	Horizo	PASS
5	5851	71.05	90.00	18.95	120.42	30.42	PK	Horizo	PASS
6	5858	66.52	85.52	19.00	110.16	24.64	PK	Horizo	PASS
7	5888	37.15	56.39	19.24	95.49	39.10	PK	Horizo	PASS
8	5931	37.19	56.77	19.58	68.30	11.53	PK	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

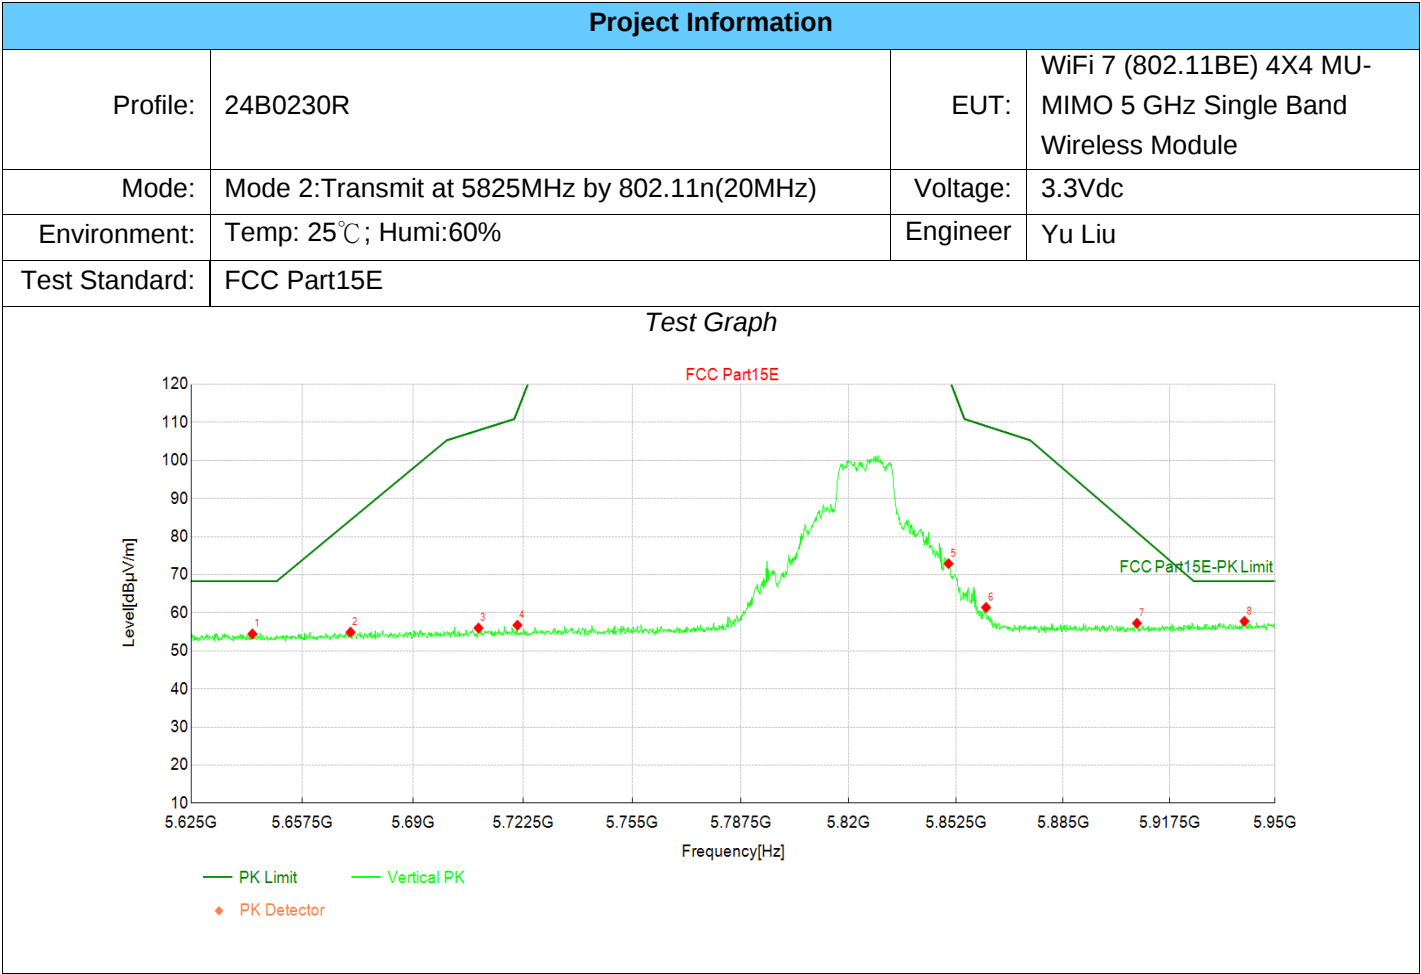


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5643	36.30	54.44	18.14	68.30	13.86	PK	Vertic	PASS
2	5672	36.49	54.91	18.42	84.37	29.46	PK	Vertic	PASS
3	5709	37.31	56.00	18.69	107.93	51.93	PK	Vertic	PASS
4	5721	38.05	56.73	18.68	113.01	56.28	PK	Vertic	PASS
5	5850	53.96	72.91	18.95	121.90	48.99	PK	Vertic	PASS
6	5862	42.37	61.40	19.03	109.06	47.66	PK	Vertic	PASS
7	5908	37.86	57.26	19.40	81.17	23.91	PK	Vertic	PASS
8	5941	38.14	57.79	19.65	68.30	10.51	PK	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5755MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

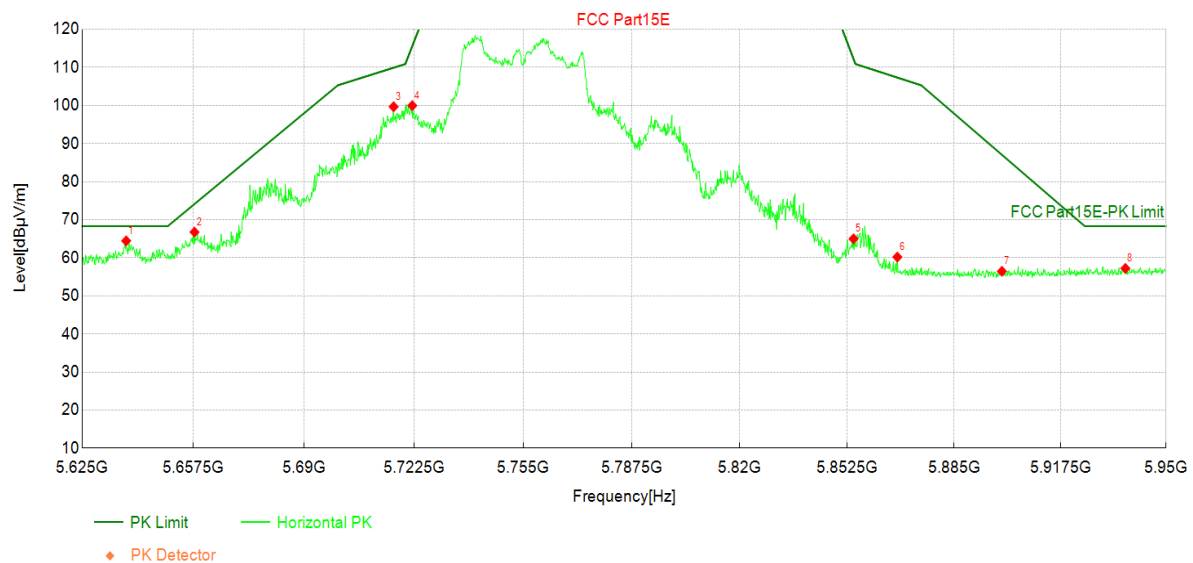

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5638	46.36	64.45	18.09	68.30	3.85	PK	Horizo	PASS
2	5658	48.46	66.75	18.29	74.12	7.37	PK	Horizo	PASS
3	5717	81.00	99.68	18.68	109.93	10.25	PK	Horizo	PASS
4	5722	81.30	99.97	18.67	115.60	15.63	PK	Horizo	PASS
5	5854	46.00	64.98	18.98	112.26	47.28	PK	Horizo	PASS
6	5868	41.11	60.20	19.09	107.33	47.13	PK	Horizo	PASS
7	5900	37.11	56.45	19.34	87.06	30.61	PK	Horizo	PASS
8	5937	37.58	57.21	19.63	68.30	11.09	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5755MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

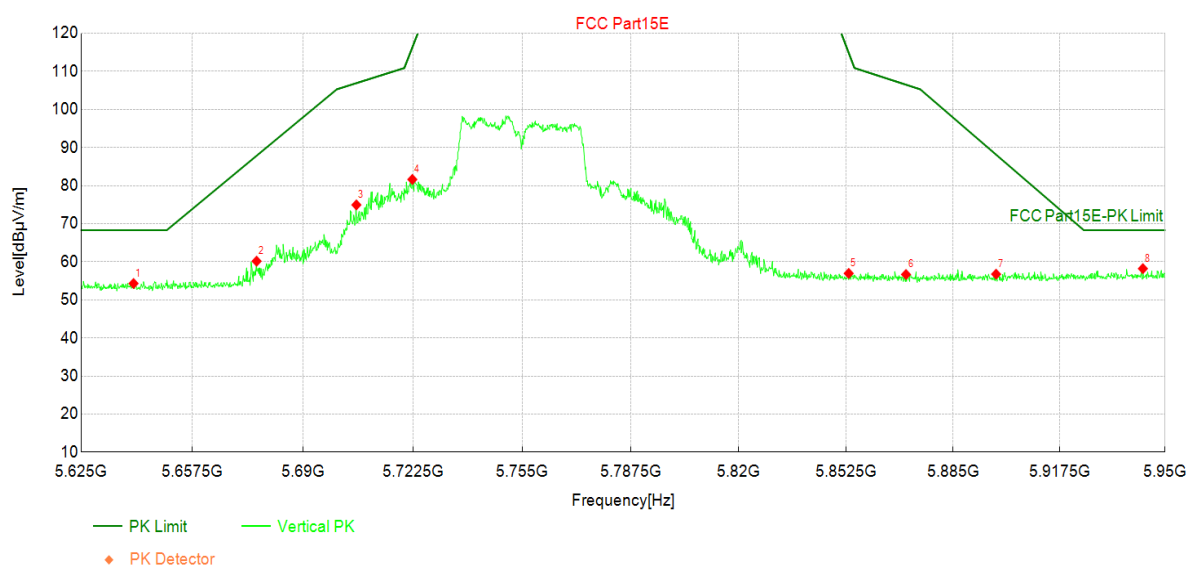

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5640	36.19	54.30	18.11	68.30	14.00	PK	Vertic	PASS
2	5676	41.68	60.16	18.48	87.86	27.70	PK	Vertic	PASS
3	5706	56.25	74.95	18.70	106.93	31.98	PK	Vertic	PASS
4	5722	62.96	81.63	18.67	116.34	34.71	PK	Vertic	PASS
5	5853	37.99	56.95	18.96	114.86	57.91	PK	Vertic	PASS
6	5871	37.57	56.67	19.10	106.51	49.84	PK	Vertic	PASS
7	5898	37.43	56.76	19.33	88.14	31.38	PK	Vertic	PASS
8	5943	38.54	58.21	19.67	68.30	10.09	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5795MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

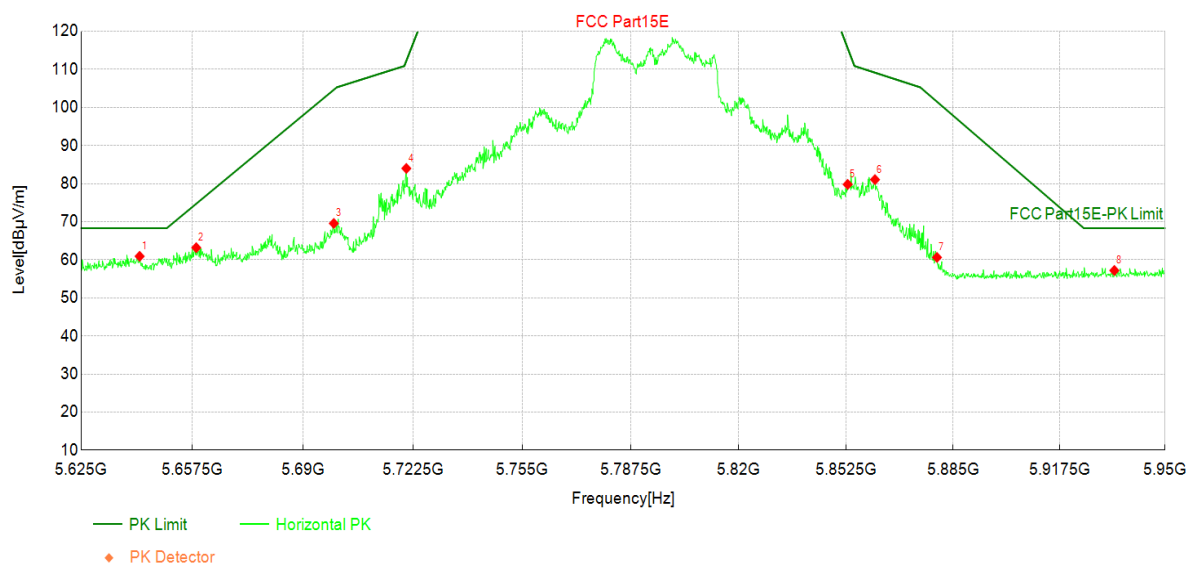

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5642	42.79	60.92	18.13	68.30	7.38	PK	Horizo	PASS
2	5659	44.89	63.18	18.29	74.73	11.55	PK	Horizo	PASS
3	5699	50.86	69.56	18.70	104.66	35.10	PK	Horizo	PASS
4	5721	65.32	84.00	18.68	112.26	28.26	PK	Horizo	PASS
5	5853	60.84	79.80	18.96	115.60	35.80	PK	Horizo	PASS
6	5861	62.03	81.06	19.03	109.15	28.09	PK	Horizo	PASS
7	5880	41.45	60.63	19.18	101.52	40.89	PK	Horizo	PASS
8	5934	37.59	57.19	19.60	68.30	11.11	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 3:Transmit at 5795MHz by 802.11n(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

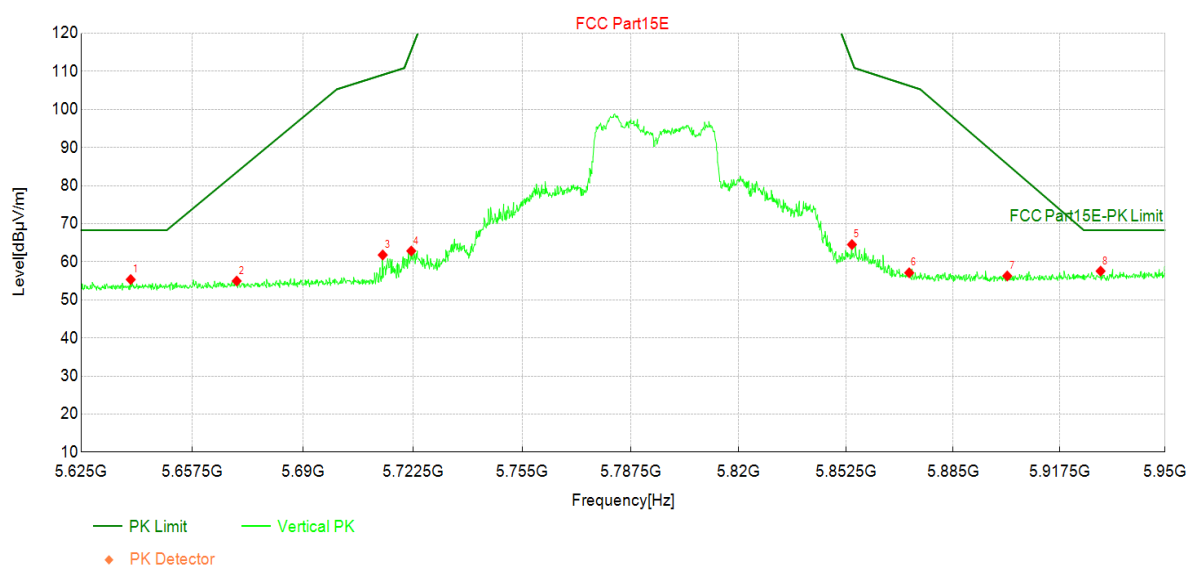

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	37.24	55.34	18.10	68.30	12.96	PK	Vertic	PASS
2	5671	36.54	54.95	18.41	83.53	28.58	PK	Vertic	PASS
3	5714	43.10	61.79	18.69	109.11	47.32	PK	Vertic	PASS
4	5722	44.18	62.85	18.67	115.60	52.75	PK	Vertic	PASS
5	5854	45.55	64.52	18.97	112.63	48.11	PK	Vertic	PASS
6	5872	38.01	57.12	19.11	106.24	49.12	PK	Vertic	PASS
7	5902	36.93	56.28	19.35	85.61	29.33	PK	Vertic	PASS
8	5930	37.98	57.55	19.57	68.30	10.75	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5745MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

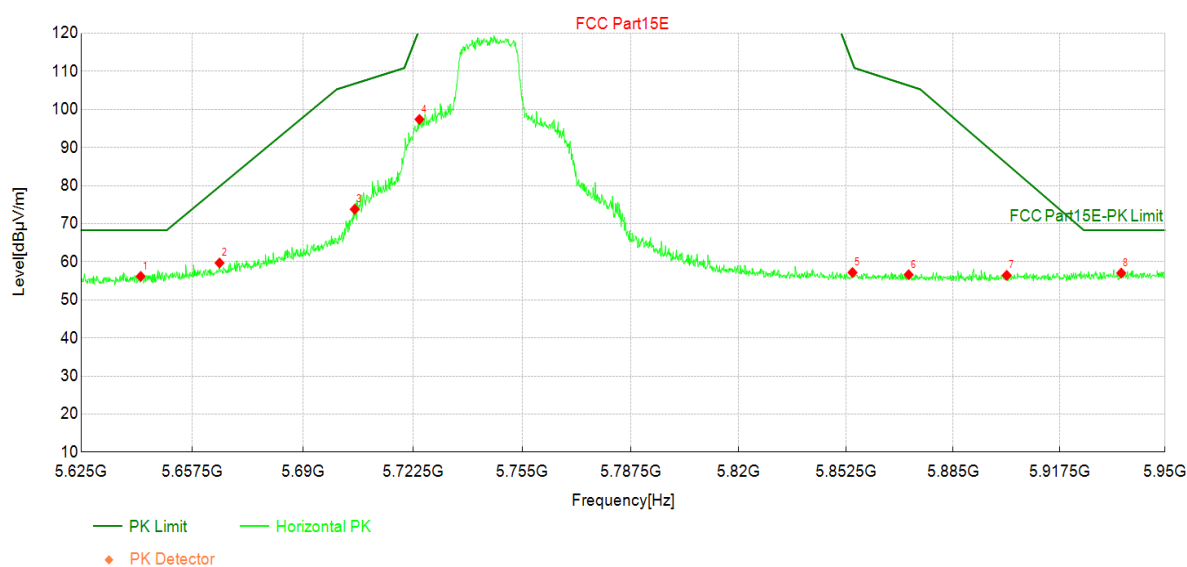

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5642	38.03	56.17	18.14	68.30	12.13	PK	Horizo	PASS
2	5665	41.33	59.69	18.36	79.79	20.10	PK	Horizo	PASS
3	5705	55.10	73.80	18.70	106.79	32.99	PK	Horizo	PASS
4	5724	78.73	97.40	18.67	121.16	23.76	PK	Horizo	PASS
5	5854	38.21	57.19	18.98	112.26	55.07	PK	Horizo	PASS
6	5871	37.50	56.61	19.11	106.29	49.68	PK	Horizo	PASS
7	5901	37.10	56.45	19.35	85.73	29.28	PK	Horizo	PASS
8	5937	37.42	57.03	19.61	68.30	11.27	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5745MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

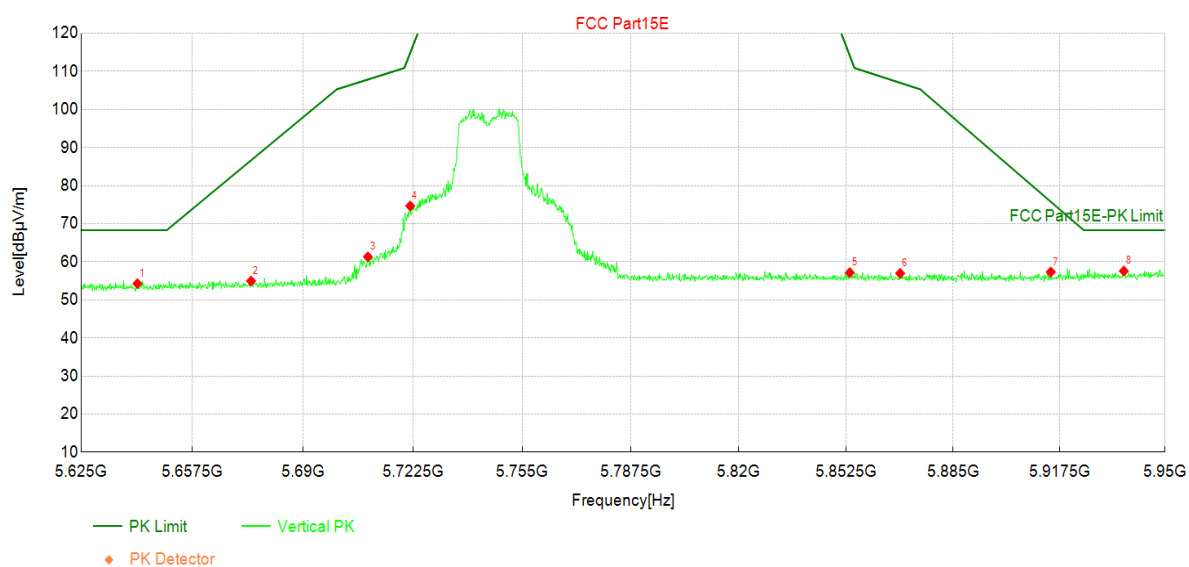

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	36.15	54.28	18.13	68.30	14.02	PK	Vertic	PASS
2	5675	36.49	54.95	18.46	86.66	31.71	PK	Vertic	PASS
3	5709	42.61	61.30	18.69	107.88	46.58	PK	Vertic	PASS
4	5722	55.99	74.66	18.67	114.86	40.20	PK	Vertic	PASS
5	5854	38.19	57.16	18.97	114.12	56.96	PK	Vertic	PASS
6	5869	37.88	56.97	19.09	107.01	50.04	PK	Vertic	PASS
7	5915	37.88	57.33	19.45	75.76	18.43	PK	Vertic	PASS
8	5937	37.94	57.57	19.63	68.30	10.73	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5785MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

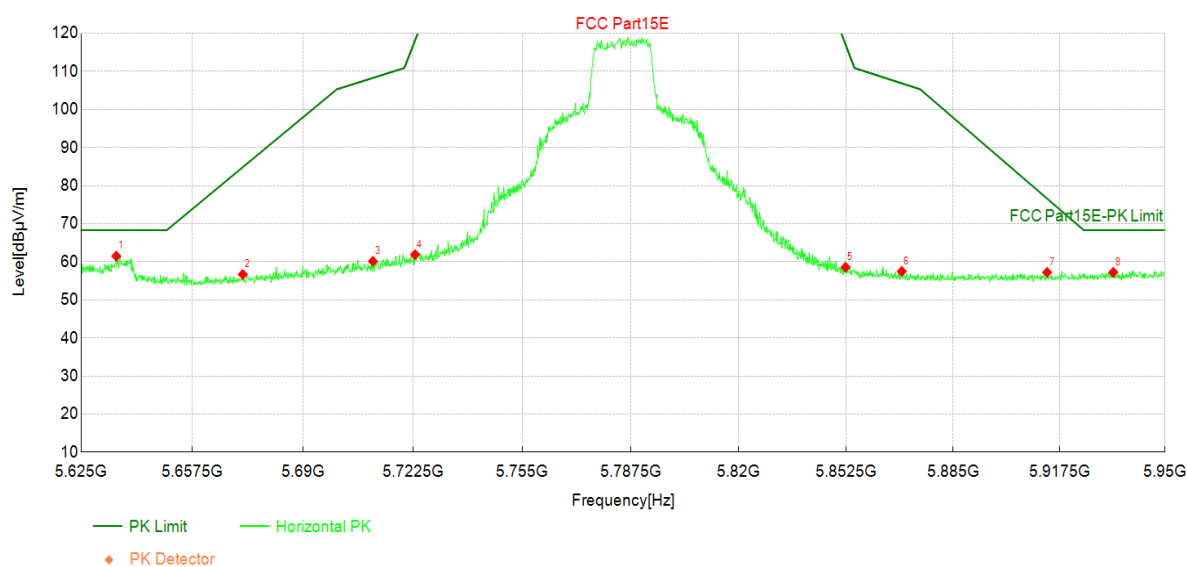

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5635	43.43	61.49	18.06	68.30	6.81	PK	Horizo	PASS
2	5672	38.24	56.68	18.44	84.85	28.17	PK	Horizo	PASS
3	5711	41.44	60.13	18.69	108.29	48.16	PK	Horizo	PASS
4	5723	43.22	61.89	18.67	118.20	56.31	PK	Horizo	PASS
5	5852	39.61	58.57	18.96	117.08	58.51	PK	Horizo	PASS
6	5869	38.39	57.49	19.10	106.88	49.39	PK	Horizo	PASS
7	5914	37.77	57.21	19.44	76.60	19.39	PK	Horizo	PASS
8	5934	37.64	57.24	19.60	68.30	11.06	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5785MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

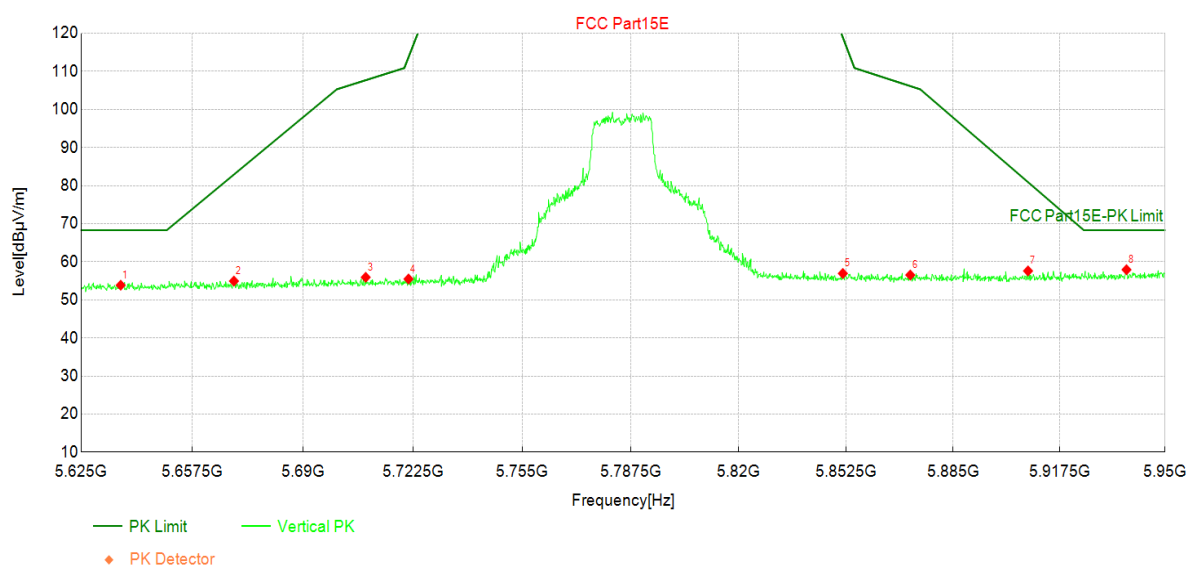

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5637	35.78	53.85	18.07	68.30	14.45	PK	Vertic	PASS
2	5670	36.53	54.94	18.41	82.92	27.98	PK	Vertic	PASS
3	5709	37.23	55.93	18.70	107.70	51.77	PK	Vertic	PASS
4	5721	36.80	55.48	18.68	113.75	58.27	PK	Vertic	PASS
5	5851	37.98	56.93	18.95	118.93	62.00	PK	Vertic	PASS
6	5872	37.40	56.52	19.12	106.15	49.63	PK	Vertic	PASS
7	5908	38.20	57.60	19.40	80.93	23.33	PK	Vertic	PASS
8	5938	38.29	57.92	19.63	68.30	10.38	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5825MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

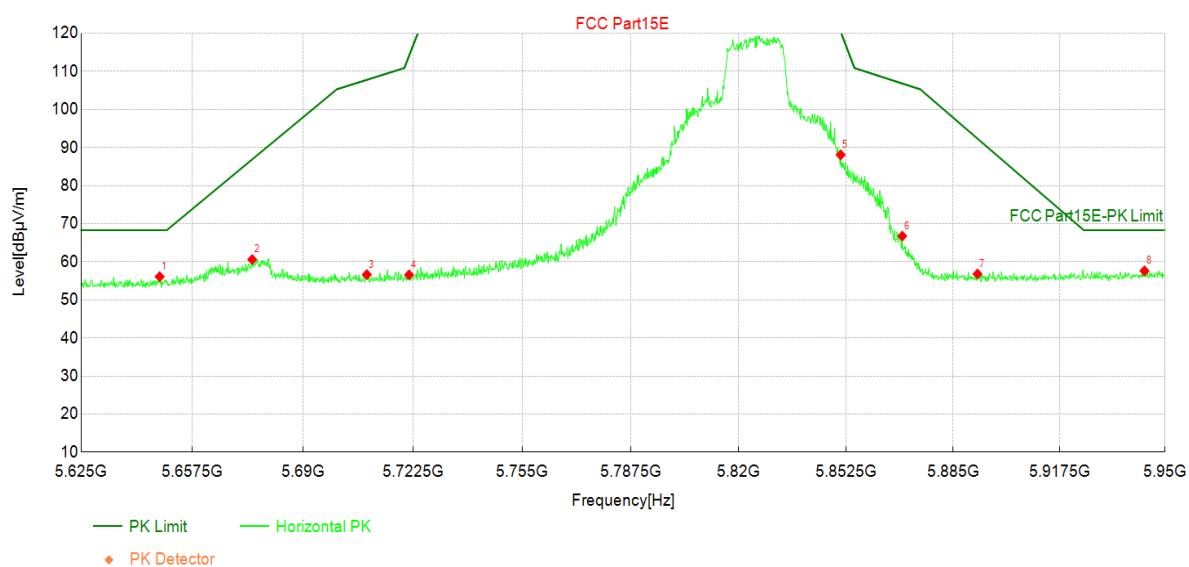

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5648	37.90	56.09	18.19	68.30	12.21	PK	Horizo	PASS
2	5675	42.14	60.60	18.46	86.90	26.30	PK	Horizo	PASS
3	5709	37.94	56.63	18.69	107.79	51.16	PK	Horizo	PASS
4	5721	37.91	56.58	18.67	114.12	57.54	PK	Horizo	PASS
5	5851	69.15	88.10	18.95	120.42	32.32	PK	Horizo	PASS
6	5870	47.65	66.75	19.10	106.83	40.08	PK	Horizo	PASS
7	5892	37.52	56.80	19.28	92.35	35.55	PK	Horizo	PASS
8	5944	37.95	57.62	19.67	68.30	10.68	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 4:Transmit at 5825MHz by 802.11ac(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

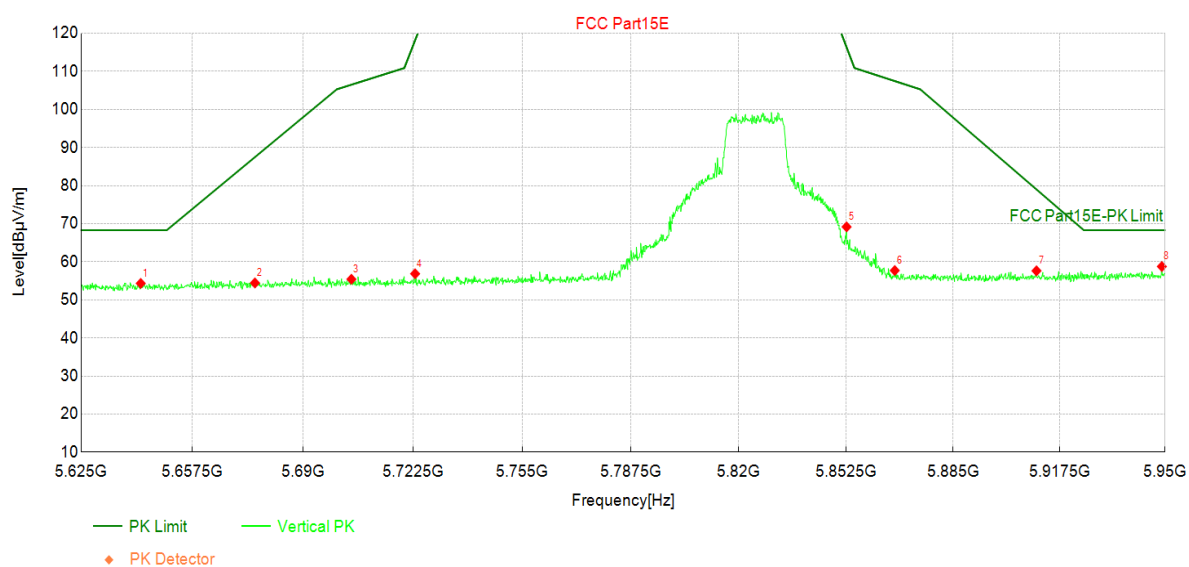

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5642	36.19	54.33	18.14	68.30	13.97	PK	Vertic	PASS
2	5676	35.98	54.44	18.46	87.50	33.06	PK	Vertic	PASS
3	5704	36.72	55.42	18.70	106.52	51.10	PK	Vertic	PASS
4	5723	38.19	56.86	18.67	118.20	61.34	PK	Vertic	PASS
5	5853	50.22	69.18	18.96	116.34	47.16	PK	Vertic	PASS
6	5867	38.65	57.72	19.07	107.47	49.75	PK	Vertic	PASS
7	5910	38.21	57.63	19.42	79.00	21.37	PK	Vertic	PASS
8	5949	39.05	58.76	19.71	68.30	9.54	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5755MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

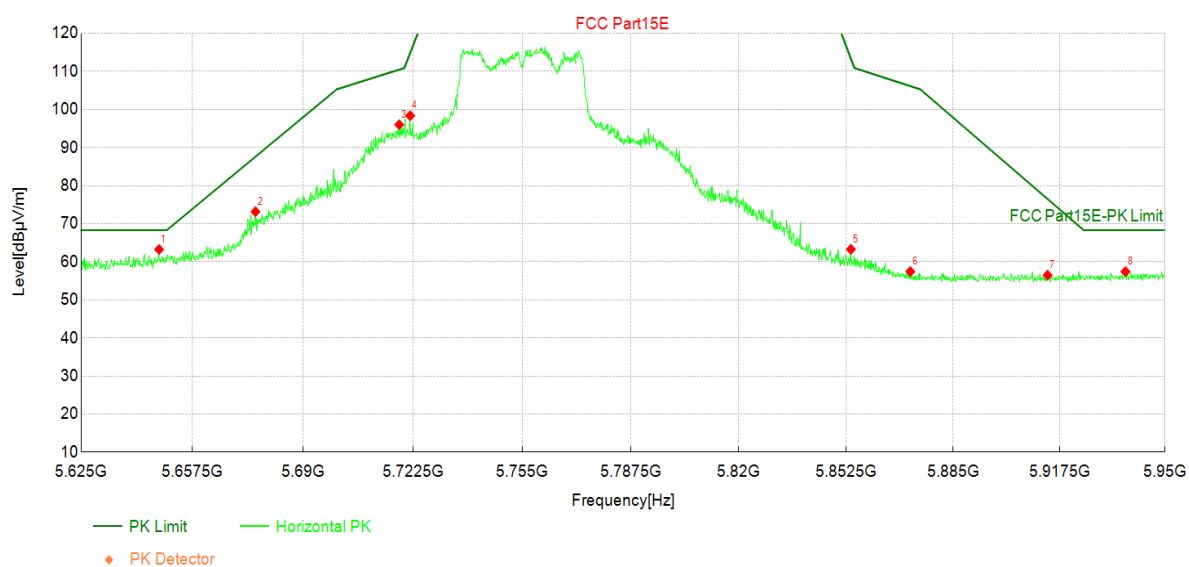

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5648	45.04	63.23	18.19	68.30	5.07	PK	Horizo	PASS
2	5676	54.70	73.17	18.47	87.62	14.45	PK	Horizo	PASS
3	5718	77.32	96.00	18.68	110.48	14.48	PK	Horizo	PASS
4	5722	79.70	98.37	18.67	114.86	16.49	PK	Horizo	PASS
5	5854	44.31	63.28	18.97	113.37	50.09	PK	Horizo	PASS
6	5872	38.31	57.43	19.12	106.15	48.72	PK	Horizo	PASS
7	5914	37.04	56.48	19.44	76.48	20.00	PK	Horizo	PASS
8	5938	37.80	57.43	19.63	68.30	10.87	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5755MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃ ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

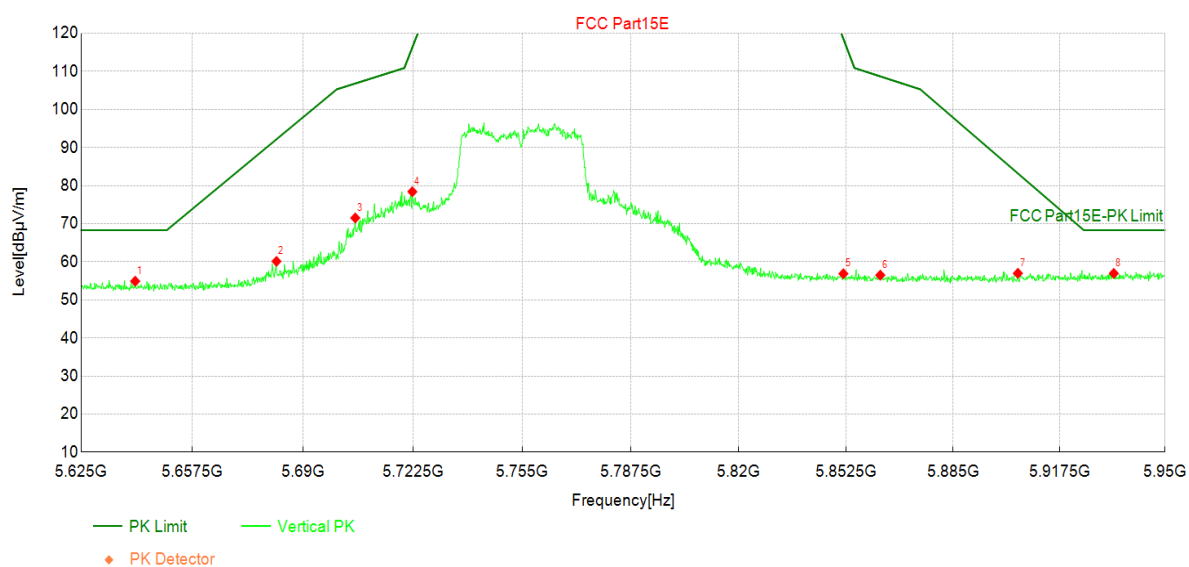

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	36.79	54.90	18.11	68.30	13.40	PK	Vertic	PASS
2	5682	41.59	60.12	18.53	92.19	32.07	PK	Vertic	PASS
3	5705	52.82	71.52	18.70	106.84	35.32	PK	Vertic	PASS
4	5722	59.74	78.41	18.67	116.34	37.93	PK	Vertic	PASS
5	5852	37.92	56.87	18.95	118.56	61.69	PK	Vertic	PASS
6	5863	37.45	56.49	19.04	108.70	52.21	PK	Vertic	PASS
7	5905	37.60	56.98	19.38	83.21	26.23	PK	Vertic	PASS
8	5934	37.35	56.95	19.60	68.30	11.35	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5795MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

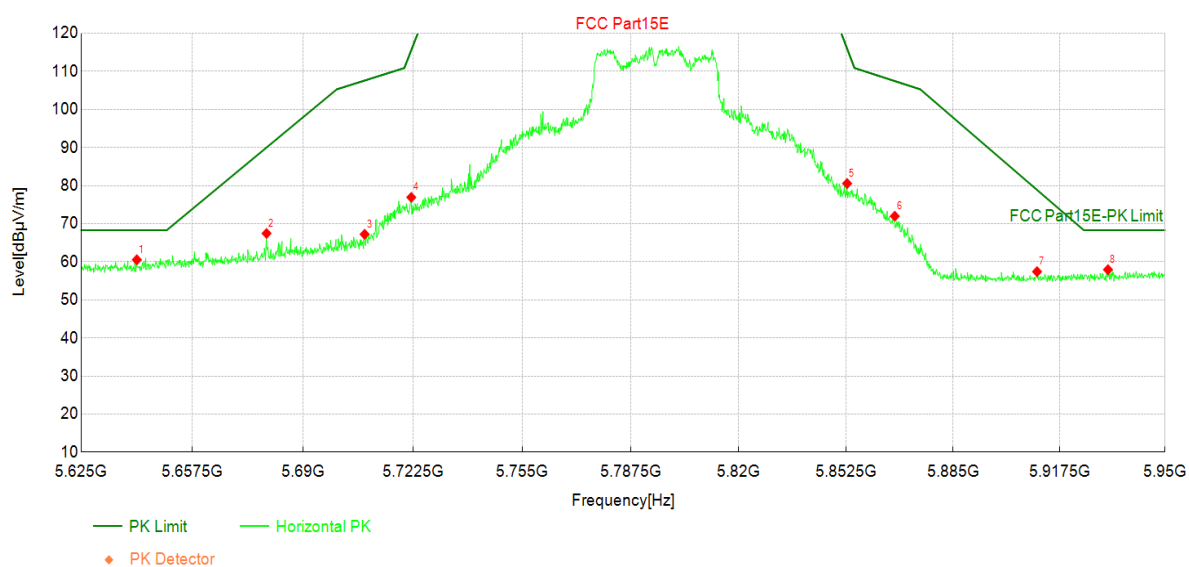

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5641	42.42	60.54	18.12	68.30	7.76	PK	Horizo	PASS
2	5679	48.96	67.46	18.50	90.02	22.56	PK	Horizo	PASS
3	5708	48.53	67.23	18.70	107.61	40.38	PK	Horizo	PASS
4	5722	58.27	76.94	18.67	115.60	38.66	PK	Horizo	PASS
5	5853	61.61	80.57	18.96	115.97	35.40	PK	Horizo	PASS
6	5867	52.91	71.98	19.07	107.47	35.49	PK	Horizo	PASS
7	5911	37.99	57.41	19.42	78.88	21.47	PK	Horizo	PASS
8	5932	38.35	57.93	19.58	68.30	10.37	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 5:Transmit at 5795MHz by 802.11ac(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

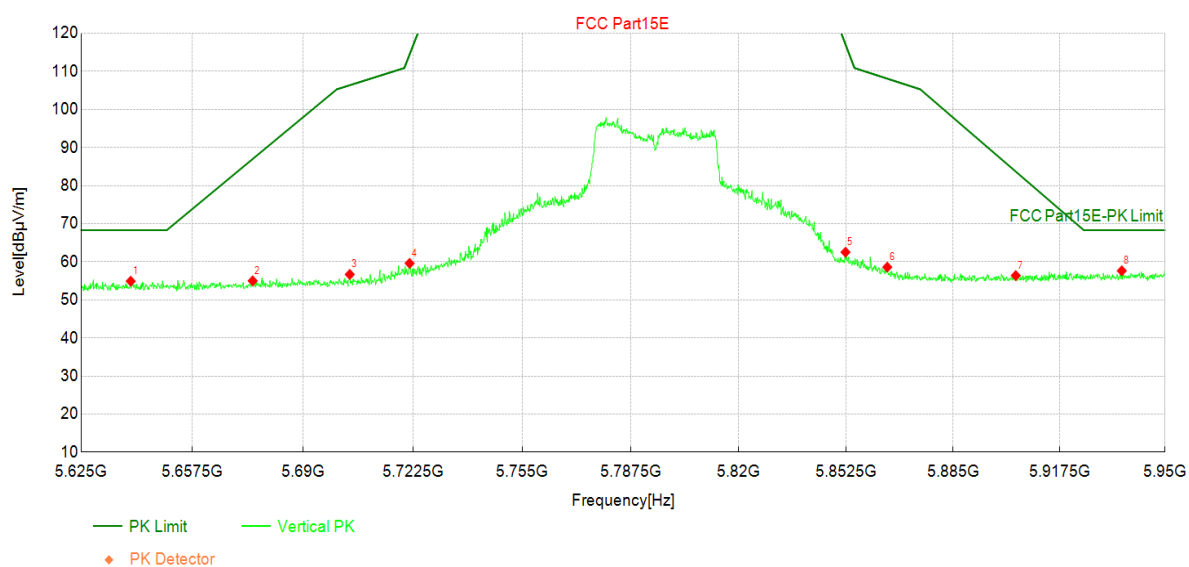

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	36.81	54.91	18.10	68.30	13.39	PK	Vertic	PASS
2	5675	36.53	54.99	18.46	87.02	32.03	PK	Vertic	PASS
3	5704	37.98	56.68	18.70	106.38	49.70	PK	Vertic	PASS
4	5722	40.92	59.59	18.67	114.49	54.90	PK	Vertic	PASS
5	5852	43.56	62.52	18.96	117.08	54.56	PK	Vertic	PASS
6	5865	39.53	58.59	19.06	108.11	49.52	PK	Vertic	PASS
7	5904	37.01	56.38	19.37	83.69	27.31	PK	Vertic	PASS
8	5937	38.02	57.63	19.61	68.30	10.67	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5775MHz by 802.11ac(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

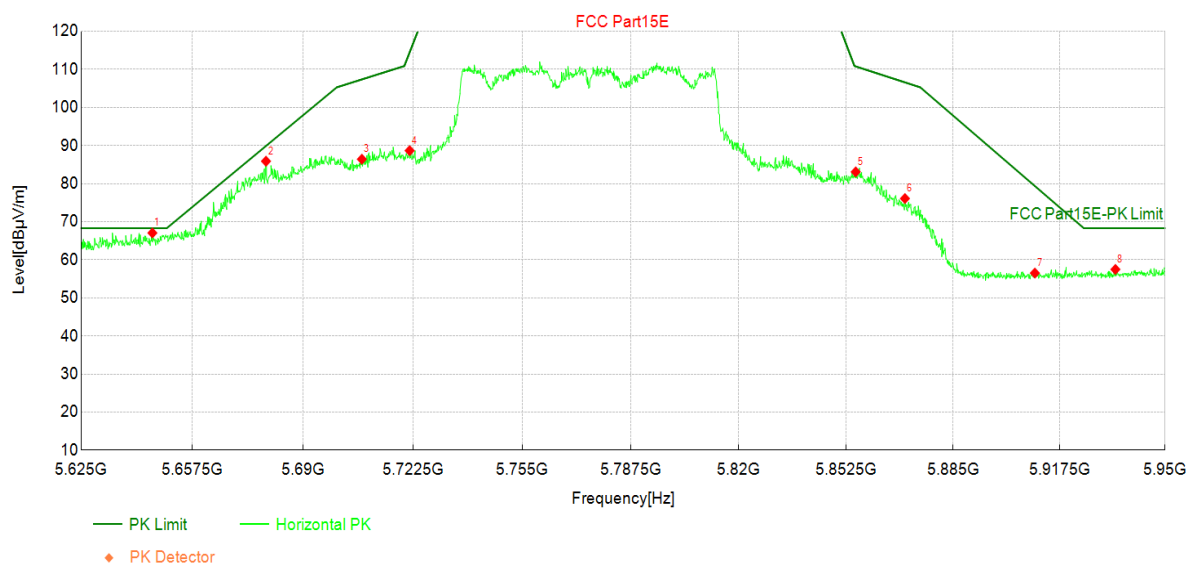

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5646	48.88	67.05	18.17	68.30	1.25	PK	Horizo	PASS
2	5679	67.39	85.89	18.50	89.90	4.01	PK	Horizo	PASS
3	5707	67.72	86.42	18.70	107.38	20.96	PK	Horizo	PASS
4	5722	70.01	88.68	18.67	114.49	25.81	PK	Horizo	PASS
5	5855	64.10	83.09	18.99	110.79	27.70	PK	Horizo	PASS
6	5870	56.99	76.09	19.10	106.60	30.51	PK	Horizo	PASS
7	5910	37.10	56.51	19.41	79.36	22.85	PK	Horizo	PASS
8	5935	37.88	57.48	19.60	68.30	10.82	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 6:Transmit at 5775MHz by 802.11ac(80MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

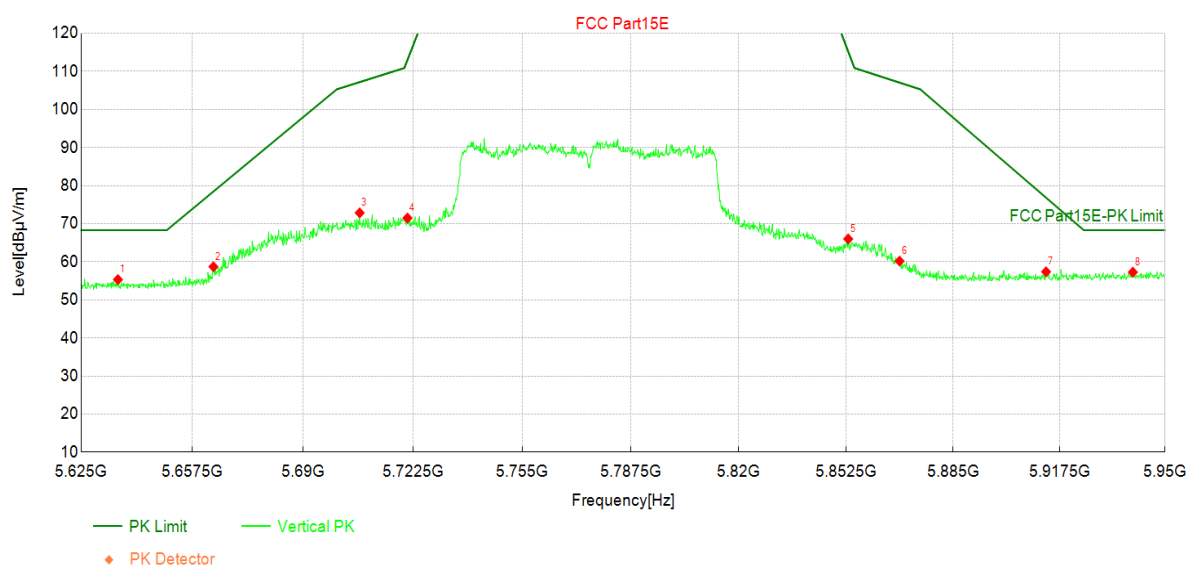

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5636	37.26	55.33	18.07	68.30	12.97	PK	Vertic	PASS
2	5664	40.35	58.70	18.35	78.47	19.77	PK	Vertic	PASS
3	5707	54.15	72.85	18.70	107.20	34.35	PK	Vertic	PASS
4	5721	52.81	71.49	18.68	113.01	41.52	PK	Vertic	PASS
5	5853	47.04	66.00	18.96	115.23	49.23	PK	Vertic	PASS
6	5869	41.10	60.19	19.09	107.06	46.87	PK	Vertic	PASS
7	5913	37.94	57.38	19.44	76.84	19.46	PK	Vertic	PASS
8	5940	37.63	57.27	19.64	68.30	11.03	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5745MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

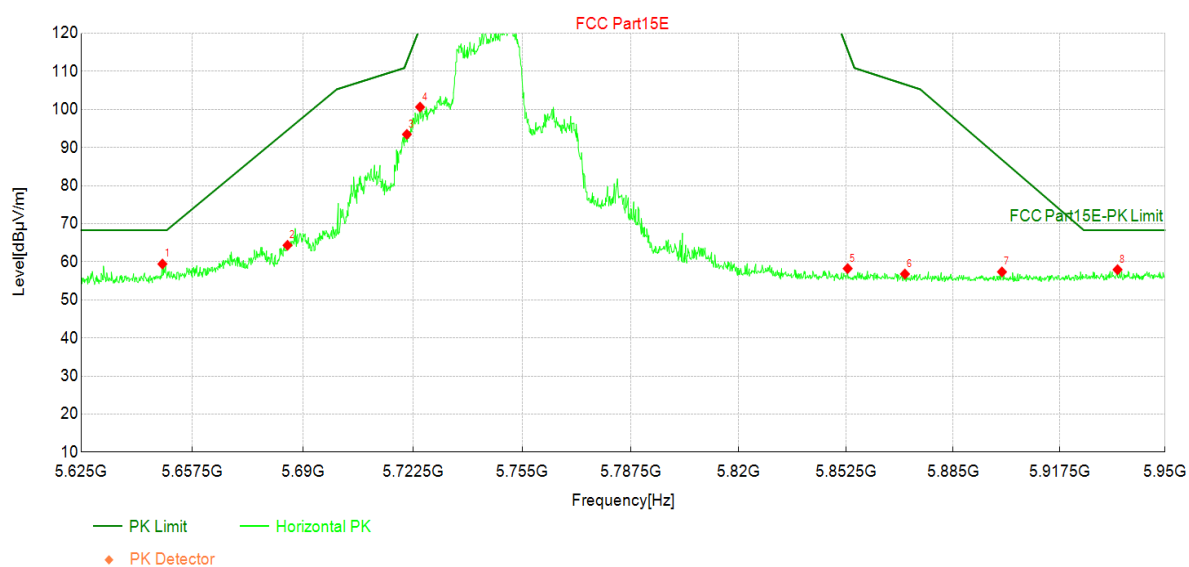

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5649	41.22	59.42	18.20	68.30	8.88	PK	Horizo	PASS
2	5685	45.76	64.33	18.57	94.59	30.26	PK	Horizo	PASS
3	5721	74.80	93.48	18.68	112.63	19.15	PK	Horizo	PASS
4	5725	81.97	100.64	18.67	121.53	20.89	PK	Horizo	PASS
5	5853	39.27	58.23	18.96	115.60	57.37	PK	Horizo	PASS
6	5870	37.70	56.80	19.10	106.60	49.80	PK	Horizo	PASS
7	5900	38.01	57.35	19.34	86.82	29.47	PK	Horizo	PASS
8	5935	38.32	57.93	19.61	68.30	10.37	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5745MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

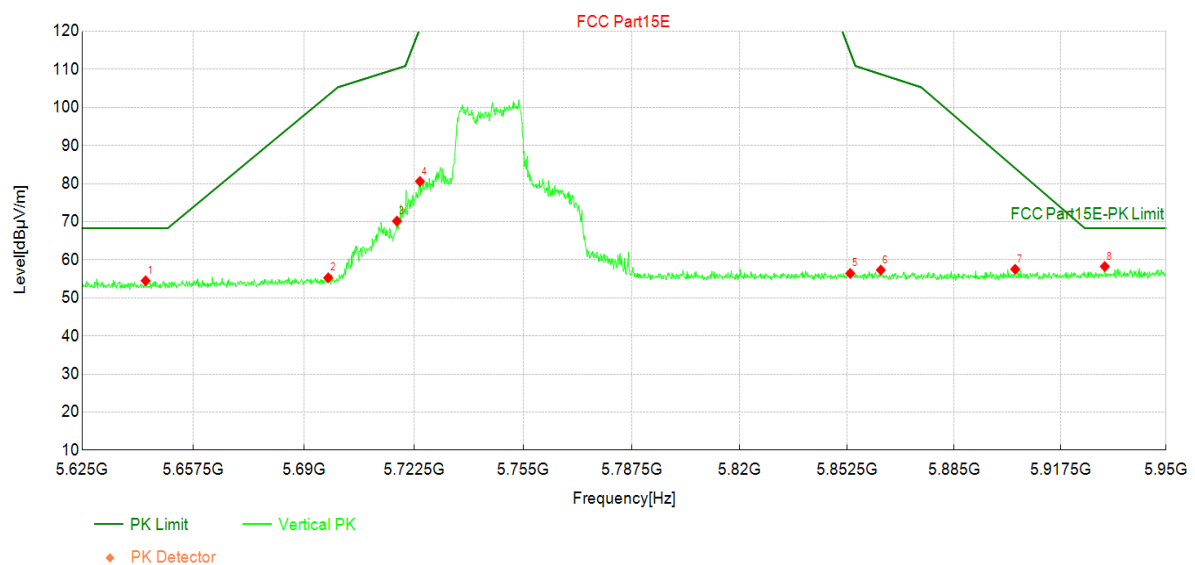

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5644	36.34	54.49	18.15	68.30	13.81	PK	Vertic	PASS
2	5697	36.59	55.27	18.68	103.23	47.96	PK	Vertic	PASS
3	5718	51.48	70.16	18.68	110.20	40.04	PK	Vertic	PASS
4	5724	61.93	80.60	18.67	120.79	40.19	PK	Vertic	PASS
5	5853	37.46	56.42	18.96	114.49	58.07	PK	Vertic	PASS
6	5863	38.27	57.31	19.04	108.74	51.43	PK	Vertic	PASS
7	5904	38.15	57.52	19.37	84.05	26.53	PK	Vertic	PASS
8	5931	38.66	58.24	19.58	68.30	10.06	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5785MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

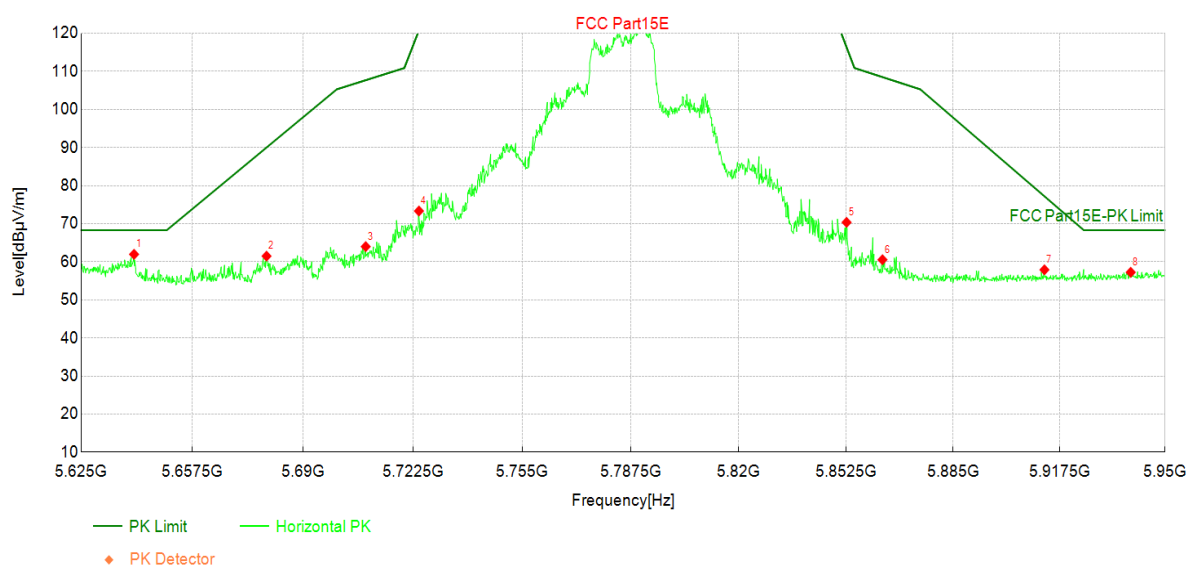

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5640	43.85	61.96	18.11	68.30	6.34	PK	Horizo	PASS
2	5679	42.99	61.49	18.50	90.02	28.53	PK	Horizo	PASS
3	5709	45.29	63.99	18.70	107.70	43.71	PK	Horizo	PASS
4	5724	54.67	73.34	18.67	120.79	47.45	PK	Horizo	PASS
5	5853	51.40	70.36	18.96	116.34	45.98	PK	Horizo	PASS
6	5864	41.50	60.55	19.05	108.52	47.97	PK	Horizo	PASS
7	5913	38.46	57.90	19.44	77.20	19.30	PK	Horizo	PASS
8	5939	37.60	57.24	19.64	68.30	11.06	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5785MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

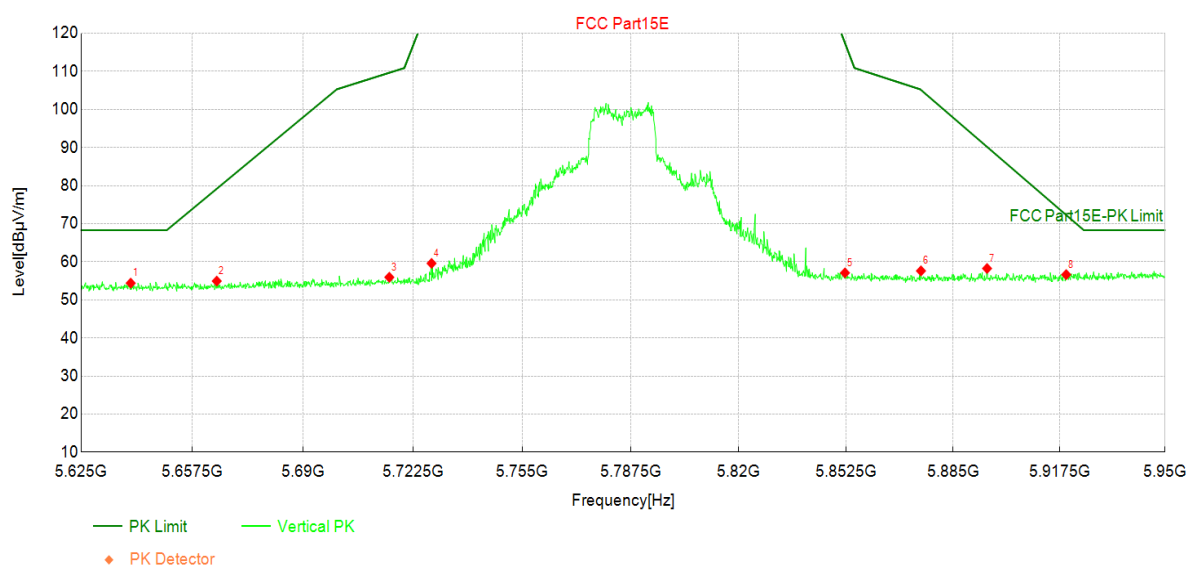

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	36.29	54.39	18.10	68.30	13.91	PK	Vertic	PASS
2	5665	36.58	54.94	18.36	79.19	24.25	PK	Vertic	PASS
3	5716	37.25	55.94	18.69	109.66	53.72	PK	Vertic	PASS
4	5728	40.92	59.58	18.66	-	-	PK	Vertic	NA
5	5852	38.13	57.09	18.96	117.45	60.36	PK	Vertic	PASS
6	5875	38.47	57.61	19.14	105.14	47.53	PK	Vertic	PASS
7	5895	38.94	58.24	19.30	90.19	31.95	PK	Vertic	PASS
8	5920	37.14	56.63	19.49	72.28	15.65	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5825MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

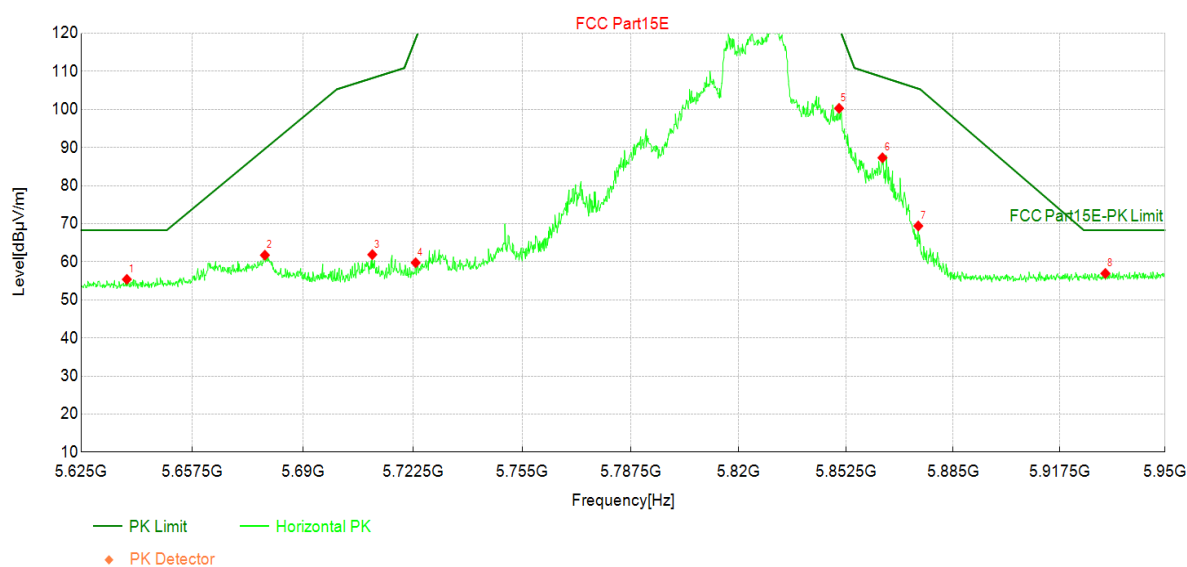

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5638	37.29	55.39	18.10	68.30	12.91	PK	Horizo	PASS
2	5679	43.24	61.74	18.50	89.66	27.92	PK	Horizo	PASS
3	5711	43.19	61.88	18.69	108.25	46.37	PK	Horizo	PASS
4	5723	41.09	59.76	18.67	118.57	58.81	PK	Horizo	PASS
5	5850	81.36	100.31	18.95	121.53	21.22	PK	Horizo	PASS
6	5864	68.27	87.32	19.05	108.52	21.20	PK	Horizo	PASS
7	5874	50.29	69.42	19.13	105.47	36.05	PK	Horizo	PASS
8	5932	37.35	56.93	19.58	68.30	11.37	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5825MHz by 802.11ax(20MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

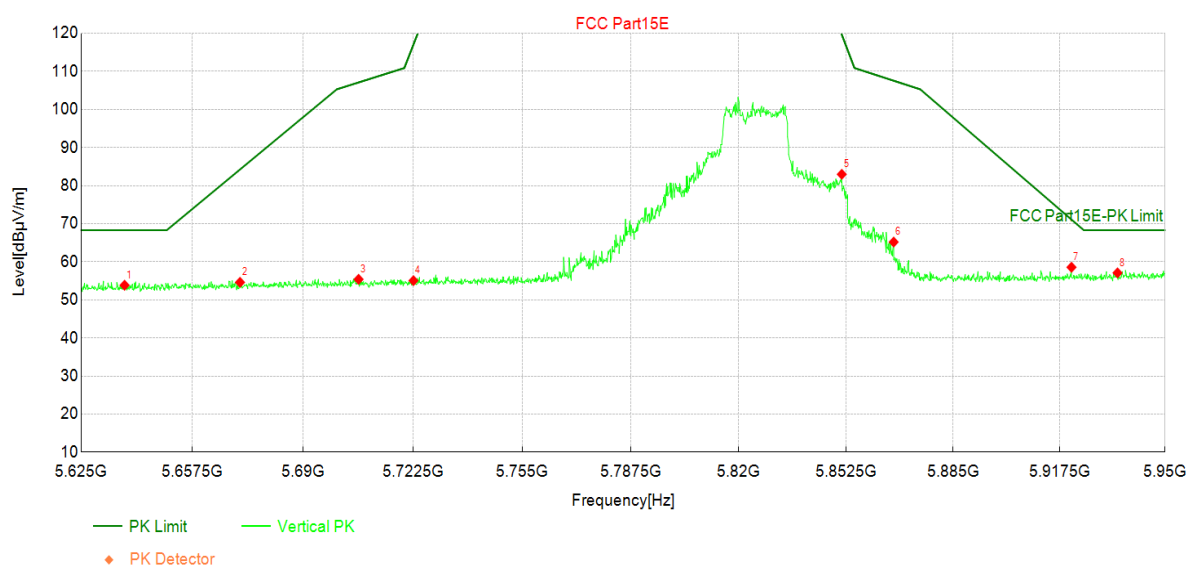

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5638	35.75	53.84	18.09	68.30	14.46	PK	Vertic	PASS
2	5671	36.18	54.60	18.42	84.25	29.65	PK	Vertic	PASS
3	5706	36.71	55.40	18.69	107.11	51.71	PK	Vertic	PASS
4	5723	36.38	55.05	18.67	117.08	62.03	PK	Vertic	PASS
5	5851	64.03	82.98	18.95	119.68	36.70	PK	Vertic	PASS
6	5867	46.12	65.19	19.07	107.56	42.37	PK	Vertic	PASS
7	5921	39.07	58.57	19.50	71.08	12.51	PK	Vertic	PASS
8	5935	37.48	57.09	19.61	68.30	11.21	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5755MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

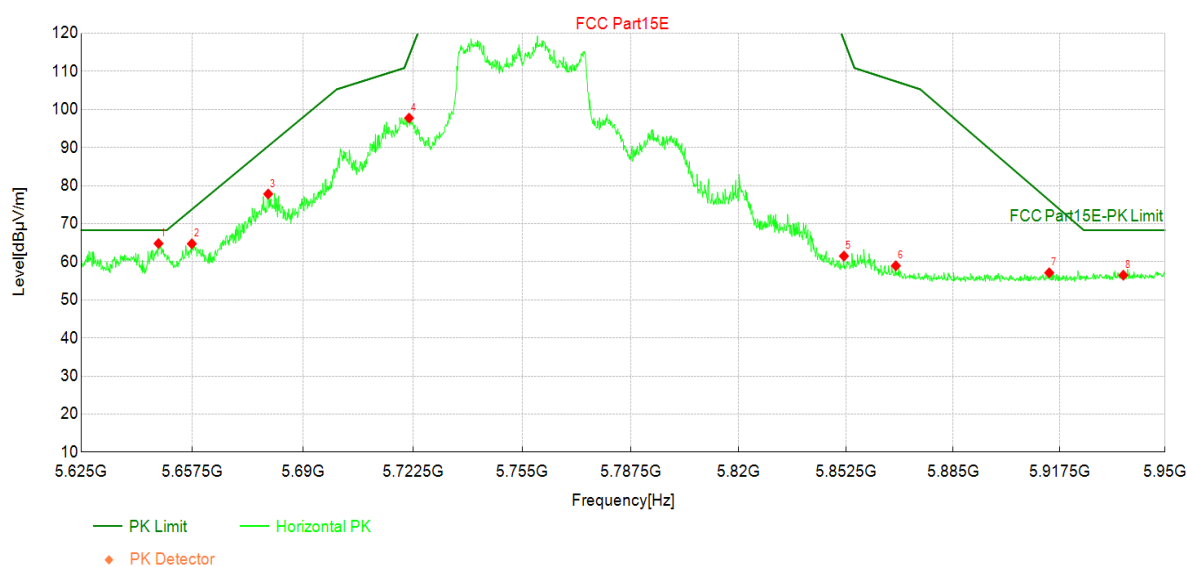

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5648	46.61	64.80	18.19	68.30	3.50	PK	Horizo	PASS
2	5657	46.46	64.74	18.28	73.76	9.02	PK	Horizo	PASS
3	5680	59.31	77.81	18.50	90.38	12.57	PK	Horizo	PASS
4	5721	79.08	97.75	18.67	114.12	16.37	PK	Horizo	PASS
5	5852	42.55	61.51	18.96	118.19	56.68	PK	Horizo	PASS
6	5868	39.86	58.95	19.09	107.38	48.43	PK	Horizo	PASS
7	5914	37.66	57.11	19.45	76.12	19.01	PK	Horizo	PASS
8	5937	36.85	56.48	19.63	68.30	11.82	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5755MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

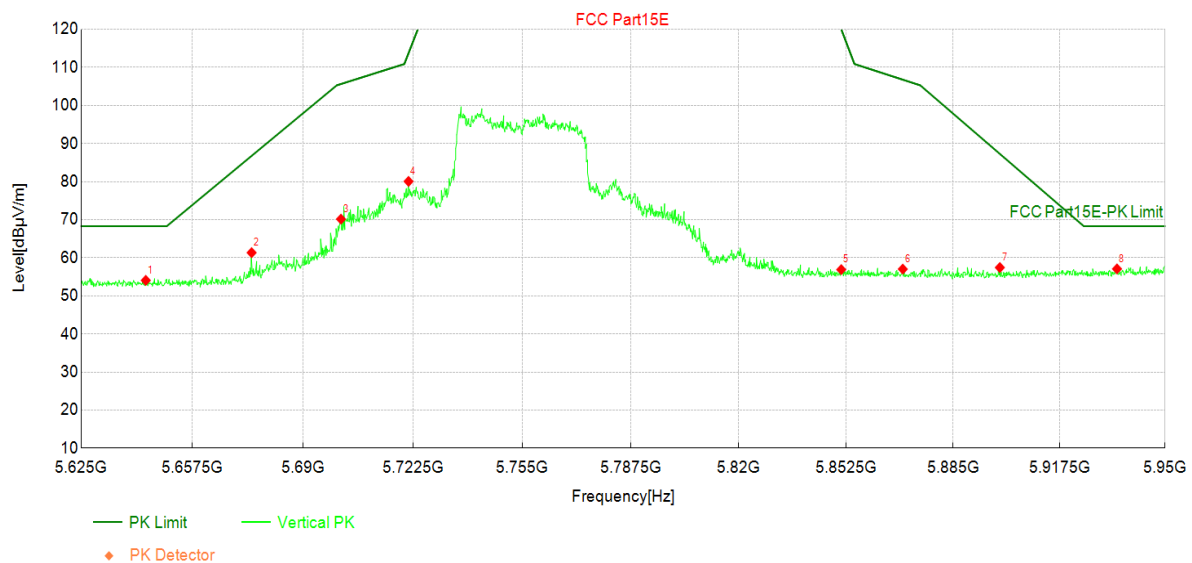

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5644	35.92	54.07	18.15	68.30	14.23	PK	Vertic	PASS
2	5675	42.89	61.35	18.46	86.78	25.43	PK	Vertic	PASS
3	5701	51.46	70.16	18.70	105.65	35.49	PK	Vertic	PASS
4	5721	61.39	80.07	18.68	113.75	33.68	PK	Vertic	PASS
5	5851	37.95	56.90	18.95	120.05	63.15	PK	Vertic	PASS
6	5870	37.93	57.03	19.10	106.79	49.76	PK	Vertic	PASS
7	5899	38.10	57.44	19.34	87.30	29.86	PK	Vertic	PASS
8	5935	37.47	57.08	19.61	68.30	11.22	PK	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5795MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

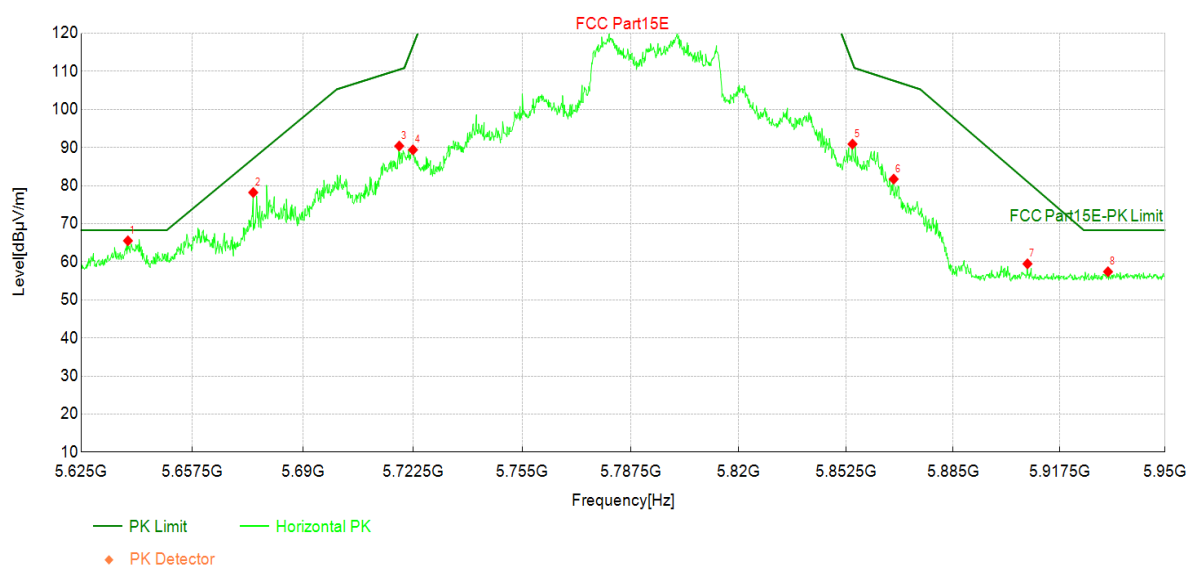

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5639	47.42	65.52	18.10	68.30	2.78	PK	Horizo	PASS
2	5675	59.74	78.20	18.46	87.14	8.94	PK	Horizo	PASS
3	5718	71.73	90.41	18.68	110.48	20.07	PK	Horizo	PASS
4	5723	70.74	89.41	18.67	116.71	27.30	PK	Horizo	PASS
5	5854	71.94	90.92	18.98	112.26	21.34	PK	Horizo	PASS
6	5867	62.64	81.71	19.07	107.56	25.85	PK	Horizo	PASS
7	5908	40.06	59.46	19.40	81.05	21.59	PK	Horizo	PASS
8	5932	37.81	57.39	19.58	68.30	10.91	PK	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24B0230R	EUT:	WiFi 7 (802.11BE) 4X4 MU-MIMO 5 GHz Single Band Wireless Module
Mode:	Mode 7:Transmit at 5795MHz by 802.11ax(40MHz)	Voltage:	3.3Vdc
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC Part15E		

Test Graph

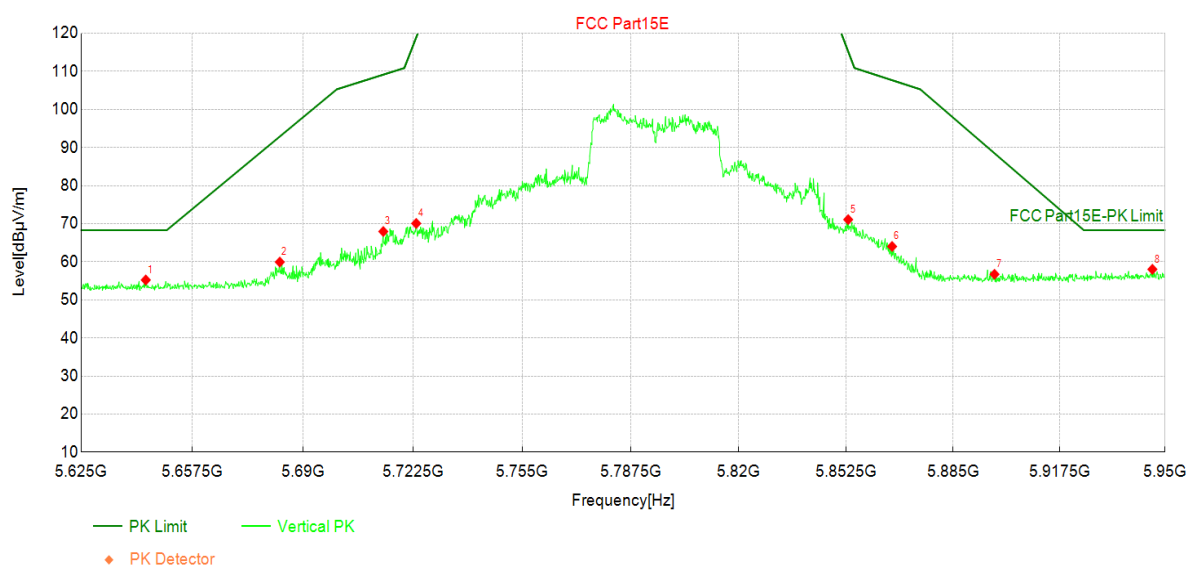

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	5644	37.07	55.22	18.15	68.30	13.08	PK	Vertic	PASS
2	5683	41.39	59.93	18.54	92.91	32.98	PK	Vertic	PASS
3	5714	49.28	67.96	18.68	109.16	41.20	PK	Vertic	PASS
4	5724	51.40	70.07	18.67	118.94	48.87	PK	Vertic	PASS
5	5853	52.13	71.09	18.96	115.23	44.14	PK	Vertic	PASS
6	5866	44.96	64.03	19.07	107.70	43.67	PK	Vertic	PASS
7	5898	37.40	56.72	19.32	88.50	31.78	PK	Vertic	PASS
8	5946	38.33	58.02	19.69	68.30	10.28	PK	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level