



FCC Test Report

FCC ID : UDX-60099010
Equipment : Wi-Fi 6 Access Point
Brand Name : CISCO
Model Name : MR36-HW
Applicant : Cisco Systems
170 West Tasman Drive, San Jose, CA 95134 USA
Manufacturer : Cisco Systems
170 West Tasman Drive, San Jose, CA 95134 USA
Standard : 47 CFR FCC Part 15.247

The product was received on Jun. 20, 2019, and testing was started from Jun. 20, 2019 and completed on Jul. 31, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	9
1.3 Testing Location Information.....	9
1.4 Measurement Uncertainty	10
2 TEST CONFIGURATION OF EUT	11
2.1 Test Condition	11
2.2 Test Channel Mode	11
2.3 The Worst Case Measurement Configuration.....	16
2.4 Support Equipment.....	17
2.5 Test Setup Diagram	18
3 TRANSMITTER TEST RESULT	20
3.1 AC Power-line Conducted Emissions	20
3.2 DTS Bandwidth	21
3.3 Maximum Conducted Output Power	22
3.4 Power Spectral Density	24
3.5 Emissions in Non-restricted Frequency Bands	25
3.6 Emissions in Restricted Frequency Bands.....	26
4 TEST EQUIPMENT AND CALIBRATION DATA	29
APPENDIX A. TEST RESULTS OF AC POWER-LINE CONDUCTED EMISSIONS	
APPENDIX B. TEST RESULTS OF DTS BANDWIDTH	
APPENDIX C. TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER	
APPENDIX D. TEST RESULTS OF POWER SPECTRAL DENSITY	
APPENDIX E. TEST RESULTS OF EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	
APPENDIX F. TEST RESULTS OF EMISSIONS IN RESTRICTED FREQUENCY BANDS	
TEST SETUP PHOTOS V01	
PHOTOGRAPHS OF EUT V01	



History of this test report

Report No.	Version	Description	Issued Date
FR962029-06AC	01	Initial issue of report	Oct. 17, 2019



Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	FCC 15.203
3.1	15.207	AC Power-line Conducted Emissions	PASS	FCC 15.207
3.2	15.247(a)	DTS Bandwidth	PASS	≥500kHz
3.3	15.247(b)	Maximum Conducted Output Power	PASS	Power [dBm]: 30
3.4	15.247(e)	Power Spectral Density	PASS	PSD [dBm/3kHz]: 8
3.5	15.247(d)	Emissions in Non-restricted Frequency Bands	PASS	Non-Restricted Bands: > 30 dBc
3.6	15.247(d)	Emissions in Restricted Frequency Bands	PASS	Restricted Bands: FCC 15.209

Note : From Sporton Project No.:FR962029AC.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and explanations:

None

Reviewed by: Jackson Tsai

Report Producer: Jenny Yang



1 General Description

1.1 Information

1.1.1 RF General Information

Radio 1_Non-Beamforming

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), ac (VHT20), ax (HEW 20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40), ac (VHT40), ax (HEW 40)	2422-2452	3-9 [7]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b	20	2TX
2.4-2.4835GHz	802.11g	20	2TX
2.4-2.4835GHz	802.11n HT20	20	2TX
2.4-2.4835GHz	802.11ac VHT20	20	2TX
2.4-2.4835GHz	802.11ax HEW20	20	2TX
2.4-2.4835GHz	802.11n HT40	40	2TX
2.4-2.4835GHz	802.11ac VHT40	40	2TX
2.4-2.4835GHz	802.11ax HEW40	40	2TX

Radio 1_Beamforming

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11ac VHT20-BF	20	2TX
2.4-2.4835GHz	802.11ac VHT40-BF	40	2TX
2.4-2.4835GHz	802.11ax HEW20-BF	20	2TX
2.4-2.4835GHz	802.11ax HEW40-BF	40	2TX

**Radio 2_Non-Beamforming**

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
2400-2483.5	b, g, n (HT20), ac (VHT20)	2412-2462	1-11 [11]
2400-2483.5	n (HT40), ac (VHT40)	2422-2452	3-9 [7]

Band	Mode	BWch (MHz)	Nant
2.4-2.4835GHz	802.11b	20	1TX
2.4-2.4835GHz	802.11g	20	1TX
2.4-2.4835GHz	802.11n HT20	20	1TX
2.4-2.4835GHz	802.11ac VHT20	20	1TX
2.4-2.4835GHz	802.11n HT40	40	1TX
2.4-2.4835GHz	802.11ac VHT40	40	1TX

Note:

- ♦ 11b mode uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.
- ♦ 11g, HT20 and HT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ VHT20, VHT40 use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.
- ♦ HEW20, HEW40 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ The resource unit of HEW 20, HEW 40 only support full loading.

**1.1.2 Antenna Information**

Ant.	Brand	Model Name	Antenna Type	Connector
1	-	-	PIFA	I-PEX
2	-	-	PIFA	I-PEX
3	-	-	PIFA	I-PEX
4	-	-	PIFA	I-PEX
5	-	-	PIFA	I-PEX
6	-	-	PIFA	I-PEX

Ant.	Port	Gain (dBi)										
		Radio 1					Radio 2					Radio 3
		2.4G	5G				2.4G	5G				BT
			B1	B2	B3	B4		B1	B2	B3	B4	
1	1	4.22	-	-	-	-	-	-	-	-	-	-
2	2	4.68	-	-	-	-	-	-	-	-	-	-
3	3	-	4.67	4.67	5.29	4.77	-	-	-	-	-	-
4	4	-	4.91	4.91	4.98	4.9	-	-	-	-	-	-
5	5	-	-	-	-	-	3.02	3.06	3.06	2.57	2.38	-
6	6	-	-	-	-	-	-			-		2.91

Note 1: The EUT has six antennas.

For 2.4GHz function:

For IEEE 802.11 b/g/n/ac/ax mode (2TX/2RX) (Radio 1)

Support diversity function and pre-tested on each single chain, Ant. 1 (port 1) and Ant. 2(port 2) can be used as transmitting/receiving antenna.

For IEEE 802.11 b/g/n/ac mode (1TX/1RX) (Radio 2)

Ant. 5 (port 5) can be used as transmitting/receiving antenna.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax mode (1TX/1RX) (Radio 1)

Support diversity function and pre-tested on each single chain, Ant. 3 (port 3) and Ant. 4(port 4) can be used as transmitting/receiving antenna.

For IEEE 802.11 a/n/ac mode (1TX/1RX) (Radio 2)

Ant. 5 (port 5) can be used as transmitting/receiving antenna.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX) (Radio 3)

Ant. 6 (port 6) can be used as transmitting/receiving antenna.



1.1.3 EUT Information

Operational Condition				
EUT Power Type	From AC Adapter / PoE			
EUT Function	☒	Point-to-multipoint	☐	Point-to-point
Beamforming Function	☒	With beamforming	☐	Without beamforming
Type of EUT				
☒	Stand-alone			
☐	Combined (EUT where the radio part is fully integrated within another device)			
	Combined Equipment - Brand Name / Model No.:		...	
☐	Plug-in radio (EUT intended for a variety of host systems)			
	Host System - Brand Name / Model No.:		...	
☐	Other:			

1.1.4 Mode Test Duty Cycle

Radio 1_Non-Beamforming

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11b	0.755	1.22	650u	3k
802.11g	0.92	0.36	1.434m	1k
802.11ac VHT20	0.95	0.22	5.429m	300
802.11ac VHT40	0.954	0.2	5.43m	300
802.11ax HEW20	0.952	0.21	5.446m	300
802.11ax HEW40	0.954	0.2	5.447m	300

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Radio 1_Beamforming

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11ax HEW20-BF	0.9	0.46	3.146m	1k
802.11ax HEW40-BF	0.875	0.58	1.695m	1k
802.11ac VHT20-BF	0.867	0.62	1.76m	1k
802.11ac VHT40-BF	0.9	0.46	1.695m	1k

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Radio 2_Non-Beamforming

Mode	DC	DCF(dB)	T(s)	VBW(Hz) ≥ 1/T
802.11b	0.994	0.03	n/a (DC ≥ 0.98)	n/a (DC ≥ 0.98)
802.11g	0.963	0.16	2.034m	1k
802.11ac VHT20	0.958	0.19	1.906m	1k
802.11ac VHT40	0.924	0.34	940.625u	3k

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

1.1.5 Table for Permissive Change

This product is an extension of original one reported under Sporton project number: FR962029AC

Below is the table for the change of the product with respect to the original one.

Modifications	Performance Checking
Update Model Name: MR36-HW	N/A

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ KDB 558074 D01 v05r02
- ♦ KDB 662911 D01 v02r01

1.3 Testing Location Information

Testing Location			
☒	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	
		TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.			
☐	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County, Taiwan (R.O.C.)	
		TEL : 886-3-656-9065	FAX : 886-3-656-9085
Test site Designation No. TW0006 with FCC.			

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction (Non-Beamforming)	CO01-HY	Justin	23.5~24.4°C / 58.3~67.3 %	24/Jun/2019~ 13/Jul/2019
AC Conduction (Beamforming)	CO01-HY	Edward	24.2~25.3°C / 57.8~59.6%	23/Jul/2019
RF Conducted	TH06-HY	Dexter	24.3~25.7°C / 54~58%	25/Jun/2019~ 31/Jul/2019
Radiated (Non-Beamforming)	03CH09-HY	Lego	23.5~26.9°C / 45~58%	20/Jun/2019~ 28/Jun/2019
Radiated (Beamforming)	03CH09-HY	Ryan	22.8~23.9°C / 41~57%	18/Jul/2019~ 19/Jul/2019



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.54 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	1.6 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.3 dB	Confidence levels of 95%
Temperature	0.7 °C	Confidence levels of 95%
Humidity	4 %	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Condition

RF Conducted	Abbreviation	Remark
TnomVnom	Tnom	20°C
-	Vnom	120V

2.2 Test Channel Mode

Radio 1_Non-Beamforming

Test Software Version	QRCT V4.0 00123
-----------------------	-----------------

Mode	Power Setting
802.11b_Nss1,(1Mbps)_1TX(Port1)	-
2412MHz	20
2437MHz	20
2462MHz	20
802.11b_Nss1,(1Mbps)_1TX(Port2)	-
2412MHz	20
2437MHz	20
2462MHz	20
802.11b_Nss1,(1Mbps)_2TX	-
2412MHz	20
2437MHz	20
2462MHz	20
802.11g_Nss1,(6Mbps)_1TX(Port1)	-
2412MHz	18
2417MHz	19.5
2437MHz	20
2457MHz	18.5
2462MHz	17.5
802.11g_Nss1,(6Mbps)_1TX(Port2)	-
2412MHz	17
2417MHz	19
2437MHz	20
2457MHz	19.5
2462MHz	17.5
802.11g_Nss1,(6Mbps)_2TX	-



Mode	Power Setting
2412MHz	16.5
2417MHz	18
2437MHz	20
2457MHz	17.5
2462MHz	16.5
802.11ac VHT20_Nss1,(MCS0)_1TX(Port1)	-
2412MHz	17.5
2417MHz	19.5
2437MHz	20
2457MHz	18.5
2462MHz	17
802.11ac VHT20_Nss1,(MCS0)_1TX(Port2)	-
2412MHz	17
2417MHz	19
2437MHz	20
2457MHz	18.5
2462MHz	17
802.11ac VHT20_Nss1,(MCS0)_2TX	-
2412MHz	17
2417MHz	18
2437MHz	20
2457MHz	17.5
2462MHz	16.5
802.11ac VHT40_Nss1,(MCS0)_1TX(Port1)	-
2422MHz	17.5
2437MHz	17.5
2447MHz	17
2452MHz	16.5
802.11ac VHT40_Nss1,(MCS0)_1TX(Port2)	-
2422MHz	16.5
2427MHz	16.5
2437MHz	17.5
2447MHz	17
2452MHz	16
802.11ac VHT40_Nss1,(MCS0)_2TX	-
2422MHz	16.5



Mode	Power Setting
2427MHz	17
2437MHz	17
2447MHz	16.5
2452MHz	15.5
802.11ax HEW20_Nss1,(MCS0)_1TX(Port1)	-
2412MHz	17.5
2417MHz	19.5
2437MHz	20
2457MHz	18.5
2462MHz	17
802.11ax HEW20_Nss1,(MCS0)_1TX(Port2)	-
2412MHz	17
2417MHz	19
2437MHz	20
2457MHz	18.5
2462MHz	17
802.11ax HEW20_Nss1,(MCS0)_2TX	-
2412MHz	17
2417MHz	18
2437MHz	20
2457MHz	17.5
2462MHz	16.5
802.11ax HEW40_Nss1,(MCS0)_1TX(Port1)	-
2422MHz	17.5
2437MHz	17.5
2447MHz	17
2452MHz	16.5
802.11ax HEW40_Nss1,(MCS0)_1TX(Port2)	-
2422MHz	16.5
2427MHz	16.5
2437MHz	17.5
2447MHz	17
2452MHz	16
802.11ax HEW40_Nss1,(MCS0)_2TX	-
2422MHz	16.5
2427MHz	17



Mode	Power Setting
2437MHz	17
2447MHz	16.5
2452MHz	15.5

Radio 1_Beamforming

Test Software	DoS
---------------	-----

Mode	Power Setting
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-
2412MHz	17
2437MHz	17
2457MHz	17
2462MHz	17
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-
2422MHz	17
2437MHz	17
2452MHz	17
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-
2412MHz	17
2437MHz	17
2457MHz	17
2462MHz	17
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-
2422MHz	17
2437MHz	17
2452MHz	17

Radio 2_Non-Beamforming

Test Software Version	QRCT V4.0 00123
-----------------------	-----------------

Mode	Power Setting
802.11b_Nss1,(1Mbps)_1TX	-
2412MHz	20
2437MHz	20
2462MHz	20
802.11g_Nss1,(6Mbps)_1TX	-
2412MHz	15
2417MHz	19



Mode	Power Setting
2437MHz	20
2457MHz	20
2462MHz	16
802.11ac VHT20_Nss1,(MCS0)_1TX	-
2412MHz	14
2417MHz	19
2437MHz	20
2457MHz	19
2462MHz	15
802.11ac VHT40_Nss1,(MCS0)_1TX	-
2422MHz	11
2427MHz	13
2437MHz	18
2447MHz	13
2452MHz	12

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	CTX
1	Adapter mode_Radio 1_Non-Beamforming
2	Adapter mode_Radio 1_Beamforming
3	Adapter mode_Radio 2_Non-Beamforming
4	PoE mode_Radio 1_Non-Beamforming
5	PoE mode_Radio 1_Beamforming
6	PoE mode_Radio 2_Non-Beamforming

The Worst Case Mode for Following Conformance Tests	
Tests Item	DTS Bandwidth Maximum Conducted Output Power Power Spectral Density Emissions in Non-restricted Frequency Bands
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Emissions in Restricted Frequency Bands		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	Adapter mode_Non-Beamforming		
2	Adapter mode_Beamforming		
3	PoE mode_Non-Beamforming		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT		V (Radio 1)	V (Radio 2)

**The Worst Case Mode for Following Conformance Tests**

Tests Item	Simultaneous Transmission Analysis
Operating Mode	CTX
1	WLAN 2.4G (Radio1) + 5G (Radio1) + BT (Radio3) + WLAN 2.4G (Radio2)
2	WLAN 2.4G (Radio1) + 5G (Radio1) + BT (Radio3) + WLAN 5G (Radio2)

Refer to Sporton Test Report No.: FA962029 for Co-location RF Exposure Evaluation.

2.4 Support Equipment

Support Equipment – AC Conduction

No.	Equipment	Brand Name	Model Name	FCC ID
1	AC adapter	Cisco	MA-PWR-30W-US	-
2	PoE	CISCO	MA-INJ-4	-
3	Notebook (remote)	DELL	E5530	DoC
4	Client AP (remote)	CISCO	AXL	DoC

Note: Support equipment No.1 & 2 & 4 was provided by customer.

Support Equipment – RF Conducted

No.	Equipment	Brand Name	Model Name	FCC ID
1	Notebook	DELL	E5410	DoC
2	Adapter for NB	DELL	HA65NM130	DoC
3	AC Power Source	GW	APS-9102	-


Support Equipment – Radiated Emission

No.	Equipment	Brand Name	Model Name	FCC ID
1	AC adapter	CISCO	MA-PWR-30W-US	-
2	PoE	CISCO	MA-INJ-4	-
3	Notebook (remote)	DELL	E5530	DoC
4	Client AP (remote)	CISCO	AXL	DoC

Note: Support equipment No.1 & 2 & 4 was provided by customer.


2.5 Test Setup Diagram

Test Setup Diagram – AC Line Conducted Emission Test - Adapter mode

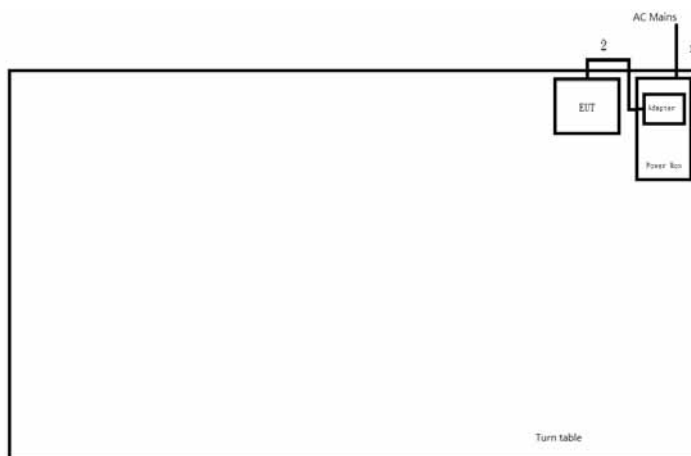


Item	Connection	Shielded	Length(m)	Remark
1	AC Power line	No	1.5	-
2	DC Power line	No	1.5	-


Test Setup Diagram – AC Line Conducted Emission Test - PoE mode

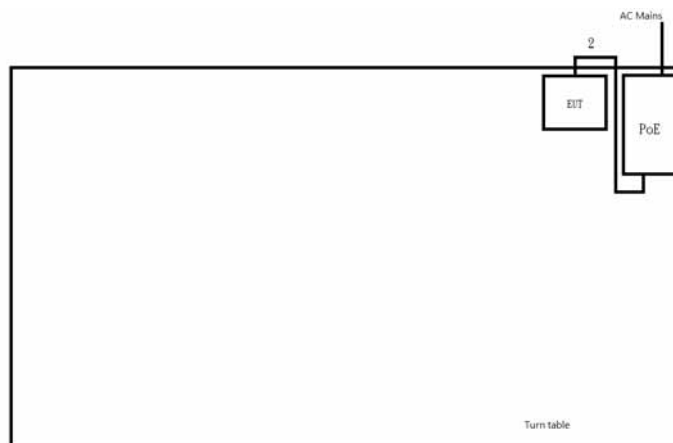

Item	Connection	Shielded	Length(m)	Remark
1	AC Power line	No	1.5	-
2	Lan cable	No	1.5	-

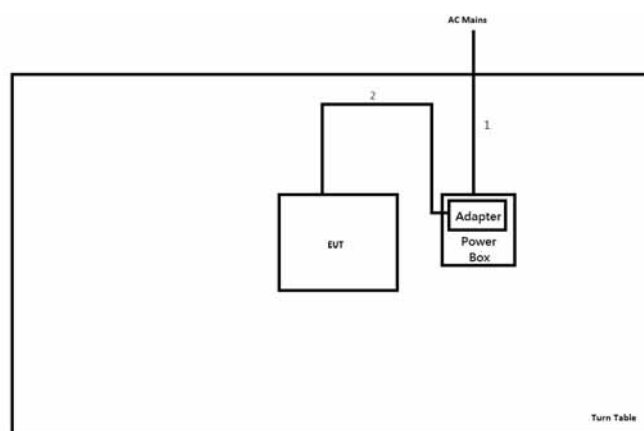Test Setup Diagram - Radiated Test - Adapter mode


Item	Connection	Shielded	Length(m)	Remark
1	AC Power line	No	1.8	-
2	DC Power line	No	1.5	-

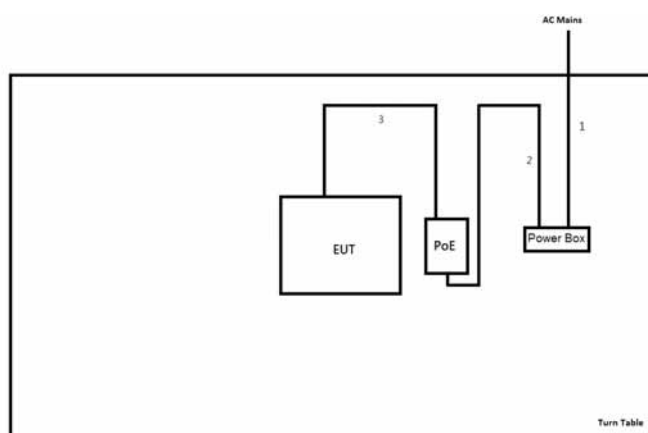Test Setup Diagram - Radiated Test – PoE mode


Item	Connection	Shielded	Length(m)	Remark
1	AC Power line	No	1.5	-
2	AC Power line	No	1.5	-
3	LAN cable	No	2.0	-

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
☒ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

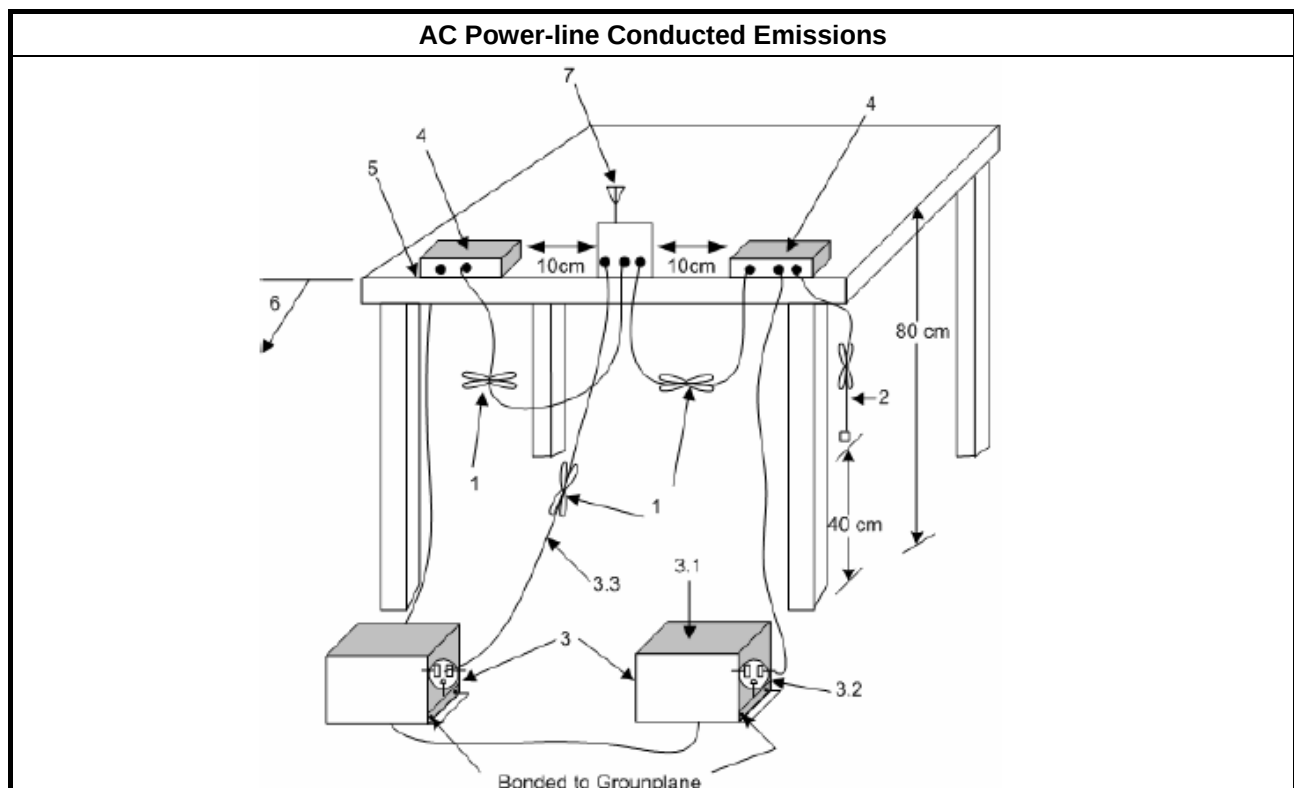

3.1.5 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 DTS Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit	
Systems using digital modulation techniques:	
▪	6 dB bandwidth $\geq$ 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
▪	For the emission bandwidth shall be measured using one of the options below:
☒	Refer as KDB 558074. clause 8.2 (11.8 of ANSI C63.10) DTS bandwidth measurement.
☐	Refer as RSS-Gen, clause 6.7 for occupied bandwidth testing.
☐	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.

3.2.4 Test Setup

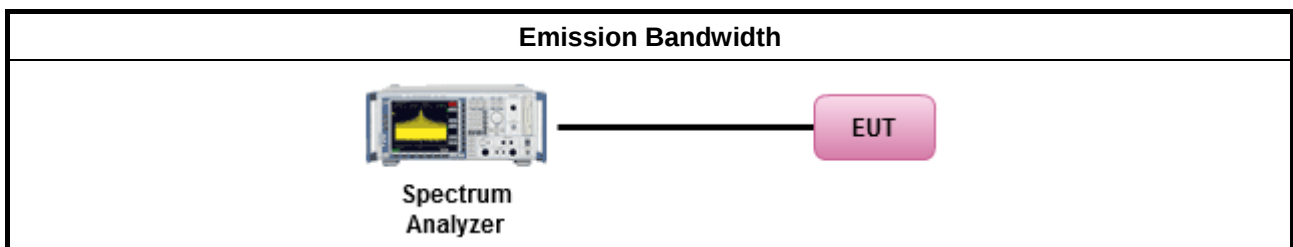

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

3.3 Maximum Conducted Output Power

3.3.1 Maximum Conducted Output Power Limit

Maximum Conducted Output Power Limit		
	▪	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
	▪	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
	▪	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	▪	Smart antenna system (SAS):
	-	Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	-	Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	-	Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm
e.i.r.p. Power Limit:		
	▪	2400-2483.5 MHz Band
	▪	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
	▪	Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
	▪	Smart antenna system (SAS)
	-	Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	-	Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	-	Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
P_{Out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi.		


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
Maximum Peak Conducted Output Power	
☐	Refer as KDB 558074, clause 8.3.1.1 (11.9.1.1 of ANSI C63.10) RBW ≥ EBW method.
☐	Refer as KDB 558074, clause 8.3.1.2 (11.9.1.2 of ANSI C63.10) integrated band power method.
☐	Refer as KDB 558074, clause 8.3.1.3 (11.9.1.3 of ANSI C63.10) peak power meter.
Maximum Average Conducted Output Power	
☐	Refer as KDB 558074, clause 8.3.2.2 (11.9.2.2 of ANSI C63.10) using a spectrum analyzer.
☒	Refer as KDB 558074, clause 8.3.2.3 (11.9.2.3 of ANSI C63.10) using a power meter.
For conducted measurement.	
If the EUT supports multiple transmit chains using options given below: Refer as KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.	
If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$	

3.3.4 Test Setup

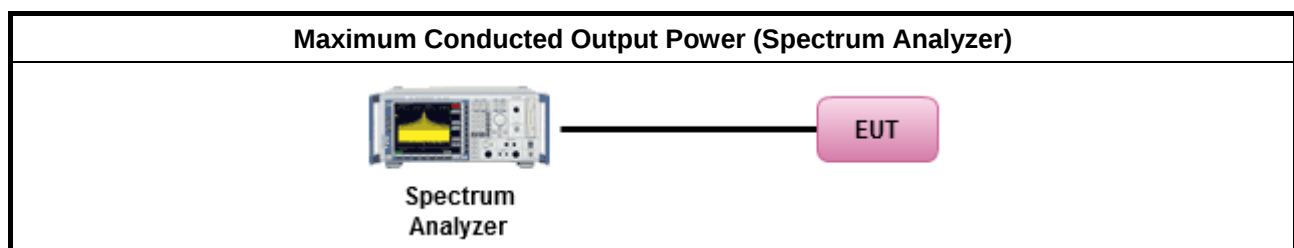

3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C

3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
▪	Power Spectral Density (PSD) ≤ 8 dBm/3kHz


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
▪	Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option).
☒	Refer as KDB 558074, clause 8.4 (11.10 of ANSI C63.10) Method PKPSD.
▪	For conducted measurement.
▪	If The EUT supports multiple transmit chains using options given below:
▪	Measure and sum the spectra across the outputs. Refer as KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.

3.4.4 Test Setup

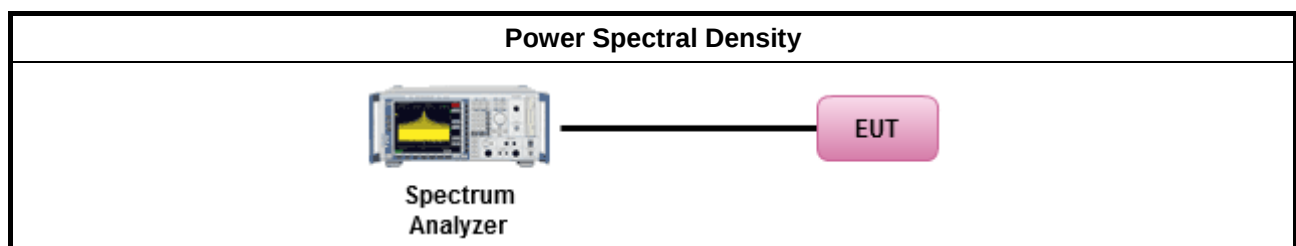

3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

3.5 Emissions in Non-restricted Frequency Bands

3.5.1 Emissions in Non-restricted Frequency Bands Limit

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak level. Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average level.	


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method
Refer as KDB 558074, clause 8.5 (11.11 of ANSI C63.10) for non-restricted frequency bands.

3.5.4 Test Setup

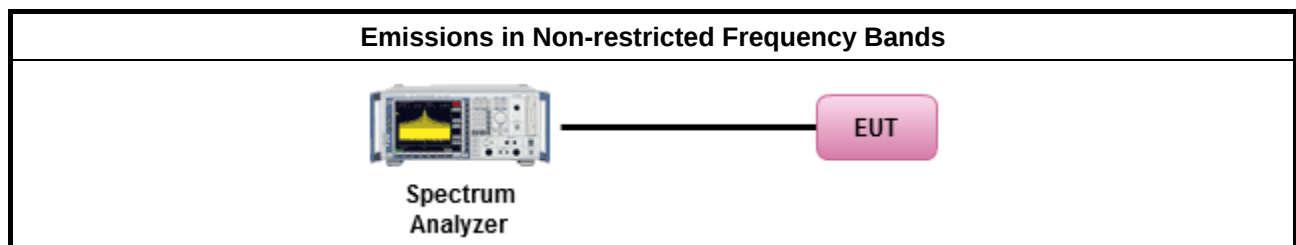

3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E

3.6 Emissions in Restricted Frequency Bands

3.6.1 Emissions in Restricted Frequency Bands Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.


3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
The average emission levels shall be measured in [duty cycle ≥ 98 or duty factor].	
Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as KDB 558074, clause 8.6 (11.12 of ANSI C63.10) for restricted frequency bands.
For the transmitter band-edge emissions shall be measured using following options below:	
	Refer as KDB 558074 clause 8.7.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.
	Refer as KDB 558074, clause 8.7.2 (6.10.6 of ANSI C63.10) for marker-delta method for band-edge measurements.
	Refer as KDB 558074, clause 8.7.3 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels.
Use the following spectrum analyzer settings:	
	Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	- Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. - For average measurement, refer as 1.1.4.

3.6.4 Test Setup

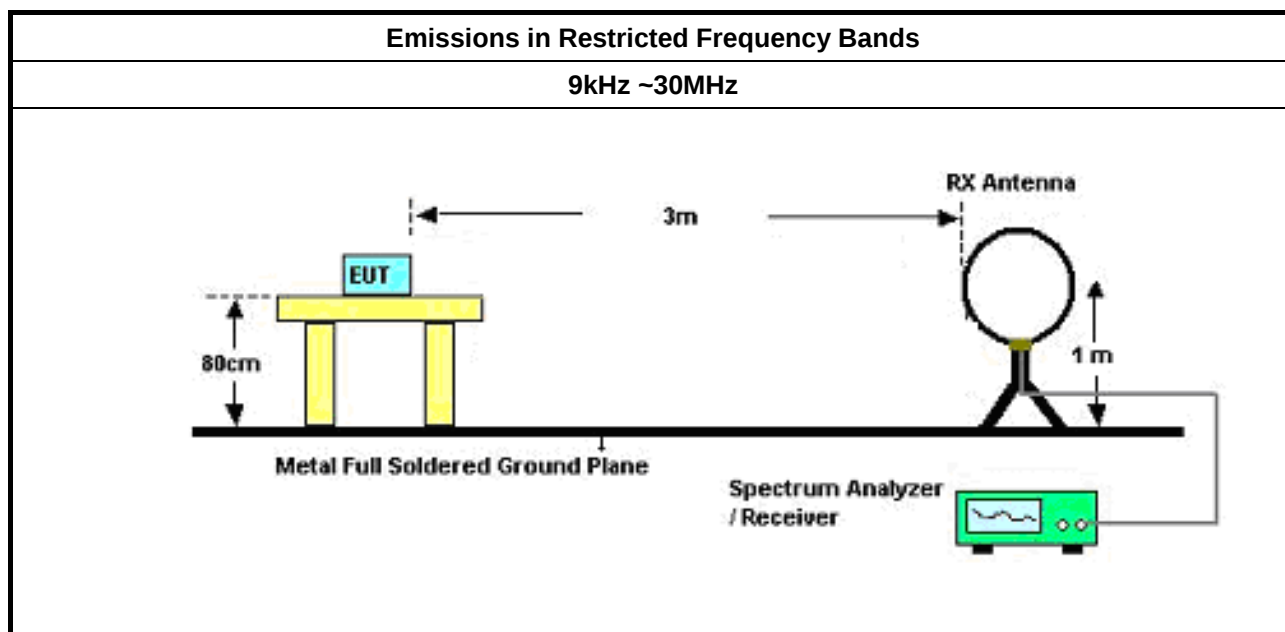

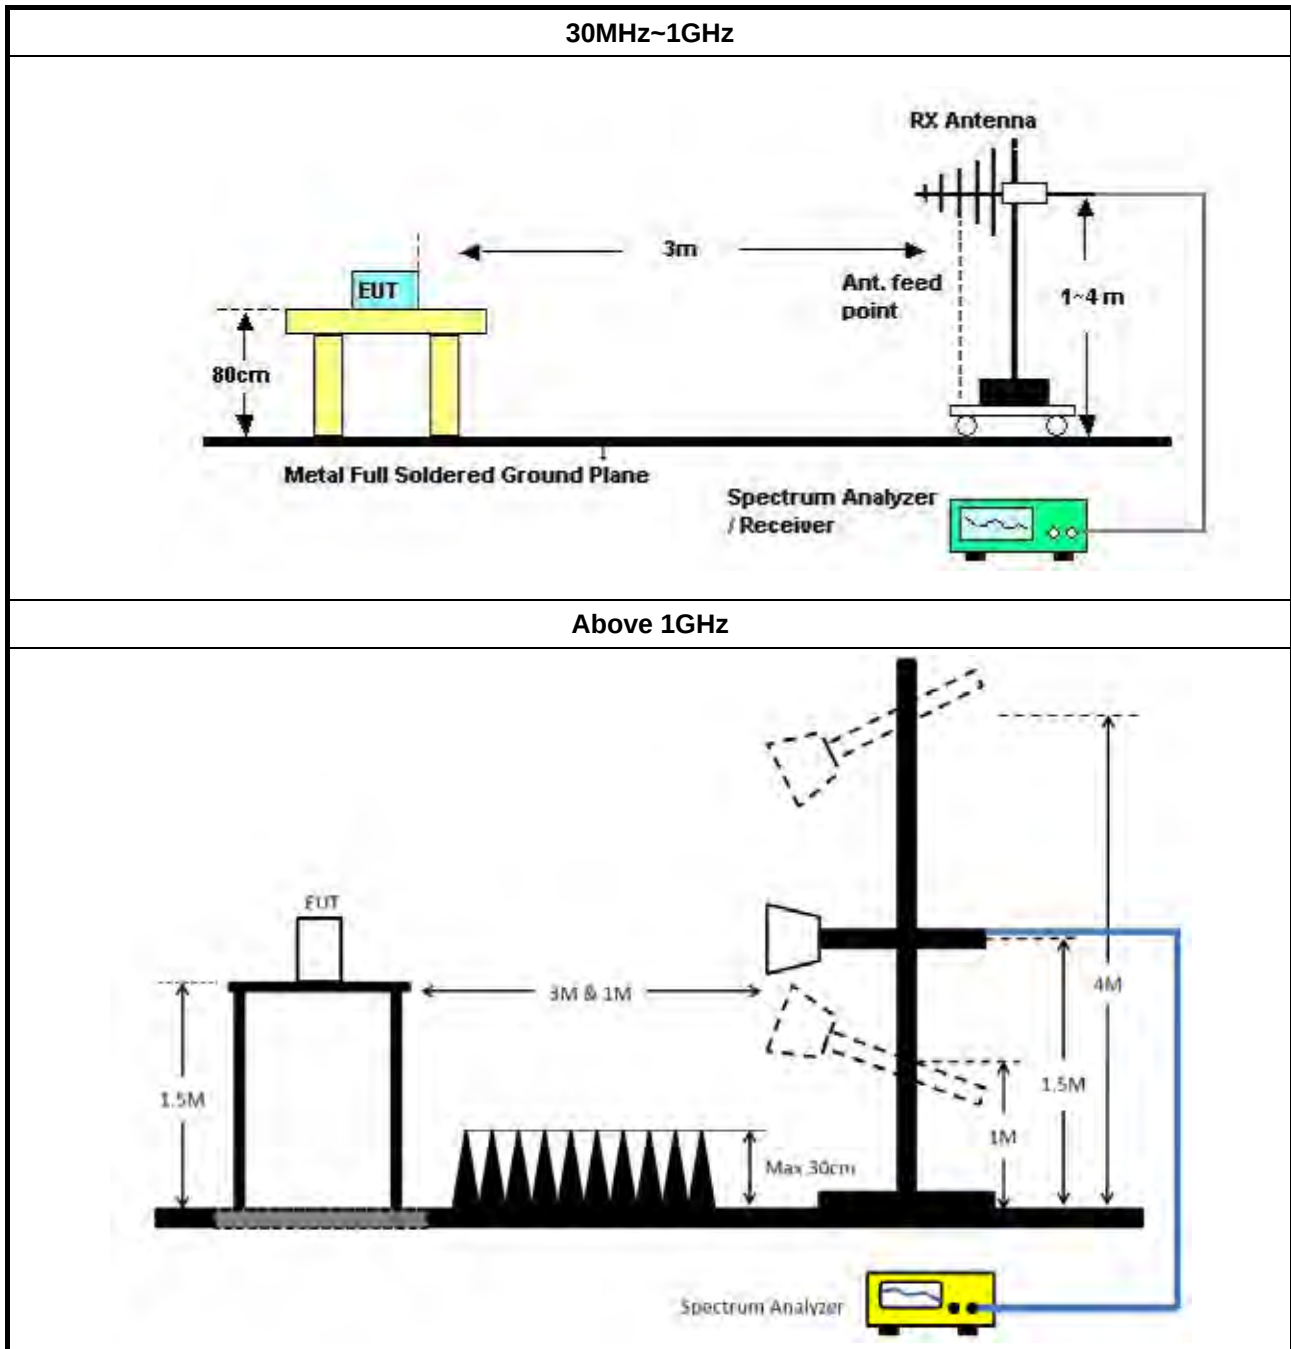

3.6.5 Test Result of Emissions in Restricted Frequency Bands (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.6.6 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR3	102052	9kHz ~ 3.6GHz	09/Apr/2019	08/Apr/2020
LISN	R&S	ENV 216	101274	9kHz ~ 30MHz	03/Jun/2019	02/Jun/2020
RF Cable-CON	MTJ	RG142	CB001-CO	9kHz ~ 30MHz	17/Sep/2018	16/Sep/2019
AC POWER	APC	AFC-11003G	F308010045	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561F	9495	9kHz ~ 30MHz	11/Oct/2018	10/Oct/2019

NCR : Non-Calibration Require

Instrument for Radiated Test (Non-Beamforming)

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	30MHz ~ 1GHz	22/Apr/2019	21/Apr/2020
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	1GHz ~ 18GHz	13/Jun/2019	12/Jun/2020
Amplifier	EMC	EMC9135	980232	9KHz~1GHz	22/Apr/2019	21/Apr/2020
Microwave Preamplifier with 10 dB Pad	EMC	EMC051845 & WK0602-10	980240 & 01	1GHz ~ 18GHz	11/Jan/2019	10/Jan/2020
EMI Test Receiver	R&S	ESR3	102052	9kHz ~ 3.6GHz	09/Apr/2019	08/Apr/2020
EXA Signal Analyzer	KEYSIGHT	N9010A	MY54200885	10Hz ~ 44GHz	31/Jul/2018	30/Jul/2019
Bilog Antenna & 5dB Attenuator	TESEQ & MTJ	CBL6111D & MTJ6102-05	35418 / 3	30MHz~1GHz	02/Oct/2018	03/Oct/2019
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA9120 D 1534	1GHz~18GHz	22/May/2019	21/May/2020
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170221	18GHz~40GHz	22/Mar/2019	21/Mar/2020
Preamplifier	MITEQ	TTA1840-35-HG	1864481	18GHz ~ 40GHz	24/Aug/2018	23/Aug/2019
LF-CABLE-2019 0218	Jye Bao	RG142	CB028	9kHz ~ 1GHz	18/Feb/2019	17/Feb/2020
RF Cable-high	HUBER+ SUHNER	SUCOFLEX104	SN 556626/4 + 556627	1GHz ~ 40GHz	13/Mar/2019	12/Mar/2020

**Instrument for Radiated Test (Beamforming)**

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	30MHz ~ 1GHz	22/Apr/2019	21/Apr/2020
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH09-HY	1GHz ~ 18GHz	13/Jun/2019	12/Jun/2020
Amplifier	EMC	EMC9135	980232	9KHz~1GHz	22/Apr/2019	21/Apr/2020
Microwave Preamplifier	Agilent	8449B	3008A02326	1GHz~26.5GHz	15/Jul/2019	14/Jul/2020
EMI Test Receiver	R&S	ESR3	102052	9kHz ~ 3.6GHz	09/Apr/2019	08/Apr/2020
EXA Signal Analyzer	KEYSIGHT	N9010A	MY54200885	10Hz ~ 44GHz	31/Jul/2018	30/Jul/2019
Bilog Antenna & 5dB Attenuator	TESEQ & MTJ	CBL6111D & MTJ6102-05	35418 / 3	30MHz~1GHz	02/Oct/2018	03/Oct/2019
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA9120 D 1534	1GHz~18GHz	22/May/2019	21/May/2020
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170221	18GHz~40GHz	22/Mar/2019	21/Mar/2020
Preamplifier	MITEQ	TTA1840-35-HG	1864481	18GHz ~ 40GHz	24/Aug/2018	23/Aug/2019
LF-CABLE-2019 0218	Jye Bao	RG142	CB028	9kHz ~ 1GHz	18/Feb/2019	17/Feb/2020
RF Cable-high	HUBER+SUHNER	SUCOFLEX104	SN 556626/4 + 556627	1GHz ~ 40GHz	13/Mar/2019	12/Mar/2020


Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101013	10Hz~40GHz	13/Mar/2019	12/Mar/2020
Power Sensor	Anritsu	MA2411B	1339407	300MHz ~ 40GHz	17/Nov/2018	16/Nov/2019
Power Meter	Anritsu	ML2495A	1517010	300MHz ~ 40GHz	17/Nov/2018	16/Nov/2019
Cable 0.2m	HUBER	MY10710/4	RF Cable - 01	30MHz ~18G	10/Jan/2019	09/Jan/2020
Cable 0.2m	HUBER	MY10711/4	RF Cable - 02	30MHz ~18G	10/Jan/2019	09/Jan/2020
Cable 0.5m	HUBER	MY39470/4	RF Cable - 29	30MHz ~18G	10/Jan/2019	09/Jan/2020
SMB100A Signal Generator	R&S	SMB100A03	181147	100kHz~40GHz	12/Nov/2018	10/Nov/2020

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Neutral
Operating Function	Adapter mode_Radio 1_Non-Beamforming		

24/06/2019

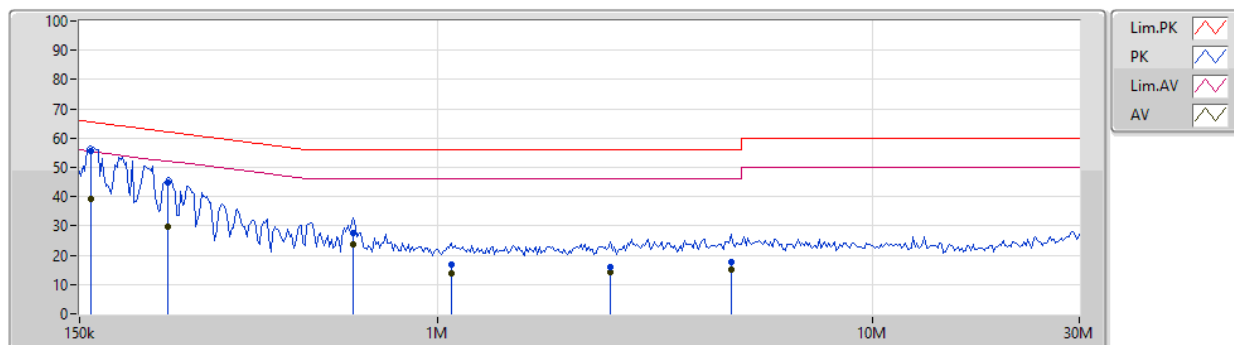


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	159.228k	55.72	65.50	-9.78	19.52	Neutral	"Worst"	36.20	9.65	0.01	9.86			
AV	159.228k	39.30	55.50	-16.20	19.52	Neutral	-	19.78	9.65	0.01	9.86			
QP	239.44k	45.01	62.12	-17.11	19.51	Neutral	-	25.50	9.64	0.01	9.86			
AV	239.44k	29.92	52.12	-22.20	19.51	Neutral	-	10.41	9.64	0.01	9.86			
QP	641.227k	27.55	56.00	-28.45	19.51	Neutral	-	8.04	9.64	0.01	9.86			
AV	641.227k	23.57	46.00	-22.43	19.51	Neutral	-	4.06	9.64	0.01	9.86			
QP	1.076M	16.67	56.00	-39.33	19.52	Neutral	-	-2.85	9.64	0.02	9.86			
AV	1.076M	13.94	46.00	-32.06	19.52	Neutral	-	-5.58	9.64	0.02	9.86			
QP	2.506M	16.10	56.00	-39.90	19.56	Neutral	-	-3.46	9.65	0.04	9.87			
AV	2.506M	14.22	46.00	-31.78	19.56	Neutral	-	-5.34	9.65	0.04	9.87			
QP	4.738M	17.58	56.00	-38.42	19.60	Neutral	-	-2.02	9.67	0.05	9.88			
AV	4.738M	15.24	46.00	-30.76	19.60	Neutral	-	-4.36	9.67	0.05	9.88			

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Adapter mode_Radio 1_Non-Beamforming		

24/06/2019

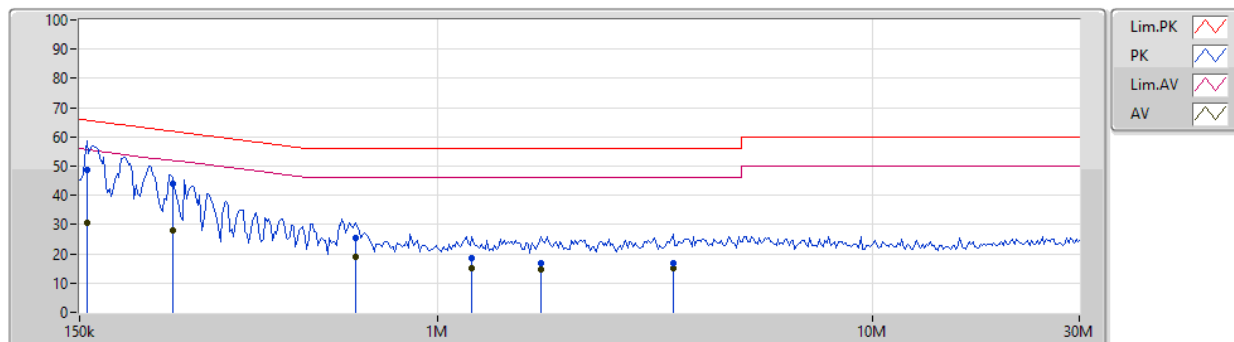


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	156.091k	48.76	65.67	-16.91	19.48	Line	"Worst"	29.28	9.61	0.01	9.86			
AV	156.091k	30.44	55.67	-25.23	19.48	Line	-	10.96	9.61	0.01	9.86			
QP	246.695k	44.14	61.87	-17.73	19.48	Line	-	24.66	9.61	0.01	9.86			
AV	246.695k	27.93	51.87	-23.94	19.48	Line	-	8.45	9.61	0.01	9.86			
QP	647.639k	25.28	56.00	-30.72	19.48	Line	-	5.80	9.61	0.01	9.86			
AV	647.639k	19.16	46.00	-26.84	19.48	Line	-	-0.32	9.61	0.01	9.86			
QP	1.2M	18.52	56.00	-37.48	19.49	Line	-	-0.97	9.61	0.02	9.86			
AV	1.2M	15.16	46.00	-30.84	19.49	Line	-	-4.33	9.61	0.02	9.86			
QP	1.734M	16.99	56.00	-39.01	19.52	Line	-	-2.53	9.62	0.03	9.87			
AV	1.734M	14.44	46.00	-31.56	19.52	Line	-	-5.08	9.62	0.03	9.87			
QP	3.481M	16.86	56.00	-39.14	19.55	Line	-	-2.69	9.63	0.04	9.88			
AV	3.481M	15.13	46.00	-30.87	19.55	Line	-	-4.42	9.63	0.04	9.88			

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Neutral
Operating Function	Adapter mode_Radio 1_Beamforming		

23/07/2019

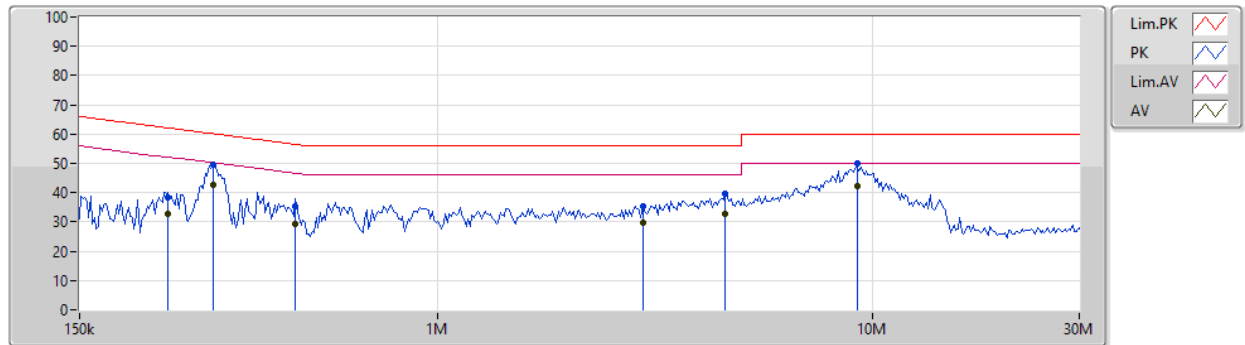


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	239.44k	38.50	62.12	-23.62	19.47	Neutral	-	19.03	9.59	0.01	9.87			
AV	239.44k	32.72	52.12	-19.40	19.47	Neutral	-	13.25	9.59	0.01	9.87			
QP	304.025k	49.38	60.13	-10.75	19.48	Neutral	-	29.90	9.59	0.01	9.88			
AV	304.025k	42.74	50.13	-7.39	19.48	Neutral	"Worst"	23.26	9.59	0.01	9.88			
QP	471.031k	35.41	56.50	-21.09	19.48	Neutral	-	15.93	9.59	0.01	9.88			
AV	471.031k	29.30	46.50	-17.20	19.48	Neutral	-	9.82	9.59	0.01	9.88			
QP	2.968M	35.31	56.00	-20.69	19.54	Neutral	-	15.77	9.61	0.04	9.89			
AV	2.968M	29.77	46.00	-16.23	19.54	Neutral	-	10.23	9.61	0.04	9.89			
QP	4.599M	39.71	56.00	-16.29	19.56	Neutral	-	20.15	9.62	0.05	9.89			
AV	4.599M	32.77	46.00	-13.23	19.56	Neutral	-	13.21	9.62	0.05	9.89			
QP	9.229M	50.13	60.00	-9.87	19.62	Neutral	-	30.51	9.66	0.07	9.89			
AV	9.229M	42.25	50.00	-7.75	19.62	Neutral	-	22.63	9.66	0.07	9.89			

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Adapter mode_Radio 1_Beamforming		

23/07/2019

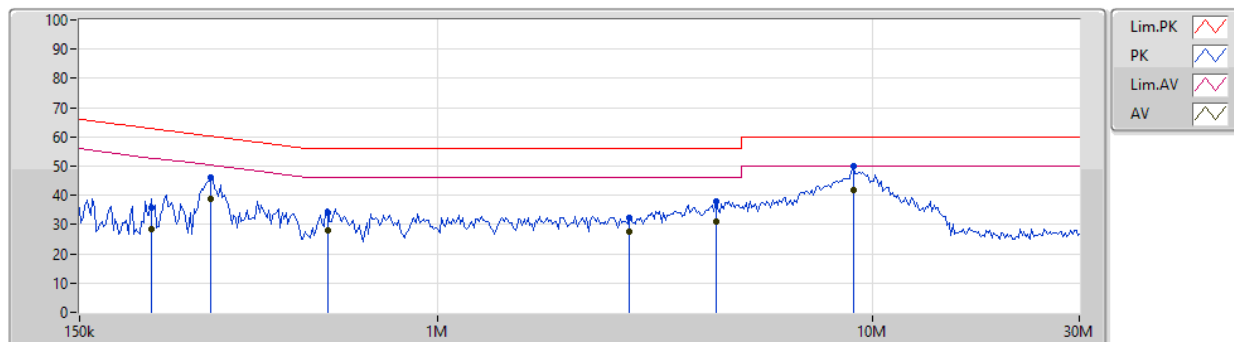


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	218.929k	35.72	62.86	-27.14	19.48	Line	-	16.24	9.60	0.01	9.87			
AV	218.929k	28.24	52.86	-24.62	19.48	Line	-	8.76	9.60	0.01	9.87			
QP	301.015k	46.13	60.21	-14.08	19.48	Line	-	26.65	9.59	0.01	9.88			
AV	301.015k	38.80	50.21	-11.41	19.48	Line	-	19.32	9.59	0.01	9.88			
QP	557.844k	33.97	56.00	-22.03	19.48	Line	-	14.49	9.59	0.01	9.88			
AV	557.844k	27.91	46.00	-18.09	19.48	Line	-	8.43	9.59	0.01	9.88			
QP	2.769M	32.31	56.00	-23.69	19.55	Line	-	12.76	9.62	0.04	9.89			
AV	2.769M	27.58	46.00	-18.42	19.55	Line	-	8.03	9.62	0.04	9.89			
QP	4.376M	37.78	56.00	-18.22	19.57	Line	-	18.21	9.63	0.05	9.89			
AV	4.376M	30.94	46.00	-15.06	19.57	Line	-	11.37	9.63	0.05	9.89			
QP	9.047M	49.87	60.00	-10.13	19.63	Line	-	30.24	9.67	0.07	9.89			
AV	9.047M	41.77	50.00	-8.23	19.63	Line	"Worst"	22.14	9.67	0.07	9.89			

AC Power-line Conducted Emissions Result

Operating Mode	2	Power Phase	Neutral
Operating Function	Adapter mode_Radio 2_Non-Beamforming		

13/07/2019

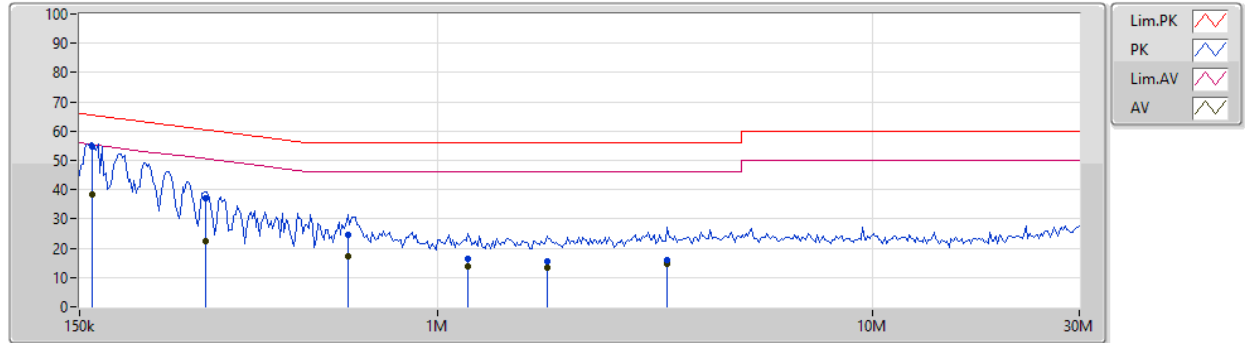


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	160.82k	54.60	65.43	-10.83	19.52	Neutral	-	35.08	9.65	0.01	9.86			
AV	160.82k	38.37	55.43	-17.06	19.52	Neutral	-	18.85	9.65	0.01	9.86			
QP	292.162k	37.14	60.46	-23.32	19.51	Neutral	-	17.63	9.64	0.01	9.86			
AV	292.162k	22.26	50.46	-28.20	19.51	Neutral	-	2.75	9.64	0.01	9.86			
QP	622.369k	24.41	56.00	-31.59	19.51	Neutral	-	4.90	9.64	0.01	9.86			
AV	622.369k	17.19	46.00	-28.81	19.51	Neutral	-	-2.32	9.64	0.01	9.86			
QP	1.177M	16.45	56.00	-39.55	19.52	Neutral	-	-3.07	9.64	0.02	9.86			
AV	1.177M	13.88	46.00	-32.12	19.52	Neutral	-	-5.64	9.64	0.02	9.86			
QP	1.787M	15.35	56.00	-40.65	19.55	Neutral	-	-4.20	9.65	0.03	9.87			
AV	1.787M	13.56	46.00	-32.44	19.55	Neutral	-	-5.99	9.65	0.03	9.87			
QP	3.378M	15.95	56.00	-40.05	19.58	Neutral	-	-3.63	9.66	0.04	9.88			
AV	3.378M	14.44	46.00	-31.56	19.58	Neutral	-	-5.14	9.66	0.04	9.88			

AC Power-line Conducted Emissions Result

Operating Mode	2	Power Phase	Line
Operating Function	Adapter mode_Radio 2_Non-Beamforming		

13/07/2019

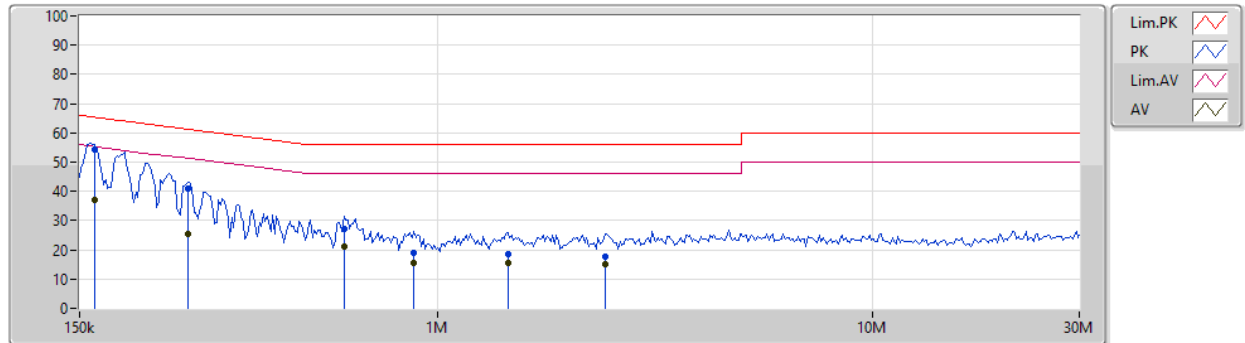


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	162.429k	54.41	65.33	-10.92	19.48	Line	"Worst"	34.93	9.61	0.01	9.86			
AV	162.429k	37.16	55.33	-18.17	19.48	Line	-	17.68	9.61	0.01	9.86			
QP	267.135k	41.06	61.20	-20.14	19.48	Line	-	21.58	9.61	0.01	9.86			
AV	267.135k	25.33	51.20	-25.87	19.48	Line	-	5.85	9.61	0.01	9.86			
QP	610.106k	27.09	56.00	-28.91	19.48	Line	-	7.61	9.61	0.01	9.86			
AV	610.106k	20.93	46.00	-25.07	19.48	Line	-	1.45	9.61	0.01	9.86			
QP	881.649k	18.95	56.00	-37.05	19.49	Line	-	-0.54	9.61	0.02	9.86			
AV	881.649k	15.73	46.00	-30.27	19.49	Line	-	-3.76	9.61	0.02	9.86			
QP	1.45M	18.51	56.00	-37.49	19.50	Line	-	-0.99	9.61	0.03	9.86			
AV	1.45M	15.43	46.00	-30.57	19.50	Line	-	-4.07	9.61	0.03	9.86			
QP	2.433M	17.55	56.00	-38.45	19.53	Line	-	-1.98	9.62	0.04	9.87			
AV	2.433M	15.15	46.00	-30.85	19.53	Line	-	-4.38	9.62	0.04	9.87			

AC Power-line Conducted Emissions Result

Operating Mode	3	Power Phase	Neutral
Operating Function	PoE mode_Radio 1_Non-Beamforming		

13/07/2019

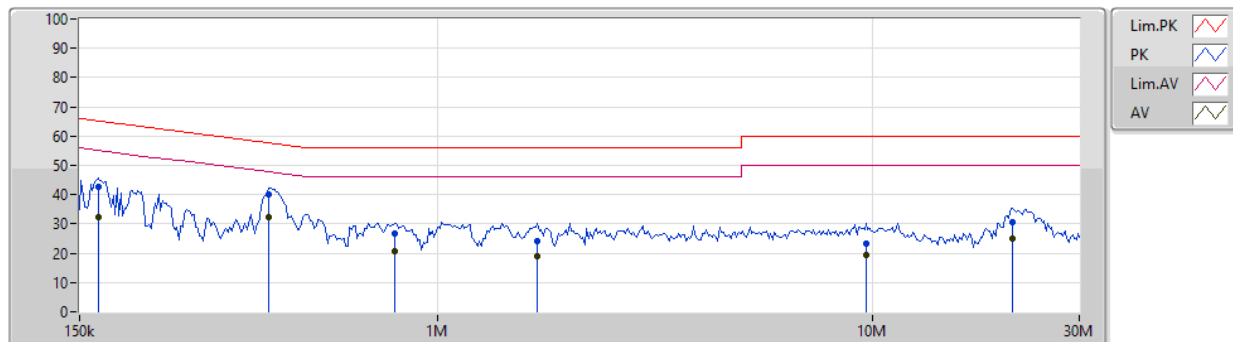


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	165.693k	42.75	65.18	-22.43	19.52	Neutral	-	23.23	9.65	0.01	9.86			
AV	165.693k	32.16	55.18	-23.02	19.52	Neutral	-	12.64	9.65	0.01	9.86			
QP	409.779k	39.98	57.64	-17.66	19.51	Neutral	-	20.47	9.64	0.01	9.86			
AV	409.779k	32.42	47.64	-15.22	19.51	Neutral	"Worst"	12.91	9.64	0.01	9.86			
QP	798.145k	26.60	56.00	-29.40	19.52	Neutral	-	7.08	9.64	0.02	9.86			
AV	798.145k	20.80	46.00	-25.20	19.52	Neutral	-	1.28	9.64	0.02	9.86			
QP	1.7M	24.33	56.00	-31.67	19.55	Neutral	-	4.78	9.65	0.03	9.87			
AV	1.7M	19.01	46.00	-26.99	19.55	Neutral	-	-0.54	9.65	0.03	9.87			
QP	9.699M	23.46	60.00	-36.54	19.68	Neutral	-	3.78	9.71	0.07	9.90			
AV	9.699M	19.44	50.00	-30.56	19.68	Neutral	-	-0.24	9.71	0.07	9.90			
QP	21.077M	30.56	60.00	-29.44	19.78	Neutral	-	10.78	9.71	0.11	9.96			
AV	21.077M	24.85	50.00	-25.15	19.78	Neutral	-	5.07	9.71	0.11	9.96			

AC Power-line Conducted Emissions Result

Operating Mode	3	Power Phase	Line
Operating Function	PoE mode_Radio 1_Non-Beamforming		

13/07/2019

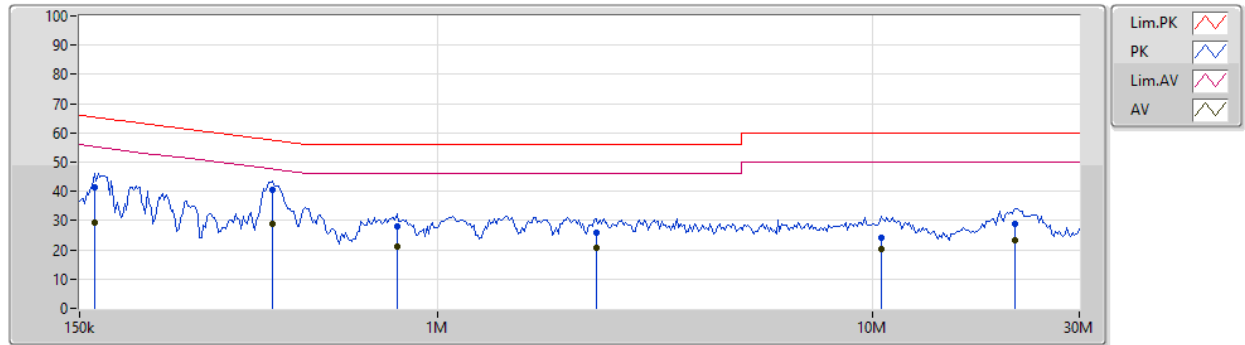


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	162.429k	41.45	65.33	-23.88	19.48	Line	-	21.97	9.61	0.01	9.86			
AV	162.429k	29.29	55.33	-26.04	19.48	Line	-	9.81	9.61	0.01	9.86			
QP	418.016k	40.54	57.49	-16.95	19.48	Line	"Worst"	21.06	9.61	0.01	9.86			
AV	418.016k	28.96	47.49	-18.53	19.48	Line	-	9.48	9.61	0.01	9.86			
QP	806.127k	27.91	56.00	-28.09	19.49	Line	-	8.42	9.61	0.02	9.86			
AV	806.127k	20.94	46.00	-25.06	19.49	Line	-	1.45	9.61	0.02	9.86			
QP	2.315M	25.71	56.00	-30.29	19.53	Line	-	6.18	9.62	0.04	9.87			
AV	2.315M	20.59	46.00	-25.41	19.53	Line	-	1.06	9.62	0.04	9.87			
QP	10.503M	24.25	60.00	-35.75	19.64	Line	-	4.61	9.66	0.07	9.91			
AV	10.503M	20.28	50.00	-29.72	19.64	Line	-	0.64	9.66	0.07	9.91			
QP	21.288M	28.89	60.00	-31.11	19.69	Line	-	9.20	9.62	0.11	9.96			
AV	21.288M	23.48	50.00	-26.52	19.69	Line	-	3.79	9.62	0.11	9.96			

AC Power-line Conducted Emissions Result

Operating Mode	4	Power Phase	Neutral
Operating Function	PoE mode_Radio 2_Non-Beamforming		

13/07/2019

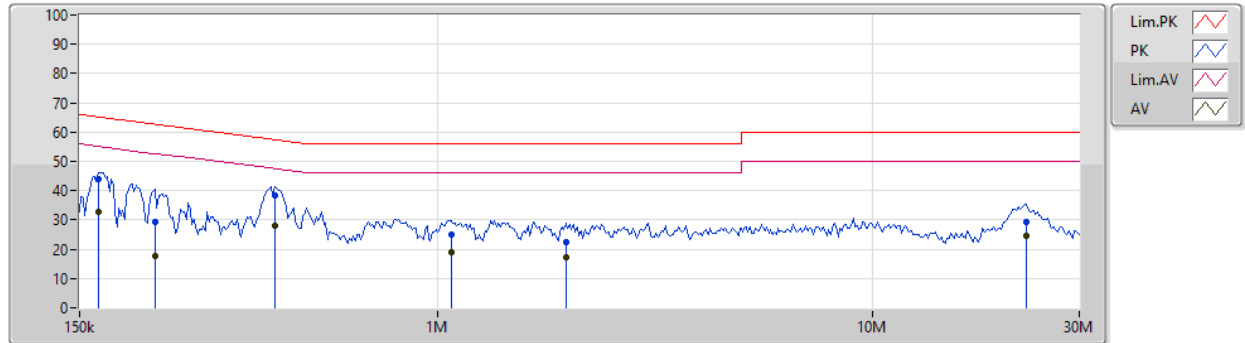


Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	165.693k	43.89	65.18	-21.29	19.52	Neutral	-	24.37	9.65	0.01	9.86			
AV	165.693k	32.83	55.18	-22.35	19.52	Neutral	-	13.31	9.65	0.01	9.86			
QP	223.33k	29.23	62.69	-33.46	19.51	Neutral	-	9.72	9.64	0.01	9.86			
AV	223.33k	17.88	52.69	-34.81	19.51	Neutral	-	-1.63	9.64	0.01	9.86			
QP	422.196k	38.47	57.40	-18.93	19.51	Neutral	"Worst"	18.96	9.64	0.01	9.86			
AV	422.196k	27.86	47.40	-19.54	19.51	Neutral	-	8.35	9.64	0.01	9.86			
QP	1.076M	25.19	56.00	-30.81	19.52	Neutral	-	5.67	9.64	0.02	9.86			
AV	1.076M	18.97	46.00	-27.03	19.52	Neutral	-	-0.55	9.64	0.02	9.86			
QP	1.974M	22.32	56.00	-33.68	19.55	Neutral	-	2.77	9.65	0.03	9.87			
AV	1.974M	17.31	46.00	-28.69	19.55	Neutral	-	-2.24	9.65	0.03	9.87			
QP	22.598M	29.48	60.00	-30.52	19.79	Neutral	-	9.69	9.70	0.12	9.97			
AV	22.598M	24.74	50.00	-25.26	19.79	Neutral	-	4.95	9.70	0.12	9.97			

AC Power-line Conducted Emissions Result

Operating Mode	4	Power Phase	Line
Operating Function	PoE mode_Radio 2_Non-Beamforming		

13/07/2019

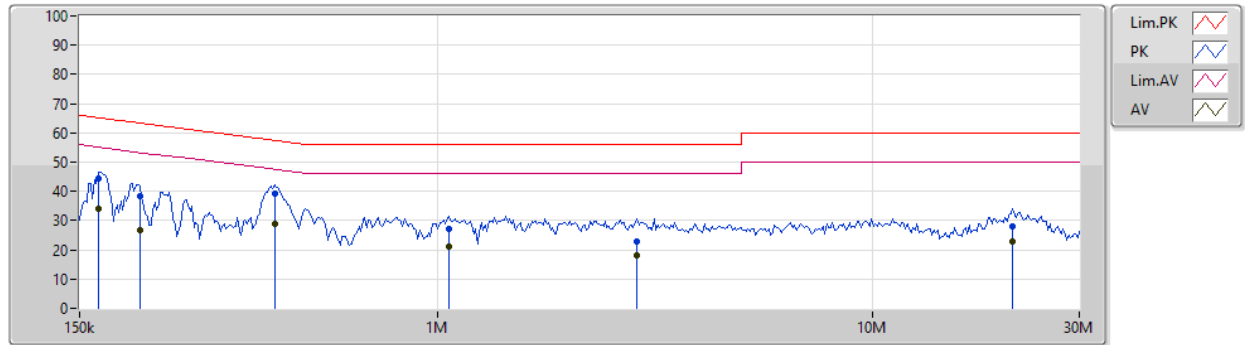

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	165.693k	44.60	65.18	-20.58	19.48	Line	-	25.12	9.61	0.01	9.86			
AV	165.693k	34.02	55.18	-21.16	19.48	Line	-	14.54	9.61	0.01	9.86			
QP	206.241k	38.46	63.36	-24.90	19.48	Line	-	18.98	9.61	0.01	9.86			
AV	206.241k	26.54	53.36	-26.82	19.48	Line	-	7.06	9.61	0.01	9.86			
QP	422.196k	39.27	57.40	-18.13	19.48	Line	"Worst"	19.79	9.61	0.01	9.86			
AV	422.196k	28.67	47.40	-18.73	19.48	Line	-	9.19	9.61	0.01	9.86			
QP	1.065M	27.21	56.00	-28.79	19.49	Line	-	7.72	9.61	0.02	9.86			
AV	1.065M	21.01	46.00	-24.99	19.49	Line	-	1.52	9.61	0.02	9.86			
QP	2.881M	22.94	56.00	-33.06	19.55	Line	-	3.39	9.63	0.04	9.88			
AV	2.881M	18.08	46.00	-27.92	19.55	Line	-	-1.47	9.63	0.04	9.88			
QP	21.077M	28.06	60.00	-31.94	19.69	Line	-	8.37	9.62	0.11	9.96			
AV	21.077M	22.82	50.00	-27.18	19.69	Line	-	3.13	9.62	0.11	9.96			

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX(Port1)	7.55M	12.894M	12M9G1D	7.525M	12.844M
802.11b_Nss1,(1Mbps)_1TX(Port2)	8.025M	12.969M	13M0G1D	7.075M	12.919M
802.11b_Nss1,(1Mbps)_2TX	8.025M	12.994M	13M0G1D	7.525M	12.869M
802.11g_Nss1,(6Mbps)_1TX(Port1)	16.3M	16.642M	16M6D1D	16.3M	16.392M
802.11g_Nss1,(6Mbps)_1TX(Port2)	16.325M	16.692M	16M7D1D	16.275M	16.392M
802.11g_Nss1,(6Mbps)_2TX	16.325M	16.667M	16M7D1D	15.875M	16.367M
802.11ac_VHT20_Nss1,(MCS0)_1TX(Port1)	17.575M	17.766M	17M8D1D	17.025M	17.591M
802.11ac_VHT20_Nss1,(MCS0)_1TX(Port2)	17.55M	17.841M	17M8D1D	17.5M	17.566M
802.11ac_VHT20_Nss1,(MCS0)_2TX	17.525M	17.816M	17M8D1D	16.9M	17.566M
802.11ac_VHT40_Nss1,(MCS0)_1TX(Port1)	36.3M	36.132M	36M1D1D	35.6M	36.082M
802.11ac_VHT40_Nss1,(MCS0)_1TX(Port2)	36.35M	36.182M	36M2D1D	36.3M	36.082M
802.11ac_VHT40_Nss1,(MCS0)_2TX	36.3M	36.182M	36M2D1D	35.4M	35.982M
802.11ax_HEW20_Nss1,(MCS0)_1TX(Port1)	18.925M	19.04M	19M0D1D	18.775M	18.891M
802.11ax_HEW20_Nss1,(MCS0)_1TX(Port2)	18.875M	19.065M	19M1D1D	18.675M	18.941M
802.11ax_HEW20_Nss1,(MCS0)_2TX	18.9M	19.065M	19M1D1D	18.5M	18.891M
802.11ax_HEW40_Nss1,(MCS0)_1TX(Port1)	38M	37.831M	37M8D1D	37.7M	37.731M
802.11ax_HEW40_Nss1,(MCS0)_1TX(Port2)	38.05M	37.731M	37M7D1D	37.7M	37.731M
802.11ax_HEW40_Nss1,(MCS0)_2TX	37.95M	37.781M	37M8D1D	37.6M	37.681M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11b_Nss1,(1Mbps)_1TX(Port1)	-	-	-	-	-	-
2412MHz	Pass	500k	7.525M	12.844M		
2437MHz	Pass	500k	7.55M	12.869M		
2462MHz	Pass	500k	7.525M	12.894M		
802.11b_Nss1,(1Mbps)_1TX(Port2)	-	-	-	-	-	-
2412MHz	Pass	500k			7.6M	12.919M
2437MHz	Pass	500k			8.025M	12.919M
2462MHz	Pass	500k			7.075M	12.969M
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	8.025M	12.869M	8M	12.944M
2437MHz	Pass	500k	7.975M	12.944M	7.525M	12.994M
2462MHz	Pass	500k	7.525M	12.869M	8.025M	12.969M
802.11g_Nss1,(6Mbps)_1TX(Port1)	-	-	-	-	-	-
2412MHz	Pass	500k	16.3M	16.417M		
2437MHz	Pass	500k	16.3M	16.642M		
2462MHz	Pass	500k	16.3M	16.392M		
802.11g_Nss1,(6Mbps)_1TX(Port2)	-	-	-	-	-	-
2412MHz	Pass	500k			16.3M	16.392M
2437MHz	Pass	500k			16.325M	16.692M
2462MHz	Pass	500k			16.275M	16.392M
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	16.325M	16.367M	16.3M	16.392M
2437MHz	Pass	500k	16.025M	16.642M	15.875M	16.667M
2462MHz	Pass	500k	16.275M	16.392M	16.325M	16.392M
802.11ac_VHT20_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-
2412MHz	Pass	500k	17.55M	17.616M		
2437MHz	Pass	500k	17.575M	17.766M		
2462MHz	Pass	500k	17.025M	17.591M		
802.11ac_VHT20_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-
2412MHz	Pass	500k			17.55M	17.566M
2437MHz	Pass	500k			17.5M	17.841M
2462MHz	Pass	500k			17.55M	17.591M
802.11ac_VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	17.275M	17.591M	17.5M	17.591M
2437MHz	Pass	500k	17.525M	17.816M	17.5M	17.816M
2462MHz	Pass	500k	16.9M	17.566M	17.525M	17.616M
802.11ac_VHT40_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-
2422MHz	Pass	500k	36.3M	36.132M		
2437MHz	Pass	500k	36.3M	36.132M		
2452MHz	Pass	500k	35.6M	36.082M		
802.11ac_VHT40_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-
2422MHz	Pass	500k			36.35M	36.132M
2437MHz	Pass	500k			36.3M	36.182M
2452MHz	Pass	500k			36.3M	36.082M

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	500k	36.3M	36.032M	35.4M	36.082M
2437MHz	Pass	500k	36.3M	36.132M	35.4M	36.182M
2452MHz	Pass	500k	35.95M	35.982M	36.3M	36.132M
802.11ax HEW20_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-
2412MHz	Pass	500k	18.925M	18.891M		
2437MHz	Pass	500k	18.775M	19.04M		
2462MHz	Pass	500k	18.925M	18.916M		
802.11ax HEW20_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-
2412MHz	Pass	500k			18.875M	18.941M
2437MHz	Pass	500k			18.675M	19.065M
2462MHz	Pass	500k			18.7M	18.966M
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	18.675M	18.916M	18.9M	18.966M
2437MHz	Pass	500k	18.5M	19.04M	18.75M	19.065M
2462MHz	Pass	500k	18.825M	18.891M	18.8M	18.941M
802.11ax HEW40_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-
2422MHz	Pass	500k	37.7M	37.731M		
2437MHz	Pass	500k	37.85M	37.731M		
2452MHz	Pass	500k	38M	37.831M		
802.11ax HEW40_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-
2422MHz	Pass	500k			37.7M	37.731M
2437MHz	Pass	500k			37.85M	37.731M
2452MHz	Pass	500k			38.05M	37.731M
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	500k	37.95M	37.731M	37.75M	37.781M
2437MHz	Pass	500k	37.85M	37.731M	37.6M	37.731M
2452MHz	Pass	500k	37.7M	37.681M	37.8M	37.731M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11b_Nss1,(1Mbps)_1TX(Port1)
EBW
2412MHz

25/06/2019

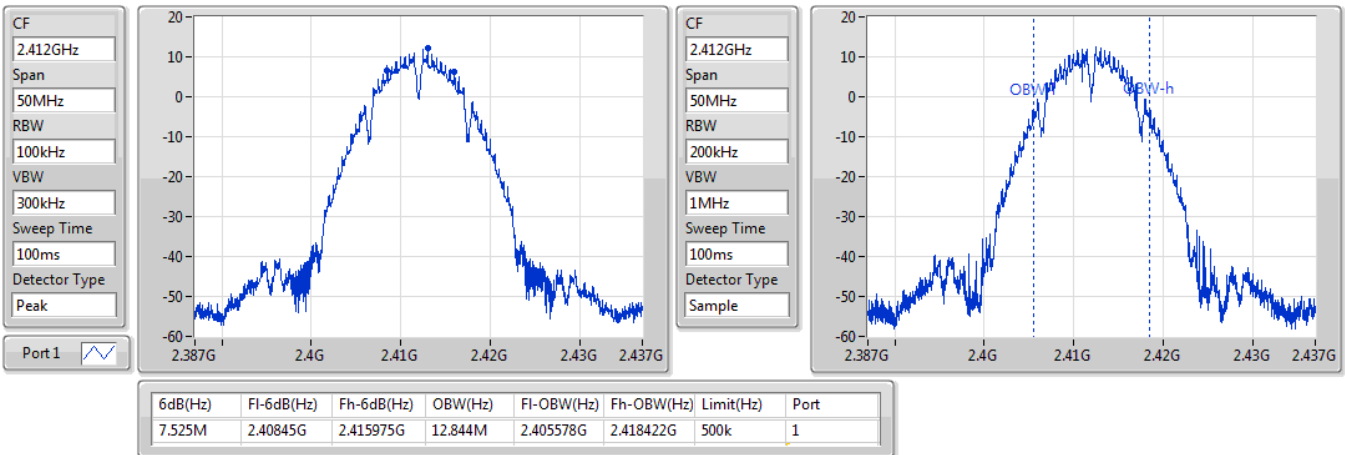

802.11b_Nss1,(1Mbps)_1TX(Port1)
EBW
2437MHz

25/06/2019

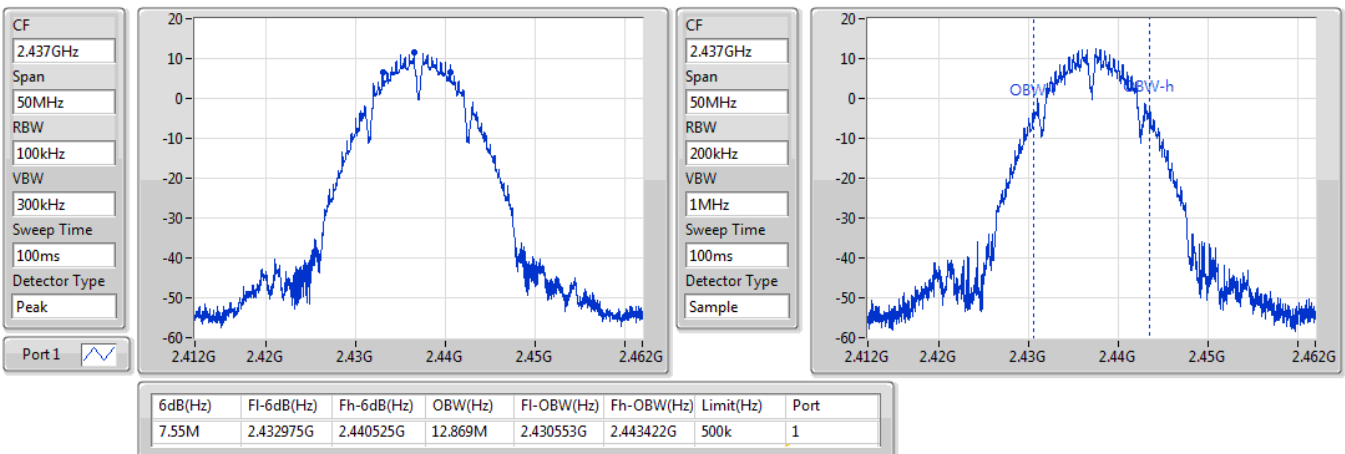


802.11b_Nss1,(1Mbps)_1TX(Port1)
EBW
2462MHz

25/06/2019

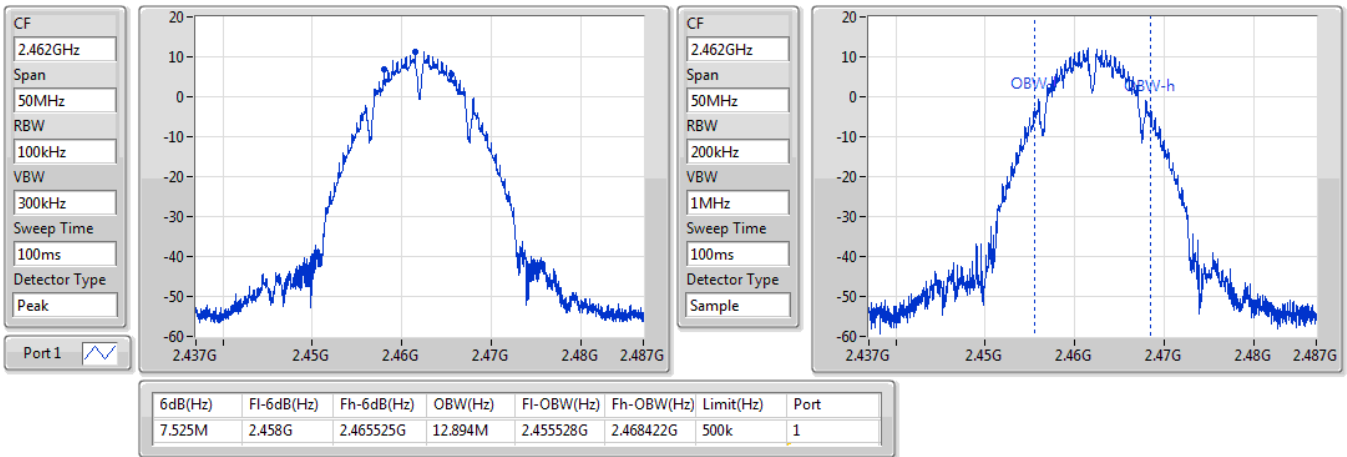

802.11b_Nss1,(1Mbps)_1TX(Port2)
EBW
2412MHz

25/06/2019

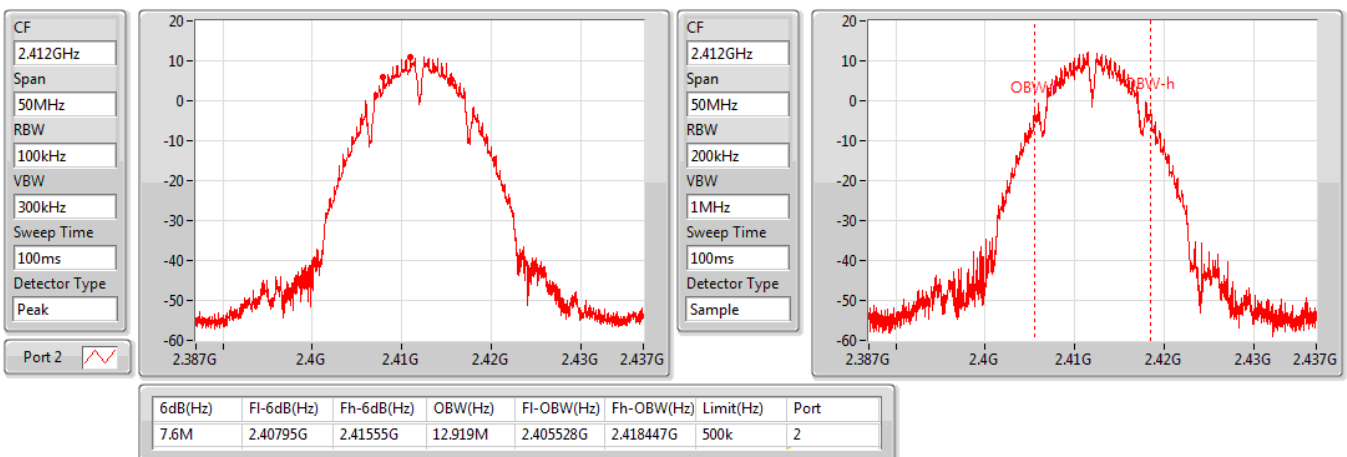


802.11b_Nss1,(1Mbps)_1TX(Port2)
EBW
2437MHz

25/06/2019

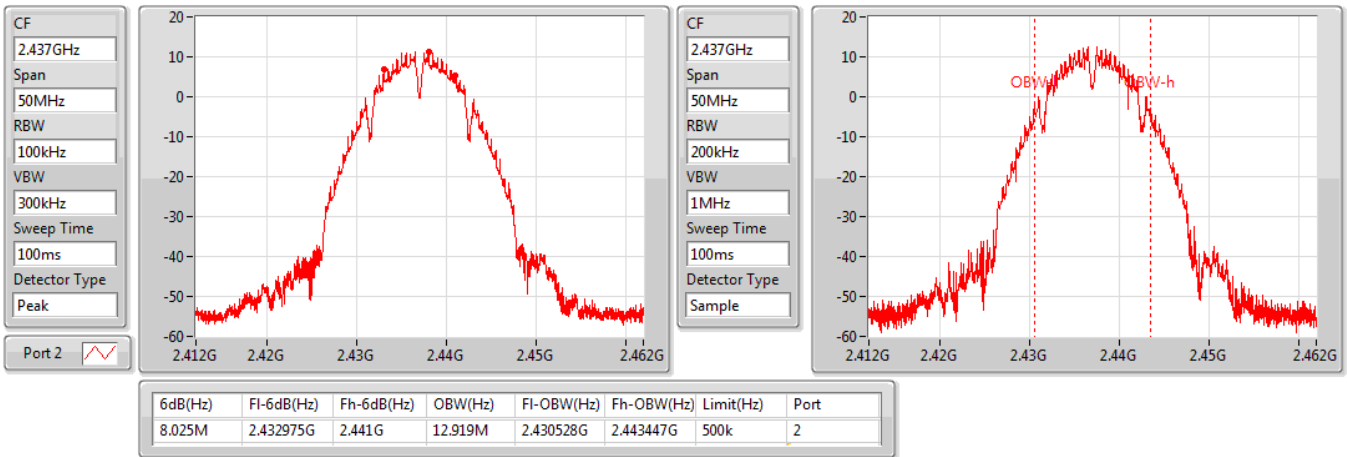

802.11b_Nss1,(1Mbps)_1TX(Port2)
EBW
2462MHz

25/06/2019

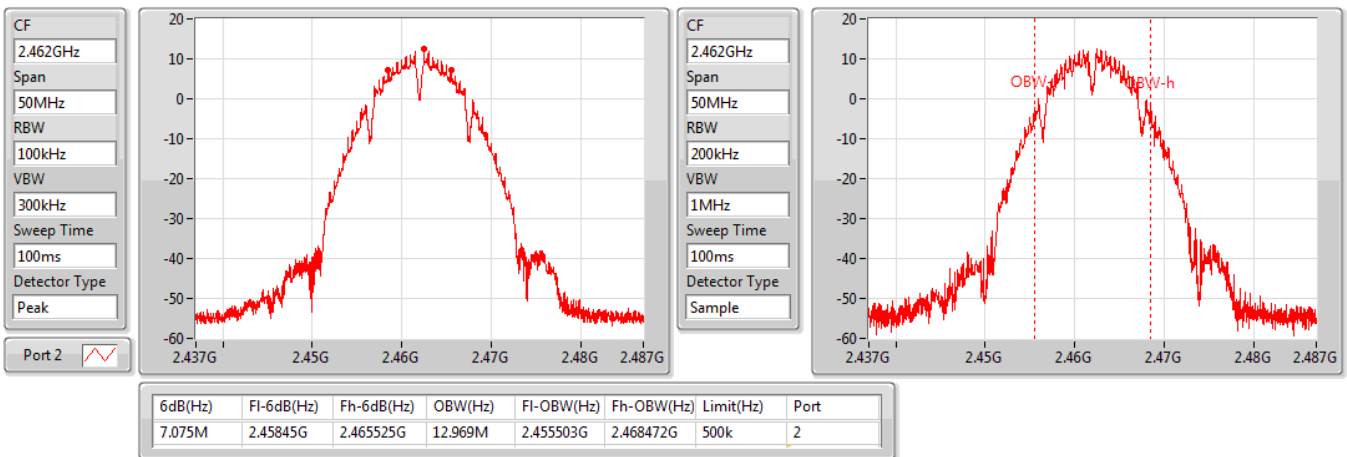


802.11b_Nss1,(1Mbps)_2TX
EBW
2412MHz

25/06/2019

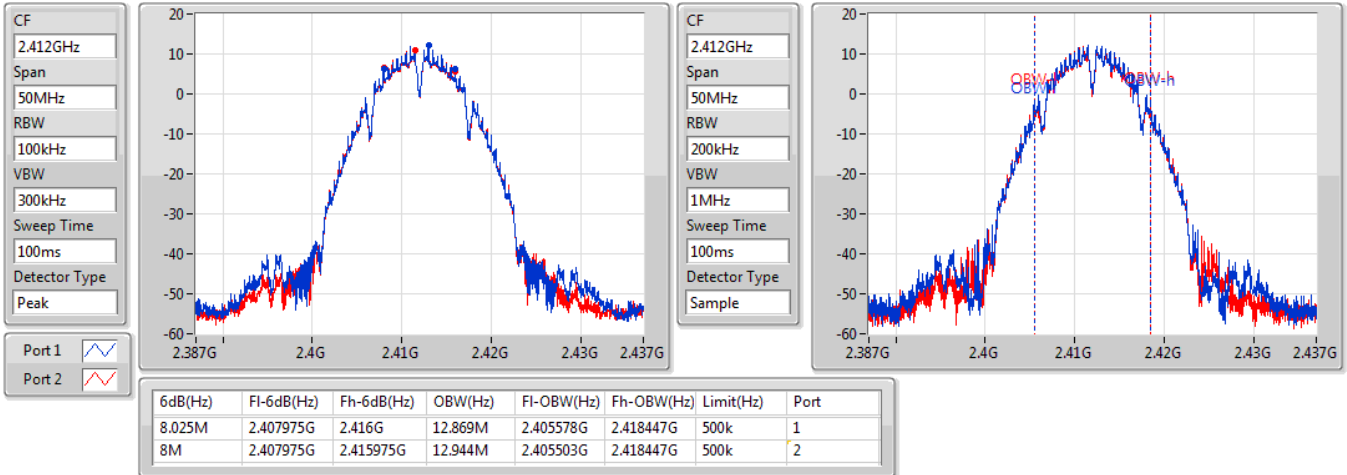

802.11b_Nss1,(1Mbps)_2TX
EBW
2437MHz

25/06/2019

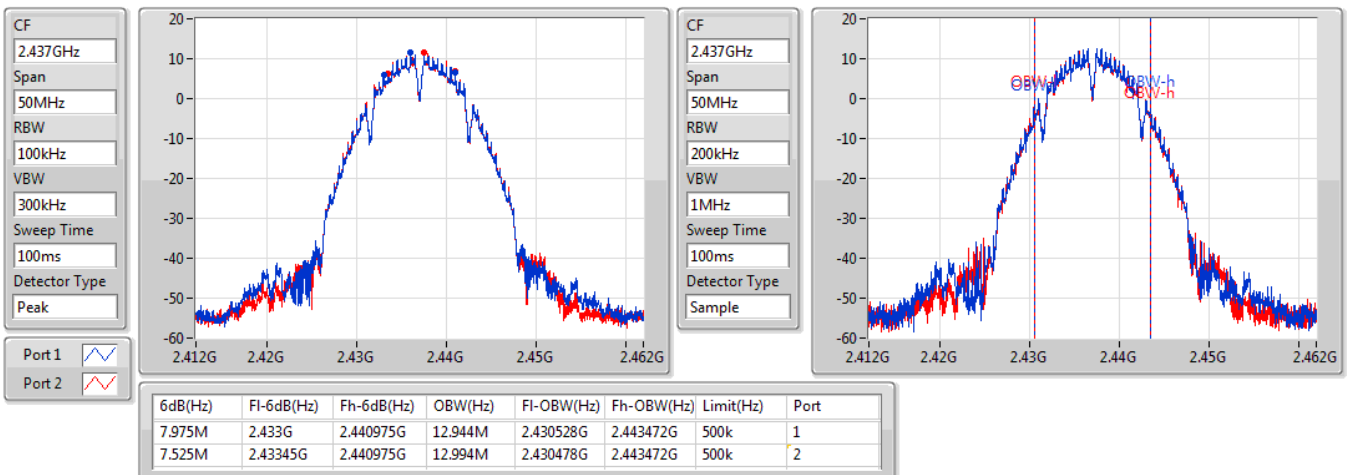


802.11b_Nss1,(1Mbps)_2TX
EBW
2462MHz

25/06/2019

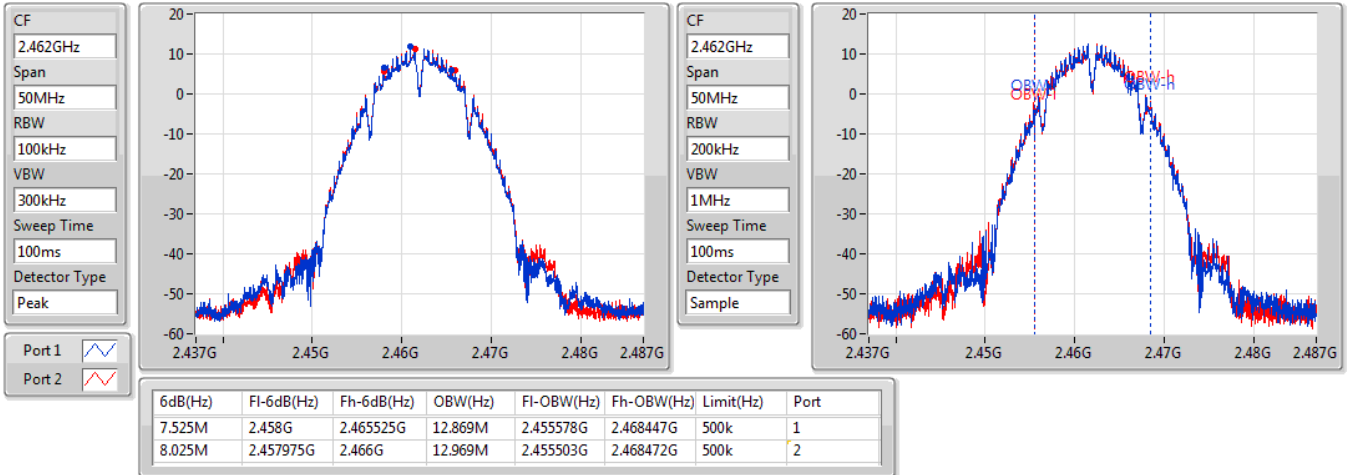

802.11g_Nss1,(6Mbps)_1TX(Port1)
EBW
2412MHz

25/06/2019

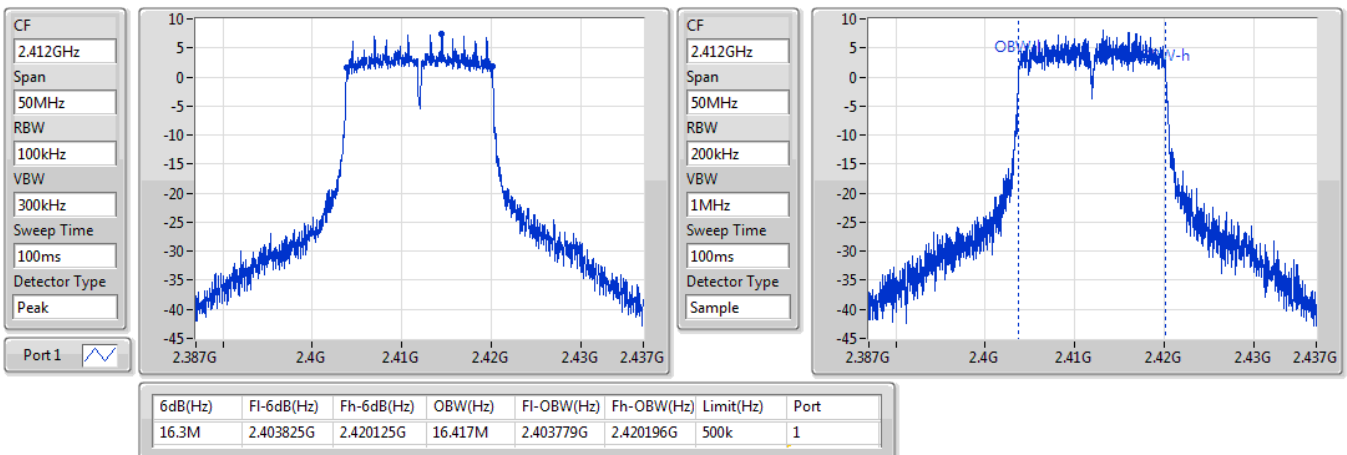


802.11g_Nss1,(6Mbps)_1TX(Port1)
EBW
2437MHz

25/06/2019

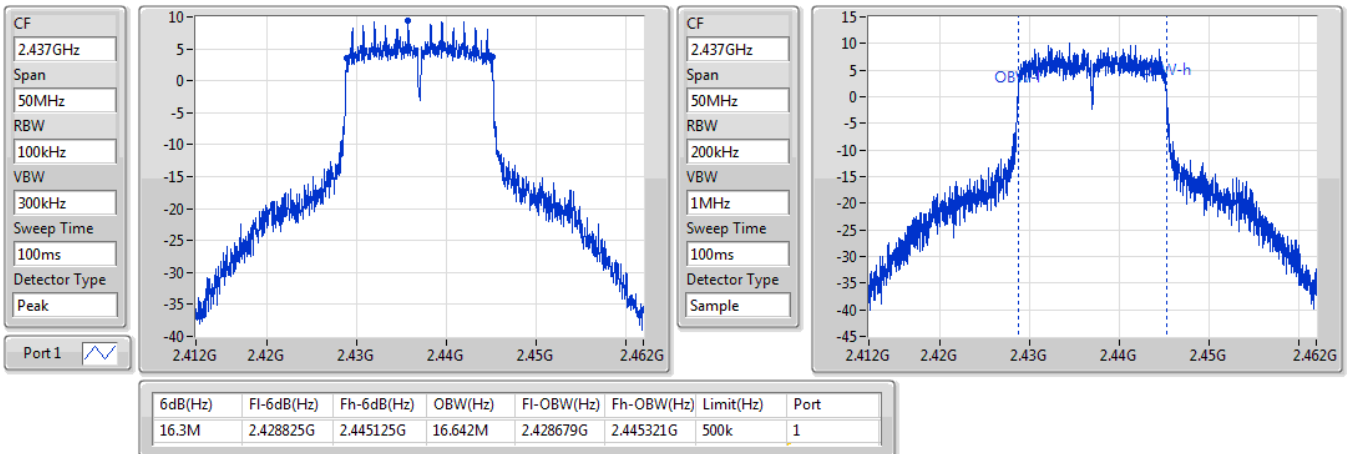

802.11g_Nss1,(6Mbps)_1TX(Port1)
EBW
2462MHz

25/06/2019

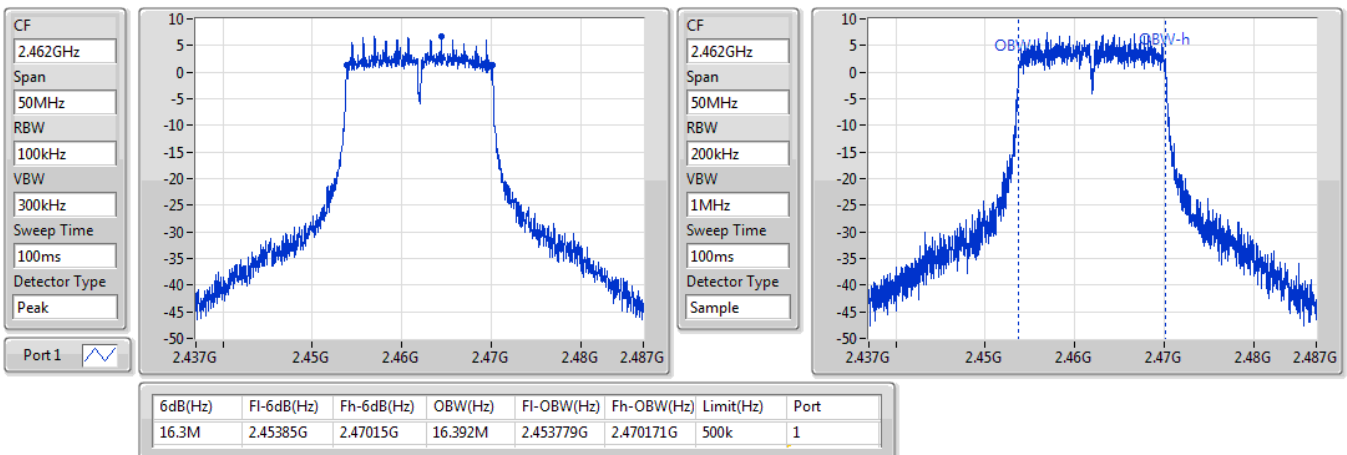


802.11g_Nss1,(6Mbps)_1TX(Port2)
EBW
2412MHz

25/06/2019

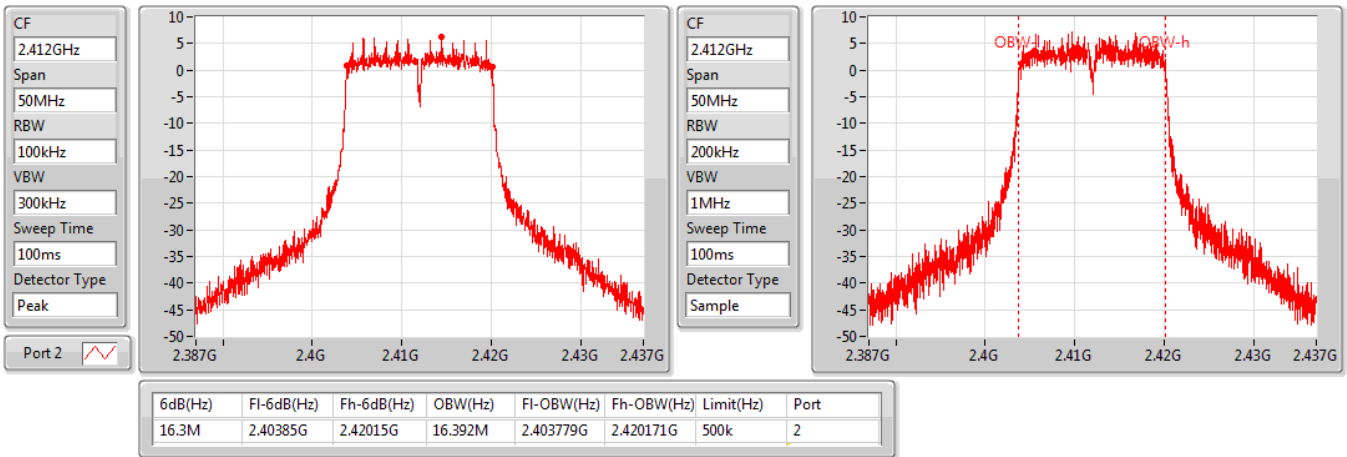

802.11g_Nss1,(6Mbps)_1TX(Port2)
EBW
2437MHz

25/06/2019

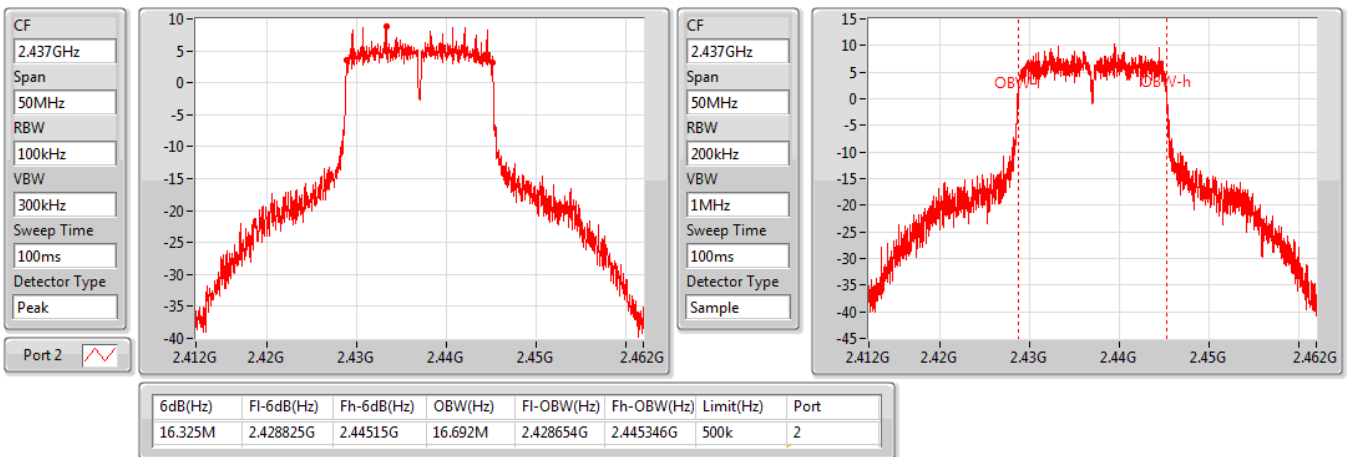


802.11g_Nss1,(6Mbps)_1TX(Port2)
EBW
2462MHz

25/06/2019

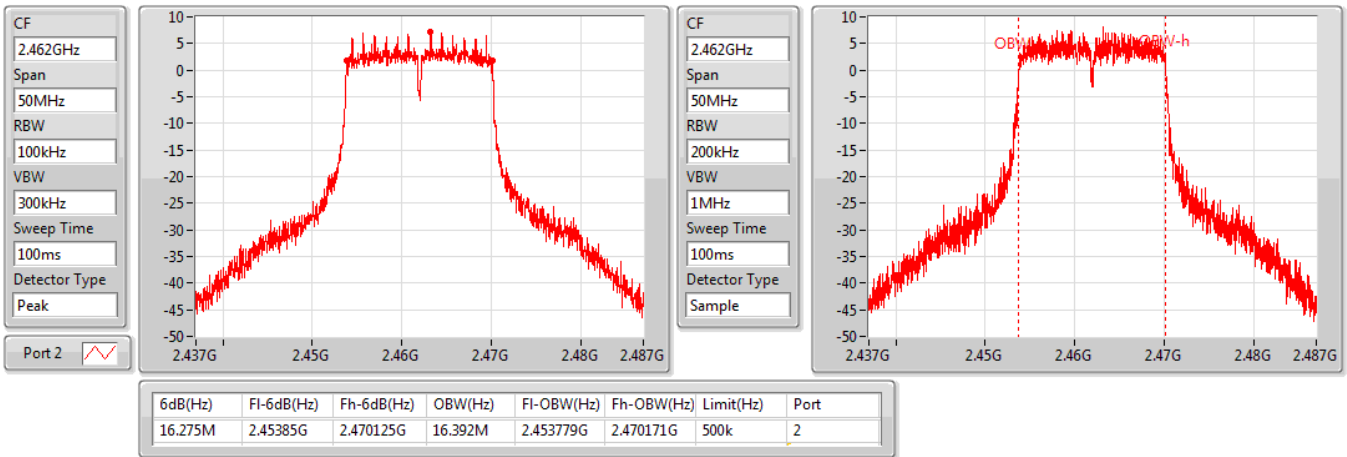

802.11g_Nss1,(6Mbps)_2TX
EBW
2412MHz

25/06/2019

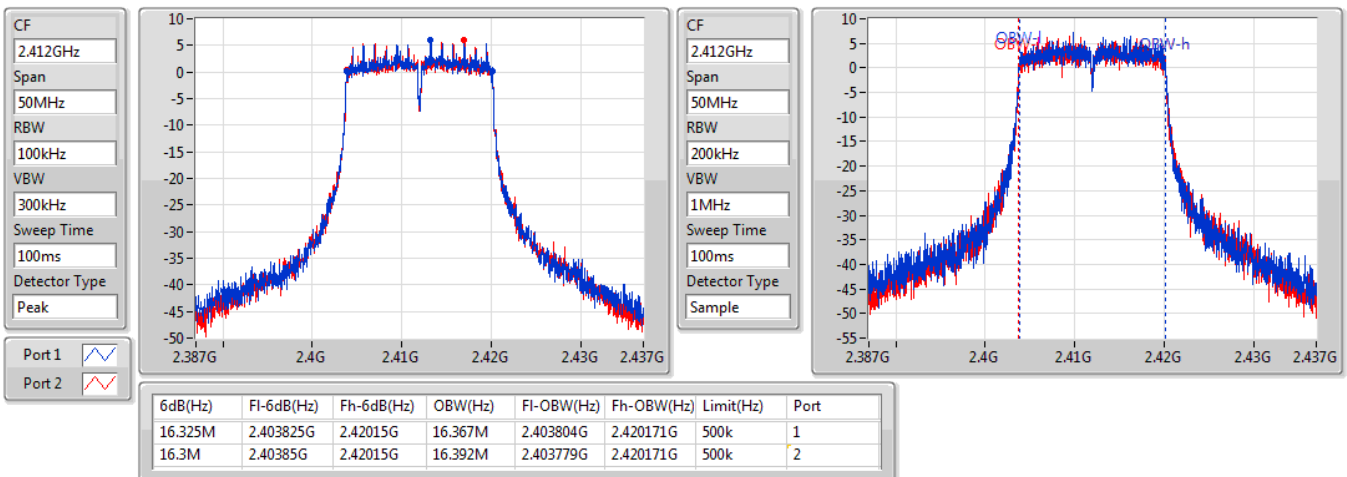


802.11g_Nss1,(6Mbps)_2TX
EBW
2437MHz

25/06/2019

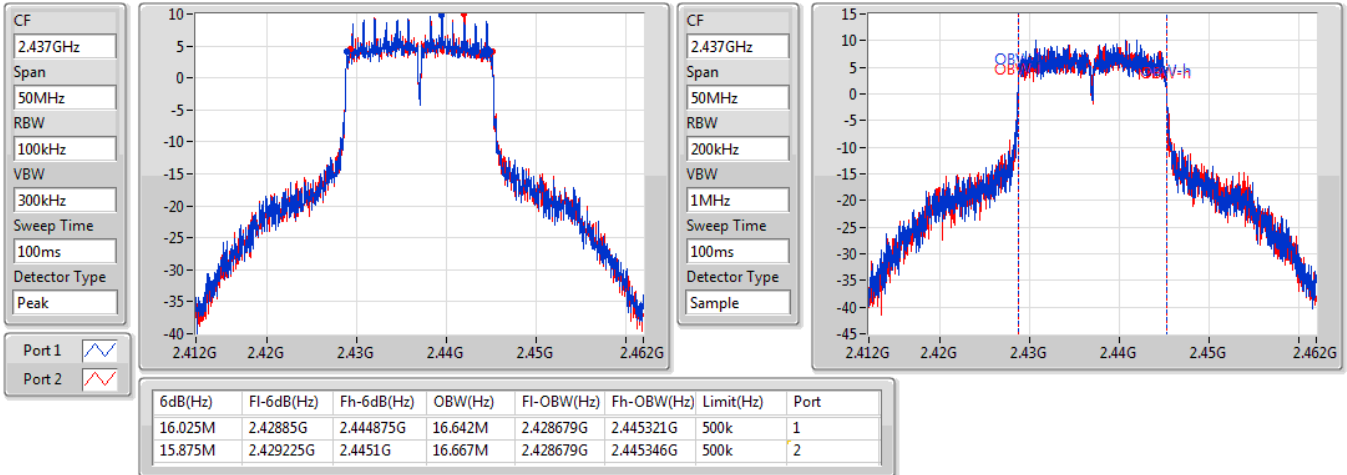

802.11g_Nss1,(6Mbps)_2TX
EBW
2462MHz

25/06/2019

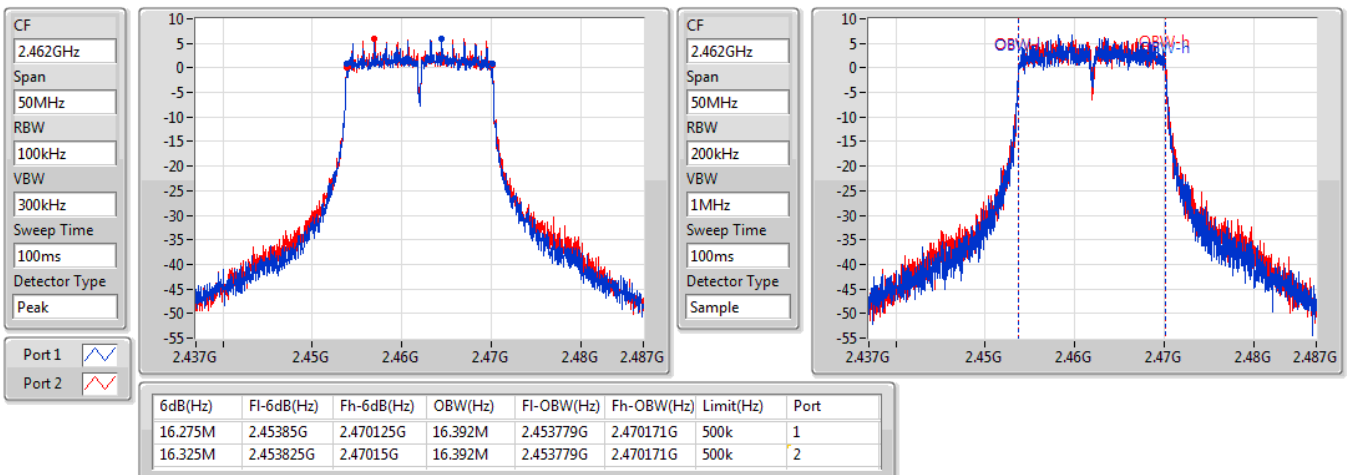


802.11ac VHT20_Nss1,(MCS0)_1TX(Port1)
2412MHz
EBW

25/06/2019

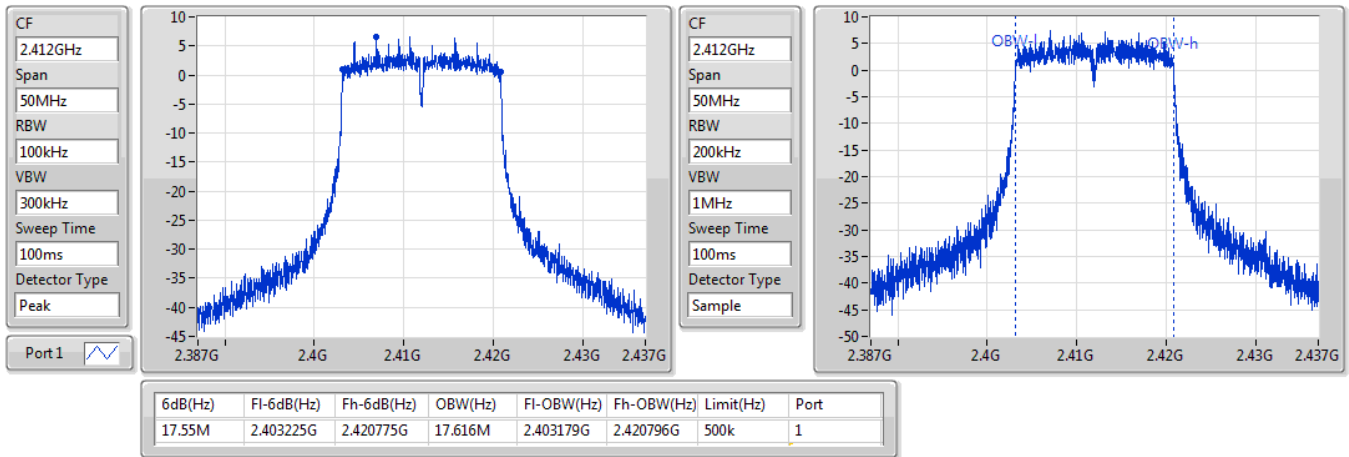

802.11ac VHT20_Nss1,(MCS0)_1TX(Port1)
2437MHz
EBW

25/06/2019

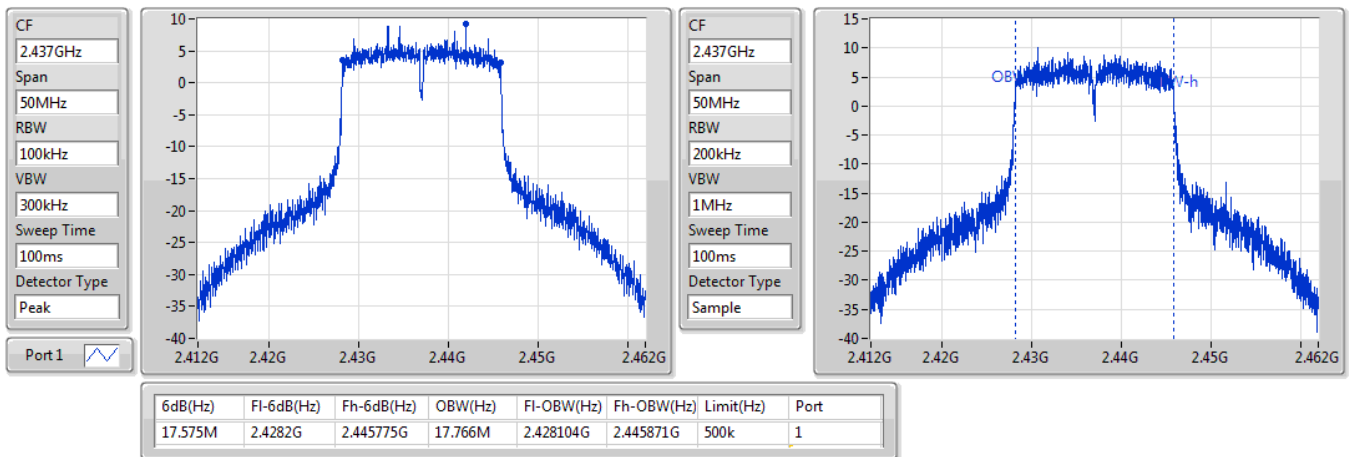


802.11ac VHT20_Nss1,(MCS0)_1TX(Port1)
2462MHz
EBW

25/06/2019

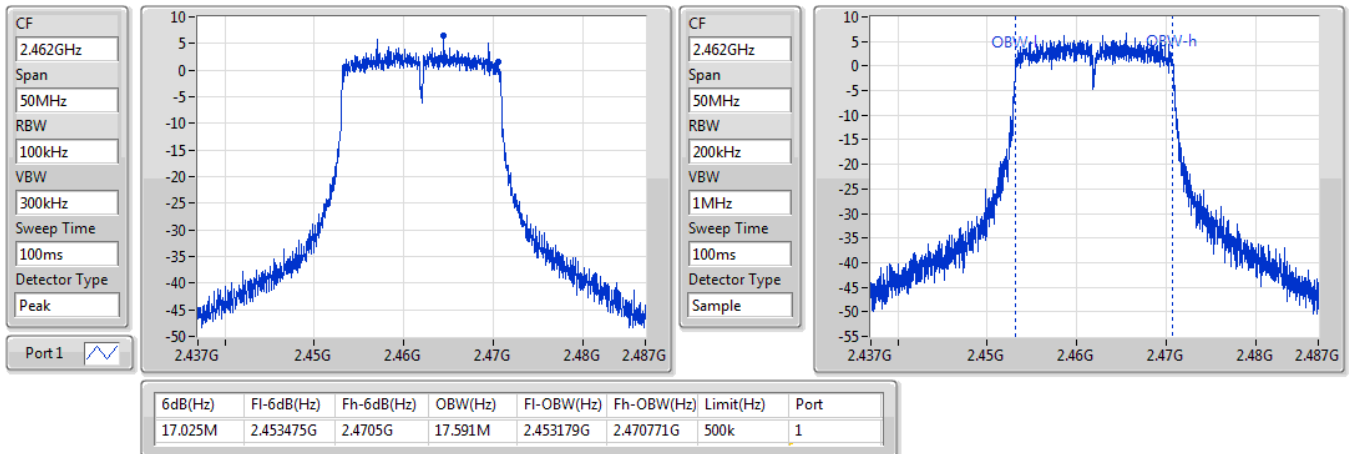

802.11ac VHT20_Nss1,(MCS0)_1TX(Port2)
2412MHz
EBW

25/06/2019

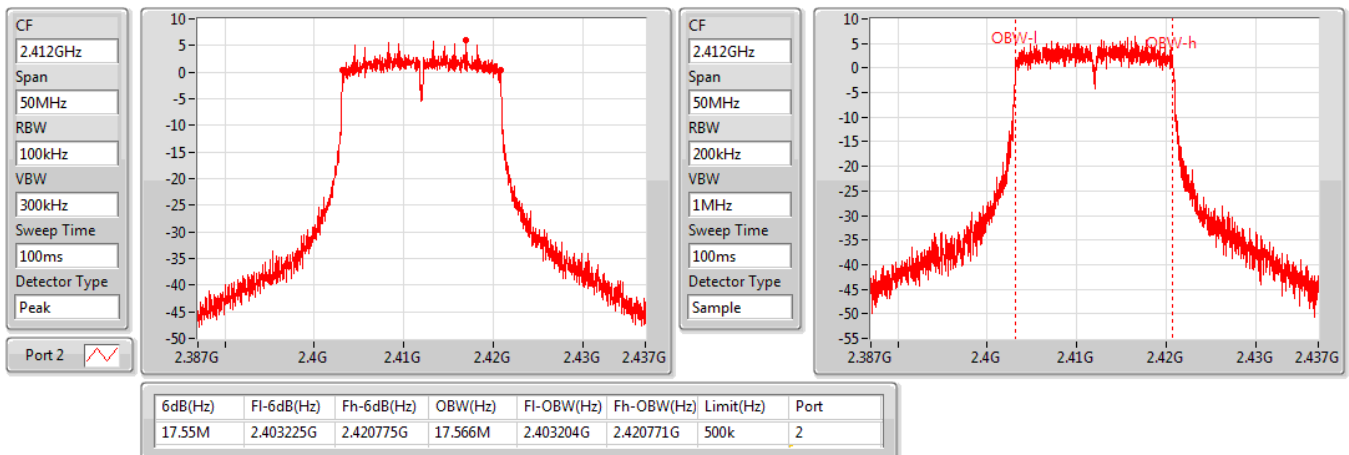


802.11ac VHT20_Nss1,(MCS0)_1TX(Port2)
2437MHz
EBW

25/06/2019

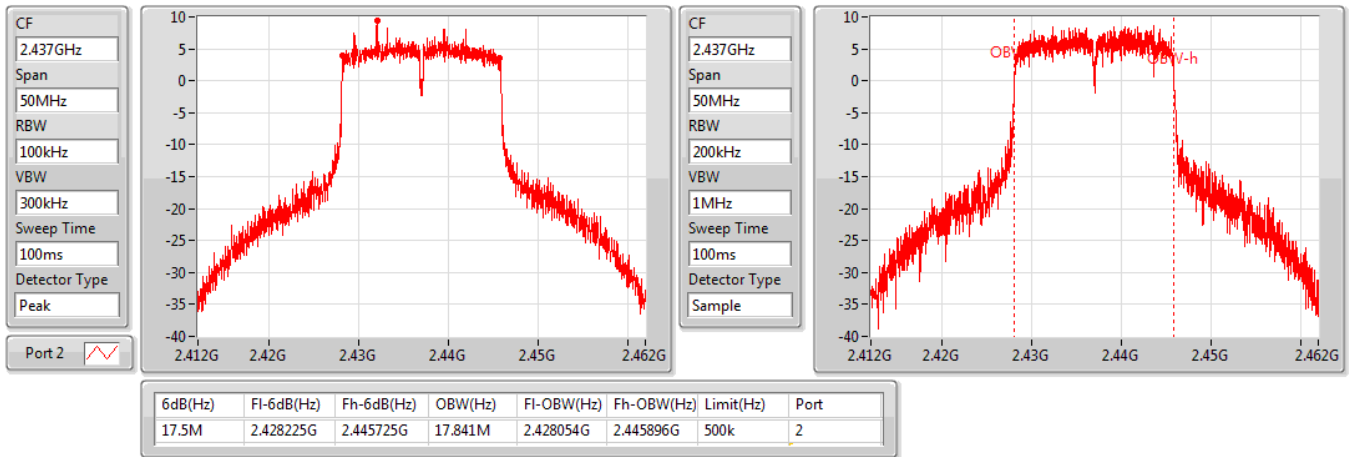

802.11ac VHT20_Nss1,(MCS0)_1TX(Port2)
2462MHz
EBW

25/06/2019

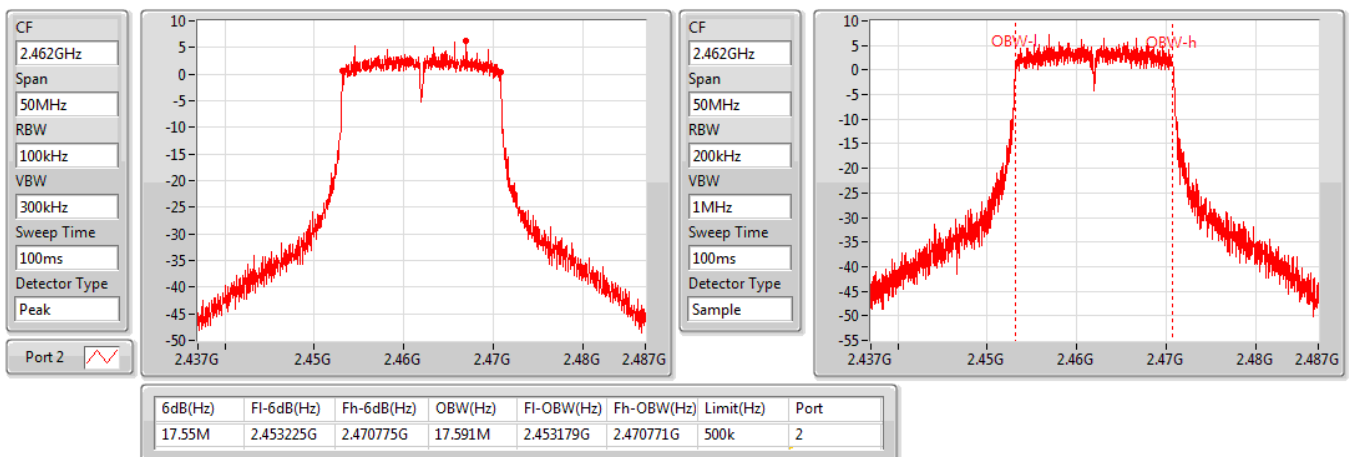


**802.11ac VHT20_Nss1,(MCS0)_2TX
2412MHz**
EBW

25/06/2019

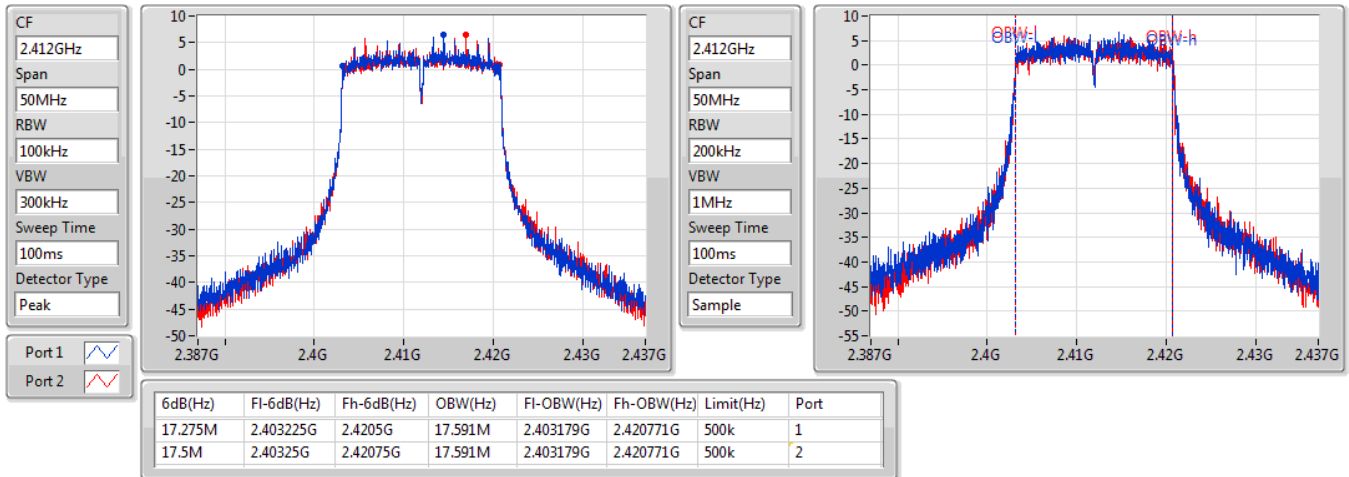

**802.11ac VHT20_Nss1,(MCS0)_2TX
2437MHz**
EBW

25/06/2019

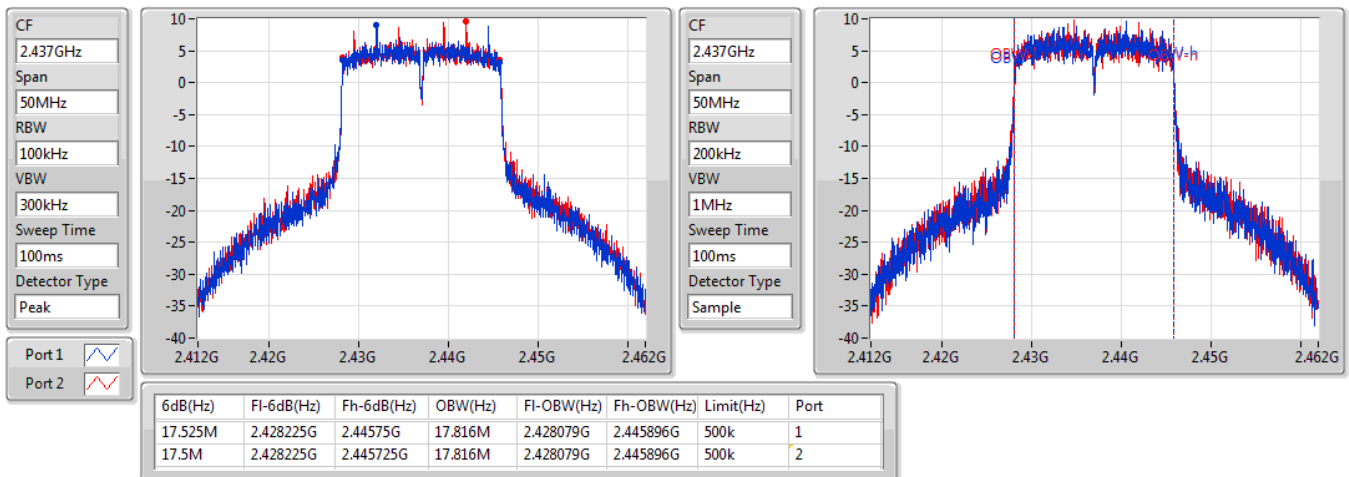


**802.11ac VHT20_Nss1,(MCS0)_2TX
2462MHz**
EBW

25/06/2019

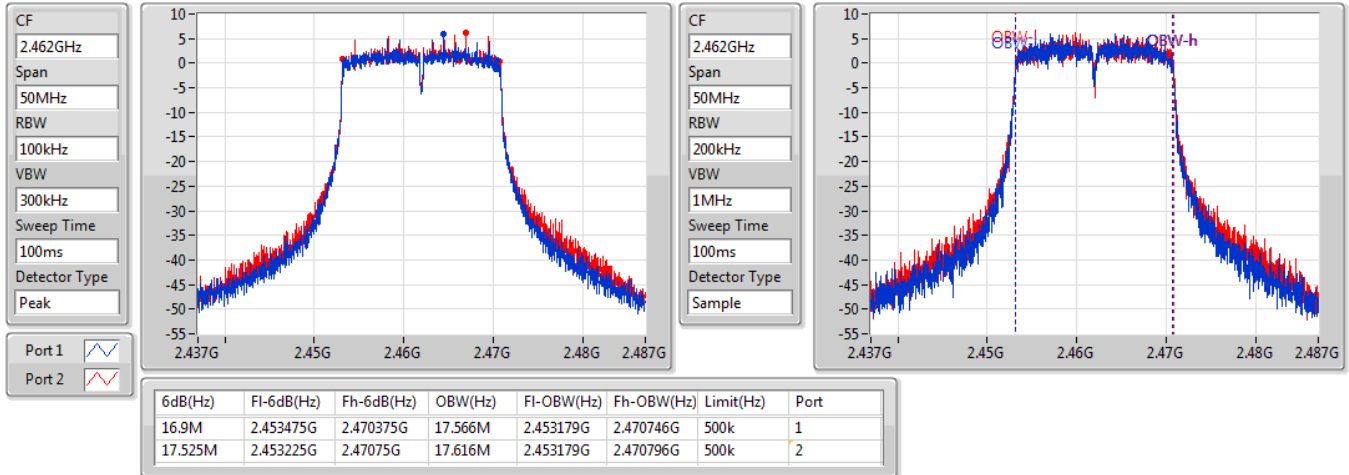

**802.11ac VHT40_Nss1,(MCS0)_1TX(Port1)
2422MHz**
EBW

25/06/2019

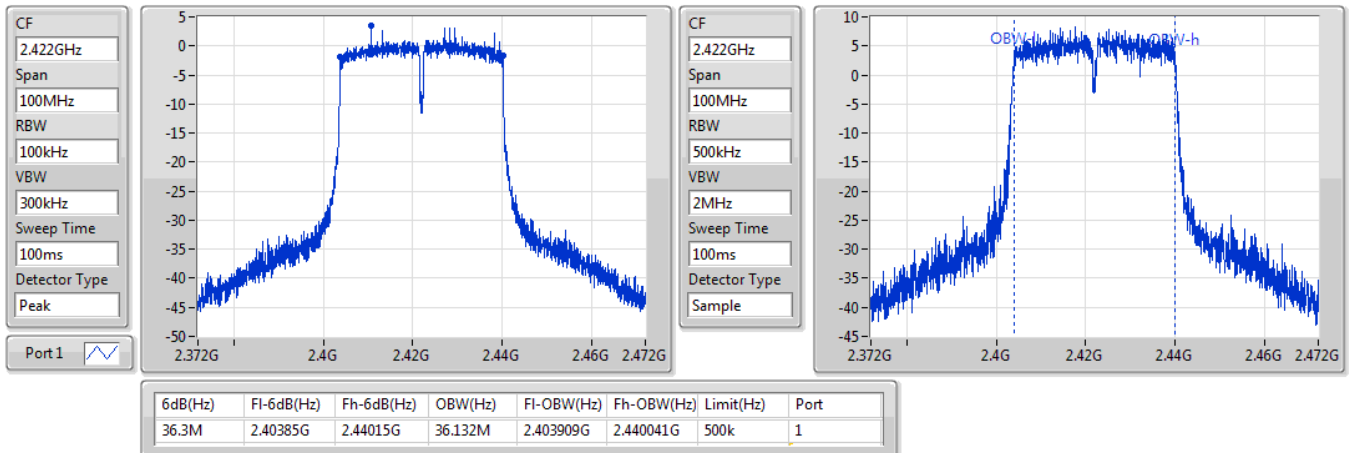


802.11ac VHT40_Nss1,(MCS0)_1TX(Port1)
2437MHz
EBW

25/06/2019

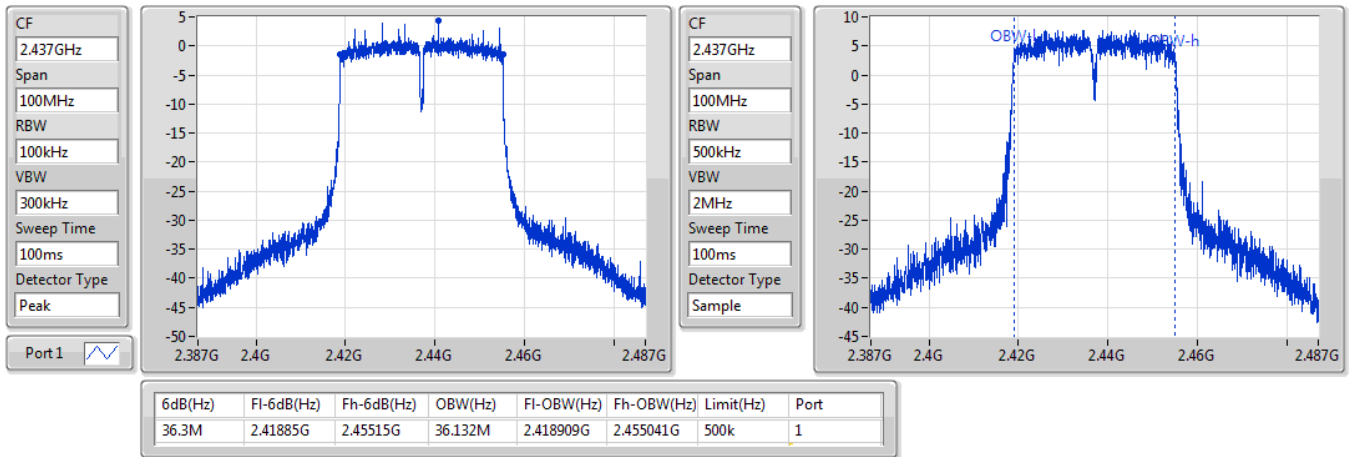
802.11ac VHT40_Nss1,(MCS0)_1TX(Port1)
2452MHz
EBW


25/06/2019

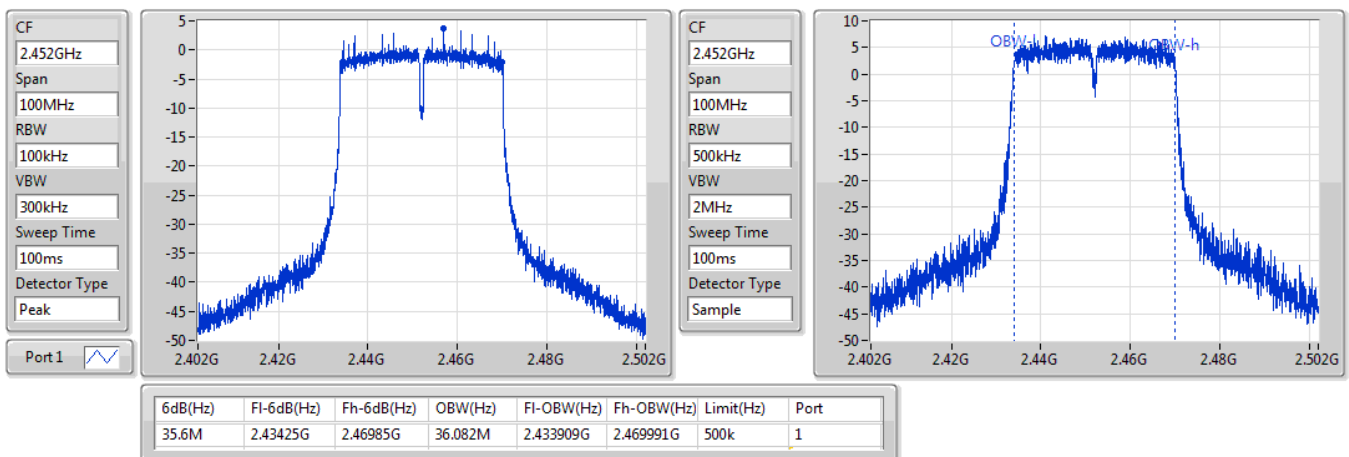

802.11ac VHT40_Nss1,(MCS0)_1TX(Port2) 2422MHz

EBW


25/06/2019

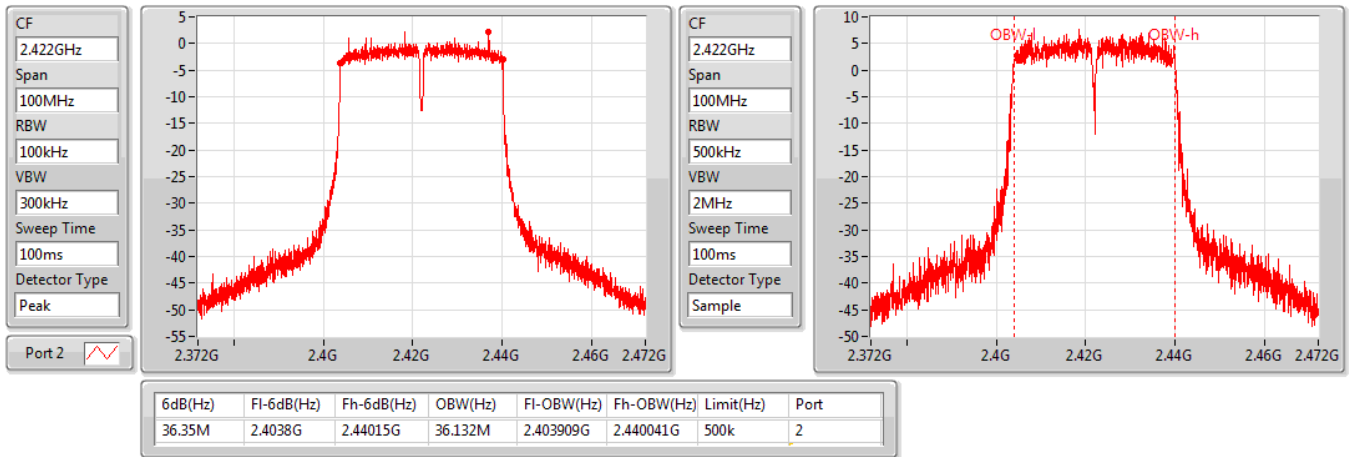

802.11ac VHT40_Nss1,(MCS0)_1TX(Port2) 2437MHz


EBW

25/06/2019

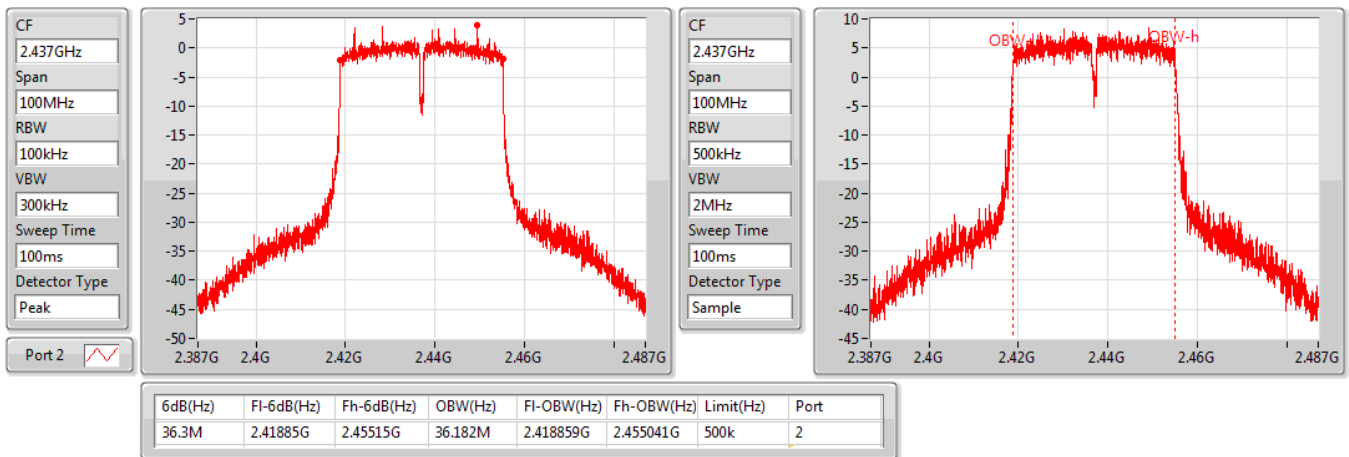


802.11ac VHT40_Nss1,(MCS0)_1TX(Port2)
2452MHz
EBW

25/06/2019

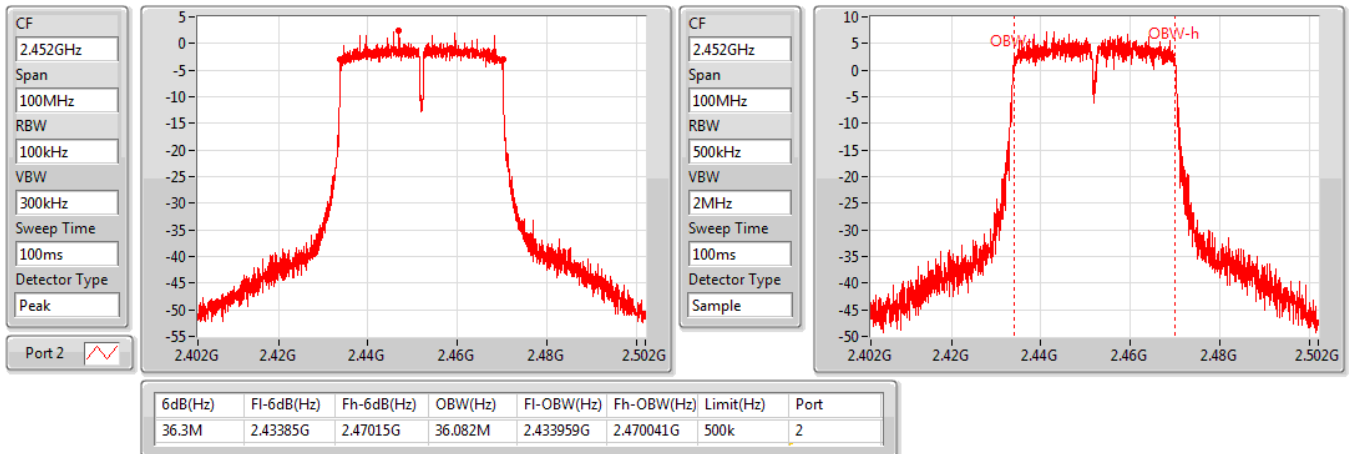

802.11ac VHT40_Nss1,(MCS0)_2TX
2422MHz
EBW

25/06/2019

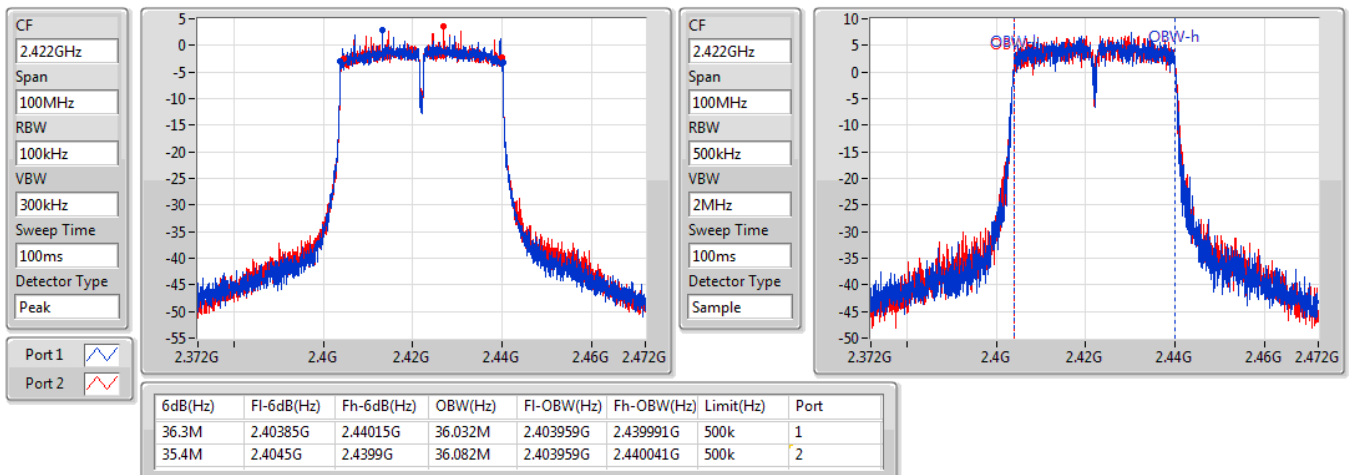


**802.11ac VHT40_Nss1,(MCS0)_2TX
2437MHz**
EBW

25/06/2019

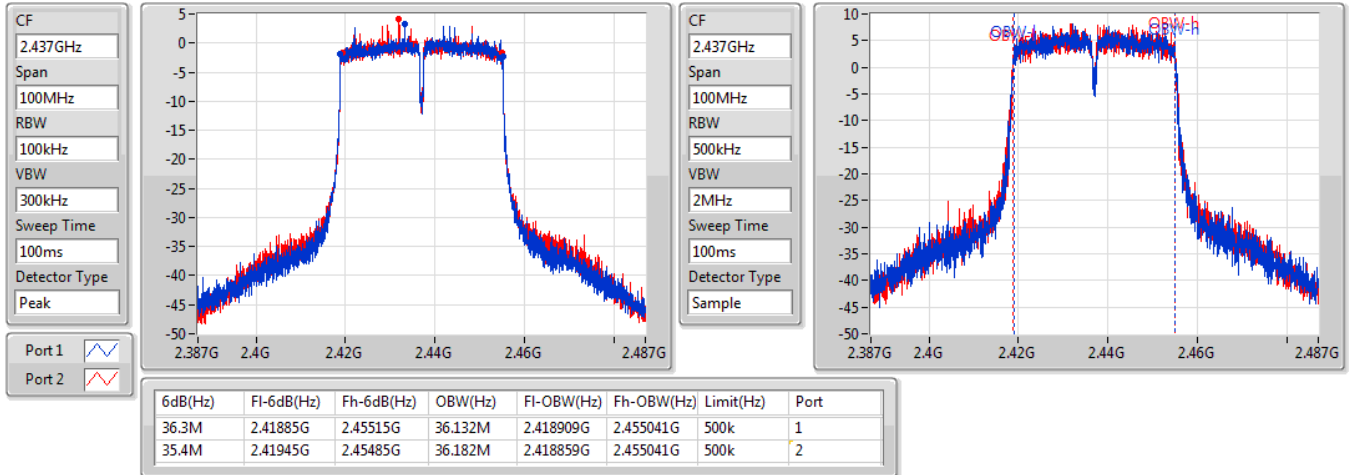

**802.11ac VHT40_Nss1,(MCS0)_2TX
2452MHz**
EBW

25/06/2019

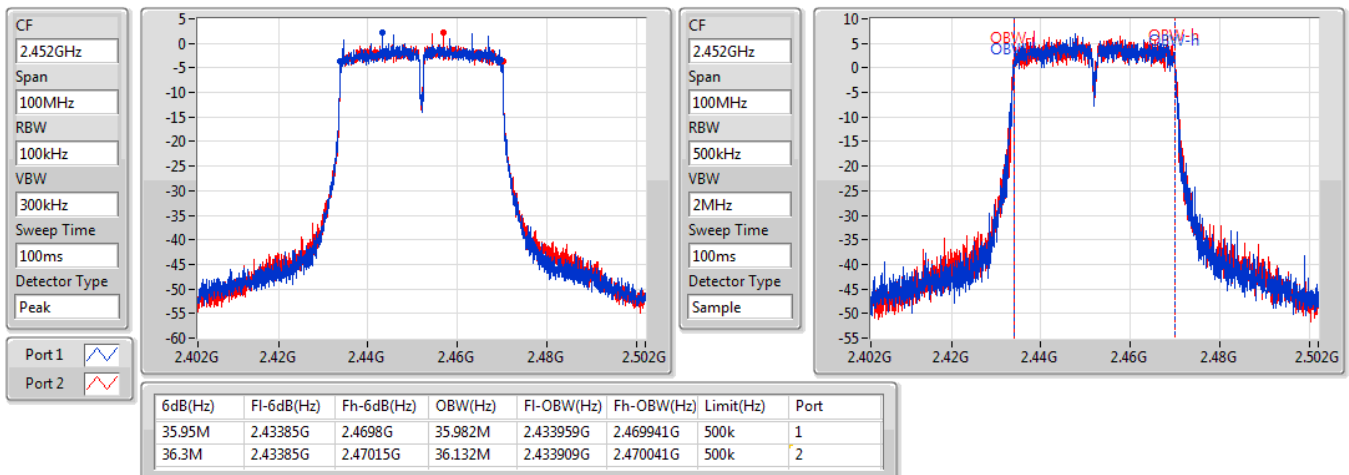


802.11ax HEW20_Nss1,(MCS0)_1TX(Port1)
EBW
2412MHz

25/06/2019

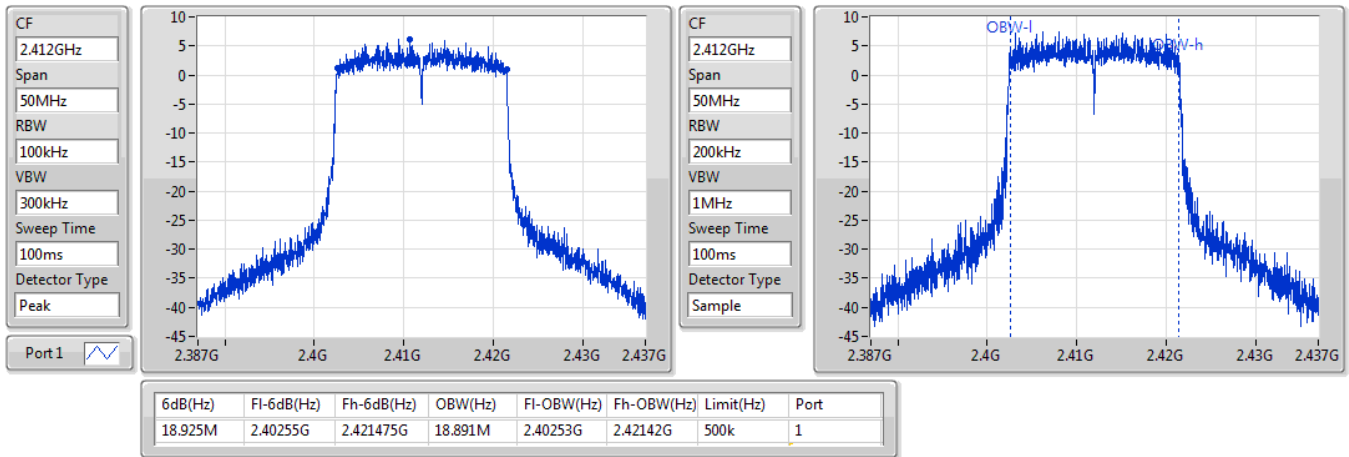

802.11ax HEW20_Nss1,(MCS0)_1TX(Port1)
EBW
2437MHz

25/06/2019

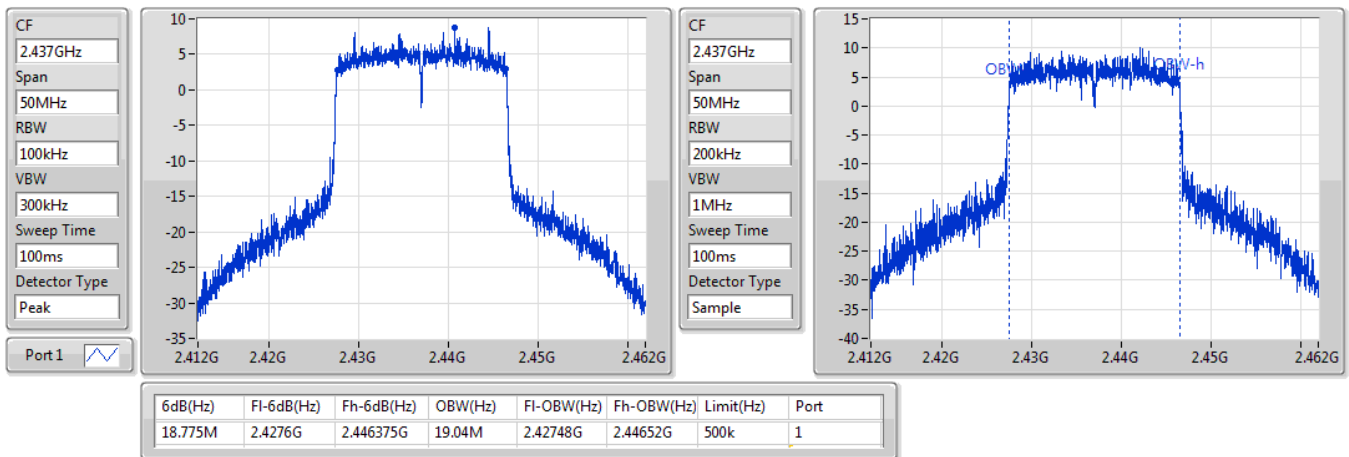


802.11ax HEW20_Nss1,(MCS0)_1TX(Port1)
EBW
2462MHz

25/06/2019

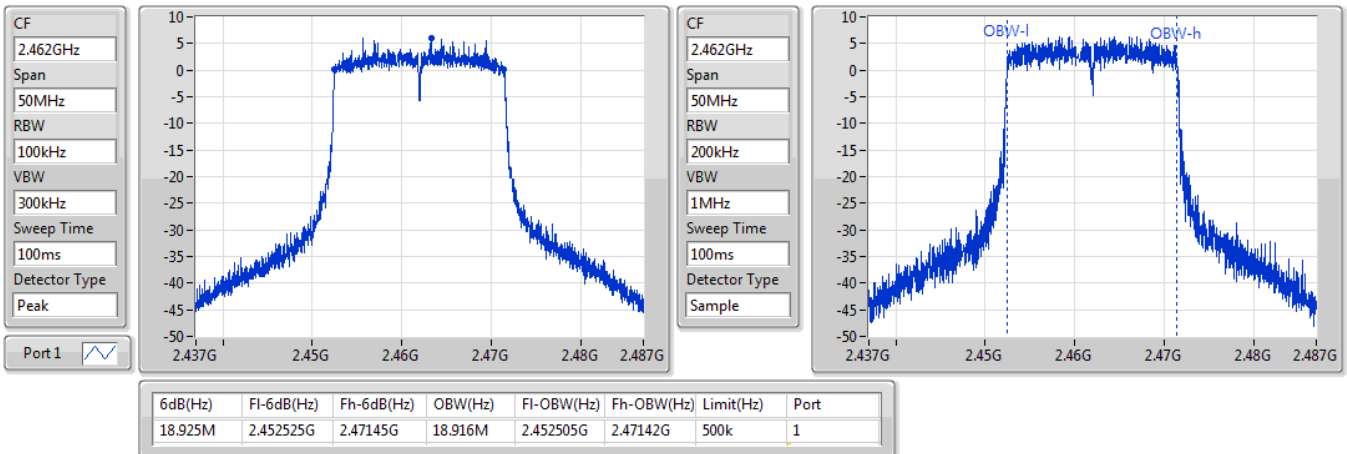

802.11ax HEW20_Nss1,(MCS0)_1TX(Port2)
EBW
2412MHz

25/06/2019

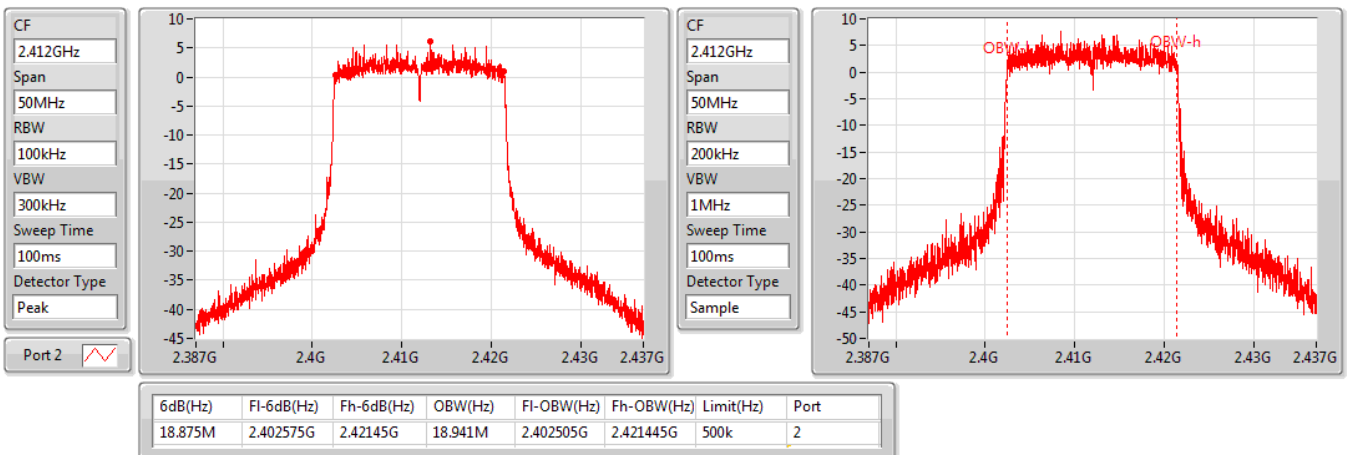


802.11ax HEW20_Nss1,(MCS0)_1TX(Port2)
EBW
2437MHz

25/06/2019

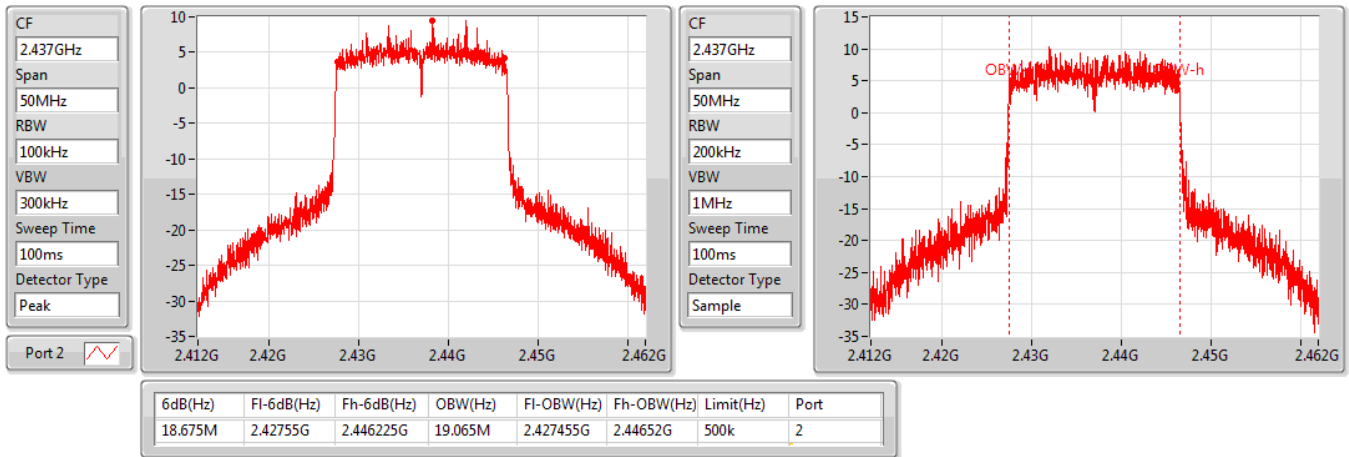
802.11ax HEW20_Nss1,(MCS0)_1TX(Port2)
EBW
2462MHz

25/06/2019

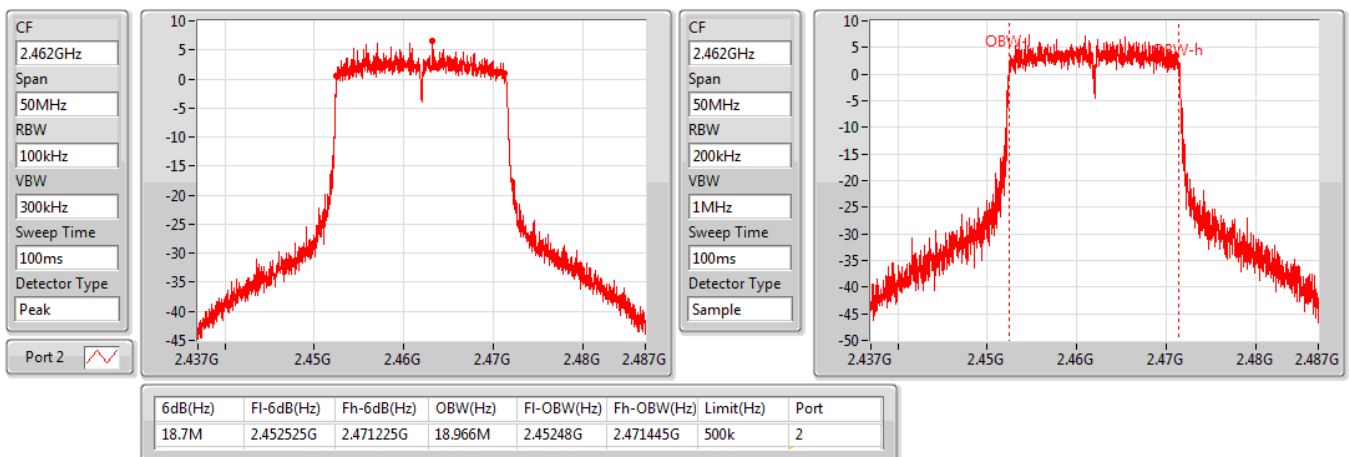


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW

2412MHz

25/06/2019

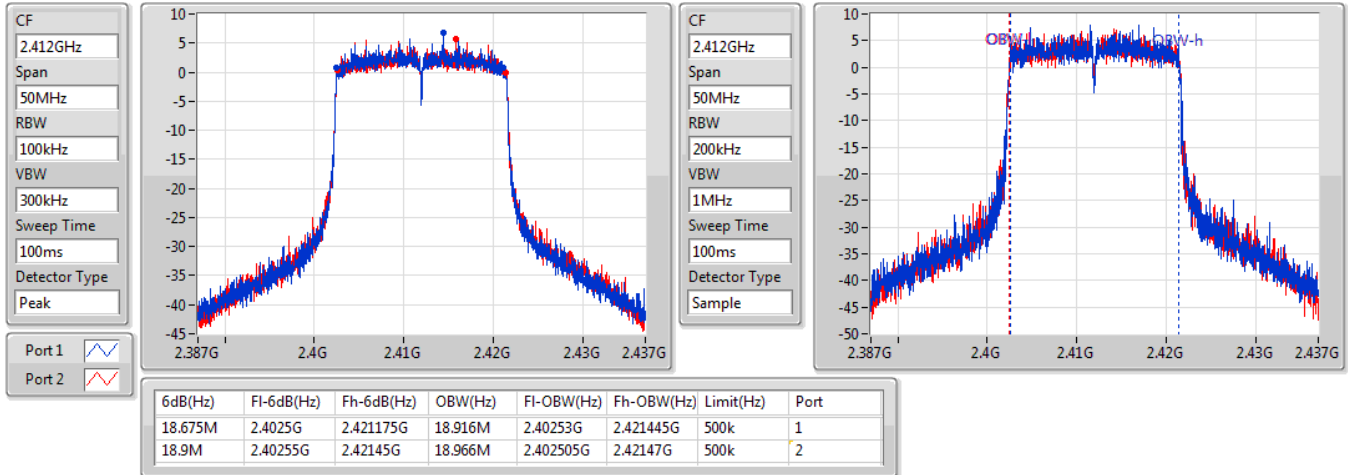


802.11ax HEW20_Nss1,(MCS0)_2TX

EBW


2437MHz

25/06/2019

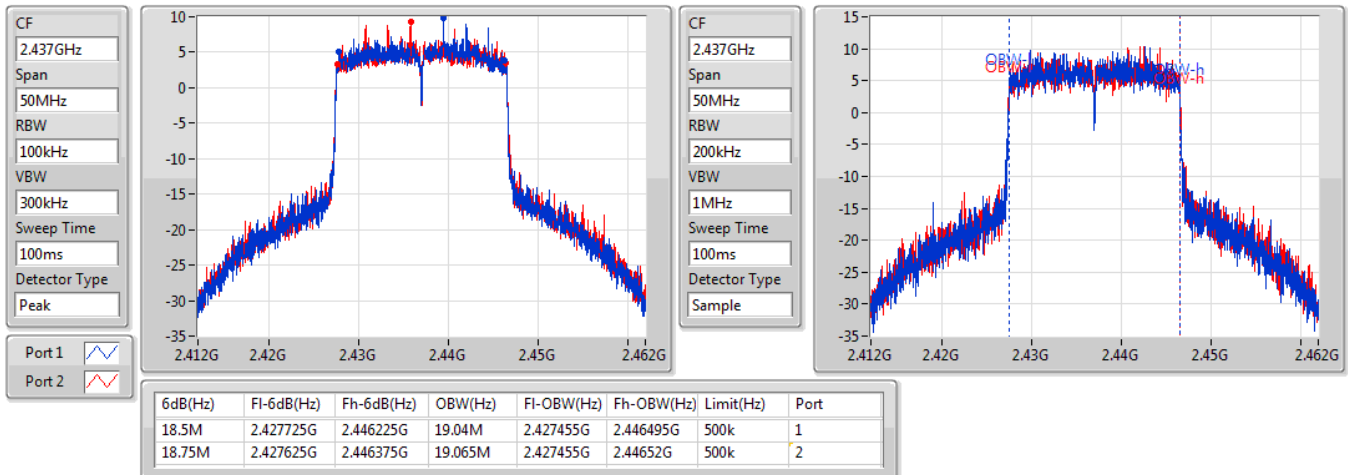


802.11ax HEW20_Nss1,(MCS0)_2TX
EBW
2462MHz

25/06/2019

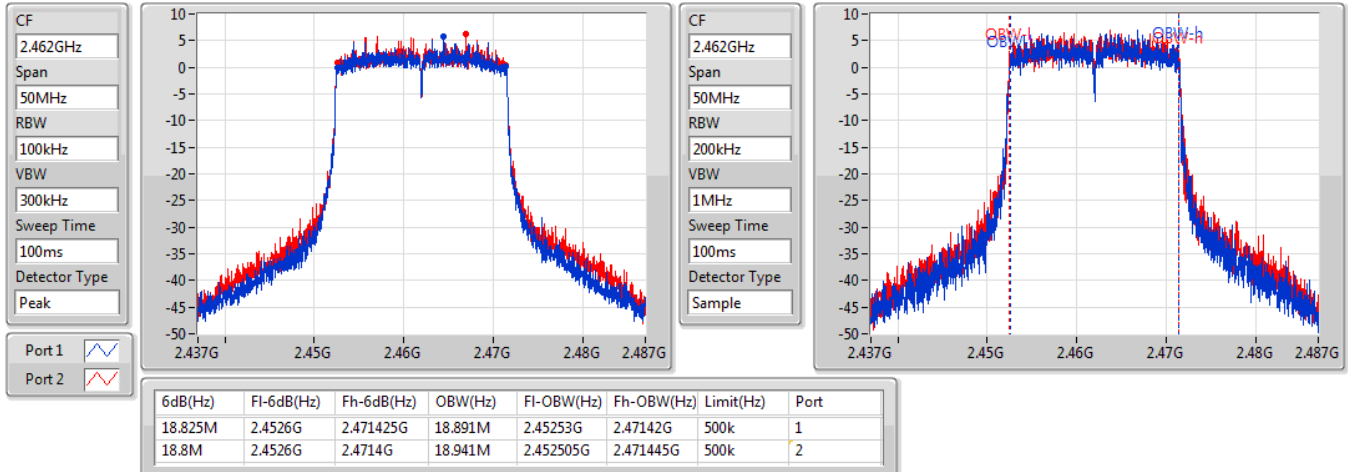

802.11ax HEW40_Nss1,(MCS0)_1TX(Port1)
EBW
2422MHz

25/06/2019

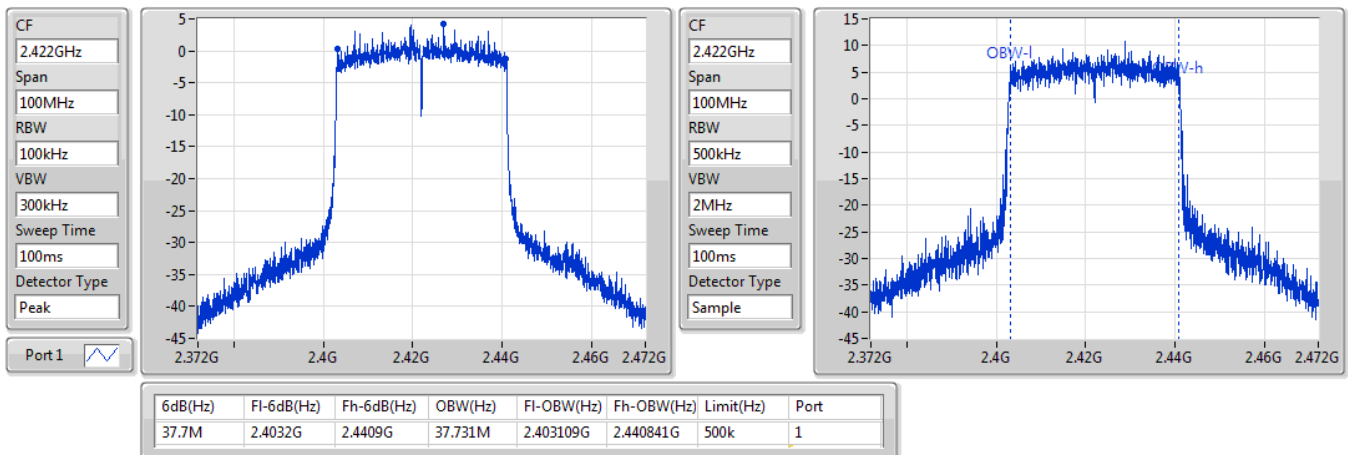


802.11ax HEW40_Nss1,(MCS0)_1TX(Port1)
EBW
2437MHz

25/06/2019

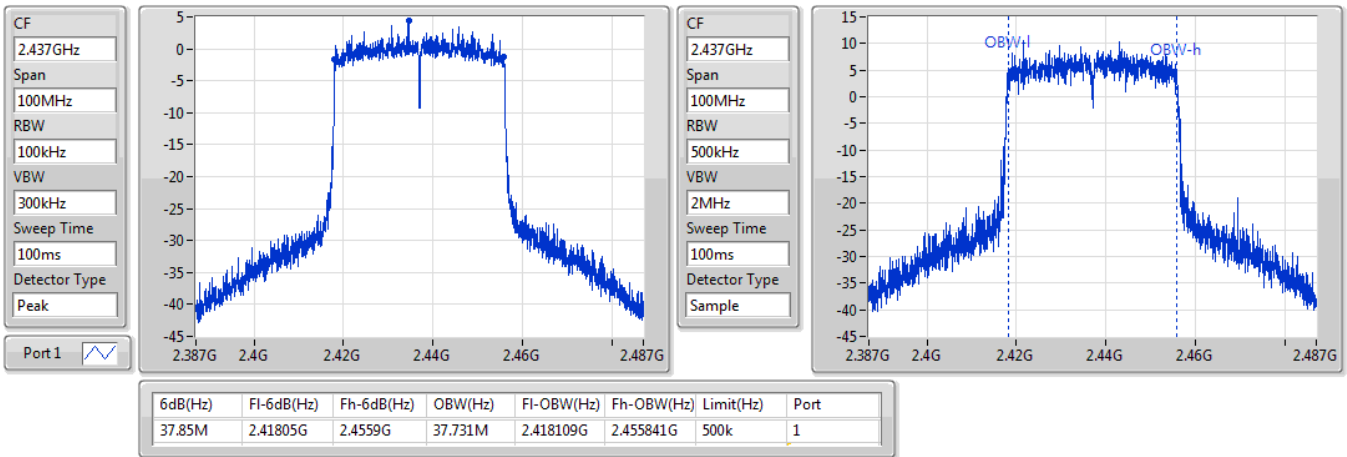

802.11ax HEW40_Nss1,(MCS0)_1TX(Port1)
EBW
2452MHz

25/06/2019

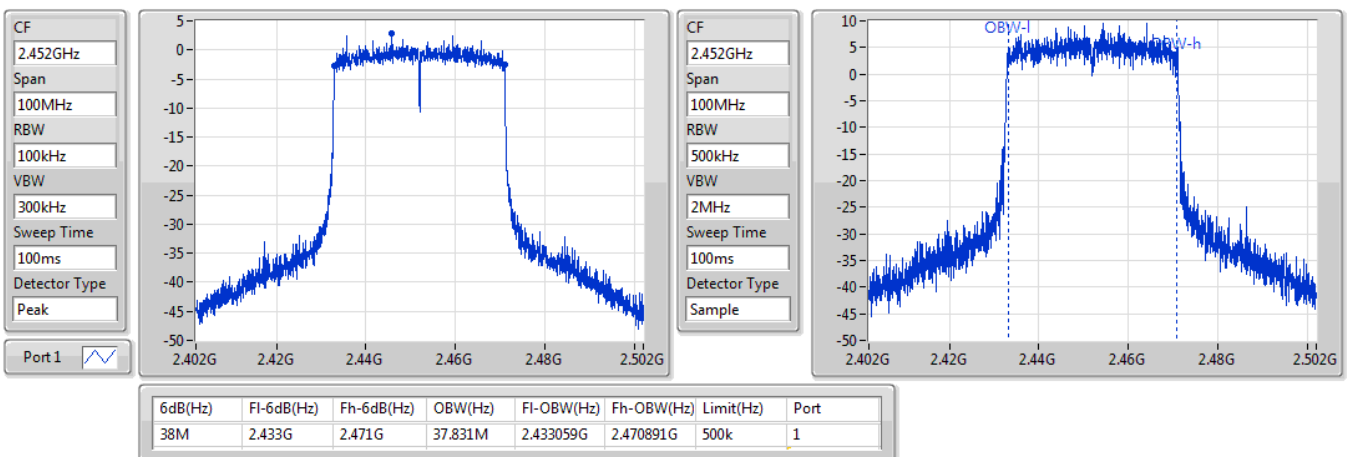


802.11ax HEW40_Nss1,(MCS0)_1TX(Port2)
EBW
2422MHz

25/06/2019

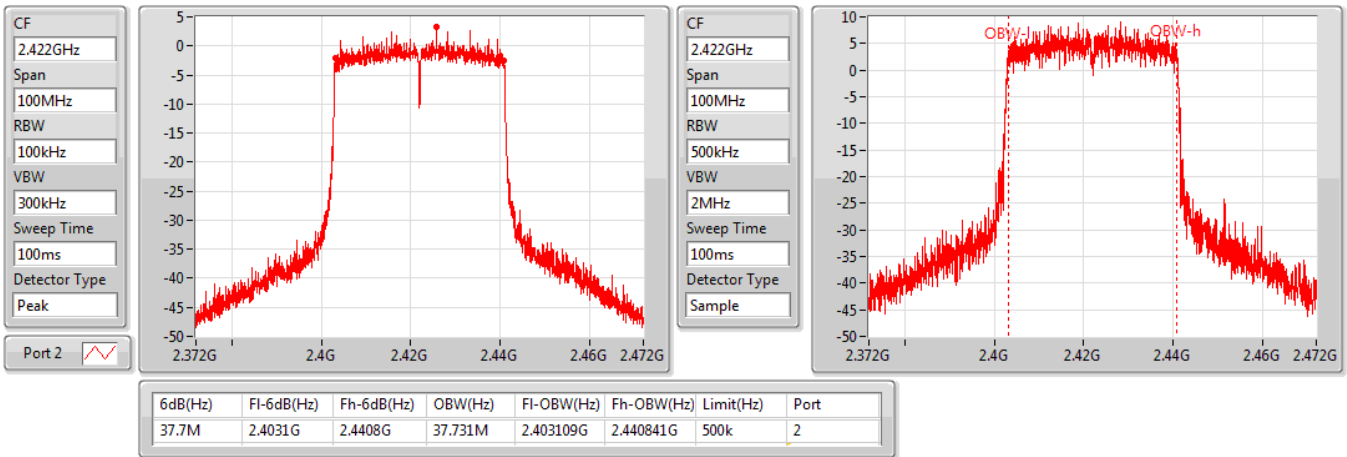

802.11ax HEW40_Nss1,(MCS0)_1TX(Port2)
EBW
2437MHz

25/06/2019

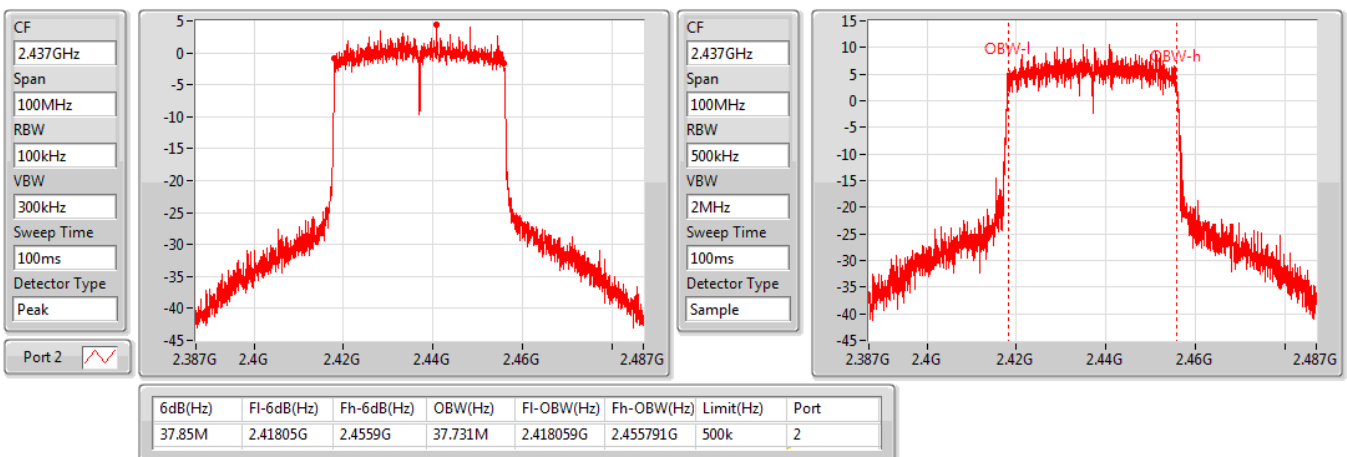


802.11ax HEW40_Nss1,(MCS0)_1TX(Port2)
EBW
2452MHz

25/06/2019

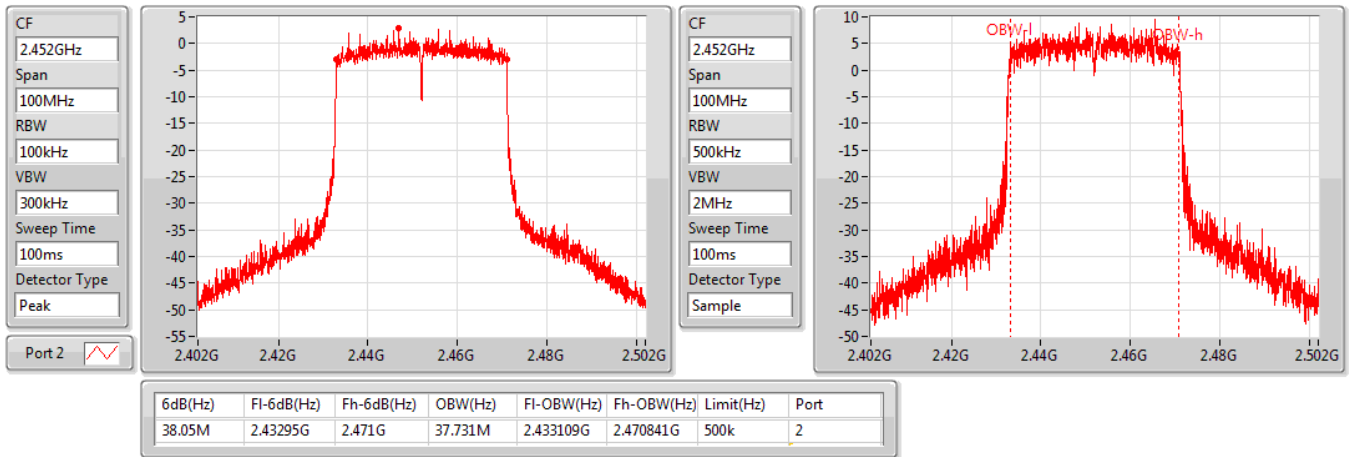
802.11ax HEW40_Nss1,(MCS0)_2TX
EBW
2422MHz

25/06/2019

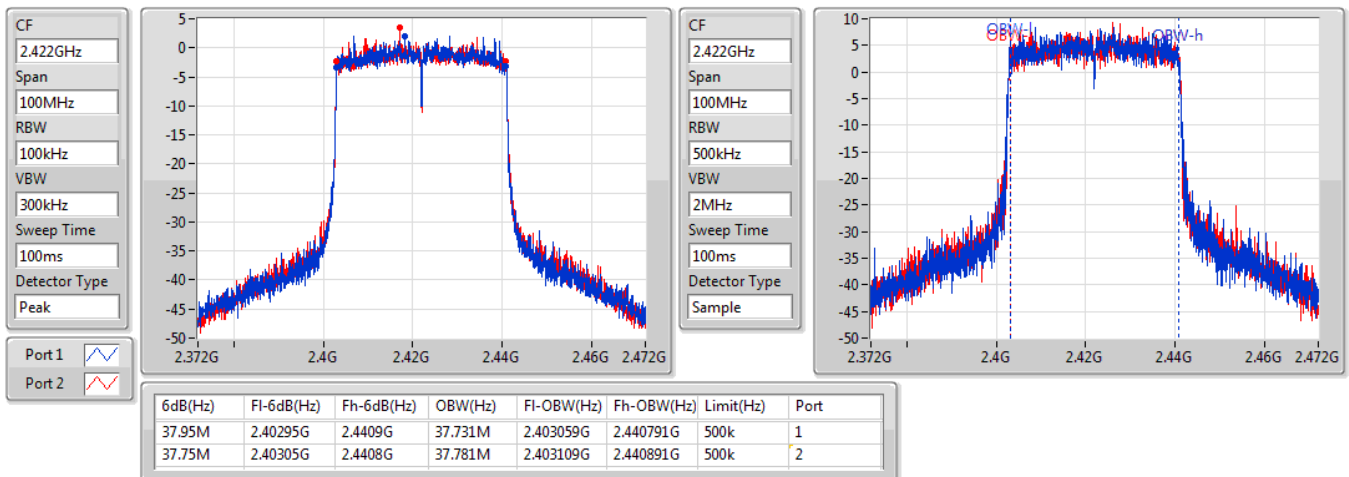


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

2437MHz

25/06/2019

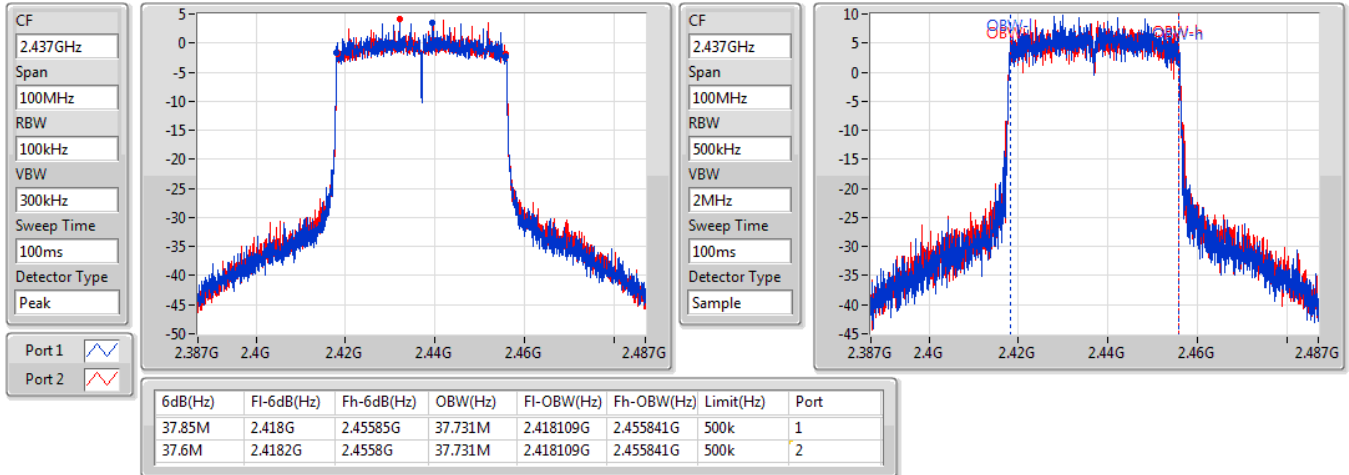


802.11ax HEW40_Nss1,(MCS0)_2TX

EBW

2452MHz

25/06/2019

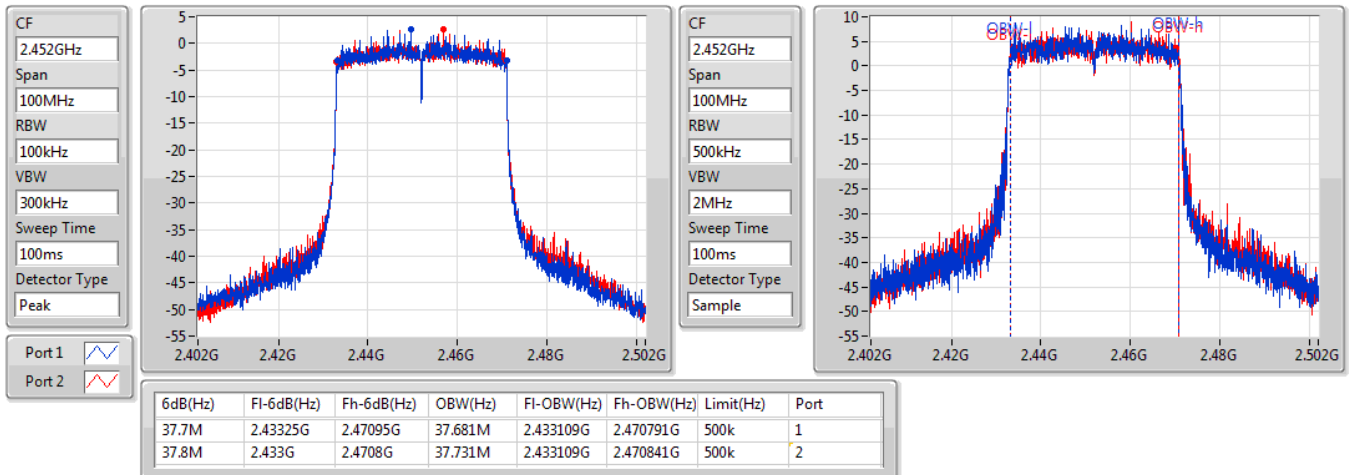

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	17.2M	17.616M	17M6D1D	14.075M	17.566M
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	33.75M	36.182M	36M2D1D	25.55M	36.032M
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	16.1M	17.591M	17M6D1D	14.95M	17.516M
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	35.6M	36.082M	36M1D1D	27.25M	35.982M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;
Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	16.775M	17.591M	16.85M	17.566M
2437MHz	Pass	500k	17.2M	17.591M	14.075M	17.616M
2462MHz	Pass	500k	16.925M	17.566M	16.6M	17.566M
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	500k	31.3M	36.082M	33.75M	36.182M
2437MHz	Pass	500k	31.3M	36.082M	25.55M	36.082M
2452MHz	Pass	500k	26.25M	36.032M	31.3M	36.082M
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	15M	17.566M	15.575M	17.566M
2437MHz	Pass	500k	15.1M	17.516M	14.95M	17.591M
2462MHz	Pass	500k	16.1M	17.566M	16.1M	17.591M
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	500k	27.25M	36.082M	33.75M	36.082M
2437MHz	Pass	500k	35.05M	36.032M	33.75M	36.082M
2452MHz	Pass	500k	35.05M	36.082M	35.6M	35.982M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11ac VHT20-BF_Nss1,(MCS0)_2TX

EBW

2412MHz

22/07/2019

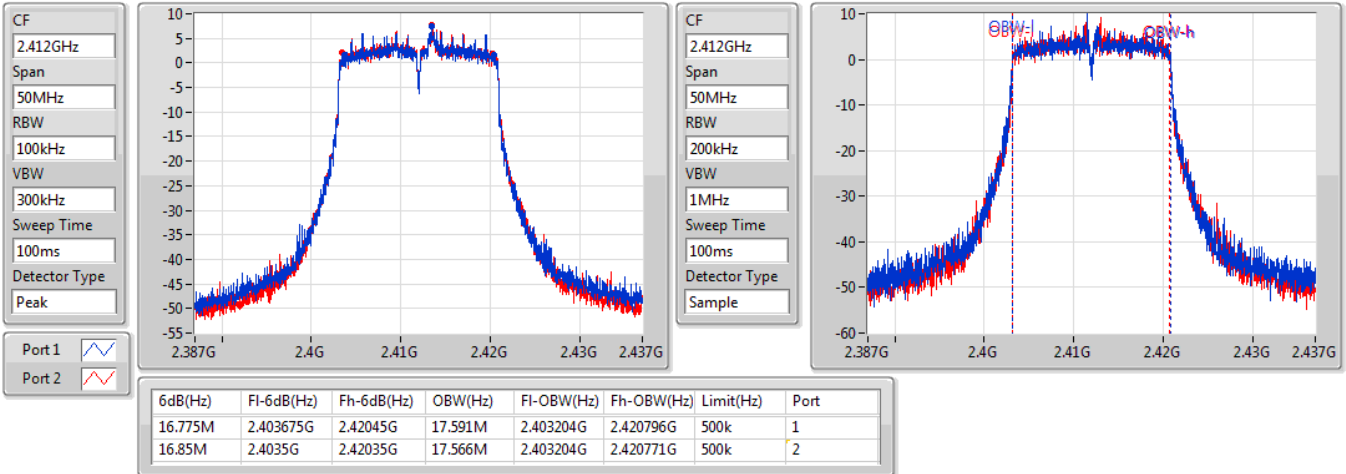


802.11ac VHT20-BF_Nss1,(MCS0)_2TX

EBW

2437MHz

22/07/2019

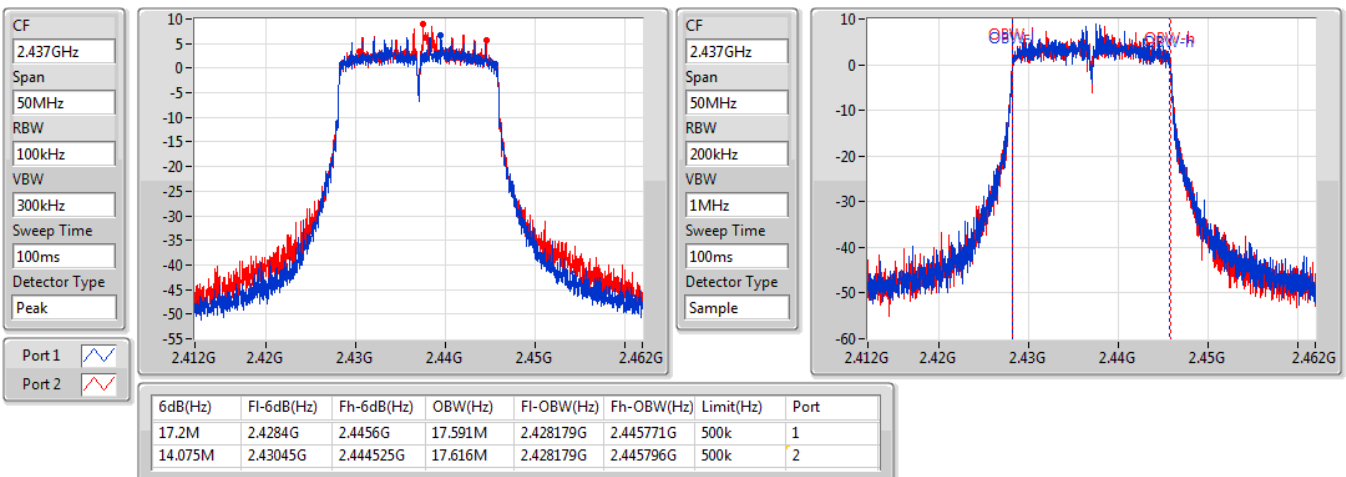


802.11ac VHT20-BF_Nss1,(MCS0)_2TX

EBW

2462MHz

22/07/2019

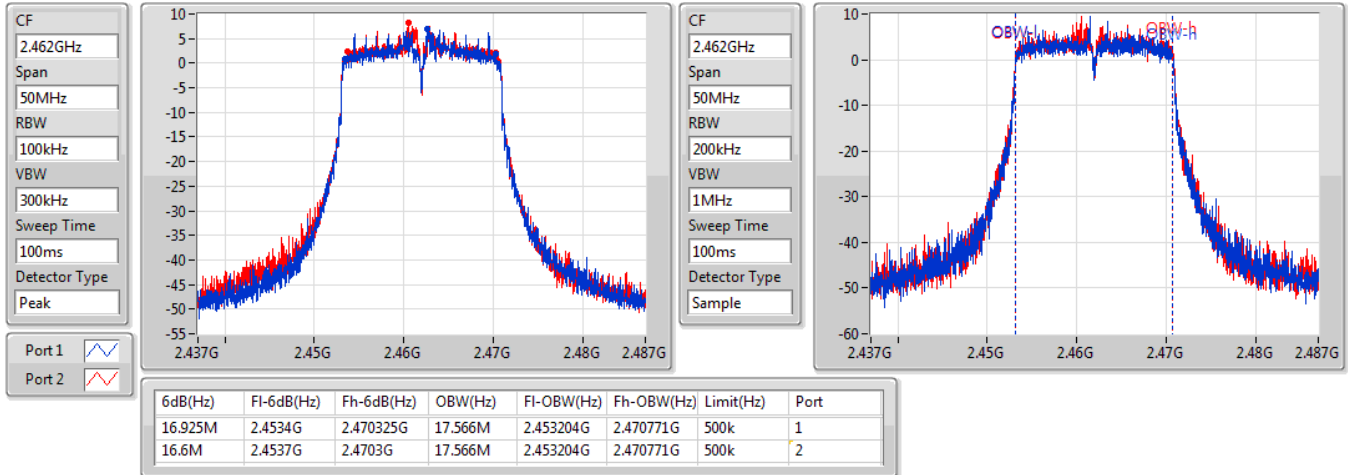


802.11ac VHT40-BF_Nss1,(MCS0)_2TX

EBW

2422MHz

22/07/2019

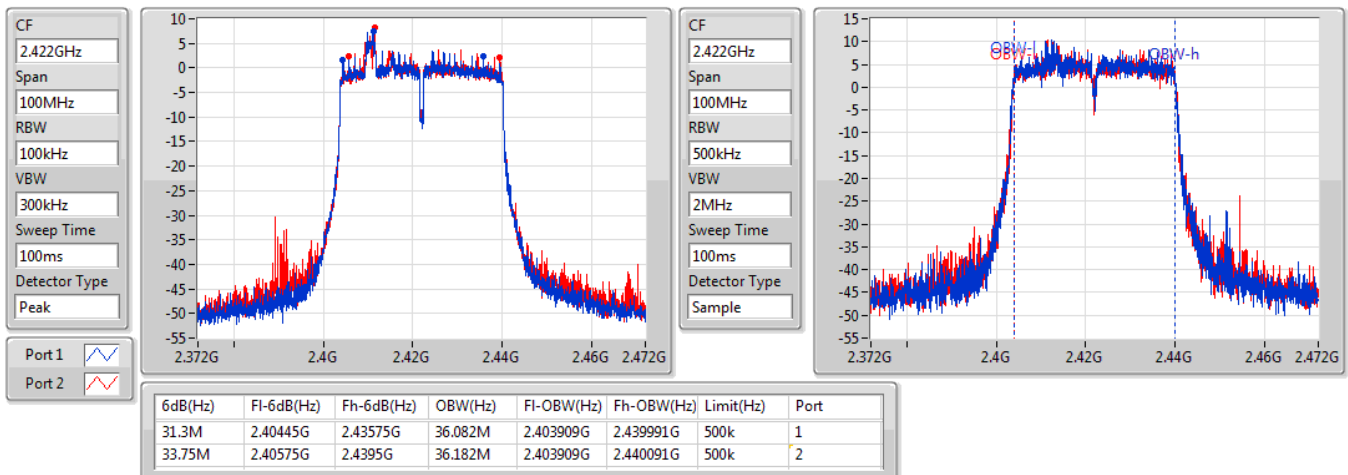


802.11ac VHT40-BF_Nss1,(MCS0)_2TX

EBW

2437MHz

22/07/2019

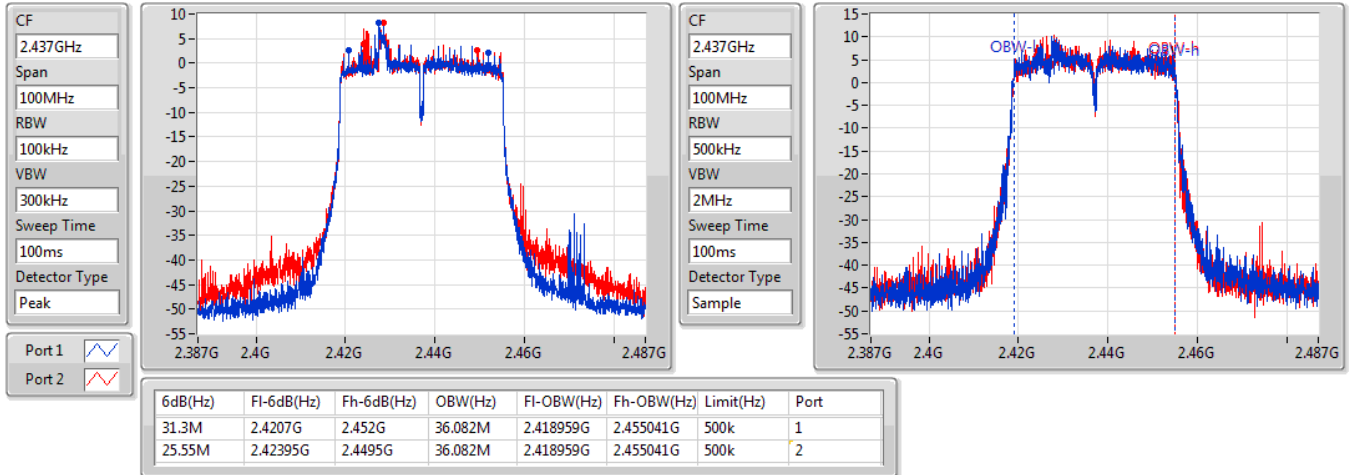


802.11ac VHT40-BF_Nss1,(MCS0)_2TX

EBW

2452MHz

22/07/2019

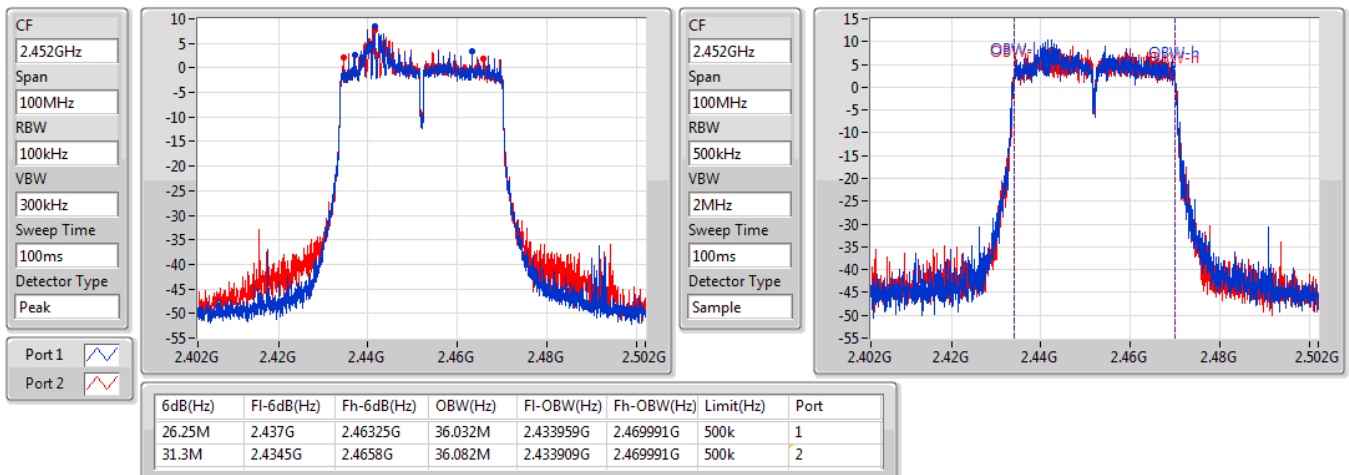


802.11ax HEW20-BF_Nss1,(MCS0)_2TX

EBW

2412MHz

22/07/2019

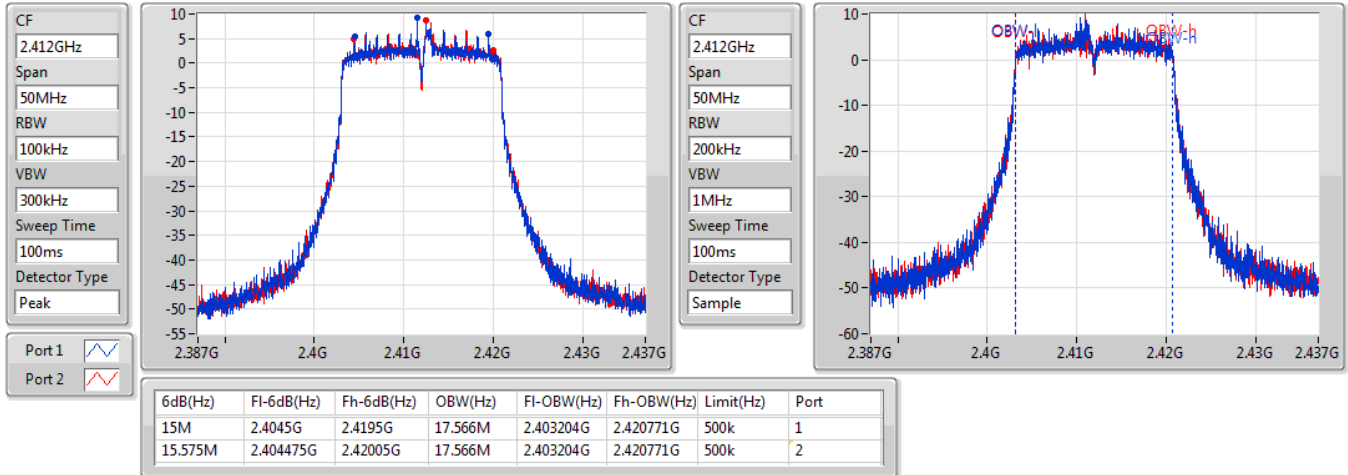


802.11ax HEW20-BF_Nss1,(MCS0)_2TX

EBW

2437MHz

22/07/2019

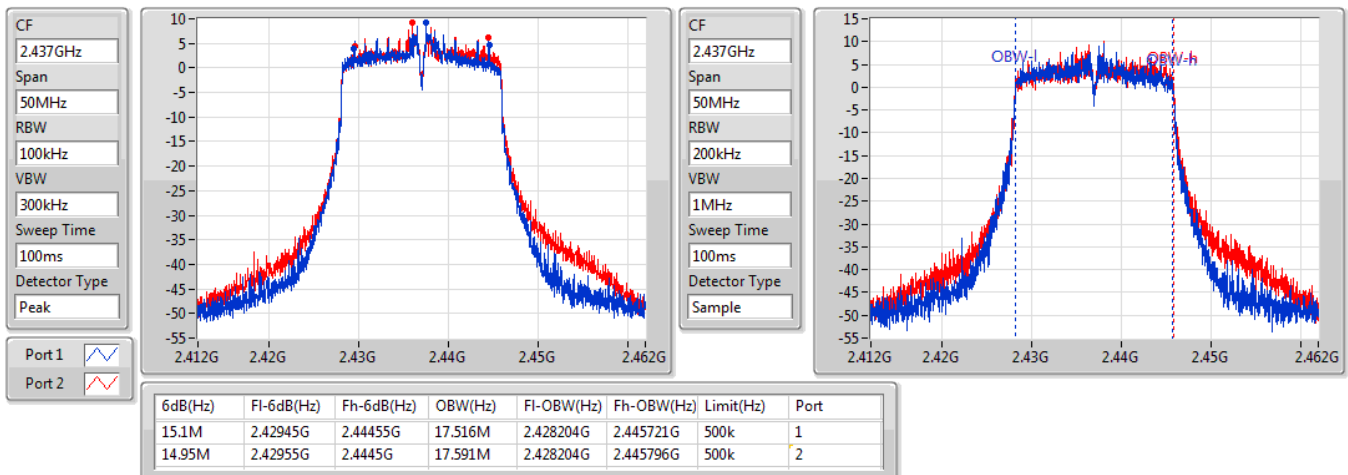


802.11ax HEW20-BF_Nss1,(MCS0)_2TX

EBW

2462MHz

22/07/2019

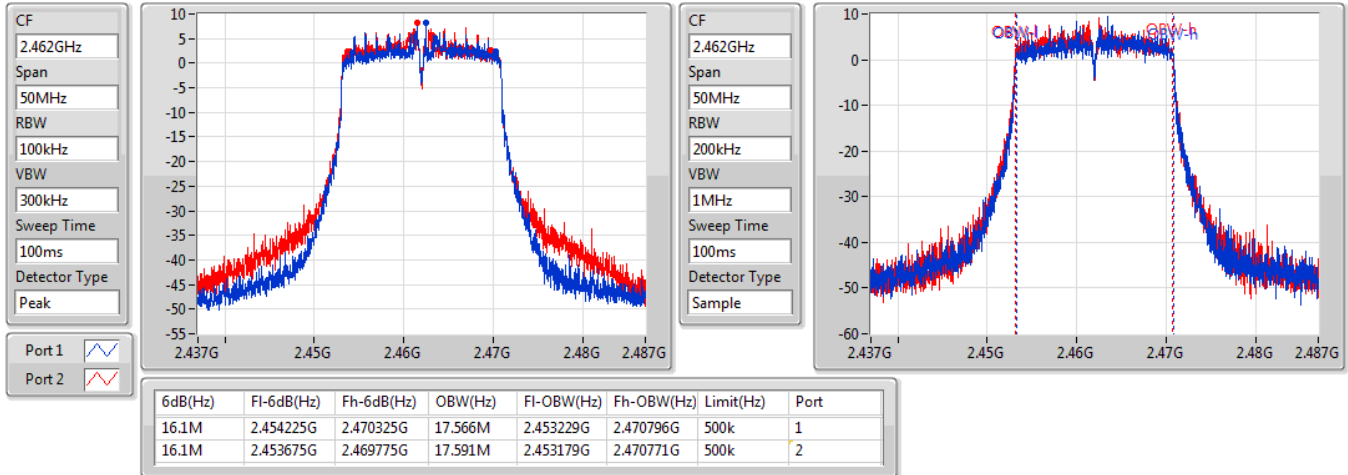


802.11ax HEW40-BF_Nss1,(MCS0)_2TX

EBW

2422MHz

22/07/2019

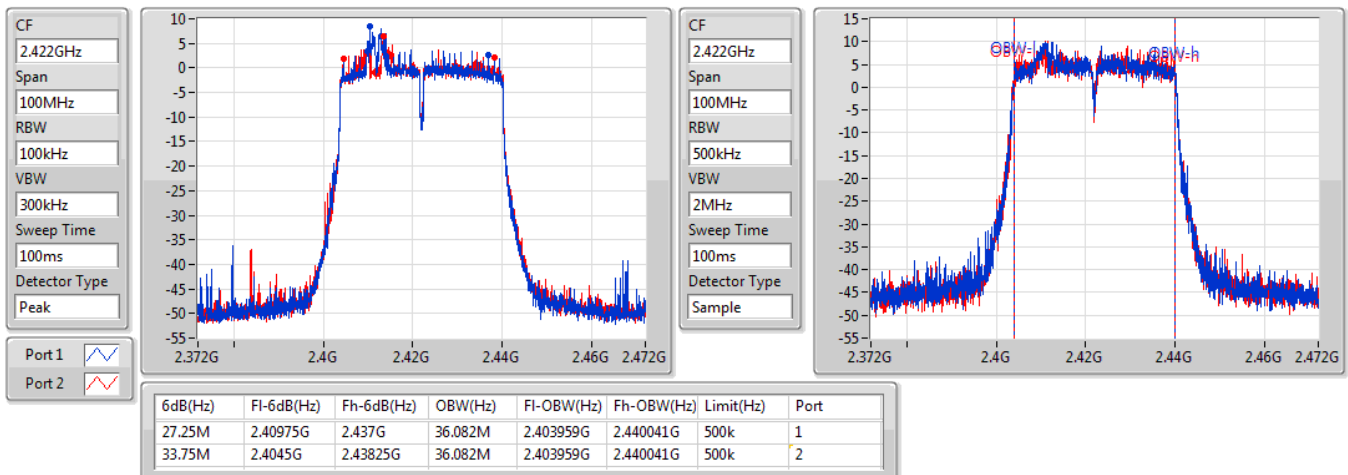


802.11ax HEW40-BF_Nss1,(MCS0)_2TX

EBW

2437MHz

22/07/2019

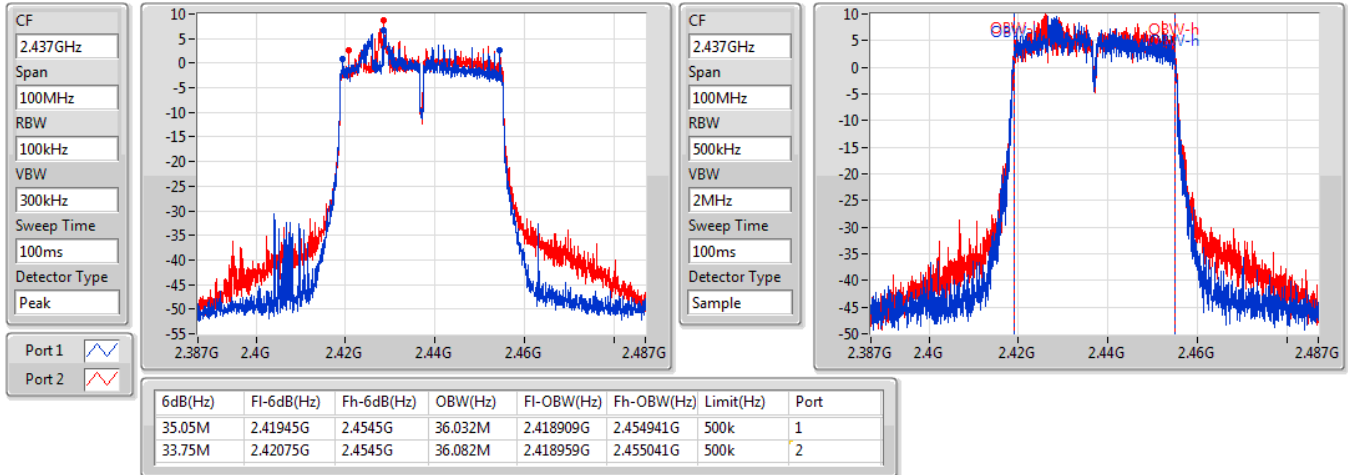


802.11ax HEW40-BF_Nss1,(MCS0)_2TX

EBW

2452MHz

22/07/2019

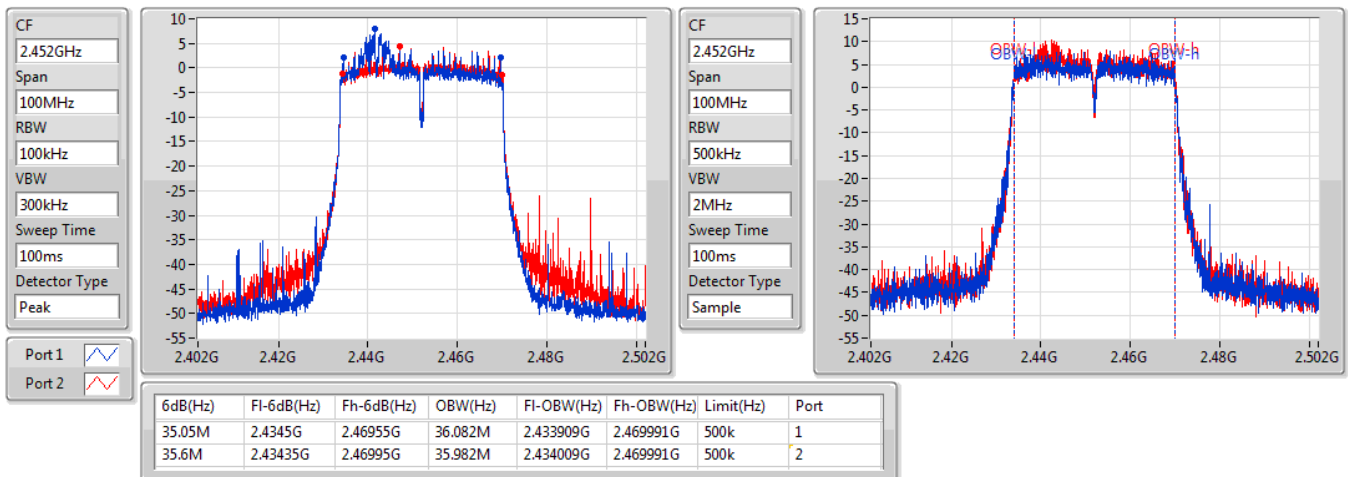

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX	7.975M	13.818M	13M8G1D	7M	12.619M
802.11g_Nss1,(6Mbps)_1TX	16.3M	18.166M	18M2D1D	16.275M	16.592M
802.11ac VHT20_Nss1,(MCS0)_1TX	17.5M	18.791M	18M8D1D	16.875M	17.716M
802.11ac VHT40_Nss1,(MCS0)_1TX	35.7M	36.382M	36M4D1D	35.05M	36.132M

Max-N dB = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-
2412MHz	Pass	500k	7.05M	12.619M
2437MHz	Pass	500k	7M	12.819M
2462MHz	Pass	500k	7.975M	13.818M
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-
2412MHz	Pass	500k	16.275M	16.592M
2437MHz	Pass	500k	16.275M	18.166M
2462MHz	Pass	500k	16.3M	16.842M
802.11ac_VHT20_Nss1,(MCS0)_1TX	-	-	-	-
2412MHz	Pass	500k	16.875M	17.716M
2437MHz	Pass	500k	16.9M	18.791M
2462MHz	Pass	500k	17.5M	17.866M
802.11ac_VHT40_Nss1,(MCS0)_1TX	-	-	-	-
2422MHz	Pass	500k	35.7M	36.182M
2437MHz	Pass	500k	35.65M	36.382M
2452MHz	Pass	500k	35.05M	36.132M


Port X-N dB = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

802.11b_Nss1,(1Mbps)_1TX
EBW
2412MHz

28/06/2019

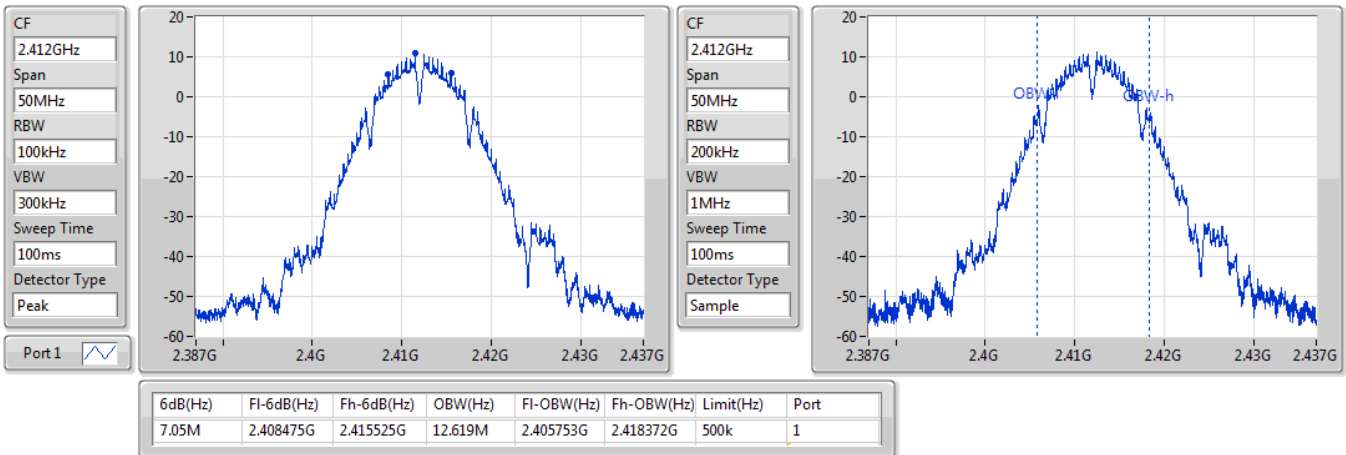

802.11b_Nss1,(1Mbps)_1TX
EBW
2437MHz

28/06/2019

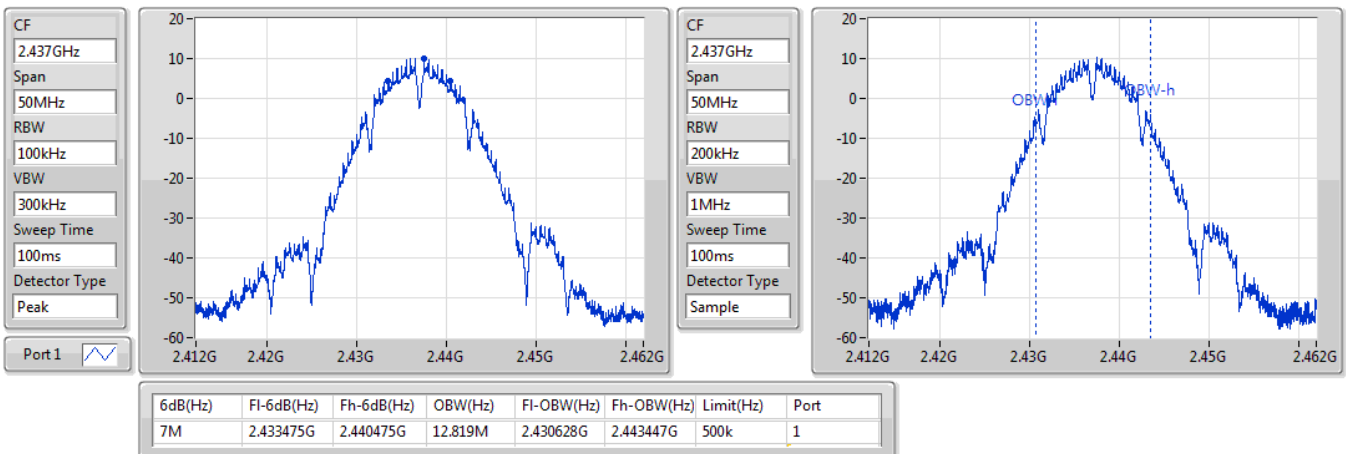


802.11b_Nss1,(1Mbps)_1TX
EBW
2462MHz

28/06/2019

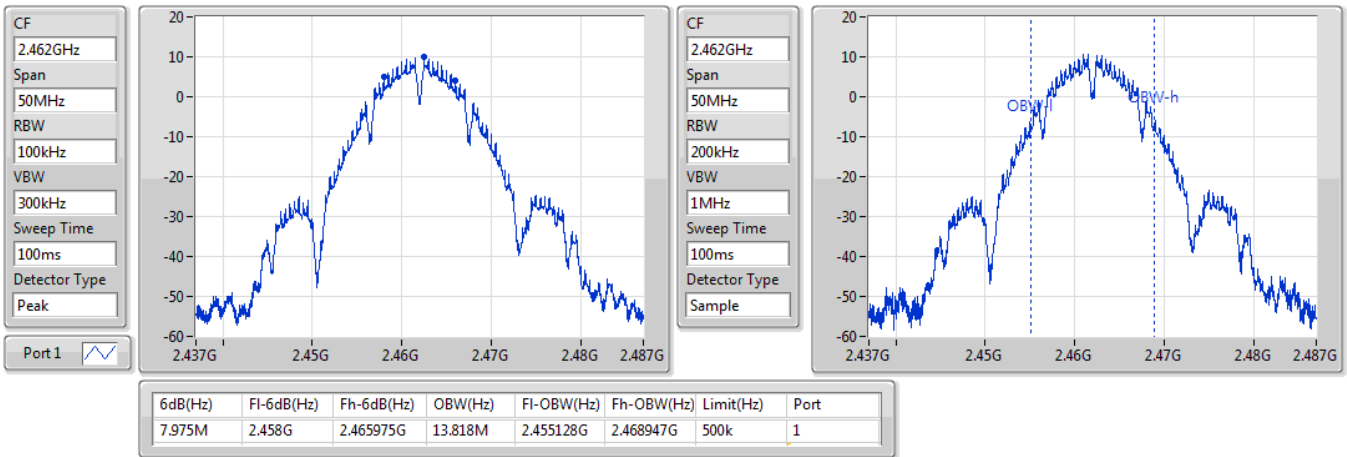

802.11g_Nss1,(6Mbps)_1TX
EBW
2412MHz

28/06/2019

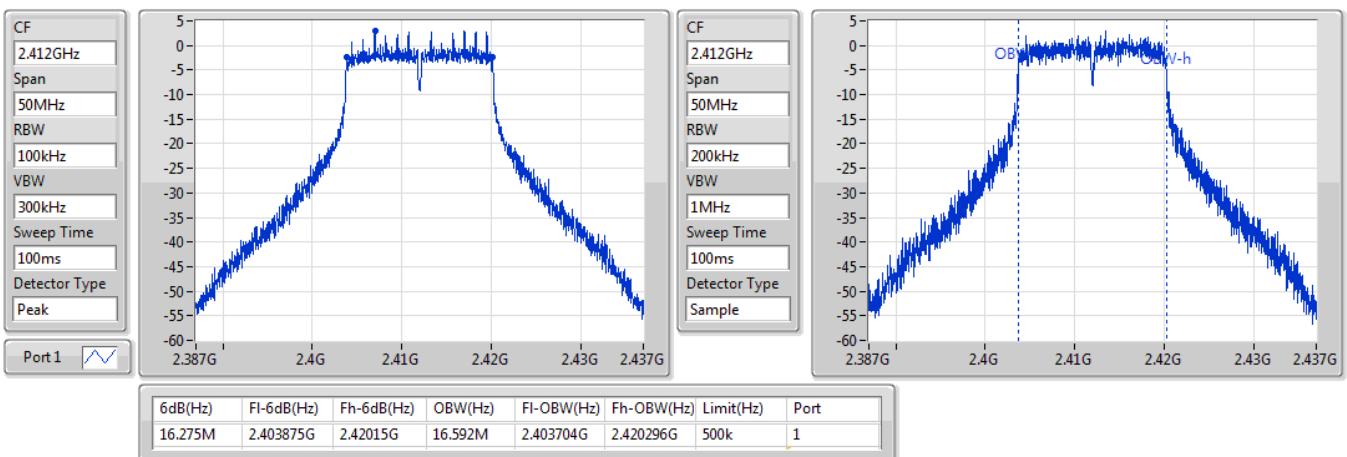


802.11g_Nss1,(6Mbps)_1TX
EBW
2437MHz

28/06/2019

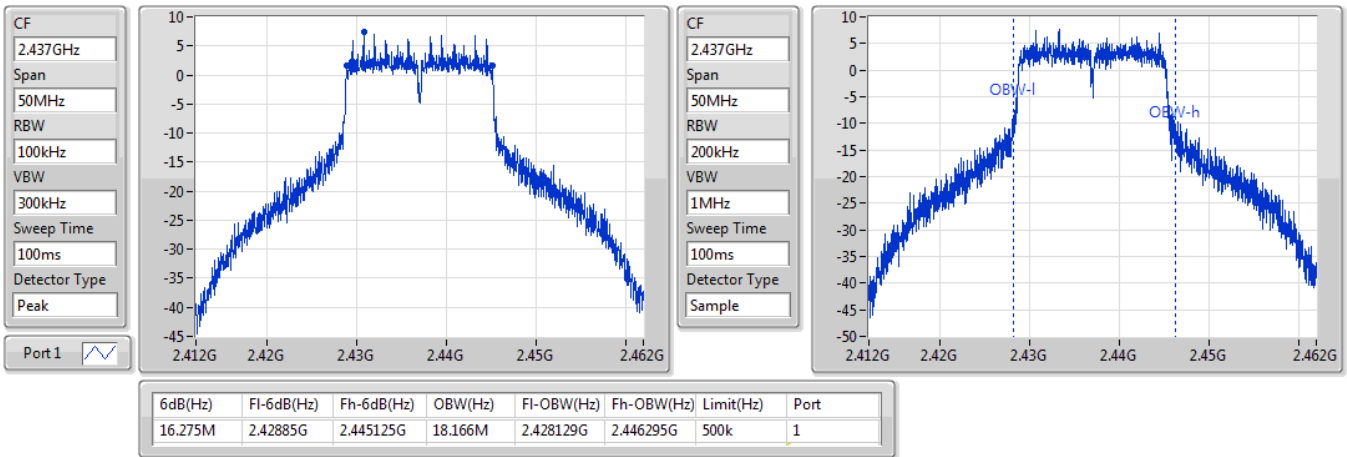

802.11g_Nss1,(6Mbps)_1TX
EBW
2462MHz

28/06/2019

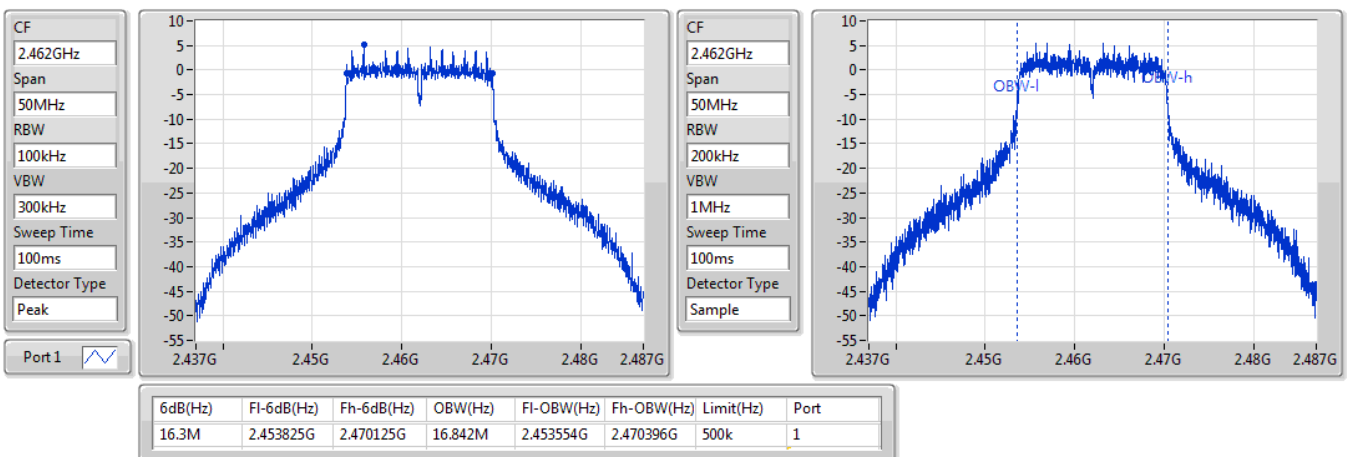


**802.11ac VHT20_Nss1,(MCS0)_1TX
2412MHz**
EBW

28/06/2019

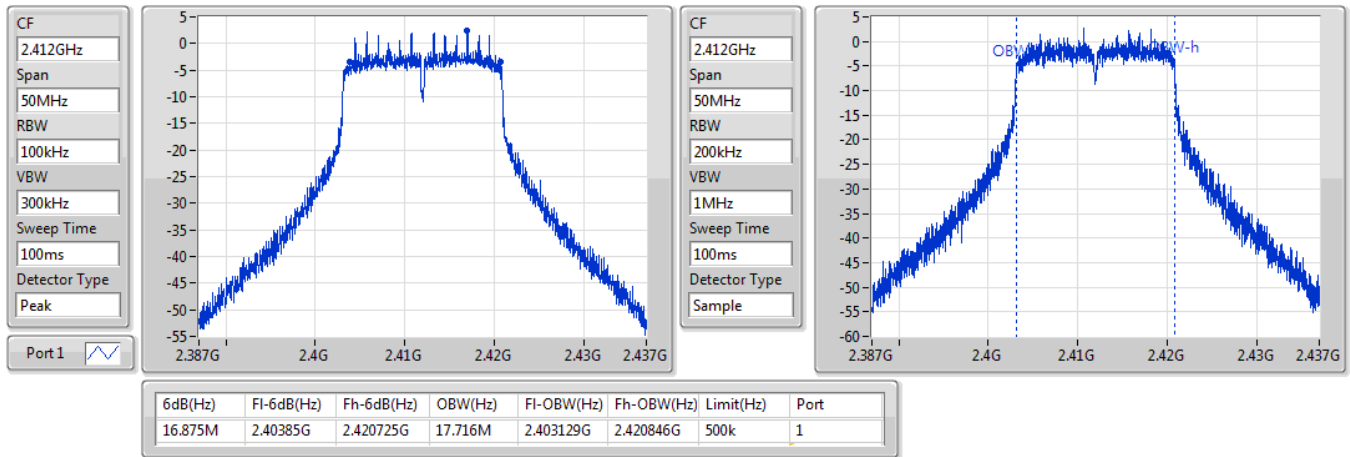

**802.11ac VHT20_Nss1,(MCS0)_1TX
2437MHz**
EBW

28/06/2019

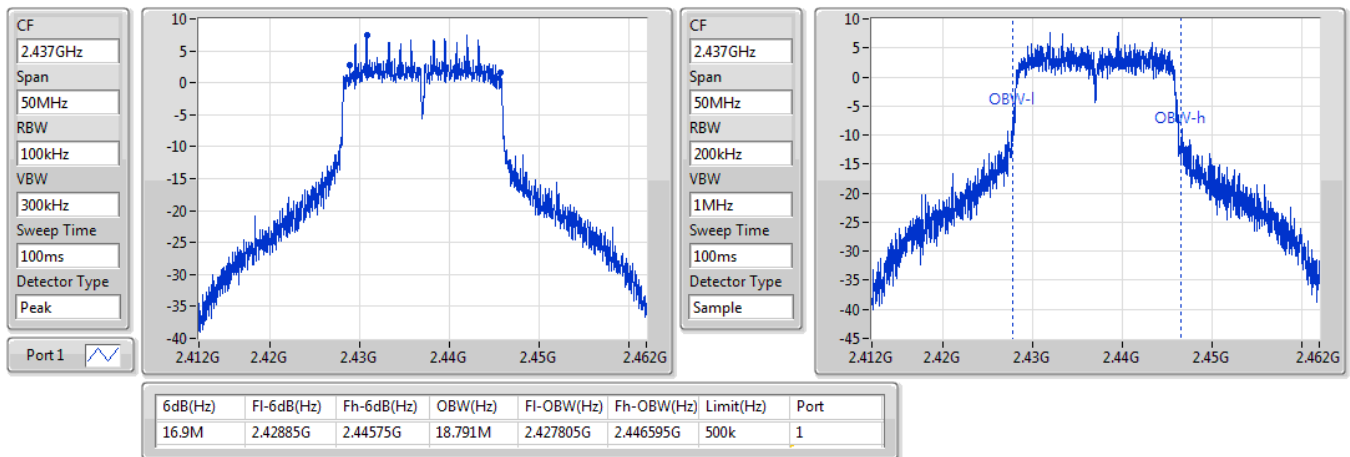


**802.11ac VHT20_Nss1,(MCS0)_1TX
2462MHz**
EBW

28/06/2019

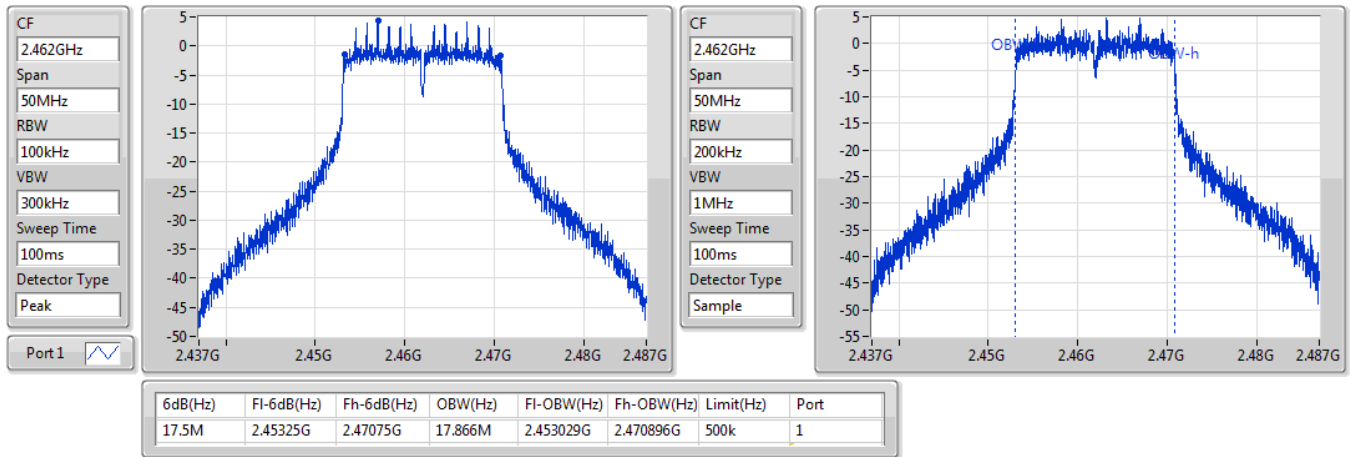

**802.11ac VHT40_Nss1,(MCS0)_1TX
2422MHz**
EBW

28/06/2019

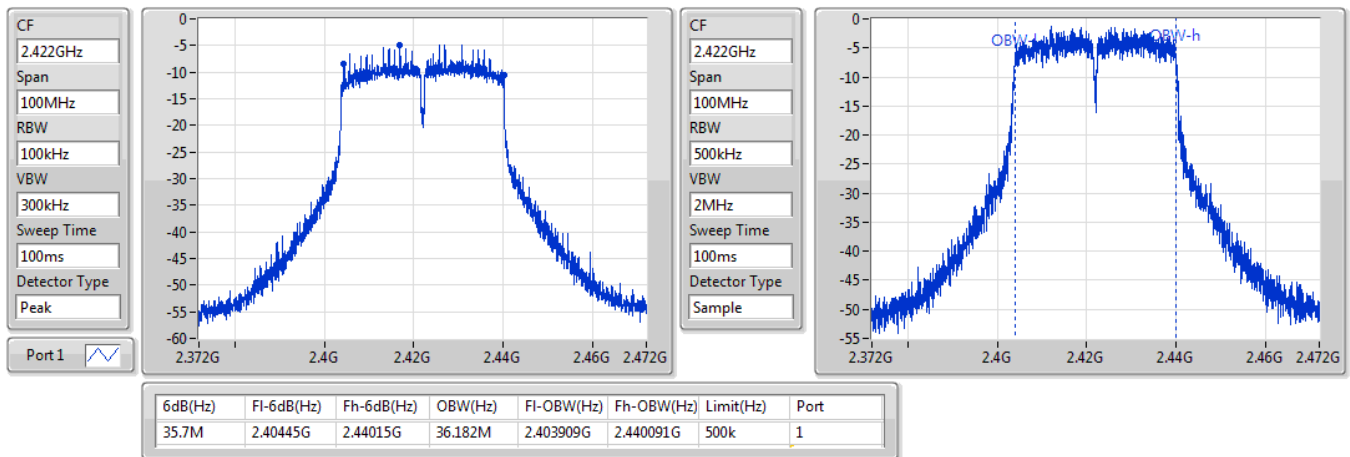


**802.11ac VHT40_Nss1,(MCS0)_1TX
2437MHz**
EBW

28/06/2019

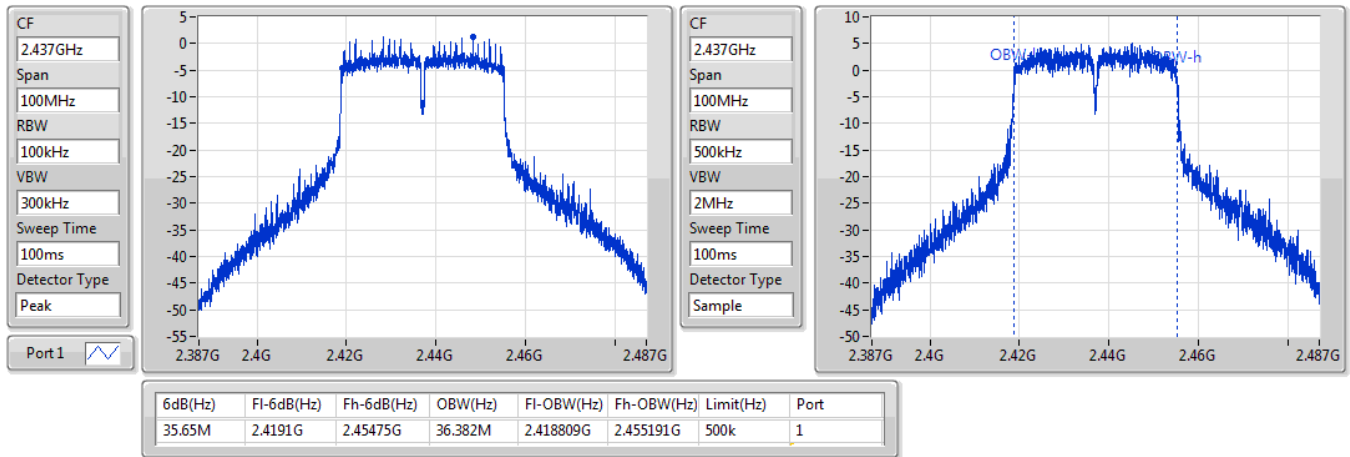
**802.11ac VHT40_Nss1,(MCS0)_1TX
2452MHz**
EBW

28/06/2019

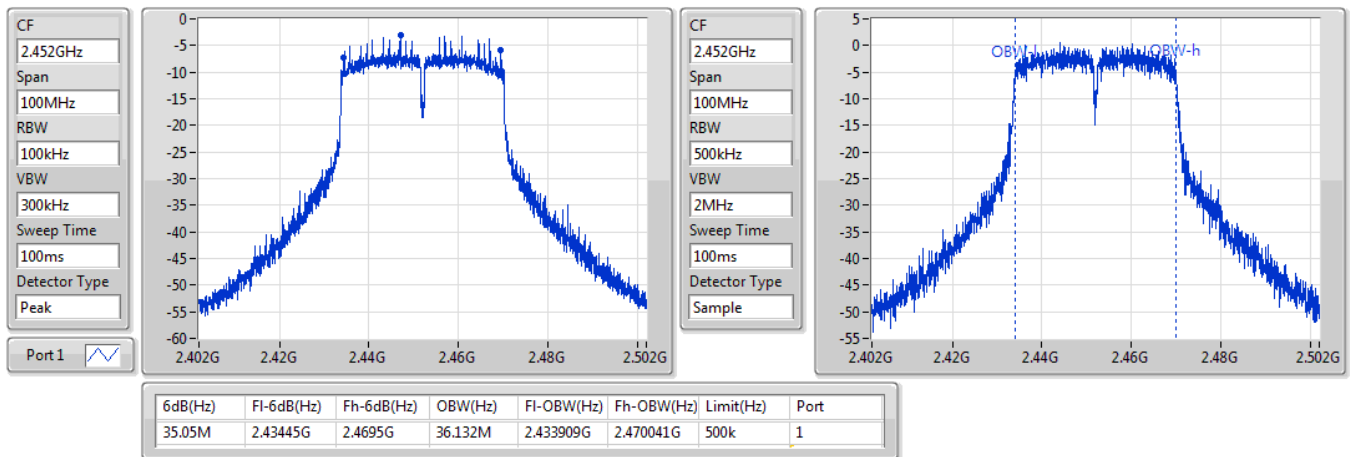

Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_1TX(Port1)	20.14	0.10328
802.11b_Nss1,(1Mbps)_1TX(Port2)	20.18	0.10423
802.11b_Nss1,(1Mbps)_2TX	23.13	0.20559
802.11g_Nss1,(6Mbps)_1TX(Port1)	20.41	0.10990
802.11g_Nss1,(6Mbps)_1TX(Port2)	20.40	0.10965
802.11g_Nss1,(6Mbps)_2TX	23.40	0.21878
802.11ac VHT20_Nss1,(MCS0)_1TX(Port1)	20.30	0.10715
802.11ac VHT20_Nss1,(MCS0)_1TX(Port2)	20.35	0.10839
802.11ac VHT20_Nss1,(MCS0)_2TX	23.39	0.21827
802.11ac VHT40_Nss1,(MCS0)_1TX(Port1)	18.43	0.06966
802.11ac VHT40_Nss1,(MCS0)_1TX(Port2)	18.46	0.07015
802.11ac VHT40_Nss1,(MCS0)_2TX	20.94	0.12417
802.11ax HEW20_Nss1,(MCS0)_1TX(Port1)	20.48	0.11169
802.11ax HEW20_Nss1,(MCS0)_1TX(Port2)	20.53	0.11298
802.11ax HEW20_Nss1,(MCS0)_2TX	23.54	0.22594
802.11ax HEW40_Nss1,(MCS0)_1TX(Port1)	18.55	0.07161
802.11ax HEW40_Nss1,(MCS0)_1TX(Port2)	18.65	0.07328
802.11ax HEW40_Nss1,(MCS0)_2TX	21.06	0.12764

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_1TX(Port1)	-	-	-	-	-	-
2412MHz	Pass	4.22	19.93		19.93	30.00
2437MHz	Pass	4.22	20.14		20.14	30.00
2462MHz	Pass	4.22	19.85		19.85	30.00
802.11b_Nss1,(1Mbps)_1TX(Port2)	-	-	-	-	-	-
2412MHz	Pass	4.68		19.97	19.97	30.00
2437MHz	Pass	4.68		20.18	20.18	30.00
2462MHz	Pass	4.68		20.16	20.16	30.00
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.68	19.83	19.89	22.87	30.00
2437MHz	Pass	4.68	20.10	20.13	23.13	30.00
2462MHz	Pass	4.68	19.87	20.11	23.00	30.00
802.11g_Nss1,(6Mbps)_1TX(Port1)	-	-	-	-	-	-
2412MHz	Pass	4.22	18.56		18.56	30.00
2417MHz	Pass	4.22	19.91		19.91	30.00
2437MHz	Pass	4.22	20.41		20.41	30.00
2457MHz	Pass	4.22	19.25		19.25	30.00
2462MHz	Pass	4.22	18.02		18.02	30.00
802.11g_Nss1,(6Mbps)_1TX(Port2)	-	-	-	-	-	-
2412MHz	Pass	4.68		17.53	17.53	30.00
2417MHz	Pass	4.68		19.41	19.41	30.00
2437MHz	Pass	4.68		20.40	20.40	30.00
2457MHz	Pass	4.68		20.16	20.16	30.00
2462MHz	Pass	4.68		18.34	18.34	30.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.68	17.24	17.04	20.15	30.00
2417MHz	Pass	4.68	18.55	18.44	21.51	30.00
2437MHz	Pass	4.68	20.38	20.39	23.40	30.00
2457MHz	Pass	4.68	18.39	18.38	21.40	30.00
2462MHz	Pass	4.68	17.12	17.40	20.27	30.00
802.11ac_VHT20_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-
2412MHz	Pass	4.22	17.94		17.94	30.00
2417MHz	Pass	4.22	19.83		19.83	30.00
2437MHz	Pass	4.22	20.30		20.30	30.00
2457MHz	Pass	4.22	19.09		19.09	30.00
2462MHz	Pass	4.22	17.44		17.44	30.00
802.11ac_VHT20_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-
2412MHz	Pass	4.68		17.45	17.45	30.00
2417MHz	Pass	4.68		19.32	19.32	30.00
2437MHz	Pass	4.68		20.35	20.35	30.00
2457MHz	Pass	4.68		19.25	19.25	30.00
2462MHz	Pass	4.68		17.78	17.78	30.00
802.11ac_VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.68	17.56	17.42	20.50	30.00



Average Power Radio 1 Non-Beamforming

Appendix C.1

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
2417MHz	Pass	4.68	18.49	18.36	21.44	30.00
2437MHz	Pass	4.68	20.33	20.42	23.39	30.00
2457MHz	Pass	4.68	18.34	18.29	21.33	30.00
2462MHz	Pass	4.68	16.91	17.29	20.11	30.00
802.11ac VHT40_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-
2422MHz	Pass	4.22	18.22		18.22	30.00
2437MHz	Pass	4.22	18.43		18.43	30.00
2447MHz	Pass	4.22	17.87		17.87	30.00
2452MHz	Pass	4.22	17.63		17.63	30.00
802.11ac VHT40_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-
2422MHz	Pass	4.68		17.21	17.21	30.00
2427MHz	Pass	4.68		17.18	17.18	30.00
2437MHz	Pass	4.68		18.46	18.46	30.00
2447MHz	Pass	4.68		17.99	17.99	30.00
2452MHz	Pass	4.68		17.22	17.22	30.00
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	4.68	17.24	17.26	20.26	30.00
2427MHz	Pass	4.68	17.69	17.67	20.69	30.00
2437MHz	Pass	4.68	17.92	17.94	20.94	30.00
2447MHz	Pass	4.68	17.38	17.37	20.39	30.00
2452MHz	Pass	4.68	16.65	16.68	19.68	30.00
802.11ax HEW20_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-
2412MHz	Pass	4.22	18.24		18.24	30.00
2417MHz	Pass	4.22	20.04		20.04	30.00
2437MHz	Pass	4.22	20.48		20.48	30.00
2457MHz	Pass	4.22	19.38		19.38	30.00
2462MHz	Pass	4.22	17.67		17.67	30.00
802.11ax HEW20_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-
2412MHz	Pass	4.68		17.71	17.71	30.00
2417MHz	Pass	4.68		19.55	19.55	30.00
2437MHz	Pass	4.68		20.53	20.53	30.00
2457MHz	Pass	4.68		19.37	19.37	30.00
2462MHz	Pass	4.68		18.02	18.02	30.00
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.68	17.82	17.72	20.78	30.00
2417MHz	Pass	4.68	18.70	18.61	21.67	30.00
2437MHz	Pass	4.68	20.49	20.57	23.54	30.00
2457MHz	Pass	4.68	18.48	18.56	21.53	30.00
2462MHz	Pass	4.68	17.19	17.53	20.37	30.00
802.11ax HEW40_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-
2422MHz	Pass	4.22	18.35		18.35	30.00
2437MHz	Pass	4.22	18.55		18.55	30.00
2447MHz	Pass	4.22	17.98		17.98	30.00
2452MHz	Pass	4.22	17.74		17.74	30.00
802.11ax HEW40_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-



Average Power_Radio 1_Non-Beamforming

Appendix C.1

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
2422MHz	Pass	4.68		17.37	17.37	30.00
2427MHz	Pass	4.68		17.41	17.41	30.00
2437MHz	Pass	4.68		18.65	18.65	30.00
2447MHz	Pass	4.68		18.09	18.09	30.00
2452MHz	Pass	4.68		17.31	17.31	30.00
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	4.68	17.44	17.32	20.39	30.00
2427MHz	Pass	4.68	17.82	17.80	20.82	30.00
2437MHz	Pass	4.68	18.04	18.06	21.06	30.00
2447MHz	Pass	4.68	17.54	17.59	20.58	30.00
2452MHz	Pass	4.68	16.83	16.81	19.83	30.00

DG = Directional Gain; **Port X** = Port X output power



Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	20.71	0.11776
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	20.74	0.11858
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	20.73	0.11830
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	20.77	0.11940

**Result**

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.46	17.32	17.52	20.43	28.54
2437MHz	Pass	7.46	17.49	17.90	20.71	28.54
2457MHz	Pass	7.46	17.51	17.69	20.61	28.54
2462MHz	Pass	7.46	17.38	17.61	20.51	28.54
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.46	17.65	17.81	20.74	28.54
2437MHz	Pass	7.46	17.59	17.86	20.74	28.54
2452MHz	Pass	7.46	17.59	17.71	20.66	28.54
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.46	17.57	17.43	20.51	28.54
2437MHz	Pass	7.46	17.46	17.96	20.73	28.54
2457MHz	Pass	7.46	17.27	17.99	20.66	28.54
2462MHz	Pass	7.46	17.26	18.13	20.73	28.54
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.46	17.62	17.88	20.76	28.54
2437MHz	Pass	7.46	17.56	17.95	20.77	28.54
2452MHz	Pass	7.46	17.22	18.11	20.70	28.54

DG = Directional Gain; **Port X** = Port X output power



Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_1TX	18.74	0.07482
802.11g_Nss1,(6Mbps)_1TX	18.28	0.06730
802.11ac VHT20_Nss1,(MCS0)_1TX	17.72	0.05916
802.11ac VHT40_Nss1,(MCS0)_1TX	15.64	0.03664

Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Total Power (dBm)	Power Limit (dBm)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	3.02	18.74	18.74	30.00
2437MHz	Pass	3.02	18.07	18.07	30.00
2462MHz	Pass	3.02	18.57	18.57	30.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	3.02	13.90	13.90	30.00
2417MHz	Pass	3.02	17.50	17.50	30.00
2437MHz	Pass	3.02	17.78	17.78	30.00
2457MHz	Pass	3.02	18.28	18.28	30.00
2462MHz	Pass	3.02	15.63	15.63	30.00
802.11ac_VHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	3.02	12.74	12.74	30.00
2417MHz	Pass	3.02	17.34	17.34	30.00
2437MHz	Pass	3.02	17.72	17.72	30.00
2457MHz	Pass	3.02	17.50	17.50	30.00
2462MHz	Pass	3.02	14.72	14.72	30.00
802.11ac_VHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	3.02	9.27	9.27	30.00
2427MHz	Pass	3.02	11.09	11.09	30.00
2437MHz	Pass	3.02	15.64	15.64	30.00
2447MHz	Pass	3.02	11.48	11.48	30.00
2452MHz	Pass	3.02	10.92	10.92	30.00

DG = Directional Gain; **Port X** = Port X output power

Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX(Port1)	-2.85
802.11b_Nss1,(1Mbps)_1TX(Port2)	-2.05
802.11b_Nss1,(1Mbps)_2TX	-0.47
802.11g_Nss1,(6Mbps)_1TX(Port1)	-6.99
802.11g_Nss1,(6Mbps)_1TX(Port2)	-6.11
802.11g_Nss1,(6Mbps)_2TX	-5.70
802.11ac_VHT20_Nss1,(MCS0)_1TX(Port1)	-5.19
802.11ac_VHT20_Nss1,(MCS0)_1TX(Port2)	-5.95
802.11ac_VHT20_Nss1,(MCS0)_2TX	-3.98
802.11ac_VHT40_Nss1,(MCS0)_1TX(Port1)	-9.53
802.11ac_VHT40_Nss1,(MCS0)_1TX(Port2)	-9.89
802.11ac_VHT40_Nss1,(MCS0)_2TX	-9.23
802.11ax_HEW20_Nss1,(MCS0)_1TX(Port1)	-6.83
802.11ax_HEW20_Nss1,(MCS0)_1TX(Port2)	-5.10
802.11ax_HEW20_Nss1,(MCS0)_2TX	-4.75
802.11ax_HEW40_Nss1,(MCS0)_1TX(Port1)	-10.23
802.11ax_HEW40_Nss1,(MCS0)_1TX(Port2)	-11.07
802.11ax_HEW40_Nss1,(MCS0)_2TX	-9.77

RBW=3 kHz.

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX(Port1)	-	-	-	-	-	-
2412MHz	Pass	4.22	-3.63		-3.63	8.00
2437MHz	Pass	4.22	-2.85		-2.85	8.00
2462MHz	Pass	4.22	-3.46		-3.46	8.00
802.11b_Nss1,(1Mbps)_1TX(Port2)	-	-	-	-	-	-
2412MHz	Pass	4.68		-3.50	-3.50	8.00
2437MHz	Pass	4.68		-3.58	-3.58	8.00
2462MHz	Pass	4.68		-2.05	-2.05	8.00
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.46	-3.36	-2.79	-0.47	6.54
2437MHz	Pass	7.46	-3.13	-3.19	-0.82	6.54
2462MHz	Pass	7.46	-3.22	-3.36	-0.52	6.54
802.11g_Nss1,(6Mbps)_1TX(Port1)	-	-	-	-	-	-
2412MHz	Pass	4.22	-7.86		-7.86	8.00
2437MHz	Pass	4.22	-6.99		-6.99	8.00
2462MHz	Pass	4.22	-9.65		-9.65	8.00
802.11g_Nss1,(6Mbps)_1TX(Port2)	-	-	-	-	-	-
2412MHz	Pass	4.68		-9.77	-9.77	8.00
2437MHz	Pass	4.68		-6.11	-6.11	8.00
2462MHz	Pass	4.68		-9.44	-9.44	8.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.46	-10.74	-10.27	-8.65	6.54
2437MHz	Pass	7.46	-7.15	-7.33	-5.70	6.54
2462MHz	Pass	7.46	-10.79	-9.93	-8.64	6.54
802.11ac_VHT20_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-
2412MHz	Pass	4.22	-8.68		-8.68	8.00
2437MHz	Pass	4.22	-5.19		-5.19	8.00
2462MHz	Pass	4.22	-8.80		-8.80	8.00
802.11ac_VHT20_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-
2412MHz	Pass	4.68		-8.52	-8.52	8.00
2437MHz	Pass	4.68		-5.95	-5.95	8.00
2462MHz	Pass	4.68		-8.88	-8.88	8.00
802.11ac_VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.46	-8.88	-8.00	-6.88	6.54
2437MHz	Pass	7.46	-5.63	-4.97	-3.98	6.54
2462MHz	Pass	7.46	-9.44	-9.13	-7.18	6.54
802.11ac_VHT40_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-
2422MHz	Pass	4.22	-10.16		-10.16	8.00
2437MHz	Pass	4.22	-9.53		-9.53	8.00
2452MHz	Pass	4.22	-11.25		-11.25	8.00
802.11ac_VHT40_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-
2422MHz	Pass	4.68		-9.89	-9.89	8.00
2437MHz	Pass	4.68		-10.17	-10.17	8.00
2452MHz	Pass	4.68		-11.37	-11.37	8.00

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.46	-12.48	-12.01	-10.11	6.54
2437MHz	Pass	7.46	-10.34	-10.59	-9.23	6.54
2452MHz	Pass	7.46	-12.12	-12.70	-10.55	6.54
802.11ax HEW20_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-
2412MHz	Pass	4.22	-8.66		-8.66	8.00
2437MHz	Pass	4.22	-6.83		-6.83	8.00
2462MHz	Pass	4.22	-8.32		-8.32	8.00
802.11ax HEW20_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-
2412MHz	Pass	4.68		-9.41	-9.41	8.00
2437MHz	Pass	4.68		-5.10	-5.10	8.00
2462MHz	Pass	4.68		-9.01	-9.01	8.00
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.46	-10.20	-9.24	-7.77	6.54
2437MHz	Pass	7.46	-6.25	-6.28	-4.75	6.54
2462MHz	Pass	7.46	-9.20	-9.49	-7.70	6.54
802.11ax HEW40_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-
2422MHz	Pass	4.22	-10.23		-10.23	8.00
2437MHz	Pass	4.22	-10.73		-10.73	8.00
2452MHz	Pass	4.22	-11.31		-11.31	8.00
802.11ax HEW40_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-
2422MHz	Pass	4.68		-12.04	-12.04	8.00
2437MHz	Pass	4.68		-11.07	-11.07	8.00
2452MHz	Pass	4.68		-11.70	-11.70	8.00
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.46	-12.85	-12.09	-10.20	6.54
2437MHz	Pass	7.46	-11.39	-10.37	-9.77	6.54
2452MHz	Pass	7.46	-12.64	-12.09	-9.92	6.54

DG = Directional Gain; RBW=3 kHz;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

802.11b_Nss1,(1Mbps)_1TX(Port1)

PSD

2412MHz

25/06/2019

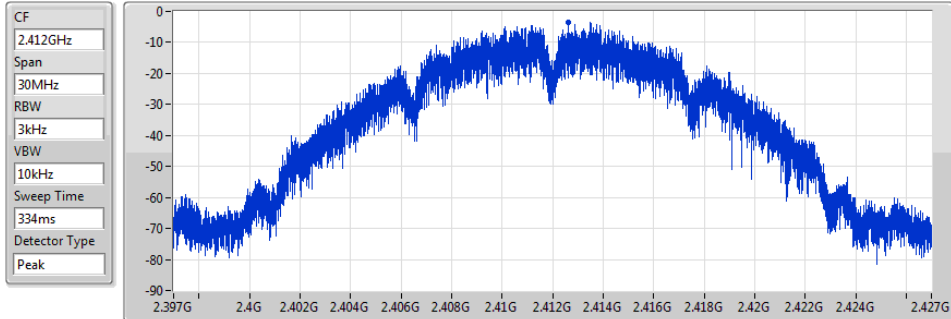


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.63	-3.63	-3.63

802.11b_Nss1,(1Mbps)_1TX(Port1)

PSD

2437MHz

25/06/2019

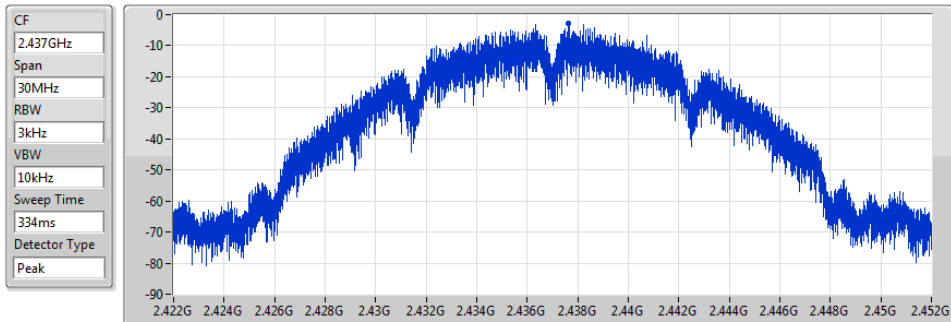


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.85	-2.85	-2.85

802.11b_Nss1,(1Mbps)_1TX(Port1)

PSD

2462MHz

25/06/2019

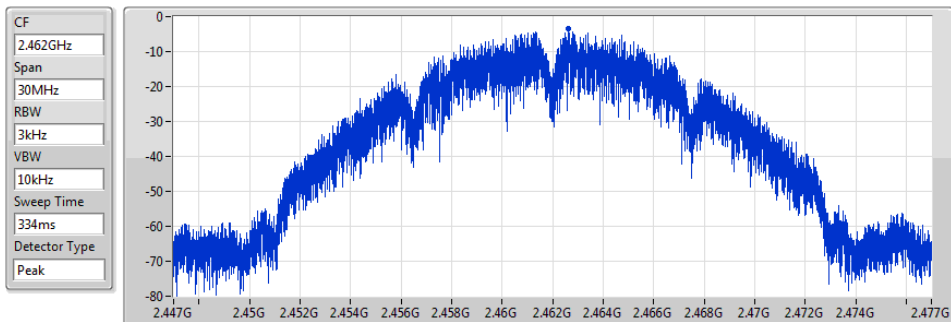


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.46	-3.46	-3.46

802.11b_Nss1,(1Mbps)_1TX(Port2)

PSD

2412MHz

25/06/2019

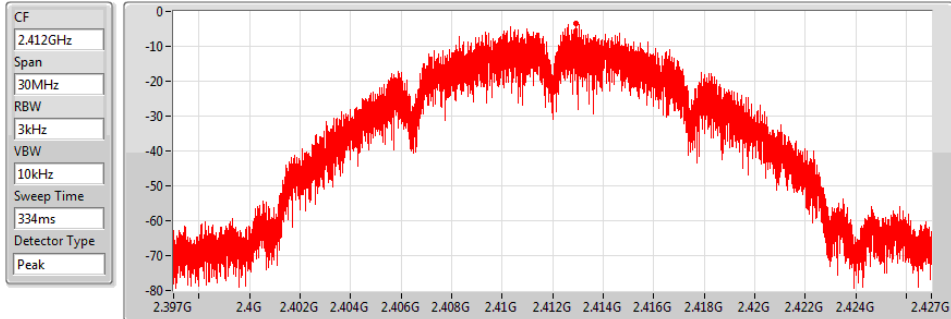


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.50	-3.50		-3.50

802.11b_Nss1,(1Mbps)_1TX(Port2)

PSD

2437MHz

25/06/2019

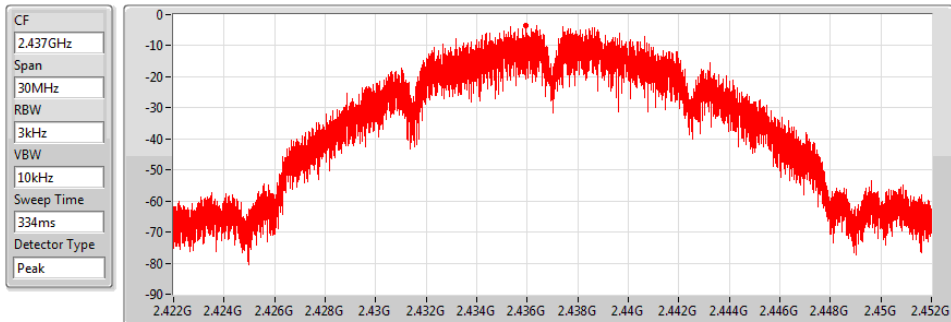


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.58	-3.58		-3.58

802.11b_Nss1,(1Mbps)_1TX(Port2)

PSD

2462MHz

25/06/2019

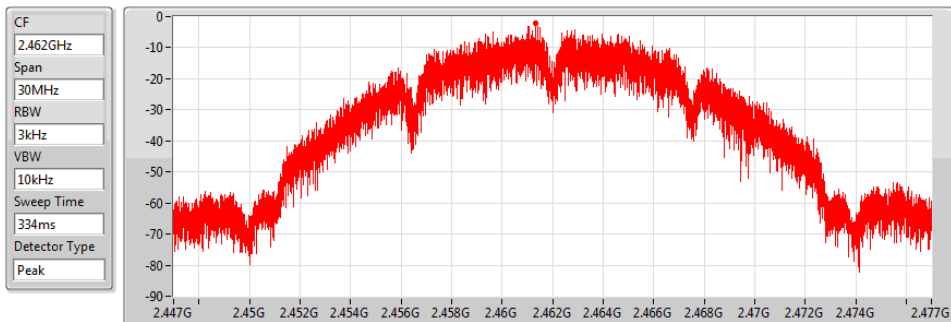


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-2.05	-2.05		-2.05

802.11b_Nss1,(1Mbps)_2TX

PSD

2412MHz

25/06/2019

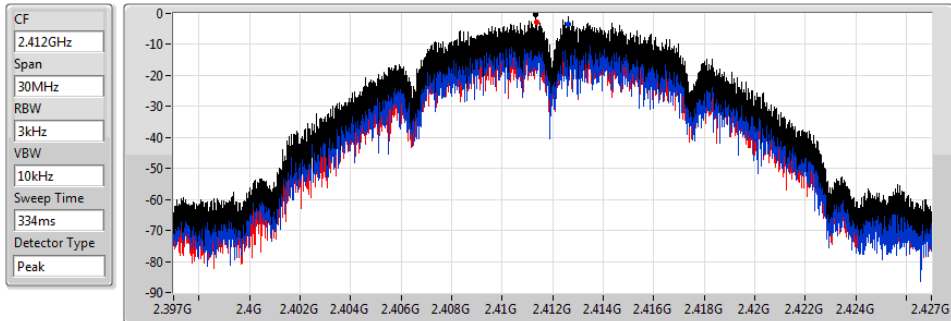


Sum	PD	Port 1	Port 2
(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)
-0.47	-0.47	-3.36	-2.79

802.11b_Nss1,(1Mbps)_2TX

PSD

2437MHz

25/06/2019

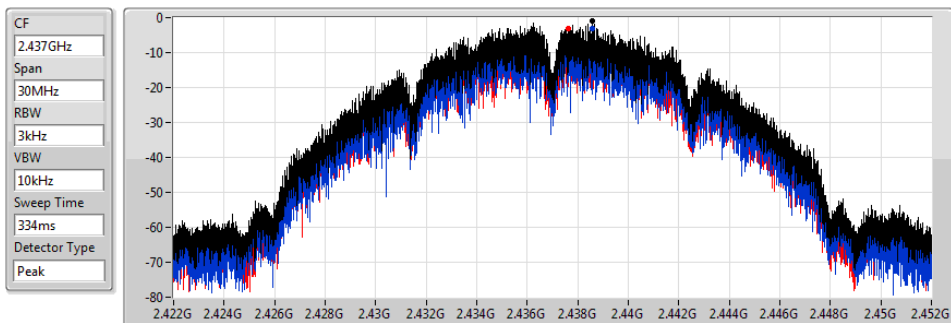


Sum	PD	Port 1	Port 2
(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)
-0.82	-0.82	-3.13	-3.19

802.11b_Nss1,(1Mbps)_2TX

PSD

2462MHz

25/06/2019

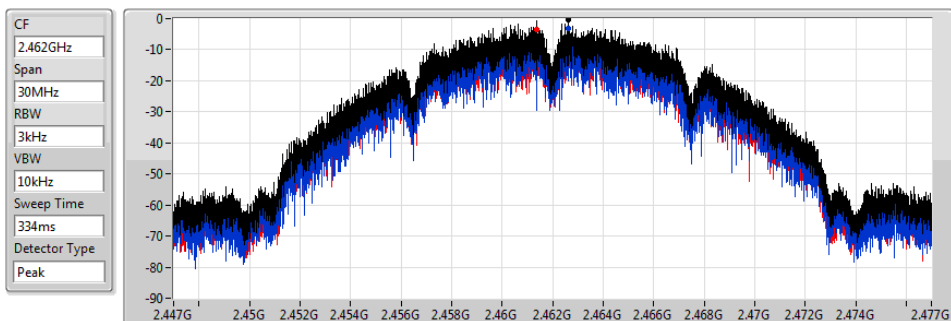


Sum	PD	Port 1	Port 2
(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)
-0.52	-0.52	-3.22	-3.36

802.11g_Nss1,(6Mbps)_1TX(Port1)

PSD

2412MHz

25/06/2019

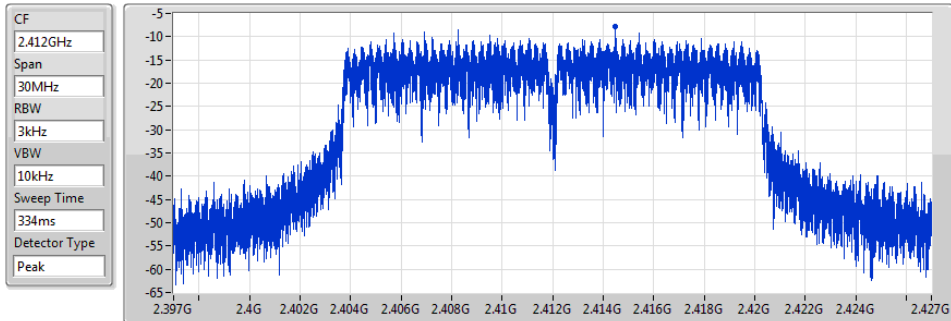


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-7.86	-7.86	-7.86

802.11g_Nss1,(6Mbps)_1TX(Port1)

PSD

2437MHz

25/06/2019

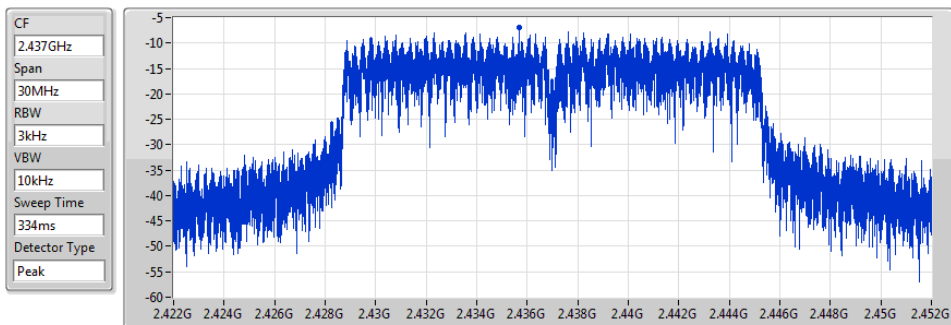


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-6.99	-6.99	-6.99

802.11g_Nss1,(6Mbps)_1TX(Port1)

PSD

2462MHz

25/06/2019

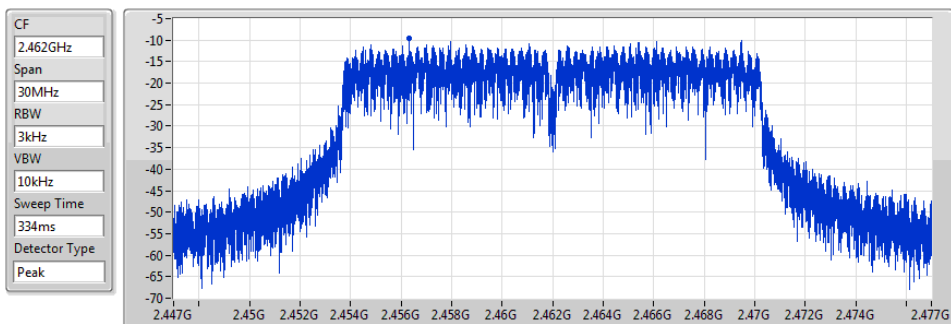


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-9.65	-9.65	-9.65

802.11g_Nss1,(6Mbps)_1TX(Port2)

PSD

2412MHz

25/06/2019

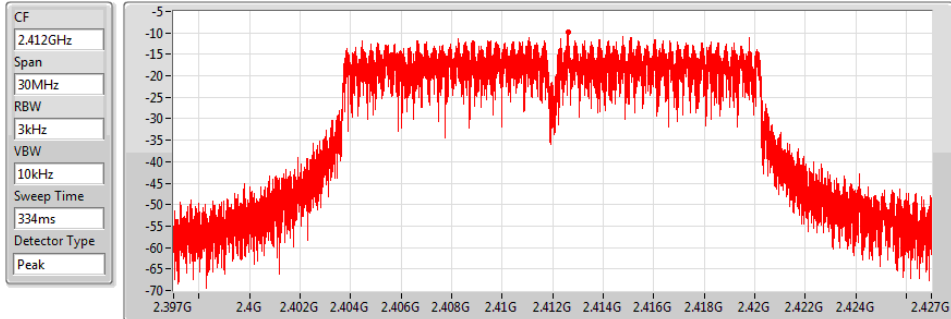


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.77	-9.77		-9.77

802.11g_Nss1,(6Mbps)_1TX(Port2)

PSD

2437MHz

25/06/2019

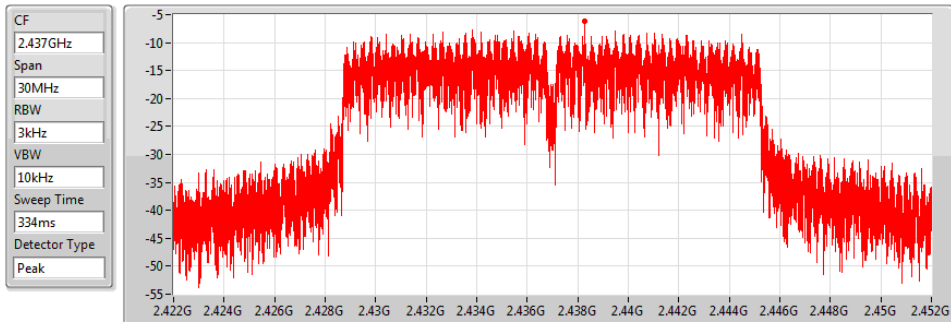


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.11	-6.11		-6.11

802.11g_Nss1,(6Mbps)_1TX(Port2)

PSD

2462MHz

25/06/2019

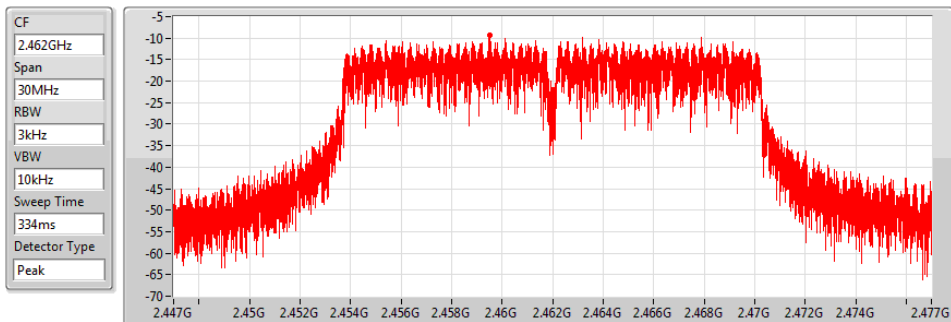


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.44	-9.44		-9.44

802.11g_Nss1,(6Mbps)_2TX

PSD

2412MHz

25/06/2019

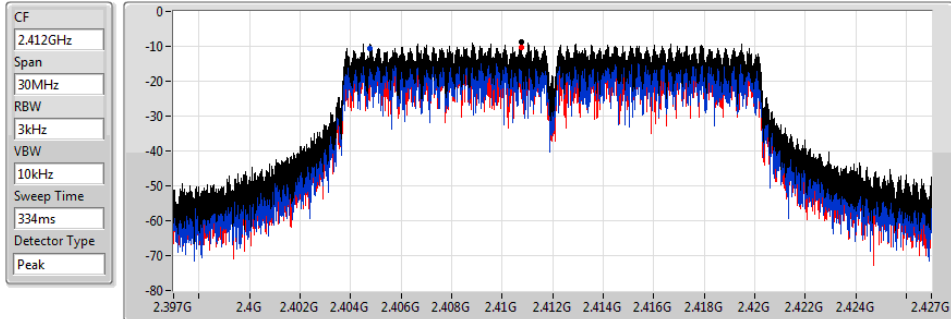


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.65	-8.65	-10.74	-10.27

802.11g_Nss1,(6Mbps)_2TX

PSD

2437MHz

25/06/2019

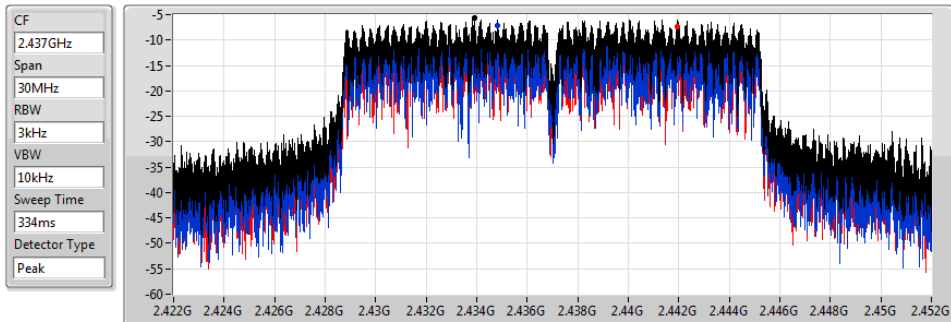


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-5.70	-5.70	-7.15	-7.33

802.11g_Nss1,(6Mbps)_2TX

PSD

2462MHz

25/06/2019

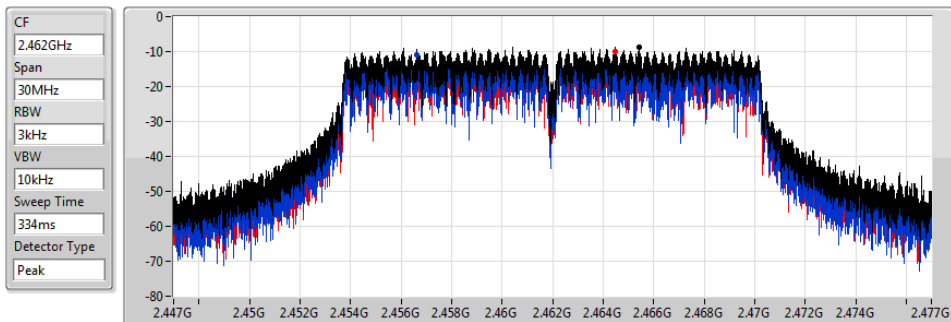


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.64	-8.64	-10.79	-9.93

802.11ac VHT20_Nss1,(MCS0)_1TX(Port1)

2412MHz

PSD

25/06/2019

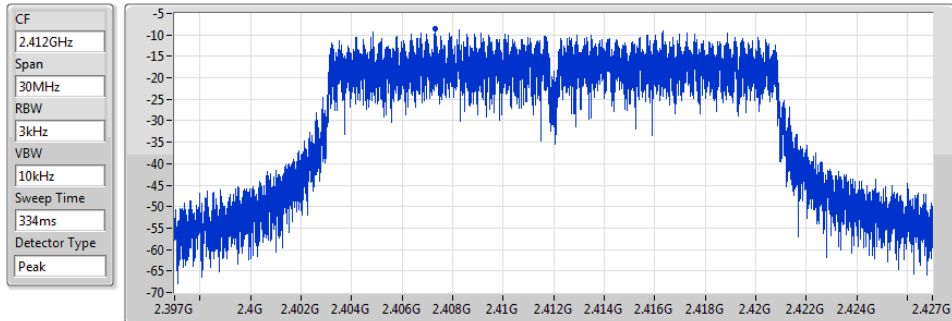


Sum	PD	Port1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.68	-8.68	-8.68

802.11ac VHT20_Nss1,(MCS0)_1TX(Port1)

2437MHz

PSD

25/06/2019

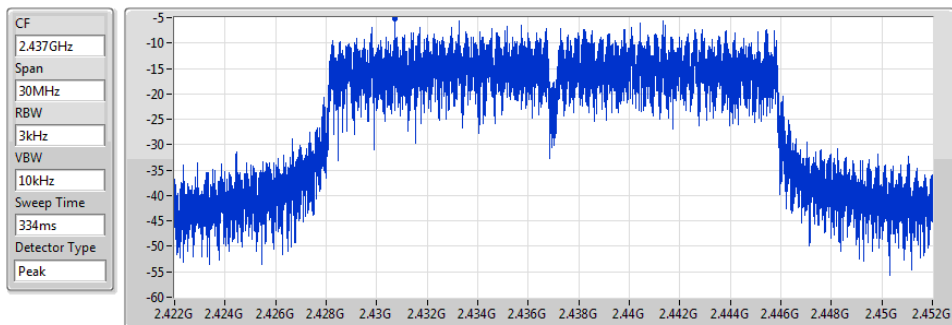


Sum	PD	Port1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-5.19	-5.19	-5.19

802.11ac VHT20_Nss1,(MCS0)_1TX(Port1)

2462MHz

PSD

25/06/2019

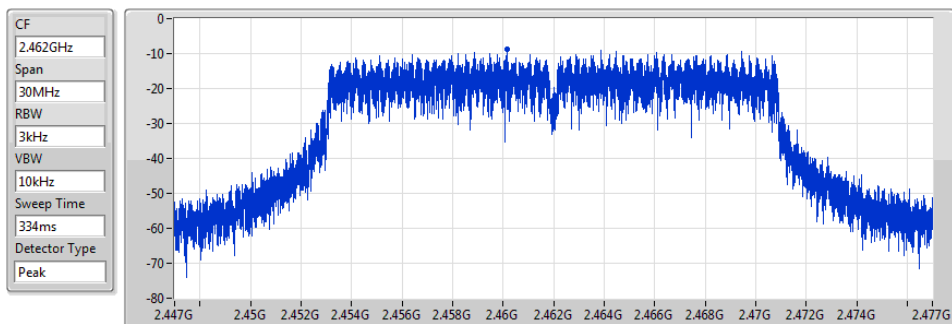


Sum	PD	Port1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.80	-8.80	-8.80

802.11ac VHT20_Nss1,(MCS0)_1TX(Port2)

2412MHz

PSD

25/06/2019

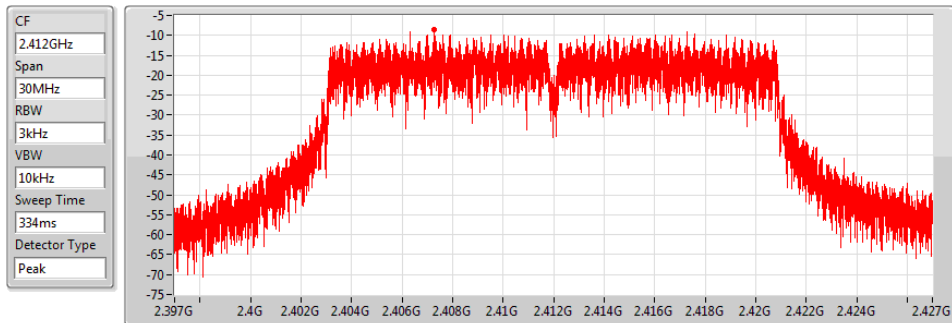


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.52	-8.52		-8.52

802.11ac VHT20_Nss1,(MCS0)_1TX(Port2)

2437MHz

PSD

25/06/2019

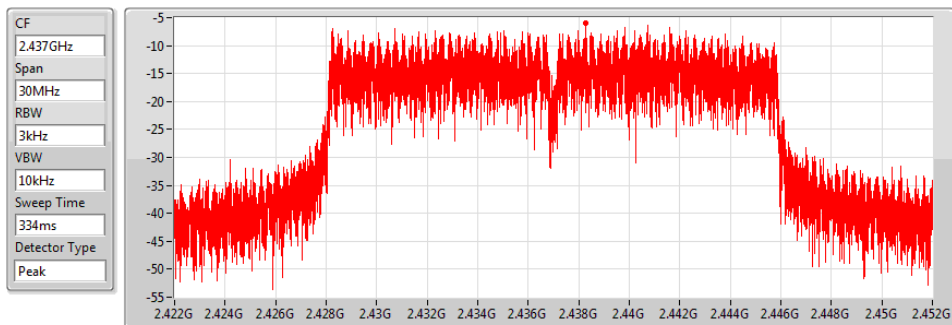


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-5.95	-5.95		-5.95

802.11ac VHT20_Nss1,(MCS0)_1TX(Port2)

2462MHz

PSD

25/06/2019

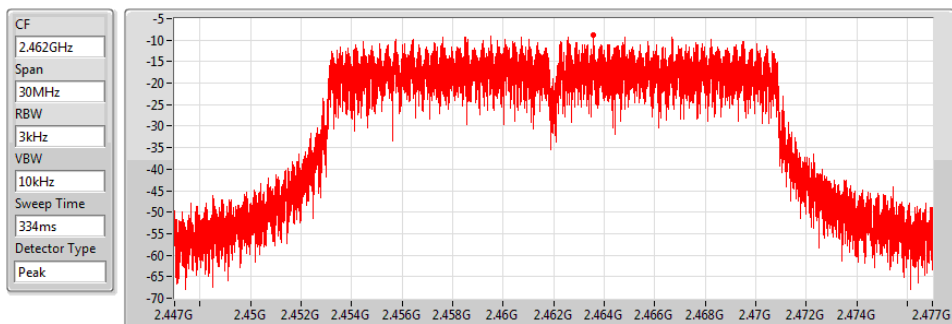


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.88	-8.88		-8.88

802.11ac VHT20_Nss1,(MCS0)_2TX
2412MHz

PSD

25/06/2019

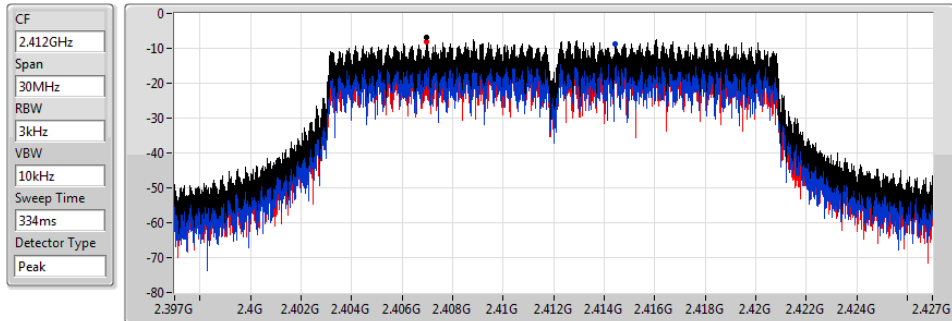


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-6.88	-6.88	-8.88	-8.00

802.11ac VHT20_Nss1,(MCS0)_2TX
2437MHz

PSD

25/06/2019

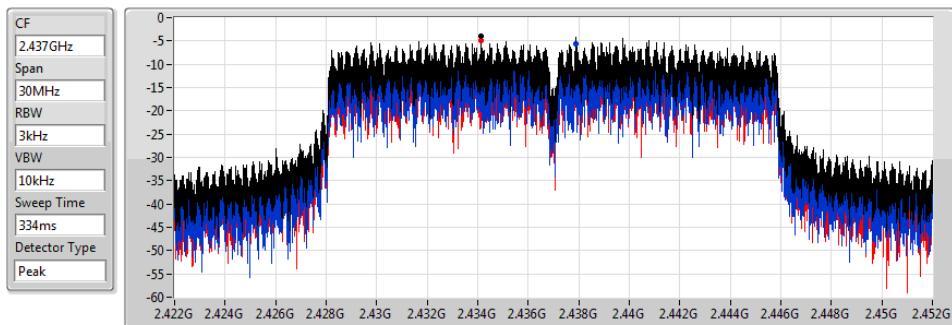


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-3.98	-3.98	-5.63	-4.97

802.11ac VHT20_Nss1,(MCS0)_2TX
2462MHz

PSD

25/06/2019

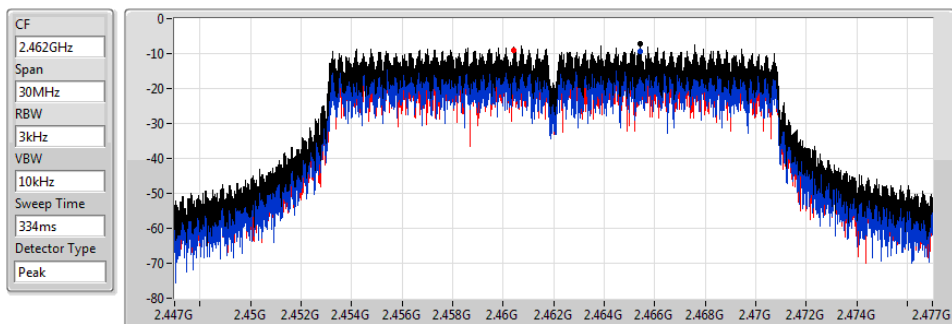


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-7.18	-7.18	-9.44	-9.13

802.11ac VHT40_Nss1,(MCS0)_1TX(Port1)

2422MHz

PSD

25/06/2019

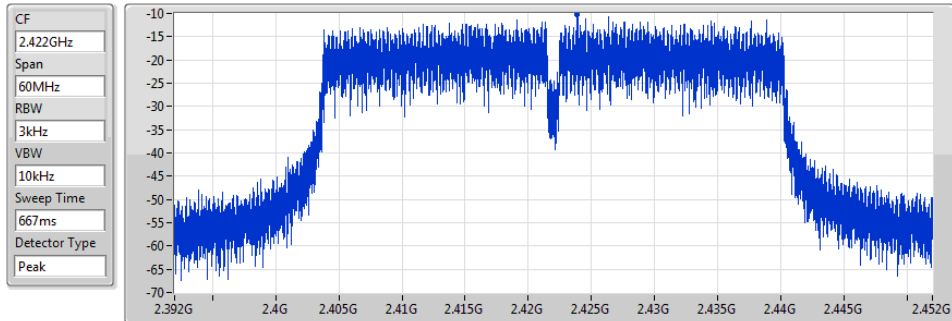


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.16	-10.16	-10.16

802.11ac VHT40_Nss1,(MCS0)_1TX(Port1)

2437MHz

PSD

25/06/2019

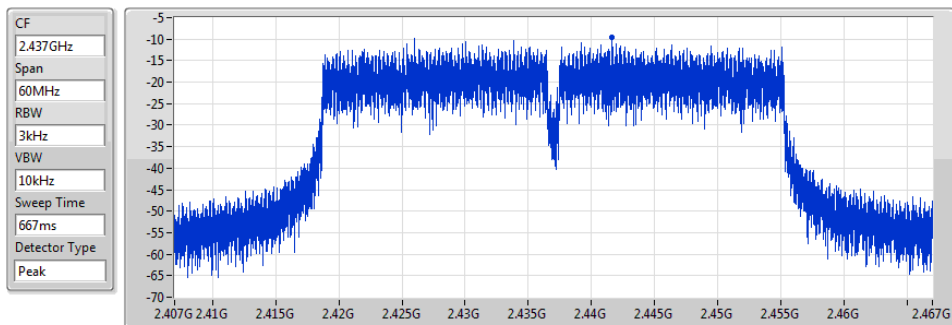


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.53	-9.53	-9.53

802.11ac VHT40_Nss1,(MCS0)_1TX(Port1)

2452MHz

PSD

25/06/2019

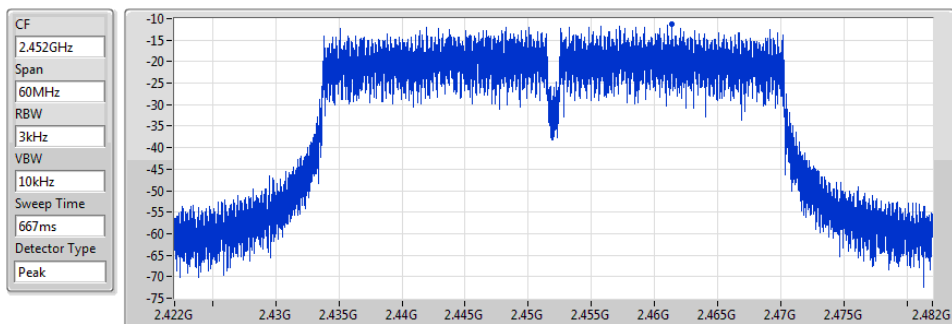


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-11.25	-11.25	-11.25

802.11ac VHT40_Nss1,(MCS0)_1TX(Port2)

2422MHz

PSD

25/06/2019

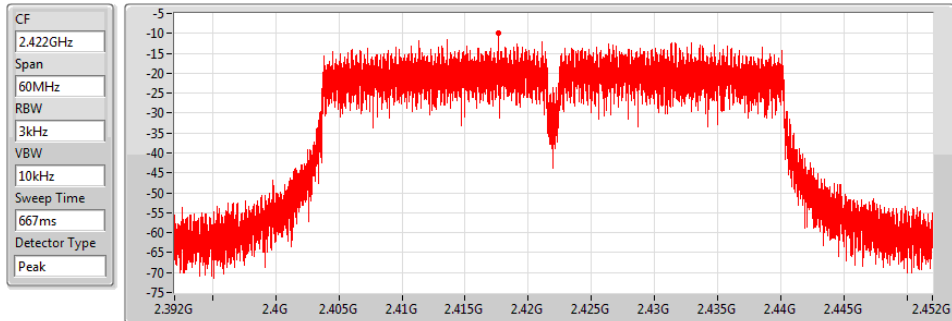


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.89	-9.89		-9.89

802.11ac VHT40_Nss1,(MCS0)_1TX(Port2)

2437MHz

PSD

25/06/2019

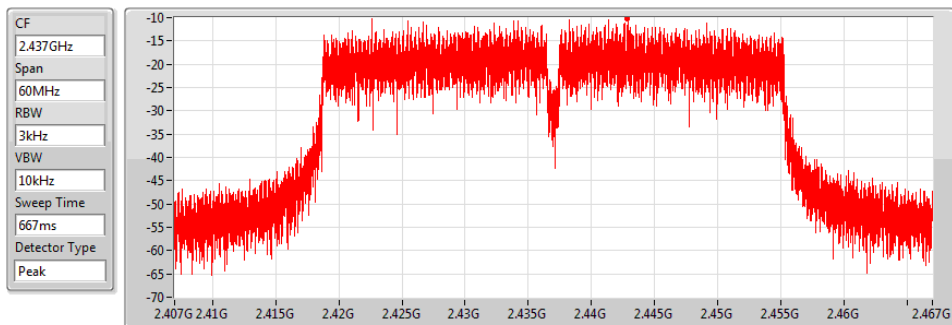


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.17	-10.17		-10.17

802.11ac VHT40_Nss1,(MCS0)_1TX(Port2)

2452MHz

PSD

25/06/2019

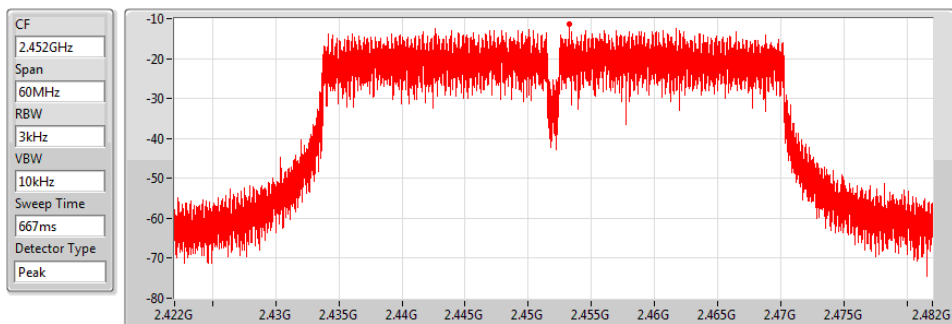


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-11.37	-11.37		-11.37

802.11ac VHT40_Nss1,(MCS0)_2TX
2422MHz

PSD

25/06/2019

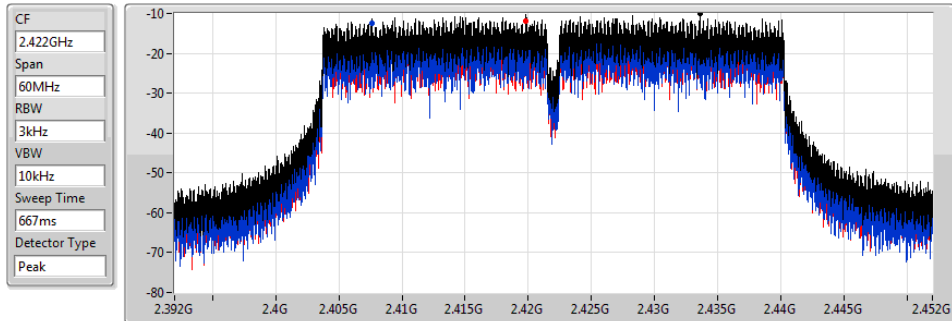


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.11	-10.11	-12.48	-12.01

802.11ac VHT40_Nss1,(MCS0)_2TX
2437MHz

PSD

25/06/2019

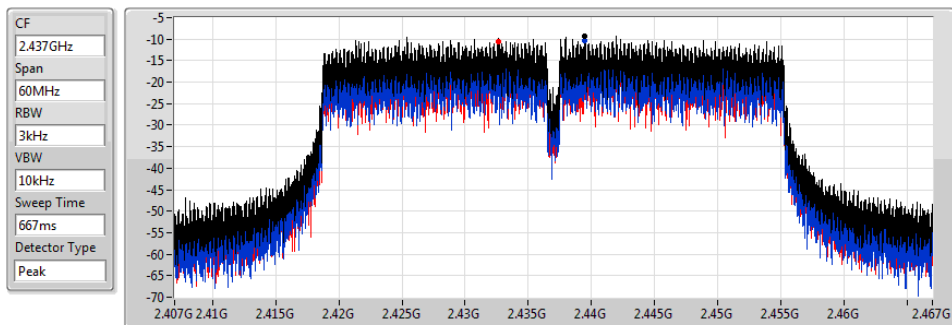


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.23	-9.23	-10.34	-10.59

802.11ac VHT40_Nss1,(MCS0)_2TX
2452MHz

PSD

25/06/2019

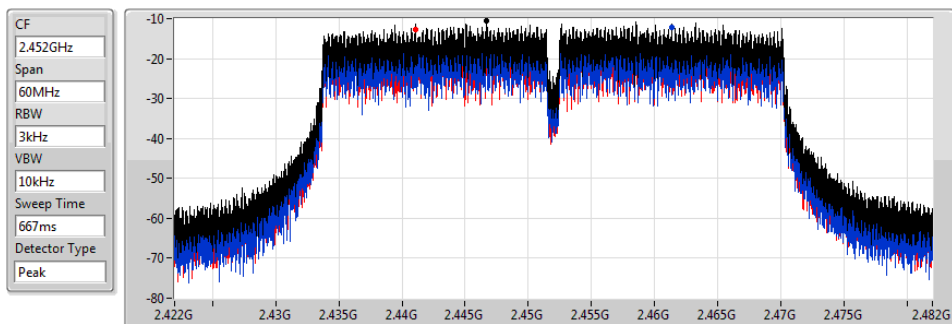


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-10.55	-10.55	-12.12	-12.70

802.11ax HEW20_Nss1,(MCS0)_1TX(Port1)

PSD

2412MHz

25/06/2019

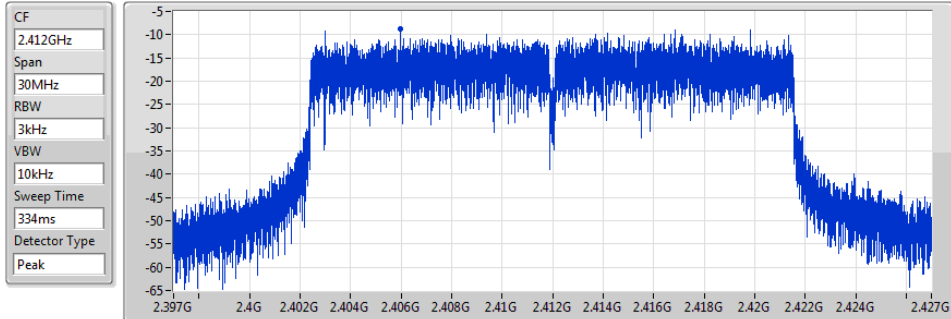


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.66	-8.66	-8.66

802.11ax HEW20_Nss1,(MCS0)_1TX(Port1)

PSD

2437MHz

25/06/2019

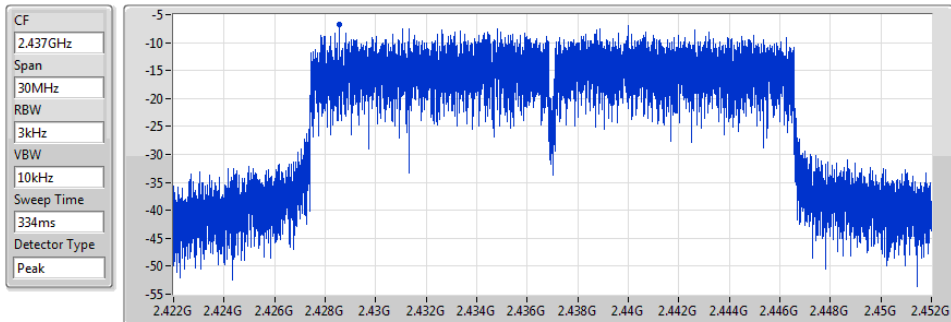


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-6.83	-6.83	-6.83

802.11ax HEW20_Nss1,(MCS0)_1TX(Port1)

PSD

2462MHz

25/06/2019

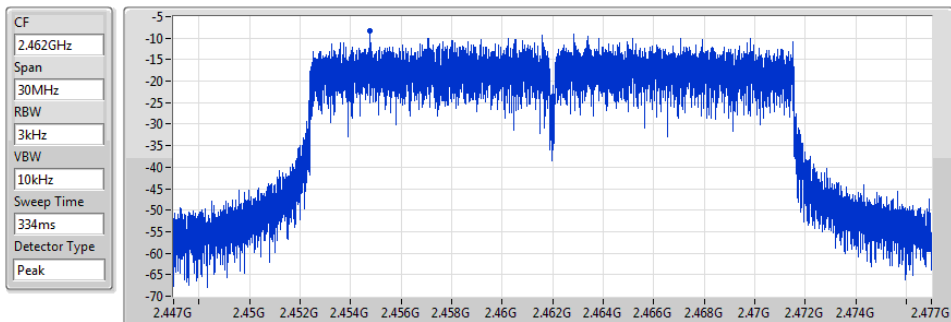


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.32	-8.32	-8.32

802.11ax HEW20_Nss1,(MCS0)_1TX(Port2)

PSD

2412MHz

25/06/2019

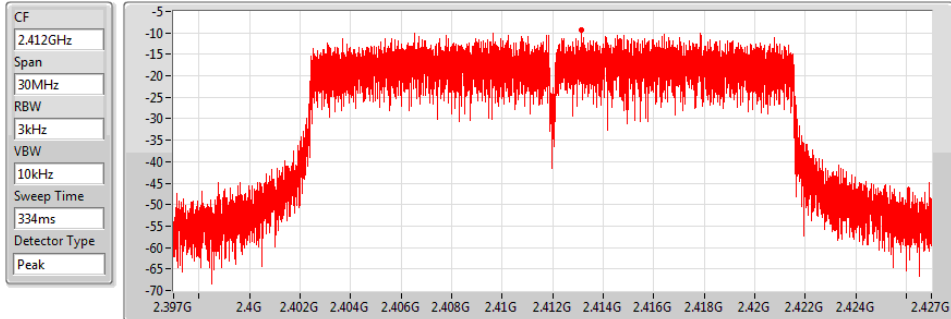


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.41	-9.41		-9.41

802.11ax HEW20_Nss1,(MCS0)_1TX(Port2)

PSD

2437MHz

25/06/2019

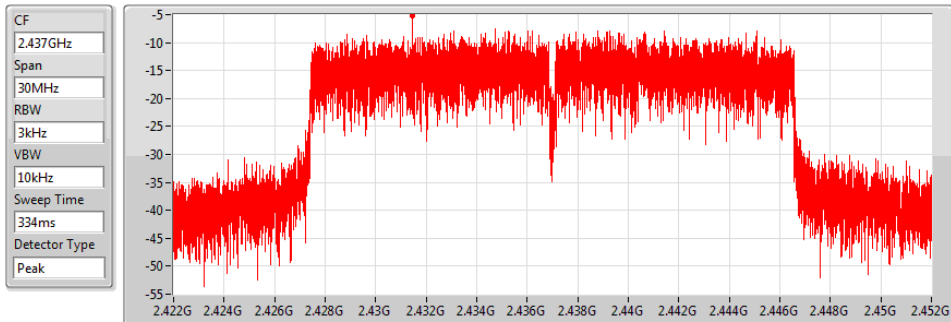


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-5.10	-5.10		-5.10

802.11ax HEW20_Nss1,(MCS0)_1TX(Port2)

PSD

2462MHz

25/06/2019

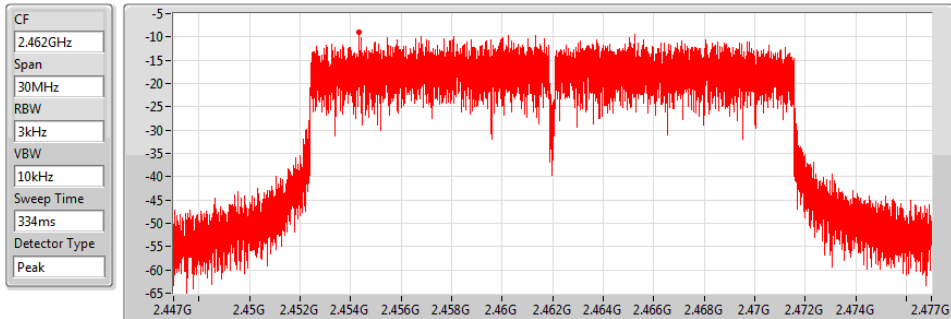


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.01	-9.01		-9.01

802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

2412MHz

25/06/2019

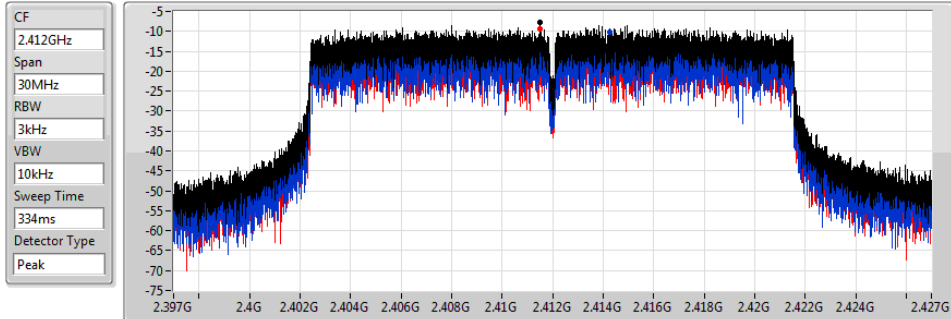


Sum	PD	Port 1	Port 2
(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)
-7.77	-7.77	-10.20	-9.24

802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

2437MHz

25/06/2019

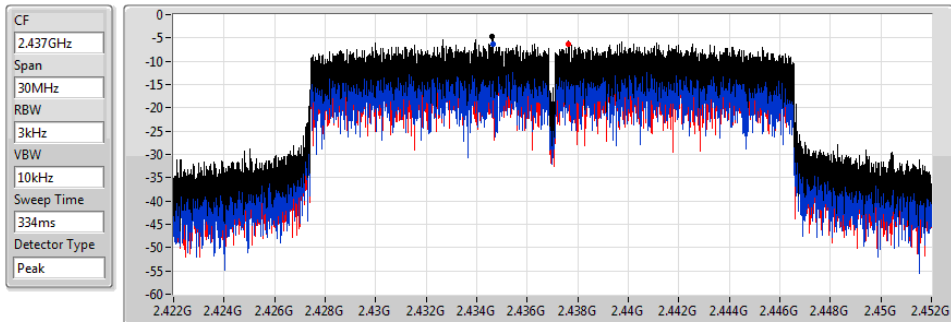


Sum	PD	Port 1	Port 2
(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)
-4.75	-4.75	-6.25	-6.28

802.11ax HEW20_Nss1,(MCS0)_2TX

PSD

2462MHz

25/06/2019

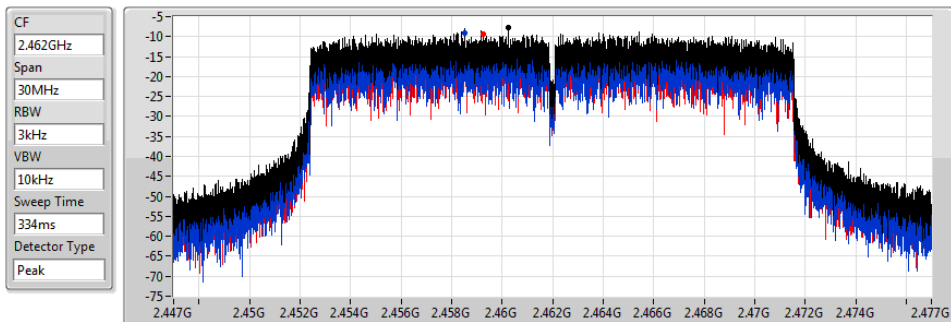


Sum	PD	Port 1	Port 2
(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)	(dBm/100Hz)
-7.70	-7.70	-9.20	-9.49

802.11ax HEW40_Nss1,(MCS0)_1TX(Port1)

PSD

2422MHz

25/06/2019

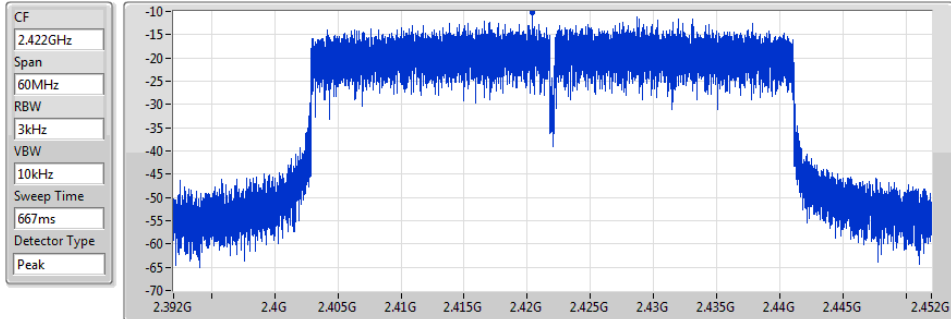


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.23	-10.23	-10.23

802.11ax HEW40_Nss1,(MCS0)_1TX(Port1)

PSD

2437MHz

25/06/2019

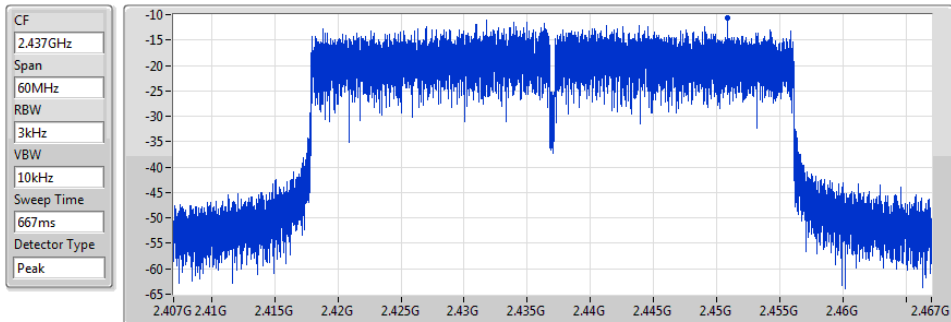


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.73	-10.73	-10.73

802.11ax HEW40_Nss1,(MCS0)_1TX(Port1)

PSD

2452MHz

25/06/2019

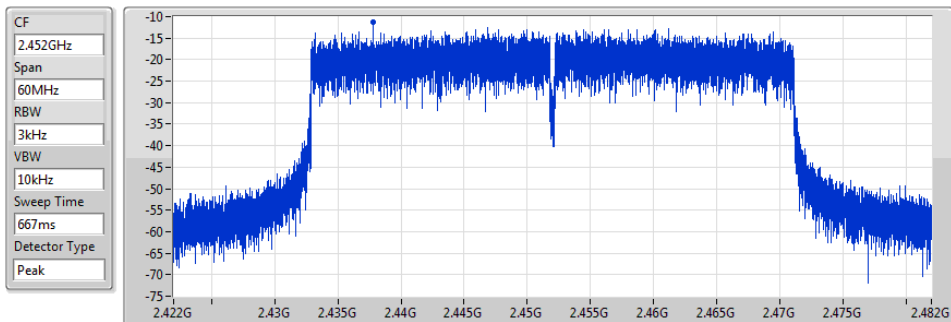


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-11.31	-11.31	-11.31

802.11ax HEW40_Nss1,(MCS0)_1TX(Port2)

PSD

2422MHz

25/06/2019

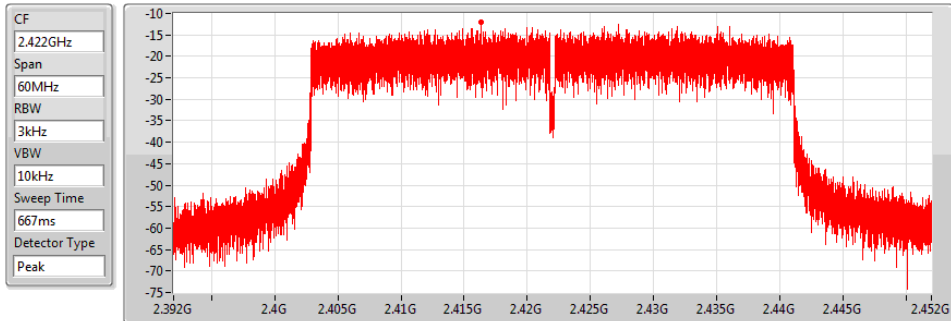


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-12.04	-12.04		-12.04

802.11ax HEW40_Nss1,(MCS0)_1TX(Port2)

PSD

2437MHz

25/06/2019

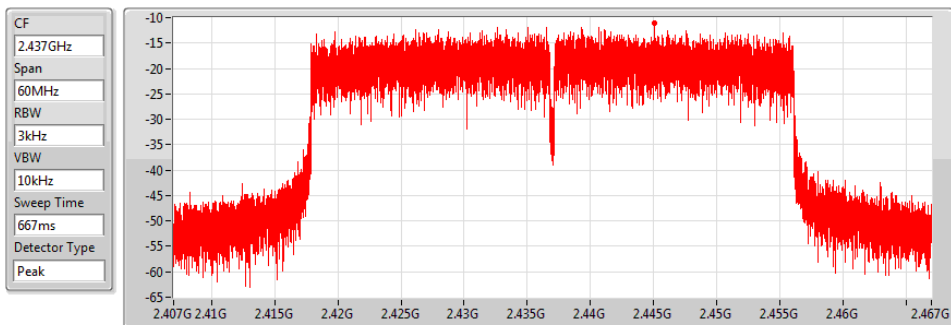


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-11.07	-11.07		-11.07

802.11ax HEW40_Nss1,(MCS0)_1TX(Port2)

PSD

2452MHz

25/06/2019

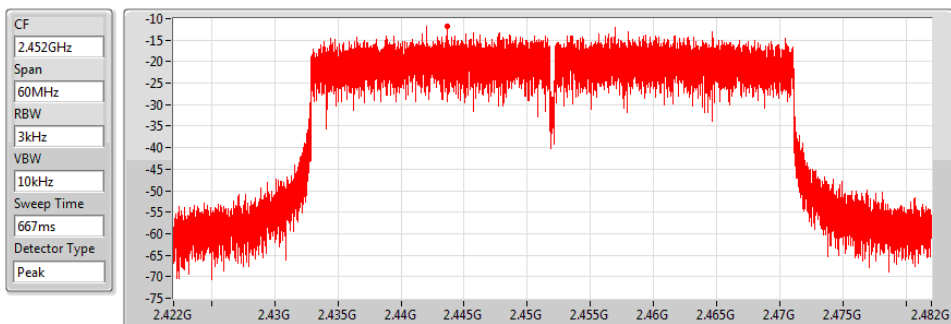


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-11.70	-11.70		-11.70

802.11ax HEW40_Nss1,(MCS0)_2TX

PSD

2422MHz

25/06/2019

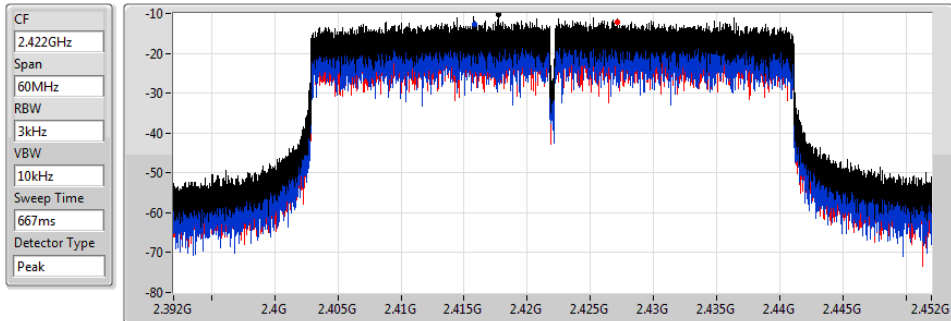


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-10.20	-10.20	-12.85	-12.09

802.11ax HEW40_Nss1,(MCS0)_2TX

PSD

2437MHz

25/06/2019

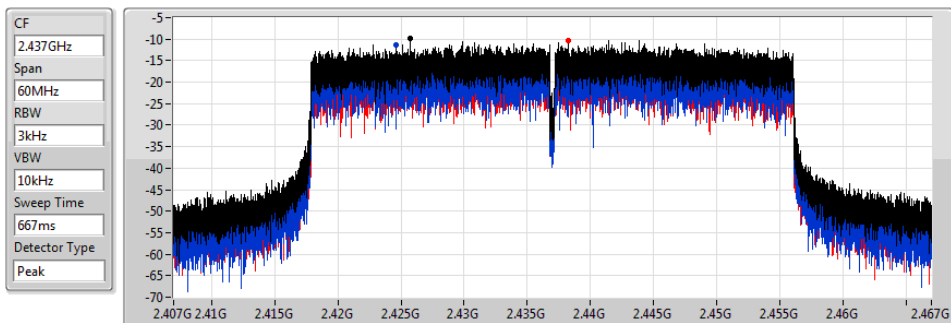


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.77	-9.77	-11.39	-10.37

802.11ax HEW40_Nss1,(MCS0)_2TX

PSD

2452MHz

25/06/2019

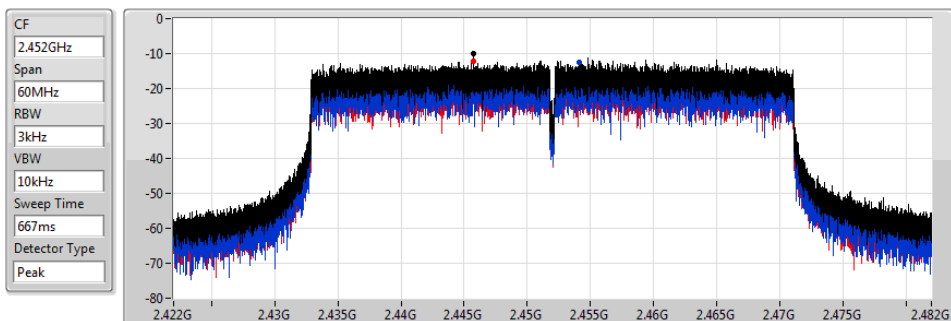

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-9.92	-9.92	-12.64	-12.09



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-4.03
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-6.92
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-6.05
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-6.80

RBW=3 kHz.

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11ac VHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.46	-8.81	-5.90	-5.84	6.54
2437MHz	Pass	7.46	-6.06	-8.19	-5.70	6.54
2462MHz	Pass	7.46	-5.97	-7.80	-4.03	6.54
802.11ac VHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.46	-7.37	-8.31	-6.92	6.54
2437MHz	Pass	7.46	-10.46	-8.37	-8.19	6.54
2452MHz	Pass	7.46	-10.93	-10.49	-9.66	6.54
802.11ax HEW20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	7.46	-7.04	-8.21	-6.05	6.54
2437MHz	Pass	7.46	-9.27	-8.51	-6.88	6.54
2462MHz	Pass	7.46	-8.43	-7.81	-7.11	6.54
802.11ax HEW40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	7.46	-7.21	-9.89	-6.80	6.54
2437MHz	Pass	7.46	-8.84	-8.26	-7.97	6.54
2452MHz	Pass	7.46	-9.09	-10.34	-8.65	6.54

DG = Directional Gain; RBW=3 kHz;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X power density;

802.11ac VHT20-BF_Nss1,(MCS0)_2TX

PSD

2412MHz

22/07/2019

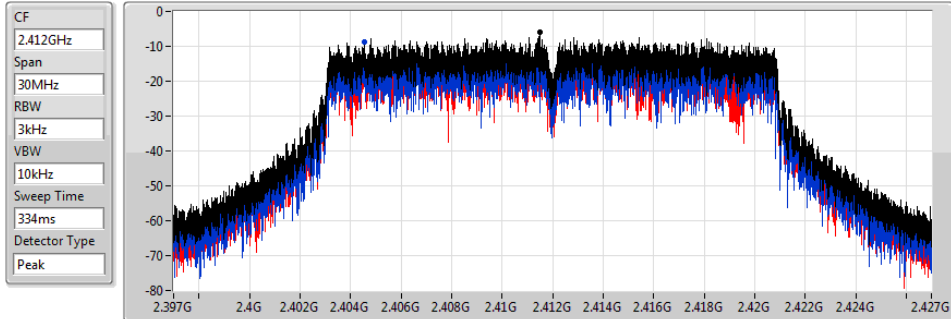


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-5.84	-5.84	-8.81	-5.90

802.11ac VHT20-BF_Nss1,(MCS0)_2TX

PSD

2437MHz

22/07/2019

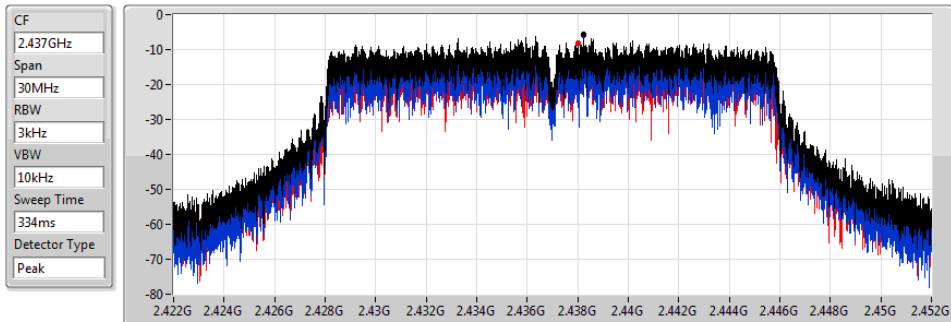


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-5.70	-5.70	-6.06	-8.19

802.11ac VHT20-BF_Nss1,(MCS0)_2TX

PSD

2462MHz

22/07/2019

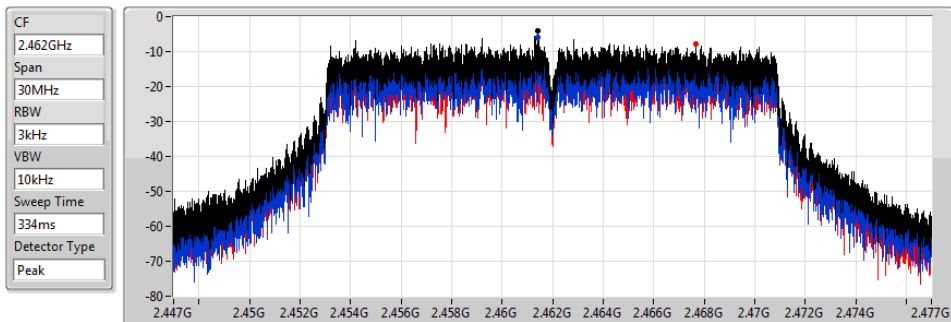


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-4.03	-4.03	-5.97	-7.80

802.11ac VHT40-BF_Nss1,(MCS0)_2TX

PSD

2422MHz

22/07/2019

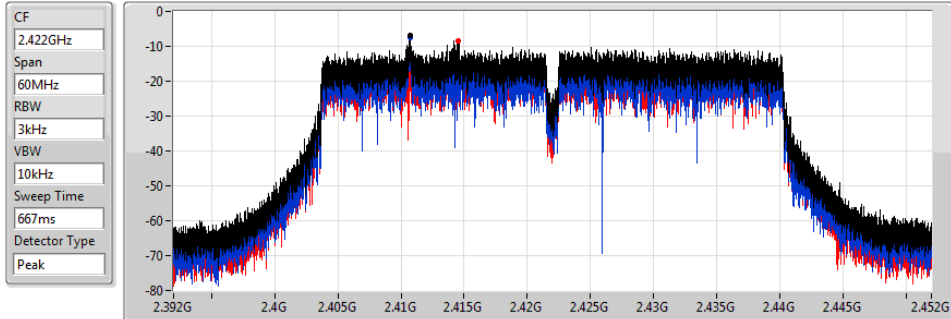


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.92	-6.92	-7.37	-8.31

802.11ac VHT40-BF_Nss1,(MCS0)_2TX

PSD

2437MHz

22/07/2019

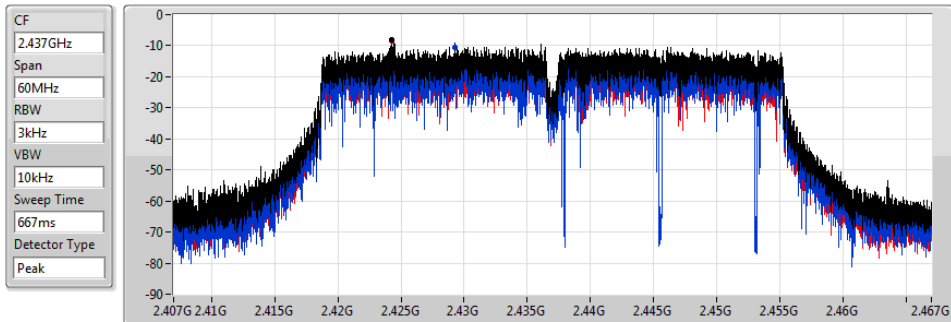


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-8.19	-8.19	-10.46	-8.37

802.11ac VHT40-BF_Nss1,(MCS0)_2TX

PSD

2452MHz

22/07/2019

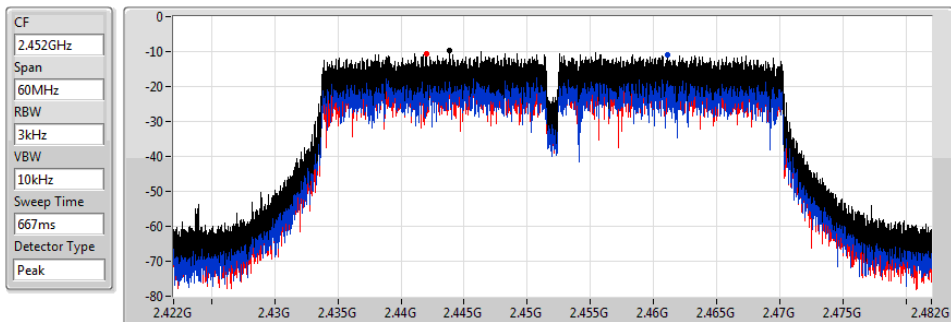


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.66	-9.66	-10.93	-10.49

802.11ax HEW20-BF_Nss1,(MCS0)_2TX

PSD

2412MHz

22/07/2019

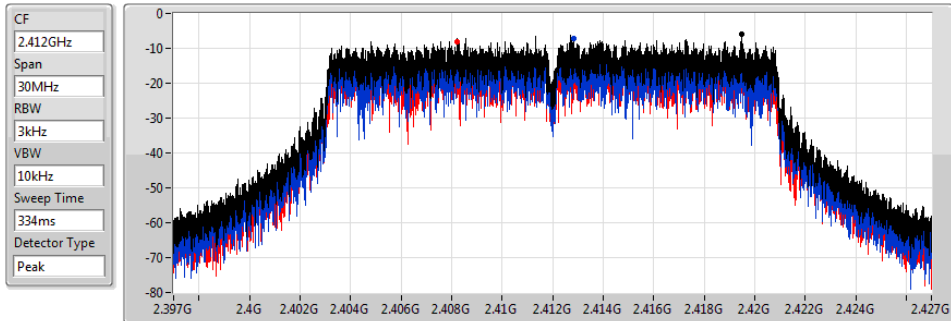


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.05	-6.05	-7.04	-8.21

802.11ax HEW20-BF_Nss1,(MCS0)_2TX

PSD

2437MHz

22/07/2019

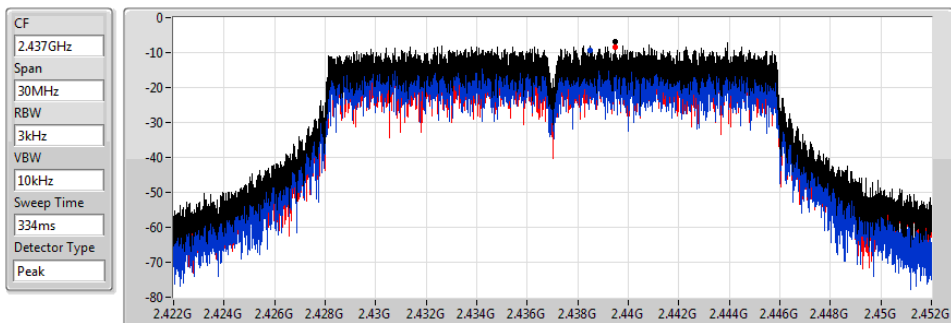


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.88	-6.88	-9.27	-8.51

802.11ax HEW20-BF_Nss1,(MCS0)_2TX

PSD

2462MHz

22/07/2019

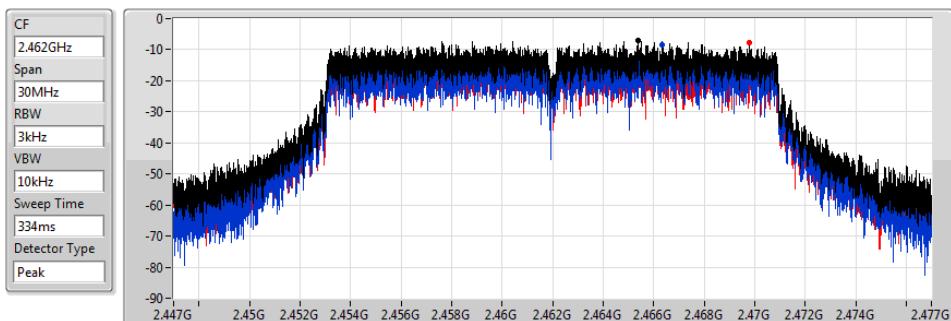


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-7.11	-7.11	-8.43	-7.81

802.11ax HEW40-BF_Nss1,(MCS0)_2TX

PSD

2422MHz

22/07/2019

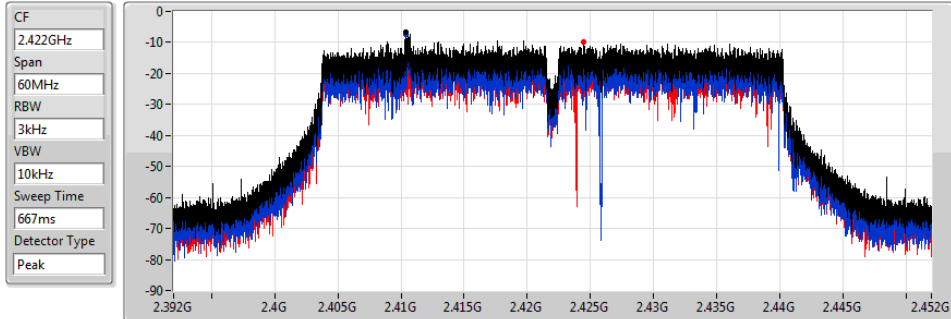


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-6.80	-6.80	-7.21	-9.89

802.11ax HEW40-BF_Nss1,(MCS0)_2TX

PSD

2437MHz

22/07/2019

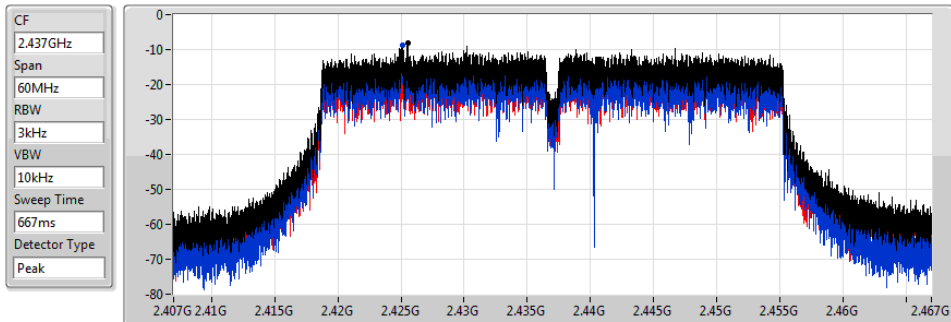


Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-7.97	-7.97	-8.84	-8.26

802.11ax HEW40-BF_Nss1,(MCS0)_2TX

PSD

2452MHz

22/07/2019

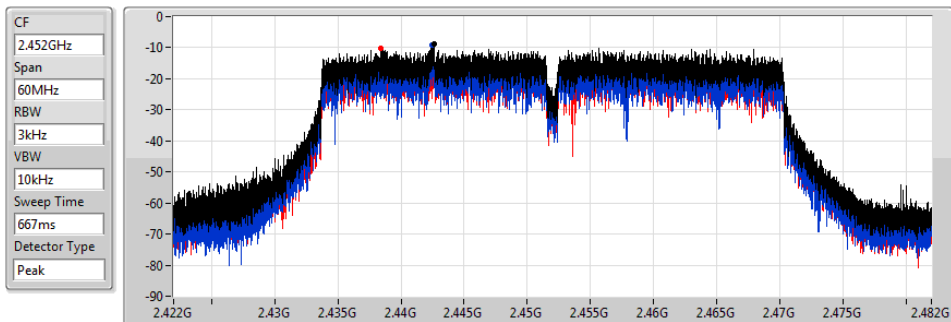

Sum	PD	Port 1	Port 2
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-8.65	-8.65	-9.09	-10.34



Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_1TX	-4.45
802.11g_Nss1,(6Mbps)_1TX	-8.52
802.11ac VHT20_Nss1,(MCS0)_1TX	-9.25
802.11ac VHT40_Nss1,(MCS0)_1TX	-13.70

RBW=3 kHz.

Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	3.02	-4.45	-4.45	8.00
2437MHz	Pass	3.02	-4.57	-4.57	8.00
2462MHz	Pass	3.02	-5.14	-5.14	8.00
802.11g_Nss1,(6Mbps)_1TX	-	-	-	-	-
2412MHz	Pass	3.02	-11.75	-11.75	8.00
2437MHz	Pass	3.02	-8.52	-8.52	8.00
2462MHz	Pass	3.02	-10.72	-10.72	8.00
802.11ac_VHT20_Nss1,(MCS0)_1TX	-	-	-	-	-
2412MHz	Pass	3.02	-13.88	-13.88	8.00
2437MHz	Pass	3.02	-9.25	-9.25	8.00
2462MHz	Pass	3.02	-12.74	-12.74	8.00
802.11ac_VHT40_Nss1,(MCS0)_1TX	-	-	-	-	-
2422MHz	Pass	3.02	-19.93	-19.93	8.00
2437MHz	Pass	3.02	-13.70	-13.70	8.00
2452MHz	Pass	3.02	-18.80	-18.80	8.00

DG = Directional Gain; RBW=3 kHz;


PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

802.11b_Nss1,(1Mbps)_1TX

PSD

2412MHz

28/06/2019

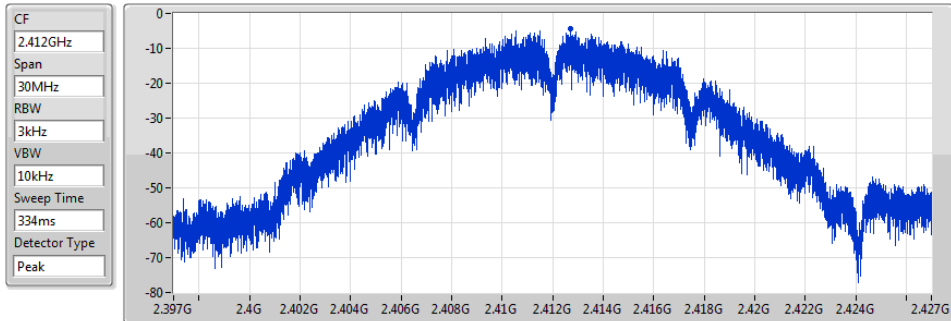


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.45	-4.45	-4.45

802.11b_Nss1,(1Mbps)_1TX

PSD

2437MHz

28/06/2019

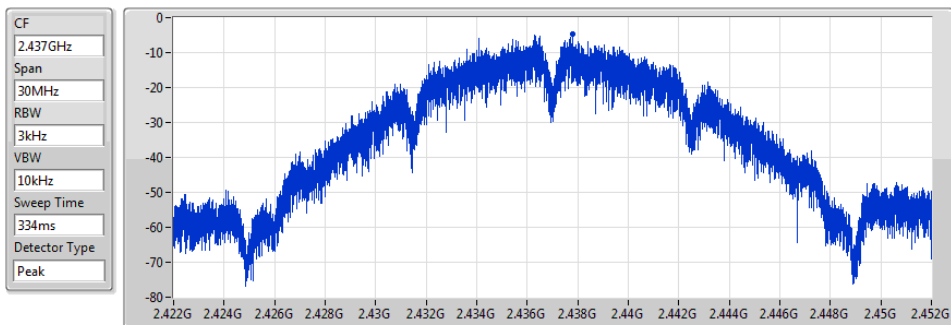


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-4.57	-4.57	-4.57

802.11b_Nss1,(1Mbps)_1TX

PSD

2462MHz

28/06/2019

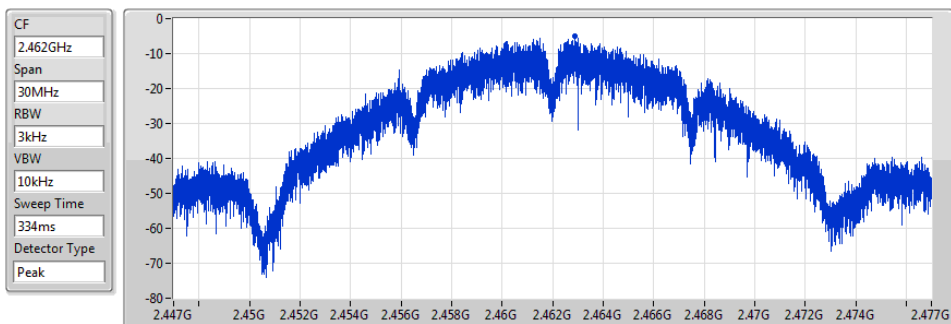


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.14	-5.14	-5.14

802.11g_Nss1,(6Mbps)_1TX

PSD

2412MHz

28/06/2019

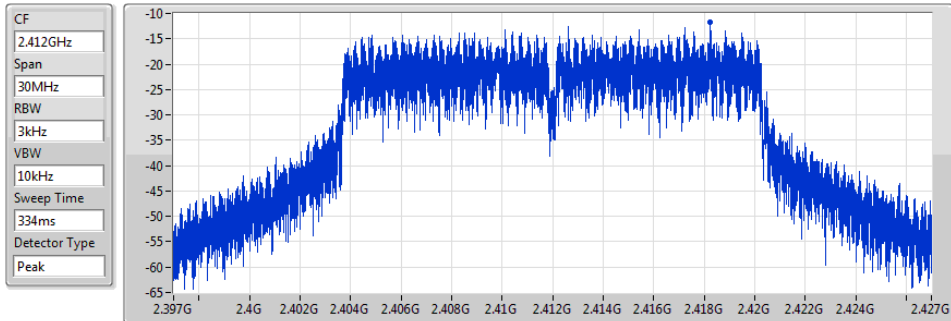


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-11.75	-11.75	-11.75

802.11g_Nss1,(6Mbps)_1TX

PSD

2437MHz

28/06/2019

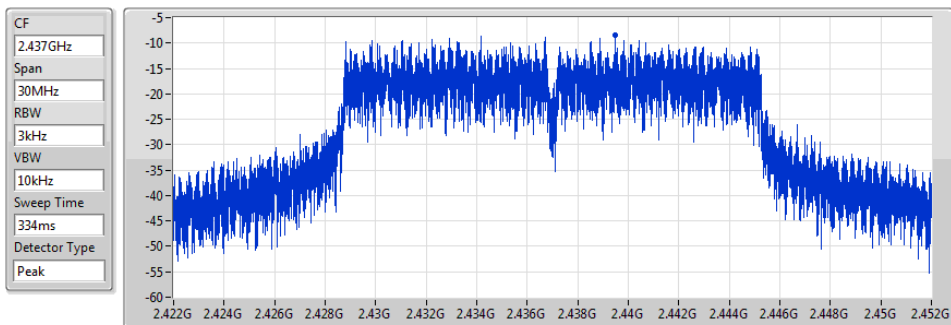


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-8.52	-8.52	-8.52

802.11g_Nss1,(6Mbps)_1TX

PSD

2462MHz

28/06/2019

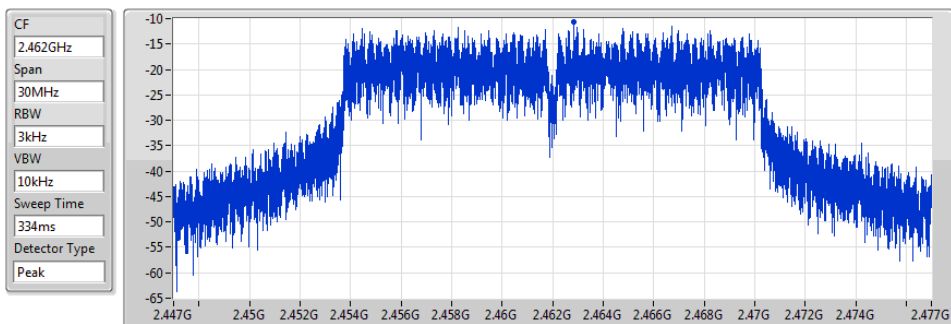


Sum	PD	Port 1
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-10.72	-10.72	-10.72

802.11ac VHT20_Nss1,(MCS0)_1TX

2412MHz

PSD

28/06/2019

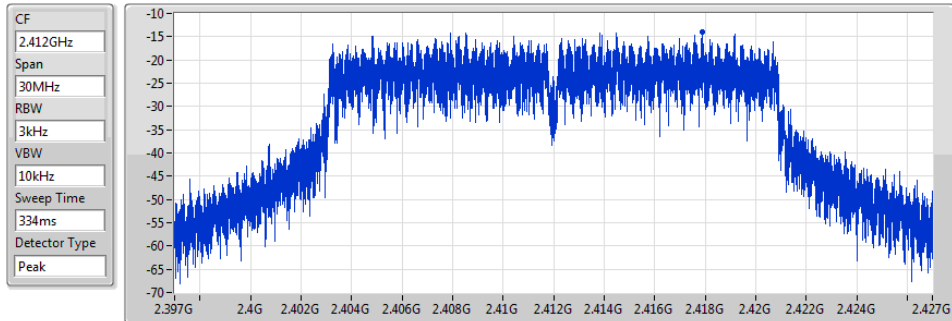


Sum	PD	Port1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.88	-13.88	-13.88

802.11ac VHT20_Nss1,(MCS0)_1TX

2437MHz

PSD

28/06/2019

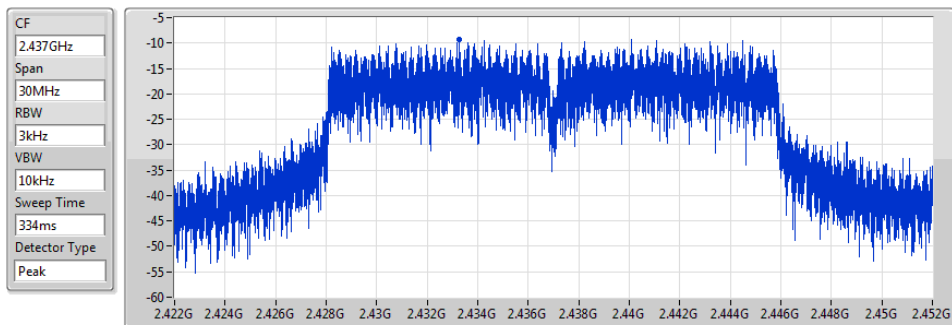


Sum	PD	Port1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-9.25	-9.25	-9.25

802.11ac VHT20_Nss1,(MCS0)_1TX

2462MHz

PSD

28/06/2019

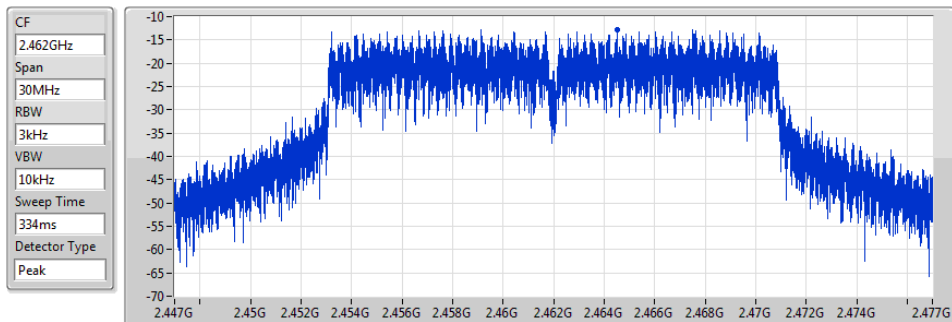


Sum	PD	Port1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-12.74	-12.74	-12.74

802.11ac VHT40_Nss1,(MCS0)_1TX

2422MHz

PSD

28/06/2019

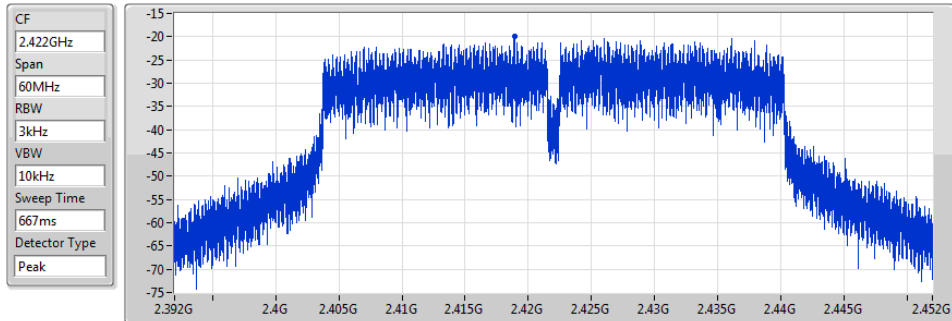


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-19.93	-19.93	-19.93

802.11ac VHT40_Nss1,(MCS0)_1TX

2437MHz

PSD

28/06/2019

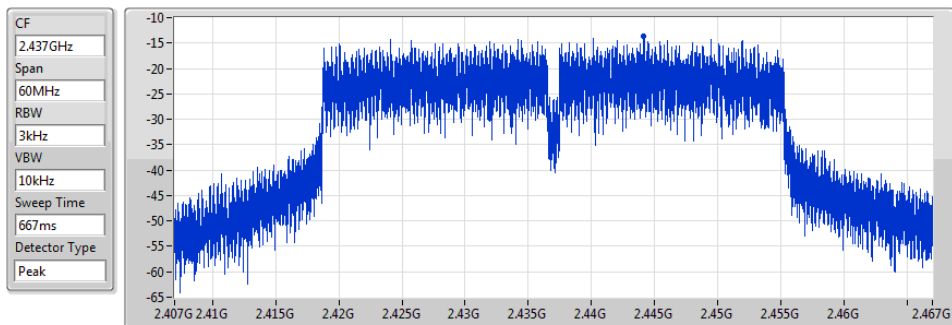


Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-13.70	-13.70	-13.70

802.11ac VHT40_Nss1,(MCS0)_1TX

2452MHz

PSD

28/06/2019

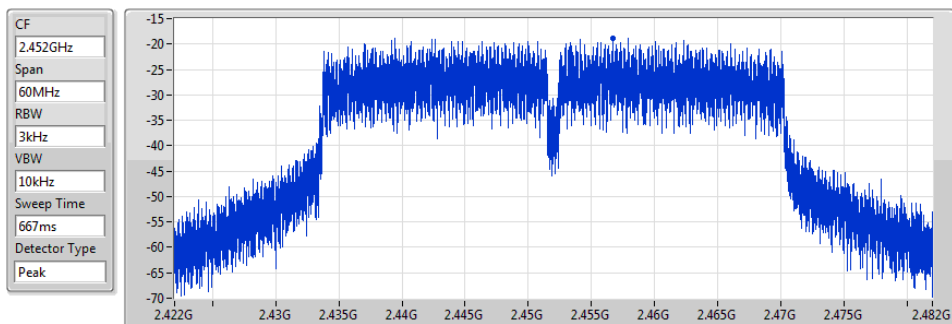

Sum	PD	Port 1
(dBm/Hz)	(dBm/Hz)	(dBm/Hz)
-18.80	-18.80	-18.80

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-	-	-
802.11b_Nss1,(1Mbps)_1TX(Port1)	Pass	2.43749G	11.35	-18.65	2.18467G	-54.22	2.39996G	-39.50	2.496G	-51.87	21.54424G	-41.11	1
802.11b_Nss1,(1Mbps)_1TX(Port2)	Pass	2.43749G	11.46	-18.54	1.86051G	-55.21	2.39998G	-40.66	2.49892G	-52.09	16.62188G	-41.76	2
802.11b_Nss1,(1Mbps)_2TX	Pass	2.43799G	11.92	-18.08	2.16312G	-55.01	2.39998G	-38.99	2.50712G	-51.81	17.5968G	-41.91	1
802.11g_Nss1,(6Mbps)_1TX(Port1)	Pass	2.4395G	9.70	-20.30	2.19399G	-54.27	2.39948G	-25.46	2.50906G	-51.68	24.81738G	-41.53	1
802.11g_Nss1,(6Mbps)_1TX(Port2)	Pass	2.43824G	9.60	-20.40	2.30641G	-54.70	2.39976G	-29.47	2.4928G	-51.12	16.2735G	-41.96	2
802.11g_Nss1,(6Mbps)_2TX	Pass	2.442G	10.02	-19.98	2.30117G	-54.69	2.39964G	-31.13	2.50754G	-52.14	16.22012G	-41.68	1
802.11ac VHT20_Nss1,(MCS0)_1TX(Port1)	Pass	2.4357G	9.19	-20.81	775.02M	-55.24	2.39922G	-27.71	2.49604G	-50.43	24.93538G	-41.64	1
802.11ac VHT20_Nss1,(MCS0)_1TX(Port2)	Pass	2.43574G	9.45	-20.55	2.30816G	-54.11	2.39984G	-29.14	2.4983G	-51.87	16.20045G	-41.44	2
802.11ac VHT20_Nss1,(MCS0)_2TX	Pass	2.43574G	9.32	-20.68	2.19282G	-54.74	2.39884G	-27.75	2.49774G	-51.57	16.81855G	-41.34	2
802.11ac VHT40_Nss1,(MCS0)_1TX(Port1)	Pass	2.44071G	4.59	-25.41	2.30082G	-47.45	2.39976G	-28.69	2.54154G	-44.43	23.32568G	-42.28	1
802.11ac VHT40_Nss1,(MCS0)_1TX(Port2)	Pass	2.43198G	4.43	-25.57	2.10989G	-53.17	2.39988G	-32.91	2.50074G	-50.55	23.29202G	-41.54	2
802.11ac VHT40_Nss1,(MCS0)_2TX	Pass	2.45198G	3.74	-26.26	2.30769G	-54.02	2.39972G	-33.40	2.48546G	-50.42	23.30324G	-42.15	2
802.11ac HEW20_Nss1,(MCS0)_1TX(Port1)	Pass	2.44196G	9.33	-20.67	2.30379G	-54.53	2.39976G	-25.06	2.4965G	-50.79	16.29317G	-41.90	1
802.11ac HEW20_Nss1,(MCS0)_1TX(Port2)	Pass	2.43574G	9.22	-20.78	2.10021G	-54.87	2.3999G	-27.00	2.48382G	-50.54	24.65723G	-41.85	2
802.11ac HEW20_Nss1,(MCS0)_2TX	Pass	2.442G	9.91	-20.09	2.30233G	-53.98	2.39938G	-25.87	2.51504G	-51.70	17.61928G	-41.16	2
802.11ac HEW40_Nss1,(MCS0)_1TX(Port1)	Pass	2.43449G	4.30	-25.70	2.30311G	-47.22	2.39936G	-28.06	2.4875G	-44.52	23.28361G	-41.41	1
802.11ac HEW40_Nss1,(MCS0)_1TX(Port2)	Pass	2.43198G	4.35	-25.65	2.01314G	-53.58	2.39816G	-32.00	2.48462G	-36.95	16.88921G	-41.41	2
802.11ac HEW40_Nss1,(MCS0)_2TX	Pass	2.44075G	3.85	-26.15	2.30569G	-54.34	2.39976G	-31.80	2.48502G	-49.53	23.32007G	-40.82	2

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
802.11b_Nss1,(1Mbps)_1TX(Port1)	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43749G	11.35	-18.65	2.18467G	-54.22	2.39996G	-39.50	2.496G	-51.87	21.54424G	-41.11	1
2437MHz	Pass	2.43749G	11.35	-18.65	857.73M	-54.45	2.3922G	-52.34	2.51594G	-52.19	23.24683G	-42.14	1
2462MHz	Pass	2.43749G	11.35	-18.65	707.45M	-55.38	2.39402G	-53.33	2.49178G	-51.74	24.06723G	-42.56	1
802.11b_Nss1,(1Mbps)_1TX(Port2)	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43749G	11.46	-18.54	1.86051G	-55.21	2.39998G	-40.66	2.49892G	-52.09	16.62188G	-41.76	2
2437MHz	Pass	2.43749G	11.46	-18.54	844.34M	-55.15	2.3919G	-53.03	2.50376G	-50.93	17.44509G	-42.27	2
2462MHz	Pass	2.43749G	11.46	-18.54	935.21M	-54.63	2.39698G	-53.17	2.486G	-51.85	17.45632G	-42.14	2
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43799G	11.92	-18.08	2.16312G	-55.01	2.39998G	-38.99	2.50712G	-51.81	17.5968G	-41.91	1
2412MHz	Pass	2.43799G	11.92	-18.08	2.30641G	-54.73	2.39982G	-40.91	2.5056G	-52.31	14.92491G	-42.18	2
2437MHz	Pass	2.43799G	11.92	-18.08	2.30641G	-54.73	2.39936G	-52.94	2.49598G	-51.71	17.48161G	-41.69	1
2437MHz	Pass	2.43799G	11.92	-18.08	2.30583G	-55.24	2.3929G	-52.58	2.4916G	-52.23	24.58138G	-42.22	2
2462MHz	Pass	2.43799G	11.92	-18.08	2.17593G	-55.01	2.39434G	-52.71	2.49274G	-51.77	16.5966G	-40.96	1
2462MHz	Pass	2.43799G	11.92	-18.08	2.02885G	-55.75	2.39044G	-52.86	2.4933G	-51.12	24.55047G	-41.90	2
802.11g_Nss1,(6Mbps)_1TX(Port1)	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.4395G	9.70	-20.30	2.19399G	-54.27	2.39948G	-25.46	2.50906G	-51.68	24.81738G	-41.53	1
2437MHz	Pass	2.4395G	9.70	-20.30	2.18292G	-53.46	2.3995G	-40.10	2.48948G	-48.41	24.89324G	-41.13	1
2462MHz	Pass	2.4395G	9.70	-20.30	2.30059G	-54.44	2.39874G	-52.11	2.48446G	-37.37	16.22574G	-41.00	1
802.11g_Nss1,(6Mbps)_1TX(Port2)	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43824G	9.60	-20.40	2.30641G	-54.70	2.39976G	-29.47	2.4928G	-51.12	16.2735G	-41.96	2
2437MHz	Pass	2.43824G	9.60	-20.40	2.1771G	-54.62	2.3995G	-40.64	2.48576G	-47.59	14.76476G	-42.30	2
2462MHz	Pass	2.43824G	9.60	-20.40	1.99361G	-54.04	2.3963G	-52.47	2.4845G	-36.58	16.24259G	-41.16	2
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.442G	10.02	-19.98	2.30117G	-54.69	2.39964G	-31.13	2.50754G	-52.14	16.22012G	-41.68	1
2412MHz	Pass	2.442G	10.02	-19.98	2.14943G	-54.65	2.39964G	-31.26	2.50198G	-51.54	23.28617G	-41.26	2
2437MHz	Pass	2.442G	10.02	-19.98	2.19486G	-54.41	2.3995G	-39.93	2.48574G	-47.99	24.33413G	-41.38	1
2437MHz	Pass	2.442G	10.02	-19.98	2.30583G	-54.24	2.3995G	-41.41	2.48362G	-47.42	24.88481G	-40.70	2
2462MHz	Pass	2.442G	10.02	-19.98	2.16137G	-54.73	2.3972G	-52.49	2.48422G	-42.74	16.22574G	-41.75	1
2462MHz	Pass	2.442G	10.02	-19.98	2.1302G	-55.00	2.39018G	-52.67	2.48352G	-41.81	23.24402G	-41.74	2
802.11ac_VHT20_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.4357G	9.19	-20.81	775.02M	-55.24	2.39922G	-27.71	2.49604G	-50.43	24.93538G	-41.64	1
2437MHz	Pass	2.4357G	9.19	-20.81	2.15409G	-53.80	2.39974G	-42.03	2.48388G	-48.28	16.3606G	-41.73	1
2462MHz	Pass	2.4357G	9.19	-20.81	2.30728G	-55.16	2.39448G	-52.02	2.48414G	-41.05	23.29179G	-42.04	1
802.11ac_VHT20_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43574G	9.45	-20.55	2.30816G	-54.11	2.39984G	-29.14	2.4983G	-51.87	16.20045G	-41.44	2
2437MHz	Pass	2.43574G	9.45	-20.55	1.96623G	-53.79	2.3995G	-41.54	2.48452G	-47.69	17.23718G	-42.19	2
2462MHz	Pass	2.43574G	9.45	-20.55	2.19457G	-53.46	2.3978G	-52.17	2.48352G	-38.93	24.9129G	-42.24	2
802.11ac_VHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43574G	9.32	-20.68	2.30903G	-53.96	2.39986G	-28.63	2.496G	-50.73	24.31166G	-42.26	1
2412MHz	Pass	2.43574G	9.32	-20.68	2.19282G	-54.74	2.39884G	-27.75	2.49774G	-51.57	16.81855G	-41.34	2
2437MHz	Pass	2.43574G	9.32	-20.68	2.13545G	-54.16	2.3995G	-40.33	2.48424G	-47.67	17.28213G	-41.30	1
2437MHz	Pass	2.43574G	9.32	-20.68	2.30117G	-54.20	2.39886G	-41.90	2.48444G	-47.62	21.48243G	-42.24	2
2462MHz	Pass	2.43574G	9.32	-20.68	2.30758G	-53.72	2.39418G	-53.16	2.48384G	-43.00	17.57152G	-41.92	1
2462MHz	Pass	2.43574G	9.32	-20.68	2.16049G	-54.74	2.39906G	-52.49	2.48424G	-42.05	24.85952G	-41.56	2
802.11ac_VHT40_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.44071G	4.59	-25.41	2.30082G	-47.45	2.39976G	-28.69	2.54154G	-44.43	23.32568G	-42.28	1
2437MHz	Pass	2.44071G	4.59	-25.41	2.30884G	-54.50	2.39952G	-35.23	2.4845G	-38.73	24.55127G	-41.80	1



Mode	Result	Ref (Hz)	Ref (dBm)	Limit (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Freq (Hz)	Level (dBm)	Port
2452MHz	Pass	2.44071G	4.59	-25.41	2.02888G	-54.99	2.39572G	-44.69	2.48498G	-37.44	15.14196G	-42.33	1
802.11ac VHT40_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.43198G	4.43	-25.57	2.10989G	-53.17	2.39988G	-32.91	2.50074G	-50.55	23.29202G	-41.54	2
2437MHz	Pass	2.43198G	4.43	-25.57	2.30855G	-53.32	2.39924G	-33.92	2.4857G	-38.73	24.13059G	-42.17	2
2452MHz	Pass	2.43198G	4.43	-25.57	2.1451G	-54.44	2.39452G	-48.29	2.48574G	-36.55	16.49657G	-42.20	2
802.11ac VHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.45198G	3.74	-26.26	2.30912G	-55.01	2.39972G	-35.10	2.5425G	-46.41	16.21891G	-41.59	1
2422MHz	Pass	2.45198G	3.74	-26.26	2.30769G	-54.02	2.39972G	-33.40	2.48546G	-50.42	23.30324G	-42.15	2
2437MHz	Pass	2.45198G	3.74	-26.26	2.18317G	-54.40	2.39888G	-36.75	2.48894G	-41.04	17.51462G	-41.67	1
2437MHz	Pass	2.45198G	3.74	-26.26	2.10903G	-54.19	2.39976G	-35.34	2.48606G	-42.34	16.25818G	-41.05	2
2452MHz	Pass	2.45198G	3.74	-26.26	2.17029G	-54.50	2.3954G	-49.03	2.4851G	-42.88	23.27239G	-41.08	1
2452MHz	Pass	2.45198G	3.74	-26.26	2.30025G	-55.06	2.39876G	-50.23	2.48634G	-41.10	17.64924G	-41.01	2
802.11ax HEW20_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.44196G	9.33	-20.67	2.30379G	-54.53	2.39976G	-25.06	2.4965G	-50.79	16.29317G	-41.90	1
2437MHz	Pass	2.44196G	9.33	-20.67	2.30845G	-53.38	2.39668G	-37.06	2.48378G	-45.02	24.33132G	-41.83	1
2462MHz	Pass	2.44196G	9.33	-20.67	2.30583G	-55.29	2.39448G	-52.61	2.48402G	-37.55	23.42665G	-41.46	1
802.11ax HEW20_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.43574G	9.22	-20.78	2.10021G	-54.87	2.3999G	-27.00	2.48382G	-50.54	24.65723G	-41.85	2
2437MHz	Pass	2.43574G	9.22	-20.78	2.30059G	-53.95	2.39742G	-39.62	2.48536G	-45.59	16.21169G	-41.36	2
2462MHz	Pass	2.43574G	9.22	-20.78	2.30845G	-55.03	2.39384G	-52.97	2.4841G	-36.78	23.24683G	-42.51	2
802.11ax HEW20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2412MHz	Pass	2.442G	9.91	-20.09	1.80226G	-55.16	2.39924G	-28.20	2.49598G	-51.06	16.55165G	-41.62	1
2412MHz	Pass	2.442G	9.91	-20.09	2.30233G	-53.98	2.39938G	-25.87	2.51504G	-51.70	17.61928G	-41.16	2
2437MHz	Pass	2.442G	9.91	-20.09	2.10137G	-54.78	2.39906G	-38.92	2.48388G	-46.07	17.61647G	-41.97	1
2437MHz	Pass	2.442G	9.91	-20.09	2.18933G	-54.00	2.39928G	-40.12	2.48378G	-45.19	17.5069G	-41.99	2
2462MHz	Pass	2.442G	9.91	-20.09	2.01574G	-55.01	2.39146G	-51.83	2.48442G	-39.01	16.87194G	-41.17	1
2462MHz	Pass	2.442G	9.91	-20.09	2.30408G	-53.02	2.39622G	-52.35	2.48444G	-36.37	23.25526G	-41.62	2
802.11ax HEW40_Nss1,(MCS0)_1TX(Port1)	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.43449G	4.30	-25.70	2.30311G	-47.22	2.39936G	-28.06	2.4875G	-44.52	23.28361G	-41.41	1
2437MHz	Pass	2.43449G	4.30	-25.70	908.79M	-55.10	2.39904G	-33.06	2.48458G	-37.45	23.4014G	-41.13	1
2452MHz	Pass	2.43449G	4.30	-25.70	2.30683G	-53.89	2.3976G	-42.78	2.48746G	-34.93	23.27519G	-42.18	1
802.11ax HEW40_Nss1,(MCS0)_1TX(Port2)	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.43198G	4.35	-25.65	2.19663G	-54.65	2.39752G	-32.20	2.48698G	-48.32	16.84714G	-42.08	2
2437MHz	Pass	2.43198G	4.35	-25.65	2.01314G	-53.58	2.39816G	-32.00	2.48462G	-36.95	16.88921G	-41.41	2
2452MHz	Pass	2.43198G	4.35	-25.65	1.9682G	-54.25	2.39924G	-47.41	2.48358G	-35.68	17.60437G	-41.38	2
802.11ax HEW40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-	-	-	-
2422MHz	Pass	2.44075G	3.85	-26.15	1.96705G	-53.07	2.39516G	-33.40	2.48478G	-47.24	24.06047G	-42.03	1
2422MHz	Pass	2.44075G	3.85	-26.15	2.30569G	-54.34	2.39976G	-31.80	2.48502G	-49.53	23.32007G	-40.82	2
2437MHz	Pass	2.44075G	3.85	-26.15	2.30426G	-53.02	2.3994G	-36.63	2.48382G	-40.00	16.30025G	-42.08	1
2437MHz	Pass	2.44075G	3.85	-26.15	2.00255G	-54.41	2.39604G	-35.11	2.48374G	-40.10	16.63119G	-42.14	2
2452MHz	Pass	2.44075G	3.85	-26.15	2.30626G	-52.89	2.39624G	-47.26	2.48446G	-37.00	16.89481G	-42.21	1
2452MHz	Pass	2.44075G	3.85	-26.15	1.95246G	-55.09	2.39188G	-49.14	2.48494G	-39.59	16.86116G	-42.02	2

802.11b_Nss1,(1Mbps)_1TX(Port1)

CSE NdB

2412MHz

25/06/2019

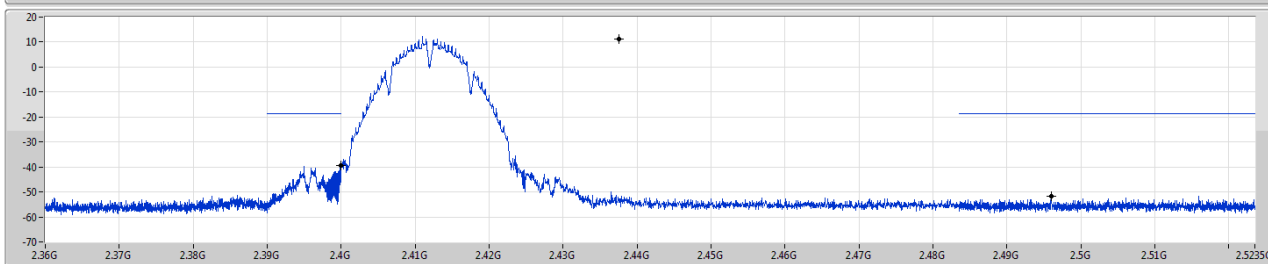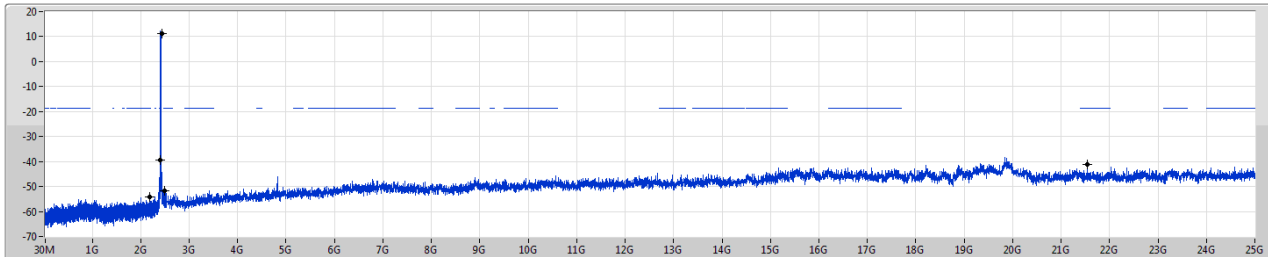

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43749G	11.35	-18.65	2.18467G	-54.22	2.39996G	-39.50	2.496G	-51.87	2.154424G	-41.11	1

802.11b_Nss1,(1Mbps)_1TX(Port1)

CSE NdB

2437MHz

25/06/2019

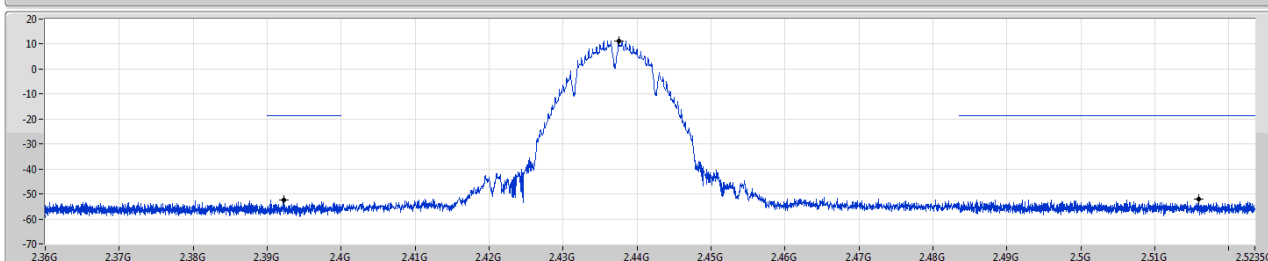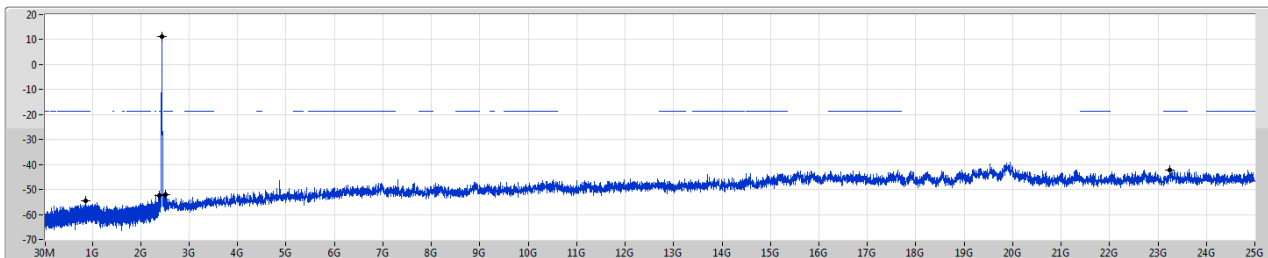

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43749G	11.35	-18.65	857.73M	-54.45	2.3922G	-52.34	2.51594G	-52.19	2.324683G	-42.14	1

802.11b_Nss1,(1Mbps)_1TX(Port1)


CSE NdB

2462MHz

25/06/2019

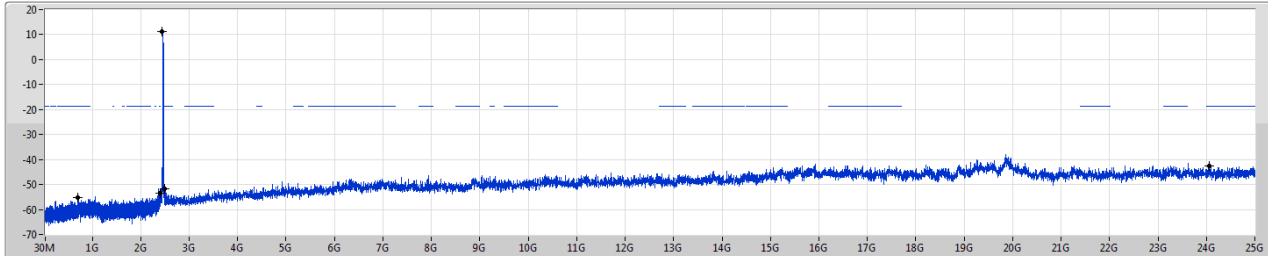

Port 1

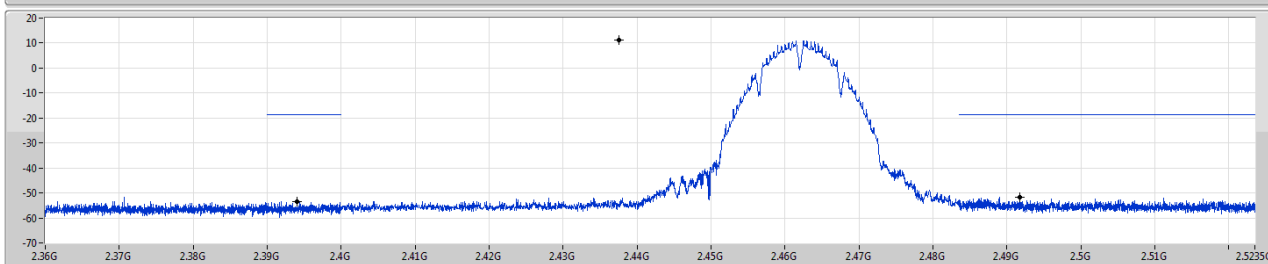

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43749G	11.35	-18.65	707.45M	-55.38	2.39402G	-53.33	2.49178G	-51.74	24.06723G	-42.56	1

802.11b_Nss1,(1Mbps)_1TX(Port2)


CSE NdB

2412MHz

25/06/2019

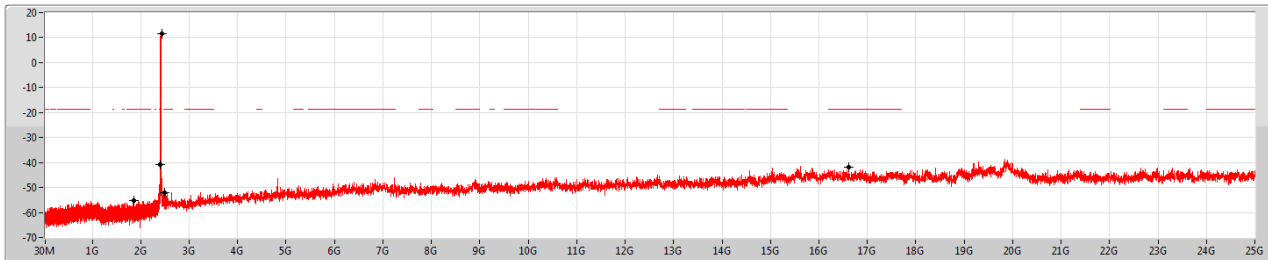

Port 2

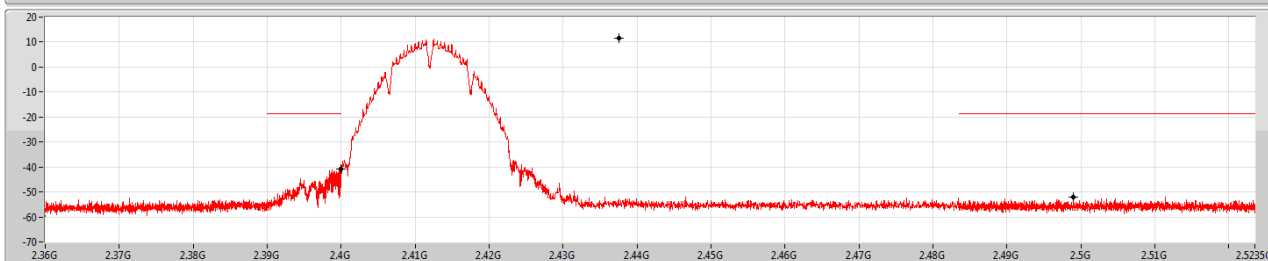

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43749G	11.46	-18.54	1.86051G	-55.21	2.39998G	-40.66	2.49892G	-52.09	16.62188G	-41.76	2

802.11b_Nss1,(1Mbps)_1TX(Port2)


CSE NdB

2437MHz

25/06/2019

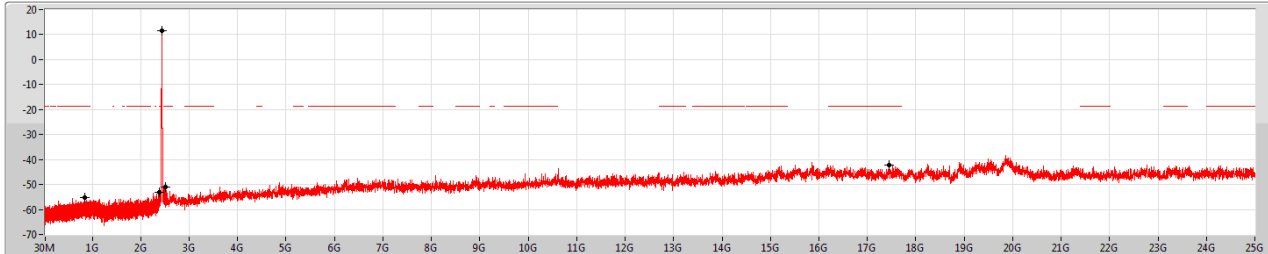

Port 2

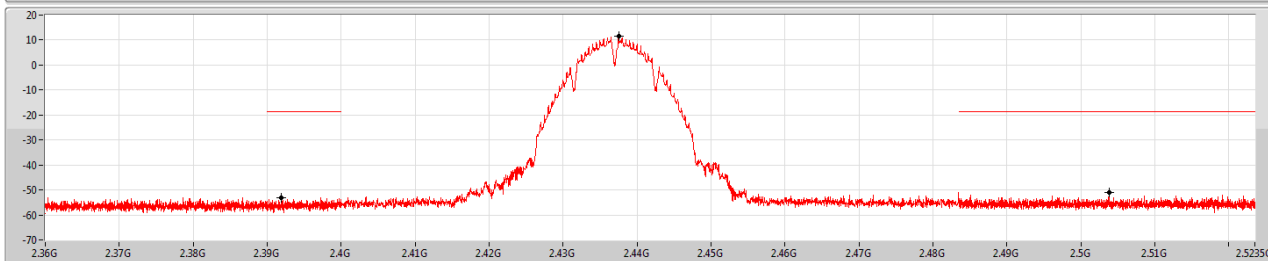

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43749G	11.46	-18.54	844.34M	-55.15	2.3919G	-53.03	2.50376G	-50.93	17.44509G	-42.27	2

802.11b_Nss1,(1Mbps)_1TX(Port2)


CSE NdB

2462MHz

25/06/2019

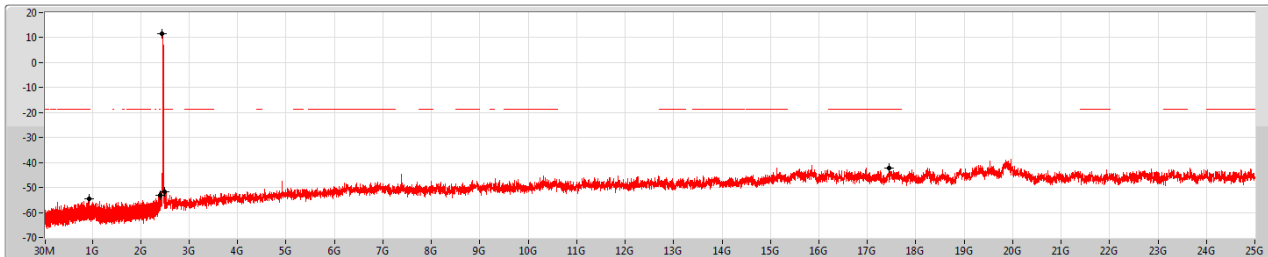

Port 2

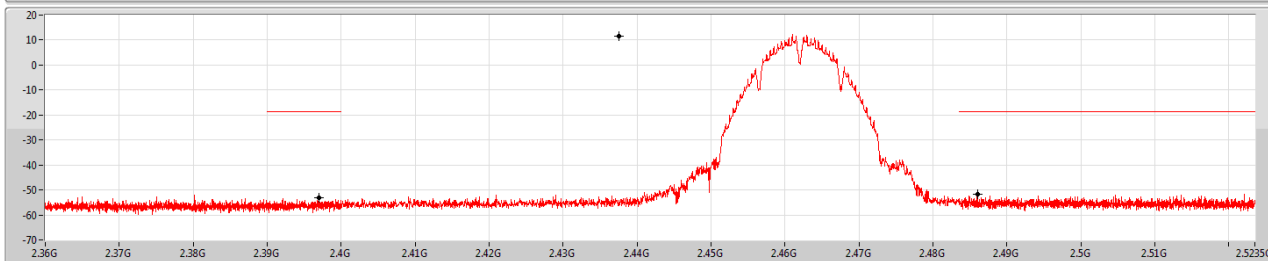

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43749G	11.46	-18.54	935.21M	-54.63	2.39698G	-53.17	2.486G	-51.85	17.45632G	-42.14	2

802.11b_Nss1,(1Mbps)_2TX

2412MHz

CSE NdB

25/06/2019

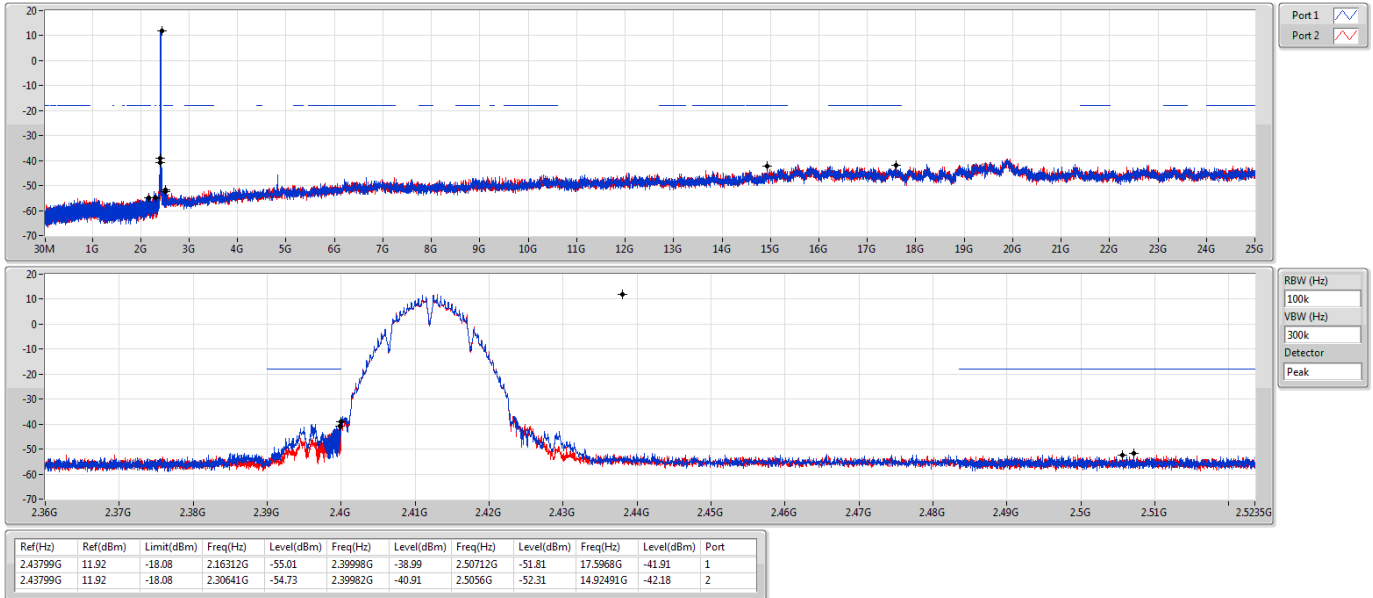


802.11b_Nss1,(1Mbps)_2TX

2437MHz

CSE NdB

25/06/2019

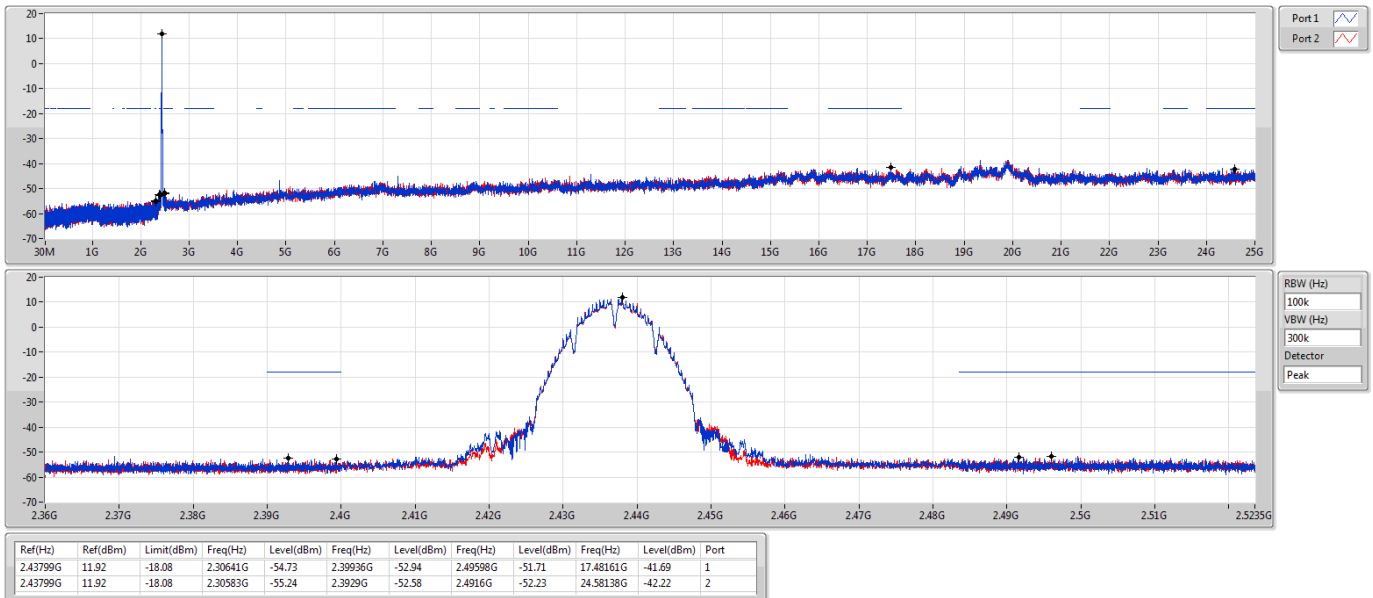


802.11b_Nss1,(1Mbps)_2TX

2462MHz

CSE NdB

25/06/2019

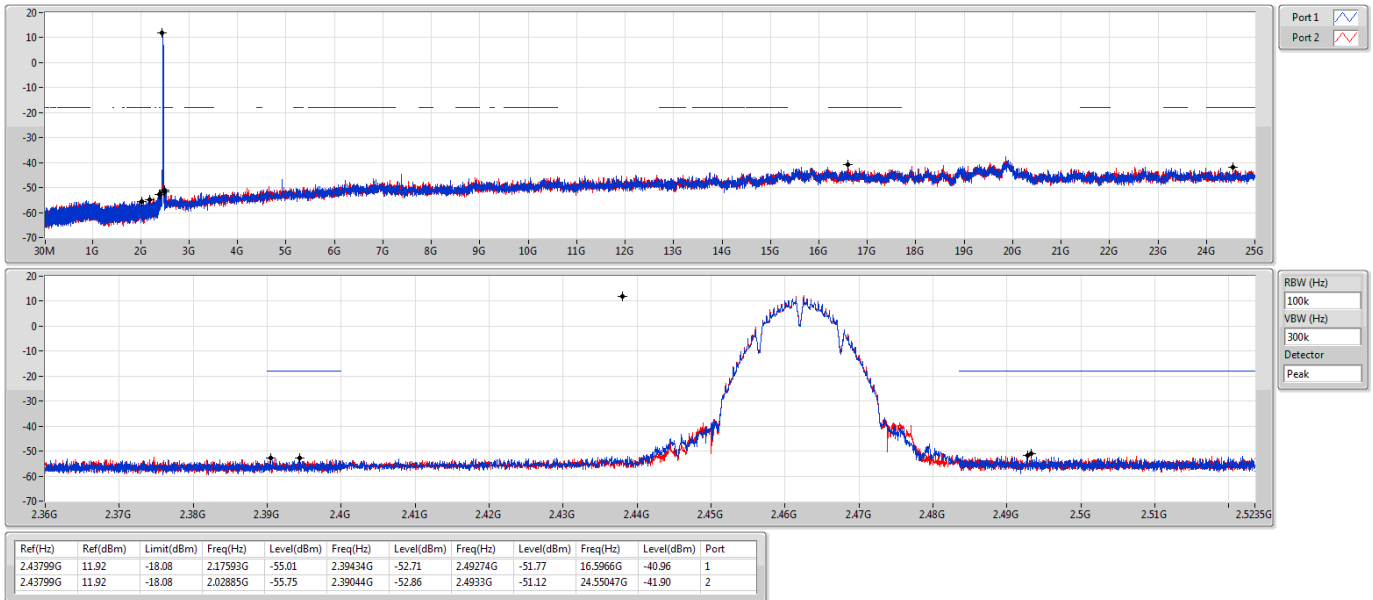


802.11g_Nss1,(6Mbps)_1TX(Port1)

2412MHz

CSE NdB

25/06/2019


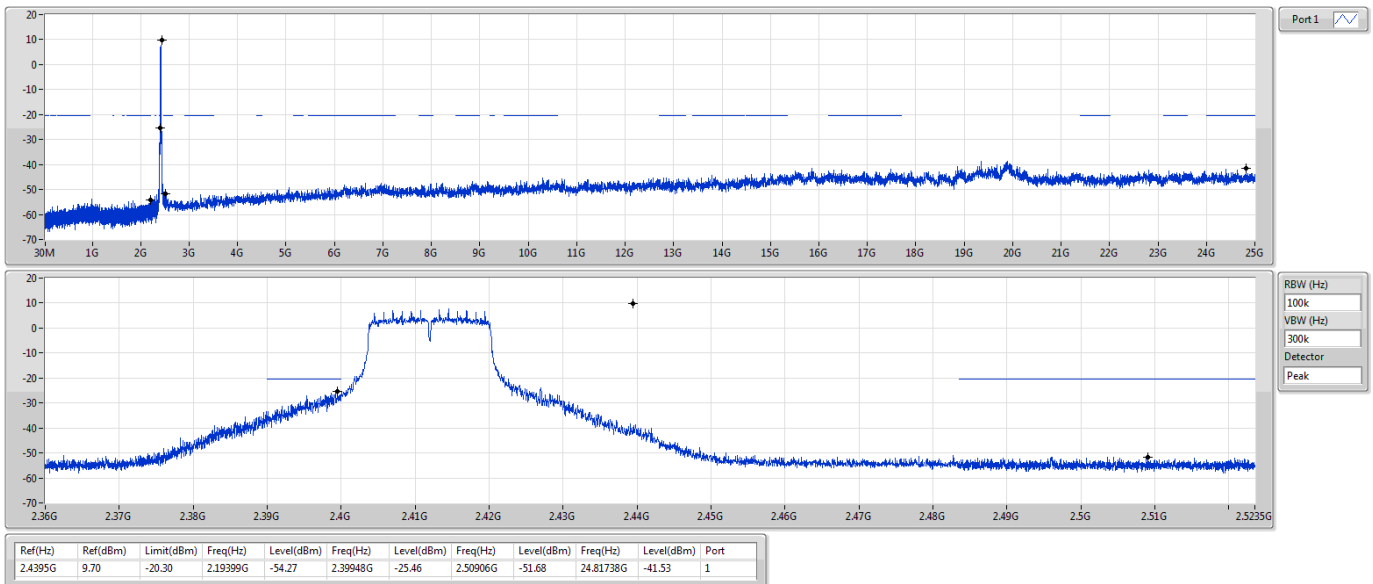


802.11g_Nss1,(6Mbps)_1TX(Port1)

CSE NdB

2437MHz

25/06/2019

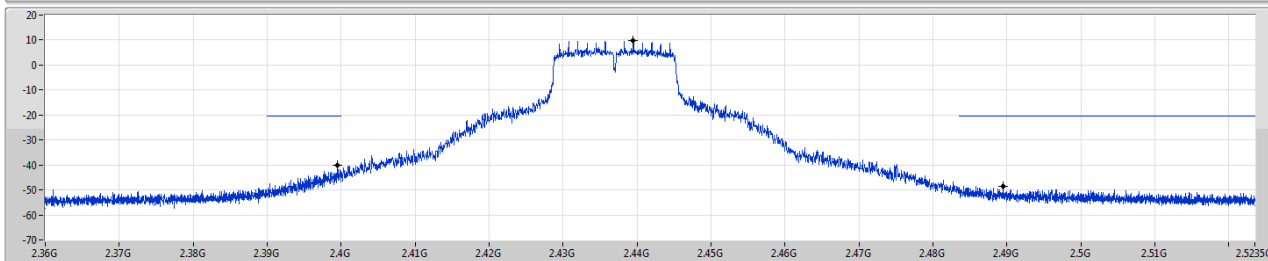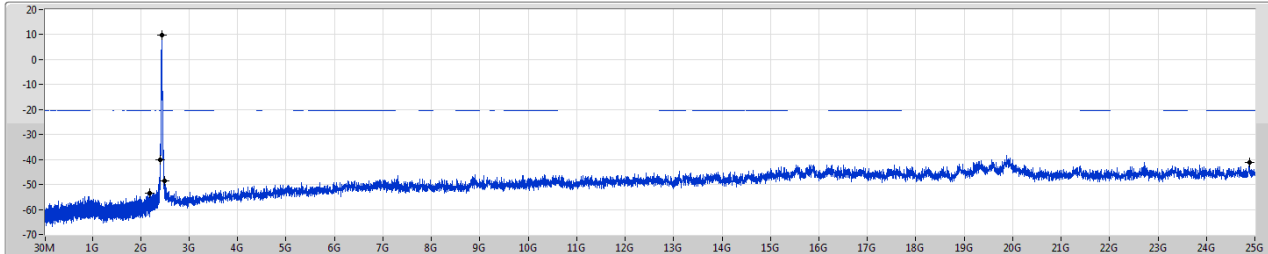



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4395G	9.70	-20.30	2.18292G	-53.46	2.3995G	-40.10	2.48948G	-48.41	2.489324G	-41.13	1

802.11g_Nss1,(6Mbps)_1TX(Port1)

CSE NdB

2462MHz

25/06/2019

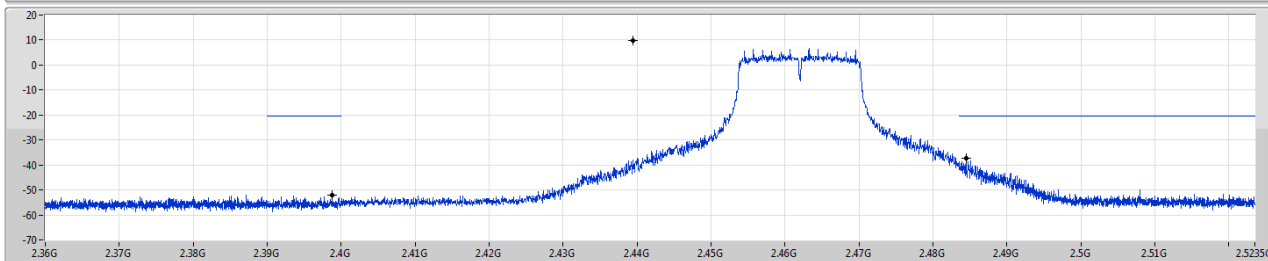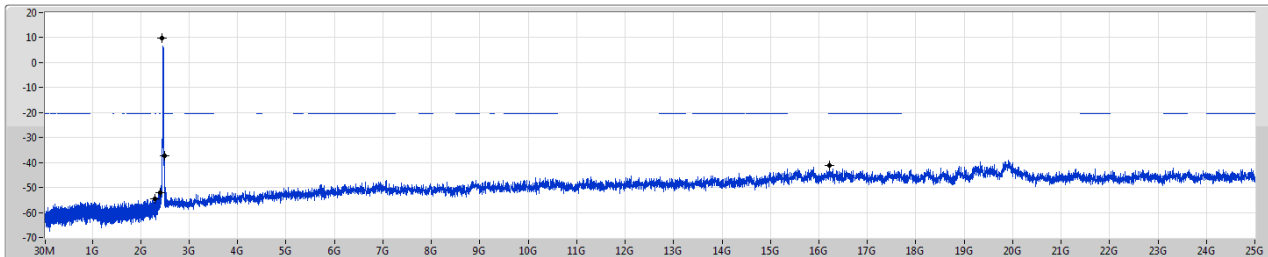


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4395G	9.70	-20.30	2.30059G	-54.44	2.39874G	-52.11	2.48446G	-37.37	16.22574G	-41.00	1

802.11g_Nss1,(6Mbps)_1TX(Port2)


CSE NdB

2412MHz

25/06/2019

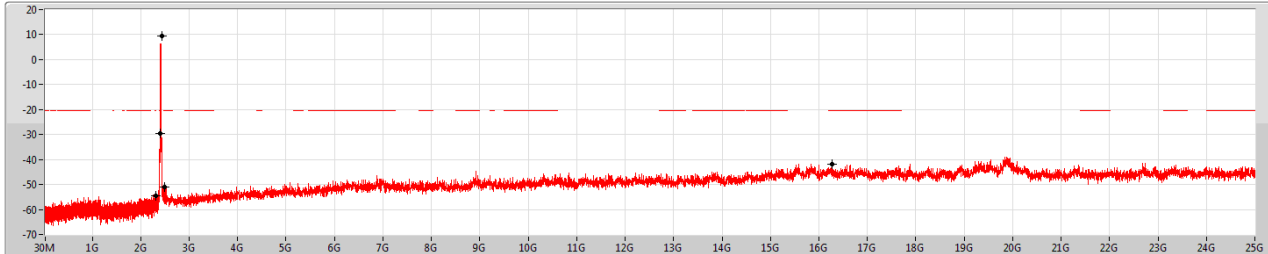

Port 2

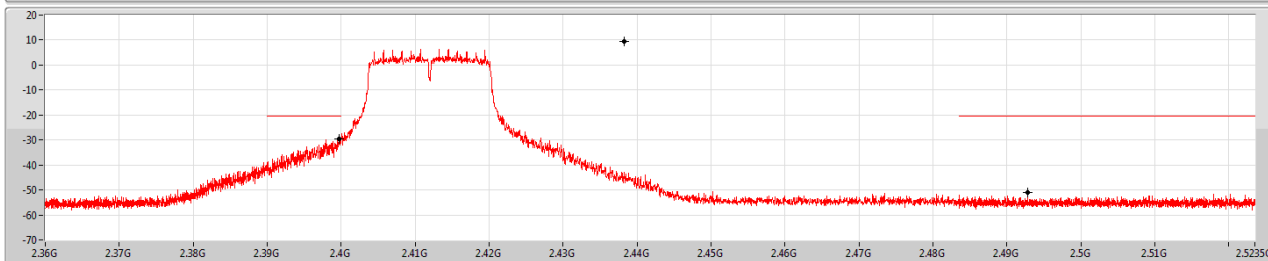

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43824G	9.60	-20.40	2.30641G	-54.70	2.39976G	-29.47	2.4928G	-51.12	16.2735G	-41.96	2

802.11g_Nss1,(6Mbps)_1TX(Port2)


CSE NdB

2437MHz

25/06/2019

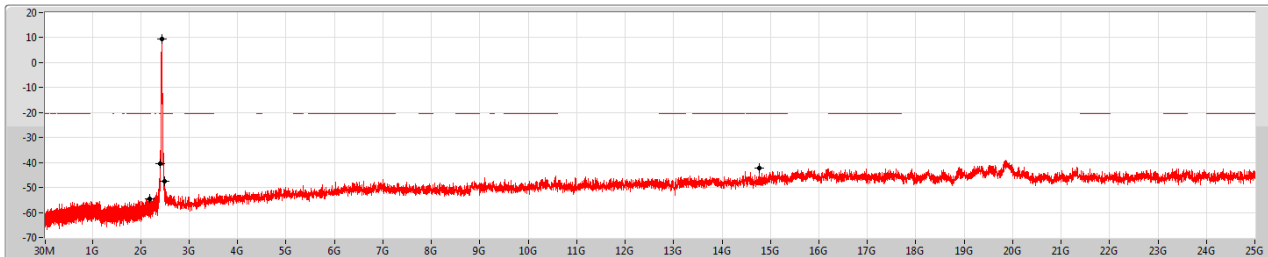

Port 2

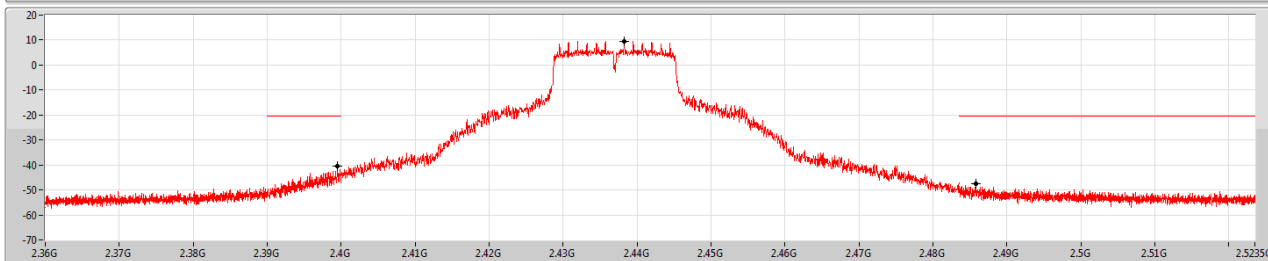


RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43824G	9.60	-20.40	2.1771G	-54.62	2.3995G	-40.64	2.48576G	-47.59	14.76476G	-42.30	2

802.11g_Nss1,(6Mbps)_1TX(Port2)

CSE NdB


2462MHz

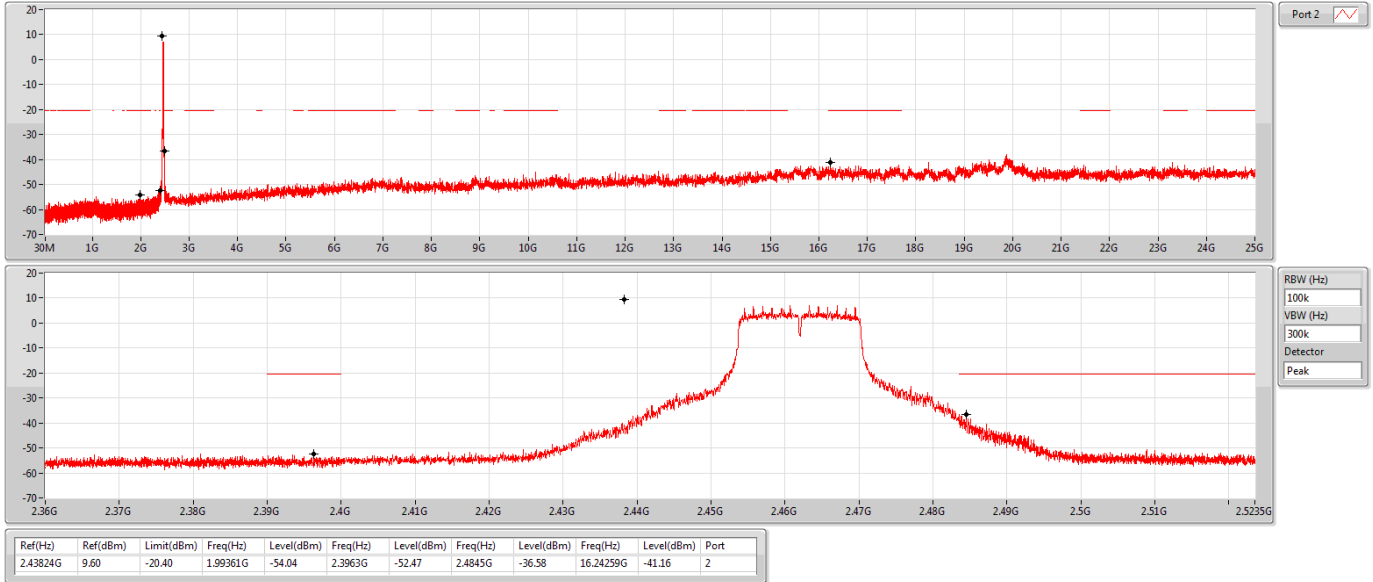

802.11g_Nss1,(6Mbps)_2TX

CSE NdB


2412MHz

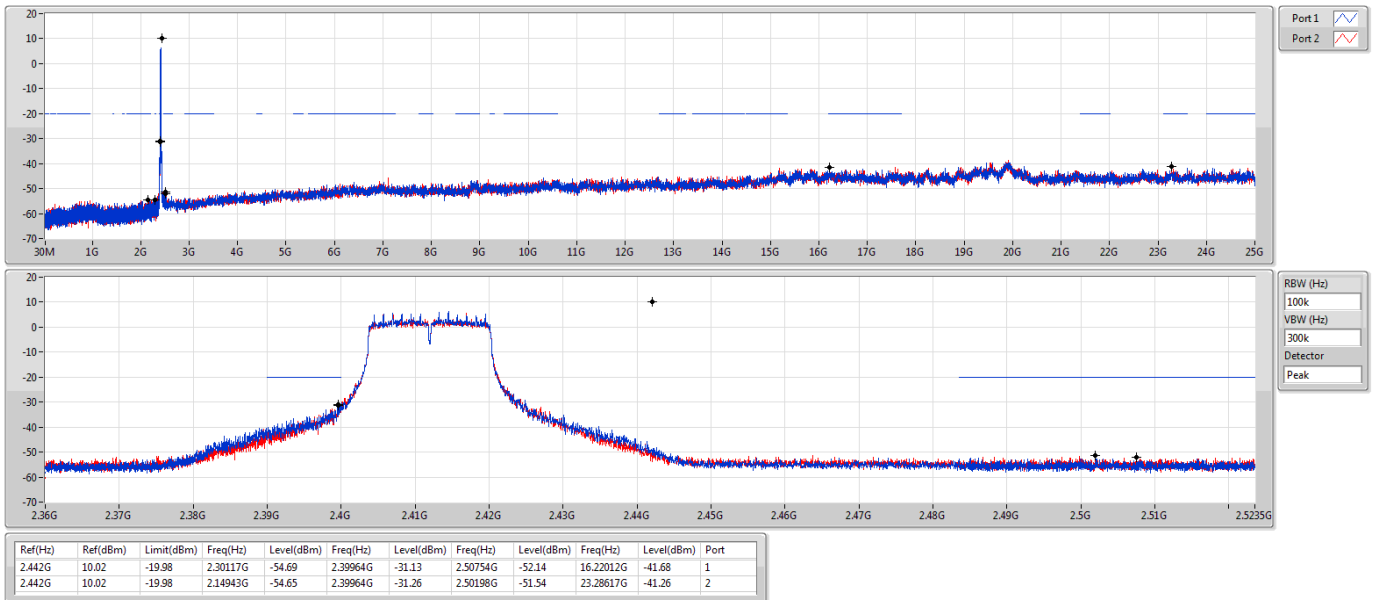

802.11g_Nss1,(6Mbps)_2TX

CSE NdB


2437MHz

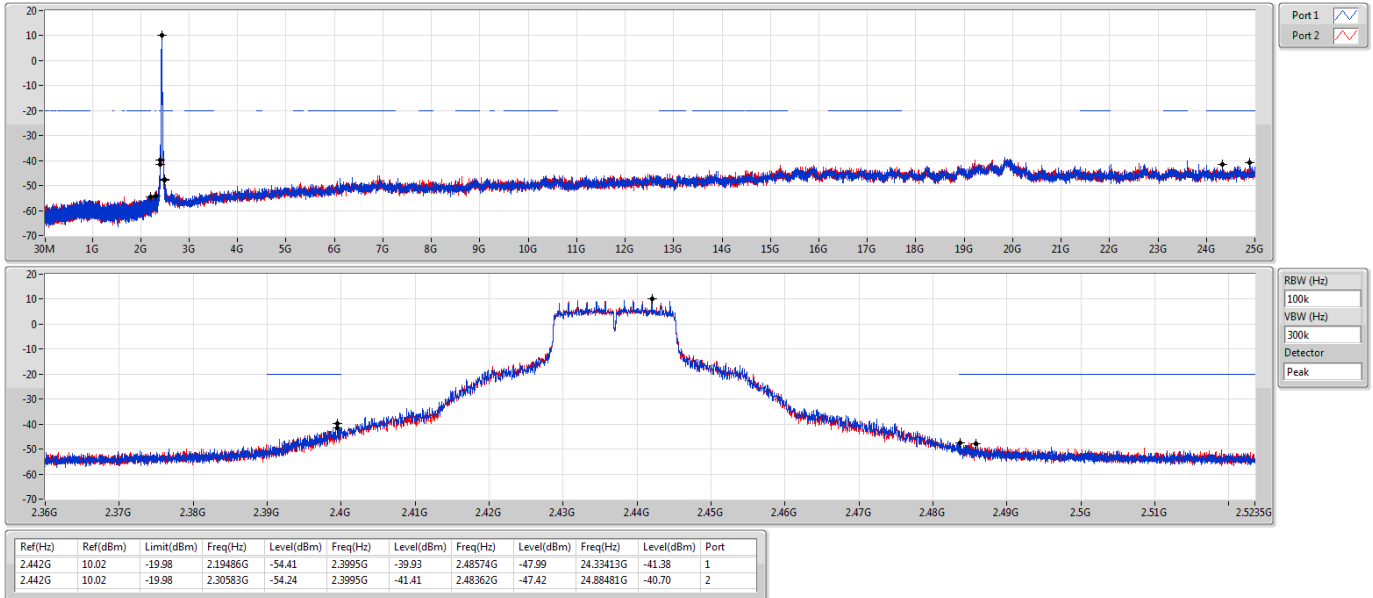

802.11g_Nss1,(6Mbps)_2TX

CSE NdB

2462MHz

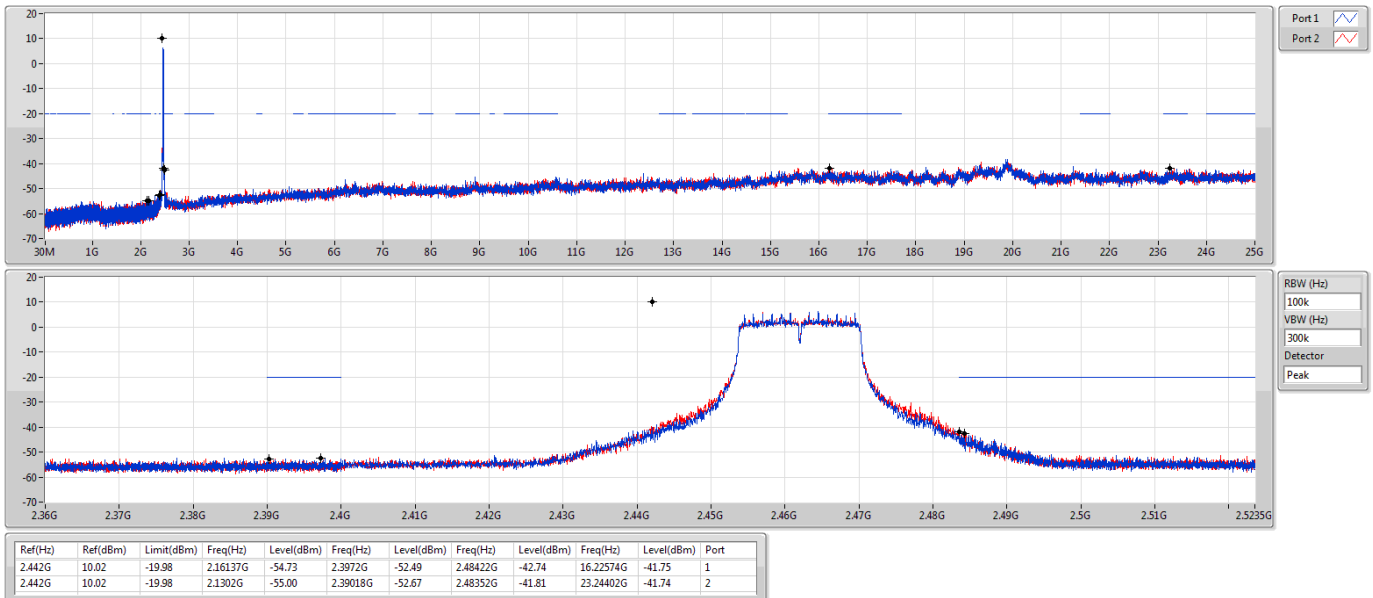


802.11ac VHT20_Nss1,(MCS0)_1TX(Port1)


CSE NdB

2412MHz

25/06/2019

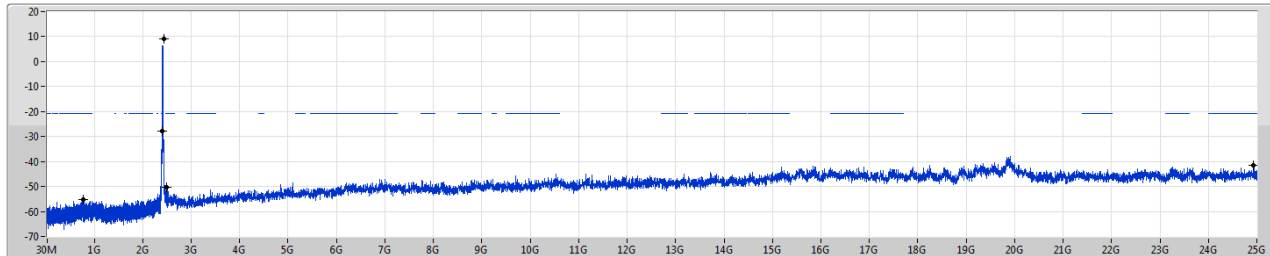

Port1

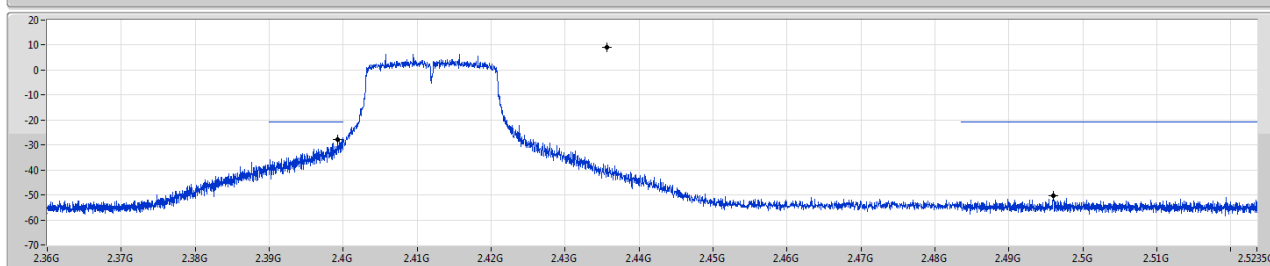

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak


Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4357G	9.19	-20.81	775.02M	-55.24	2.39922G	-27.71	2.49604G	-50.43	2.493538G	-41.64	1

802.11ac VHT20_Nss1,(MCS0)_1TX(Port1)


CSE NdB

2437MHz

25/06/2019

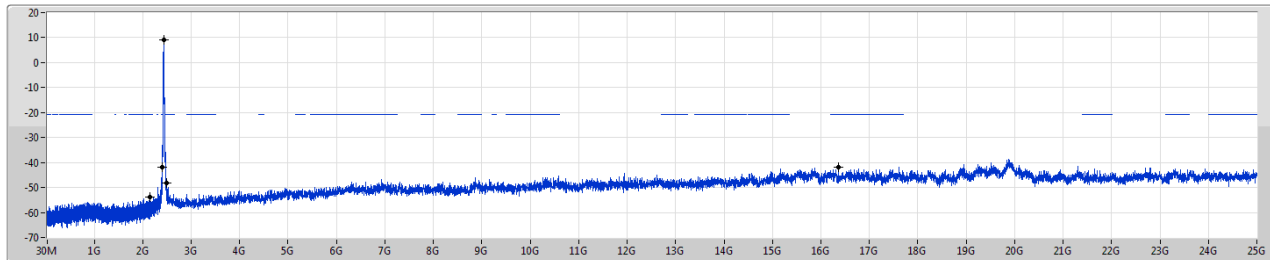

Port1

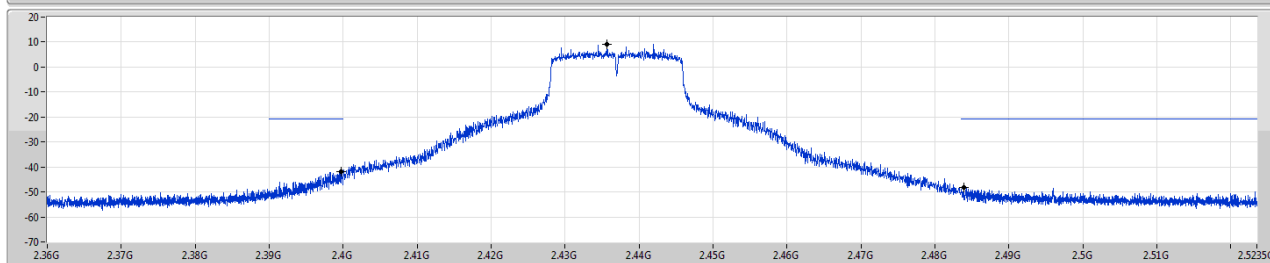

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4357G	9.19	-20.81	2.15409G	-53.80	2.39974G	-42.03	2.48388G	-48.28	16.3606G	-41.73	1

802.11ac VHT20_Nss1,(MCS0)_1TX(Port1)

CSE NdB

2462MHz

25/06/2019

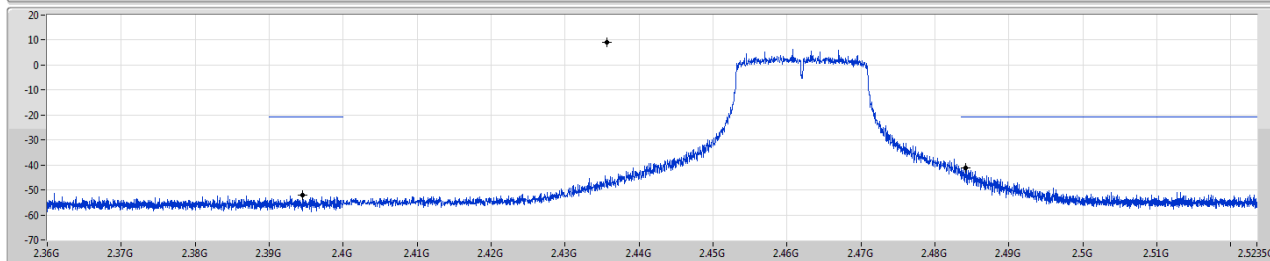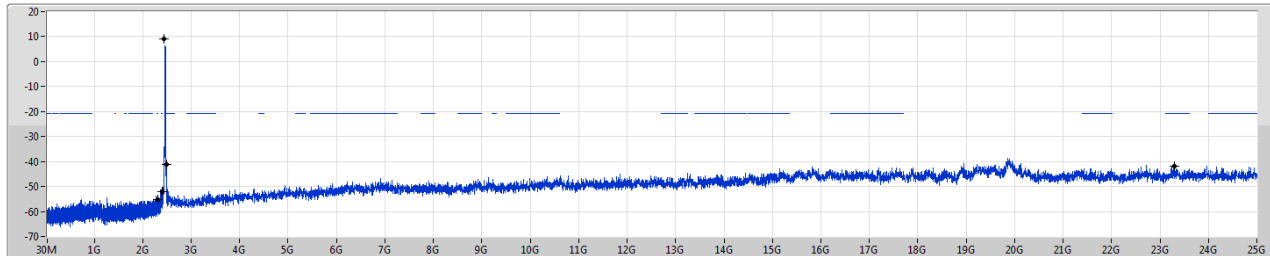

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak



Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.4357G	9.19	-20.81	2.30728G	-55.16	2.39448G	-52.02	2.48414G	-41.05	23.29179G	-42.04	1

802.11ac VHT20_Nss1,(MCS0)_1TX(Port2)

CSE NdB

2412MHz

25/06/2019

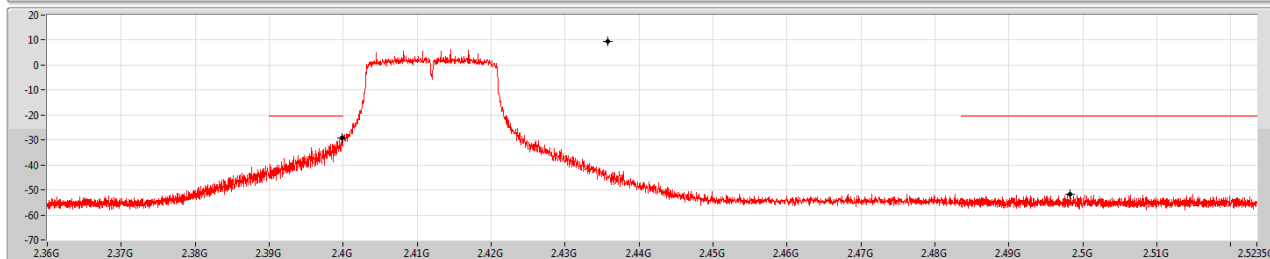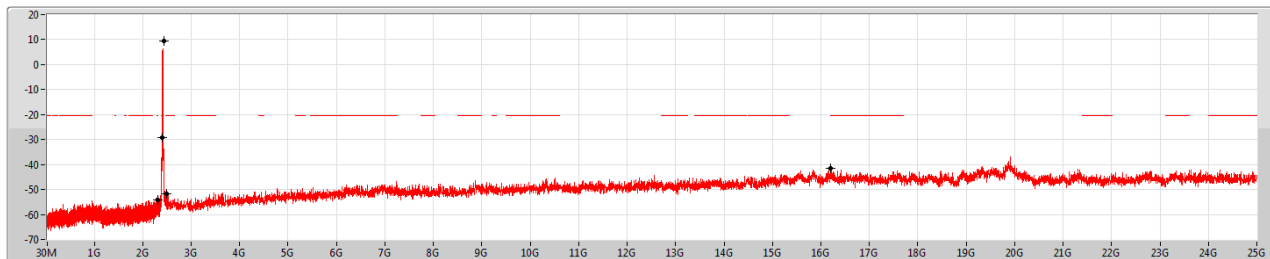

RBW (Hz)
100k
VBW (Hz)
300k
Detector
Peak

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
2.43574G	9.45	-20.55	2.30816G	-54.11	2.39984G	-29.14	2.4983G	-51.87	16.20045G	-41.44	2