


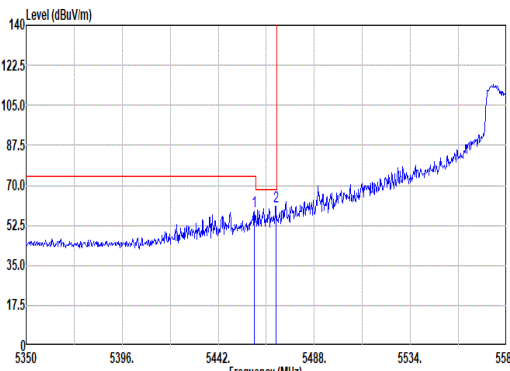
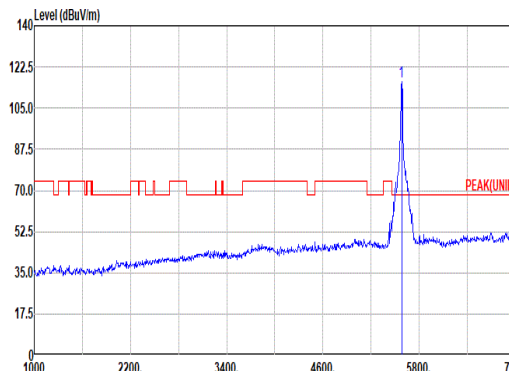



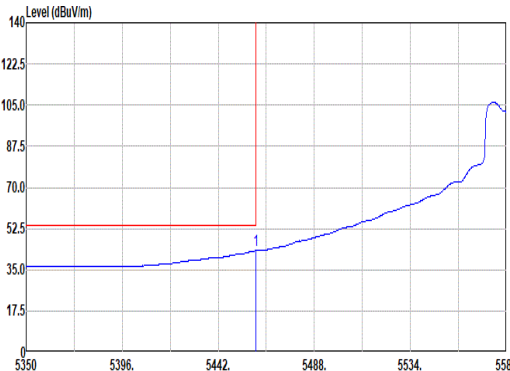


Mode	33																																																															
	Band Edge - L																																																															
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz																																																															
ANT	6+7																																																															
Pol.	Vertical					Fundamental																																																										
Peak																																																																
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto					Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																										
Avg																																																																
	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto					Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto																																																										
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.25</td><td>58.39</td><td>74.00</td><td>-15.61</td><td>50.24</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>113</td><td>29</td><td>PEAK</td></tr><tr><td>2</td><td>5469.60</td><td>60.73</td><td>68.20</td><td>-7.47</td><td>52.56</td><td>32.84</td><td>13.34</td><td>38.01</td><td>0.00</td><td>113</td><td>29</td><td>PEAK</td></tr></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5459.25	58.39	74.00	-15.61	50.24	32.82	13.33	38.00	0.00	113	29	PEAK	2	5469.60	60.73	68.20	-7.47	52.56	32.84	13.34	38.01	0.00	113	29	PEAK
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																			
1	5459.25	58.39	74.00	-15.61	50.24	32.82	13.33	38.00	0.00	113	29	PEAK																																																				
2	5469.60	60.73	68.20	-7.47	52.56	32.84	13.34	38.01	0.00	113	29	PEAK																																																				
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5580.00</td><td>116.45</td><td>-----</td><td>-----</td><td>100.23</td><td>32.76</td><td>13.47</td><td>38.01</td><td>0.00</td><td>113</td><td>29</td><td>PEAK</td></tr></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5580.00	116.45	-----	-----	100.23	32.76	13.47	38.01	0.00	113	29	PEAK													
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																			
1	5580.00	116.45	-----	-----	100.23	32.76	13.47	38.01	0.00	113	29	PEAK																																																				
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.94</td><td>43.20</td><td>54.00</td><td>-10.80</td><td>35.05</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>113</td><td>29</td><td>AVERAGE</td></tr></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5459.94	43.20	54.00	-10.80	35.05	32.82	13.33	38.00	0.00	113	29	AVERAGE													
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																			
1	5459.94	43.20	54.00	-10.80	35.05	32.82	13.33	38.00	0.00	113	29	AVERAGE																																																				
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5580.00</td><td>107.86</td><td>-----</td><td>-----</td><td>99.60</td><td>32.81</td><td>13.46</td><td>38.01</td><td>0.00</td><td>113</td><td>29</td><td>AVERAGE</td></tr></table>												Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5580.00	107.86	-----	-----	99.60	32.81	13.46	38.01	0.00	113	29	AVERAGE													
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																			
1	5580.00	107.86	-----	-----	99.60	32.81	13.46	38.01	0.00	113	29	AVERAGE																																																				



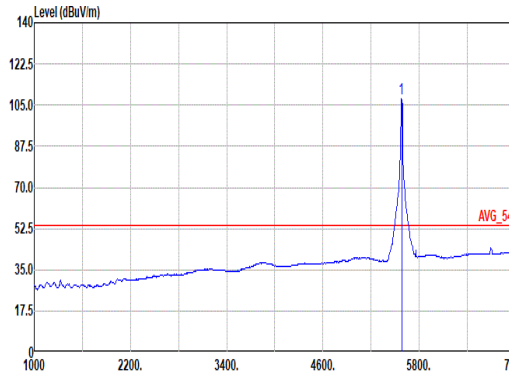


Mode	33																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz																																													
ANT	6+7																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5727.26</td><td>55.40</td><td>68.20</td><td>-12.80</td><td>46.21</td><td>33.51</td><td>13.66</td><td>37.98</td><td>0.00</td><td>113</td><td>29</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5727.26	55.40	68.20	-12.80	46.21	33.51	13.66	37.98	0.00	113	29	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5727.26	55.40	68.20	-12.80	46.21	33.51	13.66	37.98	0.00	113	29	PEAK																																		



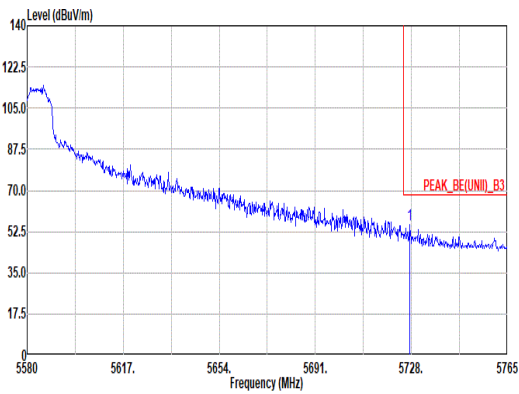


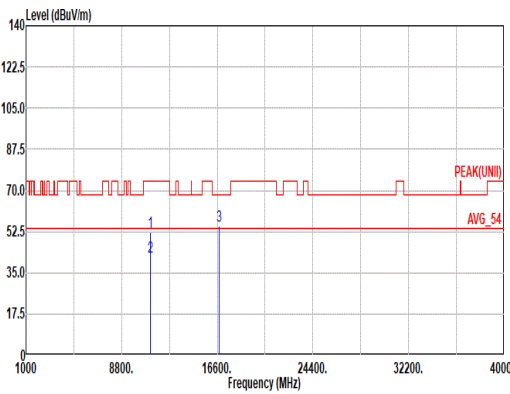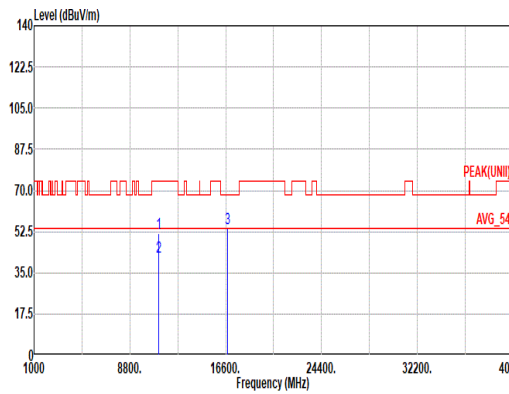Mode	33												
	Harmonic												
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full RU_5580MHz												
ANT	6+7												
Pol.	Horizontal						Vertical						
Peak Avg													
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
	1 11160.00	52.44	74.00	-21.56	35.48	38.98	19.18	42.11	0.91	103	67	PEAK	
	2 11160.00	41.60	54.00	-12.40	24.64	38.98	19.18	42.11	0.91	103	67	Average	
	3 16740.00	54.69	68.20	-13.51	34.89	39.32	23.72	44.20	0.96	--	--	PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
	1 11160.00	51.84	74.00	-22.16	34.88	38.98	19.18	42.11	0.91	400	240	PEAK	
	2 11160.00	41.75	54.00	-12.25	24.79	38.98	19.18	42.11	0.91	400	240	Average	
	3 16740.00	54.09	68.20	-14.11	34.29	39.32	23.72	44.20	0.96	--	--	PEAK	

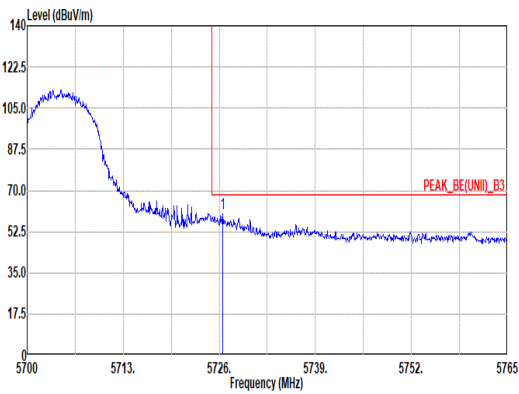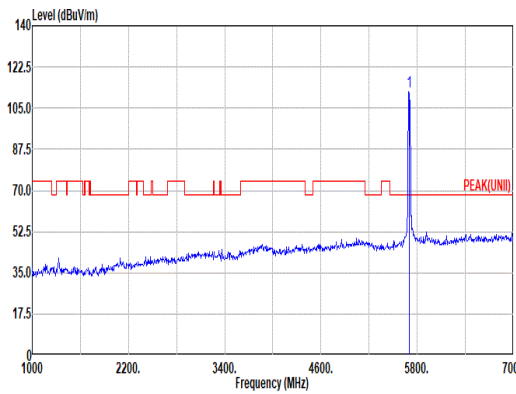
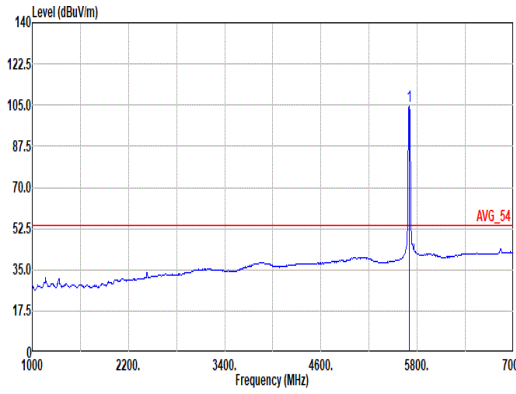


Mode	34																																																																																																			
	Band Edge																																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz																																																																																																			
ANT	6+7																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5726.46</td><td>60.26</td><td>68.20</td><td>-7.94</td><td>51.07</td><td>33.51</td><td>13.66</td><td>37.98</td><td>0.00</td><td>206</td><td>304</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5726.46	60.26	68.20	-7.94	51.07	33.51	13.66	37.98	0.00	206	304	PEAK	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>111.78</td><td>-----</td><td>-----</td><td>102.81</td><td>33.34</td><td>13.61</td><td>37.98</td><td>0.00</td><td>206</td><td>304</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	111.78	-----	-----	102.81	33.34	13.61	37.98	0.00	206	304	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5726.46	60.26	68.20	-7.94	51.07	33.51	13.66	37.98	0.00	206	304	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5700.00	111.78	-----	-----	102.81	33.34	13.61	37.98	0.00	206	304	PEAK																																																																																								
Avg	Blank						 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>104.38</td><td>-----</td><td>-----</td><td>95.31</td><td>33.42</td><td>13.63</td><td>37.98</td><td>0.00</td><td>206</td><td>304</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	104.38	-----	-----	95.31	33.42	13.63	37.98	0.00	206	304	AVERAGE																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5700.00	104.38	-----	-----	95.31	33.42	13.63	37.98	0.00	206	304	AVERAGE																																																																																								

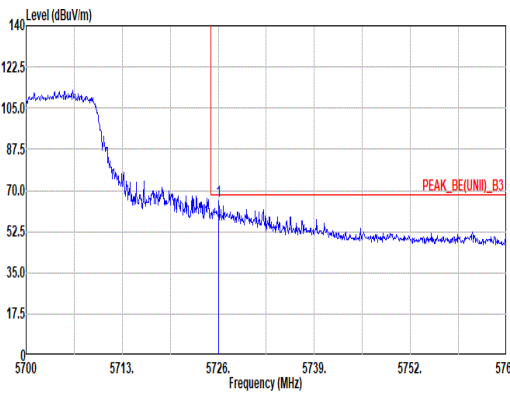
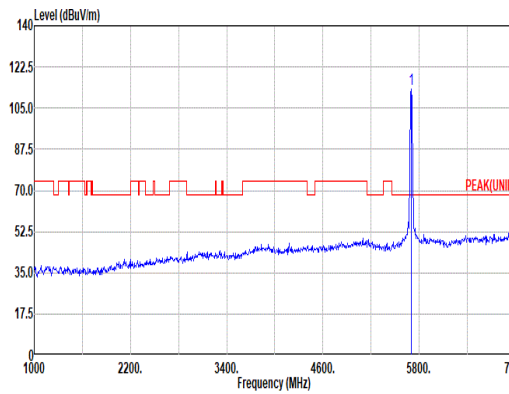
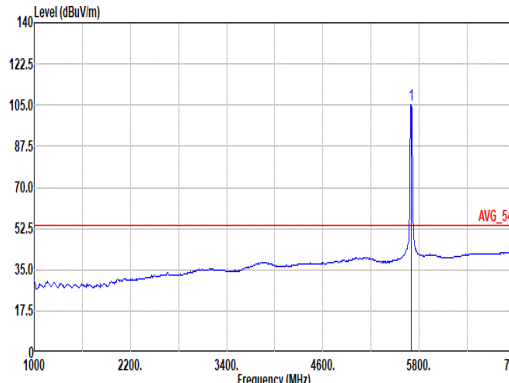


	34																																																																																																		
Mode	Band Edge																																																																																																		
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz																																																																																																		
ANT	6+7																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5726.07</td><td>65.36</td><td>68.20</td><td>-2.84</td><td>56.18</td><td>33.50</td><td>13.66</td><td>37.98</td><td>0.00</td><td>100</td><td>22</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5726.07	65.36	68.20	-2.84	56.18	33.50	13.66	37.98	0.00	100	22	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>113.24</td><td>-----</td><td>-----</td><td>104.22</td><td>33.38</td><td>13.62</td><td>37.98</td><td>0.00</td><td>125</td><td>22</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	113.24	-----	-----	104.22	33.38	13.62	37.98	0.00	125	22
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5726.07	65.36	68.20	-2.84	56.18	33.50	13.66	37.98	0.00	100	22	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5700.00	113.24	-----	-----	104.22	33.38	13.62	37.98	0.00	125	22	PEAK																																																																																							
Avg	Blank																																																																																																		
							Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>105.22</td><td>-----</td><td>-----</td><td>96.20</td><td>33.38</td><td>13.62</td><td>37.98</td><td>0.00</td><td>125</td><td>22</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	105.22	-----	-----	96.20	33.38	13.62	37.98	0.00	125	22	AVERAGE																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5700.00	105.22	-----	-----	96.20	33.38	13.62	37.98	0.00	125	22	AVERAGE																																																																																							


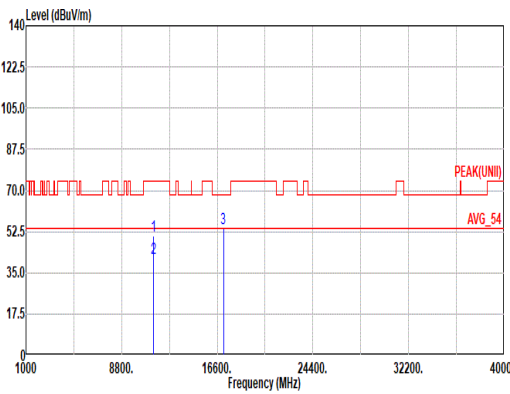
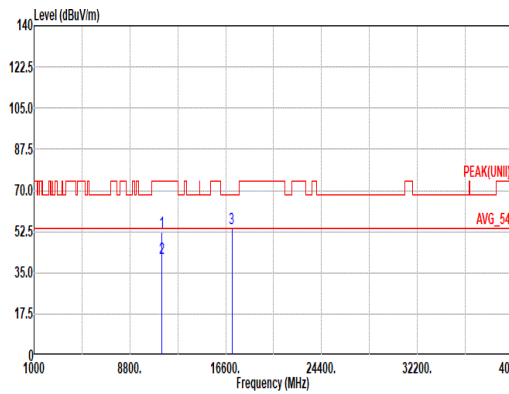


Mode	34																																																																																			
	Harmonic																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full RU_5700MHz																																																																																			
ANT	6+7																																																																																			
Pol.	Horizontal							Vertical																																																																												
Peak Avg																																																																																				
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL							Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL																																																																												
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11400.00</td><td>50.93</td><td>74.00</td><td>-23.07</td><td>33.89</td><td>39.10</td><td>19.39</td><td>42.37</td><td>0.92</td><td>293</td><td>335</td><td>PEAK</td><td></td></tr><tr><td>2</td><td>11400.00</td><td>41.25</td><td>54.00</td><td>-12.75</td><td>24.21</td><td>39.10</td><td>19.39</td><td>42.37</td><td>0.92</td><td>293</td><td>335</td><td>Average</td><td></td></tr><tr><td>3</td><td>17100.00</td><td>53.72</td><td>68.20</td><td>-14.48</td><td>34.09</td><td>39.20</td><td>23.97</td><td>44.49</td><td>0.95</td><td>--</td><td>--</td><td>PEAK</td><td></td></tr></table>																Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11400.00	50.93	74.00	-23.07	33.89	39.10	19.39	42.37	0.92	293	335	PEAK		2	11400.00	41.25	54.00	-12.75	24.21	39.10	19.39	42.37	0.92	293	335	Average		3	17100.00	53.72	68.20	-14.48	34.09	39.20	23.97	44.49	0.95	--	--	PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1	11400.00	50.93	74.00	-23.07	33.89	39.10	19.39	42.37	0.92	293	335	PEAK																																																																								
2	11400.00	41.25	54.00	-12.75	24.21	39.10	19.39	42.37	0.92	293	335	Average																																																																								
3	17100.00	53.72	68.20	-14.48	34.09	39.20	23.97	44.49	0.95	--	--	PEAK																																																																								

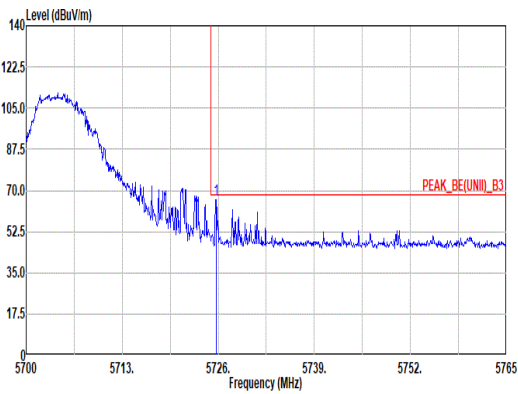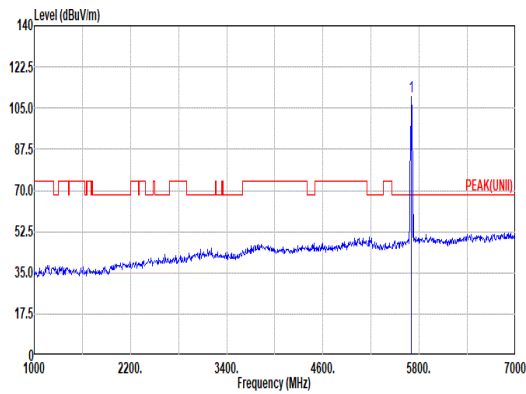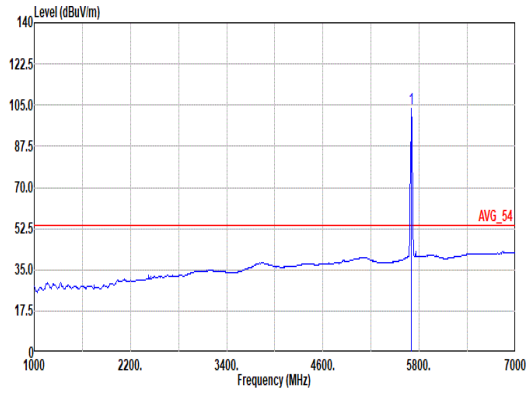

Mode	35																																																																																																		
	Band Edge																																																																																																		
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial_106/54RU_5700MHz																																																																																																		
ANT	6+7																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.74</td><td>66.19</td><td>68.20</td><td>-2.01</td><td>56.00</td><td>33.65</td><td>13.66</td><td>37.92</td><td>0.00</td><td>196</td><td>307</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5725.74	66.19	68.20	-2.01	56.00	33.65	13.66	37.92	0.00	196	307	PEAK	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>110.04</td><td>-----</td><td>-----</td><td>100.72</td><td>33.61</td><td>13.63</td><td>37.92</td><td>0.00</td><td>196</td><td>307</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	110.04	-----	-----	100.72	33.61	13.63	37.92	0.00	196	307
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5725.74	66.19	68.20	-2.01	56.00	33.65	13.66	37.92	0.00	196	307	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5700.00	110.04	-----	-----	100.72	33.61	13.63	37.92	0.00	196	307	PEAK																																																																																							
Avg	Blank																																																																																																		
							Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.120kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>103.29</td><td>-----</td><td>-----</td><td>93.97</td><td>33.61</td><td>13.63</td><td>37.92</td><td>0.00</td><td>196</td><td>307</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	103.29	-----	-----	93.97	33.61	13.63	37.92	0.00	196	307	AVERAGE																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5700.00	103.29	-----	-----	93.97	33.61	13.63	37.92	0.00	196	307	AVERAGE																																																																																							

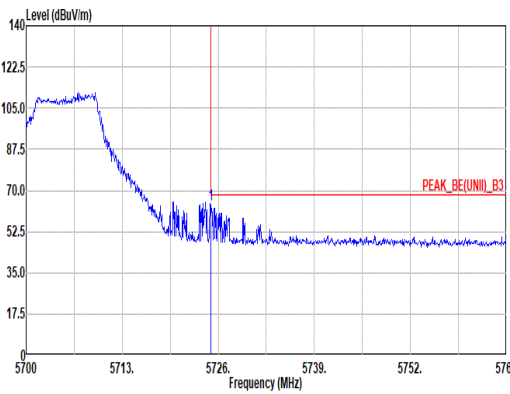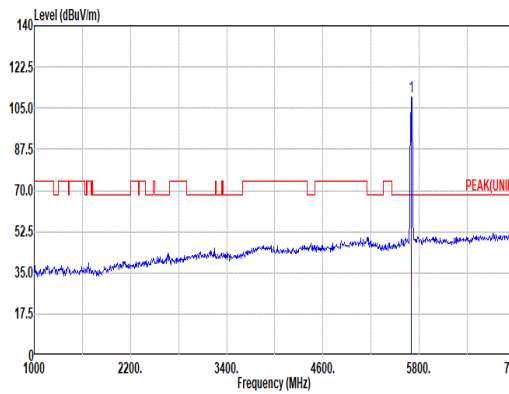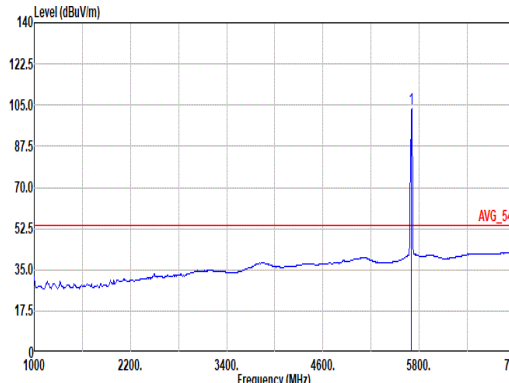


Mode	35																																																																																																
	Band Edge																																																																																																
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial_106/54RU_5700MHz																																																																																																
ANT	6+7																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.03</td><td>63.69</td><td>68.20</td><td>-4.51</td><td>54.30</td><td>33.65</td><td>13.66</td><td>37.92</td><td>0.00</td><td>150</td><td>0 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5725.03	63.69	68.20	-4.51	54.30	33.65	13.66	37.92	0.00	150	0 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>109.91</td><td>-----</td><td>-----</td><td>100.59</td><td>33.61</td><td>13.63</td><td>37.92</td><td>0.00</td><td>150</td><td>0 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	109.91	-----	-----	100.59	33.61	13.63	37.92	0.00	150	0 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5725.03	63.69	68.20	-4.51	54.30	33.65	13.66	37.92	0.00	150	0 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5700.00	109.91	-----	-----	100.59	33.61	13.63	37.92	0.00	150	0 PEAK																																																																																						
Avg	Blank						 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.120kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>103.57</td><td>-----</td><td>-----</td><td>94.23</td><td>33.62</td><td>13.64</td><td>37.92</td><td>0.00</td><td>150</td><td>0 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	103.57	-----	-----	94.23	33.62	13.64	37.92	0.00	150	0 AVERAGE																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5700.00	103.57	-----	-----	94.23	33.62	13.64	37.92	0.00	150	0 AVERAGE																																																																																						







Mode	36																																																																																																					
	Band Edge - L																																																																																																					
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																																					
ANT	6+7																																																																																																					
Pol.	Horizontal						Fundamental																																																																																															
Peak	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02030_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5450.32</td><td>52.38</td><td>74.00</td><td>-21.62</td><td>44.23</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>100</td><td>117</td><td>PEAK</td></tr><tr><td>2</td><td>5468.08</td><td>56.08</td><td>68.20</td><td>-12.12</td><td>47.91</td><td>32.84</td><td>13.34</td><td>38.01</td><td>0.00</td><td>100</td><td>117</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5450.32	52.38	74.00	-21.62	44.23	32.82	13.33	38.00	0.00	100	117	PEAK	2	5468.08	56.08	68.20	-12.12	47.91	32.84	13.34	38.01	0.00	100	117	PEAK	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02030_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>104.38</td><td>-----</td><td>-----</td><td>96.11</td><td>32.90</td><td>13.40</td><td>38.03</td><td>0.00</td><td>100</td><td>117</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5510.00	104.38	-----	-----	96.11	32.90	13.40	38.03	0.00	100	117	PEAK
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	5450.32	52.38	74.00	-21.62	44.23	32.82	13.33	38.00	0.00	100	117	PEAK																																																																																										
2	5468.08	56.08	68.20	-12.12	47.91	32.84	13.34	38.01	0.00	100	117	PEAK																																																																																										
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	5510.00	104.38	-----	-----	96.11	32.90	13.40	38.03	0.00	100	117	PEAK																																																																																										
Avg	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02030_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5459.92</td><td>42.24</td><td>54.00</td><td>-11.76</td><td>34.09</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>100</td><td>117</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.92	42.24	54.00	-11.76	34.09	32.82	13.33	38.00	0.00	100	117	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02030_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>97.60</td><td>-----</td><td>-----</td><td>89.33</td><td>32.90</td><td>13.40</td><td>38.03</td><td>0.00</td><td>100</td><td>117</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5510.00	97.60	-----	-----	89.33	32.90	13.40	38.03	0.00	100	117	AVERAGE													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	5459.92	42.24	54.00	-11.76	34.09	32.82	13.33	38.00	0.00	100	117	AVERAGE																																																																																										
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	5510.00	97.60	-----	-----	89.33	32.90	13.40	38.03	0.00	100	117	AVERAGE																																																																																										

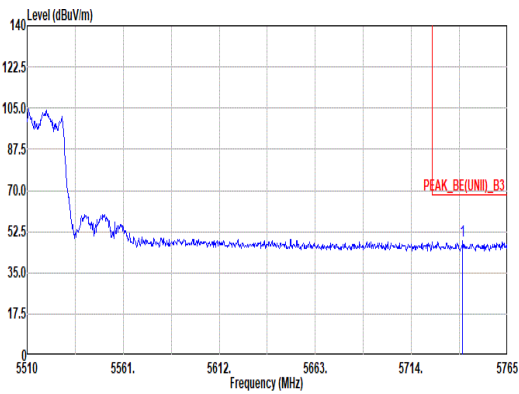


Mode	36																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																													
ANT	6+7																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5714.29</td><td>48.43</td><td>68.20</td><td>-19.77</td><td>39.15</td><td>33.57</td><td>13.68</td><td>37.97</td><td>0.00</td><td>100</td><td>117</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5714.29	48.43	68.20	-19.77	39.15	33.57	13.68	37.97	0.00	100	117	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5714.29	48.43	68.20	-19.77	39.15	33.57	13.68	37.97	0.00	100	117	PEAK																																		

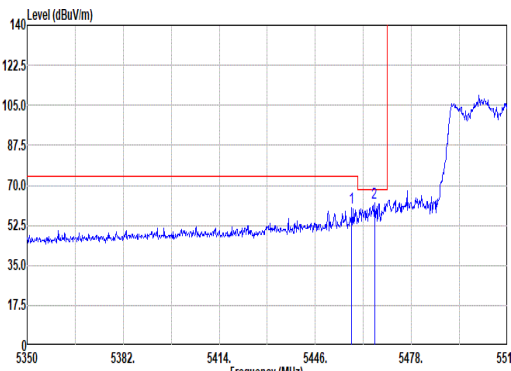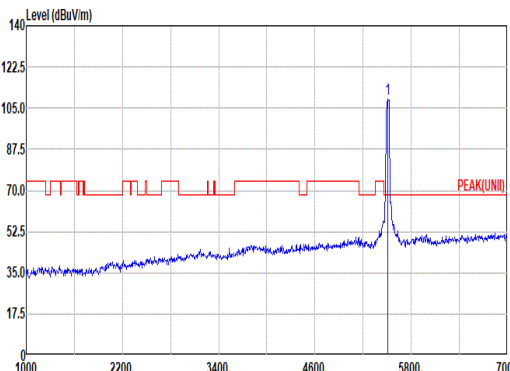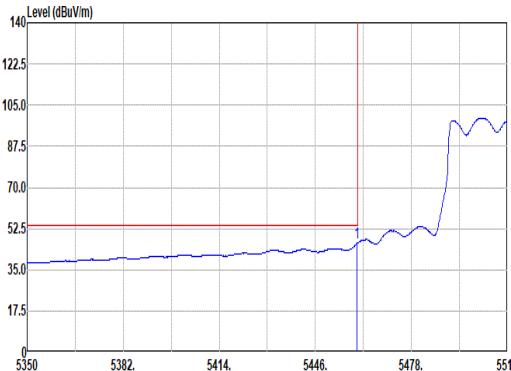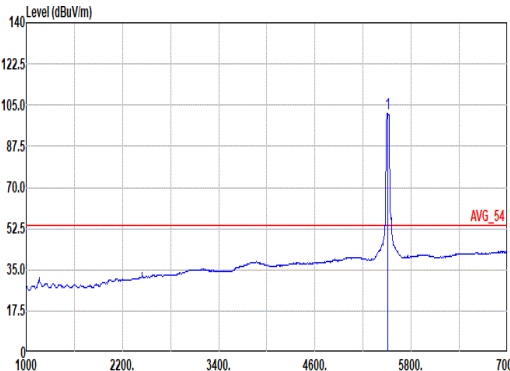

Mode	36																																																																																																												
	Band Edge - L																																																																																																												
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																																												
ANT	6+7																																																																																																												
Pol.	Vertical						Fundamental																																																																																																						
Peak																																																																																																													
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th></th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5458.16</td><td>60.35</td><td>74.00</td><td>-13.65</td><td></td><td>52.20</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>142</td><td>49</td><td>PEAK</td></tr><tr><td>2</td><td>5465.68</td><td>62.35</td><td>68.20</td><td>-5.85</td><td></td><td>54.19</td><td>32.83</td><td>13.34</td><td>38.01</td><td>0.00</td><td>142</td><td>49</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m			dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5458.16	60.35	74.00	-13.65		52.20	32.82	13.33	38.00	0.00	142	49	PEAK	2	5465.68	62.35	68.20	-5.85		54.19	32.83	13.34	38.01	0.00	142	49	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th></th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>108.68</td><td>-----</td><td>-----</td><td></td><td>100.42</td><td>32.90</td><td>13.39</td><td>38.03</td><td>0.00</td><td>142</td><td>49</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m			dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5510.00	108.68	-----	-----		100.42	32.90	13.39	38.03	0.00	142	49
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
	MHz	dBuV/m	dBuV/m			dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																
1	5458.16	60.35	74.00	-13.65		52.20	32.82	13.33	38.00	0.00	142	49	PEAK																																																																																																
2	5465.68	62.35	68.20	-5.85		54.19	32.83	13.34	38.01	0.00	142	49	PEAK																																																																																																
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
	MHz	dBuV/m	dBuV/m			dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																
1	5510.00	108.68	-----	-----		100.42	32.90	13.39	38.03	0.00	142	49	PEAK																																																																																																
Avg																																																																																																													
	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th></th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.92</td><td>46.24</td><td>54.00</td><td>-7.76</td><td></td><td>38.09</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>142</td><td>49</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m			dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5459.92	46.24	54.00	-7.76		38.09	32.82	13.33	38.00	0.00	142	49	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th></th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>101.38</td><td>-----</td><td>-----</td><td></td><td>93.13</td><td>32.90</td><td>13.38</td><td>38.03</td><td>0.00</td><td>142</td><td>49</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m			dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5510.00	101.38	-----	-----		93.13	32.90	13.38	38.03	0.00	142	49	AVERAGE													
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
	MHz	dBuV/m	dBuV/m			dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																
1	5459.92	46.24	54.00	-7.76		38.09	32.82	13.33	38.00	0.00	142	49	AVERAGE																																																																																																
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
	MHz	dBuV/m	dBuV/m			dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																
1	5510.00	101.38	-----	-----		93.13	32.90	13.38	38.03	0.00	142	49	AVERAGE																																																																																																




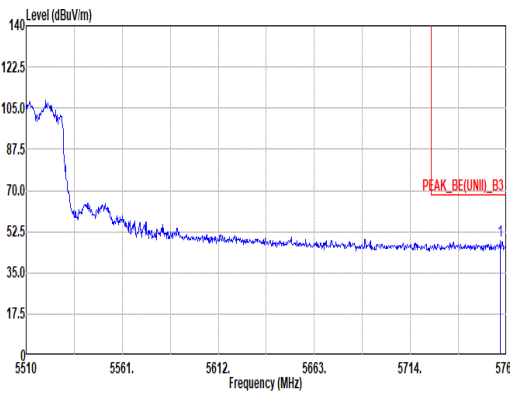


Mode	36																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																													
ANT	6+7																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5761.69</td><td>48.75</td><td>68.20</td><td>-19.45</td><td>39.34</td><td>33.67</td><td>13.71</td><td>37.97</td><td>0.00</td><td>142</td><td>49</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5761.69	48.75	68.20	-19.45	39.34	33.67	13.71	37.97	0.00	142	49	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5761.69	48.75	68.20	-19.45	39.34	33.67	13.71	37.97	0.00	142	49	PEAK																																		




		36																																																																																																																																																							
Mode		Harmonic																																																																																																																																																							
		U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full RU_5510MHz																																																																																																																																																							
ANT		6+7																																																																																																																																																							
Pol.		Horizontal							Vertical																																																																																																																																																
Peak Avg																																																																																																																																																									
		Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>11020.00</td><td>51.15</td><td>74.00</td><td>-22.85</td><td>34.33</td><td>38.80</td><td>19.07</td><td>41.96</td><td>0.91</td><td>300</td><td>304</td><td>PEAK</td><td></td></tr><tr><td>2</td><td>11020.00</td><td>40.77</td><td>54.00</td><td>-13.23</td><td>23.95</td><td>38.80</td><td>19.07</td><td>41.96</td><td>0.91</td><td>300</td><td>304</td><td>Average</td><td></td></tr><tr><td>3</td><td>16530.00</td><td>53.50</td><td>68.20</td><td>-14.70</td><td>33.85</td><td>39.14</td><td>23.57</td><td>44.02</td><td>0.96</td><td>--</td><td>--</td><td>PEAK</td><td></td></tr></tbody></table> Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>11020.00</td><td>51.54</td><td>74.00</td><td>-22.46</td><td>34.72</td><td>38.80</td><td>19.07</td><td>41.96</td><td>0.91</td><td>400</td><td>320</td><td>PEAK</td><td></td></tr><tr><td>2</td><td>11020.00</td><td>40.80</td><td>54.00</td><td>-13.20</td><td>23.98</td><td>38.80</td><td>19.07</td><td>41.96</td><td>0.91</td><td>400</td><td>320</td><td>Average</td><td></td></tr><tr><td>3</td><td>16530.00</td><td>53.23</td><td>68.20</td><td>-14.97</td><td>33.58</td><td>39.14</td><td>23.57</td><td>44.02</td><td>0.96</td><td>--</td><td>--</td><td>PEAK</td><td></td></tr></tbody></table>															Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11020.00	51.15	74.00	-22.85	34.33	38.80	19.07	41.96	0.91	300	304	PEAK		2	11020.00	40.77	54.00	-13.23	23.95	38.80	19.07	41.96	0.91	300	304	Average		3	16530.00	53.50	68.20	-14.70	33.85	39.14	23.57	44.02	0.96	--	--	PEAK			Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11020.00	51.54	74.00	-22.46	34.72	38.80	19.07	41.96	0.91	400	320	PEAK		2	11020.00	40.80	54.00	-13.20	23.98	38.80	19.07	41.96	0.91	400	320	Average		3	16530.00	53.23	68.20	-14.97	33.58	39.14	23.57	44.02	0.96	--	--
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																													
1	11020.00	51.15	74.00	-22.85	34.33	38.80	19.07	41.96	0.91	300	304	PEAK																																																																																																																																													
2	11020.00	40.77	54.00	-13.23	23.95	38.80	19.07	41.96	0.91	300	304	Average																																																																																																																																													
3	16530.00	53.50	68.20	-14.70	33.85	39.14	23.57	44.02	0.96	--	--	PEAK																																																																																																																																													
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																													
1	11020.00	51.54	74.00	-22.46	34.72	38.80	19.07	41.96	0.91	400	320	PEAK																																																																																																																																													
2	11020.00	40.80	54.00	-13.20	23.98	38.80	19.07	41.96	0.91	400	320	Average																																																																																																																																													
3	16530.00	53.23	68.20	-14.97	33.58	39.14	23.57	44.02	0.96	--	--	PEAK																																																																																																																																													

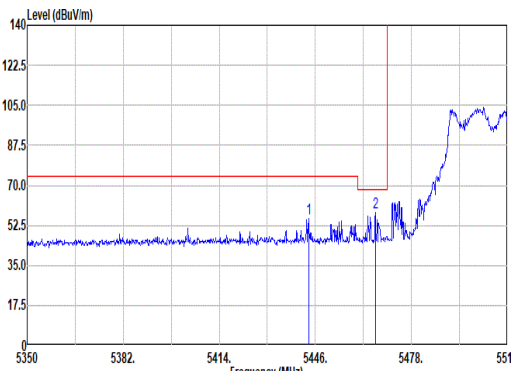
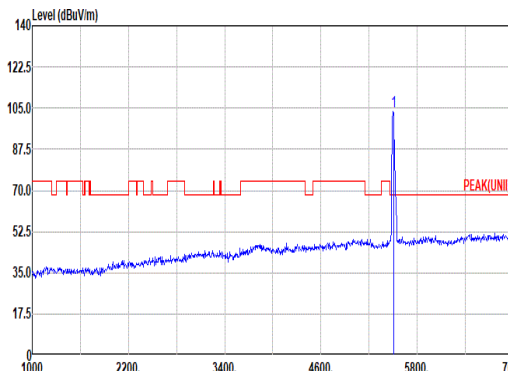
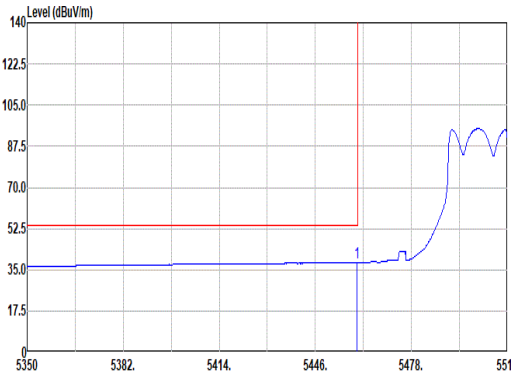
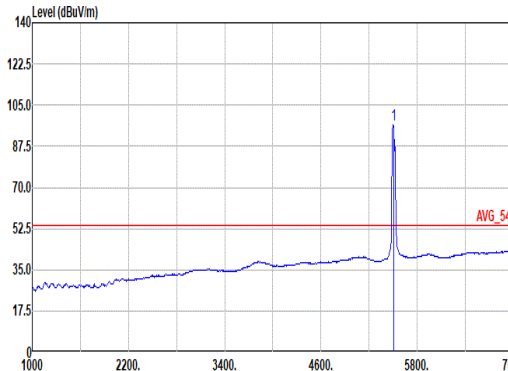


Mode	37																																																																																											
	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Partial_242/61RU_5510MHz																																																																																											
ANT	6+7																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5443.76</td><td>55.37</td><td>74.00</td><td>-18.63</td><td>46.93</td><td>33.01</td><td>13.31</td><td>37.88</td><td>0.00 100 120 PEAK</td></tr><tr><td>2</td><td>5466.00</td><td>58.28</td><td>68.20</td><td>-9.92</td><td>49.86</td><td>32.97</td><td>13.34</td><td>37.89</td><td>0.00 100 120 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5443.76	55.37	74.00	-18.63	46.93	33.01	13.31	37.88	0.00 100 120 PEAK	2	5466.00	58.28	68.20	-9.92	49.86	32.97	13.34	37.89	0.00 100 120 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5510.00</td><td>103.50</td><td>-----</td><td>-----</td><td>95.13</td><td>32.90</td><td>13.38</td><td>37.91</td><td>0.00 100 120 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5510.00	103.50	-----	-----	95.13	32.90	13.38	37.91	0.00 100 120 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																			
1	5443.76	55.37	74.00	-18.63	46.93	33.01	13.31	37.88	0.00 100 120 PEAK																																																																																			
2	5466.00	58.28	68.20	-9.92	49.86	32.97	13.34	37.89	0.00 100 120 PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																			
1	5510.00	103.50	-----	-----	95.13	32.90	13.38	37.91	0.00 100 120 PEAK																																																																																			
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5459.92</td><td>38.13</td><td>54.00</td><td>-15.87</td><td>29.71</td><td>32.98</td><td>13.33</td><td>37.89</td><td>0.00 100 120 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5459.92	38.13	54.00	-15.87	29.71	32.98	13.33	37.89	0.00 100 120 AVERAGE	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5510.00</td><td>96.80</td><td>-----</td><td>-----</td><td>88.43</td><td>32.90</td><td>13.38</td><td>37.91</td><td>0.00 100 120 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5510.00	96.80	-----	-----	88.43	32.90	13.38	37.91	0.00 100 120 AVERAGE										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																			
1	5459.92	38.13	54.00	-15.87	29.71	32.98	13.33	37.89	0.00 100 120 AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																			
1	5510.00	96.80	-----	-----	88.43	32.90	13.38	37.91	0.00 100 120 AVERAGE																																																																																			

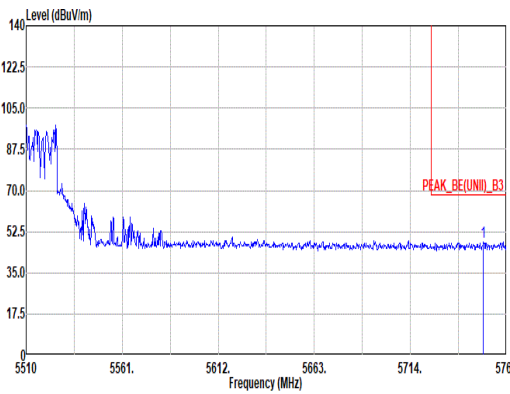


Mode	37																																																							
	Band Edge - R																																																							
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Partial_242/61RU_5510MHz																																																							
ANT	6+7																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5752.76</td><td>48.21</td><td>68.20</td><td>-19.99</td><td>38.71</td><td>33.72</td><td>13.70</td><td>37.92</td><td>0.00</td><td>100</td><td>120</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5752.76	48.21	68.20	-19.99	38.71	33.72	13.70	37.92	0.00	100	120	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5752.76	48.21	68.20	-19.99	38.71	33.72	13.70	37.92	0.00	100	120	PEAK																																												

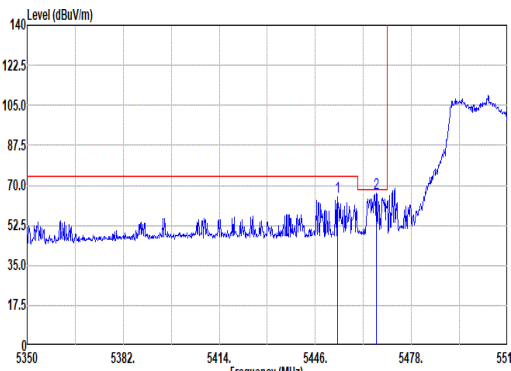
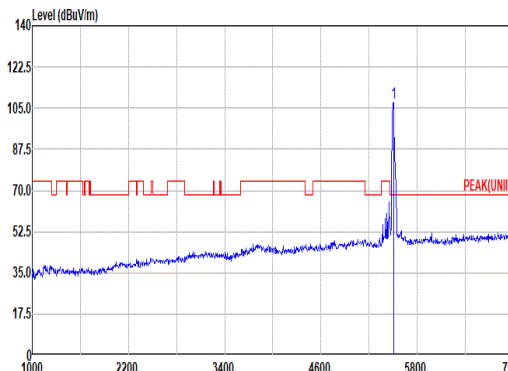
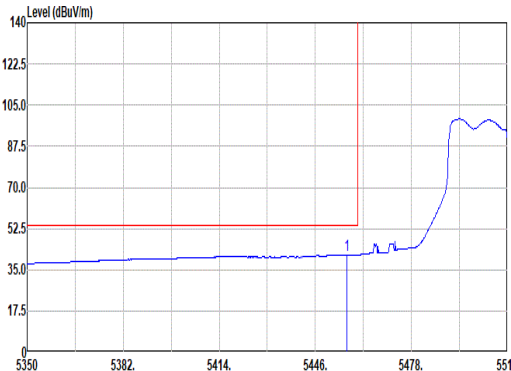
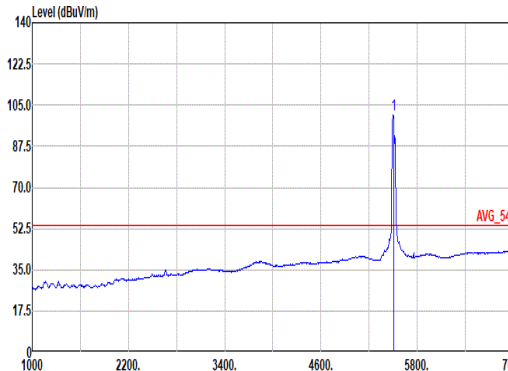


		37																																																																																																																					
Mode	Band Edge - L																																																																																																																						
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Partial_242/61RU_5510MHz																																																																																																																						
ANT	6+7																																																																																																																						
Pol.	Vertical						Fundamental																																																																																																																
Peak																																																																																																																							
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto						Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto																																																																																																																
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5453.36</td><td>64.84</td><td>74.00</td><td>-9.16</td><td>56.42</td><td>32.99</td><td>13.32</td><td>37.89</td><td>0.00</td><td>100</td><td>27 PEAK</td></tr><tr><td>2</td><td>5466.32</td><td>66.37</td><td>68.20</td><td>-1.83</td><td>57.95</td><td>32.97</td><td>13.34</td><td>37.89</td><td>0.00</td><td>100</td><td>27 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5453.36	64.84	74.00	-9.16	56.42	32.99	13.32	37.89	0.00	100	27 PEAK	2	5466.32	66.37	68.20	-1.83	57.95	32.97	13.34	37.89	0.00	100	27 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>107.29</td><td>-----</td><td>-----</td><td>98.92</td><td>32.90</td><td>13.38</td><td>37.91</td><td>0.00</td><td>100</td><td>27 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5510.00	107.29	-----	-----	98.92	32.90	13.38	37.91	0.00	100	27 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																													
1	5453.36	64.84	74.00	-9.16	56.42	32.99	13.32	37.89	0.00	100	27 PEAK																																																																																																												
2	5466.32	66.37	68.20	-1.83	57.95	32.97	13.34	37.89	0.00	100	27 PEAK																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																													
1	5510.00	107.29	-----	-----	98.92	32.90	13.38	37.91	0.00	100	27 PEAK																																																																																																												
Avg																																																																																																																							
	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto						Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto																																																																																																																
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5456.56</td><td>41.38</td><td>54.00</td><td>-12.62</td><td>32.95</td><td>32.99</td><td>13.33</td><td>37.89</td><td>0.00</td><td>100</td><td>27 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5456.56	41.38	54.00	-12.62	32.95	32.99	13.33	37.89	0.00	100	27 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>100.85</td><td>-----</td><td>-----</td><td>92.48</td><td>32.91</td><td>13.37</td><td>37.91</td><td>0.00</td><td>100</td><td>27 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5510.00	100.85	-----	-----	92.48	32.91	13.37	37.91	0.00	100	27 AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																													
1	5456.56	41.38	54.00	-12.62	32.95	32.99	13.33	37.89	0.00	100	27 AVERAGE																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																													
1	5510.00	100.85	-----	-----	92.48	32.91	13.37	37.91	0.00	100	27 AVERAGE																																																																																																												

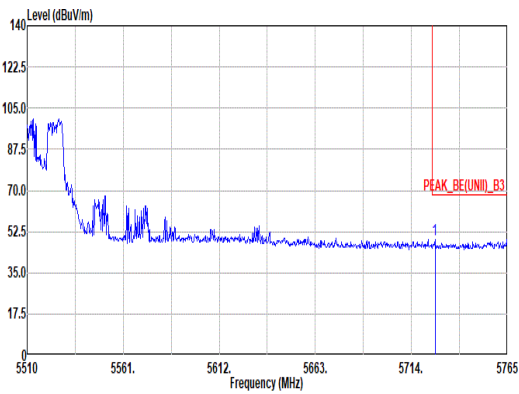


Mode	37																																												
	Band Edge - R																																												
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Partial_242/61RU_5510MHz																																												
ANT	6+7																																												
Pol.	Vertical	Fundamental																																											
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5726.50</td><td>49.31</td><td>68.20</td><td>-18.89</td><td>39.92</td><td>33.65</td><td>13.66</td><td>37.92</td><td>0.00</td><td>100</td><td>27 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5726.50	49.31	68.20	-18.89	39.92	33.65	13.66	37.92	0.00	100	27 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5726.50	49.31	68.20	-18.89	39.92	33.65	13.66	37.92	0.00	100	27 PEAK																																		

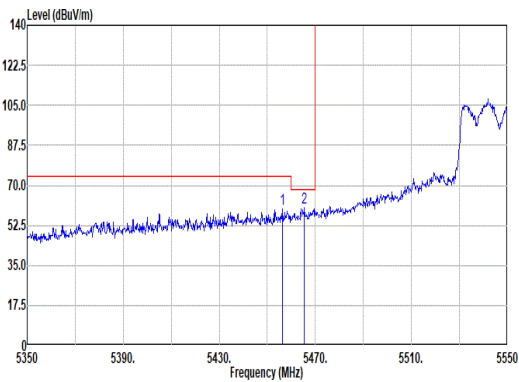
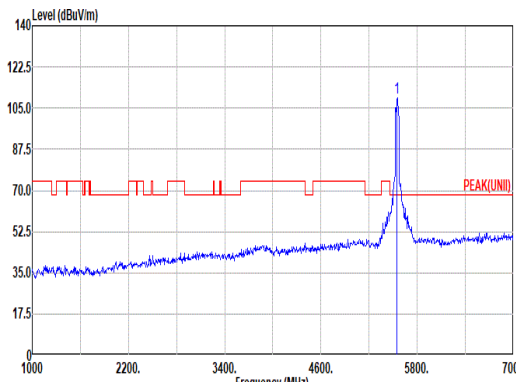
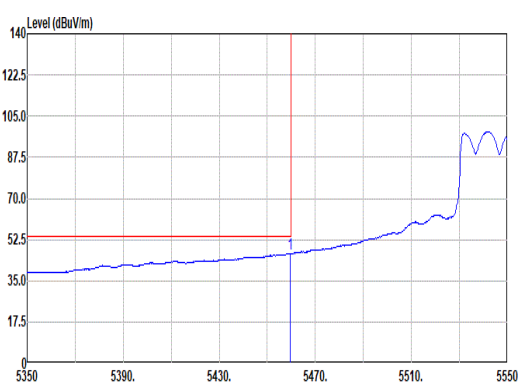
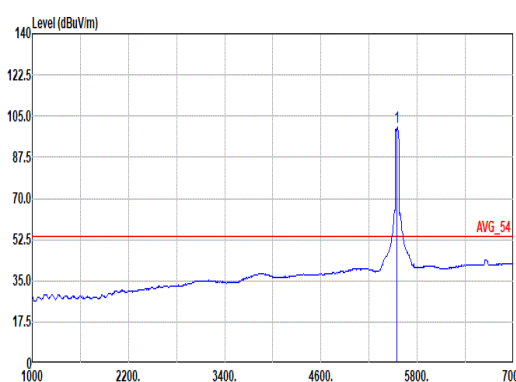


		38																																																																																																																											
Mode	Band Edge - L																																																																																																																												
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz																																																																																																																												
ANT	6+7																																																																																																																												
Pol.	Horizontal						Fundamental																																																																																																																						
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02030_240729 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5456.20</td><td>59.75</td><td>74.00</td><td>-14.25</td><td>51.62</td><td>32.81</td><td>13.32</td><td>38.00</td><td>0.00</td><td>100</td><td>326</td><td>PEAK</td></tr><tr><td>2</td><td>5465.40</td><td>60.46</td><td>68.20</td><td>-7.74</td><td>52.30</td><td>32.83</td><td>13.34</td><td>38.01</td><td>0.00</td><td>100</td><td>326</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5456.20	59.75	74.00	-14.25	51.62	32.81	13.32	38.00	0.00	100	326	PEAK	2	5465.40	60.46	68.20	-7.74	52.30	32.83	13.34	38.01	0.00	100	326	PEAK	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02030_240729 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5550.00</td><td>109.15</td><td>-----</td><td>-----</td><td>100.85</td><td>32.88</td><td>13.44</td><td>38.02</td><td>0.00</td><td>100</td><td>326</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5550.00	109.15	-----	-----	100.85	32.88	13.44	38.02	0.00	100	326	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																			
1	5456.20	59.75	74.00	-14.25	51.62	32.81	13.32	38.00	0.00	100	326	PEAK																																																																																																																	
2	5465.40	60.46	68.20	-7.74	52.30	32.83	13.34	38.01	0.00	100	326	PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																			
1	5550.00	109.15	-----	-----	100.85	32.88	13.44	38.02	0.00	100	326	PEAK																																																																																																																	
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02030_240729 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.40</td><td>46.61</td><td>54.00</td><td>-7.39</td><td>38.46</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>100</td><td>326</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5459.40	46.61	54.00	-7.39	38.46	32.82	13.33	38.00	0.00	100	326	AVERAGE	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02030_240729 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5550.00</td><td>100.28</td><td>-----</td><td>-----</td><td>91.98</td><td>32.88</td><td>13.44</td><td>38.02</td><td>0.00</td><td>100</td><td>326</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5550.00	100.28	-----	-----	91.98	32.88	13.44	38.02	0.00	100	326	AVERAGE													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																			
1	5459.40	46.61	54.00	-7.39	38.46	32.82	13.33	38.00	0.00	100	326	AVERAGE																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																			
1	5550.00	100.28	-----	-----	91.98	32.88	13.44	38.02	0.00	100	326	AVERAGE																																																																																																																	

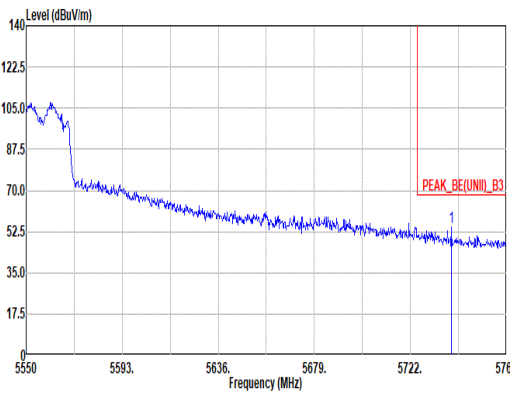


Mode	38																																											
	Band Edge - R																																											
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz																																											
ANT	6+7																																											
Pol.	Horizontal	Fundamental																																										
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5740.28</td><td>54.32</td><td>68.20</td><td>-13.88</td><td>45.05</td><td>33.56</td><td>13.68</td><td>37.97</td><td>0.00</td><td>100</td><td>326 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5740.28	54.32	68.20	-13.88	45.05	33.56	13.68	37.97	0.00	100	326 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1 5740.28	54.32	68.20	-13.88	45.05	33.56	13.68	37.97	0.00	100	326 PEAK																																		

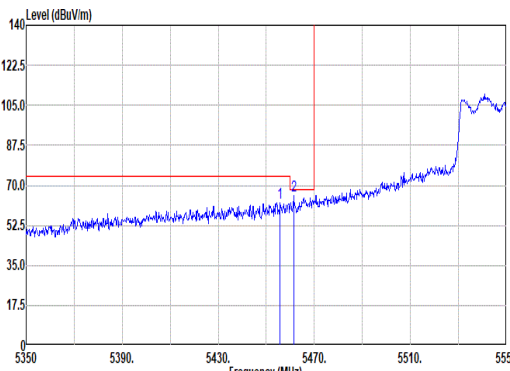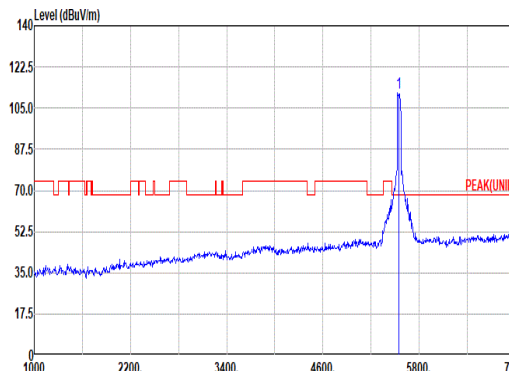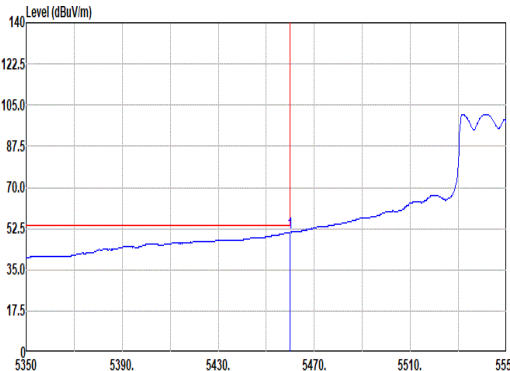
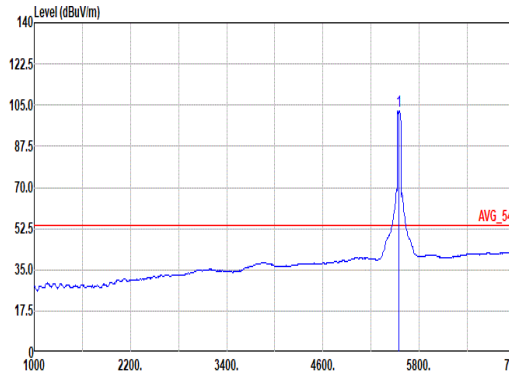


Mode	38																																																																																																					
	Band Edge - L																																																																																																					
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz																																																																																																					
ANT	6+7																																																																																																					
Pol.	Vertical						Fundamental																																																																																															
Peak																																																																																																						
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02030_240729 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5455.00</td><td>62.56</td><td>74.00</td><td>-11.44</td><td>54.43</td><td>32.81</td><td>13.32</td><td>38.00</td><td>0.00</td><td>162</td><td>48</td><td>PEAK</td></tr><tr><td>2</td><td>5461.40</td><td>65.36</td><td>68.20</td><td>-2.84</td><td>57.21</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>162</td><td>48</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5455.00	62.56	74.00	-11.44	54.43	32.81	13.32	38.00	0.00	162	48	PEAK	2	5461.40	65.36	68.20	-2.84	57.21	32.82	13.33	38.00	0.00	162	48	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02030_240729 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5550.00</td><td>111.43</td><td>-----</td><td>-----</td><td>103.14</td><td>32.90</td><td>13.41</td><td>38.02</td><td>0.00</td><td>162</td><td>48</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5550.00	111.43	-----	-----	103.14	32.90	13.41	38.02	0.00	162	48
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	5455.00	62.56	74.00	-11.44	54.43	32.81	13.32	38.00	0.00	162	48	PEAK																																																																																										
2	5461.40	65.36	68.20	-2.84	57.21	32.82	13.33	38.00	0.00	162	48	PEAK																																																																																										
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	5550.00	111.43	-----	-----	103.14	32.90	13.41	38.02	0.00	162	48	PEAK																																																																																										
Avg																																																																																																						
	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02030_240729 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>50.97</td><td>54.00</td><td>-3.03</td><td>42.82</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>162</td><td>48</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5460.00	50.97	54.00	-3.03	42.82	32.82	13.33	38.00	0.00	162	48	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02030_240729 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5550.00</td><td>102.75</td><td>-----</td><td>-----</td><td>94.45</td><td>32.90</td><td>13.42</td><td>38.02</td><td>0.00</td><td>162</td><td>48</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5550.00	102.75	-----	-----	94.45	32.90	13.42	38.02	0.00	162	48	AVERAGE												
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	5460.00	50.97	54.00	-3.03	42.82	32.82	13.33	38.00	0.00	162	48	AVERAGE																																																																																										
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	5550.00	102.75	-----	-----	94.45	32.90	13.42	38.02	0.00	162	48	AVERAGE																																																																																										




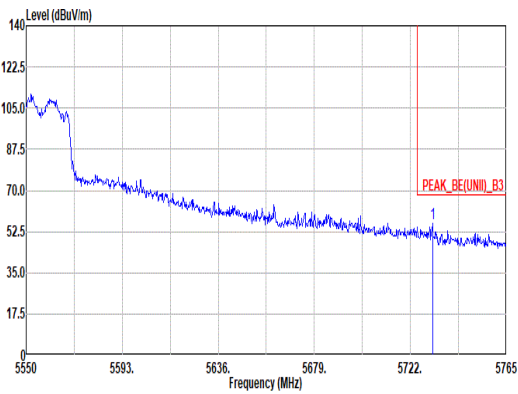


Mode	38																																											
	Band Edge - R																																											
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz																																											
ANT	6+7																																											
Pol.	Vertical	Fundamental																																										
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5731.89</td><td>56.05</td><td>68.20</td><td>-12.15</td><td>46.82</td><td>33.53</td><td>13.67</td><td>37.97</td><td>0.00</td><td>162</td><td>40 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5731.89	56.05	68.20	-12.15	46.82	33.53	13.67	37.97	0.00	162	40 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1 5731.89	56.05	68.20	-12.15	46.82	33.53	13.67	37.97	0.00	162	40 PEAK																																		

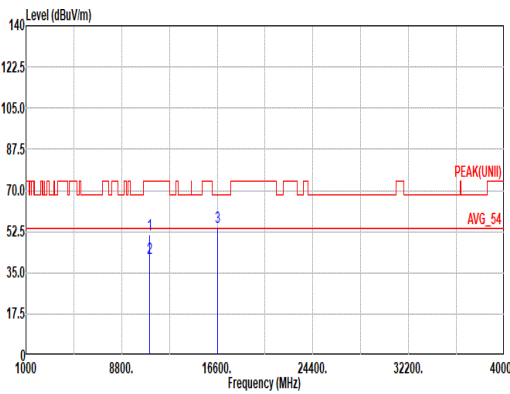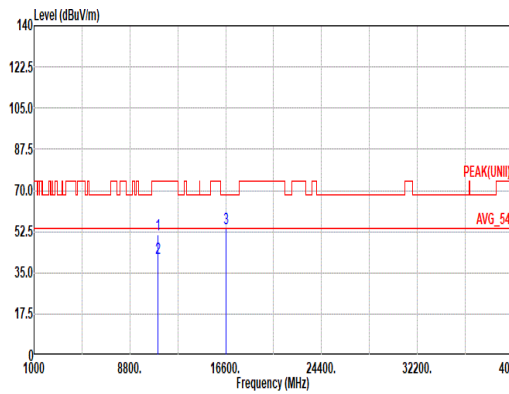


Mode	38												
	Harmonic												
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full RU_5550MHz												
ANT	6+7												
Pol.	Horizontal						Vertical						
Peak Avg													
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11100.00	51.39	74.00	-22.61	34.50	38.90	19.13	42.05	0.91	400	25	PEAK	
2	11100.00	41.04	54.00	-12.96	24.15	38.90	19.13	42.05	0.91	400	25	Average	
3	16650.00	54.36	68.20	-13.84	34.46	39.40	23.66	44.12	0.96	--	--	PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11100.00	51.40	74.00	-22.60	34.51	38.90	19.13	42.05	0.91	400	7	PEAK	
2	11100.00	41.03	54.00	-12.97	24.14	38.90	19.13	42.05	0.91	400	7	Average	
3	16650.00	54.03	68.20	-14.17	34.13	39.40	23.66	44.12	0.96	--	--	PEAK	

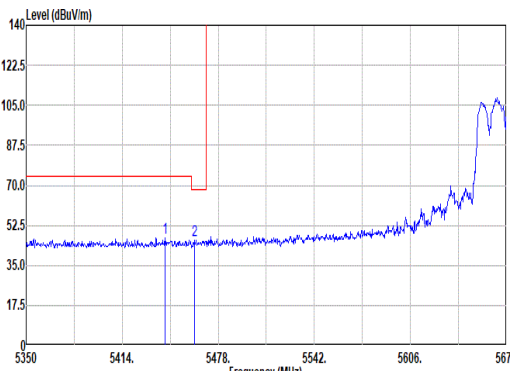
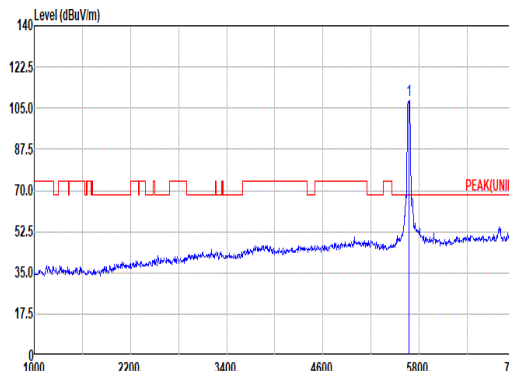
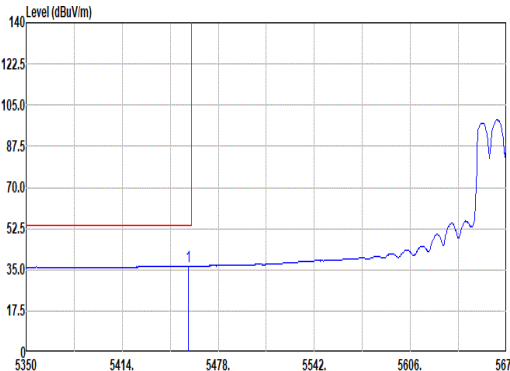
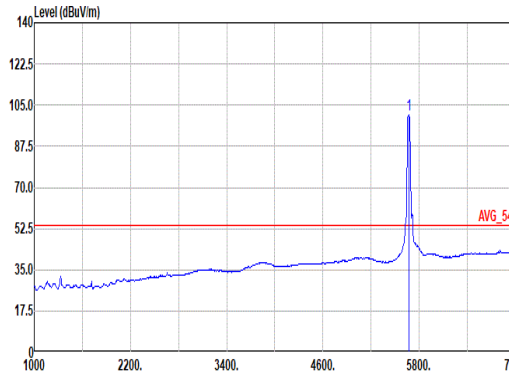


Mode	39																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																																																																																															
ANT	6+7																																																																																																															
Pol.	Horizontal						Fundamental																																																																																																									
Peak																																																																																																																
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02030_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5442.48</td><td>46.99</td><td>74.00</td><td>-27.01</td><td>38.87</td><td>32.80</td><td>13.31</td><td>37.99</td><td>0.00</td><td>200</td><td>305</td><td>PEAK</td></tr><tr><td>2</td><td>5462.32</td><td>45.92</td><td>68.20</td><td>-22.28</td><td>37.77</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>200</td><td>305</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5442.48	46.99	74.00	-27.01	38.87	32.80	13.31	37.99	0.00	200	305	PEAK	2	5462.32	45.92	68.20	-22.28	37.77	32.82	13.33	38.00	0.00	200	305	PEAK	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02030_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>100.21</td><td>-----</td><td>-----</td><td>99.30</td><td>33.29</td><td>13.61</td><td>37.99</td><td>0.00</td><td>200</td><td>305</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5670.00	100.21	-----	-----	99.30	33.29	13.61	37.99	0.00	200	305
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5442.48	46.99	74.00	-27.01	38.87	32.80	13.31	37.99	0.00	200	305	PEAK																																																																																																				
2	5462.32	45.92	68.20	-22.28	37.77	32.82	13.33	38.00	0.00	200	305	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5670.00	100.21	-----	-----	99.30	33.29	13.61	37.99	0.00	200	305	PEAK																																																																																																				
Avg																																																																																																																
	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02030_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5458.16</td><td>36.56</td><td>54.00</td><td>-17.44</td><td>28.41</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>200</td><td>305</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5458.16	36.56	54.00	-17.44	28.41	32.82	13.33	38.00	0.00	200	305	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02030_240729 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>100.72</td><td>-----</td><td>-----</td><td>91.93</td><td>33.19</td><td>13.59</td><td>37.99</td><td>0.00</td><td>200</td><td>305</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5670.00	100.72	-----	-----	91.93	33.19	13.59	37.99	0.00	200	305	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5458.16	36.56	54.00	-17.44	28.41	32.82	13.33	38.00	0.00	200	305	AVERAGE																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5670.00	100.72	-----	-----	91.93	33.19	13.59	37.99	0.00	200	305	AVERAGE																																																																																																				

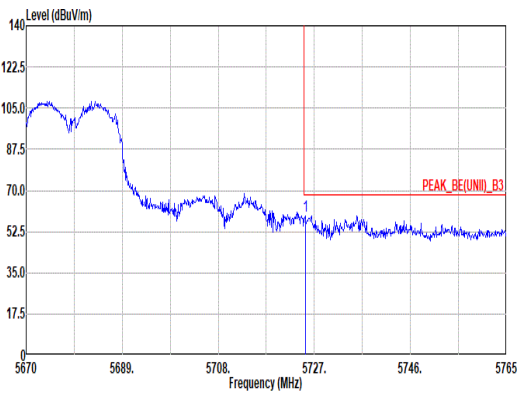


Mode	39																																																							
	Band Edge - R																																																							
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																																							
ANT	6+7																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.20</td><td>59.22</td><td>68.20</td><td>-8.98</td><td>50.04</td><td>33.50</td><td>13.66</td><td>37.98</td><td>0.00</td><td>200</td><td>305</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5725.20	59.22	68.20	-8.98	50.04	33.50	13.66	37.98	0.00	200	305	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5725.20	59.22	68.20	-8.98	50.04	33.50	13.66	37.98	0.00	200	305	PEAK																																												

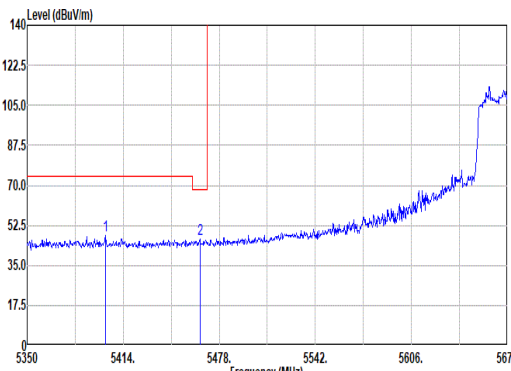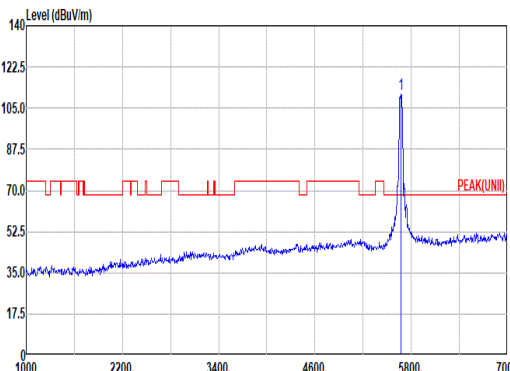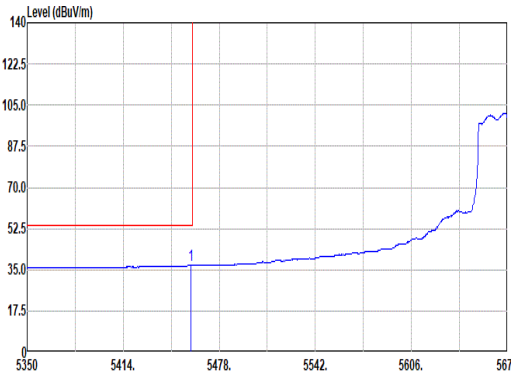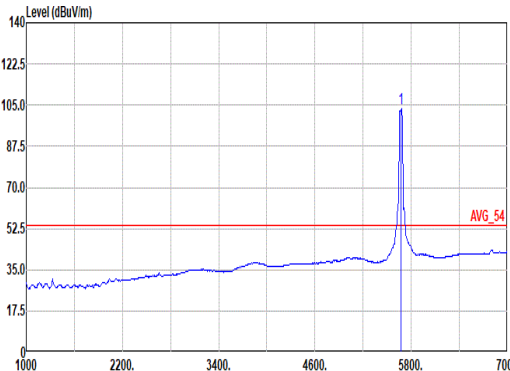


		39																																																										
Mode	Band Edge - L																																																											
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																																											
ANT	6+7																																																											
Pol.	Vertical																																																											
Peak																																																												
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02030_240729 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5402.16</td><td>47.82</td><td>74.00</td><td>-26.18</td><td>39.72</td><td>32.00</td><td>13.26</td><td>37.96</td><td>0.00 144 11 PEAK</td></tr><tr><td>2</td><td>5465.20</td><td>46.74</td><td>68.20</td><td>-21.46</td><td>38.58</td><td>32.83</td><td>13.33</td><td>38.00</td><td>0.00 144 11 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5402.16	47.82	74.00	-26.18	39.72	32.00	13.26	37.96	0.00 144 11 PEAK	2	5465.20	46.74	68.20	-21.46	38.58	32.83	13.33	38.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																			
1	5402.16	47.82	74.00	-26.18	39.72	32.00	13.26	37.96	0.00 144 11 PEAK																																																			
2	5465.20	46.74	68.20	-21.46	38.58	32.83	13.33	38.00	0.00 144 11 PEAK																																																			
Fundamental																																																												
	Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02030_240729 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>110.82</td><td>-----</td><td>-----</td><td>102.09</td><td>33.14</td><td>13.58</td><td>37.99</td><td>0.00 144 11 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5670.00	110.82	-----	-----	102.09	33.14	13.58	37.99	0.00 144 11 PEAK									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																			
1	5670.00	110.82	-----	-----	102.09	33.14	13.58	37.99	0.00 144 11 PEAK																																																			
Avg																																																												
	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02030_240729 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5459.12</td><td>36.78</td><td>54.00</td><td>-17.22</td><td>28.63</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00 144 11 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5459.12	36.78	54.00	-17.22	28.63	32.82	13.33	38.00	0.00 144 11 AVERAGE									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																			
1	5459.12	36.78	54.00	-17.22	28.63	32.82	13.33	38.00	0.00 144 11 AVERAGE																																																			
AVERAGE																																																												
	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02030_240729 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>103.39</td><td>-----</td><td>-----</td><td>94.54</td><td>33.24</td><td>13.60</td><td>37.99</td><td>0.00 144 11 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5670.00	103.39	-----	-----	94.54	33.24	13.60	37.99	0.00 144 11 AVERAGE									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Factor																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																			
1	5670.00	103.39	-----	-----	94.54	33.24	13.60	37.99	0.00 144 11 AVERAGE																																																			




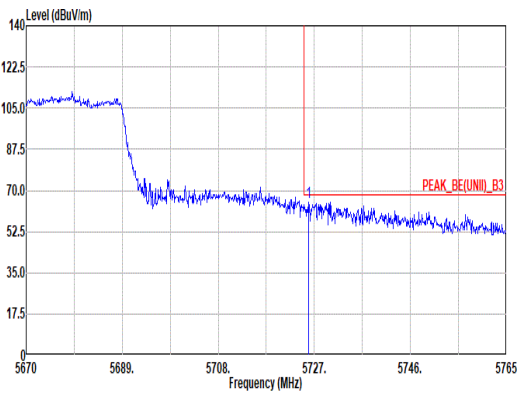


Mode	39																																																					
	Band Edge - R																																																					
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																																					
ANT	6+7																																																					
Pol.	Vertical						Fundamental																																															
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.86</td><td>65.20</td><td>68.20</td><td>-3.00</td><td>56.02</td><td>33.50</td><td>13.66</td><td>37.98</td><td>0.00</td><td>144</td><td>11 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5725.86	65.20	68.20	-3.00	56.02	33.50	13.66	37.98	0.00	144	11 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5725.86	65.20	68.20	-3.00	56.02	33.50	13.66	37.98	0.00	144	11 PEAK																																											

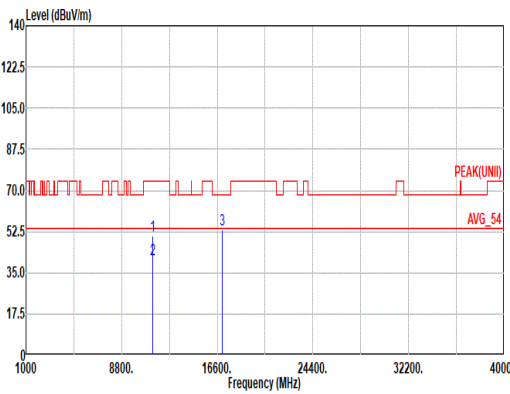


		39																																																																																	
Mode		Harmonic																																																																																	
		U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full RU_5670MHz																																																																																	
ANT		6+7																																																																																	
Pol.		Horizontal												Vertical																																																																					
Peak Avg																																																																																			
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL																																																																																		
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11340.00</td><td>50.95</td><td>74.00</td><td>-23.05</td><td>33.92</td><td>39.08</td><td>19.34</td><td>42.31</td><td>0.92</td><td>200</td><td>61</td><td>PEAK</td></tr><tr><td>2</td><td>11340.00</td><td>40.88</td><td>54.00</td><td>-13.12</td><td>23.85</td><td>39.08</td><td>19.34</td><td>42.31</td><td>0.92</td><td>200</td><td>61</td><td>Average</td></tr><tr><td>3</td><td>17010.00</td><td>53.61</td><td>68.20</td><td>-14.59</td><td>33.85</td><td>39.32</td><td>23.91</td><td>44.42</td><td>0.95</td><td>--</td><td>--</td><td>PEAK</td></tr></table>																	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11340.00	50.95	74.00	-23.05	33.92	39.08	19.34	42.31	0.92	200	61	PEAK	2	11340.00	40.88	54.00	-13.12	23.85	39.08	19.34	42.31	0.92	200	61	Average	3	17010.00	53.61	68.20	-14.59	33.85	39.32	23.91	44.42	0.95	--	--	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1	11340.00	50.95	74.00	-23.05	33.92	39.08	19.34	42.31	0.92	200	61	PEAK																																																																							
2	11340.00	40.88	54.00	-13.12	23.85	39.08	19.34	42.31	0.92	200	61	Average																																																																							
3	17010.00	53.61	68.20	-14.59	33.85	39.32	23.91	44.42	0.95	--	--	PEAK																																																																							
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11340.00</td><td>51.98</td><td>74.00</td><td>-22.02</td><td>34.95</td><td>39.08</td><td>19.34</td><td>42.31</td><td>0.92</td><td>100</td><td>21</td><td>PEAK</td></tr><tr><td>2</td><td>11340.00</td><td>40.88</td><td>54.00</td><td>-13.12</td><td>23.85</td><td>39.08</td><td>19.34</td><td>42.31</td><td>0.92</td><td>100</td><td>21</td><td>Average</td></tr><tr><td>3</td><td>17010.00</td><td>54.95</td><td>68.20</td><td>-13.25</td><td>35.19</td><td>39.32</td><td>23.91</td><td>44.42</td><td>0.95</td><td>--</td><td>--</td><td>PEAK</td></tr></table>																	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11340.00	51.98	74.00	-22.02	34.95	39.08	19.34	42.31	0.92	100	21	PEAK	2	11340.00	40.88	54.00	-13.12	23.85	39.08	19.34	42.31	0.92	100	21	Average	3	17010.00	54.95	68.20	-13.25	35.19	39.32	23.91	44.42	0.95	--	--	PEAK	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1	11340.00	51.98	74.00	-22.02	34.95	39.08	19.34	42.31	0.92	100	21	PEAK																																																																							
2	11340.00	40.88	54.00	-13.12	23.85	39.08	19.34	42.31	0.92	100	21	Average																																																																							
3	17010.00	54.95	68.20	-13.25	35.19	39.32	23.91	44.42	0.95	--	--	PEAK																																																																							

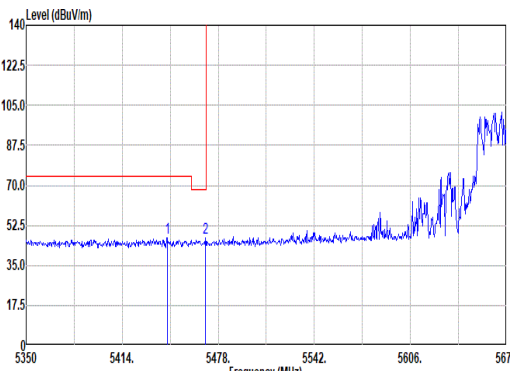
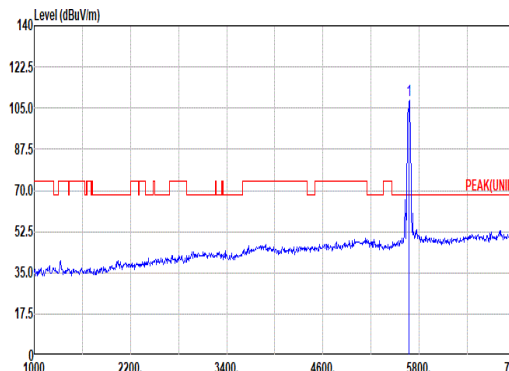
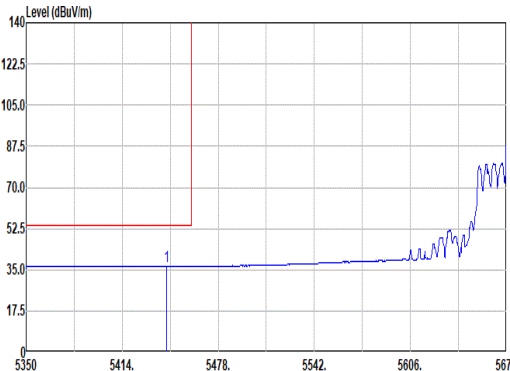
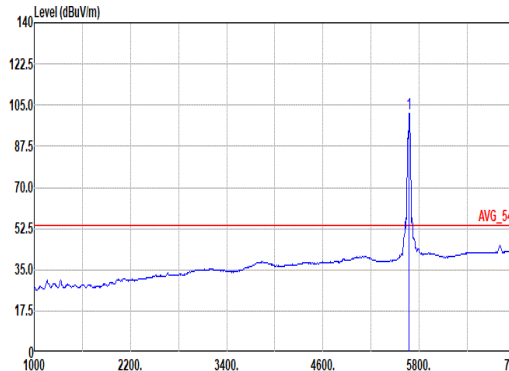


		40																																																																																																																				
Mode		Band Edge - L																																																																																																																				
		U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Partial_242/62RU_5670MHz																																																																																																																				
ANT		6+7																																																																																																																				
Pol.		Horizontal						Fundamental																																																																																																														
Peak																																																																																																																						
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5444.00</td><td>47.27</td><td>74.00</td><td>-26.73</td><td>38.83</td><td>33.01</td><td>13.31</td><td>37.88</td><td>0.00</td><td>200</td><td>306</td><td>PEAK</td></tr><tr><td>2</td><td>5469.36</td><td>46.78</td><td>68.20</td><td>-21.42</td><td>38.38</td><td>32.96</td><td>13.34</td><td>37.90</td><td>0.00</td><td>200</td><td>306</td><td>PEAK</td></tr></tbody></table>															Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5444.00	47.27	74.00	-26.73	38.83	33.01	13.31	37.88	0.00	200	306	PEAK	2	5469.36	46.78	68.20	-21.42	38.38	32.96	13.34	37.90	0.00	200	306	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>100.20</td><td>-----</td><td>-----</td><td>99.00</td><td>33.44</td><td>13.60</td><td>37.92</td><td>0.00</td><td>200</td><td>306</td><td>PEAK</td></tr></tbody></table>															Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5670.00	100.20	-----	-----	99.00	33.44	13.60	37.92	0.00	200	306
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																											
1	5444.00	47.27	74.00	-26.73	38.83	33.01	13.31	37.88	0.00	200	306	PEAK																																																																																																										
2	5469.36	46.78	68.20	-21.42	38.38	32.96	13.34	37.90	0.00	200	306	PEAK																																																																																																										
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																											
1	5670.00	100.20	-----	-----	99.00	33.44	13.60	37.92	0.00	200	306	PEAK																																																																																																										
Avg																																																																																																																						
	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5443.44</td><td>36.55</td><td>54.00</td><td>-17.45</td><td>28.11</td><td>33.01</td><td>13.31</td><td>37.88</td><td>0.00</td><td>200</td><td>306</td><td>AVERAGE</td></tr></tbody></table>															Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5443.44	36.55	54.00	-17.45	28.11	33.01	13.31	37.88	0.00	200	306	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>101.42</td><td>-----</td><td>-----</td><td>92.24</td><td>33.49</td><td>13.61</td><td>37.92</td><td>0.00</td><td>200</td><td>306</td><td>AVERAGE</td></tr></tbody></table>															Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5670.00	101.42	-----	-----	92.24	33.49	13.61	37.92	0.00	200	306	AVERAGE												
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																											
1	5443.44	36.55	54.00	-17.45	28.11	33.01	13.31	37.88	0.00	200	306	AVERAGE																																																																																																										
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																											
1	5670.00	101.42	-----	-----	92.24	33.49	13.61	37.92	0.00	200	306	AVERAGE																																																																																																										

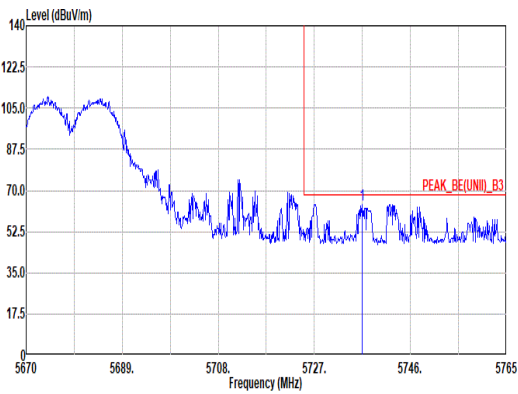


Mode	40																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Partial_242/62RU_5670MHz																																													
ANT	6+7																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91280_02368_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5736.50</td><td>64.16</td><td>68.20</td><td>-4.04</td><td>54.74</td><td>33.67</td><td>13.67</td><td>37.92</td><td>0.00</td><td>200</td><td>306</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5736.50	64.16	68.20	-4.04	54.74	33.67	13.67	37.92	0.00	200	306	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5736.50	64.16	68.20	-4.04	54.74	33.67	13.67	37.92	0.00	200	306	PEAK																																		

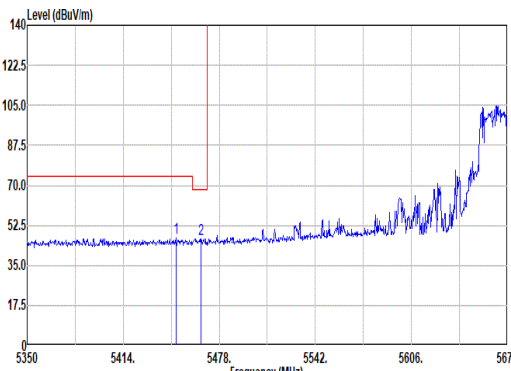
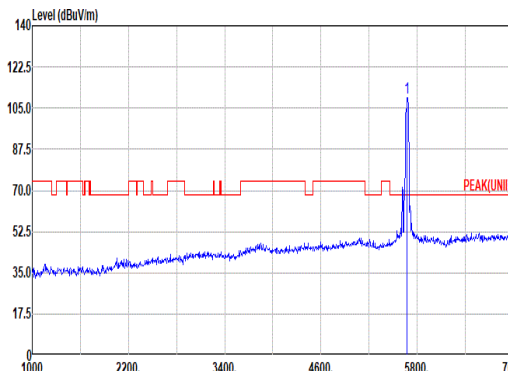
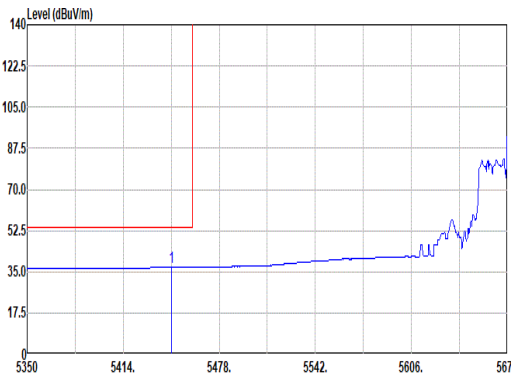
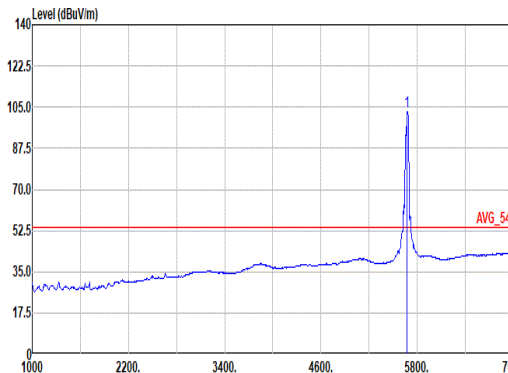


		40																																																												
Mode	Band Edge - L																																																													
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Partial_242/62RU_5670MHz																																																													
ANT	6+7																																																													
Pol.	Vertical																																																													
Peak																																																														
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5449.20</td><td>47.16</td><td>74.00</td><td>-26.84</td><td>38.73</td><td>33.00</td><td>13.32</td><td>37.89</td><td>0.00</td><td>150</td><td>15</td><td>PEAK</td></tr><tr><td>2</td><td>5465.84</td><td>46.72</td><td>68.20</td><td>-21.48</td><td>38.30</td><td>32.97</td><td>13.34</td><td>37.89</td><td>0.00</td><td>150</td><td>15</td><td>PEAK</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5449.20	47.16	74.00	-26.84	38.73	33.00	13.32	37.89	0.00	150	15	PEAK	2	5465.84	46.72	68.20	-21.48	38.30	32.97	13.34	37.89	0.00	150	15
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																			
1	5449.20	47.16	74.00	-26.84	38.73	33.00	13.32	37.89	0.00	150	15	PEAK																																																		
2	5465.84	46.72	68.20	-21.48	38.30	32.97	13.34	37.89	0.00	150	15	PEAK																																																		
Fundamental																																																														
	Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5670.00</td><td>109.44</td><td>-----</td><td>-----</td><td>100.32</td><td>33.44</td><td>13.60</td><td>37.92</td><td>0.00</td><td>150</td><td>15</td><td>PEAK</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5670.00	109.44	-----	-----	100.32	33.44	13.60	37.92	0.00	150	15	PEAK												
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																			
1	5670.00	109.44	-----	-----	100.32	33.44	13.60	37.92	0.00	150	15	PEAK																																																		
Avg																																																														
	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5446.00</td><td>36.96</td><td>54.00</td><td>-17.04</td><td>28.52</td><td>33.01</td><td>13.31</td><td>37.88</td><td>0.00</td><td>150</td><td>15</td><td>AVERAGE</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5446.00	36.96	54.00	-17.04	28.52	33.01	13.31	37.88	0.00	150	15	AVERAGE												
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																			
1	5446.00	36.96	54.00	-17.04	28.52	33.01	13.31	37.88	0.00	150	15	AVERAGE																																																		
AVERAGE																																																														
	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5670.00</td><td>103.19</td><td>-----</td><td>-----</td><td>94.01</td><td>33.49</td><td>13.61</td><td>37.92</td><td>0.00</td><td>150</td><td>15</td><td>AVERAGE</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5670.00	103.19	-----	-----	94.01	33.49	13.61	37.92	0.00	150	15	AVERAGE												
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																			
1	5670.00	103.19	-----	-----	94.01	33.49	13.61	37.92	0.00	150	15	AVERAGE																																																		

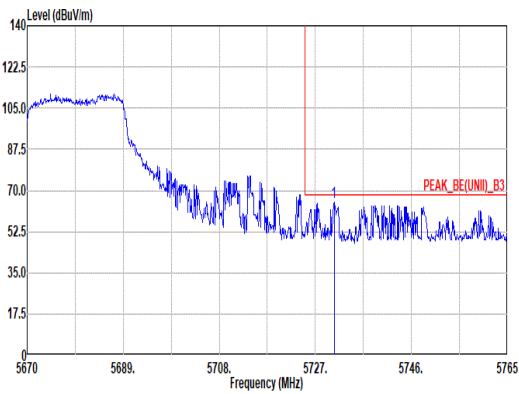


Mode	40																																												
	Band Edge - R																																												
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Partial_242/62RU_5670MHz																																												
ANT	6+7																																												
Pol.	Vertical	Fundamental																																											
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5730.71</td><td>64.78</td><td>68.20</td><td>-3.42</td><td>55.37</td><td>33.66</td><td>13.67</td><td>37.92</td><td>0.00</td><td>150</td><td>15 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5730.71	64.78	68.20	-3.42	55.37	33.66	13.67	37.92	0.00	150	15 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5730.71	64.78	68.20	-3.42	55.37	33.66	13.67	37.92	0.00	150	15 PEAK																																		

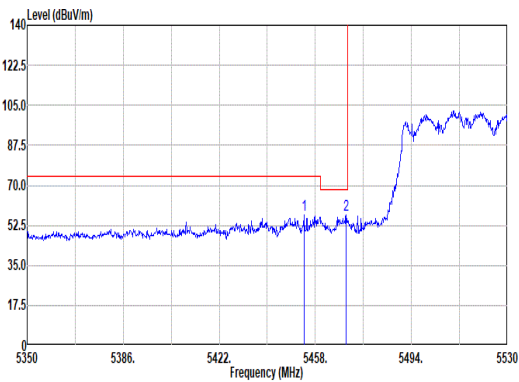
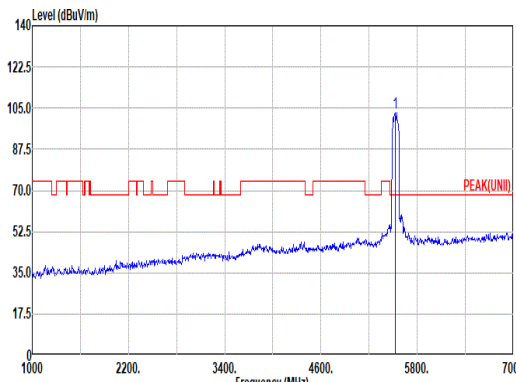
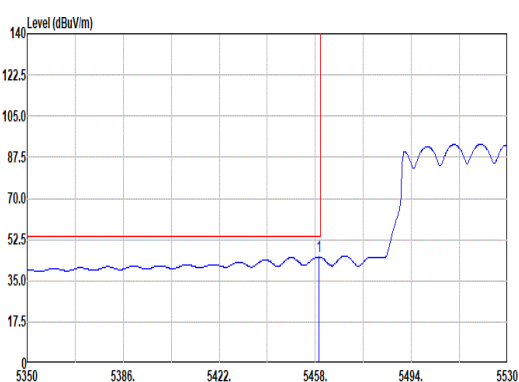
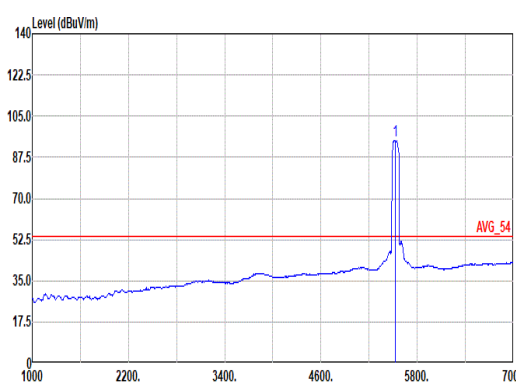


Mode	41																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																																																																																															
ANT	6+7																																																																																																															
Pol.	Horizontal						Fundamental																																																																																																									
Peak																																																																																																																
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5453.68</td><td>56.91</td><td>74.00</td><td>-17.09</td><td>48.60</td><td>32.99</td><td>13.32</td><td>38.00</td><td>0.00</td><td>100</td><td>332</td><td>PEAK</td></tr><tr><td>2</td><td>5469.52</td><td>57.26</td><td>68.20</td><td>-10.94</td><td>48.97</td><td>32.96</td><td>13.34</td><td>38.01</td><td>0.00</td><td>100</td><td>332</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5453.68	56.91	74.00	-17.09	48.60	32.99	13.32	38.00	0.00	100	332	PEAK	2	5469.52	57.26	68.20	-10.94	48.97	32.96	13.34	38.01	0.00	100	332	PEAK	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5530.00</td><td>103.19</td><td>-----</td><td>-----</td><td>94.91</td><td>32.90</td><td>13.40</td><td>38.02</td><td>0.00</td><td>100</td><td>332</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5530.00	103.19	-----	-----	94.91	32.90	13.40	38.02	0.00	100	332
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5453.68	56.91	74.00	-17.09	48.60	32.99	13.32	38.00	0.00	100	332	PEAK																																																																																																				
2	5469.52	57.26	68.20	-10.94	48.97	32.96	13.34	38.01	0.00	100	332	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5530.00	103.19	-----	-----	94.91	32.90	13.40	38.02	0.00	100	332	PEAK																																																																																																				
Avg																																																																																																																
	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.44</td><td>45.19</td><td>54.00</td><td>-8.81</td><td>36.88</td><td>32.98</td><td>13.33</td><td>38.00</td><td>0.00</td><td>100</td><td>332</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5459.44	45.19	54.00	-8.81	36.88	32.98	13.33	38.00	0.00	100	332	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5530.00</td><td>94.75</td><td>-----</td><td>-----</td><td>86.48</td><td>32.90</td><td>13.40</td><td>38.03</td><td>0.00</td><td>100</td><td>332</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5530.00	94.75	-----	-----	86.48	32.90	13.40	38.03	0.00	100	332	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5459.44	45.19	54.00	-8.81	36.88	32.98	13.33	38.00	0.00	100	332	AVERAGE																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5530.00	94.75	-----	-----	86.48	32.90	13.40	38.03	0.00	100	332	AVERAGE																																																																																																				

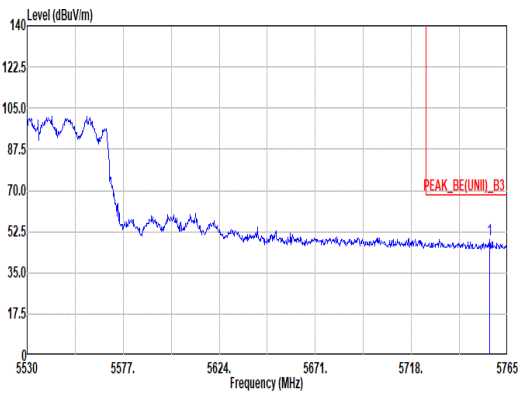


Mode	41																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																													
ANT	6+7																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5756.31</td><td>49.05</td><td>68.20</td><td>-19.15</td><td>39.57</td><td>33.75</td><td>13.70</td><td>37.97</td><td>0.00</td><td>100</td><td>332</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5756.31	49.05	68.20	-19.15	39.57	33.75	13.70	37.97	0.00	100	332	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5756.31	49.05	68.20	-19.15	39.57	33.75	13.70	37.97	0.00	100	332	PEAK																																		

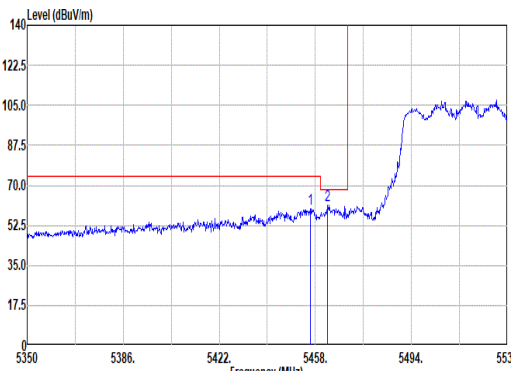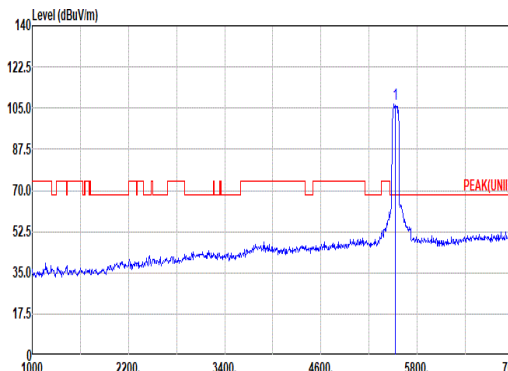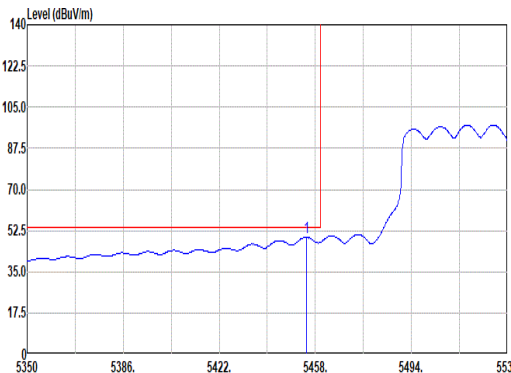
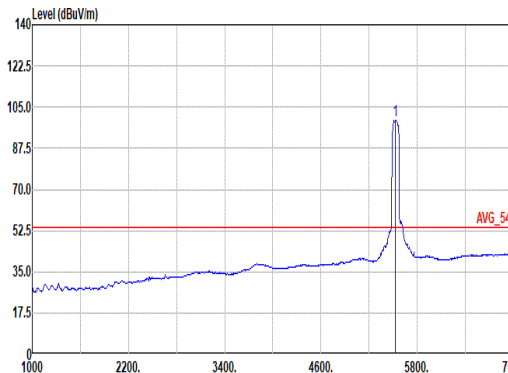


		41																																																																																																												
Mode	Band Edge - L																																																																																																													
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																																																																																													
ANT	6+7																																																																																																													
Pol.	Vertical						Fundamental																																																																																																							
Peak																																																																																																														
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5456.02</td><td>59.48</td><td>74.00</td><td>-14.52</td><td>51.17</td><td>32.99</td><td>13.32</td><td>38.00</td><td>0.00</td><td>158</td><td>20</td><td>PEAK</td></tr><tr><td>2</td><td>5462.50</td><td>61.41</td><td>68.20</td><td>-6.79</td><td>53.11</td><td>32.97</td><td>13.33</td><td>38.00</td><td>0.00</td><td>158</td><td>20</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5456.02	59.48	74.00	-14.52	51.17	32.99	13.32	38.00	0.00	158	20	PEAK	2	5462.50	61.41	68.20	-6.79	53.11	32.97	13.33	38.00	0.00	158	20	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5530.00</td><td>106.90</td><td>-----</td><td>-----</td><td>90.64</td><td>32.90</td><td>13.39</td><td>38.03</td><td>0.00</td><td>158</td><td>20</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5530.00	106.90	-----	-----	90.64	32.90	13.39	38.03	0.00	158	20
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																					
1	5456.02	59.48	74.00	-14.52	51.17	32.99	13.32	38.00	0.00	158	20	PEAK																																																																																																		
2	5462.50	61.41	68.20	-6.79	53.11	32.97	13.33	38.00	0.00	158	20	PEAK																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																					
1	5530.00	106.90	-----	-----	90.64	32.90	13.39	38.03	0.00	158	20	PEAK																																																																																																		
Avg																																																																																																														
	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5454.58</td><td>49.64</td><td>54.00</td><td>-4.36</td><td>41.33</td><td>32.99</td><td>13.32</td><td>38.00</td><td>0.00</td><td>158</td><td>20</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5454.58	49.64	54.00	-4.36	41.33	32.99	13.32	38.00	0.00	158	20	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5530.00</td><td>99.36</td><td>-----</td><td>-----</td><td>91.00</td><td>32.90</td><td>13.40</td><td>38.02</td><td>0.00</td><td>158</td><td>20</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5530.00	99.36	-----	-----	91.00	32.90	13.40	38.02	0.00	158	20	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																					
1	5454.58	49.64	54.00	-4.36	41.33	32.99	13.32	38.00	0.00	158	20	AVERAGE																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																																					
1	5530.00	99.36	-----	-----	91.00	32.90	13.40	38.02	0.00	158	20	AVERAGE																																																																																																		




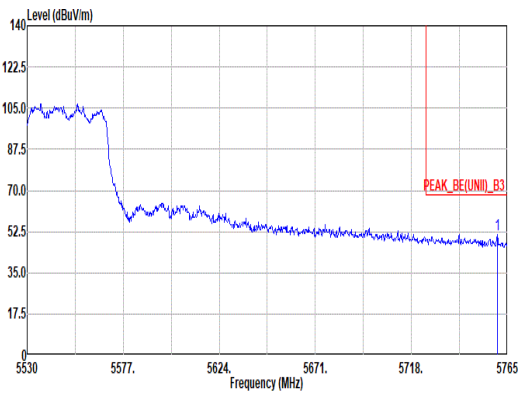


Mode	41																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																																													
ANT	6+7																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5760.07</td><td>51.09</td><td>68.20</td><td>-17.11</td><td>41.57</td><td>33.78</td><td>13.71</td><td>37.97</td><td>0.00</td><td>158</td><td>20</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5760.07	51.09	68.20	-17.11	41.57	33.78	13.71	37.97	0.00	158	20	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5760.07	51.09	68.20	-17.11	41.57	33.78	13.71	37.97	0.00	158	20	PEAK																																		

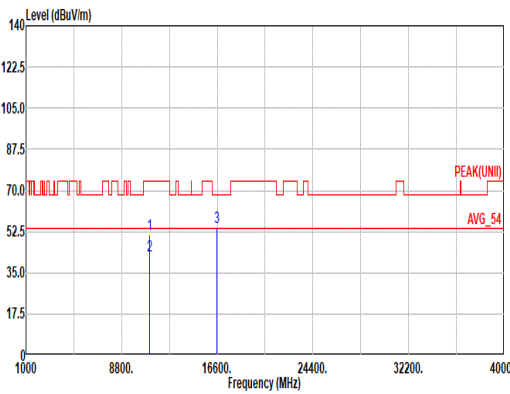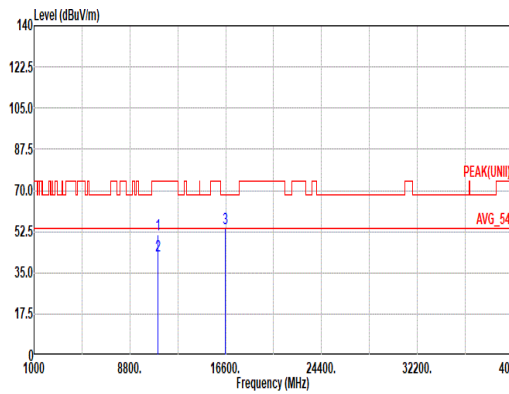


Mode	41																									
	Harmonic																									
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Full RU_5530MHz																									
ANT	6+7																									
Pol.	Horizontal							Vertical																		
Peak Avg																										
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL							Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11060.00	51.46	74.00	-22.54	34.63	38.82	19.10	42.00	0.91	312	58	PEAK		1	11060.00	51.30	74.00	-22.70	34.47	38.82	19.10	42.00	0.91	164	184	PEAK
2	11060.00	42.01	54.00	-11.99	25.18	38.82	19.10	42.00	0.91	312	58	Average		2	11060.00	42.03	54.00	-11.97	25.20	38.82	19.10	42.00	0.91	164	184	Average
3	16590.00	54.66	68.20	-13.54	35.06	39.10	23.61	44.07	0.96	--	--	PEAK		3	16590.00	53.71	68.20	-14.49	34.11	39.10	23.61	44.07	0.96	--	--	PEAK

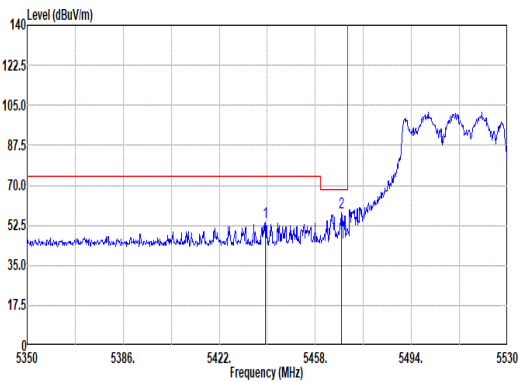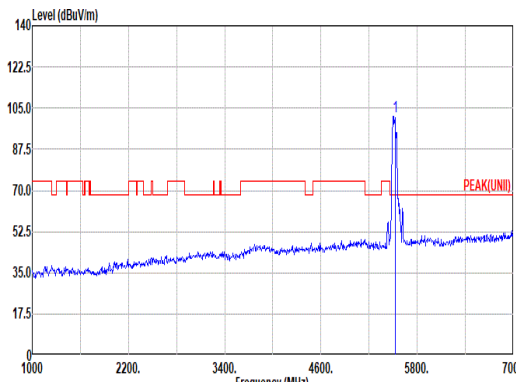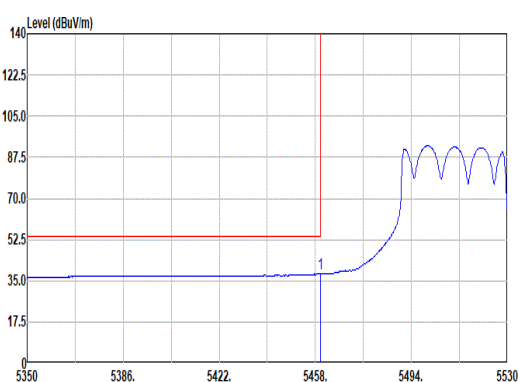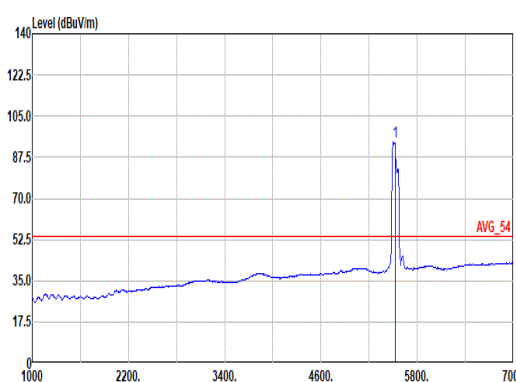

Mode	42																																																																																																														
	Band Edge - L																																																																																																														
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Partial_484/65RU_5530MHz																																																																																																														
ANT	6+7																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5439.28</td><td>54.05</td><td>74.00</td><td>-19.95</td><td>45.60</td><td>33.02</td><td>13.31</td><td>37.88</td><td>0.00</td><td>150</td><td>112</td><td>PEAK</td></tr><tr><td>2</td><td>5467.90</td><td>57.92</td><td>68.20</td><td>-10.28</td><td>49.51</td><td>32.96</td><td>13.34</td><td>37.89</td><td>0.00</td><td>150</td><td>112</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5439.28	54.05	74.00	-19.95	45.60	33.02	13.31	37.88	0.00	150	112	PEAK	2	5467.90	57.92	68.20	-10.28	49.51	32.96	13.34	37.89	0.00	150	112	PEAK	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>101.56</td><td>-----</td><td>-----</td><td>93.19</td><td>32.90</td><td>13.38</td><td>37.91</td><td>0.00</td><td>150</td><td>112</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5530.00	101.56	-----	-----	93.19	32.90	13.38	37.91	0.00	150	112
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5439.28	54.05	74.00	-19.95	45.60	33.02	13.31	37.88	0.00	150	112	PEAK																																																																																																			
2	5467.90	57.92	68.20	-10.28	49.51	32.96	13.34	37.89	0.00	150	112	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																					
1	5530.00	101.56	-----	-----	93.19	32.90	13.38	37.91	0.00	150	112	PEAK																																																																																																			
Avg																																																																																																															
	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.98</td><td>37.98</td><td>54.00</td><td>-16.02</td><td>29.56</td><td>32.98</td><td>13.33</td><td>37.89</td><td>0.00</td><td>150</td><td>112</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.98	37.98	54.00	-16.02	29.56	32.98	13.33	37.89	0.00	150	112	AVERAGE	Site : 03CH20-HY Condition: AVG 54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>94.14</td><td>-----</td><td>-----</td><td>85.77</td><td>32.90</td><td>13.38</td><td>37.91</td><td>0.00</td><td>150</td><td>112</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5530.00	94.14	-----	-----	85.77	32.90	13.38	37.91	0.00	150	112	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5459.98	37.98	54.00	-16.02	29.56	32.98	13.33	37.89	0.00	150	112	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																					
1	5530.00	94.14	-----	-----	85.77	32.90	13.38	37.91	0.00	150	112	AVERAGE																																																																																																			

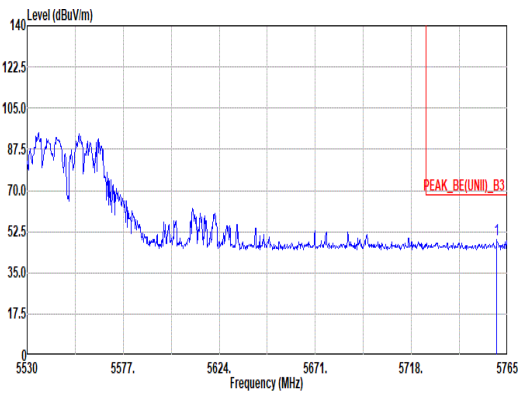


Mode	42																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Partial_484/65RU_5530MHz																																													
ANT	6+7																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5759.83</td><td>49.05</td><td>68.20</td><td>-19.15</td><td>39.48</td><td>33.78</td><td>13.71</td><td>37.92</td><td>0.00</td><td>150</td><td>112</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5759.83	49.05	68.20	-19.15	39.48	33.78	13.71	37.92	0.00	150	112	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5759.83	49.05	68.20	-19.15	39.48	33.78	13.71	37.92	0.00	150	112	PEAK																																		







Mode	42																																																																																											
	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Partial_484/65RU_5530MHz																																																																																											
ANT	6+7																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5459.98</td><td>62.91</td><td>74.00</td><td>-11.09</td><td>54.49</td><td>32.98</td><td>13.33</td><td>37.89</td><td>0.00 127 22 PEAK</td></tr><tr><td>2</td><td>5468.08</td><td>66.24</td><td>68.20</td><td>-1.96</td><td>57.83</td><td>32.96</td><td>13.34</td><td>37.89</td><td>0.00 127 22 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5459.98	62.91	74.00	-11.09	54.49	32.98	13.33	37.89	0.00 127 22 PEAK	2	5468.08	66.24	68.20	-1.96	57.83	32.96	13.34	37.89	0.00 127 22 PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>106.28</td><td>-----</td><td>-----</td><td>97.91</td><td>32.91</td><td>13.37</td><td>37.91</td><td>0.00 127 22 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5530.00	106.28	-----	-----	97.91	32.91	13.37	37.91	0.00 127 22 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																			
1	5459.98	62.91	74.00	-11.09	54.49	32.98	13.33	37.89	0.00 127 22 PEAK																																																																																			
2	5468.08	66.24	68.20	-1.96	57.83	32.96	13.34	37.89	0.00 127 22 PEAK																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																			
1	5530.00	106.28	-----	-----	97.91	32.91	13.37	37.91	0.00 127 22 PEAK																																																																																			
Avg	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5459.98</td><td>41.37</td><td>54.00</td><td>-12.63</td><td>32.95</td><td>32.98</td><td>13.33</td><td>37.89</td><td>0.00 127 22 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5459.98	41.37	54.00	-12.63	32.95	32.98	13.33	37.89	0.00 127 22 AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>98.59</td><td>-----</td><td>-----</td><td>90.22</td><td>32.91</td><td>13.37</td><td>37.91</td><td>0.00 127 22 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5530.00	98.59	-----	-----	90.22	32.91	13.37	37.91	0.00 127 22 AVERAGE										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																			
1	5459.98	41.37	54.00	-12.63	32.95	32.98	13.33	37.89	0.00 127 22 AVERAGE																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																			
1	5530.00	98.59	-----	-----	90.22	32.91	13.37	37.91	0.00 127 22 AVERAGE																																																																																			

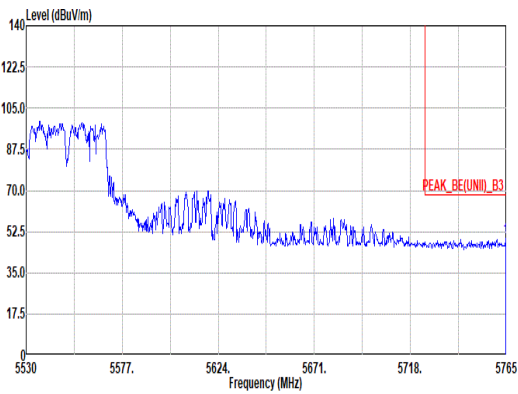


Mode	42																																																				
	Band Edge - R																																																				
	U-NII-2C_5.47-5.725_802.11ax HE80_CH106_Partial_484/65RU_5530MHz																																																				
ANT	6+7																																																				
Pol.	Vertical						Fundamental																																														
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5764.77</td><td>49.44</td><td>68.20</td><td>-18.76</td><td>39.83</td><td>33.82</td><td>13.71</td><td>37.92</td><td>0.00</td><td>127</td><td>22 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5764.77	49.44	68.20	-18.76	39.83	33.82	13.71	37.92	0.00	127	22 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1 5764.77	49.44	68.20	-18.76	39.83	33.82	13.71	37.92	0.00	127	22 PEAK																																											

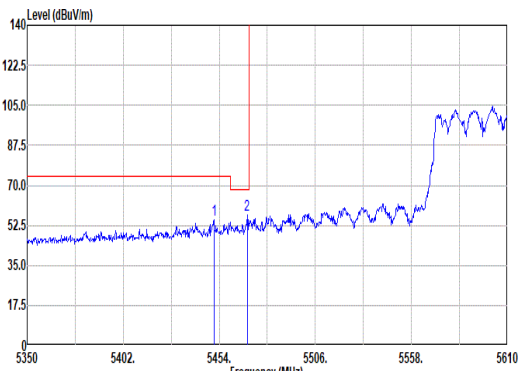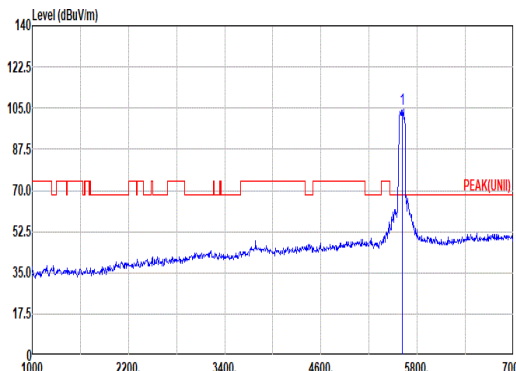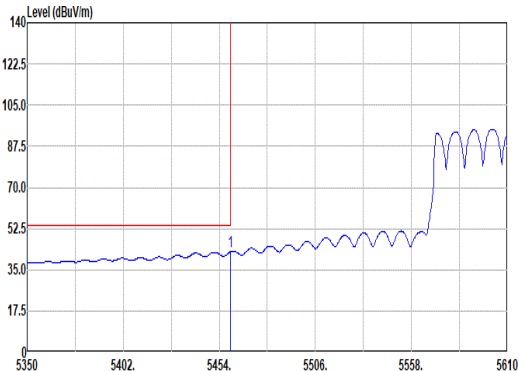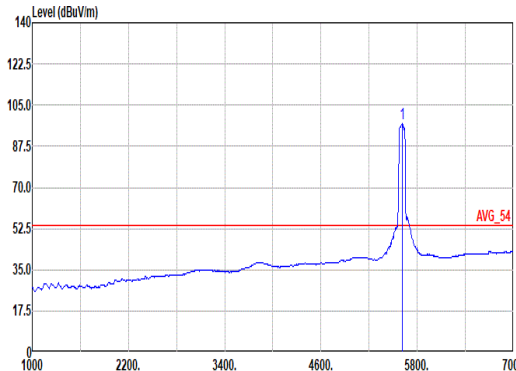

Mode	43																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																																																																																															
ANT	6+7																																																																																																															
Pol.	Horizontal						Fundamental																																																																																																									
Peak																																																																																																																
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5451.14</td><td>54.83</td><td>74.00</td><td>-19.17</td><td>46.40</td><td>33.00</td><td>13.32</td><td>37.89</td><td>0.00</td><td>200</td><td>333</td><td>PEAK</td></tr><tr><td>2</td><td>5469.08</td><td>57.13</td><td>68.20</td><td>-11.07</td><td>48.73</td><td>32.96</td><td>13.34</td><td>37.90</td><td>0.00</td><td>200</td><td>333</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5451.14	54.83	74.00	-19.17	46.40	33.00	13.32	37.89	0.00	200	333	PEAK	2	5469.08	57.13	68.20	-11.07	48.73	32.96	13.34	37.90	0.00	200	333	PEAK	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>104.39</td><td>-----</td><td>-----</td><td>95.65</td><td>33.13</td><td>13.53</td><td>37.92</td><td>0.00</td><td>200</td><td>333</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5610.00	104.39	-----	-----	95.65	33.13	13.53	37.92	0.00	200	333
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5451.14	54.83	74.00	-19.17	46.40	33.00	13.32	37.89	0.00	200	333	PEAK																																																																																																				
2	5469.08	57.13	68.20	-11.07	48.73	32.96	13.34	37.90	0.00	200	333	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5610.00	104.39	-----	-----	95.65	33.13	13.53	37.92	0.00	200	333	PEAK																																																																																																				
Avg																																																																																																																
	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.98</td><td>42.71</td><td>54.00</td><td>-11.29</td><td>34.29</td><td>32.98</td><td>13.33</td><td>37.89</td><td>0.00</td><td>200</td><td>333</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5459.98	42.71	54.00	-11.29	34.29	32.98	13.33	37.89	0.00	200	333	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>97.02</td><td>-----</td><td>-----</td><td>88.36</td><td>33.06</td><td>13.51</td><td>37.91</td><td>0.00</td><td>200</td><td>333</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5610.00	97.02	-----	-----	88.36	33.06	13.51	37.91	0.00	200	333	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5459.98	42.71	54.00	-11.29	34.29	32.98	13.33	37.89	0.00	200	333	AVERAGE																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5610.00	97.02	-----	-----	88.36	33.06	13.51	37.91	0.00	200	333	AVERAGE																																																																																																				

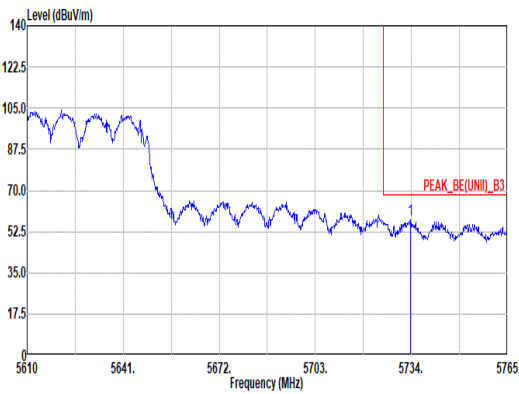


Mode	43																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																													
ANT	6+7																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5733.69</td><td>57.53</td><td>68.20</td><td>-10.67</td><td>48.11</td><td>33.67</td><td>13.67</td><td>37.92</td><td>0.00</td><td>200</td><td>333</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5733.69	57.53	68.20	-10.67	48.11	33.67	13.67	37.92	0.00	200	333	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5733.69	57.53	68.20	-10.67	48.11	33.67	13.67	37.92	0.00	200	333	PEAK																																		





Mode	43																																																																																																												
	Band Edge - L																																																																																																												
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																																																																																												
ANT	6+7																																																																																																												
Pol.	Vertical						Fundamental																																																																																																						
Peak																																																																																																													
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5451.92</td><td>54.86</td><td>74.00</td><td>-19.14</td><td>46.43</td><td>33.00</td><td>13.32</td><td>37.89</td><td>0.00</td><td>0.00</td><td>127</td><td>16</td><td>PEAK</td></tr><tr><td>2</td><td>5468.56</td><td>58.78</td><td>68.20</td><td>-9.42</td><td>50.37</td><td>32.96</td><td>13.34</td><td>37.89</td><td>0.00</td><td>0.00</td><td>127</td><td>16</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	cm	deg		1	5451.92	54.86	74.00	-19.14	46.43	33.00	13.32	37.89	0.00	0.00	127	16	PEAK	2	5468.56	58.78	68.20	-9.42	50.37	32.96	13.34	37.89	0.00	0.00	127	16	PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>108.17</td><td>-----</td><td>-----</td><td>-----</td><td>99.55</td><td>33.03</td><td>13.50</td><td>37.91</td><td>0.00</td><td>127</td><td>16</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	cm	deg		1	5610.00	108.17	-----	-----	-----	99.55	33.03	13.50	37.91	0.00	127	16
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																	
1	5451.92	54.86	74.00	-19.14	46.43	33.00	13.32	37.89	0.00	0.00	127	16	PEAK																																																																																																
2	5468.56	58.78	68.20	-9.42	50.37	32.96	13.34	37.89	0.00	0.00	127	16	PEAK																																																																																																
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																	
1	5610.00	108.17	-----	-----	-----	99.55	33.03	13.50	37.91	0.00	127	16	PEAK																																																																																																
Avg																																																																																																													
	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5455.30</td><td>43.93</td><td>54.00</td><td>-10.07</td><td>35.51</td><td>32.99</td><td>13.32</td><td>37.89</td><td>0.00</td><td>0.00</td><td>127</td><td>16</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	cm	deg		1	5455.30	43.93	54.00	-10.07	35.51	32.99	13.32	37.89	0.00	0.00	127	16	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5610.00</td><td>100.58</td><td>-----</td><td>-----</td><td>-----</td><td>91.96</td><td>33.03</td><td>13.50</td><td>37.91</td><td>0.00</td><td>127</td><td>16</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	cm	deg		1	5610.00	100.58	-----	-----	-----	91.96	33.03	13.50	37.91	0.00	127	16	AVERAGE													
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																	
1	5455.30	43.93	54.00	-10.07	35.51	32.99	13.32	37.89	0.00	0.00	127	16	AVERAGE																																																																																																
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																	
1	5610.00	100.58	-----	-----	-----	91.96	33.03	13.50	37.91	0.00	127	16	AVERAGE																																																																																																




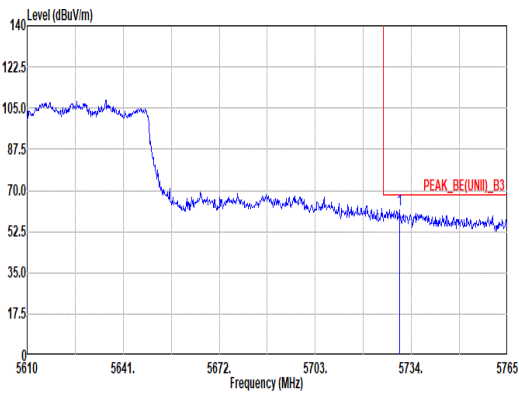


Mode	43																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																													
ANT	6+7																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5730.28</td><td>61.91</td><td>68.20</td><td>-6.29</td><td>52.50</td><td>33.66</td><td>13.67</td><td>37.92</td><td>0.00</td><td>127</td><td>16</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5730.28	61.91	68.20	-6.29	52.50	33.66	13.67	37.92	0.00	127	16	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5730.28	61.91	68.20	-6.29	52.50	33.66	13.67	37.92	0.00	127	16	PEAK																																		

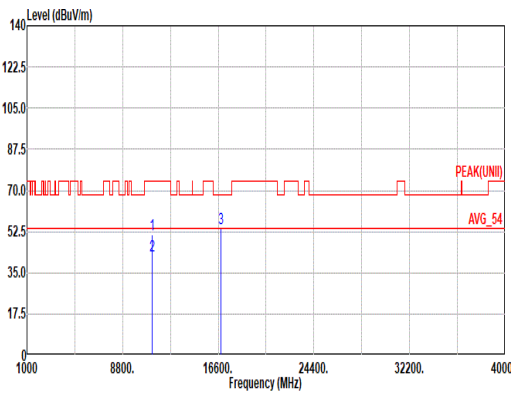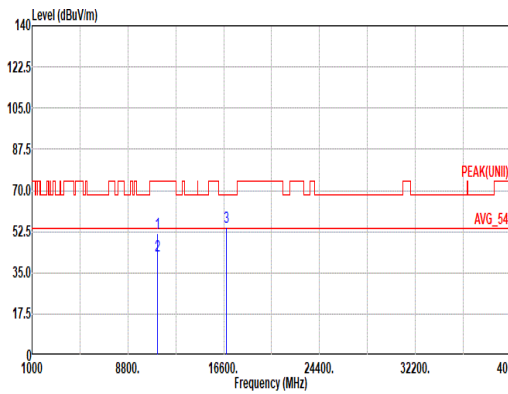


Mode	43																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Full RU_5610MHz																																																																																																																																													
ANT	6+7																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11220.00</td><td>51.14</td><td>74.00</td><td>-22.86</td><td>34.28</td><td>38.90</td><td>19.23</td><td>42.18</td><td>0.91</td><td>115</td><td>318</td><td></td><td>PEAK</td></tr><tr><td>2</td><td>11220.00</td><td>42.06</td><td>54.00</td><td>-11.94</td><td>25.20</td><td>38.90</td><td>19.23</td><td>42.18</td><td>0.91</td><td>115</td><td>318</td><td></td><td>Average</td></tr><tr><td>3</td><td>16830.00</td><td>53.78</td><td>68.20</td><td>-14.42</td><td>33.95</td><td>39.36</td><td>23.78</td><td>44.27</td><td>0.96</td><td>--</td><td>--</td><td></td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11220.00	51.14	74.00	-22.86	34.28	38.90	19.23	42.18	0.91	115	318		PEAK	2	11220.00	42.06	54.00	-11.94	25.20	38.90	19.23	42.18	0.91	115	318		Average	3	16830.00	53.78	68.20	-14.42	33.95	39.36	23.78	44.27	0.96	--	--		PEAK	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11220.00</td><td>51.78</td><td>74.00</td><td>-22.22</td><td>34.92</td><td>38.90</td><td>19.23</td><td>42.18</td><td>0.91</td><td>200</td><td>24</td><td></td><td>PEAK</td></tr><tr><td>2</td><td>11220.00</td><td>42.02</td><td>54.00</td><td>-11.98</td><td>25.16</td><td>38.90</td><td>19.23</td><td>42.18</td><td>0.91</td><td>200</td><td>24</td><td></td><td>Average</td></tr><tr><td>3</td><td>16830.00</td><td>54.37</td><td>68.20</td><td>-13.83</td><td>34.54</td><td>39.36</td><td>23.78</td><td>44.27</td><td>0.96</td><td>--</td><td>--</td><td></td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11220.00	51.78	74.00	-22.22	34.92	38.90	19.23	42.18	0.91	200	24		PEAK	2	11220.00	42.02	54.00	-11.98	25.16	38.90	19.23	42.18	0.91	200	24		Average	3	16830.00	54.37	68.20	-13.83	34.54	39.36	23.78	44.27	0.96	--	--		PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																		
1	11220.00	51.14	74.00	-22.86	34.28	38.90	19.23	42.18	0.91	115	318		PEAK																																																																																																																																	
2	11220.00	42.06	54.00	-11.94	25.20	38.90	19.23	42.18	0.91	115	318		Average																																																																																																																																	
3	16830.00	53.78	68.20	-14.42	33.95	39.36	23.78	44.27	0.96	--	--		PEAK																																																																																																																																	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																		
1	11220.00	51.78	74.00	-22.22	34.92	38.90	19.23	42.18	0.91	200	24		PEAK																																																																																																																																	
2	11220.00	42.02	54.00	-11.98	25.16	38.90	19.23	42.18	0.91	200	24		Average																																																																																																																																	
3	16830.00	54.37	68.20	-13.83	34.54	39.36	23.78	44.27	0.96	--	--		PEAK																																																																																																																																	

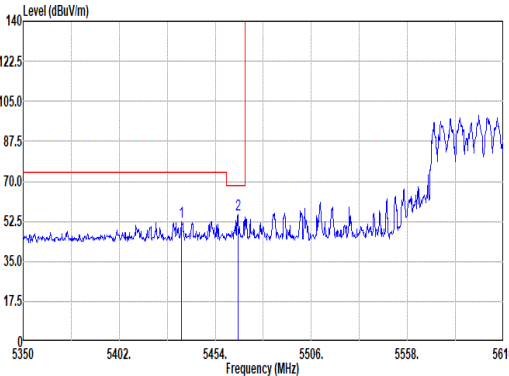
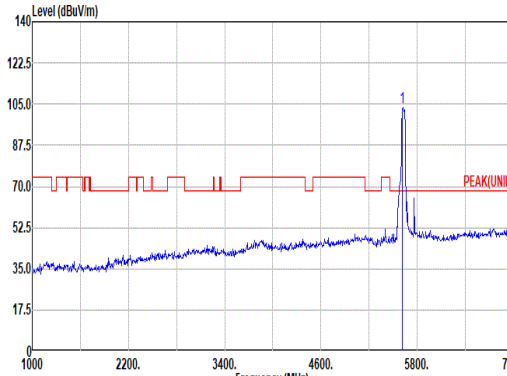
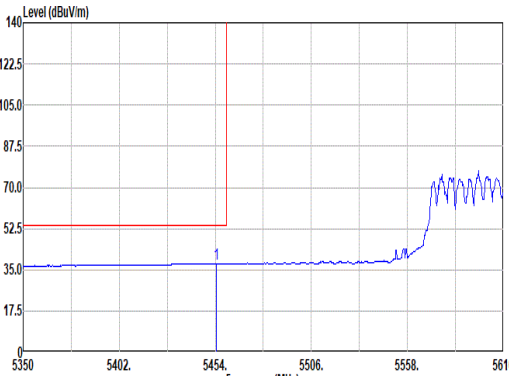
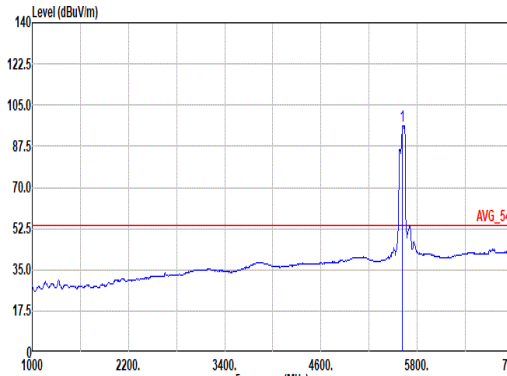


		44																																																																																																																			
Mode	Band Edge - L																																																																																																																				
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Partial_484/66RU_5610MHz																																																																																																																				
ANT	6+7																																																																																																																				
Pol.	Horizontal						Fundamental																																																																																																														
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5435.54</td><td>52.54</td><td>74.00</td><td>-21.46</td><td>44.09</td><td>33.03</td><td>13.30</td><td>37.88</td><td>0.00</td><td>200</td><td>307</td><td>PEAK</td></tr><tr><td>2</td><td>5466.22</td><td>55.21</td><td>68.20</td><td>-12.99</td><td>46.79</td><td>32.97</td><td>13.34</td><td>37.89</td><td>0.00</td><td>200</td><td>307</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5435.54	52.54	74.00	-21.46	44.09	33.03	13.30	37.88	0.00	200	307	PEAK	2	5466.22	55.21	68.20	-12.99	46.79	32.97	13.34	37.89	0.00	200	307	PEAK	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5610.00</td><td>103.56</td><td>-----</td><td>-----</td><td>94.85</td><td>33.10</td><td>13.53</td><td>37.92</td><td>0.00</td><td>200</td><td>307</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	103.56	-----	-----	94.85	33.10	13.53	37.92	0.00	200	307	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	5435.54	52.54	74.00	-21.46	44.09	33.03	13.30	37.88	0.00	200	307	PEAK																																																																																																									
2	5466.22	55.21	68.20	-12.99	46.79	32.97	13.34	37.89	0.00	200	307	PEAK																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	5610.00	103.56	-----	-----	94.85	33.10	13.53	37.92	0.00	200	307	PEAK																																																																																																									
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5454.78</td><td>37.53</td><td>54.00</td><td>-16.47</td><td>29.11</td><td>32.99</td><td>13.32</td><td>37.89</td><td>0.00</td><td>200</td><td>307</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.78	37.53	54.00	-16.47	29.11	32.99	13.32	37.89	0.00	200	307	AVERAGE	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5610.00</td><td>96.32</td><td>-----</td><td>-----</td><td>87.61</td><td>33.10</td><td>13.53</td><td>37.92</td><td>0.00</td><td>200</td><td>307</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	96.32	-----	-----	87.61	33.10	13.53	37.92	0.00	200	307	AVERAGE													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	5454.78	37.53	54.00	-16.47	29.11	32.99	13.32	37.89	0.00	200	307	AVERAGE																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	5610.00	96.32	-----	-----	87.61	33.10	13.53	37.92	0.00	200	307	AVERAGE																																																																																																									

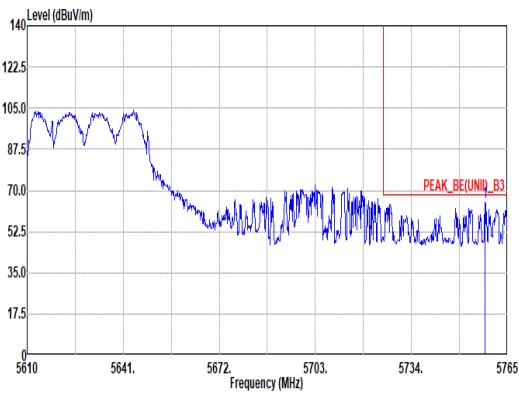


Mode	44																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Partial_484/66RU_5610MHz																																													
ANT	6+7																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5757.72</td><td>65.11</td><td>68.20</td><td>-3.09</td><td>55.57</td><td>33.76</td><td>13.70</td><td>37.92</td><td>0.00</td><td>200</td><td>307</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5757.72	65.11	68.20	-3.09	55.57	33.76	13.70	37.92	0.00	200	307	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5757.72	65.11	68.20	-3.09	55.57	33.76	13.70	37.92	0.00	200	307	PEAK																																		

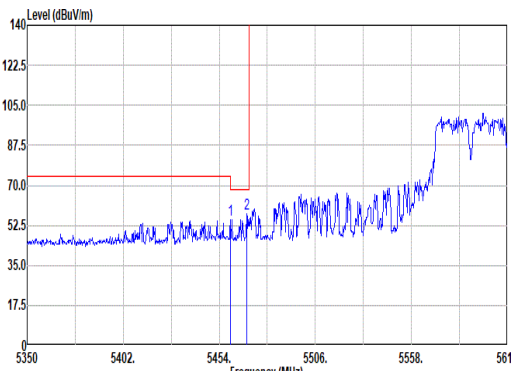
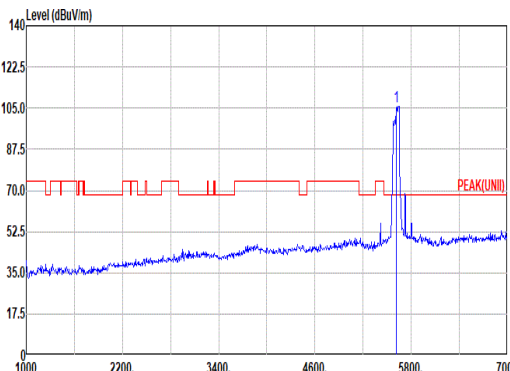
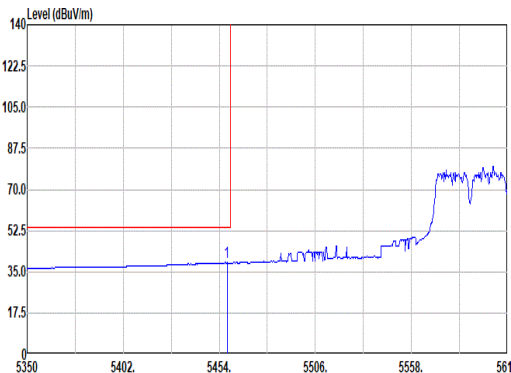
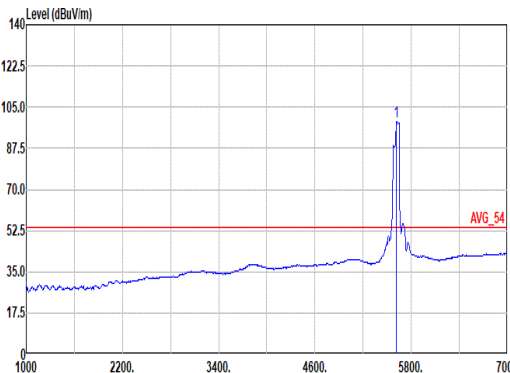


		44																																																																																																																																																																																																																				
Mode	Band Edge - L																																																																																																																																																																																																																					
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Partial_484/66RU_5610MHz																																																																																																																																																																																																																					
ANT	6+7																																																																																																																																																																																																																					
Pol.	Vertical						Fundamental																																																																																																																																																																																																															
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.98</td><td>55.16</td><td>74.00</td><td>-18.84</td><td>46.74</td><td>32.98</td><td>13.33</td><td>37.89</td><td>0.00</td><td>145</td><td>11</td><td>PEAK</td></tr><tr><td>2</td><td>5468.82</td><td>57.37</td><td>68.20</td><td>-10.83</td><td>48.97</td><td>32.96</td><td>13.34</td><td>37.90</td><td>0.00</td><td>145</td><td>11</td><td>PEAK</td></tr></table>  Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5610.00</td><td>105.80</td><td>-----</td><td>-----</td><td>97.11</td><td>33.08</td><td>13.52</td><td>37.91</td><td>0.00</td><td>145</td><td>11</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.98	55.16	74.00	-18.84	46.74	32.98	13.33	37.89	0.00	145	11	PEAK	2	5468.82	57.37	68.20	-10.83	48.97	32.96	13.34	37.90	0.00	145	11	PEAK		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	105.80	-----	-----	97.11	33.08	13.52	37.91	0.00	145	11	PEAK	Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.16</td><td>38.89</td><td>54.00</td><td>-15.11</td><td>30.47</td><td>32.98</td><td>13.33</td><td>37.89</td><td>0.00</td><td>145</td><td>11</td><td>AVERAGE</td></tr></table>  Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5610.00</td><td>98.67</td><td>-----</td><td>-----</td><td>90.01</td><td>33.06</td><td>13.51</td><td>37.91</td><td>0.00</td><td>145</td><td>11</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.16	38.89	54.00	-15.11	30.47	32.98	13.33	37.89	0.00	145	11	AVERAGE		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5610.00	98.67	-----	-----	90.01	33.06	13.51	37.91	0.00	145	11	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																												
1	5459.98	55.16	74.00	-18.84	46.74	32.98	13.33	37.89	0.00	145	11	PEAK																																																																																																																																																																																																										
2	5468.82	57.37	68.20	-10.83	48.97	32.96	13.34	37.90	0.00	145	11	PEAK																																																																																																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																												
1	5610.00	105.80	-----	-----	97.11	33.08	13.52	37.91	0.00	145	11	PEAK																																																																																																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																												
1	5458.16	38.89	54.00	-15.11	30.47	32.98	13.33	37.89	0.00	145	11	AVERAGE																																																																																																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																												
1	5610.00	98.67	-----	-----	90.01	33.06	13.51	37.91	0.00	145	11	AVERAGE																																																																																																																																																																																																										

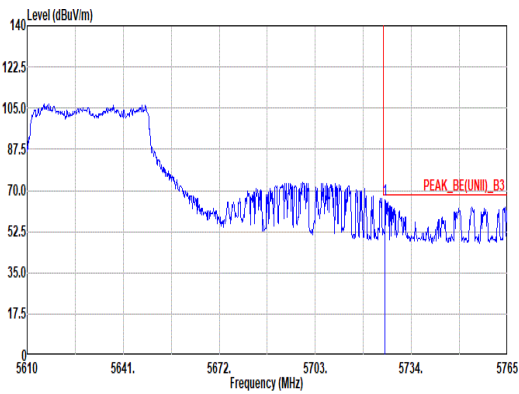


Mode	44																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ax HE80_CH122_Partial_484/66RU_5610MHz																																													
ANT	6+7																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.48</td><td>66.03</td><td>68.20</td><td>-2.17</td><td>56.64</td><td>33.65</td><td>13.66</td><td>37.92</td><td>0.00</td><td>145</td><td>11</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5725.48	66.03	68.20	-2.17	56.64	33.65	13.66	37.92	0.00	145	11	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5725.48	66.03	68.20	-2.17	56.64	33.65	13.66	37.92	0.00	145	11	PEAK																																		

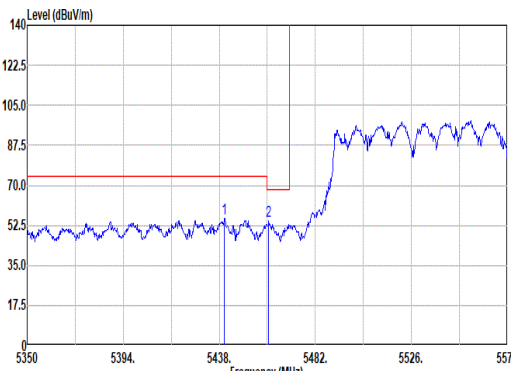
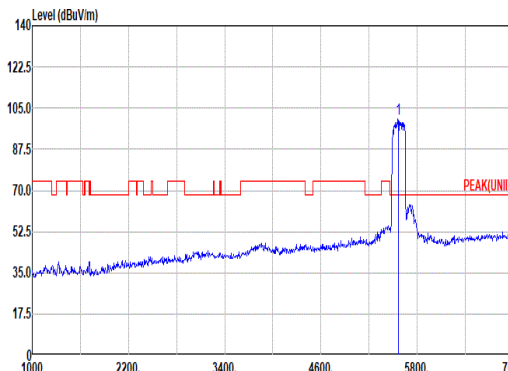
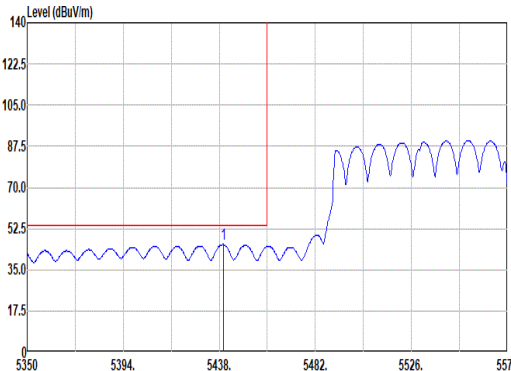
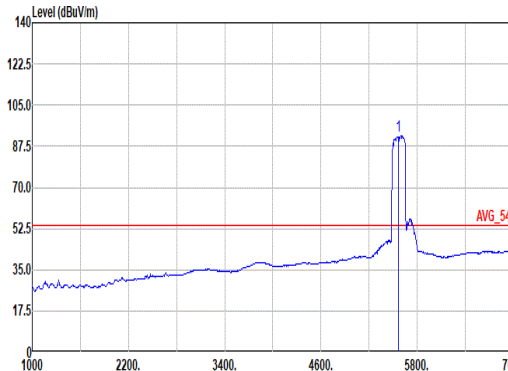


Mode	45																																																																																																													
	Band Edge - L																																																																																																													
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																																													
ANT	6+7																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																							
Peak																																																																																																														
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5440.42</td><td>55.52</td><td>74.00</td><td>-18.48</td><td>47.07</td><td>33.02</td><td>13.31</td><td>37.88</td><td>0.00</td><td>200</td><td>316</td><td>PEAK</td></tr><tr><td>2</td><td>5460.66</td><td>54.34</td><td>68.20</td><td>-13.86</td><td>45.92</td><td>32.98</td><td>13.33</td><td>37.89</td><td>0.00</td><td>200</td><td>316</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5440.42	55.52	74.00	-18.48	47.07	33.02	13.31	37.88	0.00	200	316	PEAK	2	5460.66	54.34	68.20	-13.86	45.92	32.98	13.33	37.89	0.00	200	316	PEAK	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5570.00</td><td>100.23</td><td>-----</td><td>-----</td><td>91.78</td><td>32.92</td><td>13.44</td><td>37.91</td><td>0.00</td><td>200</td><td>316</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	100.23	-----	-----	91.78	32.92	13.44	37.91	0.00	200	316
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5440.42	55.52	74.00	-18.48	47.07	33.02	13.31	37.88	0.00	200	316	PEAK																																																																																																		
2	5460.66	54.34	68.20	-13.86	45.92	32.98	13.33	37.89	0.00	200	316	PEAK																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5570.00	100.23	-----	-----	91.78	32.92	13.44	37.91	0.00	200	316	PEAK																																																																																																		
Avg																																																																																																														
	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5439.76</td><td>45.71</td><td>54.00</td><td>-8.29</td><td>37.26</td><td>33.02</td><td>13.31</td><td>37.88</td><td>0.00</td><td>200</td><td>316</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5439.76	45.71	54.00	-8.29	37.26	33.02	13.31	37.88	0.00	200	316	AVERAGE	Site : 03CH20-HY Condition: AVG 54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5570.00</td><td>91.88</td><td>-----</td><td>-----</td><td>83.29</td><td>33.01</td><td>13.49</td><td>37.91</td><td>0.00</td><td>200</td><td>316</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5570.00	91.88	-----	-----	83.29	33.01	13.49	37.91	0.00	200	316	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5439.76	45.71	54.00	-8.29	37.26	33.02	13.31	37.88	0.00	200	316	AVERAGE																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5570.00	91.88	-----	-----	83.29	33.01	13.49	37.91	0.00	200	316	AVERAGE																																																																																																		

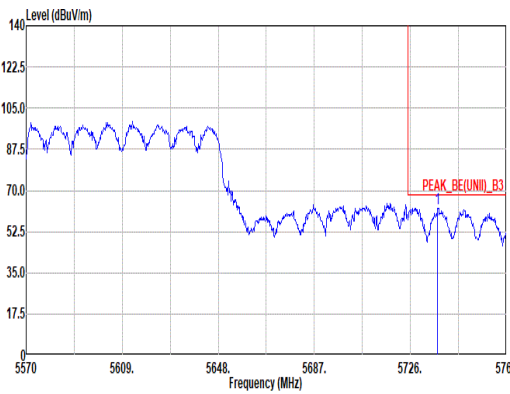


Mode	45																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																									
ANT	6+7																																									
Pol.	Horizontal	Fundamental																																								
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5737.12</td><td>62.44</td><td>68.20</td><td>-5.76</td><td>53.01</td><td>33.67</td><td>13.68</td><td>37.92</td><td>0.00</td><td>200 316 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5737.12	62.44	68.20	-5.76	53.01	33.67	13.68	37.92	0.00	200 316 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																	
1 5737.12	62.44	68.20	-5.76	53.01	33.67	13.68	37.92	0.00	200 316 PEAK																																	

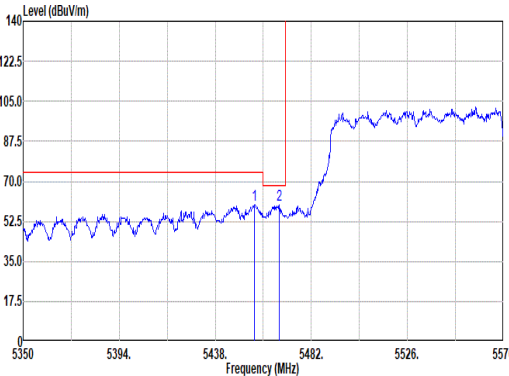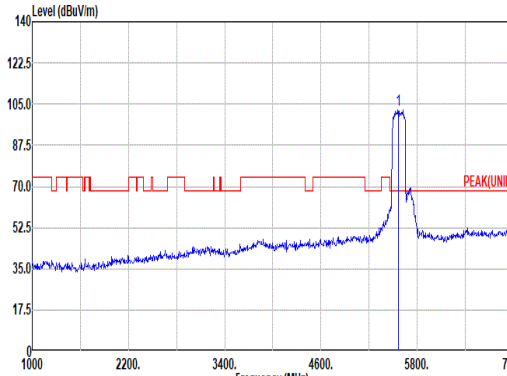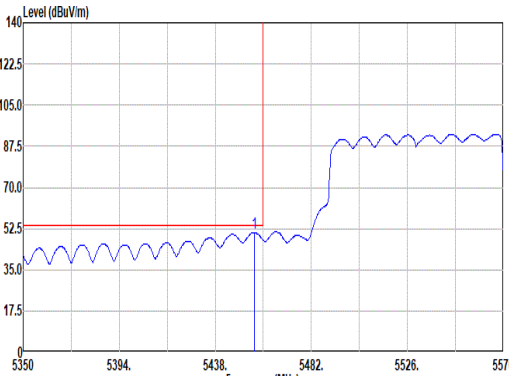
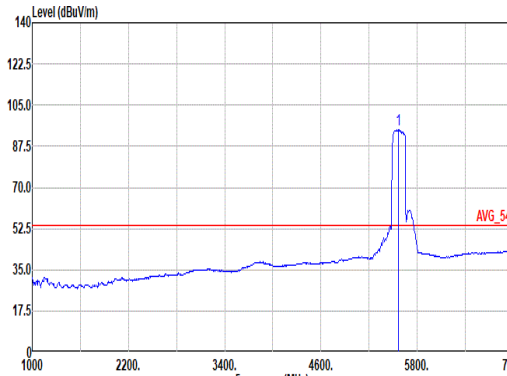


Mode	45																																																																																																										
	Band Edge - L																																																																																																										
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																																										
ANT	6+7																																																																																																										
Pol.	Vertical						Fundamental																																																																																																				
Peak																																																																																																											
	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto						Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto																																																																																																				
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5456.04</td><td>59.56</td><td>74.00</td><td>-14.44</td><td>51.14</td><td>32.99</td><td>13.32</td><td>37.89</td><td>0.00</td><td>143</td><td>8</td><td>PEAK</td></tr><tr><td>2</td><td>5467.26</td><td>59.62</td><td>68.20</td><td>-8.58</td><td>51.20</td><td>32.97</td><td>13.34</td><td>37.89</td><td>0.00</td><td>143</td><td>8</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5456.04	59.56	74.00	-14.44	51.14	32.99	13.32	37.89	0.00	143	8	PEAK	2	5467.26	59.62	68.20	-8.58	51.20	32.97	13.34	37.89	0.00	143	8	PEAK	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5570.00</td><td>102.56</td><td>-----</td><td>-----</td><td>-----</td><td>93.85</td><td>33.10</td><td>13.53</td><td>37.92</td><td>0.00</td><td>143</td><td>8</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5570.00	102.56	-----	-----	-----	93.85	33.10	13.53	37.92	0.00	143	8	PEAK
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																														
1	5456.04	59.56	74.00	-14.44	51.14	32.99	13.32	37.89	0.00	143	8	PEAK																																																																																															
2	5467.26	59.62	68.20	-8.58	51.20	32.97	13.34	37.89	0.00	143	8	PEAK																																																																																															
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																														
1	5570.00	102.56	-----	-----	-----	93.85	33.10	13.53	37.92	0.00	143	8	PEAK																																																																																														
Avg																																																																																																											
	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto						Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto																																																																																																				
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5455.82</td><td>50.87</td><td>54.00</td><td>-3.13</td><td>42.45</td><td>32.99</td><td>13.32</td><td>37.89</td><td>0.00</td><td>143</td><td>8</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5455.82	50.87	54.00	-3.13	42.45	32.99	13.32	37.89	0.00	143	8	AVERAGE	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5570.00</td><td>94.37</td><td>-----</td><td>-----</td><td>-----</td><td>85.90</td><td>32.93</td><td>13.45</td><td>37.91</td><td>0.00</td><td>143</td><td>8</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5570.00	94.37	-----	-----	-----	85.90	32.93	13.45	37.91	0.00	143	8	AVERAGE													
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																														
1	5455.82	50.87	54.00	-3.13	42.45	32.99	13.32	37.89	0.00	143	8	AVERAGE																																																																																															
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																														
1	5570.00	94.37	-----	-----	-----	85.90	32.93	13.45	37.91	0.00	143	8	AVERAGE																																																																																														




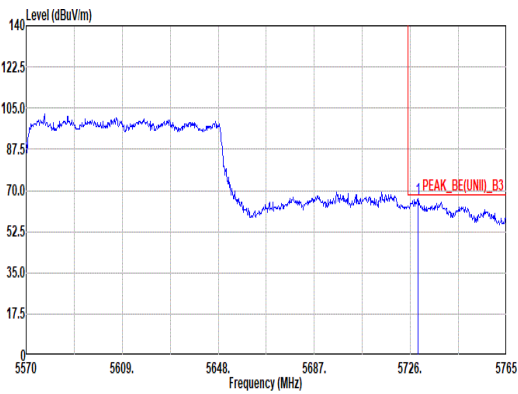


Mode	45																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																													
ANT	6+7																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5729.12</td><td>66.66</td><td>68.20</td><td>-1.54</td><td>57.26</td><td>33.66</td><td>13.66</td><td>37.92</td><td>0.00</td><td>143</td><td>8</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5729.12	66.66	68.20	-1.54	57.26	33.66	13.66	37.92	0.00	143	8	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5729.12	66.66	68.20	-1.54	57.26	33.66	13.66	37.92	0.00	143	8	PEAK																																		

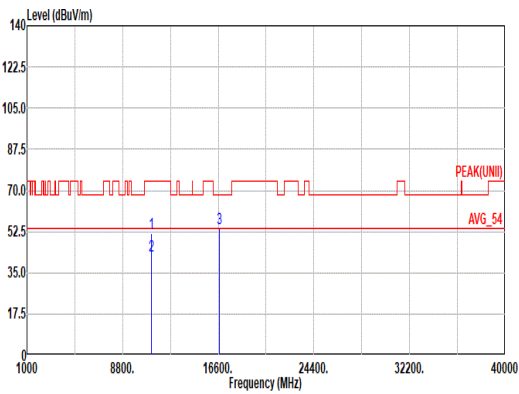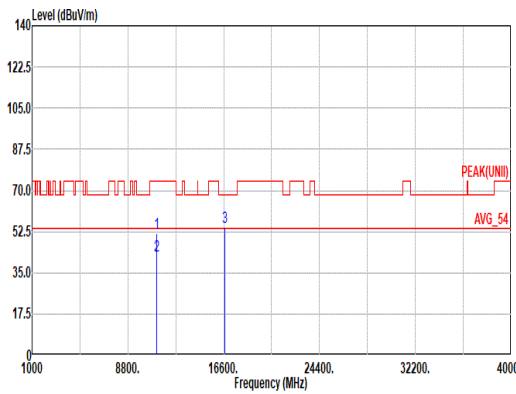


Mode	45																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Full RU_5570MHz																																																																																																																																													
ANT	6+7																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11140.00</td><td>51.61</td><td>74.00</td><td>-22.39</td><td>34.64</td><td>38.98</td><td>19.17</td><td>42.09</td><td>0.91</td><td>198</td><td>56</td><td></td><td>PEAK</td></tr><tr><td>2</td><td>11140.00</td><td>42.18</td><td>54.00</td><td>-11.82</td><td>25.21</td><td>38.98</td><td>19.17</td><td>42.09</td><td>0.91</td><td>198</td><td>56</td><td></td><td>Average</td></tr><tr><td>3</td><td>16710.00</td><td>53.97</td><td>68.20</td><td>-14.23</td><td>34.10</td><td>39.38</td><td>23.70</td><td>44.17</td><td>0.96</td><td>--</td><td>--</td><td></td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11140.00	51.61	74.00	-22.39	34.64	38.98	19.17	42.09	0.91	198	56		PEAK	2	11140.00	42.18	54.00	-11.82	25.21	38.98	19.17	42.09	0.91	198	56		Average	3	16710.00	53.97	68.20	-14.23	34.10	39.38	23.70	44.17	0.96	--	--		PEAK	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11140.00</td><td>51.82</td><td>74.00</td><td>-22.18</td><td>34.85</td><td>38.98</td><td>19.17</td><td>42.09</td><td>0.91</td><td>184</td><td>55</td><td></td><td>PEAK</td></tr><tr><td>2</td><td>11140.00</td><td>42.23</td><td>54.00</td><td>-11.77</td><td>25.26</td><td>38.98</td><td>19.17</td><td>42.09</td><td>0.91</td><td>184</td><td>55</td><td></td><td>Average</td></tr><tr><td>3</td><td>16710.00</td><td>54.57</td><td>68.20</td><td>-13.63</td><td>34.70</td><td>39.38</td><td>23.70</td><td>44.17</td><td>0.96</td><td>--</td><td>--</td><td></td><td>PEAK</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11140.00	51.82	74.00	-22.18	34.85	38.98	19.17	42.09	0.91	184	55		PEAK	2	11140.00	42.23	54.00	-11.77	25.26	38.98	19.17	42.09	0.91	184	55		Average	3	16710.00	54.57	68.20	-13.63	34.70	39.38	23.70	44.17	0.96	--	--		PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																		
1	11140.00	51.61	74.00	-22.39	34.64	38.98	19.17	42.09	0.91	198	56		PEAK																																																																																																																																	
2	11140.00	42.18	54.00	-11.82	25.21	38.98	19.17	42.09	0.91	198	56		Average																																																																																																																																	
3	16710.00	53.97	68.20	-14.23	34.10	39.38	23.70	44.17	0.96	--	--		PEAK																																																																																																																																	
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																		
1	11140.00	51.82	74.00	-22.18	34.85	38.98	19.17	42.09	0.91	184	55		PEAK																																																																																																																																	
2	11140.00	42.23	54.00	-11.77	25.26	38.98	19.17	42.09	0.91	184	55		Average																																																																																																																																	
3	16710.00	54.57	68.20	-13.63	34.70	39.38	23.70	44.17	0.96	--	--		PEAK																																																																																																																																	

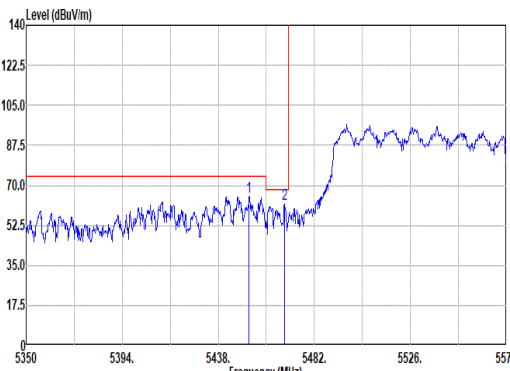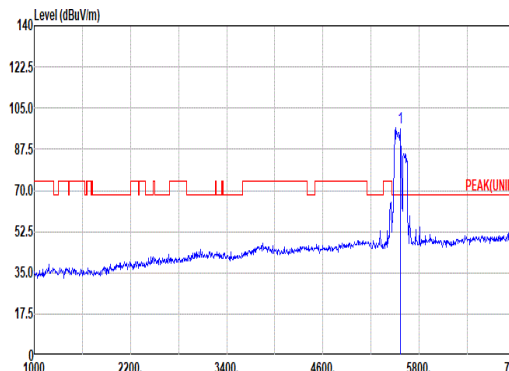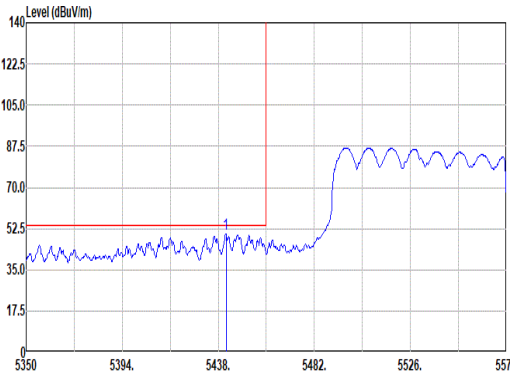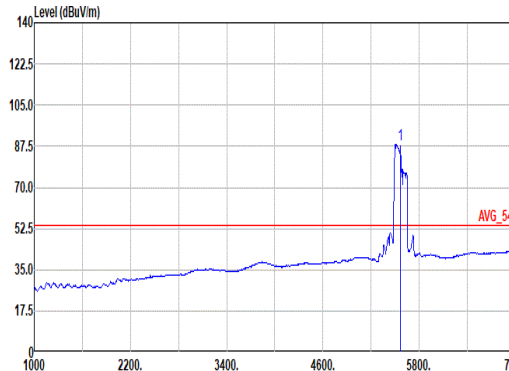

Mode	46																																																																																																												
	Band Edge - L																																																																																																												
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Partial_996/67RU_5570MHz																																																																																																												
ANT	6+7																																																																																																												
Pol.	Horizontal						Fundamental																																																																																																						
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5452.00</td><td>65.23</td><td>74.00</td><td>-8.77</td><td>56.00</td><td>33.00</td><td>13.32</td><td>37.89</td><td>0.00</td><td>202</td><td>0 PEAK</td></tr><tr><td>2</td><td>5468.36</td><td>61.55</td><td>68.20</td><td>-6.65</td><td>53.14</td><td>32.96</td><td>13.34</td><td>37.89</td><td>0.00</td><td>202</td><td>0 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5452.00	65.23	74.00	-8.77	56.00	33.00	13.32	37.89	0.00	202	0 PEAK	2	5468.36	61.55	68.20	-6.65	53.14	32.96	13.34	37.89	0.00	202	0 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5570.00</td><td>96.82</td><td>-----</td><td>-----</td><td>88.45</td><td>32.90</td><td>13.38</td><td>37.91</td><td>0.00</td><td>202</td><td>0 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5570.00	96.82	-----	-----	88.45	32.90	13.38	37.91	0.00	202	0 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5452.00	65.23	74.00	-8.77	56.00	33.00	13.32	37.89	0.00	202	0 PEAK																																																																																																		
2	5468.36	61.55	68.20	-6.65	53.14	32.96	13.34	37.89	0.00	202	0 PEAK																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5570.00	96.82	-----	-----	88.45	32.90	13.38	37.91	0.00	202	0 PEAK																																																																																																		
Avg	 Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:1.500kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5441.52</td><td>50.34</td><td>54.00</td><td>-3.66</td><td>41.89</td><td>33.02</td><td>13.31</td><td>37.88</td><td>0.00</td><td>202</td><td>0 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5441.52	50.34	54.00	-3.66	41.89	33.02	13.31	37.88	0.00	202	0 AVERAGE	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:1.500kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5570.00</td><td>88.43</td><td>-----</td><td>-----</td><td>80.06</td><td>32.91</td><td>13.37</td><td>37.91</td><td>0.00</td><td>202</td><td>0 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5570.00	88.43	-----	-----	80.06	32.91	13.37	37.91	0.00	202	0 AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5441.52	50.34	54.00	-3.66	41.89	33.02	13.31	37.88	0.00	202	0 AVERAGE																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																			
1	5570.00	88.43	-----	-----	80.06	32.91	13.37	37.91	0.00	202	0 AVERAGE																																																																																																		

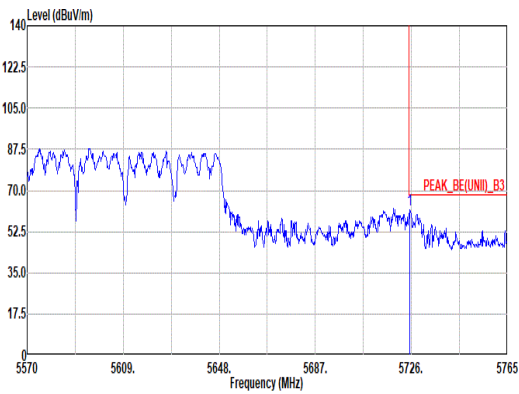


Mode	46																																												
	Band Edge - R																																												
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Partial_996/67RU_5570MHz																																												
ANT	6+7																																												
Pol.	Horizontal	Fundamental																																											
Peak	 Site : 03CH20-HY Condition: PEAK_BE(U-NII)_B3 3m HF_91280_02368_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.22</td><td>61.96</td><td>68.20</td><td>-6.24</td><td>52.57</td><td>33.65</td><td>13.66</td><td>37.92</td><td>0.00</td><td>202</td><td>0 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5725.22	61.96	68.20	-6.24	52.57	33.65	13.66	37.92	0.00	202	0 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5725.22	61.96	68.20	-6.24	52.57	33.65	13.66	37.92	0.00	202	0 PEAK																																		







Mode	46																																																																																																			
	Band Edge - L																																																																																																			
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Partial_996/67RU_5570MHz																																																																																																			
ANT	6+7																																																																																																			
Pol.	Vertical					Fundamental																																																																																														
Peak	Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5450.76</td><td>59.18</td><td>74.00</td><td>-14.82</td><td>50.75</td><td>33.00</td><td>13.32</td><td>37.89</td><td>0.00 200 298 PEAK</td></tr><tr><td>2</td><td>5461.54</td><td>57.96</td><td>68.20</td><td>-10.24</td><td>49.54</td><td>32.98</td><td>13.33</td><td>37.89</td><td>0.00 200 298 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5450.76	59.18	74.00	-14.82	50.75	33.00	13.32	37.89	0.00 200 298 PEAK	2	5461.54	57.96	68.20	-10.24	49.54	32.98	13.33	37.89	0.00 200 298 PEAK	Site : 03CH20-HY Condition: PEAK(UNII)_3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5570.00</td><td>91.27</td><td>-----</td><td>-----</td><td>82.90</td><td>32.90</td><td>13.38</td><td>37.91</td><td>0.00 200 298 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5570.00	91.27	-----	-----	82.90	32.90	13.38	37.91	0.00 200 298 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																											
1	5450.76	59.18	74.00	-14.82	50.75	33.00	13.32	37.89	0.00 200 298 PEAK																																																																																											
2	5461.54	57.96	68.20	-10.24	49.54	32.98	13.33	37.89	0.00 200 298 PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																											
1	5570.00	91.27	-----	-----	82.90	32.90	13.38	37.91	0.00 200 298 PEAK																																																																																											
Avg	Site : 03CH20-HY Condition: AVG_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:1.500kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5445.48</td><td>45.04</td><td>54.00</td><td>-8.96</td><td>36.60</td><td>33.01</td><td>13.31</td><td>37.88</td><td>0.00 200 298 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5445.48	45.04	54.00	-8.96	36.60	33.01	13.31	37.88	0.00 200 298 AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:1.500kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1</td><td>5570.00</td><td>84.36</td><td>-----</td><td>-----</td><td>75.99</td><td>32.90</td><td>13.38</td><td>37.91</td><td>0.00 200 298 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5570.00	84.36	-----	-----	75.99	32.90	13.38	37.91	0.00 200 298 AVERAGE										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																											
1	5445.48	45.04	54.00	-8.96	36.60	33.01	13.31	37.88	0.00 200 298 AVERAGE																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																											
1	5570.00	84.36	-----	-----	75.99	32.90	13.38	37.91	0.00 200 298 AVERAGE																																																																																											

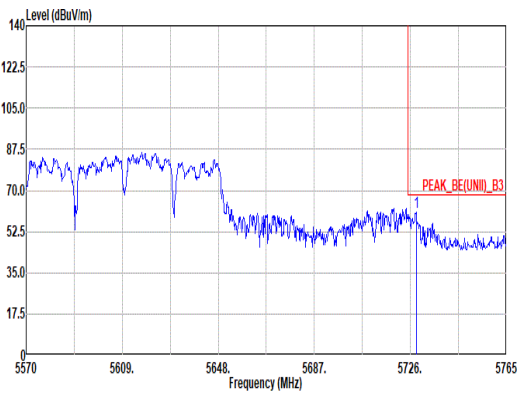


Mode	46																																																					
	Band Edge - R																																																					
	U-NII-2C_5.47-5.725_802.11ax HE160_CH114_Partial_996/67RU_5570MHz																																																					
ANT	6+7																																																					
Pol.	Vertical						Fundamental																																															
Peak	 Site : 03CH20-HY Condition: PEAK_BE(UNII)_B3 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5728.34</td><td>60.73</td><td>68.20</td><td>-7.47</td><td>51.33</td><td>33.66</td><td>13.66</td><td>37.92</td><td>0.00</td><td>200</td><td>290</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5728.34	60.73	68.20	-7.47	51.33	33.66	13.66	37.92	0.00	200	290	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1 5728.34	60.73	68.20	-7.47	51.33	33.66	13.66	37.92	0.00	200	290	PEAK																																											

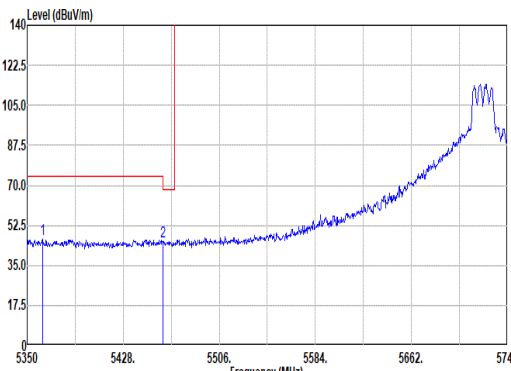
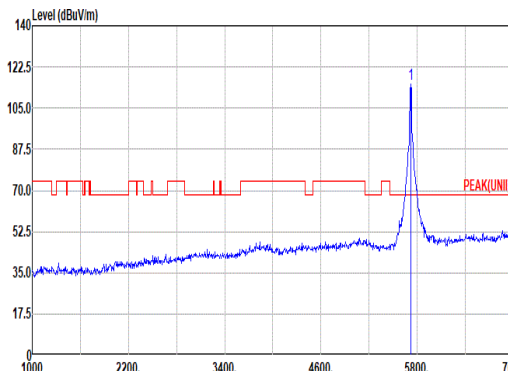
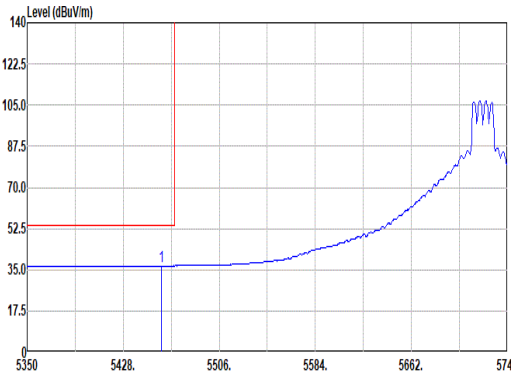
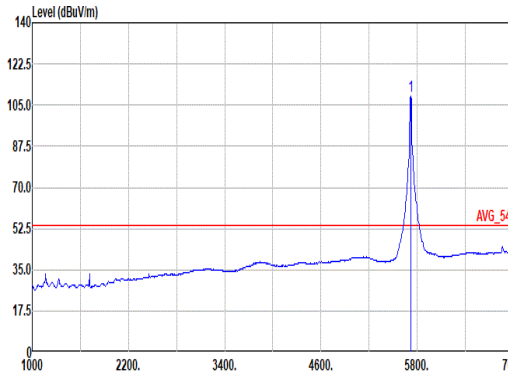


		47																																																																																																				
Mode	Band Edge - L																																																																																																					
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz																																																																																																					
ANT	6+7																																																																																																					
Pol.	Horizontal						Fundamental																																																																																															
Peak																																																																																																						
	Site : 03CH20-HY Condition: STRADOLLES U-NII-182A 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5362.48</td><td>46.23</td><td>74.00</td><td>-27.77</td><td>38.00</td><td>32.88</td><td>13.20</td><td>37.93</td><td>0.00</td><td>200</td><td>299</td><td>PEAK</td></tr><tr><td>2</td><td>5468.37</td><td>45.50</td><td>68.20</td><td>-22.70</td><td>37.35</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>200</td><td>299</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5362.48	46.23	74.00	-27.77	38.00	32.88	13.20	37.93	0.00	200	299	PEAK	2	5468.37	45.50	68.20	-22.70	37.35	32.82	13.33	38.00	0.00	200	299	PEAK	Site : 03CH20-HY Condition: PEAK(U-NII) 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5720.00</td><td>115.18</td><td>-----</td><td>-----</td><td>106.02</td><td>33.49</td><td>13.65</td><td>37.98</td><td>0.00</td><td>200</td><td>299</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5720.00	115.18	-----	-----	106.02	33.49	13.65	37.98	0.00	200	299
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																										
1	5362.48	46.23	74.00	-27.77	38.00	32.88	13.20	37.93	0.00	200	299	PEAK																																																																																										
2	5468.37	45.50	68.20	-22.70	37.35	32.82	13.33	38.00	0.00	200	299	PEAK																																																																																										
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																										
1	5720.00	115.18	-----	-----	106.02	33.49	13.65	37.98	0.00	200	299	PEAK																																																																																										
Avg																																																																																																						
	Site : 03CH20-HY Condition: U-NII-182A AVERAGE 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5458.81</td><td>36.59</td><td>54.00</td><td>-17.41</td><td>28.44</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>200</td><td>299</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5458.81	36.59	54.00	-17.41	28.44	32.82	13.33	38.00	0.00	200	299	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5720.00</td><td>108.59</td><td>-----</td><td>-----</td><td>99.43</td><td>33.49</td><td>13.65</td><td>37.98</td><td>0.00</td><td>200</td><td>299</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5720.00	108.59	-----	-----	99.43	33.49	13.65	37.98	0.00	200	299	AVERAGE												
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																										
1	5458.81	36.59	54.00	-17.41	28.44	32.82	13.33	38.00	0.00	200	299	AVERAGE																																																																																										
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																										
1	5720.00	108.59	-----	-----	99.43	33.49	13.65	37.98	0.00	200	299	AVERAGE																																																																																										

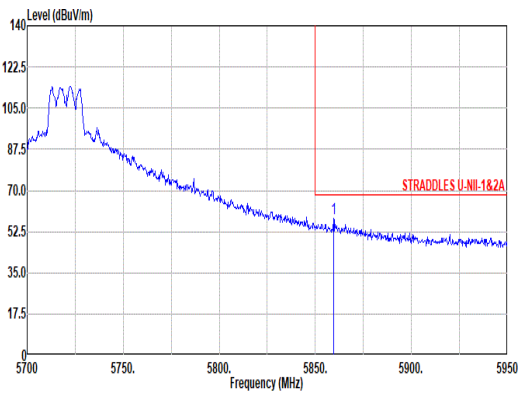


Mode	47																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz																																													
ANT	6+7																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: STRADDLES U-NII-1&2A 3m HF_91200_020308_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5859.50</td><td>58.09</td><td>68.20</td><td>-10.11</td><td>48.13</td><td>34.04</td><td>13.86</td><td>37.94</td><td>0.00</td><td>200</td><td>299</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5859.50	58.09	68.20	-10.11	48.13	34.04	13.86	37.94	0.00	200	299	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5859.50	58.09	68.20	-10.11	48.13	34.04	13.86	37.94	0.00	200	299	PEAK																																		

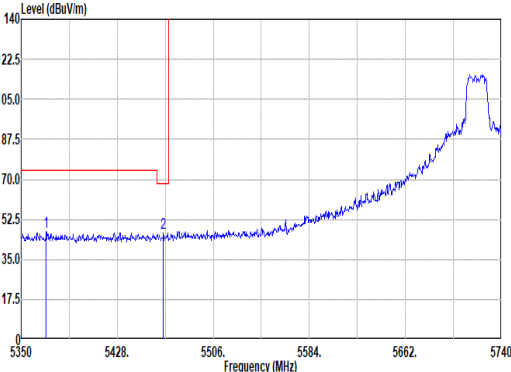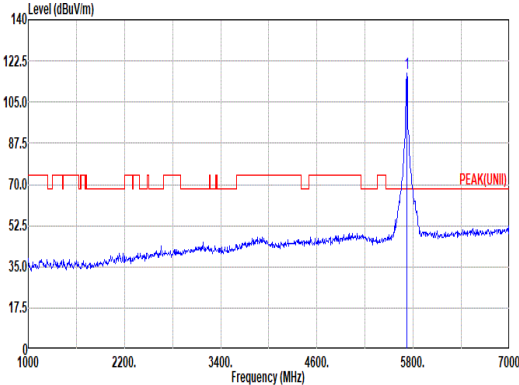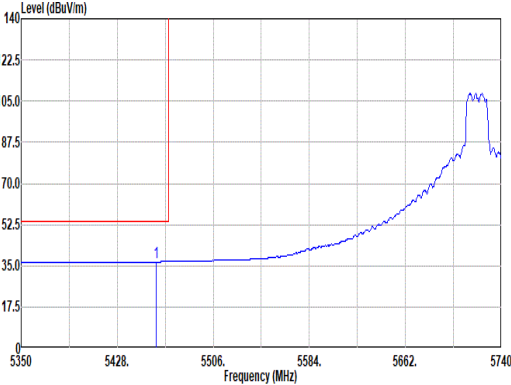
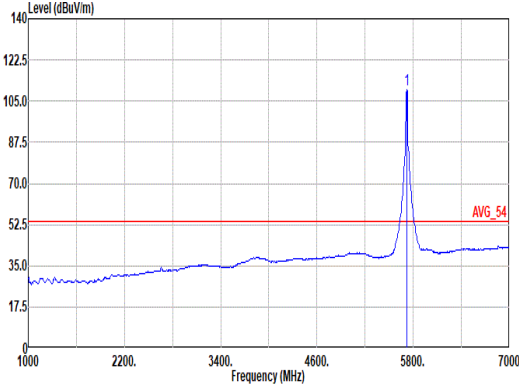


Mode	47																																																																																																						
	Band Edge - L																																																																																																						
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz																																																																																																						
ANT	6+7																																																																																																						
Pol.	Vertical						Fundamental																																																																																																
Peak	 Site : 03CH20-HY Condition: STRADDOLES U-NII-182A 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5370.28</td><td>47.14</td><td>74.00</td><td>-26.86</td><td>39.00</td><td>32.86</td><td>13.22</td><td>37.94</td><td>0.00</td><td>100</td><td>13</td><td>PEAK</td></tr><tr><td>2</td><td>5465.44</td><td>46.38</td><td>68.20</td><td>-21.82</td><td>38.22</td><td>32.83</td><td>13.34</td><td>38.01</td><td>0.00</td><td>100</td><td>13</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5370.28	47.14	74.00	-26.86	39.00	32.86	13.22	37.94	0.00	100	13	PEAK	2	5465.44	46.38	68.20	-21.82	38.22	32.83	13.34	38.01	0.00	100	13	PEAK	 Site : 03CH20-HY Condition: PEAK(U-NII) 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5720.00</td><td>117.13</td><td>-----</td><td>-----</td><td>107.97</td><td>33.49</td><td>13.65</td><td>37.98</td><td>0.00</td><td>100</td><td>13</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5720.00	117.13	-----	-----	107.97	33.49	13.65	37.98	0.00	100	13	PEAK
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	5370.28	47.14	74.00	-26.86	39.00	32.86	13.22	37.94	0.00	100	13	PEAK																																																																																											
2	5465.44	46.38	68.20	-21.82	38.22	32.83	13.34	38.01	0.00	100	13	PEAK																																																																																											
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	5720.00	117.13	-----	-----	107.97	33.49	13.65	37.98	0.00	100	13	PEAK																																																																																											
Avg	 Site : 03CH20-HY Condition: U-NII-182A AVERAGE 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5459.59</td><td>36.70</td><td>54.00</td><td>-17.30</td><td>28.55</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>100</td><td>13</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.59	36.70	54.00	-17.30	28.55	32.82	13.33	38.00	0.00	100	13	AVERAGE	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5720.00</td><td>110.09</td><td>-----</td><td>-----</td><td>100.96</td><td>33.46</td><td>13.65</td><td>37.98</td><td>0.00</td><td>100</td><td>13</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5720.00	110.09	-----	-----	100.96	33.46	13.65	37.98	0.00	100	13	AVERAGE													
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	5459.59	36.70	54.00	-17.30	28.55	32.82	13.33	38.00	0.00	100	13	AVERAGE																																																																																											
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	5720.00	110.09	-----	-----	100.96	33.46	13.65	37.98	0.00	100	13	AVERAGE																																																																																											




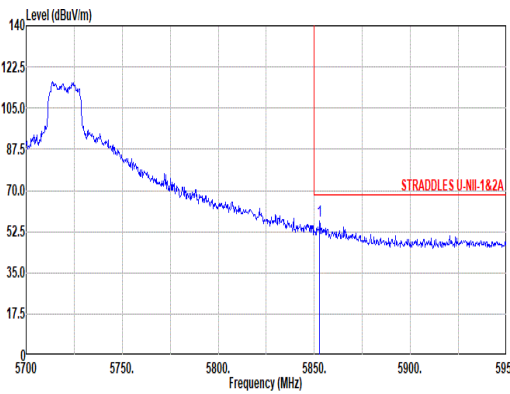


Mode	47																																																					
	Band Edge - R																																																					
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz																																																					
ANT	6+7																																																					
Pol.	Vertical						Fundamental																																															
Peak	 Site : 03CH20-HY Condition: STRADDLES U-NII-1&2A 3m HF_91200_02030_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5852.75</td><td>56.83</td><td>68.20</td><td>-11.37</td><td>46.93</td><td>34.01</td><td>13.84</td><td>37.95</td><td>0.00</td><td>100</td><td>13 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5852.75	56.83	68.20	-11.37	46.93	34.01	13.84	37.95	0.00	100	13 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5852.75	56.83	68.20	-11.37	46.93	34.01	13.84	37.95	0.00	100	13 PEAK																																											

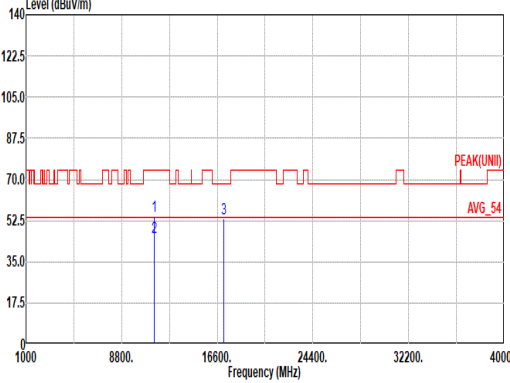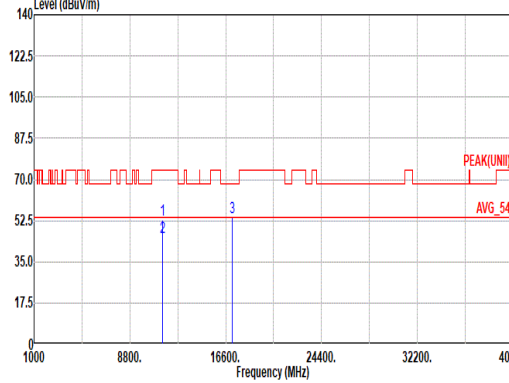


Mode	47												
	Harmonic												
	U-NII-2C_5.47-5.725_802.11a_CH144_5720MHz												
ANT	6+7												
Pol.	Horizontal						Vertical						
Peak Avg													
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
	1	11440.00	54.30	74.00	-19.70	37.20	39.18	19.42	42.42	0.92	311	322	PEAK
	2	11440.00	45.45	54.00	-8.55	28.35	39.18	19.42	42.42	0.92	311	322	Average
	3	17160.00	53.33	68.20	-14.87	33.57	39.34	24.01	44.54	0.95	--	--	PEAK
	1	11440.00	52.73	74.00	-21.27	35.63	39.18	19.42	42.42	0.92	285	244	PEAK
	2	11440.00	45.34	54.00	-8.66	28.24	39.18	19.42	42.42	0.92	285	244	Average
	3	17160.00	53.84	68.20	-14.36	34.08	39.34	24.01	44.54	0.95	--	--	PEAK

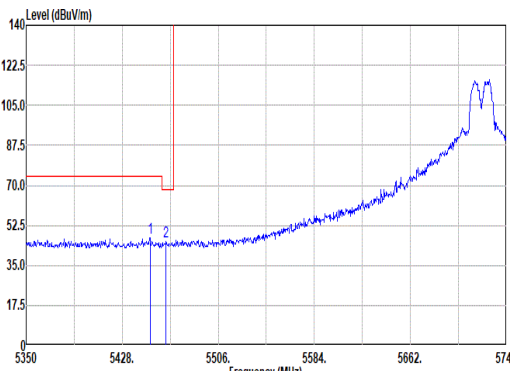
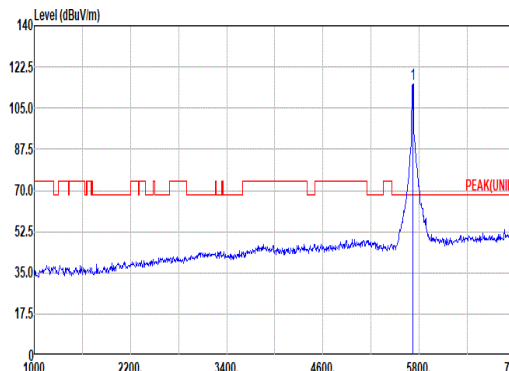
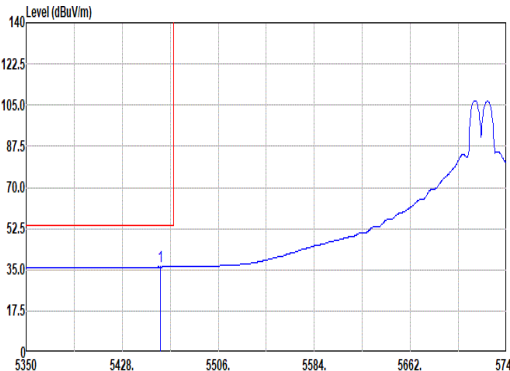
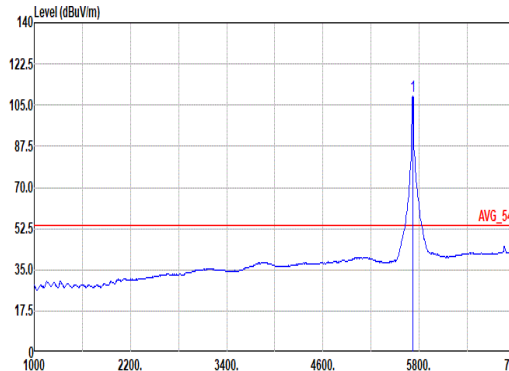


		48																																																																																																				
Mode	Band Edge - L																																																																																																					
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_Full RU_5720MHz																																																																																																					
ANT	6+7																																																																																																					
Pol.	Horizontal						Fundamental																																																																																															
Peak																																																																																																						
	Site : 03CH20-HY Condition: STRADDLES U-NII-182A 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5450.62</td><td>47.20</td><td>74.00</td><td>-26.80</td><td>39.07</td><td>32.00</td><td>13.32</td><td>37.99</td><td>0.00</td><td>200</td><td>305</td><td>PEAK</td></tr><tr><td>2</td><td>5463.49</td><td>45.26</td><td>68.20</td><td>-22.94</td><td>37.10</td><td>32.83</td><td>13.33</td><td>38.00</td><td>0.00</td><td>200</td><td>305</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5450.62	47.20	74.00	-26.80	39.07	32.00	13.32	37.99	0.00	200	305	PEAK	2	5463.49	45.26	68.20	-22.94	37.10	32.83	13.33	38.00	0.00	200	305	PEAK	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5720.00</td><td>115.41</td><td>-----</td><td>-----</td><td>106.28</td><td>33.46</td><td>13.65</td><td>37.98</td><td>0.00</td><td>200</td><td>305</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5720.00	115.41	-----	-----	106.28	33.46	13.65	37.98	0.00	200	305
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	5450.62	47.20	74.00	-26.80	39.07	32.00	13.32	37.99	0.00	200	305	PEAK																																																																																										
2	5463.49	45.26	68.20	-22.94	37.10	32.83	13.33	38.00	0.00	200	305	PEAK																																																																																										
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	5720.00	115.41	-----	-----	106.28	33.46	13.65	37.98	0.00	200	305	PEAK																																																																																										
Avg																																																																																																						
	Site : 03CH20-HY Condition: U-NII-182A AVERAGE 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5458.81</td><td>36.21</td><td>54.00</td><td>-17.79</td><td>28.06</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>200</td><td>305</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5458.81	36.21	54.00	-17.79	28.06	32.82	13.33	38.00	0.00	200	305	AVERAGE	Site : 03CH20-HY Condition: AVG 54 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5720.00</td><td>108.58</td><td>-----</td><td>-----</td><td>99.45</td><td>33.46</td><td>13.65</td><td>37.98</td><td>0.00</td><td>200</td><td>305</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5720.00	108.58	-----	-----	99.45	33.46	13.65	37.98	0.00	200	305	AVERAGE												
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	5458.81	36.21	54.00	-17.79	28.06	32.82	13.33	38.00	0.00	200	305	AVERAGE																																																																																										
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	5720.00	108.58	-----	-----	99.45	33.46	13.65	37.98	0.00	200	305	AVERAGE																																																																																										

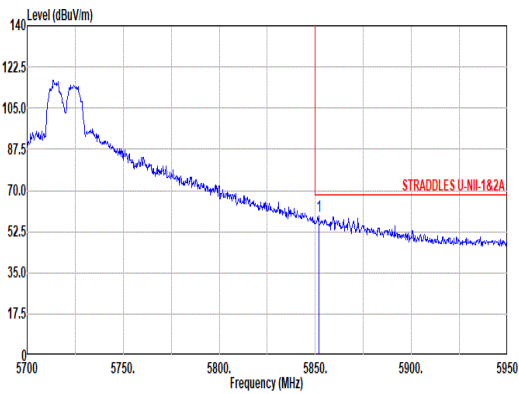


Mode	48																																												
	Band Edge - R																																												
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_Full RU_5720MHz																																												
ANT	6+7																																												
Pol.	Horizontal	Fundamental																																											
Peak	 Site : 03CH20-HY Condition: STRADDLES U-NII-1&2A 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5851.75</td><td>59.13</td><td>68.20</td><td>-9.07</td><td>49.23</td><td>34.01</td><td>13.84</td><td>37.95</td><td>0.00</td><td>200</td><td>305</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5851.75	59.13	68.20	-9.07	49.23	34.01	13.84	37.95	0.00	200	305	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																			
1 5851.75	59.13	68.20	-9.07	49.23	34.01	13.84	37.95	0.00	200	305	PEAK																																		

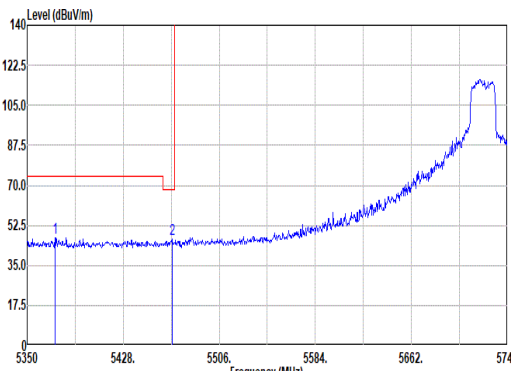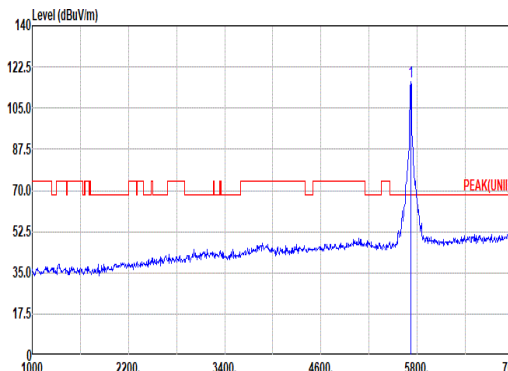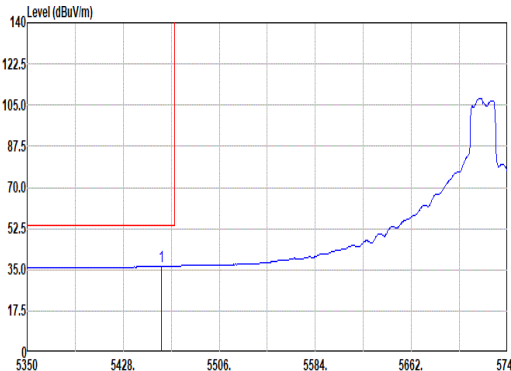
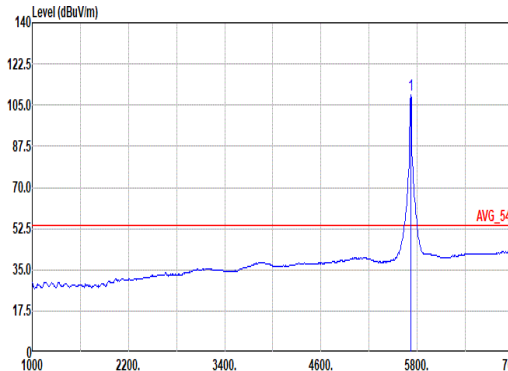


		48																																																																																																											
Mode	Band Edge - L																																																																																																												
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_Full RU_5720MHz																																																																																																												
ANT	6+7																																																																																																												
Pol.	Vertical						Fundamental																																																																																																						
Peak																																																																																																													
	Site : 03CH20-HY Condition: STRADOLLES U-NII-182A 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5372.62</td><td>47.03</td><td>74.00</td><td>-26.97</td><td>38.90</td><td>32.85</td><td>13.22</td><td>37.94</td><td>0.00</td><td>147</td><td>11</td><td>PEAK</td></tr><tr><td>2</td><td>5467.78</td><td>46.32</td><td>68.20</td><td>-21.88</td><td>38.15</td><td>32.84</td><td>13.34</td><td>38.01</td><td>0.00</td><td>147</td><td>11</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5372.62	47.03	74.00	-26.97	38.90	32.85	13.22	37.94	0.00	147	11	PEAK	2	5467.78	46.32	68.20	-21.88	38.15	32.84	13.34	38.01	0.00	147	11	PEAK	Site : 03CH20-HY Condition: PEAK(U-NII) 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5720.00</td><td>116.42</td><td>-----</td><td>-----</td><td>107.26</td><td>33.49</td><td>13.65</td><td>37.98</td><td>0.00</td><td>147</td><td>11</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5720.00	116.42	-----	-----	107.26	33.49	13.65	37.98	0.00	147	11
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5372.62	47.03	74.00	-26.97	38.90	32.85	13.22	37.94	0.00	147	11	PEAK																																																																																																	
2	5467.78	46.32	68.20	-21.88	38.15	32.84	13.34	38.01	0.00	147	11	PEAK																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5720.00	116.42	-----	-----	107.26	33.49	13.65	37.98	0.00	147	11	PEAK																																																																																																	
Avg																																																																																																													
	Site : 03CH20-HY Condition: U-NII-182A AVERAGE 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.20</td><td>36.42</td><td>54.00</td><td>-17.58</td><td>28.27</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>147</td><td>11</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.20	36.42	54.00	-17.58	28.27	32.82	13.33	38.00	0.00	147	11	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5720.00</td><td>109.56</td><td>-----</td><td>-----</td><td>100.43</td><td>33.46</td><td>13.65</td><td>37.98</td><td>0.00</td><td>147</td><td>11</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5720.00	109.56	-----	-----	100.43	33.46	13.65	37.98	0.00	147	11	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5459.20	36.42	54.00	-17.58	28.27	32.82	13.33	38.00	0.00	147	11	AVERAGE																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	5720.00	109.56	-----	-----	100.43	33.46	13.65	37.98	0.00	147	11	AVERAGE																																																																																																	

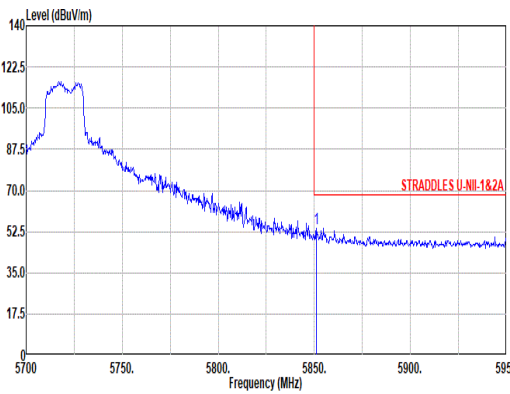

Mode	48																																																					
	Band Edge - R																																																					
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_Full RU_5720MHz																																																					
ANT	6+7																																																					
Pol.	Vertical						Fundamental																																															
Peak	 Site : 03CH20-HY Condition: STRADDLES U-NII-1&2A 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5851.00</td><td>53.97</td><td>68.20</td><td>-14.23</td><td>44.08</td><td>34.00</td><td>13.84</td><td>37.95</td><td>0.00</td><td>147</td><td>11 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5851.00	53.97	68.20	-14.23	44.08	34.00	13.84	37.95	0.00	147	11 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5851.00	53.97	68.20	-14.23	44.08	34.00	13.84	37.95	0.00	147	11 PEAK																																											

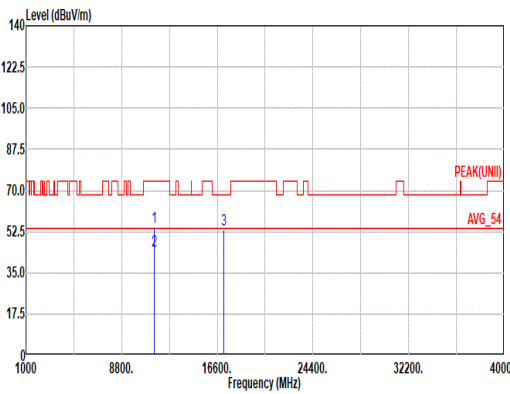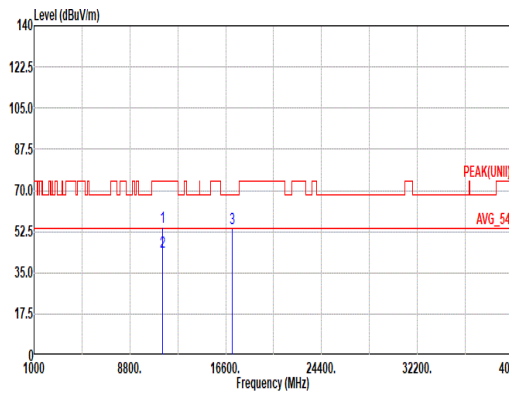


Mode	48													
	Harmonic													
	U-NII-2C_5.47-5.725_802.11ax HE20_CH144_Full RU_5720MHz													
ANT	6+7													
Pol.	Horizontal							Vertical						
Peak Avg														
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL							Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	11440.00	54.44	74.00	-19.56	37.34	39.18	19.42	42.42	0.92	284	326	PEAK		
2	11440.00	44.37	54.00	-9.63	27.27	39.18	19.42	42.42	0.92	284	326	Average		
3	17160.00	53.49	68.20	-14.71	33.73	39.34	24.01	44.54	0.95	--	--	PEAK		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	11440.00	54.30	74.00	-19.70	37.20	39.18	19.42	42.42	0.92	302	289	PEAK		
2	11440.00	43.91	54.00	-10.09	26.81	39.18	19.42	42.42	0.92	302	289	Average		
3	17160.00	53.81	68.20	-14.39	34.05	39.34	24.01	44.54	0.95	--	--	PEAK		







		49																																																																																																															
Mode	Band Edge - L																																																																																																																
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_Full RU_5710MHz																																																																																																																
ANT	6+7																																																																																																																
Pol.	Horizontal												Fundamental																																																																																																				
Peak	Site : 03CH20-HY Condition: STRADOLLES U-NII-1&2A 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5412.79</td><td>47.18</td><td>74.00</td><td>-26.82</td><td>39.08</td><td>32.00</td><td>13.27</td><td>37.97</td><td>0.00</td><td>244</td><td>360</td><td>PEAK</td></tr><tr><td>2</td><td>5468.95</td><td>48.21</td><td>68.20</td><td>-19.99</td><td>40.04</td><td>32.84</td><td>13.34</td><td>38.01</td><td>0.00</td><td>244</td><td>360</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5412.79	47.18	74.00	-26.82	39.08	32.00	13.27	37.97	0.00	244	360	PEAK	2	5468.95	48.21	68.20	-19.99	40.04	32.84	13.34	38.01	0.00	244	360	PEAK	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5710.00</td><td>106.94</td><td>-----</td><td>-----</td><td>97.92</td><td>33.38</td><td>13.62</td><td>37.98</td><td>0.00</td><td>244</td><td>360</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5710.00	106.94	-----	-----	97.92	33.38	13.62	37.98	0.00	244	360	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																								
1	5412.79	47.18	74.00	-26.82	39.08	32.00	13.27	37.97	0.00	244	360	PEAK																																																																																																					
2	5468.95	48.21	68.20	-19.99	40.04	32.84	13.34	38.01	0.00	244	360	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																								
1	5710.00	106.94	-----	-----	97.92	33.38	13.62	37.98	0.00	244	360	PEAK																																																																																																					
Avg	Site : 03CH20-HY Condition: U-NII-1&2A AVERAGE 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.20</td><td>36.39</td><td>54.00</td><td>-17.61</td><td>28.24</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>244</td><td>360</td><td>AVERAGE</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.20	36.39	54.00	-17.61	28.24	32.82	13.33	38.00	0.00	244	360	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5710.00</td><td>98.14</td><td>-----</td><td>-----</td><td>89.01</td><td>33.46</td><td>13.65</td><td>37.98</td><td>0.00</td><td>244</td><td>360</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5710.00	98.14	-----	-----	89.01	33.46	13.65	37.98	0.00	244	360	AVERAGE													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																								
1	5459.20	36.39	54.00	-17.61	28.24	32.82	13.33	38.00	0.00	244	360	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																								
1	5710.00	98.14	-----	-----	89.01	33.46	13.65	37.98	0.00	244	360	AVERAGE																																																																																																					

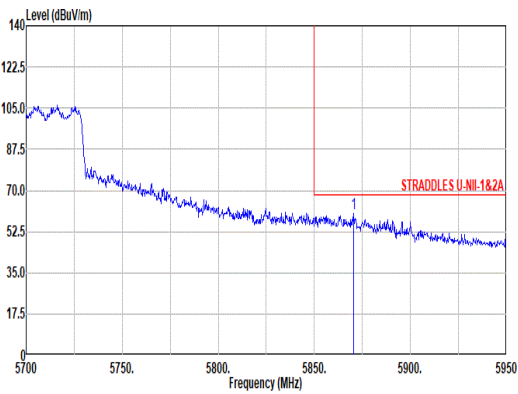


Mode	49																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_Full RU_5710MHz																																													
ANT	6+7																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: STRADDLES U-NII-1&2A 3m HF_91200_02038_240729 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5870.50</td><td>60.16</td><td>68.20</td><td>-8.04</td><td>50.15</td><td>34.00</td><td>13.87</td><td>37.94</td><td>0.00</td><td>244</td><td>360</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5870.50	60.16	68.20	-8.04	50.15	34.00	13.87	37.94	0.00	244	360	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5870.50	60.16	68.20	-8.04	50.15	34.00	13.87	37.94	0.00	244	360	PEAK																																		

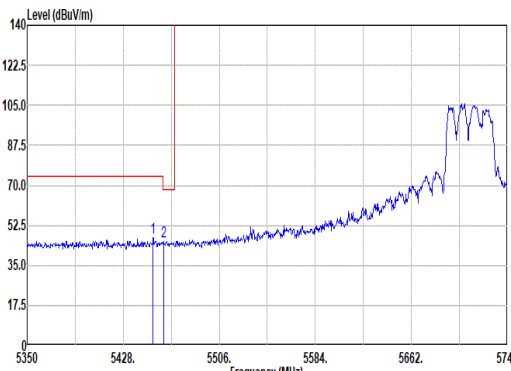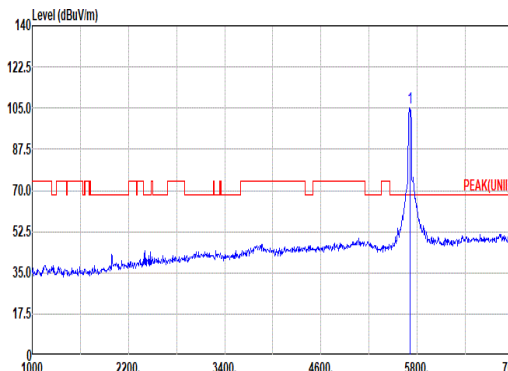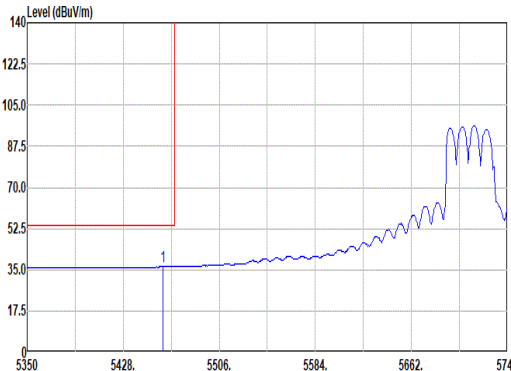
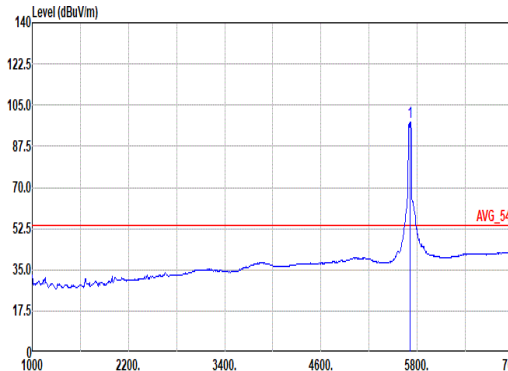


Mode	49																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_Full RU_5710MHz																																																																																																															
ANT	6+7																																																																																																															
Pol.	Vertical						Fundamental																																																																																																									
Peak																																																																																																																
	Site : 03CH20-HY Condition: STRADDLES U-NII-182A 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5452.18</td><td>46.89</td><td>74.00</td><td>-27.11</td><td>38.77</td><td>32.00</td><td>13.32</td><td>38.00</td><td>0.00</td><td>300</td><td>322</td><td>PEAK</td></tr><tr><td>2</td><td>5468.76</td><td>45.70</td><td>68.20</td><td>-22.50</td><td>37.55</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>300</td><td>322</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm	deg	1	5452.18	46.89	74.00	-27.11	38.77	32.00	13.32	38.00	0.00	300	322	PEAK	2	5468.76	45.70	68.20	-22.50	37.55	32.82	13.33	38.00	0.00	300	322	PEAK	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5710.00</td><td>104.97</td><td>-----</td><td>-----</td><td>95.90</td><td>33.42</td><td>13.63</td><td>37.98</td><td>0.00</td><td>300</td><td>322</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm	deg	1	5710.00	104.97	-----	-----	95.90	33.42	13.63	37.98	0.00	300	322
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5452.18	46.89	74.00	-27.11	38.77	32.00	13.32	38.00	0.00	300	322	PEAK																																																																																																				
2	5468.76	45.70	68.20	-22.50	37.55	32.82	13.33	38.00	0.00	300	322	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5710.00	104.97	-----	-----	95.90	33.42	13.63	37.98	0.00	300	322	PEAK																																																																																																				
Avg																																																																																																																
	Site : 03CH20-HY Condition: U-NII-182A AVERAGE 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.98</td><td>36.26</td><td>54.00</td><td>-17.74</td><td>28.11</td><td>32.82</td><td>13.33</td><td>38.00</td><td>0.00</td><td>300</td><td>322</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm	deg	1	5459.98	36.26	54.00	-17.74	28.11	32.82	13.33	38.00	0.00	300	322	AVERAGE	Site : 03CH20-HY Condition: AVG 54 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5710.00</td><td>97.75</td><td>-----</td><td>-----</td><td>88.65</td><td>33.44</td><td>13.64</td><td>37.98</td><td>0.00</td><td>300</td><td>322</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm	deg	1	5710.00	97.75	-----	-----	88.65	33.44	13.64	37.98	0.00	300	322	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5459.98	36.26	54.00	-17.74	28.11	32.82	13.33	38.00	0.00	300	322	AVERAGE																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5710.00	97.75	-----	-----	88.65	33.44	13.64	37.98	0.00	300	322	AVERAGE																																																																																																				




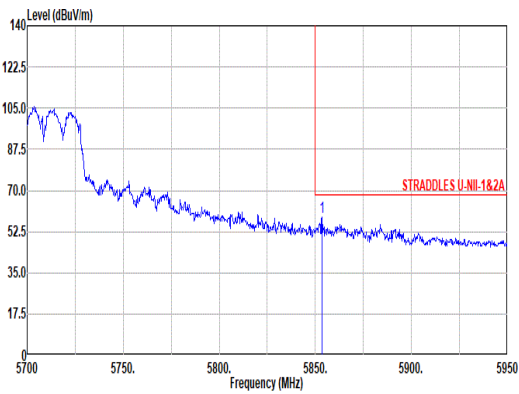


Mode	49																																											
	Band Edge - R																																											
	U-NII-2C_5.47-5.725_802.11ax HE40_CH142_Full RU_5710MHz																																											
ANT	6+7																																											
Pol.	Vertical	Fundamental																																										
Peak	 Site : 03CH20-HY Condition: STRADDLES U-NII-1&2A 3m HF_91200_02038_240729 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5853.50</td><td>58.73</td><td>68.20</td><td>-9.47</td><td>48.82</td><td>34.01</td><td>13.85</td><td>37.95</td><td>0.00</td><td>300</td><td>322 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5853.50	58.73	68.20	-9.47	48.82	34.01	13.85	37.95	0.00	300	322 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																		
1 5853.50	58.73	68.20	-9.47	48.82	34.01	13.85	37.95	0.00	300	322 PEAK																																		

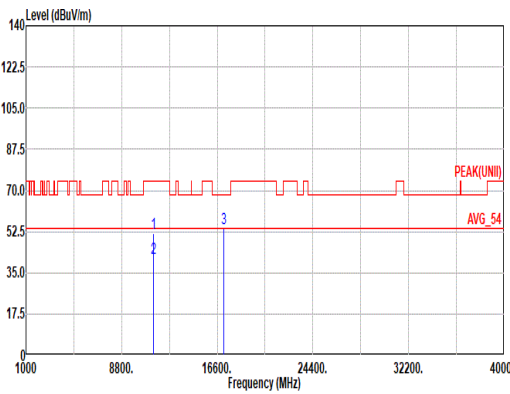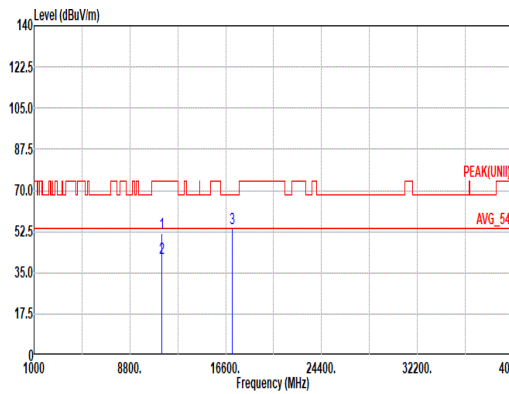


		49																																																																																																																																																											
Mode		Harmonic																																																																																																																																																											
		U-NII-2C_5.47-5.725_802.11ax HE40_CH142_Full RU_5710MHz																																																																																																																																																											
ANT		6+7																																																																																																																																																											
Pol.		Horizontal												Vertical																																																																																																																																															
Peak Avg																																																																																																																																																													
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL														Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL																																																																																																																																														
		<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11420.00</td><td>51.71</td><td>74.00</td><td>-22.29</td><td>34.64</td><td>39.14</td><td>19.40</td><td>42.39</td><td>0.92</td><td>300</td><td>318</td><td></td><td>PEAK</td></tr><tr><td>2</td><td>11420.00</td><td>41.33</td><td>54.00</td><td>-12.67</td><td>24.26</td><td>39.14</td><td>19.40</td><td>42.39</td><td>0.92</td><td>300</td><td>318</td><td></td><td>Average</td></tr><tr><td>3</td><td>17130.00</td><td>53.97</td><td>68.20</td><td>-14.23</td><td>34.29</td><td>39.26</td><td>23.99</td><td>44.52</td><td>0.95</td><td>--</td><td>--</td><td></td><td>PEAK</td></tr></table>															Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11420.00	51.71	74.00	-22.29	34.64	39.14	19.40	42.39	0.92	300	318		PEAK	2	11420.00	41.33	54.00	-12.67	24.26	39.14	19.40	42.39	0.92	300	318		Average	3	17130.00	53.97	68.20	-14.23	34.29	39.26	23.99	44.52	0.95	--	--		PEAK	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11420.00</td><td>51.88</td><td>74.00</td><td>-22.12</td><td>34.81</td><td>39.14</td><td>19.40</td><td>42.39</td><td>0.92</td><td>300</td><td>277</td><td></td><td>PEAK</td></tr><tr><td>2</td><td>11420.00</td><td>41.29</td><td>54.00</td><td>-12.71</td><td>24.22</td><td>39.14</td><td>19.40</td><td>42.39</td><td>0.92</td><td>300</td><td>277</td><td></td><td>Average</td></tr><tr><td>3</td><td>17130.00</td><td>53.65</td><td>68.20</td><td>-14.55</td><td>33.97</td><td>39.26</td><td>23.99</td><td>44.52</td><td>0.95</td><td>--</td><td>--</td><td></td><td>PEAK</td></tr></table>			Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	11420.00	51.88	74.00	-22.12	34.81	39.14	19.40	42.39	0.92	300	277		PEAK	2	11420.00	41.29	54.00	-12.71	24.22	39.14	19.40	42.39	0.92	300	277		Average	3	17130.00	53.65	68.20	-14.55	33.97	39.26	23.99	44.52	0.95	--	--		PEAK
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																	
1	11420.00	51.71	74.00	-22.29	34.64	39.14	19.40	42.39	0.92	300	318		PEAK																																																																																																																																																
2	11420.00	41.33	54.00	-12.67	24.26	39.14	19.40	42.39	0.92	300	318		Average																																																																																																																																																
3	17130.00	53.97	68.20	-14.23	34.29	39.26	23.99	44.52	0.95	--	--		PEAK																																																																																																																																																
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																	
1	11420.00	51.88	74.00	-22.12	34.81	39.14	19.40	42.39	0.92	300	277		PEAK																																																																																																																																																
2	11420.00	41.29	54.00	-12.71	24.22	39.14	19.40	42.39	0.92	300	277		Average																																																																																																																																																
3	17130.00	53.65	68.20	-14.55	33.97	39.26	23.99	44.52	0.95	--	--		PEAK																																																																																																																																																

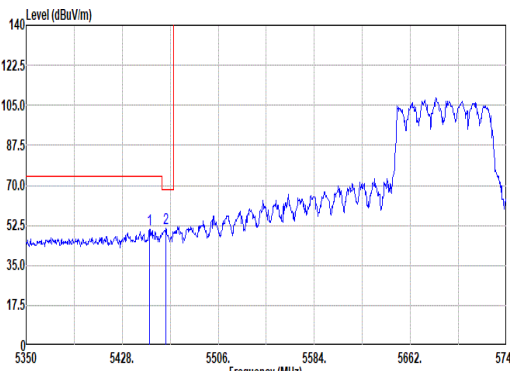
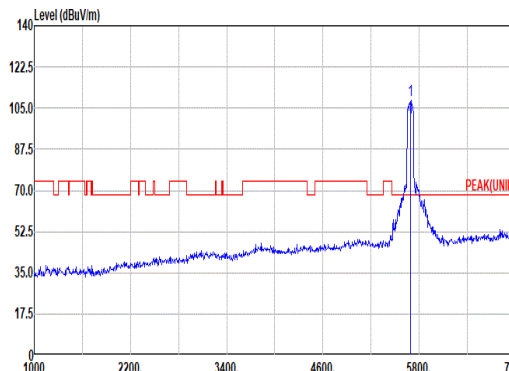
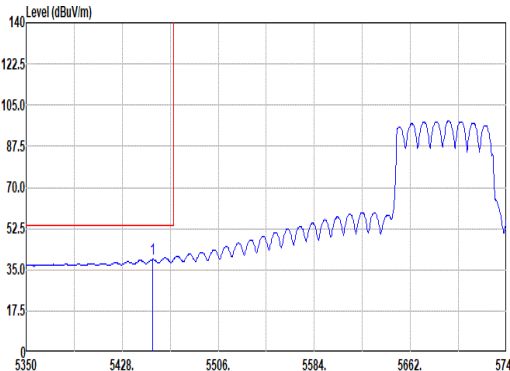
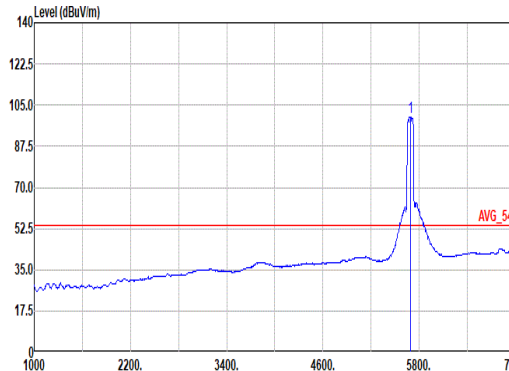


		50																																																																																																														
Mode	Band Edge - L																																																																																																															
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_Full RU_5690MHz																																																																																																															
ANT	6+7																																																																																																															
Pol.	Horizontal						Fundamental																																																																																																									
Peak																																																																																																																
	Site : 03CH20-HY Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5450.23</td><td>50.65</td><td>74.00</td><td>-23.35</td><td>42.22</td><td>33.00</td><td>13.32</td><td>37.89</td><td>0.00</td><td>168</td><td>319</td><td>PEAK</td></tr><tr><td>2</td><td>5463.49</td><td>51.35</td><td>68.20</td><td>-16.85</td><td>42.94</td><td>32.97</td><td>13.33</td><td>37.89</td><td>0.00</td><td>168</td><td>319</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5450.23	50.65	74.00	-23.35	42.22	33.00	13.32	37.89	0.00	168	319	PEAK	2	5463.49	51.35	68.20	-16.85	42.94	32.97	13.33	37.89	0.00	168	319	PEAK	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5690.00</td><td>100.24</td><td>-----</td><td>-----</td><td>90.92</td><td>33.61</td><td>13.63</td><td>37.92</td><td>0.00</td><td>168</td><td>319</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5690.00	100.24	-----	-----	90.92	33.61	13.63	37.92	0.00	168	319
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5450.23	50.65	74.00	-23.35	42.22	33.00	13.32	37.89	0.00	168	319	PEAK																																																																																																				
2	5463.49	51.35	68.20	-16.85	42.94	32.97	13.33	37.89	0.00	168	319	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5690.00	100.24	-----	-----	90.92	33.61	13.63	37.92	0.00	168	319	PEAK																																																																																																				
Avg																																																																																																																
	Site : 03CH20-HY Condition: U-NII-182A AVERAGE 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5452.57</td><td>39.39</td><td>54.00</td><td>-14.61</td><td>30.97</td><td>32.99</td><td>13.32</td><td>37.89</td><td>0.00</td><td>168</td><td>319</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5452.57	39.39	54.00	-14.61	30.97	32.99	13.32	37.89	0.00	168	319	AVERAGE	Site : 03CH20-HY Condition: AVG 54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5690.00</td><td>100.01</td><td>-----</td><td>-----</td><td>90.78</td><td>33.54</td><td>13.61</td><td>37.92</td><td>0.00</td><td>168</td><td>319</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5690.00	100.01	-----	-----	90.78	33.54	13.61	37.92	0.00	168	319	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5452.57	39.39	54.00	-14.61	30.97	32.99	13.32	37.89	0.00	168	319	AVERAGE																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5690.00	100.01	-----	-----	90.78	33.54	13.61	37.92	0.00	168	319	AVERAGE																																																																																																				

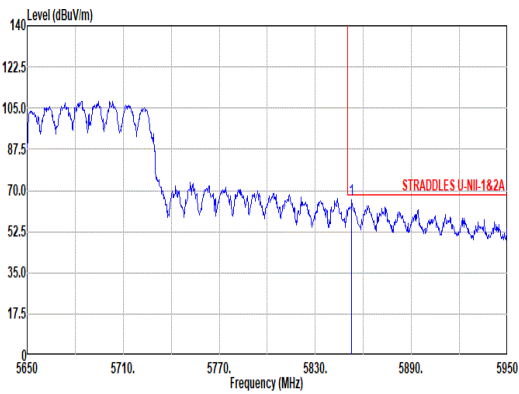


Mode	50																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_Full RU_5690MHz																																													
ANT	6+7																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH20-HY Condition: STRADDLES U-NII-1&2A 3m HF_91200_023600_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5852.00</td><td>66.04</td><td>68.20</td><td>-2.16</td><td>55.82</td><td>34.30</td><td>13.84</td><td>37.92</td><td>0.00</td><td>168</td><td>319</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5852.00	66.04	68.20	-2.16	55.82	34.30	13.84	37.92	0.00	168	319	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5852.00	66.04	68.20	-2.16	55.82	34.30	13.84	37.92	0.00	168	319	PEAK																																		

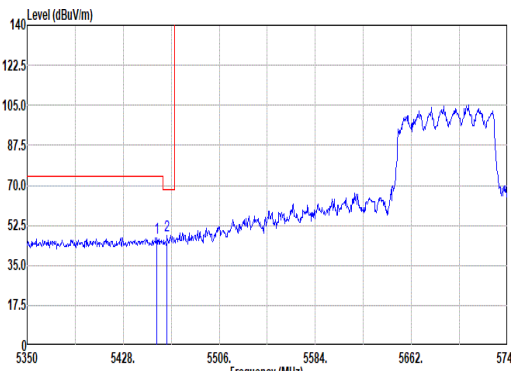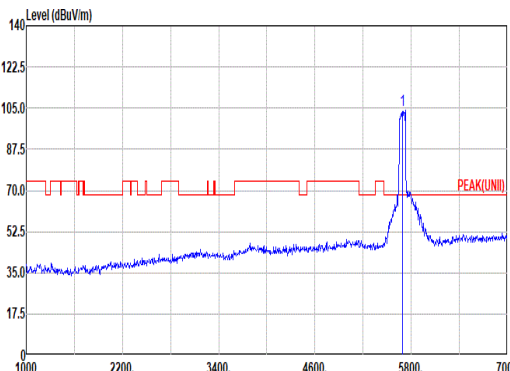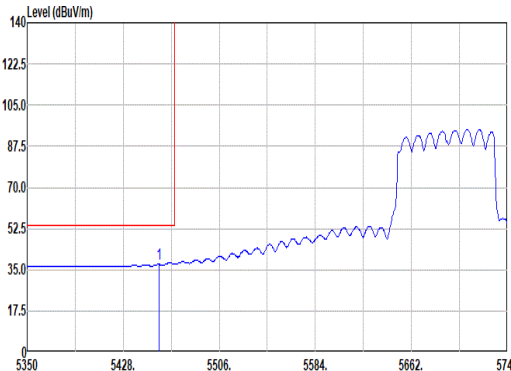
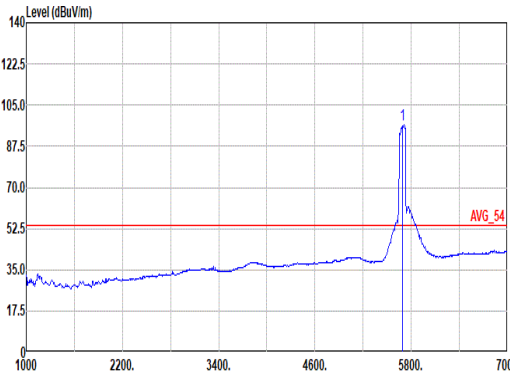


Mode	50																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_Full RU_5690MHz																																																																																																															
ANT	6+7																																																																																																															
Pol.	Vertical						Fundamental																																																																																																									
Peak																																																																																																																
	Site : 03CH20-HY Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5455.30</td><td>47.08</td><td>74.00</td><td>-26.92</td><td>38.66</td><td>32.99</td><td>13.32</td><td>37.89</td><td>0.00</td><td>150</td><td>336</td><td>PEAK</td></tr><tr><td>2</td><td>5463.49</td><td>48.00</td><td>68.20</td><td>-20.20</td><td>39.59</td><td>32.97</td><td>13.33</td><td>37.89</td><td>0.00</td><td>150</td><td>336</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5455.30	47.08	74.00	-26.92	38.66	32.99	13.32	37.89	0.00	150	336	PEAK	2	5463.49	48.00	68.20	-20.20	39.59	32.97	13.33	37.89	0.00	150	336	PEAK	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5690.00</td><td>103.97</td><td>-----</td><td>-----</td><td>94.57</td><td>33.66</td><td>13.66</td><td>37.92</td><td>0.00</td><td>150</td><td>336</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5690.00	103.97	-----	-----	94.57	33.66	13.66	37.92	0.00	150	336
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5455.30	47.08	74.00	-26.92	38.66	32.99	13.32	37.89	0.00	150	336	PEAK																																																																																																				
2	5463.49	48.00	68.20	-20.20	39.59	32.97	13.33	37.89	0.00	150	336	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5690.00	103.97	-----	-----	94.57	33.66	13.66	37.92	0.00	150	336	PEAK																																																																																																				
Avg																																																																																																																
	Site : 03CH20-HY Condition: U-NII-182A AVERAGE 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5456.86</td><td>37.33</td><td>54.00</td><td>-16.67</td><td>28.90</td><td>32.99</td><td>13.33</td><td>37.89</td><td>0.00</td><td>150</td><td>336</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5456.86	37.33	54.00	-16.67	28.90	32.99	13.33	37.89	0.00	150	336	AVERAGE	Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5690.00</td><td>96.49</td><td>-----</td><td>-----</td><td>87.15</td><td>33.62</td><td>13.64</td><td>37.92</td><td>0.00</td><td>150</td><td>336</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg	1	5690.00	96.49	-----	-----	87.15	33.62	13.64	37.92	0.00	150	336	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5456.86	37.33	54.00	-16.67	28.90	32.99	13.33	37.89	0.00	150	336	AVERAGE																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	dB	cm	deg																																																																																																						
1	5690.00	96.49	-----	-----	87.15	33.62	13.64	37.92	0.00	150	336	AVERAGE																																																																																																				

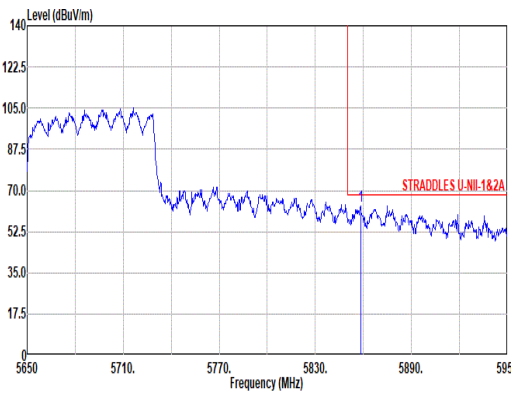

Mode	50																																												
	Band Edge - R																																												
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_Full RU_5690MHz																																												
ANT	6+7																																												
Pol.	Vertical	Fundamental																																											
Peak	 Site : 03CH20-HY Condition: STRADDLES U-NII-182A 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5858.20</td><td>63.64</td><td>68.20</td><td>-4.56</td><td>53.41</td><td>34.30</td><td>13.85</td><td>37.92</td><td>0.00</td><td>150</td><td>336 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5858.20	63.64	68.20	-4.56	53.41	34.30	13.85	37.92	0.00	150	336 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																			
1	5858.20	63.64	68.20	-4.56	53.41	34.30	13.85	37.92	0.00	150	336 PEAK																																		



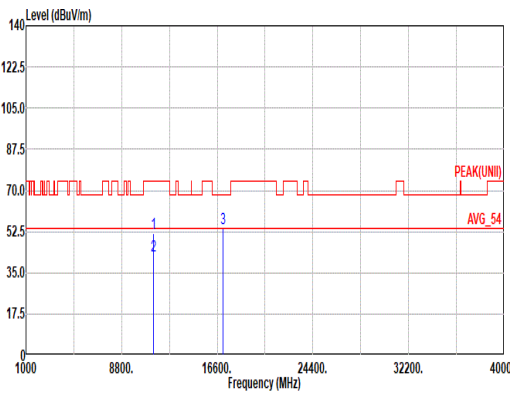
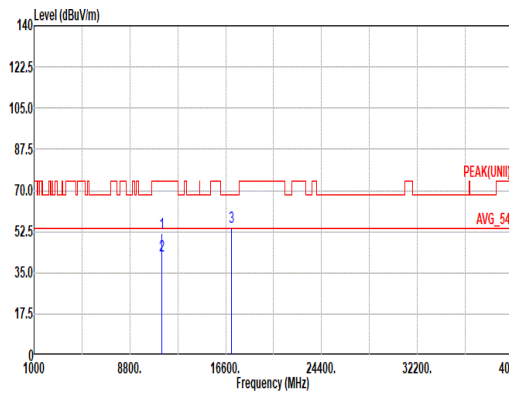


Mode	50																									
	Harmonic																									
	U-NII-2C_5.47-5.725_802.11ax HE80_CH138_Full RU_5690MHz																									
ANT	6+7																									
Pol.	Horizontal							Vertical																		
Peak Avg																										
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL							Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL																		
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	11380.00	51.62	74.00	-22.38	34.58	39.10	19.37	42.35	0.92	196	33		PEAK	1	11380.00	51.66	74.00	-22.34	34.62	39.10	19.37	42.35	0.92	186	66	PEAK
2	11380.00	42.22	54.00	-11.78	25.18	39.10	19.37	42.35	0.92	196	33		Average	2	11380.00	42.31	54.00	-11.69	25.27	39.10	19.37	42.35	0.92	186	66	Average
3	17070.00	53.71	68.20	-14.49	33.96	39.32	23.95	44.47	0.95	--	--		PEAK	3	17070.00	54.17	68.20	-14.03	34.42	39.32	23.95	44.47	0.95	--	--	PEAK





Mode	68																																																																																																																																																																																																																																
	LF																																																																																																																																																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																																																																																																																																																																
ANT	6+7																																																																																																																																																																																																																																
Pol.	Horizontal	Vertical																																																																																																																																																																																																																															
QP/ Peak	Site : 03CH20-HY Condition: QP 3m CBL6111D800802N1D01N-06_47020 & 06_241005 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>56.19</td><td>26.55</td><td>40.00</td><td>-13.45</td><td>48.16</td><td>12.32</td><td>1.42</td><td>35.57</td><td>0.22</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>93.05</td><td>33.98</td><td>43.50</td><td>-9.52</td><td>52.35</td><td>15.16</td><td>1.82</td><td>35.52</td><td>0.17</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>260.86</td><td>22.48</td><td>46.00</td><td>-23.52</td><td>34.36</td><td>20.17</td><td>2.96</td><td>35.20</td><td>0.19</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>502.39</td><td>26.41</td><td>46.00</td><td>-19.59</td><td>32.99</td><td>23.83</td><td>4.07</td><td>34.61</td><td>0.13</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>781.75</td><td>34.11</td><td>46.00</td><td>-11.89</td><td>34.34</td><td>28.15</td><td>5.01</td><td>33.54</td><td>0.15</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>945.68</td><td>35.35</td><td>46.00</td><td>-10.65</td><td>31.87</td><td>30.88</td><td>5.49</td><td>33.00</td><td>0.11</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	cm	deg		1	56.19	26.55	40.00	-13.45	48.16	12.32	1.42	35.57	0.22	--	--	--	Peak	2	93.05	33.98	43.50	-9.52	52.35	15.16	1.82	35.52	0.17	--	--	--	Peak	3	260.86	22.48	46.00	-23.52	34.36	20.17	2.96	35.20	0.19	--	--	--	Peak	4	502.39	26.41	46.00	-19.59	32.99	23.83	4.07	34.61	0.13	--	--	--	Peak	5	781.75	34.11	46.00	-11.89	34.34	28.15	5.01	33.54	0.15	--	--	--	Peak	6	945.68	35.35	46.00	-10.65	31.87	30.88	5.49	33.00	0.11	--	--	--	Peak	Site : 03CH20-HY Condition: QP 3m CBL6111D800802N1D01N-06_47020 & 06_241005 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>55.22</td><td>34.43</td><td>40.00</td><td>-5.57</td><td>55.85</td><td>12.52</td><td>1.40</td><td>35.57</td><td>0.23</td><td>109</td><td>104</td><td>QP</td></tr><tr><td>2</td><td>92.08</td><td>30.62</td><td>43.50</td><td>-12.88</td><td>49.15</td><td>15.00</td><td>1.81</td><td>35.52</td><td>0.18</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>264.74</td><td>22.25</td><td>46.00</td><td>-23.75</td><td>34.38</td><td>19.89</td><td>2.98</td><td>35.19</td><td>0.19</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>495.60</td><td>26.61</td><td>46.00</td><td>-19.39</td><td>33.35</td><td>23.72</td><td>4.04</td><td>34.63</td><td>0.13</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>771.08</td><td>32.76</td><td>46.00</td><td>-13.24</td><td>32.98</td><td>28.23</td><td>4.98</td><td>33.58</td><td>0.15</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>955.38</td><td>35.56</td><td>46.00</td><td>-10.44</td><td>31.75</td><td>31.15</td><td>5.52</td><td>32.95</td><td>0.09</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	cm	deg		1	55.22	34.43	40.00	-5.57	55.85	12.52	1.40	35.57	0.23	109	104	QP	2	92.08	30.62	43.50	-12.88	49.15	15.00	1.81	35.52	0.18	--	--	--	Peak	3	264.74	22.25	46.00	-23.75	34.38	19.89	2.98	35.19	0.19	--	--	--	Peak	4	495.60	26.61	46.00	-19.39	33.35	23.72	4.04	34.63	0.13	--	--	--	Peak	5	771.08	32.76	46.00	-13.24	32.98	28.23	4.98	33.58	0.15	--	--	--	Peak	6	955.38	35.56	46.00	-10.44	31.75	31.15	5.52	32.95	0.09	--	--	--	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																			
		MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																				
1	56.19	26.55	40.00	-13.45	48.16	12.32	1.42	35.57	0.22	--	--	--	Peak																																																																																																																																																																																																																				
2	93.05	33.98	43.50	-9.52	52.35	15.16	1.82	35.52	0.17	--	--	--	Peak																																																																																																																																																																																																																				
3	260.86	22.48	46.00	-23.52	34.36	20.17	2.96	35.20	0.19	--	--	--	Peak																																																																																																																																																																																																																				
4	502.39	26.41	46.00	-19.59	32.99	23.83	4.07	34.61	0.13	--	--	--	Peak																																																																																																																																																																																																																				
5	781.75	34.11	46.00	-11.89	34.34	28.15	5.01	33.54	0.15	--	--	--	Peak																																																																																																																																																																																																																				
6	945.68	35.35	46.00	-10.65	31.87	30.88	5.49	33.00	0.11	--	--	--	Peak																																																																																																																																																																																																																				
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																																					
1	55.22	34.43	40.00	-5.57	55.85	12.52	1.40	35.57	0.23	109	104	QP																																																																																																																																																																																																																					
2	92.08	30.62	43.50	-12.88	49.15	15.00	1.81	35.52	0.18	--	--	--	Peak																																																																																																																																																																																																																				
3	264.74	22.25	46.00	-23.75	34.38	19.89	2.98	35.19	0.19	--	--	--	Peak																																																																																																																																																																																																																				
4	495.60	26.61	46.00	-19.39	33.35	23.72	4.04	34.63	0.13	--	--	--	Peak																																																																																																																																																																																																																				
5	771.08	32.76	46.00	-13.24	32.98	28.23	4.98	33.58	0.15	--	--	--	Peak																																																																																																																																																																																																																				
6	955.38	35.56	46.00	-10.44	31.75	31.15	5.52	32.95	0.09	--	--	--	Peak																																																																																																																																																																																																																				

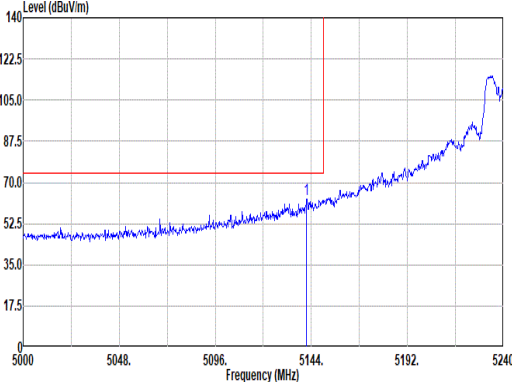
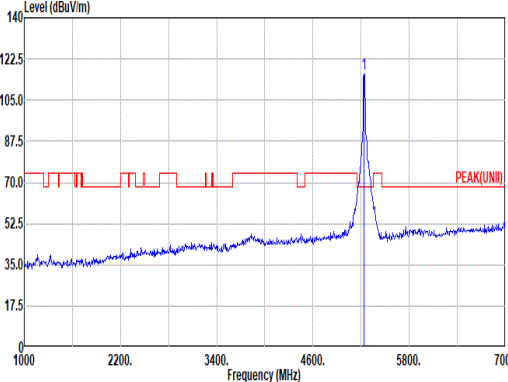
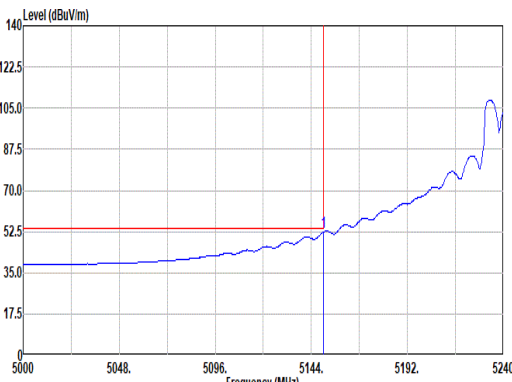
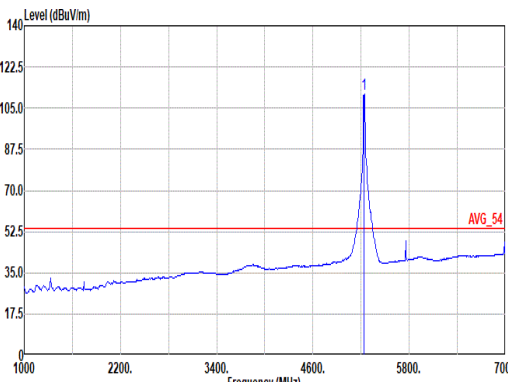


Mode	70																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																																																																															
ANT	6+7																																																																																																															
Pol.	Horizontal						Fundamental																																																																																																									
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5141.60</td><td>62.87</td><td>74.00</td><td>-11.13</td><td>54.43</td><td>33.28</td><td>12.90</td><td>37.74</td><td>0.00</td><td>210</td><td>297</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5141.60	62.87	74.00	-11.13	54.43	33.28	12.90	37.74	0.00	210	297	PEAK	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>116.20</td><td>-----</td><td>-----</td><td>100.10</td><td>32.87</td><td>13.01</td><td>37.78</td><td>0.00</td><td>210</td><td>297</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	116.20	-----	-----	100.10	32.87	13.01	37.78	0.00	210	297	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5141.60	62.87	74.00	-11.13	54.43	33.28	12.90	37.74	0.00	210	297	PEAK																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5240.00	116.20	-----	-----	100.10	32.87	13.01	37.78	0.00	210	297	PEAK																																																																																																				
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>52.30</td><td>54.00</td><td>-1.70</td><td>43.83</td><td>33.30</td><td>12.91</td><td>37.74</td><td>0.00</td><td>210</td><td>297</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	52.30	54.00	-1.70	43.83	33.30	12.91	37.74	0.00	210	297	AVERAGE	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>110.84</td><td>-----</td><td>-----</td><td>102.73</td><td>32.88</td><td>13.02</td><td>37.79</td><td>0.00</td><td>210</td><td>297</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	110.84	-----	-----	102.73	32.88	13.02	37.79	0.00	210	297	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5150.00	52.30	54.00	-1.70	43.83	33.30	12.91	37.74	0.00	210	297	AVERAGE																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	5240.00	110.84	-----	-----	102.73	32.88	13.02	37.79	0.00	210	297	AVERAGE																																																																																																				

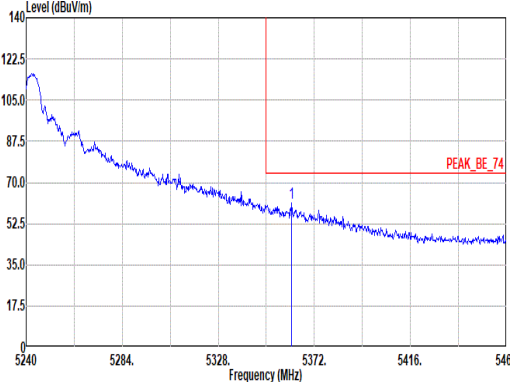
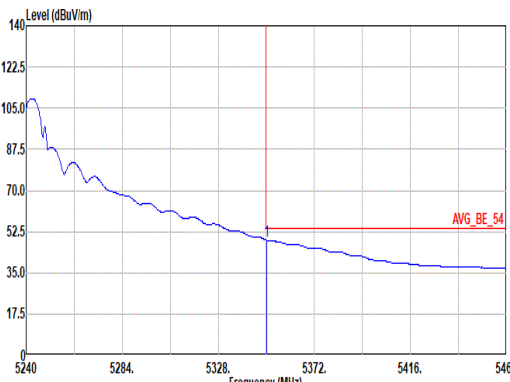


Mode	70																																																								
	Band Edge - R																																																								
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																								
ANT	6+7																																																								
Pol.	Horizontal						Fundamental																																																		
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5361.66</td><td>61.37</td><td>74.00</td><td>-12.63</td><td>52.91</td><td>33.10</td><td>13.20</td><td>37.84</td><td>0.00</td><td>210</td><td>297</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5361.66	61.37	74.00	-12.63	52.91	33.10	13.20	37.84	0.00	210	297	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5361.66	61.37	74.00	-12.63	52.91	33.10	13.20	37.84	0.00	210	297	PEAK																																													
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91280_02360_241101 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.22</td><td>48.84</td><td>54.00</td><td>-5.16</td><td>40.39</td><td>33.10</td><td>13.19</td><td>37.84</td><td>0.00</td><td>210</td><td>297</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.22	48.84	54.00	-5.16	40.39	33.10	13.19	37.84	0.00	210	297	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5350.22	48.84	54.00	-5.16	40.39	33.10	13.19	37.84	0.00	210	297	AVERAGE																																													

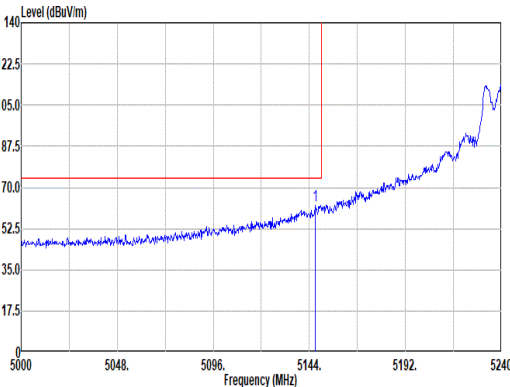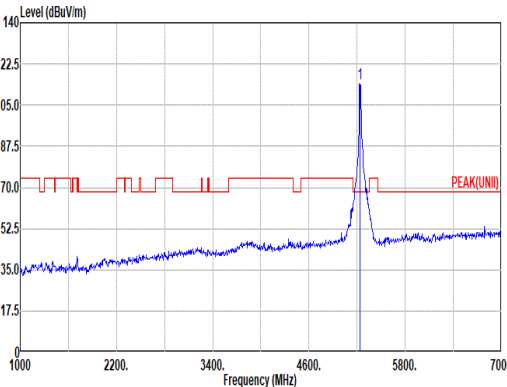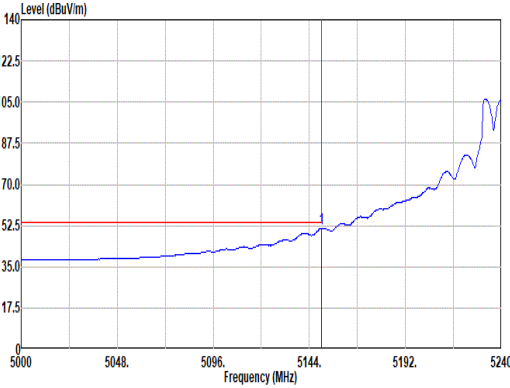
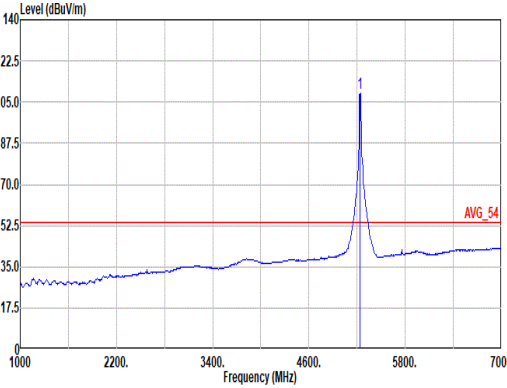


Mode	70																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																																																	
ANT	6+7																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.12</td><td>62.28</td><td>74.00</td><td>-11.72</td><td>53.82</td><td>33.29</td><td>12.91</td><td>37.74</td><td>0.00 200 52 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.12	62.28	74.00	-11.72	53.82	33.29	12.91	37.74	0.00 200 52 PEAK	 Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>114.01</td><td>-----</td><td>-----</td><td>105.92</td><td>32.86</td><td>13.01</td><td>37.78</td><td>0.00 200 52 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	114.01	-----	-----	105.92	32.86	13.01	37.78	0.00 200 52 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5147.12	62.28	74.00	-11.72	53.82	33.29	12.91	37.74	0.00 200 52 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5240.00	114.01	-----	-----	105.92	32.86	13.01	37.78	0.00 200 52 PEAK																																																																									
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>51.27</td><td>54.00</td><td>-2.73</td><td>42.00</td><td>33.30</td><td>12.91</td><td>37.74</td><td>0.00 200 52 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	51.27	54.00	-2.73	42.00	33.30	12.91	37.74	0.00 200 52 AVERAGE	 Site : 03CH20-HY Condition: AVG_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>108.99</td><td>-----</td><td>-----</td><td>100.88</td><td>32.88</td><td>13.02</td><td>37.79</td><td>0.00 200 52 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	108.99	-----	-----	100.88	32.88	13.02	37.79	0.00 200 52 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5150.00	51.27	54.00	-2.73	42.00	33.30	12.91	37.74	0.00 200 52 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5240.00	108.99	-----	-----	100.88	32.88	13.02	37.79	0.00 200 52 AVERAGE																																																																									

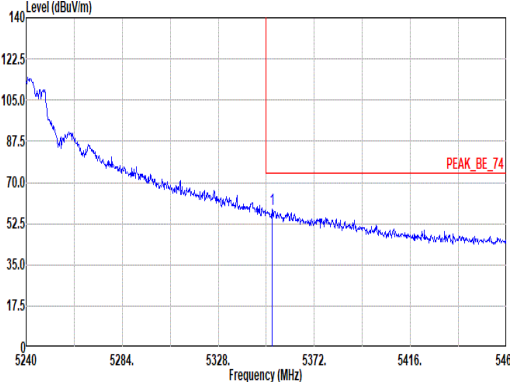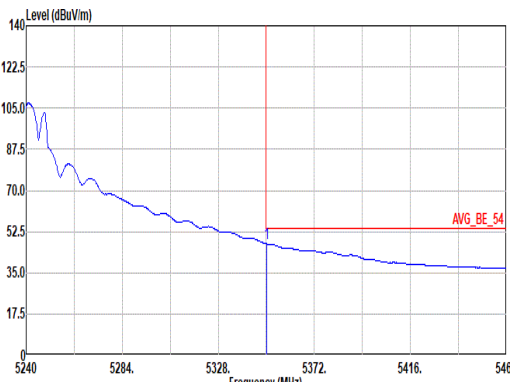

Mode	70																																																					
	Band Edge - R																																																					
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																					
ANT	6+7																																																					
Pol.	Vertical						Fundamental																																															
Peak	 Site : 03CH20-HY Condition: PEAK_BE_74 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5352.64</td><td>58.77</td><td>74.00</td><td>-15.23</td><td>50.32</td><td>33.10</td><td>13.19</td><td>37.84</td><td>0.00</td><td>200</td><td>52 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5352.64	58.77	74.00	-15.23	50.32	33.10	13.19	37.84	0.00	200	52 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5352.64	58.77	74.00	-15.23	50.32	33.10	13.19	37.84	0.00	200	52 PEAK																																											
Avg	 Site : 03CH20-HY Condition: AVG_BE_54 3m HF_91200_02360_241101 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.22</td><td>47.30</td><td>54.00</td><td>-6.70</td><td>38.85</td><td>33.10</td><td>13.19</td><td>37.84</td><td>0.00</td><td>200</td><td>52 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.22	47.30	54.00	-6.70	38.85	33.10	13.19	37.84	0.00	200	52 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	5350.22	47.30	54.00	-6.70	38.85	33.10	13.19	37.84	0.00	200	52 AVERAGE																																											

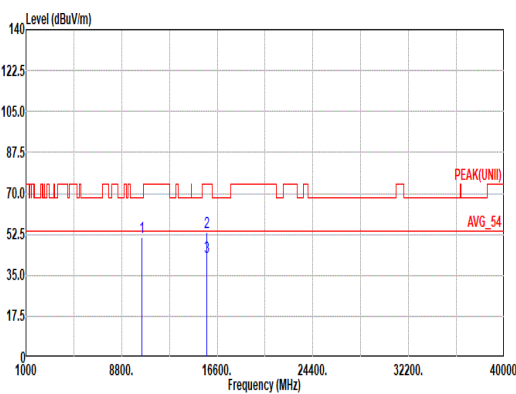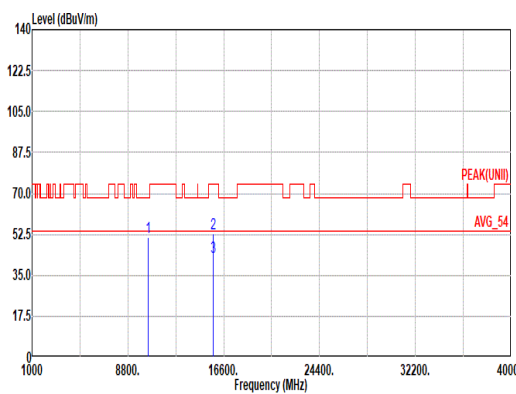


Mode	70																																																																															
	Harmonic																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT20_CH48_5240MHz																																																																															
ANT	6+7																																																																															
Pol.	Horizontal						Vertical																																																																									
Peak Avg																																																																																
	Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 HORIZONTAL						Site : 03CH20-HY Condition: PEAK(UNII) 3m HF_91280_02360_241101 VERTICAL																																																																									
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>51.28</td><td>68.20</td><td>-16.92</td><td>34.61</td><td>38.64</td><td>18.55</td><td>41.41</td><td>0.89</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15720.00</td><td>53.33</td><td>74.00</td><td>-20.67</td><td>34.96</td><td>38.94</td><td>22.96</td><td>44.46</td><td>0.93</td><td>200</td><td>265</td><td>PEAK</td></tr><tr><td>3</td><td>15720.00</td><td>42.96</td><td>54.00</td><td>-11.04</td><td>24.59</td><td>38.94</td><td>22.96</td><td>44.46</td><td>0.93</td><td>200</td><td>265</td><td>Average</td></tr></table>														Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	10480.00	51.28	68.20	-16.92	34.61	38.64	18.55	41.41	0.89	--	--	--	PEAK	2	15720.00	53.33	74.00	-20.67	34.96	38.94	22.96	44.46	0.93	200	265	PEAK	3	15720.00	42.96	54.00	-11.04	24.59	38.94	22.96	44.46	0.93	200	265	Average
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																			
1	10480.00	51.28	68.20	-16.92	34.61	38.64	18.55	41.41	0.89	--	--	--	PEAK																																																																			
2	15720.00	53.33	74.00	-20.67	34.96	38.94	22.96	44.46	0.93	200	265	PEAK																																																																				
3	15720.00	42.96	54.00	-11.04	24.59	38.94	22.96	44.46	0.93	200	265	Average																																																																				



Appendix D. Duty Cycle Plots


Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
6+7	802.11a	99.29	-	-	10Hz
6+7	5GHz 802.11ac VHT20 Full RU	99.76	-	-	10Hz
6+7	5GHz 802.11ax HE20 Full RU	99.63	-	-	10Hz
6+7	5GHz 802.11ax HE20 106 RU	92.50	9250	0.11	110Hz
6+7	5GHz 802.11ax HE40 Full RU	99.57	-	-	10Hz
6+7	5GHz 802.11ax HE40 242 RU	98.72	-	-	10Hz
6+7	5GHz 802.11ax HE80 Full RU	99.68	-	-	10Hz
6+7	5GHz 802.11ax HE80 484 RU	99.29	-	-	10Hz
6+7	5GHz 802.11ax HE160 Full RU	99.33	-	-	10Hz
6+7	5GHz 802.11ax HE160 996 RU	97.93	711	1.41	1.5kHz

MIMO <Ant. 6+7>

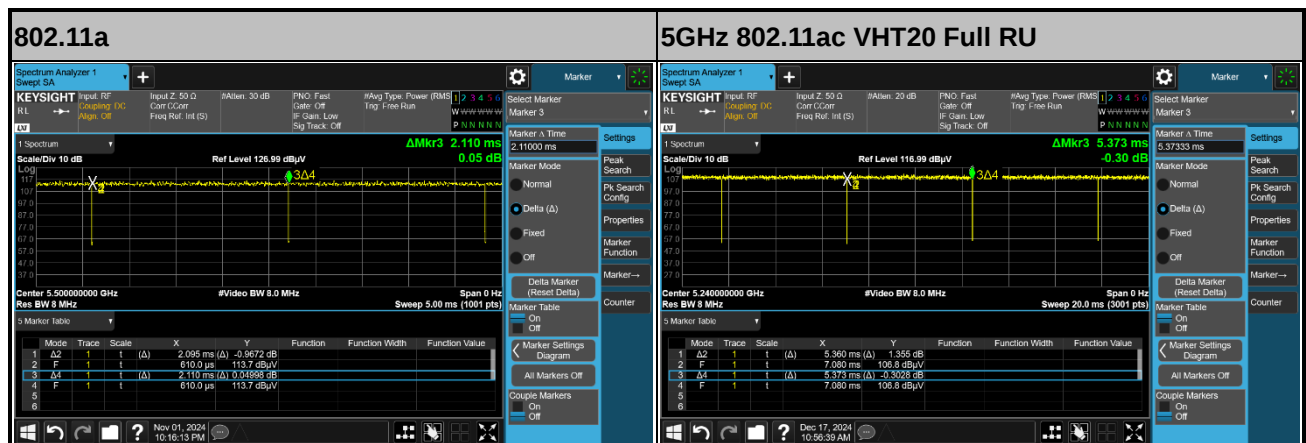





5GHz 802.11ax HE20 Full RU

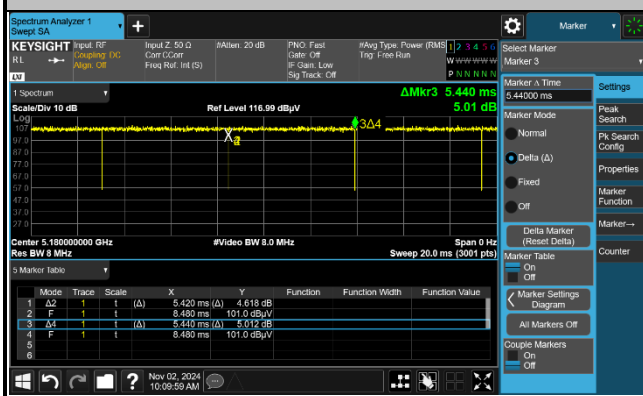


5GHz 802.11ax HE20 106 RU

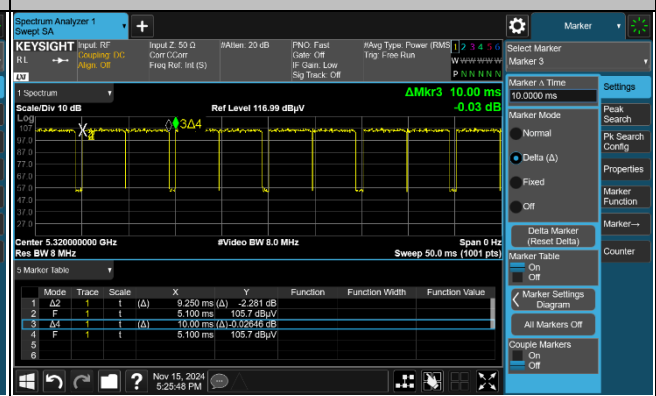


5GHz 802.11ax HE40 Full RU

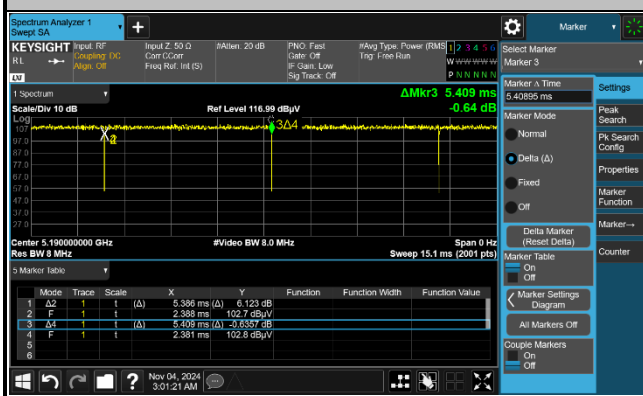


5GHz 802.11ax HE40 242 RU

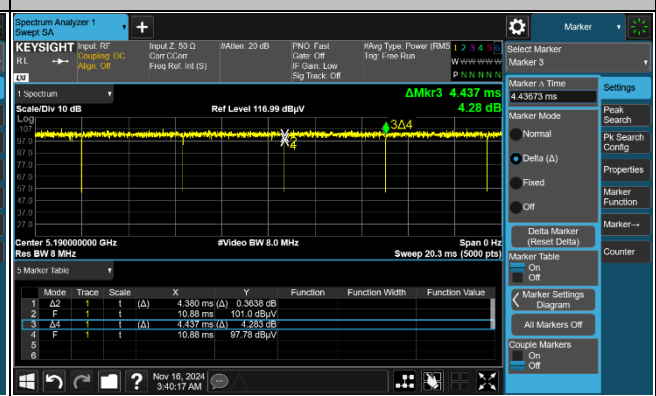


5GHz 802.11ax HE80 Full RU

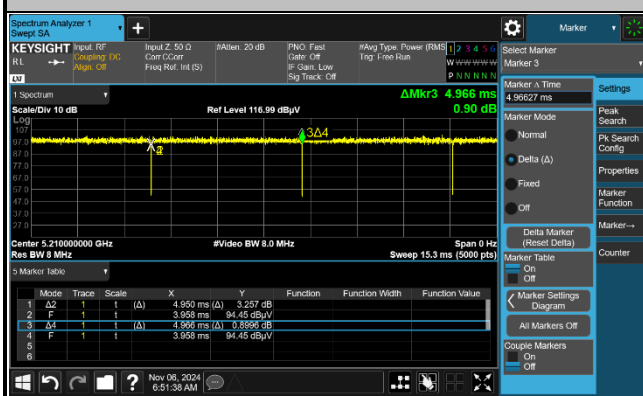

5GHz 802.11ax HE80 484 RU

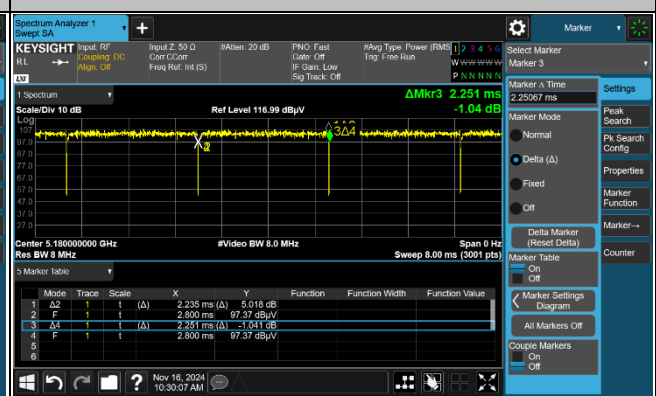

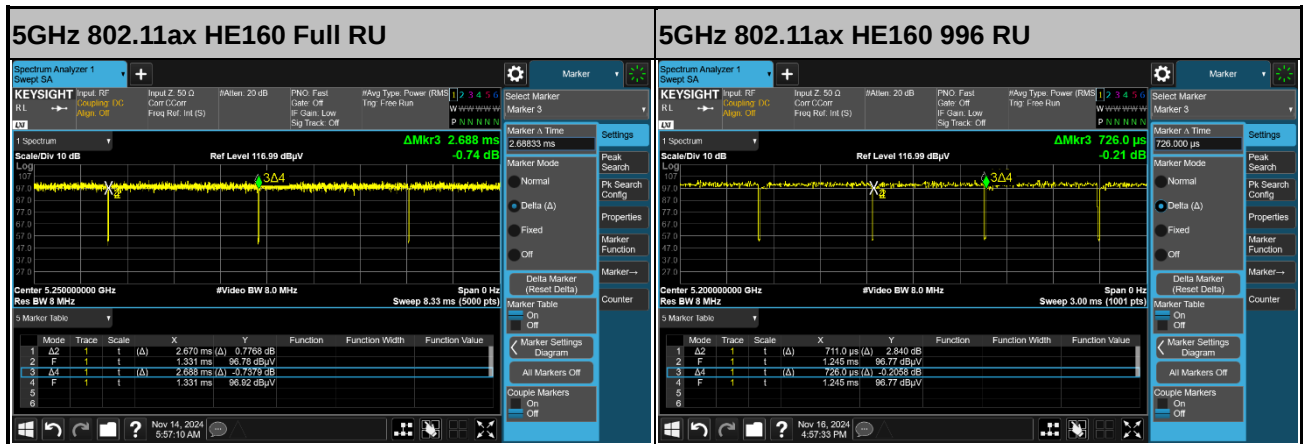



Appendix F. Spot Check Evaluation on MC345B

Conducted power test and radiated spurious emission test configurations were selected from the worst cases identified in the reference model and tested to demonstrate the test data from reference model remains representative for the variant model.

The deviation between the spot check and the referenced values is within 3dB, therefore data referencing is justified according to the guidance in the ECR inquiry

Mode	Test Item	UZ7MC345A Reference Worst mode Test Result	UZ7MC345B Variant Check Test Result	Deviation	Limit (dB)
WLAN 5G B1-3	26dB Bandwidth	21.95 MHz	26.11 MHz	-	Within the authorized frequency block
	99% Bandwidth	18.97 MHz	19.06 MHz	-	Within the authorized frequency block
	Power Spectral Density	10.88 (dBm/MHz)	10.62 (dBm/MHz)	0.26	Deviation (ddB) < 3 dB
	Conducted Output Power	23.09 dBm	22.72 dBm	0.37	Deviation (ddB) < 3 dB
	Unwanted Emissions	72.84 dBuV/m	72.26 dBuV/m	0.58	Deviation (ddB) < 3 dB
	AC Conducted Emission	Under limit14.56db	Under limit17.85db	-	compliant rule parts



List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Jan. 07, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Jul. 04, 2024	Jan. 07, 2025	Jul. 03, 2025	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Jul. 04, 2024	Jan. 07, 2025	Jul. 03, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101566	10Hz~40GHz	Aug. 23, 2024	Jan. 07, 2025	Aug. 22, 2025	Conducted (TH05-HY)
Switch Control Mainframe	Burgeon	ETF-058	EC1300484 (BOX3)	N/A	May 20, 2024	Jan. 07, 2025	May 19, 2025	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_v ersion_240513	N/A	Conducted Other Test Item	N/A	Jan. 07, 2025	N/A	Conducted (TH05-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	N/A	Oct. 16, 2024	Dec. 01, 2024~ Dec. 12, 2024	Oct. 15, 2025	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Dec. 01, 2024~ Dec. 12, 2024	Aug. 28, 2025	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 27, 2024	Dec. 01, 2024~ Dec. 12, 2024	May 26, 2025	Radiation (03CH20-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Dec. 01, 2024~ Dec. 12, 2024	N/A	Radiation (03CH20-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Dec. 01, 2024~ Dec. 12, 2024	N/A	Radiation (03CH20-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Dec. 01, 2024~ Dec. 12, 2024	N/A	Radiation (03CH20-HY)
Signal Analyzer	Keysight	N9010B	MY64320114	N/A	Oct. 05, 2024	Dec. 01, 2024~ Dec. 12, 2024	Oct. 04, 2025	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00800N 1D01N-06	55606 & 08	30MHz~1GHz	Nov. 27, 2024	Dec. 01, 2024~ Dec. 12, 2024	Nov. 26, 2025	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	02360	1GHz-18GHz	Dec. 01, 2024	Dec. 01, 2024~ Dec. 12, 2024	Oct. 30, 2025	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1230	18GHz-40GHz	Oct. 25, 2024	Dec. 01, 2024~ Dec. 12, 2024	Oct. 24, 2025	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Jan. 01, 2024	Dec. 01, 2024~ Dec. 12, 2024	Dec. 31, 2024	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45SE	980792	N/A	Nov. 12, 2024	Dec. 01, 2024~ Dec. 12, 2024	Nov. 11, 2025	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,804 015/2,804027 /2	N/A	Jan. 17, 2024	Dec. 01, 2024~ Dec. 12, 2024	Jan. 16, 2025	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303A	TP211382	N/A	Mar. 27, 2024	Dec. 01, 2024~ Dec. 12, 2024	Mar. 26, 2025	Radiation (03CH20-HY)
Software	Audix	N/A	RK-002156	N/A	N/A	Dec. 01, 2024~ Dec. 12, 2024	N/A	Radiation (03CH20-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Dec. 04, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Dec. 04, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 23, 2024	Dec. 04, 2024	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Dec. 04, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Dec. 04, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Dec. 04, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESCI7	100724	9kHz~7GHz	Feb. 20, 2024	Dec. 04, 2024	Feb. 19, 2025	Conduction (CO07-HY)

—THE END—