



TEST REPORT

| | | |
|---|--|------------------|
| Report Number | 90534-21-72-21-PP003 | |
| Date of issue | Oct.09.2021 | |
| Tested by (+signature) | Duke | <i>Duke Chen</i> |
| Approved by (+signature) | Jason | <i>Jason gao</i> |
| Testing Laboratory name | SLG-CPC Testlaboratory Co., Ltd. | |
| Address | No. 11, Wu Song Road, Dongcheng District, Dongguan, Guangdong Province, China 523117 | |
| Applicant's name | NANJING MIDAS TECHNOLOGY CO., LTD | |
| Address | Block A, Kechuang Building, Lishui District, Nanjing City, Jiangsu Province | |
| Manufacturer's name | NANJING MIDAS TECHNOLOGY CO., LTD | |
| Address | Block A, Kechuang Building, Lishui District, Nanjing City, Jiangsu Province | |
| Factory's name | NANJING MIDAS TECHNOLOGY CO., LTD | |
| Address | Block A, Kechuang Building, Lishui District, Nanjing City, Jiangsu Province | |
| Standard(s) | FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C | |
| Test item description | Midas-926 Gateway | |
| Trade Mark |  | |
| Model/Type reference | Midas-926.GB915 | |
| FCC ID | 2A293M926GB915 | |
| Date of receipt of test item | Sep.07.2021 | |
| Date (s) of performance of test: | Sep.08.2021 to Sep.30.2021 | |
| Summary of Test Results | Pass | |

The Summary of Test Results based on a technical opinion belongs to the standard(s).

General disclaimer:

This report shall not be reproduced except in full, without the written approval of SLG-CPC Testlaboratory Co., Ltd. The test results in the report only apply to the tested sample.



Table of Contents

| | | |
|----------|--|-----------|
| 1 | EUT TECHNICAL DESCRIPTION | 3 |
| 2 | SUMMARY OF TEST RESULT | 4 |
| 3 | TEST METHODOLOGY | 5 |
| 3.1 | GENERAL DESCRIPTION OF APPLIED STANDARDS..... | 5 |
| 3.2 | MEASUREMENT EQUIPMENT USED | 5 |
| 3.3 | DESCRIPTION OF TEST MODES..... | 6 |
| 4 | FACILITIES AND ACCREDITATIONS | 7 |
| 4.1 | FACILITIES | 7 |
| 4.2 | LABORATORY ACCREDITATIONS AND LISTINGS | 7 |
| 5 | TEST SYSTEM UNCERTAINTY | 8 |
| 6 | SETUP OF EQUIPMENT UNDER TEST..... | 9 |
| 6.1 | RADIO FREQUENCY TEST SETUP 1..... | 9 |
| 6.2 | RADIO FREQUENCY TEST SETUP 2..... | 9 |
| 6.3 | CONDUCTED EMISSION TEST SETUP | 11 |
| 6.4 | BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM | 12 |
| 6.5 | SUPPORT EQUIPMENT | 12 |
| 7 | TEST REQUIREMENTS | 13 |
| 7.1 | DTS 6DB BANDWIDTH..... | 13 |
| 7.2 | MAXIMUM PEAK CONDUCTED OUTPUT POWER..... | 16 |
| 7.3 | MAXIMUM POWER SPECTRAL DENSITY | 20 |
| 7.4 | UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS | 23 |
| 7.5 | RADIATED SPURIOUS EMISSION | 28 |
| 7.6 | CONDUCTED EMISSIONS TEST..... | 33 |
| 7.7 | ANTENNA APPLICATION..... | 36 |



1 EUT TECHNICAL DESCRIPTION

| | |
|-----------------------------------|--|
| Product | Midas-926 Gateway |
| Model Number | Midas-926.GB915 |
| Modulation: | Lora |
| Operating Frequency Range: | 923.3-927.5MHz |
| Number of Channels: | 8 |
| Transmit Power Max: | 24.89 dBm |
| Antenna Type: | Extenal Antenna |
| Antenna Gain: | 3 dBi |
| Power supply | <input checked="" type="checkbox"/> DC supply: DC 5V |
| | <input checked="" type="checkbox"/> Adapter supply: Model:AS2401A-0503000US IN PUT:100~240V 50/60Hz 0.8A MAX OUT PUT: 5V 3000mA |
| Temperature Range: | -20°C ~ +55°C |

Note: for more details, please refer to the User's manual of the EUT.



2 SUMMARY OF TEST RESULT

| FCC Part Clause | Test Parameter | Verdict | Remark |
|---------------------|---|---------|--------|
| 15.247(a)(2) | DTS (6dB) Bandwidth | PASS | |
| 15.247(b)(3) | Maximum Peak Conducted Output Power | PASS | |
| 15.247(e) | Maximum Power Spectral Density Level | PASS | |
| 15.247(d) | Unwanted Emission Into Non-Restricted Frequency Bands | PASS | |
| 15.247(d) 15.209 | Unwanted Emission Into Restricted Frequency Bands (conducted) | PASS | |
| 15.247(d) 15.209 | Radiated Spurious Emission | PASS | |
| 15.207 | Conducted Emission Test | PASS | |
| 15.247(b) | Antenna Application | PASS | |
| | NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits. | | |

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2A293M926GB915 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.



3 TEST METHODOLOGY

3.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

3.2 MEASUREMENT EQUIPMENT USED

| Equipment | Model | Manufacturer | S/N | Cal. Due |
|-------------------------------------|-----------------|--------------|------------------|------------|
| RF Connected Test | | | | |
| Vector Signal Generator | Rohde & Schwarz | SMBV100B(6G) | 101166 | 2022/07/30 |
| Analog Signal Generator | Rohde & Schwarz | SMB100A(40G) | 181333 | 2022/07/30 |
| Signal Analyzer | Rohde & Schwarz | FSV40 | 101527 | 2022/05/24 |
| Power Analyzer | Rohde & Schwarz | OSP-B157W8 | N/A | 2022/09/23 |
| Wideband Radio Communication Tester | R&S | CMW270 | 101985 | 2022/07/30 |
| Temperature&Humidity test chamber | ESPEC | VC 4018 | / | 2022/04/02 |
| Wideband Radio Communication Tester | Rohde & Schwarz | CMW500 | 166898 | 2022/09/07 |
| Radiated Emission Test | | | | |
| EMI Test Receiver | KEYSIGHT | N9010A | MY56070465 | 2021/12/23 |
| EMI Test Receiver | Rohde & Schwarz | FSV40 | 101511 | 2022/05/24 |
| Bilog Antenna | Schwarzbeck | VULB 9163 | 01335 | 2023/04/28 |
| Power Amplifier | EMEC | EM330 | 060676 | 2021/12/23 |
| Cable | Tuyue | F4309 | L-400-NmNm-12000 | 2021/12/23 |
| Signal Analyzer | Rohde & Schwarz | FSV40 | 101511 | 2022/05/24 |
| Horn Antenna | Schwarzbeck | BBHA9170 | / | 2022/10/09 |
| Power Amplifier | Rohde & Schwarz | SCU-18F | 180118 | 2022/05/17 |
| Active Loop Antenna | ETS LINDGREN | 6512 | 41623 | 2022/04/26 |
| Test Software | Farad | EZ-EMC | Ver.CPC-3A1 | / |
| Conducted Emission Test | | | | |
| LISN | Schwarzbeck | NSLK 8127 | 8127-892 | 2022-03-19 |
| EMI Test Receiver | R&S | ESR3 | 102124 | 2021-12-23 |
| Pulse Limiter | R&S | ESH3-Z2 | 357.8810.52 | 2021-12-22 |
| Test Software | Farad | EZ-EMC | Ver.CPC-3A1 | / |



3.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates DTS were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for DTS:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|
| 1 | 923.3 | 5 | 925.7 | ... | ... |
| 2 | 923.9 | 6 | 926.3 | ... | ... |
| 3 | 924.5 | 7 | 926.9 | ... | ... |
| 4 | 925.1 | 8 | 927.5 | ... | ... |

Test Frequency and channel for DTS:

| Lowest Frequency | | Middle Frequency | | Highest Frequency | |
|------------------|-----------------|------------------|-----------------|-------------------|-----------------|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 1 | 923.3 | 5 | 925.7 | 8 | 927.5 |



4 FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

No. 11, Wu Song Road, Dongcheng District, Dongguan, Guangdong Province, China 523117

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

4.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

:

Accredited by A2LA

The Certificate Number is 6325.01.

Name of Firm

: SLG-CPC Testlaboratory Co., Ltd.

Site Location

: No. 11, Wu Song Road, Dongcheng District, Dongguan, Guangdong Province, China 523117



5 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Test Parameter | Measurement Uncertainty |
|---|-------------------------|
| RF Output Power | ±1.0% |
| Power Spectral Density | ±0.9% |
| Duty Cycle and Tx-Sequence and Tx-Gap | ±1.3% |
| Medium Utilisation Factor | ±1.5% |
| Occupied Channel Bandwidth | ±2.3% |
| Transmitter Unwanted Emission in the Out-of Band | ±1.2% |
| Transmitter Unwanted Emissions in the Spurious Domain | ±2.7% |
| Receiver Spurious Emissions | ±2.7% |
| Temperature | ±3.2% |
| Humidity | ±2.5% |


Measurement Uncertainty for a level of Confidence of 95%



6 SETUP OF EQUIPMENT UNDER TEST

6.1 RADIO FREQUENCY TEST SETUP 1

The 915M DTS component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



6.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:


The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

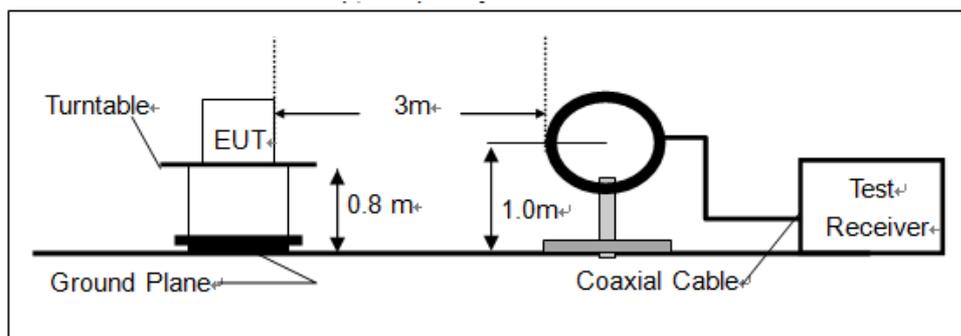




(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

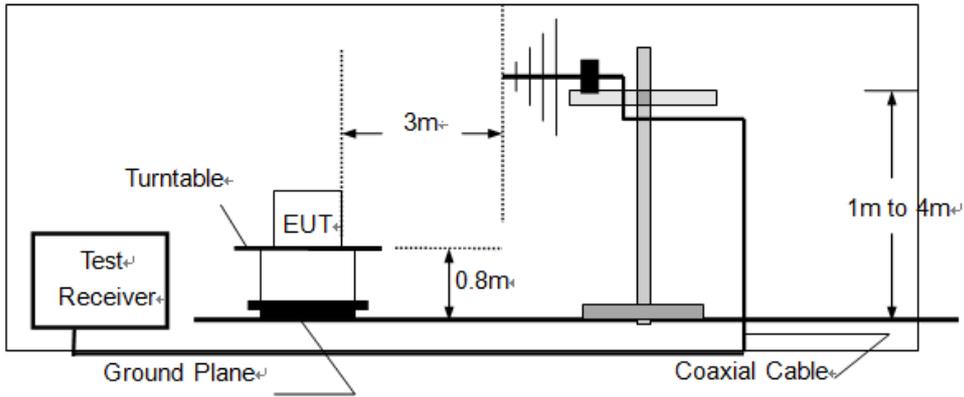

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

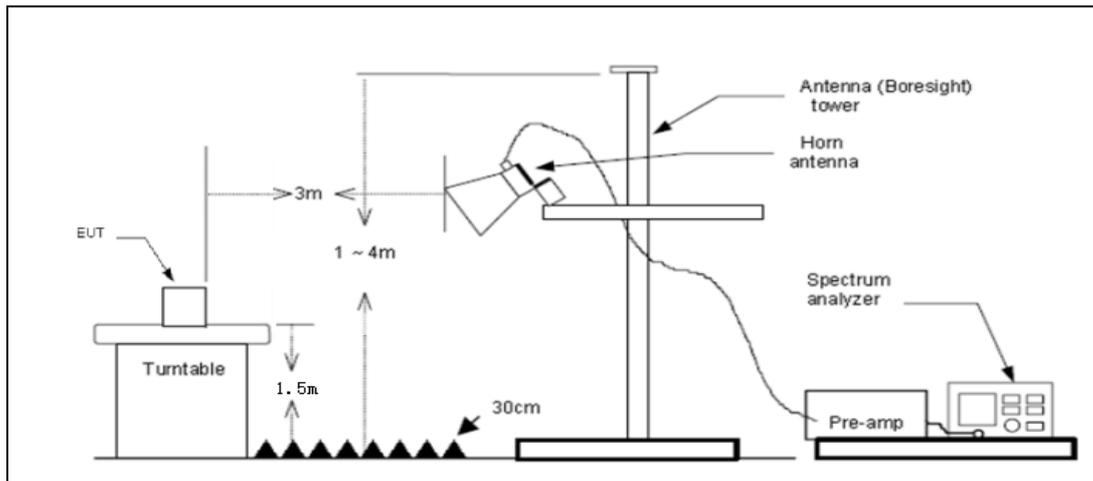




6.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.


Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

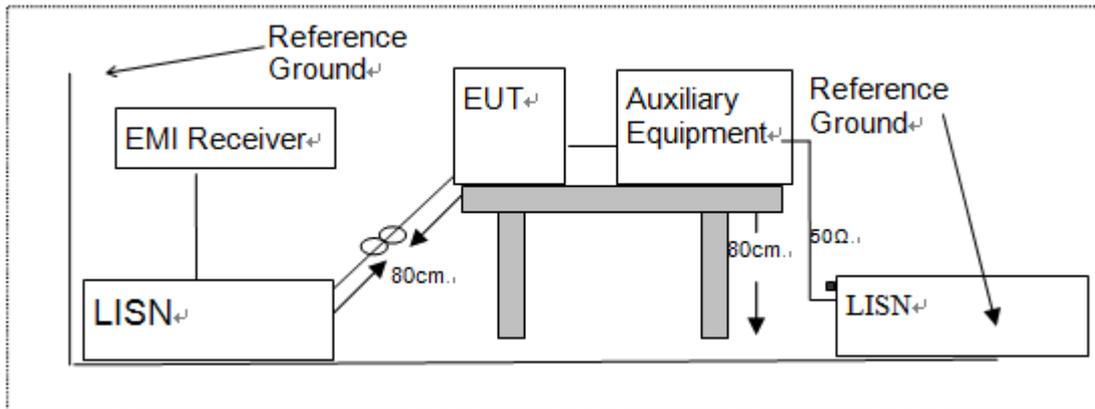



6.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

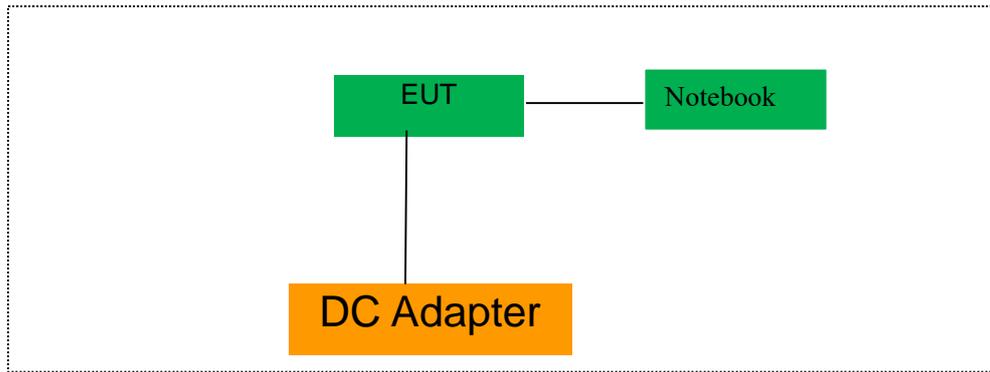

6.5 SUPPORT EQUIPMENT

| EUT Cable List and Details | | | |
|----------------------------|------------|---------------------|------------------------|
| Cable Description | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| DC cable | 1.0 | Unshielded | Without Ferrite |

| Auxiliary Cable List and Details | | | |
|----------------------------------|------------|---------------------|------------------------|
| Cable Description | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| / | / | / | / |

| Auxiliary Equipment List and Details | | | |
|--------------------------------------|--------------|--------------|---------------|
| Description | Manufacturer | Model | Serial Number |
| Notebook | Lenovo | MPNXB1505007 | MP1XHYY7 |

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



7 TEST REQUIREMENTS

7.1 DTS 6DB BANDWIDTH

7.1.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02

7.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

7.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

7.1.4 Test Procedure

The EUT was operating in DTS mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300 kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.

Test Results


| | |
|--------------------|-----------|
| Temperature: | 26° C |
| Relative Humidity: | 54% |
| ATM Pressure: | 1011 mbar |

| Operation Mode | Channel Number | Channel Frequency (MHz) | Measurement Bandwidth (kHz) | Limit (kHz) | Verdict |
|----------------|----------------|-------------------------|-----------------------------|-------------|---------|
| DTS | 1 | 923.3 | 631.7 | >500 | PASS |
| | 5 | 925.7 | 633.9 | >500 | PASS |
| | 8 | 927.5 | 636.0 | >500 | PASS |




DTS (6dB) Bandwidth
DTS
Channel 1: 923.3MHz

Test Model

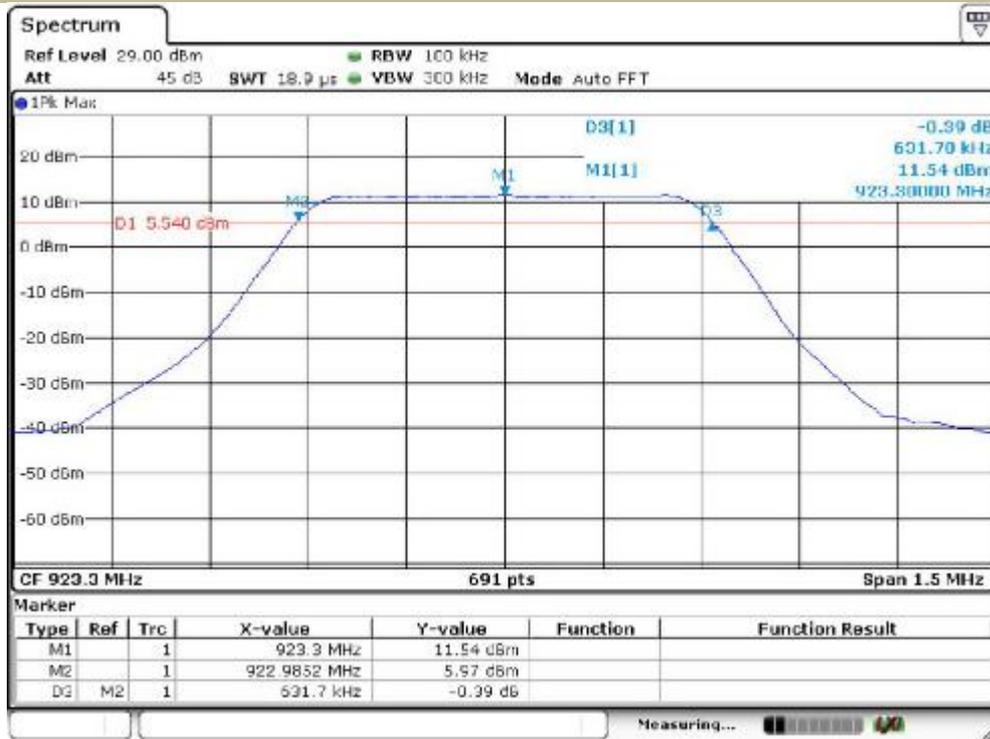

DTS (6dB) Bandwidth
DTS
Channel 5: 925.7MHz

Test Model

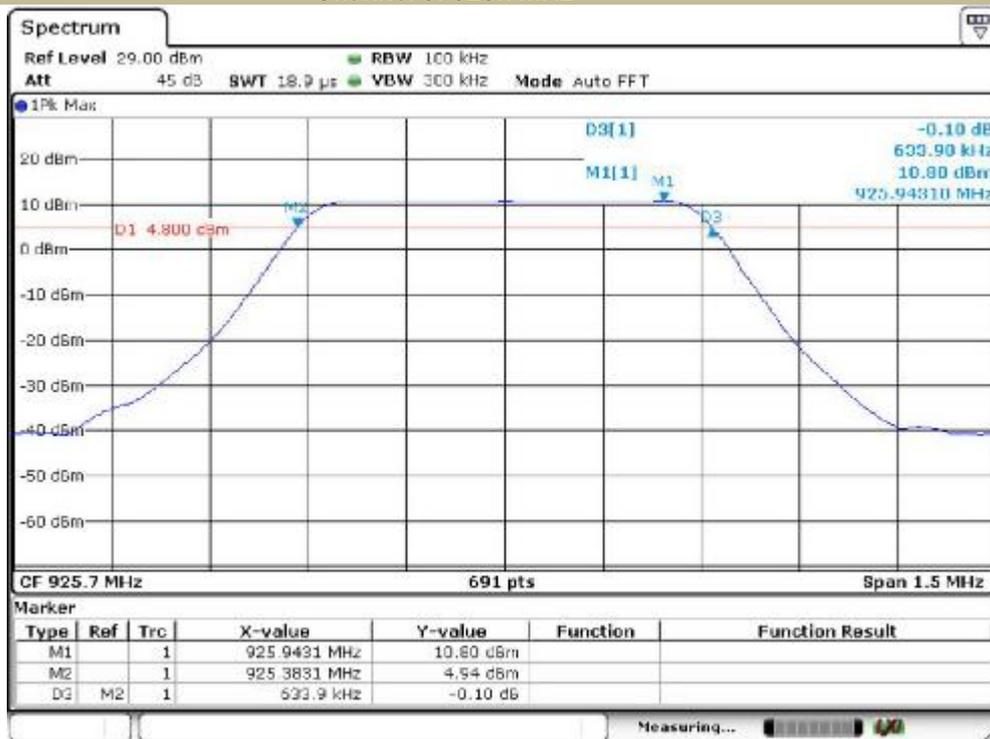




Test Model

DTS (6dB) Bandwidth
DTS

Channel 8: 927.5MHz

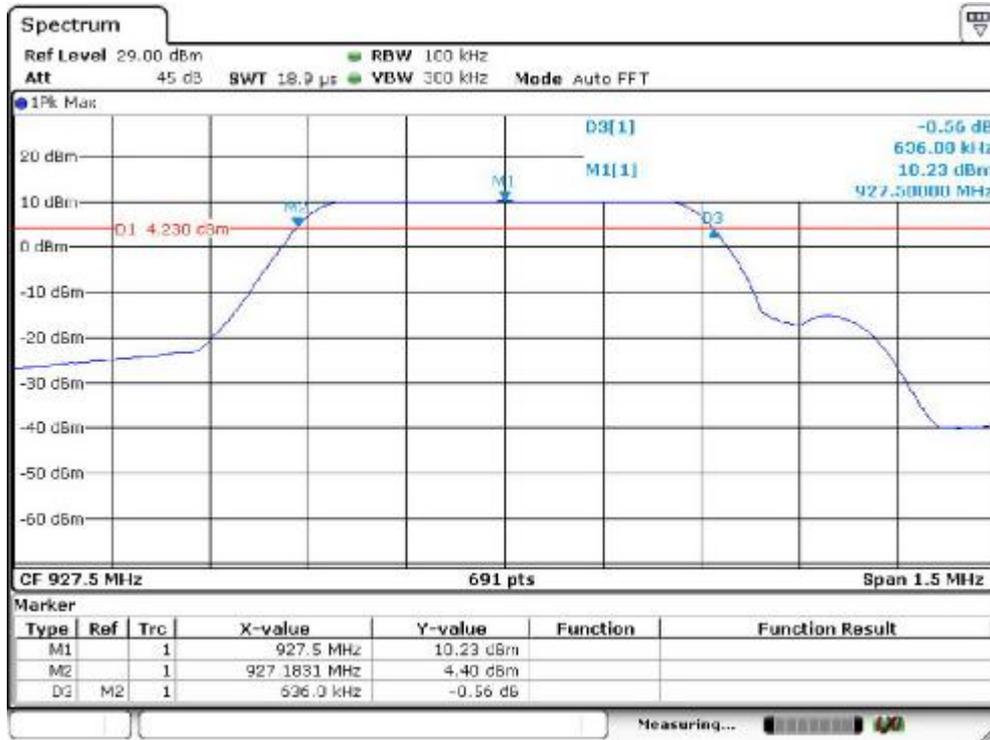



7.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

7.2.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02

7.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 902 - 928 MHz bands shall not exceed: 1 Watt (30dBm).

7.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

7.2.4 Test Procedure

n According to FCC Part 15.247(b)(3)

To demonstrate compliance with Part 15.247(b)(3) we implement the maximum conducted (average) output power method, AVGSA-1, of 558074 D01 15.247 Meas Guidance v05r02, since we will use averaging methods to show compliance with the power spectral density requirements of 15.247(e).

Set the RBW = 1 % to 5 % of the OBW

Set $VBW \geq 3 \cdot RBW$

Set the span = 1.5 times to 5.0 times the OBW.

Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

Use the 99 % power bandwidth function of the instrument (if available).

If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

n According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


Test Results


| | |
|--------------------|-----------|
| Temperature: | 26° C |
| Relative Humidity: | 54% |
| ATM Pressure: | 1011 mbar |


| Operation Mode | Channel Number | Channel Frequency (MHz) | Measurement Level (dBm) | Limit (dBm) | Verdict |
|----------------|----------------|-------------------------|-------------------------|-------------|---------|
| DTS | 1 | 923.3 | 24.89 | 30 | PASS |
| | 5 | 925.7 | 24.89 | 30 | PASS |
| | 8 | 927.5 | 23.98 | 30 | PASS |



| | | |
|------------|--------------------------------|----------------|
| Test Model | Maximum Conducted Output Power | |
| | DTS | |
| | Channel 1: 923.3MHz | FSK modulation |

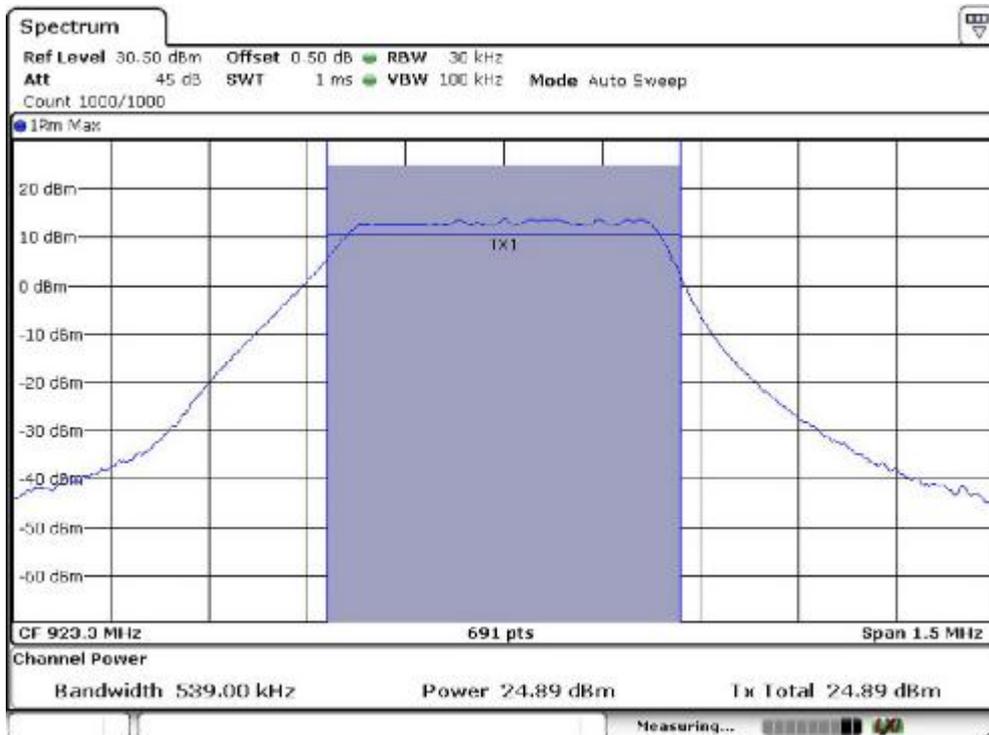

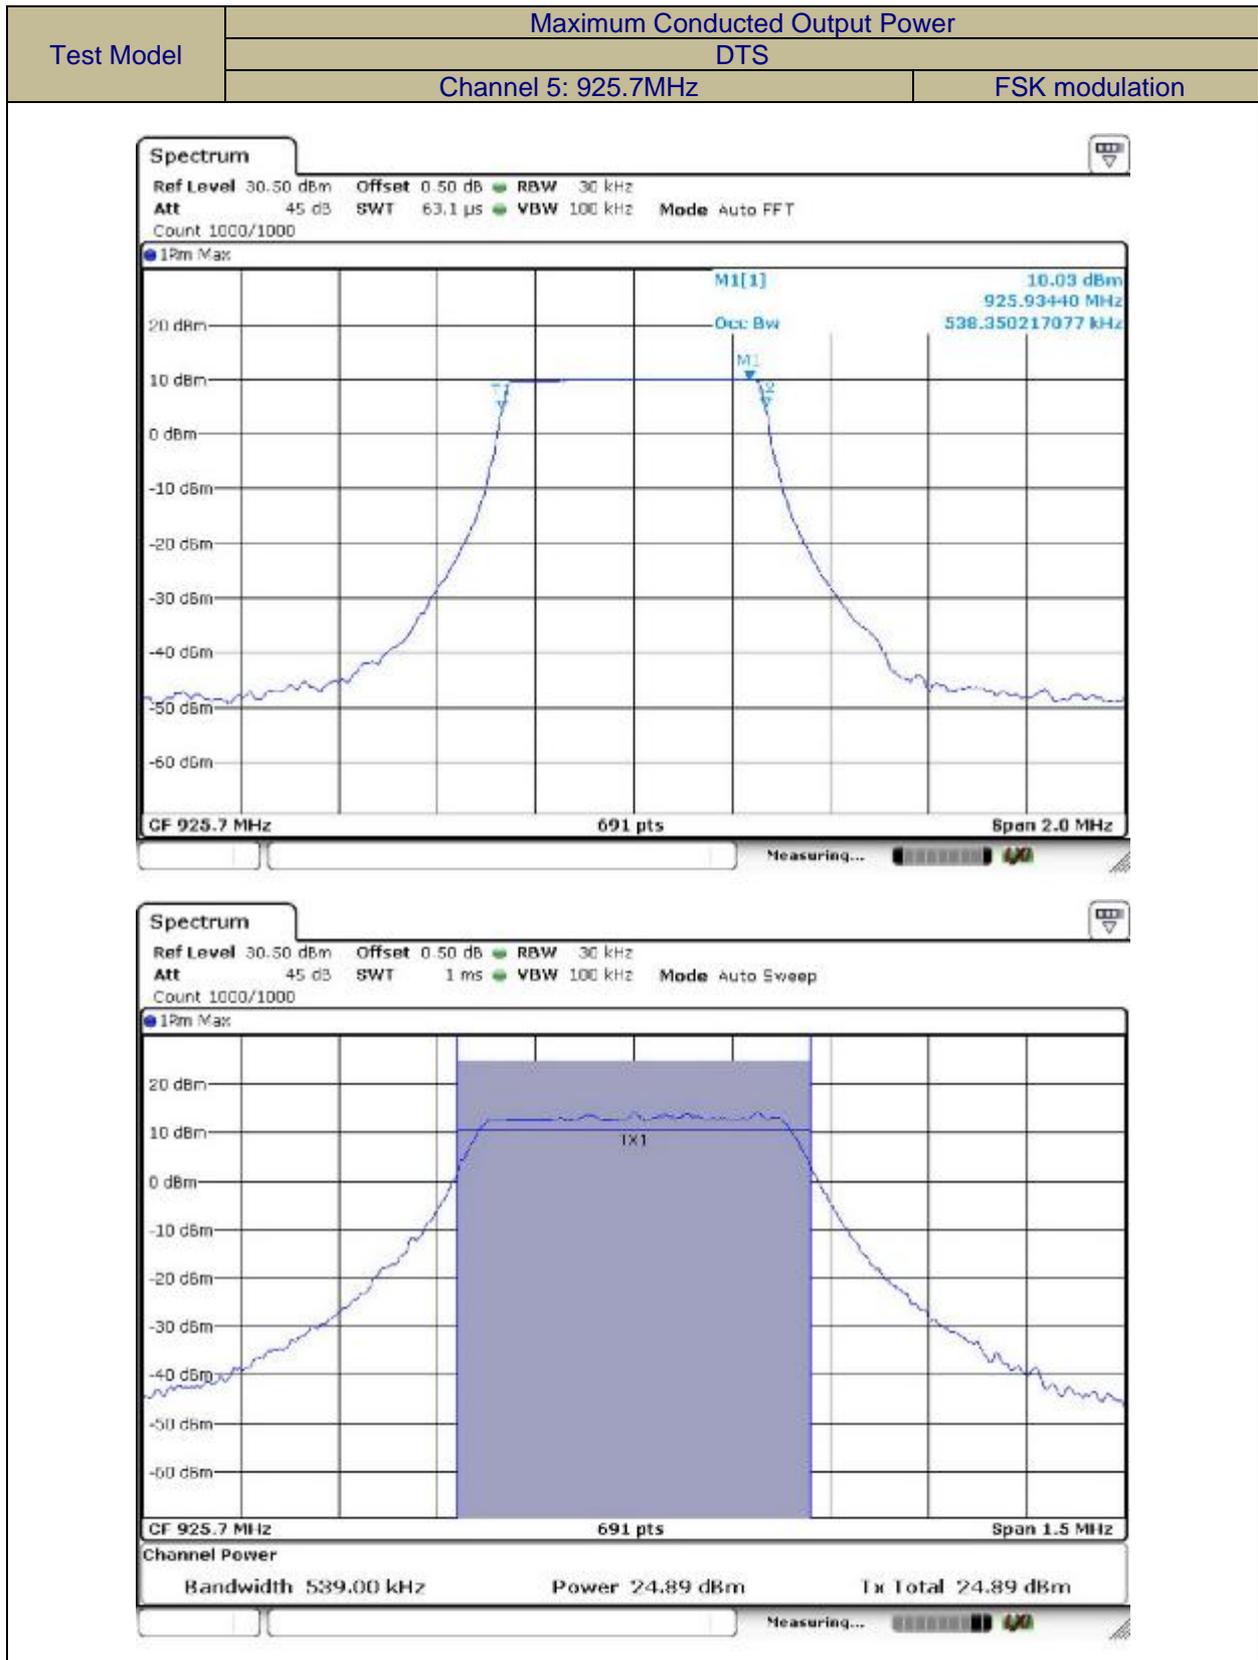

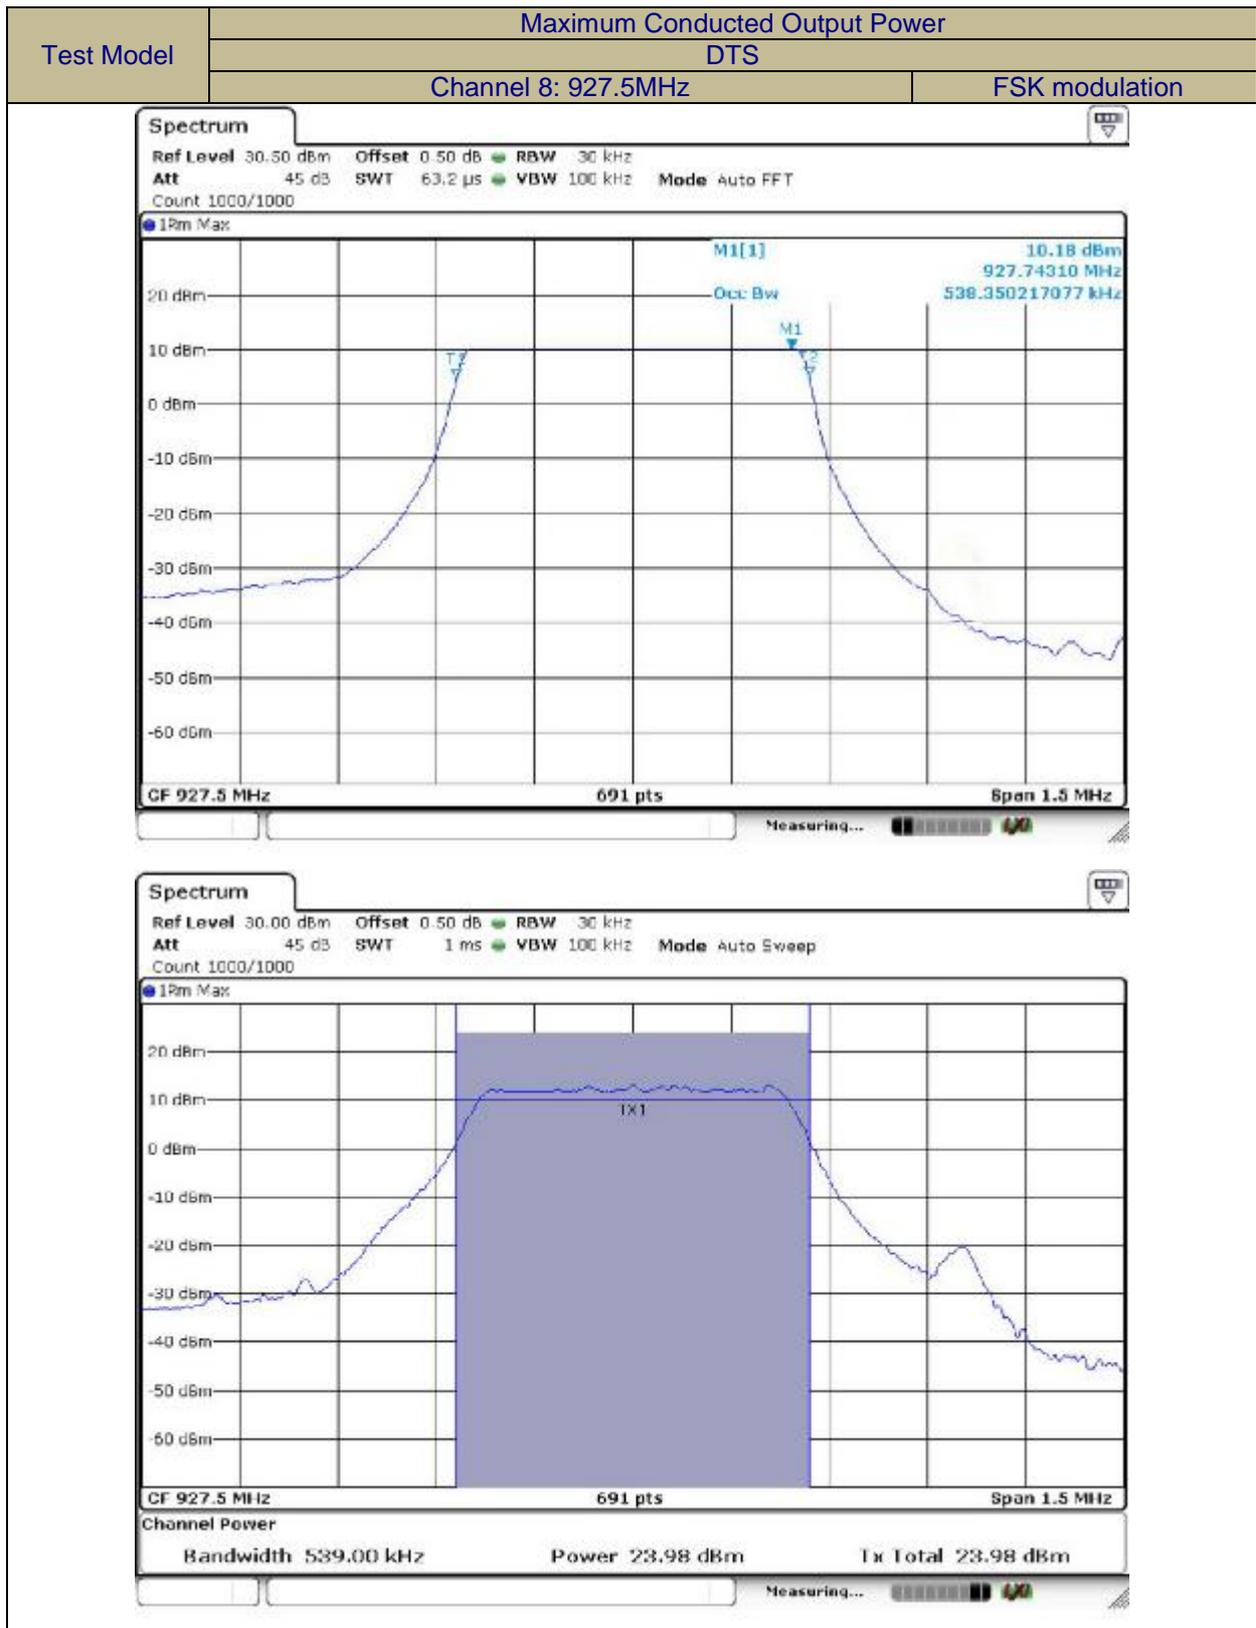



7.3 MAXIMUM POWER SPECTRAL DENSITY

7.3.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02

7.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

7.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

7.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

7.3.5 Test Results

| | |
|--------------------|-----------|
| Temperature: | 26° C |
| Relative Humidity: | 54% |
| ATM Pressure: | 1011 mbar |

Band1:

| Operation Mode | Channel Number | Channel Frequency (MHz) | Measurement Level (dBm/3kHz) | Limit (dBm/3kHz) | Verdict |
|----------------|----------------|-------------------------|------------------------------|------------------|---------|
| DTS | 1 | 923.3 | 7.22 | <8 | PASS |
| | 5 | 925.7 | 7.43 | <8 | PASS |
| | 8 | 927.5 | 6.18 | <8 | PASS |
| Note: N/A | | | | | |



Power Spectral Density
DTS
Test Model
Channel 1: 923.3MHz



Power Spectral Density
DTS
Test Model
Channel 5: 925.7MHz






Test Model

Power Spectral Density
DTS

Channel 8: 927.5MHz

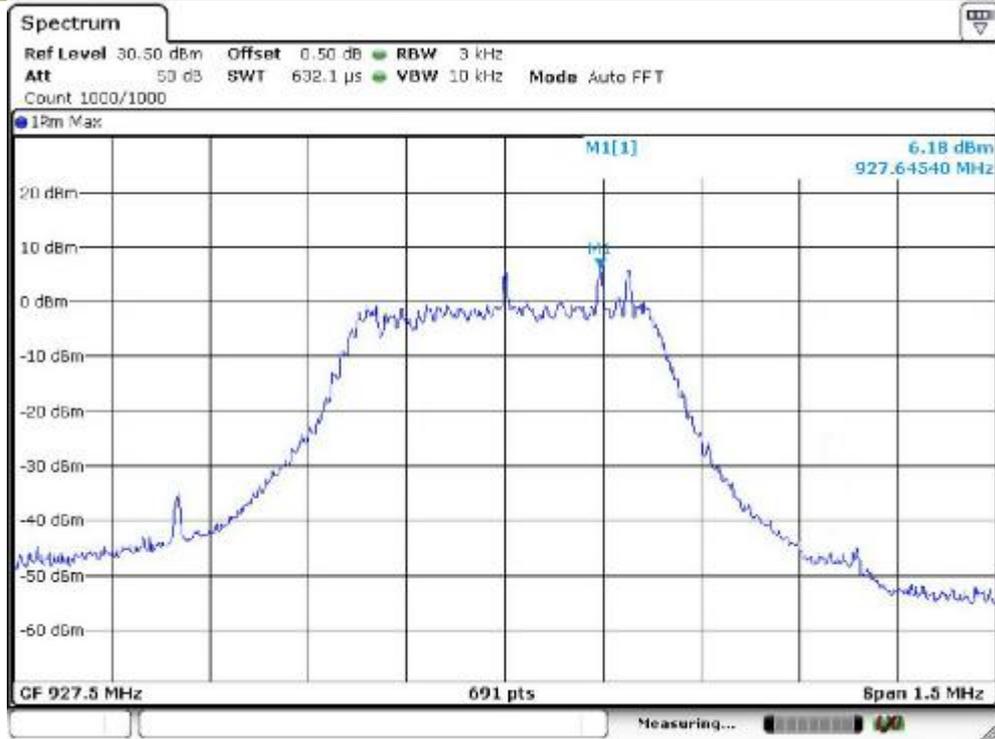



7.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

7.4.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02

7.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

7.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

7.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

n Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to = 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

n Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

7.4.5 Test Results


| | |
|--------------------|-----------|
| Temperature: | 26° C |
| Relative Humidity: | 54% |
| ATM Pressure: | 1011 mbar |



Test Model PSD(Power Spectral Density) RBW=100kHz
DTS
Channel 1: 923.3MHz



Test Model Unwanted Emissions in non-restricted frequency bands
DTS
Channel 1: 923.3MHz

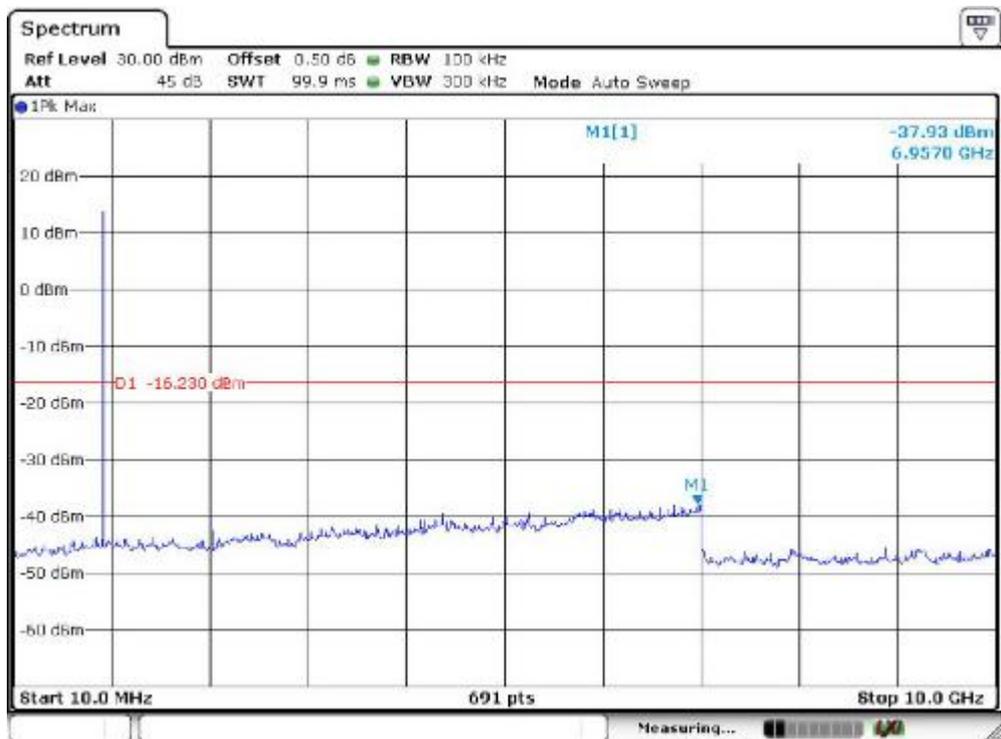




Test Model

Band edge
DTS

Channel 1: 923.3MHz

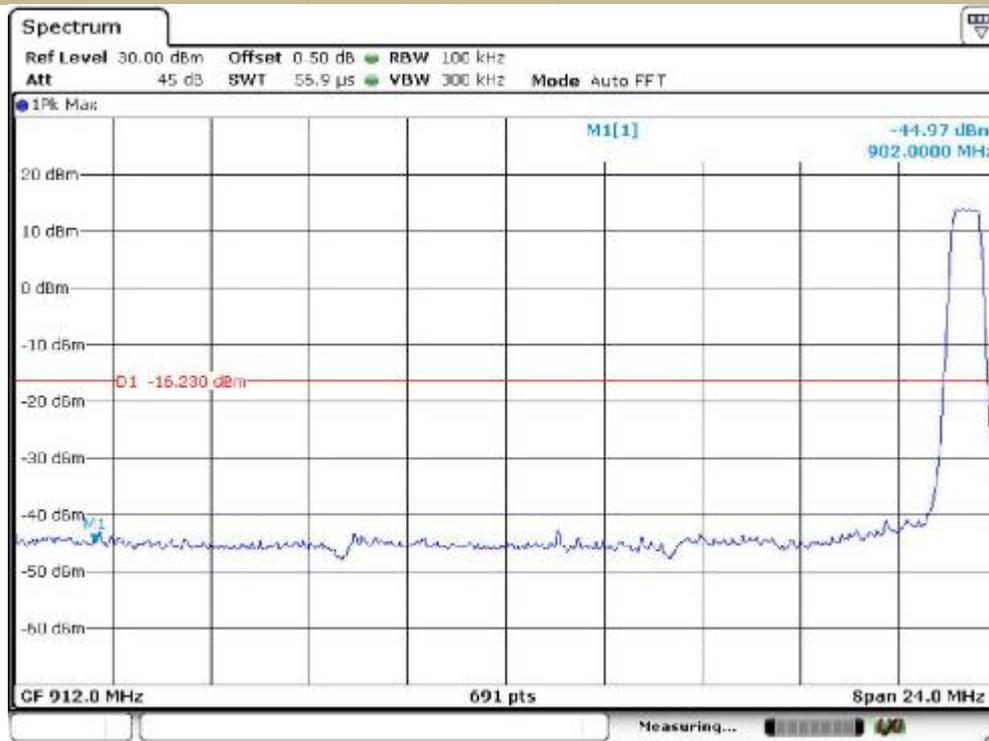

Test Model

PSD(Power Spectral Density) RBW=100kHz
DTS


Channel 5: 925.7MHz





Unwanted Emissions In Non-Restricted Frequency Bands
DTS
Channel 5: 925.7MHz

Test Model

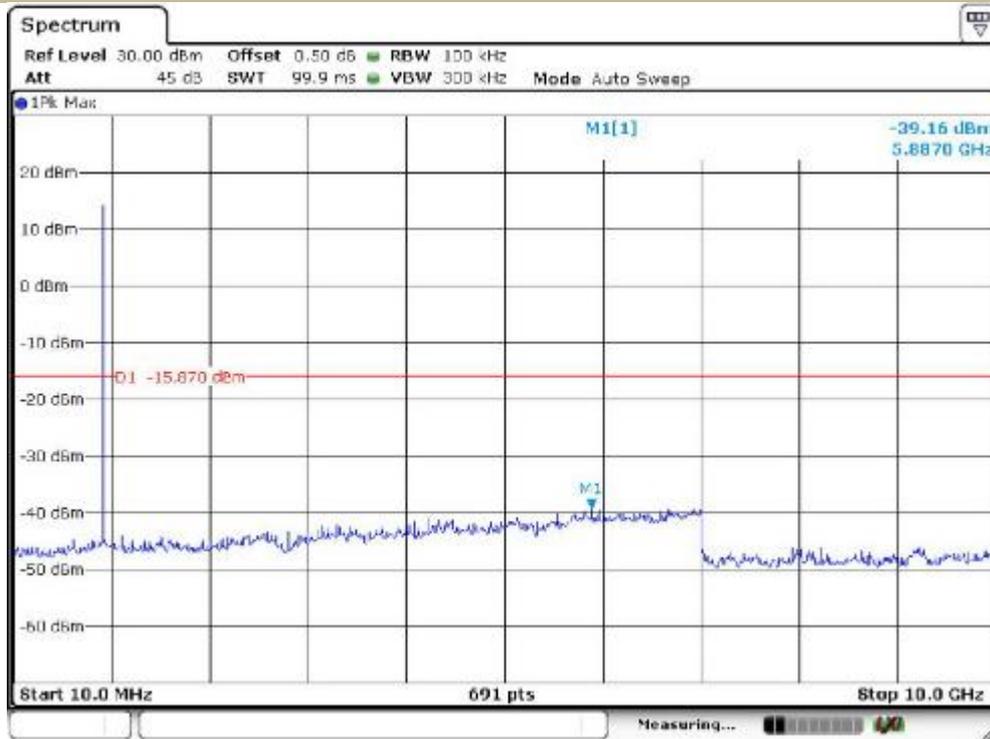

PSD(Power Spectral Density) RBW=100kHz
DTS
Channel 8: 927.5MHz


Test Model





Unwanted Emissions In Non-Restricted Frequency Bands
DTS
Channel 8: 927.5MHz

Test Model

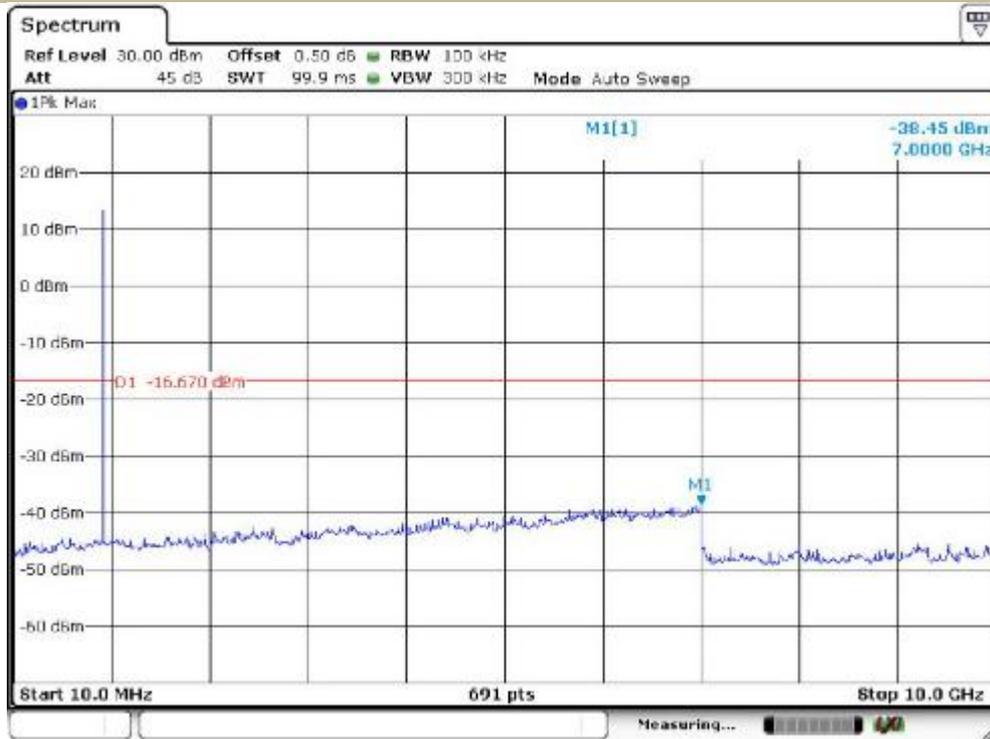

Band edge
DTS
Channel 8: 927.5MHz

Test Model





7.5 RADIATED SPURIOUS EMISSION

7.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 Meas Guidance v05r02

7.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 10.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (2) |
| 13.36-13.41 | | | |

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

| Restricted Frequency(MHz) | Field Strength ($\mu\text{V}/\text{m}$) | Field Strength ($\text{dB}\mu\text{V}/\text{m}$) | Measurement Distance |
|---------------------------|---|--|----------------------|
| 0.009-0.490 | 2400/F(KHz) | 20 log ($\mu\text{V}/\text{m}$) | 300 |
| 0.490-1.705 | 2400/F(KHz) | 20 log ($\mu\text{V}/\text{m}$) | 30 |
| 1.705-30 | 30 | 29.5 | 30 |
| 30-88 | 100 | 40 | 3 |
| 88-216 | 150 | 43.5 | 3 |
| 216-960 | 200 | 46 | 3 |
| Above 960 | 500 | 54 | 3 |

7.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

7.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz (1GHz to 25GHz), 100 kHz for $f < 1$ GHz (30MHz to 1GHz)

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold



Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

7.5.5 Test Results

| | |
|--------------------|-----------|
| Temperature: | 26° C |
| Relative Humidity: | 54% |
| ATM Pressure: | 1011 mbar |

n Spurious Emission below 30MHz (9KHz to 30MHz)

| Freq. (MHz) | Ant.Pol. H/V | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Over(dB) | |
|----------------|-----------------|---------------------------|----|------------------|----|----------|----|
| | | PK | AV | PK | AV | PK | AV |
| -- | -- | -- | -- | -- | -- | -- | -- |

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/ \text{test distance})$ (dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor



n Spurious Emission Above 1GHz (1GHz to 25GHz)
 DTS mode have been tested, and the worst result was report as below:

Test mode: TX Frequency: Channel 1: 923.3MHz

| Freq. (MHz) | Ant. Pol. H/V | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Over(dB) | |
|-------------|---------------|------------------------|-------|------------------|----|----------|--------|
| | | PK | AV | PK | AV | PK | AV |
| 5121.73 | V | 58.10 | 44.87 | 74 | 54 | -15.90 | -9.13 |
| 9155.12 | V | 53.17 | 39.12 | 74 | 54 | -20.83 | -14.88 |
| 12107.35 | V | 50.22 | 36.75 | 74 | 54 | -23.78 | -17.25 |
| 4912.22 | H | 59.45 | 42.71 | 74 | 54 | -14.55 | -11.29 |
| 8117.92 | H | 51.74 | 38.92 | 74 | 54 | -22.26 | -15.08 |
| 13871.06 | H | 47.20 | 36.62 | 74 | 54 | -26.80 | -17.38 |

Test mode: TX Frequency: Channel 5: 925.7MHz

| Freq. (MHz) | Ant. Pol. H/V | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Over(dB) | |
|-------------|---------------|------------------------|-------|------------------|----|----------|--------|
| | | PK | AV | PK | AV | PK | AV |
| 6032.06 | V | 56.45 | 44.70 | 74 | 54 | -17.55 | -9.30 |
| 10449.43 | V | 53.02 | 40.34 | 74 | 54 | -20.98 | -13.66 |
| 13855.03 | V | 48.39 | 35.57 | 74 | 54 | -25.61 | -18.43 |
| 48.94.51 | H | 55.43 | 44.01 | 74 | 54 | -18.57 | -9.99 |
| 9124.74 | H | 53.99 | 39.52 | 74 | 54 | -20.01 | -14.48 |
| 14115.75 | H | 49.47 | 37.44 | 74 | 54 | -24.53 | -16.56 |

Test mode: TX Frequency: Channel 8: 927.5MHz

| Freq. (MHz) | Ant. Pol. H/V | Emission Level(dBuV/m) | | Limit 3m(dBuV/m) | | Over(dB) | |
|-------------|---------------|------------------------|-------|------------------|----|----------|--------|
| | | PK | AV | PK | AV | PK | AV |
| 4959.30 | V | 56.65 | 41.80 | 74 | 54 | -17.35 | -12.20 |
| 10446.41 | V | 54.43 | 40.26 | 74 | 54 | -19.57 | -13.74 |
| 14468.93 | V | 50.37 | 36.91 | 74 | 54 | -23.63 | -17.09 |
| 4692.26 | H | 58.88 | 43.53 | 74 | 54 | -15.12 | -10.47 |
| 7409.31 | H | 53.86 | 39.44 | 74 | 54 | -20.14 | -14.56 |
| 13479.77 | H | 46.65 | 34.81 | 74 | 54 | -27.35 | -19.19 |

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Correct Factor +Cable Loss.
 (3) Correct Factor= Ant_F + Cab_L - Preamp
 (4)Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



n Spurious Emission below 1GHz (30MHz to 1GHz)

All modes have been tested, and the worst result recorded was report as below:



Site: Polarization: *Vertical* Temperature: 24°C
 Limit: FCC Part15 C 30-1 GHz Power: AC 120 V/60 Hz Humidity: 51 %
 Mode: TX 923.3Mhz
 Note:

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1 | * | 61.0400 | 53.23 | -23.88 | 29.35 | 40.00 | -10.65 | QP |
| 2 | | 96.9300 | 53.75 | -25.09 | 28.66 | 43.50 | -14.84 | QP |
| 3 | | 215.2700 | 55.32 | -26.02 | 29.30 | 43.50 | -14.20 | QP |
| 4 | | 500.4500 | 51.69 | -22.02 | 29.67 | 46.00 | -16.33 | QP |
| 5 | | 545.0700 | 51.22 | -20.72 | 30.50 | 46.00 | -15.50 | QP |
| 6 | | 875.8400 | 45.00 | -15.02 | 29.98 | 46.00 | -16.02 | QP |

*:Maximum data x:Over limit !:over margin j: Reference Only



Site: Polarization: **Horizontal** Temperature: 24 °C
 Limit: FCC Part15 C 30-1 GHz Power: AC 120 V/60 Hz Humidity: 51 %
 Mode: TX 923.3Mhz
 Note:

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | Detector |
| 1 | | 62.9800 | 52.88 | -24.89 | 27.99 | 40.00 | -12.01 | QP |
| 2 | | 97.9000 | 53.25 | -24.83 | 28.42 | 43.50 | -15.08 | QP |
| 3 | * | 183.2600 | 58.89 | -26.83 | 32.06 | 43.50 | -11.44 | QP |
| 4 | | 240.4900 | 58.81 | -24.89 | 33.92 | 46.00 | -12.08 | QP |
| 5 | | 544.1000 | 50.49 | -20.74 | 29.75 | 46.00 | -16.25 | QP |
| 6 | | 797.2700 | 47.61 | -15.30 | 32.31 | 46.00 | -13.69 | QP |

*:Maximum data x:Over limit !:over margin

j: Reference Only



7.6 CONDUCTED EMISSIONS TEST

7.6.1 Applicable Standard

According to FCC Part 15.207(a)

7.6.2 Conformance Limit

| Frequency(MHz) | Conducted Emission Limit | |
|----------------|--------------------------|---------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66-56 | 56-46 |
| 0.5-5.0 | 56 | 46 |
| 5.0-30.0 | 60 | 50 |

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.6.3 Test Configuration

Test according to clause 7.3 conducted emission test setup


7.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

7.6.5 Test Results

Pass

All modes have been tested, and the worst result recorded was report as below:

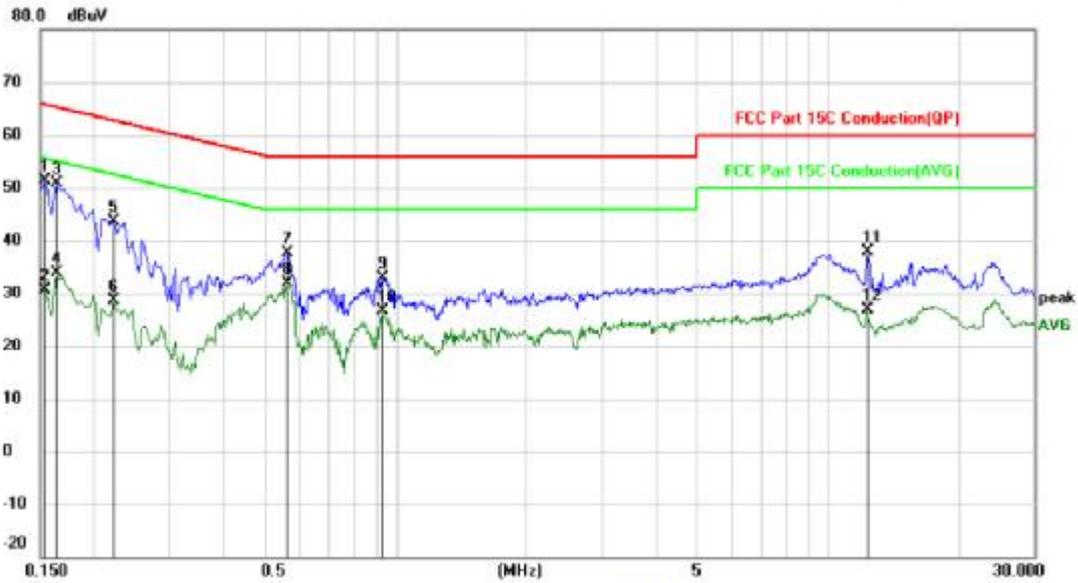


Site: Phase: **L1** Temperature: 23°C
 Limit: FCC Part 15C Conduction(QP) Power: AC 120 V/60 Hz Humidity: 55 %
 Mode: 915 Mode
 Note:

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Detector | Comment |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|---------|
| | | MHz | dBuV | dB | dBuV | dBuV | dB | | |
| 1 | | 0.1539 | 41.40 | 10.05 | 51.45 | 65.79 | -14.34 | QP | |
| 2 | | 0.1539 | 20.62 | 10.05 | 30.67 | 55.79 | -25.12 | AVG | |
| 3 | | 0.1633 | 40.79 | 10.05 | 50.84 | 65.29 | -14.45 | QP | |
| 4 | | 0.1633 | 23.73 | 10.05 | 33.78 | 55.29 | -21.51 | AVG | |
| 5 | | 0.2220 | 33.70 | 10.05 | 43.75 | 62.74 | -18.99 | QP | |
| 6 | | 0.2220 | 18.47 | 10.05 | 28.52 | 52.74 | -24.22 | AVG | |
| 7 | | 0.5611 | 27.57 | 10.07 | 37.64 | 56.00 | -18.36 | QP | |
| 8 | * | 0.5611 | 21.93 | 10.07 | 32.00 | 46.00 | -14.00 | AVG | |
| 9 | | 0.9282 | 22.63 | 10.14 | 32.77 | 56.00 | -23.23 | QP | |
| 10 | | 0.9282 | 16.51 | 10.14 | 26.65 | 46.00 | -19.35 | AVG | |
| 11 | | 12.3179 | 27.16 | 10.78 | 37.94 | 60.00 | -22.06 | QP | |
| 12 | | 12.3179 | 15.98 | 10.78 | 26.76 | 50.00 | -23.24 | AVG | |

*:Maximum data x:Over limit !:over margin

<Reference Only

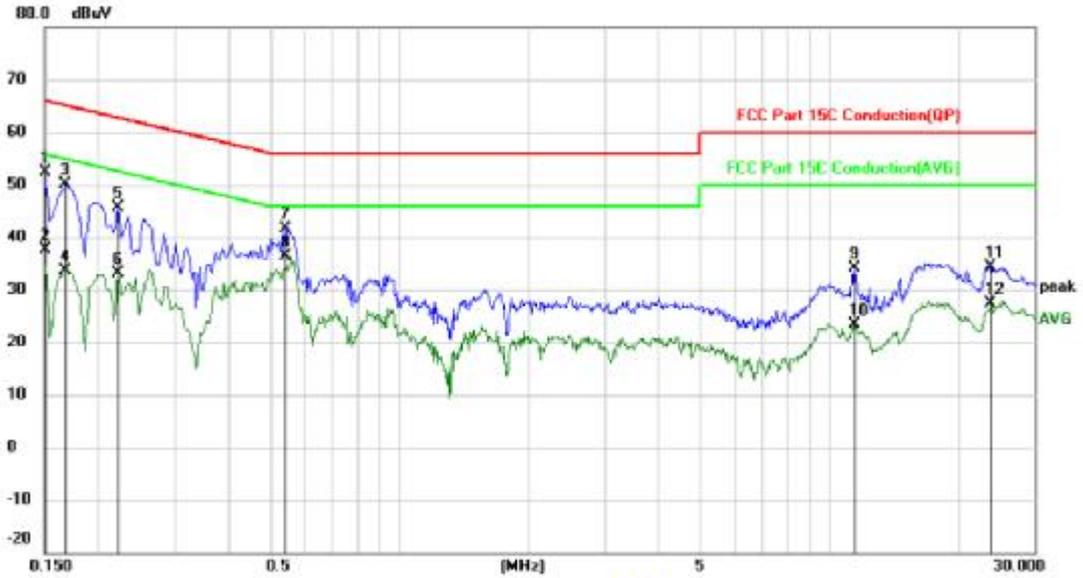

Site: _____ Phase: **N** Temperature: 23°C
 Limit: FCC Part 15C Conduction(QP) Power: AC 120 V/60 Hz Humidity: 55 %
 Mode: 915 Mode
 Note:

| No. Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV | Limit dBuV | Over dB | Detector | Comment |
|---------|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|---------|
| 1 | 0.1500 | 42.45 | 10.05 | 52.50 | 66.00 | -13.50 | QP | |
| 2 | 0.1500 | 27.56 | 10.05 | 37.61 | 56.00 | -18.39 | AVG | |
| 3 | 0.1675 | 39.96 | 10.05 | 50.01 | 65.08 | -15.07 | QP | |
| 4 | 0.1675 | 23.70 | 10.05 | 33.75 | 55.08 | -21.33 | AVG | |
| 5 | 0.2220 | 35.67 | 10.05 | 45.72 | 62.74 | -17.02 | QP | |
| 6 | 0.2220 | 22.97 | 10.05 | 33.02 | 52.74 | -19.72 | AVG | |
| 7 | 0.5433 | 31.47 | 10.06 | 41.53 | 56.00 | -14.47 | QP | |
| 8 * | 0.5433 | 26.25 | 10.06 | 36.31 | 46.00 | -9.69 | AVG | |
| 9 | 11.4375 | 23.44 | 10.63 | 34.07 | 60.00 | -25.93 | QP | |
| 10 | 11.4375 | 12.81 | 10.63 | 23.44 | 50.00 | -26.56 | AVG | |
| 11 | 23.6358 | 23.70 | 10.80 | 34.50 | 60.00 | -25.50 | QP | |
| 12 | 23.6358 | 16.61 | 10.80 | 27.41 | 50.00 | -22.59 | AVG | |

*:Maximum data x:Over limit !:over margin

<Reference Only



7.7 ANTENNA APPLICATION

7.7.1 Antenna Requirement

| Standard | Requirement |
|---------------------|--|
| FCC CRF Part 15.203 | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. |

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

7.7.2 Result

PASS.

The EUT has 1 antenna: a External Antenna for 915M with classic model, the gain is 3 dBi;

- Note:
- Antenna use a permanently attached antenna which is not replaceable.
 - Not using a standard antenna jack or electrical connector for antenna replacement
 - The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

----- END OF REPORT -----