

# FCC TEST REPORT

Client Name : Intuition Robotics

Address : 3 ha-yetsira street (floor 15) Ramat Gan Israel

Product Name : Tablet

Date : May 24, 2022

**Shenzhen Anbotech Compliance Laboratory Limited**



**Shenzhen Anbotech Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline

400-003-0500

[www.anbotech.com](http://www.anbotech.com)

# Contents

1. General Information .....	5
1.1. Client Information .....	5
1.2. Description of Device (EUT) .....	5
1.3. Auxiliary Equipment Used During Test .....	6
1.4. Operation State .....	6
1.5. Environmental Conditions .....	6
1.6. Test Equipment List .....	7
1.7. Measurement Uncertainty .....	8
1.8. Description of Test Facility .....	8
2. Summary of Test .....	9
2.1. Summary of test result .....	9
3. Conducted Output Power Test .....	10
3.1. Test Standard and Limit .....	10
3.2. Test Setup .....	10
3.3. Test Procedure .....	10
3.4. Test Data .....	10
4. Peak-Average Ratio .....	11
4.1. Test Standard and Limit .....	11
4.2. Test Setup .....	11
4.3. Test Procedure .....	11
4.4. Test Data .....	11
5. Modulation Characteristic .....	12
6. 99% Occupied Bandwidth & 26 dB Bandwidth .....	13
6.1. Test Standard and Limit .....	13
6.2. Test Setup .....	13
6.3. Test Procedure .....	13
6.4. Test Data .....	13
7. Conducted Spurious Emission .....	14
7.1. Test Standard and Limit .....	14
7.2. Test Setup .....	14
7.3. Test Procedure .....	14
7.4. Test Data .....	14
8. Band Edge .....	15
8.1. Test Standard and Limit .....	15
8.2. Test Setup .....	15
8.3. Test Procedure .....	15
8.4. Test Data .....	15
9. Radiated Spurious Emission .....	16
9.1. Test Standard and Limit .....	16
9.2. Test Setup .....	16

**Shenzhen Anbotech Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline

400-003-0500

www.anbotech.com

9.3. Test Procedure .....	16
9.4. Test Data .....	18
10. ERP and EIRP .....	20
10.1. Test Standard and Limit .....	20
10.2. Test Setup .....	20
10.3. Test Procedure .....	20
10.4. Test Data .....	22
11. Frequency stability VS Temperature measurement .....	23
11.1. Test Standard and Limit .....	23
11.2. Test Setup .....	23
11.3. Test Procedure .....	23
11.4. Test Data .....	23
12. Frequency stability VS Voltage measurement .....	24
12.1. Test Standard and Limit .....	24
12.2. Test Setup .....	24
12.3. Test Procedure .....	24
12.4. Test Data .....	24
APPENDIX I -- TEST SETUP PHOTOGRAPH .....	25
APPENDIX II -- EXTERNAL PHOTOGRAPH .....	26
APPENDIX III -- INTERNAL PHOTOGRAPH .....	26
APPENDIX IV -- Appendix Test Data .....	27



## TEST REPORT

Applicant : Intuition Robotics  
Manufacturer : Huafun International (China) Development Co., Ltd  
Product Name : Tablet  
Model No. : TAB-002  
Trade Mark : N.A  
Rating(s) : Input: DC 5V2A (with DC 3.7V, 4000mAh Battery inside)

Test Standard(s) : FCC PART 2, FCC Part 22(H), FCC Part 24(E)

Test Method(s) : ANSI C63.26-2015

KDB 971168 D01 Power Meas License Digital Systems v03r01

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 22, FCC Part 24 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Nov. 30, 2021

Date of Test :

Nov. 30, 2021~Mar. 28, 2022

Prepared by :

Tu Tu Hong

(TuTu Hong)

Approved & Authorized Signer :

Kingkong Jin

(Kingkong Jin)

**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com

## 1. General Information

### 1.1. Client Information

Applicant	:	Intuition Robotics
Address	:	3 ha-yetsira street (floor 15) Ramat Gan Israel
Manufacturer	:	Huafun International (China) Development Co., Ltd
Address	:	Room B548, Gangshen International center, Xinniu Road, Minzhi Street, Longhua New District, Shenzhen, China
Factory	:	Huafun International (China) Development Co., Ltd
Address	:	Room B548, Gangshen International center, Xinniu Road, Minzhi Street, Longhua New District, Shenzhen, China

### 1.2. Description of Device (EUT)

Product Name	:	Tablet
Model No.	:	TAB-002
Trade Mark	:	N.A
Test Power Supply	:	DC 3.7V Battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Transmit Frequency:	FDD Band II: 1852.40MHz~1907.60MHz FDD Band V: 826.40MHz~846.60MHz
	Receive Frequency:	FDD Band II: 1932.40MHz~1987.60MHz FDD Band V: 871.40MHz~891.60MHz
	Modulation Type	QPSK
	Power Class	Class 3
	Antenna Type	FPC antenna
	Antenna Gain(Peak):	FDD Band II: 0.8 dBi (Provided by customer) FDD Band V: 0.8 dBi (Provided by customer)
	Adapter	N.A.

**Remark:** 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. 2) This report is for WCDMA module.

### 1.3. Auxiliary Equipment Used During Test

N.A.	:	
------	---	--

### 1.4. Operation State

#### Test frequency list:

FDD Band II		FDD Band V	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
9262	1852.40	4132	826.40
9400	1880.00	4183	836.60
9538	1907.60	4233	846.60

#### Test mode:

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03 and ANSI C63.26-2015 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

30 MHz to 10th harmonic for FDD Band II, Band V.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test modes		
Band	Radiated	Conducted
FDD Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
FDD Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

### 1.5. Environmental Conditions

Temperature range:	21-25℃
Humidity range:	40-75%
Pressure range:	86-106kPa



## 1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	Oct. 22, 2021	1 Year
2.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Oct. 22, 2021	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Oct. 22, 2021	1Year
4.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Oct. 22, 2021	2 Year
5.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Oct. 22, 2021	2 Year
6.	Pre-amplifier	SONOMA	310N	186860	Oct. 22, 2021	1 Year
7.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
8.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 22, 2021	1 Year
9.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 22, 2021	1 Year
10.	DC Power Supply	LW	TPR-6420D	374470	Oct. 22, 2021	1 Year
11.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 22, 2021	1 Year
12.	Universal Radio Communication Tester	Rohde & Schwarz	CMU 200	117888	Oct. 22, 2021	1 Year
13.	Wideband Radio Communication Tester	Rohde & Schwarz	CMW 500	104209	Oct. 22, 2021	1 Year
14.	High-Pass Filter	CDKMV	ZHPF-BM1100-4000-0730	B2015094550	Oct. 22, 2021	1 Year
15.	High-Pass Filter	CDKMV	ZHPF-M3.5-18G-3834	1307006523	Oct. 22, 2021	1 Year
16.	4 Ch. Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	TW54063507	Oct. 22, 2021	1 Year
17.	4 Ch. Simultaneous Sampling 14 Bits 2 MS/s	Agilent	U2531A	TW54063513	Oct. 22, 2021	1 Year

## Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline  
400-003-0500  
www.anbotek.com

## 1.7. Measurement Uncertainty

Maximum measurement uncertainty

Parameter	Uncertainty
RF output power, conducted	±1,5 dB
Power Spectral Density, conducted	±3 dB
Unwanted Emissions, conducted	±3 dB
All emissions, radiated	±6 dB
Temperature	±1 °C
Humidity	±5 %
DC and low frequency voltages	±3 %
Time	±5 %
Confidence interval: 95%. Confidence factor:k=2	

## 1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

### ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

### Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102



## 2. Summary of Test

### 2.1. Summary of test result

FCC Rules	Description of Test	Result
Part 2.1046 Part 22.913(a) Part 24.232(c)	Conducted Output Power	Compliance
Part 24.232	Peak-Average Ratio	Compliance
§ 2.1047	Modulation Characteristics	N/A
Part 2.1049	99% Occupied Bandwidth & 26 dB Bandwidth	Compliance
Part 2.1051 Part 22.917 Part 24.238	Conducted Spurious Emission	Compliance
Part 2.1051 Part 22.917 Part 24.238	Band Edge	Compliance
Part 2.1055(a)(1)(b) Part 22.355 Part 24.235	Frequency stability VS. temperature	Compliance
Part 2.1055(d)(1)(2) Part 22.355 Part 24.235	Frequency stability VS. voltage	Compliance
Part 2.1046 Part 22.913(a) Part 24.232(b)	ERP and EIRP	Compliance
Part 2.1053 Part 22.917 Part 24.238	Radiated Spurious Emission	Compliance


Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different

### 3. Conducted Output Power Test

#### 3.1. Test Standard and Limit

Applicable Standard:	Part 2.1046 Part 22.913(a) Part 24.232(c)
Limit:	N/A

#### 3.2. Test Setup

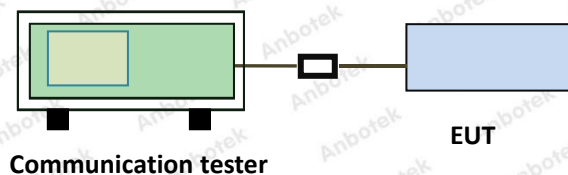

#### 3.3. Test Procedure

1. The EUT output port was connected to communication tester.
2. Set EUT at maximum power through communication tester.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power.

#### 3.4. Test Data

Pass


Please refer to Appendix A of the Appendix Test Data.

## 4. Peak-Average Ratio

### 4.1. Test Standard and Limit

Applicable Standard:	Part 24.232
Limit:	13dB

### 4.2. Test Setup

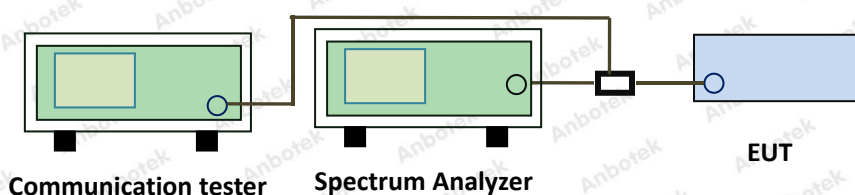

### 4.3. Test Procedure

According with KDB 971168 D01 Section 5.7:

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. Center Frequency = Carrier frequency, RBW > Emission bandwidth of signal.
4. The signal analyzer was set to collect one million samples to generate the CCDF curve.
5. The measurement interval was set depending on the type of signal analyzed.
  - i. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms.
  - ii. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power
6. Record the maximum PAPR level associated with a probability of 0.1%.

### 4.4. Test Data

Pass

Please refer to Appendix B of the Appendix Test Data.



## 5. Modulation Characteristic


According to FCC § 2.1047(d), Part 22H, Part 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

## 6. 99% Occupied Bandwidth & 26 dB Bandwidth

### 6.1. Test Standard and Limit

Applicable Standard:	Part 2.1049
Limit:	N/A

### 6.2. Test Setup

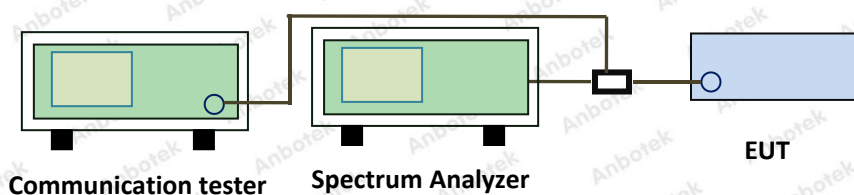

### 6.3. Test Procedure

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:  
Center Frequency= Carrier frequency, RBW=1% to 5% of anticipated OBW, VBW= 3 \* RBW, Detector=Peak, Trace maximum hold.
4. Record the value of 99% Occupied bandwidth and -26dB bandwidth.

### 6.4. Test Data

Pass


Please refer to Appendix C of the Appendix Test Data.

## 7. Conducted Spurious Emission

### 7.1. Test Standard and Limit

Applicable Standard:	Part 2.1051 Part 22.917 Part 24.238
Limit:	<p>Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least <math>43 + 10 \log(P)</math> dB.</p> <p>The specification that emissions shall be attenuated below the transmitter power (P) by at least <math>43 + 10 \log(P)</math> dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.</p>

### 7.2. Test Setup

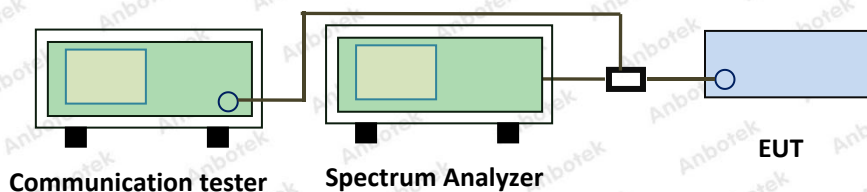

### 7.3. Test Procedure

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. Spectrum analyzer setting as follow:  
Below 1GHz, RBW=100KHz, VBW = 300KHz, Detector=Peak, Sweep time= Auto  
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peak, Sweep time= Auto  
Scan frequency range up to 10<sup>th</sup> harmonic.
4. Record the test plot.

### 7.4. Test Data

Pass

Please refer to Appendix E of the Appendix Test Data.




## 8. Band Edge

### 8.1. Test Standard and Limit

Applicable Standard:	Part 2.1051 Part 22.917 Part 24.238
Limit:	<p>Part 24.238 and Part 22.917 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least <math>43 + 10 \log(P)</math> dB.</p> <p>The specification that emissions shall be attenuated below the transmitter power (P) by at least <math>43 + 10 \log(P)</math> dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.</p>

### 8.2. Test Setup

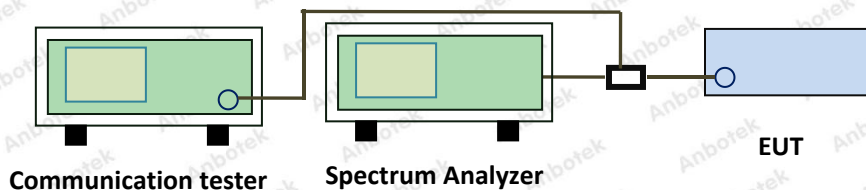

### 8.3. Test Procedure

1. The EUT was connected to the spectrum analyzer and communication tester via a power splitter.
2. Set EUT in maximum power output.
3. The band edges of low and high channels were measured.
4. Spectrum analyzer setting as follow:  
RBW=3KHz, VBW = 10KHz, Sweep time= Auto
5. Record the test plot.

### 8.4. Test Data

Pass


Please refer to Appendix D of the Appendix Test Data.

## 9. Radiated Spurious Emission

### 9.1. Test Standard and Limit

Applicable Standard:	Part 2.1053 Part 22.917 Part 24.238
Limit:	-13dBm

### 9.2. Test Setup

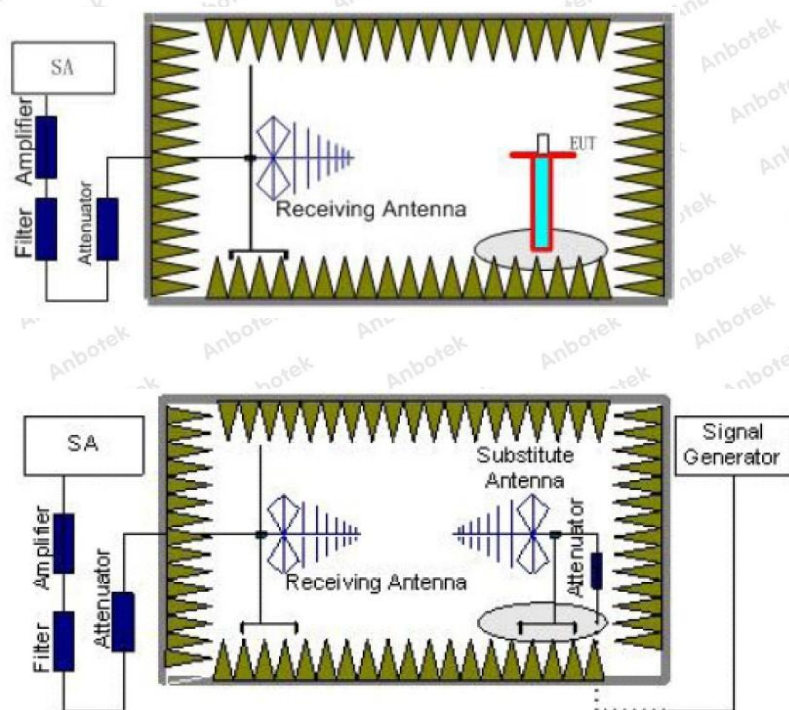

### 9.3. Test Procedure

- Place the EUT in the center of the turntable.
  - For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
  - For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
- Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
- The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
- Receiver or Spectrum set as follow:  
Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto  
Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto

#### Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com



5. Each emission under consideration shall be evaluated:
  - a) Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
  - b) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
  - c) Return the turntable to the azimuth where the highest emission amplitude level was observed.
  - d) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
  - e) Record the measured emission amplitude level and frequency
6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
10. For each emission that was detected and measured in the initial test
  - a) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
  - b) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
  - c) Record the output power level of the signal generator when equivalence is achieved in step b).
11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.
12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
where  
 $P_e$  = equivalent emission power in dBm  
 $P_s$  = source (signal generator) power in dBm  
*NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.*
13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:
$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}.$$
If necessary, the antenna gain can be calculated from calibrated antenna factor information
14. Provide the complete measurement results as a part of the test report.



**9.4. Test Data**

Pass

Note: Worst case at WCDMA Band II/ WCDMA Band V

WCDMA Band II							
Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
		Polarization	reading (dBm)	factor (dB)	Level (dBm)		
9262	3704.80	Vertical	-48.83	13.26	-35.57	<-13.00	PASS
	5557.20	V	-55.85	16.62	-39.23		
	7409.60	V	-58.18	17.84	-40.34		
	3704.80	Horizontal	-50.38	13.26	-37.12	<-13.00	PASS
	5557.20	H	-57.31	16.62	-40.69		
	7409.60	H	-59.42	17.84	-41.58		
9400	3760.00	Vertical	-47.67	13.27	-34.40	<-13.00	PASS
	5640.00	V	-54.62	16.49	-38.13		
	7520.00	V	-57.27	17.96	-39.31		
	3760.00	Horizontal	-48.97	13.27	-35.70	<-13.00	PASS
	5640.00	H	-56.03	16.49	-39.54		
	7520.00	H	-58.44	17.96	-40.48		
9538	3815.20	Vertical	-46.00	13.59	-32.41	<-13.00	PASS
	5722.80	V	-53.01	16.69	-36.32		
	7630.40	V	-55.54	17.95	-37.59		
	3815.20	Horizontal	-48.59	13.59	-35.00	<-13.00	PASS
	5722.80	H	-55.57	16.69	-38.88		
	7630.40	H	-57.87	17.95	-39.92		

Remark:

1. The emission behaviour belongs to narrowband spurious emission.
2. The emission levels of not record in the report are very lower than the limit and not show in test report.

WCDMA Band V							
Channel	Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
		Polarization	reading (dBm)	factor (dB)	Level (dBm)		
4132	1652.80	Vertical	-38.55	5.62	-32.93	<-13.00	PASS
	2479.20	V	-46.83	9.32	-37.51		
	3305.60	V	-52.78	12.69	-40.09		
	1652.80	Horizontal	-40.14	5.62	-34.52	<-13.00	PASS
	2479.20	H	-48.32	9.32	-39.00		
	3305.60	H	-54.18	12.69	-41.49		
4183	1673.20	Vertical	-39.30	7.69	-31.61	<-13.00	PASS
	2509.80	V	-45.73	9.46	-36.27		
	3346.40	V	-51.19	12.26	-38.93		
	1673.20	Horizontal	-41.12	7.69	-33.43	<-13.00	PASS
	2509.80	H	-47.43	9.46	-37.97		
	3346.40	H	-52.78	12.26	-40.52		
4233	1693.20	Vertical	-38.32	8.26	-30.06	<-13.00	PASS
	2539.80	V	-44.46	9.65	-34.81		
	3386.40	V	-49.97	12.41	-37.56		
	1693.20	Horizontal	-40.40	8.26	-32.14	<-13.00	PASS
	2539.80	H	-46.41	9.65	-36.76		
	3386.40	H	-51.79	12.41	-39.38		

Remark:

- The emission behaviour belongs to narrowband spurious emission.
- The emission levels of not record in the report are very lower than the limit and not show in test report.




## 10. ERP and EIRP

### 10.1. Test Standard and Limit

Applicable Standard:	Part 2.1046 Part 22.913(a) Part 24.232(b)
Limit:	WCDMA Band II: 2W (33dBm) EIRP WCDMA Band V: 7W (38.45dBm) ERP

### 10.2. Test Setup

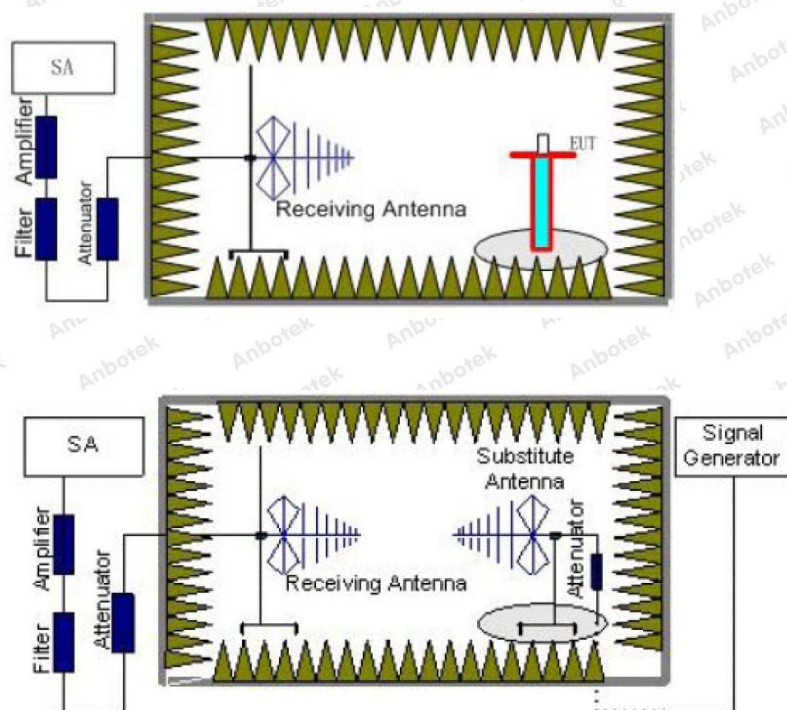

### 10.3. Test Procedure

- Place the EUT in the center of the turntable.
  - For radiated emissions measurements performed at frequencies less than or equal to 1 GHz, the EUT shall be placed on a RF-transparent table at a nominal height of 80 cm above the reference ground plane
  - For radiated measurements performed at frequencies above 1 GHz, the EUT shall be placed on an RF transparent table at a nominal height of 1.5 m above the ground plane.
- Unless the EUT uses an integral antenna, the EUT shall be terminated with a non-radiating transmitter load. In cases where the EUT uses an adjustable antenna, the antenna shall be adjusted through typical positions and lengths to maximize emissions levels.
- The EUT shall be tested while operating on the frequency per manufacturer specification. Set the transmitter to operate in continuous transmit mode.
- Receiver or Spectrum set as follow:



Below 1GHz, RBW=100kHz, VBW=300kHz, Detector=Peak, Sweep time=Auto

Above 1GHz, RBW=1MHz, VBW=3MHz, Detector=Peck, Sweep time=Auto

5. Each emission under consideration shall be evaluated:

- Raise and lower the measurement antenna from 1 m to 4 m, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
- Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
- Return the turntable to the azimuth where the highest emission amplitude level was observed.
- Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
- Record the measured emission amplitude level and frequency

6. Repeat step 5 for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.

7. Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.

8. Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.

9. Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.

10. For each emission that was detected and measured in the initial test

- Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
- Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step 5 and step 6.
- Record the output power level of the signal generator when equivalence is achieved in step b).

11. Repeat step 8 through step 10 with the measurement antenna oriented in the opposite polarization.

12. Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$Pe = Ps(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

where

Pe = equivalent emission power in dBm

Ps = source (signal generator) power in dBm

*NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.*

13. Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:

$$\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB.}$$

If necessary, the antenna gain can be calculated from calibrated antenna factor information

14. Provide the complete measurement results as a part of the test report.

**Shenzhen Anbotech Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com



Hotline

400-003-0500

www.anbotech.com

**10.4. Test Data**

Pass

Mode	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
WCDMA Band II	9262	22.87	21.22	<33	PASS
	9400	23.36	19.74		
	9538	22.47	20.84		


Mode	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
WCDMA Band V	4132	20.85	19.78	<38.45	PASS
	4183	21.20	18.44		
	4233	20.06	19.33		

## 11. Frequency stability VS Temperature measurement

### 11.1. Test Standard and Limit

Applicable Standard:	Part 2.1055(a)(1)(b) Part 22.355 Part 24.235
Limit:	2.5ppm

### 11.2. Test Setup

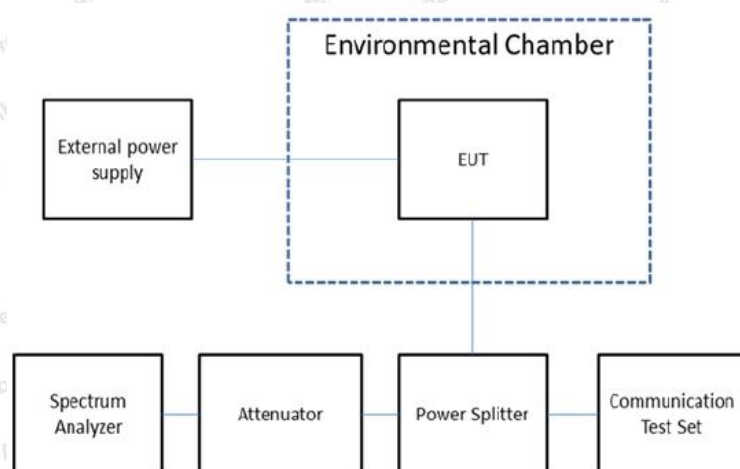

### 11.3. Test Procedure

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber.
4. Turn EUT off and set the chamber temperature to  $-30^{\circ}\text{C}$ . After the temperature stabilized for approximately 30 minutes recorded the frequency.
5. Repeat step 4 measure with  $10^{\circ}\text{C}$  increased per stage until the highest temperature of  $+50^{\circ}\text{C}$  reached.

### 11.4. Test Data

Pass

Please refer to Appendix G of the Appendix Test Data.




## 12. Frequency stability VS Voltage measurement

### 12.1. Test Standard and Limit

Applicable Standard:	Part 2.1055(d)(1)(2) Part 22.355 Part 24.235
Limit:	2.5ppm

### 12.2. Test Setup

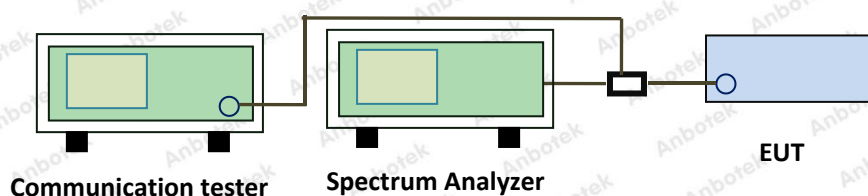

### 12.3. Test Procedure

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. The EUT output port was connected to communication tester.
3. The EUT was placed inside the temperature chamber at 25°C.
4. The power supply voltage to the EUT was varied  $\pm 15\%$  of the nominal value measured at the input to the EUT.
5. Record the maximum frequency change.

### 12.4. Test Data

Pass

Please refer to Appendix F of the Appendix Test Data.

## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Radiation Emission Test





## **APPENDIX II -- EXTERNAL PHOTOGRAPH**

Reference to the test report 18220WC10264301.

## **APPENDIX III -- INTERNAL PHOTOGRAPH**

Reference to the test report 18220WC10264301.



## APPENDIX IV – Appendix Test Data

---

**Shenzhen Anbotech Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotech.com

**Hotline**

400-003-0500  
[www.anbotech.com](http://www.anbotech.com)