

TEST REPORT

Product Name: LEGEND
FCC ID: 2A68BS2
Trademark: GOOSKY
Model Number: S2, S05, S1, S3, S4, S5, RS05, RS1, RS2, RS3, RS4, RS5, E05, E1, E2, E3, E4, E5
Prepared For: Zhongshan Goosky Innovation Technology Co.,Ltd
Address: 1st Floor, No. 25 South Industrial Road, Xiaolan Town, Zhongshan, Guangdong, China
Manufacturer: Zhongshan Goosky Innovation Technology Co.,Ltd
Address: 1st Floor, No. 25 South Industrial Road, Xiaolan Town, Zhongshan, Guangdong, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinghe Road, Xinqiao Community, Xinqiao Street, Baoan District, Shenzhen, Guangdong China
Sample Received Date: May.16,2022
Sample tested Date: May.16,2022 to May.30,2022
Issue Date: May.30,2022
Report No.: CTB220523020RFX
Test Standards: FCC Part15.249
ANSI C63.10:2013
Test Results: PASS
Remark: This is 2.4GHz radio test report.

Compiled by:

Chen Zheng

Reviewed by:

Arron Liu

Approved by:

Bin Mei / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	22
8.1 Block Diagram Of Test Setup	22
8.2 Limit	22
8.3 Test procedure	23
8.4 Test Result	24
9. BANDWIDTH TEST	25
9.1 Block Diagram Of Test Setup	25
9.2 Limit	25
9.3 Test procedure	25
9.4 Test Result	25
10. ANTENNA REQUIREMENT	27
11. EUT TEST SETUP PHOTOGRAPHS	28

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB220523020RFX	May.23,2022	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.215	20dB Bandwidth	PASS	
15.249	Fundamental & Radiated Spurious Emission Measurement	PASS	
15.205	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m chamber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10^{-7}
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	S2, S05, S1, S3, S4, S5, RS05, RS1, RS2 RS3, RS4, RS5, E05, E1, E2, E3, E4, E5
Model Description:	All the model are the same circuit and RF module, only for model name. Test sample model: S2
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	2404-2447.5MHz
Type of Modulation:	GFSK
Antenna installation:	Interna Antenna
Antenna Gain:	1dBi
Ratings:	DC 5V by adapter DC 3.7V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/T	Series No.	Note
1.	AC adapter	SHENZHEN ENGINE ELECTRONIC CO., LTD	EE-05010 00E	/	AE
2.	remote control aircraft	Zhongshan Goosky Innovation Technology Co., Ltd	S2	S05, S1, S3, S4, S5, RS05, RS1, RS2 RS3, RS4, RS5, E05, E1, E2, E3, E4, E5	AE

Notes:

- All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)	CH No.	Frequency (MHz)
0	2404	1	2426.5	2	2447.5	/	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting GFSK	2404MHz	2426.5MHz	2447.5MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2021.09.27	2022.08.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2021.09.27	2022.08.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2021.09.27	2022.08.05
4	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
5	Spectrum Analyzer	R&S	FSP40	100550	2021.09.27	2022.08.05
6	Signal Generator	Agilent	N5181A	MY49060920	2021.09.27	2022.08.16
7	Signal Generator	Agilent	N5182A	MY47420195	2021.09.27	2022.08.05
8	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
9	band rejection filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2021.09.27	2022.08.05
10	band rejection filter	Shenxiang	MSF5150-5850MS-1155	20181015001	2021.09.27	2022.08.05
11	band rejection filter	Xingbo	XBLBQ-DZA120	190821-1-1	2021.09.27	2022.08.05
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	2021.09.27	2022.08.05
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2021.09.27	2022.08.05
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2021.09.27	2022.08.05


15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	2021.09.27	2022.08.05
16	966 chamber	C.R.T.	966 Room	966	2021.09.27	2024.08.11
17	Receiver	R&S	ESPI	100362	2021.09.27	2022.08.05
18	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
19	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	869	2021.09.27	2022.08.07
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	2021.09.27	2022.08.08
22	Software	Fala	EZ-EMC	FA-03A2 RE	2021.09.27	2022.08.05
23	3-Loop Antenna	Daze	ZN30401	17014	2021.09.27	2022.08.05
24	loop antenna	ZHINAN	ZN30900A	/	2021.09.27	2022.08.05
25	Horn antenna	A/H/System	SAS-574	588	2021.09.27	2022.08.05
26	Amplifier	AEROFLEX	/	S/N/ 097	2021.09.27	2022.08.05

Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	AMN	ROHDE&SCHWARZ	ESH3-Z5	831551852	2021.09.27	2022.08.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2021.09.27	2022.08.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCS30	834115/006	2021.09.27	2022.08.05
4	Coaxial cable	ZDECL	Z302S	18091904	2021.09.27	2022.08.05
5	AAN	Schwarzbeck	NTFM8158	183	2021.09.27	2022.08.05
6	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
7	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission						
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated date	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120D	1911	2021.09.27	2022.08.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	869	2021.09.27	2022.08.05
3	Amplifier	Agilent	8449B	3008A01838	2021.09.27	2022.08.05
4	Amplifier	HP	8447E	2945A02747	2021.09.27	2022.08.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI7	100362	2021.09.27	2022.08.05
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2021.09.27	2022.08.05
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2021.09.27	2022.08.05
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2021.09.27	2022.08.05
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2021.09.27	2022.08.05
10	Communication test set	Agilent	E5515C	MY50102567	2021.09.27	2022.08.16
11	Communication test set	R&S	CMW500	108058	2021.09.27	2022.08.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

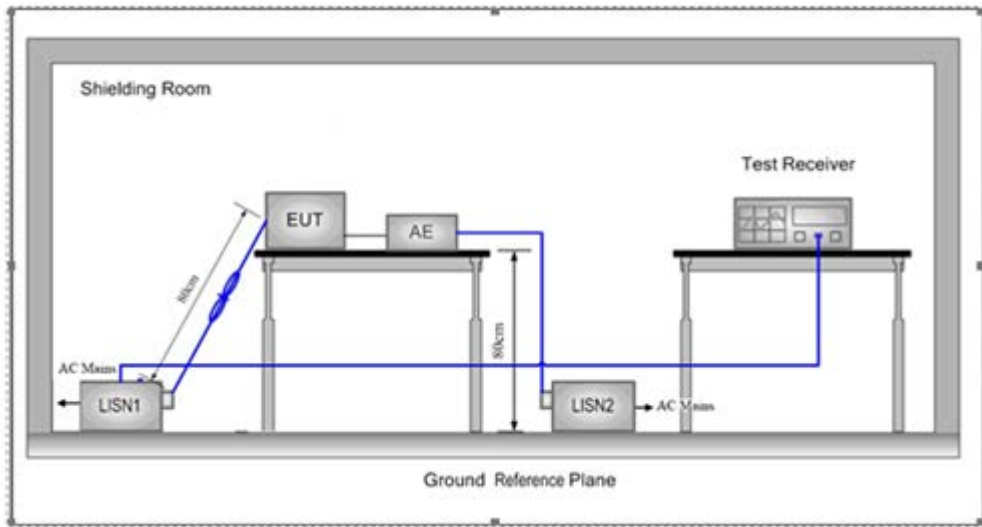

6.2 Limit

Table 4 - AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency


6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,

- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L:

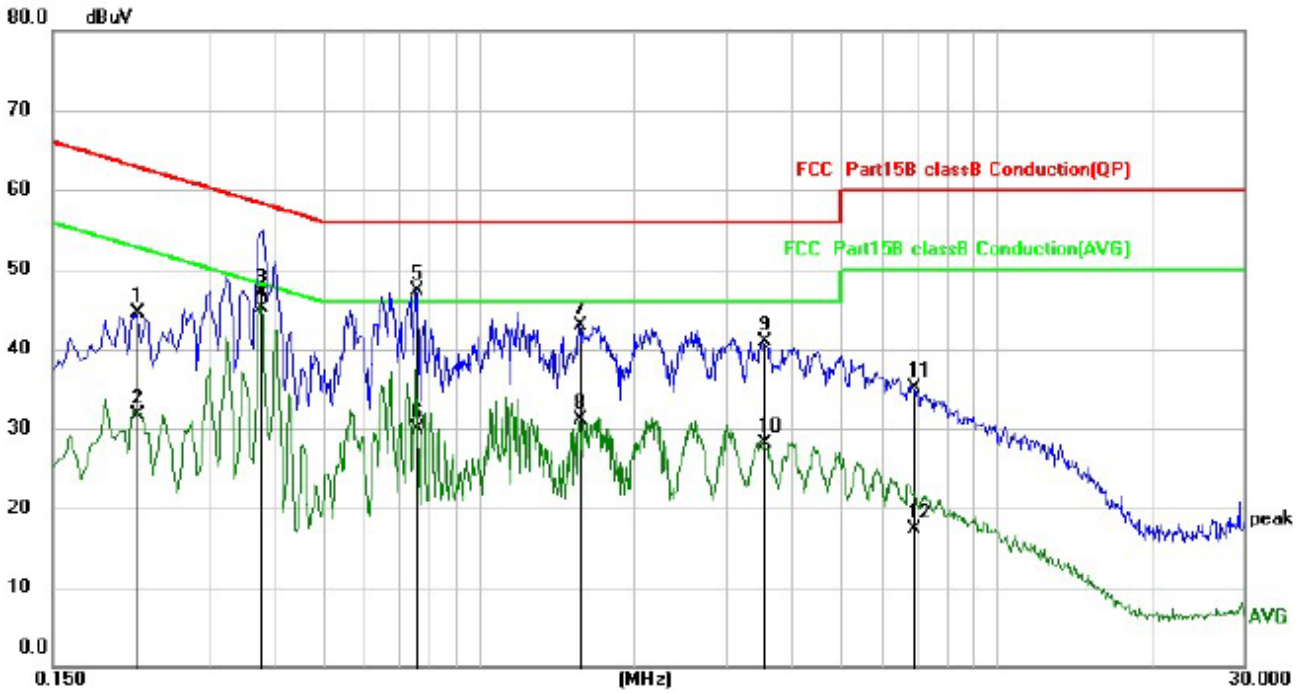


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.2180	33.77	10.68	44.45	62.89	-18.44	QP
2		0.2180	20.98	10.68	31.66	52.89	-21.23	AVG
3		0.3780	36.40	10.59	46.99	58.32	-11.33	QP
4	*	0.3780	34.54	10.59	45.13	48.32	-3.19	AVG
5		0.7580	36.78	10.57	47.35	56.00	-8.65	QP
6		0.7580	19.34	10.57	29.91	46.00	-16.09	AVG
7		1.5620	32.34	10.62	42.96	56.00	-13.04	QP
8		1.5620	20.58	10.62	31.20	46.00	-14.80	AVG
9		3.5540	30.18	10.64	40.82	56.00	-15.18	QP
10		3.5540	17.39	10.64	28.03	46.00	-17.97	AVG
11		6.8979	24.49	10.71	35.20	60.00	-24.80	QP
12		6.8979	6.56	10.71	17.27	50.00	-32.73	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N:

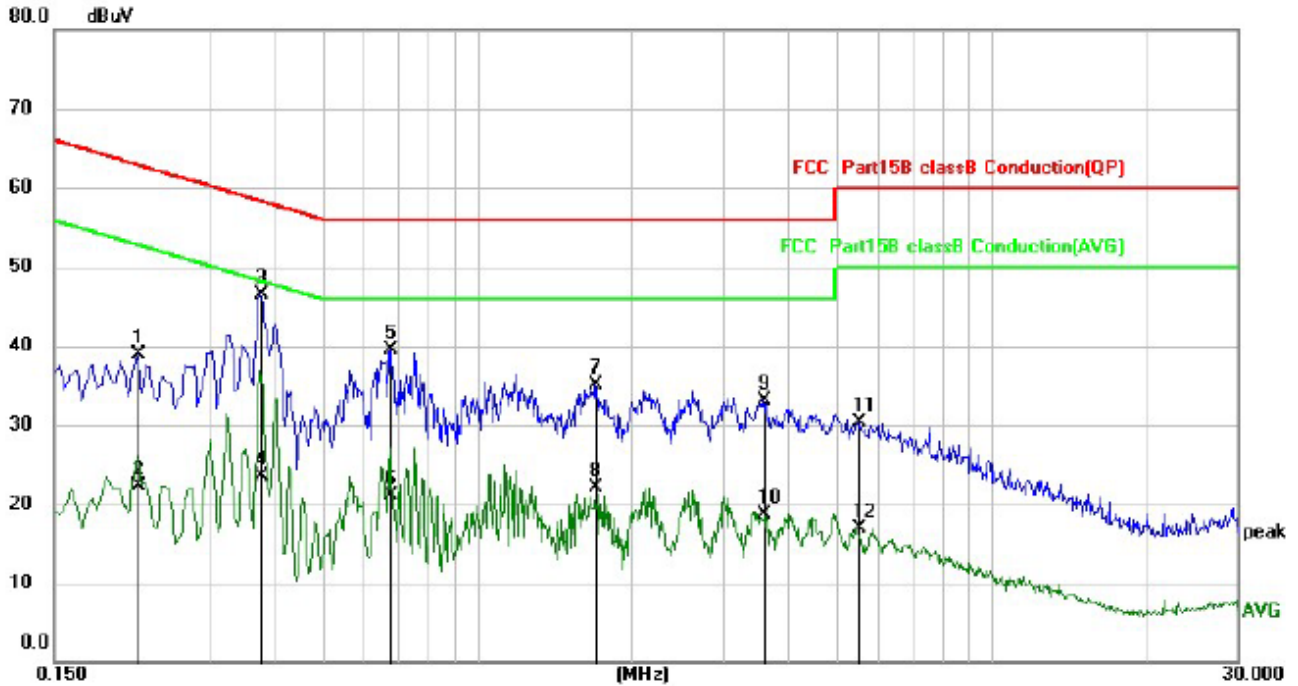

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.2180	28.22	10.68	38.90	62.89	-23.99	QP
2		0.2180	11.70	10.68	22.38	52.89	-30.51	AVG
3	*	0.3780	35.90	10.59	46.49	58.32	-11.83	QP
4		0.3780	12.96	10.59	23.55	48.32	-24.77	AVG
5		0.6780	29.02	10.56	39.58	56.00	-16.42	QP
6		0.6780	10.52	10.56	21.08	46.00	-24.92	AVG
7		1.6980	24.42	10.63	35.05	56.00	-20.95	QP
8		1.6980	11.46	10.63	22.09	46.00	-23.91	AVG
9		3.5940	22.45	10.64	33.09	56.00	-22.91	QP
10		3.5940	8.01	10.64	18.65	46.00	-27.35	AVG
11		5.5100	19.60	10.67	30.27	60.00	-29.73	QP
12		5.5100	6.26	10.67	16.93	50.00	-33.07	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

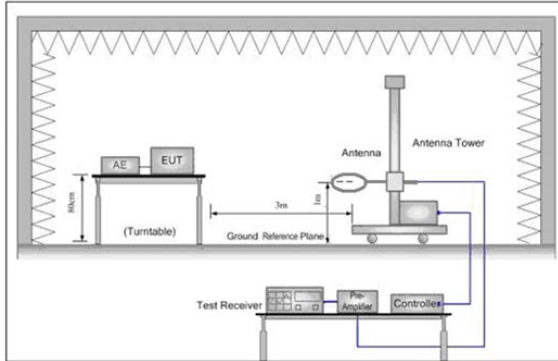


Figure 1. Below 30MHz


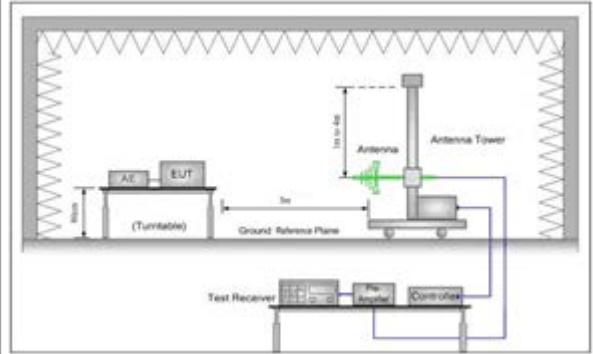


Figure 2. 30MHz to 1GHz

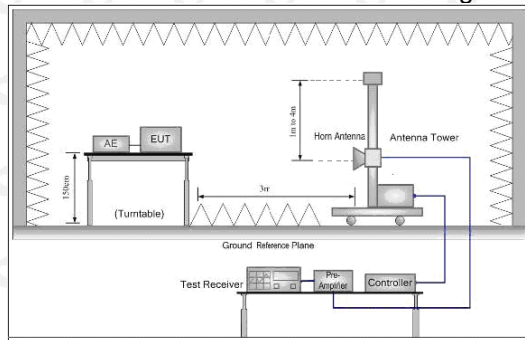

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
 - h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
 - j. Repeat above procedures until all frequencies measured was complete.
 - j. Full battery is used during test
- Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result


Below 1GHz Test Results:
Antenna polarity: H

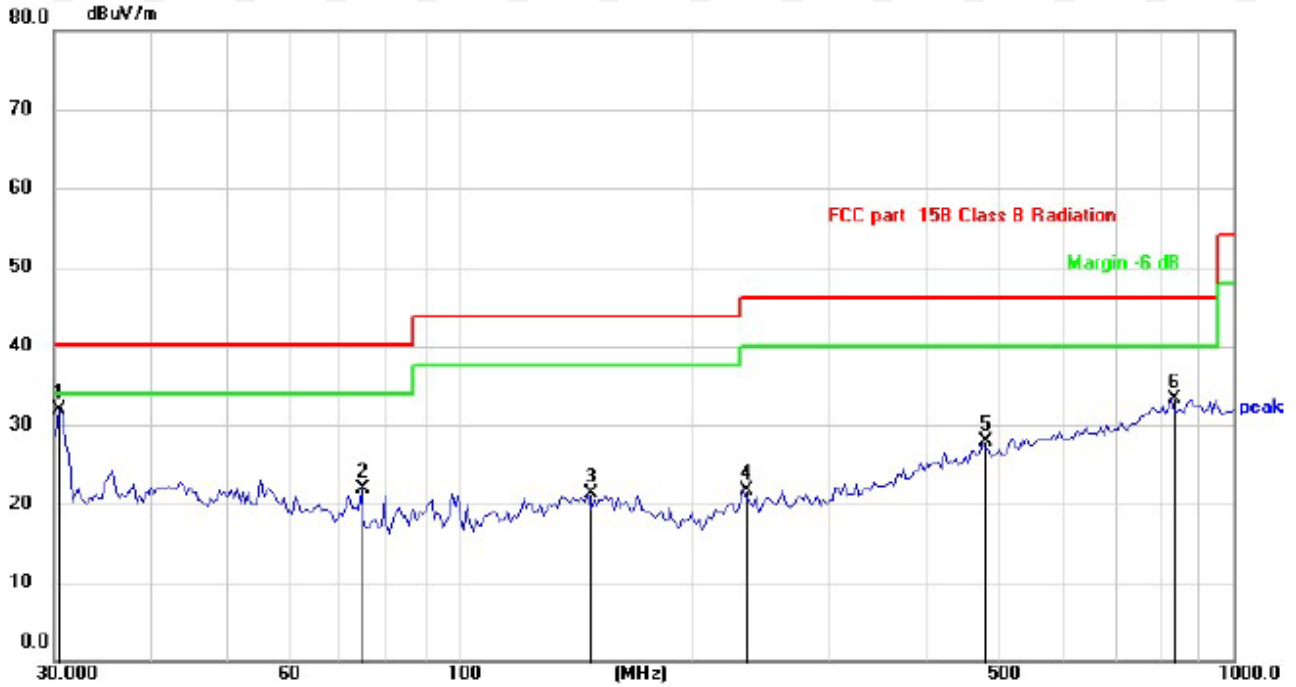

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	30.5306	39.25	-7.43	31.82	40.00	-8.18	QP
2		74.6569	30.60	-8.78	21.82	40.00	-18.18	QP
3		146.6304	26.80	-5.48	21.32	43.50	-22.18	QP
4		233.3487	27.53	-5.86	21.67	46.00	-24.33	QP
5		474.6662	27.78	0.10	27.88	46.00	-18.12	QP
6		831.8574	27.26	6.09	33.35	46.00	-12.65	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

Antenna polarity: V

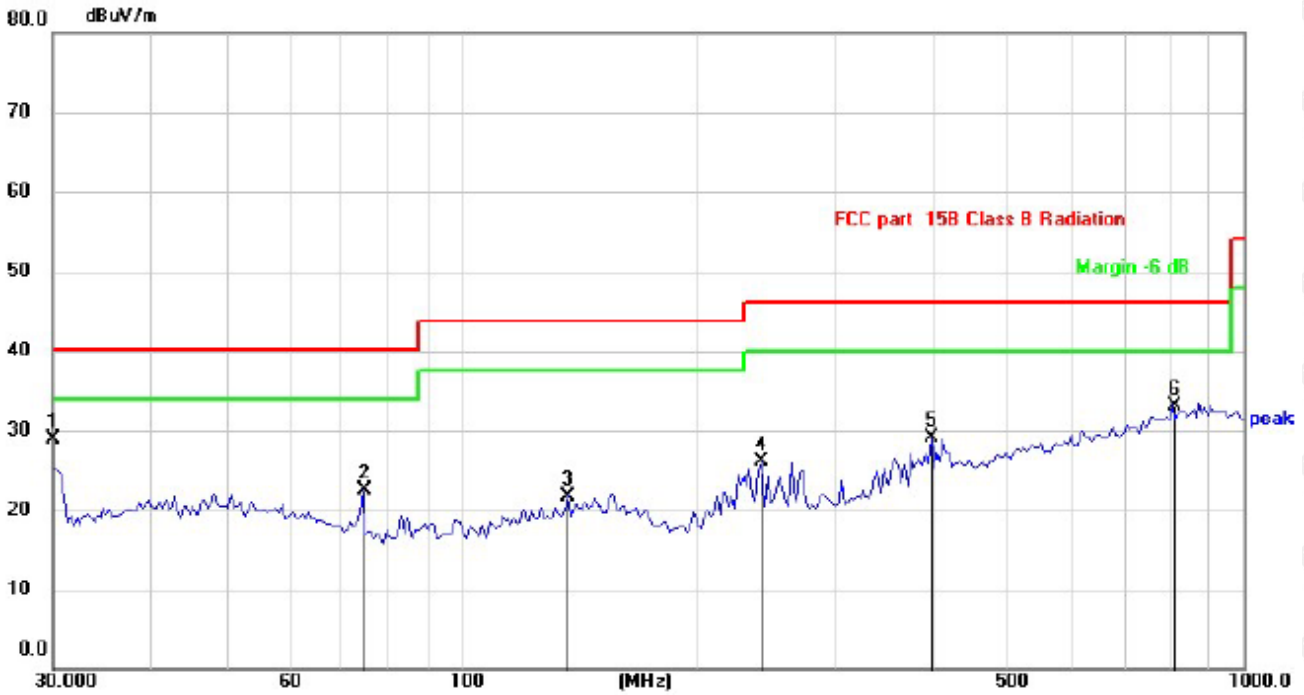

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	30.0000	36.46	-7.54	28.92	40.00	-11.08	QP
2		74.6569	31.25	-8.78	22.47	40.00	-17.53	QP
3		136.6993	27.47	-5.67	21.80	43.50	-21.70	QP
4		241.6763	31.83	-5.78	26.05	46.00	-19.95	QP
5		398.3312	30.85	-1.74	29.11	46.00	-16.89	QP
6		810.2654	27.15	6.05	33.20	46.00	-12.80	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement – Limit

CH Low (2404MHz)
Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2404	110.87	-5.84	105.03	114	-8.97	peak
2404	92.63	-5.84	86.79	94	-7.21	AVG
4808	57.45	-3.64	53.81	74	-20.19	peak
4808	49.61	-3.64	45.97	54	-8.03	AVG
7212	60.76	-0.95	59.81	74	-14.19	peak
7212	48.92	-0.95	47.97	54	-6.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
2404	109.87	-5.84	104.03	114	-9.97	peak
2404	94.97	-5.84	89.13	94	-4.87	AVG
4808	56.90	-3.64	53.26	74	-20.74	peak
4808	47.77	-3.64	44.13	54	-9.87	AVG
7212	60.37	-0.95	59.42	74	-14.58	peak
7212	48.99	-0.95	48.04	54	-5.96	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH Middle (2426.5MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2426.5	107.82	-5.71	102.11	114	-11.89	peak
2426.5	92.68	-5.71	86.97	94	-7.03	AVG
4853	54.26	-3.51	50.75	74	-23.25	peak
4853	46.33	-3.51	42.82	54	-11.18	AVG
7279.5	57.83	-0.82	57.01	74	-16.99	peak
7279.5	46.72	-0.82	45.90	54	-8.10	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2426.5	106.55	-5.71	100.84	114	-13.16	peak
2426.5	92.92	-5.71	87.21	94	-6.79	AVG
4880	55.11	-3.51	51.60	74	-22.40	peak
4880	45.60	-3.51	42.09	54	-11.91	AVG
7320	57.93	-0.82	57.11	74	-16.89	peak
7320	47.37	-0.82	46.55	54	-7.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

CH High (2447.5MHz)

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2447.5	106.53	-5.65	100.88	114	-13.12	peak
2447.5	92.37	-5.65	86.72	94	-7.28	AVG
4895	55.36	-3.43	51.93	74	-22.07	peak
4895	46.67	-3.43	43.24	54	-10.76	AVG
7342.5	55.54	-0.75	54.79	74	-19.21	peak
7342.5	47.46	-0.75	46.71	54	-7.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB μ V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
2447.5	106.77	-5.65	101.12	114	-12.88	peak
2447.5	91.17	-5.65	85.52	94	-8.48	AVG
4950	54.36	-3.43	50.93	74	-23.07	peak
4950	46.96	-3.43	43.53	54	-10.47	AVG
7425	56.27	-0.75	55.52	74	-18.48	peak
7425	45.80	-0.75	45.05	54	-8.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 9KHz to the 25 GHz.
- (2). All modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported for below 1GHz test.
- (3). For BT above 1GHz test all modes of GFSK were test at Low, Middle, and High channel, only the worst result of GFSK Low Channel was reported.
- (4). By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, and test data recorded in this report.
- (5). Radiated emission test from 9kHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9kHz to 30MHz and not recorded in this report.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

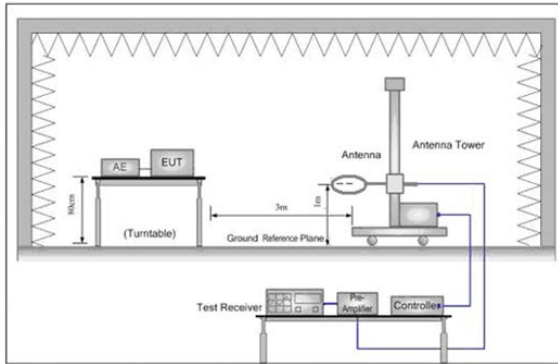


Figure 1. Below 30MHz


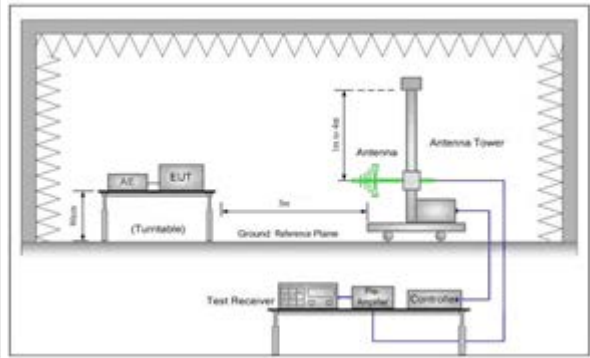


Figure 2. 30MHz to 1GHz

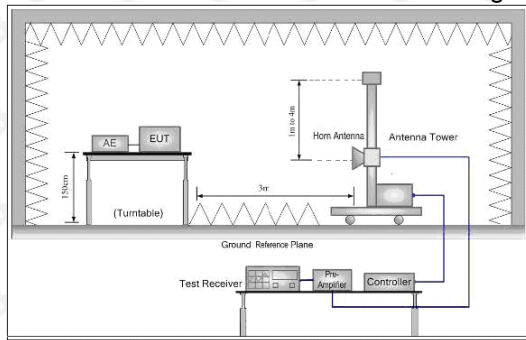

8.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

8.3 Test procedure

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Frequency	Detector	RBW	VBW	Remark
2310MHz-2400MHz	peak	1MHz	3MHz	peak
2483.5MHz-2500MHz	peak	1MHz	3MHz	peak

8.4 Test Result

CH Low:
Horizontal:

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2309.991	30.41	-4.28	26.14	54	-27.86	peak
2	2343.826	30.50	-4.28	26.22	54	-27.78	peak
3	2378.069	31.20	-4.46	26.74	54	-27.26	peak
4	2389.756	27.80	-4.97	22.84	54	-31.16	peak
5	2439.85	25.73	-3.97	21.76	54	-32.24	peak

Vertical:

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.031	30.68	-4.29	26.38	54	-27.62	peak
2	2343.571	30.37	-4.29	26.07	54	-27.93	peak
3	2378.11	28.44	-4.45	23.99	54	-30.01	peak
4	2389.71	27.20	-4.89	22.30	54	-31.70	peak
5	2439.87	28.72	-3.95	24.78	54	-29.22	peak

CH High:
Horizontal:


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2484.116	29.24	-4.36	24.89	54	-29.11	peak
2	2488.984	30.25	-4.33	25.91	54	-28.09	peak
3	2490.075	30.09	-4.48	25.61	54	-28.39	peak
4	2493.263	33.02	-4.89	28.12	54	-25.88	peak
5	2496.056	30.27	-3.93	26.33	54	-27.67	peak

Vertical:

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.747	31.20	-4.30	26.91	54	-27.09	peak
2	2488.65	31.12	-4.35	26.77	54	-27.23	peak
3	2490.446	31.36	-4.49	26.87	54	-27.13	peak
4	2493.37	31.05	-4.96	26.09	54	-27.91	peak
5	2495.93	25.90	-3.92	21.98	54	-32.02	peak

9. BANDWIDTH TEST

9.1 Block Diagram Of Test Setup

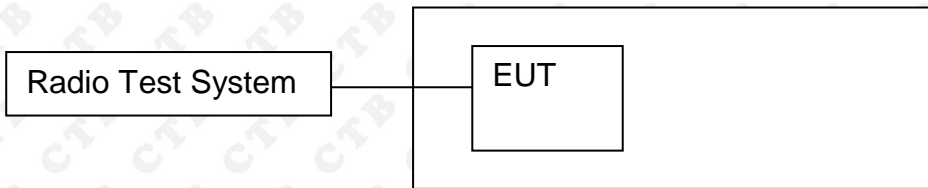

9.2 Limit

FCC Part15 (15.249) , Subpart C			
Section	Test Item	Frequency Range (MHz)	Result
15.249	Bandwidth	2402-2483.5	PASS

9.3 Test procedure

1. Set resolution bandwidth (RBW) = 1-5% or DTS BW, not to exceed 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 x RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

9.4 Test Result

Test Mode	Frequency (MHz)	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.9057	PASS
	Mid channel	0.8535	PASS
	High channel	0.9049	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:

<p>GFSK Low channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.404000000 GHz Center Freq: 2.404000000 GHz Trig: Free Run #Gain: Low #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.96 dB Ref 26.95 dBm</p> <p>Center 2.404 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>8.04 dBm</td> </tr> <tr> <td>494.58 kHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-57.377 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td>905.7 kHz</td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	8.04 dBm	494.58 kHz			Transmit Freq Error	OBW Power	99.00 %	-57.377 kHz	x dB	-20.00 dB	x dB Bandwidth	905.7 kHz	
Occupied Bandwidth	Total Power	8.04 dBm														
494.58 kHz																
Transmit Freq Error	OBW Power	99.00 %														
-57.377 kHz	x dB	-20.00 dB														
x dB Bandwidth	905.7 kHz															
<p>GFSK Mid channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.426500000 GHz Center Freq: 2.426500000 GHz Trig: Free Run #Gain: Low #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.91 dB Ref 26.91 dBm</p> <p>Center 2.427 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>8.07 dBm</td> </tr> <tr> <td>420.08 kHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-18.417 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td>853.5 kHz</td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	8.07 dBm	420.08 kHz			Transmit Freq Error	OBW Power	99.00 %	-18.417 kHz	x dB	-20.00 dB	x dB Bandwidth	853.5 kHz	
Occupied Bandwidth	Total Power	8.07 dBm														
420.08 kHz																
Transmit Freq Error	OBW Power	99.00 %														
-18.417 kHz	x dB	-20.00 dB														
x dB Bandwidth	853.5 kHz															
<p>GFSK High channel</p>	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.447500000 GHz Center Freq: 2.447500000 GHz Trig: Free Run #Gain: Low #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 6.97 dB Ref 26.97 dBm</p> <p>Center 2.448 GHz #Res BW 100 kHz #VBW 300 kHz Span 3 MHz Sweep 1 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>8.55 dBm</td> </tr> <tr> <td>423.56 kHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-15.443 kHz</td> <td>x dB</td> <td>-20.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td>904.9 kHz</td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	8.55 dBm	423.56 kHz			Transmit Freq Error	OBW Power	99.00 %	-15.443 kHz	x dB	-20.00 dB	x dB Bandwidth	904.9 kHz	
Occupied Bandwidth	Total Power	8.55 dBm														
423.56 kHz																
Transmit Freq Error	OBW Power	99.00 %														
-15.443 kHz	x dB	-20.00 dB														
x dB Bandwidth	904.9 kHz															

10. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


EUT Antenna:

The antenna is Interna Antenna. The best case gain of the antenna is 1dBi.


11. EUT TEST SETUP PHOTOGRAPHS

Radiated Emissions

Below 1G

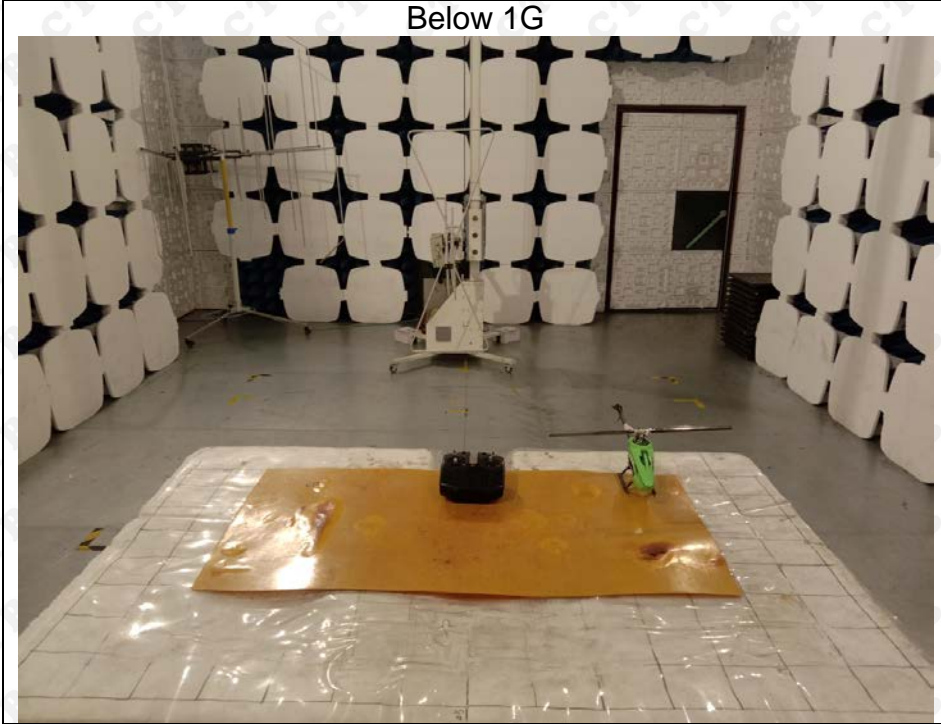

Above 1G

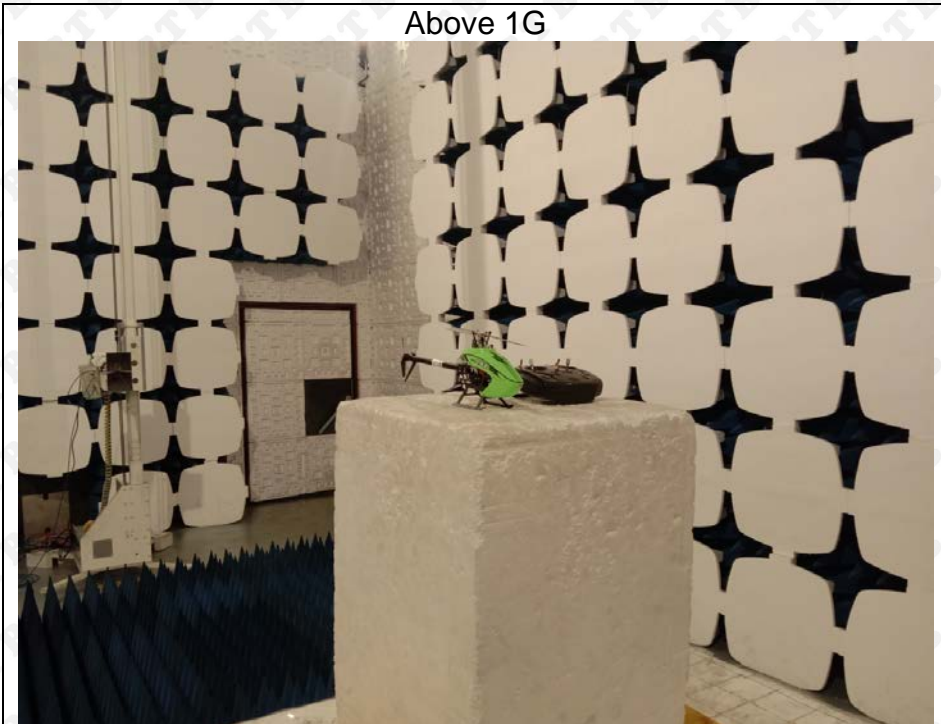

Conducted Emission

******* END OF REPORT *******