

## TEST REPORT

### FCC Rules Part 15.247

**Report Reference No.....: MTWG22060436-R**

**FCC ID..... : 2A7R5-DR8BTS**

Compiled by

( position+printed name+signature)...: File administrators Alisa Luo

Supervised by

( position+printed name+signature)...: Test Engineer Sunny Deng

Approved by

( position+printed name+signature)...: Manager Yvette Zhou

Date of issue.....: **July 10,2022**

**Representative Laboratory Name .: Shenzhen Most Technology Service Co., Ltd.**

Address .....: East A, 1 floor of New Aolin Factory buiding, Langshan Erlu, North District, Hi-tech Industry Park, Nanshan, Shenzhen, Guangdong, China

**Applicant's name.....: DB RESEARCH L.L.P**

Address .....: **302 Hanmore Industrial Parkway,Harlingen,TX78550,USA**

**Test specification/ Standard .....: FCC Rules Part 15.247**

TRF Originator.....: Shenzhen Most Technology Service Co., Ltd.

**Shenzhen Most Technology Service Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Most Technology Service Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Most Technology Service Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description .....: Portable Speaker**

Trade Mark .....: DRIVEN

Manufacturer .....: **Wonders Technology Co., Ltd**

Model/Type reference.....: **DR8BTS**

Listed Models .....: N/A

Modulation Type .....: GFSK,  $\pi/4$ DQPSK, 8DPSK

Operation Frequency.....: From 2402MHz to 2480MHz

Hardware Version.....: VER: 1.0

Software Version .....: V2.1.2

Rating .....: DC 12V

Rating .....: DC5V (by USB)

Rating .....: DC 3.7V by Battery

Result.....: **PASS**

TEST REPORT

Equipment under Test : Portable Speaker

Model /Type : DR8BTS

Listed Models : N/A

Remark : N/A

Applicant : DB RESEARCH L.L.P

Address : 302 Hanmore Industrial Parkway,Harlingen,TX78550,USA

Manufacturer : Wonders Technology Co., Ltd

Address : 4/F,Tower A,3rd Building,Tian'an Cloud Park,Bantian Avenue,  
Longgang District ,Shenzhen 518129,China

Test Result:	PASS
--------------	------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b><u>1</u></b>	<b><u>REVISION HISTORY .....</u></b>	<b><u>4</u></b>
<b><u>2</u></b>	<b><u>TEST STANDARDS .....</u></b>	<b><u>5</u></b>
<b><u>3</u></b>	<b><u>SUMMARY .....</u></b>	<b><u>6</u></b>
3.1	General Remarks	6
3.2	Product Description	6
3.3	Equipment Under Test	6
3.4	Short description of the Equipment under Test (EUT)	6
3.5	EUT operation mode	7
3.6	Block Diagram of Test Setup	7
3.7	Test Item (Equipment Under Test) Description*	7
3.8	Auxiliary Equipment (AE) Description	7
3.9	Antenna Information*	7
3.10	Related Submittal(s) / Grant (s)	8
3.11	Modifications	8
<b><u>4</u></b>	<b><u>TEST ENVIRONMENT .....</u></b>	<b><u>9</u></b>
4.1	Address of the test laboratory	9
4.2	Environmental conditions	9
4.3	Summary of measurement results	10
4.4	Statement of the measurement uncertainty	10
4.5	Equipments Used during the Test	11
<b><u>5</u></b>	<b><u>TEST CONDITIONS AND RESULTS .....</u></b>	<b><u>12</u></b>
5.1	AC Power Conducted Emission	12
5.2	Radiated Emission	15
5.3	Maximum Peak Output Power	21
5.4	20dB Bandwidth	22
5.5	Frequency Separation	25
5.6	Number of hopping frequency	28
5.7	Time of Occupancy (Dwell Time)	30
5.8	Spurious RF Conducted Emission	33
5.9	Pseudorandom Frequency Hopping Sequence	39
5.10	Antenna Requirement	40
<b><u>6</u></b>	<b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>	<b><u>41</u></b>
<b><u>7</u></b>	<b><u>PHOTOS OF THE EUT .....</u></b>	<b><u>42</u></b>

1 Revision History

Revision	Issue Date	Revisions	Revised By
00	2022-07-11	Initial Issue	Alisa Luo

## **2 TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

### 3 SUMMARY

#### 3.1 General Remarks

Date of receipt of test sample	:	2022.06.10
Testing commenced on	:	2022.06.11
Testing concluded on	:	2022.06.21

#### 3.2 Product Description

Product Name:	Portable Speaker
Model/Type reference:	<b>DR8BTS</b>
Power Supply:	DC 12V DC5V (by USB) DC 3.7V by Battery
Testing sample ID:	MT22060151
<b>Bluetooth :</b>	
Supported Type:	Bluetooth BR/EDR
Modulation:	GFSK, $\pi/4$ DQPSK, 8DPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB antenna
Antenna gain:	-0.58 dBi

#### 3.3 Equipment Under Test

##### Power supply system utilised

Power supply voltage	:	<input type="radio"/> 230V / 50 Hz	<input type="radio"/> 120V / 60Hz
		<input type="radio"/> 12 V DC	<input type="radio"/> 24 V DC
		<input checked="" type="radio"/> Other (specified in blank below)	

DC 12V  
DC5V (by USB)  
DC 3.7V by Battery

#### 3.4 Short description of the Equipment under Test (EUT)

This is a Portable Speaker For more details, refer to the user's manual of the EUT.

### 3.5 EUT operation mode

The Applicant provides communication tools software(Engineer mode) to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .There are 79 channels provided to the EUT and Channel 00/39/78 were selected to test.

#### Operation Frequency:

Channel	Frequency (MHz)
00	2402
01	2403
⋮	⋮
38	2440
39	2441
40	2442
⋮	⋮
77	2479
78	2480

### 3.6 Block Diagram of Test Setup



### 3.7 Test Item (Equipment Under Test) Description\*

Short designation	EUT Name	EUT Description	Serial number	Hardware status	Software status
EUT A					
EUT B					

\*: declared by the applicant. According to customers information EUTs A and B are the same devices.

### 3.8 Auxiliary Equipment (AE) Description

AE short designation	EUT Name (if available)	EUT Description	Serial number (if available)	Software (if used)
AE 1				
AE 2	-			

### 3.9 Antenna Information\*

Short designation	Antenna Name	Antenna Type	Frequency Range	Serial number	Antenna Peak Gain
Antenna 1	---	PCB antenna	2.4 – 2.5 GHz	---	-0.58dBi
Antenna 2					

\*: declared by the applicant.

### **3.10 Related Submittal(s) / Grant (s)**

This submittal(s) (test report) is intended for the device filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

### **3.11 Modifications**

No modifications were implemented to meet testing criteria.



## 4 TEST ENVIRONMENT

### 4.1 Address of the test laboratory

#### **Shenzhen Most Technology Service Co., Ltd.**

East A, 1 floor of New Aolin Factory building, Langshan Erlu, North District, Hi-tech Industry Park, Nanshan, Shenzhen, Guangdong, China

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

#### **Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

#### **FCC-Designation No.: CN0124**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

#### **A2LA-Lab Cert. No.: 6343.01**

Shenzhen Most Technology Service Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### 4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

#### Radiated Emission:

Temperature:	23 ° C
Humidity:	48 %
Atmospheric pressure:	950-1050mbar

#### AC Main Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

#### Conducted testing:

Temperature:	24 ° C
Humidity:	45 %
Atmospheric pressure:	950-1050mbar

### 4.3 Summary of measurement results

Test Specification clause	Test case	Test Mode	Test Channel	Recorded In Report		Test result
§15.247(a)(1)	Carrier Frequency separation	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Middle	Compliant
§15.247(a)(1)	Number of Hopping channels	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Full	GFSK 8DPSK	<input checked="" type="checkbox"/> Full	Compliant
§15.247(a)(1)	Time of Occupancy (dwell time)	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Middle	Compliant
§15.247(a)(1)	Spectrum bandwidth of aFHSS system 20dB bandwidth	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.247(b)(1)	Maximum output power	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.247(d)	Band edge compliance conducted	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	Compliant
§15.205	Band edge compliance radiated	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest	Compliant
§15.247(d)	TX spurious emissions conducted	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.247(d)	TX spurious emissions radiated	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	Compliant
§15.209(a)	TX spurious Emissions radiated Below 1GHz	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Middle	Compliant
§15.207	Conducted Emissions 150KHz-30 MHz	GFSK Π/4DQPSK 8DPSK	<input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest	GFSK	<input checked="" type="checkbox"/> Middle	Compliant

Remark:

1. The measurement uncertainty is not included in the test result.
2. We tested all test mode and recorded worst case in report

### 4.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Most Technology Service Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Most Technology Service Co., Ltd. is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10 dB	(1)
Radiated Emission	1~18GHz	4.32 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.12 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

#### 4.5 Equipments Used during the Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Firmware versions	Last Cal.	Cal. Interval
1.	L.I.S.N.	R&S	ENV216	100093	/	2022/04/18	1 Year
2	Three-phase artificial power network	Schwarzback Mess	NNLK8129	8129178	/	2022/04/18	1 Year
3.	Receiver	R&S	ESCI	100492	V3.0-10-2	2022/04/06	1 Year
4	Receiver	R&S	ESPI	101202	V3.0-10-2	2022/04/06	1 Year
5	Spectrum analyzer	Agilent	9020A	MT-E306	A14.16	2022/04/06	1 Year
6	Bilong Antenna	Sunol Sciences	JB3	A121206	/	2022/03/13	1 Year
7	Horn antenna	HF Antenna	HF Antenna	MT-E158	/	2022/04/06	1 Year
8	Loop antenna	Beijing Daze	ZN30900B	/	/	2022/04/15	1 Year
9	Horn antenna	R&S	OBH100400	26999002	/	2022/04/15	1 Year
10	Wireless Communication Test Set	R&S	CMW500	/	CMW-BASE-3.7.21	2022/04/14	1 Year
11	Spectrum analyzer	R&S	FSP	100019	V4.40 SP2	2022/04/14	1 Year
12	High gain antenna	Schwarzbeck	LB-180400KF	MT-E389	/	2022/03/13	1 Year
13	Preamplifier	Schwarzbeck	BBV 9743	MT-E390	/	2022/03/13	1 Year
14	Pre-amplifier	EMCI	EMC051845S E	MT-E391	/	2022/03/13	1 Year
15	Pre-amplifier	Agilent	83051A	MT-E392	/	2022/03/13	1 Year
16	High pass filter unit	Tonscend	JS0806-F	MT-E393	/	2022/03/13	1 Year
17	RF Cable(below1GHz)	Times	9kHz-1GHz	MT-E394	/	2022/03/13	1 Year
18	RF Cable(above 1GHz)	Times	1-40G	MT-E395	/	2022/03/13	1 Year
19	RF Cable (9KHz-40GHz)	Tonscend	170660	N/A	/	2022/03/13	1 Year

Note: The Cal.Interval was one year.

## 5 TEST CONDITIONS AND RESULTS

### 5.1 AC Power Conducted Emission

#### TEST CONFIGURATION

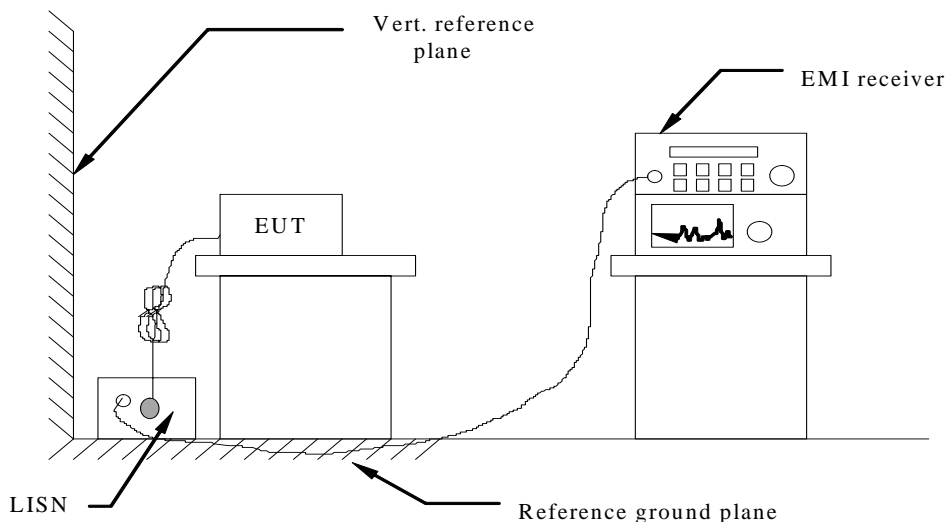

#### TEST PROCEDURE

- 1 The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013.
- 2 Support equipment, if needed, was placed as per ANSI C63.10-2013
- 3 All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013
- 4 The EUT received DC 12V power from adapter, the adapter received AC120V/60Hz and AC 240V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5 All support equipments received AC power from a second LISN, if any.
- 6 The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7 Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8 During the above scans, the emissions were maximized by cable manipulation.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50


\* Decreases with the logarithm of the frequency.


#### TEST RESULTS

## Remark:

1. All modes were test at Low, Middle, and High channel; only the worst result of Middle Channel was reported as below:
2. Both DC 12V,120 VAC, 50/60 Hz, and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:

Remark: Result=Reading value+Factor,and Margin=Limit- Result

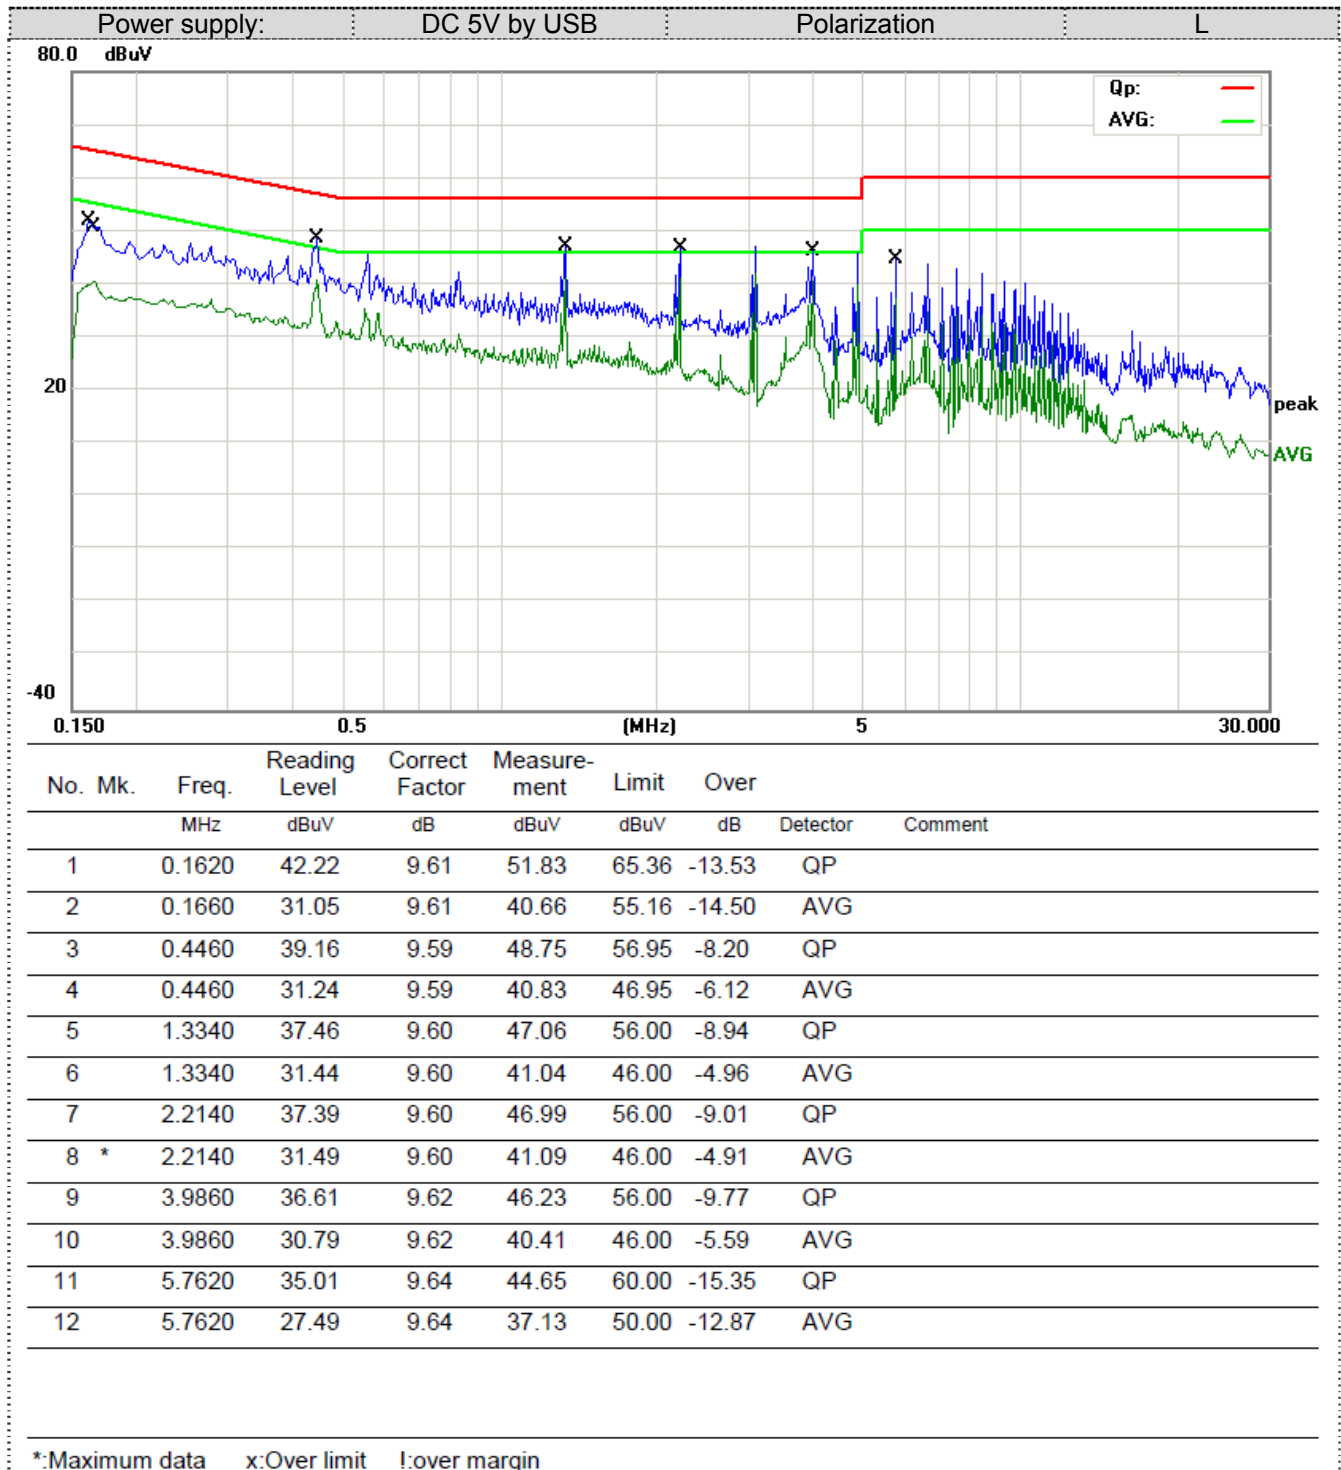

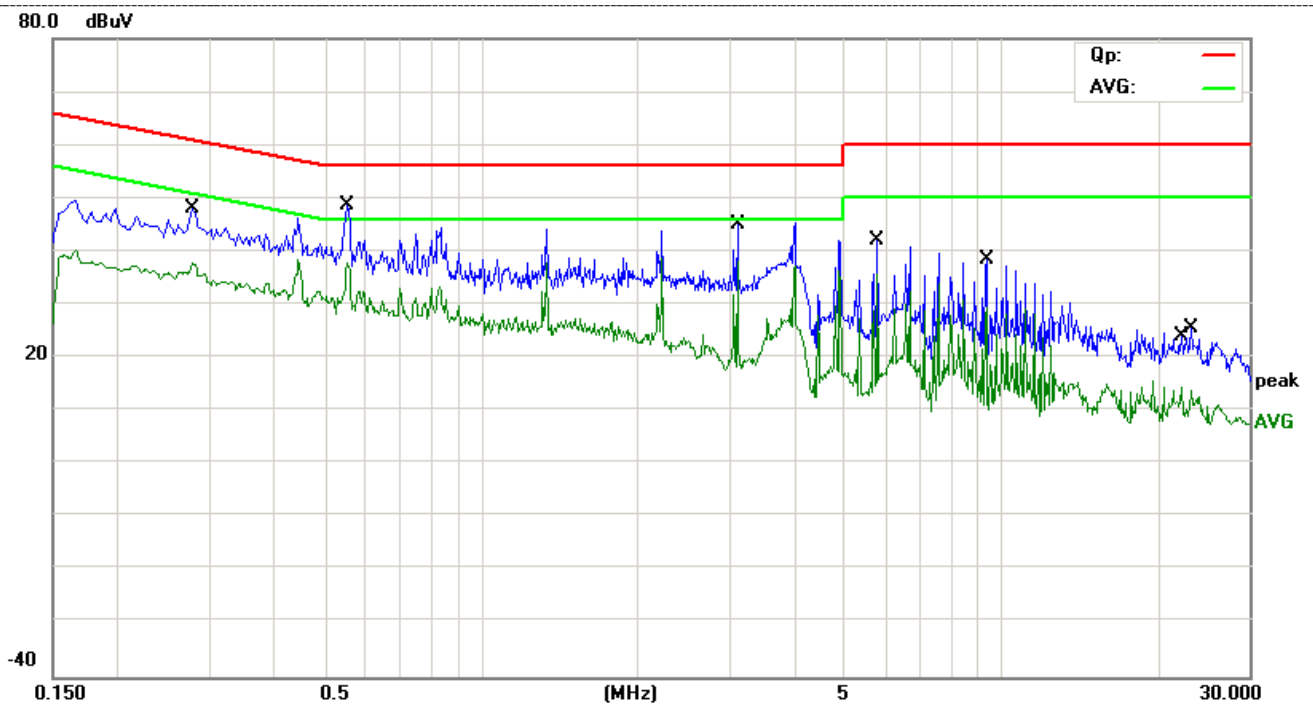


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.5540	39.15	9.59	48.74	56.00	-7.26	QP	
2		0.5540	28.24	9.59	37.83	46.00	-8.17	AVG	
3		3.1180	35.30	9.61	44.91	56.00	-11.09	QP	
4		3.1180	28.66	9.61	38.27	46.00	-7.73	AVG	
5		5.7900	32.52	9.64	42.16	60.00	-17.84	QP	
6		5.7900	26.13	9.64	35.77	50.00	-14.23	AVG	
7		9.3540	28.68	9.68	38.36	60.00	-21.64	QP	
8		9.3540	19.78	9.68	29.46	50.00	-20.54	AVG	
9		0.2780	38.34	9.59	47.93	60.88	-12.95	QP	
10		0.2780	28.27	9.59	37.86	50.88	-13.02	AVG	
11		23.1740	15.91	9.74	25.65	60.00	-34.35	QP	
12		22.2820	4.78	9.74	14.52	50.00	-35.48	AVG	

\*:Maximum data    x:Over limit    !:over margin


## 5.2 Radiated Emission

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

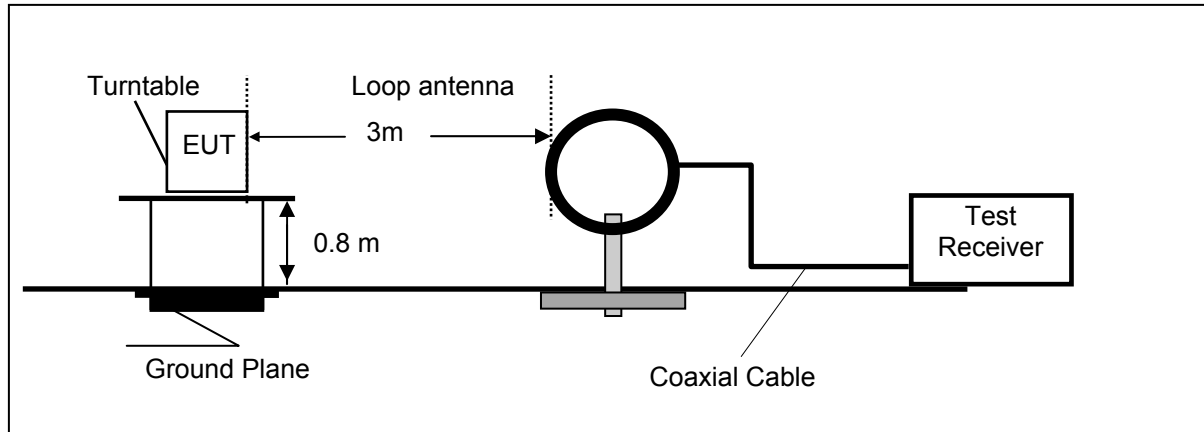

Frequency range 30MHz – 1000MHz

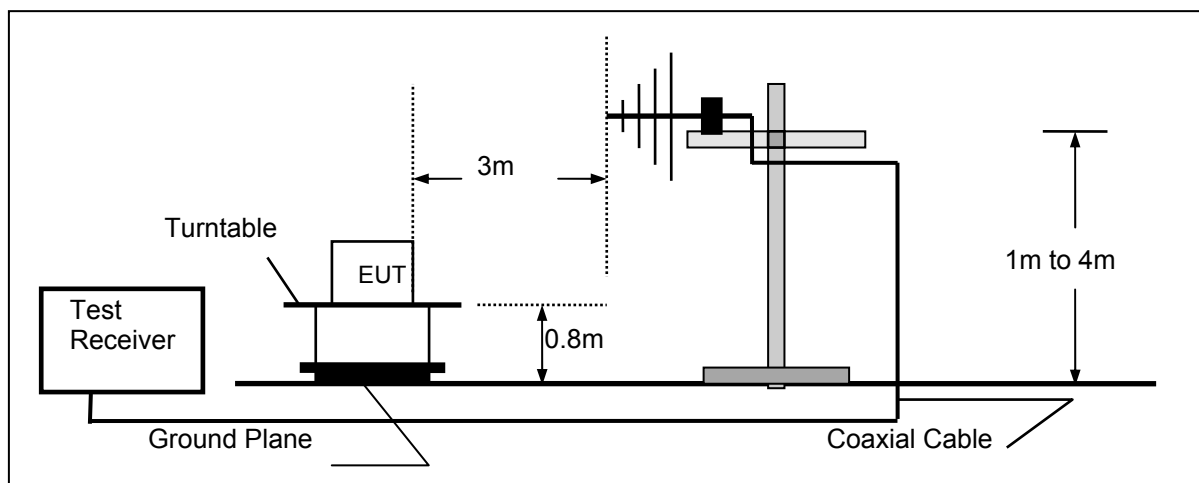

Frequency range above 1GHz-25GHz

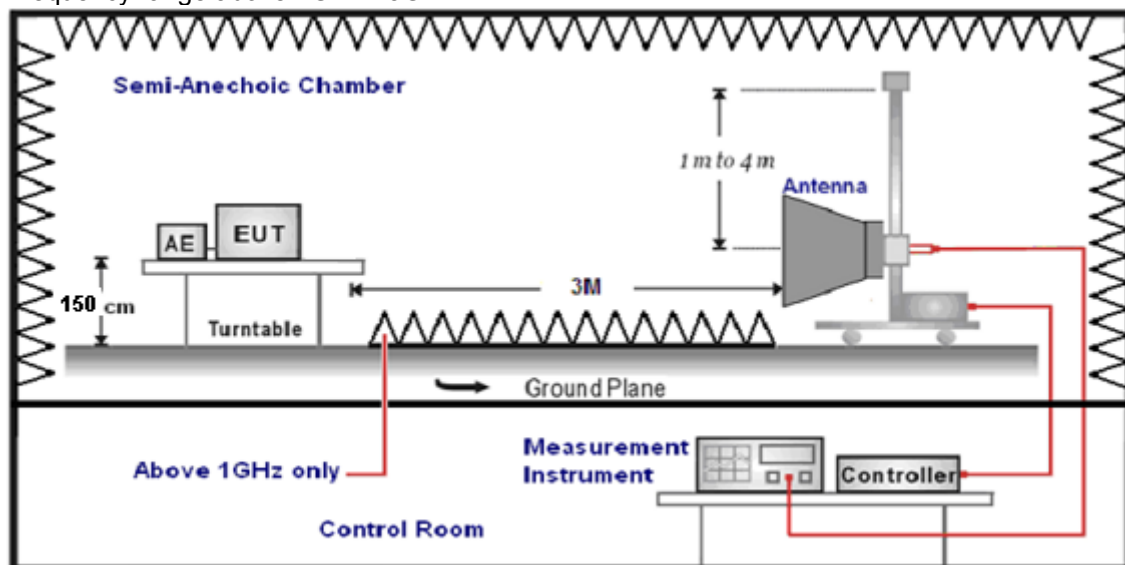

**TEST PROCEDURE**

1. The EUT was placed on a turn table which is 0.8m above ground plane when testing frequency range 9 KHz –1GHz;the EUT was placed on a turn table which is 1.5m above ground plane when testing frequency range 1GHz – 25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. Radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

Test Frequency range	Test Antenna Type	Test Distance
9KHz-30MHz	Active Loop Antenna	3
30MHz-1GHz	Ultra-Broadband Antenna	3
1GHz-18GHz	Double Ridged Horn Antenna	3
18GHz-25GHz	Horn Antenna	1

7. Setting test receiver/spectrum as following table states:

Test Frequency range	Test Receiver/Spectrum Setting	Detector
9KHz-150KHz	RBW=200Hz/VBW=3KHz,Sweep time=Auto	QP
150KHz-30MHz	RBW=9KHz/VBW=100KHz,Sweep time=Auto	QP
30MHz-1GHz	RBW=120KHz/VBW=1000KHz,Sweep time=Auto	QP
1GHz-40GHz	Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto Average Value: RBW=1MHz/VBW=10Hz, Sweep time=Auto	Peak

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

$$\text{Transd}=AF +CL-AG$$

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500



**TEST RESULTS**


Remark:

1. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in X position.
2. We measured Radiated Emission at GFSK,  $\pi/4$  DQPSK and 8DPSK mode from 9 KHz to 25GHz and recorded worst case at GFSK DH5 mode.
3. For below 1GHz testing recorded worst at GFSK DH5 middle channel.
4. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.
5. Remark: Result=Reading value+Factor

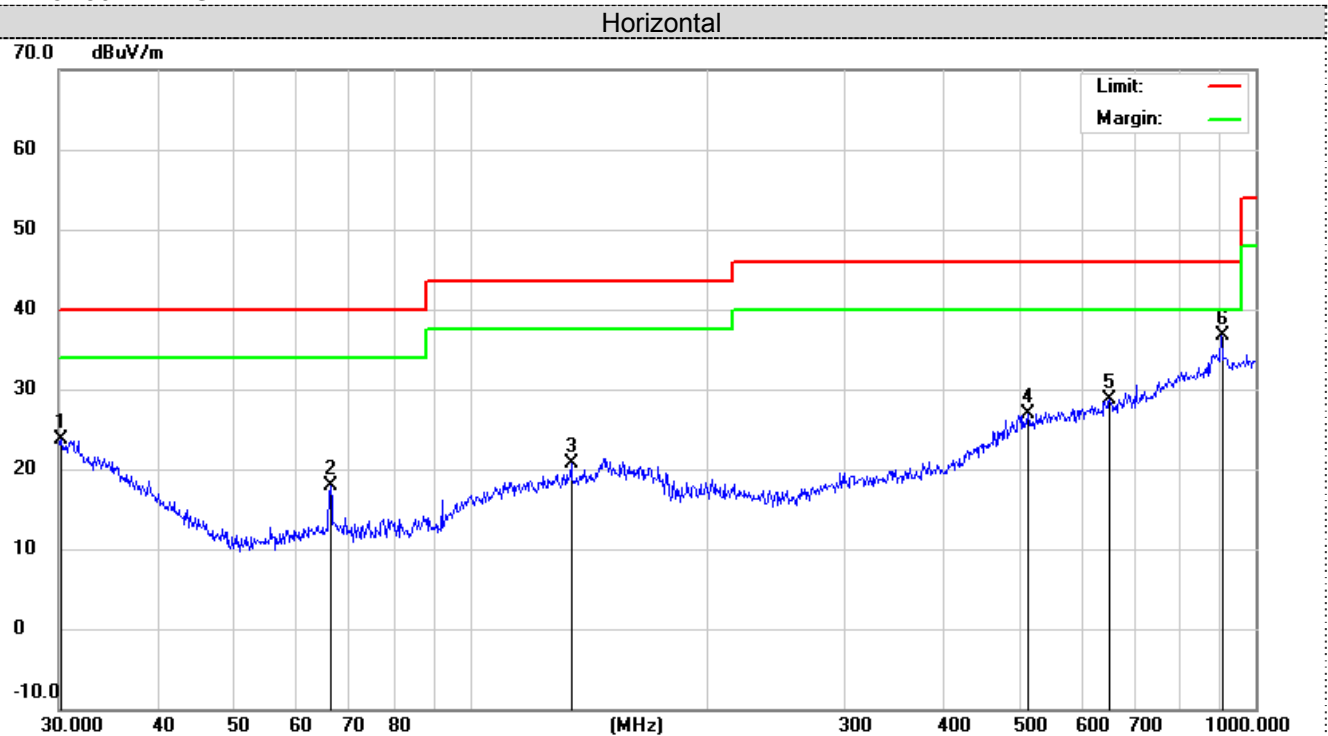**For 30MHz-1GHz**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.2111	2.86	20.76	23.62	40.00	-16.38	QP		
2		66.4989	8.90	9.05	17.95	40.00	-22.05	QP		
3		134.5592	4.43	16.25	20.68	43.50	-22.82	QP		
4		513.6331	3.96	22.85	26.81	46.00	-19.19	QP		
5		651.9417	4.21	24.48	28.69	46.00	-17.31	QP		
6	*	903.3094	7.71	29.03	36.74	46.00	-9.26	QP		

\*:Maximum data    x:Over limit    !:over margin

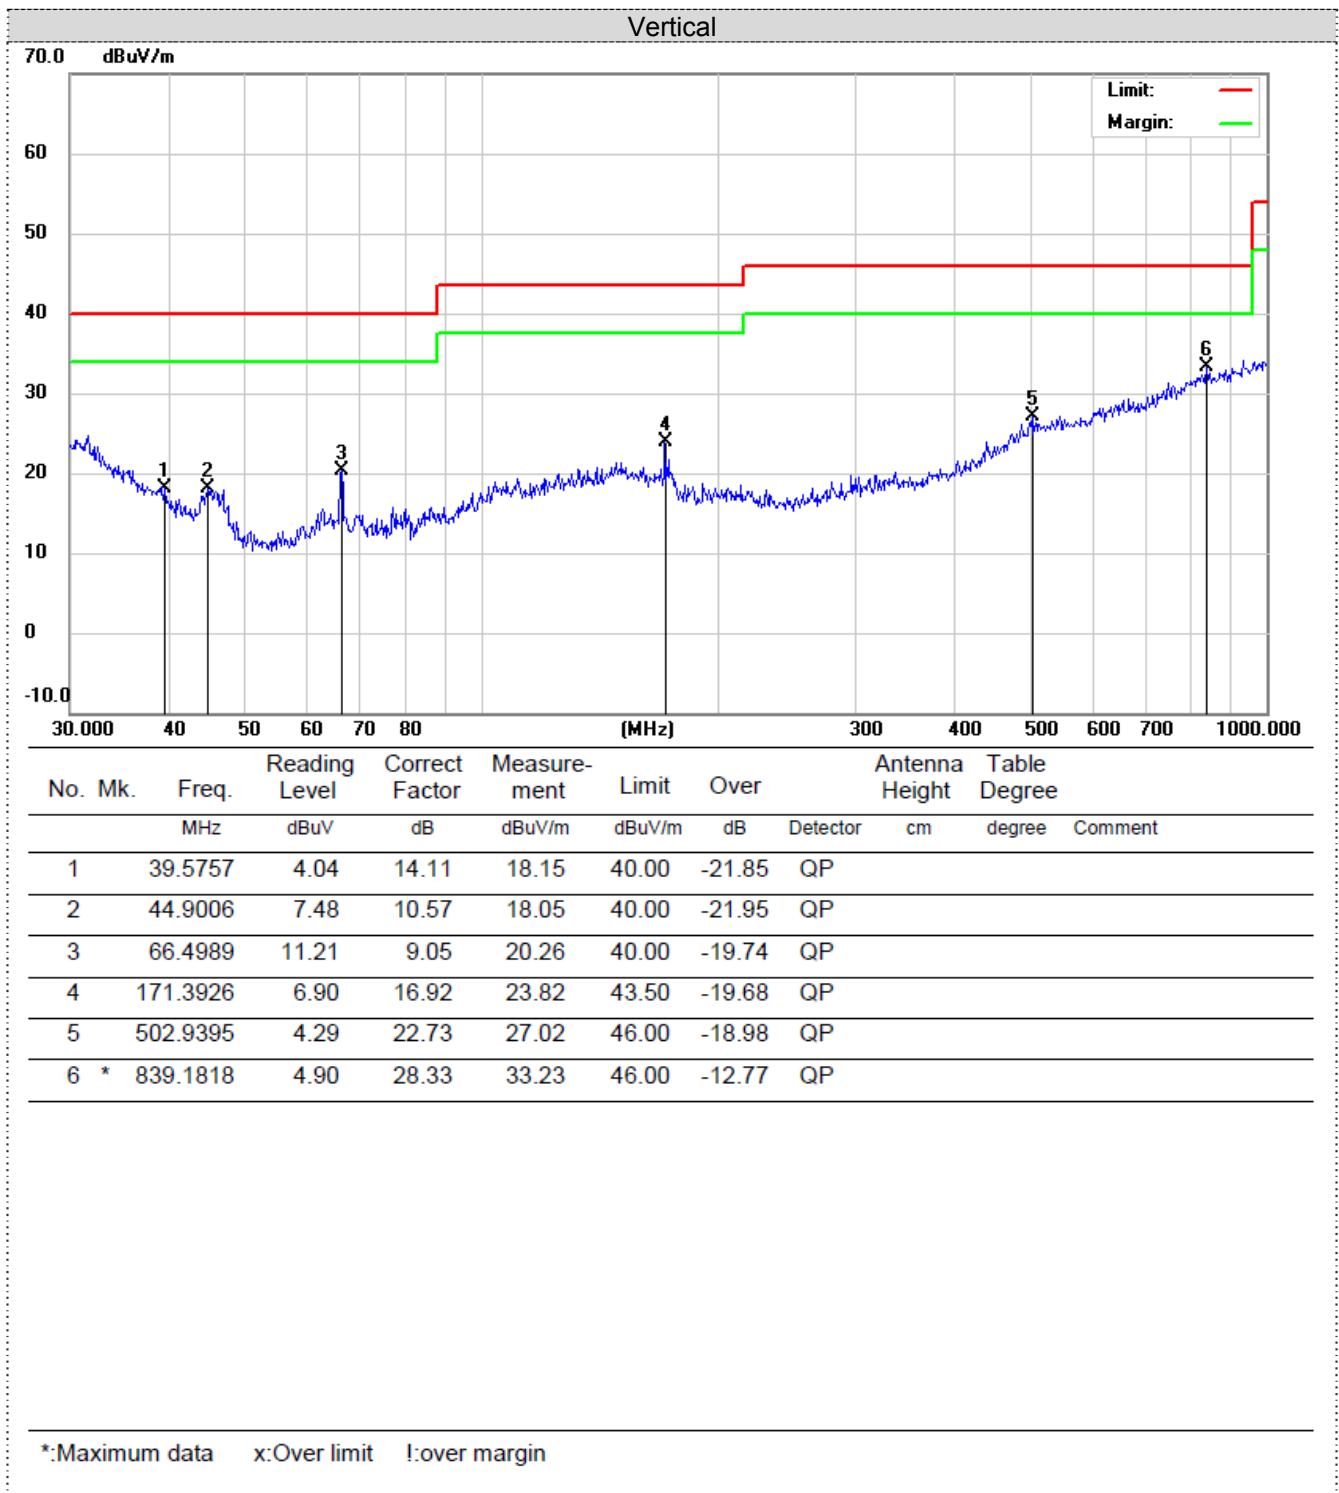

**For 1GHz to 25GHz**

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

**GFSK (above 1GHz)**

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804	57.41	PK	74	16.59	55.51	31.42	6.98	36.5	1.9
4804	44.44	AV	54	9.56	42.54	31.42	6.98	36.5	1.9
7206	52.25	PK	74	21.75	41.65	37.03	8.87	35.3	10.6
7206	42.82	AV	54	11.18	32.22	37.03	8.87	35.3	10.6

Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4804	54.2	PK	74	19.8	52.3	31.42	6.98	36.5	1.9
4804	42.64	AV	54	11.36	40.74	31.42	6.98	36.5	1.9
7206	51.6	PK	74	22.4	41	37.03	8.87	35.3	10.6
7206	42.49	AV	54	11.51	31.89	37.03	8.87	35.3	10.6

Frequency(MHz):			2441		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882	53.52	PK	74	20.48	51.46	30.98	7.58	36.5	2.06
4882	44.05	AV	54	9.95	41.99	30.98	7.58	36.5	2.06
7323	53.44	PK	74	20.56	42.52	37.66	8.56	35.3	10.92
7323	42.52	AV	54	11.48	31.6	37.66	8.56	35.3	10.92

Frequency(MHz):			2441		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4882	53.5	PK	74	20.5	51.44	30.98	7.58	36.5	2.06
4882	45.48	AV	54	8.52	43.42	30.98	7.58	36.5	2.06
7323	53.38	PK	74	20.62	42.46	37.66	8.56	35.3	10.92
7323	42.81	AV	54	11.19	31.89	37.66	8.56	35.3	10.92

Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960	56.76	PK	74	17.24	53.69	31.47	7.8	36.2	3.07
4960	44.95	AV	54	9.05	41.88	31.47	7.8	36.2	3.07
7440	53.06	PK	74	20.94	41.32	38.32	8.72	35.3	11.74
7440	42.19	PK	54	11.81	30.45	38.32	8.72	35.3	11.74

Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
4960	56.57	PK	74	17.43	53.5	31.47	7.8	36.2	3.07
4960	44.54	AV	54	9.46	41.47	31.47	7.8	36.2	3.07
7440	56.35	PK	74	17.65	44.61	38.32	8.72	35.3	11.74
7440	41.88	PK	54	12.12	30.14	38.32	8.72	35.3	11.74

## REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier

3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.

**Results of Band Edges Test (Radiated)**

Note: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

**GFSK**

Frequency(MHz):			2402		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390	58.71	PK	74	15.29	64.12	27.49	3.32	36.22	-5.41
2390	42.48	AV	54	11.52	47.89	27.49	3.32	36.22	-5.41
Frequency(MHz):			2402		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2390	54.82	PK	74	19.18	60.23	27.49	3.32	36.22	-5.41
2390	42.49	AV	54	11.51	47.9	27.49	3.32	36.22	-5.41
Frequency(MHz):			2480		Polarity:		HORIZONTAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.5	55.56	PK	74	18.44	61.07	27.45	3.38	36.34	-5.51
2483.5	38.89	AV	54	15.11	44.4	27.45	3.38	36.34	-5.51
Frequency(MHz):			2480		Polarity:		VERTICAL		
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2483.5	58.25	PK	74	15.75	63.76	27.45	3.38	36.34	-5.51
2483.5	40.85	AV	54	13.15	46.36	27.45	3.38	36.34	-5.51

## REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)- Pre-amplifier
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.

### 5.3 Maximum Peak Output Power


#### Limit

The Maximum Peak Output Power Measurement is 125mW (20.97).

#### Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the powersensor.

#### Test Configuration



#### Test Results

Type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	-2.15	20.97	Pass
	39	-3.02		
	78	-3.56		
$\pi/4$ DQPSK	00	-0.79	20.97	Pass
	39	-1.55		
	78	-2.12		
8DPSK	00	-0.55	20.97	Pass
	39	-1.24		
	78	-2.33		

Note: 1.The test results including the cable lose.

## 5.4 20dB Bandwidth

### Limit


For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### Test Configuration



### Test Results

Modulation	Channel	20dB bandwidth (MHz)	Result
GFSK	CH00	1.026	Pass
	CH39	1.019	
	CH78	1.025	
$\pi/4$ DQPSK	CH00	1.359	
	CH39	1.359	
	CH78	1.363	
8DPSK	CH00	1.345	
	CH39	1.344	
	CH78	1.343	

Test plot as follows:


GFSK Modulation



$\pi/4$ DQPSK Modulation



CH00



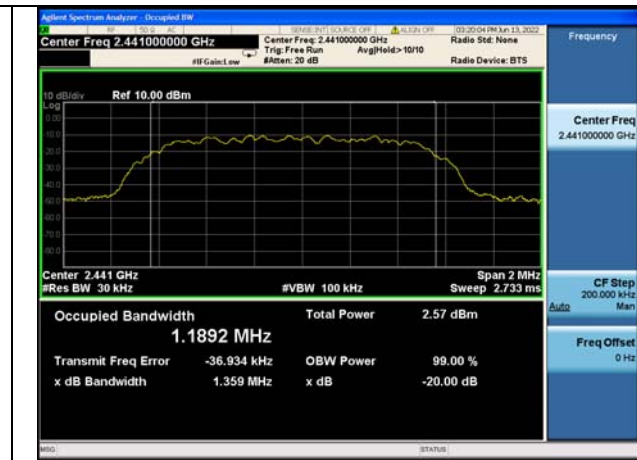


CH39



CH78

8DPSK Modulation

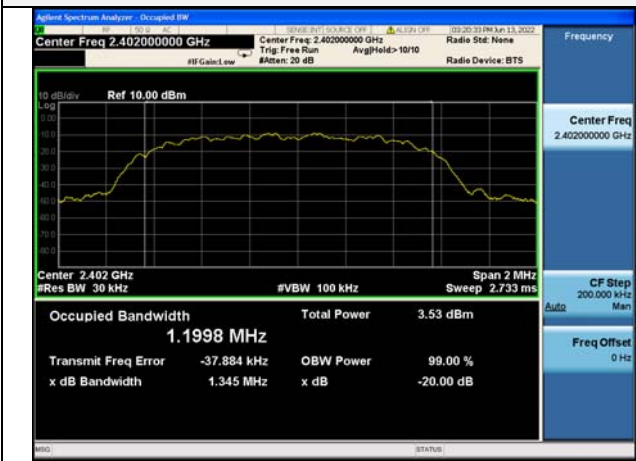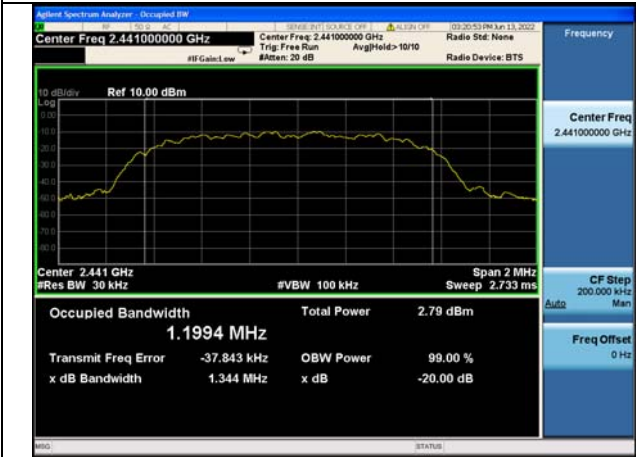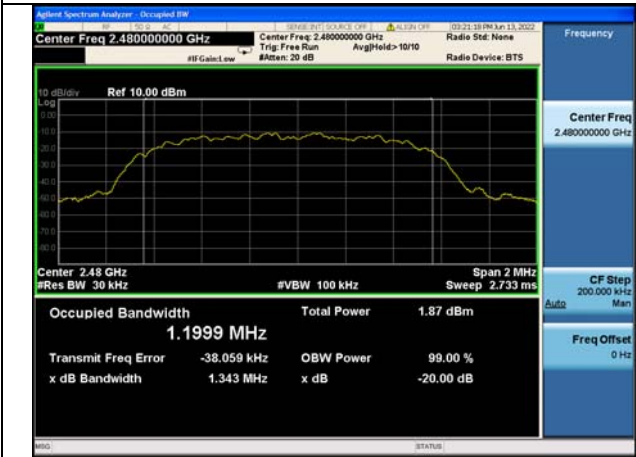	
CH00	
	
CH39	
	
CH78	



## 5.5 Frequency Separation


### LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the  $2/3 \times 20\text{dB}$  bandwidth of the hopping channel, whichever is greater.

### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW.

### TEST CONFIGURATION



### TEST RESULTS


Modulation	Channel	Channel Separation (MHz)	Limit(MHz) ( $2/3 \times 20\text{dB}$ bandwidth)	Result
GFSK	CH00	0.999	0.68	Pass
	CH39	0.996	0.68	
	CH78	1.014	0.68	
$\pi/4$ DQPSK	CH00	1.197	0.91	Pass
	CH39	1.062	0.91	
	CH78	1.203	0.91	
8DPSK	CH00	1.185	0.90	Pass
	CH39	1.194	0.90	
	CH78	1.200	0.90	

Note:


We have tested all mode at high, middle and low g..channel, and recorded worst case at middle

Test plot as follows:



GFSK Modulation

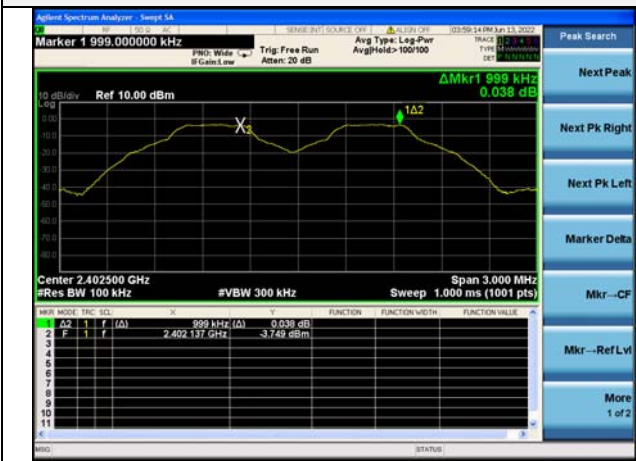


$\pi/4$ DQPSK Modulation

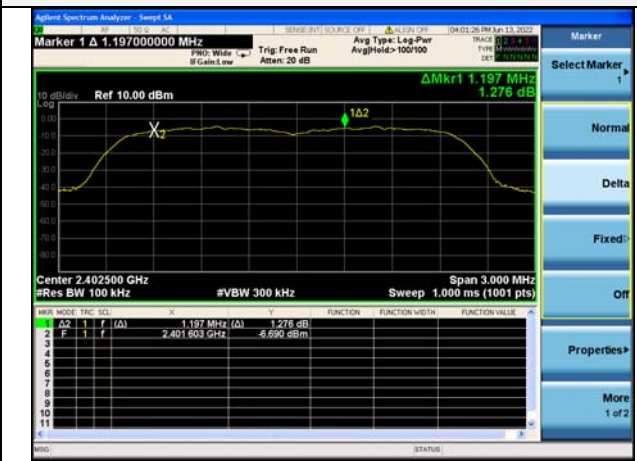

CH00

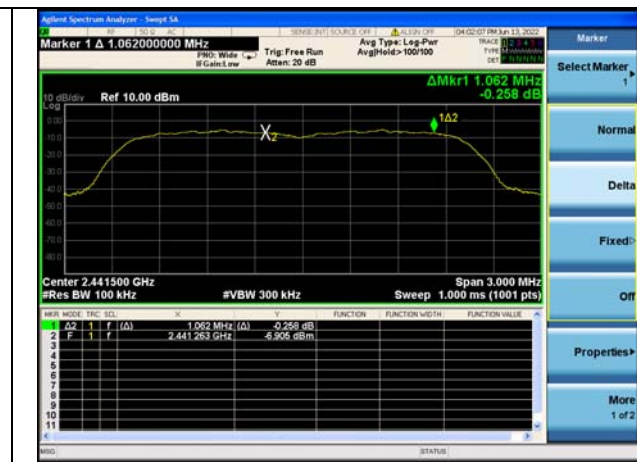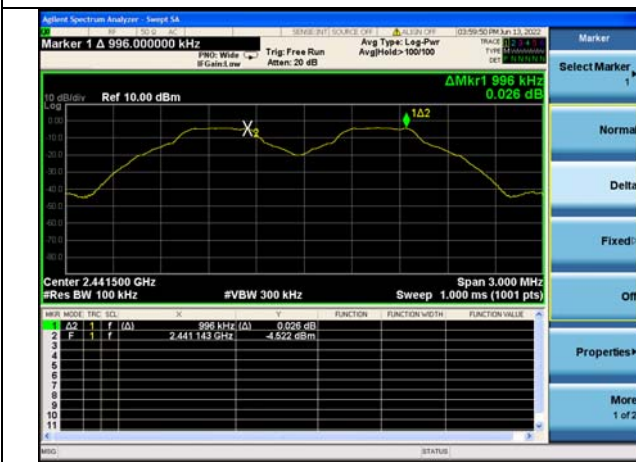

CH39

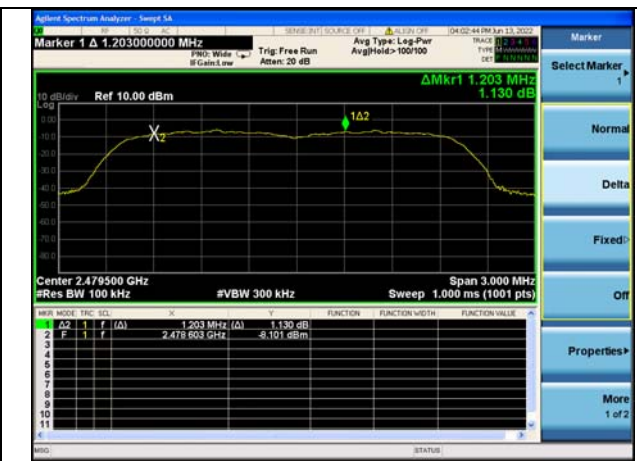

CH78

8DPSK Modulation

8DPSK Modulation

Agilent Spectrum Analyzer - Sweep SA

Marker 1 -1.18500000 MHz

Trig: Free Run  
Atten: 20 dB

Avg Type: Log-Pwr  
AvgHold: 100/100

Ref 10.00 dBm

ΔMkr1 -1.185 MHz  
-1.185 dB

Center 2.402500 GHz  
#Res BW 100 kHz  
#VBW 300 kHz  
Span 3.000 MHz  
Sweep 1.000 ms (1001 pts)

PKR MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	A2	1	f	(Δ)	1.185 MHz (Δ)		-1.185 dB
2	F	1	f		2.402 782 GHz		-5.016 dBm
3							
4							
5							
6							
7							
8							
9							
10							
11							

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr--CF

Mkr--Ref Lvl

More  
1 of 2

CH00

Agilent Spectrum Analyzer - Sweep SA

Marker 1 1.194000000 MHz

Trig: Free Run  
Atten: 20 dB

Avg Type: Log-Pwr  
AvgHold: 100/100

Ref 10.00 dBm

ΔMkr1 1.194 MHz  
1.199 dB

Center 2.441500 GHz  
#Res BW 100 kHz  
#VBW 300 kHz  
Span 3.000 MHz  
Sweep 1.000 ms (1001 pts)

PKR MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	A2	1	f	(Δ)	1.194 MHz (Δ)		-1.199 dB
2	F	1	f		2.440 588 GHz		-5.932 dBm
3							
4							
5							
6							
7							
8							
9							
10							
11							

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr--CF

Mkr--Ref Lvl

More  
1 of 2

No Peak Found

CH39

Agilent Spectrum Analyzer - Sweep SA

Marker 1 1.200000000 MHz

Trig: Free Run  
Atten: 20 dB

Avg Type: Log-Pwr  
AvgHold: 100/100

Ref 10.00 dBm

ΔMkr1 1.200 MHz  
0.926 dB

Center 2.479500 GHz  
#Res BW 100 kHz  
#VBW 300 kHz  
Span 3.000 MHz  
Sweep 1.000 ms (1001 pts)

PKR MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	A2	1	f	(Δ)	1.200 MHz (Δ)		0.926 dB
2	F	1	f		2.478 588 GHz		-7.686 dBm
3							
4							
5							
6							
7							
8							
9							
10							
11							

Peak Search

Next Peak

Next Pk Right

Next Pk Left

Marker Delta

Mkr--CF

Mkr--Ref Lvl

More  
1 of 2

CH78

## 5.6 Number of hopping frequency


### Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with 100 KHz RBW and 300 KHz VBW.

### Test Configuration




### Test Results

Modulation	Number of Hopping Channel	Limit	Result
GFSK	79	≥15	Pass
$\pi/4$ DQPSK	79		
8DPSK	79		


### Test plot as follows:



## GFSK Modulation

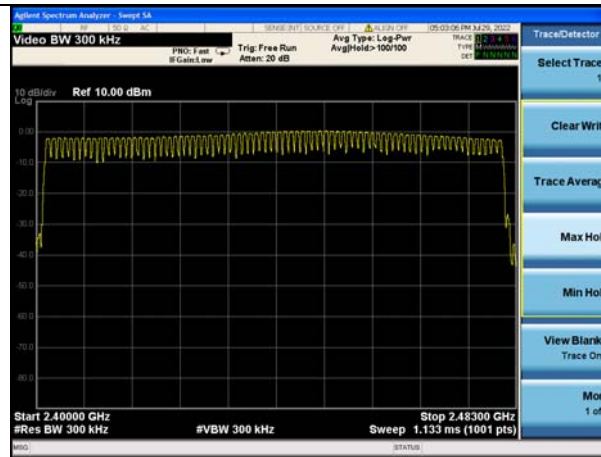

### $\pi/4$ DQPSK Modulation

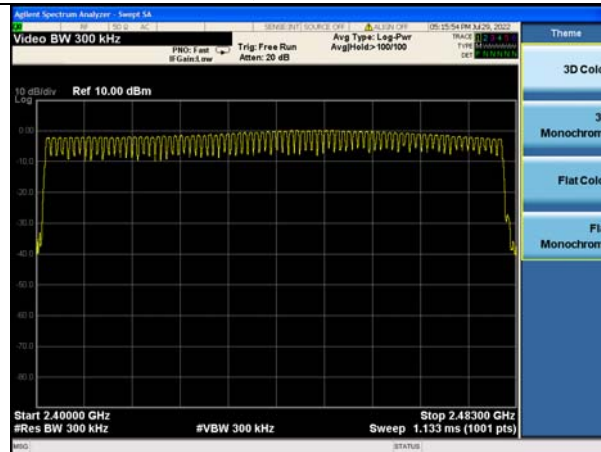

## 8DPSK Modulation

## 5.7 Time of Occupancy (Dwell Time)


### Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with 1MHz RBW and 1MHz VBW, Span 0Hz.

### Test Configuration



### Test Results

Modulation	Packet	Burst time (ms)	Dwell time (s)	Limit (s)	Result
GFSK	DH1	0.410	0.131	0.40	Pass
	DH3	1.665	0.266		
	DH5	2.910	0.311		
$\pi/4$ DQPSK	2-DH1	0.380	0.122	0.40	Pass
	2-DH3	1.655	0.265		
	2-DH5	2.930	0.314		
8DPSK	3-DH1	0.410	0.131	0.40	Pass
	3-DH3	1.645	0.263		
	3-DH5	2.930	0.314		

Note: We have tested all mode at high, middle and low channel, and recorded worst case at middle channel.

Dwell time = Pulse time (ms)  $\times$  (1600  $\div$  2  $\div$  79)  $\times$  31.6 Second for DH1, 2-DH1, 3-DH1

Dwell time = Pulse time (ms)  $\times$  (1600  $\div$  4  $\div$  79)  $\times$  31.6 Second for DH3, 2-DH3, 3-DH3

Dwell time = Pulse time (ms)  $\times$  (1600  $\div$  6  $\div$  79)  $\times$  31.6 Second for DH5, 2-DH5, 3-DH5

Test plot as follows:





Rohde & Schwarz FSWP Spectrum Analyzer - Sweep 5A

Marker 1  $\Delta$  410.000  $\mu$ s

Trace 1: 410.0 MHz, -33.86 dB

Trace 2: 970.0 MHz, -7.05 dB

Center 2.441000000 GHz, Res BW 1.0 MHz, Span 0 Hz, #VBW 3.0 MHz, Sweep 5.000 ms (1001 pts)

TRAC	MODE	TYPE	SQL	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
1	$\Delta$ 2	f	f	(f)	410.0 $\mu$ Hz (f)	-33.86 dB
2	F	f	t	(f)	970.0 $\mu$ Hz	-7.05 dBm

The screenshot shows a Rohde & Schwarz Spectrum Analyzer interface. The top status bar displays 'Reference Spectrum Analyzer - Smp2 Sa', 'SERIES: ZETI SOURCE: VFP', 'ALPHA: OFF', and the date '03/30/2019 PM 3:13, 2022'. The main display area is divided into two sections: a top section showing a frequency plot with a yellow trace and a bottom section showing a time-domain plot with a green trace. The top section has a 'Marker 1' at 1.6450 ms. The bottom section has a 'Marker 1' at 1.645 ms. The right sidebar contains a 'Marker' section with a 'Select Marker' button and a 'Norm' button. The bottom status bar shows 'MPO: 4' and '(STATUS)'.

Reference Spectrum Analyzer - Smp2 Sa

SERIES: ZETI SOURCE: VFP ALPHA: OFF 03/30/2019 PM 3:13, 2022

Marker 1  $\Delta$  1.6450 ms

Trig: Free Run Avg Type: Log-Pwr

Trace 01 1 0.0000

Time Domain

DET: ENVELOPE

10 dB/div Ref 10.00 dBm

$\Delta$  Mkr1 1.645 ms 2.67 dB

Center 2.441000000 GHz #BW 3.0 MHz Span 0 Hz

Res BW 1.0 MHz Sweep 5.000 ms (1001 pts)

MEAS MODE: FREQ ACCL X Y FUNCTION FUNCTION WIDTH FUNCTION VALUE

1	F	1	1	1.645 ms ( $\Delta$ )	2.67 dB		
2	F	1	1	1.615 ms	-15.63 dBm		

MPO: 4 (STATUS)

Agilent Spectrum Analyzer - Sengul Sa

Marker 1  $\Delta$  2.930000 ms

TRIGGER: F edge  $\rightarrow$  B' Gate: on

Trig: Free Run

Avg Type: Log-Pwr

TRACE 01 4 4

00:57:33 PM Jun 13, 2002

10 dBmV

Ref 10.00 dBm

$\Delta$ Mkr1 2.930 ms

-36.60 dB

1d2

Center 2.441000000 GHz

Res BW 1.0 MHz

#VBW 3.0 MHz

Sweep 5.000 ms (1001 pts)

Span 0 Hz

MARK MODE	TYPE	VAL	UNIT	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE
2	F	1	t	2.930 ms ( $\Delta$ )	-36.60 dB	
3		1	t	1.090 ms	-1.82 dBm	

MARK

SELECT MARKER

Normal

Define

Fixed

Properties


Marker 1 of 1

CH78



## 5.8 Spurious RF Conducted Emission

### TEST CONFIGURATION



### TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 9KHz to 25GHz.

### LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

Test plot as follows:

GFSK CH00



30MHz -25GHz

GFSK CH39



30MHz -25GHz

GFSK CH78



30MHz -25GHz

$\pi/4$ DQPSK CH00



30MHz -25GHz

$\pi/4$ DQPSK CH39



30MHz -25GHz

$\pi/4$ DQPSK CH78



30MHz -25GHz

8DPSK CH00



30MHz -25GHz

8DPSK CH39




30MHz -25GHz

8DPSK CH78




30MHz -25GHz

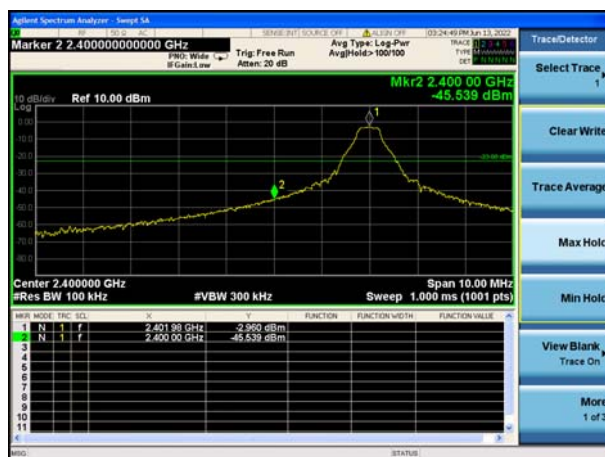

**Band-edge Measurements for RF Conducted Emissions:****GFSK**


Left Band edge hopping off

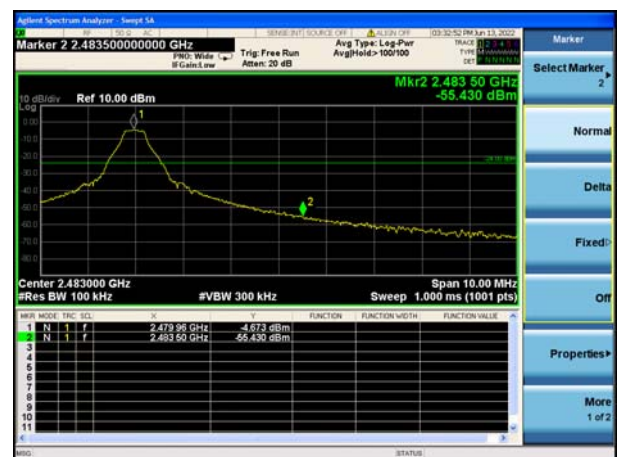


Right Band edge hopping off




Left Band edge hopping on

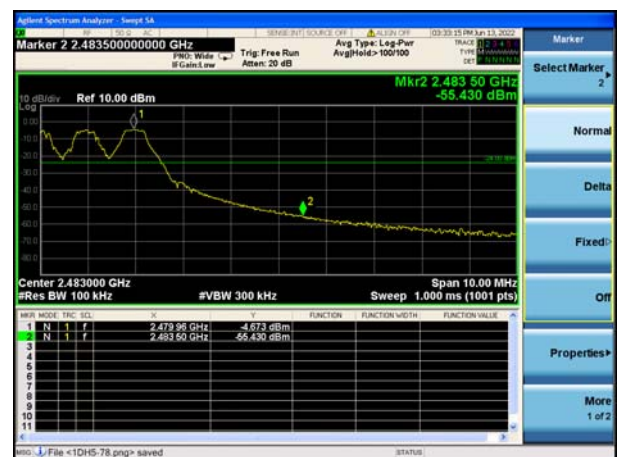

Right Band edge hopping on

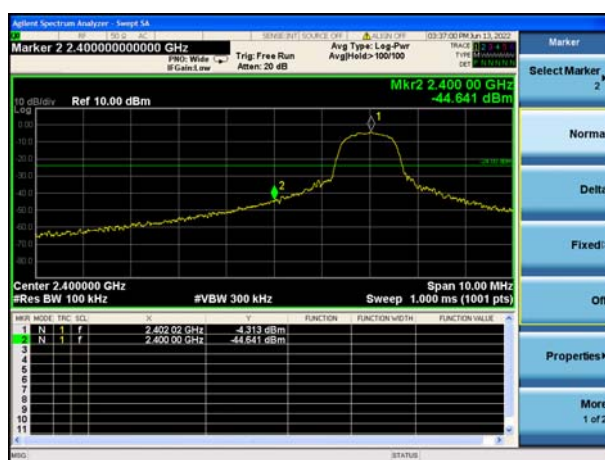 **$\pi/4$ DQPSK**

Left Band edge hopping off

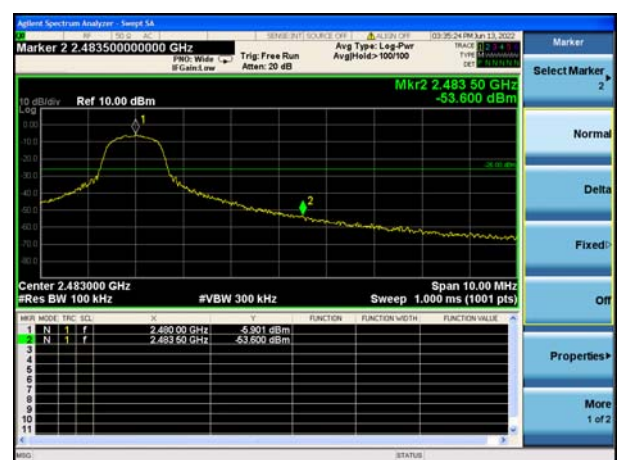

Right Band edge hopping off




Left Band edge hopping on




Right Band edge hopping on

8DPSK

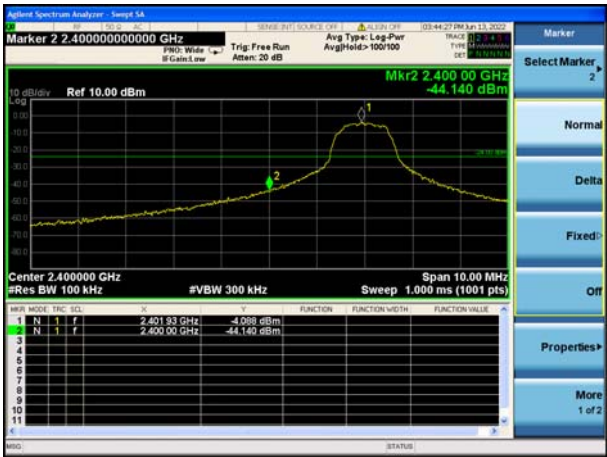

Left Band edge hopping off

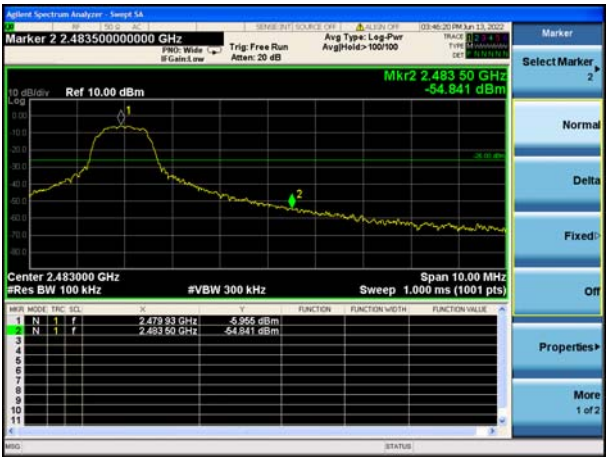

Right Band edge hopping off



Left Band edge hopping on



Right Band edge hopping on

## 5.9 Pseudorandom Frequency Hopping Sequence

### TEST APPLICABLE


#### **For 47 CFR Part 15C section 15.247 (a) (1) requirement:**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hop-ping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hop-ping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### **EUT Pseudorandom Frequency Hopping Sequence Requirement**


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages:9
- Length of pseudo-random sequence:29-1=511 bits
- Longest sequence of zeros:8(non-inverted signal)

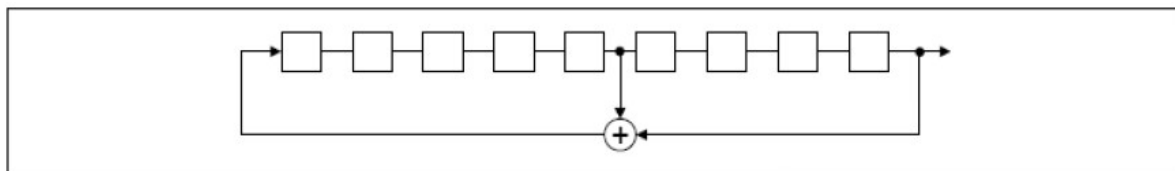

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

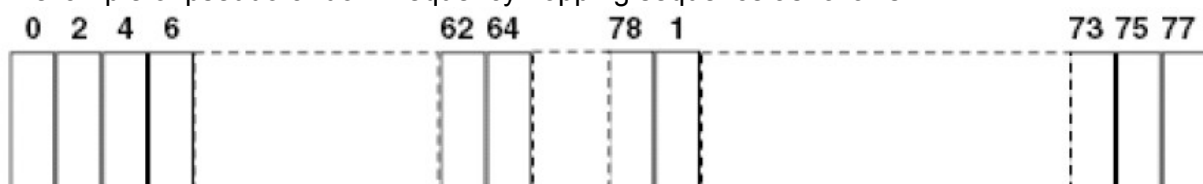

Each frequency used equally one the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shift frequencies in synchronization with the transmitted signals.

## 5.10 Antenna Requirement

### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **Refer to statement below for compliance**

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **Antenna Connected Construction**

The directional gains of antenna used for transmitting is -0.58 dBi, and the antenna is an PCB antenna connect to PCB board and no consideration of replacement. Please see EUT photo for details.

Results: Compliance.



## 6 Test Setup Photos of the EUT



## **7 Photos of the EUT**

See related photo report.

\*\*\*\*\* End of Report \*\*\*\*\*