

FCC Test Report

Client Name : Dongguan Dongju Electronic Technology Co., Ltd.

Client Address : Room 201, No. 18, Xinyuan Second Road, Songbailang Village, Dalang Town, Dongguan City, Guangdong Province, 518000, China

Product Name : Wireless portable charger

Report Date : Nov. 18, 2022

Shenzhen Anbotek Compliance Laboratory Limited



Contents

1. General Information	4
1.1. Client Information	4
1.2. Description of Device (EUT)	4
1.3. Auxiliary Equipment Used During Test	5
1.4. Test Equipment List	5
1.5. Measurement Uncertainty	5
1.6. Description of Test Facility	5
2. Measurement and Result	6
2.1. Requirements	6
2.2. Test Setup	7
2.3. Test Procedure	7
2.4. Test Result	7
APPENDIX I -- TEST SETUP PHOTOGRAPH	13
APPENDIX II -- EXTERNAL PHOTOGRAPH	13
APPENDIX III -- INTERNAL PHOTOGRAPH	13



TEST REPORT

Applicant : Dongguan Dongju Electronic Technology Co., Ltd.

Manufacturer : Dongguan Dongju Electronic Technology Co., Ltd.

Product Name : Wireless portable charger

Model No. : PP-PBQI10K-BK

Trade Mark : N.A.

Rating(s) : Capacity (Mah): 10000
PD Power (W): 20W
Wireless Output: 15W
Micro Input: 5V/2A, 9V/2A, 12V/1.5A
Type-C PD Input: 5V/3A, 9V/2A, 12V/1.5A
Type-C PD Output: 5V/3A, 9V/2.22A, 12V/1.67A
USB Output 1: 5V/4.5A, 4.5V/5A, 9V/2A, 12V/1.5A
USB Output2: 5V/3A, 9V/2A, 12V/1.5A

Test Standard(s) : **FCC Part 1.1310, 1.1307(b)**
KDB680106 D01 RF Exposure Wireless Charging Apps v03r01;

Test Method(s) : **October 2021 TCB Workshop;**
Part 18 and Wireless Power Transfer Updates- April 2022 TCB Workshop

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 1.1307 & KDB680106 D01 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Nov. 03, 2022

Date of Test

Nov. 03~ Nov. 11, 2022

Prepared By

Tu Tu Hong

(TuTu Hong)

Approved & Authorized Signer

Kingkong Jin

(Kingkong Jin)



1. General Information

1.1. Client Information

Applicant	:	Dongguan Dongju Electronic Technology Co., Ltd.
Address	:	Room 201, No. 18, Xinyuan Second Road, Songbailang Village, Dalang Town, Dongguan City, Guangdong Province, 518000, China
Manufacturer	:	Dongguan Dongju Electronic Technology Co., Ltd.
Address	:	Room 201, No. 18, Xinyuan Second Road, Songbailang Village, Dalang Town, Dongguan City, Guangdong Province, 518000, China
Factory	:	Dongguan Dongju Electronic Technology Co., Ltd.
Address	:	Room 201, No. 18, Xinyuan Second Road, Songbailang Village, Dalang Town, Dongguan City, Guangdong Province, 518000, China

1.2. Description of Device (EUT)

Product Name	:	Wireless portable charger
Model No.	:	PP-PBQI10K-BK
Trade Mark	:	N.A.
Test Power Supply	:	DC 3.7V battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A
RF Specification		
Operation Frequency	:	110.1-205KHZ
Modulation Type	:	ASK
Antenna Type	:	Inductive loop coil Antenna
Antenna Gain(Peak)	:	0 dBi (Provided by customer)
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		



1.3. Auxiliary Equipment Used During Test

Description	Rating(s)
Mobile Phone	Xiaomi 11

1.4. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Electric and Magnetic field Analyzer	NARDA	EHP-200A	180ZX10202	Nov. 12, 2022	1 Year

1.5. Measurement Uncertainty

Magnetic Field Reading(A/m)	:	+/-0.04282(A/m)
Electric Field Reading(V/m)	:	+/-0.03679(V/m)

1.6. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China. 518102



2. Measurement and Result

2.1. Requirements

According to the item 5.b) of KDB 680106 D01v03:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.


- 1) Power transfer frequency is less than 1 MHz
- 2) Output power from each primary coil is less than or equal to 15 watts.
- 3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils
- 4) Client device is inserted in or placed directly in contact with the transmitter
- 5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion)
- 6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Limits For Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30
F=frequency in MHz *=Plane-wave equivalent power density RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).				



2.2. Test Setup

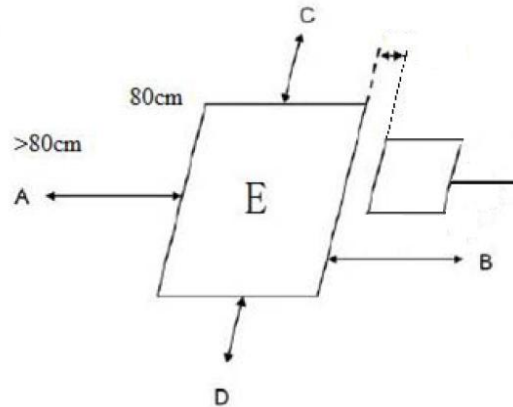

Note:

H-field data are taken along all three axes the device, from 0 cm to 20 cm, in 2 cm minimum increment measured from the edge of the device, with one axis coincident with the axis of the main coil. (probe radius is 4.75cm)

2.3. Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at required test distance (from 0 cm to 20 cm, in 2 cm minimum increment) which is between the edge/top surface of the charger and the geometric edge of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed. (A is the right, B is the back, C is the left, D is the front, and E is the top side.)
- 4) The EUT was measured according to the dictates of October 2021 TCB Workshop , KDB 680106 D01 v03r01 and Part 18 and Wireless Power Transfer Updates- April 2022 TCB Workshop.

Remark:

The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

2.4. Test Result

2.4.1. Equipment Approval Considerations item 5.b of KDB 680106 D01 v03.

- 1) Power transfer frequency is less than 1 MHz
 - The device operate in the frequency range 110.1-205KHz.
- 2) Output power from each primary coil is less than 15 watts
 - The maximum output power of the primary coil is 15W.
- 3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils
 - The transfer system including a charging system with only single primary coils is to detect and allow only between individual pairs of coils.



- 4) Client device is inserted in or placed directly in contact with the transmitter
- Client device is placed directly in contact with the transmitter.
- 5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion)
- The EUT is a portable exposure conditions
- 6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
- Conducted the measurement with the required distance and the test results please refer to the section 2.4.

2.4.2. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

Temperature:	23.8°C	Relative Humidity:	52 %
Pressure:	1012 hPa	Test Voltage:	DC 3.7V battery inside
Frequency Range:	110.1-205KHZ		

Note:

All the situation(full load, half load and empty load) has been tested,only the worst situation (full load (15W)) was recorded in the report.



E-Field Strength								
Test distance	Battery power	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
0cm	1%	0.43	0.52	0.47	0.48	0.60	307	614
	50%	1.41	1.85	1.34	1.47	1.64	307	614
	99%	2.43	2.83	2.44	2.39	2.85	307	614
	Stand-by	0.45	0.60	0.44	0.43	0.57	307	614
2cm	1%	0.42	0.51	0.46	0.47	0.59	307	614
	50%	1.37	1.81	1.30	1.43	1.60	307	614
	99%	2.48	2.88	2.49	2.44	2.90	307	614
	Stand-by	0.38	0.53	0.37	0.36	0.50	307	614
4cm	1%	0.41	0.50	0.45	0.46	0.58	307	614
	50%	1.48	1.92	1.41	1.54	1.71	307	614
	99%	2.46	2.86	2.47	2.42	2.88	307	614
	Stand-by	0.49	0.64	0.48	0.47	0.61	307	614
6cm	1%	0.33	0.42	0.37	0.38	0.50	307	614
	50%	1.34	1.77	1.27	1.41	1.56	307	614
	99%	2.41	2.82	2.41	2.39	2.83	307	614
	Stand-by	0.32	0.50	0.33	0.30	0.47	307	614
8cm	1%	0.29	0.38	0.33	0.34	0.46	307	614
	50%	1.30	1.73	1.23	1.37	1.52	307	614
	99%	2.39	2.80	2.39	2.37	2.81	307	614
	Stand-by	0.31	0.49	0.32	0.29	0.46	307	614
10cm	1%	0.28	0.37	0.32	0.33	0.45	307	614
	50%	1.35	1.78	1.28	1.42	1.57	307	614
	99%	2.33	2.74	2.33	2.31	2.75	307	614
	Stand-by	0.30	0.48	0.31	0.28	0.45	307	614
12cm	1%	0.26	0.34	0.30	0.30	0.41	307	614
	50%	1.33	1.78	1.25	1.37	1.54	307	614
	99%	2.27	2.72	2.28	2.24	2.71	307	614
	Stand-by	0.25	0.41	0.26	0.25	0.36	307	614



E-Field Strength								
Test distance	Battery power	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
14cm	1%	0.23	0.31	0.27	0.27	0.38	307	614
	50%	1.28	1.73	1.20	1.32	1.49	307	614
	99%	2.32	2.77	2.33	2.29	2.76	307	614
	Stand-by	0.33	0.49	0.34	0.33	0.44	307	614
16cm	1%	0.21	0.29	0.25	0.25	0.36	307	614
	50%	1.26	1.71	1.18	1.30	1.47	307	614
	99%	2.31	2.76	2.32	2.28	2.75	307	614
	Stand-by	0.27	0.43	0.28	0.27	0.38	307	614
18cm	1%	0.16	0.22	0.15	0.16	0.30	307	614
	50%	1.19	1.64	1.12	1.26	1.44	307	614
	99%	2.26	2.65	2.22	2.20	2.66	307	614
	Stand-by	0.23	0.38	0.21	0.23	0.34	307	614
20cm	1%	0.15	0.21	0.14	0.15	0.29	307	614
	50%	1.20	1.65	1.13	1.27	1.45	307	614
	99%	2.26	2.65	2.22	2.20	2.66	307	614
	Stand-by	0.25	0.40	0.23	0.25	0.36	307	614



H-Field Strength								
Test distance	Battery power	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
0cm	1%	0.030	0.052	0.058	0.042	0.052	0.815	1.63
	50%	0.35	0.44	0.34	0.34	0.51	0.815	1.63
	99%	0.44	0.62	0.51	0.33	0.32	0.815	1.63
	Stand-by	0.47	0.29	0.39	0.51	0.37	0.815	1.63
2cm	1%	0.029	0.051	0.057	0.041	0.051	0.815	1.63
	50%	0.40	0.49	0.39	0.39	0.56	0.815	1.63
	99%	0.43	0.61	0.50	0.32	0.31	0.815	1.63
	Stand-by	0.57	0.39	0.49	0.61	0.47	0.815	1.63
4cm	1%	0.029	0.051	0.057	0.041	0.051	0.815	1.63
	50%	0.37	0.46	0.36	0.36	0.53	0.815	1.63
	99%	0.49	0.67	0.56	0.38	0.37	0.815	1.63
	Stand-by	0.51	0.33	0.43	0.55	0.41	0.815	1.63
6cm	1%	0.028	0.050	0.056	0.040	0.050	0.815	1.63
	50%	0.29	0.40	0.30	0.29	0.46	0.815	1.63
	99%	0.36	0.55	0.46	0.26	0.24	0.815	1.63
	Stand-by	0.45	0.28	0.35	0.48	0.33	0.815	1.63
8cm	1%	0.028	0.050	0.056	0.040	0.050	0.815	1.63
	50%	0.28	0.39	0.29	0.28	0.45	0.815	1.63
	99%	0.37	0.56	0.47	0.27	0.25	0.815	1.63
	Stand-by	0.41	0.24	0.31	0.44	0.29	0.815	1.63
10cm	1%	0.027	0.049	0.055	0.039	0.049	0.815	1.63
	50%	0.25	0.36	0.26	0.25	0.42	0.815	1.63
	99%	0.41	0.60	0.51	0.31	0.29	0.815	1.63
	Stand-by	0.39	0.22	0.29	0.42	0.27	0.815	1.63
12cm	1%	0.027	0.049	0.055	0.039	0.049	0.815	1.63
	50%	0.24	0.33	0.24	0.20	0.37	0.815	1.63
	99%	0.28	0.44	0.33	0.16	0.15	0.815	1.63
	Stand-by	0.41	0.21	0.32	0.41	0.28	0.815	1.63



H-Field Strength								
Test distance	Battery power	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limit (V/m)	Limits Test (V/m)
14cm	1%	0.027	0.049	0.055	0.039	0.049	0.815	1.63
	50%	0.16	0.25	0.16	0.12	0.29	0.815	1.63
	99%	0.30	0.46	0.35	0.18	0.17	0.815	1.63
	Stand-by	0.38	0.18	0.29	0.38	0.25	0.815	1.63
16cm	1%	0.026	0.048	0.054	0.038	0.048	0.815	1.63
	50%	0.25	0.34	0.25	0.21	0.38	0.815	1.63
	99%	0.26	0.42	0.31	0.14	0.13	0.815	1.63
	Stand-by	0.36	0.16	0.27	0.36	0.23	0.815	1.63
18cm	1%	0.025	0.047	0.053	0.037	0.047	0.815	1.63
	50%	0.17	0.21	0.15	0.12	0.27	0.815	1.63
	99%	0.24	0.35	0.24	0.09	0.08	0.815	1.63
	Stand-by	0.27	0.06	0.16	0.31	0.16	0.815	1.63
20cm	1%	0.023	0.043	0.051	0.035	0.044	0.815	1.63
	50%	0.12	0.16	0.10	0.07	0.22	0.815	1.63
	99%	0.33	0.44	0.33	0.18	0.17	0.815	1.63
	Stand-by	0.29	0.08	0.18	0.33	0.18	0.815	1.63



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_MPE

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

