

FCC TEST REPORT(Mobile Phone)

for

PC Smart S.A.

Mobile Phone

Model Number: TouchSmart Phone

FCC ID: 2ABFV-TOUCH

Prepared for : PC Smart S.A.

Address : Carrera 116 no. 15 – 25 Bogota - Colombia

Prepared by : Keyway Testing Technology Co., Ltd.

Address : Baishun Industrial Zone, Zhangmutou Town,
Dongguan, Guangdong, China

Tel: 86-769-8718 2258

Fax: 86-769-8718 1058

Report No. : 13KWE11102615R



Date of Test : Nov. 20~Dec.09, 2013

Date of Report : Dec. 10, 2013

TABLE OF CONTENTS

	Page
Test Report Declaration	Page
1. TEST SUMMARY	4
2. GENERAL PRODUCT INFORMATION	5
2.1. Product Function.....	5
2.2. Description of Device (EUT)	5
2.3. Difference between Model Numbers.....	6
2.4. Independent Operation Modes	6
2.5. Test mode	6
3. TEST SITES	8
3.1. Test Facilities	8
3.2. List of Test and Measurement Instruments.....	9
4. TEST SET-UP AND OPERATION MODES.....	10
4.1. Principle of Configuration Selection.....	10
4.2. Block Diagram of Test Set-up	10
4.3. Test Operation Mode and Test Software	10
4.4. Special Accessories and Auxiliary Equipment.....	10
4.5. Countermeasures to Achieve EMC Compliance.....	10
5. EMISSION TEST RESULTS.....	11
5.1. Conducted Emission at the Mains Terminals Test.....	11
5.2. Conducted RF Output Power.....	14
5.3. 99% & -26 dB Occupied Bandwidth.....	15
5.4. Frequency Stability	21
5.5. Conducted Out of Band Emissions	24
5.6. Conducted Out of Band Emissions	30
5.7. Transmitter Radiated Power (EIRP/ERP)	32
5.8. Radiated Out of Band Emissions	38
6. PHOTOGRAPHS OF TEST SET-UP.....	42
6.1. Set-up for Conducted Emission Test	42
6.2. Set-up for Radiated Emission Test	43
7. PHOTOGRAPHS OF THE EUT.....	43

Keyway Testing Technology Co., Ltd.

Applicant:	PC Smart S.A.		
Address:	Carrera 116 no. 15 – 25 Bogota - Colombia		
Manufacturer:	PC Smart S.A.		
Address:	Planta de Produccion, Carrera 106 No. 15A – 25 Mzn 4, Int 11 Bodega 4, Fontibon-Bogota, Colombia		
Factor:	SHENZHEN PERFECT TECHNOLOGY CO.,LTD		
Address:	The 2nd Floor, Xinlong Science And Technology Park, Industry Number One Road, Dawang Shan Community, Shajing Street, Bao'an, Shenzhen, China		
E.U.T:	Mobile Phone		
Model Number:	TouchSmart Phone		
Trade Name:	PCSMART	Serial No.:	-----
Date of Receipt:	Nov. 20, 2013	Date of Test:	Nov. 20~Dec.09, 2013
Test Specification:	FCC CFR Title 47 Part 2: 2013 FCC CFR Title 47 Part22 Subpart H: 2013 FCC CFR Title 47 Part24 Subpart E: 2013		
Test Result:	The equipment under test was found to be compliance with the requirements of the standards applied.		
Issue Date: Dec. 10, 2013			
Tested by:	Reviewed by:	Approved by:	
			
Andy Gao / Engineer	Jade Yang/ Supervisor	Chris Du / Manager	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology Co., Ltd.			

1. TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emission at the Mains Terminals	15.207	PASS
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Passed* (Please refer to SAR Report)
Conducted RF Output Power	2.1046	PASS
99% & -26 dB Occupied Bandwidth	2.1049, 22.917 24.238,	PASS
Frequency Stability	2.1055, 22.355 24.235,	PASS
Conducted Out of Band Emissions	2.1051,2.1057 22.917, 24.238	PASS
Band Edge	2.1051,2.1057 22.917, 24.238	PASS
Transmitter Radiated Power (EIPR/ERP)	22.913, 24.232	PASS
Radiated Out of Band Emissions	2.1053,2.1057 22.917, 24.238	PASS

2.GENERAL PRODUCT INFORMATION

2.1. Product Function

Refer to Technical Construction Form and User Manual.

2.2. Description of Device (EUT)

Product Name:	Mobile Phone
Model No.:	TouchSmart Phone
Operation Frequency:	Bluetooth:2402~2480MHz WIFI:2412MHz~2462MHz (802.11b/802.11g/802.11n(H20)) 2422MHz~2452MHz (802.11n(H40)) GSM 850MHz: Tx: 824.20 - 848.80MHz (at intervals of 200kHz); Rx: 869.20 - 893.80MHz (at intervals of 200kHz) GSM 1900MHz: Tx: 1850.20 - 1909.80MHz (at intervals of 200kHz); Rx: 1930.20 - 1989.80MHz (at intervals of 200kHz) WCDMA Band II: TX: 1852.4MHz - 1907.6MHz, RX: 1932.4MHz - 1987.6MHz
Channel numbers:	Bluetooth:79 Channels WIFI:11 Channel for 802.11b/g/n(HT20), 7 Channel for 802.11n(HT40)
Channel separation:	Bluetooth:1M WIFI:5M
Modulation technology:	Bluetooth: FHSS(GFSK 1Mbps),Pi/4DQPSK(EDR 2Mbps), 8-DQPSK(EDR 3Mbps) WIFI DBPSK/ DQPSK/CCK/BPSK/ QPSK/ 16QAM/ 64QAM GSM/GPRS Mode with GMSK Modulation WCDMA Mode with BPSK Modulation HSDPA Mode with QPSK, 16QAM Modulation HSUPA Mode with QPSK, 16QAM Modulation
Antenna Type:	PIFA Antenna
Antenna gain:	-1dBi (BT &WIFI) 0dBi (GSM&WCDMA)
Power supply:	DC 5V from adapter
Multislot Class:	12
EGPRS Class:	12
Adapter	Model : JK060501000V Input: AC 100-240V, 50/60Hz, 0.15A Output: DC 5V 1000mA

2.3. Difference between Model Numbers

None.

2.4. Independent Operation Modes

2.5. Test mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Test modes		
Band	Radiated	Conducted
GSM 850	■ GSM link ■ EGPRS 8 link	■ GSM link ■ EGPRS 8 link
PCS 1900	■ GSM link ■ EGPRS 8 link	■ GSM link ■ EGPRS 8 link
WCDMA Band II	■ RMC 12.2Kbps link	■ RMC 12.2Kbps link

Note: The maximum power levels are GSM mode for GMSK link, EGPRS multi-slot class 8 mode for 8PSK link, RMC12.2Kbps mode for WCDMA Band II. only these modes were used for all tests.

The conducted power tables are as follows:

Band	Conducted Power (dBm)					
	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency	824.20	836.60	848.80	1850.20	1880.00	1909.80
GSM (GMSK, 1 TX slot)	31.96	32.15	32.37	28.95	29.10	29.57
GPRS (GMSK, 1 TX slot)	31.94	32.14	32.34	28.93	29.09	29.55
GPRS (GMSK, 2 TX slot)	31.19	31.39	31.59	28.16	28.34	28.80
GPRS (GMSK, 3 TX slot)	29.22	29.42	29.62	26.19	26.37	26.83
GPRS (GMSK, 4 TX slot)	27.12	27.32	27.52	24.09	24.27	24.73
EGPRS(GMSK, 1 TX slot)	31.90	32.10	32.30	28.87	29.05	29.51
EGPRS(GMSK, 2 TX slot)	31.17	31.37	31.57	28.14	28.32	28.78
EGPRS(GMSK, 3 TX slot)	29.17	29.37	29.57	26.14	26.32	26.78
EGPRS(GMSK, 4 TX slot)	27.13	27.33	27.53	24.10	24.28	24.74
EGPRS (8PSK, 1 TX slot)	26.54	26.75	26.93	24.28	24.53	24.89
EGPRS (8PSK, 2 TX slot)	25.18	25.48	25.79	23.10	23.31	23.63
EGPRS (8PSK, 3 TX slot)	23.05	23.34	23.52	21.85	21.98	22.25
EGPRS (8PSK, 4 TX slot)	22.11	22.27	22.49	20.95	21.02	21.34

Conducted Power			
Band	WCDMA Band II		
Channel	9262	9400	9538
Frequency	1852.4	1880.0	1907.6
RMC 12.2Kbps	24.13	24.65	23.26
RMC 64Kbps	24.09	24.59	23.22
RMC 144Kbps	24.10	24.61	23.19
RMC 384Kbps	24.07	24.57	23.17
HSDPA Subtest-1	24.11	24.64	23.24
HSDPA Subtest-2	24.1	24.62	23.23
HSDPA Subtest-3	24.08	24.61	23.21
HSDPA Subtest-4	24.07	24.59	23.19
HSUPA Subtest-1	24.12	24.63	23.25
HSUPA Subtest-2	24.09	24.62	23.23
HSUPA Subtest-3	24.07	24.61	23.22
HSUPA Subtest-4	24.06	24.59	23.19
HSUPA Subtest-5	24.05	24.56	23.18
AMR	24.11	24.60	23.24

3. TEST SITES

3.1. Test Facilities

Lab Qualifications : 944 Shielded Room built by ETS-Lindgren, USA

Date of completion: March 28, 2011

966 Chamber built by ETS-Lindgren, USA

Date of completion: March 28, 2011

Certificated by TUV Rheinland, Germany.

Registration No.: UA 50207153

Date of registration: July 13, 2011

Certificated by UL, USA

Registration No.: 100567-237

Date of registration: September 1, 2011

Certificated by Intertek

Registration No.: 2011-RTL-L1-31

Date of registration: October 11, 2011

Certificated by Industry Canada

Registration No.: 9868A

Date of registration: December 8, 2011

Certificated by FCC, USA

Registration No.: 370994

Date of registration: February 21, 2012

Certificated by CNAS China

Registration No.: CNAS L5783

Date of registration: August 8, 2012

Name of Firm : Keyway Testing Technology Co., Ltd.

Site Location : Baishun Industrial Zone, Zhangmutou Town,
Dongguan, Guangdong, China

3.2. List of Test and Measurement Instruments

3.2.1. For conducted emission at the mains terminals test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	May 9,13	May 9,14
Artificial Mains Network	Rohde&Schwarz	ENV216	101315	May 9,13	May 9,14
Artificial Mains Network (AUX)	Rohde&Schwarz	ENV216	101314	May 9,13	May 9,14
RF Cable	FUJIKURA	3D-2W	944 Cable	May 9,13	May 9,14

3.2.2. For radiated emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	May 9,13	May 9,14
System Simulator	Agilent	E5515C	GB43130245	May 9,13	May 9,14
Power Splitter	Weinschel	1506A	NW425	May 9,13	May 9,14
Bilog Antenna	ETS-LINDGREEN	3142D	135452	May 20,13	May 20,14
Spectrum Analyzer	Agilent	E4411B	MY4511304	May 9,13	May 9,14
3m Semi-anechoic Chamber	ETS-LINDGREEN	966	KW01	May 9,13	May 9,14
Signal Amplifier	SONOMA	310	187016	May 9,13	May 9,14
Signal Amplifier	Agilent	8449B	3008A00251	May 9,13	May 9,14
RF Cable	IMRO	IMRO-400	966 Cable 1#	N/A	N/A
MULTI-DEVICE Controller	ETS-LINDGREEN	2090	126913	N/A	N/A
Horn Antenna	DAZE	ZN30701	11003	May 11,13	May. 11,14
Horn Antenna	SCHWARZBECK	BBHA9170	9170-068	May.11,13	May. 11,14
Spectrum Analyzer	Agilent	8593E	3911A04271	May 9,13	May 9,14
Spectrum Analyzer	Agilent	E4408B	MY44211125	May 9,13	May 9,14
Signal Amplifier	DAZE	ZN3380C	11001	May 9,13	May 9,14
High Pass filter	Micro	HPM50111	324216	May 9,13	May 9,14
Filter	COM-MW	ZBSF-C836.5-25-X	KW032	May 9,13	May 9,14
Filter	COM-MW	ZBSF-C1747.5-75-X2	KW035	May 9,13	May 9,14
Filter	COM-MW	ZBSF-C1880-60-X2	KW037	May 9,13	May 9,14
DC Power Supply	LongWei	PS-305D	010964729	May 9,13	May 9,14
Constant temperature and humidity box	GF	GTH-800-40-1P	MAA9906-005	May 9,13	May 9,14


4. TEST SET-UP AND OPERATION MODES

4.1. Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

4.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators

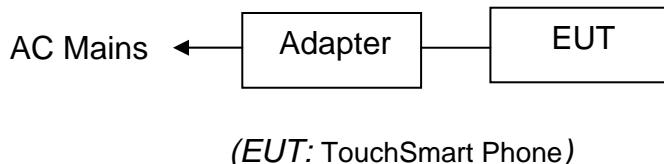

(EUT: TouchSmart Phone)

4.3. Test Operation Mode and Test Software

None.

4.4. Special Accessories and Auxiliary Equipment

None.

4.5. Countermeasures to Achieve EMC Compliance

None.

5. EMISSION TEST RESULTS

5.1. Conducted Emission at the Mains Terminals Test

5.1.1. Limit 15.207 limits

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

5.1.2. Test Setup

The EUT was put on a wooden table which was 0.8 m high above the ground and connected to the AC mains through the Artificial Mains Network (AMN). Where the mains cable supplied by the manufacture was longer than 0.8 m, the excess was folded back and forth parallel to the cable at the centre so as to form a bundle no longer than 0.4 m.


The EUT was kept 0.4 m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during the conducted emission test.

The frequency range from 150 kHz to 30 MHz was investigated.

The bandwidth of the test receiver was set at 9 kHz.

Pretest for all mode, The test data of the worst case condition(s) was reported on the following page.

Measurement Uncertainty: ± 2.6 dB.

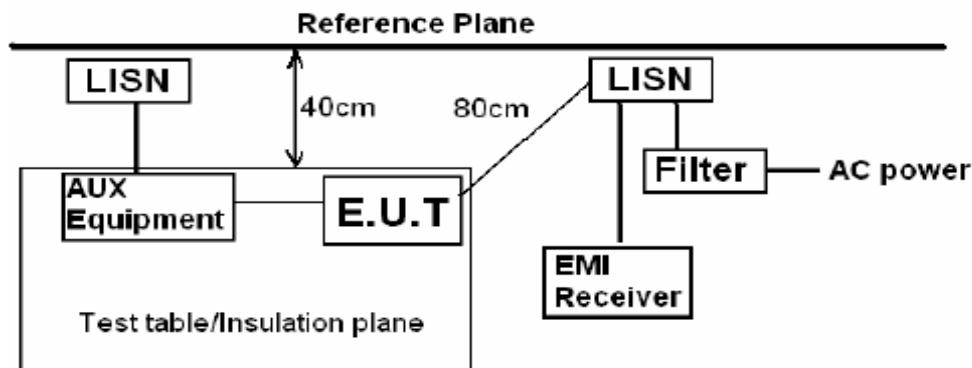

Remark:

E.U.T: Equipment Under Test

LISN: Line Impedance Stabilization Network

Test table height=0.8m

5.1.3. Test Mode

Set EUT in TX mode.

Test Data**GSM Mode Line**

			Limit	Over	
	Freq	Level	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	
1	0.171	40.90	54.90	-14.00	Average
2	0.171	50.46	64.90	-14.44	QP
3	0.285	37.93	50.68	-12.75	Average
4	0.285	42.65	60.68	-18.03	QP
5	0.456	37.19	46.76	-9.57	Average
6	0.456	39.30	56.76	-17.46	QP
7	0.567	36.25	46.00	-9.75	Average
8	0.567	38.22	56.00	-17.78	QP
9	0.853	33.77	46.00	-12.23	Average
10	0.853	37.80	56.00	-18.20	QP
11	1.197	32.77	46.00	-13.23	Average
12	1.197	38.42	56.00	-17.58	QP

GSM Mode Neutral

			Limit	Over	
	Freq	Level	Line	Limit	Remark
	MHz	dBuV	dBuV	dB	
1	0.171	38.55	54.90	-16.35	Average
2	0.171	51.10	64.90	-13.80	QP
3	0.285	33.18	50.68	-17.50	Average
4	0.285	42.06	60.68	-18.62	QP
5	0.573	29.42	46.00	-16.58	Average
6	0.573	34.45	56.00	-21.55	QP
7	0.743	26.22	46.00	-19.78	Average
8	0.743	33.06	56.00	-22.94	QP
9	1.197	24.70	46.00	-21.30	Average
10	1.197	32.06	56.00	-23.94	QP
11	2.297	23.61	46.00	-22.39	Average
12	2.297	33.17	56.00	-22.83	QP

WCDMA Mode Line

Freq	Level	Limit		Over Limit	Remark
		Line	dBuV		
	MHz	dBuV	dB		
1	0.171	40.51	54.90	-14.39	Average
2	0.171	50.99	64.90	-13.91	QP
3	0.229	33.84	52.48	-18.64	Average
4	0.229	46.40	62.48	-16.08	QP
5	0.285	37.69	50.68	-12.99	Average
6	0.285	41.50	60.68	-19.18	QP
7	0.456	37.46	46.76	-9.30	Average
8	0.456	38.70	56.76	-18.06	QP
9	0.573	36.12	46.00	-9.88	Average
10	0.573	38.40	56.00	-17.60	QP
11	2.225	30.75	46.00	-15.25	Average
12	2.225	36.78	56.00	-19.22	QP

WCDMA Mode Neutral

Freq	Level	Limit		Over Limit	Remark
		Line	dBuV		
	MHz	dBuV	dB		
1	0.171	38.02	54.90	-16.88	Average
2	0.171	50.80	64.90	-14.10	QP
3	0.285	33.26	50.68	-17.42	Average
4	0.285	42.30	60.68	-18.38	QP
5	0.573	30.12	46.00	-15.88	Average
6	0.573	38.16	56.00	-17.84	QP
7	0.974	25.59	46.00	-20.41	Average
8	0.974	30.50	56.00	-25.50	QP
9	1.197	24.96	46.00	-21.04	Average
10	1.197	31.50	56.00	-24.50	QP
11	2.297	24.17	46.00	-21.83	Average
12	2.297	32.70	56.00	-23.30	QP

5.2. Conducted RF Output Power

5.2.1. Limit

According to FCC section 2.1046(a), for transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in FCC section 2.1033(c)(8).

5.2.2. Test Setup

The EUT, which is powered by the adapter, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power.

5.2.3. Test Result

Here the lowest, middle and highest channels are selected to perform testing to verify the conducted RF output power of the EUT.

Measurement data

EUT Mode	Channel	Frequency (MHz)	PK power (dBm)	Limit (dBm)	Result
GSM 850 (GSM link)	128	824.20	31.96	38.45	Pass
	190	836.60	32.15		
	251	848.80	32.37		
GSM 850 (EGPRS 8 link)	128	824.20	26.54	38.45	Pass
	190	836.60	26.75		
	251	848.80	26.93		
PCS 1900 (GSM link)	512	1850.20	28.95	33.01	Pass
	661	1880.00	29.10		
	810	1909.80	29.57		
PCS 1900 (EGPRS 8 link)	512	1850.20	24.28	33.01	Pass
	661	1880.00	24.53		
	810	1909.80	24.89		
WCDMA Band II (RMC 12.2Kbps link)	9262	1852.4	24.13	33.01	Pass
	9400	1880.0	24.65		
	9538	1907.6	23.26		

Note: Measurement Uncertainty: ± 2.6 dB.

5.3. 99% & -26 dB Occupied Bandwidth

5.3.1. Limit

According to FCC section 2.1049 and FCC 22.917 &24.238 and 27.53(g), the occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission.

Occupied bandwidth is also known as the 99% emission bandwidth,

5.3.2. Test Setup

The EUT, which is powered by the adapter, is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power.



5.3.3. Test Result

Measurement Data


EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (KHz)	-26dB bandwidth (KHz)
GSM 850 (GSM link)	128	824.20	246.23	321.41
	190	836.60	243.04	313.94
	251	848.80	245.03	321.99
GSM 850 (EGPRS 8 link)	128	824.20	243.54	319.62
	190	836.60	243.44	318.74
	251	848.80	243.99	322.83
PCS 1900 (GSM link)	512	1850.20	243.99	322.09
	661	1880.00	243.62	320.10
	810	1909.80	243.15	313.11
PCS 1900 (EGPRS 8 link)	512	1850.20	243.82	324.45
	661	1880.00	243.44	322.14
	810	1909.80	243.18	322.40
WCDMA Band II (RMC 12.2Kbps link)	9262	1852.4	4203.00	4748.00
	9400	1880.0	4146.70	4673.00
	9538	1907.6	4192.30	4743.00

Note: Measurement Uncertainty: $\pm 20\text{Hz}$.


Test plot as follows:

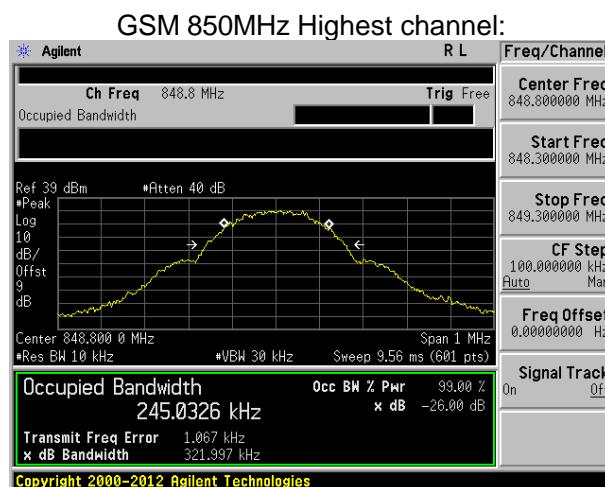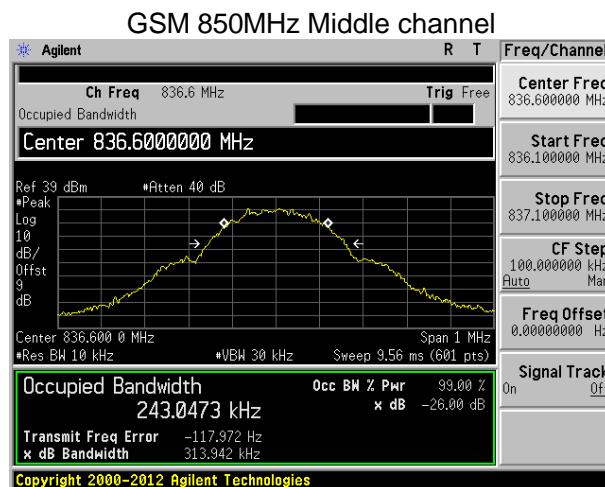

GSM 850 (EGPRS 8 link) Lowest channel

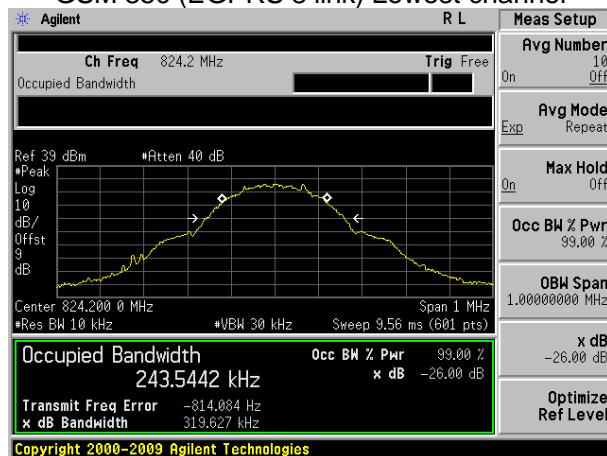


GSM 850 (EGPRS 8 link) Middle channel

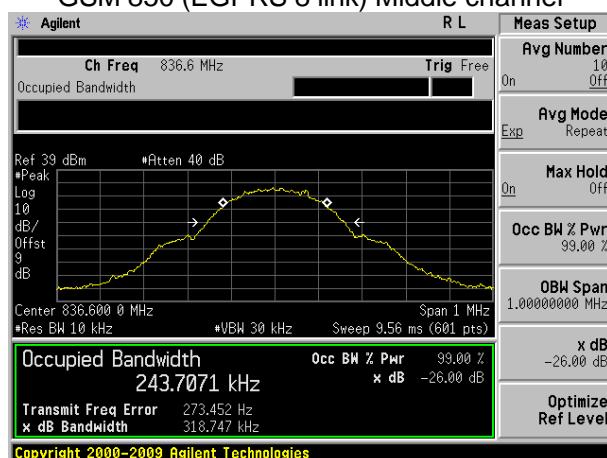


GSM 850 (EGPRS 8 link) Highest channel



PCS 1900 (GSM link) Lowest channel

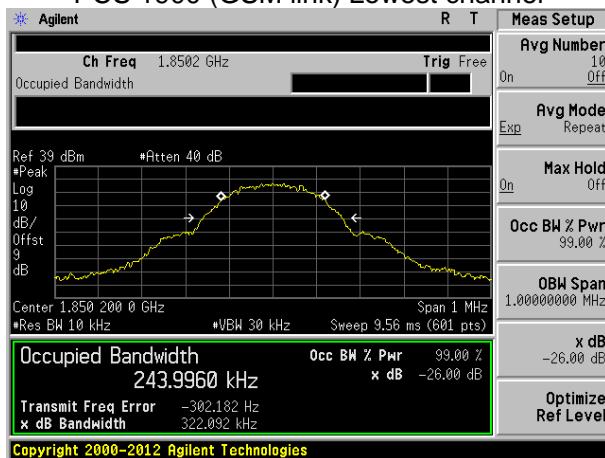


EGPRS 850MHz Middle channel

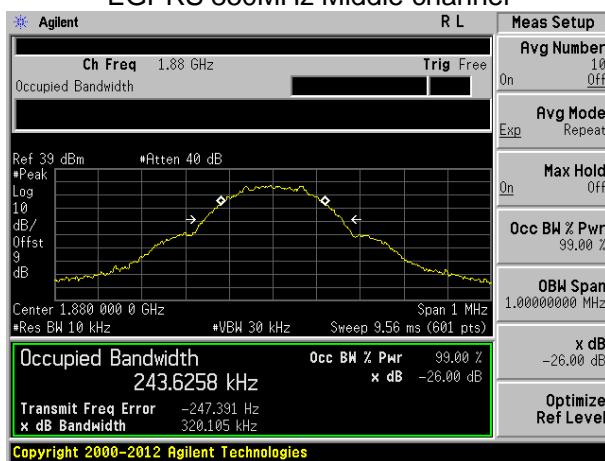


EGPRS 850MHz Highest channel




PCS 1900 (EGPRS 8 link) Lowest channel

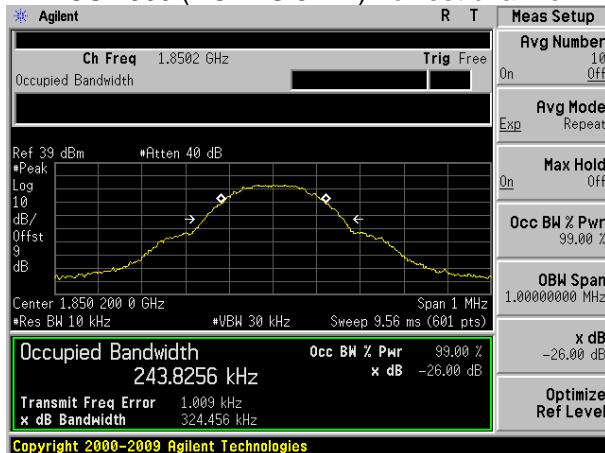


EGPRS 1900MHz Middle channel

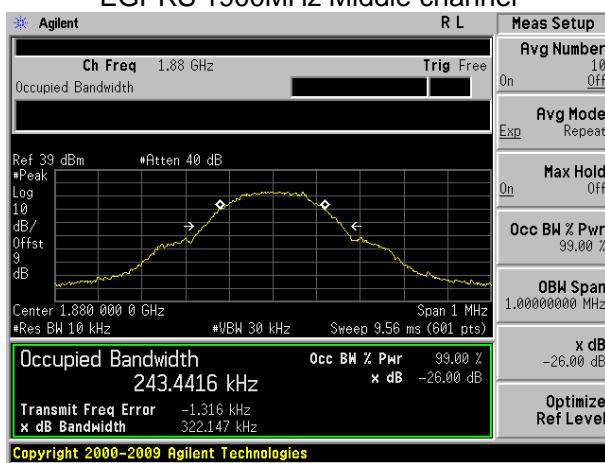


EGPRS 1900MHz Highest channel

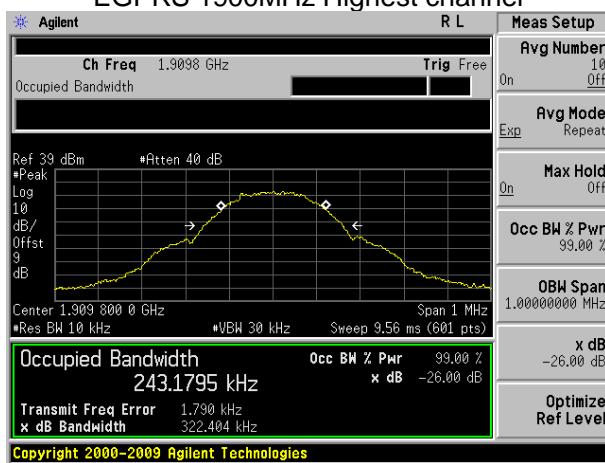


WCDMA Band II (RMC 12.2Kbps link) Lowest channel

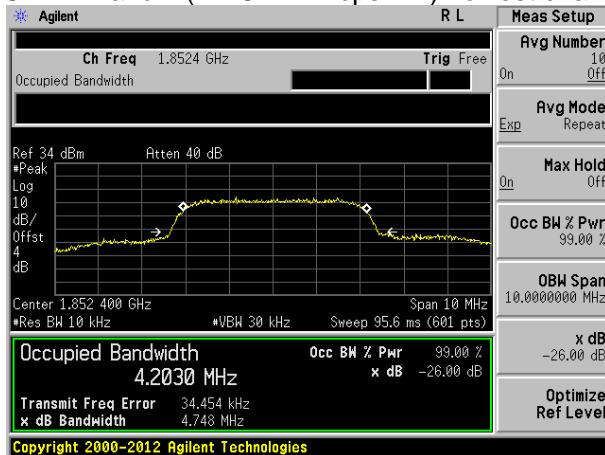

WCDMA Band II (RMC 12.2Kbps link) Middle channel

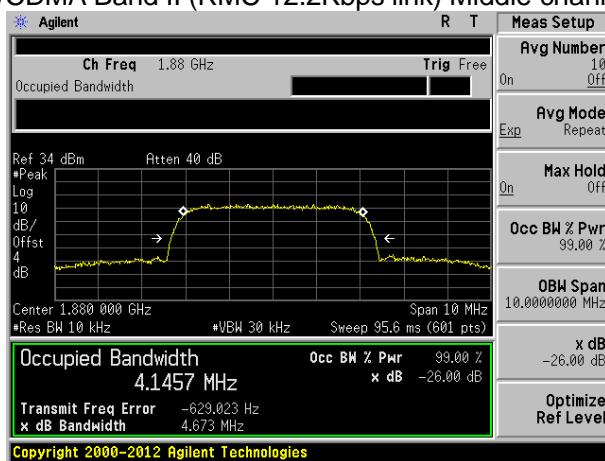

WCDMA Band II (RMC 12.2Kbps link) Highest channel

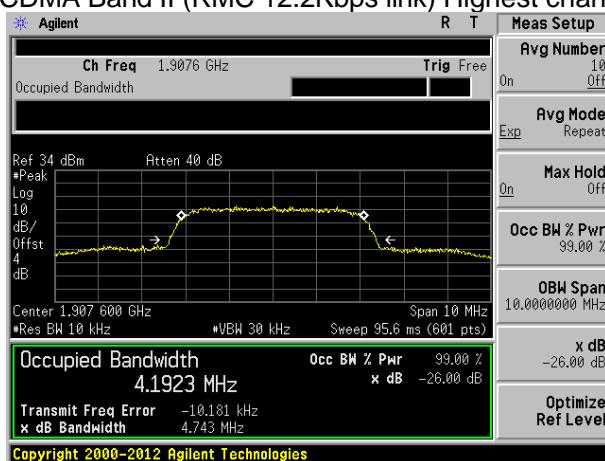


5.4. Frequency Stability

5.4.1. Limit

According to FCC section 22.355 and FCC section 24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. According to FCC section 2.1055, the test conditions are:

- (a) The temperature is varied from -30°C to +50°C at intervals of not more than 10°C.
- (b) For hand carried battery powered equipment, the primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer. The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

5.4.2. Test Setup

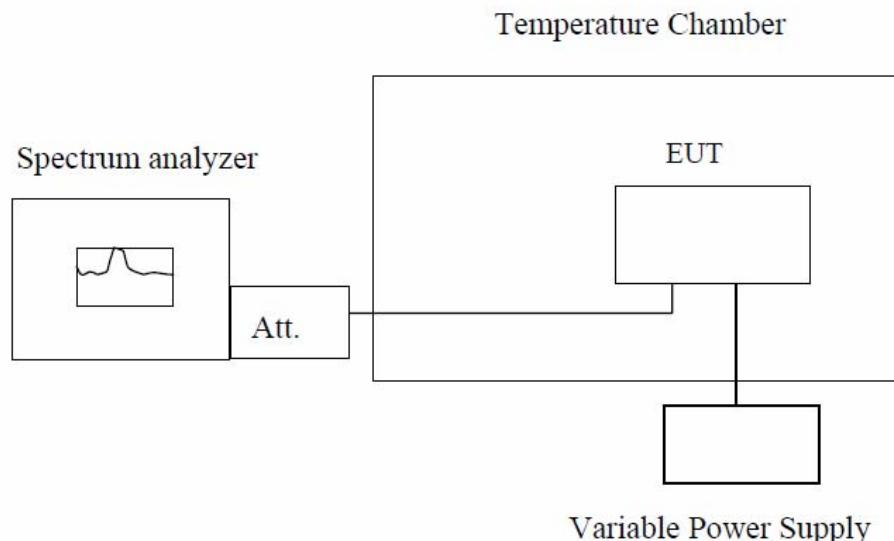

Note : Measurement setup for testing on Antenna connector

The EUT, which is powered by the DC Power Supply directly, is located in the Temperature Chamber.

The EUT is commanded by the System Simulator (SS) to operate at the maximum output power

5.4.3. Test Result

The nominal, highest and lowest extreme voltages are separately 3.7VDC, 4.2VDC and 3.6VDC which are specified by the applicant; the normal temperature here used is 25°C. The frequency deviation limit of 850MHz band is ± 2.5 ppm, and 1900MHz is ± 1 ppm

Normal

Test Conditions			Frequency Deviation			Result
Band	Power(Vdc)	Temperature(°C)	Frequency Error(Hz)	ppm	Limit	
GSM850 (GSM link) Middle channel=190 channel=836. 6MHz	3.7	-30	47	0.0247	±2.5	PASS
	3.7	-20	44	0.0231		
	3.7	-10	39	0.0207		
	3.7	0	38	0.0199		
	3.7	10	36	0.0191		
	3.7	20	33	0.0176		
	3.7	30	36	0.0191		
	3.7	40	41	0.0215		
	3.7	50	41	0.0219		
	4.25	25	17	0.0208		
	3.70	25	15	0.0179		
	3.40	25	20	0.0236		
	3.7	-30	28	0.0332		
	3.7	-20	25	0.0304		
GSM850 (EGPRS 8 link) Middle channel=190 channel=836. 6MHz	3.7	-10	22	0.0261	±2.5	PASS
	3.7	0	21	0.0246		
	3.7	10	19	0.0232		
	3.7	20	17	0.0203		
	3.7	30	21	0.0246		
	3.7	40	23	0.0275		
	3.7	50	24	0.0282		
	4.25	25	19	0.0221		
	3.70	25	17	0.0203		
	3.40	25	20	0.0239		
	3.7	-30	51	0.0274		
	3.7	-20	48	0.0254		
	3.7	-10	42	0.0225		
	3.7	0	40	0.0215		
PCS1900 (GSM link) Middle channel=661 channel=188 0MHz	3.7	10	39	0.0206	±2.5	PASS
	3.7	20	35	0.0186		
	3.7	30	40	0.0215		
	3.7	40	44	0.0235		
	3.7	50	42	0.0225		
	4.25	25	39	0.0197		
	3.70	25	35	0.0223		
	3.40	25	37	0.0207		

Note: Measurement Uncertainty: ±20Hz.

PCS1900 (EGPRS 8 link) Middle channel=661 channel=188 0MHz	3.7	-30	47	0.0247	±2.5	PASS
	3.7	-20	44	0.0231		
	3.7	-10	39	0.0207		
	3.7	0	38	0.0199		
	3.7	10	36	0.0191		
	3.7	20	33	0.0176		
	3.7	30	36	0.0191		
	3.7	40	41	0.0215		
	3.7	50	41	0.0219		
	4.25	25	36	0.0197		
	3.70	25	33	0.0223		
	3.40	25	35	0.0207		
	3.7	-30	49	0.0258		
WCDMA Band II Middle channel=940 0 channel=188 0.0MHz	3.7	-20	44	0.0235		
	3.7	-10	38	0.0200		
	3.7	0	36	0.0189		
	3.7	10	33	0.0177		
	3.7	20	29	0.0154		
	3.7	30	36	0.0189		
	3.7	40	40	0.0212		
	3.7	50	38	0.0200		
	4.25	25	34	0.0197		
	3.70	25	29	0.0223		
	3.40	25	32	0.0207		


Note: Measurement Uncertainty: ±20Hz.

5.5. Conducted Out of Band Emissions

5.5.1. Limit

According to FCC section 22.917(a) and FCC section 24.238(a), the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB. This calculated to be -13dBm.

5.5.2. Test Setup

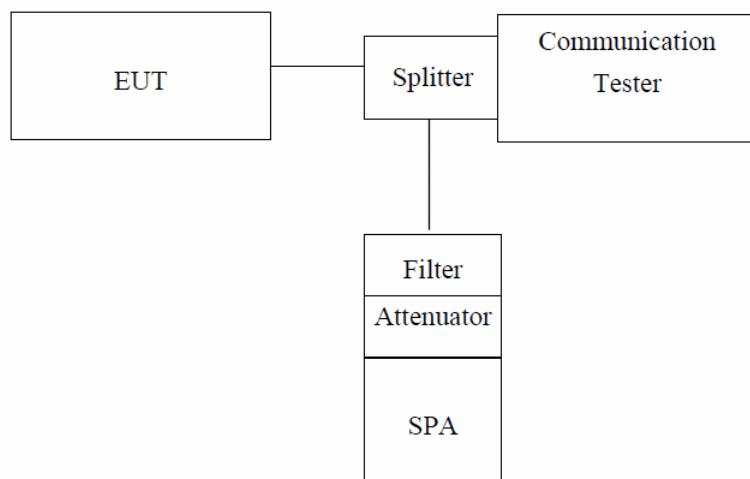

Note: Measurement setup for testing on Antenna connector

5.5.3. Measurement Procedure

The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.

For the out of band: Set the RBW, VBW = 100KHz, Start=30MHz, Stop= 10th harmonic.


Limit = -13dBm

5.5.4. Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.


Test plot as follows:

GSM 850MHz Lowest channel

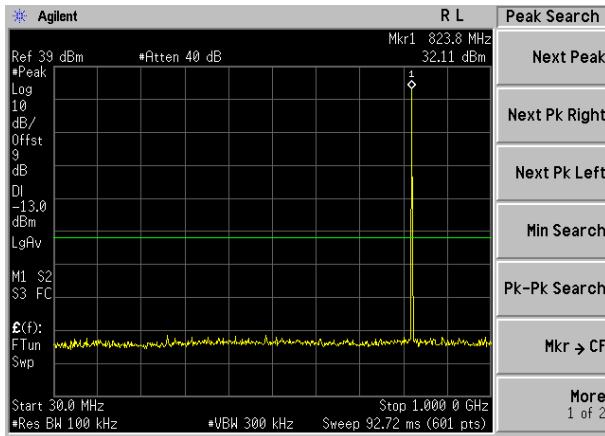


Copyright 2000-2012 Agilent Technologies


GSM 850MHz Middle channel

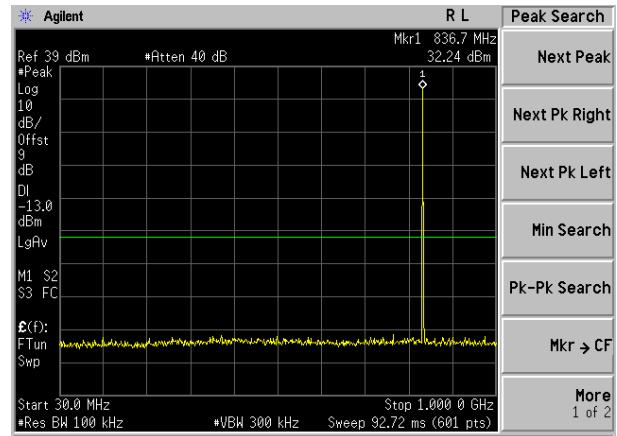

Copyright 2000-2012 Agilent Technologies

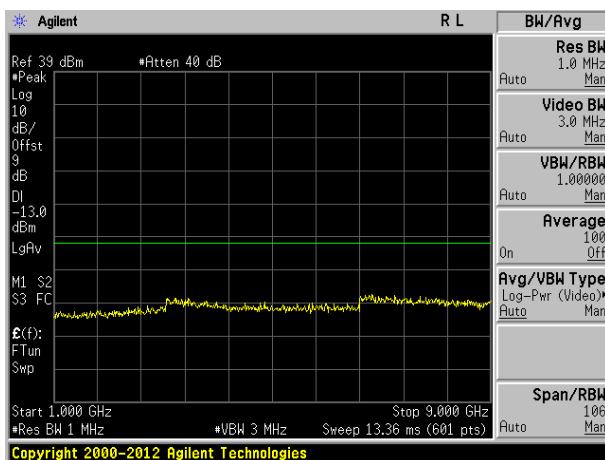


Copyright 2000-2012 Agilent Technologies



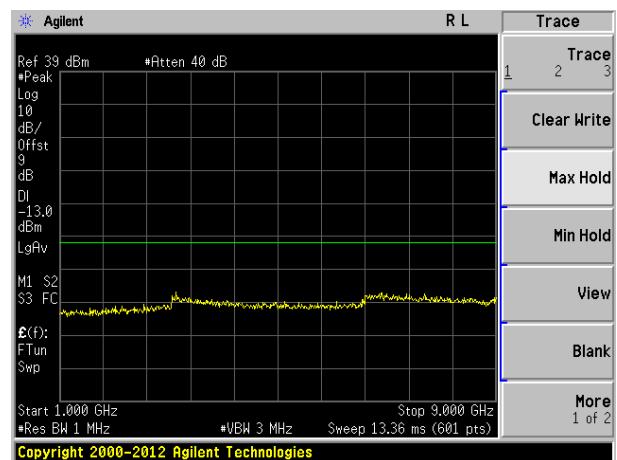


Copyright 2000-2012 Agilent Technologies


GSM 850MHz Highest channel

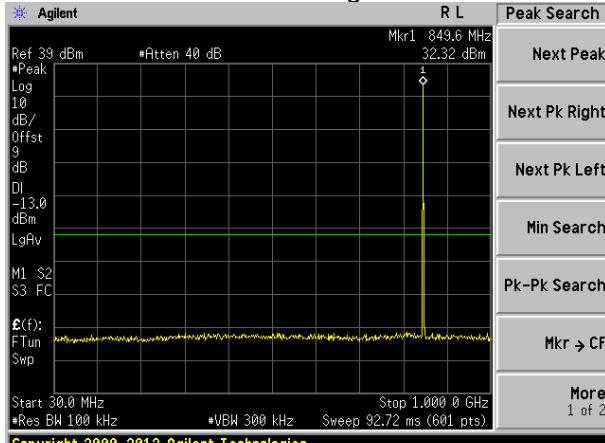




GSM 1900MHz Lowest channel

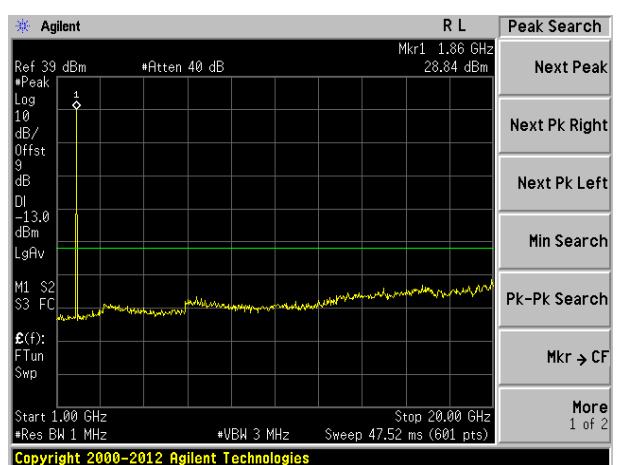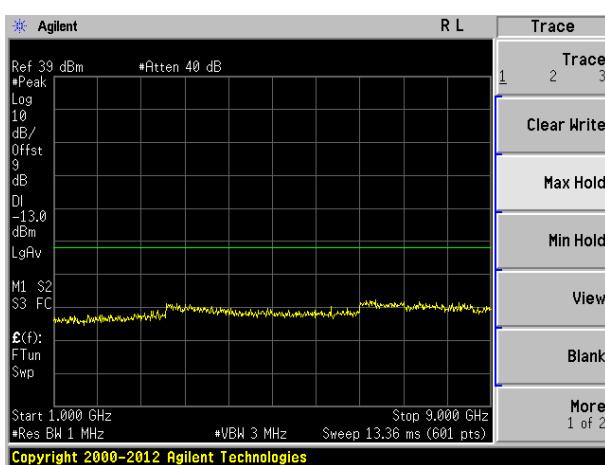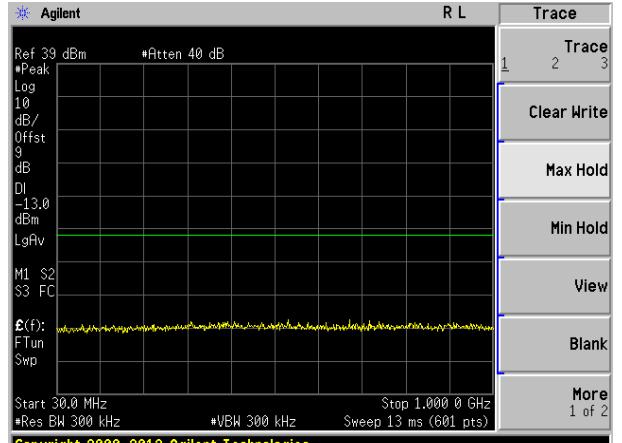


GSM 1900MHz Middle channel

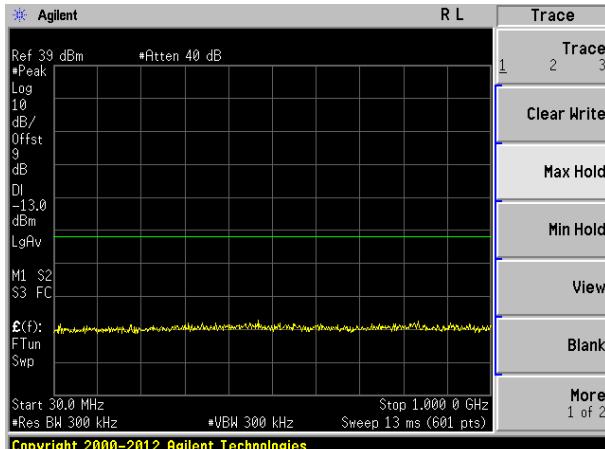




GSM 1900MHz Highest channel

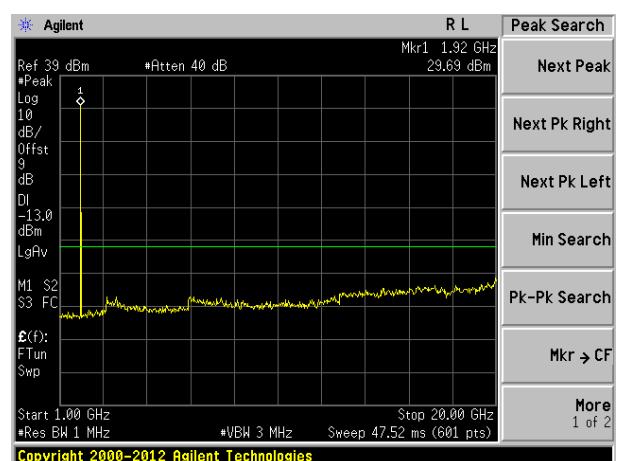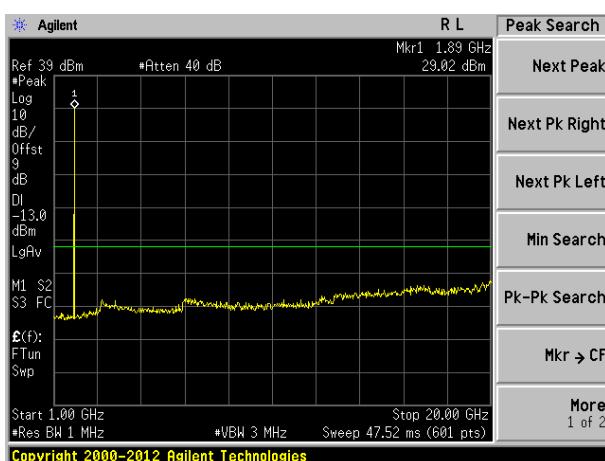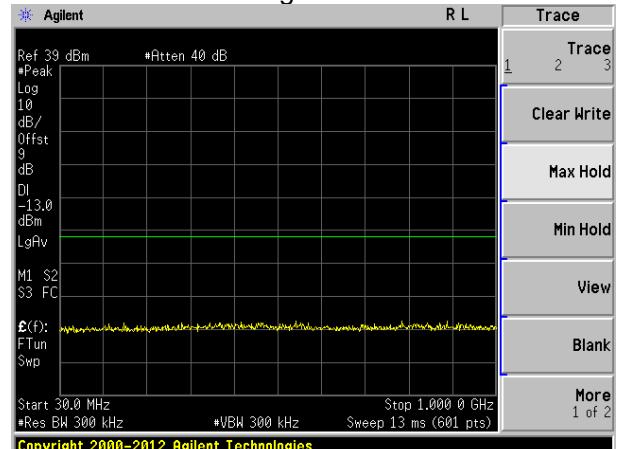



WCDMA Band II (RMC 12.2Kbps link)
Lowest channel

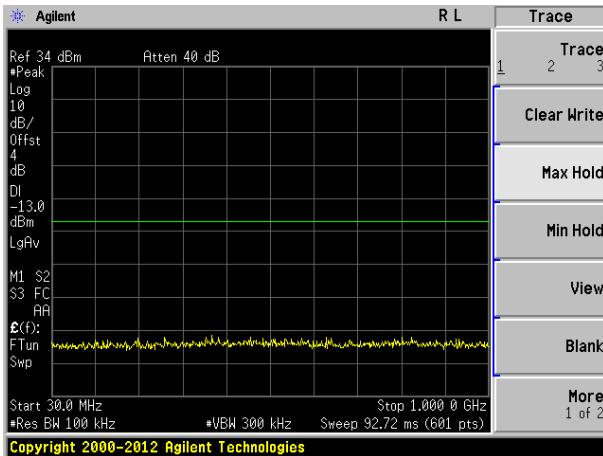

WCDMA Band II (RMC 12.2Kbps link)
Middle channel

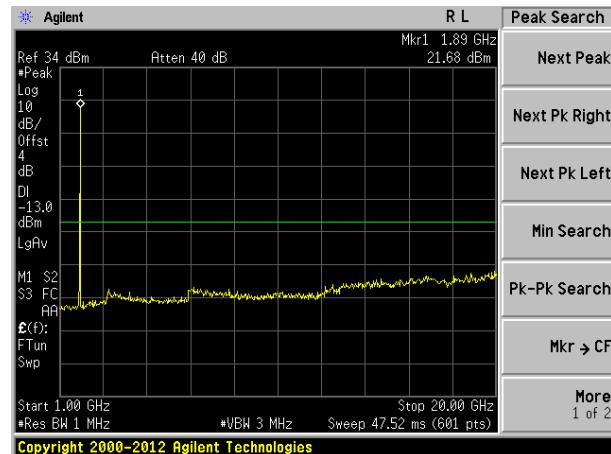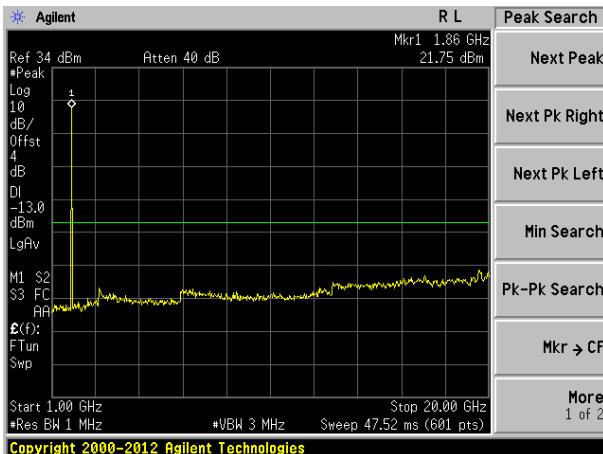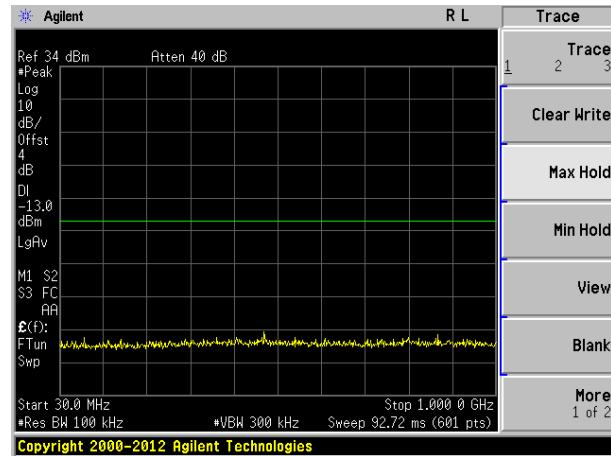

WCDMA Band II (RMC 12.2Kbps link)
Highest channel

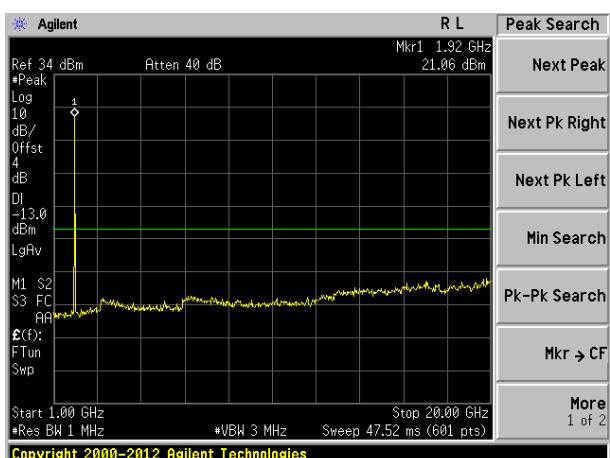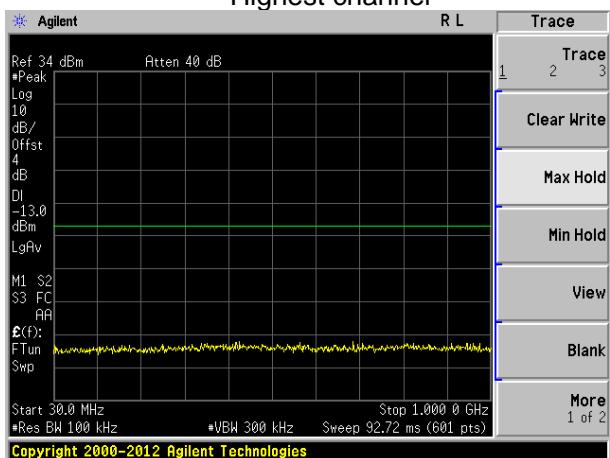


5.6. Conducted Out of Band Emissions

5.6.1. Limit

According to FCC section 22.917(b) and FCC section 24.238(b), 27.53(g)(h) in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth (26dB emission bandwidth) of the fundamental emission of the transmitter may be employed.

5.6.2. Test Setup

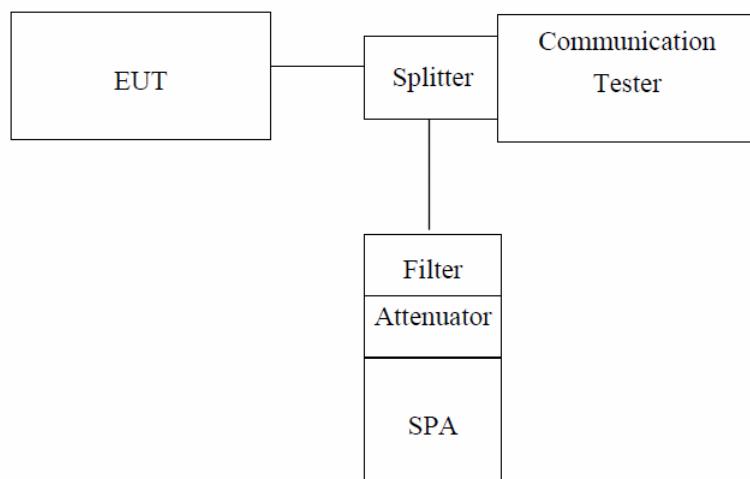

Note: Measurement setup for testing on Antenna connector

5.6.3. Measurement Procedure


The EUT, which is powered by the adapter, is coupled to the Spectrum Analyzer and the System Simulator with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the System Simulator to operate at the maximum output power i.e. Power Control Level (PCL) = 5 and Power Class = 4. A call is established between the EUT and the System Simulator.

5.6.4. Test Result


The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the out of band emissions.

Test plot as follows:


GSM 850MHz Lowest channel

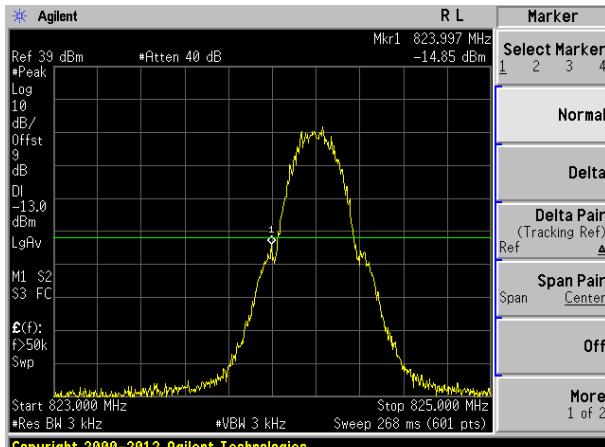




GSM 1900MHz Lowest channel

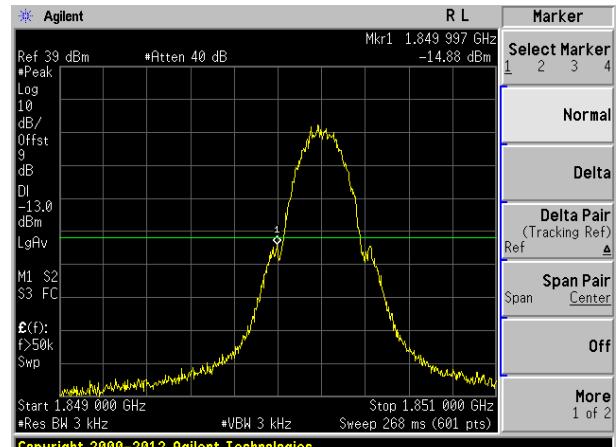

GSM 850MHz Highest channel

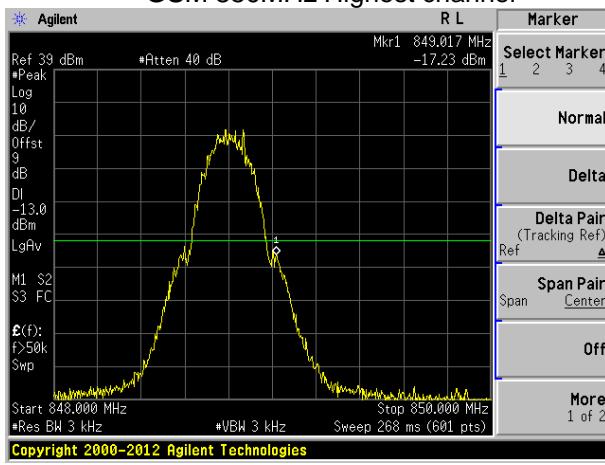

GSM 1900MHz Highest channel

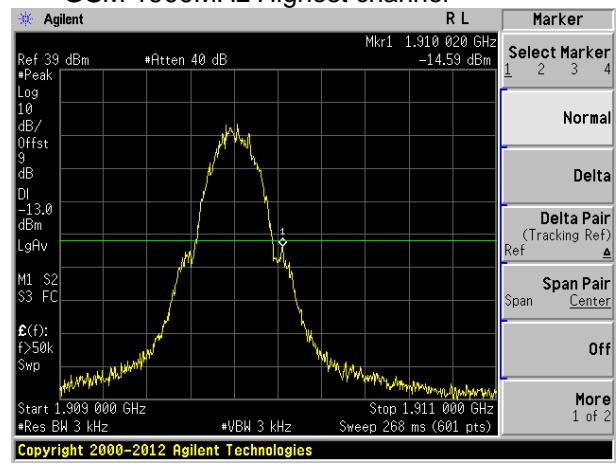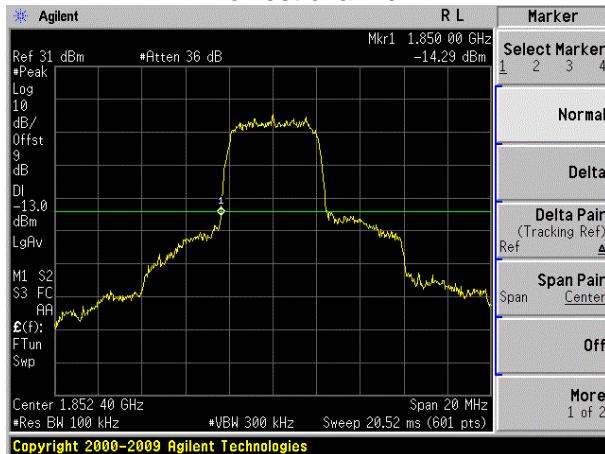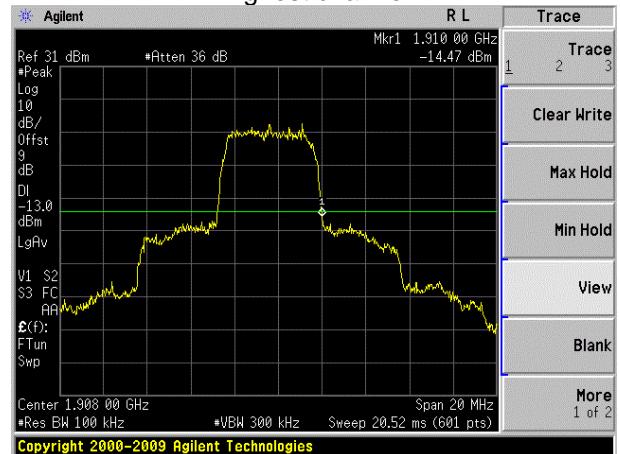
WCDMA Band II (RMC 12.2Kbps link)
Lowest channelWCDMA Band II (RMC 12.2Kbps link)
Highest channel

5.7. Transmitter Radiated Power (EIRP/ERP)

5.7.1. Limit

According to FCC section 22.913, the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7Watts, and FCC section 24.232, the broadband PCS mobile station is limited to 2 Watts e.i.r.p. peak power.

5.7.2. Test Setup

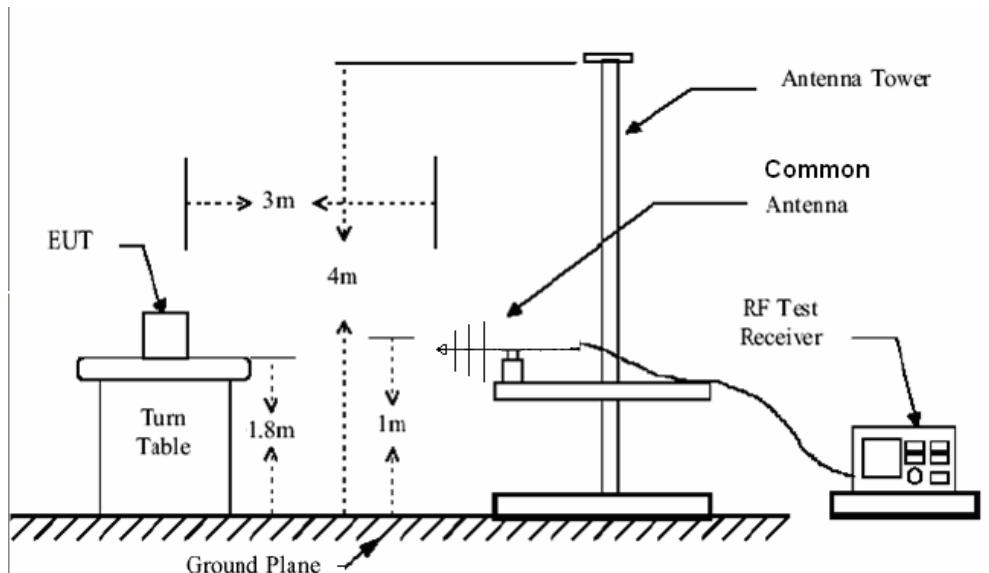

5.7.3. Measurement Procedure

The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. all test in Full-Anechoic Chamber.

During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.

ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated as follows:

EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:

$$\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}$$

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}$$

5.7.4. Test Result

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850 (GSM link)	Lowest	H	V	33.13	38.45	Pass
			H	30.14		
		E1	V	24.91		
			H	30.57		
		E2	V	24.23		
			H	28.45		
	Middle	H	V	33.46	38.45	Pass
			H	30.60		
		E1	V	25.48		
			H	31.18		
		E2	V	26.04		
			H	29.18		
	Highest	H	V	33.85	38.45	Pass
			H	30.22		
		E1	V	25.29		
			H	29.94		
		E2	V	23.84		
			H	29.35		

EUT mode	Channel	EUT Pol.	Antenna Pol.	ERP(dBm)	Limit (dBm)	Result
GSM850 (EGPRS 8 link)	Lowest	H	V	27.39	38.45	Pass
			H	24.31		
		E1	V	18.90		
			H	24.75		
		E2	V	18.20		
			H	22.56		
	Middle	H	V	27.53	38.45	Pass
			H	24.57		
		E1	V	19.29		
			H	25.18		
		E2	V	19.87		
			H	23.11		
	Highest	H	V	27.75	38.45	Pass
			H	24.00		
		E1	V	18.91		
			H	23.71		
		E2	V	17.42		
			H	23.11		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP (dBm)	Limit (dBm)	Result
PCS1900 (GSM link)	Lowest	H	V	29.27	33.01	Pass
			H	26.59		
		E1	V	21.90		
			H	26.98		
		E2	V	21.29		
			H	25.07		
	Middle	H	V	29.62	33.01	Pass
			H	27.05		
		E1	V	22.47		
			H	27.58		
		E2	V	22.97		
			H	25.78		
	Highest	H	V	30.07	33.01	Pass
			H	26.81		
		E1	V	22.40		
			H	26.56		
		E2	V	21.10		
			H	26.04		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP (dBm)	Limit (dBm)	Result
PCS1900 (EGPRS 8 link)	Lowest	H	V	24.95	33.01	Pass
			H	21.74		
		E1	V	16.11		
			H	22.20		
		E2	V	15.38		
			H	19.92		
	Middle	H	V	25.27	33.01	Pass
			H	22.19		
		E1	V	16.70		
			H	22.82		
		E2	V	17.29		
			H	20.67		
	Highest	H	V	25.64	33.01	Pass
			H	21.73		
		E1	V	16.44		
			H	21.44		
		E2	V	14.88		
			H	20.81		

EUT mode	Channel	EUT Pol.	Antenna Pol.	EIRP(dBm)	Limit (dBm)	Result
WCDMA Band II	Lowest	H	V	25.38	33.01	Pass
			H	23.47		
		E1	V	20.12		
			H	23.74		
		E2	V	19.69		
			H	22.39		
	Middle	H	V	25.73	33.01	Pass
			H	23.90		
		E1	V	20.63		
			H	24.27		
		E2	V	20.98		
			H	22.99		
	Highest	H	V	24.59	33.01	Pass
			H	22.27		
		E1	V	19.11		
			H	22.09		
		E2	V	18.19		
			H	21.71		


5.8. Radiated Out of Band Emissions

5.8.1. Limit

According to FCC section 22.917(a) and section 24.238(a), 27.53(g) the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43+10\log(P)$ dB. This calculated to be -13dBm.

The spurious emission with frequency band 1900 according to FCC section 2.1057.

5.8.2. Test Setup

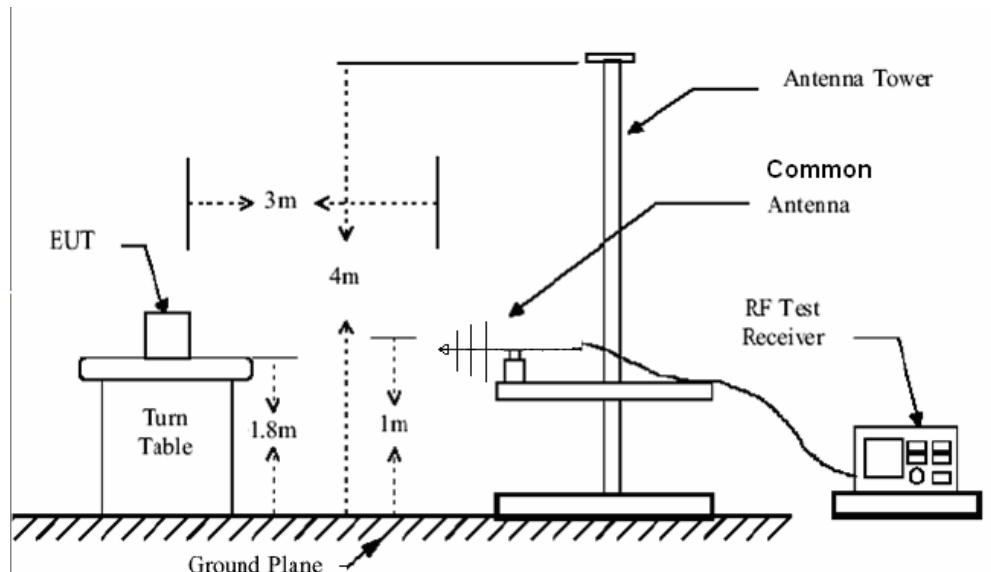

5.8.3. Measurement Procedure

The EUT was placed on a non-conductive, The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. all test in Full-Anechoic Chamber.

The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.

The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.

$$\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain(dBi)} - \text{Cable Loss (dB)}$$

Note: Measurement Uncertainty: ± 3.6 dB.

Band	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level(dBm)		
GSM 850 Lowest	68.75	Vertical	-73.17	-13	PASS
	1648.40	Vertical	-23.33		
	2472.60	Vertical	-32.06		
	3296.80	Vertical	-39.28		
	4121.00	Vertical	-45.06		
	4945.20	Vertical	-37.34		
	87.29	Horizontal	-74.43		
	2472.60	Horizontal	-25.62		
	3296.80	Horizontal	-31.51		
	4121.00	Horizontal	-42.62		
	4945.20	Horizontal	-47.47		
	5769.40	Horizontal	-39.26		

Band	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level(dBm)		
GSM 850 Middle	128.06	Vertical	-73.28	-13	PASS
	1673.20	Vertical	-23.61		
	2509.80	Vertical	-26.84		
	3346.40	Vertical	-38.46		
	4183.00	Vertical	-40.35		
	5019.60	Vertical	-38.86		
	183.29	Horizontal	-74.05		
	1673.20	Horizontal	-22.29		
	2509.80	Horizontal	-28.43		
	3346.40	Horizontal	-41.66		
	4183.00	Horizontal	-43.74		
	5019.60	Horizontal	-38.59		

Band	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level(dBm)		
GSM 850 Highest	58.26	Vertical	-73.09	-13	PASS
	1697.60	Vertical	-21.36		
	2546.40	Vertical	-24.37		
	3395.20	Vertical	-31.93		
	4244.00	Vertical	-38.37		
	5092.80	Vertical	-43.64		
	74.15	Horizontal	-74.56		
	1697.60	Horizontal	-20.87		
	2546.40	Horizontal	-26.55		
	3395.20	Horizontal	-34.69		
	4244.00	Horizontal	-40.04		
	5092.80	Horizontal	-45.67		

Band	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level(dBm)		
PCS1900 Lowest	39.86	Vertical	-72.11	-13	PASS
	3700.40	Vertical	-41.34		
	5550.60	Vertical	-41.12		
	7400.80	Vertical	-34.06		
	9251.00	Vertical	-38.26		
	11101.20	Vertical	-37.40		
	267.53	Horizontal	-72.16		
	3700.40	Horizontal	-43.42		
	5550.60	Horizontal	-42.24		
	7400.80	Horizontal	-36.46		
	9251.00	Horizontal	-41.31		
	11101.20	Horizontal	-39.57		

Band	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level(dBm)		
PCS1900 Middle	49.68	Vertical	-70.41	-13	PASS
	3760.00	Vertical	-42.52		
	5640.00	Vertical	-42.33		
	7520.00	Vertical	-37.03		
	9400.00	Vertical	-37.21		
	11280.00	Vertical	-38.36		
	574.11	Horizontal	-72.61		
	3760.00	Horizontal	-41.24		
	5640.00	Horizontal	-41.63		
	7520.00	Horizontal	-33.87		
	9400.00	Horizontal	-37.18		
	11280.00	Horizontal	-36.59		

Band	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level(dBm)		
PCS1900 Highest	39.64	Vertical	-71.31	-13	PASS
	3819.60	Vertical	-42.32		
	5729.40	Vertical	-36.43		
	7639.20	Vertical	-32.94		
	9549.00	Vertical	-38.65		
	11458.80	Vertical	-38.66		
	86.76	Horizontal	-71.67		
	3819.60	Horizontal	-40.26		
	5729.40	Horizontal	-35.36		
	7639.20	Horizontal	-31.74		
	9549.00	Horizontal	-36.45		
	11458.80	Horizontal	-36.61		

Band	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level(dBm)		
WCDMA Band II Lowest	78.65	Vertical	-73.25	-13	PASS
	3704.80	Vertical	-23.31		
	5557.20	Vertical	-24.26		
	7409.60	Vertical	-31.32		
	9262.00	Vertical	-38.21		
	11114.40	Vertical	-43.10		
	112.04	Horizontal	-74.06		
	5557.20	Horizontal	-20.71		
	7409.60	Horizontal	-26.44		
	9262.00	Horizontal	-34.22		
	11114.40	Horizontal	-40.43		
	3704.80	Horizontal	-45.61		

Band	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level(dBm)		
WCDMA Band II Middle	69.78	Vertical	-73.21	-13	PASS
	3760.00	Vertical	-22.46		
	5640.00	Vertical	-24.21		
	7520.00	Vertical	-31.26		
	9400.00	Vertical	-38.01		
	11280.00	Vertical	-43.32		
	324.43	Horizontal	-74.93		
	3760.00	Horizontal	-20.22		
	5640.00	Horizontal	-26.44		
	7520.00	Horizontal	-34.32		
	9400.00	Horizontal	-40.66		
	11280.00	Horizontal	-45.21		

Band	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level(dBm)		
WCDMA Band II Highest	39.78	Vertical	-73.21	-13	PASS
	3819.60	Vertical	-21.77		
	5729.40	Vertical	-26.82		
	7639.20	Vertical	-31.56		
	9549.00	Vertical	-38.71		
	11458.80	Vertical	-43.92		
	425.36	Horizontal	-74.37		
	3819.60	Horizontal	-20.63		
	5729.40	Horizontal	-26.21		
	7639.20	Horizontal	-34.34		
	9549.00	Horizontal	-40.59		
	11458.80	Horizontal	-45.42		

6. PHOTOGRAPHS OF TEST SET-UP

6.1. Set-up for Conducted Emission Test



6.2. Set-up for Radiated Emission Test



7. PHOTOGRAPHS OF THE EUT

Reference to the test report No. 13KWE11102612R

END.