

TEST REPORT

FCC/ISED DTS Test for 1080i
Certification

APPLICANT

Ericsson-LG Enterprise Co., Ltd.

REPORT NO.

HCT-RF-2104-FI004

DATE OF ISSUE

April 1, 2021

Tested by
Sang Hoon Lee



Technical Manager
Jong Seok Lee



HCT CO., LTD.
BongJae Huh
BongJae Huh / CEO

HCT CO., LTD.

74, Seoicheon-ro 578beon-gil, Majang-myeon,
Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 F ax. +82 31 645 6401

**HCT Co., Ltd.**

74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383 KOREA
Tel. +82 31 634 6300 Fax. +82 31 645 6401

TEST REPORT FCC / ISED DTS Test for 1080i	REPORT NO. HCT-RF-2104-FI004
	DATE OF ISSUE April 01, 2021
	Additional Model VIP-1080i-00

Applicant	Ericsson-LG Enterprise Co., Ltd. LG Gasan digital Center 11F, Gasan digital 1-ro 189, Geumchun-gu, Seoul 08503, Korea
Eut Type Model Name	IP Phone 1080i
FCC ID IC	2ABGA1080I 11597A-1080I
Max. RF Output Power	802.11b : 21.00 dBm / 802.11g : 22.92 dBm / 802.11n(HT20) : 23.66 dBm
Modulation type	CCK/DSSS/OFDM
FCC Classification	Digital Transmission System(DTS)
FCC Rule Part(s) ISED Rule Part(s)	Part 15.247 RSS-247 Issue 2 (February 2017) RSS-Gen Issue 5_Amendment 2 (February 2021)

The result shown in this test report refer only to the sample(s) tested unless otherwise stated.

This test results were applied only to the test methods required by the standard.

REVISION HISTORY

The revision history for this test report is shown in table.

Revision No.	Date of Issue	Description
0	April 01, 2021	Initial Release

Engineering Statement:

The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC / ISED Rules under normal use and maintenance

* The report shall not be reproduced except in full(only partly) without approval of the laboratory.

CONTENTS

1. EUT DESCRIPTION	5
2. TEST METHODOLOGY	6
EUT CONFIGURATION	6
EUT EXERCISE	6
GENERAL TEST PROCEDURES	6
DESCRIPTION OF TEST MODES	7
3. INSTRUMENT CALIBRATION	7
4. FACILITIES AND ACCREDITATIONS	7
FACILITIES	7
EQUIPMENT	7
5. ANTENNA REQUIREMENTS	8
6. MEASUREMENT UNCERTAINTY	8
7. DESCRIPTION OF TESTS	9
8. SUMMARY TEST OF RESULTS	29
9. TEST RESULT	31
9.1 DUTY CYCLE	31
9.2 6dB BANDWIDTH & 99 % BANDWIDTH	34
9.3 OUTPUT POWER	40
9.4 POWER SPECTRAL DENSITY	46
9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS	49
9.6 RADIATED SPURIOUS EMISSIONS	60
9.7 RADIATED RESTRICTED BAND EDGES	68
9.8 RECEIVER SPURIOUS EMISSIONS	74
9.9 POWERLINE CONDUCTED EMISSIONS	75
10. LIST OF TEST EQUIPMENT	79
11. ANNEX A_ TEST SETUP PHOTO	81

1. EUT DESCRIPTION

Model	1080i
Additional Model	VIP-1080i-00
EUT Type	IP Phone
Power Supply	DC 48.0 [V]
Frequency Range	2 412 MHz ~ 2 462 MHz
Max. RF Output Power	Peak Power 802.11b : 21.00 dBm 802.11g : 22.92 dBm 802.11n(HT20) : 23.66 dBm Average Power 802.11b : 15.14 dBm 802.11g : 15.17 dBm 802.11n(HT20) : 15.65 dBm
Modulation Type	DSSS/CCK : 802.11b OFDM : 802.11g, 802.11n
Number of Channels	11 Channels
Antenna Specification	Antenna type: Pattern Antenna Peak Gain : 0.73 dBi
Date(s) of Tests	March 15, 2021 ~ March 26, 2021
PMN (Product Marketing Number)	iPECS Videophone
HVIN (Hardware Version Identification Number)	1080i
FVIN (Firmware Version Identification Number)	Android 10.0
HMN (Host Marketing Name)	N/A
EUT serial numbers	Radiated : 1080i Conducted : 1080i

2. TEST METHODOLOGY

FCC KDB 558074 D01 15.247 Meas Guidance v05r02 dated April 02, 2019 entitled “guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices and the measurement procedure described in ANSI C63.10(Version : 2013) ‘the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices’.

EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

EUT EXERCISE

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C. / RSS-Gen issue 5, RSS-247 issue 2.

GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2 of ANSI C63.10. (Version :2013) Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz. Above 1GHz with 1.5m using absorbers between the EUT and receive antenna. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3 m away from the receiving antenna, which varied from 1 m to 4 m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 6.6.5 of ANSI C63.10. (Version: 2013)

DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

3. INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment's, which is traceable to recognized national standards.

Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5 (Version : 2017).

4. FACILITIES AND ACCREDITATIONS

FACILITIES

The SAC(Semi-Anechoic Chamber) and conducted measurement facility used to collect the radiated data are located at the 74, Seoicheon-ro 578beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do, 17383, Rep. of KOREA. The site is constructed in conformance with the requirements of A NSI C63.4. (Version :2014) and CISPR Publication 22.

Detailed description of test facility was submitted to the Commission and accepted dated April 02, 2018 (Registration Number: KR0032).

For ISED, test facility was accepted dated February 14, 2019 (CAB identifier: KR0032).

EQUIPMENT

Radiated emissions are measured with one or more of the following types of Linearly polarized antennas: tuned dipole, bi-conical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers. Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5. ANTENNA REQUIREMENTS

According to FCC 47 CFR § 15.203:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- (1) The antennas of this E.U.T are permanently attached.
- (2) The E.U.T Complies with the requirement of § 15.203

6. MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of
ANSI C63.10-2013.

All measurement uncertainty values are shown with a coverage factor of $k=2$ to indicate a 95 % level of confidence.


The measurement data shown herein meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Parameter	Expanded Uncertainty (\pm dB)
Conducted Disturbance (150 kHz ~ 30 MHz)	1.82
Radiated Disturbance (9 kHz ~ 30 MHz)	3.40
Radiated Disturbance (30 MHz ~ 1 GHz)	4.80
Radiated Disturbance (1 GHz ~ 18 GHz)	5.70
Radiated Disturbance (18 GHz ~ 40 GHz)	5.05

7. DESCRIPTION OF TESTS

7.1. Duty Cycle

Test Configuration

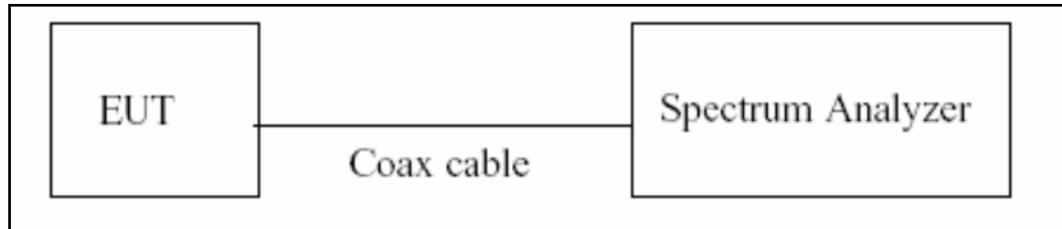

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to the zero-span measurement method.

The largest available value of RBW is 8 MHz and VBW is 50 MHz.

The zero-span method of measuring duty cycle shall not be used if $T \leq 6.25$ microseconds. ($50/6.25 = 8$)

The zero-span method was used because all measured T data are > 6.25 microseconds and both RBW and VBW are $> 50/T$.


1. RBW = 8 MHz (the largest available value)
2. VBW = 8 MHz (\geq RBW)
3. SPAN = 0 Hz
4. Detector = Peak
5. Number of points in sweep > 100
6. Trace mode = Clear write
7. Measure T_{total} and T_{on}
8. Calculate Duty Cycle = T_{on}/T_{total} and Duty Cycle Factor = $10\log(1/\text{Duty Cycle})$

7.2. 6dB Bandwidth & 99 % Bandwidth

Limit

The minimum permissible 6 dB bandwidth is 500 kHz.

Test Configuration

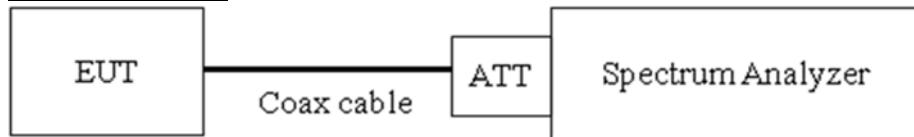

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

The Spectrum Analyzer is set to (Procedure 11.8.1 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Detector = Peak
- 4) Trace mode = max hold
- 5) Sweep = auto couple
- 6) Allow the trace to stabilize
- 7) We tested 6 dB bandwidth using the automatic bandwidth measurement capability of a spectrum analyzer. X dB is set 6 dB.

Test Procedure (99 % Bandwidth for ISED)

The transmitter output is connected to the spectrum analyzer.

RBW = 1% ~ 5% of the occupied bandwidth

VBW \approx 3 x RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

Allow the trace to stabilize


Note : We tested OBW using the automatic bandwidth measurement capability of a spectrum analyzer.

7.3. Output Power

Limit

The maximum permissible conducted output power is 1 Watt.

Test Configuration

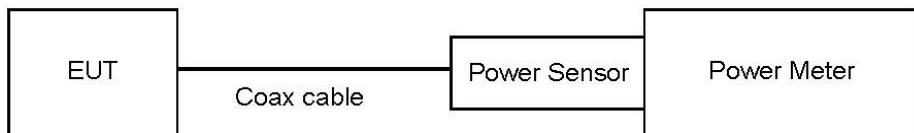

Test Procedure

The transmitter output is connected to the Power Meter.

- Peak Power (Procedure 11.9.1.3 in ANSI 63.10-2013)
 - : Measure the peak power of the transmitter.

- Average Power (Procedure 11.9.2.3 in ANSI 63.10-2013)
 - 1) Measure the duty cycle.
 - 2) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
 - 3) Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times.

Sample Calculation


- Conducted Output Power(Peak) = Reading Value + ATT loss + Cable loss
- Conducted Output Power(Average) = Reading Value + ATT loss + Cable loss + Duty Cycle Factor

7.4. Power Spectral Density

Limit

The transmitter power density average over 1-second interval shall not be greater than 8dBm in any 3kHz BW.

Test Configuration

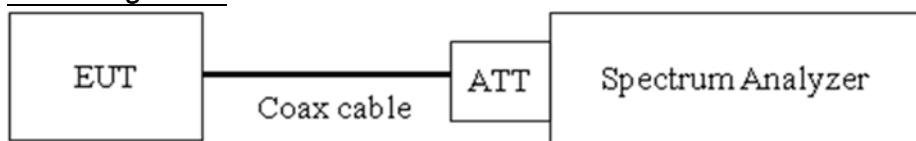

Test Procedure

The transmitter output is connected to the Spectrum Analyzer.

We tested according to Procedure 8.4 in KDB 558074 v05r02, Procedure 11.10 in ANSI 63.10-2013.

The spectrum analyzer is set to :

- 1) Set analyzer center frequency to DTS channel center frequency.
- 2) Span = 1.5 times the DTS channel bandwidth.
- 3) RBW = $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- 4) VBW $\geq 3 \times \text{RBW}$.
- 5) Sweep = auto couple
- 6) Detector = peak
- 7) Trace Mode = max hold
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Sample Calculation

- Power Spectral Density = Reading Value + ATT loss + Cable loss


7.5. Conducted Band Edge(Out of Band Emissions) & Conducted Spurious Emissions

Limit

The maximum conducted (Peak) output power was used to demonstrate compliance, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

[Conducted > 30 dBc]

Test Configuration

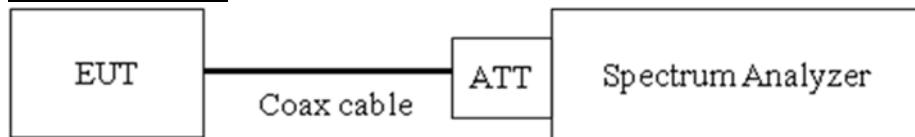

Test Procedure

The transmitter output is connected to the spectrum analyzer.

(Procedure 11.11 in ANSI 63.10-2013)

- 1) RBW = 100 kHz
- 2) VBW \geq 3 x RBW
- 3) Set span to encompass the spectrum to be examined
- 4) Detector = Peak
- 5) Trace Mode = max hold
- 6) Sweep time = auto couple
- 7) Ensure that the number of measurement points \geq 2 x Span/RBW
- 8) Allow trace to fully stabilize.
- 9) Use peak marker function to determine the maximum amplitude level.

Measurements are made over the 30 MHz to 25 GHz range with the transmitter set to the lowest, middle, and highest channels.

Factors for frequency

Freq(MHz)	Factor(dB)
30	10.19
100	10.27
200	10.33
300	10.40
400	10.46
500	10.58
600	10.61
700	10.68
800	10.71
900	10.83
1000	10.86
2000	11.07
2400	11.17
2480	11.22
2500	11.32
3000	11.47
4000	11.67
5000	11.85
5150	11.87
5850	12.02
6000	12.13
7000	12.23
8000	12.31
9000	12.40
10000	12.53
11000	12.60
12000	12.75
13000	12.88
14000	12.88
15000	12.93
16000	13.02
17000	13.12
18000	13.20
19000	13.25
20000	13.34
21000	13.56
22000	13.54
23000	13.79
24000	13.69
25000	13.75
26000	13.85

Note : 1. 2400 ~ 2500 MHz is fundamental frequency range.

2. Factor = Attenuator loss(10 dB) + Cable loss(1ea) + EUT Cable(For Conducted)

7.6. Radiated Test**FCC**

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30	30	30

ISED


Frequency (MHz)	Field Strength (uA/m)	Measurement Distance (m)
0.009 – 0.490	6.37/F(kHz)	300
0.490 – 1.705	63.7/F(kHz)	30
1.705 – 30	0.08	30

FCC&ISED


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Test Configuration


Below 30 MHz

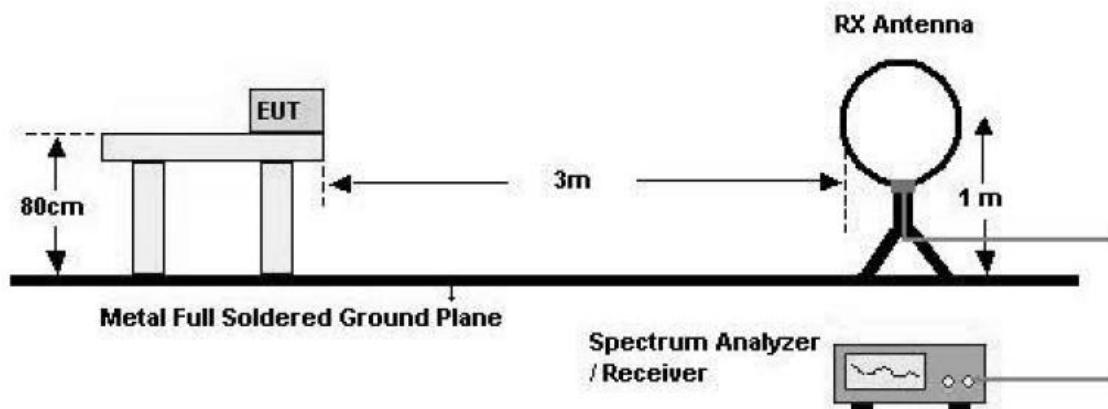

30 MHz - 1 GHz

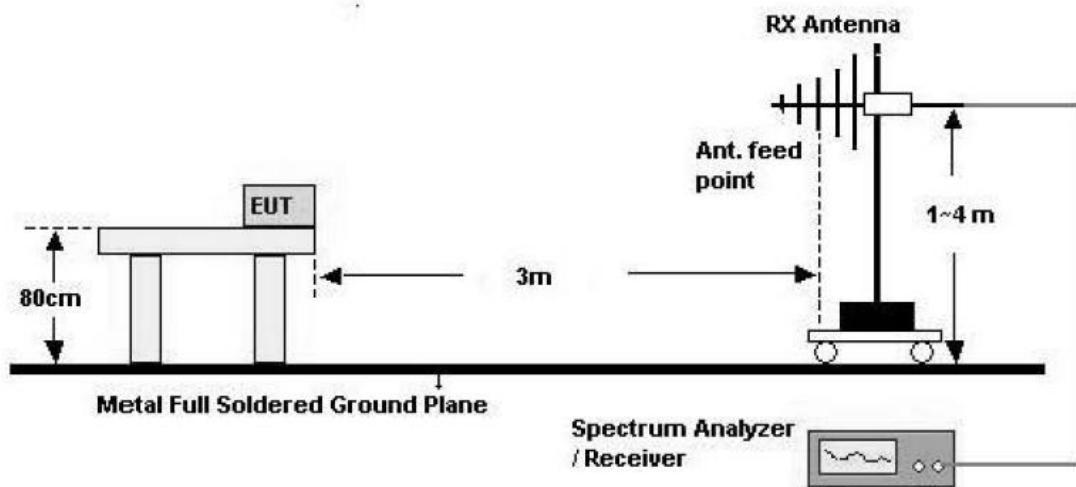

Above 1 GHz

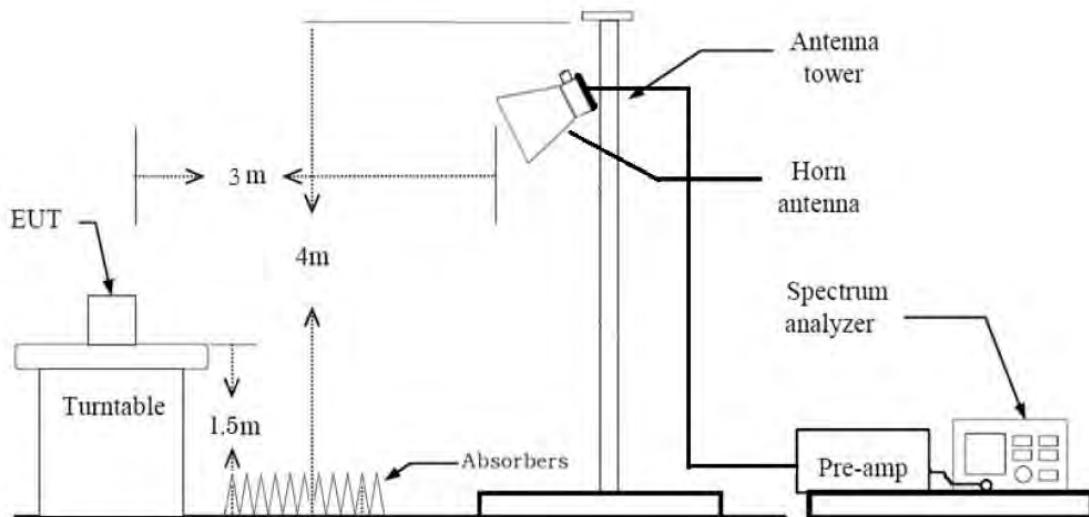Test Procedure of Radiated spurious emissions(Below 30 MHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The loop antenna was placed at a location 3m from the EUT
3. The EUT is placed on a turntable, which is 0.8m above ground plane.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization and Parallel to the ground plane in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Distance Correction Factor($0.009 \text{ MHz} - 0.490 \text{ MHz}$) = $40\log(3 \text{ m}/300 \text{ m}) = -80 \text{ dB}$
Measurement Distance : 3 m
7. Distance Correction Factor($0.490 \text{ MHz} - 30 \text{ MHz}$) = $40\log(3 \text{ m}/30 \text{ m}) = -40 \text{ dB}$
Measurement Distance : 3 m
8. Spectrum Setting
 - Frequency Range = 9 kHz ~ 30 MHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 9 kHz
 - VBW $\geq 3 \times \text{RBW}$
9. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) + Distance Factor(D.F)
10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered

that's already beyond the background noise floor.

KDB 414788 OFS and Chamber Correlation Justification

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.

OFS and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

Test Procedure of Radiated spurious emissions(Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

6. Spectrum Setting**(1) Measurement Type(Peak):**

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 100 kHz
- VBW \geq 3 x RBW

(2) Measurement Type(Quasi-peak):

- Measured Frequency Range : 30 MHz – 1 GHz
- Detector = Quasi-Peak
- RBW = 120 kHz

※In general, (1) is used mainly

7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)
8. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting (Method 8.6 in KDB 558074 v05r02, Procedure 11.12 in ANSI 63.10-2013)

(1) Measurement Type(Peak):

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

(2) Measurement Type(Average): Duty cycle \geq 98%

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $<$ 98%, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin $>$ 20 dB from the applicable limit) and considered that's already beyond the background noise floor.10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

$$= \text{Reading Value} + \text{Antenna Factor(A.F)} + \text{Cable Loss(C.L)} - \text{Amp Gain(G)} + \text{Distance Factor(D.F)}$$

Total(Measurement Type : Average, Duty cycle $\geq 98\%$)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle $< 98\%$)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

Test Procedure of Radiated Restricted Band Edge

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.

8. Spectrum Setting

(1) Measurement Type(Peak):

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW

(2) Measurement Type(Average): Duty cycle $\geq 98\%$,

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz
- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW $\geq 3 \times$ RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).

(3) Measurement Type(Average): Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

- Measured Frequency Range : 2310 MHz ~ 2390 MHz/ 2483.5 MHz ~ 2500 MHz

- Detector = RMS
- Averaging type = power (*i.e.*, RMS)
- RBW = 1 MHz
- VBW \geq 3 x RBW
- Sweep time = auto.
- Trace mode = average (at least 100 traces).
- Correction factor shall be added to the measurement results prior to comparing to the emission limit in order to compute the emission level that would have been measured had the test been performed at 100 percent duty cycle.
- Duty Cycle Factor (dB) : Please refer to the please refer to section 9.1.

9. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.

10. Distance extrapolation factor = $20\log(\text{test distance} / \text{specific distance})$ (dB)

11. Total(Measurement Type : Peak)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle \geq 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)

Total(Measurement Type : Average, Duty cycle < 98%)

= Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G) + Distance Factor(D.F)
+ Duty Cycle Factor

7.7. AC Power line Conducted Emissions

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56 ^(a)	56 to 46 ^(a)
0.50 to 5	56	46
5 to 30	60	50

^(a)Decreases with the logarithm of the frequency.

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

See test photographs attached in Annex A for the actual connections between EUT and support equipment.

Test Procedure

1. The EUT is placed on a wooden table 80 cm above the reference ground plane.
2. The EUT is connected via LISN to a test power supply.
3. The measurement results are obtained as described below:
4. Detectors : Quasi Peak and Average Detector.

Sample Calculation

Quasi-peak(Final Result) = Reading Value + Correction Factor

7.8. Receiver Spurious Emissions

Limit


Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

Measurements for compliance with the limits in table may be performed at distances other than 3 metres.

Test Configuration


30 MHz - 1 GHz

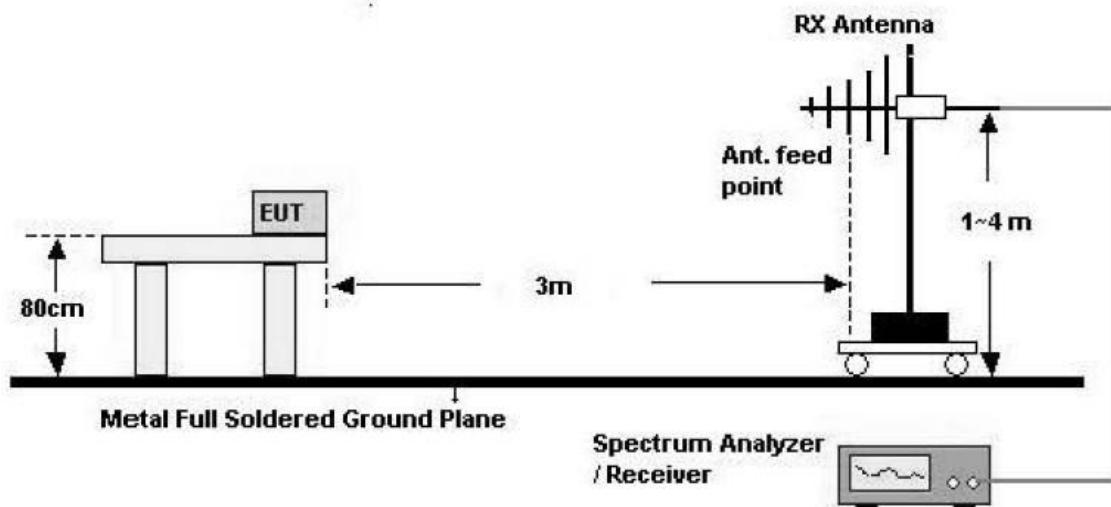

Test Procedure of Receiver Spurious Emissions (Below 1GHz)

1. The EUT was placed on a non-conductive table located on semi-anechoic chamber.
2. The EUT is placed on a turntable, which is 0.8m above ground plane.
3. The Hybrid antenna was placed at a location 3m from the EUT, which is varied from 1m to 4m to find out the highest emissions.
4. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
5. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
6. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 100 kHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Quasi-peak):
 - Measured Frequency Range : 30 MHz – 1 GHz
 - Detector = Quasi-Peak
 - RBW = 120 kHz
7. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L)

Above 1 GHz

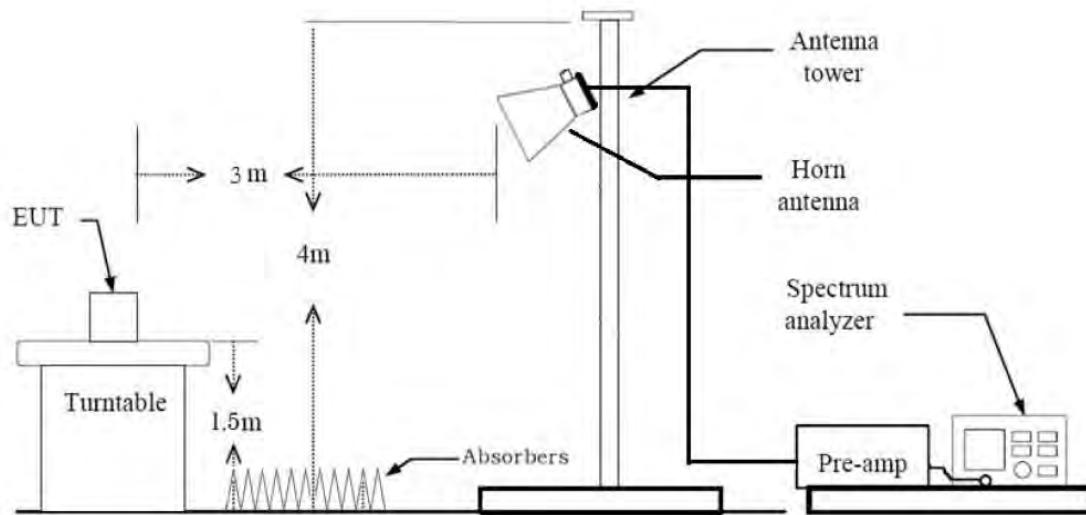

Test Procedure of Radiated spurious emissions (Above 1 GHz)

1. The EUT is placed on a turntable, which is 1.5 m above ground plane.
2. We have done x, y, z planes in EUT and horizontal and vertical polarization in detecting antenna.
3. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
4. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
6. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
7. The unit was tested with its standard battery.
8. Spectrum Setting
 - (1) Measurement Type(Peak):
 - Measured Frequency Range : 1 GHz – 25 GHz
 - Detector = Peak
 - Trace = Maxhold
 - RBW = 1 MHz
 - VBW \geq 3 x RBW
 - (2) Measurement Type(Average):
 - We performed using a reduced video BW method was done with the analyzer in linear mode

- Measured Frequency Range : 1 GHz – 25 GHz
- Detector = Peak
- Trace = Maxhold
- RBW = 1 MHz
- VBW \geq 3 x RBW

10. Measurement value only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin > 20 dB from the applicable limit) and considered that's already beyond the background noise floor.
11. Total = Reading Value + Antenna Factor(A.F) + Cable Loss(C.L) - Amp Gain(G)

7.9. Worst case configuration and mode

Radiated test

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone +Switching Power Supply
 - Worstcase : Stand alone +Switching Power Supply
2. EUT Axis
 - Radiated Spurious Emissions : X-V
 - Radiated Restricted Band Edge : X-V
3. Duty cycle factor applies only 802.11g/n(Duty cycle < 98%).
4. All data rate of operation were investigated and the test results are worst case in lowest datarate of each mode.
 - 802.11b : 1Mbps
 - 802.11g : 6Mbps
 - 802.11n_HT20 : MCS0
5. All position of loop antenna were investigated and the test result is a no critical peak found at all positions.
 - Position : Horizontal, Vertical, Parallel to the ground plane

AC Power line Conducted Emissions

1. All modes of operation were investigated and the worst case configuration results are reported.
 - Mode : Stand alone + Switching Power Supply + External accessories (Notebook)

Conducted test

1. The EUT was configured with data rate of highest power.

8. SUMMARY TEST OF RESULTS**FCC Part**

Test Description	FCC Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	§ 15.247(a)(2)	> 500 kHz		PASS
Conducted Maximum Output Power	§ 15.247(b)(3)	< 1 Watt		PASS
Power Spectral Density	§ 15.247(e)	< 8 dBm / 3 kHz Band	Conducted	PASS
Band Edge (Out of Band Emissions)	§ 15.247(d)	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	§ 15.207	cf. Section 7.7		PASS
Radiated Spurious Emissions	§ 15.247(d), 15.205, 15.209	cf. Section 7.6		PASS
Radiated Restricted Band Edge	§ 15.247(d), 15.205, 15.209	cf. Section 7.6	Radiated	PASS

ISED Part

Test Description	ISED Part Section(s)	Test Limit	Test Condition	Test Result
6 dB Bandwidth	RSS-247, 5.2	> 500 kHz	Conducted	PASS
99% Bandwidth	RSS-GEN, 6.7	N/A		PASS
Conducted Maximum Peak Output Power And e.i.r.p.	RSS-247, 5.4.	< 1 Watt <4 Watt(e.i.r.p.)		PASS
Power Spectral Density	RSS-247, 5.2	< 8 dBm / 3 kHz Band		PASS
Band Edge(Out of Band Emissions)	RSS-247, 5.5	Conducted > 20 dBc		PASS
AC Power line Conducted Emissions	RSS-GEN, 8.8	cf. Section 7.7		N/A (Note1)
Radiated Spurious Emissions	RSS-GEN, 8.9	cf. Section 7.6		PASS
Receiver Spurious Emissions	RSS-GEN, 7	cf. Section 7.8	Radiated	PASS
Radiated Restricted Band Edge	RSS-GEN, 8.10	cf. Section 7.6		PASS


9. TEST RESULT

9.1 DUTY CYCLE


Mode	Data Rate (Mbps)	T _{on} (ms)	T _{total} (ms)	Duty Cycle	Duty Cycle Factor (dB)
802.11b	1	8.407	8.452	0.995	0.023
	2	4.179	4.239	0.986	0.062
	5.5	1.591	1.625	0.979	0.092
	11	0.844	0.879	0.961	0.175
802.11g	6	1.397	1.440	0.970	0.134
	9	0.941	0.983	0.958	0.187
	12	0.707	0.751	0.942	0.257
	18	0.480	0.523	0.918	0.370
	24	0.364	0.407	0.893	0.493
	36	0.252	0.295	0.856	0.677
	48	0.192	0.235	0.817	0.876
	54	0.176	0.219	0.804	0.947
	6.5 (MCS0)	1.307	1.350	0.968	0.141
802.11n (HT20)	13 (MCS1)	0.672	0.714	0.940	0.267
	19.5 (MCS2)	0.459	0.502	0.914	0.389
	26 (MCS3)	0.356	0.399	0.892	0.498
	39 (MCS4)	0.249	0.292	0.852	0.696
	52 (MCS5)	0.196	0.239	0.819	0.866
	58.5 (MCS6)	0.180	0.223	0.808	0.924
	65 (MCS7)	0.164	0.207	0.793	1.007

■ Test Plots


Duty cycle plot (802.11b(1Mbps))

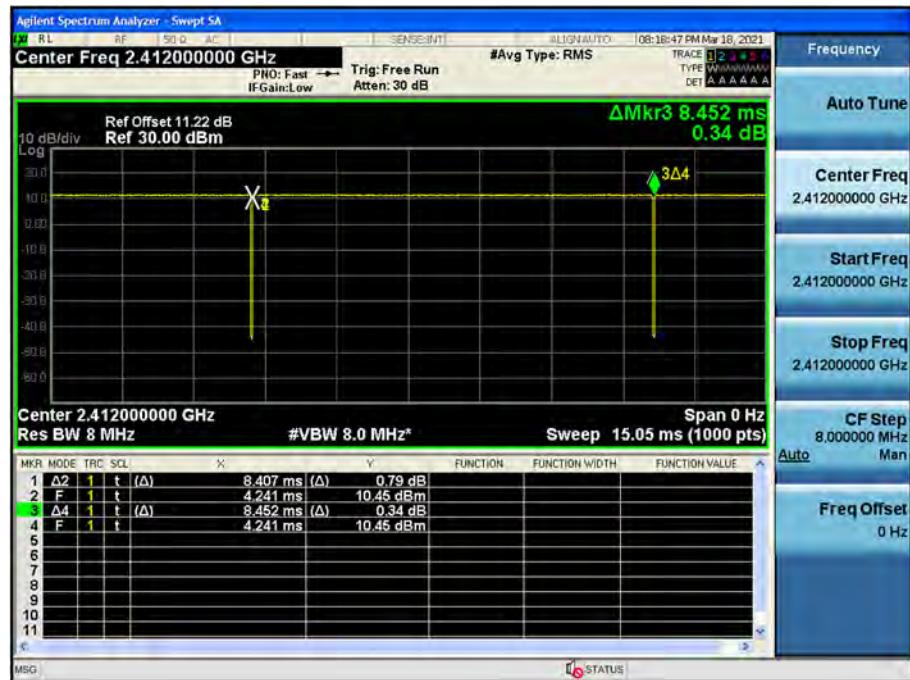

Duty cycle plot (802.11g(6Mbps))

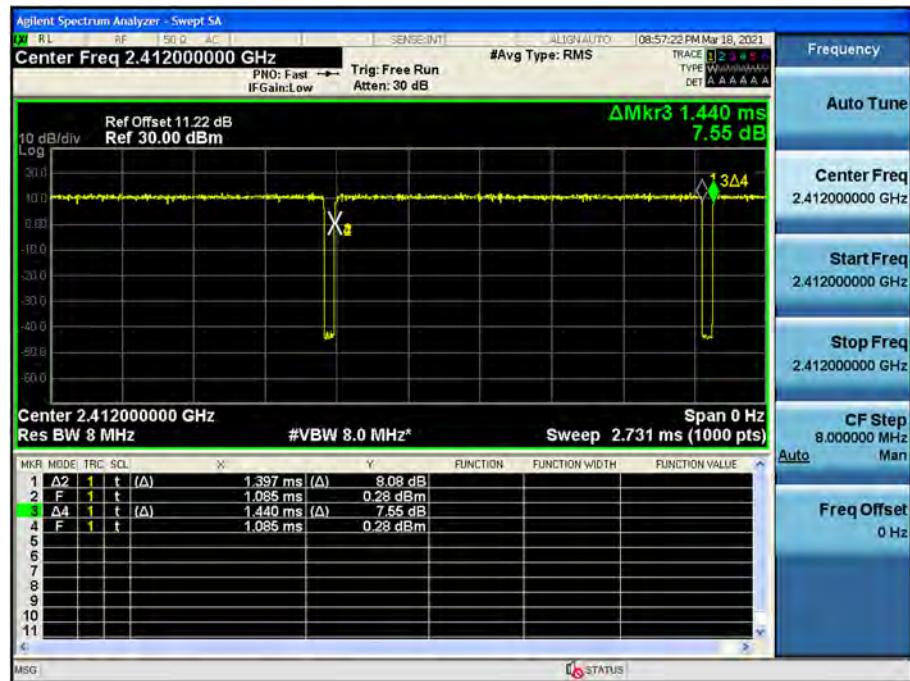

Duty cycle plot (802.11n(MCS0))

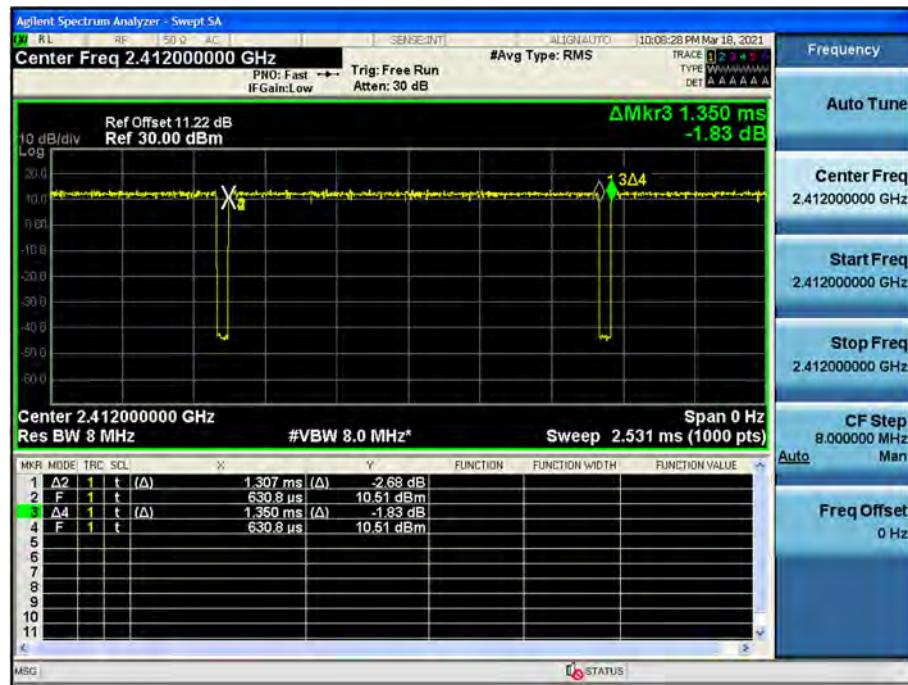**Note:**

In order to simplify the report, attached plots were only the most lowest data rate.

9.2 6dB BANDWIDTH & 99 % BANDWIDTHFCC

802.11b Mode		Measured Bandwidth (6dB BW)[MHz]	OBW Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.			
2412	1	7.129	10.274	0.5
2437	6	7.135	10.358	0.5
2462	11	7.589	10.764	0.5

802.11g Mode		Measured Bandwidth (6dB BW)[MHz]	OBW Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.			
2412	1	15.23	16.322	0.5
2437	6	15.36	16.343	0.5
2462	11	15.18	16.264	0.5

802.11n Mode		Measured Bandwidth (6dB BW)[MHz]	OBW Bandwidth [MHz]	Minimum Bandwidth [MHz]
Frequency [MHz]	Channel No.			
2412	1	15.23	17.521	0.5
2437	6	15.22	17.530	0.5
2462	11	15.22	17.477	0.5


■ Test Plots

6dB Bandwidth plot (802.11b-CH 1)



6dB Bandwidth plot (802.11g-CH 11)



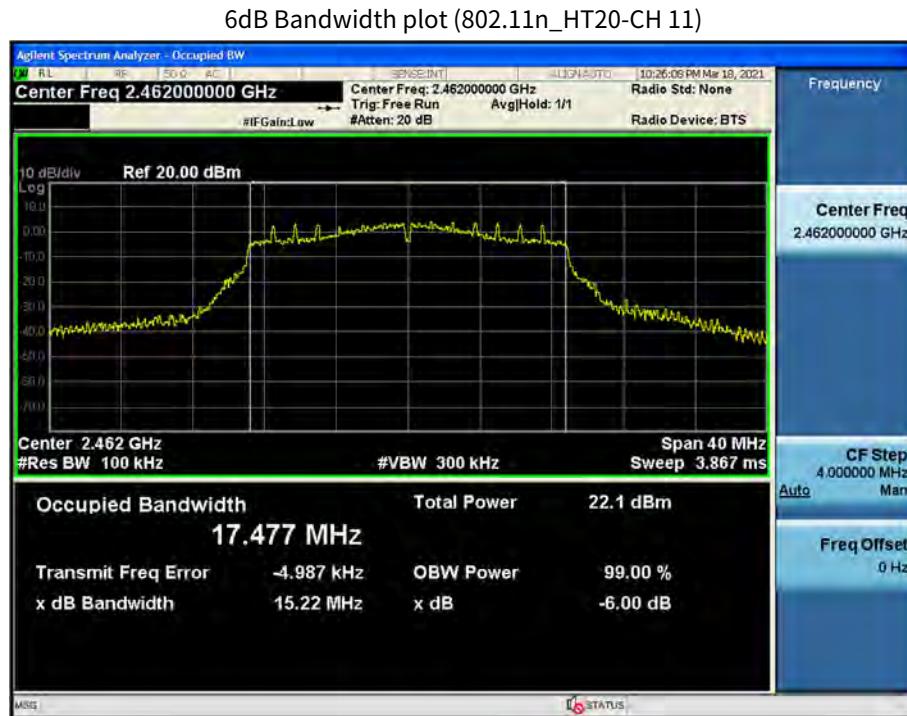

Note:

In order to simplify the report, attached plots were only the most narrow 6 dB BW channel.

99% Bandwidth Measurements(ISED)

802.11b Mode		OBW Bandwidth (99% BW)[MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	10.624	N/A
2437	6	10.773	N/A
2462	11	11.255	N/A

802.11g Mode		OBW Bandwidth (99% BW)[MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	16.970	N/A
2437	6	17.024	N/A
2462	11	16.824	N/A

802.11n(HT20) Mode		OBW Bandwidth (99% BW)[MHz]	Limit [MHz]
Frequency [MHz]	Channel No.		
2412	1	17.992	N/A
2437	6	18.004	N/A
2462	11	17.811	N/A

■ Test Plots

99% Bandwidth plot (802.11b-CH 11)



99% Bandwidth plot (802.11g-CH 6)



99% Bandwidth plot (802.11n_HT20-CH 6)

**Note:**

In order to simplify the report, attached plots were only the most wide 99% Bandwidth channel.

9.3 OUTPUT POWER

Peak Power

1. Power Meter offset = Attenuator loss(10 dB) + Cable loss(1ea) + EUT Cable(For Conducted)
2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.
So, 11.22 dB is offset for 2.4 GHz Band

802.11b Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	1	14.63	30.00
		2	15.05	30.00
		5.5	16.90	30.00
		11	18.34	30.00
2437	6	1	15.94	30.00
		2	16.34	30.00
		5.5	18.51	30.00
		11	19.80	30.00
2462	11	1	17.22	30.00
		2	17.53	30.00
		5.5	19.43	30.00
		11	21.00	30.00

802.11g Mode		Rate (Mbps)	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	6	20.60	30.00
		9	20.58	30.00
		12	20.30	30.00
		18	20.28	30.00
		24	20.37	30.00
		36	20.50	30.00
		48	18.96	30.00
		54	18.81	30.00
2437	6	6	22.92	30.00
		9	22.84	30.00
		12	22.47	30.00
		18	22.40	30.00
		24	22.67	30.00
		36	22.82	30.00
		48	21.31	30.00
		54	21.46	30.00
2462	11	6	20.98	30.00
		9	20.87	30.00
		12	20.65	30.00
		18	20.57	30.00
		24	20.78	30.00
		36	20.92	30.00
		48	18.98	30.00
		54	19.18	30.00

802.11n(HT20) Mode		MCS Index	Measured Power(dBm)	Limit (dBm)
Frequency[MHz]	Channel No.			
2412	1	0	21.95	30.00
		1	21.02	30.00
		2	21.06	30.00
		3	22.39	30.00
		4	21.50	30.00
		5	20.40	30.00
		6	19.49	30.00
		7	19.31	30.00
2437	6	0	23.14	30.00
		1	22.25	30.00
		2	22.33	30.00
		3	23.66	30.00
		4	22.61	30.00
		5	21.77	30.00
		6	20.77	30.00
		7	20.64	30.00
2462	11	0	22.40	30.00
		1	21.34	30.00
		2	21.39	30.00
		3	22.83	30.00
		4	21.98	30.00
		5	20.81	30.00
		6	19.68	30.00
		7	19.69	30.00

Average Power

1. Power Meter offset = Attenuator loss(10 dB) + Cable loss(1ea) + EUT Cable(For Conducted)

2. We apply to the offset in the 2.4 GHz range that was rounded off to the closest tenth dB.

So, 11.22 dB is offset for 2.4 GHz Band.

802.11b Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm)	Limit (dBm)
Frequency [MHz]	Channel No.				+ Duty Cycle Factor	
2412	1	1	12.20	0.023	12.23	30.00
		2	12.39	0.062	12.45	30.00
		5.5	12.56	0.092	12.65	30.00
		11	12.19	0.175	12.37	30.00
2437	6	1	13.51	0.023	13.53	30.00
		2	13.66	0.062	13.72	30.00
		5.5	14.05	0.092	14.15	30.00
		11	13.70	0.175	13.87	30.00
2462	11	1	14.61	0.023	14.64	30.00
		2	14.73	0.062	14.79	30.00
		5.5	15.05	0.092	15.14	30.00
		11	14.80	0.175	14.98	30.00

802.11g Mode		Rate (Mbps)	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm) + Duty Cycle Factor	Limit (dBm)
Frequency [MHz]	Channel No.					
2412	1	6	12.71	0.134	12.84	30.00
		9	12.67	0.187	12.85	30.00
		12	12.59	0.257	12.85	30.00
		18	12.50	0.370	12.87	30.00
		24	12.30	0.493	12.79	30.00
		36	12.10	0.677	12.78	30.00
		48	10.39	0.876	11.26	30.00
		54	10.36	0.947	11.30	30.00
2437	6	6	15.03	0.134	15.17	30.00
		9	14.98	0.187	15.17	30.00
		12	14.82	0.257	15.08	30.00
		18	14.68	0.370	15.05	30.00
		24	14.56	0.493	15.05	30.00
		36	14.41	0.677	15.09	30.00
		48	12.70	0.876	13.58	30.00
		54	12.72	0.947	13.67	30.00
2462	11	6	13.00	0.134	13.13	30.00
		9	12.94	0.187	13.13	30.00
		12	12.93	0.257	13.19	30.00
		18	12.81	0.370	13.18	30.00
		24	12.67	0.493	13.16	30.00
		36	12.33	0.677	13.01	30.00
		48	10.36	0.876	11.24	30.00
		54	10.54	0.947	11.49	30.00

802.11n Mode		MCS Index	Measured Power (dBm)	Duty Cycle Factor	Measured Power(dBm)	Limit (dBm)
Frequency [MHz]	Channel No.				+ Duty Cycle Factor	
2412	1	0	14.24	0.141	14.38	30.00
		1	13.18	0.267	13.44	30.00
		2	13.05	0.389	13.44	30.00
		3	13.88	0.498	14.38	30.00
		4	12.88	0.696	13.58	30.00
		5	11.61	0.866	12.48	30.00
		6	10.49	0.924	11.41	30.00
		7	10.37	1.007	11.38	30.00
2437	6	0	15.36	0.141	15.51	30.00
		1	14.38	0.267	14.65	30.00
		2	14.30	0.389	14.69	30.00
		3	15.15	0.498	15.65	30.00
		4	13.96	0.696	14.66	30.00
		5	12.94	0.866	13.81	30.00
		6	11.72	0.924	12.64	30.00
		7	11.66	1.007	12.66	30.00
2462	11	0	14.64	0.141	14.79	30.00
		1	13.46	0.267	13.73	30.00
		2	13.42	0.389	13.81	30.00
		3	14.34	0.498	14.84	30.00
		4	13.17	0.696	13.86	30.00
		5	11.88	0.866	12.74	30.00
		6	10.71	0.924	11.63	30.00
		7	10.71	1.007	11.72	30.00

9.4 POWER SPECTRAL DENSITY

Mode	Frequency (MHz)	Channel No.	Test Result	
			Measured PSD (dBm)	Limit
802.11b	2412	1	-9.544	8dBm / 3kHz
	2437	6	-7.521	
	2462	11	-7.478	
802.11g	2412	1	-10.318	
	2437	6	-7.737	
	2462	11	-9.616	
802.11n	2412	1	-9.176	
	2437	6	-5.939	
	2462	11	-8.262	

Note :

1. Spectrum reading values are not plot data.


The PSD results in plot is already including the actual values of loss for the attenuator and cable combination.

2. Spectrum offset = Attenuator loss(10 dB) + Cable loss(1ea) + EUT Cable(For Conducted)


3. 11.22 dB is offset for 2.4 GHz Band.

□ Test Plots

Power Spectral Density (802.11b-CH 11)

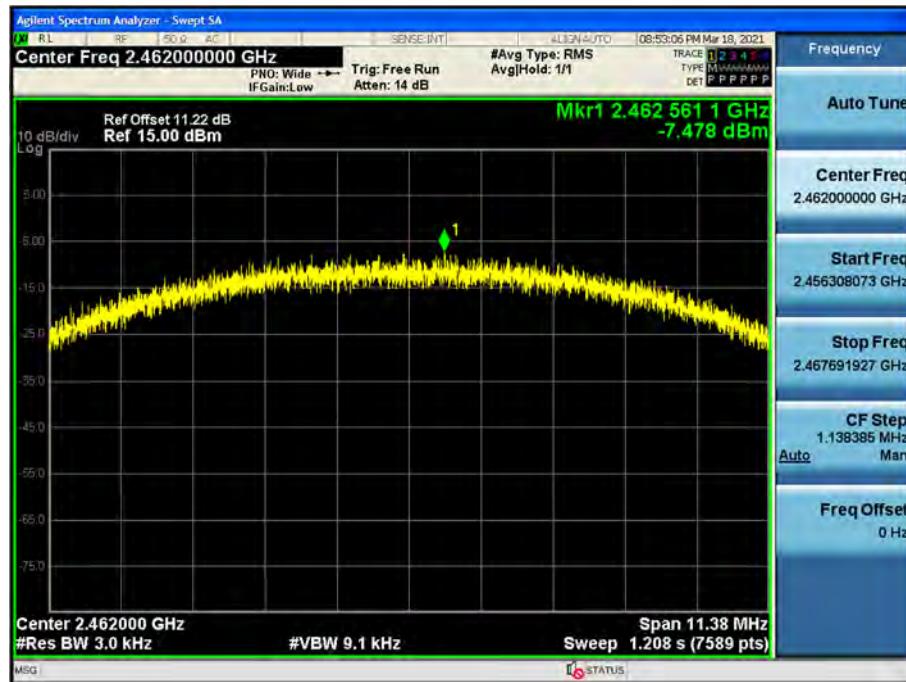

Power Spectral Density (802.11g-CH 6)

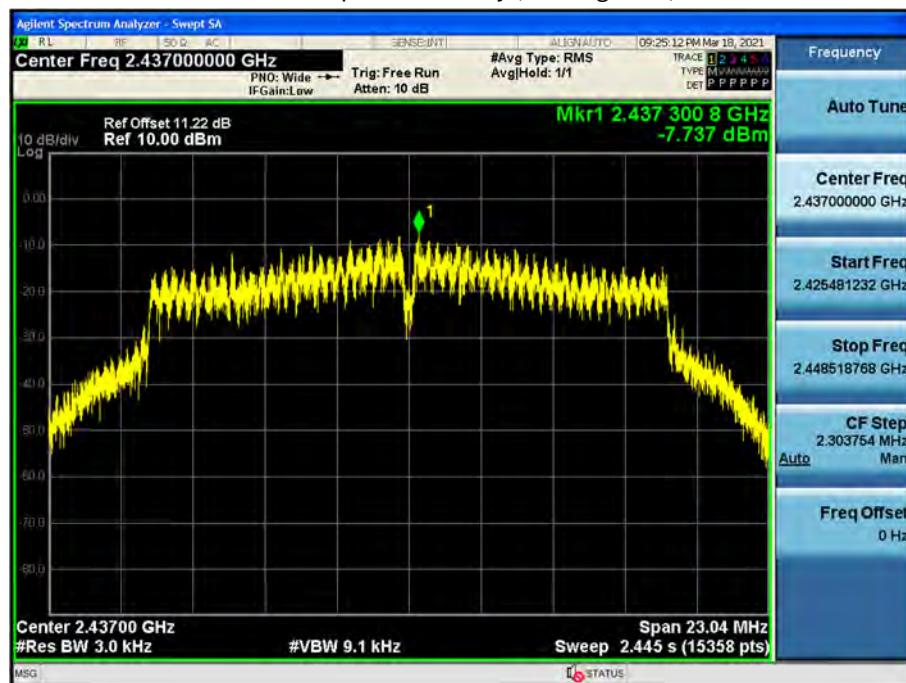

Power Spectral Density (802.11n_HT20 -CH 6)

**Note :**

In order to simplify the report, attached plots were only the worstcase PSD channel.


9.5 BAND EDGE/ CONDUCTED SPURIOUS EMISSIONS

Test Result : please refer to the plot below.

In order to simplify the report, attached plots were only the worst case channel and data rate.

■ Test Plots(BandEdge)

Band Edge (802.11b-CH1)

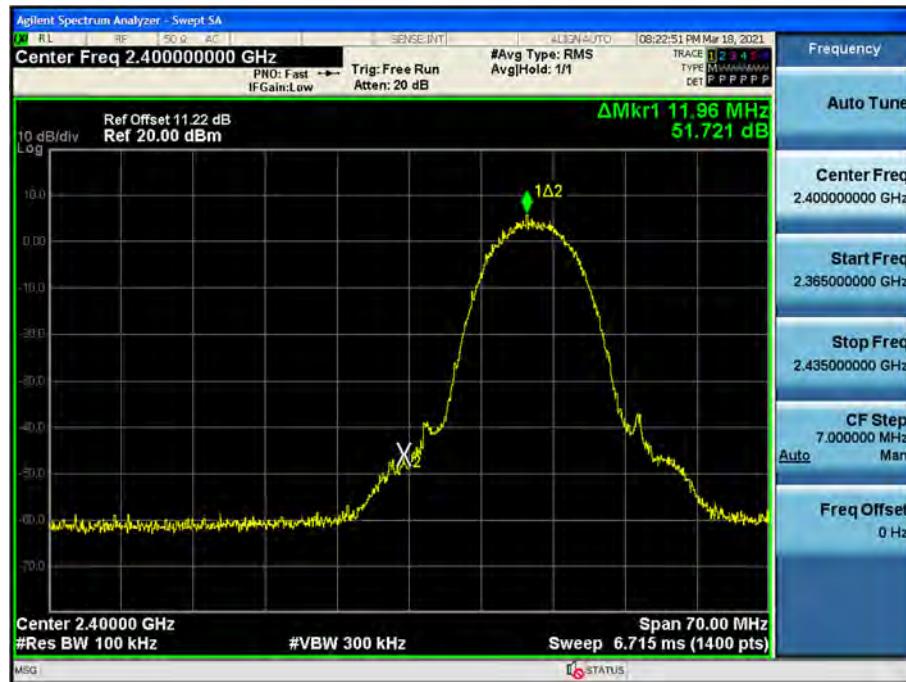

Band Edge (802.11b-CH11)



Band Edge (802.11g-CH1)




Band Edge (802.11g-CH11)



Band Edge (802.11n(HT20)-CH1)




Band Edge (802.11n(HT20)-CH11)

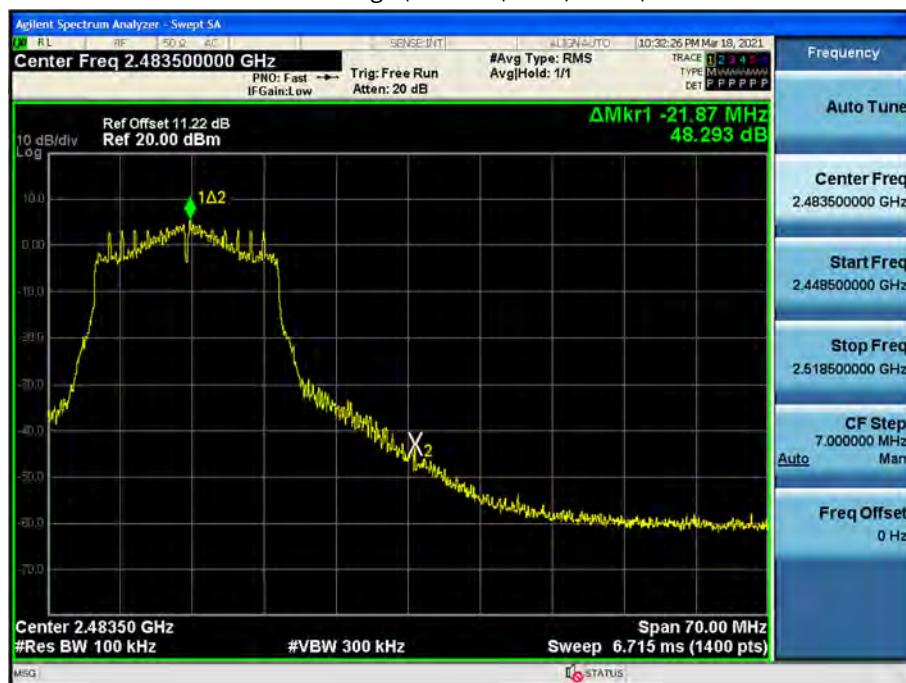

■ Test Plots(Conducted Spurious Emission)


30 MHz ~ 1 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS3)

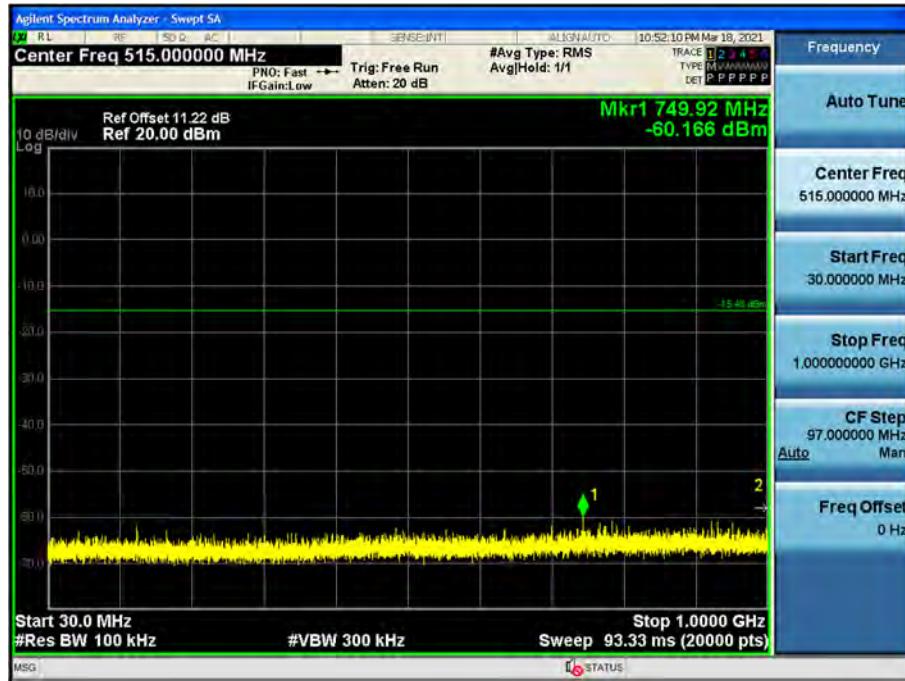


1 GHz ~ 3 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS3)

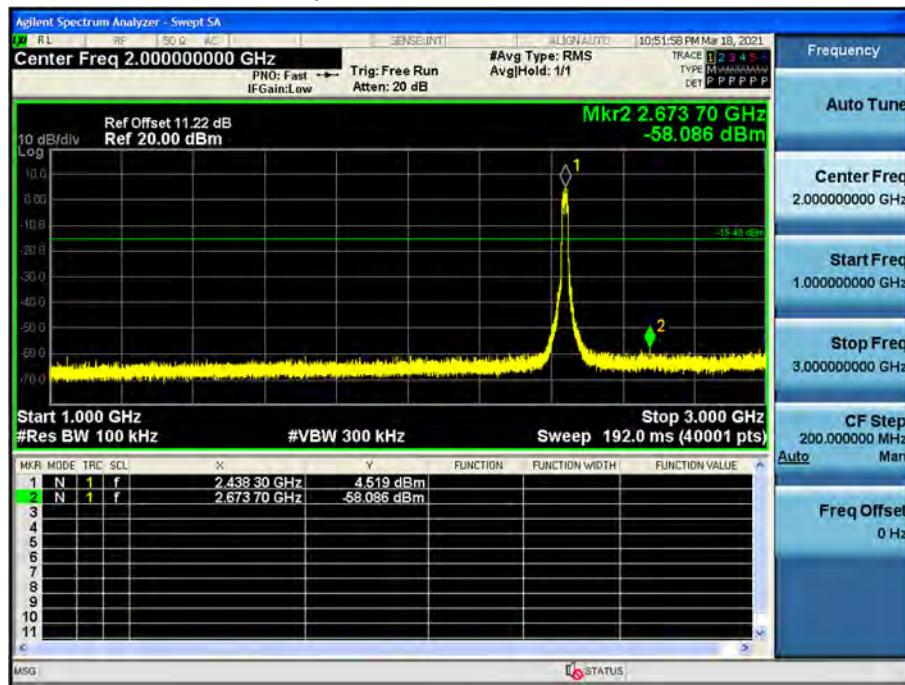


3 GHz ~ 5 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS3)

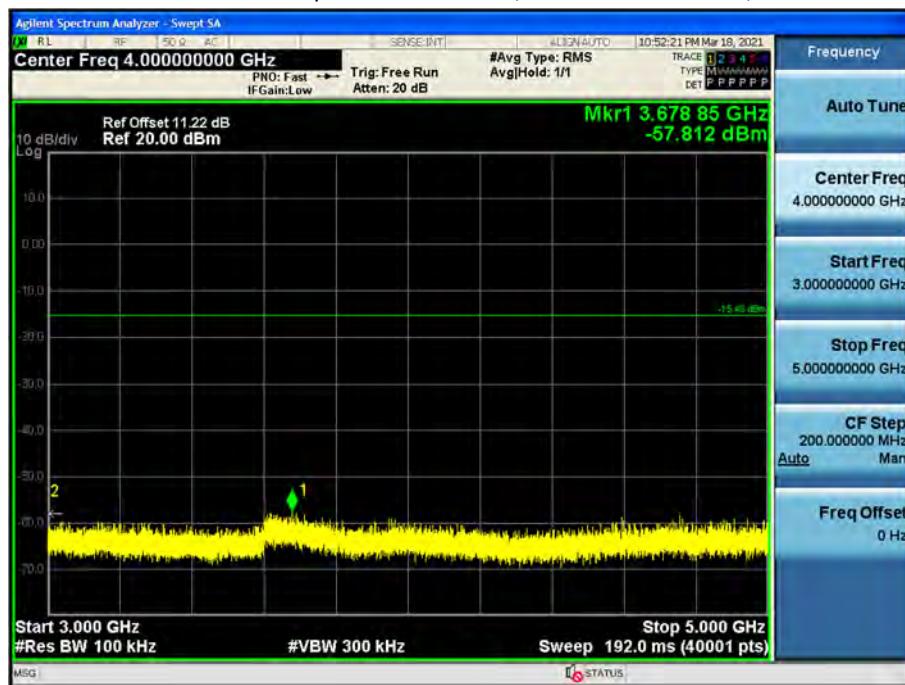


5 GHz ~ 7 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS3)

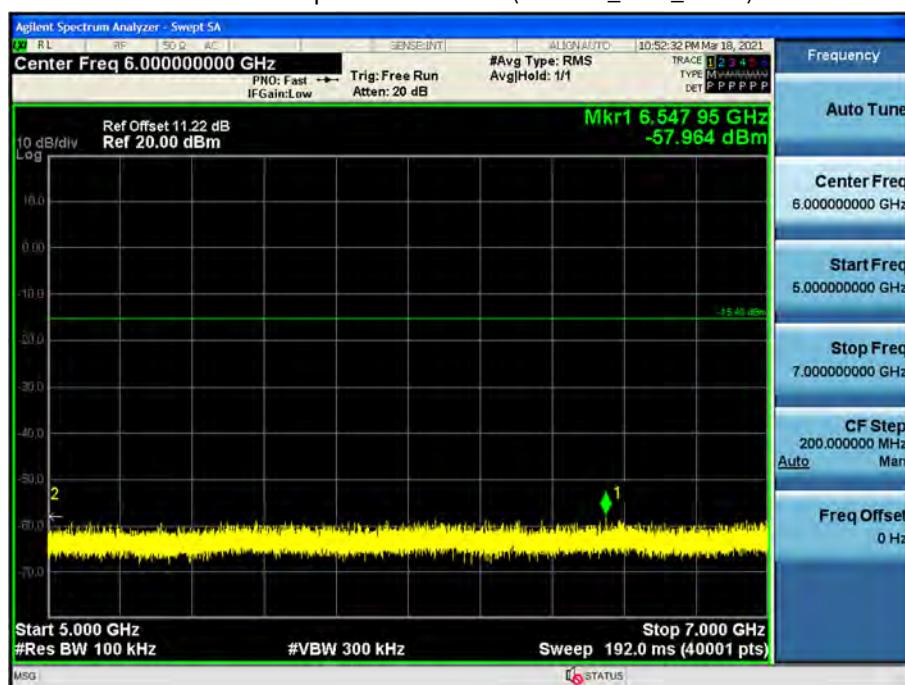


7 GHz ~ 9 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS3)

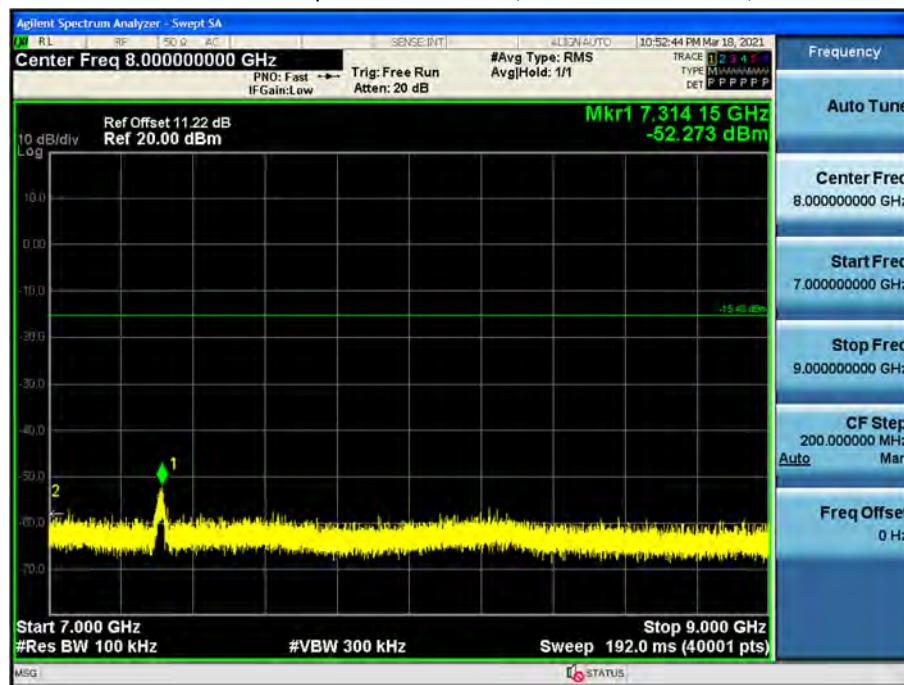


9 GHz ~ 11 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS3)

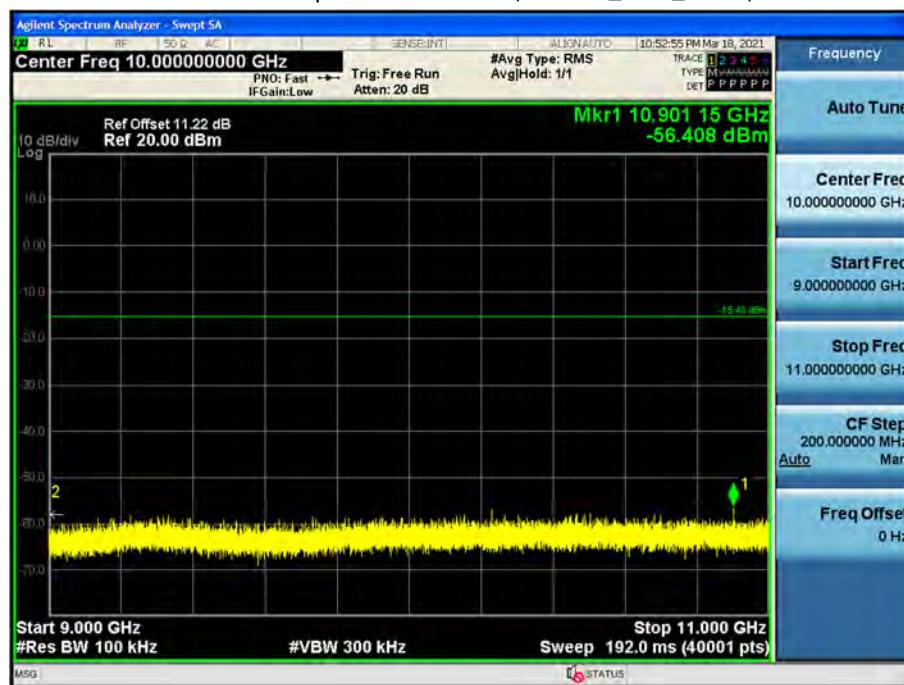


11 GHz ~ 13 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS3)

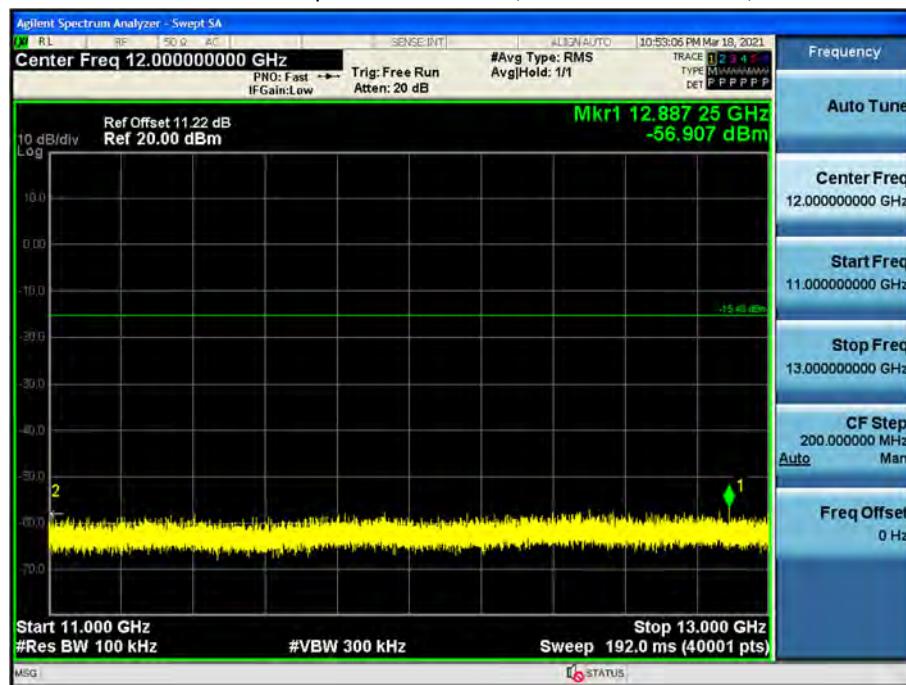


13 GHz ~ 15 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS3)

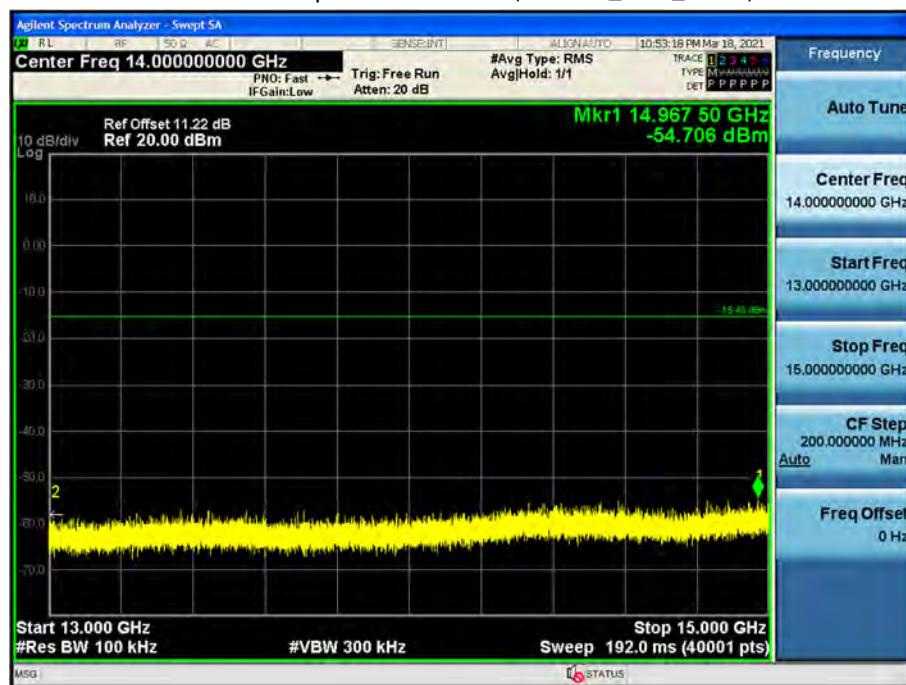


15 GHz ~ 17 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS3)

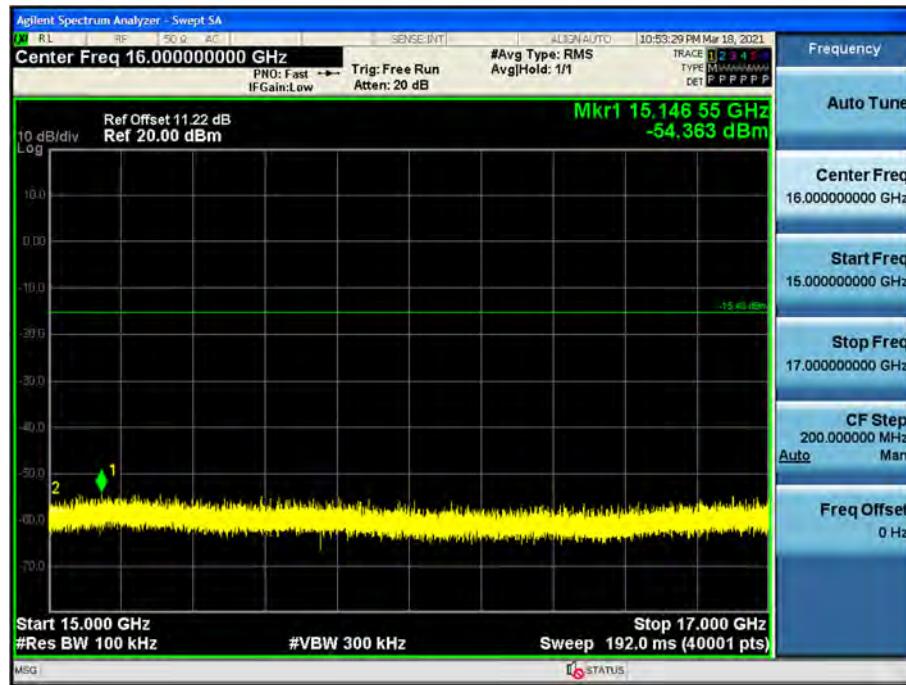


17 GHz ~ 19 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS3)

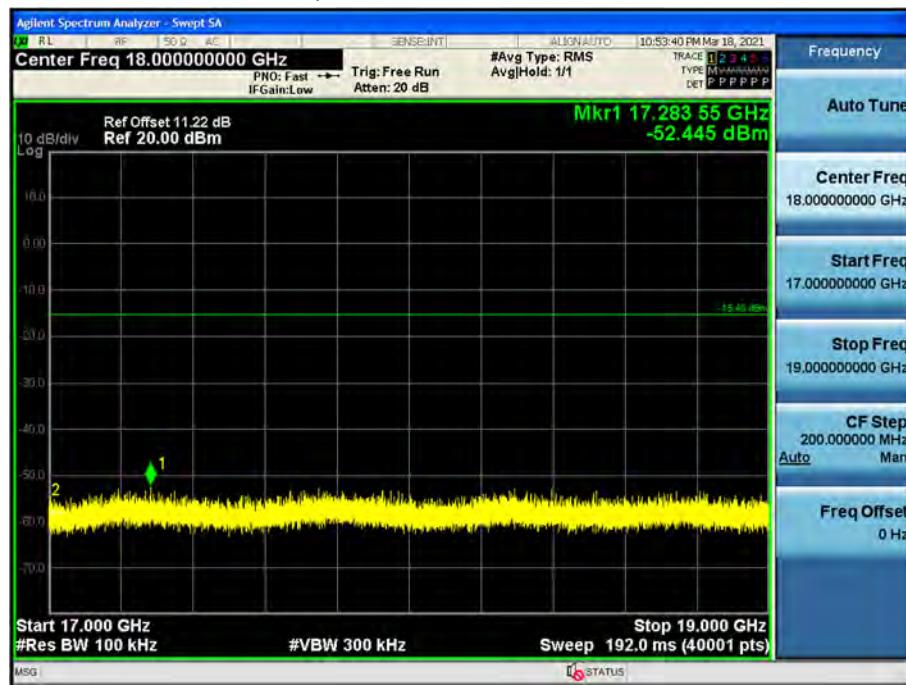


19 GHz ~ 21 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS3)

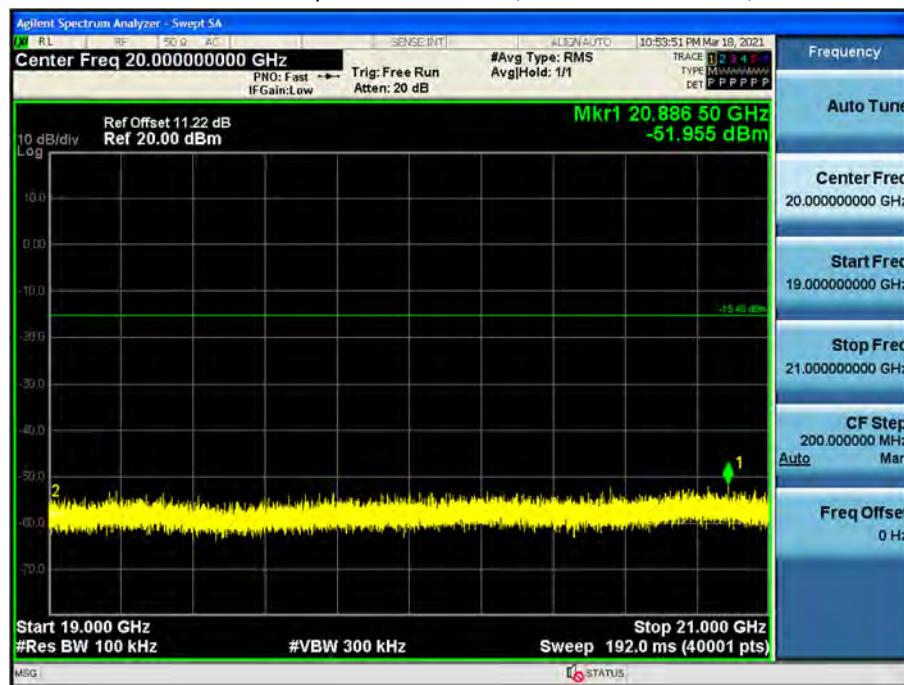


21 GHz ~ 23 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS3)

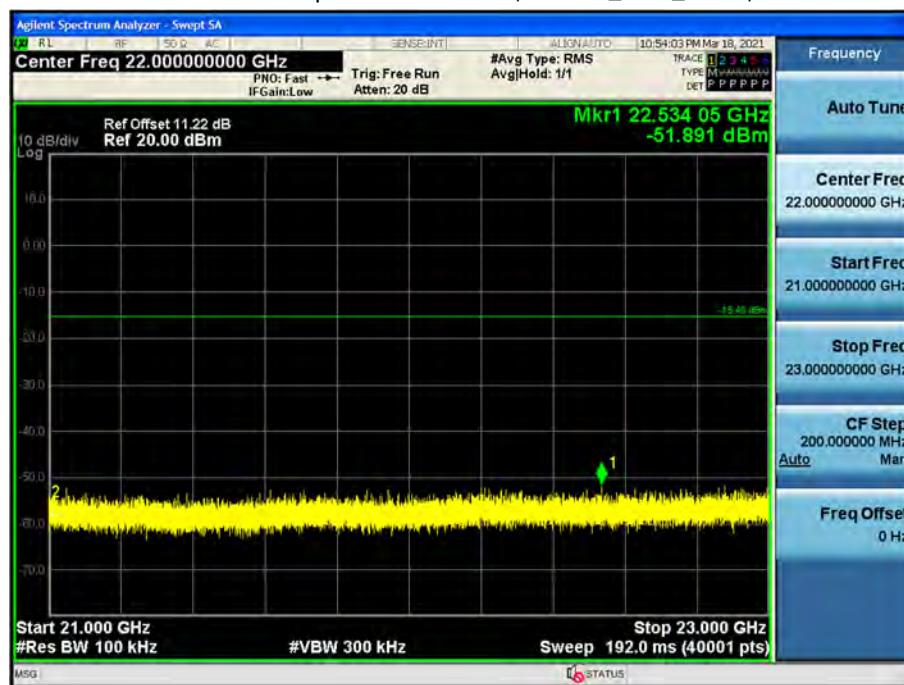

23 GHz ~ 25 GHz

Conducted Spurious Emission (802.11n_Ch.6_MCS3)

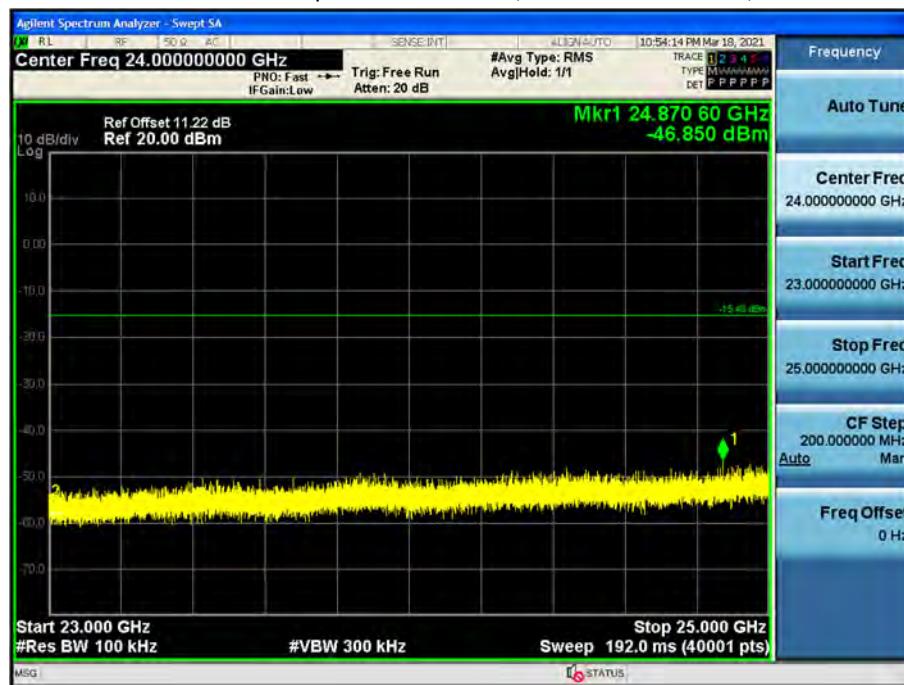

9.6 RADIATED SPURIOUS EMISSIONS

Frequency Range : 9 kHz – 30MHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. The reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.
2. Distance extrapolation factor = $40\log(\text{specific distance} / \text{test distance})$ (dB)
3. Limit line = specific Limits (dBuV) + Distance extrapolation factor
4. Radiated test is performed with hopping off.

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency	Reading	A.F+C.L-AMP+D.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4824	40.34	4.11	V	44.45	73.98	29.53	PK
4824	32.82	4.11	V	36.93	53.98	17.05	AV
7236	40.12	12.15	V	52.27	73.98	21.71	PK
7236	31.76	12.15	V	43.91	53.98	10.07	AV
4824	43.91	4.11	H	48.02	73.98	25.96	PK
4824	36.15	4.11	H	40.26	53.98	13.72	AV
7236	43.83	12.15	H	55.98	73.98	18.00	PK
7236	36.59	12.15	H	48.74	53.98	5.24	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency 2437
 Channel No. 06 Ch

Frequency	Reading	A.F+C.L-AMP+D.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4874	40.03	4.00	V	44.03	73.98	29.95	PK
4874	29.36	4.00	V	33.36	53.98	20.62	AV
7311	40.08	12.39	V	52.47	73.98	21.51	PK
7311	33.24	12.39	V	45.63	53.98	8.35	AV
4874	41.83	4.00	H	45.83	73.98	28.15	PK
4874	29.75	4.00	H	33.75	53.98	20.23	AV
7311	44.61	12.39	H	57.00	73.98	16.98	PK
7311	37.03	12.39	H	49.42	53.98	4.56	AV

Operation Mode: 802.11b
Transfer Rate: 1 Mbps
Operating Frequency 2462
Channel No. 11 Ch

Frequency	Reading	A.F+C.L-AMP+D.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	[dBuV]	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
4924	40.20	4.29	V	44.49	73.98	29.49	PK
4924	30.65	4.29	V	34.94	53.98	19.04	AV
7386	40.03	12.44	V	52.47	73.98	21.51	PK
7386	32.72	12.44	V	45.16	53.98	8.82	AV
4924	43.24	4.29	H	47.53	73.98	26.45	PK
4924	34.98	4.29	H	39.27	53.98	14.71	AV
7386	44.33	12.44	H	56.77	73.98	17.21	PK
7386	36.43	12.44	H	48.87	53.98	5.11	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency	Reading	Duty Cycle	A.F+C.L-AMP+D.F	ANT. POL	Total	Limit	Margin [dB]	Detect
[MHz]	dBuV	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]		
4824	40.76	0.00	4.11	V	44.87	73.98	29.11	PK
4824	29.33	0.13	4.11	V	33.57	53.98	20.41	AV
7236	46.13	0.00	12.15	V	58.28	73.98	15.70	PK
7236	31.04	0.13	12.15	V	43.32	53.98	10.66	AV
4824	44.27	0.00	4.11	H	48.38	73.98	25.60	PK
4824	31.75	0.13	4.11	H	35.99	53.98	17.99	AV
7236	50.54	0.00	12.15	H	62.69	73.98	11.29	PK
7236	34.87	0.13	12.15	H	47.15	53.98	6.83	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency 2437
 Channel No. 06 Ch

Frequency	Reading	Duty Cycle	A.F+C.L-AMP+D.F	ANT. POL	Total	Limit	Margin [dB]	Detect
[MHz]	dBuV	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]		
4874	41.24	0.00	4.00	V	45.24	73.98	28.74	PK
4874	29.29	0.13	4.00	V	33.42	53.98	20.56	AV
7311	48.60	0.00	12.39	V	60.99	73.98	12.99	PK
7311	33.25	0.13	12.39	V	45.77	53.98	8.21	AV
4874	44.32	0.00	4.00	H	48.32	73.98	25.66	PK
4874	29.91	0.13	4.00	H	34.04	53.98	19.94	AV
7311	52.03	0.00	12.39	H	64.42	73.98	9.56	PK
7311	37.33	0.13	12.39	H	49.85	53.98	4.13	AV

Operation Mode: 802.11g
Transfer Rate: 6 Mbps
Operating Frequency 2462
Channel No. 11 Ch

Frequency	Reading	Duty Cycle	A.F+C.L-AMP+D.F	ANT. POL	Total	Limit	Margin [dB]	Detect
[MHz]	dBuV	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]		
4924	41.23	0.00	4.29	V	45.52	73.98	28.46	PK
4924	29.21	0.13	4.29	V	33.63	53.98	20.35	AV
7386	43.28	0.00	12.44	V	55.72	73.98	18.26	PK
7386	28.42	0.13	12.44	V	40.99	53.98	12.99	AV
4924	43.09	0.00	4.29	H	47.38	73.98	26.60	PK
4924	30.18	0.13	4.29	H	34.60	53.98	19.38	AV
7386	46.52	0.00	12.44	H	58.96	73.98	15.02	PK
7386	31.57	0.13	12.44	H	44.14	53.98	9.84	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency 2412
 Channel No. 01 Ch

Frequency	Reading	Duty Cycle	A.F+C.L-AMP+D.F	ANT. POL	Total	Limit	Margin [dB]	Detect
[MHz]	dBuV	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]		
4824	41.03	0.00	4.11	V	45.14	73.98	28.84	PK
4824	29.34	0.14	4.11	V	33.59	53.98	20.39	AV
7236	48.67	0.00	12.15	V	60.82	73.98	13.16	PK
7236	33.21	0.14	12.15	V	45.50	53.98	8.48	AV
4824	45.44	0.00	4.11	H	49.55	73.98	24.43	PK
4824	32.41	0.14	4.11	H	36.66	53.98	17.32	AV
7236	52.45	0.00	12.15	H	64.60	73.98	9.38	PK
7236	37.06	0.14	12.15	H	49.35	53.98	4.63	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency 2437
 Channel No. 06 Ch


Frequency	Reading	Duty Cycle	A.F+C.L-AMP+D.F	ANT. POL	Total	Limit	Margin [dB]	Detect
[MHz]	dBuV	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]		
4874	41.15	0.00	4.00	V	45.15	73.98	28.83	PK
4874	29.24	0.14	4.00	V	33.38	53.98	20.60	AV
7311	48.89	0.00	12.39	V	61.28	73.98	12.70	PK
7311	33.96	0.14	12.39	V	46.49	53.98	7.49	AV
4874	45.40	0.00	4.00	H	49.40	73.98	24.58	PK
4874	30.10	0.14	4.00	H	34.24	53.98	19.74	AV
7311	52.64	0.00	12.39	H	65.03	73.98	8.95	PK
7311	37.86	0.14	12.39	H	50.39	53.98	3.59	AV

Operation Mode: 802.11n (HT20)
 Transfer MCS Index: 0
 Operating Frequency 2462
 Channel No. 11 Ch


Frequency	Reading	Duty Cycle	A.F+C.L-AMP+D.F	ANT. POL	Total	Limit	Margin [dB]	Detect
[MHz]	dBuV	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]		
4924	41.07	0.00	4.29	V	45.36	73.98	28.62	PK
4924	29.52	0.14	4.29	V	33.95	53.98	20.03	AV
7386	47.41	0.00	12.44	V	59.85	73.98	14.13	PK
7386	30.35	0.14	12.44	V	42.93	53.98	11.05	AV
4924	44.54	0.00	4.29	H	48.83	73.98	25.15	PK
4924	31.24	0.14	4.29	H	35.67	53.98	18.31	AV
7386	49.71	0.00	12.44	H	62.15	73.98	11.83	PK
7386	33.93	0.14	12.44	H	46.51	53.98	7.47	AV

Test Plots

Radiated Spurious Emissions plot – Average Reading (802.11n, Ch.6 3rd Harmonic, X-H)

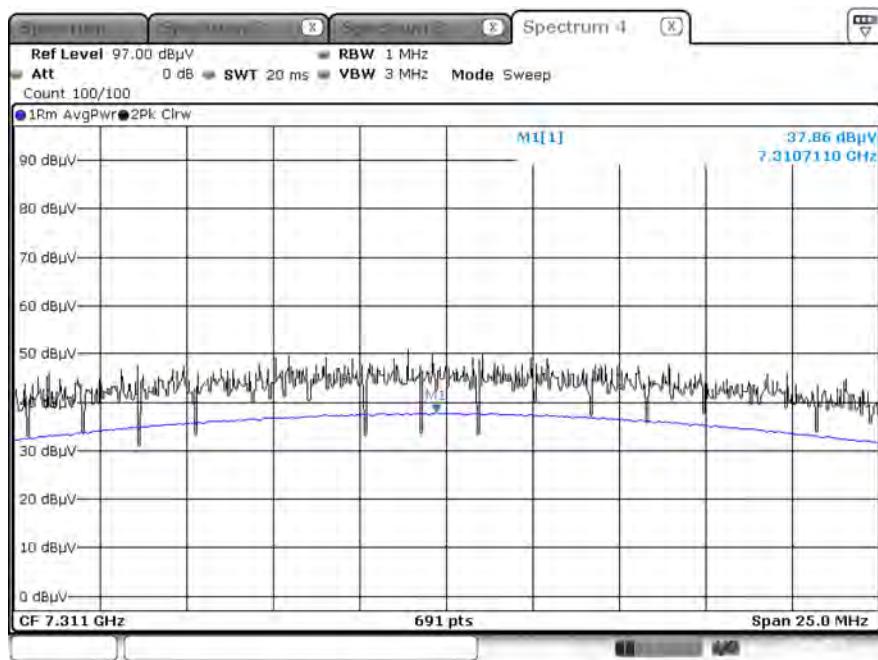

Radiated Spurious Emissions plot – Peak Reading (802.11n, Ch.6 3rd Harmonic, X-H)

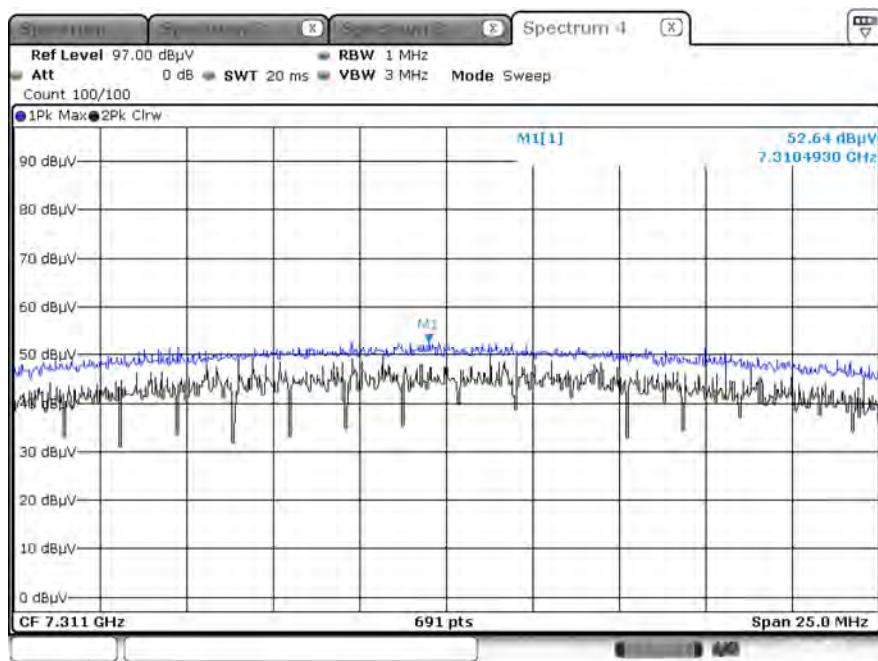**Note:**

Plot of worst case are only reported.

9.7 RADIATED RESTRICTED BAND EDGES

Operation Mode:	802.11b		
Transfer Rate:	1 Mbps		
Operating Frequency	2412 MHz, 2462 MHz		
Channel No.	01 Ch, 11 Ch		

Frequency	Reading	※ A.F+C.L-A.G +ATT+D.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	48.82	3.32	H	52.14	73.98	21.84	PK
2390.0	35.97	3.32	H	39.29	53.98	14.69	AV
2390.0	47.75	3.32	V	51.07	73.98	22.91	PK
2390.0	35.82	3.32	V	39.14	53.98	14.84	AV
2483.5	50.43	3.78	H	54.21	73.98	19.77	PK
2483.5	36.27	3.78	H	40.05	53.98	13.93	AV
2483.5	48.25	3.78	V	52.03	73.98	21.95	PK
2483.5	33.58	3.78	V	37.36	53.98	16.62	AV

Operation Mode:	802.11b		
Transfer Rate:	1 Mbps		
Operating Frequency	2417 MHz		
Channel No.	02 Ch		

Frequency	Reading	※ A.F+C.L-A.G +ATT+D.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	48.40	3.32	H	51.72	73.98	22.26	PK
2390.0	35.83	3.32	H	39.15	53.98	14.83	AV
2390.0	47.16	3.32	V	50.48	73.98	23.50	PK
2390.0	35.71	3.32	V	39.03	53.98	14.95	AV

Operation Mode: 802.11b
 Transfer Rate: 1 Mbps
 Operating Frequency 2457 MHz
 Channel No. 10 Ch

Frequency	Reading	※ A.F+C.L-A.G +ATT+D.F	ANT. POL	Total	Limit	Margin	Detect
[MHz]	dBuV	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2483.5	49.07	3.78	H	52.85	73.98	21.13	PK
2483.5	35.64	3.78	H	39.42	53.98	14.56	AV
2483.5	48.29	3.78	V	52.07	73.98	21.91	PK
2483.5	35.58	3.78	V	39.36	53.98	14.62	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency 2412 MHz, 2462 MHz
 Channel No. 01 Ch, 11 Ch

Frequency [MHz]	Reading	Duty Cycle	※ A.F+C.L- A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Detect
	dBuV	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	61.15	0.00	3.32	H	64.47	73.98	9.51	PK
2390.0	44.16	0.13	3.32	H	47.61	53.98	6.37	AV
2390.0	57.76	0.00	3.32	V	61.08	73.98	12.90	PK
2390.0	40.72	0.13	3.32	V	44.17	53.98	9.81	AV
2483.5	62.02	0.00	3.78	H	65.80	73.98	8.18	PK
2483.5	43.73	0.13	3.78	H	47.64	53.98	6.34	AV
2483.5	57.52	0.00	3.78	V	61.30	73.98	12.68	PK
2483.5	40.37	0.13	3.78	V	44.28	53.98	9.70	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency 2417 MHz
 Channel No. 02 Ch

Frequency [MHz]	Reading	Duty Cycle	※ A.F+C.L- A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Detect
	dBuV	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	62.03	0.00	3.32	H	65.35	73.98	8.63	PK
2390.0	47.25	0.13	3.32	H	50.70	53.98	3.28	AV
2390.0	60.20	0.00	3.32	V	63.52	73.98	10.46	PK
2390.0	45.16	0.13	3.32	V	48.61	53.98	5.37	AV

Operation Mode: 802.11g
 Transfer Rate: 6 Mbps
 Operating Frequency 2457 MHz
 Channel No. 10 Ch

Frequency [MHz]	Reading	Duty Cycle	※ A.F+C.L- A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Detect
	dBuV	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2483.5	60.75	0.00	3.78	H	64.53	73.98	9.45	PK
2483.5	45.46	0.13	3.78	H	49.37	53.98	4.61	AV
2483.5	57.33	0.00	3.78	V	61.11	73.98	12.87	PK
2483.5	43.24	0.13	3.78	V	47.15	53.98	6.83	AV

Operation Mode:	802.11n (HT20)		
Transfer MCS Index:	6.5 Mbps		
Operating Frequency	2412 MHz, 2462 MHz		
Channel No.	01 Ch, 11 Ch		

Frequency [MHz]	Reading	Duty Cycle	※ A.F+C.L- A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Detect
	dBuV	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	64.10	0.00	3.32	H	67.42	73.98	6.56	PK
2390.0	46.52	0.14	3.32	H	49.98	53.98	4.00	AV
2390.0	61.24	0.00	3.32	V	64.56	73.98	9.42	PK
2390.0	42.89	0.14	3.32	V	46.35	53.98	7.63	AV
2483.5	66.87	0.00	3.78	H	70.65	73.98	3.33	PK
2483.5	45.36	0.14	3.78	H	49.28	53.98	4.70	AV
2483.5	62.05	0.00	3.78	V	65.83	73.98	8.15	PK
2483.5	42.13	0.14	3.78	V	46.05	53.98	7.93	AV

Operation Mode:	802.11n (HT20)		
Transfer Rate:	6.5 Mbps		
Operating Frequency	2417 MHz		
Channel No.	02 Ch		


Frequency [MHz]	Reading	Duty Cycle	※ A.F+C.L- A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Detect
	dBuV	Factor	[dB]	[H/V]	[dBuV/m]	[dBuV/m]	[dB]	
2390.0	64.03	0.00	3.32	H	67.35	73.98	6.63	PK
2390.0	44.65	0.14	3.32	H	48.11	53.98	5.87	AV
2390.0	62.18	0.00	3.32	V	65.50	73.98	8.48	PK
2390.0	42.59	0.14	3.32	V	46.05	53.98	7.93	AV

Operation Mode:	802.11n (HT20)
Transfer Rate:	6.5 Mbps
Operating Frequency	2457 MHz
Channel No.	10 Ch


Frequency [MHz]	Reading	Duty Cycle	※ A.F+C.L- A.G+ATT+D.F	ANT. POL	Total	Limit	Margin	Detect
	dBuV	Factor						
2483.5	62.03	0.00	3.78	H	65.81	73.98	8.17	PK
2483.5	44.80	0.14	3.78	H	48.72	53.98	5.26	AV
2483.5	59.57	0.00	3.78	V	63.35	73.98	10.63	PK
2483.5	42.21	0.14	3.78	V	46.13	53.98	7.85	AV

■ Test Plots (Worst case : X-V)

Radiated Restricted Band Edges plot – Average Reading (802.11g Ch.2)

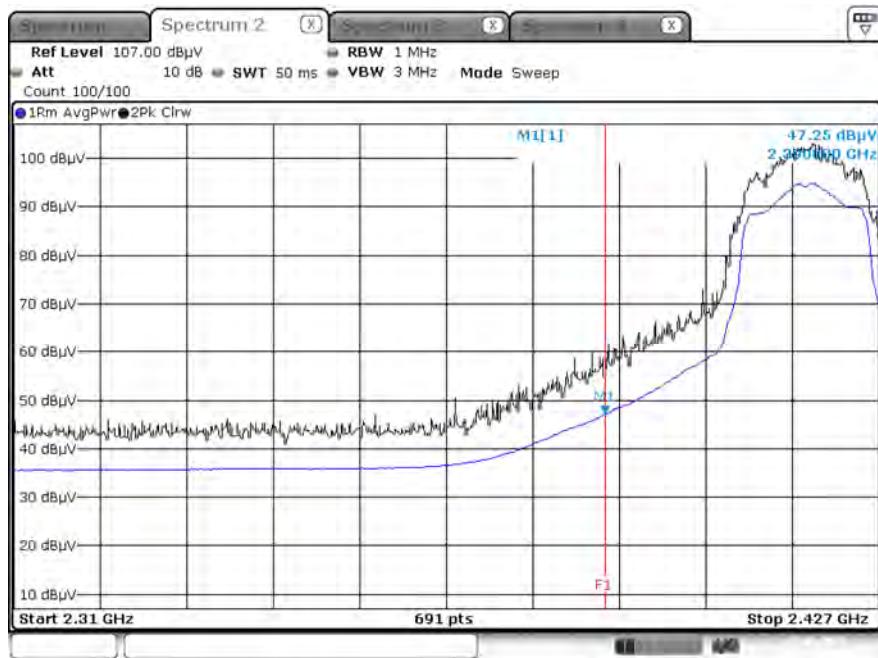

Radiated Restricted Band Edges plot – Peak Reading (802.11g Ch.2)

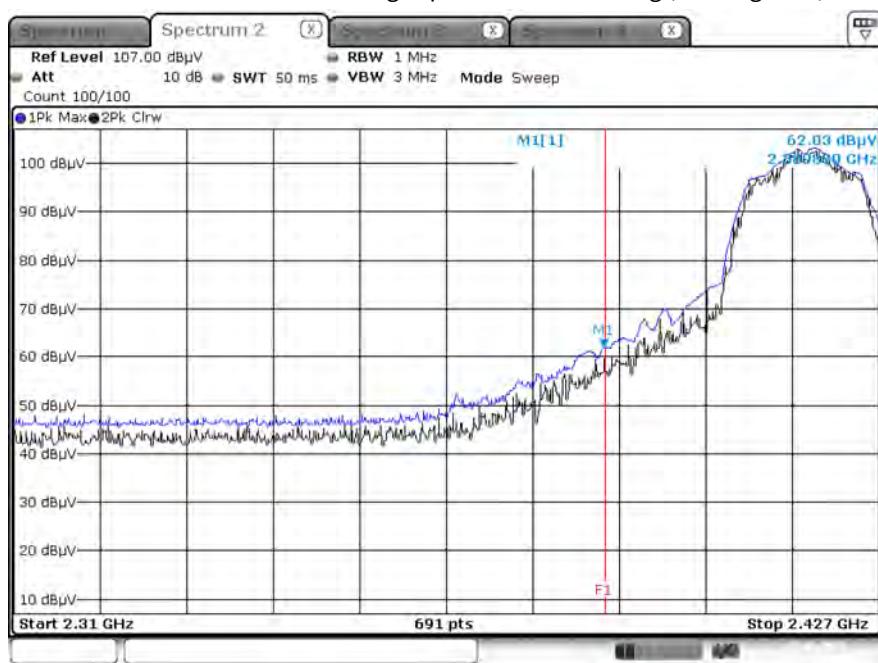**Note:**

Plot of worst case are only reported.

9.8 RECEIVER SPURIOUS EMISSIONS

Frequency Range : Below 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

Note:

1. Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Quasi peak detector mode.

Frequency Range : Above 1 GHz

Frequency	Reading	Ant. factor	Cable loss	Ant. POL	Total	Limit	Margin
MHz	dBuV/m	dBm/m	dBm	(H/V)	dBuV/m	dBuV/m	dB
No Critical peaks found							

9.9 POWERLINE CONDUCTED EMISSIONS

Conducted Emissions (Line 1)

Test


1 / 2

Test Report

Common Information

EUT : 1080i
Manufacturer : ERICSSON-LG
Test Site: SHIELD ROOM
Operating Conditions : 2.4G WLAN L1 Mode

Full Spectrum

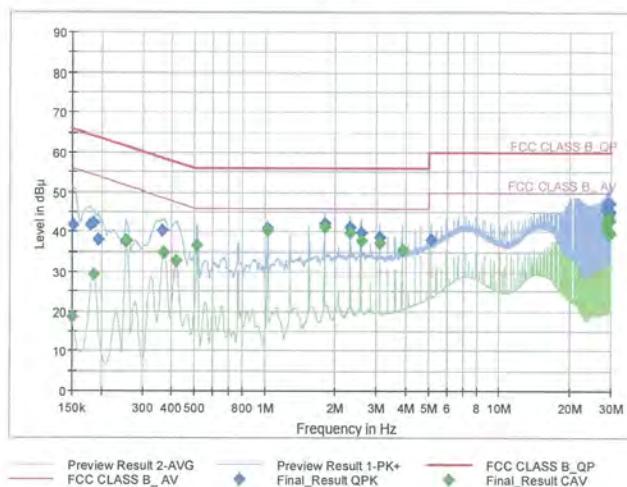

Final_Result_QPK

Frequency (MHz)	QuasiPeak	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1523	41.75	65.88	24.13	9.000	L1	OFF	9.6
0.1793	41.71	64.52	22.81	9.000	L1	OFF	9.6
0.1860	42.33	64.21	21.88	9.000	L1	OFF	9.6
0.1950	37.95	63.82	25.87	9.000	L1	OFF	9.6
0.2558	37.73	61.57	23.84	9.000	L1	OFF	9.6
0.3660	40.48	58.59	18.12	9.000	L1	OFF	9.6
1.0288	40.97	56.00	15.03	9.000	L1	OFF	9.6
1.8005	42.20	56.00	13.80	9.000	L1	OFF	9.6
2.3135	41.15	56.00	14.85	9.000	L1	OFF	9.7
2.5700	39.86	56.00	16.14	9.000	L1	OFF	9.7
3.0853	38.66	56.00	17.34	9.000	L1	OFF	9.7
5.1418	38.09	60.00	21.91	9.000	L1	OFF	9.8
28.5395	45.45	60.00	14.55	9.000	L1	OFF	10.0
28.7960	46.06	60.00	13.94	9.000	L1	OFF	10.0
29.0525	47.39	60.00	12.61	9.000	L1	OFF	10.0
29.3113	44.55	60.00	15.45	9.000	L1	OFF	10.0
29.5678	45.42	60.00	14.58	9.000	L1	OFF	10.0
29.8243	47.36	60.00	12.64	9.000	L1	OFF	10.0

Final_Result_CAV

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	18.71	56.00	37.29	9.000	L1	OFF	9.6

2021-03-18

오전 3:50:11

Test

2 / 2

0.1860	29.30	54.21	24.91	9.000	L1	OFF	9.6
0.2580	37.69	51.50	13.81	9.000	L1	OFF	9.6
0.3705	34.83	48.49	13.66	9.000	L1	OFF	9.6
0.4178	32.77	47.49	14.72	9.000	L1	OFF	9.6
0.5135	36.56	46.00	9.44	9.000	L1	OFF	9.6
1.0288	40.33	46.00	5.67	9.000	L1	OFF	9.6
1.8005	41.12	46.00	4.88	9.000	L1	OFF	9.6
2.3135	39.87	46.00	6.13	9.000	L1	OFF	9.7
2.5723	37.82	46.00	8.18	9.000	L1	OFF	9.7
3.0853	37.17	46.00	8.83	9.000	L1	OFF	9.7
3.8570	35.42	46.00	10.58	9.000	L1	OFF	9.7
28.5395	41.06	50.00	8.94	9.000	L1	OFF	10.0
28.7960	41.73	50.00	8.27	9.000	L1	OFF	10.0
29.0525	43.83	50.00	6.17	9.000	L1	OFF	10.0
29.3113	39.97	50.00	10.03	9.000	L1	OFF	10.0
29.5678	39.60	50.00	10.40	9.000	L1	OFF	10.0
29.8243	42.90	50.00	7.10	9.000	L1	OFF	10.0

2021-03-18

오전 3:50:11

Conducted Emissions (Line 2)


Test

1 / 2

Test Report**Common Information**

EUT : 1080i
 Manufacturer : ERICSSON-LG
 Test Site: SHIELD ROOM
 Operating Conditions : 2.4G WLAN N Mode

Full Spectrum

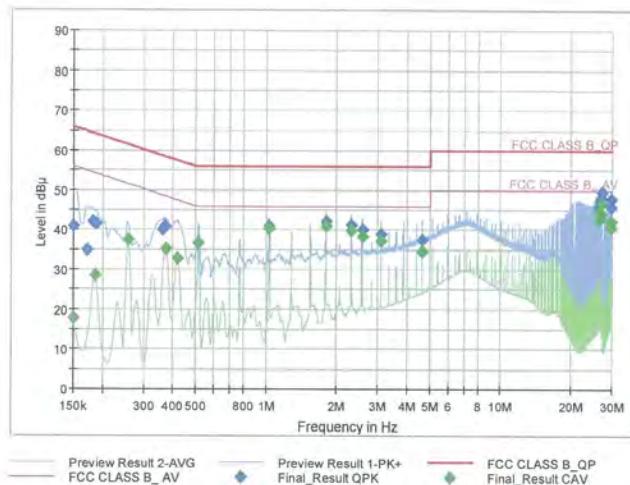**Final_Result_QPK**

Frequency (MHz)	QuasiPeak	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	41.06	66.00	24.94	9.000	N	OFF	9.6
0.1725	35.02	64.84	29.82	9.000	N	OFF	9.6
0.1815	42.17	64.42	22.24	9.000	N	OFF	9.6
0.1883	41.59	64.11	22.52	9.000	N	OFF	9.6
0.3593	40.00	58.75	18.75	9.000	N	OFF	9.6
0.3705	41.02	58.49	17.47	9.000	N	OFF	9.6
1.0288	41.09	56.00	14.91	9.000	N	OFF	9.6
1.8005	42.20	56.00	13.80	9.000	N	OFF	9.6
2.3135	41.22	56.00	14.78	9.000	N	OFF	9.6
2.5700	40.13	56.00	15.87	9.000	N	OFF	9.6
3.0853	39.05	56.00	16.95	9.000	N	OFF	9.7
4.6265	37.58	56.00	18.42	9.000	N	OFF	9.7
26.2220	45.78	60.00	14.22	9.000	N	OFF	10.0
26.4785	47.25	60.00	12.75	9.000	N	OFF	10.0
26.7350	48.11	60.00	11.89	9.000	N	OFF	10.0
26.9915	49.64	60.00	10.36	9.000	N	OFF	10.0
29.5633	45.83	60.00	14.17	9.000	N	OFF	10.1
29.8198	47.80	60.00	12.20	9.000	N	OFF	10.1

Final_Result_CAV

Frequency (MHz)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.1500	17.85	56.00	38.15	9.000	N	OFF	9.6

2021-03-18

오전 2:24:30

Test

2 / 2

0.1860	28.63	54.21	25.58	9.000	N	OFF	9.6
0.2580	37.60	51.50	13.89	9.000	N	OFF	9.6
0.3728	35.23	48.44	13.21	9.000	N	OFF	9.6
0.4178	32.99	47.49	14.50	9.000	N	OFF	9.6
0.5135	36.55	46.00	9.45	9.000	N	OFF	9.6
1.0288	40.29	46.00	5.71	9.000	N	OFF	9.6
1.8005	40.98	46.00	5.02	9.000	N	OFF	9.6
2.3135	39.85	46.00	6.15	9.000	N	OFF	9.6
2.5700	38.34	46.00	7.66	9.000	N	OFF	9.6
3.0853	37.14	46.00	8.86	9.000	N	OFF	9.7
4.6265	34.66	46.00	11.34	9.000	N	OFF	9.7
26.2198	44.44	50.00	5.56	9.000	N	OFF	10.0
26.4785	42.82	50.00	7.18	9.000	N	OFF	10.0
26.7350	44.07	50.00	5.93	9.000	N	OFF	10.0
26.9915	46.63	50.00	3.37	9.000	N	OFF	10.0
29.5633	40.75	50.00	9.25	9.000	N	OFF	10.1
29.8198	42.24	50.00	7.76	9.000	N	OFF	10.1

2021-03-18

오전 2:24:30

10. LIST OF TEST EQUIPMENT**Conducted Test**

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Rohde & Schwarz	ENV216 / LISN	09/04/2020	Annual	102245
Rohde & Schwarz	ESR / EMI Test Receiver	09/16/2020	Annual	101910
ESPEC	SU-642 /Temperature Chamber	07/30/2020	Annual	0093000718
Agilent	N9020A / Signal Analyzer	05/11/2020	Annual	MY51110085
Agilent	N9030A / Signal Analyzer	03/09/2021	Annual	MY49432108
Agilent	N1911A / Power Meter	04/07/2020	Annual	MY45100523
Agilent	N1921A / Power Sensor	06/08/2020	Annual	MY57820067
Agilent	87300B / Directional Coupler	11/10/2020	Annual	3116A03621
Hewlett Packard	11667B / Power Splitter	02/09/2021	Annual	10545
HP	E3632A / DC Power Supply	09/16/2020	Annual	MY40004427
HP	8493C / Attenuator(10 dB)(DC-26.5 GHz)	06/26/2020	Annual	07560
HP	8493C / Attenuator(10 dB)(DC-26.5 GHz)	07/03/2020	Annual	08285
Rohde & Schwarz	18N-20dB / Attenuator(20 dB)	03/08/2021	Annual	8
Rohde & Schwarz	EMC32 / Software	N/A	N/A	N/A
HCT CO., LTD.	FCC WLAN&BT&BLE Conducted Test Software v3.0	N/A	N/A	N/A
Rohde & Schwarz	CBT / Bluetooth Tester	02/23/2021	Annual	100808

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

Radiated Test

Manufacturer	Model / Equipment	Calibration Date	Calibration Interval	Serial No.
Innco system	CO3000 / Controller(Antenna mast)	N/A	N/A	CO3000-4p
Innco system	MA4640/800-XP-EP / Antenna Position Tower	N/A	N/A	N/A
Audix	EM1000 / Controller	N/A	N/A	060520
Audix	Turn Table	N/A	N/A	N/A
TNM system	FBSM-01B / Amp & Filter Bank Switch Controller	N/A	N/A	N/A
Schwarzbeck	Loop Antenna	03/19/2020	Biennial	1513-333
Schwarzbeck	VULB 9168 / Hybrid Antenna	08/02/2019	Biennial	01039
Schwarzbeck	BBHA 9120D / Horn Antenna	08/01/2019	Biennial	912D-1151
Schwarzbeck	BBHA9170 / Horn Antenna(15 GHz ~ 40 GHz)	02/11/2020	Biennial	BBHA9170124
Rohde & Schwarz	FSP(10 Hz ~ 40 GHz) / Spectrum Analyzer	05/13/2020	Annual	101055
Wainwright Instruments	WRCJV2400/2483.5-2370/2520-60/12SS / Band Reject Filter	01/06/2021	Annual	2
Wainwright Instruments	WRCJV12-4900-5100-5900-6100-50SS	06/24/2021	Annual	5
Wainwright Instruments	WRCJV12-4900-5100-5900-6100-50SS	06/24/2021	Annual	6
CERNEX	CBL18265035 / Power Amplifier	12/04/2020	Annual	22966
CERNEX	CBL26405040 / Power Amplifier	03/23/2021	Annual	25956
TESCOM	TC-3000C / Bluetooth Tester	04/28/2020	Annual	3000C000175
TNM system	FBSM-05B / HPF(3~18GHz) + LNA1(1~18GHz)	01/20/2021	Annual	F6
TNM system	FBSM-05B / ATT(10dB) + LNA1(1~18GHz)	01/20/2021	Annual	None
TNM system	FBSM-05B / ATT(3dB) + LNA1(1~18GHz)	01/20/2021	Annual	None
TNM system	FBSM-05B / LNA1(1~18GHz)	01/20/2021	Annual	25540
TNM system	FBSM-05B / HPF(7~18GHz) + LNA2(6~18GHz)	01/20/2021	Annual	28550
TNM system	FBSM-05B / Thru(30MHz ~ 18GHz)	01/20/2021	Annual	None

Note:

1. Equipment listed above that calibrated during the testing period was set for test after the calibration.
2. Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.
3. Especially, all antenna for measurement is calibrated in accordance with the requirements of C63.5(Version : 2017).

11. ANNEX A_ TEST SETUP PHOTO

Please refer to test setup photo file no. as follows;

No.	Description
1	HCT-RF-2104-FI004-P