



TEST REPORT

APPLICANT : Reliance Communications LLC

PRODUCT NAME : Orbic Speed 5G

MODEL NAME : R500L5

BRAND NAME : Orbic

FCC ID : 2ABGH-R500L5

STANDARD(S) : 47 CFR Part 15 Subpart B

RECEIPT DATE : 2021-06-10

TEST DATE : 2021-06-24 to 2021-06-30

ISSUE DATE : 2021-10-11

Edited by:

He Sinuo

He Sinuo(Rapporteur)

Approved by:

Xiao Xiong

Xiao Xiong(Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen ,GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn





DIRECTORY

1. Technical Information.....	3
1.1. Applicant and Manufacturer Information.....	3
1.2. Equipment Under Test (EUT) Description	3
2. Test Results	5
2.1. Applied Reference Documents	5
2.2. EUT Setup and Operating Conditions.....	6
3. 47 CFR Part 15B Requirements	7
3.1. Conducted Emission	7
3.2. Radiated Emission.....	11
Annex A Test Uncertainty	18
Annex B Testing Laboratory Information.....	19

Change History

Version	Date	Reason for Change
1.0	2021-10-11	First edition



1. Technical Information

Note: Provide by applicant

1.1. Applicant and Manufacturer Information

Applicant:	Reliance Communications LLC
Applicant Address:	91 Colin Drive, Unit 1, HOLBROOK, New York 11741, United States
Manufacturer:	Unimaxcomm
Manufacturer Address:	35F,HBC HuiLong Center Building-II Minzhi Street,Longhua, Shenzhen, P.R. China 518110

1.2. Equipment Under Test (EUT) Description

Product Name:	Orbic Speed 5G
EUT No.:	1#
Hardware Version:	V1.2
Software Version:	ORB500L5_v1.0.1.3_BVZRT
Tx Frequency:	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz 5G NR n2: 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n77: 3300 MHz ~ 4200 MHz 5G NR n78: 3300 MHz ~ 3800 MHz 5G NR n260: 37000 MHz ~ 29500 MHz 5G NR n261: 27.5GHz ~ 28.35 GHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/ac/n/ax: 5180 MHz ~ 5240 MHz; 5745 MHz ~ 5825 MHz
Rx Frequency:	WCDMA Band II: 1930 MHz ~ 1990 MHz WCDMA Band IV: 2110 MHz ~ 2155 MHz



	WCDMA Band V: 869 MHz ~ 894 MHz LTE Band 2: 1930 MHz ~ 1990 MHz LTE Band 4: 2110 MHz ~ 2155 MHz LTE Band 5: 869 MHz ~ 894 MHz LTE Band 12: 729 MHz ~ 746 MHz LTE Band 13: 746 MHz ~ 756 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 2110 MHz ~ 2180MHz 5G NR n2: 1930 MHz ~ 1990 MHz 5G NR n5: 869 MHz ~ 894 MHz 5G NR n66: 2110 MHz ~ 2180MHz 5G NR n77: 3300 MHz ~ 4200 MHz 5G NR n78: 3300 MHz ~ 3800 MHz 5G NR n260: 37000 MHz ~ 29500 MHz 5G NR n261: 27.5GHz ~ 28.35 GHz 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/ac/n/ax: 5180 MHz ~ 5240 MHz; 5745 MHz ~ 5825 MHz
Ancillary Equipment:	AC Adapter Brand Name: Orbic Model No.: TPA-23A050200UU01 Serial No.: (N/A, marked #1 by test site) Rated Input: 100-240V~ 50/60Hz,0.3A Rated Output: 5V=2A Manufacturer: Dongguan summer electronics Co., LTD Battery Brand Name: Orbic Model No.: BTE-4401 Serial No.: (N/A, marked #1 by test site) Capacity: 4400mAh Rated Voltage: 3.8V Charge Limit: 4.35V Manufacturer: HUIZHOU DXDRAGON INC

Note:

1. For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.



2. Test Results

2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination Remark
1	15.107	Conducted Emission	2021.06.24	Wu Runfeng	PASS	No deviation
2	15.109	Radiated Emission	2021.06.30	Lin Jiayong	PASS	No deviation

Note 1: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



2.2. EUT Setup and Operating Conditions

Note: All of the following test modes are tested in all the test items.

Test Modes	
Mode 1	WCDMA Band II Idle + 2.4G WLAN Idle + Adapter + SIM Card
Mode 2	WCDMA Band IV Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 3	WCDMA Band V Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 4	LTE Band 2 Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 5	LTE Band 4 Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 6	LTE Band 5 Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 7	LTE Band 12 Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 8	LTE Band 13 Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 9	LTE Band 48 Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 10	LTE Band 66 Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 11	NSA_2A_n2A Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 12	NSA_2A_n5A Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 13	NSA_2A_n66A Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 14	NSA_2A_n77A Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 15	NSA_2A_n78A Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 16	NSA_2A_n260A Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 17	NSA_2A_n261A Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 18	SA_n2 Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 19	SA_n66 Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 20	SA_n78 Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 21	SA_n260 Idle+ 5G WLAN Idle+ Adapter + SIM Card
Mode 22	SA_n261 Idle+ 5G WLAN Idle+ Adapter + SIM Card
Remark:	
The above test mode in boldface (Mode 1) was the worst case of conducted emission and radiated emission test, only the test data of these modes were reported.	

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106

3. 47 CFR Part 15B Requirements

3.1. Conducted Emission

3.1.1. Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- a) The limit subjects to the Class B digital device.
- b) The lower limit shall apply at the band edges.
- c) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2. Test Setup

Please refer to Annex A for the photographs of the Test Configuration.

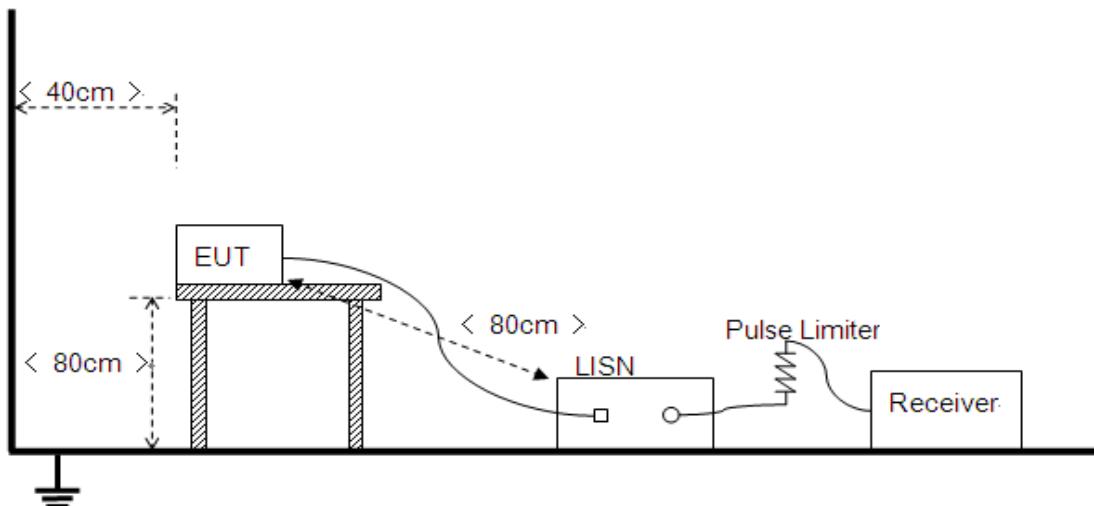




The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

The power strip or extension cord has been investigated to make sure that the LISN integrity is maintained with respect to the impedance characteristics as prescribed in ANSI C63.4-2014 at Clause 4.3.


3.1.3. Test Result

Set RBW=9 kHz, VBW=30 kHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

A. Test Plot and Suspicious Points:

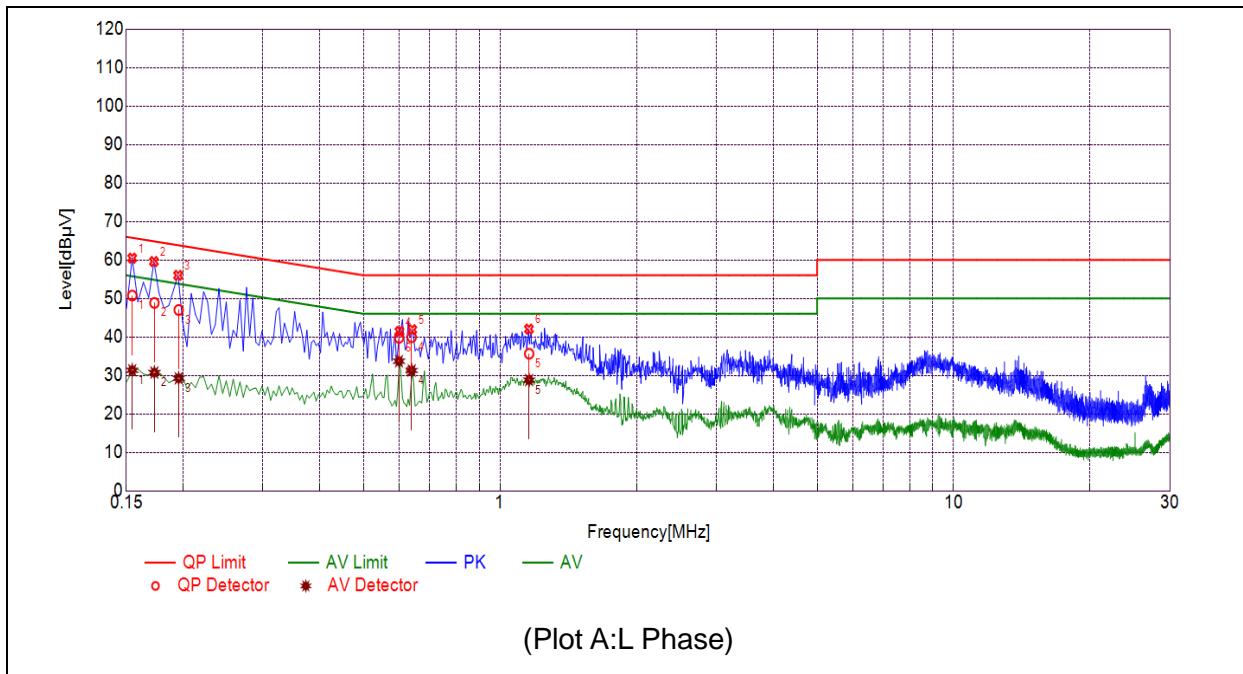

NO.	Fre. (MHz)	Emission Level (dB μ V)		Limit (dB μ V)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1545	50.75	31.33	65.75	55.75	Line	PASS
2	0.1729	48.83	30.73	64.82	54.82		PASS
3	0.1956	47.00	29.24	63.80	53.80		PASS
4	0.6385	39.94	31.28	56.00	46.00		PASS
5	1.1590	35.63	28.78	56.00	46.00		PASS
6	0.5986	39.77	33.68	56.00	46.00		PASS

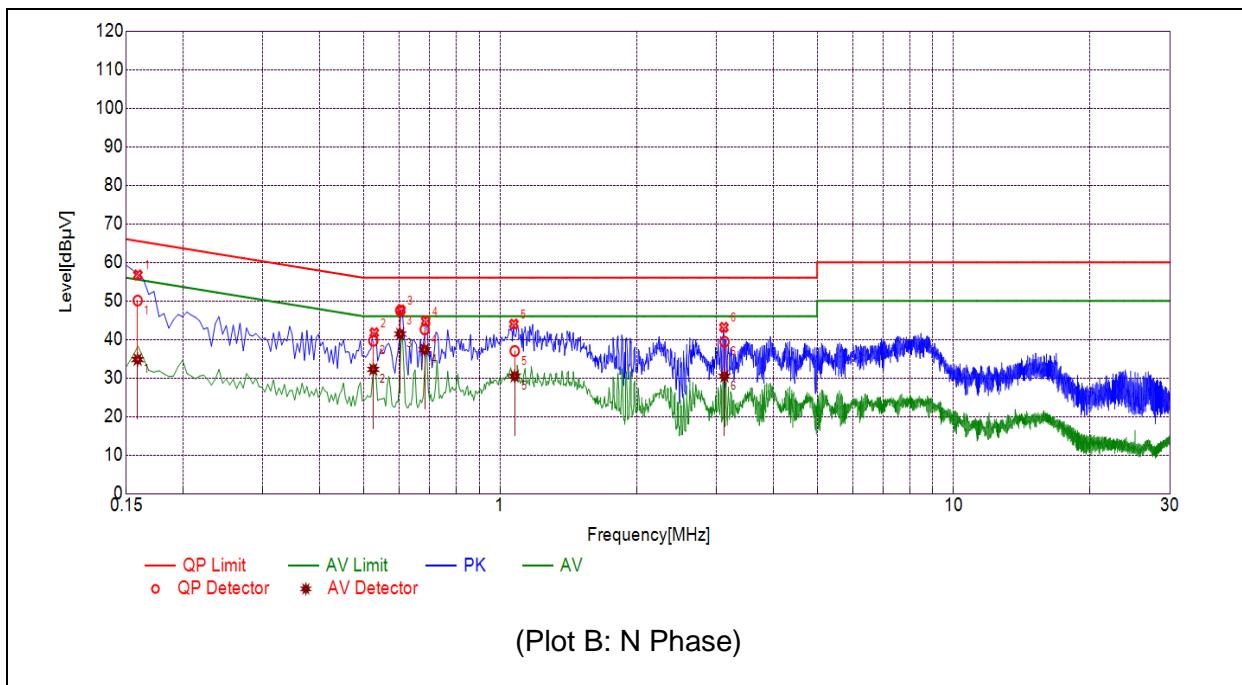

NO.	Fre. (MHz)	Emission Level (dB μ V)		Limit (dB μ V)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1588	50.08	34.79	65.53	55.53	Neutral	PASS
2	0.5254	39.63	32.24	56.00	46.00		PASS
3	0.6023	47.48	41.40	56.00	46.00		PASS
4	0.6821	42.61	37.33	56.00	46.00		PASS
5	1.0770	37.00	30.47	56.00	46.00		PASS
6	3.1242	39.42	30.46	56.00	46.00		PASS



3.2. Radiated Emission

3.2.1. Requirement

According to FCC section 15.109 (a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency Range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	(μ V/m)	(dB μ V/m)
30.0 - 88.0	100	20log 100
88.0 - 216.0	150	20log 150
216.0 - 960.0	200	20log 200
Above 960.0	500	20log 500

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dB μ V/m is calculated by 20log Emission Level(μ V/m).


3.2.2. Frequency Range of Measurement

According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705–108	1000.
108–500	2000.
500–1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

3.2.3. Test Setup

- 1) For radiated emissions from 30MHz to1GHz

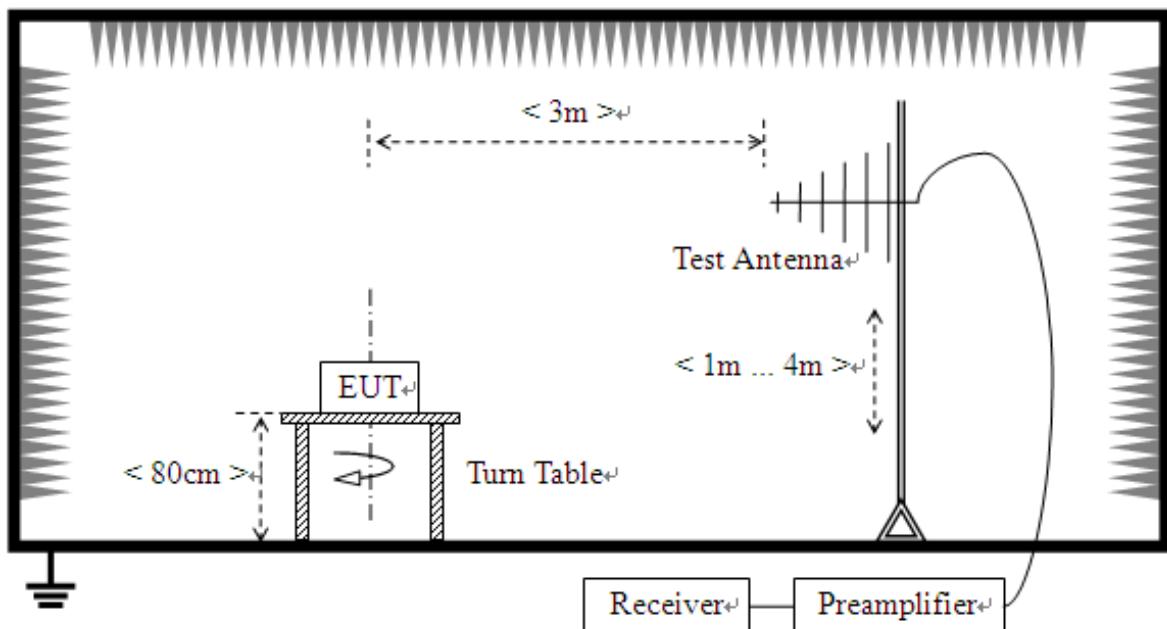

- 2) For radiated emissions above 1GHz

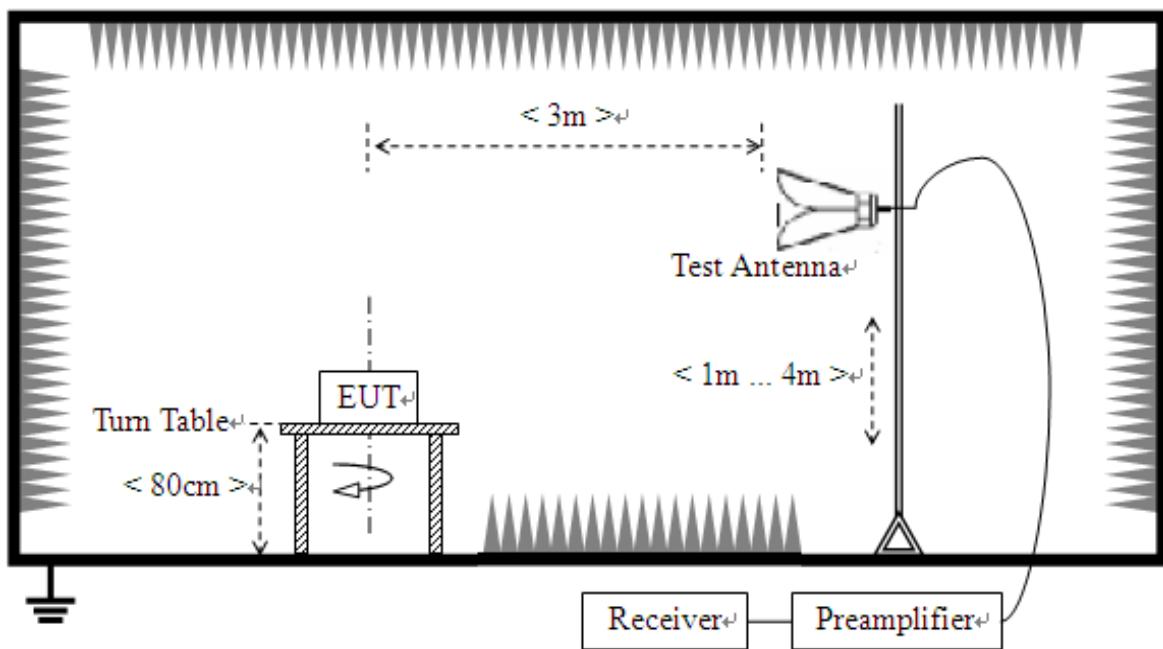



The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on variable-height antenna master tower.

For the test Antenna:

In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

For measurements below 1GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.


For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video bandwidth is set to 3MHz for peak measurements and as applicable for average measurements.

3.2.4. Test Result


The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of emissions which (6GHz-40GHz) are attenuated more than 20 dB below the permissible value need not be reported.


Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

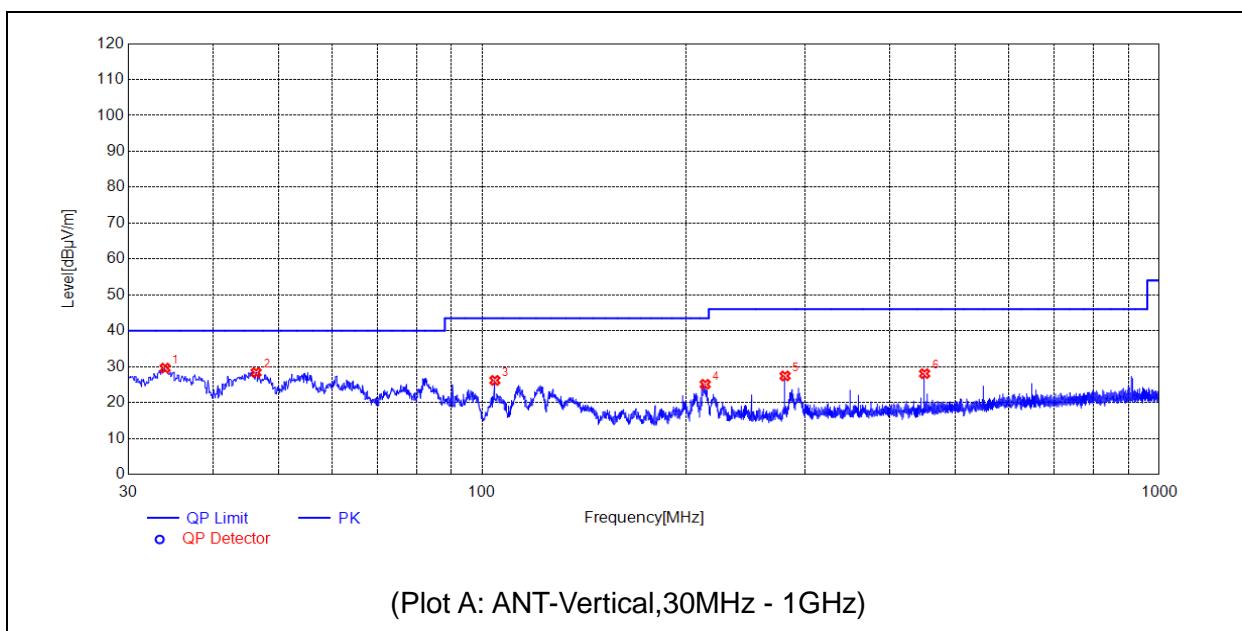


No.	Fre. MHz	PK dB μ V/m	QP dB μ V/m	AV dB μ V/m	Limit-PK dB μ V/m	Limit-QP dB μ V/m	Limit-AV dB μ V/m	ANT	Verdict
1	33.9774	29.61	N.A	N.A	N.A	40.00	N.A	V	PASS
2	46.2976	28.37	N.A	N.A	N.A	40.00	N.A	V	PASS
3	104.3094	26.17	N.A	N.A	N.A	43.50	N.A	V	PASS
4	213.3483	25.08	N.A	N.A	N.A	43.50	N.A	V	PASS
5	279.9940	27.41	N.A	N.A	N.A	46.00	N.A	V	PASS
6	450.0520	28.05	N.A	N.A	N.A	46.00	N.A	V	PASS

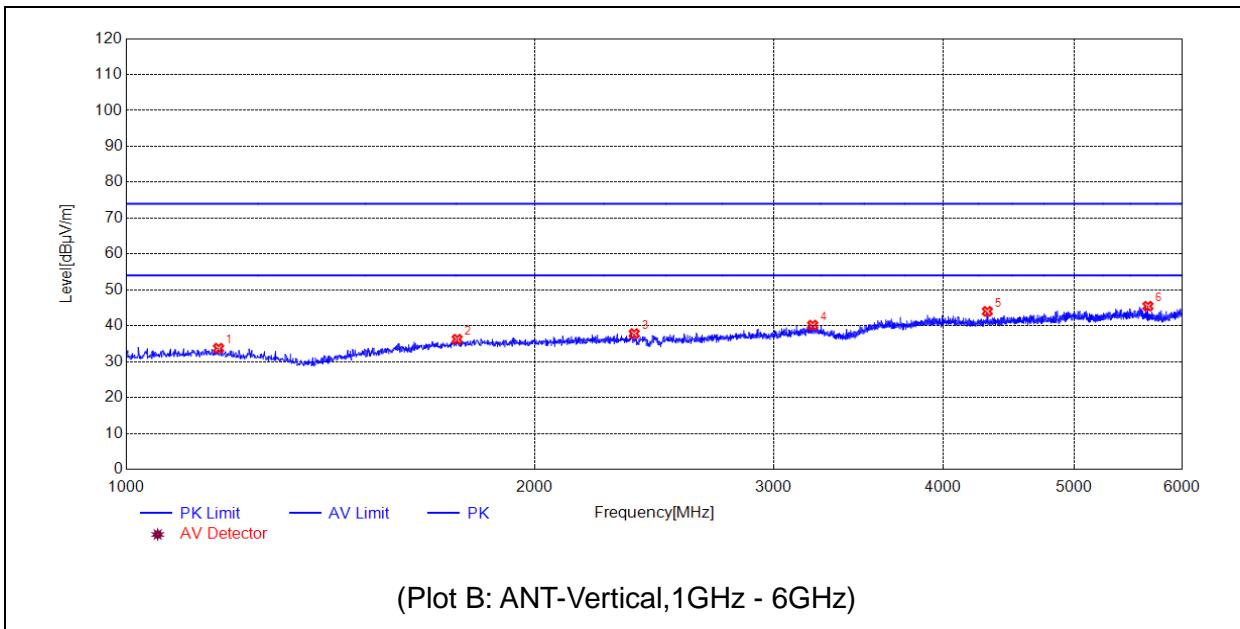

No.	Fre. MHz	PK dB μ V/m	QP dB μ V/m	AV dB μ V/m	Limit-PK dB μ V/m	Limit-QP dB μ V/m	Limit-AV dB μ V/m	ANT	Verdict
1	1169.0338	33.74	N.A	N.A	74.00	N.A	54.00	V	PASS
2	1753.1506	36.25	N.A	N.A	74.00	N.A	54.00	V	PASS
3	2368.2737	37.81	N.A	N.A	74.00	N.A	54.00	V	PASS
4	3206.4413	40.18	N.A	N.A	74.00	N.A	54.00	V	PASS
5	4313.6627	44.01	N.A	N.A	74.00	N.A	54.00	V	PASS
6	5665.9332	45.45	N.A	N.A	74.00	N.A	54.00	V	PASS

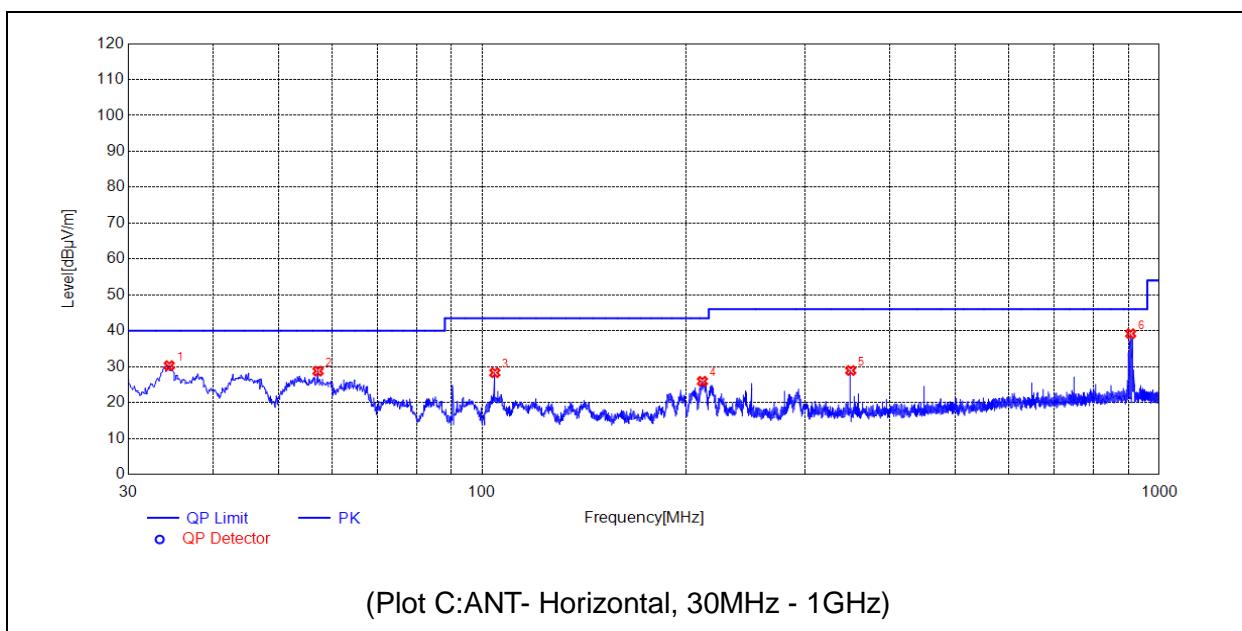

No.	Fre. MHz	PK dB μ V/m	QP dB μ V/m	AV dB μ V/m	Limit-PK dB μ V/m	Limit-QP dB μ V/m	Limit-AV dB μ V/m	ANT	Verdict
1	34.4624	30.29	N.A	N.A	N.A	40.00	N.A	H	PASS
2	57.1627	28.75	N.A	N.A	N.A	40.00	N.A	H	PASS
3	104.3094	28.32	N.A	N.A	N.A	43.50	N.A	H	PASS
4	211.3111	25.92	N.A	N.A	N.A	43.50	N.A	H	PASS
5	350.0350	28.92	N.A	N.A	N.A	46.00	N.A	H	PASS
6	907.2587	39.18	N.A	N.A	N.A	46.00	N.A	H	PASS

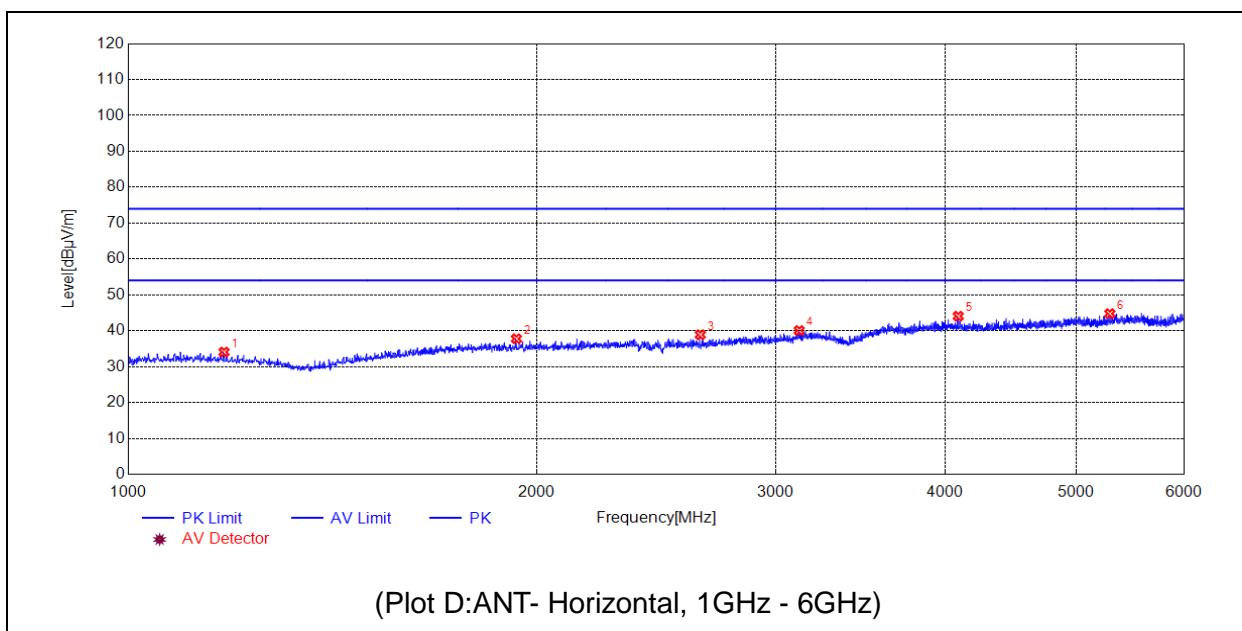

No.	Fre. MHz	PK dB μ V/m	QP dB μ V/m	AV dB μ V/m	Limit-PK dB μ V/m	Limit-QP dB μ V/m	Limit-AV dB μ V/m	ANT	Verdict
1	1176.0352	34.08	N.A	N.A	74.00	N.A	54.00	H	PASS
2	1932.1864	37.78	N.A	N.A	74.00	N.A	54.00	H	PASS
3	2640.3281	38.89	N.A	N.A	74.00	N.A	54.00	H	PASS
4	3123.4247	40.07	N.A	N.A	74.00	N.A	54.00	H	PASS
5	4091.6183	44.07	N.A	N.A	74.00	N.A	54.00	H	PASS
6	5292.8586	44.78	N.A	N.A	74.00	N.A	54.00	H	PASS



Annex A Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%($U=2U_{\text{c}}(y)$)	9kHz-150kHz	$\pm 3.3\text{dB}$
	150kHz-30MHz	$\pm 2.8\text{dB}$

Uncertainty of Radiated Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%($U=2U_{\text{c}}(y)$)	30MHz-200MHz	$\pm 5.06\text{dB}$
	200MHz-1000MHz	$\pm 5.04\text{dB}$
	1GHz-6GHz	$\pm 5.18\text{dB}$
	6GHz-18GHz	$\pm 5.48\text{dB}$



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Accreditation Certificate

Accredited Testing Laboratory:	The FCC designation number is CN1192. Test firm registration number is 226174. (Shenzhen Morlab Communications Technology Co., Ltd.)
---------------------------------------	--

4. Test Software Utilized

Model	Version Number	Producer
JS32-RE	Version 2.0.2.0	Tonscend
TS+ -[JS32-CE]	Version2.5.0.0	Tonscend



5. Test Equipments Utilized

Description	Model	Serial No.	Manufacturer	Cal. Date	Due. Date
Bi-Log Antenna	VULB 9163	9163-519	SCHWARZBECK	2019/5/24	2022/5/23
Horn Antenna	BBHA 9120D	01774	SCHWARZBECK	2019/7/26	2022/7/25
Horn Antenna	BBHA 9170	BBHA 9170#773	SCHWARZBECK	2019/7/26	2022/7/25
Receiver	N9038A	MY56400093	KEYSIGHT	2021/3/9	2022/3/8
Receiver	N9038A	MY54130016	Agilent	2020/7/21	2021/7/20
6db Attenuator	BW-N6W5+	E191001	Mini-circuits	2020/10/20	2021/10/19
Preamplifier	S020180L320 3	61171/61172	LUCIX CORP.	2020/7/21	2021/7/20
Preamplifier	S10M100L380 2	46732	LUCIX CORP.	2020/7/21	2021/7/20
Receiver	ESPI	101052	R&S	2020/7/21	2021/7/20
LISN	NSLK 8127	8127449	Schwarzbeck	2021/3/9	2022/3/8
10dB Pulse Limiter	VTSD 9561-F	VTSD 9561 F-B #206	SCHWARZBECK	2020/7/24	2021/7/23

5. Ancillary Equipment Utilized

Description	Manufacturer	Model	Serial No.
Adapter	ORBIC	TPA-23A050200UU01	N/A

— END OF REPORT —