

## FCC TEST REPORT

for

ShenZhen Soundpower Technology Co., Ltd.

Bluetooth audio receiver

Model Number: AAR1000X; AAR1100X; AAR1200X; AAR1300X;  
AAR1400X; AAR1500X; AAR1600X; AAR1700X; AAR1800X;  
AAR1900X; AAR2000X; AAR2100X; AAR2200X; AAR2300X;  
AAR2400X; AAR2500X; AAR2600X; AAR2700X; AAR2800X;  
AAR2900X; AAR3000X; AAR3100X; AAR4000X; AAR5000X;  
AAR6000X;(The symbol "X" can be 0-9 to indicate different color)

FCC ID: 2ABHDAAR1000X

Prepared for : ShenZhen Soundpower Technology Co., Ltd.

Address : 202B, Floor 2,B6 Building WenWu Industrial Zone, DaTianYang  
SongYu Road, SongGang Town, Bao an, Shenzhen, China

Prepared by : Keyway Testing Technology Co., Ltd.

Address : Baishun Industrial Zone, Zhangmutou Town,  
Dongguan, Guangdong, China

Tel: 86-769-8718 2258

Fax: 86-769-8718 1058

Report No. : 13KWE12905F



Date of Test : Dec. 1~5, 2013

Date of Report : Dec. 6, 2013

## TABLE OF CONTENTS

	<b>Page</b>
<b>Test Report Declaration</b>	<b>Page</b>
1. TEST SUMMARY .....	4
2. GENERAL PRODUCT INFORMATION.....	5
2.1. Product Function.....	5
2.2. Description of Device (EUT) .....	5
2.3. Independent Operation Modes .....	5
2.4. Difference between Model Numbers.....	5
2.5. Test Supporting System.....	5
2.6. Test Facilities .....	6
2.7. List of Test and Measurement Instruments.....	6
3. TEST SET-UP AND OPERATION MODES.....	7
3.1. Principle of Configuration Selection.....	7
3.2. Block Diagram of Test Set-up .....	7
3.3. Test Operation Mode and Test Software .....	7
3.4. Special Accessories and Auxiliary Equipment.....	7
3.5. Countermeasures to Achieve EMC Compliance.....	7
4. EMISSION TEST RESULTS.....	8
4.1. Radiated Emission Test.....	8
4.2. Conducted Emission at the Mains Terminals Test.....	18
5. 20DB OCCUPY BANDWIDTH.....	21
5.1. Limits.....	21
5.2. Test setup .....	21
6. BAND EDGE COMPLIANCE TEST .....	24
6.1. Limits.....	24
6.2. Test setup .....	24
7. ANTENNA REQUIREMENT: .....	26
8. PHOTOGRAPHS OF TEST SET-UP.....	26
9. PHOTOGRAPHS OF THE EUT.....	26

# Keyway Testing Technology Co., Ltd.

<b>Applicant:</b>	ShenZhen Soundpower Technology Co., Ltd.		
<b>Address:</b>	202B, Floor 2,B6 Building WenWu Industrial Zone, DaTianYang SongYu Road,SongGang Town, Bao an, Shenzhen, China		
<b>Manufacturer:</b>	ShenZhen Soundpower Technology Co., Ltd.		
<b>Address:</b>	202B, Floor 2,B6 Building WenWu Industrial Zone, DaTianYang SongYu Road,SongGang Town, Bao an, Shenzhen, China		
<b>E.U.T:</b>	Bluetooth audio receiver		
<b>Model Number:</b>	AAR1000X; AAR1100X; AAR1200X; AAR1300X; AAR1400X; AAR1500X; AAR1600X; AAR1700X; AAR1800X; AAR1900X; AAR2000X; AAR2100X; AAR2200X; AAR2300X; AAR2400X; AAR2500X; AAR2600X; AAR2700X; AAR2800X; AAR2900X; AAR3000X; AAR3100X; AAR4000X; AAR5000X; AAR6000X; (The symbol "X" can be 0-9 to indicate different color)		
<b>Trade Name:</b>	BUS-POWER	<b>Serial No.:</b>	-----
<b>Date of Receipt:</b>	Dec. 1, 2013	<b>Date of Test:</b>	Dec. 1~5, 2013
<b>Test Specification:</b>	FCC Part 15, Subpart C: Oct. 1, 2013 ANSI C63.4:2009		
<b>Test Result:</b>	The equipment under test was found to be compliance with the requirements of the standards applied.		
<b>Issue Date: Dec. 6, 2013</b>			
Tested by:	Reviewed by:	Approved by:	
			
Andy Gao / Engineer	Jade Yang/ Supervisor	Chris Du / Manager	
<b>Other Aspects:</b>	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology Co., Ltd.			

## 1. TEST SUMMARY

Test Items	Test Requirement	Uncertainty	Result
Conducted Emissions	15.207 ANSI C63.4	±2.6dB	PASS
Radiated Emissions	15.209 15.249 ANSI C63.4	±3.6dB	PASS
20dB Bandwidth	15.249 ANSI C63.4	±1kHz	PASS
Band Edge Compliance Test	15.249 ANSI C63.4	±3.6dB	PASS
Antenna Requirement	15.203 ANSI C63.4	/	PASS

Note: N/A means not applicable.

## 2.GENERAL PRODUCT INFORMATION

### 2.1. Product Function

Refer to Technical Construction Form and User Manual.

### 2.2. Description of Device (EUT)

Description:	Bluetooth audio receiver
M/N:	AAR1000X; AAR1100X; AAR1200X; AAR1300X; AAR1400X; AAR1500X; AAR1600X; AAR1700X; AAR1800X; AAR1900X; AAR2000X; AAR2100X; AAR2200X; AAR2300X; AAR2400X; AAR2500X; AAR2600X; AAR2700X; AAR2800X; AAR2900X; AAR3000X; AAR3100X; AAR4000X; AAR5000X; AAR6000X; (The symbol "X" can be 0-9 to indicate different color)
Operation Frequency:	2402~2480MHz
Channel numbers:	79
Channel separation:	1M
Modulation Technology:	GFSK, Pi/4DQPSK, 8-DQPSK
Antenna Type:	PCB antenna
Antenna Gain:	0dBi
Power Supply:	DC 5V

### 2.3. Independent Operation Modes

The basic operation modes are:

#### 2.3.1. EUT work continues TX mode and frequency as below:

Channel	Frequency
Low	2402MHz
Middle	2441MHz
High	2480MHz

### 2.4. Difference between Model Numbers

Note: The products different for trade name and outlook colors.

### 2.5. Test Supporting System

#### Adapter

Model:GQ07-050550

Manufacturer: Keyway

I/P:AC 100~240V 50/60Hz

O/P:DC 5V/0.55A

## 2.6. Test Facilities

Lab Qualifications : Certificated by Industry Canada  
 Registration No.: 9868A  
 Date of registration: December 8, 2011

Certificated by FCC, USA  
 Registration No.: 370994  
 Date of registration: February 21, 2012

## 2.7. List of Test and Measurement Instruments

### 2.7.1. For radiated emission test (Below 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	May 9,13	May 9,14
Bilog Antenna	ETS-LINDGREN	3142D	00135452	May 20,13	May 20,14
Spectrum Analyzer	Agilent	8593E	3911A04271	May 9,13	May 9,14
3m Semi-anechoic Chamber	ETS-LINDGREN	966	KW01	May 20,13	May 20,14
Signal Amplifier	SONOMA	310	187303	May 9,13	May 9,14
RF Cable	IMRO	IMRO-400	966 Cable 1#	May 9,13	May 9,14
MULTI-DEVICE Controller	ETS-LINDGREN	2090	126913	N/A	N/A
Antenna Holder	ETS-LINDGREN	2070B	00109601	N/A	N/A

### 2.7.2. For above 1GHz radiated emission, band edge, 20dB bandwidth test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	DAZE	ZN30701	11003	May 11,13	May 11,14
Horn Antenna	SCHWARZBECK	BBHA9170	9170-068	May 11,13	May 11,14
Spectrum Analyzer	Agilent	8593E	3911A04271	May 9,13	May 9,14
Spectrum Analyzer	Agilent	E4408B	MY44211125	May 9,13	May 9,14
Spectrum Analyzer	Rohde&Schwarz	FSP	100394	May 9,13	May 9,14
3m Semi-anechoic Chamber	ETS-LINDGREN	966	KW01	May 20,13	May 20,14
Signal Amplifier	DAZE	ZN3380C	11001	May 9,13	May 9,14
Signal Amplifier	Agilent	8449B	3008A00251	May 9,13	May 9,14
High Pass filter	Micro	HPM50111	324216	May 9,13	May 9,14
Power Meter	R&S	NRVS	101824	May 9,13	May 9,14
RF Cable	IMRO	IMRO-400	966 Cable 1#	May 9,13	May 9,14
MULTI-DEVICE Controller	ETS-LINDGREN	2090	126913	N/A	N/A
Antenna Holder	ETS-LINDGREN	2070B	00109601	N/A	N/A

### 3. TEST SET-UP AND OPERATION MODES

#### 3.1. Principle of Configuration Selection

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

#### 3.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators



(EUT: Bluetooth audio receiver)

Note: 1:By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Y axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

2 By preliminary testing three modulation of EUT transmitted status, it was found that "GFSK" modulation was the worst, then the final test was executed the worst condition and test data were recorded in this report. Test data as below.

Frequency (MHz)	Axis	Field Strength (dBuV/m)	Antenna Polarization
2402	GFSK	88.47	VERTICAL
2402	Pi/4DQPSK	82.56	VERTICAL
2402	8-DQPSK	84.76	VERTICAL

#### 3.3. Test Operation Mode and Test Software

None.

#### 3.4. Special Accessories and Auxiliary Equipment

None.

#### 3.5. Countermeasures to Achieve EMC Compliance

None.

## 4. EMISSION TEST RESULTS

### 4.1. Radiated Emission Test

#### 4.1.1. Limit 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

#### 4.1.2. Fundamental and harmonics emission limits

Fundamental Frequency	Field Strength of Fundamental		Field Strength of Harmonics	
	mV/m	dBuV/m	uV/m	dBuV/m
902~928 MHz	50	94	500	54
2400~2483.5 MHz	50	94	500	54
5725~5875MHz	50	94	500	54
24.0~24.25GHz	250	108	2500	68

#### 4.1.3. Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 4.1.4. Test setup

The EUT was placed on a turn table which was 0.8 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.


The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz.

The frequency range from 30MHz to 10<sup>th</sup> harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.


The test data of the worst case condition(s) was reported on the following pages.

Notes: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading-Preamp Factor.  
2. Measurement Uncertainty:  $\pm 3.6$  dB at a level of confidence of 95%.

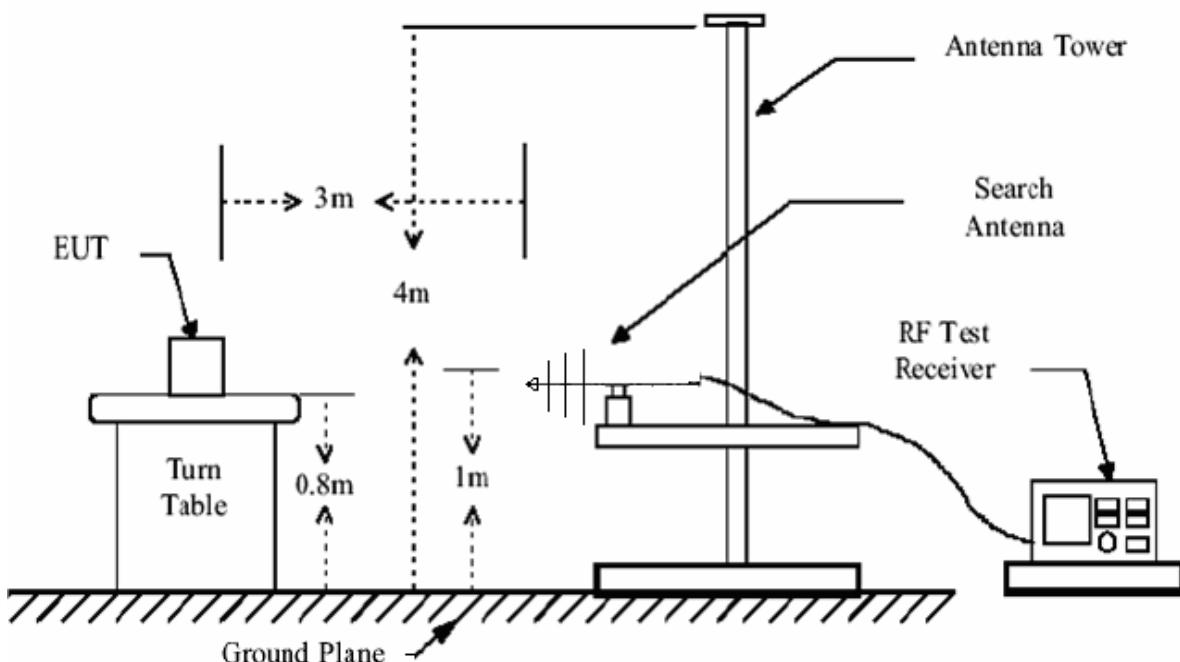

**Test Data**


Polarization: VERTICAL

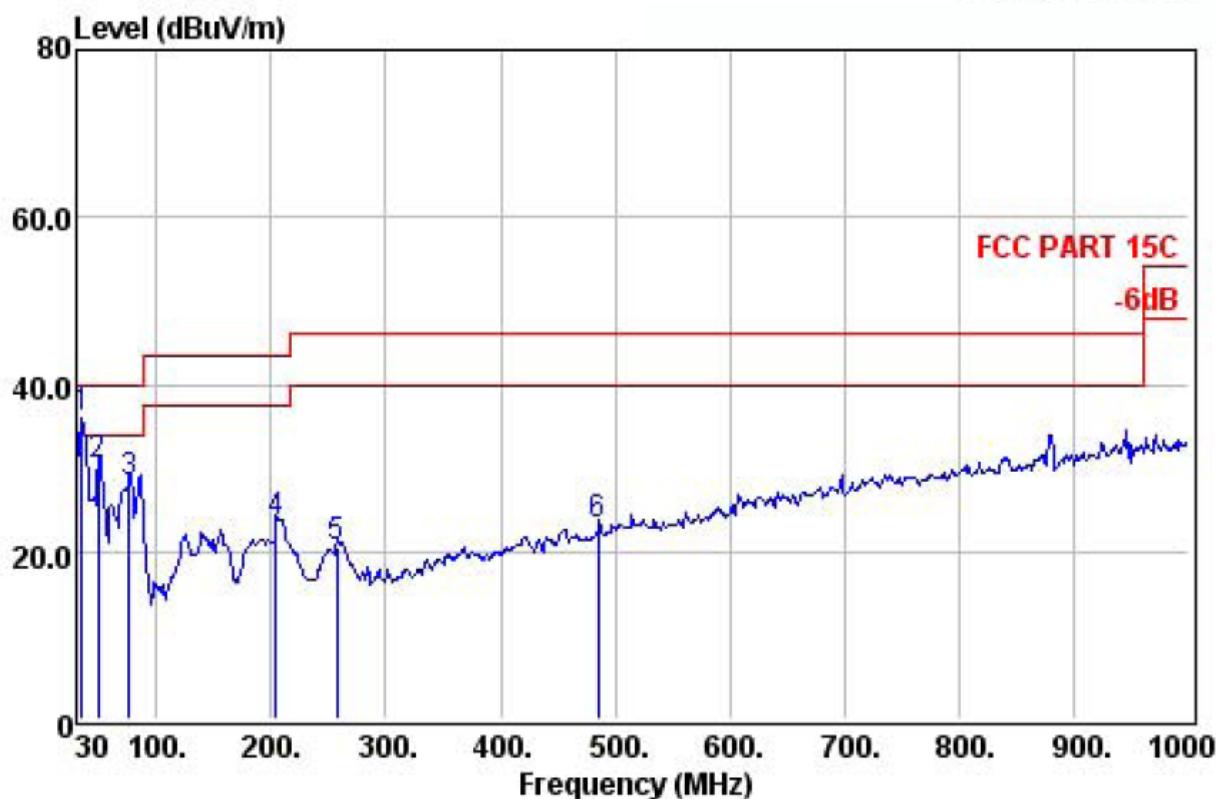

	Preamp Freq	Read Level	Cable Loss	Antenna Factor		Limit Level	Over Line	Over Limit	Remark
--	----------------	---------------	---------------	-------------------	--	----------------	--------------	---------------	--------

	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	34.67	31.38	50.80	0.56	16.04	36.02	40.00	-3.98	QP
2	49.36	31.38	51.82	0.75	9.06	30.25	40.00	-9.75	QP
3	76.65	31.33	50.97	0.85	7.83	28.32	40.00	-11.68	QP
4	203.61	31.09	42.04	1.46	11.17	23.58	43.50	-19.92	QP
5	257.58	30.96	36.97	1.70	12.93	20.64	46.00	-25.36	QP
6	484.69	30.59	32.51	2.77	18.46	23.15	46.00	-22.85	QP


Polarization: HORIZONTAL

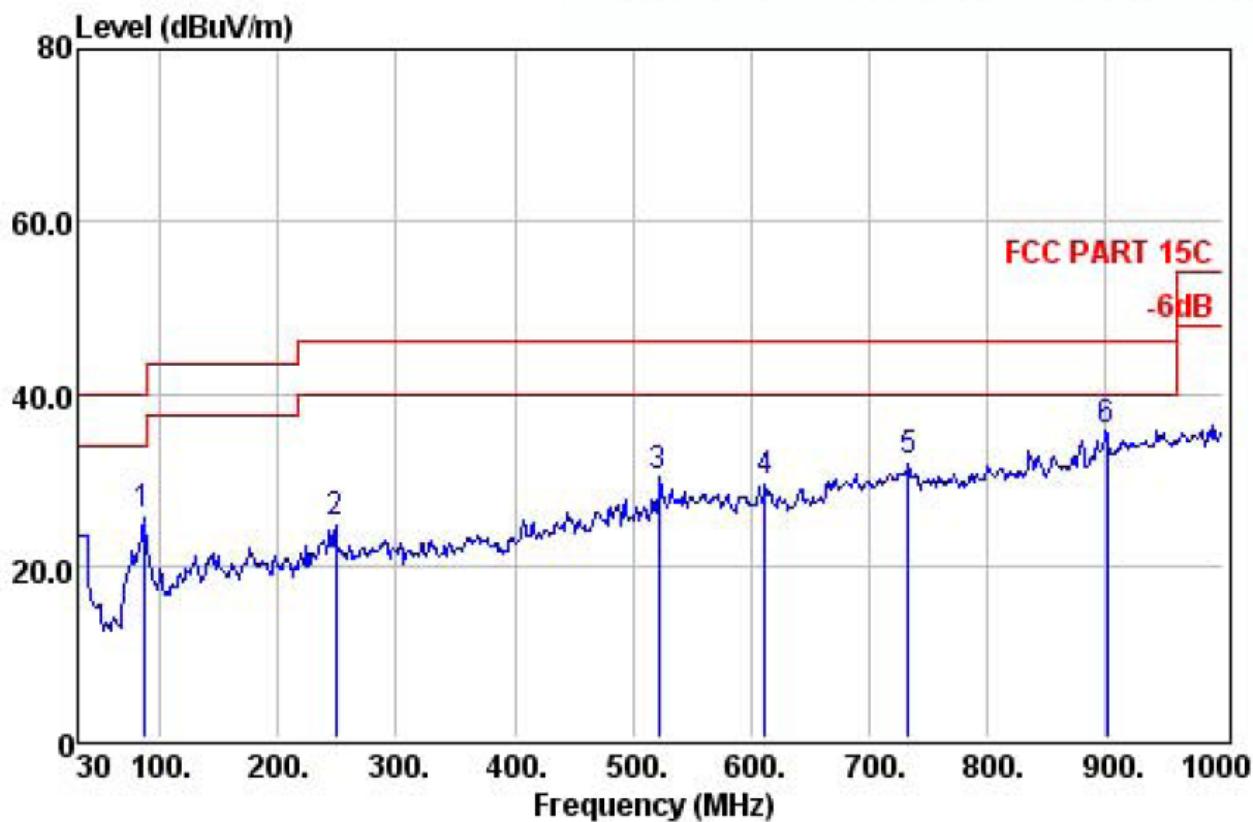

Freq	Preamp Factor	Read Level	Cable Antenna		Limit Level	Over Line	Over Limit	Remark
			Loss	Factor				
MHz		dB	dBuV					
1	86.12	31.35	47.76	0.94	8.67	26.02	40.00	-13.98 QP
2	248.15	30.96	41.35	1.70	12.85	24.94	46.00	-21.06 QP
3	522.19	30.68	38.96	2.94	19.14	30.36	46.00	-15.64 QP
4	611.94	30.62	35.95	3.38	20.93	29.64	46.00	-16.36 QP
5	733.31	30.66	35.97	4.04	22.67	32.02	46.00	-13.98 QP
6	902.06	30.05	36.81	4.84	24.06	35.66	46.00	-10.34 QP

Test mode: 2402MHz


Polarization: VERTICAL

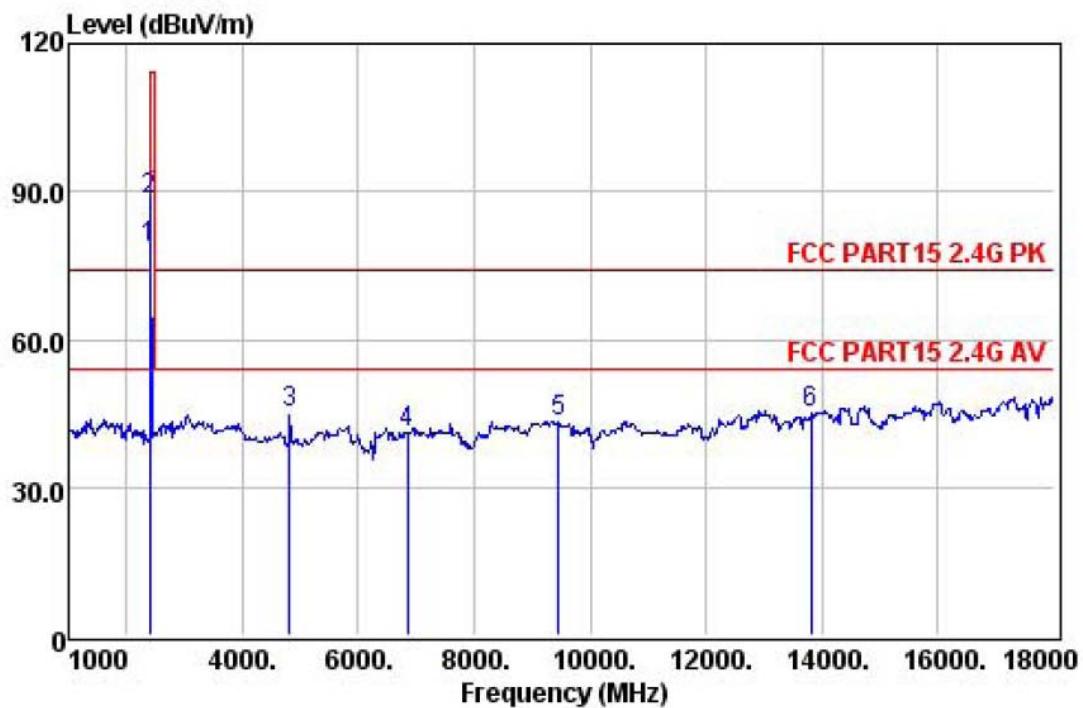

	Preamp Freq	Read Factor	Cable Level	Antenna Loss Factor	Limit Level	Over Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	2402.00	26.32	68.82	7.34	28.72	78.56	94.00	-15.44 Average
2	2402.00	26.32	78.73	7.34	28.72	88.47	114.00	-25.53 Peak
3	4804.00	27.49	27.50	11.96	32.94	44.91	74.00	-29.09 Peak
4	6848.00	27.87	15.42	16.60	36.80	40.95	74.00	-33.05 Peak
5	9449.00	28.58	17.19	16.92	37.94	43.47	74.00	-30.53 Peak
6	13801.00	29.36	11.96	19.12	43.30	45.02	74.00	-28.98 Peak

Test mode: 2402MHz


Polarization: HORIZONTAL

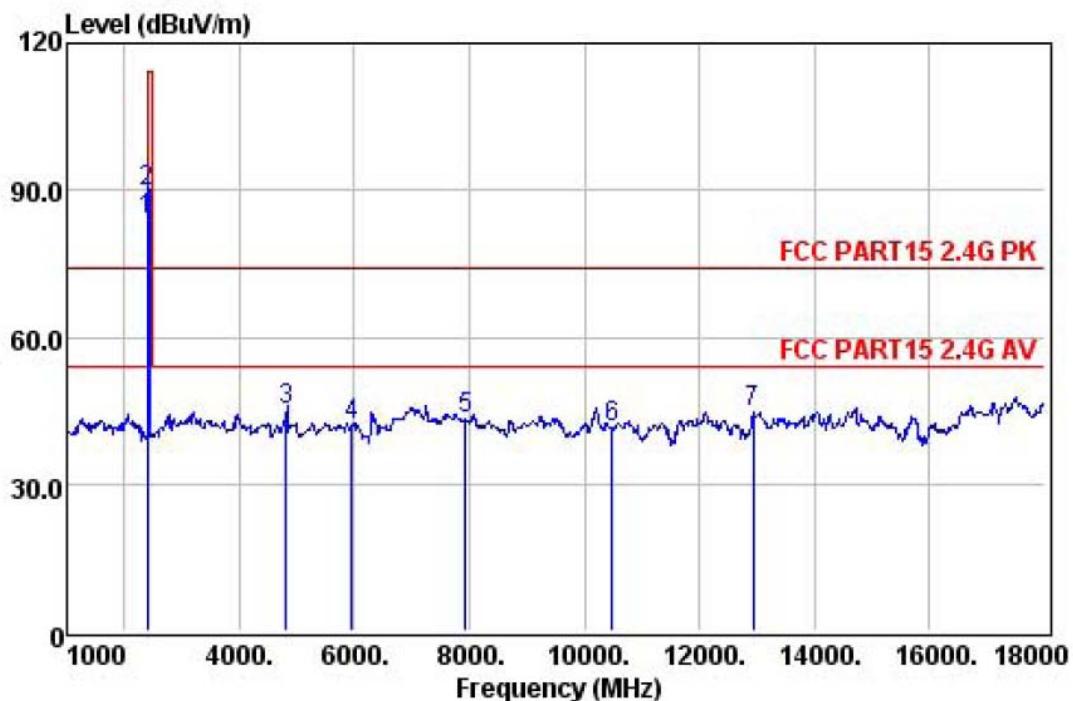

Freq	Preamp Factor	Read Level	Cable Antenna		Limit Level	Over Line	Over Limit	Remark	
			MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB
1	2402.00	26.32	73.93	7.34	28.72	83.67	94.00	-10.33	Average
2	2402.00	26.32	79.91	7.34	28.72	89.65	114.00	-24.35	Peak
3	4804.00	27.49	27.46	11.96	32.94	44.87	74.00	-29.13	Peak
4	5947.00	27.69	18.10	16.36	35.09	41.86	74.00	-32.14	Peak
5	7936.00	28.09	18.02	16.65	36.53	43.11	74.00	-30.89	Peak
6	10486.00	28.85	14.09	17.06	39.17	41.47	74.00	-32.53	Peak
7	12934.00	29.19	15.03	18.15	40.54	44.53	74.00	-29.47	Peak

Test mode: 2441MHz


Polarization: VERTICAL

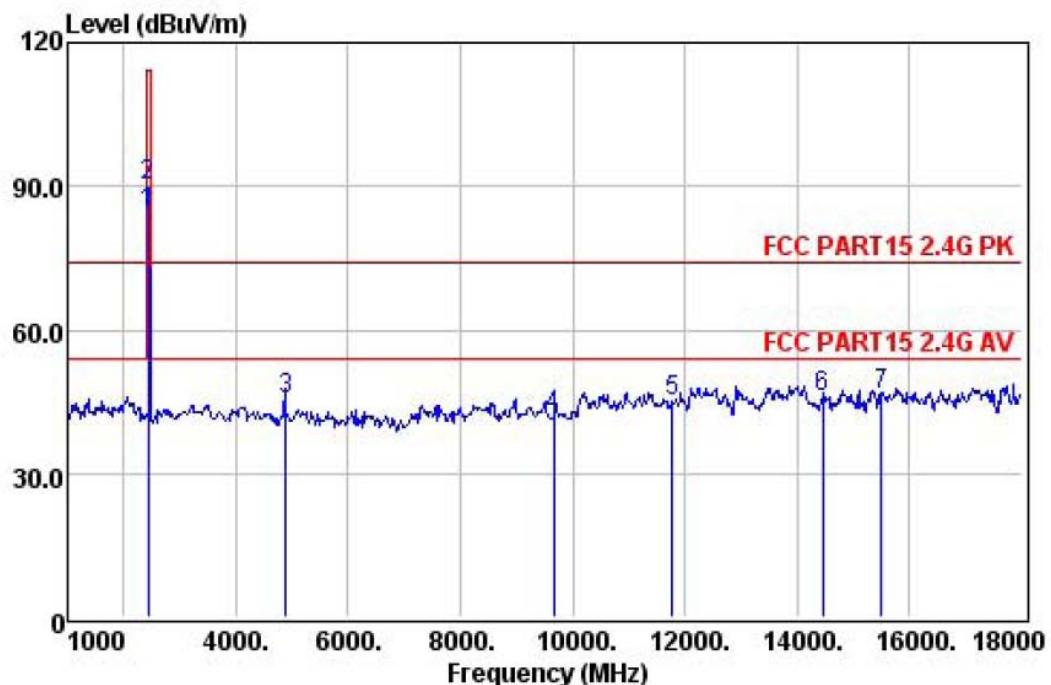

Freq	Preamp Factor	Read Level	Cable Antenna		Limit Level	Line Limit	Over Remark		
			MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB
1	2441.00	26.33	74.33	7.48	28.76	84.24	94.00	-9.76	Average
2	2441.00	26.33	80.06	7.48	28.76	89.97	114.00	-24.03	Peak
3	4882.00	27.53	27.59	12.14	33.11	45.31	74.00	-28.69	Peak
4	9653.00	28.66	15.35	16.94	38.12	41.75	74.00	-32.25	Peak
5	11778.00	28.98	17.24	17.32	39.62	45.20	74.00	-28.80	Peak
6	14447.00	29.47	14.88	19.64	40.90	45.95	74.00	-28.05	Peak
7	15501.00	29.63	17.19	20.32	38.40	46.28	74.00	-27.72	Peak

Test mode: 2441MHz


Polarization: HORIZONTAL

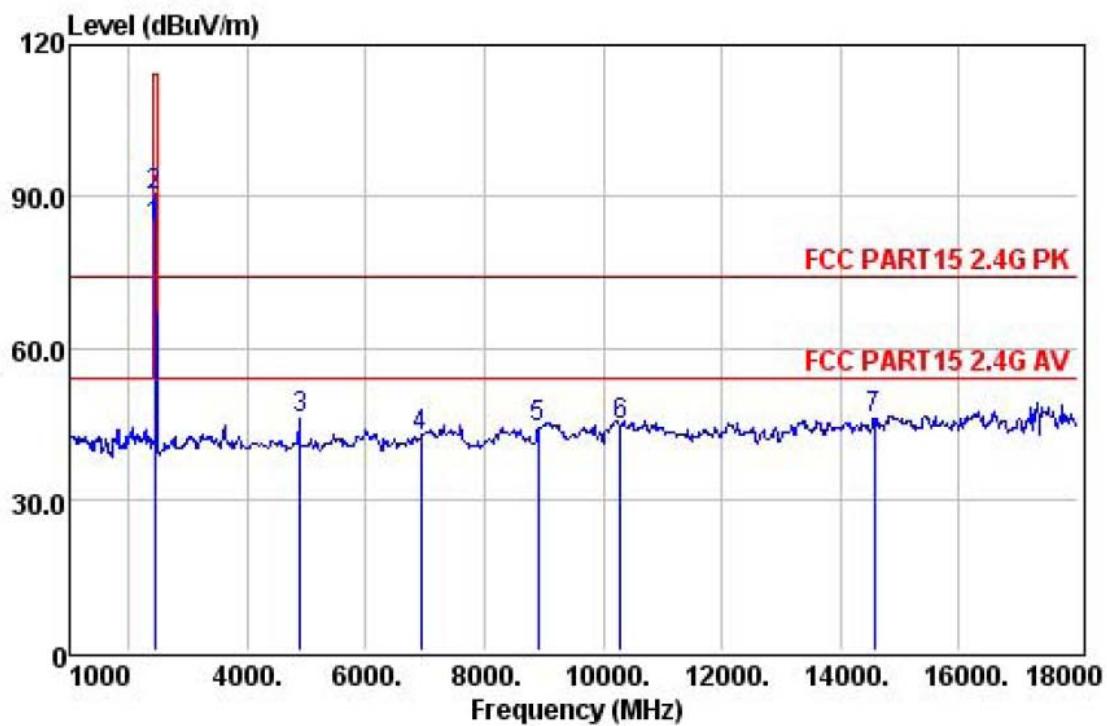

Preamp Freq	Read Level	Cable		Antenna Loss Factor	Limit Level	Limit Line	Over Limit	Remark
		Factor	dB					
MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1 2441.00	26.33	73.96	7.48	28.76	83.87	94.00	-10.13	Average
2 2441.00	26.33	80.15	7.48	28.76	90.06	114.00	-23.94	Peak
3 4882.00	27.53	28.35	12.14	33.11	46.07	74.00	-27.93	Peak
4 6916.00	27.88	16.83	16.60	36.98	42.53	74.00	-31.47	Peak
5 8905.00	28.37	18.38	16.86	37.28	44.15	74.00	-29.85	Peak
6 10282.00	28.83	17.52	17.02	38.85	44.56	74.00	-29.44	Peak
7 14566.00	29.48	15.48	19.72	40.32	46.04	74.00	-27.96	Peak

Test mode: 2480MHz


Polarization: VERTICAL

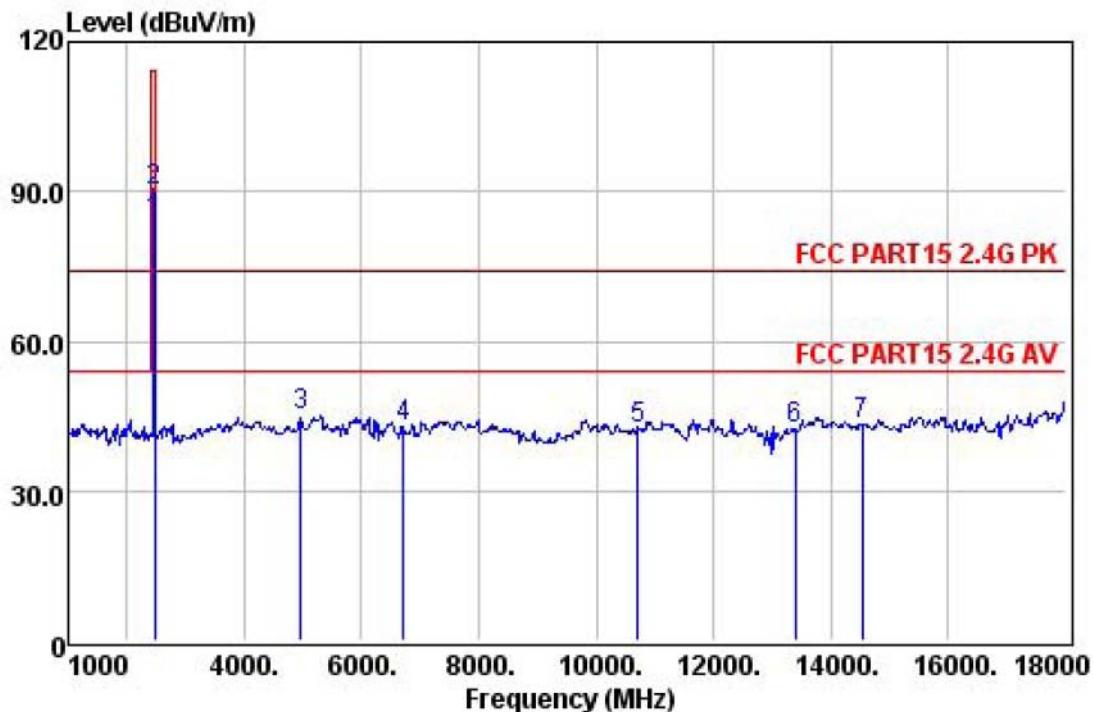

Preamp Freq	Factor	Read	Cable	Antenna	Limit Level	Limit Line	Over Limit	Remark
		Level	Loss	Factor				
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	2480.00	26.34	74.00	7.57	28.79	84.02	94.00	-9.98
2	2480.00	26.34	79.97	7.57	28.79	89.99	114.00	-24.01
3	4960.00	27.58	26.98	12.36	33.32	45.08	74.00	-28.92
4	6712.00	27.84	17.73	16.60	36.44	42.93	74.00	-31.07
5	10707.00	28.87	15.00	17.11	39.32	42.56	74.00	-31.44
6	13393.00	29.28	10.45	18.67	42.52	42.36	74.00	-31.64
7	14532.00	29.48	12.56	19.70	40.46	43.24	74.00	-30.76

Test mode: 2480MHz

Polarization: HORIZONTAL

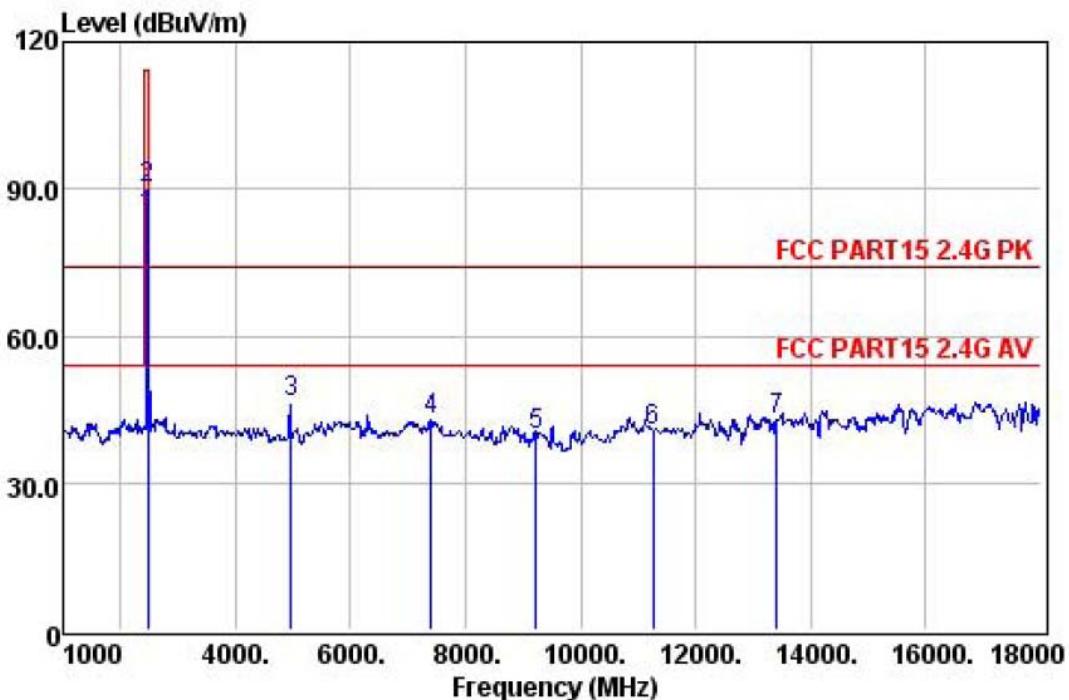

Preamp Freq	Factor	Read	Cable Antenna		Limit Level	Over Line	Over Limit	Remark
		Level	Loss	Factor				
	MHz	dB	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB
1	2480.00	26.34	74.16	7.57	28.79	84.18	94.00	-9.82 Average
2	2480.00	26.34	80.03	7.57	28.79	90.05	114.00	-23.95 Peak
3	4960.00	27.58	28.11	12.36	33.32	46.21	74.00	-27.79 Peak
4	7392.00	27.98	17.01	16.62	37.36	43.01	74.00	-30.99 Peak
5	9228.00	28.49	13.57	16.90	37.67	39.65	74.00	-34.35 Peak
6	11268.00	28.93	12.65	17.22	39.71	40.65	74.00	-33.35 Peak
7	13410.00	29.28	10.93	18.69	42.60	42.94	74.00	-31.06 Peak

## 4.2. Conducted Emission at the Mains Terminals Test

### 4.2.1. Limit 15.209 limits

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

### 4.2.2. Test Setup


The EUT was put on a wooden table which was 0.8 m high above the ground and connected to the AC mains through the Artificial Mains Network (AMN). Where the mains cable supplied by the manufacture was longer than 0.8 m, the excess was folded back and forth parallel to the cable at the centre so as to form a bundle no longer than 0.4 m.

The EUT was kept 0.4 m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during the conducted emission test.

The frequency range from 150 kHz to 30 MHz was investigated.

The bandwidth of the test receiver was set at 9 kHz.

Pretest for all mode, The test data of the worst case condition(s) was reported on the following page.

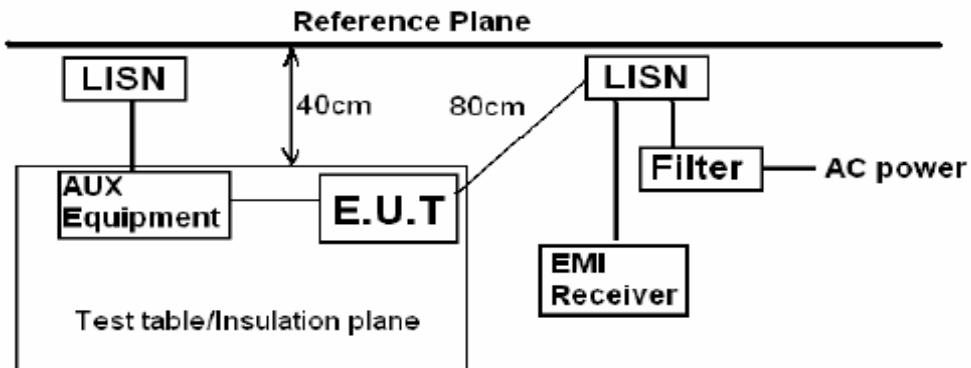

Remark:

E.U.T: Equipment Under Test

LISN: Line Impedance Stabilization Network

Test table height=0.8m


### 4.2.3. Test Mode

Set EUT in TX mode.

## Test Data

**Test mode: TX Mode**

**Test Line: LINE**

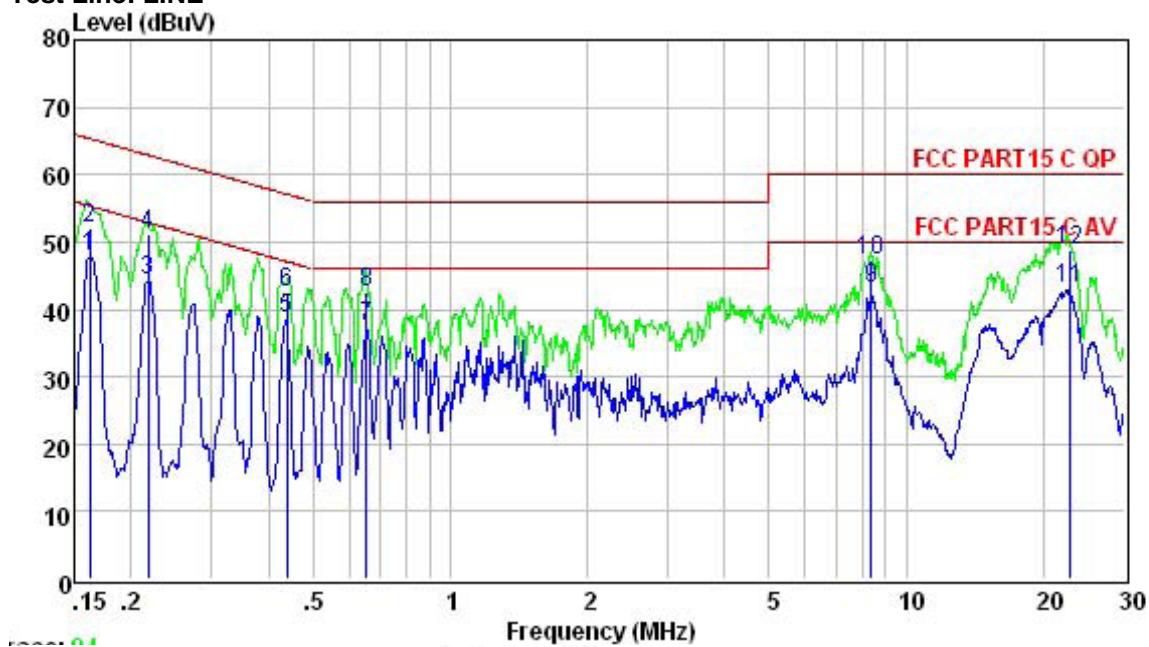


Freq	Level	Limit	Over	
	MHz	dBuV	dBuV	dB

	Freq	Level	Limit	Over	Remark
		MHz	dBuV	dBuV	dB
1	0.162	47.91	55.34	-7.43	Average
2	0.162	52.10	65.34	-13.24	QP
3	0.217	44.42	52.92	-8.50	Average
4	0.217	51.02	62.92	-11.90	QP
5	0.440	38.52	47.07	-8.55	Average
6	0.440	42.40	57.07	-14.67	QP
7	0.654	37.54	46.00	-8.46	Average
8	0.654	42.60	56.00	-13.40	QP
9	8.367	43.14	50.00	-6.86	Average
10	8.367	47.40	60.00	-12.60	QP
11	22.775	43.00	50.00	-7.00	Average
12	22.775	48.80	60.00	-11.20	QP

Test mode: TX Mode

Test Line: NEUTRAL

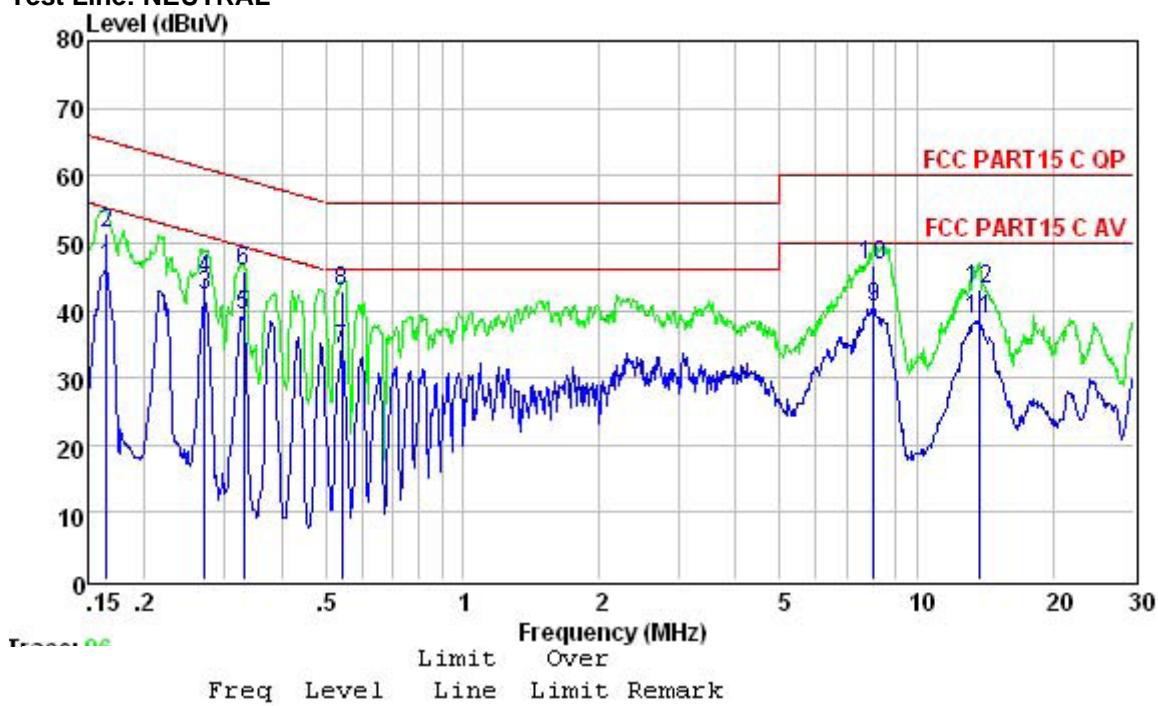

Freq	Level	Limit		Over	Remark
		Line	Limit		
MHz	dBuV	dBuV	dB		
1	0.165	46.46	55.21	-8.75	Average
2	0.165	51.40	65.21	-13.81	QP
3	0.272	42.16	51.07	-8.91	Average
4	0.272	44.60	61.07	-16.47	QP
5	0.330	39.33	49.44	-10.11	Average
6	0.330	45.70	59.44	-13.74	QP
7	0.544	34.16	46.00	-11.84	Average
8	0.544	42.90	56.00	-13.10	QP
9	8.020	40.45	50.00	-9.55	Average
10	8.020	46.60	60.00	-13.40	QP
11	13.695	38.61	50.00	-11.39	Average
12	13.695	43.10	60.00	-16.90	QP

## 5. 20DB OCCUPY BANDWIDTH

### 5.1. Limits

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

### 5.2. Test setup


1. Set the RBW =30kHz.
2. Set the VBW = 100kHz
3. Span=3MHz
4. Detector = peak.
5. Sweep time = auto couple.
6. Allow trace to fully stabilize ,and view the plot.
7. Measure and record the result in the test report.



For pretest, the worst mode was GFSK, the data only show the GFSK mode.

Test data:

Channel Frequency (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
2402	1.218	N/A
2441	1.218	N/A
2480	1.206	N/A

Test plot as follows:

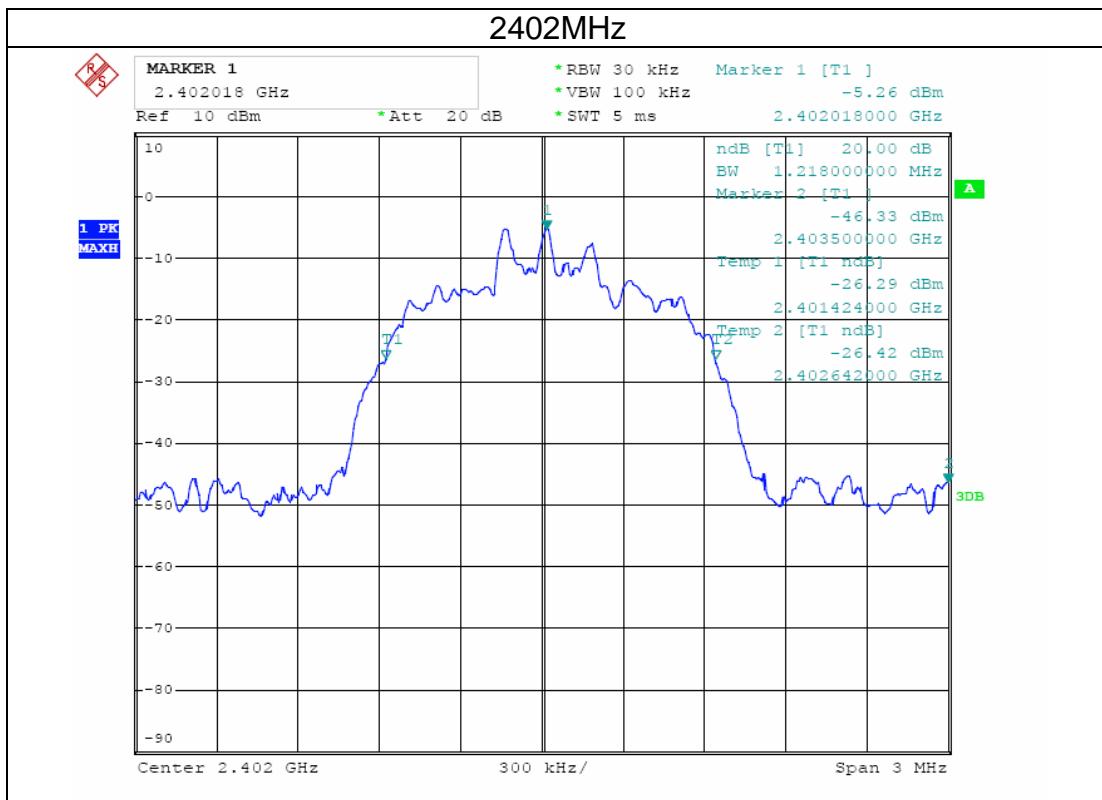

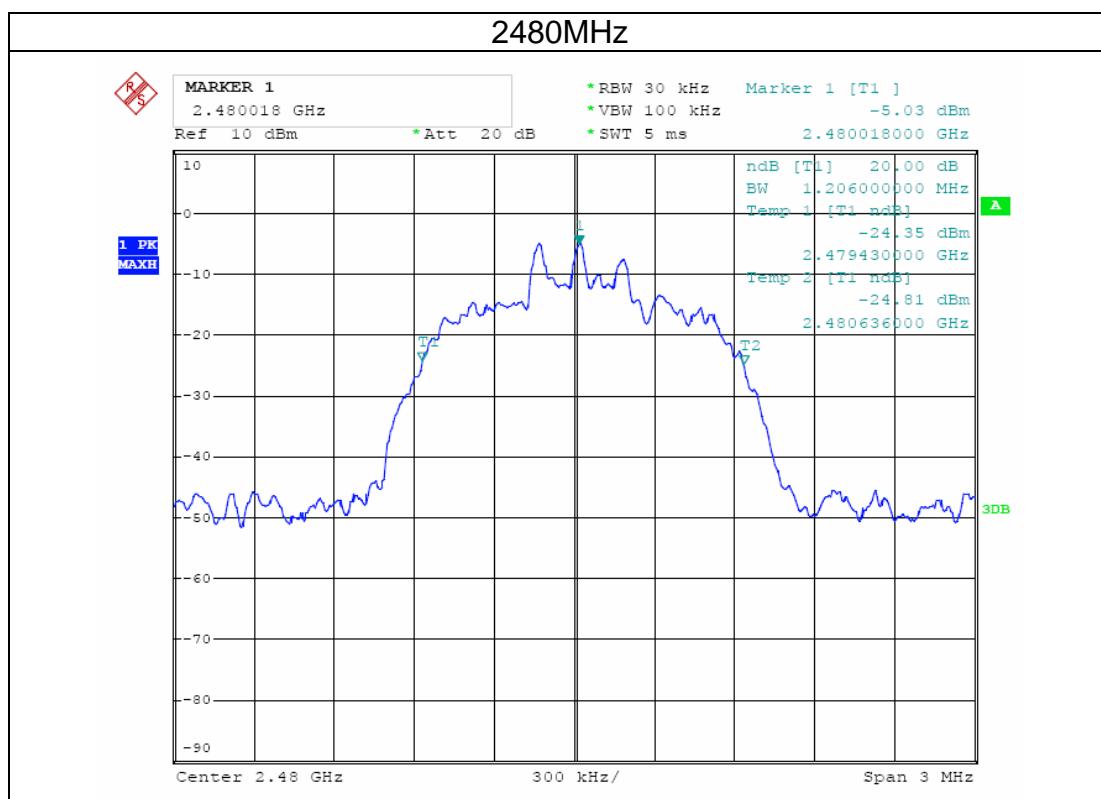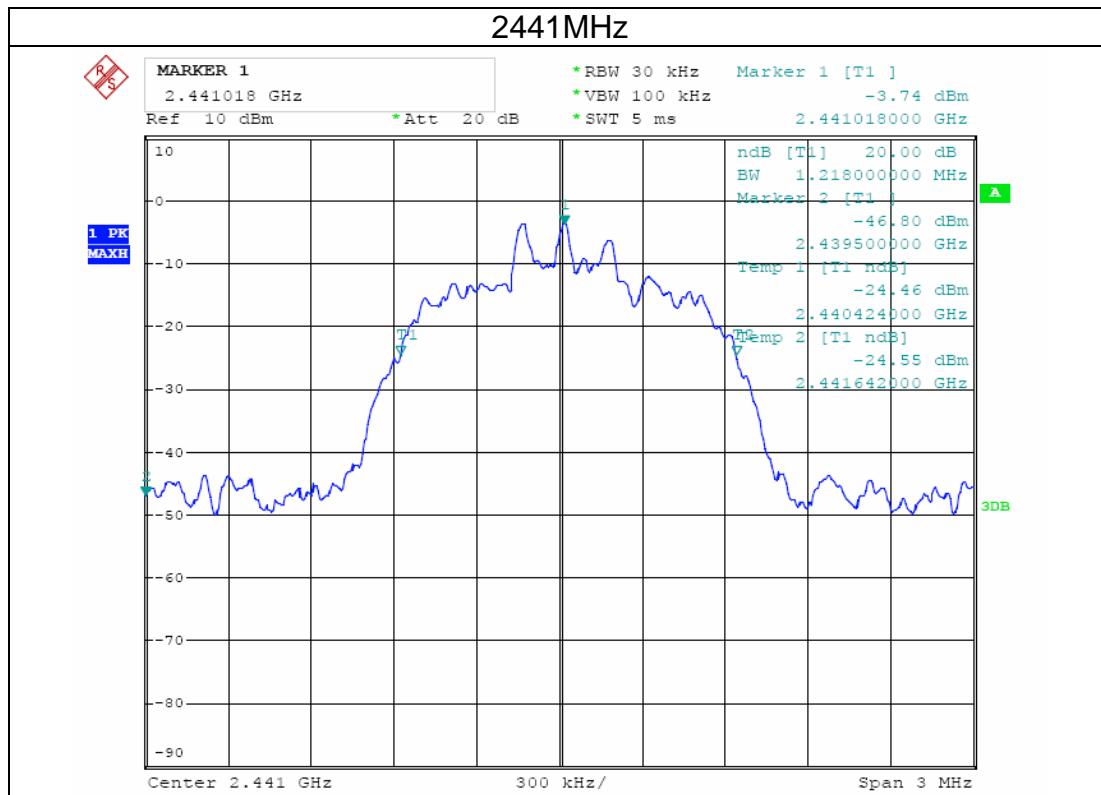

## 6. BAND EDGE COMPLIANCE TEST

### 6.1. Limits

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 6.2. Test setup

The EUT was placed on a turn table which was 0.8 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure.

Note: If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

For radiated test as follows:

Unhopping

	Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)	
			PK	AV	PK	AV
GFSK	<2400	H	46.57	39.56	74.00	54.00
	<2400	V	46.37	38.76	74.00	54.00
	>2483.5	H	45.18	37.32	74.00	54.00
	>2483.5	V	46.33	38.06	74.00	54.00

Hopping

	Frequency (MHz)	Antenna polarization (H/V)	Emission (dBuV/m)		Band edge Limit (dBuV/m)	
			PK	AV	PK	AV
GFSK	<2400	H	46.19	39.11	74.00	54.00
	<2400	V	45.01	38.15	74.00	54.00
	>2483.5	H	46.32	37.18	74.00	54.00
	>2483.5	V	45.41	36.78	74.00	54.00

## 7. ANTENNA REQUIREMENT:

Standard requirement:	FCC Part15 C Section 15.203 /249(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.249 requirement: Antenna gain must be at least 33 dBi. Alternatively, the main lobe beamwidth must not exceed 3.5 degrees. The beamwidth limit shall apply to both the azimuth and elevation planes. At antenna gains over 33 dBi or beamwidths narrower than 3.5 degrees, power must be reduced to ensure that the field strength does not exceed 2500 millivolts/meter.	
E.U.T Antenna: The antenna is PCB antenna, the best case gain of the antenna is 0dBi	

## 8. PHOTOGRAPHS OF TEST SET-UP

Please see annex.

## 9. PHOTOGRAPHS OF THE EUT

Please see annex.

END