

APPLICATION CERTIFICATION FCC Part 15C
On Behalf of
SHENZHEN AINOL ELECTRON CO.,LTD

Numy 3G serials-AX1 SPEC
Model No.: Nemy 3G AX1

FCC ID: 2ABTP-NUMY-3G

Prepared for : SHENZHEN AINOL ELECTRON CO.,LTD
Address : Room 606,Bldg B,7 Star Business Plaza, Minzhi
Street, Longhua District, Shenzhen, China
Prepared by : ACCURATE TECHNOLOGY CO., LTD
Address : F1, Bldg. A, Chan Yuan New Material Port, Keyuan
Rd. Science & Industry Park, Nan Shan, Shenzhen,
Guangdong P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20132565
Date of Test : Dec 02, 2013-Feb 15, 2014
Date of Report : Feb 15, 2014

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Carrier Frequency of Channels	6
1.3. Special Accessory and Auxiliary Equipment	6
1.4. Description of Test Facility	7
1.5. Measurement Uncertainty	7
2. MEASURING DEVICE AND TEST EQUIPMENT	8
3. OPERATION OF EUT DURING TESTING	9
3.1. Operating Mode.....	9
3.2. Configuration and peripherals	9
4. TEST PROCEDURES AND RESULTS	10
5. POWER LINE CONDUCTED MEASUREMENT	11
5.1. Block Diagram of Test Setup.....	11
5.2. Power Line Conducted Emission Measurement Limits.....	11
5.3. Configuration of EUT on Measurement	11
5.4. Operating Condition of EUT	11
5.5. Test Procedure	12
5.6. Power Line Conducted Emission Measurement Results	13
6. 6DB BANDWIDTH MEASUREMENT	16
6.1. Block Diagram of Test Setup.....	16
6.2. The Requirement For Section 15.247(a)(2).....	16
6.3. EUT Configuration on Measurement	16
6.4. Operating Condition of EUT	16
6.5. Test Procedure	17
6.6. Test Result	17
7. MAXIMUM PEAK OUTPUT POWER	19
7.1. Block Diagram of Test Setup.....	19
7.2. The Requirement For Section 15.247(b)(3).....	19
7.3. EUT Configuration on Measurement	19
7.4. Operating Condition of EUT	19
7.5. Test Procedure	20
7.6. Test Result	20
8. POWER SPECTRAL DENSITY MEASUREMENT	22
8.1. Block Diagram of Test Setup.....	22
8.2. The Requirement For Section 15.247(e).....	22
8.3. EUT Configuration on Measurement	22
8.4. Operating Condition of EUT	22
8.5. Test Procedure	23
8.6. Test Result	24
9. BAND EDGE COMPLIANCE TEST	26
9.1. Block Diagram of Test Setup.....	26
9.2. The Requirement For Section 15.247(d)	26
9.3. EUT Configuration on Measurement	26
9.4. Operating Condition of EUT	27

9.5. Test Procedure	27
9.6. Test Result	27
10. RADIATED SPURIOUS EMISSION TEST	34
10.1. Block Diagram of Test Setup.....	34
10.2. The Limit For Section 15.247(d)	35
10.3. Restricted bands of operation	35
10.4. Configuration of EUT on Measurement	36
10.5. Operating Condition of EUT	36
10.6. Test Procedure	36
10.7. The Field Strength of Radiation Emission Measurement Results	36
11. CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST	49
11.1. Block Diagram of Test Setup.....	49
11.2. The Requirement For Section 15.247(d)	49
11.3. EUT Configuration on Measurement	49
11.4. Operating Condition of EUT	50
11.5. Test Procedure	50
11.6. Test Result	50
12. ANTENNA REQUIREMENT	54
12.1. The Requirement	54
12.2. Antenna Construction	54

Test Report Certification

Applicant : SHENZHEN AINOL ELECTRON CO.,LTD
Manufacturer : SHENZHEN AINOL ELECTRON CO.,LTD
EUT Description : Numpy 3G serials-AX1 SPEC
(A) MODEL NO.: Numpy 3G AX1
(B) Trade Name.: Ainol
(C) POWER SUPPLY: DC 3.7V (Powered by battery) or AC 120V/60Hz
(Powered by adapter)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.4: 2009

The EUT was tested according to DTS test procedure of April 09, 2013 KDB558074 D01 DTS Meas Guidance v03 for compliance to FCC 47CFR 15.247 requirements

The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.247 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test : Dec 02, 2013-Feb 15, 2014

Prepared by : Tim Zhang
(Tim.zhang, Engineer)

Approved & Authorized Signer : Sean Liu
(Sean Liu, Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	:	Numy 3G serials-AX1 SPEC
Model Number	:	Numy 3G AX1
Bluetooth version	:	Bluetooth V4.0 LE
Frequency Range	:	2402MHz-2480MHz
Number of Channels	:	40
Type of Antenna	:	Integral Antenna
Antenna gain	:	1.5dBi
Power Supply	:	DC 3.7V (Powered by Battery) AC 120V/60Hz (Powered by Adapter)
Adapter	:	Model: SJ-0520-E Input: AC 100-240V 50/60Hz 0.3A Output: 5.0V 2.0A
Modulation mode	:	GFSK
Applicant	:	SHENZHEN AINOL ELECTRON CO.,LTD
Address	:	Room 606, Bldg B, 7 Star Business Plaza, Minzhi Street, Longhua District, Shenzhen, China
Manufacturer	:	SHENZHEN AINOL ELECTRON CO.,LTD
Address	:	Room 606, Bldg B, 7 Star Business Plaza, Minzhi Street, Longhua District, Shenzhen, China
Date of sample received	:	Dec 02, 2013
Date of Test	:	Dec 02, 2013-Feb 15, 2014

1.2.Carrier Frequency of Channels

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channe 1	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

1.3.Special Accessory and Auxiliary Equipment

N/A

1.4. Description of Test Facility

EMC Lab	: Accredited by TUV Rheinland Shenzhen Listed by FCC The Registration Number is 752051
	Listed by Industry Canada The Registration Number is 5077A-2
	Accredited by China National Accreditation Committee for Laboratories The Certificate Registration Number is L3193
Name of Firm	: ACCURATE TECHNOLOGY CO. LTD
Site Location	: F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

1.5. Measurement Uncertainty

Conducted Emission Expanded Uncertainty	= 2.23dB, k=2
Radiated emission expanded uncertainty (9kHz-30MHz)	= 3.08dB, k=2
Radiated emission expanded uncertainty (30MHz-1000MHz)	= 4.42dB, k=2
Radiated emission expanded uncertainty (Above 1GHz)	= 4.06dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated dates	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	Jan. 11, 2014	Jan. 10, 2015
EMI Test Receiver	Rohde&Schwarz	ESPI3	101526/003	Jan. 11, 2014	Jan. 10, 2015
Spectrum Analyzer	Agilent	E7405A	MY45115511	Jan. 11, 2014	Jan. 10, 2015
Pre-Amplifier	Rohde&Schwarz	CBLU118354 0-01	3791	Jan. 11, 2014	Jan. 10, 2015
Loop Antenna	Schwarzbeck	FMZB1516	1516131	Jan. 15, 2014	Jan. 14, 2015
Bilog Antenna	Schwarzbeck	VULB9163	9163-323	Jan. 15, 2014	Jan. 14, 2015
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-655	Jan. 15, 2014	Jan. 14, 2015
Horn Antenna	Schwarzbeck	BBHA9170	9170-359	Jan. 15, 2014	Jan. 14, 2015
LISN	Rohde&Schwarz	ESH3-Z5	100305	Jan. 11, 2014	Jan. 10, 2015
LISN	Schwarzbeck	NSLK8126	8126431	Jan. 11, 2014	Jan. 10, 2015
Highpass Filter	Wainwright Instruments	WHKX3.6/18 G-10SS	N/A	Jan. 11, 2014	Jan. 10, 2015
Band Reject Filter	Wainwright Instruments	WRCG2400/2 485-2375/2510 -60/11SS	N/A	Jan. 11, 2014	Jan. 10, 2015

3. OPERATION OF EUT DURING TESTING

3.1.Operating Mode


The mode is used: **BLE Transmitting mode**

Low Channel: 2402MHz

Middle Channel: 2440MHz

High Channel: 2480MHz

3.2.Configuration and peripherals

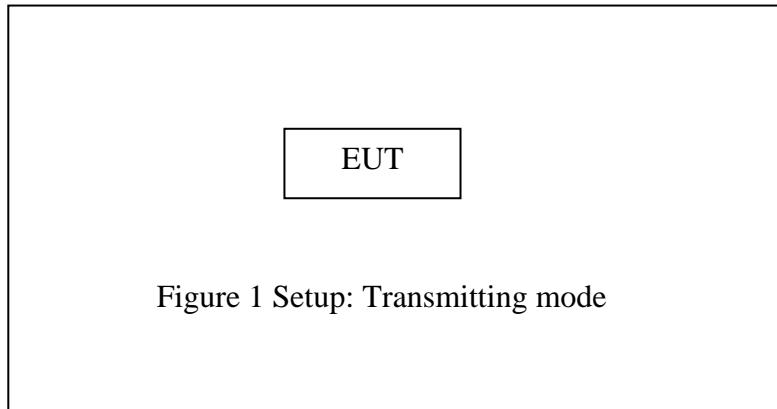


4. TEST PROCEDURES AND RESULTS

FCC Rules	Description of Test	Result
Section 15.207	Power Line Conducted Emission	Compliant
Section 15.247(a)(2)	6dB Bandwidth Test	Compliant
Section 15.247(e)	Power Spectral Density Test	Compliant
Section 15.247(b)(3)	Maximum Peak Output Power Test	Compliant
Section 15.247(d)	Band Edge Compliance Test	Compliant
Section 15.247(d) Section 15.209	Radiated Spurious Emission Test	Compliant
Section 15.247(d)	Conducted Spurious Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

5. POWER LINE CONDUCTED MEASUREMENT

5.1. Block Diagram of Test Setup

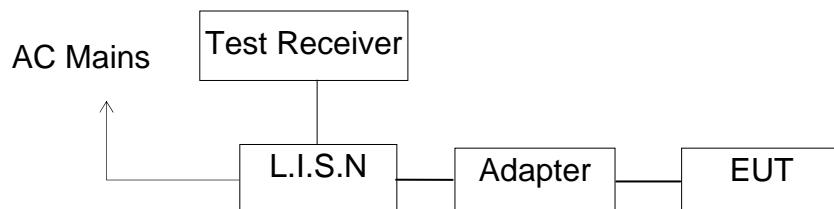

(EUT: Nemy 3G serials-AX1 SPEC)

5.2. Power Line Conducted Emission Measurement Limits

Frequency (MHz)	Limit dB(μ V)	
	Quasi-peak Level	Average Level
0.15 - 0.50	66.0 – 56.0 *	56.0 – 46.0 *
0.50 - 5.00	56.0	46.0
5.00 - 30.00	60.0	50.0

NOTE1: The lower limit shall apply at the transition frequencies.
NOTE2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

5.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner, which tends to maximize its emission characteristics in a normal application.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in test mode and measure it.

5.5. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2009 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESCS30) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

5.6.Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150kHz to 30MHz is checked.

Test mode : Charging&BT communicating								
<u>MEASUREMENT RESULT: "AN16_fin"</u>								
2013-12-4 13:50								
Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE	
0.180073	49.20	10.7	65	15.3	QP	L1	GND	
0.498615	40.60	12.5	56	15.4	QP	L1	GND	
2.346107	40.80	12.3	56	15.2	QP	L1	GND	
<u>MEASUREMENT RESULT: "AN16_fin2"</u>								
2013-12-4 13:50								
Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE	
0.498615	35.20	12.5	46	10.8	AV	L1	GND	
2.346107	34.30	12.3	46	11.7	AV	L1	GND	
6.496284	29.30	12.2	50	20.7	AV	L1	GND	
<u>MEASUREMENT RESULT: "AN15_fin"</u>								
2013-12-4 13:47								
Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE	
0.181155	51.40	10.7	64	13.0	QP	N	GND	
0.498615	42.90	12.5	56	13.1	QP	N	GND	
2.353145	41.60	12.3	56	14.4	QP	N	GND	
<u>MEASUREMENT RESULT: "AN15_fin2"</u>								
2013-12-4 13:47								
Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE	
0.454398	37.10	12.3	47	9.7	AV	N	GND	
2.353145	35.20	12.3	46	10.8	AV	N	GND	
5.609437	34.00	12.2	50	16.0	AV	N	GND	

Emissions attenuated more than 20 dB below the permissible value are not reported.

The spectral diagrams are attached as below.


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15

EUT: Numpy 3G serials-AX1 SPEC M/N:Numy 3G AX1
 Manufacturer: AINOL
 Operating Condition: BT Operation
 Test Site: 2#Shielding Room
 Operator: star
 Test Specification: L 120V/60Hz
 Comment: Report No.:ATE20132565
 Start of Test: 2013-12-4 / 13:48:14

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.4 % QuasiPeak 1.0 s 9 kHz LISN (ESH3-Z5)
 Average

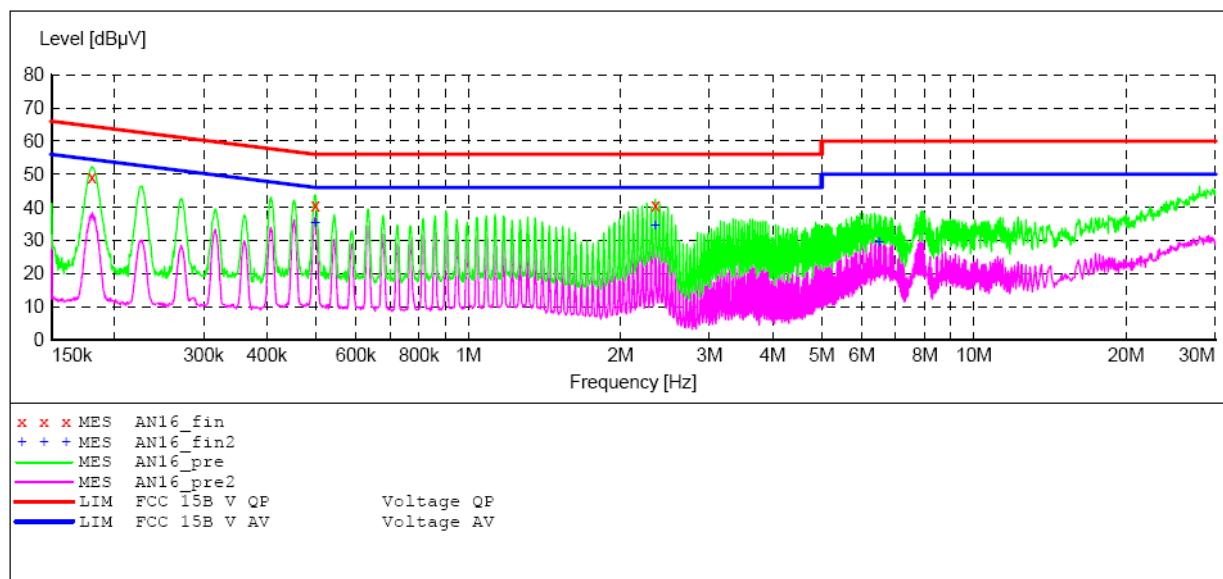**MEASUREMENT RESULT: "AN16_fin"**

2013-12-4 13:50

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.180073	49.20	10.7	65	15.3	QP	L1	GND
0.498615	40.60	12.5	56	15.4	QP	L1	GND
2.346107	40.80	12.3	56	15.2	QP	L1	GND

MEASUREMENT RESULT: "AN16_fin2"

2013-12-4 13:50

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.498615	35.20	12.5	46	10.8	AV	L1	GND
2.346107	34.30	12.3	46	11.7	AV	L1	GND
6.496284	29.30	12.2	50	20.7	AV	L1	GND


ACCURATE TECHNOLOGY CO., LTD

CONDUCTED EMISSION STANDARD FCC PART 15

EUT: Numpy 3G serials-AX1 SPEC M/N:Numy 3G AX1
 Manufacturer: AINOL
 Operating Condition: BT Operation
 Test Site: 2#Shielding Room
 Operator: star
 Test Specification: N 120V/60Hz
 Comment: Report No.:ATE20132565
 Start of Test: 2013-12-4 / 13:46:23

SCAN TABLE: "V 150K-30MHz fin"

Short Description: _SUB_STD_VTERM2 1.70
 Start Stop Step Detector Meas. IF Transducer
 Frequency Frequency Width Time Bandw.
 150.0 kHz 30.0 MHz 0.4 % QuasiPeak 1.0 s 9 kHz LISN(ESH3-Z5)
 Average

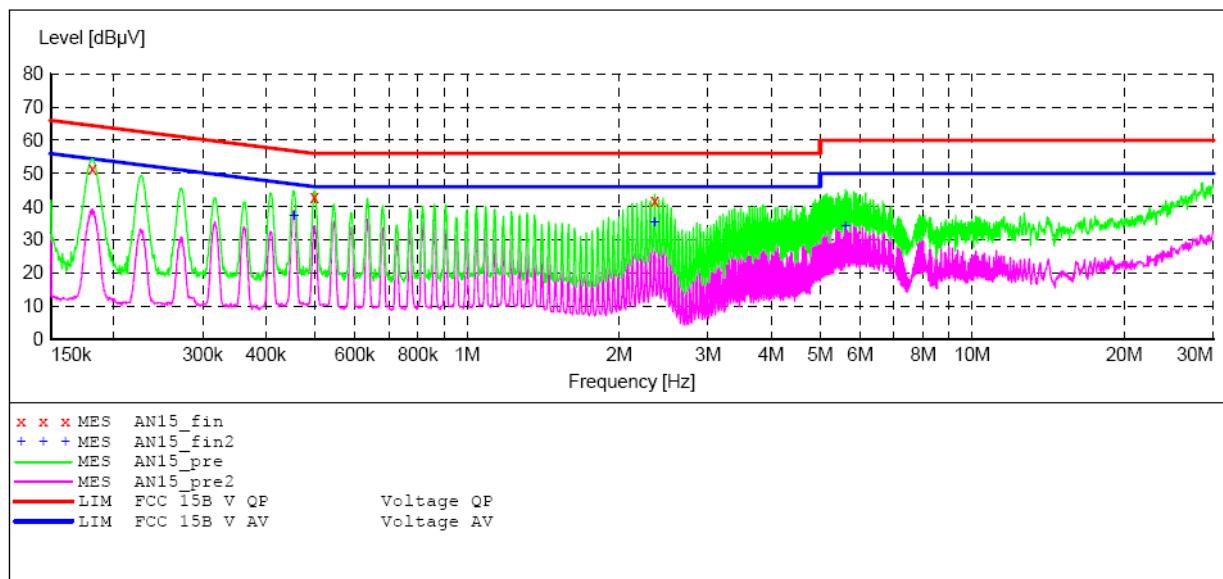**MEASUREMENT RESULT: "AN15_fin"**

2013-12-4 13:47

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.181155	51.40	10.7	64	13.0	QP	N	GND
0.498615	42.90	12.5	56	13.1	QP	N	GND
2.353145	41.60	12.3	56	14.4	QP	N	GND


MEASUREMENT RESULT: "AN15_fin2"

2013-12-4 13:47

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.454398	37.10	12.3	47	9.7	AV	N	GND
2.353145	35.20	12.3	46	10.8	AV	N	GND
5.609437	34.00	12.2	50	16.0	AV	N	GND

6. 6DB BANDWIDTH MEASUREMENT

6.1. Block Diagram of Test Setup



(EUT: Numpy 3G serials-AX1 SPEC)

6.2. The Requirement For Section 15.247(a)(2)

Section 15.247(a)(2): Systems using digital modulation techniques may operate in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.3. EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 5.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

6.5. Test Procedure

6.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

6.5.2. Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.


6.5.3. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

6.6. Test Result


Channel	Frequency (MHz)	6 dB Bandwith (MHz)	Minimum Limit(MHz)	PASS/FAIL
0	2402	0.692	0.5	PASS
19	2440	0.676	0.5	PASS
39	2480	0.672	0.5	PASS

The spectrum analyzer plots are attached as below.


channel 0

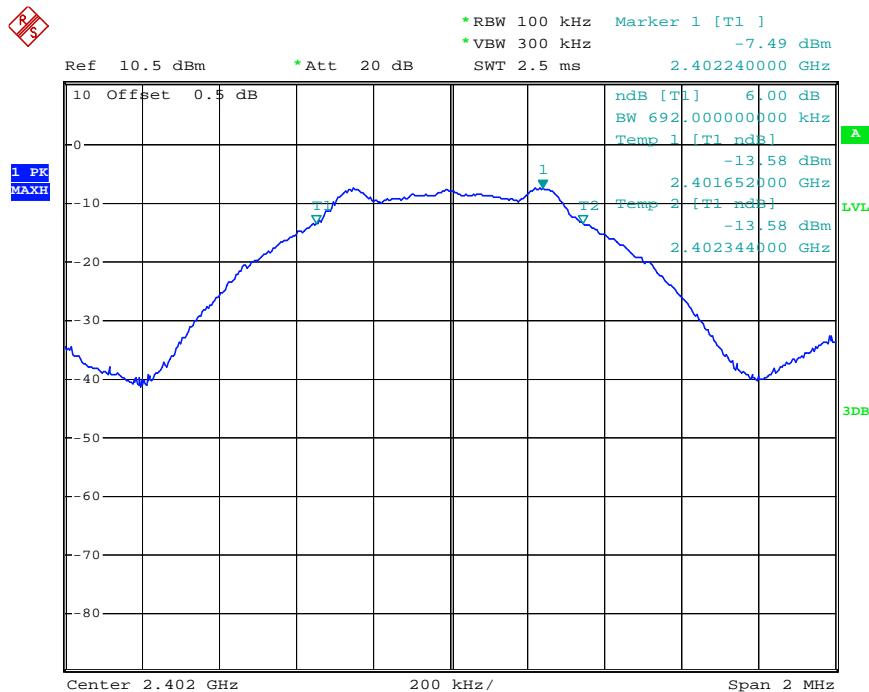

channel 19

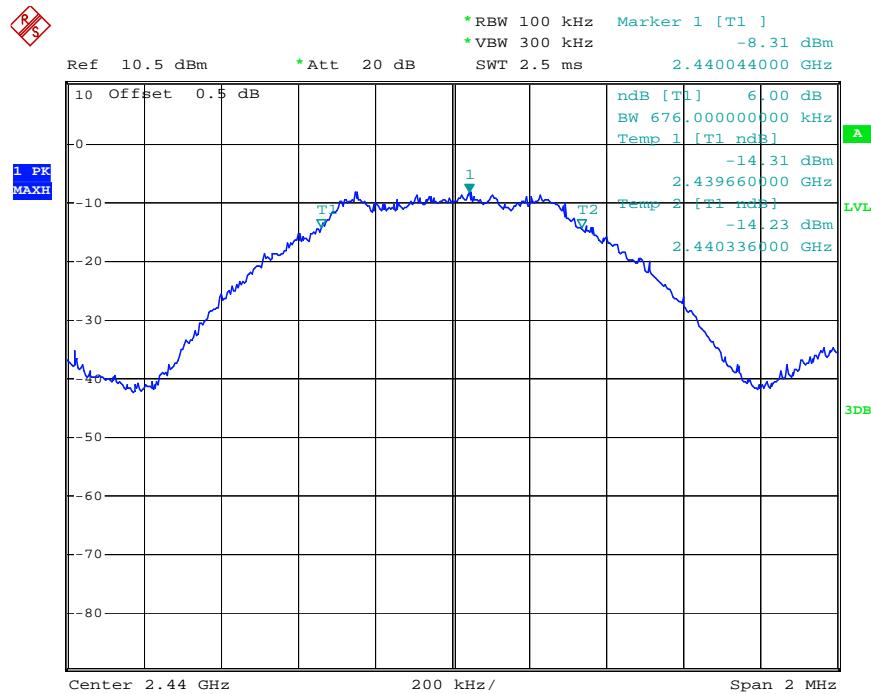


channel 39

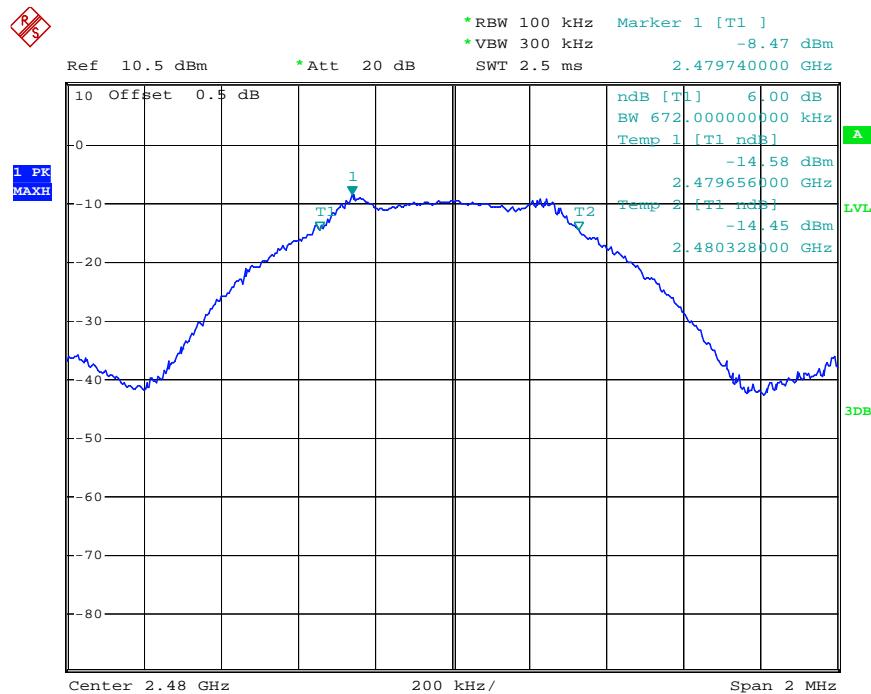

7. MAXIMUM PEAK OUTPUT POWER

7.1. Block Diagram of Test Setup



(EUT: Numpy 3G serials-AX1 SPEC)

7.2. The Requirement For Section 15.247(b)(3)

Section 15.247(b)(3): For systems using digital modulation in the 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz bands: 1 Watt.

7.3. EUT Configuration on Measurement

The equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

7.4. Operating Condition of EUT

7.4.1. Setup the EUT and simulator as shown as Section 6.1.

7.4.2. Turn on the power of all equipment.

7.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

7.5. Test Procedure

7.5.1. The transmitter output was connected to the spectrum analyzer through a low loss cable.

7.5.2. Test method is options 1 from KDB558074 D01 DTS Meas Guidance v03


7.5.3. Set RBW of spectrum analyzer to 3 MHz and VBW to 3 MHz.

7.5.4. Measurement the maximum peak output power.


7.6. Test Result

Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Limit (dBm)	Pass / Fail
0	2402	-7.59	30	PASS
19	2440	-7.58	30	PASS
39	2480	-7.63	30	PASS


The spectrum analyzer plots are attached as below.

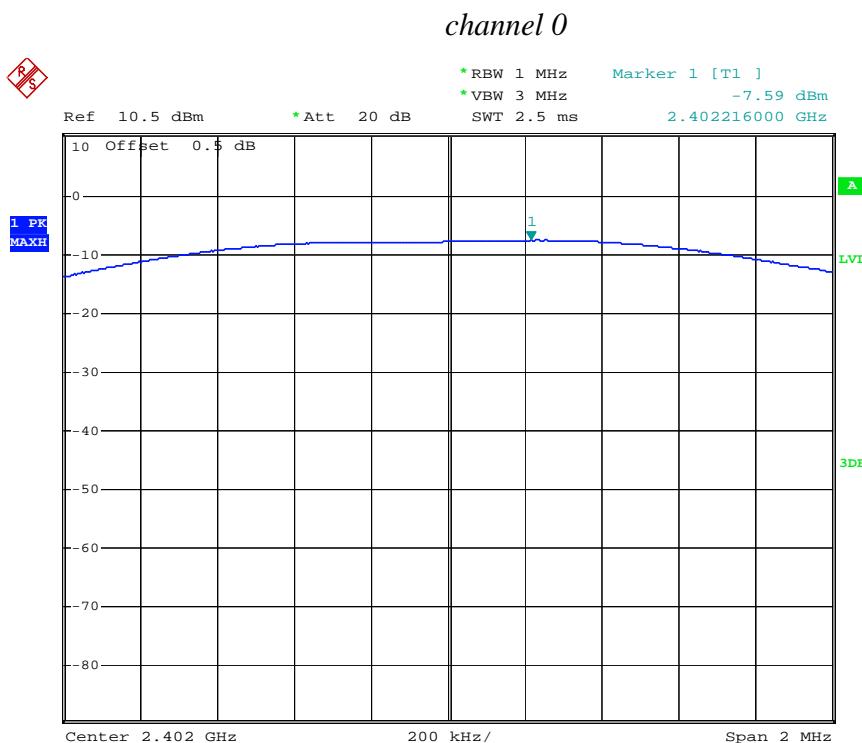

channel 19

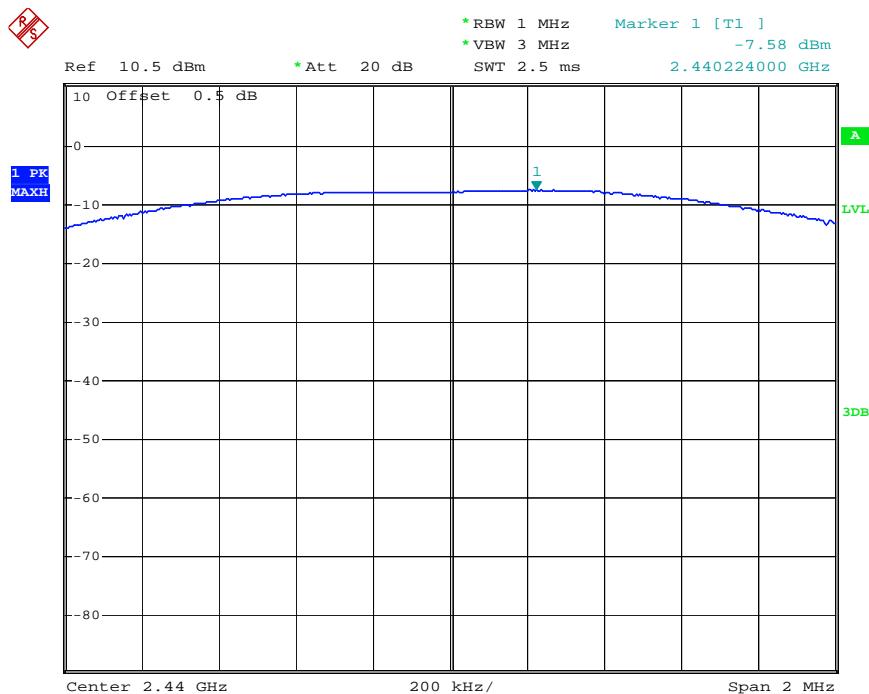

channel 39

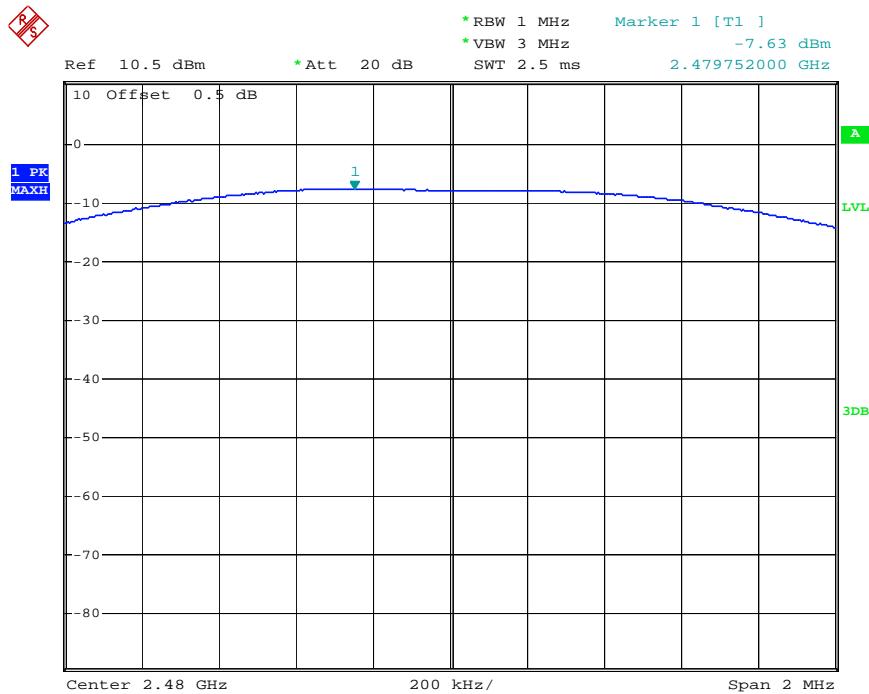

8. POWER SPECTRAL DENSITY MEASUREMENT

8.1. Block Diagram of Test Setup



(EUT: Numpy 3G serials-AX1 SPEC)

8.2. The Requirement For Section 15.247(e)

Section 15.247(e): For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3. EUT Configuration on Measurement

The equipment is installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

8.4. Operating Condition of EUT

8.4.1. Setup the EUT and simulator as shown as Section 8.1.

8.4.2. Turn on the power of all equipment.

8.4.3. Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

8.5. Test Procedure

8.5.1. The EUT was tested according to DTS test procedure of April 09, 2013 KDB558074 D01 DTS Meas Guidance v03 for compliance to FCC 47CFR 15.247 requirements.

8.5.2. The transmitter output was connected to the spectrum analyzer through a low loss cable.

8.5.3. Measurement Procedure PKPSD:

This procedure must be used if maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit, and is optional if the maximum (average) conducted output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


8.5.4. Measurement the maximum power spectral density.

8.6. Test Result


CHANNEL NUMBER	FREQUENCY (MHz)	PSD (dBm/3KHz)	LIMIT (dBm/3KHz)	PASS/FAIL
0	2402	-20.08	8	PASS
19	2440	-20.10	8	PASS
39	2480	-20.37	8	PASS

The spectrum analyzer plots are attached as below.


channel 0

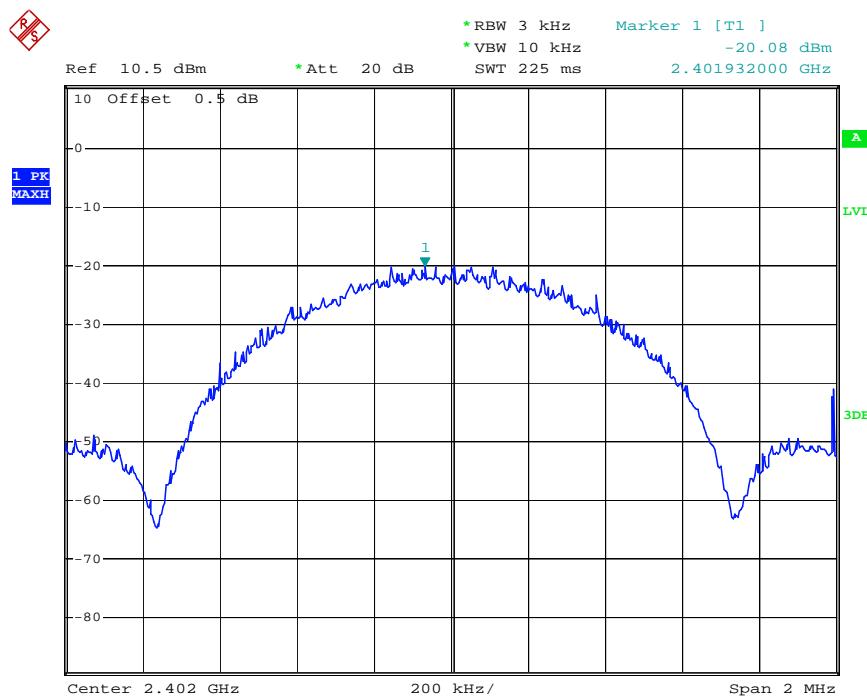

channel 19

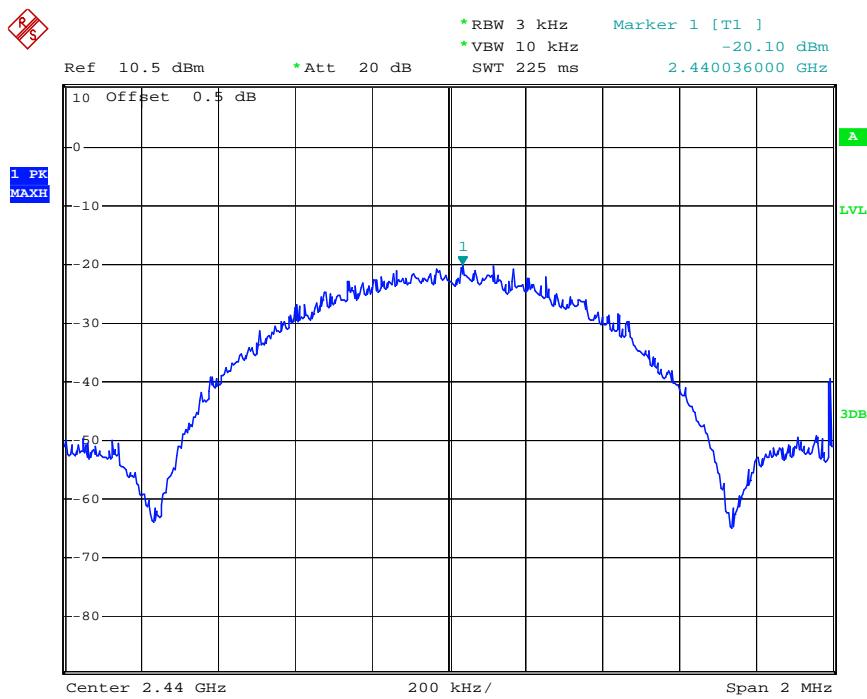

channel 39

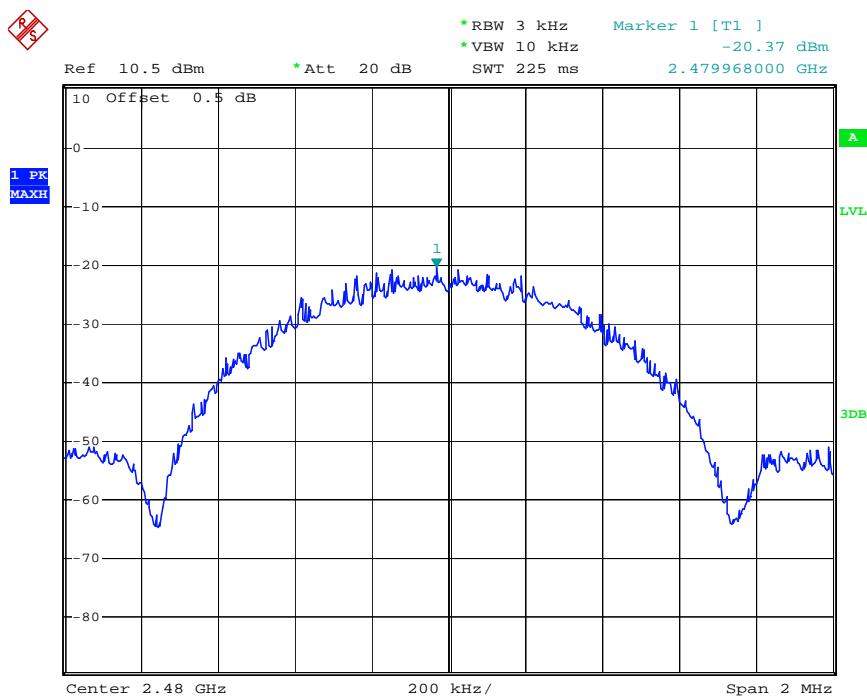

9. BAND EDGE COMPLIANCE TEST

9.1. Block Diagram of Test Setup



(EUT: Numpy 3G serials-AX1 SPEC)

9.2. The Requirement For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

9.3. EUT Configuration on Measurement

The equipment is installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

9.4.Operating Condition of EUT

9.4.1.Setup the EUT and simulator as shown as Section 9.1.

9.4.2.Turn on the power of all equipment.

9.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2480MHz TX frequency to transmit.

9.5.Test Procedure

Conducted Band Edge:

9.5.1. The transmitter output was connected to the spectrum analyzer via a low loss cable.

9.5.2.Set RBW of spectrum analyzer to 100 kHz and VBW to 300 kHz.

Radiate Band Edge:

9.5.3. The EUT is placed on a turntable, which is 0.8m above the ground plane and worked at highest radiated power.

9.5.4. The turntable was rotated for 360 degrees to determine the position of maximum emission level.

9.5.5. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.

9.5.6. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

RBW=1MHz, VBW=1MHz


9.5.7.The band edges was measured and recorded.

9.6.Test Result


Pass

Channel	Frequency	Delta peak to band emission	Limit(dBc)
0	2399.3MHz	29.98	20
39	2486.0MHz	44.63	20

channel 0

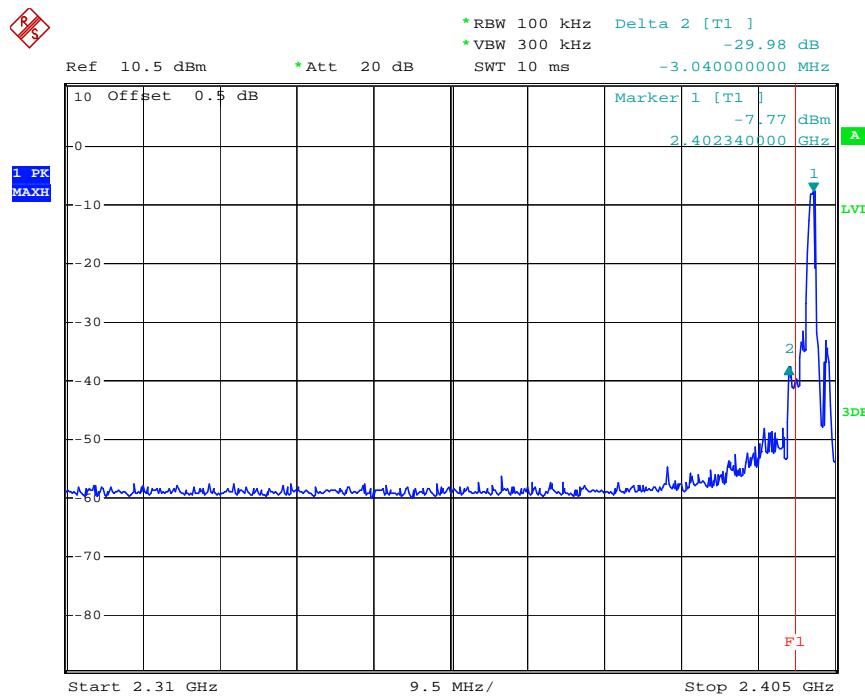

channel 39

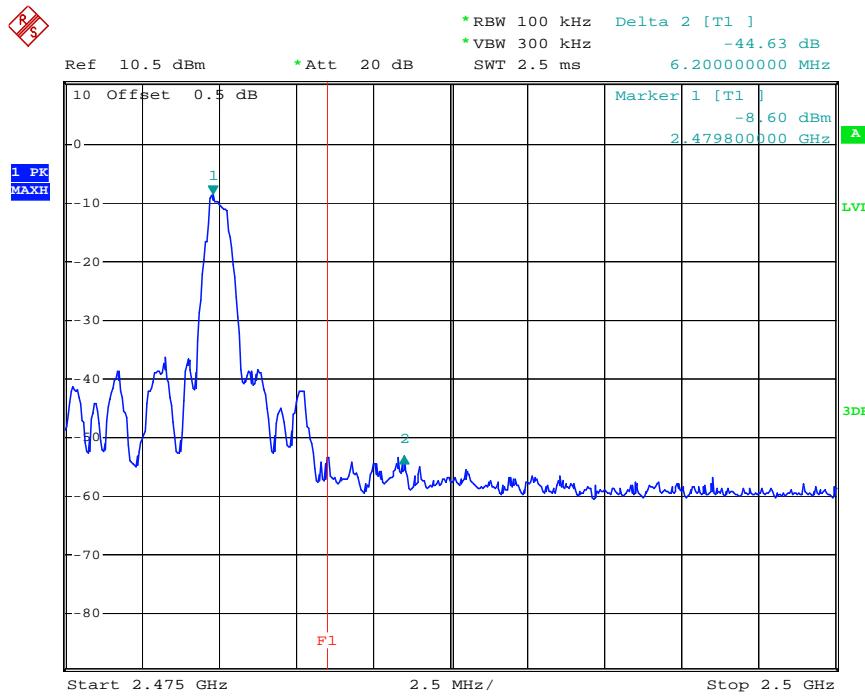

Radiated Band Edge Result

Date of Test:	Dec 07, 2013	Temperature:	25°C
EUT:	Numy 3G serials-AX1 SPEC	Humidity:	50%
Model No.:	Numy 3G AX1	Power Supply:	DC 3.7V
Test Mode:	TX (2402MHz) GFSK	Test Engineer:	Alen

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2310.000	34.58	37.44	-6.76	27.82	30.68	54.00	74.00	-26.18	-43.42	Vertical
2397.120	43.45	46.31	-6.76	36.69	39.55	54.00	74.00	-17.31	-34.45	Vertical
2400.000	47.79	50.68	-6.76	41.03	43.92	54.00	74.00	-12.97	-30.08	Vertical
2310.000	34.09	36.11	-6.76	27.33	29.35	54.00	74.00	-26.67	-44.65	Horizontal
2396.900	43.87	46.75	-6.76	37.11	39.99	54.00	74.00	-16.89	-34.01	Horizontal
2400.000	48.37	51.24	-6.76	41.61	44.48	54.00	74.00	-12.39	-29.52	Horizontal

Date of Test:	Dec 07, 2013	Temperature:	25°C
EUT:	Numy 3G serials-AX1 SPEC	Humidity:	50%
Model No.:	Numy 3G AX1	Power Supply:	DC 3.7V
Test Mode:	TX (2480MHz) GFSK	Test Engineer:	Alen

Frequency (MHz)	Reading(dB μ V/m)		Factor(dB) Corr.	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
2483.500	44.57	47.35	-6.54	38.03	40.81	54.00	74.00	-15.97	-33.19	Vertical
2485.720	45.71	48.57	-6.54	39.17	42.03	54.00	74.00	-14.83	-31.97	Vertical
2500.000	33.40	36.26	-6.54	26.86	29.72	54.00	74.00	-24.28	-44.28	Vertical
2483.500	44.56	47.39	-6.54	38.02	40.85	54.00	74.00	-15.98	-33.15	Horizontal
2485.640	45.67	48.44	-6.54	39.13	41.90	54.00	74.00	-14.87	-32.10	Horizontal
2500.000	34.45	37.31	-6.54	27.91	30.77	54.00	74.00	-26.09	-43.23	Horizontal

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:
Result = Reading + Corrected Factor
3. Display the measurement of peak values.

Job No.: alen #1506

Polarization: Vertical

Standard: FCC PK

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/12/07/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 8/56/44

EUT: Numpy 3G serials-AX1 SPEC

Engineer Signature:


Mode: TX 2402MHz

Distance: 3m

Model: Numpy 3G

Manufacturer: AINOL

Note: Report No.:ATE20132565

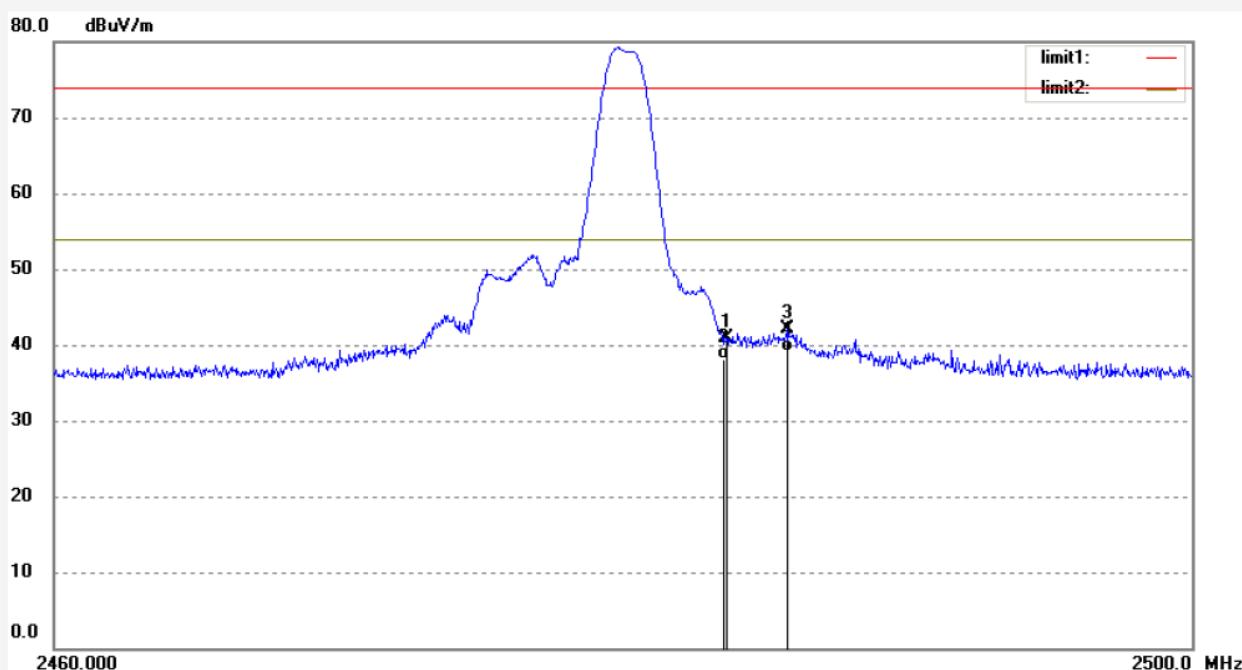

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	47.35	-6.54	40.81	74.00	-33.19	peak			
2	2483.500	44.57	-6.54	38.03	54.00	-15.97	AVG			
3	2485.720	48.57	-6.54	42.03	74.00	-31.97	peak			
4	2485.720	45.71	-6.54	39.17	54.00	-14.83	AVG			

Job No.: alen #1507

Polarization: Horizontal

Standard: FCC PK

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/12/07/

Temp. (C)/Hum.(%) 25 C / 55 %

Time: 8/57/45

EUT: Numpy 3G serials-AX1 SPEC

Engineer Signature:


Mode: TX 2402MHz

Distance: 3m

Model: Numpy 3G

Manufacturer: AINOL

Note: Report No.:ATE20132565

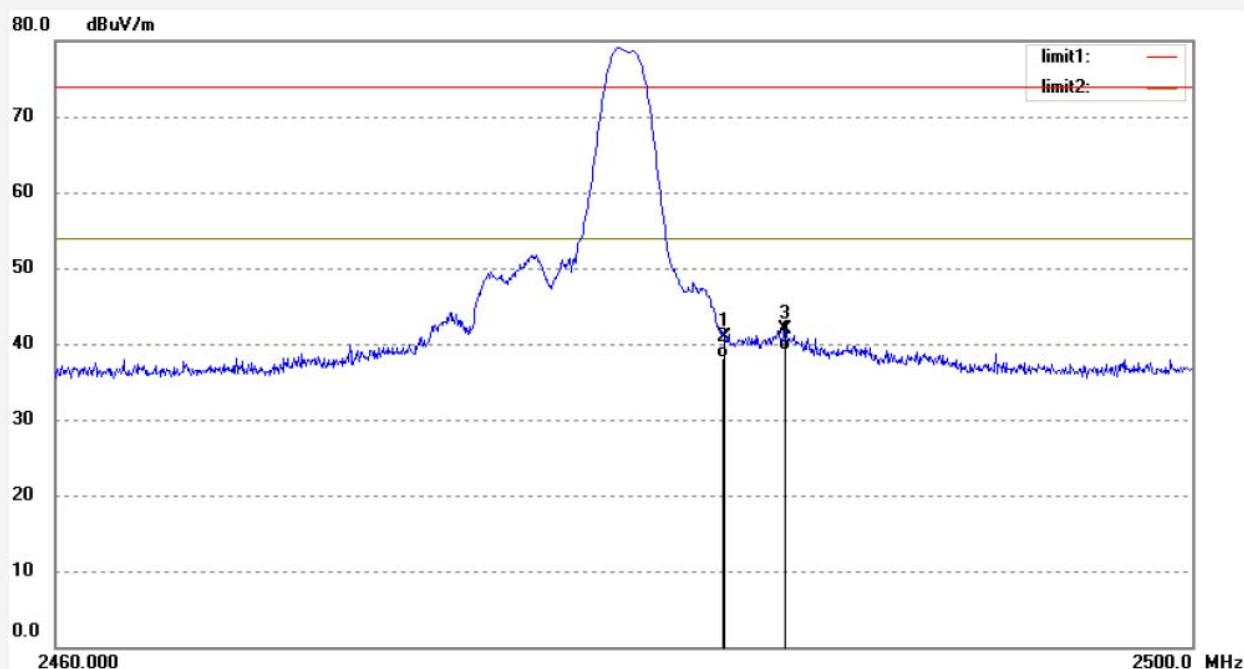

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2483.500	47.39	-6.54	40.85	74.00	-33.15	peak			
2	2483.500	44.56	-6.54	38.02	54.00	-15.98	AVG			
3	2485.640	48.44	-6.54	41.90	74.00	-32.10	peak			
4	2485.640	45.67	-6.54	39.13	54.00	-14.87	AVG			



ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 1# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: alen #1508

Polarization: Horizontal

Standard: FCC PK

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/12/07/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 9/00/48

EUT: Numpy 3G serials-AX1 SPEC

Engineer Signature:


Mode: TX 2402MHz

Distance: 3m

Model: Numpy 3G


Manufacturer: AINOL

Note: Report No.:ATE20132565

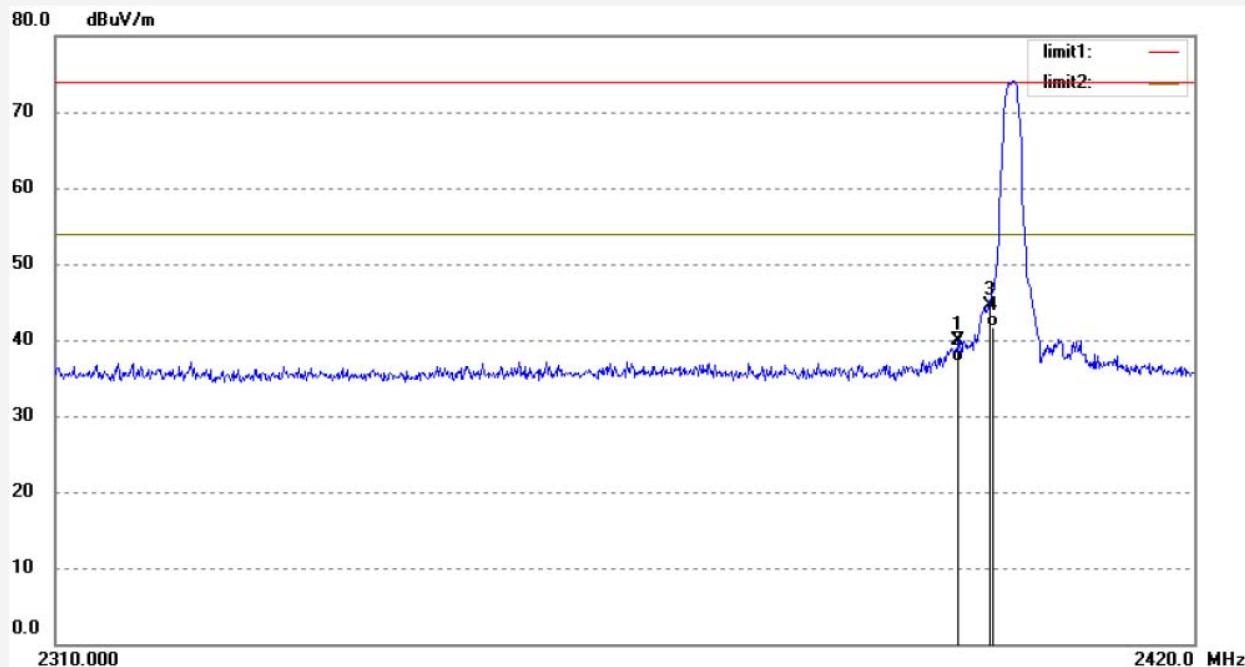

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2396.900	46.75	-6.76	39.99	74.00	-34.01	peak			
2	2396.900	43.87	-6.76	37.11	54.00	-16.89	AVG			
3	2400.000	51.24	-6.76	44.48	74.00	-29.52	peak			
4	2400.000	48.37	-6.76	41.61	54.00	-12.39	AVG			

Job No.: alen #1509	Polarization: Vertical
Standard: FCC PK	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/12/07/
Temp.(C)/Hum.(%) 25 C / 55 %	Time: 9/01/31
EUT: Numpy 3G serials-AX1 SPEC	Engineer Signature:
Mode: TX 2402MHz	Distance: 3m
Model: Numpy 3G	
Manufacturer: AINOL	
Note: Report No.:ATE20132565	

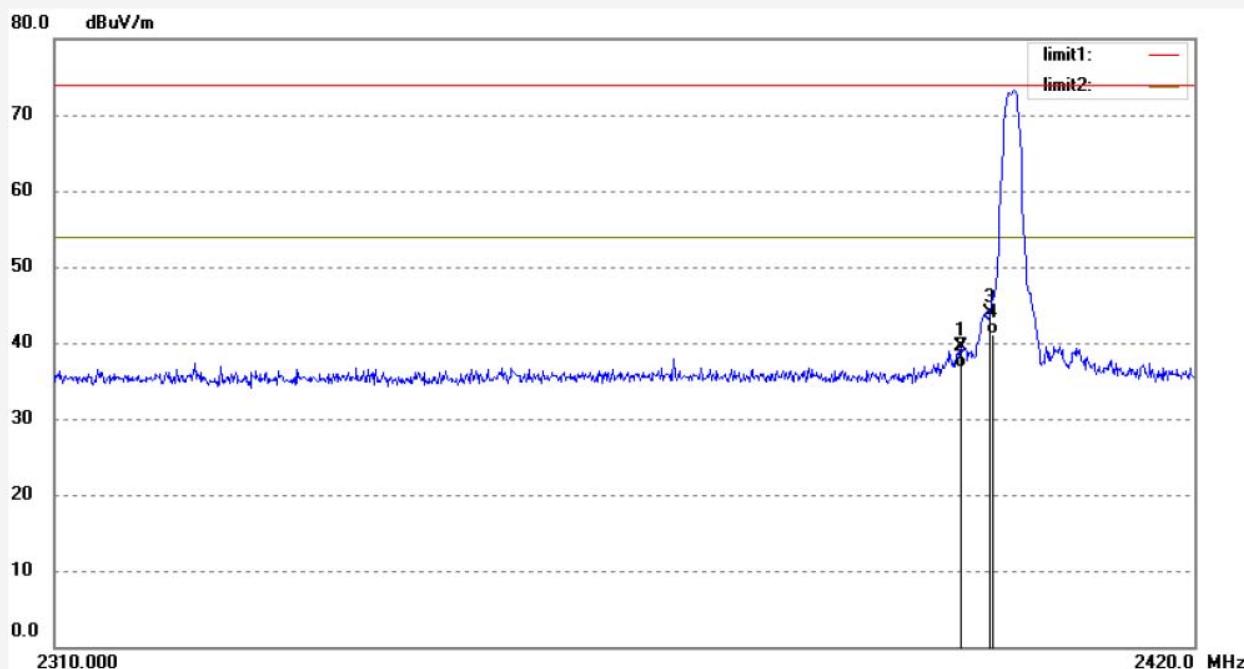

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	2397.120	46.31	-6.76	39.55	74.00	-34.45	peak			
2	2397.120	43.45	-6.76	36.69	54.00	-17.31	AVG			
3	2400.000	50.68	-6.76	43.92	74.00	-30.08	peak			
4	2400.000	47.79	-6.76	41.03	54.00	-12.97	AVG			

Note:

1. Emissions attenuated more than 20 dB below the permissible value are not reported.
2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:


Result = Reading + Corrected Factor

3. Display the measurement of peak values.

10.RADIATED SPURIOUS EMISSION TEST

10.1.Block Diagram of Test Setup


10.1.1.Block diagram of connection between the EUT and peripherals

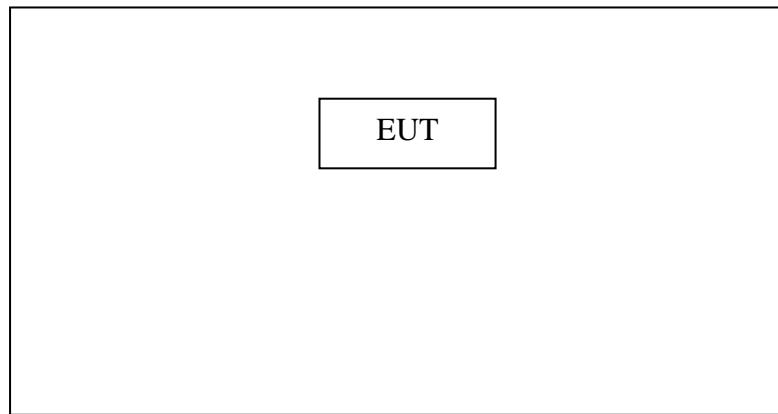

Setup: Transmitting mode

(EUT: Numpy 3G serials-AX1 SPEC)

10.1.2.Semi-Anechoic Chamber Test Setup Diagram

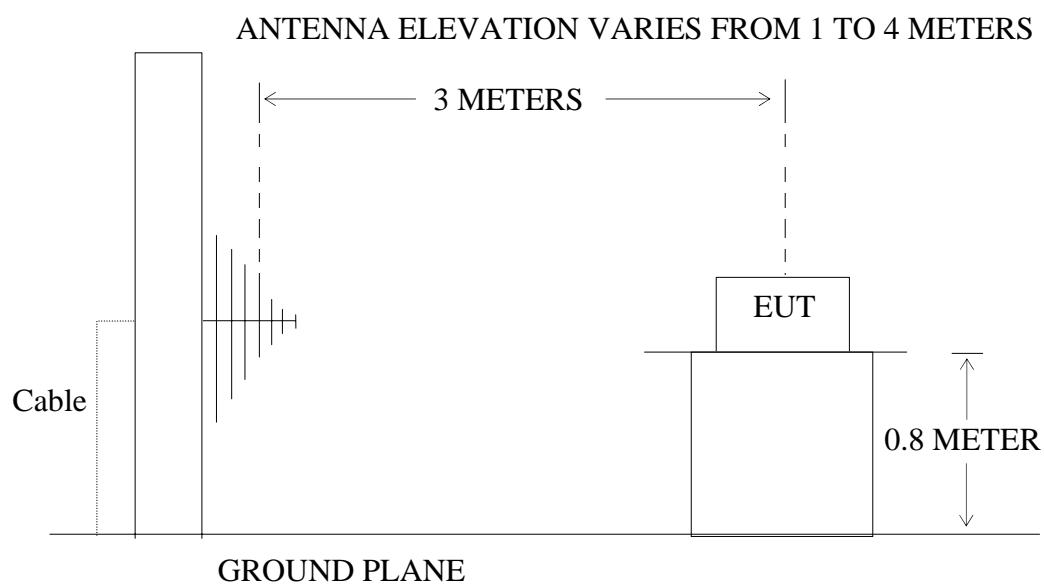

10.2.The Limit For Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

10.3.Restricted bands of operation

10.3.1.FCC Part 15.205 Restricted bands of operation

(a) Except as shown in paragraph (d) of this section, Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510

²Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emission appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000MHz, Compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

10.4.Configuration of EUT on Measurement

The equipment is installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

10.5.Operating Condition of EUT

10.5.1.Setup the EUT and simulator as shown as Section 10.1.

10.5.2.Turn on the power of all equipment.

10.5.3.Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

10.6.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2009 on radiated emission measurement. The EUT was tested in 3 orthogonal planes.

The bandwidth of test receiver is set at 9 kHz in below 30MHz. and set at 120 kHz in 30-1000MHz, and 1MHz in above 1000MHz.

The frequency range from 9 kHz to 25GHz is checked.

The final measurement in band 9-90 kHz, 110-490 kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

The field strength is calculated by adding the antenna factor, and cable loss, and subtracting the amplifier gain from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor

Where Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

10.7.The Field Strength of Radiation Emission Measurement Results

PASS.

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. The EUT is tested radiation emission at Low, Middle, High channel in three axes. The worst emissions are reported in all channels. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

3. The radiation emissions from 18-25GHz are not reported, because the test values lower than the limits of 20dB.

Job No.: STAR #4104

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/12/07/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 17/50/38

EUT: Numin 3G serials-AX1 SPEC

Engineer Signature:


Mode: TX 2402MHz

Distance: 3m

Model: Numin 3G

Manufacturer: AINOL

Note: Report No.:ATE20132565

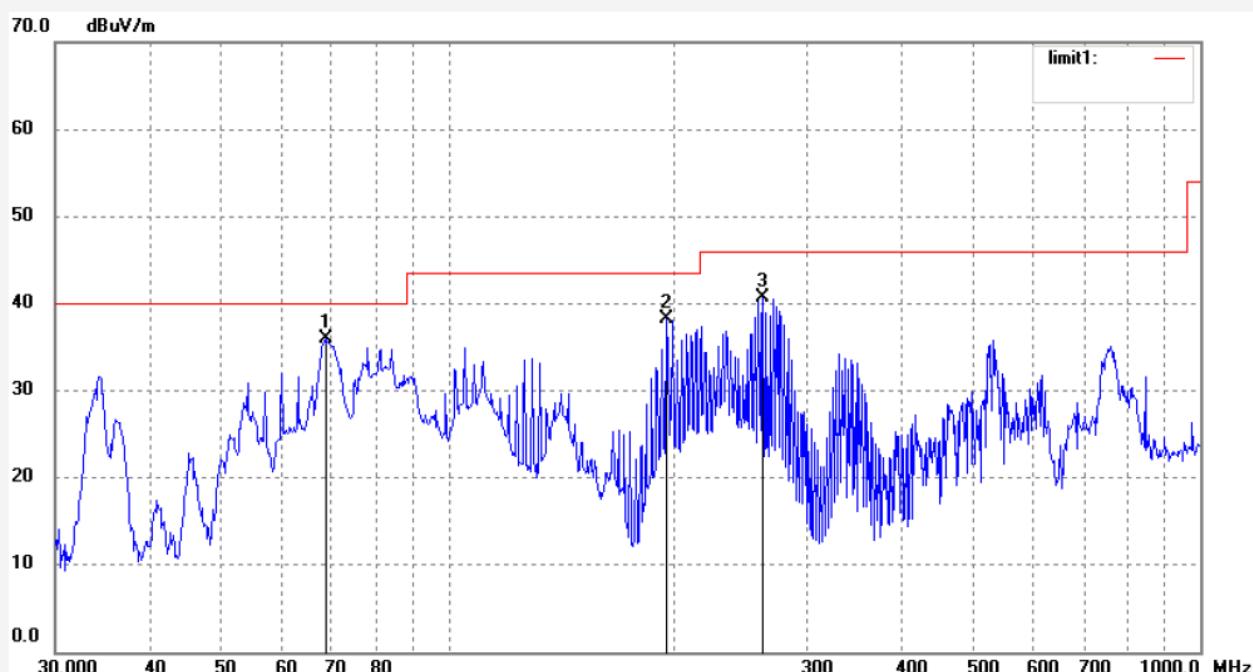

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	68.6310	57.24	-21.31	35.93	40.00	-4.07	peak			
2	195.1365	58.66	-20.49	38.17	43.50	-5.33	peak			
3	261.9753	59.65	-19.02	40.63	46.00	-5.37	peak			

Job No.: STAR #4105

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/12/07/

Temp. (C)/Hum.(%) 25 C / 55 %

Time: 17/51/19

EUT: Numpy 3G serials-AX1 SPEC

Engineer Signature:


Mode: TX 2402MHz

Distance: 3m

Model: Numpy 3G

Manufacturer: AINOL

Note: Report No.:ATE20132565

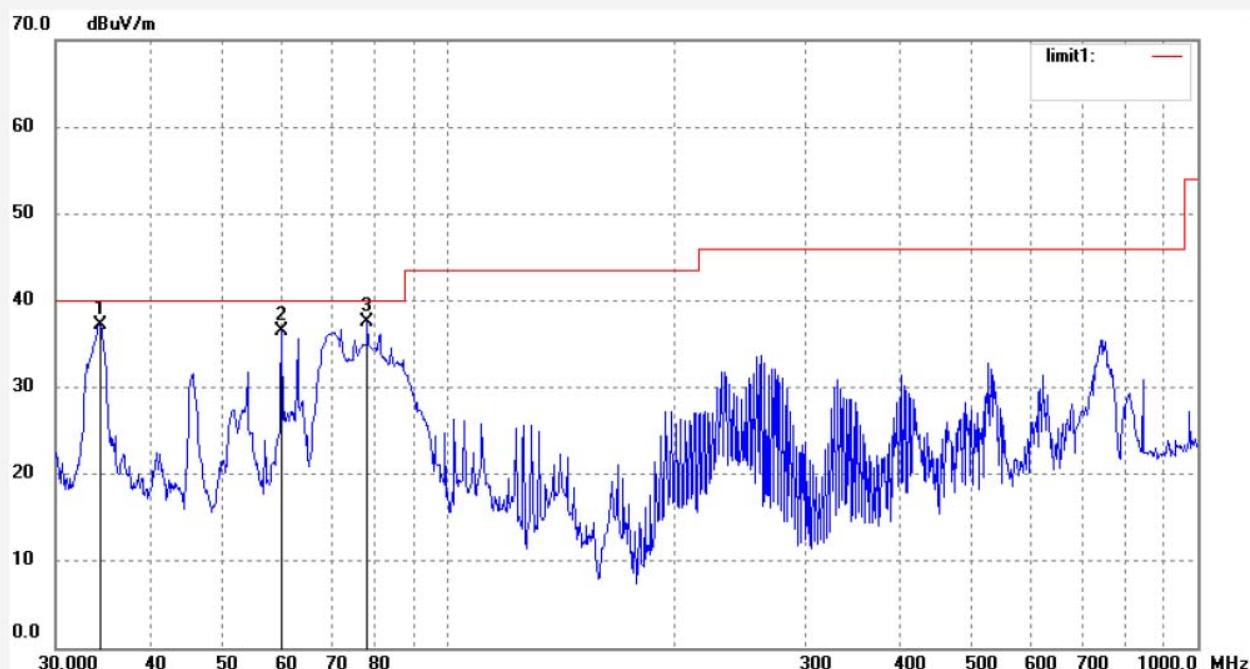

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.3964	56.55	-19.30	37.25	40.00	-2.75	peak			
2	60.0691	57.63	-21.09	36.54	40.00	-3.46	peak			
3	78.1389	58.95	-21.47	37.48	40.00	-2.52	peak			

Job No.: STAR #4107

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/12/07/

Temp. (C)/Hum.(%) 25 C / 55 %

Time: 17/52/27

EUT: Numpy 3G serials-AX1 SPEC

Engineer Signature:


Mode: TX 2440MHz

Distance: 3m

Model: Numpy 3G

Manufacturer: AINOL

Note: Report No.:ATE20132565

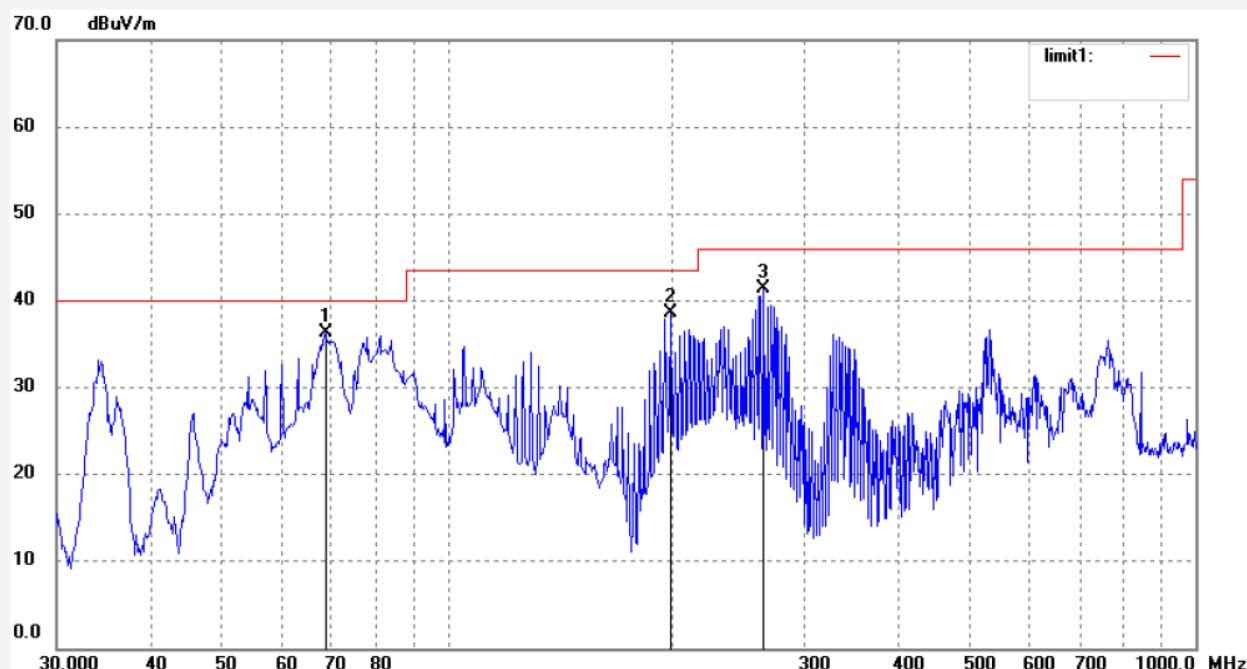

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	68.6310	57.64	-21.31	36.33	40.00	-3.67	peak			
2	198.5880	58.95	-20.32	38.63	43.50	-4.87	peak			
3	264.7457	60.25	-18.87	41.38	46.00	-4.62	peak			

Job No.: STAR #4106

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/12/07/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 17/51/47

EUT: Numpy 3G serials-AX1 SPEC

Engineer Signature:


Mode: TX 2440MHz

Distance: 3m

Model: Numpy 3G

Manufacturer: AINOL

Note: Report No.:ATE20132565

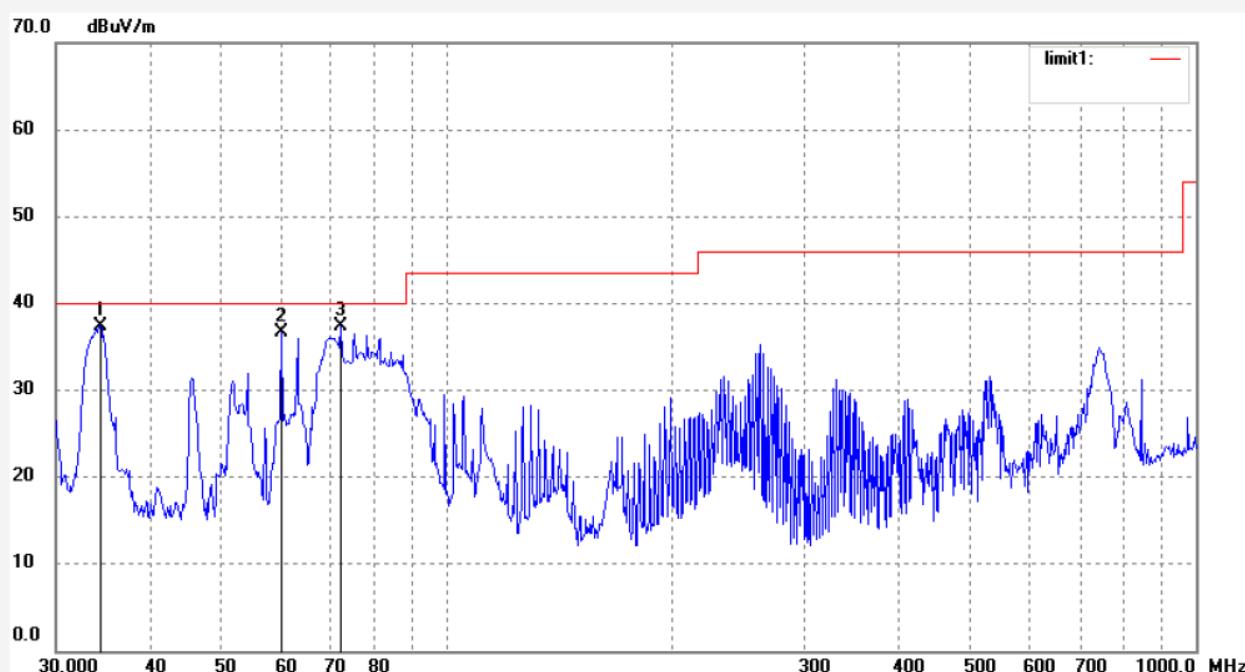

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.3964	56.59	-19.30	37.29	40.00	-2.71	peak			
2	60.0691	57.73	-21.09	36.64	40.00	-3.36	peak			
3	72.0843	58.78	-21.46	37.32	40.00	-2.68	peak			

Job No.: STAR #4108

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/12/07/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 17/53/15

EUT: Numpy 3G serials-AX1 SPEC

Engineer Signature:


Mode: TX 2480MHz

Distance: 3m

Model: Numpy 3G

Manufacturer: AINOL

Note: Report No.:ATE20132565

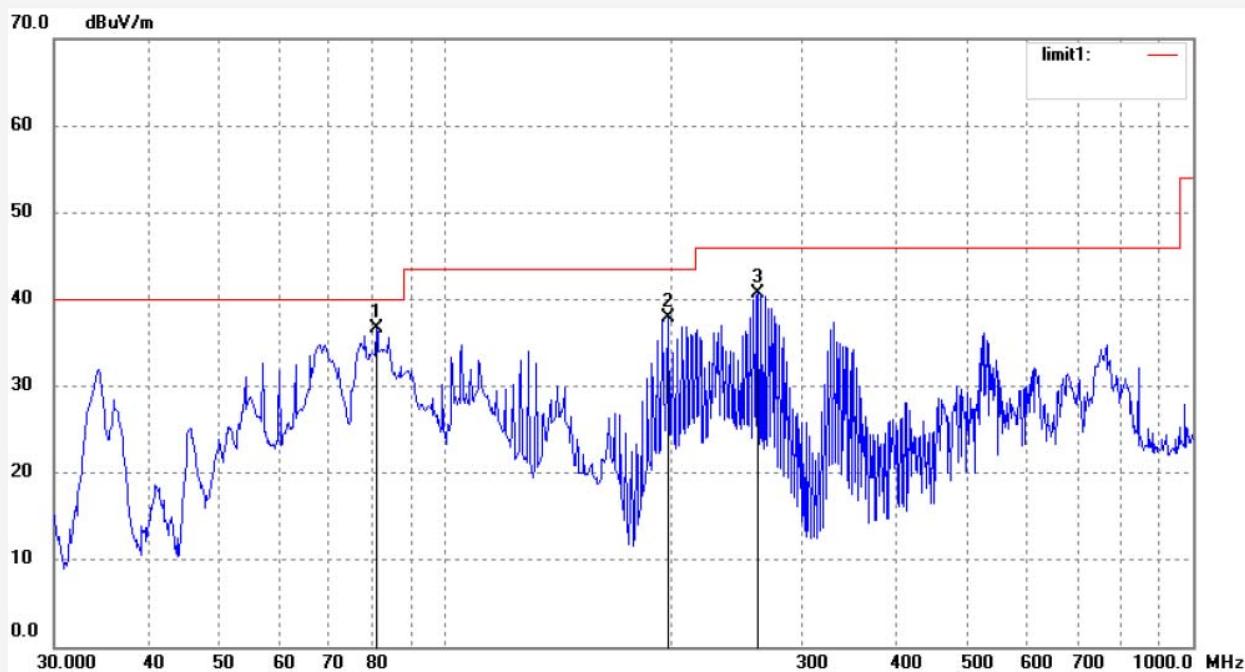

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	80.9275	57.99	-21.41	36.58	40.00	-3.42	peak			
2	198.5880	58.21	-20.32	37.89	43.50	-5.61	peak			
3	261.9753	59.74	-19.02	40.72	46.00	-5.28	peak			

Job No.: STAR #4109

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/12/07/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 17/53/49

EUT: Numpy 3G serials-AX1 SPEC

Engineer Signature:


Mode: TX 2480MHz

Distance: 3m

Model: Numpy 3G

Manufacturer: AINOL

Note: Report No.:ATE20132565

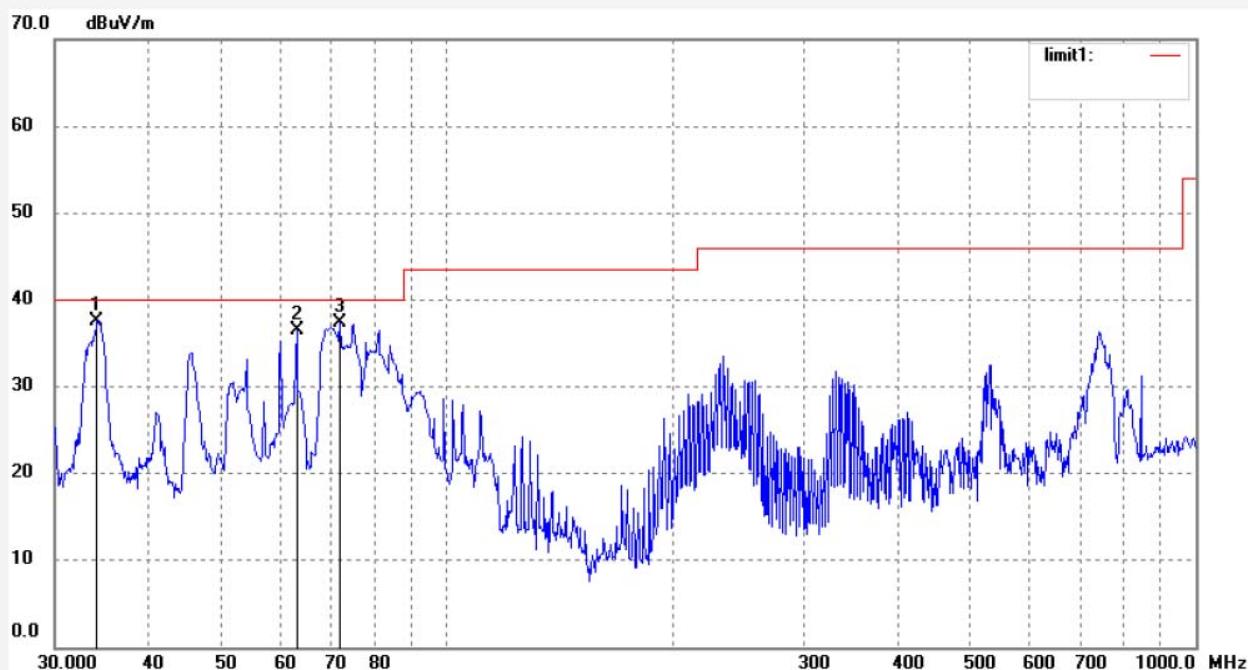

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	34.1561	56.73	-19.22	37.51	40.00	-2.49	peak			
2	63.0916	57.62	-21.15	36.47	40.00	-3.53	peak			
3	72.0843	58.89	-21.46	37.43	40.00	-2.57	peak			

Job No.: STAR #4098

Standard: FCC Class B 3M Radiated

Test item: Radiation Test

Temp.(C)/Hum.(%) 25 C / 55 %

EUT: Numpy 3G serials-AX1 SPEC

Mode: TX 2402MHz

Model: Numpy 3G

Manufacturer: AINOL

Polarization: Horizontal

Power Source: AC 120V/60Hz


Date: 13/12/07/

Time: 17:45:28

Engineer Signature:

Distance: 3m

Note: Report No.:ATE20132565

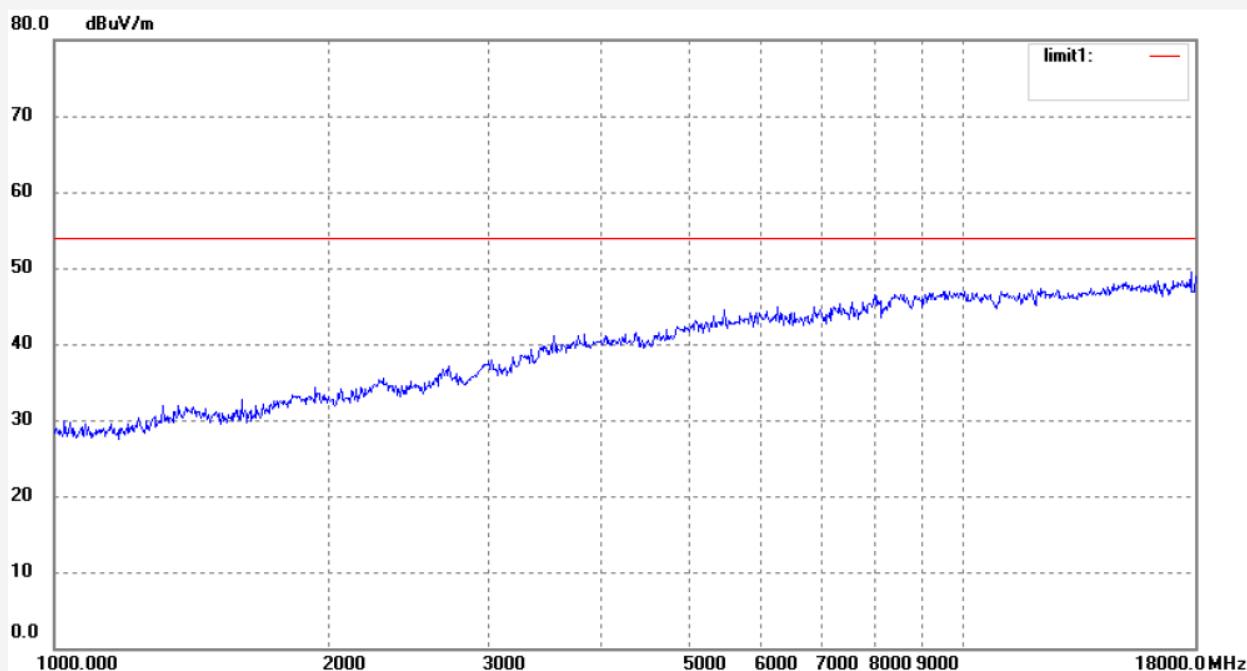

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

Job No.: STAR #4099

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/12/07/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 17/45/53

EUT: Numpy 3G serials-AX1 SPEC

Engineer Signature:


Mode: TX 2402MHz

Distance: 3m

Model: Numpy 3G

Manufacturer: AINOL

Note: Report No.:ATE20132565

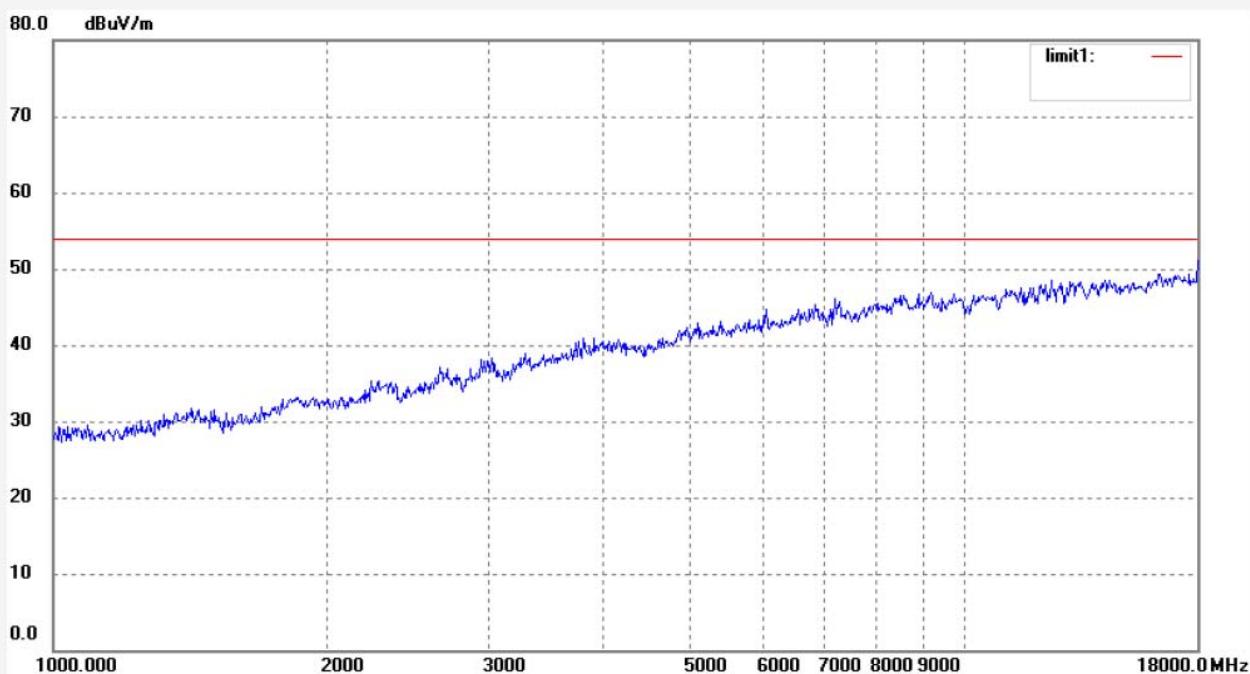

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

Job No.: STAR #4101

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/12/07/

Temp. (C)/Hum.(%) 25 C / 55 %

Time: 17/46/56

EUT: Numpy 3G serials-AX1 SPEC

Engineer Signature:


Mode: TX 2440MHz

Distance: 3m

Model: Numpy 3G

Manufacturer: AINOL

Note: Report No.:ATE20132565

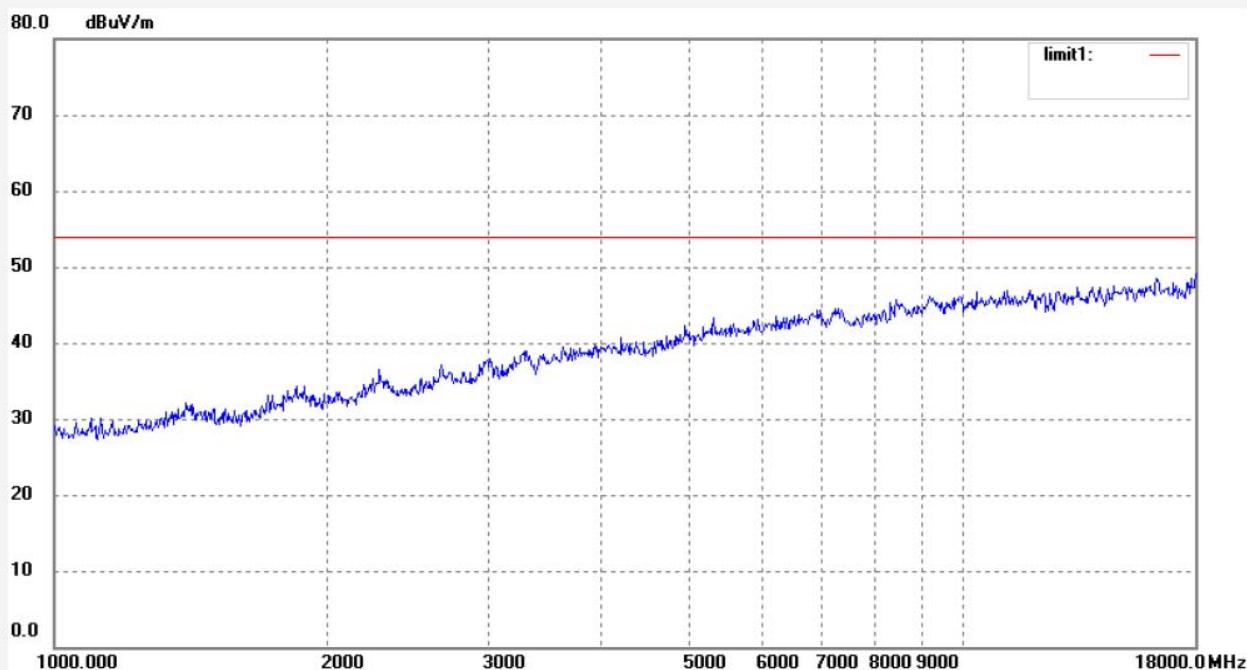

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

Job No.: STAR #4100

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/12/07/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 17/46/30

EUT: Numpy 3G serials-AX1 SPEC

Engineer Signature:


Mode: TX 2440MHz

Distance: 3m

Model: Numpy 3G

Manufacturer: AINOL

Note: Report No.:ATE20132565

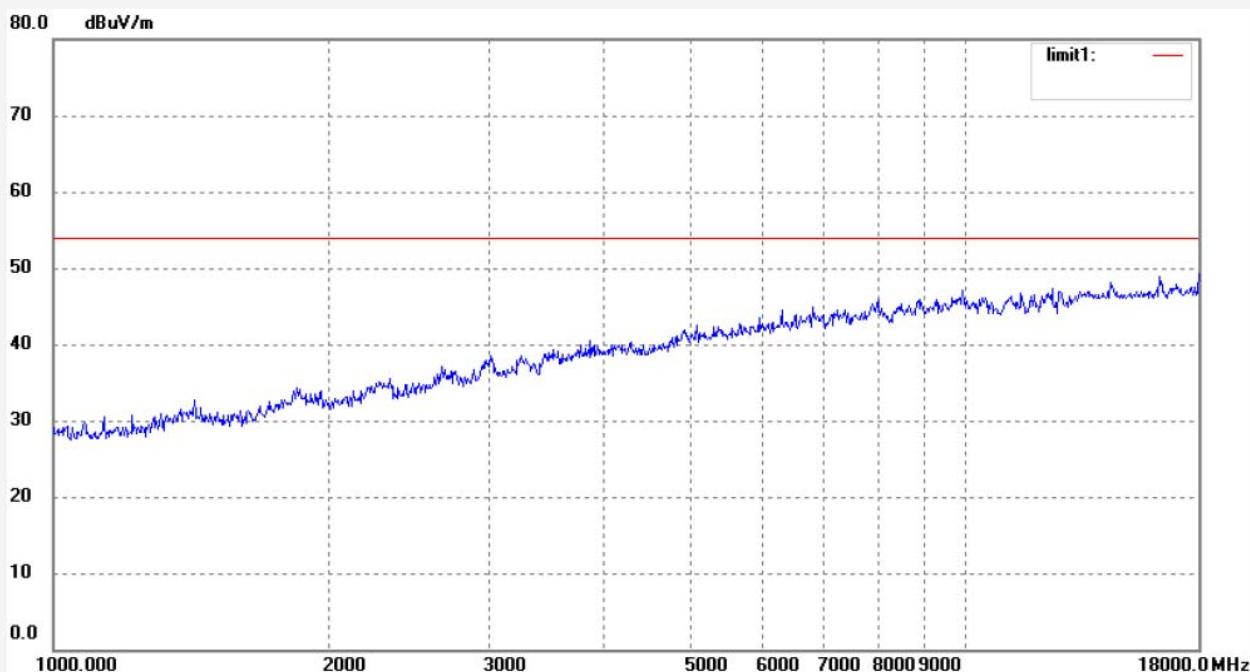

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	----------------	---------------------	----------------	--------------------	-------------------	----------------	----------	----------------	------------------	--------

Job No.: STAR #4102

Polarization: Horizontal

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/12/07/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 17/47/31

EUT: Numpy 3G serials-AX1 SPEC

Engineer Signature:


Mode: TX 2480MHz

Distance: 3m

Model: Numpy 3G

Manufacturer: AINOL

Note: Report No.:ATE20132565

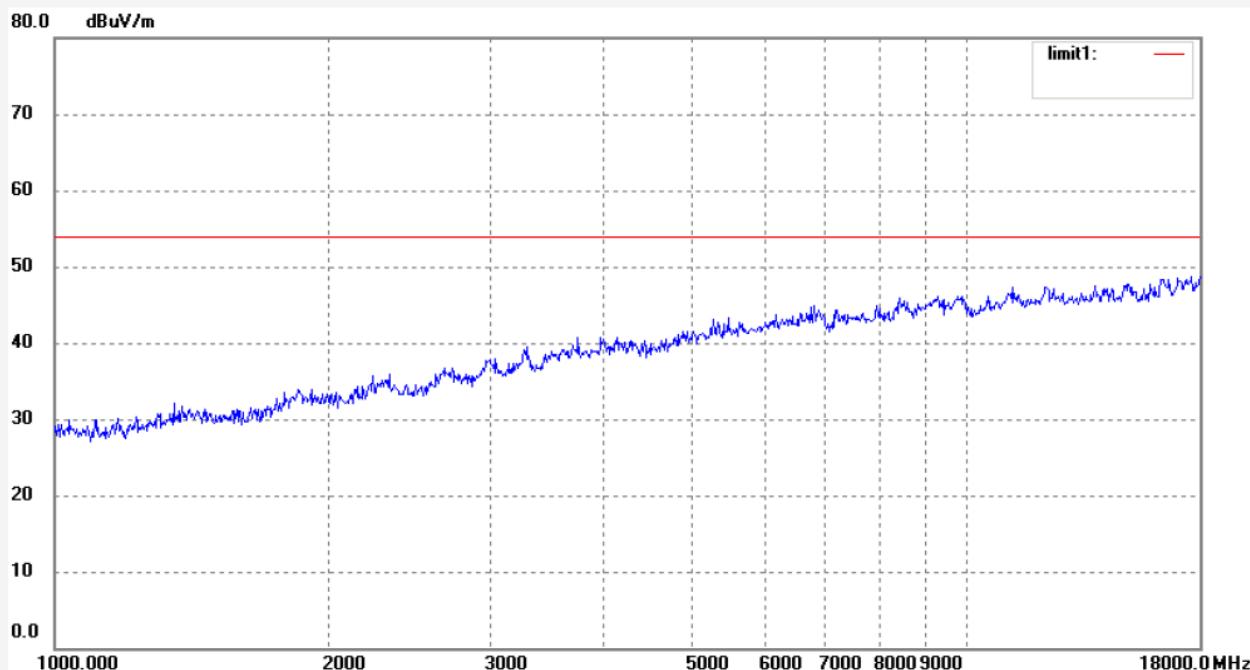

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

Job No.: STAR #4103

Polarization: Vertical

Standard: FCC Class B 3M Radiated

Power Source: AC 120V/60Hz

Test item: Radiation Test

Date: 13/12/07/

Temp.(C)/Hum.(%) 25 C / 55 %

Time: 17/48/01

EUT: Numpy 3G serials-AX1 SPEC

Engineer Signature:


Mode: TX 2480MHz

Distance: 3m

Model: Numpy 3G

Manufacturer: AINOL


Note: Report No.:ATE20132565

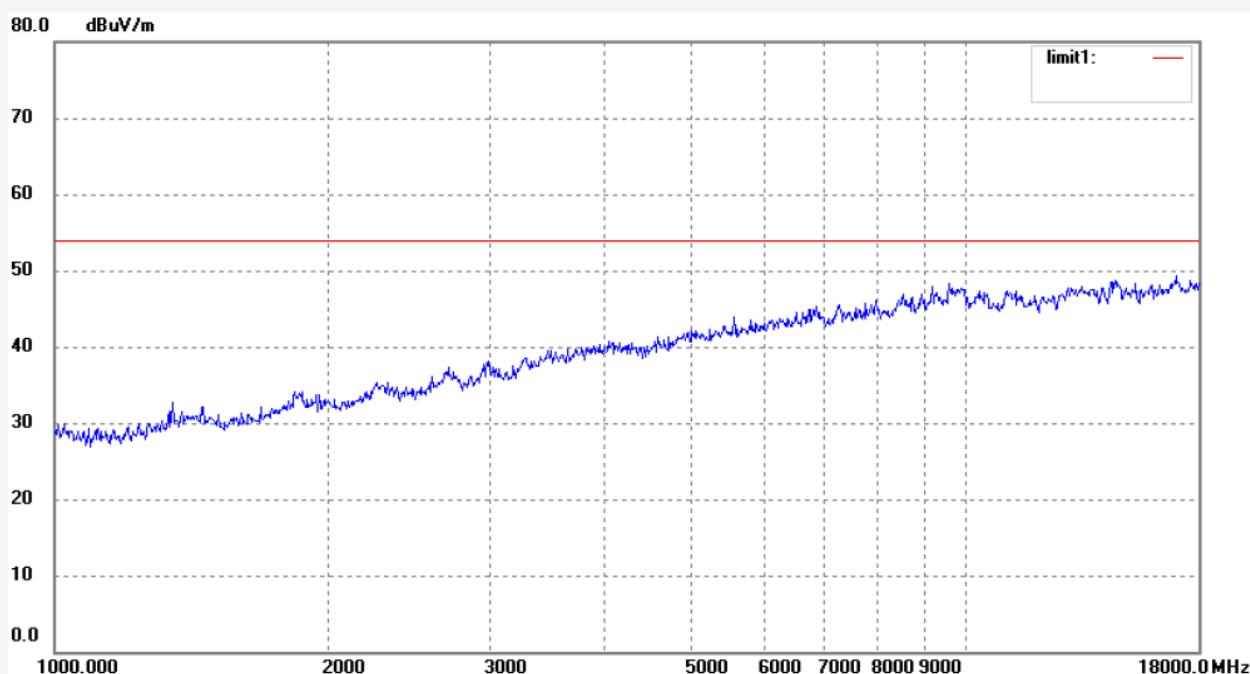

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------

11.CONDUCTED SPURIOUS EMISSION COMPLIANCE TEST

11.1.Block Diagram of Test Setup



(EUT: Numpy 3G serials-AX1 SPEC)

11.2.The Requirement of Section 15.247(d)

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

11.3.EUT Configuration on Measurement

The equipment is installed on the emission measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

11.4.Operating Condition of EUT

11.4.1.Setup the EUT and simulator as shown as Section 11.1.

11.4.2.Turn on the power of all equipment.

11.4.3.Let the EUT work in TX modes measure it. The transmit frequency are 2402-2480 MHz. We select 2402MHz, 2440MHz, and 2480MHz TX frequency to transmit.

11.5.Test Procedure

11.5.1.The transmitter output was connected to the spectrum analyzer via a low loss cable.

11.5.2.Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz



11.5.3.The Conducted Spurious Emission was measured and recorded.

11.6.Test Result



Pass.

The spectrum analyzer plots are attached as below.



BLE Channel Low 2402MHz

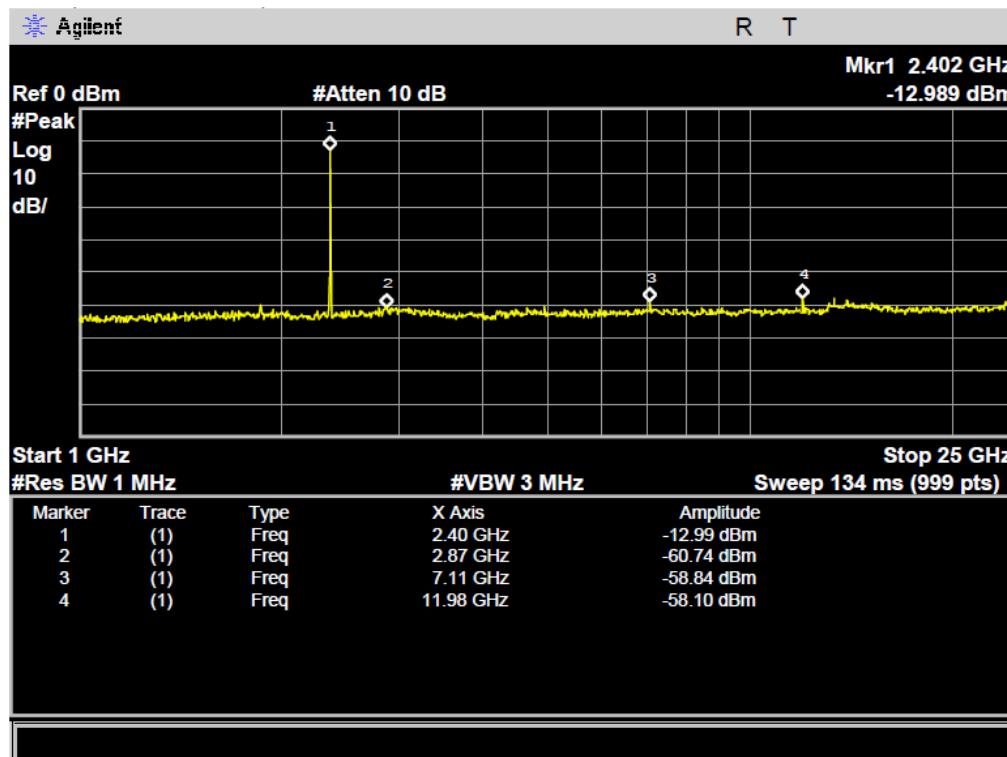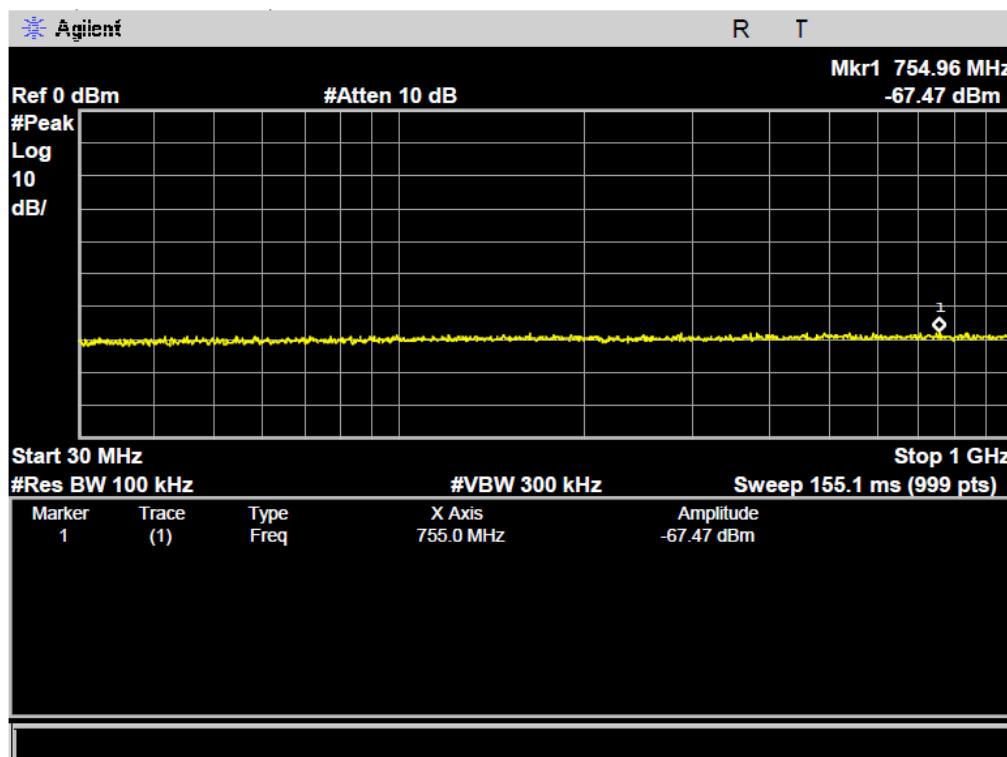

BLE Channel Middle 2440MHz

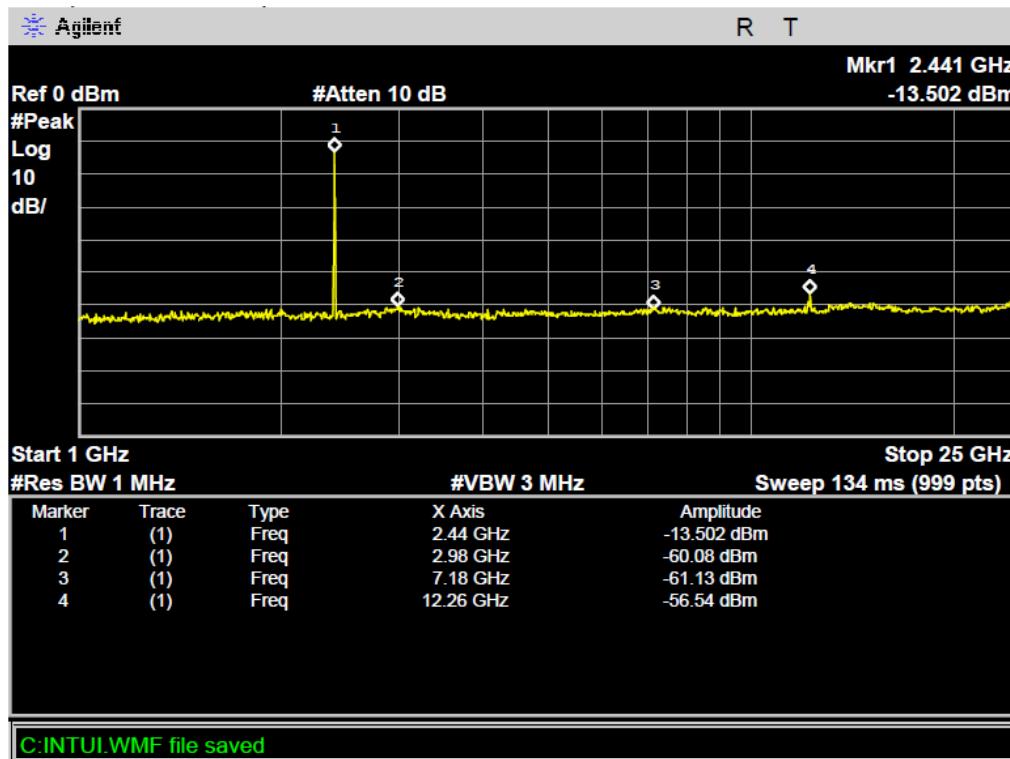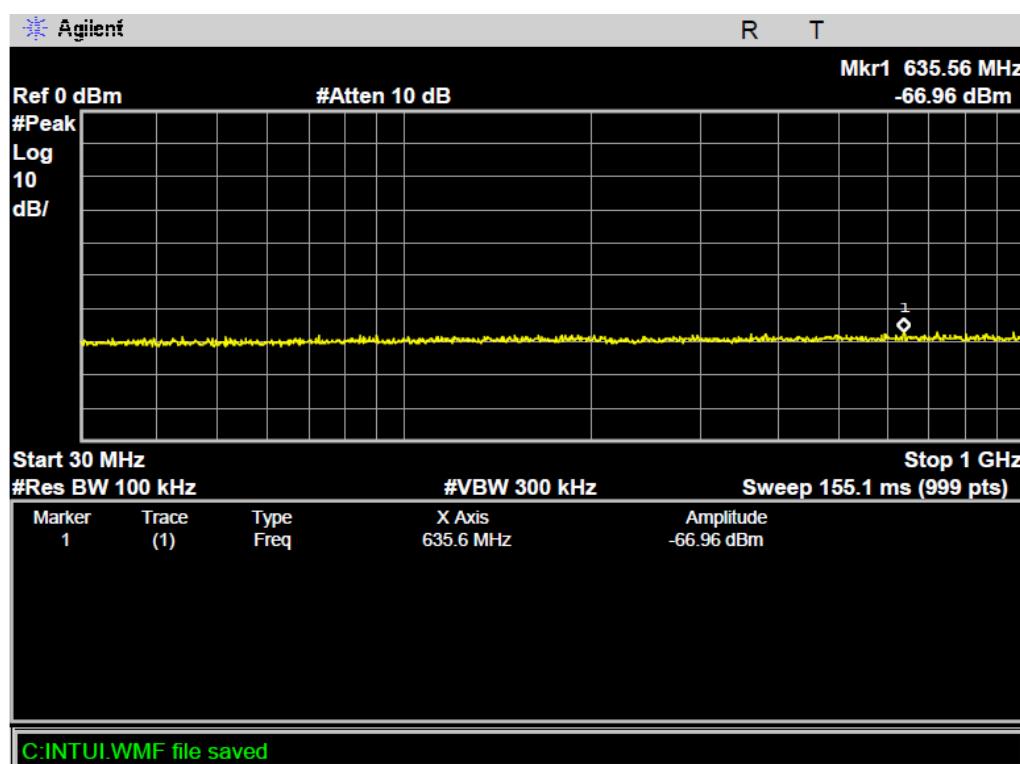

BLE Channel High 2480MHz

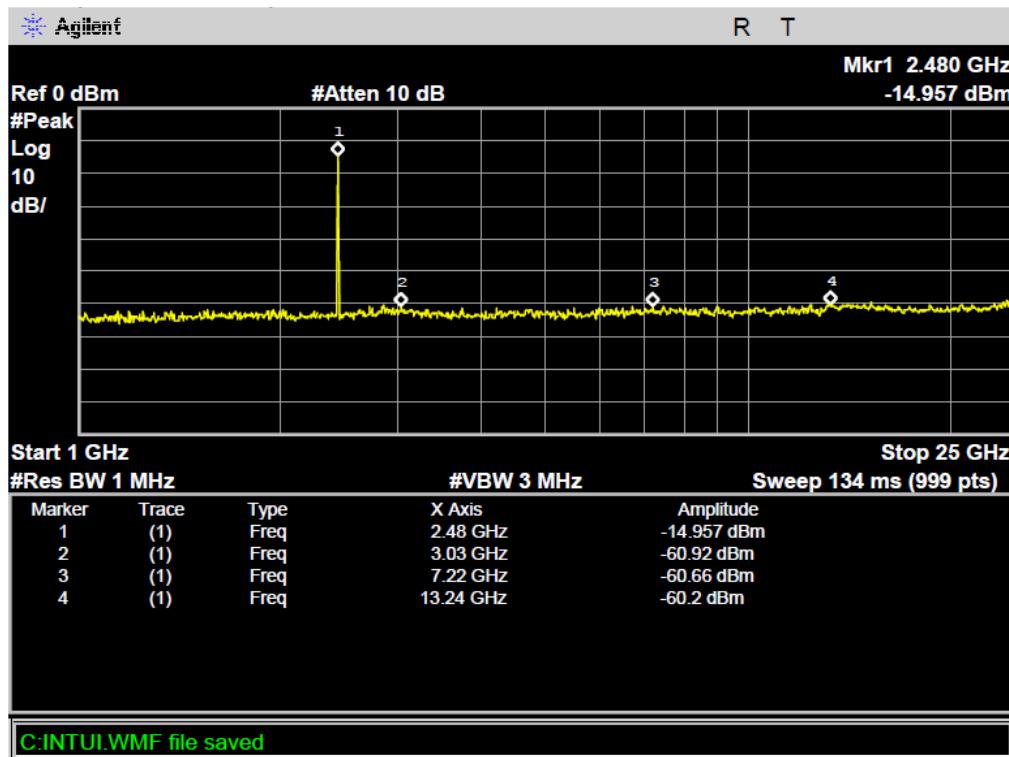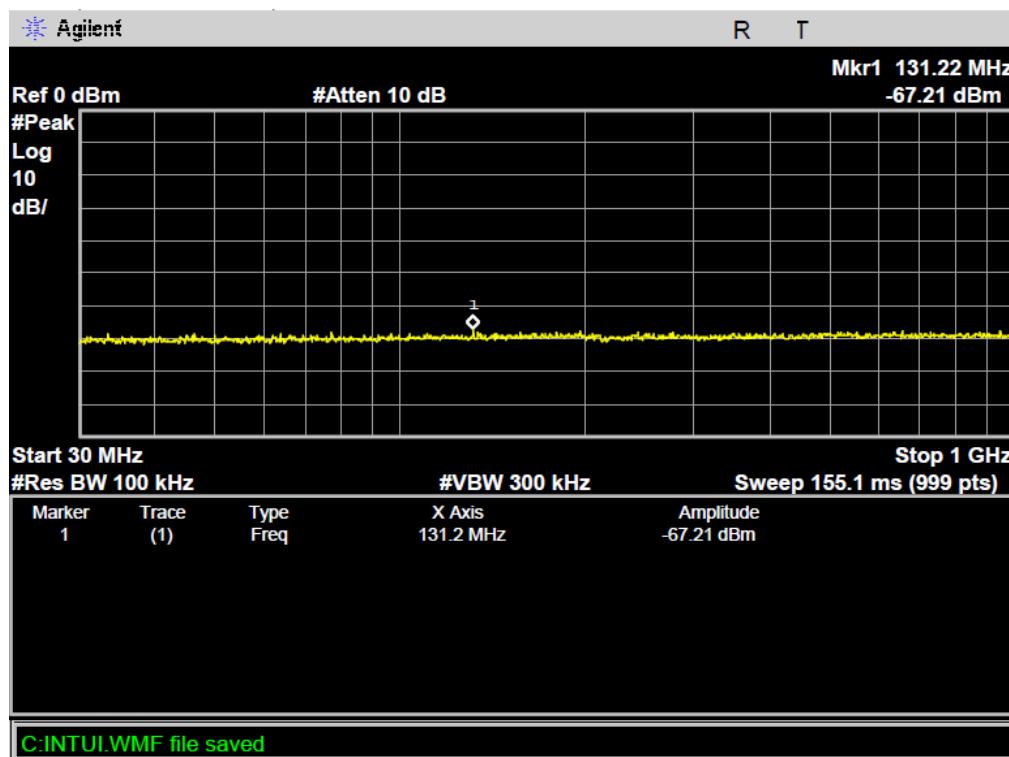

12. ANTENNA REQUIREMENT

12.1. The Requirement

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

12.2. Antenna Construction

Device is equipped with unique antenna, which isn't displaced by other antenna. Therefore, the equipment complies with the antenna requirement of Section 15.203.

