



EMC TEST REPORT

Applicant Aava Mobile Oy
FCC ID 2ABVH-INARI10E1
Product 10" Tablet Computer
Brand AAVA
Model INARI-E-10-WIG-1
Report No. R2406A0726-E1
Issue Date September 11, 2024

Eurofins TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2023)/ ANSI C63.4-2014**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Prepared by: Liu Wei

Approved by: Fan Guangchang

Eurofins TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

Table of Contents

1	Test Laboratory	4
1.1	Notes of the Test Report.....	4
1.2	Test Facility.....	4
1.3	Testing Location.....	4
2	General Description of Equipment Under Test	5
2.1	Applicant and Manufacturer Information	5
2.2	General Information	5
2.3	Applied Standards	6
2.4	Test Mode	7
3	Test Case Results	9
3.1	Radiated Emission.....	9
3.2	Conducted Emission.....	14
4	Uncertainty Measurement.....	17
5	Main Test Instruments	18
ANNEX A:	The EUT Appearance	19
ANNEX B:	Test Setup Photos	20

Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Date of Testing: July 6, 2024 ~ August 27, 2024			
Date of Sample Received: June 24, 2024			
<p>Note:</p> <p>1. All indications of Pass/Fail in this report are opinions expressed by Eurofins TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results.</p> <p>Measurement Uncertainties were not taken into account and are published for informational purposes only.</p>			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **Eurofins TA Technology (Shanghai) Co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test Facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

Eurofins TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company: Eurofins TA Technology (Shanghai) Co., Ltd.
Address: Building 3, No.145, Jintang Rd, Pudong Shanghai, P.R.China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Fan Guangchang
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <https://www.eurofins.com/electrical-and-electronics>
E-mail: Jack.Fan@cpt.eurofinscn.com

2 General Description of Equipment Under Test

2.1 Applicant and Manufacturer Information

Applicant	Aava Mobile Oy
Applicant address	Nahkatehtaankatu 2, FI-90130 Oulu, Finland
Manufacturer	Aava Mobile Oy
Manufacturer address	Nahkatehtaankatu 2, FI-90130 Oulu, Finland

2.2 General Information

EUT Description						
Device Type	Portable Device					
Model	INARI-E-10-WIG-1					
SN	XBBA2FC1700039					
HW Version	EV1					
SW Version	007					
Power Rating	DC 3.85V from battery or DC 5V/9V from Adapter.					
Connecting I/O Port(s)	Please refer to the User's Manual.					
Antenna Type	NFC	Internal Antenna				
	Other Band	Chip Antenna				
Frequency	Band	Tx (MHz)	Rx (MHz)			
	Bluetooth	2400 ~ 2483.5	2400 ~ 2483.5			
	Wi-Fi 2.4G	2400 ~ 2483.5	2400 ~ 2483.5			
	Wi-Fi 5G (U-NII-1)	5150 ~ 5250	5150 ~ 5250			
	Wi-Fi 5G (U-NII-2A)	5250 ~ 5350	5250 ~ 5350			
	Wi-Fi 5G (U-NII-2C)	5470 ~ 5725	5470 ~ 5725			
	Wi-Fi 5G (U-NII-3)	5725 ~ 5850	5725 ~ 5850			
	NFC	13.56	13.56			
EUT Accessory						
Battery	Manufacturer: Shenzhen Guangwei Electronic Technology Co., Ltd. Model: AMME5260					
Auxiliary Test Equipment						
PC	Manufacturer: DELL Model: Latitude 3301 (SN: DR6DJW2)					
Note:						
1. The EUT is sent from the applicant to Eurofins TA and the information of the EUT is declared by the applicant.						

2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2023)

ANSI C63.4-2014


2.4 Test Mode

Test Mode	
Mode 1:	Adapter +USB cable + Front camera On +Bluetooth/ Wi-Fi /NFC receiver
Mode 2:	Adapter +USB cable + Rear camera On +Bluetooth/Wi-Fi/NFC receiver
Mode 3:	Adapter + USB cable + play (1kHz)
Mode 4:	USB Copy (EUT with PC) + USB cable
Mode 5:	USB Copy (PC card with EUT + USB cable
Mode 6:	EUT +Front Camera On +Bluetooth/Wi-Fi/NFC receiver
Mode 7:	EUT+ Rear camera On +Bluetooth/ Wi-Fi /NFC receiver
Mode 8:	EUT + earphone + play (1kHz)


Test Type	Test Mode	Worst Mode
Radiated Emission	Mode 1, 2, 3, 4, 5, 6, 7, 8	Mode 4
Conducted Emission	Mode 1, 2, 3, 4, 5	Mode 5
After technical evaluation or/and preliminary test, the test data of the worst-case condition was recorded in this report.		

System Configurations


Connection Diagram (Mode 1 ~ Mode 3)

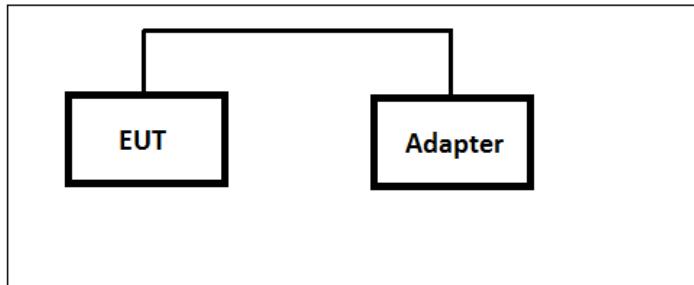

Connection Diagram (Mode 4 ~ Mode 5)

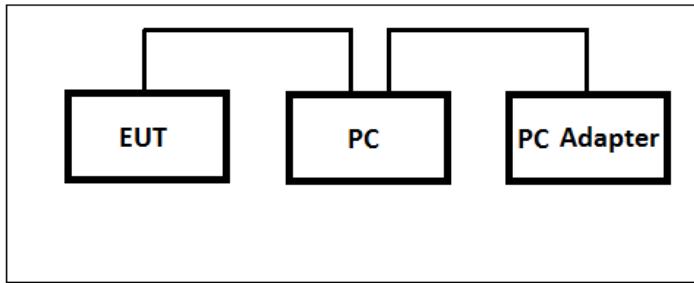

Connection Diagram (Mode 6 ~ Mode 7)

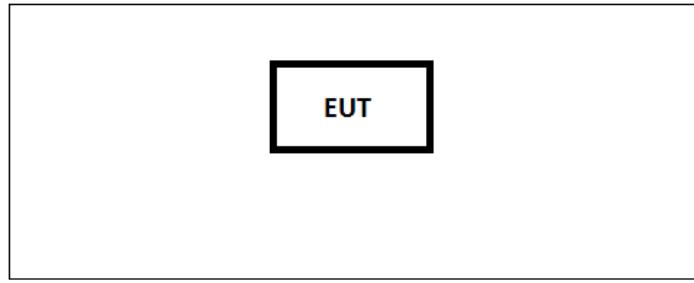

3 Test Case Results

3.1 Radiated Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO



Above 1GHz:

(a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO

(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

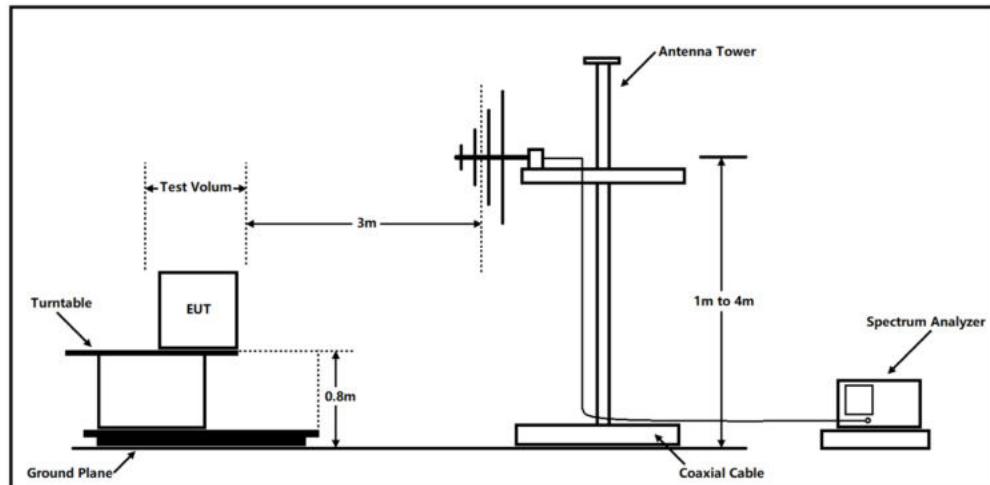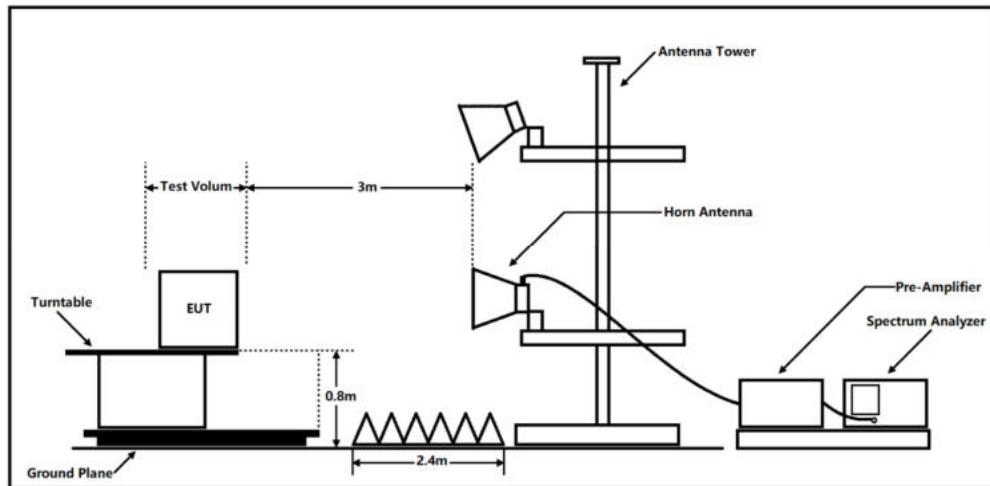Test Setup
Below 1GHz

Above 1GHz


Note: Area side: 2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

Limits**Class B**

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

Class A

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	49.08	Quasi-peak
88-216	53.52	Quasi-peak
216 – 960	56.40	Quasi-peak
960-1000	59.50	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	59.50 79.50	Average Peak

Frequency range of radiated measurements


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705-108	1000
108-500	2000
500-1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. The Emissions in the frequency band 18GHz – 40GHz is more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software. For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

A symbol (dB μ V/m) in the test plot below means (dB μ V/m)

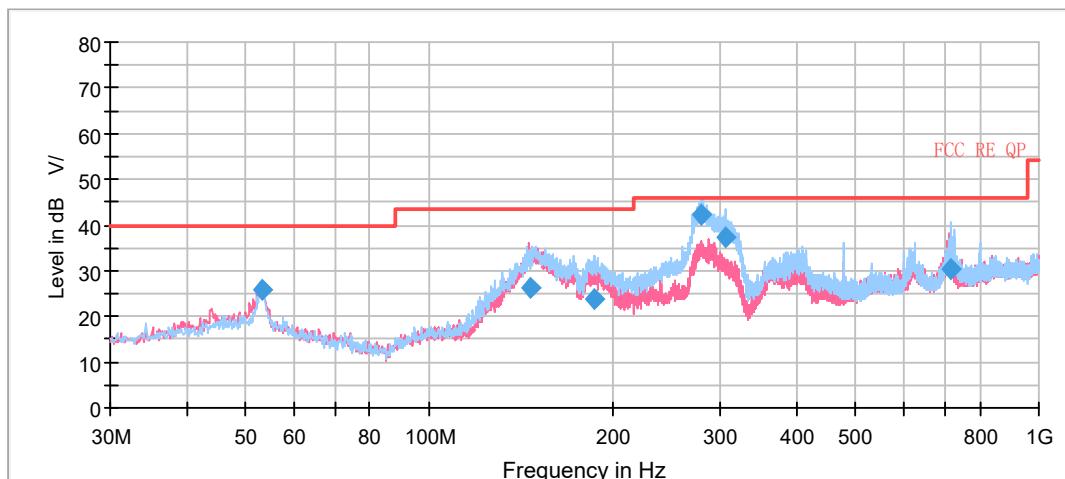
Mode 4


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
53.082500	25.86	40.00	14.14	125.0	V	137.0	20.8
146.63625	26.38	43.50	17.12	100.0	V	279.0	15.4
187.01250	23.96	43.50	19.54	125.0	H	233.0	17.9
278.52750	42.07	46.00	3.93	100.0	H	72.0	20.4
305.44250	37.41	46.00	8.59	100.0	H	75.0	21.0
714.41750	30.29	46.00	15.71	225.0	H	316.0	28.0

Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

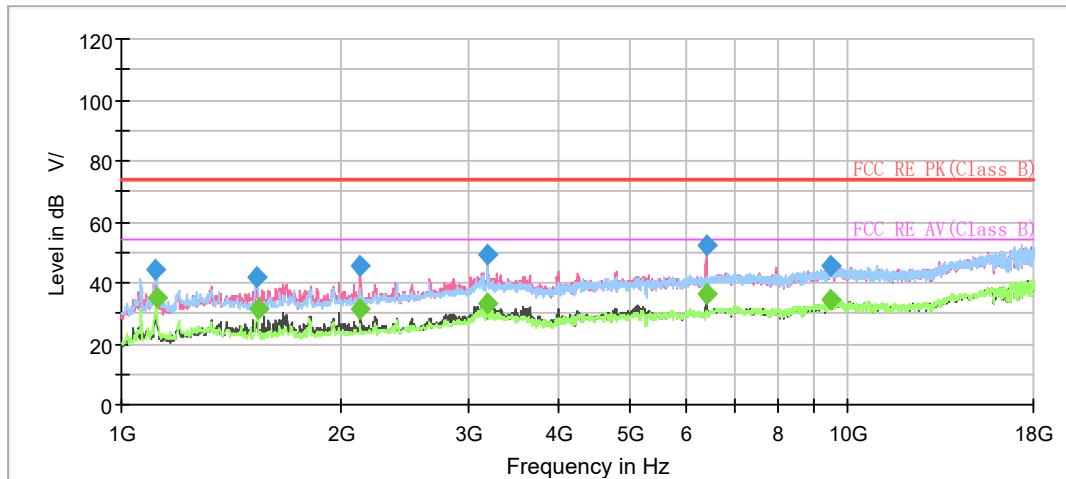
Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1114.791250	44.30	---	74.00	29.70	500.0	100.0	H	257.0	-20.0
1116.713750	---	35.07	54.00	18.93	500.0	100.0	H	257.0	-20.0
1536.623750	41.68	---	74.00	32.32	500.0	100.0	H	231.0	-16.8
1539.238750	---	31.10	54.00	22.90	500.0	100.0	H	231.0	-16.8
2131.125000	45.34	---	74.00	28.66	500.0	100.0	V	278.0	-13.6
2131.458750	---	31.22	54.00	22.78	500.0	200.0	V	148.0	-13.6
3188.042500	---	33.44	54.00	20.56	500.0	100.0	V	92.0	-10.0
3190.325000	49.07	---	74.00	24.93	500.0	100.0	V	92.0	-9.9
6384.491250	---	36.31	54.00	17.69	500.0	100.0	V	188.0	-4.2
6392.580000	52.05	---	74.00	21.95	500.0	100.0	V	188.0	-4.2
9464.256250	45.76	---	74.00	28.24	500.0	200.0	V	200.0	-0.2
9464.991250	---	34.17	54.00	19.83	500.0	200.0	H	27.0	-0.1

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)
2. Margin = Limit – MaxPeak / Average

3.2 Conducted Emission

Ambient Condition


Temperature	Relative humidity
15°C ~ 35°C	30% ~ 60%

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

During the test, EUT is connected to a laptop via a USB cable in the case of Transfer Data mode. The EUT is used as the peripheral equipment of the PC. The data is transferred from EUT to PC; PC is connected to server via a long LAN cable.

Test Setup

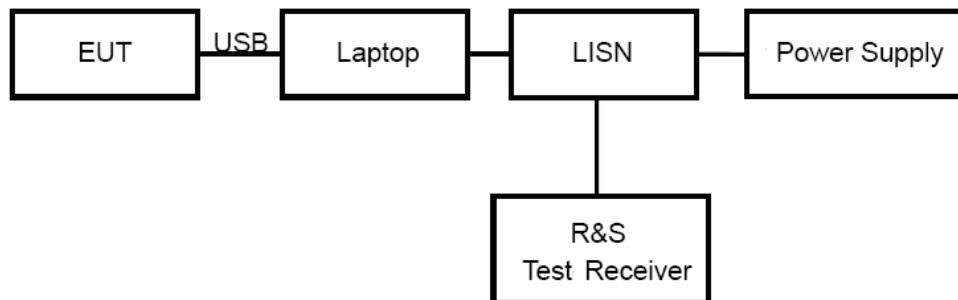

Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

Limits

Frequency (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 to 56 *	56 to 46*
0.5 - 5	73	60	56	46
5 - 30	73	60	60	50


*: Decreases with the logarithm of the frequency.

Note: The EUT should meet CLASS B limit.

Test Results

Mode 5

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

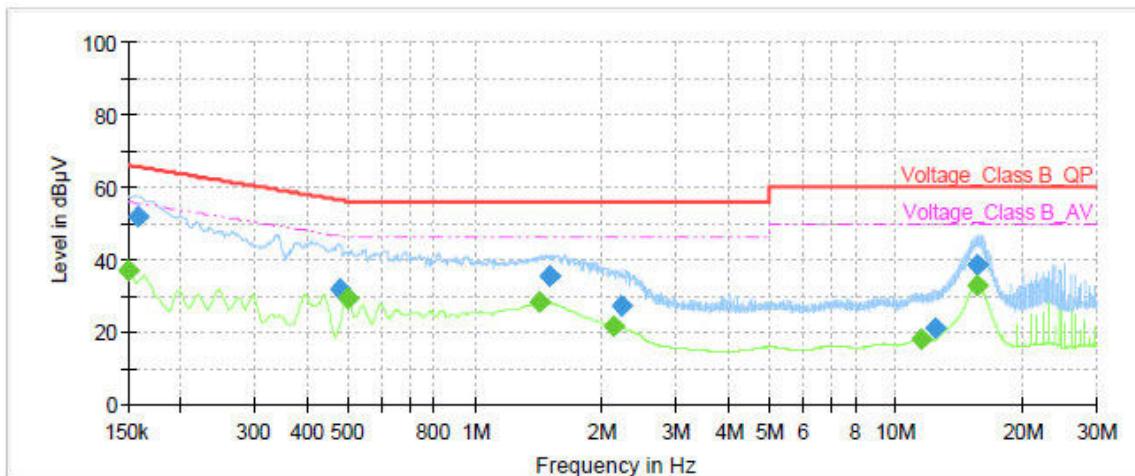


Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.15	---	37.15	56.00	18.85	1000.0	9.000	L1	ON	21.0
0.16	51.99	---	65.52	13.53	1000.0	9.000	L1	ON	21.0
0.48	31.70	---	56.40	24.70	1000.0	9.000	L1	ON	20.9
0.50	---	29.28	46.06	16.78	1000.0	9.000	L1	ON	20.9
1.42	---	28.02	46.00	17.98	1000.0	9.000	L1	ON	20.0
1.51	35.31	---	56.00	20.69	1000.0	9.000	L1	ON	19.9
2.12	---	21.62	46.00	24.38	1000.0	9.000	L1	ON	19.7
2.22	27.01	---	56.00	28.99	1000.0	9.000	L1	ON	19.7
11.45	---	17.94	50.00	32.06	1000.0	9.000	L1	ON	19.5
12.38	20.81	---	60.00	39.19	1000.0	9.000	L1	ON	19.6
15.53	---	33.05	50.00	16.95	1000.0	9.000	L1	ON	19.6
15.59	38.43	---	60.00	21.57	1000.0	9.000	L1	ON	19.6

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 kHz to 30 MHz

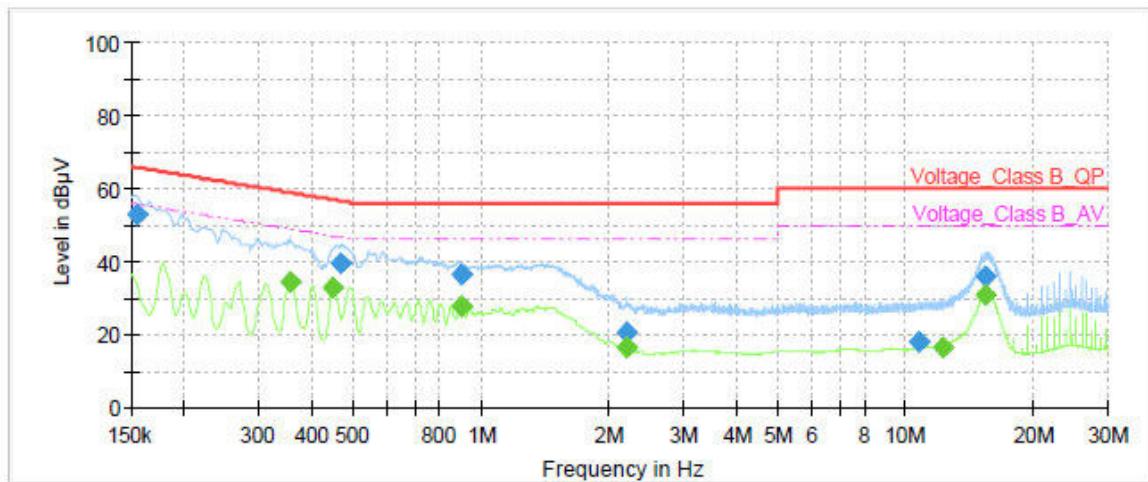

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.15	52.79	---	65.75	12.96	1000.0	9.000	N	ON	21.0
0.36	---	34.40	48.80	14.40	1000.0	9.000	N	ON	21.0
0.45	---	33.02	46.89	13.87	1000.0	9.000	N	ON	20.9
0.47	39.36	---	56.52	17.16	1000.0	9.000	N	ON	20.9
0.90	---	27.75	46.00	18.25	1000.0	9.000	N	ON	20.3
0.90	36.20	---	56.00	19.80	1000.0	9.000	N	ON	20.3
2.20	---	16.35	46.00	29.65	1000.0	9.000	N	ON	19.7
2.21	20.33	---	56.00	35.67	1000.0	9.000	N	ON	19.7
10.74	17.92	---	60.00	42.08	1000.0	9.000	N	ON	19.6
12.24	---	16.59	50.00	33.41	1000.0	9.000	N	ON	19.6
15.43	---	30.77	50.00	19.23	1000.0	9.000	N	ON	19.7
15.46	36.09	---	60.00	23.91	1000.0	9.000	N	ON	19.7

Remark: Correct factor=cable loss + LISN factor

 N line
 Conducted Emission from 150 kHz to 30 MHz

4 Uncertainty Measurement

Case	Uncertainty	Factor k
Radiated Emission 30MHz – 200MHz	4.17 dB	1.96
Radiated Emission 200MHz – 1GHz	4.84 dB	1.96
Radiated Emission 1GHz – 18GHz	4.35 dB	1.96
Radiated Emission 18GHz – 26.5GHz	5.90 dB	1.96
Radiated Emission 26.5GHz – 40GHz	5.92 dB	1.96
Conducted Emission	2.57 dB	2

5 Main Test Instruments

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESR	102389	2024-05-07	2025-05-06
EMI Test Receiver	R&S	ESCI3	100948	2024-05-07	2025-05-06
Signal Analyzer	R&S	FSV40	101298	2024-05-07	2025-05-06
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2023-04-16	2026-04-15
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	01111	2022-10-25	2025-10-24
Horn Antenna	R&S	HF 907	102723	2023-11-24	2026-11-23
Horn Antenna	ETS-Lindgren	3160-09	00102643	2021-10-10	2024-10-09
Horn Antenna	STEATITE	QSH-SL-26-40-K-15	16779	2023-01-17	2026-01-16
Software	R&S	EMC32	9.26.01	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	102191	2022-12-10	2024-12-09
EMI Test Receiver	R&S	ESR	101667	2024-05-07	2025-05-06
Software	R&S	EMC32	10.35.10	/	/

ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.

ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.

***** END OF REPORT *****