



**InterLab®**

Final Report on

INARI8-3GAN-1 and INARI8-WLAN-1  
FCC ID: 24BVH-INARI81  
IC: 11875A-INARI81

**Report Reference:** MDE\_AAVAM\_1301\_FCCb Rev 002

According to  
Title 47 CFR chapter I part 15 subpart C

**Date:** April 29, 2014

**Test Laboratory:**

7Layers AG  
Borsigstr. 11  
40880 Ratingen  
Germany

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7Layers AG  
Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
[www.7Layers.com](http://www.7Layers.com)

Aufsichtsratsvorsitzender •  
Chairman of the Supervisory Board:  
Peter Mertel  
Vorstand • Board:  
Dr. H.-J. Meckelburg  
Dr. H. Ansorge



Registergericht • registered in:  
Düsseldorf, HRB 44096  
UST-IdNr • VAT No.:  
DE 203159652  
TAX No. 147/5869/0385



## 1 Administrative Data

### 1.1 Project Data

*Project Responsible:* Patrick Lomax  
*Date Of Test Report:* 2014/04/29  
*Date of first test:* 2014/03/04  
*Date of last test:* 2014/06/03

### 1.2 Applicant Data

*Company Name:* Aava Mobile

*Street:* Nahkatehtaankatu 2  
Oulu  
*City:* 90130  
*Country:* Finland

*Contact Person:* Kari Räisänen

*Phone:* +3588373800  
*Fax:* +49 (0) 2102 749 380  
*E-Mail:* kari.raisanen@aavamobile.com

### 1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:

#### 7 layers DE

---

*Company Name :* 7 layers AG  
*Street :* Borsigstrasse 11  
*City :* 40880 Ratingen  
*Country :* Germany  
*Contact Person :* Mr. Michael Albert  
*Phone :* +49 2102 749 201  
*Fax :* +49 2102 749 444  
*E Mail :* michael.albert@7Layers.de

#### Laboratory Details

Lab ID	Identification	Responsible	Accreditation Info
Lab 1	Conducted Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkkS-Registration no. D-PL-12140-01-01
Lab 2	Radiated Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkkS-Registration no. D-PL-12140-01-01
Lab 3	Regulatory Bluetooth RF Test Solution	Mr. Jimmy Chatheril Mr. Sören Berentzen	DAkkS-Registration no. D-PL-12140-01-01



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

#### 1.4 Signature of the Testing Responsible

Patrick Lomax  
responsible for tests performed in: Lab 1, Lab 2, Lab 3

#### 1.5 Signature of the Accreditation Responsible

Accreditation scope responsible person  
responsible for Lab 1, Lab 2, Lab 3

[A. Petz]



## 2 Test Object Data

### 2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

#### OUT: INARI8 Tablet PC

*Type / Model / Family:* INARI8-3GAN-1 and INARI8-WLAN-1  
FCC ID: 24BVH-INARI81  
IC: 11875A-INARI81

*Product Category:* Mobile Computer

**Manufacturer:**  
*Company Name:* Please see applicant data

*Contact Person:* -

#### Parameter List:

<i>Parameter name</i>	<i>Value</i>
-----------------------	--------------

**Parameter for Scope FCC\_v2:**

AC Power Supply	120V/60Hz AC input to charger
Antenna Gain - Bluetooth Antenna	1.9 (dBi)
highest channel (BT)	2480 (MHz)
lowest channel (BT)	2402 (MHz)
mid channel (BT)	2441 (MHz)

#### Ancillary Equipment: AC/DC adapter (EU)

*Product Category:* Computer Accessory

#### Ancillary Equipment: IN0201-1 Tablet Dock

*Type / Model / Family:* FCC.ID: 2ABVH-IN020101  
IC: 11875A-IN020101

*Product Category:* Computer Accessory

**Manufacturer:**  
*Company Name:* Please see applicant data

*Contact Person:* -

#### Ancillary Equipment: Micro-USB cable

*Product Category:* Computer Accessory



## 2.2 Detailed Description of OUT Samples

### Sample : ac01

<i>OUT Identifier</i>	INARI8 Tablet PC		
<i>Sample Description</i>	conducted BT/BLE/WLan #2		
<i>Serial No.</i>	IN14060104		
<i>HW Status</i>	Pre-Production Sample		
<i>SW Status</i>	Windows 8.1		
<i>Low Voltage</i>	3.5 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4.36 V	<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	3.8 V	<i>Normal Temp.</i>	23 °C

#### *Parameter List:*

<i>Parameter Description</i>	<i>Value</i>
<b>Parameter for Scope FCC_v2</b>	
Antenna Gain	1.9 (dBi)
Channel_BW	1 (MHz)

### Sample : ae01

<i>OUT Identifier</i>	INARI8 Tablet PC		
<i>Sample Description</i>	RSE #1		
<i>Serial No.</i>	IN14060110		
<i>HW Status</i>	Pre-Production Sample		
<i>SW Status</i>	Windows 8.1		
<i>Date of Receipt</i>	2014/02/24		

#### *Parameter List:*

<i>Parameter Description</i>	<i>Value</i>
<b>Parameter for Scope FCC_v2</b>	
Antenna Gain	1.9 (dBi)
Channel_BW	1 (MHz)

### Sample : cdc01

<i>OUT Identifier</i>	AC/DC adapter (EU)
<i>Sample Description</i>	AC adapter
<i>Serial No.</i>	053W3370003
<i>Date of Receipt</i>	2014/02/24



---

Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

**Sample : Dock1**

<i>OUT Identifier</i>	IN0201-1 Tablet Dock
<i>Sample Description</i>	Docking station for Tablet
<i>Serial No.</i>	0001
<i>HW Status</i>	Pre-Production Sample

**Sample : sb1**

<i>OUT Identifier</i>	Micro-USB cable
<i>Sample Description</i>	USB cable
<i>Date of Receipt</i>	2014/02/24



## 2.3 OUT Features

### Features for OUT: INARI8 Tablet PC

Designation	Description	Allowed Values	Supported Value(s)
<b>Features for scope: FCC_v2</b>			
AC	The OUT is powered by or connected to AC Mains		
BT	EUT supports Bluetooth data rate of 1 Mbps with GFSK modulation in the band 2400 MHz - 2483.5 MHz		
BTLE	Support of Bluetooth Low Energy		
EDGE850	EUT supports EDGE in the band 824 MHz - 849 MHz		
EDGE1900	EUT supports EDGE in the band 1850 MHz - 1910 MHz		
EDR2	EUT supports Bluetooth using data rate of 2 Mbps with PI/4 DQPSK modulation in the band 2400 MHz - 2483.5 MHz		
EDR3	EUT supports Bluetooth using data rate of 3 Mbps with 8DPSK modulation in the band 2400 MHz - 2483.5 MHz		
FDD2	EUT supports UMTS FDD2 in the band 1850 MHz - 1910 MHz		
FDD4	EUT supports UMTS FDD4 in the band 1710 MHz - 1755 MHz		
FDD5	EUT supports UMTS FDD5 in the band 824 MHz - 849 MHz		
GSM850	EUT supports GSM850 band 824MHz - 849MHz		
HSDPA-FDD2	EUT supports UMTS FDD2 HSDPA in the band 1850 MHz - 1910 MHz		
HSDPA-FDD4	EUT supports UMTS FDD4 HSDPA in the band 1710 MHz - 1755 MHz		
HSDPA-FDD5	EUT supports UMTS FDD5 HSDPA in the band 824 MHz - 849 MHz		
HSUPA-FDD2	EUT supports UMTS FDD2 HSUPA in the band 1850 MHz - 1910 MHz		
HSUPA-FDD4	EUT supports UMTS FDD4 HSUPA in the band 1710 MHz - 1755 MHz		
HSUPA-FDD5	EUT supports UMTS FDD5 HSUPA in the band 824 MHz - 849 MHz		
lant	Integral Antenna: permanent fixed antenna, which may be built-in, designed as an indispensable part of the equipment		
PCS1900	EUT supports PCS1900 band 1850MHz - 1910MHz		
SRD	EUT is a short range device		
TantC	temporary antenna connector, which may be only built-in for testing, designed as an example part of the equipment		
Wa1	EUT supports WLAN in mode a in the band 5150 MHz - 5250 MHz		
Wa2	EUT supports WLAN in mode a in the band 5250 MHz - 5350 MHz		
Wa3	EUT supports WLAN in mode a in the band 5470 MHz - 5725 MHz		
Wa4	EUT supports WLAN in mode a in the band 5725 MHz - 5825 MHz		
Wa5	EUT supports WLAN in mode a in the band 5725 MHz - 5850 MHz		
Wa6	EUT supports WLAN in mode a in the band 5745 MHz - 5805 MHz		



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

#### Features for OUT: INARI8 Tablet PC

Designation	Description	Allowed Values	Supported Value(s)
Wa7	EUT supports WLAN in mode a in the band 5180 MHz - 5240 MHz		
Wa8	EUT supports WLAN in mode a in the band 5260 MHz - 5320 MHz		
Wa9	EUT supports WLAN in mode a in the band 5500 MHz - 5600 MHz		
Wa10	EUT supports WLAN in mode a in the band 5650 MHz - 5700 MHz		
Wb	EUT supports WLAN in mode b in the band 2400 MHz - 2483.5 MHz		
Wg	EUT supports WLAN in mode g in the band 2400 MHz - 2483.5 MHz		
WLAN	EUT supports WLAN channels 2412 MHz - 2462 MHz.		

#### 2.4 Auxiliary Equipment

AE No.	Type Designation	Serial No.	HW Status	SW Status	Description
AE 09	E119932-U with 2 fixed mounted				HDMI Cable
AE 02	Fujitsu ADP-80NB A	07Y17323A	120V/60Hz AC		AC Adapter
AE 01	Fujitsu Siemens Lifebook Eseries	DSCK013817		Windows 7 Pro	Laptop RE
AE 03	Logitech M-BT58	HC60915A2XC			Mouse
AE 04	Logitech Ultrax Media Keyboard	ST635J01624			Keyboard
AE 11	Netgear WNDR3300	1TS1847F01363			WLAN access point
AE 05	NXP NFC passive tag				NFC Tag
AE 10	R&M freenet Real 10 S/FTP Cat. 6				LAN Cable ca. 3.2m
AE 08	Samsung AD-3014A		120V/60Hz AC		ACDC Power adapter
AE 07	Samsung S22B350H	0166H4MC40232 8Y			Monitor
AE 06	USB Memory Stick SONY 16 GB				USB Memory Stick



## 2.5 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup.

<i>Setup No.</i>	<i>List of OUT samples</i>		<i>List of auxiliary equipment</i>
<i>Sample No.</i>	<i>Sample Description</i>	<i>AE No.</i>	<i>AE Description</i>
<b>PC_E01 (Computer peripheral setup)</b>			
<i>Sample: Dock1</i>	Docking station for Tablet	AE 09	HDMI Cable
<i>Sample: ae01</i>	RSE #1	AE 02	AC Adapter
		AE 01	Laptop RE
		AE 03	Mouse
		AE 04	Keyboard
		AE 11	WLAN access point
		AE 05	NFC Tag
		AE 10	LAN Cable ca. 3.2m
		AE 08	ACDC Power adapter
		AE 07	Monitor
		AE 06	USB Memory Stick

### S01\_AE01 (Tablet, AC/DC adapter, USB cable)

<i>Sample: cdc01</i>	AC adapter
<i>Sample: sb1</i>	USB cable
<i>Sample: ae01</i>	RSE #1

### S02\_AC01 (Tablet, dummy battery)

<i>Sample: ac01</i>	conducted BT/BLE/WLan #2
---------------------	-----------------------------



### 3 Results

#### 3.1 General

<b>Documentation of tested devices:</b>	Available at the test laboratory.
<b>Interpretation of the test results:</b>	The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.
	In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.
	In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.
<b>Note:</b>	<ol style="list-style-type: none"><li>1. This report contains the abbreviated information content pertaining to services rendered. Supporting documentation not included herein is maintained and available at the laboratory.</li><li>2. All tests are performed under environmental conditions within the requirements of the specifications. Environmental conditions are available at the laboratory.</li><li>3. This test report covers only the Bluetooth functionality of this device.</li></ol>

#### 3.2 List of the Applicable Body

(Body for Scope: FCC\_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES	Subpart C - Intentional Radiators; 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

#### 3.3 List of Test Specification

<i>Test Specification:</i>	<b>FCC part 2 and 15</b>
<i>Version</i>	10-1-12 Edition
<i>Title:</i>	PART 2 - GENERAL RULES AND REGULATIONS PART 15 - RADIO FREQUENCY DEVICES



### 3.4 Summary

<i>Test Case Identifier / Name</i>	<i>Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab Ref.</i>	<i>Setup</i>
<b>15c.1 Conducted emissions (AC power line) §15.207</b>	15c.1; Mode = transmit	Passed	2014/03/24	Lab 1	PC_E01
<b>15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209</b>	15c.2; Frequency = 2402 - 2480, Mode = BT transmit using GFSK/PSK Modulation, Maximum Output Power	Passed	2014/03/04	Lab 2	S01_AE01
<b>15c.3 Occupied bandwidth §15.247 (a) (1)</b>	15c.3; Occupied Bandwidth Summary	Passed	2014/03/06	Lab 3	S02_AC01
<b>15c.4 Peak power output §15.247 (b) (1)</b>	15c.4; Peak power output Summary	Passed	2014/03/06	Lab 3	S02_AC01
<b>15c.5 Spurious RF conducted emissions §15.247 (d)</b>	15c.5; = BT transmit mode: Low/Mid/High Frequency	Passed	2014/06/03	Lab 3	S02_AC01
<b>15c.6 Band edge compliance §15.247 (d)</b>	15c.6; Band edge compliance Summary 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated 15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation, Method = radiated	Passed Passed Passed	2014/03/10 2014/03/04 2014/03/04	Lab 3 Lab 2 Lab 2	S02_AC01 S01_AE01 S01_AE01
<b>15c.7 Dwell time §15.247 (a) (1) (iii)</b>	15c.7; Dwell time Summary	Passed	2014/04/03	Lab 3	S02_AC01
<b>15c.8 Channel separation §15.247 (a) (1)</b>	15c.8; Channel separation Summary	Passed	2014/03/06	Lab 3	S02_AC01
<b>15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)</b>	15c.9; Number of hopping frequencies Summary	Passed	2014/03/06	Lab 3	S02_AC01



---

Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

### 3.5 Detailed Results

#### 3.5.1 15c.1 Conducted emissions (AC power line) §15.207

##### Test: 15c.1; Mode = transmit

*Result:* Passed

*Setup No.:* PC\_E01

*Date of Test:* 2014/03/24 10:11

*Body:* FCC47CFRch1PART15c247RADIO FREQUENCY DEVICES

*Test Specification:* FCC part 2 and 15


**Detailed Results:**

**AC MAINS CONDUCTED**

EUT: (DE1004000ae01+DE1004000dock1)  
 Manufacturer: AAVAM  
 Operating Condition: GSM1900 traffic mode / WLANTX / NFC-on / Video / pinging  
 Test Site: 7 layers Ratingen  
 Operator: URO  
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207  
 Comment: computer peripheral setup, 120V / 60 Hz  
 Start of Test: 24.03.2014 / 19:13:10

**SCAN TABLE: "FCC Voltage"**

Short Description:			FCC Voltage			
Start	Stop	Step	Detector	Meas.	IF	Transducer
Frequency	Frequency	Width		Time	Bandw.	
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
			Average			

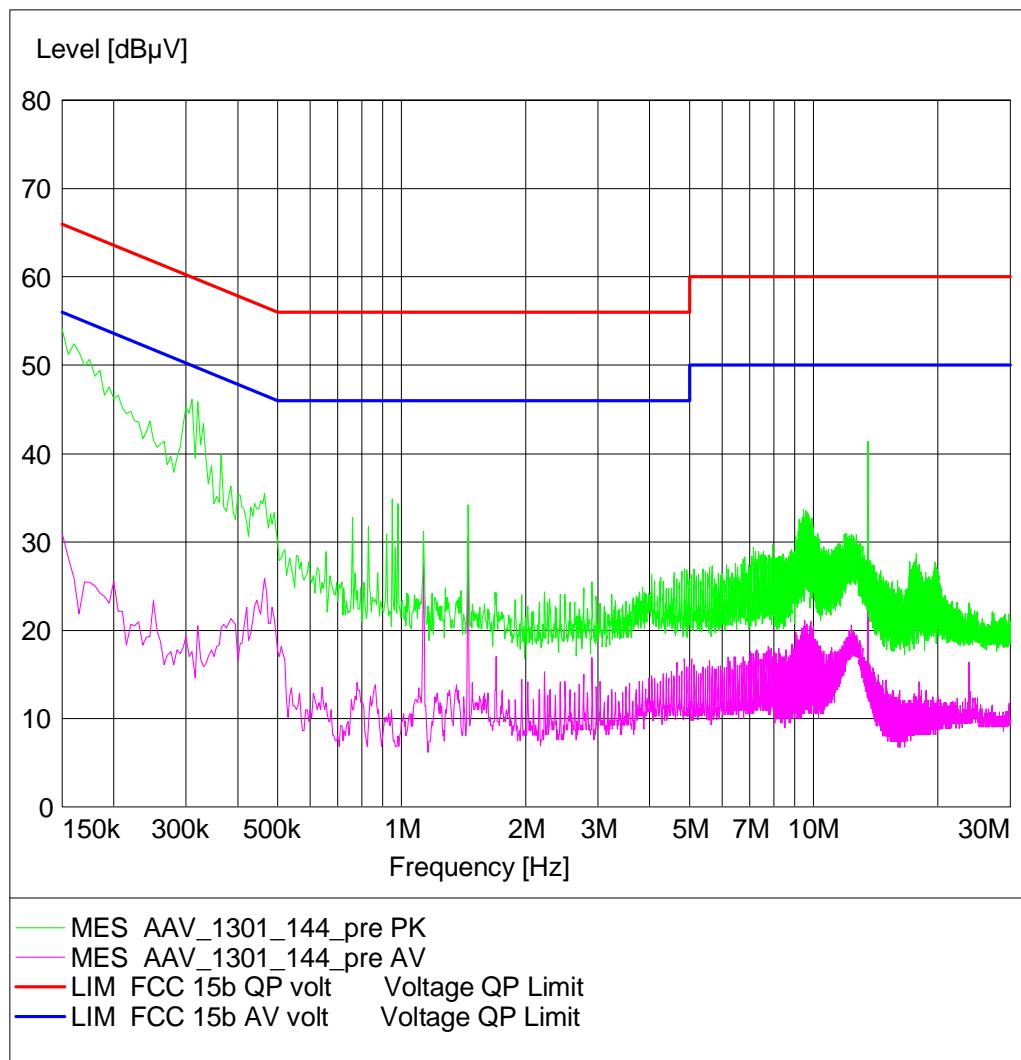



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

### 3.5.2 15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209

**Test: 15c.2; Frequency = 2402 - 2480, Mode = BT transmit using GFSK/PSK Modulation, Maximum Output Power**

*Result:* Passed  
*Setup No.:* S01\_AE01  
*Date of Test:* 2014/03/04 17:18  
*Body:* FCC47CFRCHIPART15c247RADIO FREQUENCY DEVICES  
*Test Specification:* FCC part 2 and 15

#### Detailed Results:

Test	TX freq.	EUT	Diagram no.	Result	Measure-ment Range	EUT	Diagram no.	Result	Measure-ment Range
<b>FCC 15c247 Ch./MHz</b>									
<b>GFSK Modulation</b>									
H-Field	39 / 2441	ab01	146-149	Passed	9k-30M	-	-	-	-
30M-1G	0 / 2402	ae01	112	Passed	30M-1G	-	-	-	-
	39 / 2441	ae01	113	Passed	30M-1G	-	-	-	-
	78 / 2480	ae01	114	Passed	30M-1G	-	-	-	-
	0 / 2402	ae01	001	Passed	1G-3G	ae01	004	Passed	1G-3G
1G-18G	39 / 2441	ae01	002	Passed	1G-3G	ae01	005	Passed	1G-3G
	78 / 2480	ae01	003	Passed	1G-3G	ae01	006	Passed	1G-3G
	2480 BE	ae01	003_BE	Passed	78/2.48G-2.5G	ae01	006_BE	Passed	78/2.48G-2.5G
	0 / 2402	ae01	001	Passed	3G-18G	ae01	004	Passed	3G-8G
	39 / 2441	ae01	002	Passed	3G-18G	ae01	005	Passed	3G-8G
	78 / 2480	ae01	003	Passed	3G-18G	ae01	006	Passed	3G-8G
18G-25G	0 / 2402	ae01	016	Passed	18G-25G	-	-	-	-
	39 / 2441	ae01	017	Passed	18G-25G	-	-	-	-
	78 / 2480	ae01	018	Passed	18G-25G	-	-	-	-
	** REMARK: Emissions which are within 20 dB of the limit are listed in the tables below.								

Diagram No.	Ant. Polar.	Limit QPK [dB $\mu$ V]	Frequency [MHz]	Corrected value QPK [dB $\mu$ V]	Margin QPK [dB]	Result
	Ver + Hor				Passed	

Frequency range 1 GHz - 25 GHz									
Diagram No.	Ant. Polar.	Limit PK [dB $\mu$ V]	Limit AV [dB $\mu$ V]	Frequency [MHz]	Corrected value PK [dB $\mu$ V]	Corrected value AV [dB $\mu$ V]	Margin PK [dB]	Margin AV [dB]	Result
	Ver + Hor								Passed

Remark: No spurious emissions in the range 20 dB below the limit found.
Remark: Because no emission where found within 20 dB of the limit under GFSK modulation, PSK modulation was tested using a reduced frequency range of 1-18GHz



---

Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C


### **3.5.3 15c.3 Occupied bandwidth §15.247 (a) (1)**

#### **Test: 15c.3; Occupied Bandwidth Summary**

*Result:* Passed  
*Setup No.:* S02\_AC01  
*Date of Test:* 2014/03/06 16:20  
*Body:* FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES  
*Test Specification:* FCC part 2 and 15

**Detailed Results:**


Modulation	Frequency	Occupied Bandwidth MHz
GFSK	2402 MHz	0.8840
	2441 MHz	0.8840
	2480 MHz	0.8840
PI/4 DQPSK	2402 MHz	1.2270
	2441 MHz	1.2940
	2480 MHz	1.2270
8DPSK	2402 MHz	1.2270
	2441 MHz	1.2940
	2480 MHz	1.2880

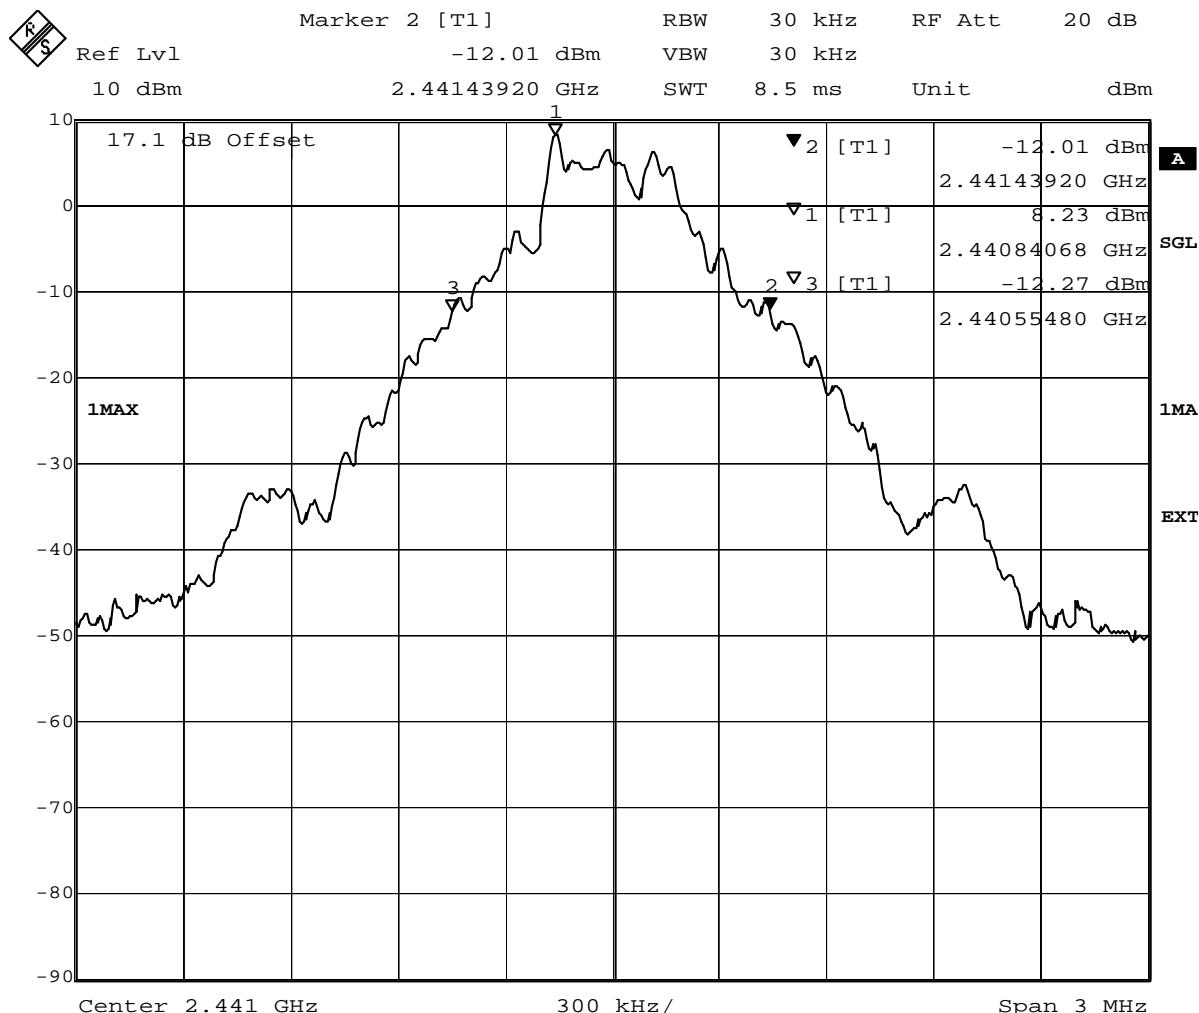

Title: 20dB Bandwidth

Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):884.4

Date: 6.MAR.2014 11:32:03

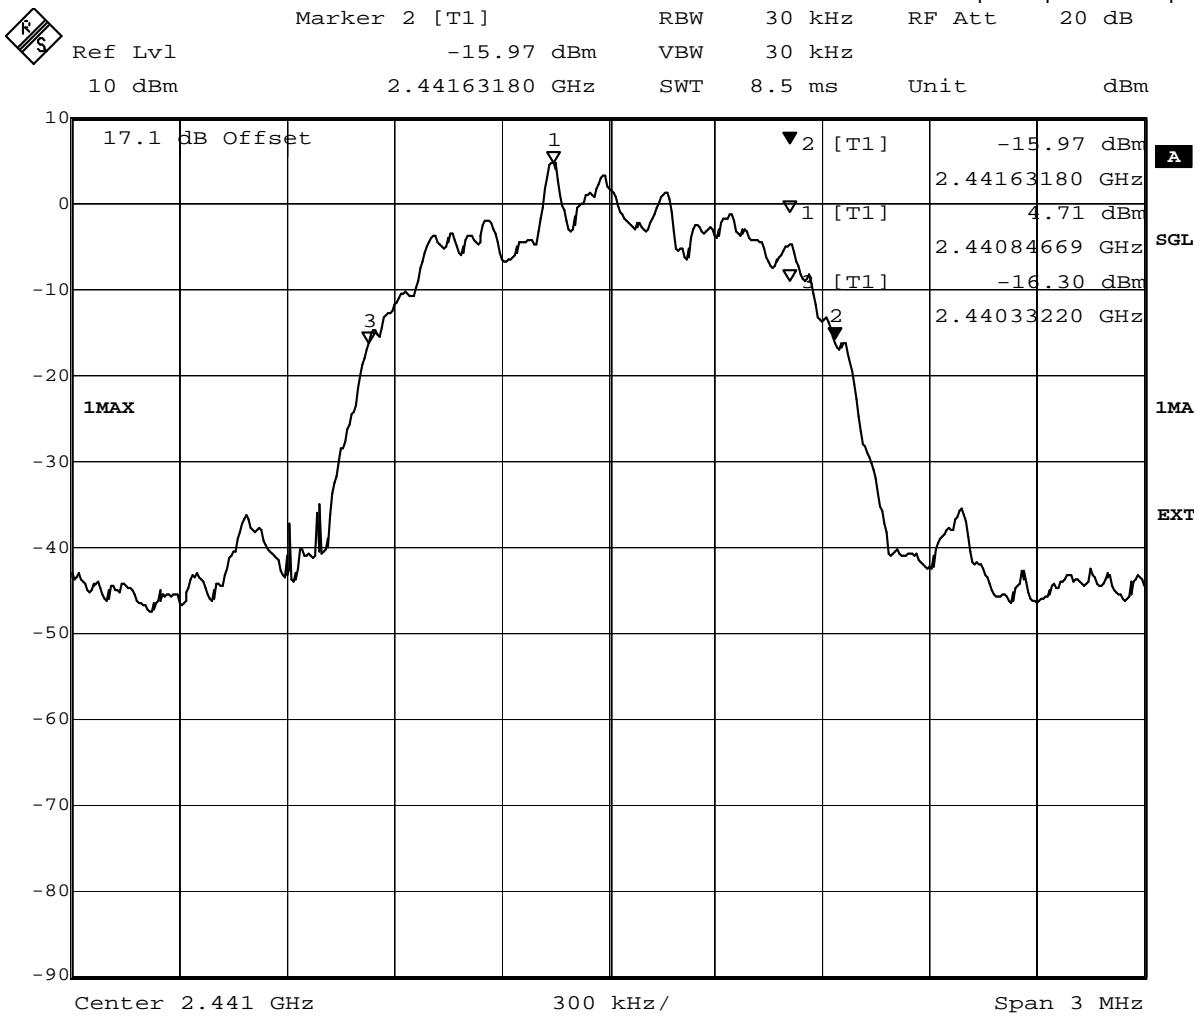

**Title:** 20dB Bandwidth


**Comment A:** CH M: 2441 MHz; 20dB bandwidth (kHz):1299.6

**Date:** 6.MAR.2014 11:15:08



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to

Title 47 CFR chapter I part 15 subpart C

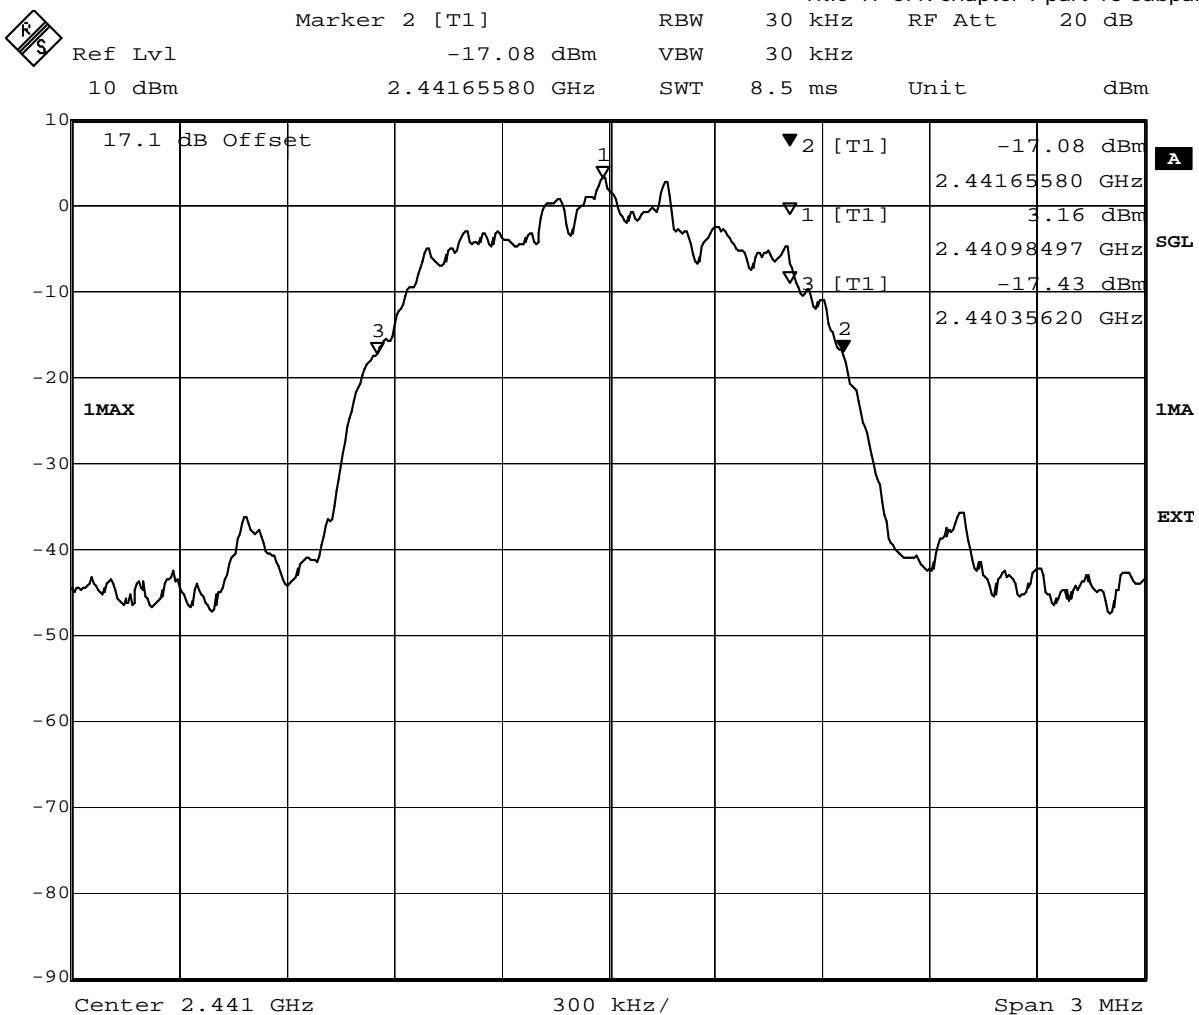

Title: 20dB Bandwidth

Comment A: CH M: 2441 MHz; 20dB bandwidth (kHz):1299.6

Date: 6.MAR.2014 10:55:52



---

Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

### **3.5.4 15c.4 Peak power output §15.247 (b) (1)**

#### **Test: 15c.4; Peak power output Summary**

*Result:* Passed

*Setup No.:* S02\_AC01

*Date of Test:* 2014/03/06 16:26

*Body:* FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

*Test Specification:* FCC part 2 and 15



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

**Detailed Results:**

		Conducted Transmitter Power					
		2402 MHz		2441 MHz		2480 MHz	
Modulation	Conditions	Output Power (dBm)	Output Power (mW)	Output Power (dBm)	Output Power (mW)	Output Power (dBm)	Output Power (mW)
<b>GFSK</b>	TN, VN	9.45	8.81	9.53	8.97	9.6	9.12
<b>n/4 DQPSK</b>	TN, VN	8.55	7.16	8.53	7.13	8.93	7.82
<b>8-DPSK</b>	TN, VN	9.15	8.22	8.93	7.82	8.85	7.67


  

<b>Max Conducted Output Power (FSK Modulation)</b>	<b>9.6</b>	<b>dBm</b>	<b>9.12</b>	<b>mW</b>
<b>Max Conducted Output Power (PSK Modulation)</b>	<b>9.15</b>	<b>dBm</b>	<b>8.22</b>	<b>mW</b>



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to

Title 47 CFR chapter I part 15 subpart C

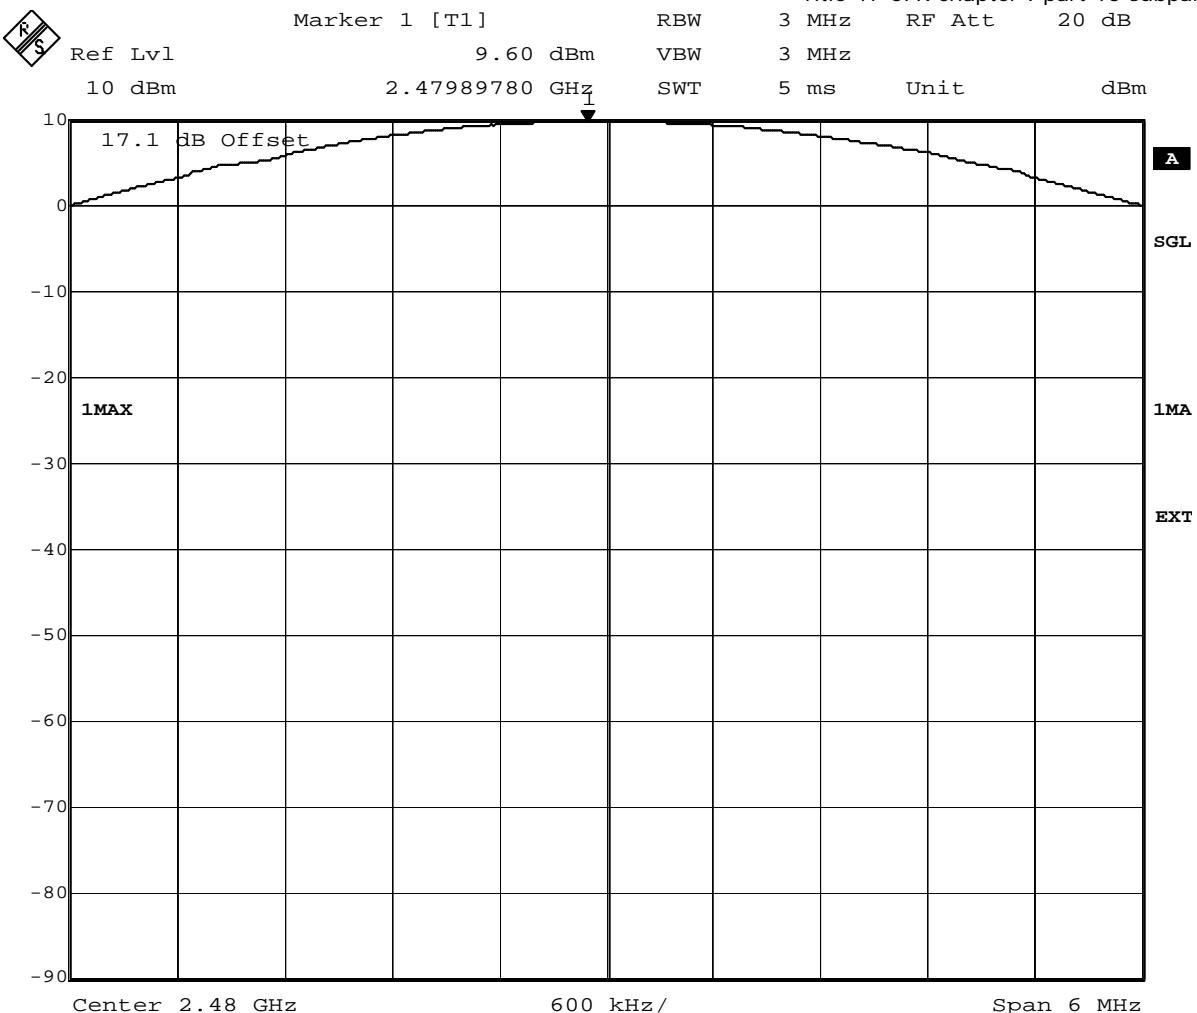


Title: Peak outputpower Power  
Comment A: CH T: 2480 MHz  
Date: 6.MAR.2014 11:52:54



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to

Title 47 CFR chapter I part 15 subpart C

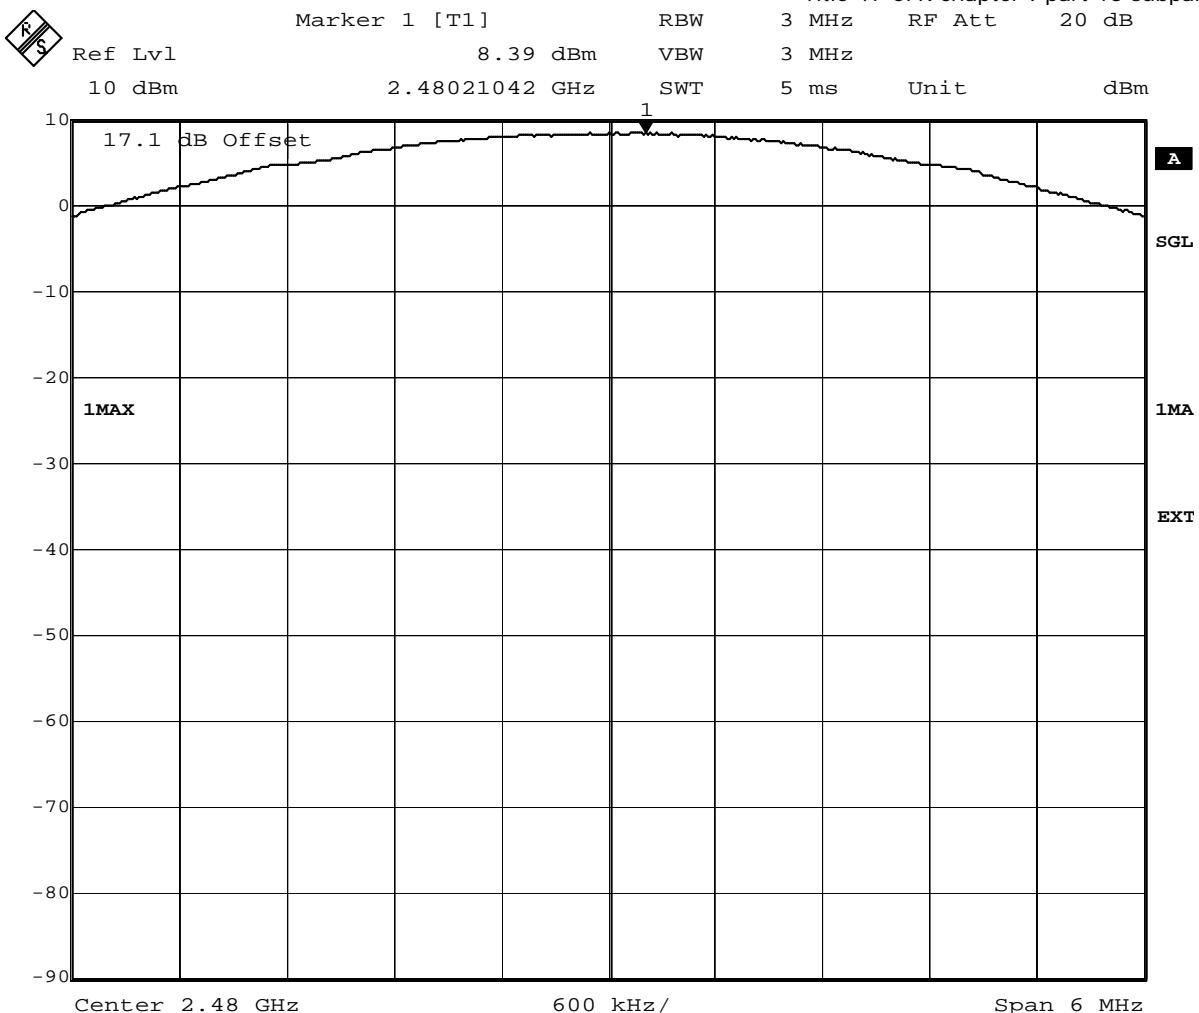


Title: Peak outputpower Power  
Comment A: CH T: 2480 MHz  
Date: 6.MAR.2014 12:09:42



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to

Title 47 CFR chapter I part 15 subpart C

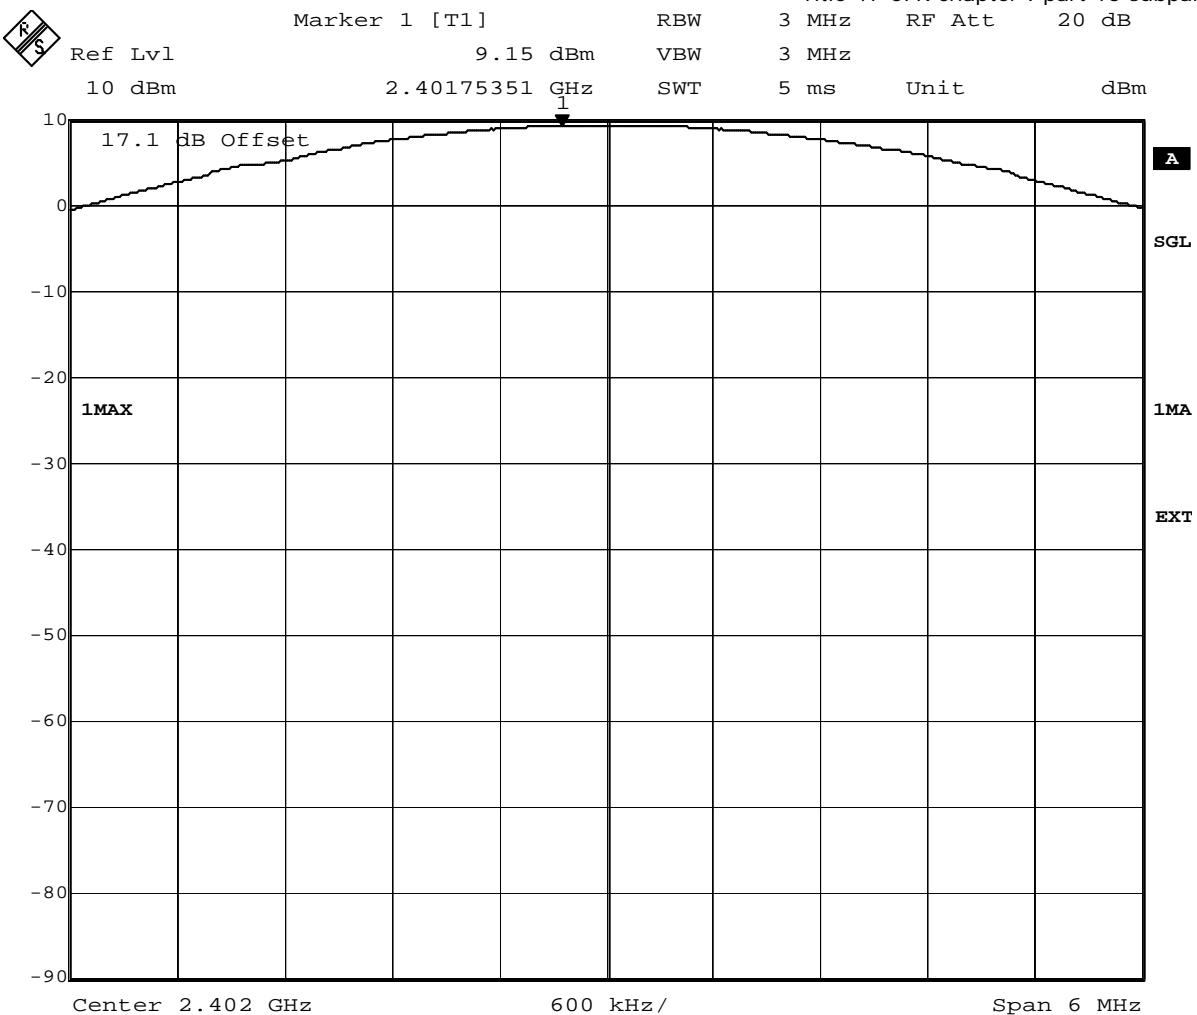

Title: Peak outputpower Power  
Comment A: CH B: 2402 MHz  
Date: 6.MAR.2014 10:39:27



---

Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

### **3.5.5 15c.5 Spurious RF conducted emissions §15.247 (d)**

#### **Test: 15c.5; = BT transmit mode: Low/Mid/High Frequency**

*Result:*

Passed

*Setup No.:*

S02\_AC01

*Date of Test:*

2014/06/03 16:42

*Body:*

FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

*Test Specification:*

FCC part 2 and 15



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

**Detailed Results:**


Mode / Channel	Frequency of emission MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
GFSK / 2402	-				None found
GFSK / 2441	-				None found
GFSK / 2480	-				None found
4 DQPSK / 2402	-				None found
4 DQPSK / 2441	-				None found
4 DQPSK / 2480	-				None found
8DPSK / 2402	-				None found
8DPSK / 2441	-				None found
8DPSK / 2480	-				None found

\* No further peaks found within 20 dB of the limit line.



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to

Title 47 CFR chapter I part 15 subpart C

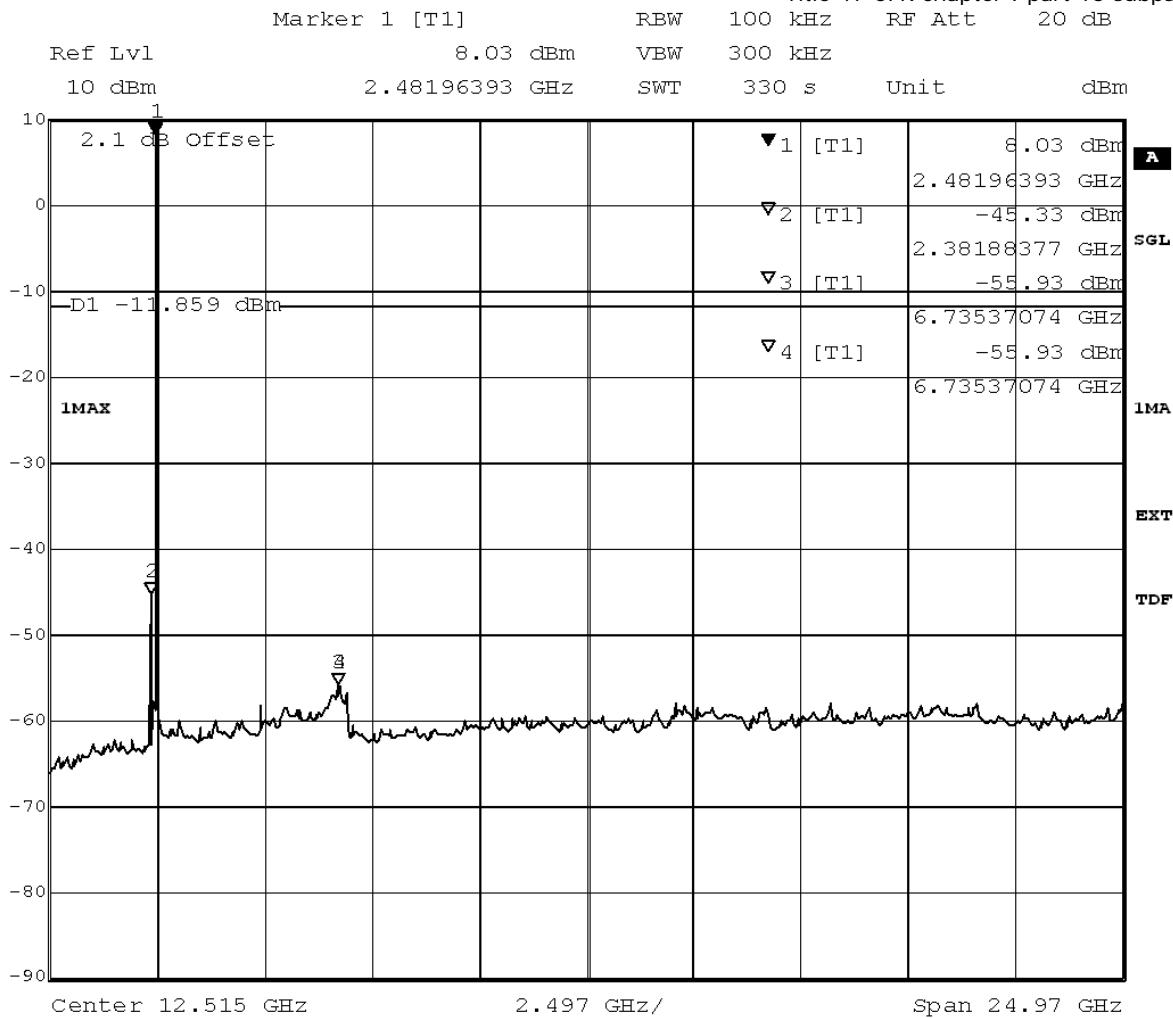

Title: spurious emissions  
Comment A: CH T: 2480 MHz  
Date: 10.MAR.2014 08:45:39



---

Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C


### **3.5.6 15c.6 Band edge compliance §15.247 (d)**

#### **Test: 15c.6; Band edge compliance Summary**


*Result:* Passed  
*Setup No.:* S02\_AC01  
*Date of Test:* 2014/03/10 8:54  
*Body:* FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES  
*Test Specification:* FCC part 2 and 15

**Detailed Results:**

Modulation	Frequency MHz	Measured value dBm	Reference value dBm	Limit dBm	Margin to limit dB
<b>GFSK</b>	2400	-53.40	8.46	-11.54	41.87
<b>4DQPSK</b>	2400	-54.58	5.50	-14.50	40.08
<b>8DPSK</b>	2400	-55.43	5.51	-14.49	40.94
<b>GFSK</b>	2483.5	-59.23	8.14	-11.86	47.37
<b>4DQPSK</b>	2483.5	-61.3	4.67	-15.33	45.97
<b>8DPSK</b>	2483.5	-61.70	4.69	-15.31	46.39

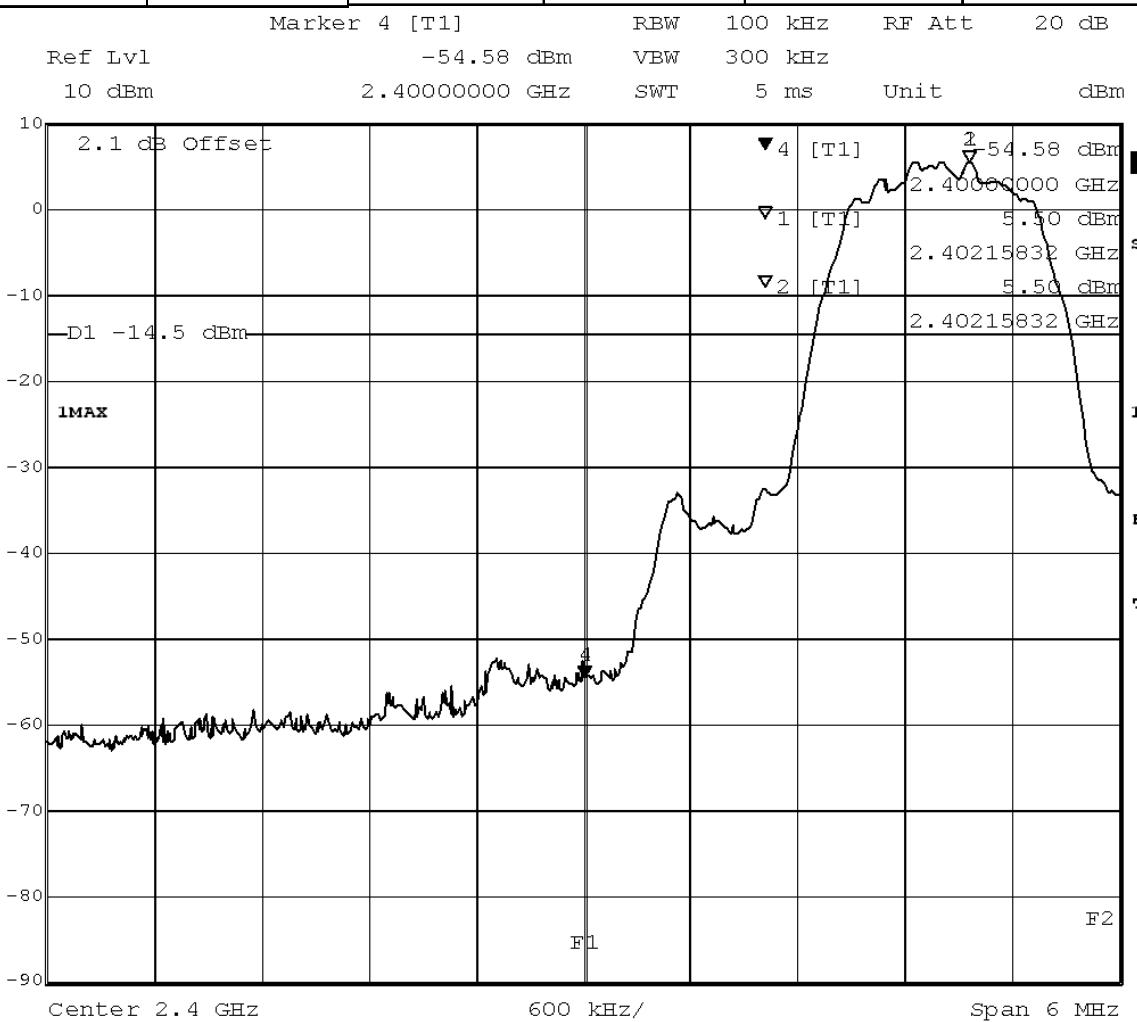

Title: Band Edge Compliance  
 Comment A: CH B: 2402 MHz  
 Date: 10.MAR.2014 07:16:10

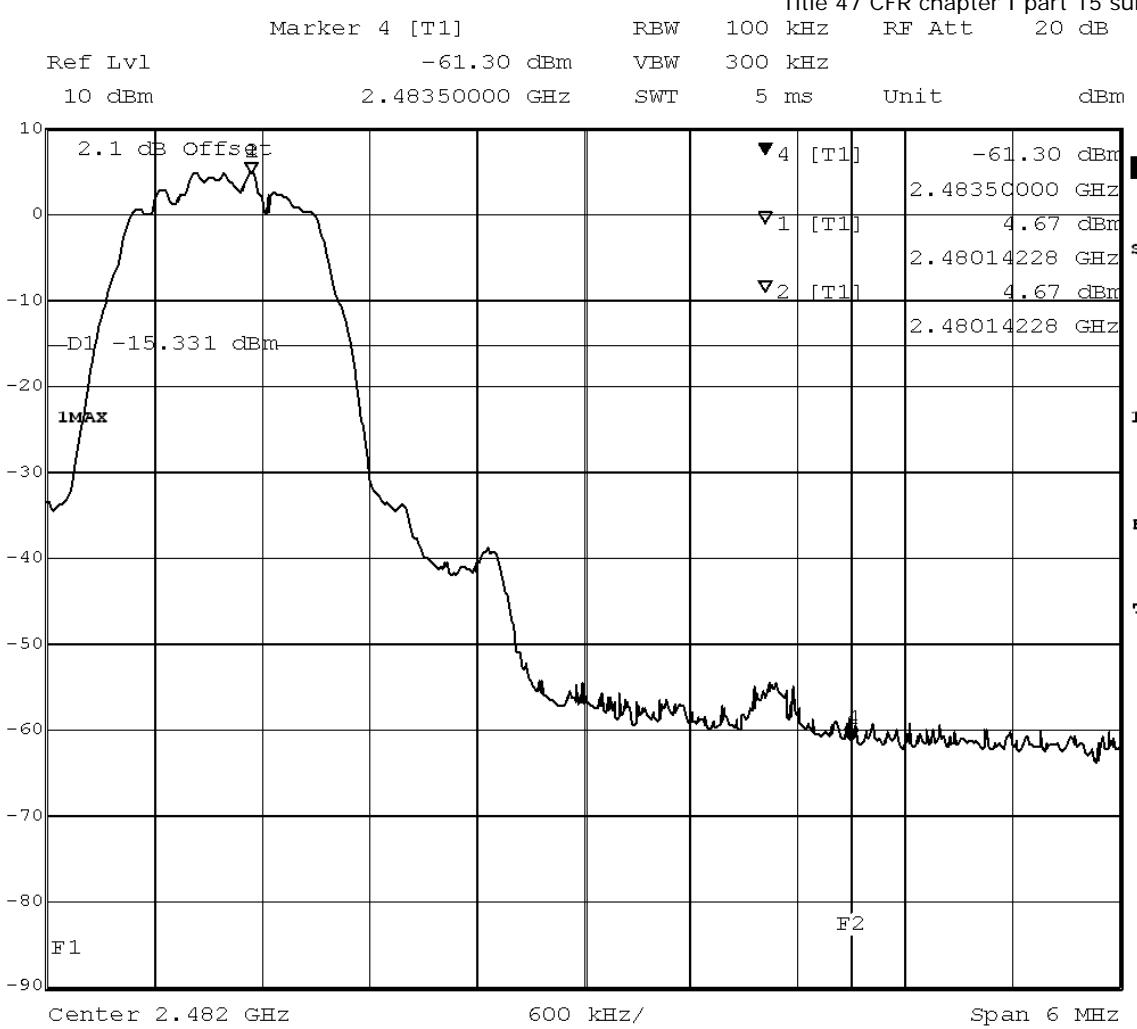

Title: Band Edge Compliance

Comment A: CH T: 2480 MHz

Date: 10.MAR.2014 08:59:19

**Test: 15c.6; Frequency = 2480, Mode = BT transmit using 1 Mbps with GFSK modulation, Method = radiated**

Result: Passed

Setup No.: S01\_AE01

Date of Test: 2014/03/04 17:35

Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

Test Specification: FCC part 2 and 15



---


Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

**Detailed Results:**

Diagram No.	TX on	Ant. Polar.	Limit PK [dB $\mu$ V]	Limit AV [dB $\mu$ V]	Frequency [MHz]	Corrected value PK [dB $\mu$ V]	Corrected value AV [dB $\mu$ V]	Margin PK [dB]	Margin AV [dB]	Result
AAV_1301_003	2480 MHz	Ver + Hor	74	54	2483.5	51.94	39.04	22.06	14.96	Passed

**SPURIOUS EMISSION RADIATED**

EUT: (DE1004000ae01)  
 Manufacturer: AAVAM  
 Operating Condition: TX on 2480 MHz  
 Test Site: 7 layers Ratingen  
 Operator: Moh  
 Test Specification: FCC 15.247 (15.35b, 15.209)  
 Comment: vertical + horizontal antenna polarisation  
 Start of Test: 28.02.2014 / 14:37:15

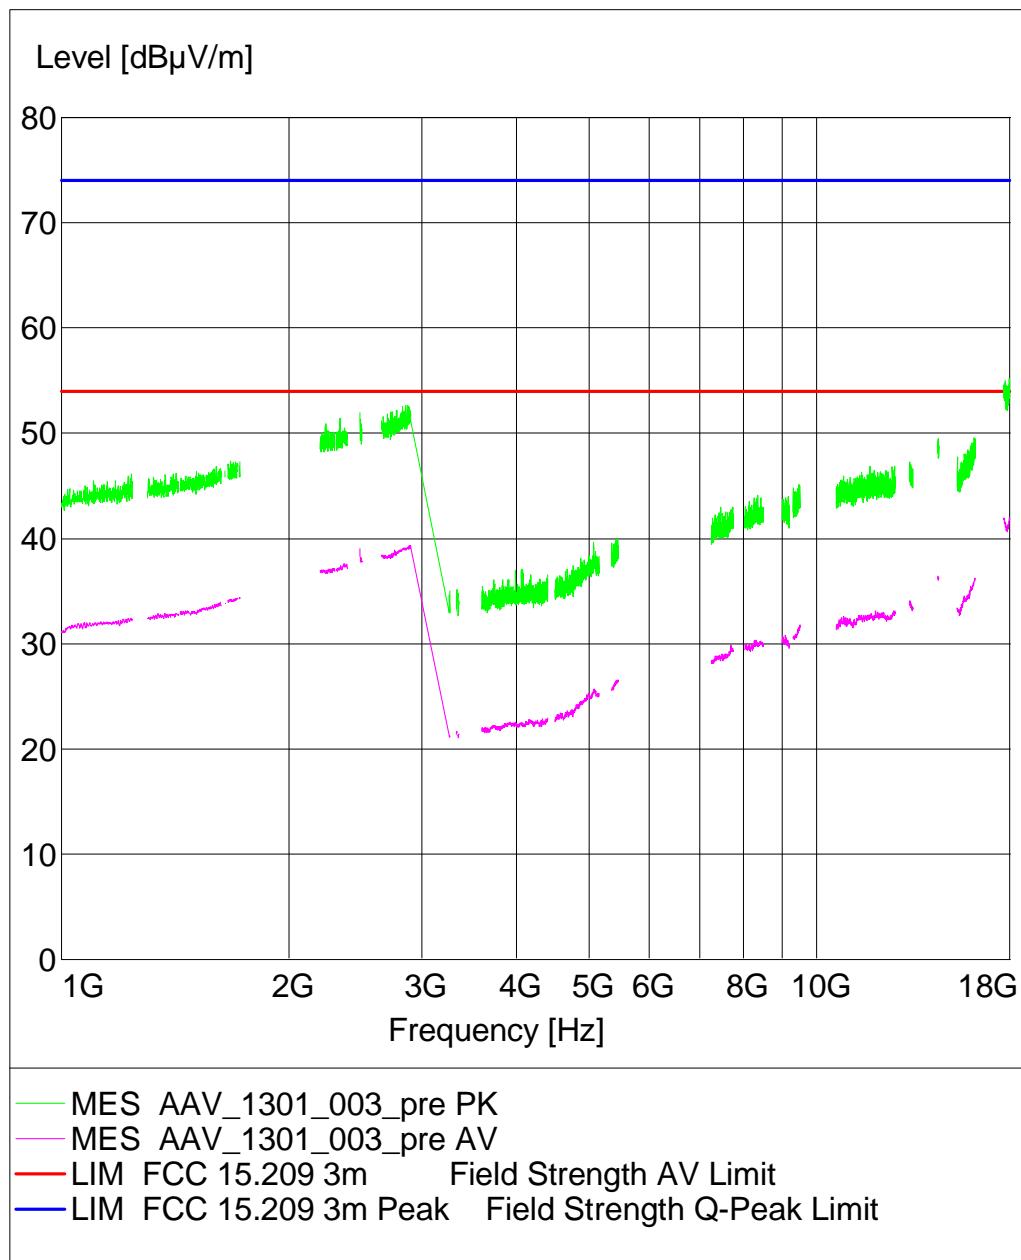



---

Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

**Test: 15c.6; Frequency = 2480, Mode = BT transmit using 2 Mbps with PI/4 DQPSK modulation,  
Method = radiated**

*Result:* Passed  
*Setup No.:* S01\_AE01  
*Date of Test:* 2014/03/04 17:37  
*Body:* FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES  
*Test Specification:* FCC part 2 and 15



---


Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

**Detailed Results:**

Diagram No.	TX on	Ant. Polar.	Limit PK [dB $\mu$ V]	Limit AV [dB $\mu$ V]	Frequency [MHz]	Corrected value PK [dB $\mu$ V]	Corrected value AV [dB $\mu$ V]	Margin PK [dB]	Margin AV [dB]	Result
006_BE	2480 MHz	Ver + Hor	74	54	2483.5	51.31	38.53	22.69	15.47	Passed

**SPURIOUS EMISSION RADIATED**

EUT: (DE1004000ae01)  
 Manufacturer: AAVAM  
 Operating Condition: TX on 2480 MHz 2-DH1  
 Test Site: 7 layers Ratingen  
 Operator: MOH  
 Test Specification: FCC 15.247 (15.35b, 15.209)  
 Comment: vertical + horizontal antenna polarisation  
 Start of Test: 28.02.2014 / 16:07:07

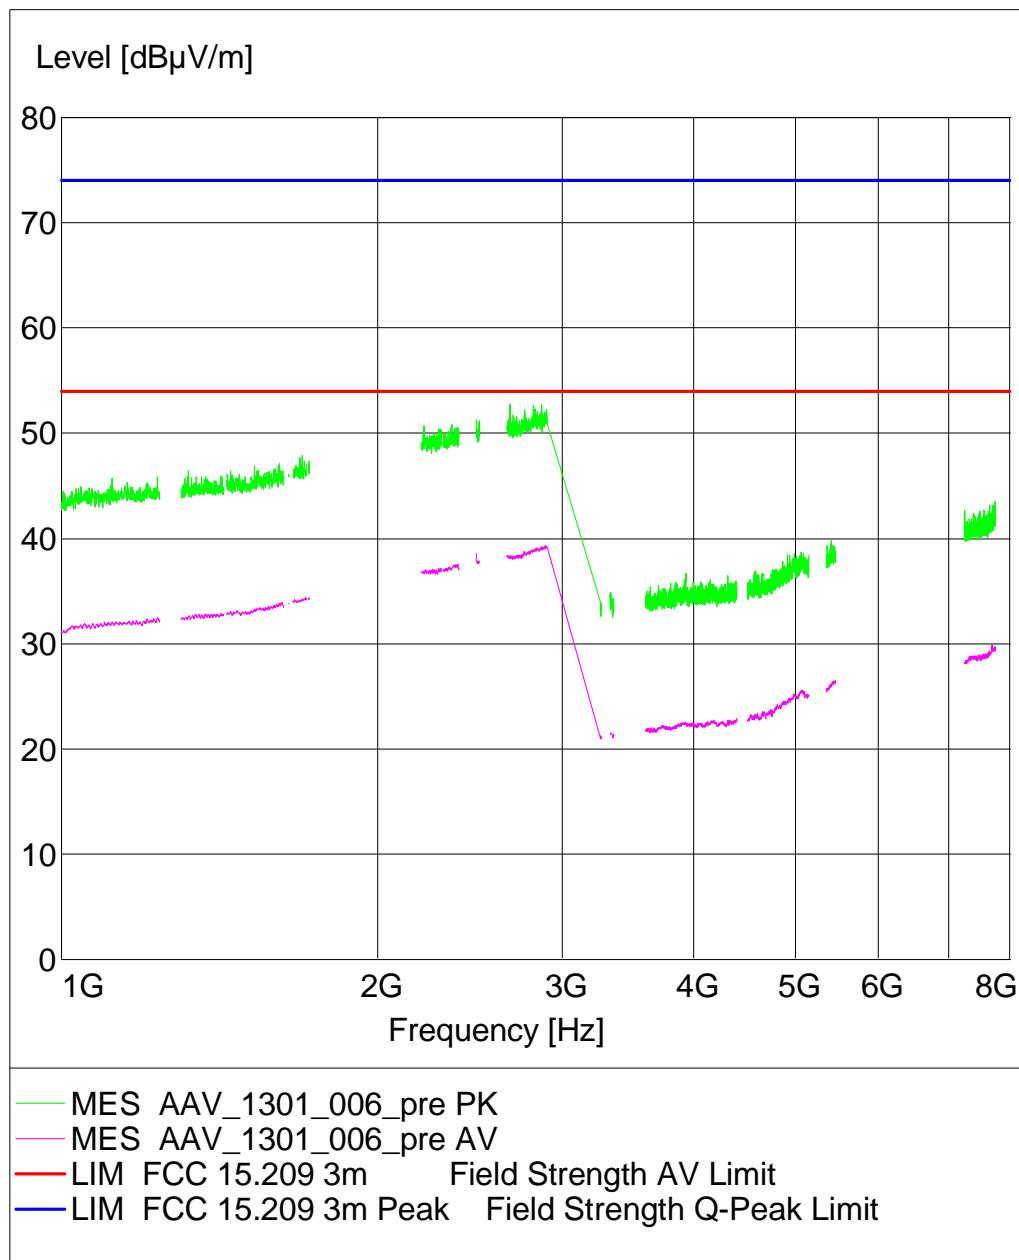



---

Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C


### **3.5.7 15c.7 Dwell time §15.247 (a) (1) (iii)**

#### **Test: 15c.7; Dwell time Summary**

*Result:* Passed  
*Setup No.:* S02\_AC01  
*Date of Test:* 2014/04/03 8:48  
*Body:* FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES  
*Test Specification:* FCC part 2 and 15

**Detailed Results:**

Modulation	Packet type	Time slot length	Dwell time	Dwell time ms
GFSK	DH5	2.90	time slot length * 1600/5 /79 * 31.6	371.20
4_DQPSK	DH5	2.90	time slot length * 1600/5 /79 * 31.6	371.20
8DPSK	DH5	2.90	time slot length * 1600/5 /79 * 31.6	371.20

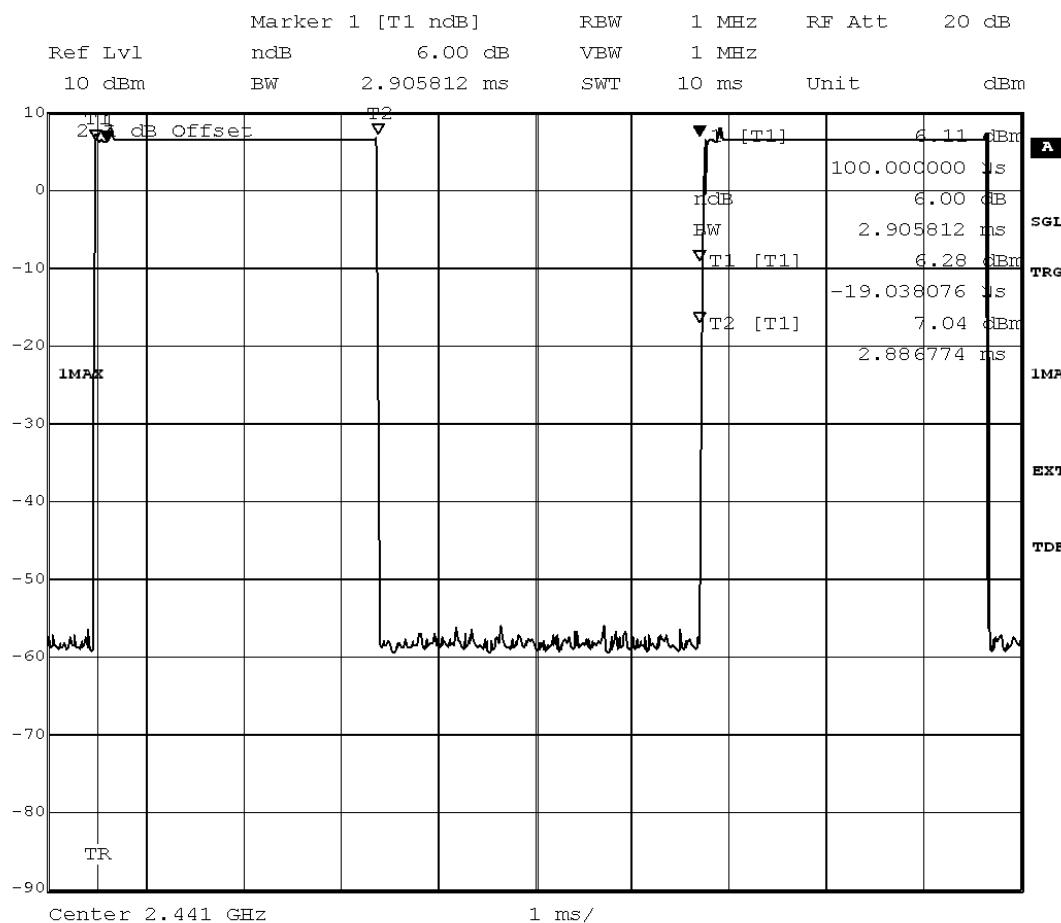

Title: Dwell time  
 Comment A: CH M: 2441 MHz  
 Date: 3.APR.2014 08:35:19


### 3.5.8 15c.8 Channel separation §15.247 (a) (1)

#### Test: 15c.8; Channel separation Summary

Result: Passed  
 Setup No.: S02\_AC01  
 Date of Test: 2014/03/06 16:37  
 Body: FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES  
 Test Specification: FCC part 2 and 15

#### Detailed Results:

Modulation	Channel Separation
GFSK	1 MHz
PI/4 DQPSK	1 MHz
8DPSK	1 MHz

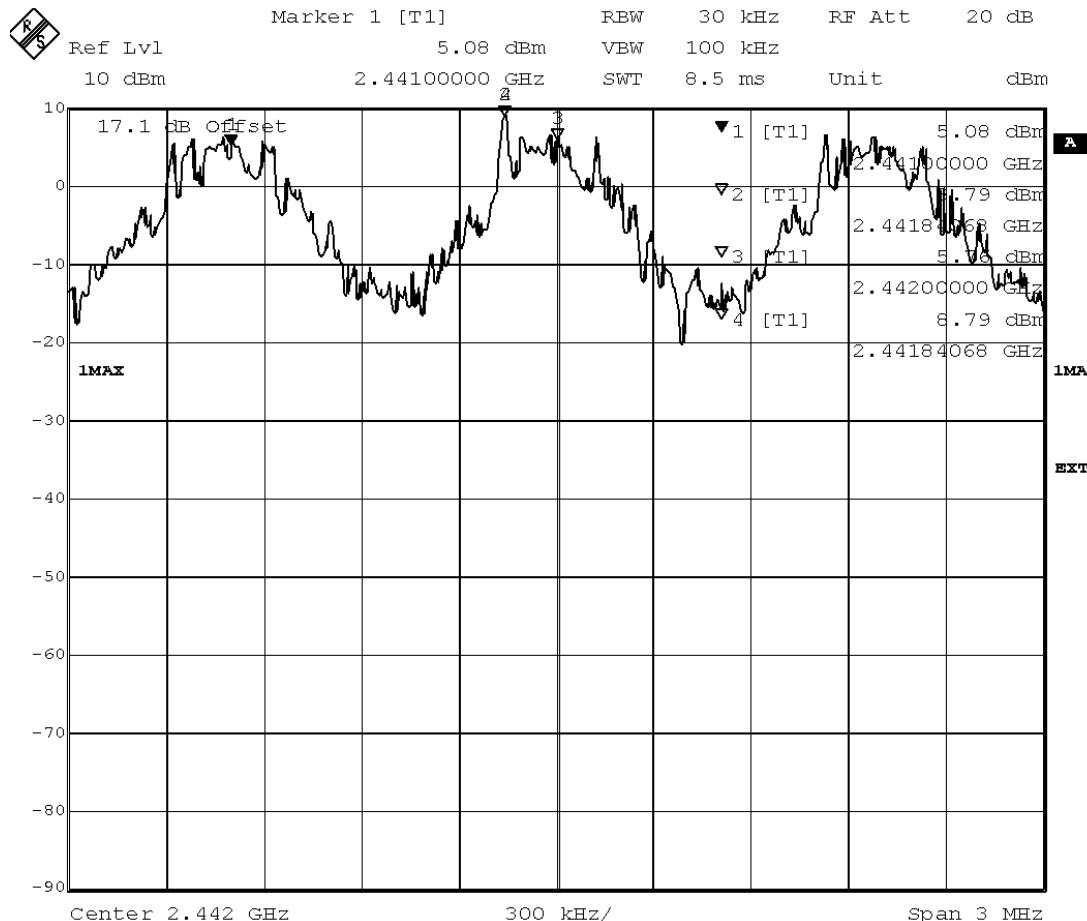

Title: Channel separation  
 Comment A: CH H: Hopping  
 Date: 6.MAR.2014 14:23:53



---

Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

### **3.5.9 15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)**

#### **Test: 15c.9; Number of hopping frequencies Summary**

*Result:* Passed

*Setup No.:* S02\_AC01


*Date of Test:* 2014/03/06 16:39

*Body:* FCC47CFRChIPART15c247RADIO FREQUENCY DEVICES

*Test Specification:* FCC part 2 and 15

**Detailed Results:**

Modulation	Number of hopping channels
GFSK	79
PI/4 DQPSK	79
8DPSK	79

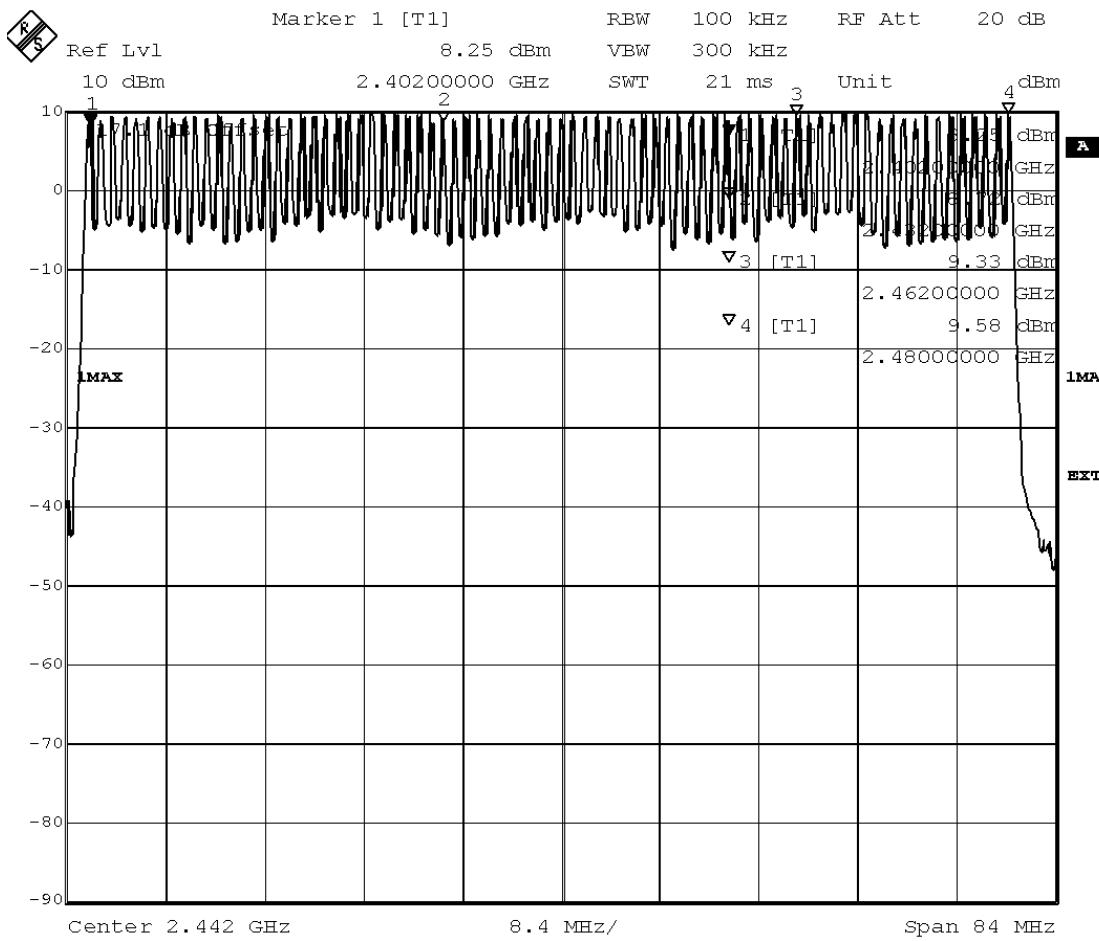

Title: Number of hopping frequencies  
 Comment A: CH H: Hopping  
 Date: 6.MAR.2014 14:19:33



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

## 4 Test Equipment Details

### 4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

#### Test Equipment Anechoic Chamber

<i>Lab ID:</i>	<b>Lab 2</b>	<i>Last Execution</i>	<i>Next Exec.</i>
<i>Manufacturer:</i>	Frankonia		
<i>Description:</i>	Anechoic Chamber for radiated testing		
<i>Type:</i>	10.58x6.38x6.00 m <sup>3</sup>		
<i>Calibration Details</i>			
	NSA (FCC)	2014/01/09	2017/01/09

#### Single Devices for Anechoic Chamber

<i>Single Device Name</i>	<i>Type</i>	<i>Serial Number</i>	<i>Manufacturer</i>
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m <sup>3</sup>	none	Frankonia
<i>Calibration Details</i>			
	FCC listing 96716 3m Part15/18		2014/01/09 2017/01/08
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

### Test Equipment Auxiliary Equipment for Conducted emissions

**Lab ID:** **Lab 1**  
**Manufacturer:** Rohde & Schwarz GmbH & Co.KG  
**Description:** EMI Conducted Auxiliary Equipment

### Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber&Suhner
Impedance Stabilization Network	ISN T800	36159	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/02/06 2016/02/28
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ENY41	100002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/03/01 2015/03/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN ST08	36292	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2014/01/10 2016/01/31
Impedance Stabilization Network, Coupling Decoupling Network	ISN/CDN T8-Cat6	32187	Teseq GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/01/08 2016/01/31
One-Line V-Network	ESH 3-Z6	100489	Rohde & Schwarz GmbH & Co. KG
One-Line V-Network	ESH 3-Z6	100570	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2013/11/25 2016/11/24
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standart Calibration		2013/03/01 2015/02/28
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2013/03/01 2015/02/28



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

### Test Equipment Auxiliary Equipment for Radiated emissions

#### Lab ID:

Description:

Serial Number:

#### Lab 2

Equipment for emission measurements

see single devices

### Single Devices for Auxiliary Equipment for Radiated emissions

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AM 4.0	AM4.0/180/11920 513	Maturo GmbH
Biconical Broadband Antenna	SBA 9119	9119-005	Schwarzbeck
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2009/06/04 2014/06/03
Biconical dipole	VUBA 9117	9117-108	Schwarzbeck
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2012/01/18 2015/01/17
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P	849785	Miteq
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4	-	Miteq
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P	896037	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2+W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A+UFB293C	W18.02-2+W38.02-2	Rosenberger Micro-Coax
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2012/05/18 2015/05/17
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2012/06/26 2015/06/25
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
High Pass Filter	WHKX 7.0/18G-8SS	09	Wainwright
Horn Antenna Schwarzbeck 15-26 GHz BBHA 9170	BBHA 9170		
Log.-per. Antenna	HL 562 Ultralog	100609	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2012/12/18 2015/12/17
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/10/27 2014/10/26



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

### Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/379070 9	Maturo GmbH

### Test Equipment Auxiliary Test Equipment

**Lab ID:** Lab 2  
**Manufacturer:** see single devices  
**Description:** Single Devices for various Test Equipment  
**Type:** various  
**Serial Number:** none

### Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
AC Power Source	Chroma 6404	64040001304	Chroma ATE INC.
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Signal Analyzer	FSV30	103005	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2014/02/10 2016/02/09
Spectrum Analyser	FSP3	836722/011	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard		2012/06/13 2015/06/12
Spectrum Analyser	FSU26	200418	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/07/29 2014/07/28
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co. KG



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

### Test Equipment Digital Signalling Devices

**Lab ID:**

Description:

**Lab 1, Lab 2**

Signalling equipment for various wireless technologies.

### Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT	CBT	100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/24 2014/11/23
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co. KG
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/28 2014/11/27
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04		2007/07/16
	Software: K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22		
	Firmware: μP1 8v50 02.05.06		
	---		
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/12/07 2014/12/06
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	HW options: B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02		2007/01/02
	SW options: K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10,		
	Firmware: μP1 8v40 01.12.05		
	---		
	SW: K62, K69		2008/11/03
Vector Signal Generator	SMU200A	100912	Rohde & Schwarz GmbH & Co. KG



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

### Test Equipment Emission measurement devices

**Lab ID:** **Lab 1, Lab 2**  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

#### Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/05/03 2014/05/02
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/04/30 2014/04/29
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	standard calibration		2011/05/12 2014/05/11
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2014/01/07 2016/01/31
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03

### Test Equipment Multimeter 12

**Lab ID:** **Lab 3**  
**Description:** Ex-Tech 520  
**Serial Number:** 05157876

#### Single Devices for Multimeter 12

Single Device Name	Type	Serial Number	Manufacturer
Digital Multimeter 12 (Multimeter)	EX520	05157876	Extech Instruments Corp.
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Customized calibration		2013/12/04 2015/12/03



Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

### Test Equipment Regulatory Bluetooth RF Test Solution

**Lab ID:** **Lab 3**  
*Description:* Regulatory Bluetooth RF Tests  
*Type:* Bluetooth RF  
*Serial Number:* 001

### Single Devices for Regulatory Bluetooth RF Test Solution

Single Device Name	Type	Serial Number	Manufacturer
ADU 200 Relay Box 7	Relay Box	A04380	Ontrak Control Systems Inc.
Bluetooth Signalling Unit CBT	CBT	100302	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/08/28 2014/08/27
Power Meter NRVD	NRVD	832025/059	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/08/26 2014/08/25
Power Sensor NRV Z1 A	PROBE	832279/013	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/08/28 2014/08/27
Power Supply	NGSM 32/10	2725	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/06/14 2015/06/13
Rubidium Frequency Normal MFS	Datum MFS	002	Datum GmbH
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/08/27 2014/08/26
Signal Analyser FSIQ26	1119.6001.26	832695/007	Rohde & Schwarz GmbH & Co.KG
Vector Signal Generator SMIQ03B	SMIQ03B	832870/017	
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2013/06/21 2016/06/20

### Test Equipment Shielded Room 02

**Lab ID:** **Lab 1**  
*Manufacturer:* Frankonia  
*Description:* Shielded Room for conducted testing  
*Type:* 12 qm  
*Serial Number:* none

### Test Equipment Shielded Room 07

**Lab ID:** **Lab 3**  
*Description:* Shielded Room 4m x 6m



---

Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

#### Test Equipment T/H Logger 04

**Lab ID:** **Lab 3**  
**Description:** Lufft Opus10  
**Serial Number:** 7481

#### Single Devices for T/H Logger 04

Single Device Name	Type	Serial Number	Manufacturer
ThermoHygro Datalogger 04 (Environ)	Opus10 THI (8152.00)	7481	Lufft Mess- und Regeltechnik GmbH

#### Test Equipment Temperature Chamber 01

**Lab ID:** **Lab 3**  
**Manufacturer:** see single devices  
**Description:** Temperature Chamber KWP 120/70  
**Type:** Weiss  
**Serial Number:** see single devices

#### Single Devices for Temperature Chamber 01

Single Device Name	Type	Serial Number	Manufacturer
Temperature Chamber Weiss 01	KWP 120/70	59226012190010	Weiss Umwelttechnik GmbH
<i>Calibration Details</i>			
	Customized calibration	2012/03/12	2014/03/11
	Customized calibration	2014/03/12	2016/03/11



---

Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

## **5      Annex**

### **5.1    Additional Information for Report**



---

Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to  
Title 47 CFR chapter I part 15 subpart C

Summary of Test Results

---

---

The EUT complied with all performed tests as listed in the summary section of this report.

---

Technical Report Summary

---

---

Type of Authorization :

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15. The following subparts are applicable to the results in this test report

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

additional documents

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000. Instead of applying ANSI C63.4-1992 which is referenced in the FCC Public Note, the newer ANSI C63.4-2009 is applied.

Description of Methods of Measurements

---

---

---

---

Conducted emissions (AC power line)

---

Standard      FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

Test Description



The test set-up was made in accordance to the general provisions of ANSI C 63.4. The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from 50 $\mu$ H || 50 Ohm Line Impedance Stabilization Network (LISN). The LISN's unused connections were terminated with 50 Ohm loads. The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

#### Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

#### Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

#### Test Requirements / Limits

##### FCC Part 15, Subpart C, §15.207

Frequency Range (MHz)	QP Limit (dB $\mu$ V)	AV Limit (dB $\mu$ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50

Used conversion factor: Limit (dB $\mu$ V) = 20 log (Limit ( $\mu$ V)/1 $\mu$ V).

---

#### Occupied bandwidth

---

##### Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

#### Test Description

The Equipment Under Test (EUT) was setup to perform the occupied bandwidth measurements. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produces the worst-case (widest) occupied bandwidth. The resolution bandwidth for measuring the reference level and the occupied bandwidth was 30 kHz.



The EUT was connected to the spectrum analyzer via a short coax cable.

#### Test Requirements / Limits

##### FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

##### Implication by the test laboratory:

Since the Bluetooth technology defines a fixed channel separation of 1 MHz this design parameter defines the maximum allowed occupied bandwidth depending on the EUT's output power:

1. Under the provision that the system operates with an output power not greater than 125 mW (21.0 dBm) : Implicit Limit: Max. 20 dB BW = 1.0 MHz / 2/3 = 1.5 MHz
2. If the system output power exceeds 125 mW (21.0 dBm): Implicit Limit: Max. 20 dB BW = 1.0 MHz

Used conversion factor: Output power (dBm) = 10 log (Output power (W) / 1mW)

The measured output power of the system is below 125 mW (21.0 dBm). For the results, please refer to the related chapter of this report. Therefore the limit is determined as 1.5 MHz.

---

#### Peak power output

---

##### Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

#### Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The resolution bandwidth for measuring the output power was set to 3 MHz. The reference level of the spectrum analyzer was set higher than the output power of the EUT. The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

#### Test Requirements / Limits

##### FCC Part 15, Subpart C, §15.247 (b) (1)

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:  
(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)  
==> Maximum Output Power: 30 dBm

---

#### Spurious RF conducted emissions

---

##### Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

#### Test Description

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements.  
The EUT was connected to spectrum analyzer via a short coax cable with a known loss.  
Analyzer settings:

- Detector: Peak-Maxhold
- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: 330 s

The reference value for the measurement of the spurious RF conducted emissions is determined during the test "band edge compliance" (cf. chapter 3.6). This value is used to calculate the 20 dBc limit.

#### Test Requirements / Limits

##### FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

---

#### Spurious radiated emissions

---

##### Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4,

#### Test Description

The test set-up was made in accordance to the general provisions of ANSI C63.4–2009.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The test was performed at the distance of 3 m between the EUT and the receiving antenna. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The radiated emissions measurements were made in a typical installation configuration. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition.

##### 1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C63.4.

The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration.

The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

The Loop antenna HFH2-Z2 is used.

Step 1: pre-measurement

- Anechoic chamber
- Antenna distance: 10 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 – 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test site
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz – 10 kHz
- Measuring time / Frequency step: 100 ms

##### 2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz

- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100  $\mu$ s (BT Timing 1.25 ms)
- Turntable angle range: -180 to +180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

#### Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180 to +180°
- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

#### Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/-22.5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/-25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -22.5° to +22.5° around the determined value
- Height variation range: -0.25 m to +0.25 m around the determined value

#### Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

##### EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

### 3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz: The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2–4 are omitted. Step 1 was performed with one height of the receiving antenna only.

##### EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.



---

Reference: MDE\_AAVAM\_1301\_FCCb Rev 002  
According to

Title 47 CFR chapter I part 15 subpart C

For the enhanced data rate packets the test is performed as worst-case-check in order to verify that emissions have a comparable level as found at basic data rate. Typically, the measurement for these packets is performed in the frequency range 1 to 8 GHz but it depends on the emissions found during the test for the basic data rate. Please refer to the results for the used frequency range.

#### Test Requirements / Limits

##### FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

##### FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit ( $\mu$ V/m)	Measurement distance (m)	Limit (dB $\mu$ V/m @10m)
0.009 – 0.49	2400/F(kHz)	300	Limit (dB $\mu$ V/m) +30dB
0.49 – 1.705	24000/F(kHz)	30	Limit (dB $\mu$ V/m) +10dB
1.705 – 30	30	30	Limit (dB $\mu$ V/m) +10dB

Frequency in MHz	Limit ( $\mu$ V/m)	Measurement distance (m)	Limit (dB $\mu$ V/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

#### §15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: Limit (dB $\mu$ V/m) = 20 log (Limit ( $\mu$ V/m)/1 $\mu$ V/m)

---

#### Band edge compliance

---

Standard FCC Part 15, Subpart C

The test was performed according to: ANSI C 63.4, FCC §15.31

#### Test Description

The procedure to show compliance with the band edge requirement is divided into two measurements: 1. Show compliance of the lower band edge by a conducted measurement and 2. show compliance of the higher band edge by a radiated and conducted measurement.

For the first measurement the EUT is set to transmit on the lowest channel (2402 MHz). The lower band edge is 2400 MHz.

Analyzer settings:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

For the second measurement the EUT is set to transmit on the highest channel (2480 MHz). The higher band edge is 2483.5 MHz.

Analyzer settings for conducted measurement:

- Detector: Peak
- RBW= 100 kHz
- VBW= 300 kHz

EMI receiver settings:

- Detector: Peak, Average
- IF Bandwidth = 1 MHz



#### Test Requirements / Limits

##### FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

...

Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the measurement of the lower band edge the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

For the measurement of the higher band edge the limit is "specified in Section 15.209(a)".

---

#### Dwell time

---

Standard    FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

#### Test Description

The Equipment Under Test (EUT) was set up to perform the dwell time measurements. The EUT was connected to the spectrum analyzer via a short coax cable. The dwell time is calculated by:

Dwell time = time slot length \* hop rate / number of hopping channels \* 31.6 s

with:

- hop rate =  $1600 * 1/s$  for DH1 packets    = 1600 s-1
- hop rate =  $1600/3 * 1/s$  for DH3 packets    = 533.33 s-1
- hop rate =  $1600/5 * 1/s$  for DH5 packets    = 320 s-1
- number of hopping channels = 79
- $31.6 \text{ s} = 0.4 \text{ seconds multiplied by the number of hopping channels} = 0.4 \text{ s} * 79$

The highest value of the dwell time is reported.

#### Test Requirements / Limits

##### FCC Part 15, Subpart C, §15.247 (a) (1) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Since the Bluetooth technology uses 79 channels this period is calculated to be 31.6 seconds.

---

#### Channel separation

---

Standard    FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

#### Test Description

The Equipment Under Test (EUT) was set up to perform the channel separation measurements. The channel separation is independent from the modulation pattern.

The EUT was connected to spectrum analyzer via a short coax cable.

Analyzer settings:

- Detector: Peak-Maxhold



- Span: 3 MHz
- Centre Frequency: a mid frequency of the 2.4 GHz ISM band
- Resolution Bandwidth (RBW): 30 kHz
- Video Bandwidth (VBW): 100 kHz
- Sweep Time: Coupled

#### Test Requirements / Limits

##### FCC Part 15, Subpart C, §15.247 (a) (1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

---

#### Number of hopping frequencies

---

##### Standard FCC Part 15, Subpart C

The test was performed according to: FCC §15.31

#### Test Description

The Equipment Under Test (EUT) was set up to perform the number of hopping frequencies measurement. The number of hopping frequencies is independent from the modulation pattern.

The EUT was connected to spectrum analyzer via a short coax cable.

##### Analyzer settings:

- Detector: Peak-Maxhold
- Centre frequency: 2442 MHz
- Frequency span: 84 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Sweep Time: Coupled

#### Test Requirements / Limits

##### FCC Part 15, Subpart C, §15.247 (a) (iii)

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

---

#### FCC and IC Correlation of measurement requirements

---

The following tables show the correlation of measurement requirements for Bluetooth equipment and Digital Apparatus from FCC and IC standards.

##### Bluetooth® equipment:

Measurement	FCC reference	IC reference
Conducted emissions on AC mains	§ 15.207	RSS-Gen Issue 3: 7.2.4
Occupied bandwidth	§ 15.247 (a) (1)	RSS-210 Issue 8: A8.1
Peak power output	§ 15.247 (b) (1)	RSS-210 Issue 8: A8.4
Spurious RF conducted emissions	§ 15.247 (d)	RSS-Gen Issue 3: 6; RSS-210 Issue 8: A8.5
Spurious radiated emissions	§ 15.247 (d)	RSS-Gen Issue 3: 6; RSS-210 Issue 8: A8.5
Band edge compliance	§ 15.247 (d)	RSS-210 Issue 8: A8.5
Dwell time	§ 15.247 (a) (1) (iii)	RSS-210 Issue 8: A8.1
Channel separation	§ 15.247 (a) (1)	RSS-210 Issue 8: A8.1
No. of hopping frequencies	§ 15.247 (a) (1) (iii)	RSS-210 Issue 8: A8.1

Antenna requirement

§ 15.203 / 15.204

RSS-Gen Issue 8: 7.1.2

Digital Apparatus:

Measurement

Conducted Emissions(AC Power Line)

FCC reference

§15.107

IC reference


ICES-003 Issue 5

Spurious Radiated Emissions

§15.109

ICES-003 Issue 5

Setup Drawings

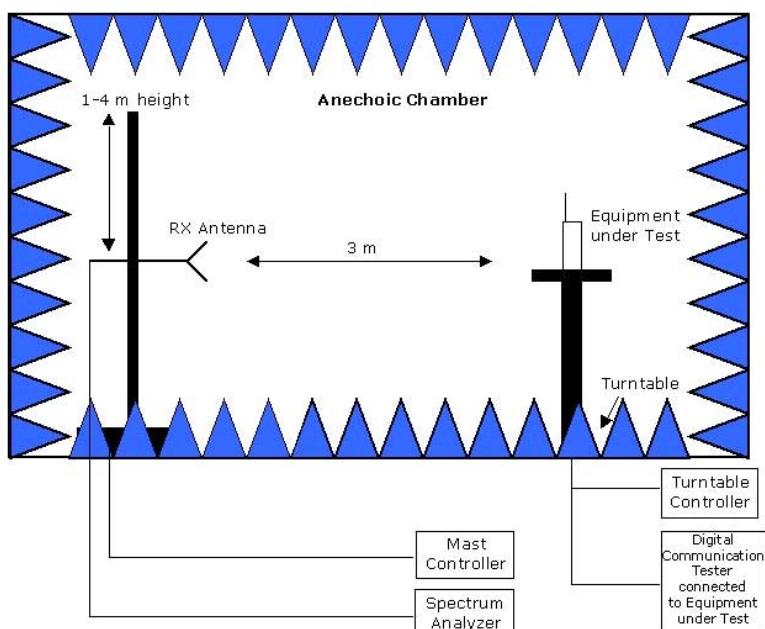

*Remark:* Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Setup in the Anechoic chamber:

Measurements below 1 GHz: Semi-anechoic, conducting ground plane.

Measurements above 1 GHz: Fully-anechoic, absorbers on all surfaces

Report version control		
Version	Release date	Changes
001	11.04.2014	Initial version
002	29.04.2014	Added INARI8-WLAN to title page. Added missing conducted spurious emissions plot. Added missing Dwell Time measurement plots



## 6 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	3
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	4
2.1	General OUT Description	4
2.2	Detailed Description of OUT Samples	5
2.3	OUT Features	7
2.4	Auxiliary Equipment	8
2.5	Setups used for Testing	9
3	Results	10
3.1	General	10
3.2	List of the Applicable Body	10
3.3	List of Test Specification	10
3.4	Summary	11
3.5	Detailed Results	12
3.5.1	15c.1 Conducted emissions (AC power line) §15.207	12
3.5.2	15c.2 Spurious radiated emissions §15.247 (d), §15.35 (b), §15.209	14
3.5.3	15c.3 Occupied bandwidth §15.247 (a) (1)	15
3.5.4	15c.4 Peak power output §15.247 (b) (1)	19
3.5.5	15c.5 Spurious RF conducted emissions §15.247 (d)	24
3.5.6	15c.6 Band edge compliance §15.247 (d)	27
3.5.7	15c.7 Dwell time §15.247 (a) (1) (iii)	35
3.5.8	15c.8 Channel separation §15.247 (a) (1)	37
3.5.9	15c.9 Number of hopping frequencies §15.247 (a) (1) (iii)	38
4	Test Equipment Details	40



---

Reference: MDE\_AAVAM\_1301\_FCCb Rev 002

According to

Title 47 CFR chapter I part 15 subpart C

40

4.1 List of Used Test Equipment

40

5 Annex

48

5.1 Additional Information for Report

48

6 Index

58