


Lowest Channel

Frequency 2402MHz


Detector mode: Average

Polarity: Horizontal

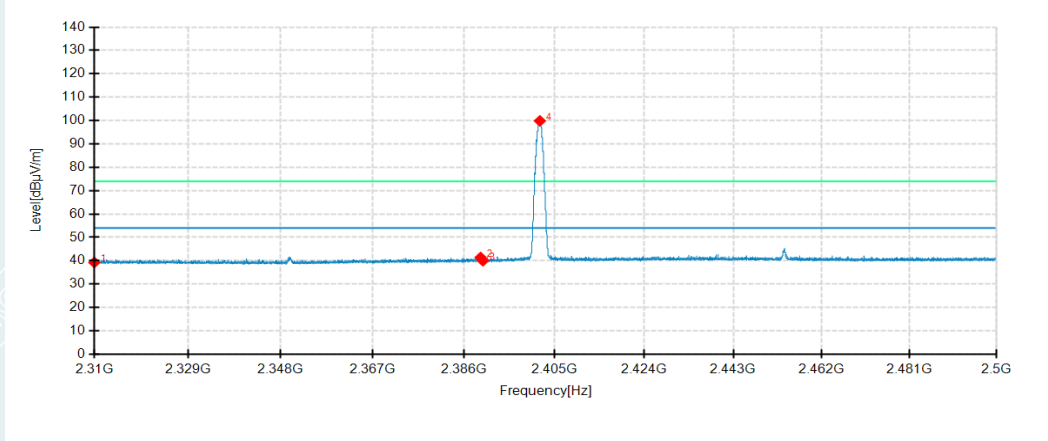

Detector mode: Average


Polarity: Vertical

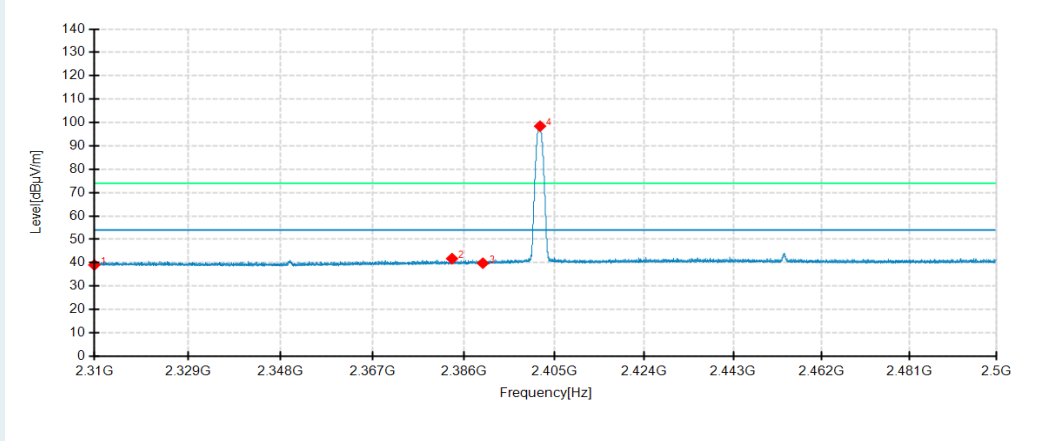

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2310.0000	35.78	39.26	3.48	54.00	14.74	200	142	Horizontal	/
2	2389.5150	37.58	41.38	3.80	54.00	12.62	200	260	Horizontal	/
3	2390.0000	36.17	39.98	3.81	54.00	14.02	100	204	Horizontal	/
4	2401.9600	95.87	99.86	3.99	54.00	-45.86	200	142	Horizontal	No limit
1	2310.0000	35.57	39.05	3.48	54.00	14.95	200	184	Vertical	/
2	2383.5490	38.06	41.76	3.70	54.00	12.24	100	279	Vertical	/
3	2390.0000	36.00	39.81	3.81	54.00	14.19	100	348	Vertical	/
4	2401.9980	94.44	98.43	3.99	54.00	-44.43	100	313	Vertical	No limit


Highest Channel
Frequency 2480MHz
Detector mode: Peak

Polarity: Horizontal

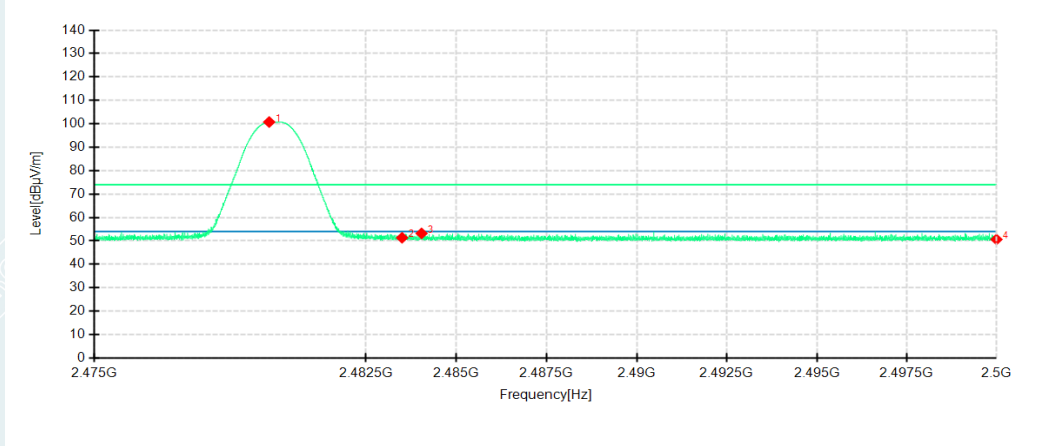

Detector mode: Peak

Polarity: Vertical

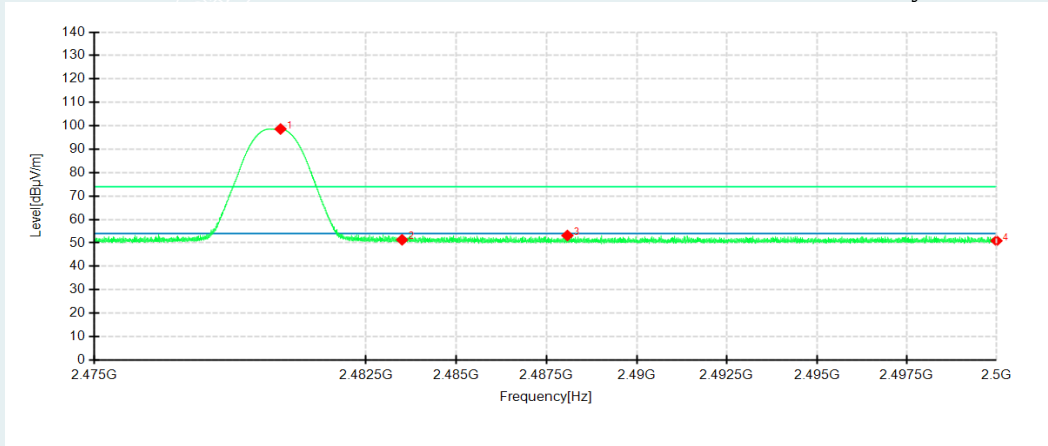


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2479.8275	96.44	100.76	4.32	74.00	-26.76	100	8	Horizontal	No limit
2	2483.5000	47.02	51.35	4.33	74.00	22.65	200	142	Horizontal	/
3	2484.0400	48.87	53.20	4.33	74.00	20.80	200	142	Horizontal	/
4	2500.0000	46.25	50.63	4.38	74.00	23.37	200	356	Horizontal	/
1	2480.1400	94.31	98.63	4.32	74.00	-24.63	100	348	Vertical	No limit
2	2483.5000	46.99	51.32	4.33	74.00	22.68	200	150	Vertical	/
3	2488.0775	48.82	53.16	4.34	74.00	20.84	100	258	Vertical	/
4	2500.0000	46.52	50.90	4.38	74.00	23.10	100	142	Vertical	/

Highest Channel

Frequency 2480MHz


Detector mode: Average

Polarity: Horizontal

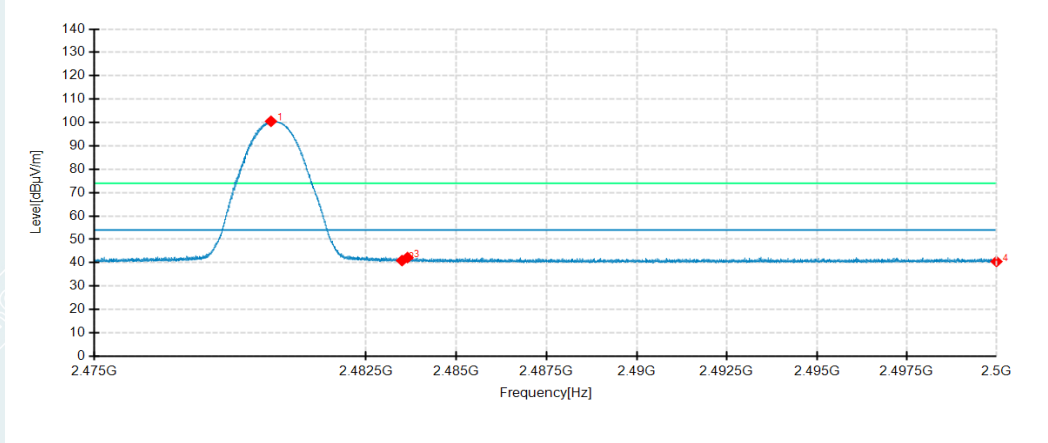

Detector mode: Average

Polarity: Vertical

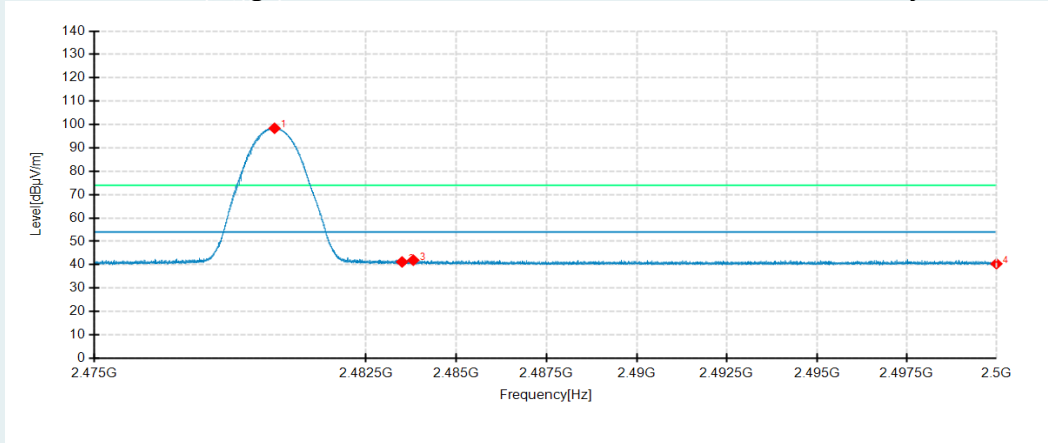


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2479.8775	96.20	100.52	4.32	54.00	-46.52	100	6	Horizontal	No limit
2	2483.5000	36.60	40.93	4.33	54.00	13.07	100	32	Horizontal	/
3	2483.6500	37.88	42.21	4.33	54.00	11.79	100	218	Horizontal	/
4	2500.0000	36.12	40.50	4.38	54.00	13.50	100	25	Horizontal	/
1	2479.9750	94.07	98.39	4.32	54.00	-44.39	100	348	Vertical	No limit
2	2483.5000	36.87	41.20	4.33	54.00	12.80	100	245	Vertical	/
3	2483.8100	37.62	41.95	4.33	54.00	12.05	200	31	Vertical	/
4	2500.0000	36.02	40.40	4.38	54.00	13.60	200	175	Vertical	/

3DH5**Lowest Channel**

Frequency 2402MHz


Detector mode: Peak

Polarity: Horizontal

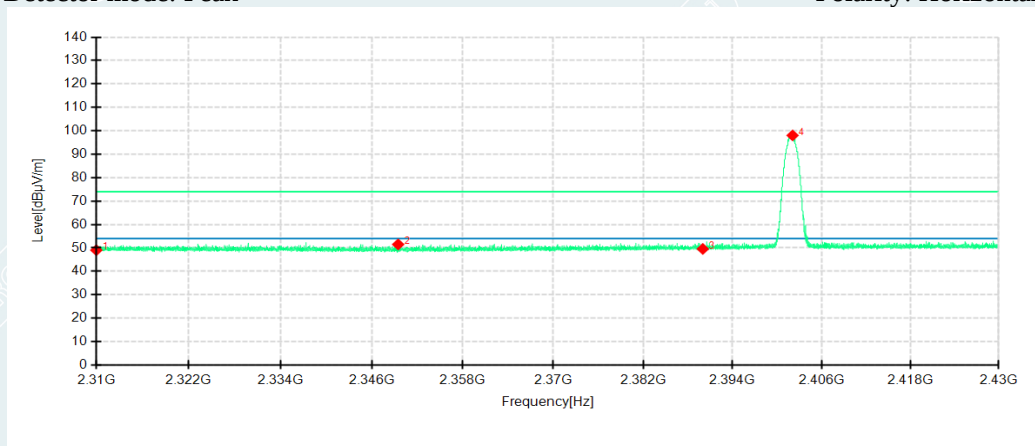

Detector mode: Peak

Polarity: Vertical

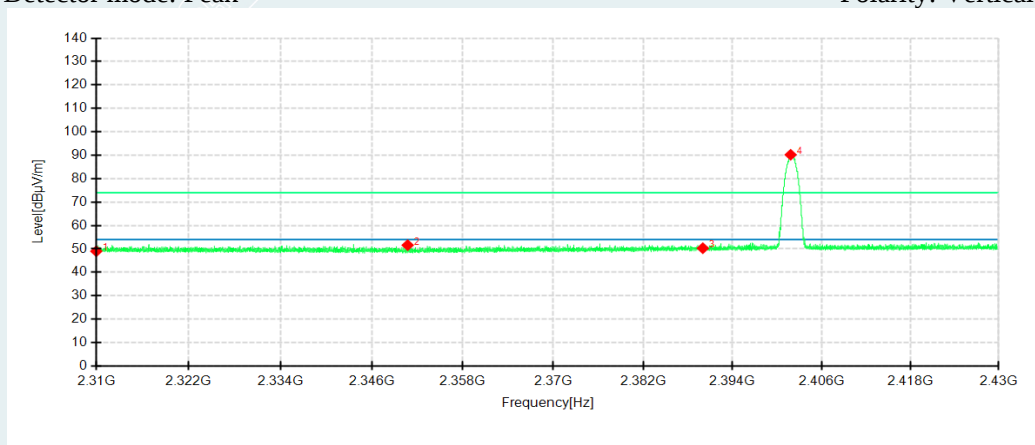


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2310.0000	45.56	49.04	3.48	74.00	24.96	200	142	Horizontal	/
2	2349.4800	48.36	51.49	3.13	74.00	22.51	100	156	Horizontal	/
3	2390.0000	45.75	49.56	3.81	74.00	24.44	100	218	Horizontal	/
4	2402.0760	94.04	98.03	3.99	74.00	-24.03	100	129	Horizontal	No limit
1	2310.0000	45.53	49.01	3.48	74.00	24.99	200	218	Vertical	/
2	2350.7280	48.45	51.59	3.14	74.00	22.41	100	211	Vertical	/
3	2390.0000	46.49	50.30	3.81	74.00	23.70	100	272	Vertical	/
4	2401.8120	86.21	90.20	3.99	74.00	-16.20	200	7	Vertical	No limit

Lowest Channel

Frequency 2402MHz


Detector mode: Average

Polarity: Horizontal

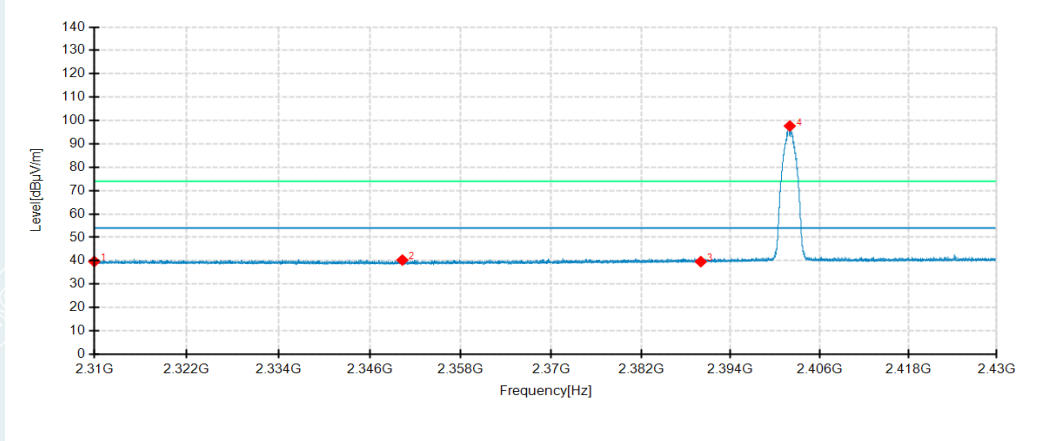

Detector mode: Average


Polarity: Vertical

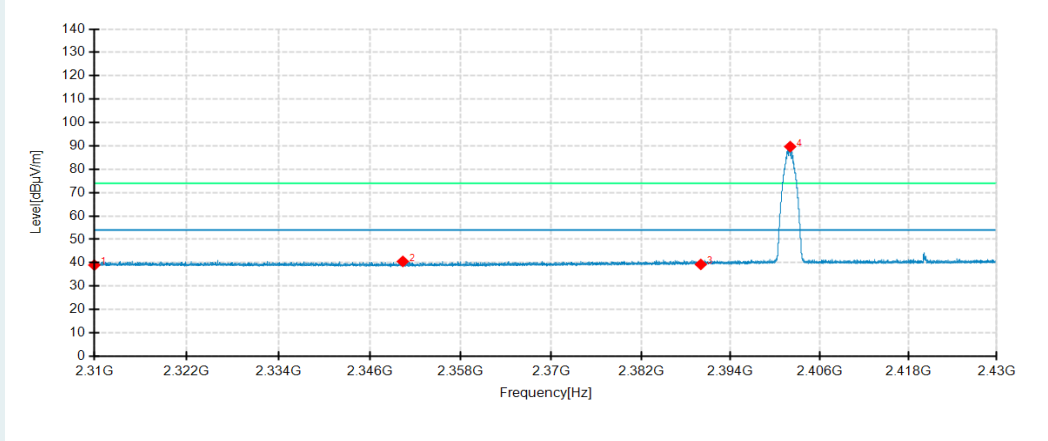

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2310.0000	36.19	39.67	3.48	54.00	14.33	100	31	Horizontal	/
2	2350.2960	37.15	40.29	3.14	54.00	13.71	100	121	Horizontal	/
3	2390.0000	35.79	39.60	3.81	54.00	14.40	200	142	Horizontal	/
4	2401.9680	93.67	97.66	3.99	54.00	-43.66	100	100	Horizontal	No limit
1	2310.0000	35.51	38.99	3.48	54.00	15.01	200	50	Vertical	/
2	2350.3560	37.42	40.56	3.14	54.00	13.44	100	260	Vertical	/
3	2390.0000	35.48	39.29	3.81	54.00	14.71	100	142	Vertical	/
4	2402.0280	85.69	89.68	3.99	54.00	-35.68	200	0	Vertical	No limit


Highest Channel
Frequency 2480MHz
Detector mode: Peak

Polarity: Horizontal

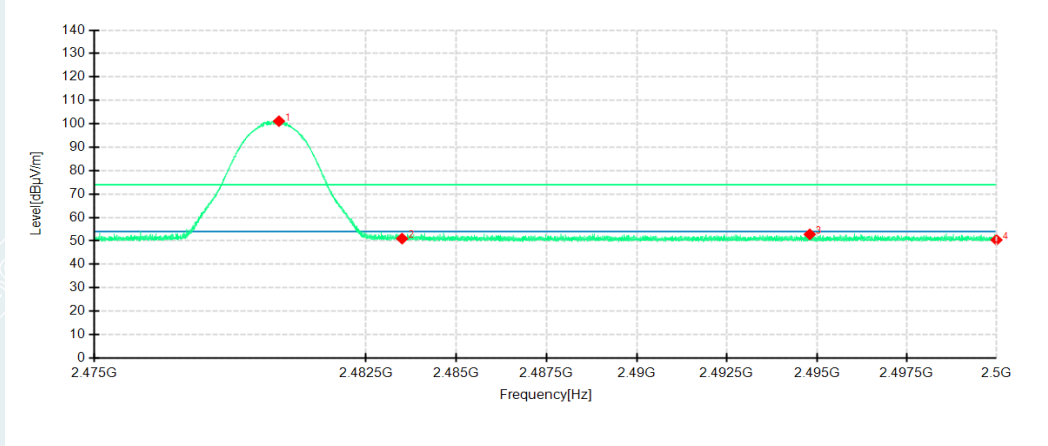

Detector mode: Peak

Polarity: Vertical

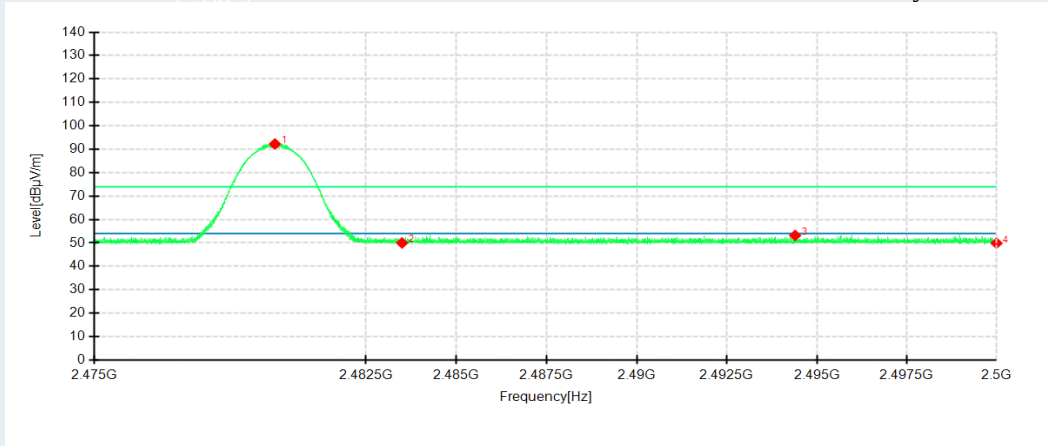


No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2480.0975	96.81	101.13	4.32	74.00	-27.13	100	238	Horizontal	No limit
2	2483.5000	46.65	50.98	4.33	74.00	23.02	100	359	Horizontal	/
3	2494.8050	48.44	52.80	4.36	74.00	21.20	100	142	Horizontal	
4	2500.0000	46.03	50.41	4.38	74.00	23.59	100	142	Horizontal	/
1	2479.9850	87.93	92.25	4.32	74.00	-18.25	200	314	Vertical	No limit
2	2483.5000	45.65	49.98	4.33	74.00	24.02	200	266	Vertical	/
3	2494.3975	48.82	53.18	4.36	74.00	20.82	100	218	Vertical	/
4	2500.0000	45.49	49.87	4.38	74.00	24.13	200	225	Vertical	/

Highest Channel

Frequency 2480MHz


Detector mode: Average

Polarity: Horizontal

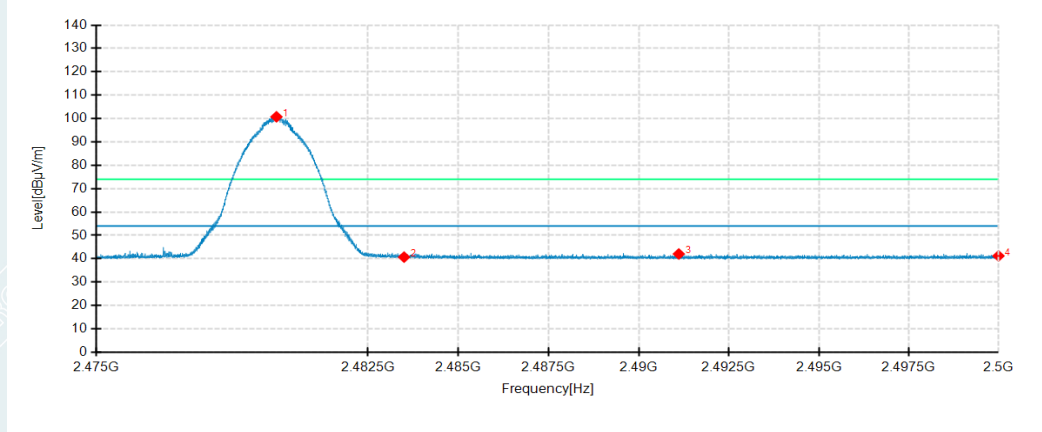

Detector mode: Average

Polarity: Vertical

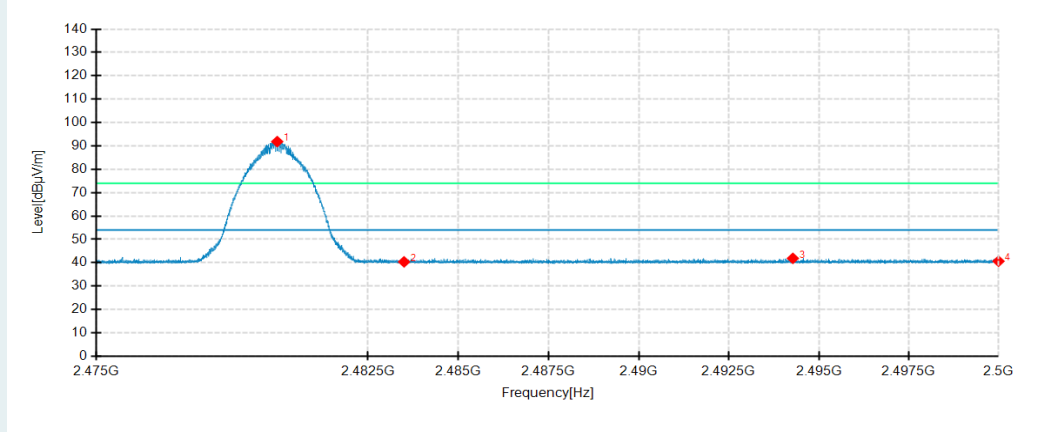

No.	Frequency MHz	Reading dBμV/m	Level dBμV/m	Factor dB	Limit dBμV/m	Margin dB	Height cm	Angle °	Pole	Remark
1	2479.9725	96.42	100.74	4.32	54.00	-46.74	100	237	Horizontal	No limit
2	2483.5000	36.36	40.69	4.33	54.00	13.31	100	319	Horizontal	/
3	2491.1125	37.70	42.05	4.35	54.00	11.95	100	142	Horizontal	/
4	2500.0000	36.82	41.20	4.38	54.00	12.80	100	142	Horizontal	/
1	2479.9925	87.51	91.83	4.32	54.00	-37.83	200	314	Vertical	No limit
2	2483.5000	36.04	40.37	4.33	54.00	13.63	200	150	Vertical	/
3	2494.2800	37.52	41.88	4.36	54.00	12.12	100	218	Vertical	/
4	2500.0000	36.26	40.64	4.38	54.00	13.36	100	21	Vertical	/

Remark:

- 1) Max field strength in 3m distance. No any other emission which falls in restricted bands can be detected and be reported.
- 2) As the Transmit Power of GFSK and 8DPSK is larger than $\pi/4$ -DQPSK, Therefore, restricted bands of operation recorded the worst case results in this report.

APPENDIX A. PHOTOGRAPH OF THE TEST CONNECTION DIAGRAM

Please refer to the attached document E20220126055701-11-Test photo.

APPENDIX B. PHOTOGRAPH OF THE EUT

Please refer to the attached document E20220126055701-9-EUT photo.

----- End of Report -----