

**CFR 47 FCC PART 15 SUBPART E
ISED RSS-247 Issue 3**

TEST REPORT

For

WIFI+BT Module

MODEL NUMBER: DCT1ZR2701

REPORT NUMBER: 4791526758-1-RF-4

ISSUE DATE: October 29, 2024

**FCC ID:2AC23-DCT1Z
IC:12290A-DCT1Z**

Prepared for

**Hui Zhou Gaoshengda Technology Co.,LTD
No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou
City,Guangdong,China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	October 29, 2024	Initial Issue	

Note: This report is based on 4791227226-1-RF-4 which is issued by UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch. The EUT had already applied for the FCC ID and IC ID, the customer wants to add the new antennas. The antenna WCT5J-45 is used for BT, and TVN22-A-179-150 is used for WIFI. The antennas type remains unchanged, but the antenna gain is higher than before. Therefore, based on the new antennas, radiated band edge and spurious are considered testing in this report. And power and PSD for UNII-1 are considered testing in this report because of limited by PSD, the power setting will be reduced in 802.11n HT20 mode. For the other data, please refer to the original report.

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
ON TIME AND DUTY CYCLE	ANSI C63.10-2013, Clause 12.2	None; for reporting purposes only.	Note 1
6dB AND 26dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	KDB 789033 D02 v02r01 Section C.1	FCC Part 15.407 (a)/(e), RSS-247 Issue 3, Clause 6.2.1.2 RSS-Gen Clause 6.7	Note 1
CONDUCTED OUTPUT POWER	KDB 789033 D02 v02r01 Section E.3.a (Method PM)/KDB 789033 D02 v02r01 Section E.3.a (Method PM) Section E.2.d (Method SA-2)	FCC 15.407 (a) RSS-247 Clause 6.2	Pass
POWER SPECTRAL DENSITY	KDB 789033 D02 v02r01 Section F	FCC 15.407 (a) RSS-247 Clause 6.2	Pass (Note 2)
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2.	FCC 15.207 RSS-GEN Clause 8.8	Note 1
Radiated Emissions and Band Edge Measurement	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	FCC 15.407 (b) FCC 15.209 FCC 15.205 RSS-247 Clause 6.2 RSS-GEN Clause 8.9	Pass (Note 2)
FREQUENCY STABILITY	ANSI C63.10-2013, Clause 6.8	FCC 15.407 (g)	Note 1
Dynamic Frequency Selection (Slave)	KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02	FCC Part 15.407 (h), RSS-247 Issue 3 Clause 6.3	Note 1
Antenna Requirement	N/A	FCC 47 CFR Part 15.203/ 15.407(a)(1) (2), RSS-Gen Issue 5, Clause 6.8	Pass

Note:

1. Please refer to the original report 4791227226-1-RF-4.
2. For UNII-2A/2C/3 please refer to the original report 4791227226-1-RF-4.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART E><ISED RSS-247 Issue 3> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	7
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	7
4.2. <i>MEASUREMENT UNCERTAINTY</i>	7
5. EQUIPMENT UNDER TEST	8
5.1. <i>DESCRIPTION OF EUT</i>	8
5.2. <i>CHANNEL LIST</i>	8
5.3. <i>MAXIMUM POWER</i>	9
5.4. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	10
5.5. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	11
5.6. <i>SUPPORT UNITS FOR SYSTEM TEST</i>	12
6. MEASURING EQUIPMENT AND SOFTWARE USED	13
7. ANTENNA PORT TEST RESULTS	15
7.1. <i>ON TIME AND DUTY CYCLE</i>	15
7.2. <i>6DB AND 26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH</i> ...	16
7.3. <i>CONDUCTED OUTPUT POWER</i>	18
7.4. <i>POWER SPECTRAL DENSITY</i>	21
7.5. <i>FREQUENCY STABILITY</i>	57
7.6. <i>DYNAMIC FREQUENCY SELECTION (SLAVE)</i>	59
8. RADIATED TEST RESULTS	63
8.1. <i>RESTRICTED BANDEDGE</i>	72
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~7 GHZ)</i>	119
8.3. <i>SPURIOUS EMISSIONS(7 GHZ~18 GHZ)</i>	145
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i>	229
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i>	232
8.6. <i>SPURIOUS EMISSIONS(26 GHZ~40 GHZ)</i>	234
8.7. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ)</i>	236
9. AC POWER LINE CONDUCTED EMISSION	238
10. ANTENNA REQUIREMENT	239

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
 Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

Manufacturer Information


Company Name: Hui Zhou Gaoshengda Technology Co.,LTD
 Address: No.2,Jin-da Road,Huinan High-tech Industrial Park,Hui-ao Avenue,Huizhou City,Guangdong,China

EUT Information

EUT Name: WIFI+BT Module
 Model: DCT1ZR2701
 Brand: GSD
 Sample Received Date: October 21, 2024
 Sample Status: Normal
 Sample ID: 7002245
 Date of Tested: October 21, 2024 to October 29, 2024


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART E ISED RSS-247 Issue 3	Pass

Prepared By:



Fanny Huang
 Engineer Project Associate

Checked By:



Kebo Zhang
 Senior Project Engineer

Approved By:



Stephen Guo
 Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART E ISED RSS-247 Issue 3, ANSI C63.10-2013, CFR 47 FCC Part 2, KDB 789033 D02 v02r01, RSS-GEN Issue 5, KDB414788 D01 Radiated Test Site v01, KDB 662911 D01 Multiple Transmitter Output v02r01, KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02, KDB 905462 D03 UNII clients without radar detection New Rules v01r02, KDB 905462 D04 Operational Modes for DFS Testing New Rules v01 and KDB 905462 D06 802 11 Channel Plans New Rules v02.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155</p>
---------------------------	--

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 40 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
	5.37 dB (26 GHz ~ 40 GHz)
Duty Cycle	±0.028%
Emission Bandwidth and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.766 dB
Maximum Power Spectral Density Level	±1.22 dB
Frequency Stability	±2.76%
Dynamic Frequency Selection	±1.01 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	WIFI+BT Module
Model	DCT1ZR2701
Normal Test Voltage:	DC 3.3 V

Please refer to the original report 4791227226-1-RF-4.

5.2. CHANNEL LIST

UNII-1 (For Bandwidth=20MHz)		UNII-1 (For Bandwidth=40MHz)		UNII-1 (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

UNII-2A (For Bandwidth=20MHz)		UNII-2A (For Bandwidth=40MHz)		UNII-2A (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

UNII-2C (For Bandwidth=20MHz)		UNII-2C (For Bandwidth=40MHz)		UNII-2C (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	*5610
108	5540	118	*5590	/	/
112	5560	126	*5630		
116	5580	134	5670		
120	*5600	/	/		
124	*5620				
128	*5640				
132	5660				
136	5680				
140	5700				
/	/				

Note: *indicated that not operational in Canada.

UNII-3 (For Bandwidth=20MHz)		UNII-3 (For Bandwidth=40MHz)		UNII-3 (For Bandwidth=80MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

Straddle Test Channel Configuration		
Bandwidth	Test Channel Number	Frequency
BW= 20 MHz	CH 144	5720 MHz
BW= 40 MHz	CH 142	5710 MHz
BW= 80 MHz	CH 138	5690 MHz

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Maximum Average Conducted Power (dBm)
a	5180 ~ 5825	15.95
n HT20		15.68
n HT40		15.74
ac VHT80		16.47

5.4. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter	
Test Software	MP tool

Mode	Freq(MHz)	Tx power from QA(dBm)	
		ANT1	ANT2
802.11a	5180	90	82
	5200	90	82
	5240	90	82
	5260	95	85
	5280	95	85
	5320	95	85
	5500	88	88
	5580	86	86
	5700	88	86
	5720-2C	88	86
	5720-3	88	86
	5745	90	84
	5785	90	86
	5825	90	86
802.11n 20M	5180	75	55
	5200	74	54
	5240	72	55
	5260	97	87
	5280	97	87
	5320	100	90
	5500	98	84
	5580	98	84
	5700	94	77
	5720-2C	94	77
	5720-3	94	77
	5745	103	85
	5785	103	87
	5825	103	89
802.11n 40M	5190	92	85
	5230	92	85
	5270	86	79

	5310	86	79
	5510	85	88
	5550	85	88
	5670	83	80
	5710-2C	83	80
	5710-3	83	80
	5755	85	80
	5795	88	83
802.11ac 80M	5210	85	73
	5290	90	80
	5530	60	60
	5610	60	60
	5690-2C	60	60
	5690-3	60	60
	5775	85	80

5.5. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna No.	Model Number	Frequency Band	Antenna Type	Max Antenna Gain (dBi)
1	TVN22-A-179-150	5150-5850	PIFA antenna	3.5
2	TVN22-A-179-150	5150-5850	PIFA antenna	3.5

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 3.5 \text{ dBi}$

G_{ANT} : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 6.51 \text{ dBi}$

Array Gain = $10 \log(N_{ANT}/N_{SS}) \text{ dB}$.

N_{ANT} : number of transmit antennas

N_{SS} : number of spatial streams, The worst case directional gain will occur when $N_{SS} = 1$

5.6. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	PC	Lenovo	E42-80	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

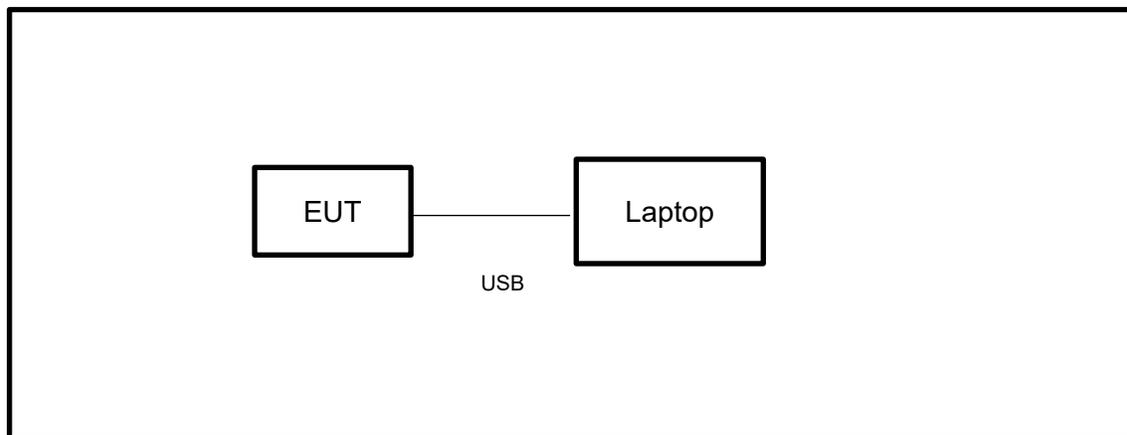

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.25,2024	Mar.24,2025
Vector Signal Generator	R&S	SMBV100A	261637	Sep.28, 2024	Sep.27, 2025
Signal Generator	R&S	SMB100A	178553	Sep.28, 2024	Sep.27, 2025
Signal Analyzer	R&S	FSV40	101118	Sep.28, 2024	Sep.27, 2025
Software					
Description	Manufacturer	Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz	EMC 32		10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.13, 2024	Sep.12, 2025
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.28, 2024	Sep.27, 2025
DC power supply	Keysight	E3642A	MY55159130	Sep.28, 2024	Sep.27, 2025
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.28, 2024	Sep.27, 2025
Attenuator	Aglient	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025
RF Control Unit	Tonscend	JS0806-2	23B80620666	Mar.25,2024	Mar.24,2025
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.28, 2024	Sep.27, 2025
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	May.08, 2023	May.07 2026
Preamplifier	HP	8447D	2944A09099	Sep.28, 2024	Sep.27, 2025
EMI Measurement Receiver	R&S	ESR26	101377	Sep.28, 2024	Sep.27, 2025
Horn Antenna	TDK	HRN-0118	130939	Apr.29, 2022	Apr.28, 2025
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.28, 2024	Sep.27, 2025
Horn Antenna	Schwarzbeck	BBHA9170	697	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.28, 2024	Sep.27, 2025
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Sep.28, 2024	Sep.27, 2025
Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	Sep.28, 2024	Sep.27, 2025
Band Reject Filter	Wainwright	WRCJV20-5120-5150-5350-5380-60SS	2	Sep.28, 2024	Sep.27, 2025
Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	Sep.28, 2024	Sep.27, 2025
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.8, 2024	Oct.7, 2025
Barometer	Yiyi	Baro	N/A	Sep.28, 2024	Sep.27, 2025
Attenuator	Agilent	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.B.

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value. Set $VBW \geq RBW$. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST SETUP

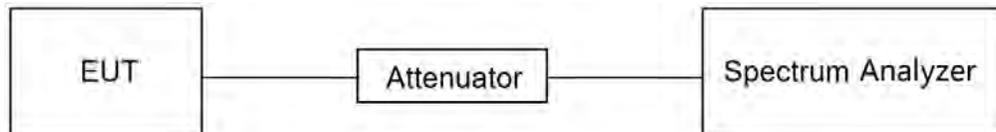

TEST RESULTS

Please refer to the original report.

7.2. 6DB AND 26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15, Subpart E ISED RSS-247 ISSUE 3		
Test Item	Limit	Frequency Range (MHz)
26 dB Emission Bandwidth	For reporting purposes only.	5150 ~ 5250
26 dB Emission Bandwidth	For reporting purposes only.	5250 ~ 5350
26 dB Emission Bandwidth	For reporting purposes only.	5470 ~ 5725 (For FCC) 5470 ~ 5600 (For ISED) 5650 ~ 5725 (For ISED)
6 dB Emission Bandwidth	The minimum 6 dB emission bandwidth shall be 500 kHz.	5725 ~ 5850
99 % Occupied Bandwidth	For reporting purposes only.	5150 ~ 5825 (For ISED)

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.C1. for 26 dB Emission Bandwidth; section II.C2. for 6 dB Emission Bandwidth; section II.D. for 99 % Occupied Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Emission Bandwidth: RBW=100 kHz For 26 dB Emission bandwidth: approximately 1 % of the EBW. For 99 % Occupied Bandwidth: approximately 1 % ~ 5 % of the OBW.
VBW	For 6 dB Bandwidth: $\geq 3 \times \text{RBW}$ For 26 dB Bandwidth: $> 3 \times \text{RBW}$ For 99 % Bandwidth: $> 3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

- Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6/26 dB relative to the maximum level measured in the fundamental emission.

Calculation for 99 % Bandwidth of UNII-2C and UNII-3 Straddle Channel:

For Example: Fundamental Frequency: 5720 MHz

99 % OBW: 21.00 MHz

Turning Frequency: 5725 MHz

99 % Bandwidth of UNII-2C Band Portion = $(5725-(5720-(21.00/2))) = 15.50$ MHz

99 % Bandwidth of UNII-3 Band Portion = $(5720+(21.00/2)-5725) = 5.50$ MHz

Calculation for 26 dB Bandwidth of UNII-2C Straddle Channel:

For Example: Fundamental frequency: 5720 MHz

26 dB BW: 20.00 MHz

FL: 5710.16 MHz

FH: 5730.16 MHz

Turning Frequency: 5725 MHz

26 dB Bandwidth of UNII-2C Band Portion = $5725-5710.16=14.84$ MHz

Calculation for 6dB Bandwidth of UNII-3 Straddle Channel:

For Example: Fundamental frequency: 5720 MHz

6 dB BW: 16.44 MHz


FL: 5711.76 MHz

FH: 5728.2 MHz

Turning Frequency: 5725 MHz

6 dB Bandwidth of UNII-3 band Portion = $5728.2-5725=3.2$ MHz

TEST SETUP

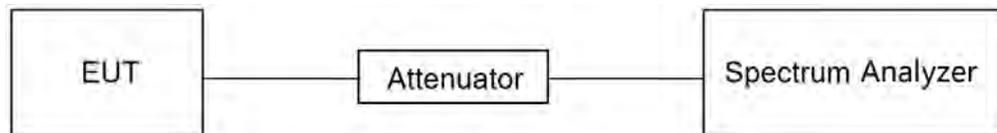

TEST RESULTS

Please refer to the original report.

7.3. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	<input type="checkbox"/> Outdoor Access Point: 1 W (30 dBm) <input type="checkbox"/> Indoor Access Point: 1 W (30 dBm) <input type="checkbox"/> Fixed Point-To-Point Access Points: 1 W (30 dBm) <input checked="" type="checkbox"/> Client Devices: 250 mW (24 dBm)	5150 ~ 5250
	Shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.	5250 ~ 5350 5470 ~ 5725
	Shall not exceed 1 Watt (30 dBm).	5725 ~ 5850

ISED RSS-247 ISSUE 3		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power or e.i.r.p.	The maximum e.i.r.p. shall not exceed 200 mW (23 dBm) or 10 + 10 log ₁₀ B, dBm, whichever power is less. B is the 99 % emission bandwidth in megahertz.	5150 ~ 5250
	a. The maximum conducted output power shall not exceed 250 mW (24 dBm) or 11 + 10 log ₁₀ B dBm, whichever is less. b. The maximum e.i.r.p. shall not exceed 1.0 W (30 dBm) or 17 + 10 log ₁₀ B dBm, whichever is less. B is the 99 % emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.	5250 ~ 5350 5470 ~ 5600 5650 ~ 5725
	Shall not exceed 1 Watt (30 dBm). The e.i.r.p. shall not exceed 4 W	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.E.

Method SA-2 (trace averaging across ON and OFF times of the EUT transmissions, followed by duty cycle correction.):

- (a) Measure the duty cycle D of the transmitter output signal.
- (b) Set span to encompass the entire 26 dB EBW or 99% OBW of the signal.


- (c) Set RBW = 1 MHz.
- (d) Set VBW \geq 3 MHz.
- (e) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- (f) Sweep time = auto.
- (g) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (h) Do not use sweep triggering. Allow the sweep to “free run.”
- (i) Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the ON and OFF periods of the transmitter.
- (j) Compute power by integrating the spectrum across the 26 dB EBW or 99% OBW of the signal using the instrument’s band power measurement function with band limits set equal to the EBW or OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in power units) at 1 MHz intervals extending across the 26 dB EBW or 99% OBW of the spectrum.
- (k) Add $[10 \log (1 / D)]$, where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add $[10 \log (1 / 0.25)] = 6 \text{ dB}$ if the duty cycle is 25%.

Method PM (Measurement using an RF average power meter):

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - a. The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - b. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - c. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25 %).

Note: Method SA-2 was used for straddle channel output power test, and Method PM was used for testing rest channels

TEST SETUP

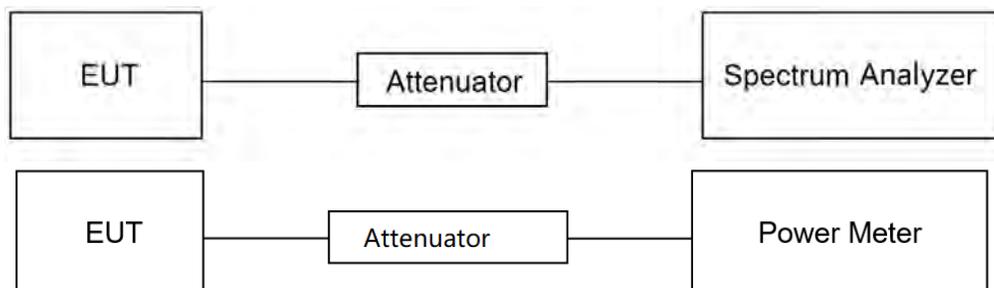

TEST ENVIRONMENT

Temperature	23.6°C	Relative Humidity	52%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3 V

TEST DATE / ENGINEER

Test Date	October 29, 2024	Test By	Bairong Liu
-----------	------------------	---------	-------------

TEST RESULTS

We have retested UNII-1, for UNII-2A/2C/3 test data, please refer to the original report.

Test Mode	Antenna	Frequency[MHz]	Power [dBm]	FCC Limit [dBm]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11A	Ant1	5180	15.40	≤23.98	18.9	≤22.23	PASS
	Ant2	5180	15.61	≤23.98	19.11	≤22.23	PASS
	Ant1	5200	14.87	≤23.98	18.37	≤22.24	PASS
	Ant2	5200	15.40	≤23.98	18.9	≤22.23	PASS
	Ant1	5240	14.82	≤23.98	18.32	≤22.24	PASS
	Ant2	5240	14.92	≤23.98	18.42	≤22.24	PASS
11N20MIMO	Ant1	5180	11.02	≤23.98	14.52	≤22.52	PASS
	Ant2	5180	10.03	≤23.98	13.53	≤22.60	PASS
	total	5180	13.56	≤23.98	17.06	≤22.52	PASS
	Ant1	5200	11.01	≤23.98	14.51	≤22.53	PASS
	Ant2	5200	9.96	≤23.98	13.46	≤22.53	PASS
	total	5200	13.53	≤23.98	17.03	≤22.53	PASS
	Ant1	5240	11.07	≤23.98	14.57	≤22.52	PASS
	Ant2	5240	10.11	≤23.98	13.61	≤22.57	PASS
total	5240	13.63	≤23.98	17.13	≤22.52	PASS	
11N40MIMO	Ant1	5190	11.72	≤23.98	15.22	≤23.00	PASS
	Ant2	5190	11.20	≤23.98	14.7	≤23.00	PASS
	total	5190	14.48	≤23.98	17.98	≤23.00	PASS
	Ant1	5230	11.28	≤23.98	14.78	≤23.00	PASS
	Ant2	5230	10.65	≤23.98	14.15	≤23.00	PASS
	total	5230	13.99	≤23.98	17.49	≤23.00	PASS
11AC80MIMO	Ant1	5210	13.04	≤23.98	16.54	≤23.00	PASS
	Ant2	5210	12.74	≤23.98	16.24	≤23.00	PASS
	total	5210	15.90	≤23.98	19.4	≤23.00	PASS

Note: The Duty Cycle Factor is compensated in the test data.

7.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	<input type="checkbox"/> Outdoor Access Point: 17 dBm/MHz <input type="checkbox"/> Indoor Access Point: 17 dBm/MHz <input type="checkbox"/> Fixed Point-To-Point Access Points: 17 dBm/MHz <input checked="" type="checkbox"/> Client Devices: 11 dBm/MHz	5150 ~ 5250
	11 dBm/MHz	5250 ~ 5350 5470 ~ 5725
	30 dBm/500kHz	5725 ~ 5850

ISED RSS-247 ISSUE 3		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.	5150 ~ 5250
	The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.	5250 ~ 5350 5470 ~ 5600 5650 ~ 5725
	30 dBm / 500 kHz	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.F.

Connect the EUT to the spectrum analyzer and use the following settings:

For U-NII-1, U-NII-2A and U-NII-2C band:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	1 MHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Average
Sweep time	Auto


For U-NII-3:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	500 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Average
Sweep time	Auto

Allow trace to fully stabilize and use the peak search function on the instrument to find the peak of the spectrum and record its value.

Add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum, the result is the Maximum PSD over 1 MHz / 500 kHz reference bandwidth.

TEST SETUP

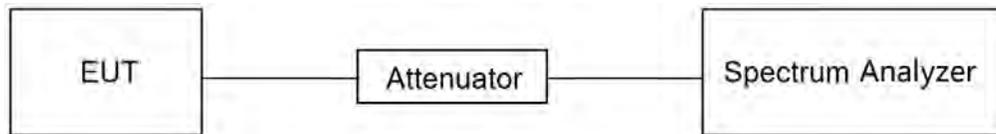

TEST ENVIRONMENT

Temperature	23.6°C	Relative Humidity	52%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3 V

TEST DATE / ENGINEER

Test Date	October 29, 2024	Test By	Bairong Liu
-----------	------------------	---------	-------------

TEST RESULTS

Test Mode	Antenna	Frequency[MHz]	Power [dBm/MHz]	Limit [dBm/MHz]	EIRP [dBm/MHz]	Limit [dBm/MHz]	Verdict	
11A	Ant1	5180	4.02	---	7.52	≤10.00	PASS	
	Ant2	5180	4.41	---	7.91	≤10.00	PASS	
	Ant1	5200	3.37	---	6.87	≤10.00	PASS	
	Ant2	5200	4.07	---	7.57	≤10.00	PASS	
	Ant1	5240	3.43	---	6.93	≤10.00	PASS	
	Ant2	5240	3.75	---	7.25	≤10.00	PASS	
	Ant1	5260	3.66	≤10.49	7.16	---	PASS	
	Ant2	5260	3.98	≤10.49	7.48	---	PASS	
	Ant1	5280	3.74	≤10.49	7.24	---	PASS	
	Ant2	5280	4.13	≤10.49	7.63	---	PASS	
	Ant1	5320	3.16	≤10.49	6.66	---	PASS	
	Ant2	5320	3.54	≤10.49	7.04	---	PASS	
	Ant1	5500	4.24	≤10.49	7.74	---	PASS	
	Ant2	5500	4.20	≤10.49	7.7	---	PASS	
	Ant1	5580	4.30	≤10.49	7.8	---	PASS	
	Ant2	5580	4.37	≤10.49	7.87	---	PASS	
	Ant1	5700	3.83	≤10.49	7.33	---	PASS	
	Ant2	5700	4.59	≤10.49	8.09	---	PASS	
	Ant1	5720_UNII-2C	3.52	≤10.49	7.02	---	PASS	
	Ant2	5720_UNII-2C	4.44	≤10.49	7.94	---	PASS	
	Ant1	5720_UNII-3	0.93	≤29.49	4.43	---	PASS	
	Ant2	5720_UNII-3	1.60	≤29.49	5.1	---	PASS	
	Ant1	5745	1.29	≤29.49	4.79	---	PASS	
	Ant2	5745	1.16	≤29.49	4.66	---	PASS	
	Ant1	5785	1.05	≤29.49	4.55	---	PASS	
	Ant2	5785	0.79	≤29.49	4.29	---	PASS	
	Ant1	5825	1.19	≤29.49	4.69	---	PASS	
	Ant2	5825	0.96	≤29.49	4.46	---	PASS	
	11N20MIMO	Ant1	5180	0.27	---	3.77	≤10.00	PASS
		Ant2	5180	-0.69	---	2.81	≤10.00	PASS
total		5180	2.83	---	9.34	≤10.00	PASS	
Ant1		5200	0.08	---	3.58	≤10.00	PASS	
Ant2		5200	-0.78	---	2.72	≤10.00	PASS	
total		5200	2.68	---	9.19	≤10.00	PASS	
Ant1		5240	0.19	---	3.69	≤10.00	PASS	
Ant2		5240	-0.66	---	2.84	≤10.00	PASS	
total		5240	2.80	---	9.31	≤10.00	PASS	
Ant1		5260	0.47	≤10.49	3.97	---	PASS	
Ant2		5260	0.70	≤10.49	4.2	---	PASS	
total		5260	3.60	≤10.49	10.11	---	PASS	
Ant1		5280	0.49	≤10.49	3.99	---	PASS	
Ant2		5280	0.52	≤10.49	4.02	---	PASS	
total		5280	3.52	≤10.49	10.03	---	PASS	
Ant1		5320	1.08	≤10.49	4.58	---	PASS	
Ant2		5320	0.81	≤10.49	4.31	---	PASS	
total		5320	3.96	≤10.49	10.47	---	PASS	
Ant1		5500	-2.02	≤10.49	1.48	---	PASS	
Ant2		5500	-2.16	≤10.49	1.34	---	PASS	
total		5500	0.92	≤10.49	7.43	---	PASS	
Ant1		5580	-1.08	≤10.49	2.42	---	PASS	
Ant2		5580	-1.14	≤10.49	2.36	---	PASS	
total		5580	1.90	≤10.49	8.41	---	PASS	
Ant1	5700	-0.88	≤10.49	2.62	---	PASS		
Ant2	5700	-1.02	≤10.49	2.48	---	PASS		

	total	5700	2.06	≤10.49	8.57	---	PASS
	Ant1	5720 UNII-2C	-0.83	≤10.49	2.67	---	PASS
	Ant2	5720 UNII-2C	-1.39	≤10.49	2.11	---	PASS
	total	5720 UNII-2C	1.91	≤10.49	8.42	---	PASS
	Ant1	5720 UNII-3	-3.90	≤29.49	-0.4	---	PASS
	Ant2	5720 UNII-3	-4.31	≤29.49	-0.81	---	PASS
	total	5720 UNII-3	-1.09	≤29.49	5.42	---	PASS
	Ant1	5745	-2.01	≤29.49	1.49	---	PASS
	Ant2	5745	-2.25	≤29.49	1.25	---	PASS
	total	5745	0.88	≤29.49	7.39	---	PASS
	Ant1	5785	-2.28	≤29.49	1.22	---	PASS
	Ant2	5785	-2.56	≤29.49	0.94	---	PASS
	total	5785	0.59	≤29.49	7.1	---	PASS
	Ant1	5825	-1.82	≤29.49	1.68	---	PASS
	Ant2	5825	-2.32	≤29.49	1.18	---	PASS
	total	5825	0.95	≤29.49	7.46	---	PASS
	Ant1	5190	-2.53	---	0.97	≤10.00	PASS
	Ant2	5190	-3.24	---	0.26	≤10.00	PASS
	total	5190	0.14	---	6.65	≤10.00	PASS
	Ant1	5230	-2.56	---	0.94	≤10.00	PASS
	Ant2	5230	-3.36	---	0.14	≤10.00	PASS
	total	5230	0.07	---	6.58	≤10.00	PASS
	Ant1	5270	-3.72	≤10.49	-0.22	---	PASS
	Ant2	5270	-4.32	≤10.49	-0.82	---	PASS
	total	5270	-1.00	≤10.49	5.51	---	PASS
	Ant1	5310	-3.46	≤10.49	0.04	---	PASS
	Ant2	5310	-3.51	≤10.49	-0.01	---	PASS
	total	5310	-0.47	≤10.49	6.04	---	PASS
	Ant1	5510	-1.59	≤10.49	1.91	---	PASS
	Ant2	5510	-1.86	≤10.49	1.64	---	PASS
	total	5510	1.29	≤10.49	7.8	---	PASS
	Ant1	5550	-1.84	≤10.49	1.66	---	PASS
	Ant2	5550	-1.79	≤10.49	1.71	---	PASS
	total	5550	1.20	≤10.49	7.71	---	PASS
	Ant1	5670	-1.52	≤10.49	1.98	---	PASS
	Ant2	5670	-1.68	≤10.49	1.82	---	PASS
	total	5670	1.41	≤10.49	7.92	---	PASS
	Ant1	5710 UNII-2C	-2.49	≤10.49	1.01	---	PASS
	Ant2	5710 UNII-2C	-2.28	≤10.49	1.22	---	PASS
	total	5710 UNII-2C	0.63	≤10.49	7.14	---	PASS
	Ant1	5710 UNII-3	-6.69	≤29.49	-3.19	---	PASS
	Ant2	5710 UNII-3	-6.63	≤29.49	-3.13	---	PASS
	total	5710 UNII-3	-3.65	≤29.49	2.86	---	PASS
	Ant1	5755	-4.93	≤29.49	-1.43	---	PASS
	Ant2	5755	-4.92	≤29.49	-1.42	---	PASS
	total	5755	-1.91	≤29.49	4.6	---	PASS
	Ant1	5795	-4.39	≤29.49	-0.89	---	PASS
	Ant2	5795	-5.08	≤29.49	-1.58	---	PASS
	total	5795	-1.71	≤29.49	4.8	---	PASS
	Ant1	5210	-3.81	---	-0.31	≤10.00	PASS
	Ant2	5210	-4.46	---	-0.96	≤10.00	PASS
	total	5210	-1.11	---	5.4	≤10.00	PASS
	Ant1	5290	-3.76	≤10.49	-0.26	---	PASS
	Ant2	5290	-3.76	≤10.49	-0.26	---	PASS
	total	5290	-0.75	≤10.49	5.76	---	PASS
	Ant1	5530	-6.67	≤10.49	-3.17	---	PASS
	Ant2	5530	-6.07	≤10.49	-2.57	---	PASS
	total	5530	-3.35	≤10.49	3.16	---	PASS
	Ant1	5610	-6.29	≤10.49	-2.79	---	PASS
	Ant2	5610	-6.43	≤10.49	-2.93	---	PASS

	total	5610	-3.35	≤10.49	3.16	---	PASS
	Ant1	5690 UNII-2C	-7.40	≤10.49	-3.9	---	PASS
	Ant2	5690 UNII-2C	-7.84	≤10.49	-4.34	---	PASS
	total	5690 UNII-2C	-4.60	≤10.49	1.91	---	PASS
	Ant1	5690 UNII-3	-12.04	≤29.49	-8.54	---	PASS
	Ant2	5690 UNII-3	-13.58	≤29.49	-10.08	---	PASS
	total	5690 UNII-3	-9.73	≤29.49	-3.22	---	PASS
	Ant1	5775	-6.46	≤29.49	-2.96	---	PASS
	Ant2	5775	-6.48	≤29.49	-2.98	---	PASS
	total	5775	-3.46	≤29.49	3.05	---	PASS

- Note:
1. The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
 2. The Duty Cycle Factor and RBW Factor is compensated in the graph.
 3. We have retested UNII-1, for UNII-2A/2C/3 test data, please refer to the original report.
 4. For UNII-2A/2C/3, because of the directional gain is higher than 6dBi, we have recalculated the limit to ensure that it complies with the limits.

Test Graphs





11A_Ant2_5200



11A_Ant1_5240



11A_Ant2_5240



11A Ant1 5260



11A Ant2 5260



11A Ant1 5280



11A_Ant2_5280



11A_Ant1_5320



11A_Ant2_5320



11A Ant1 5500



11A Ant2 5500



11A Ant1 5580






11A_Ant2_5580




11A_Ant1_5700



11A_Ant2_5700

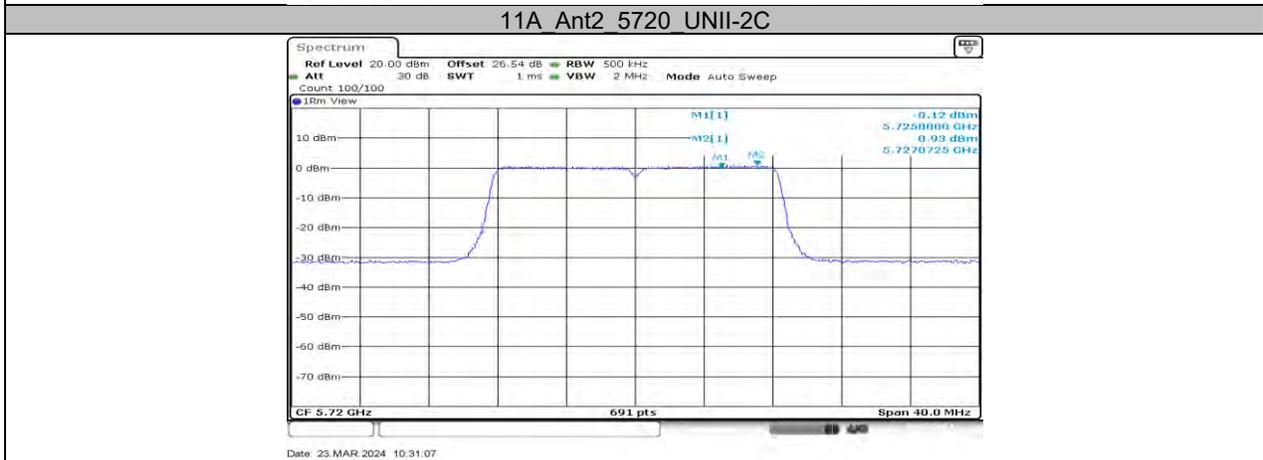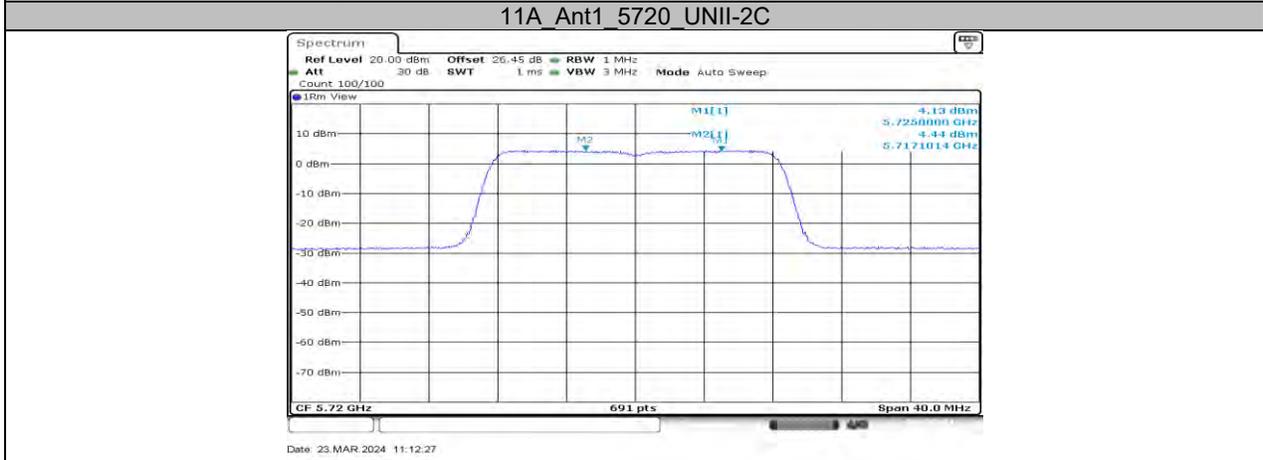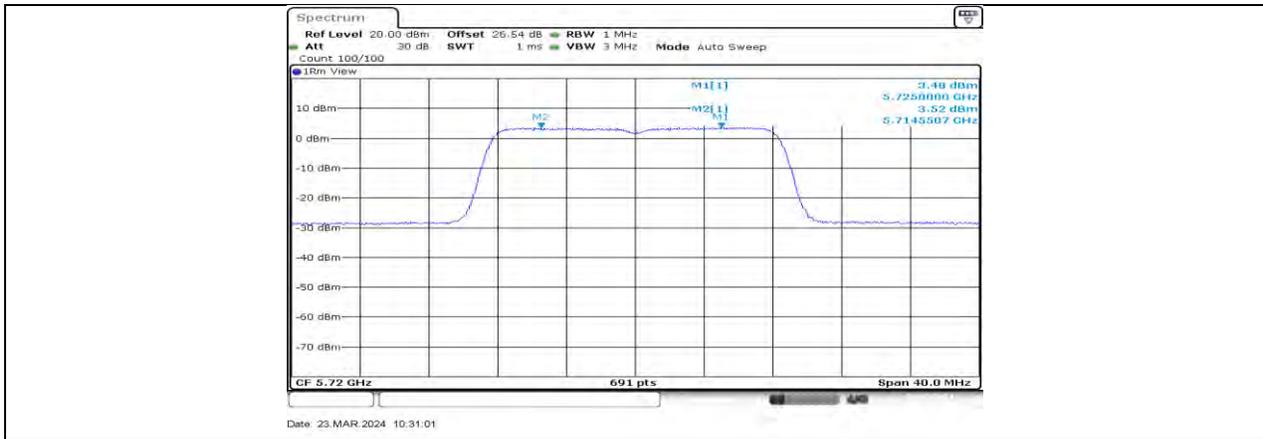

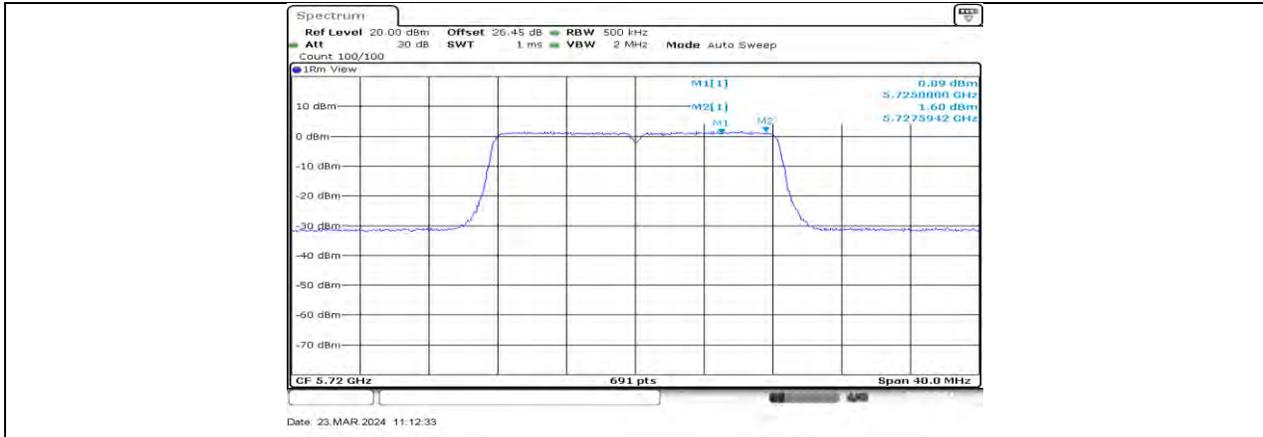


11A_Ant2_5720_UNII-3




11A_Ant1_5745



11A_Ant2_5745

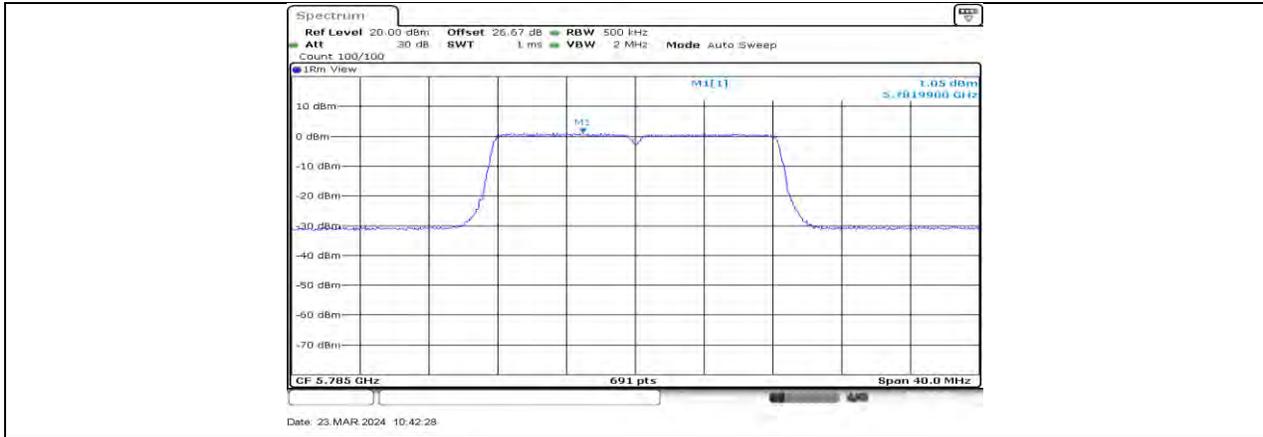


11A Ant1 5785

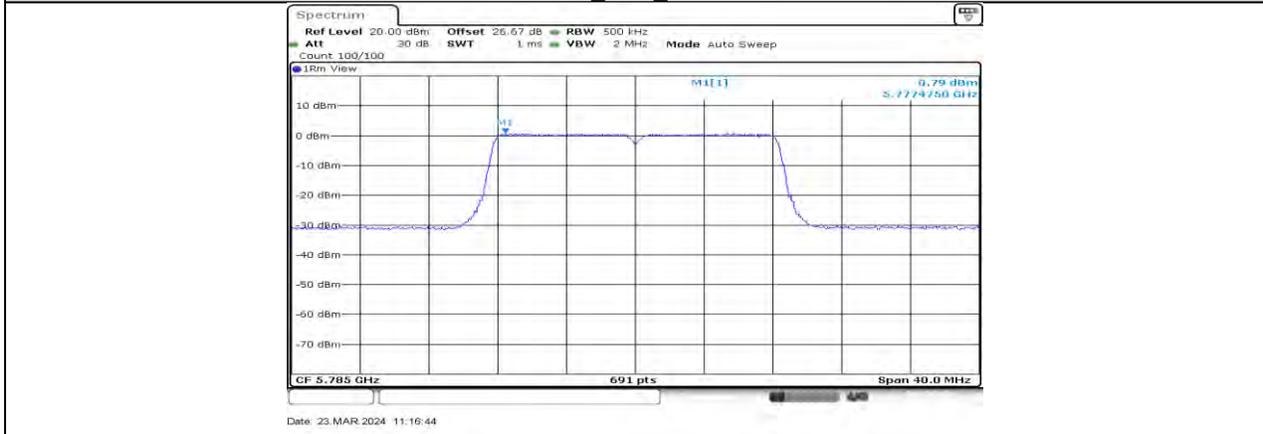

11A Ant2 5785



11A Ant1 5825

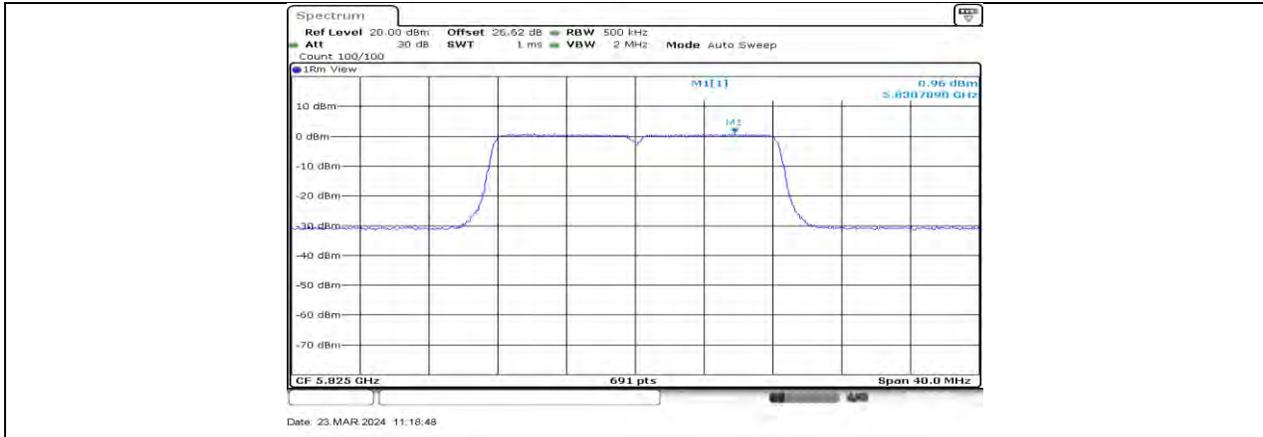

11A_Ant2_5825



11N20MIMO_Ant1_5180



11N20MIMO_Ant2_5180



11N20MIMO Ant1 5200



11N20MIMO Ant2 5200



11N20MIMO Ant1 5240



11N20MIMO Ant2 5240



11N20MIMO Ant1 5260



11N20MIMO Ant2 5260



11N20MIMO Ant1 5280



11N20MIMO Ant2 5280



11N20MIMO Ant1 5320



11N20MIMO Ant2 5320



11N20MIMO Ant1 5500



11N20MIMO Ant2 5500



11N20MIMO Ant1 5580



11N20MIMO Ant2 5580



11N20MIMO Ant1 5700



11N20MIMO_Ant2_5700




11N20MIMO_Ant1_5720_UNII-2C



11N20MIMO_Ant2_5720_UNII-2C




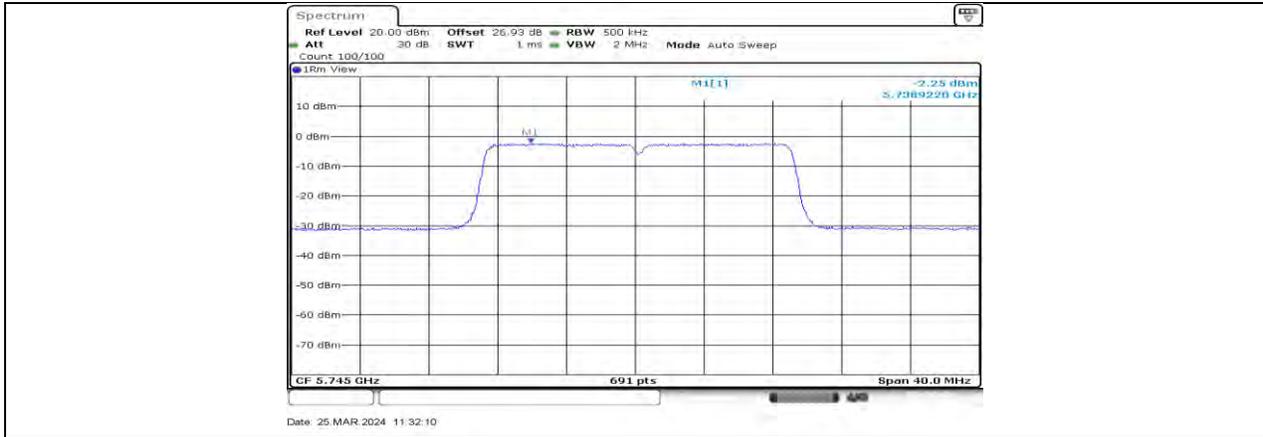


11N20MIMO Ant2 5745



11N20MIMO Ant1 5785

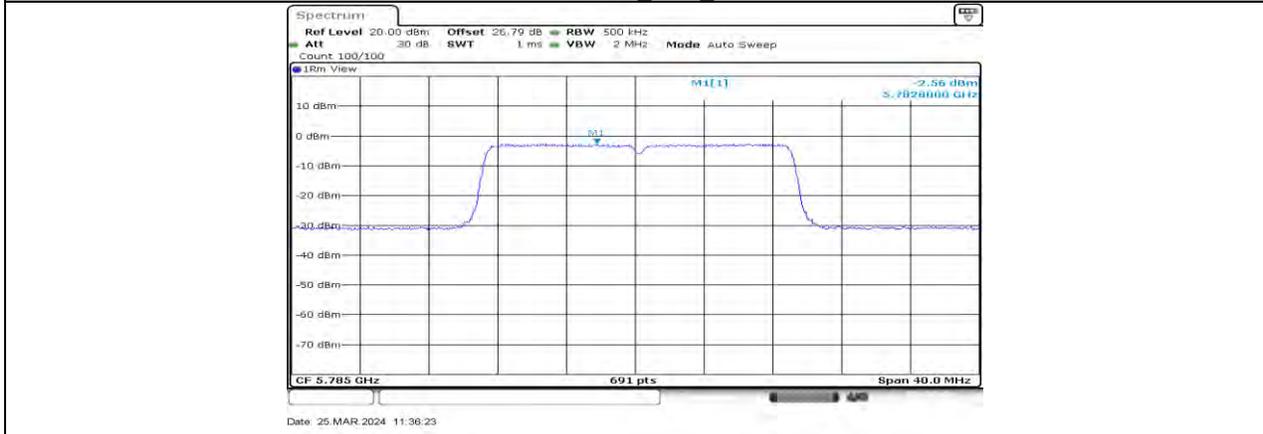

11N20MIMO Ant2 5785

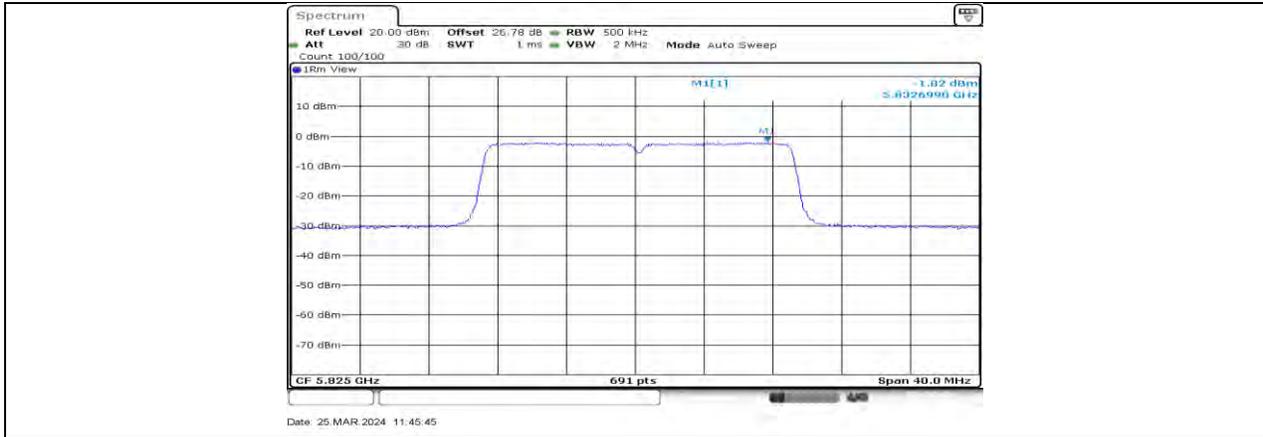

11N20MIMO Ant1 5825



11N20MIMO Ant2 5825



11N40MIMO Ant1 5190



11N40MIMO Ant2 5190



11N40MIMO Ant1 5230



11N40MIMO Ant2 5230



11N40MIMO Ant1 5270




11N40MIMO Ant2 5270




11N40MIMO Ant1 5310



11N40MIMO Ant2 5310

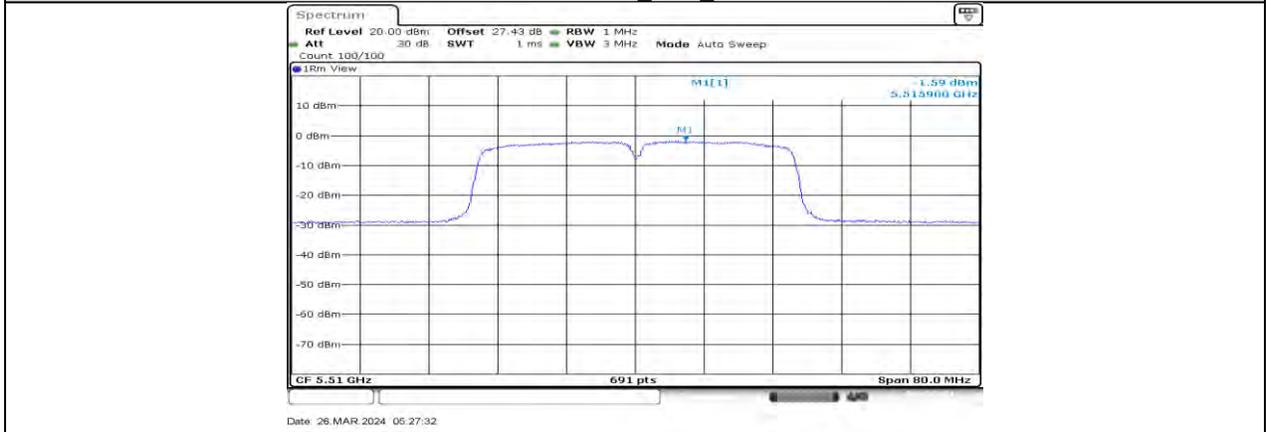


11N40MIMO Ant1 5510

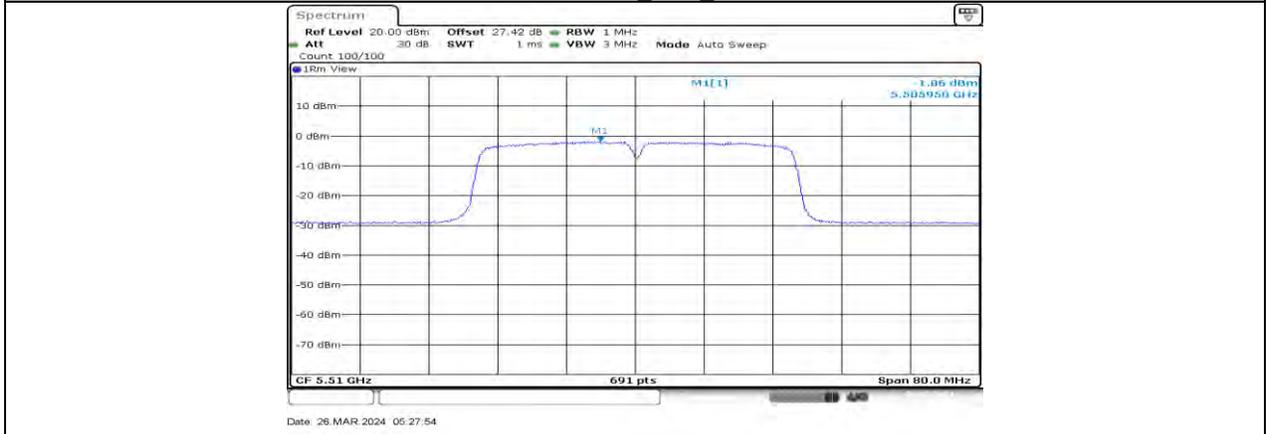

11N40MIMO Ant2 5510



11N40MIMO Ant1 5550

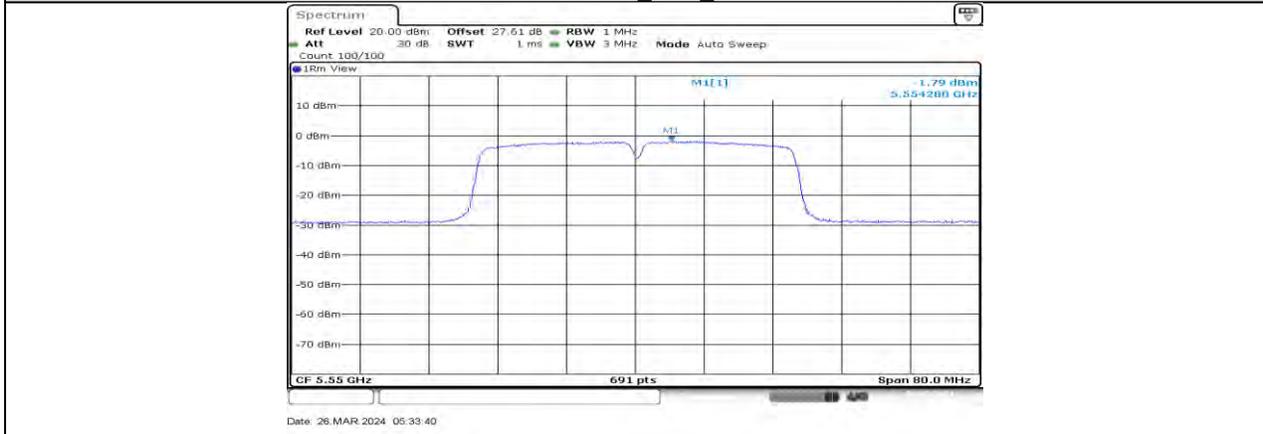

11N40MIMO Ant2 5550




11N40MIMO Ant1 5670



11N40MIMO Ant2 5670




11N40MIMO Ant1 5710 UNII-2C

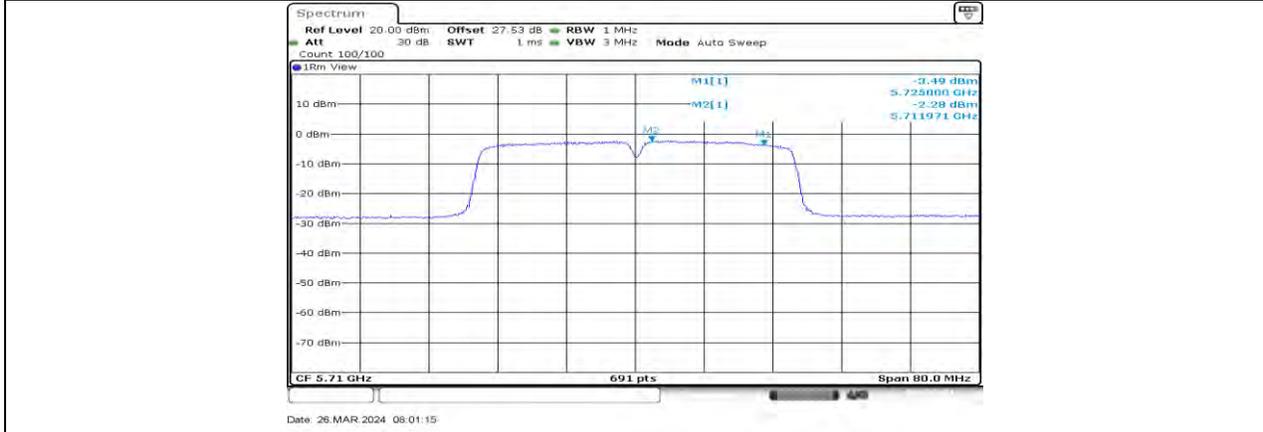

11N40MIMO Ant2 5710 UNII-2C



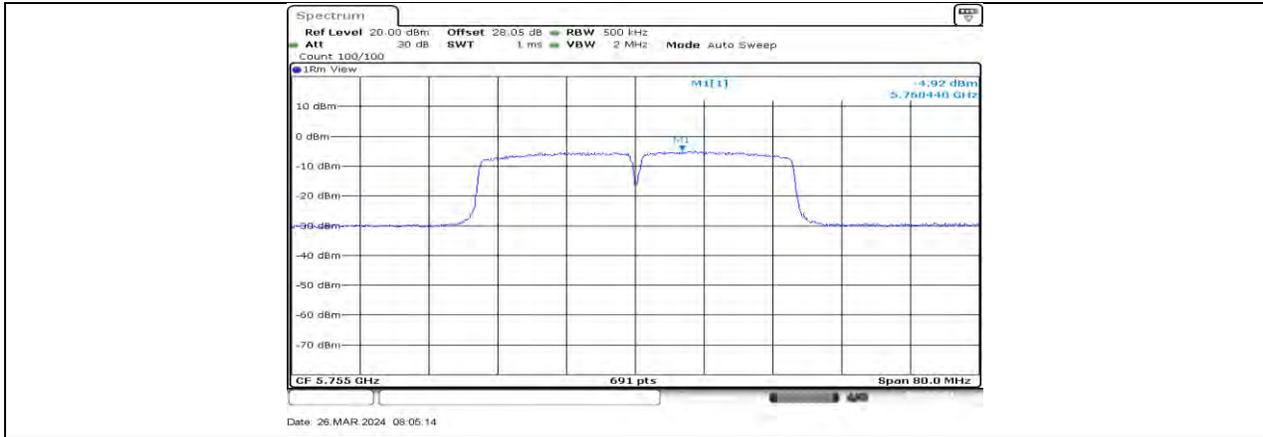


11N40MIMO Ant2 5755




11N40MIMO Ant1 5795




11N40MIMO Ant2 5795

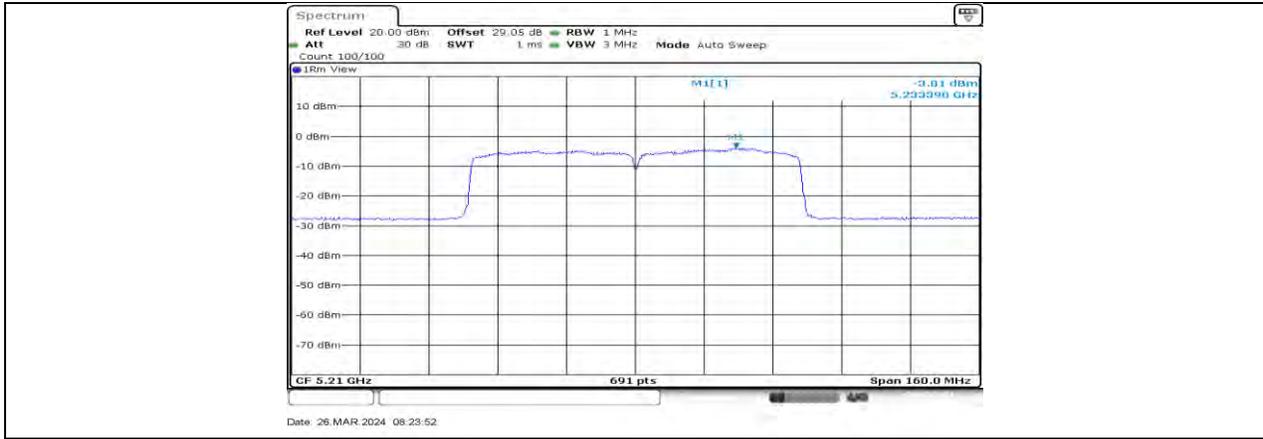

11AC80MIMO_Ant1_5210

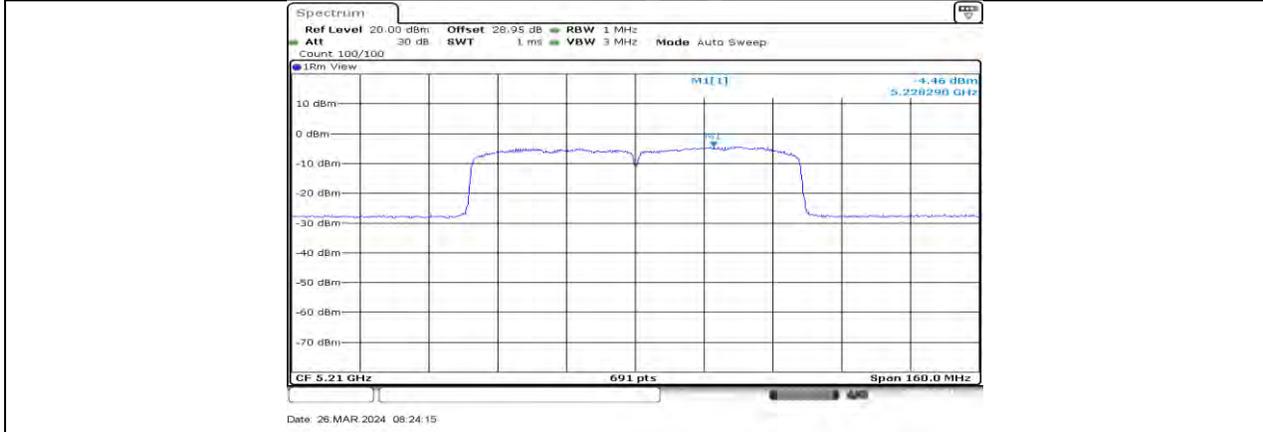


11AC80MIMO_Ant2_5210

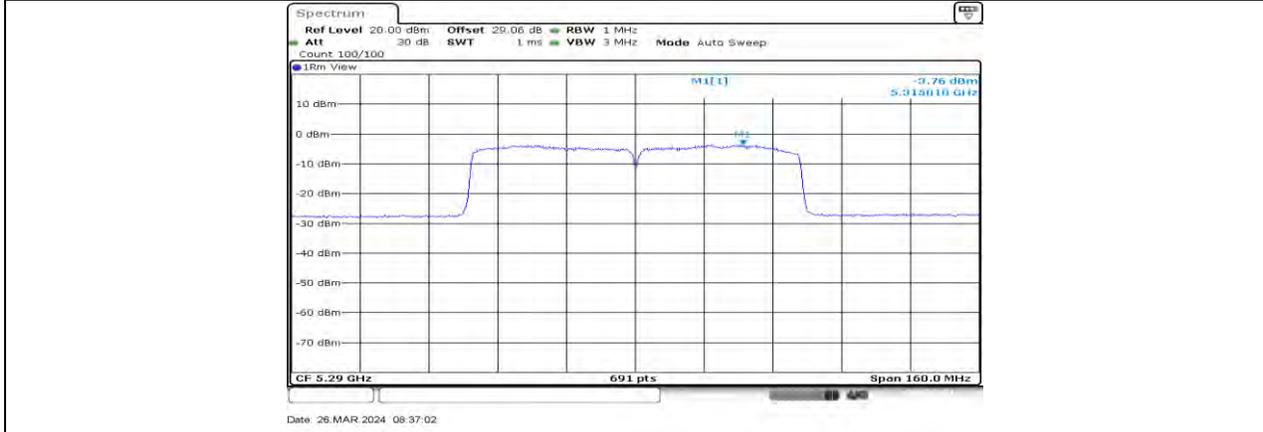

11AC80MIMO_Ant1_5290



11AC80MIMO_Ant2_5290

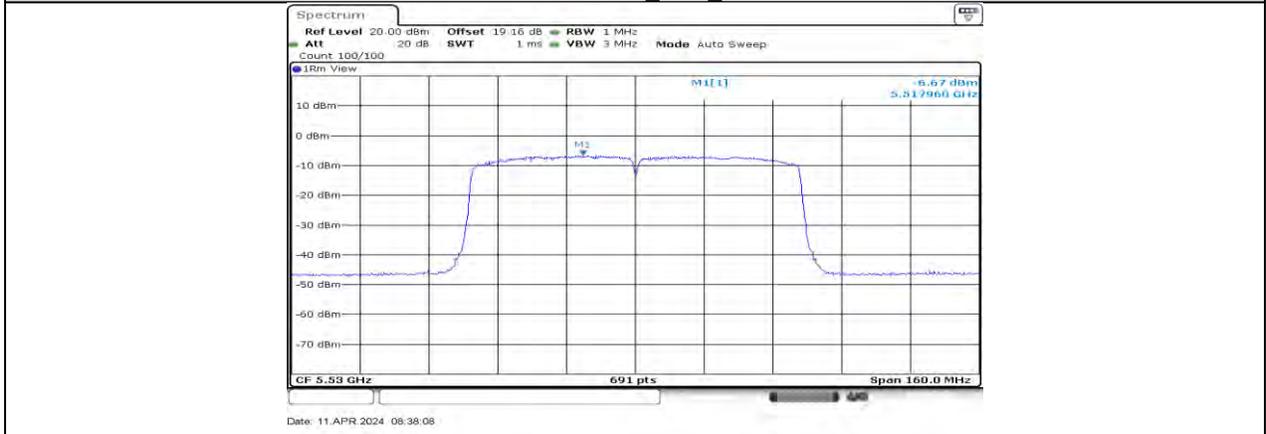


11AC80MIMO_Ant1_5530



11AC80MIMO_Ant2_5530





11AC80MIMO_Ant1_5610

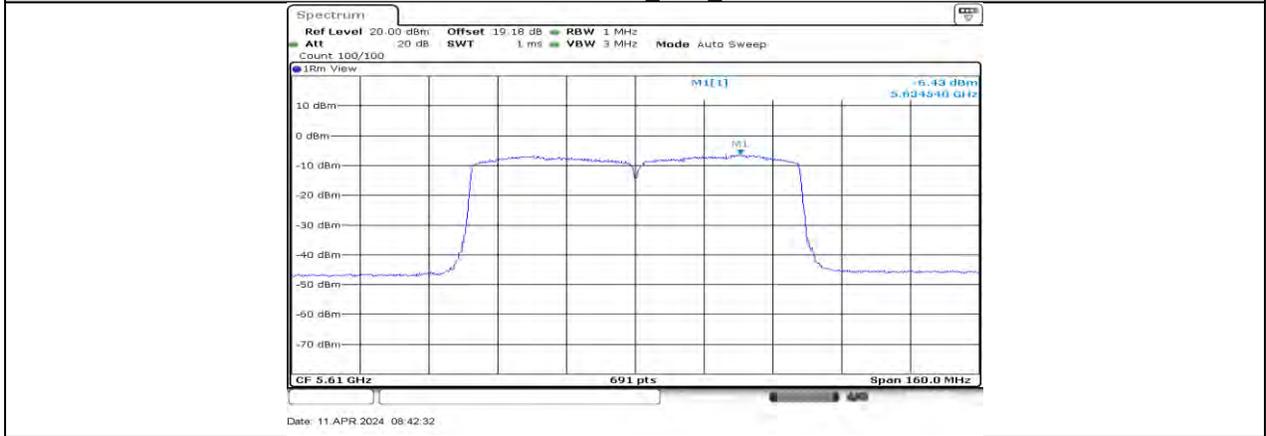


11AC80MIMO_Ant2_5610




11AC80MIMO_Ant1_5690_UNII-2C

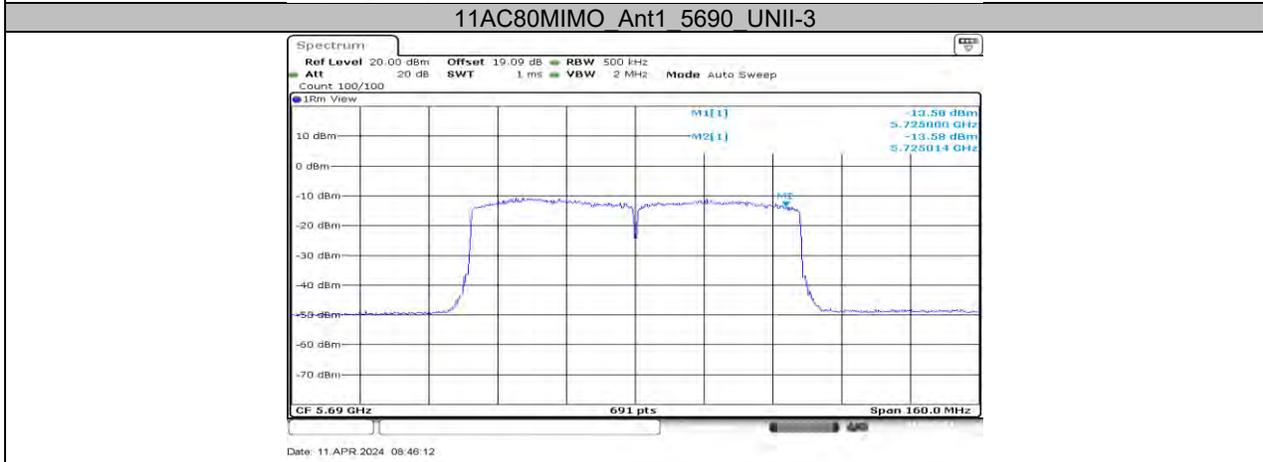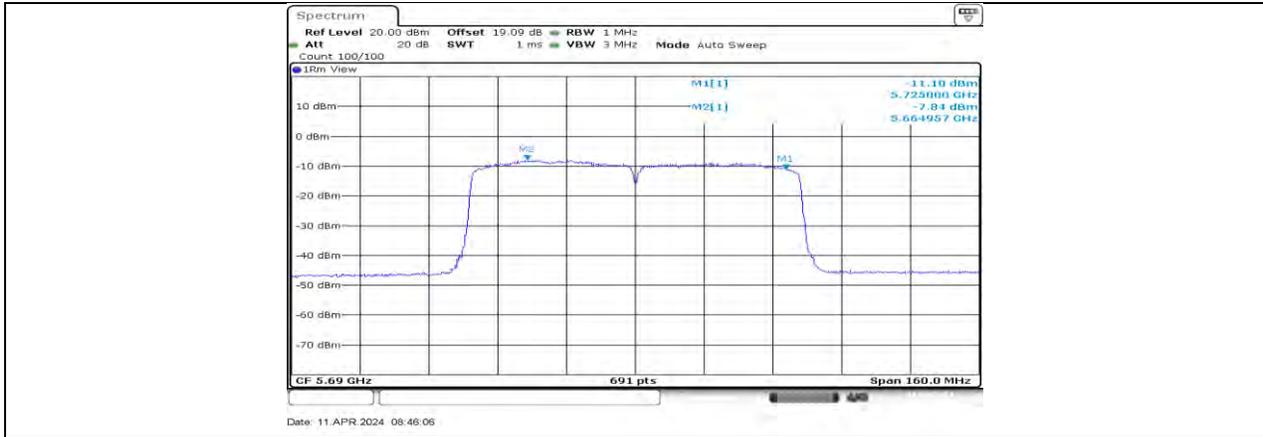

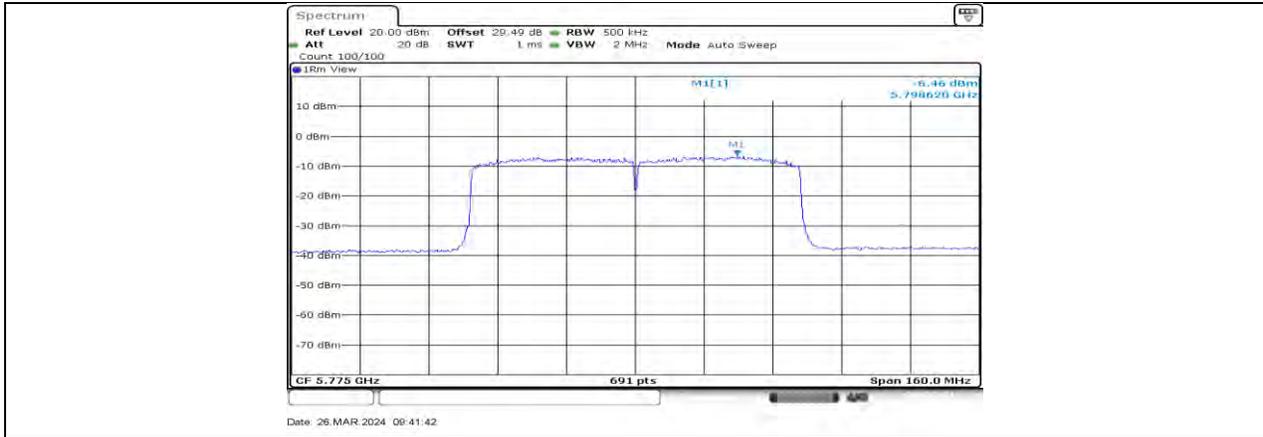

11AC80MIMO_Ant1_5775

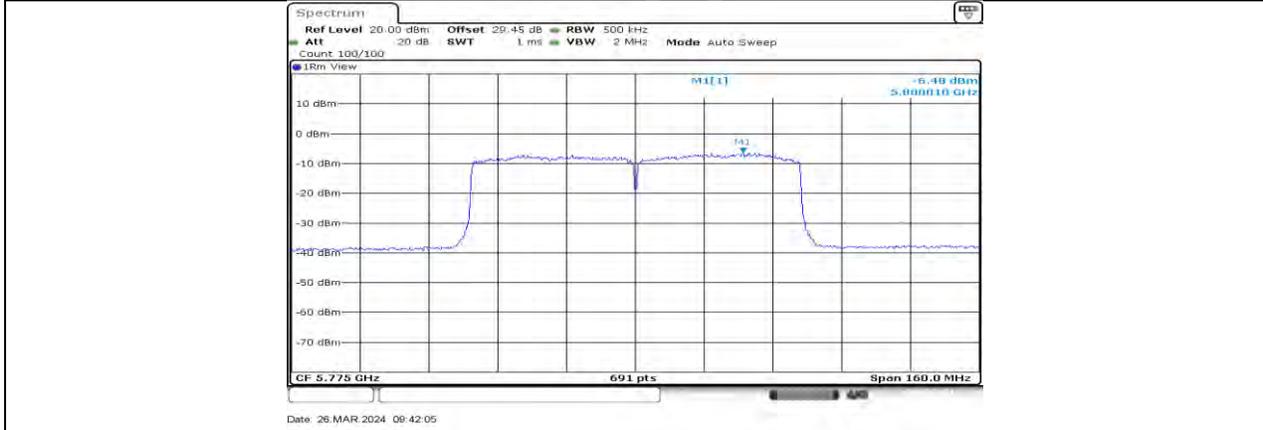

11AC80MIMO_Ant2_5775

7.5. FREQUENCY STABILITY

LIMITS

The frequency of the carrier signal shall be maintained within band of operation.

TEST PROCEDURE

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between 0 °C ~ 70 °C (declared by customer).
2. The temperature was incremented by 10 °C intervals and the unit allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Connect the EUT to the spectrum analyzer and use the following settings:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	10 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

4. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized.
5. Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

TEST ENVIRONMENT

	Normal Test Conditions	Extreme Test Conditions
Relative Humidity	20 % ~ 75 %	/
Atmospheric Pressure	100 kPa ~ 102 kPa	/
Temperature	T _N (Normal Temperature): 23.5 °C	T _L (Low Temperature): 0 °C
		T _H (High Temperature): 70 °C
Supply Voltage	V _N (Normal Voltage): DC 3.3 V	V _L (Low Voltage): DC 2.805 V
		V _H (High Voltage): DC 3.795 V

TEST SETUP

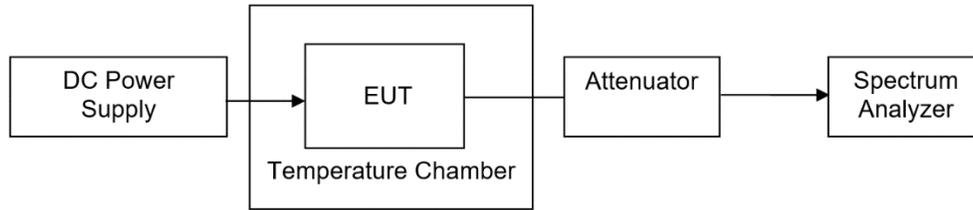

TEST RESULTS

Please refer to the original report.

7.6. DYNAMIC FREQUENCY SELECTION (SLAVE)

LIMITS

(1) DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP \geq 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.
 Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

(2) DFS Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.
 Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.
 Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

APPLICABILITY OF DFS REQUIREMENTS

A U-NII network will employ a DFS function to detect signals from radar systems and to avoid co-channel operation with these systems. This applies to the 5250-5350 MHz and/or 5470-5725 MHz bands.

Within the context of the operation of the DFS function, a U-NII device will operate in either Master Mode or Client Mode. U-NII devices operating in Client Mode can only operate in a network controlled by a U-NII device operating in Master Mode.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	<input type="checkbox"/> Master	<input checked="" type="checkbox"/> Client Without Radar Detection	<input type="checkbox"/> Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	<input type="checkbox"/> Master Device or Client with Radar Detection	<input checked="" type="checkbox"/> Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	<input type="checkbox"/> Master Device or Client with Radar Detection	<input checked="" type="checkbox"/> Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

PARAMETERS OF RADAR TEST WAVEFORMS

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.


Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (µsec)	PRI (µsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A	Roundup $\left(\frac{f}{360} \right)$	60%	30
		Test B			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.
 Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a.
 Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values selected in Test A

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. Test aggregate is average of the percentage of successful detections of short pulse radar types 1-4.

TEST SETUP

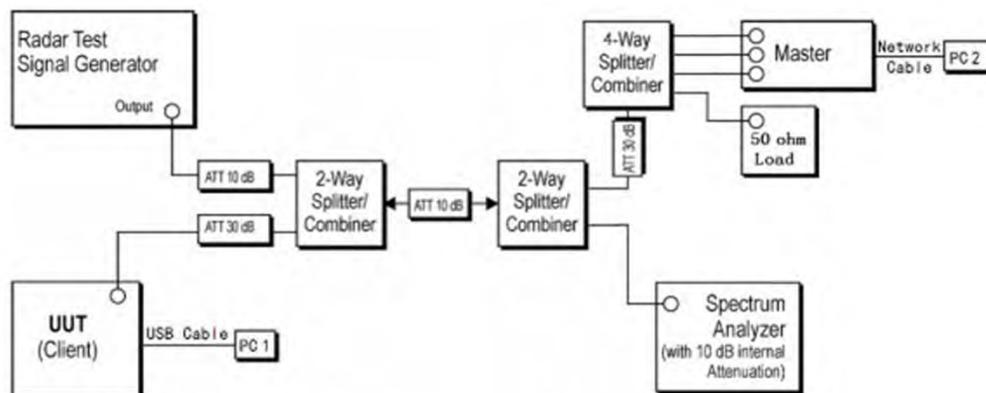

TEST RESULTS

Please refer to the original report.

Note: The antenna gain is higher than before, it can be covered by the test result before. So DFS doesn't need to consider testing.

8. RADIATED TEST RESULTS

LIMITS

Refer to CFR 47 FCC §15.205, §15.209 and §15.407 (b).

Refer to ISED RSS-GEN Clause 8.9, Clause 8.10 and ISED RSS-247 6.2.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) (µA/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands refer to ISED RSS-GEN Clause 8.10

Table 7 – Restricted frequency bands^{Note 1}

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

Limits of unwanted/undesirable emission out of the restricted bands refer to CFR 47 FCC §15.407 (b) and ISED RSS-247 6.2.

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1GHz)		
Frequency Range (MHz)	EIRP Limit	Field Strength Limit (dBuV/m) at 3 m
5150~5250 MHz	PK: -27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz		
5470~5725 MHz		
5725~5850 MHz	PK: -27 (dBm/MHz) *1 PK: 10 (dBm/MHz) *2 PK: 15.6 (dBm/MHz) *3 PK: 27 (dBm/MHz) *4	PK: 68.2(dBμV/m) *1 PK: 105.2 (dBμV/m) *2 PK: 110.8(dBμV/m) *3 PK: 122.2 (dBμV/m) *4
<p>Note:</p> <p>*1 beyond 75 MHz or more above of the band edge.</p> <p>*2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.</p> <p>*3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.</p> <p>*4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p>		

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.

7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.G.3 ~ II.G.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

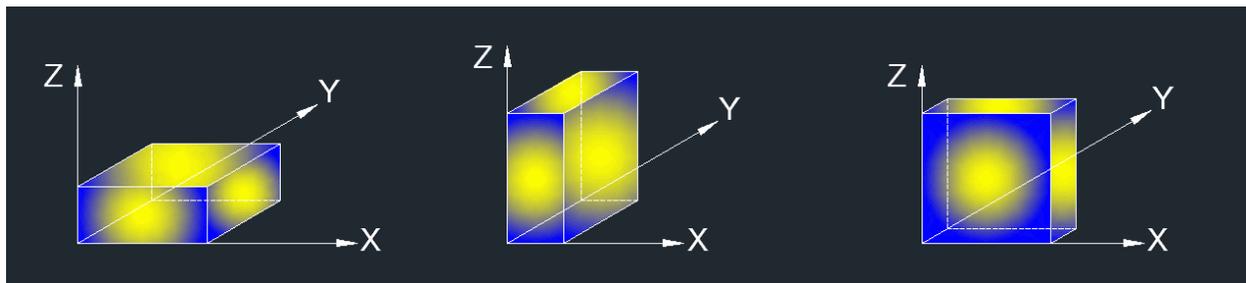

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 7 GHz):

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (7 GHz ~ 18 GHz):

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):

Note:


1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (26 GHz ~ 40 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

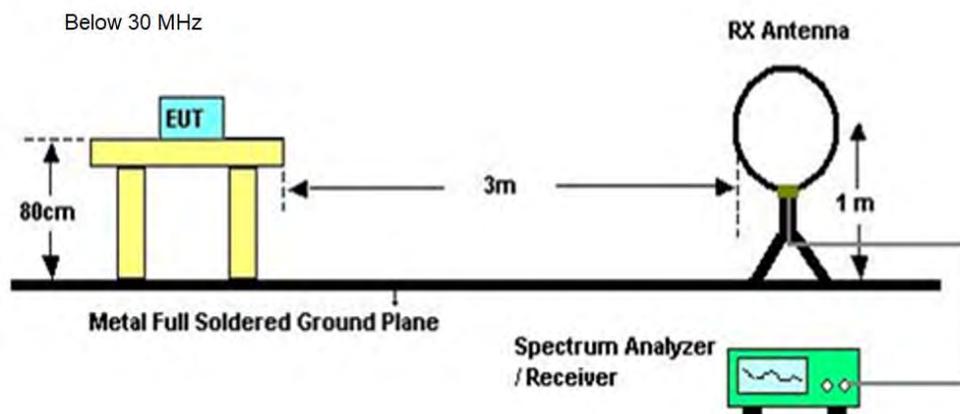

Below 1 GHz and above 30 MHz

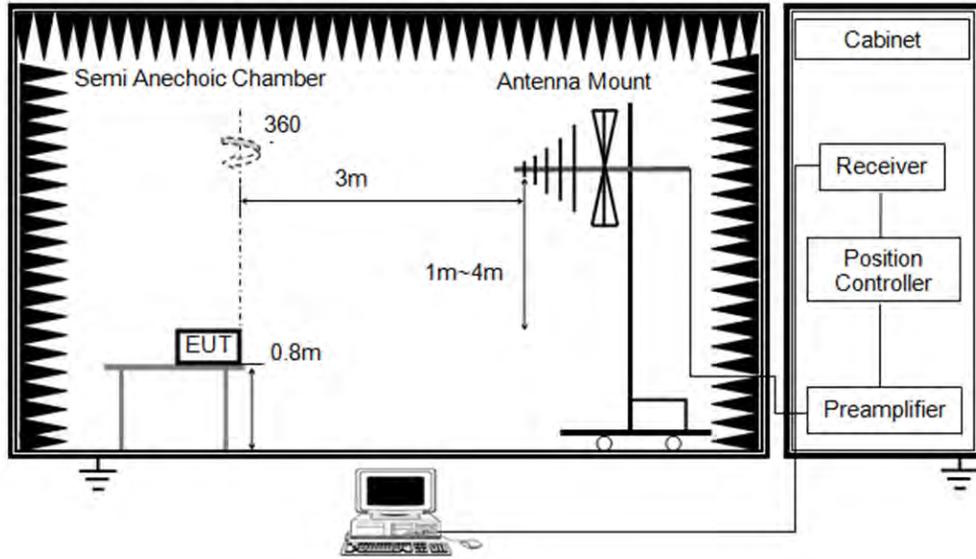

Above 1 GHz

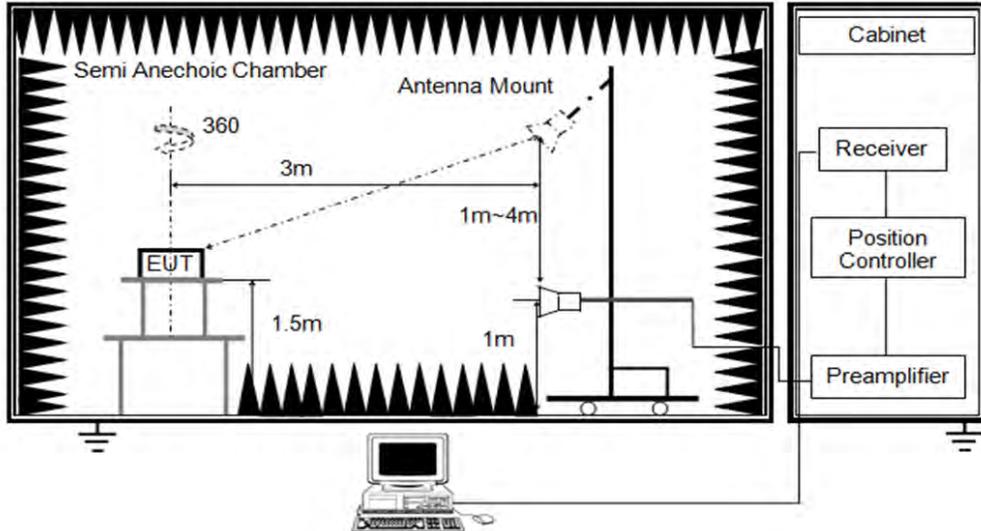

TEST ENVIRONMENT

Temperature	22.6°C	Relative Humidity	53.6%
Atmosphere Pressure	101kPa	Test Voltage	


TEST DATE / ENGINEER

Test Date	October 28, 2024	Test By	Rex Huang
-----------	------------------	---------	-----------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	802.11a 20 PK	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

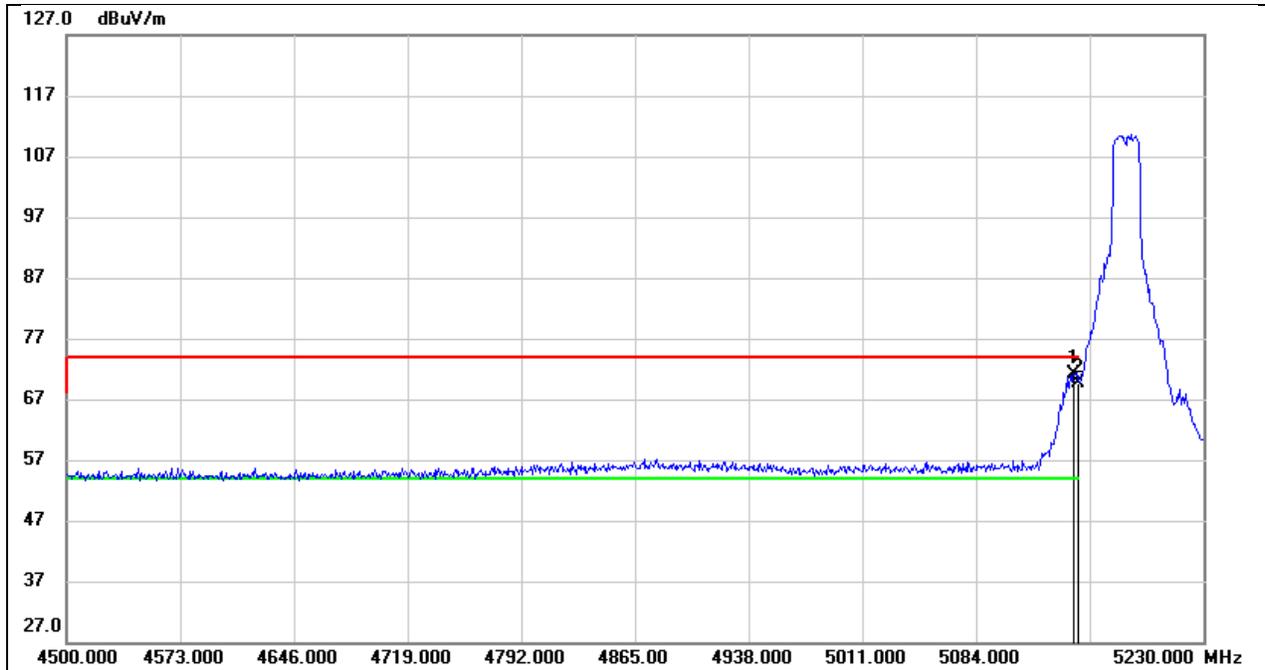


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.780	32.38	38.84	71.22	74.00	-2.78	peak
2	5150.000	30.91	38.84	69.75	74.00	-4.25	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

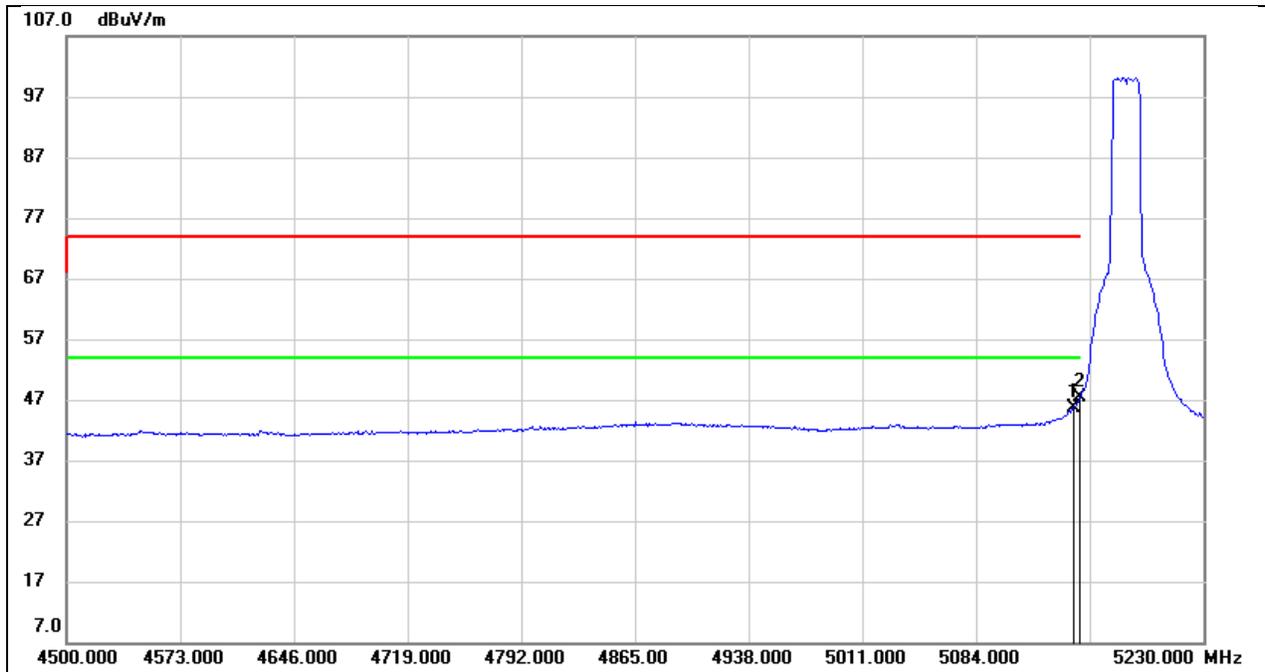


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.780	6.88	38.84	45.72	54.00	-8.28	AVG
2	5150.000	8.43	38.84	47.27	54.00	-6.73	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

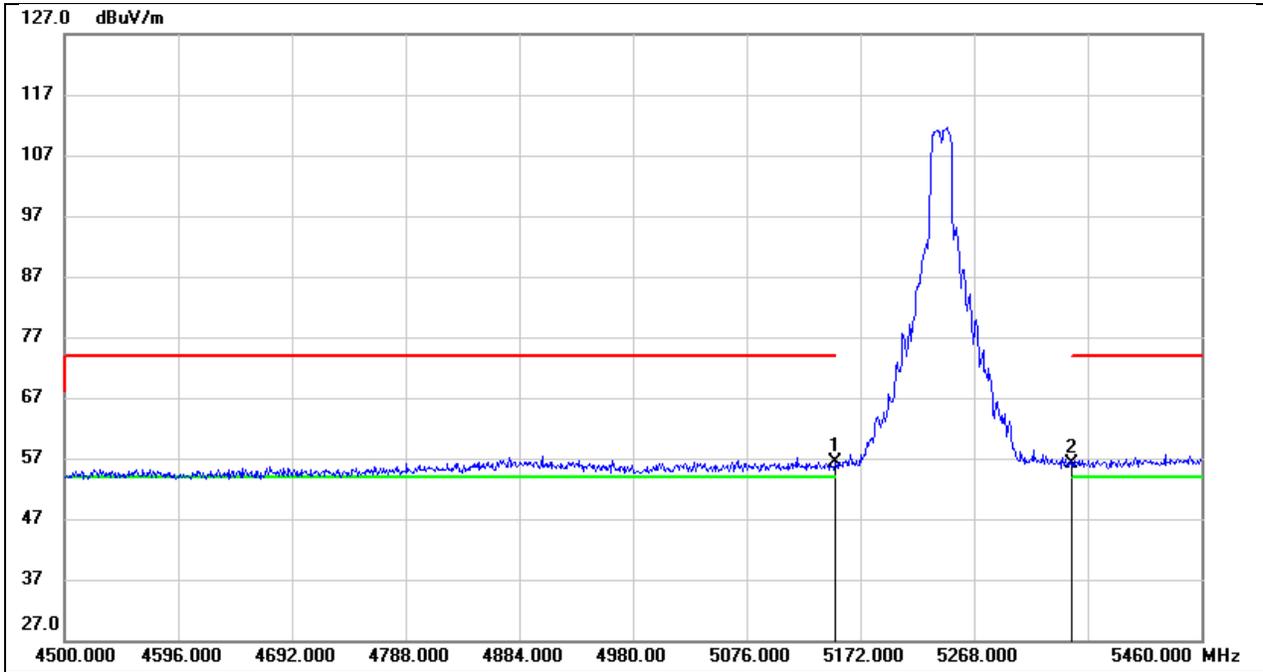


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	17.48	38.84	56.32	74.00	-17.68	peak
2	5350.000	16.88	39.29	56.17	74.00	-17.83	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

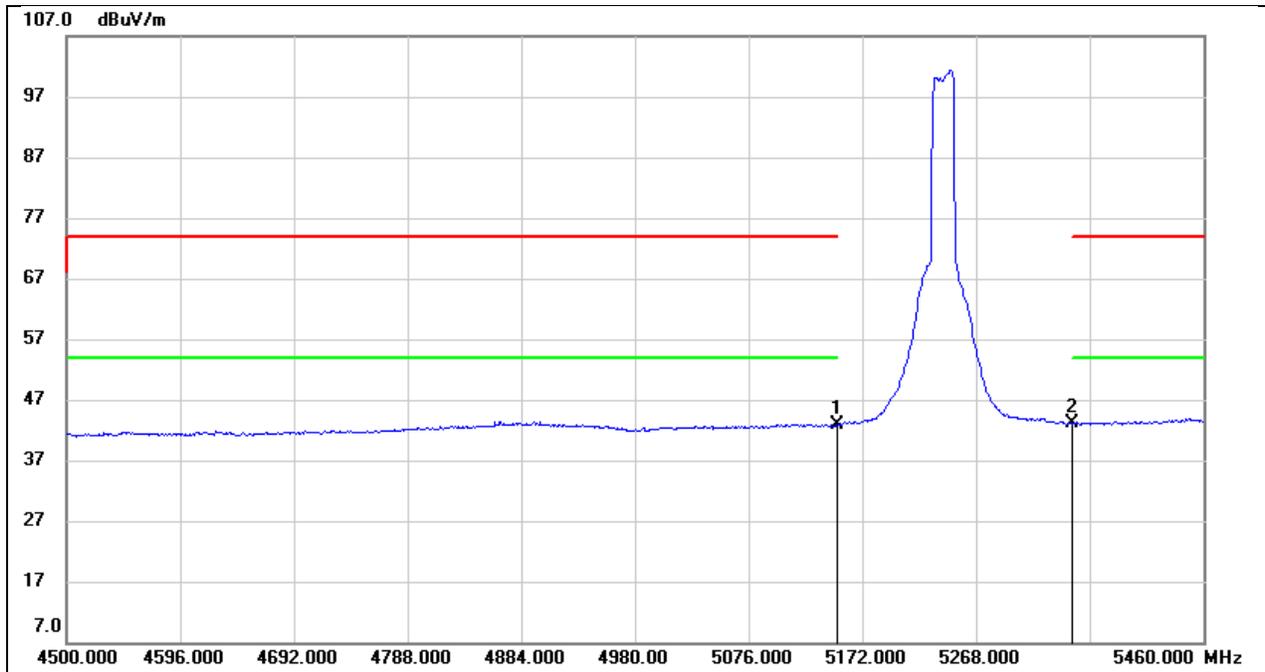


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	3.95	38.84	42.79	54.00	-11.21	AVG
2	5350.000	3.72	39.29	43.01	54.00	-10.99	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

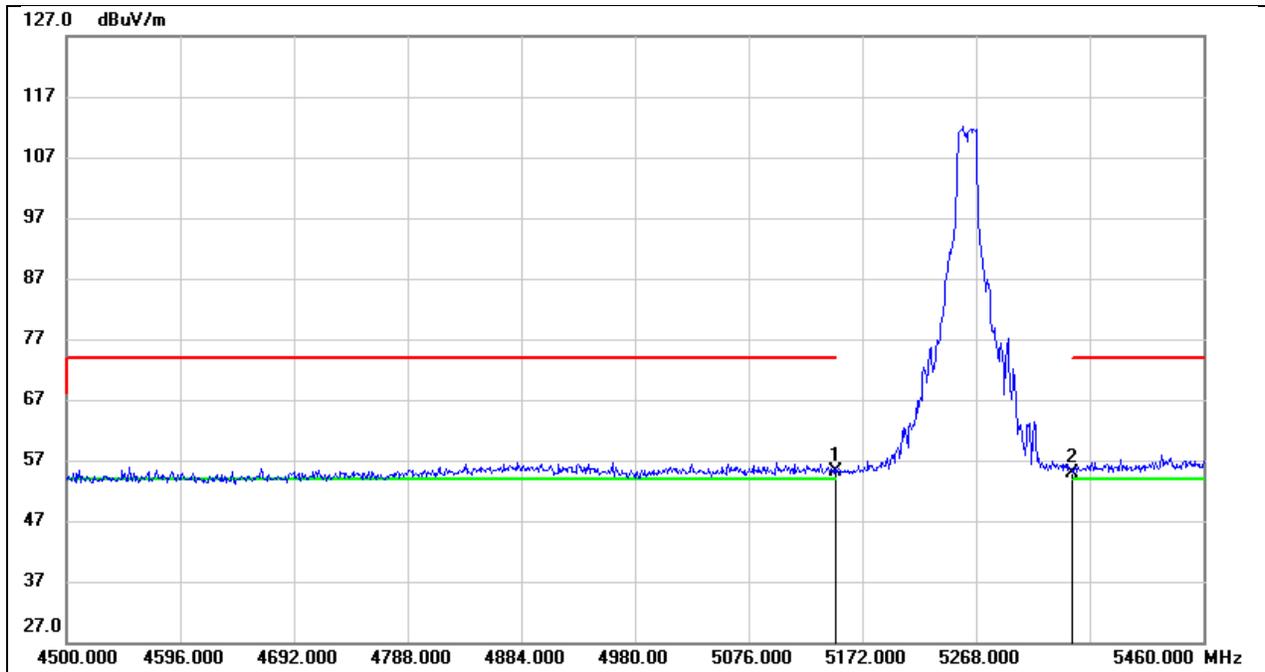


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	16.19	38.84	55.03	74.00	-18.97	peak
2	5350.000	15.61	39.29	54.90	74.00	-19.10	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

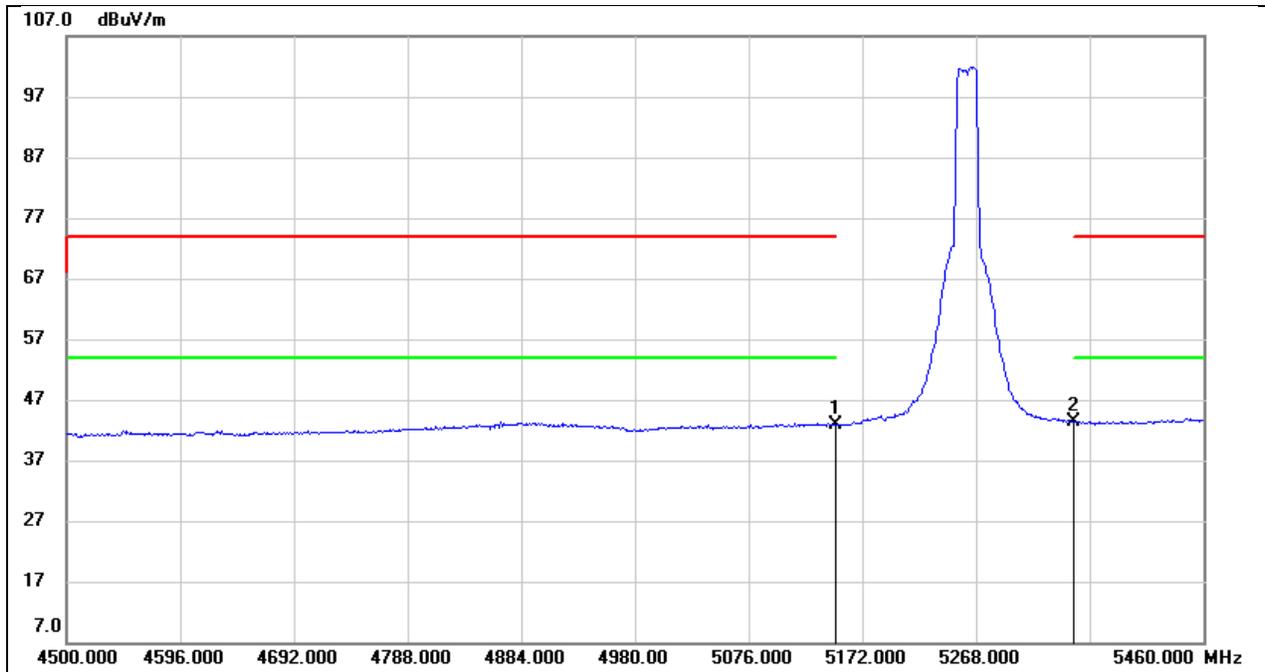


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	4.01	38.84	42.85	54.00	-11.15	AVG
2	5350.000	4.03	39.29	43.32	54.00	-10.68	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

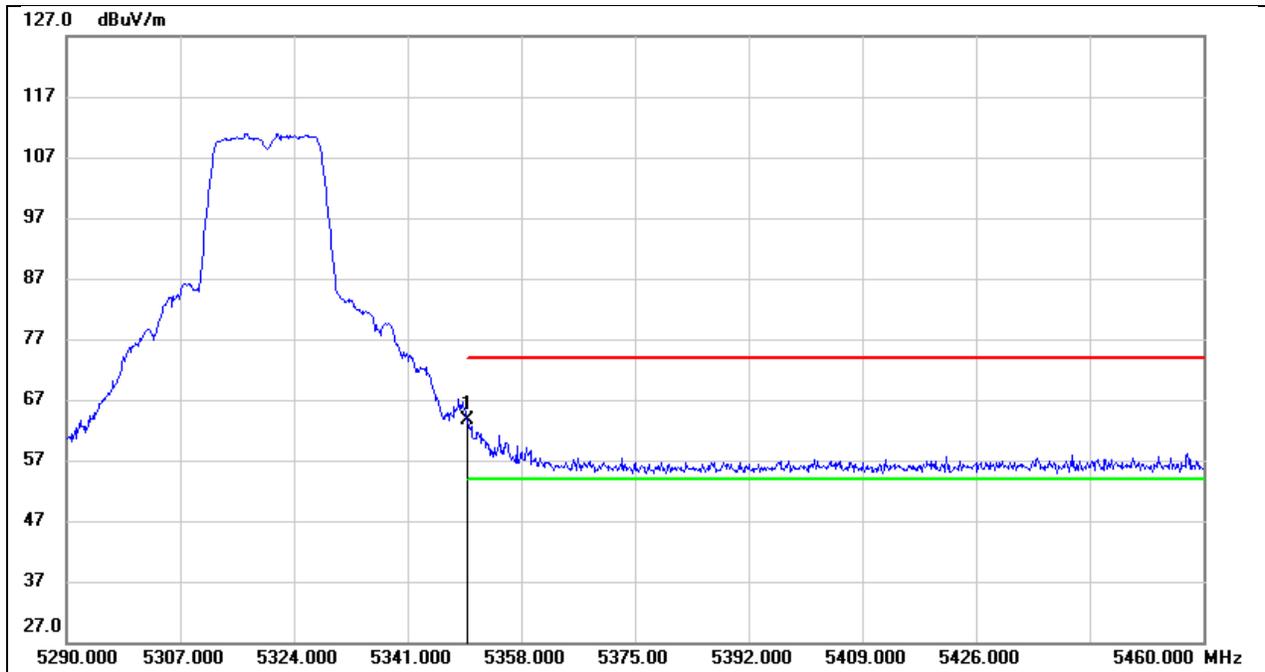


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	24.41	39.29	63.70	74.00	-10.30	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

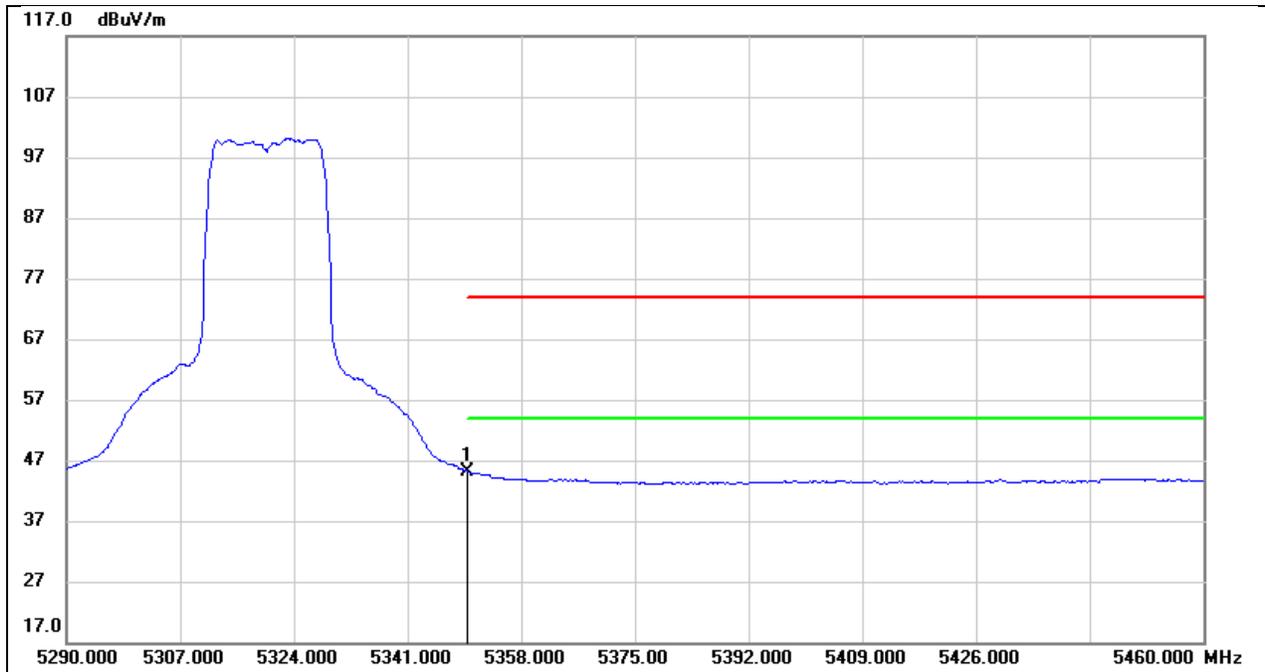


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	5.93	39.29	45.22	54.00	-8.78	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

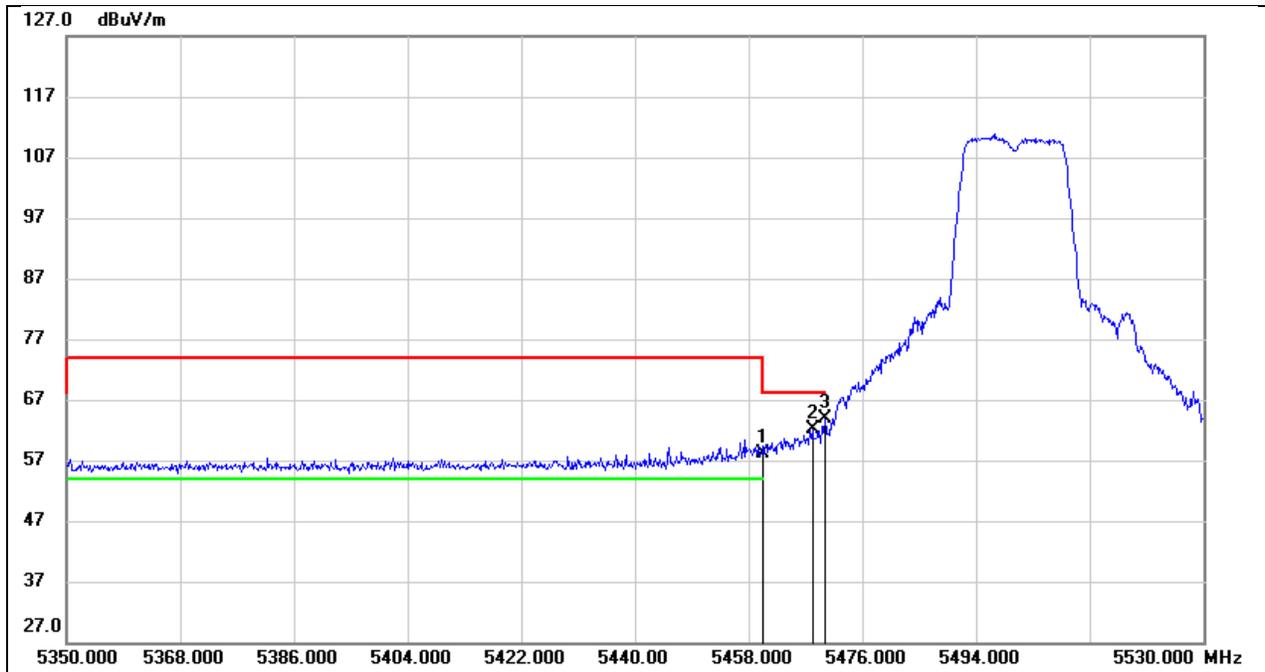


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	18.52	39.56	58.08	74.00	-15.92	peak
2	5468.080	22.44	39.58	62.02	68.20	-6.18	peak
3	5470.000	24.18	39.58	63.76	68.20	-4.44	peak

Test Mode:	802.11a 20 AV	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

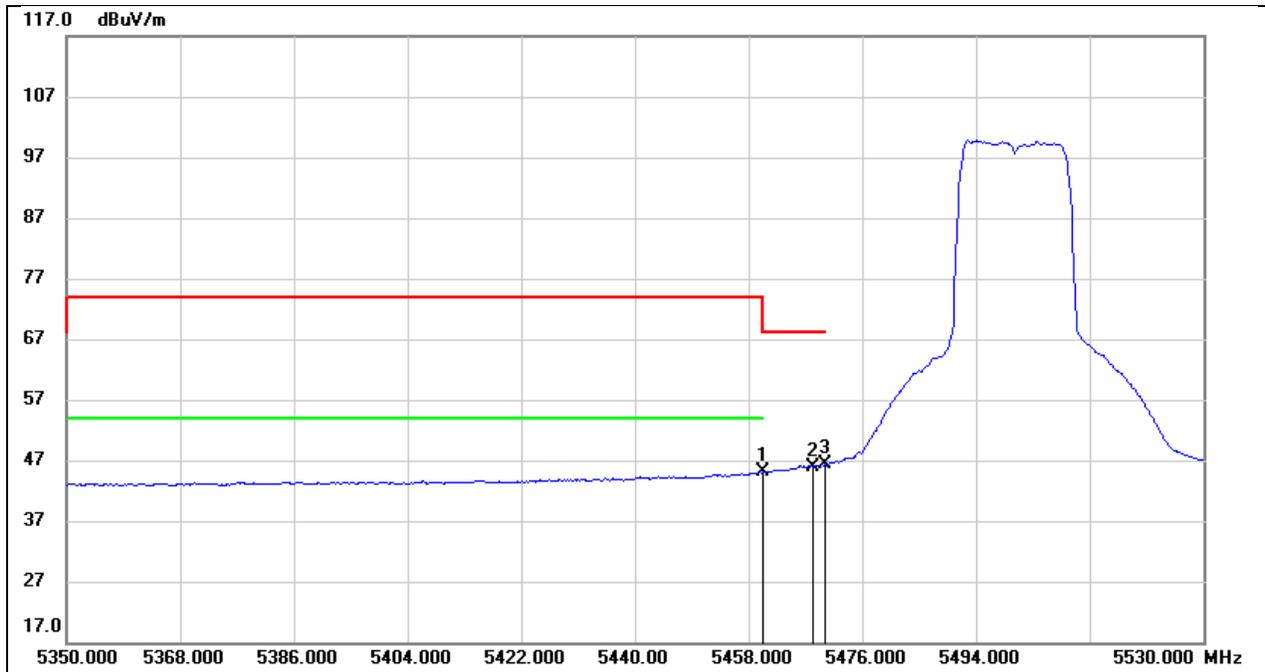


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	5.48	39.56	45.04	54.00	-8.96	AVG
2	5468.080	6.42	39.58	46.00	/	/	AVG
3	5470.000	6.68	39.58	46.26	/	/	AVG

Test Mode:	802.11a 20 PK	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

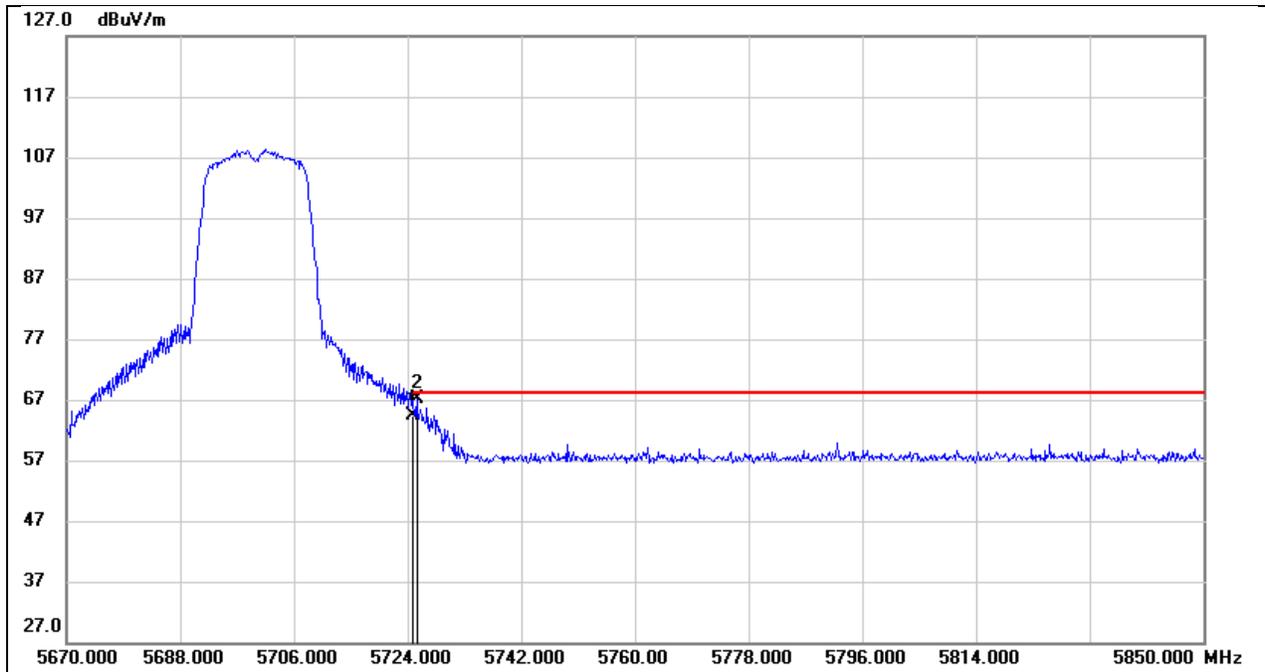


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	24.33	40.09	64.42	68.20	-3.78	peak
2	5725.440	27.05	40.09	67.14	68.20	-1.06	peak

Test Mode:	802.11a 20 PK	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

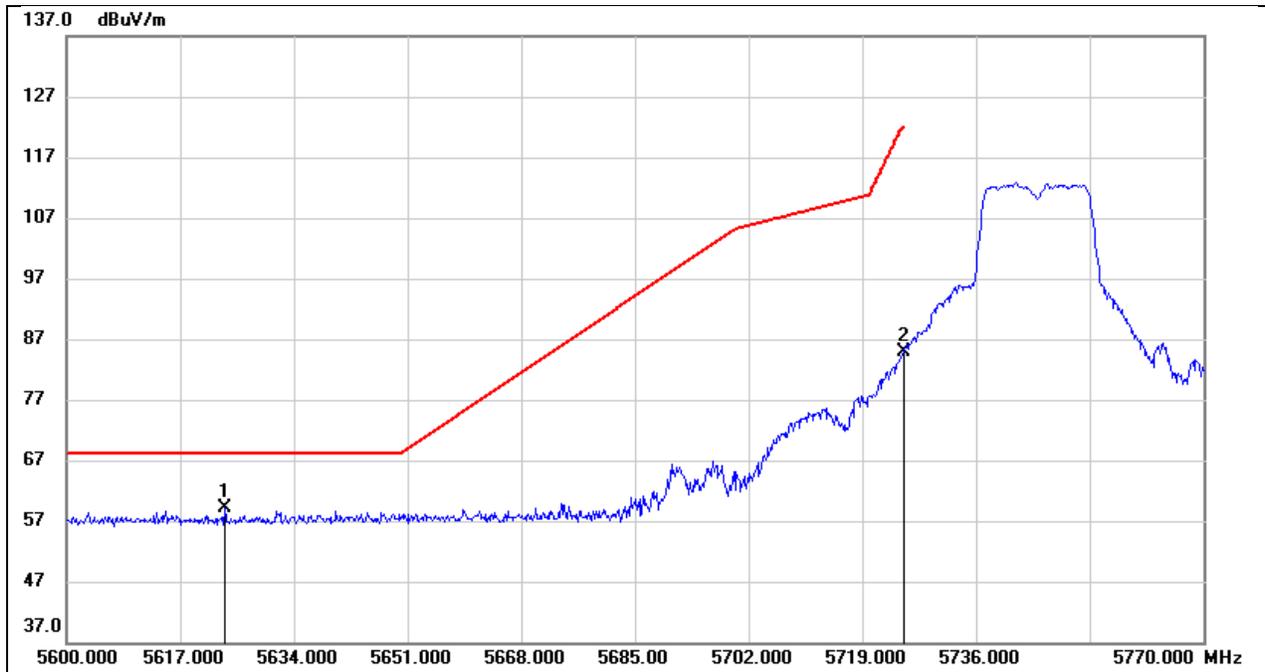


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5623.630	19.09	39.96	59.05	68.20	-9.15	peak
2	5725.000	44.74	40.09	84.83	122.20	-37.37	peak

Test Mode:	802.11a 20 PK	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

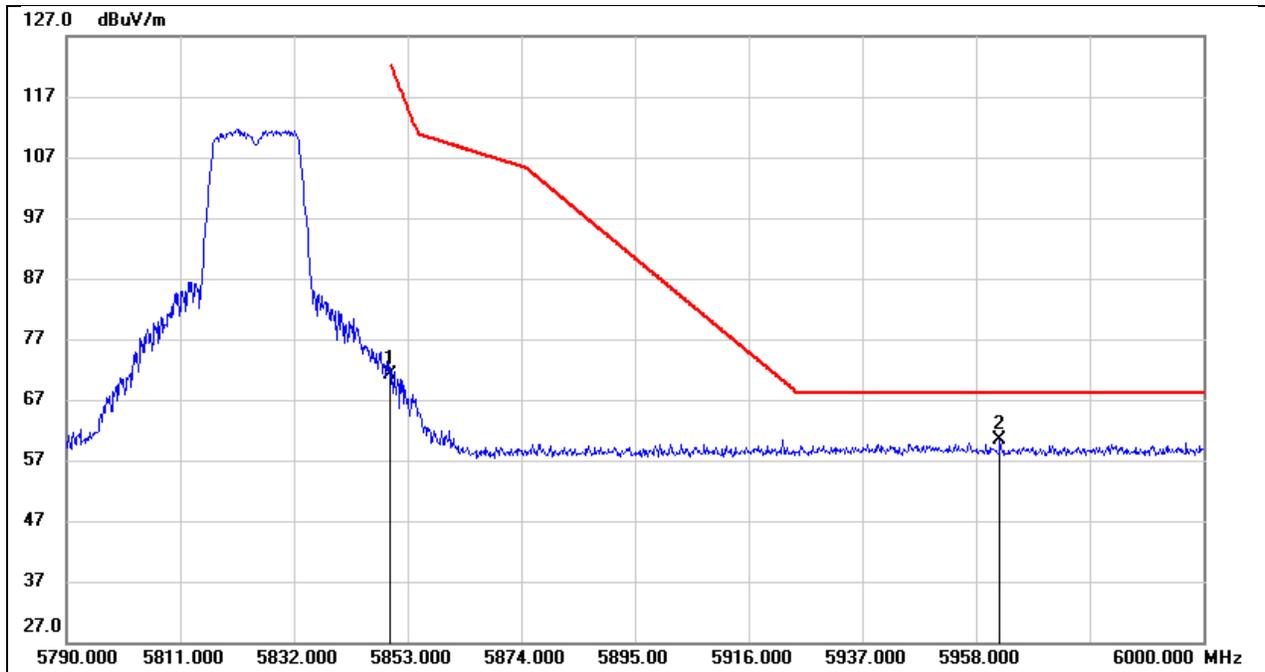


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	30.71	40.30	71.01	122.20	-51.19	peak
2	5962.410	19.89	40.56	60.45	68.20	-7.75	peak

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

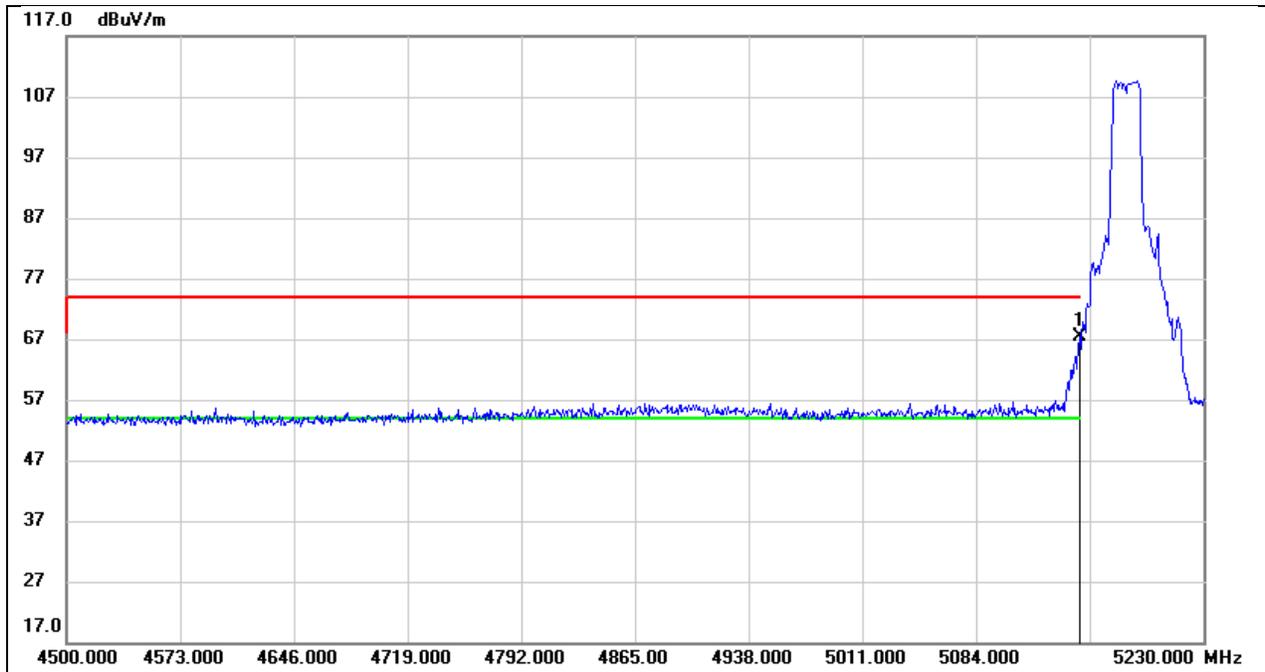


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	28.62	38.84	67.46	74.00	-6.54	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

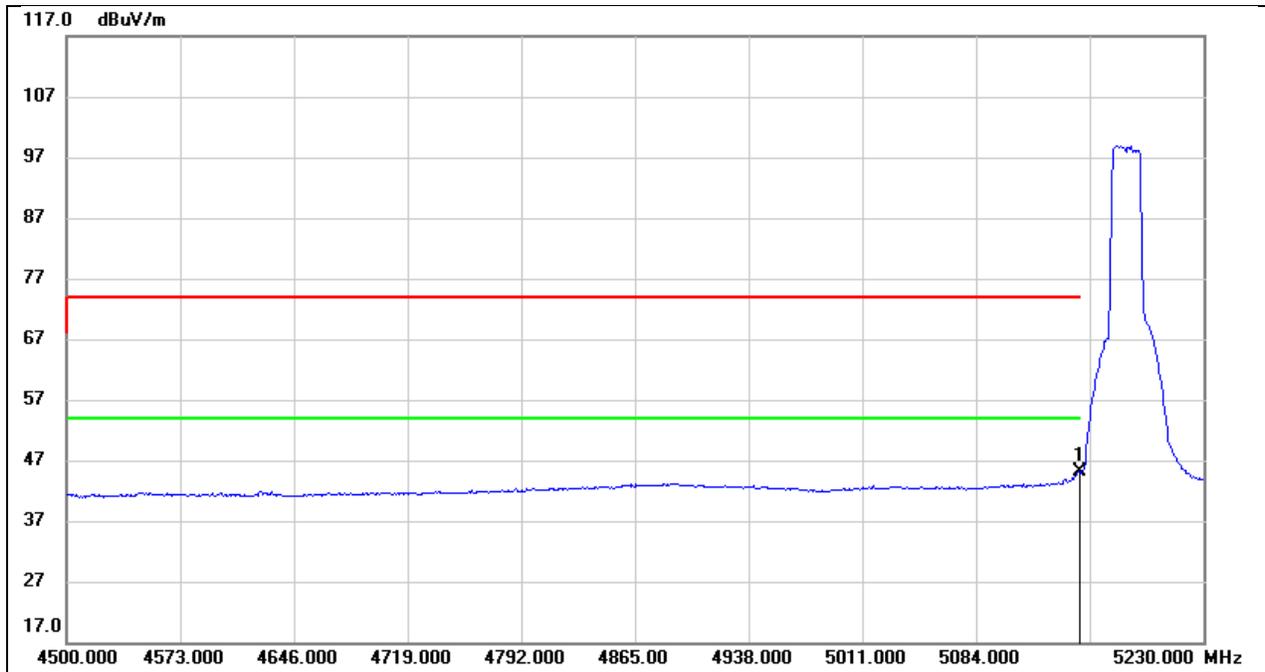


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	6.19	38.84	45.03	54.00	-8.97	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

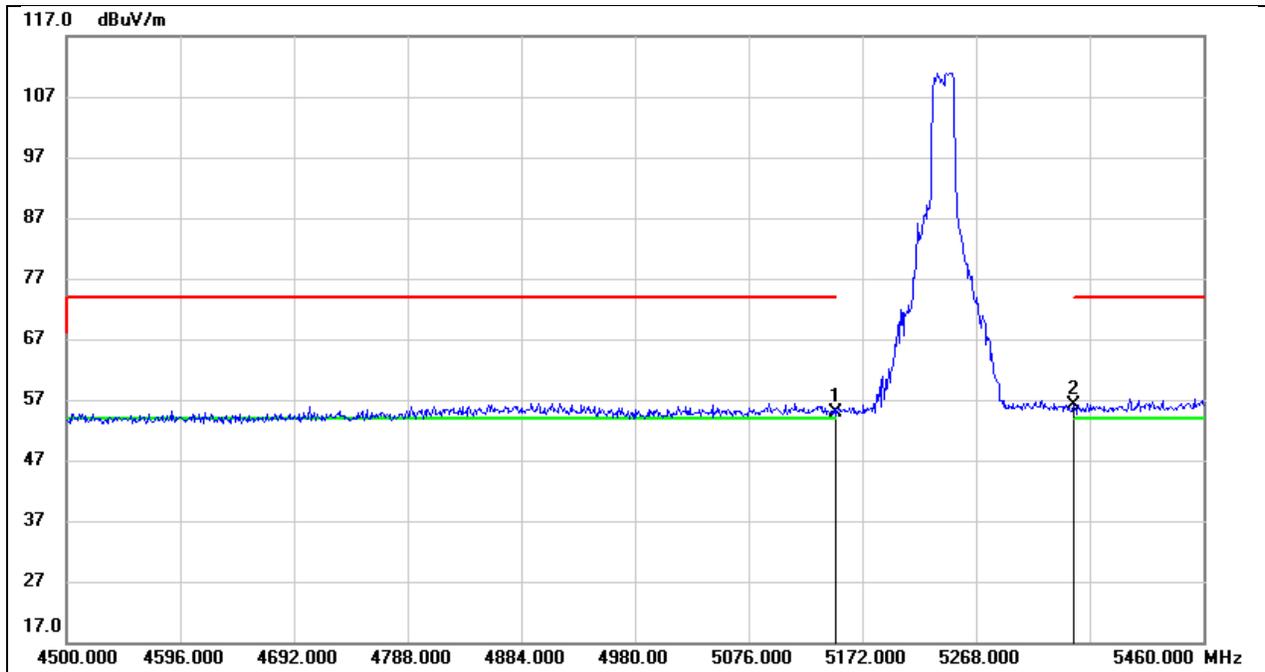


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	16.16	38.84	55.00	74.00	-19.00	peak
2	5350.000	16.94	39.29	56.23	74.00	-17.77	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

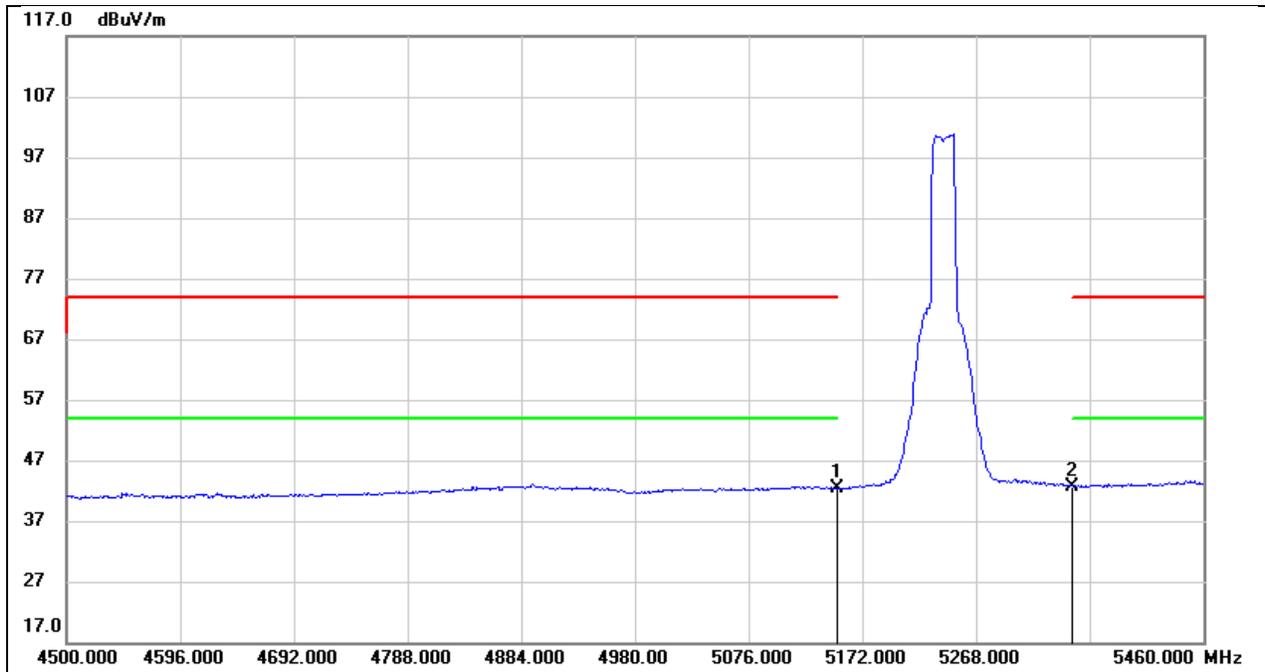


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	3.60	38.84	42.44	54.00	-11.56	AVG
2	5350.000	3.44	39.29	42.73	54.00	-11.27	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

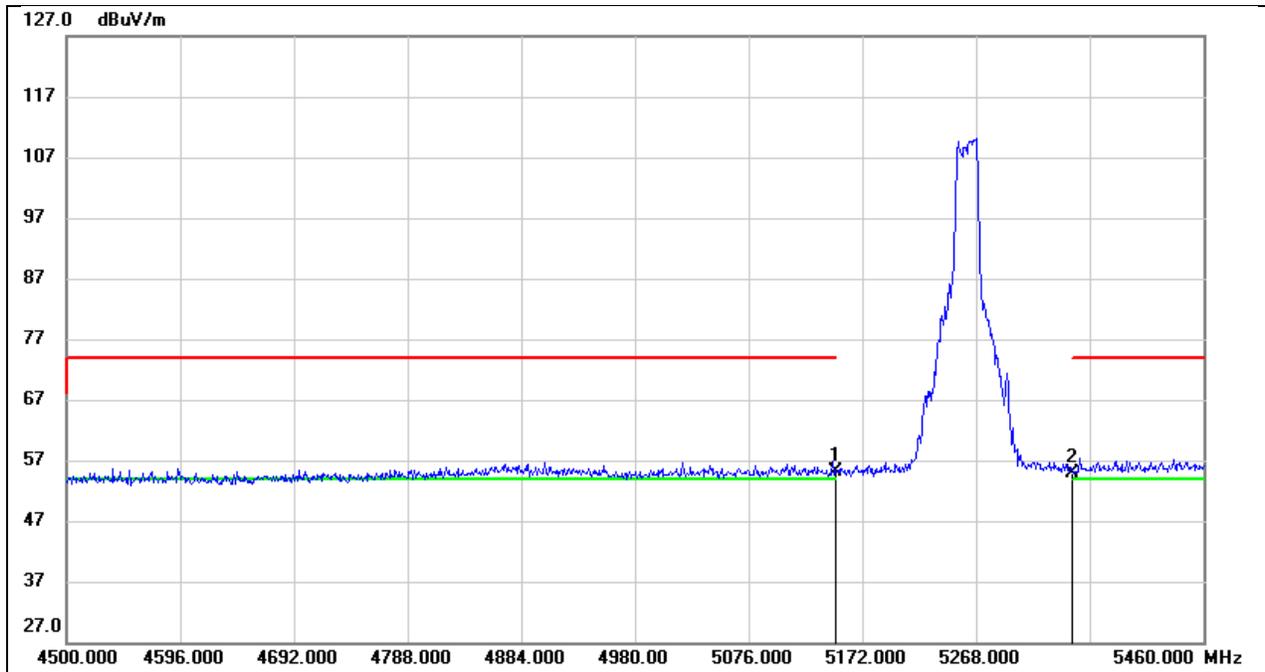


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	16.26	38.84	55.10	74.00	-18.90	peak
2	5350.000	15.69	39.29	54.98	74.00	-19.02	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

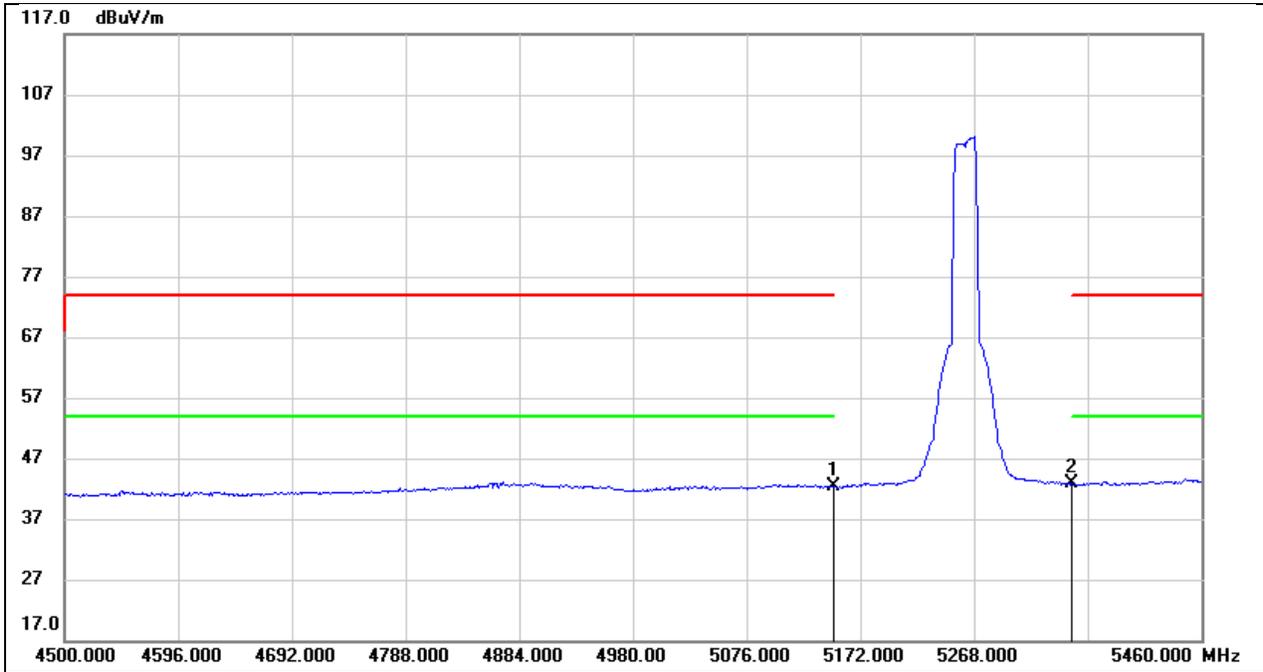


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	3.49	38.84	42.33	54.00	-11.67	AVG
2	5350.000	3.63	39.29	42.92	54.00	-11.08	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

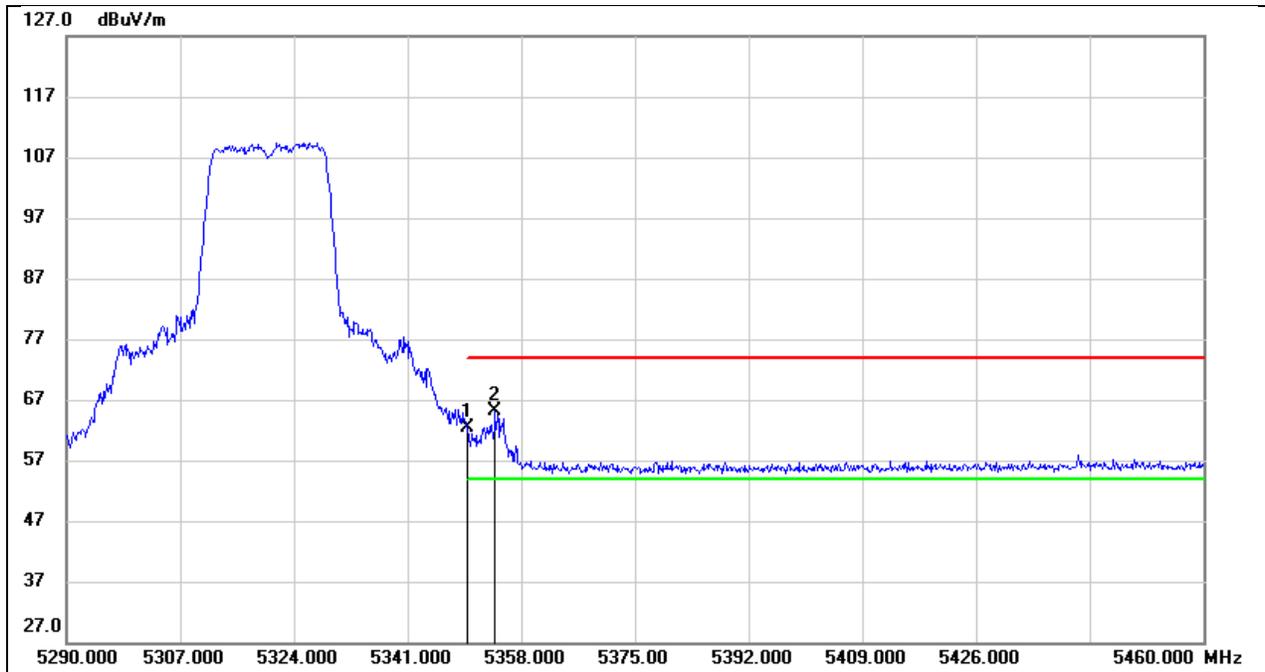


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	23.01	39.29	62.30	74.00	-11.70	peak
2	5354.090	25.74	39.30	65.04	74.00	-8.96	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

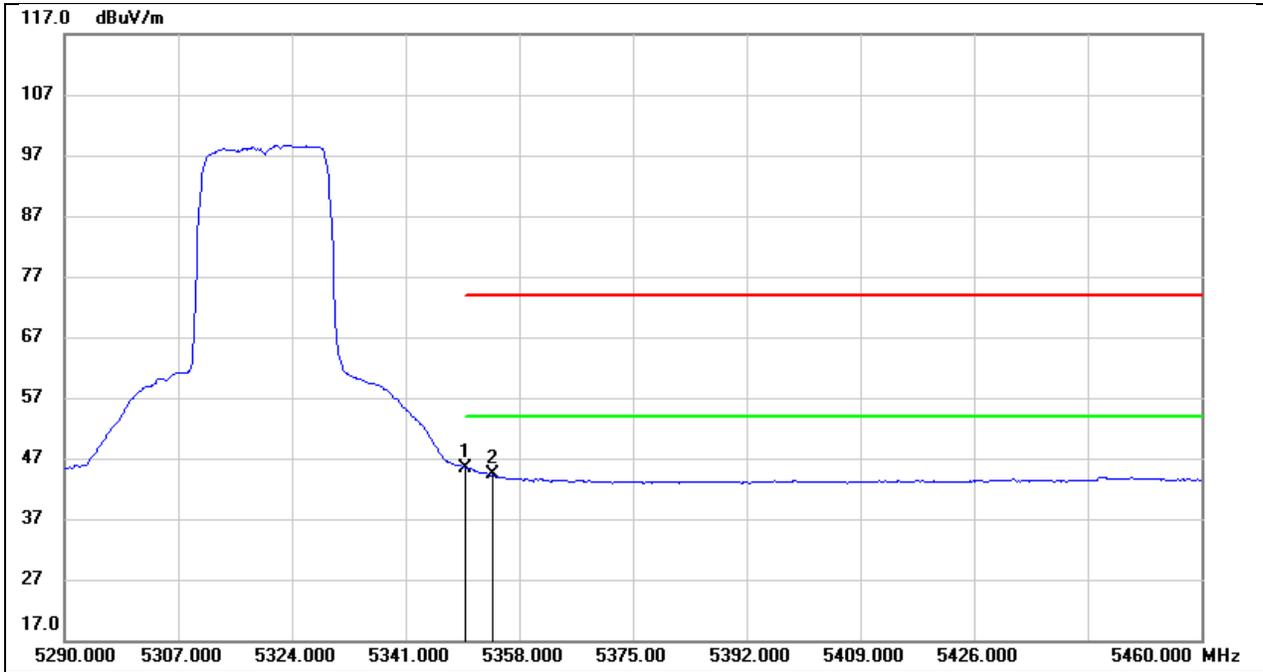


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	6.08	39.29	45.37	54.00	-8.63	AVG
2	5354.090	5.00	39.30	44.30	54.00	-9.70	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

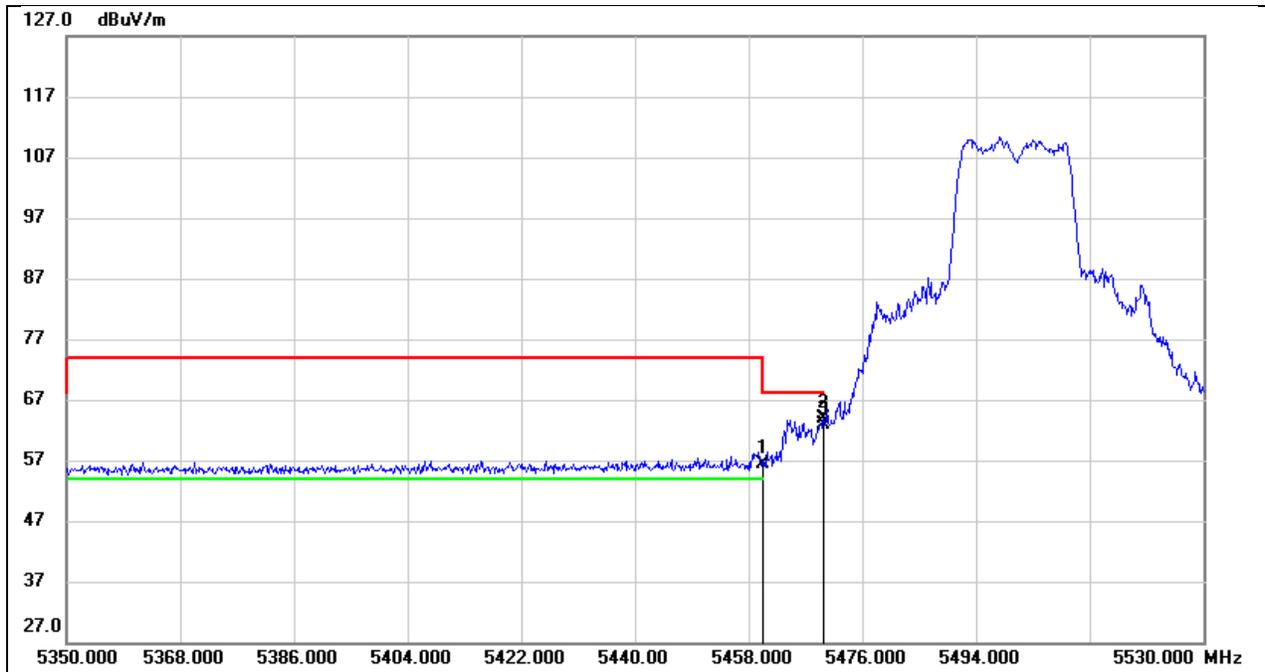


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	16.81	39.56	56.37	74.00	-17.63	peak
2	5469.880	24.24	39.58	63.82	68.20	-4.38	peak
3	5470.000	23.22	39.58	62.80	68.20	-5.40	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

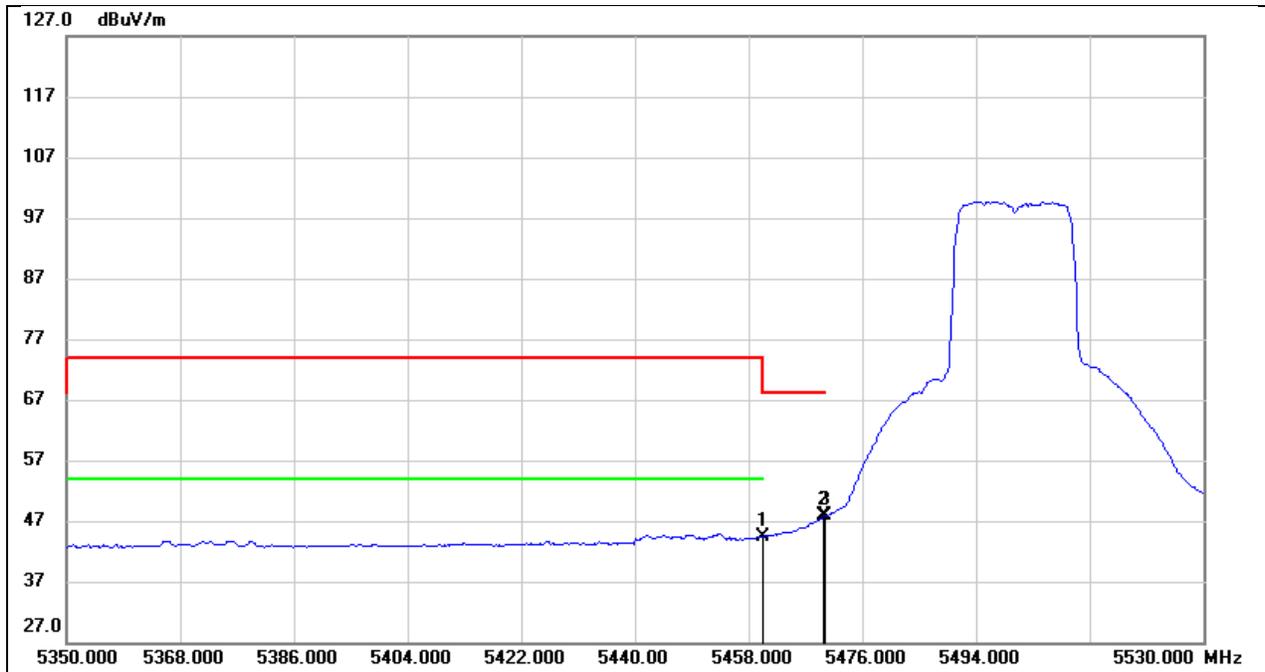


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	4.83	39.56	44.39	54.00	-9.61	AVG
2	5469.880	8.36	39.58	47.94	/	/	AVG
3	5470.000	8.41	39.58	47.99	/	/	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

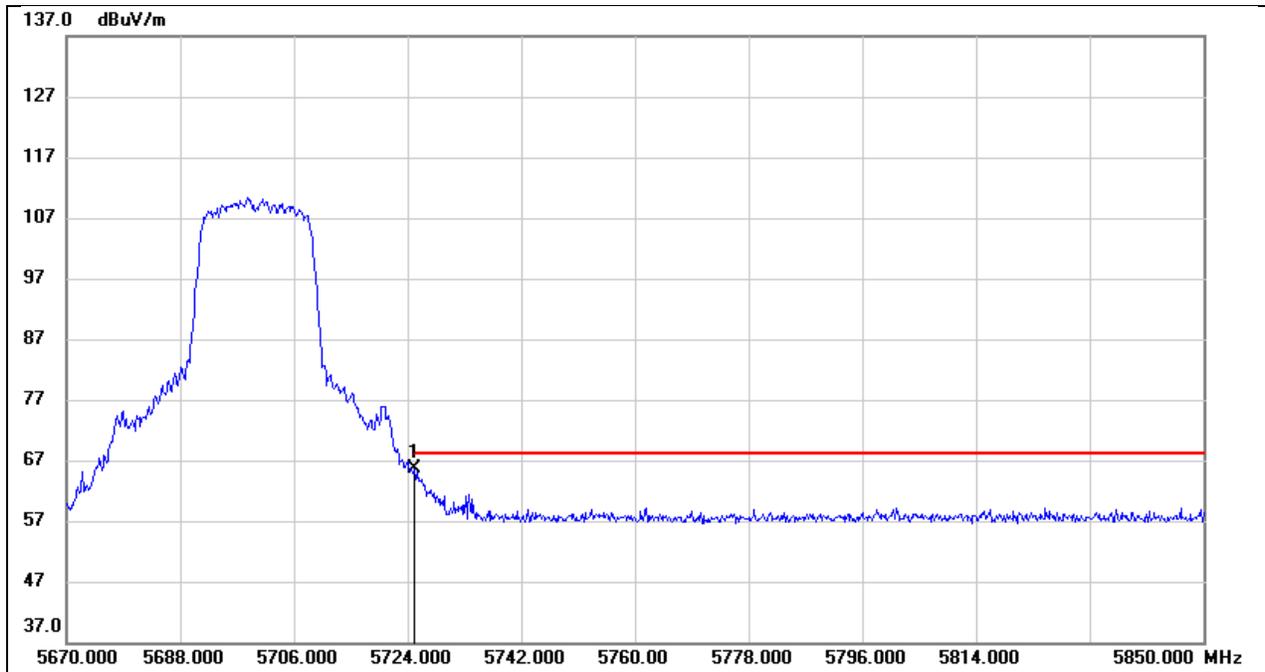


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	25.49	40.09	65.58	68.20	-2.62	peak

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

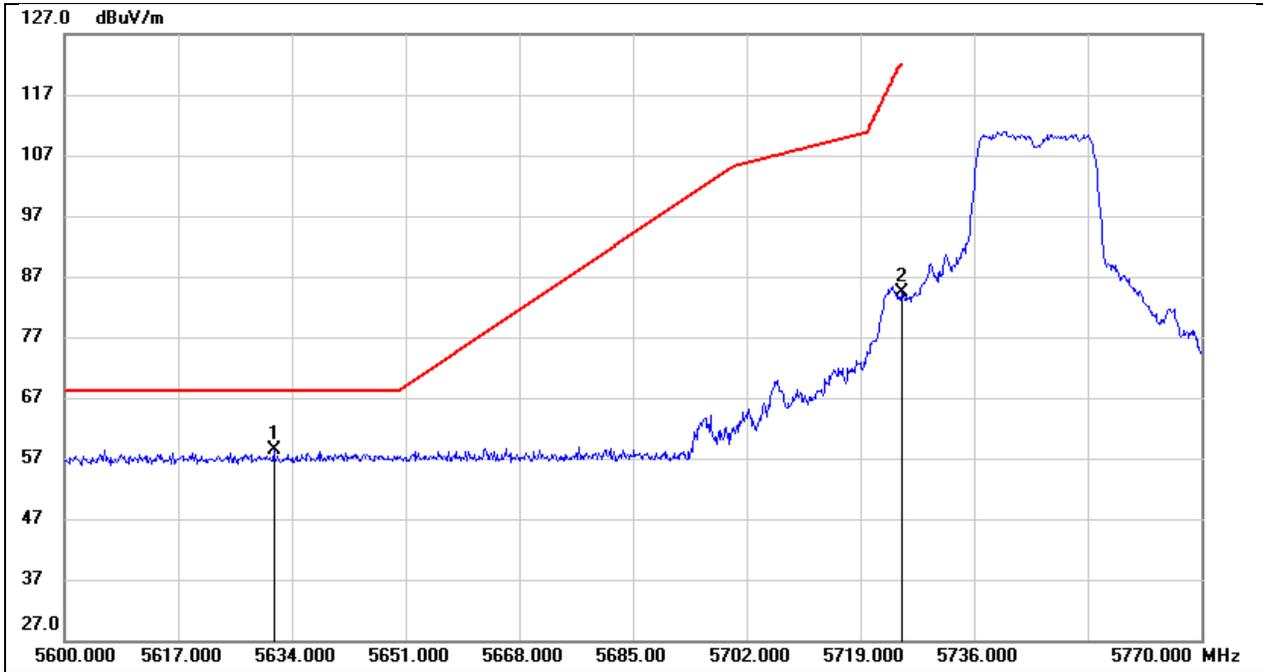


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5631.280	18.50	39.97	58.47	68.20	-9.73	peak
2	5725.000	44.25	40.09	84.34	122.20	-37.86	peak

Test Mode:	802.11n HT20 PK	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

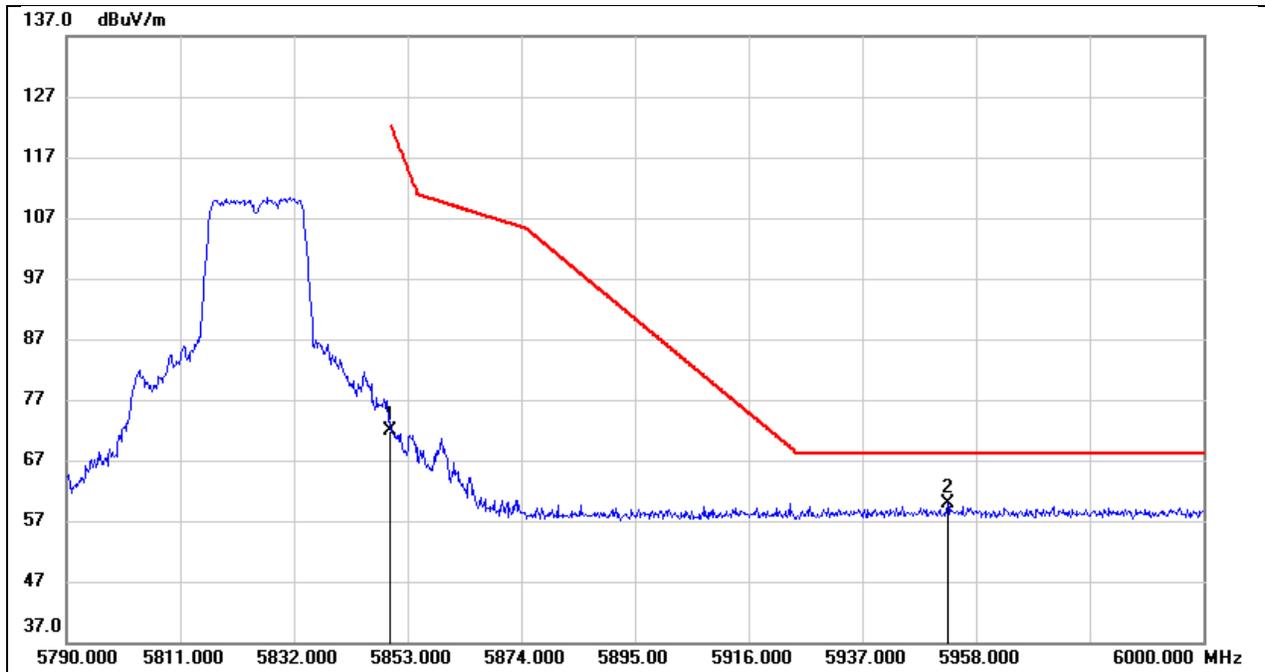


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	31.62	40.30	71.92	122.20	-50.28	peak
2	5952.750	19.25	40.53	59.78	68.20	-8.42	peak

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3V

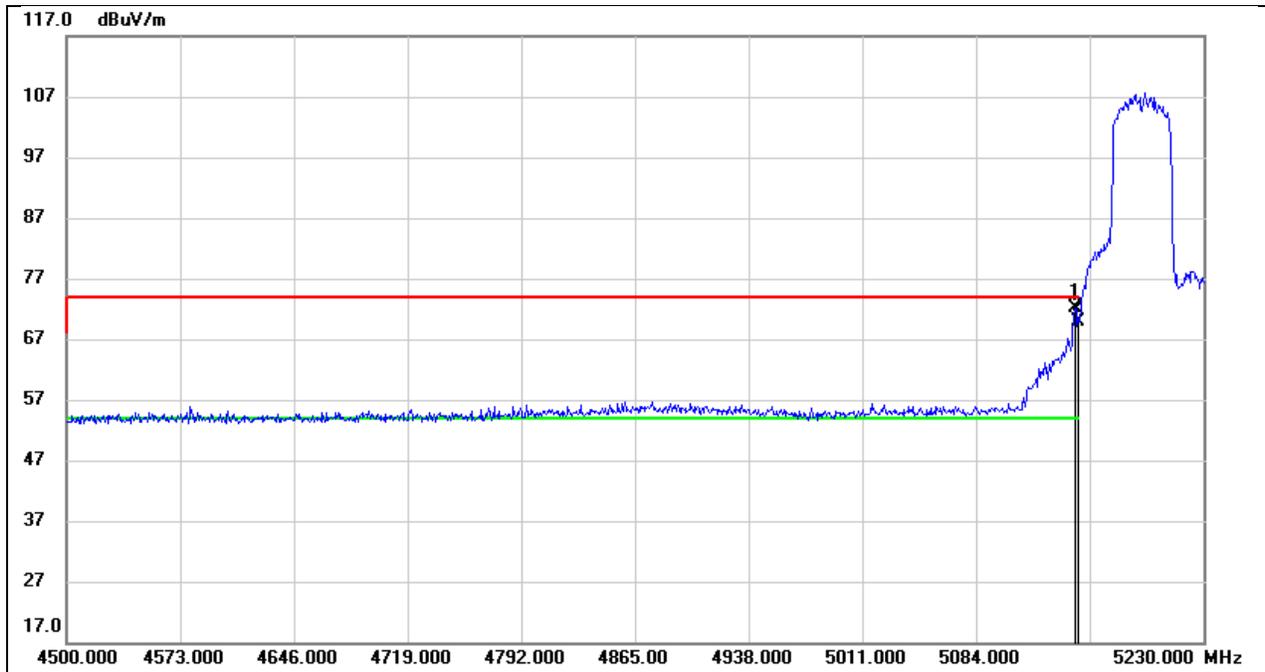


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.510	33.36	38.84	72.20	74.00	-1.80	peak
2	5150.000	31.15	38.84	69.99	74.00	-4.01	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3V

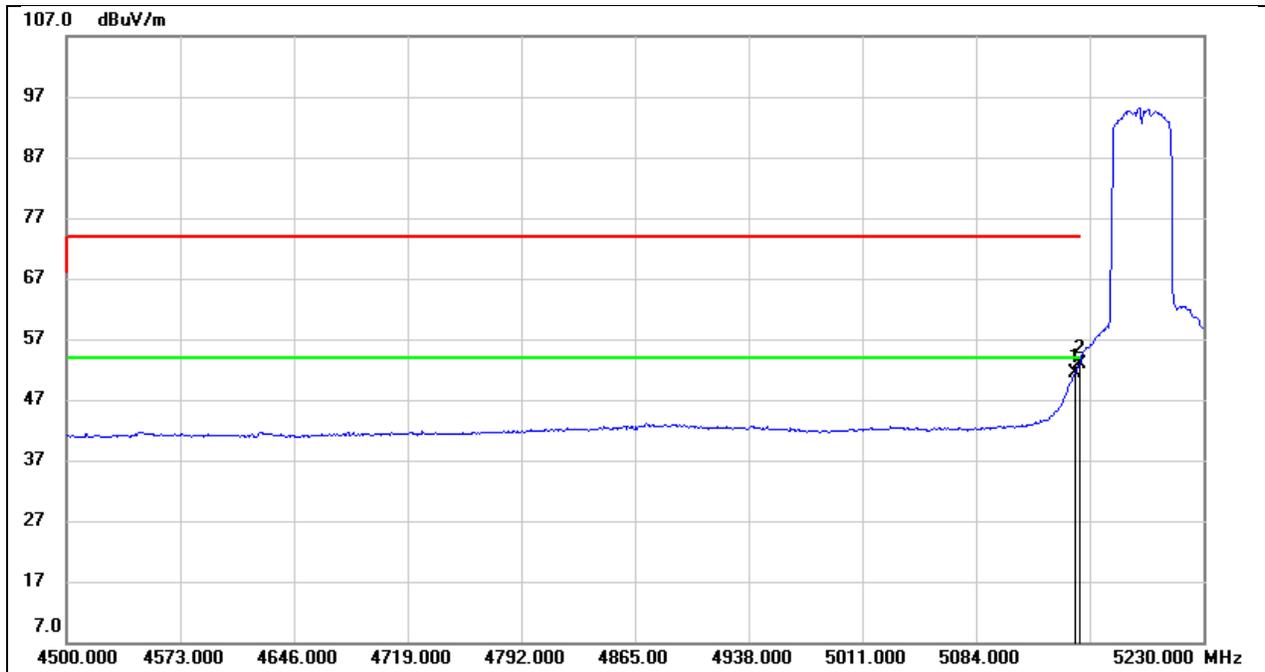


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.510	12.57	38.84	51.41	54.00	-2.59	AVG
2	5150.000	14.15	38.84	52.99	54.00	-1.01	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3V

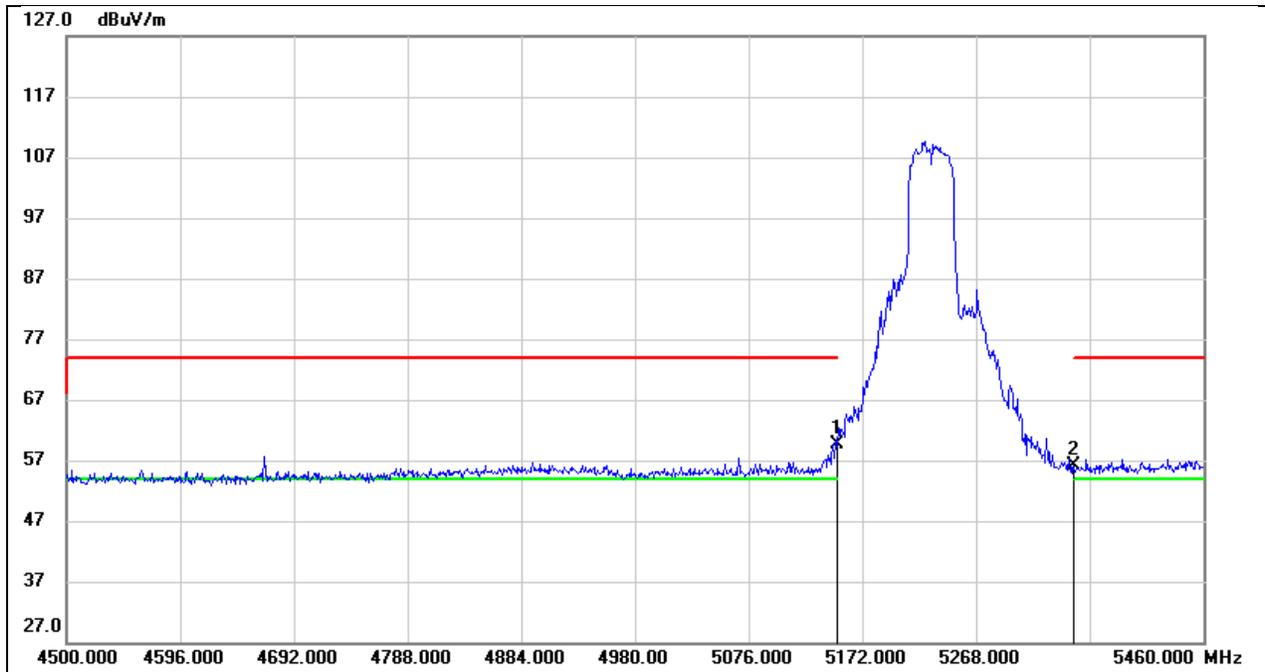


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	20.84	38.84	59.68	74.00	-14.32	peak
2	5350.000	16.83	39.29	56.12	74.00	-17.88	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3V

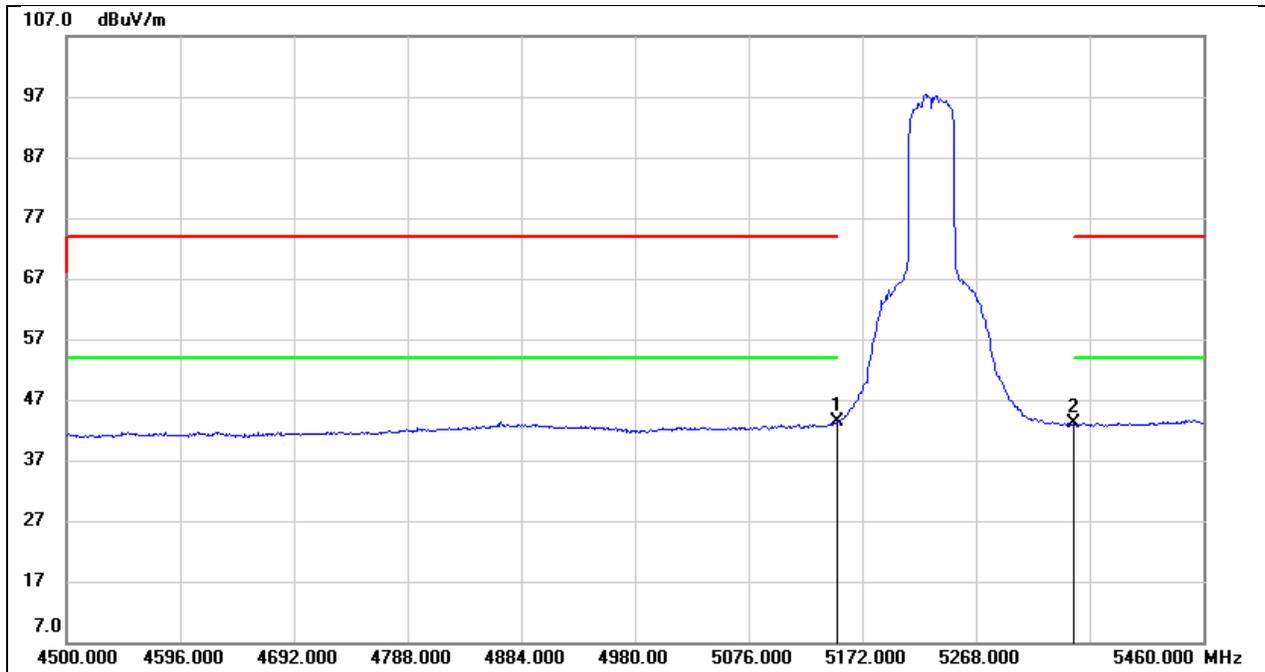


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	4.44	38.84	43.28	54.00	-10.72	AVG
2	5350.000	3.76	39.29	43.05	54.00	-10.95	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3V

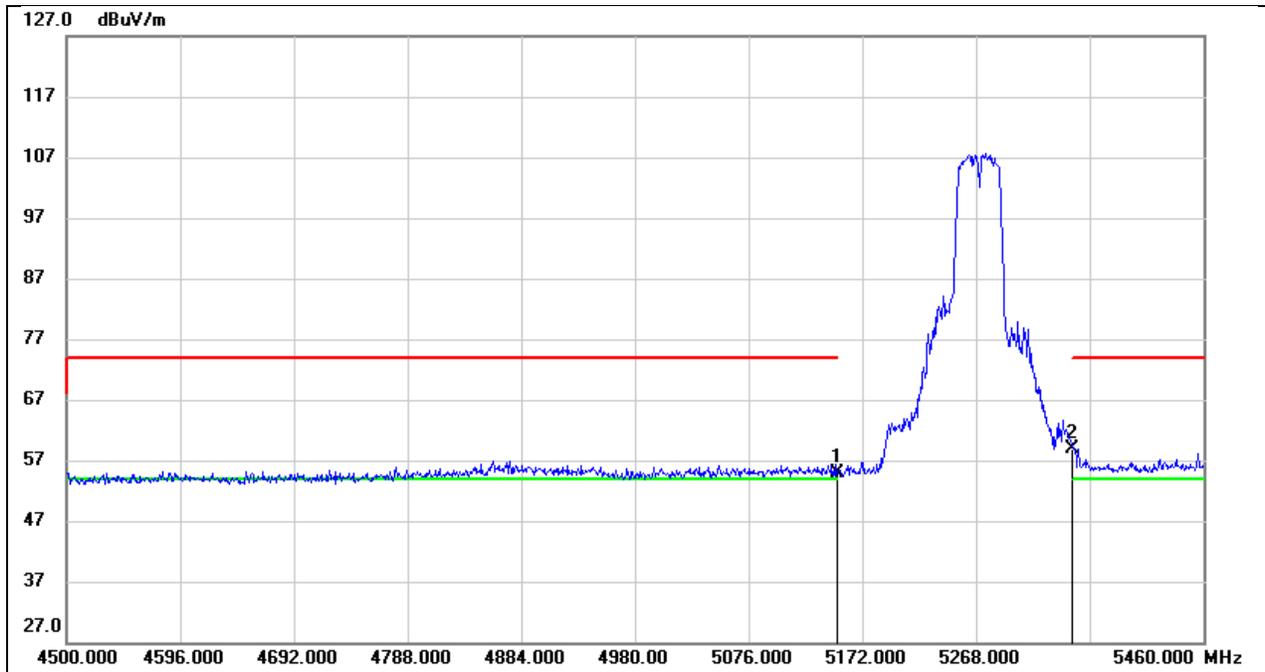


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	15.99	38.84	54.83	74.00	-19.17	peak
2	5350.000	19.52	39.29	58.81	74.00	-15.19	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3V

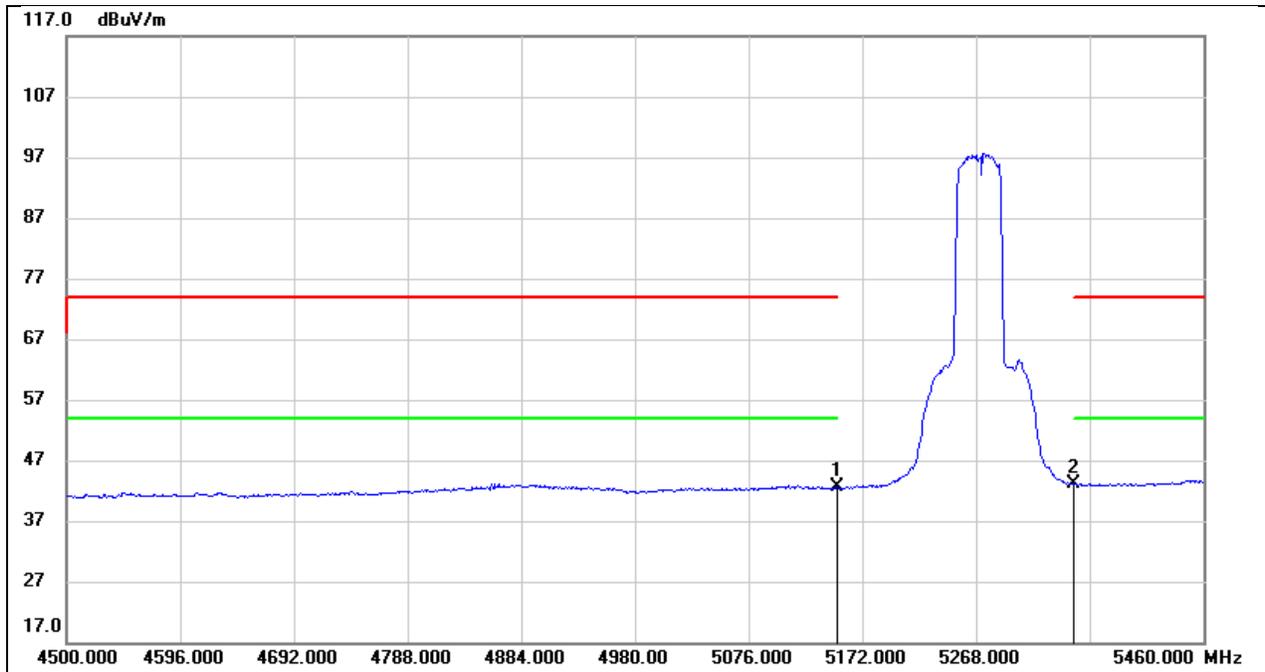


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	3.83	38.84	42.67	54.00	-11.33	AVG
2	5350.000	3.96	39.29	43.25	54.00	-10.75	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3V

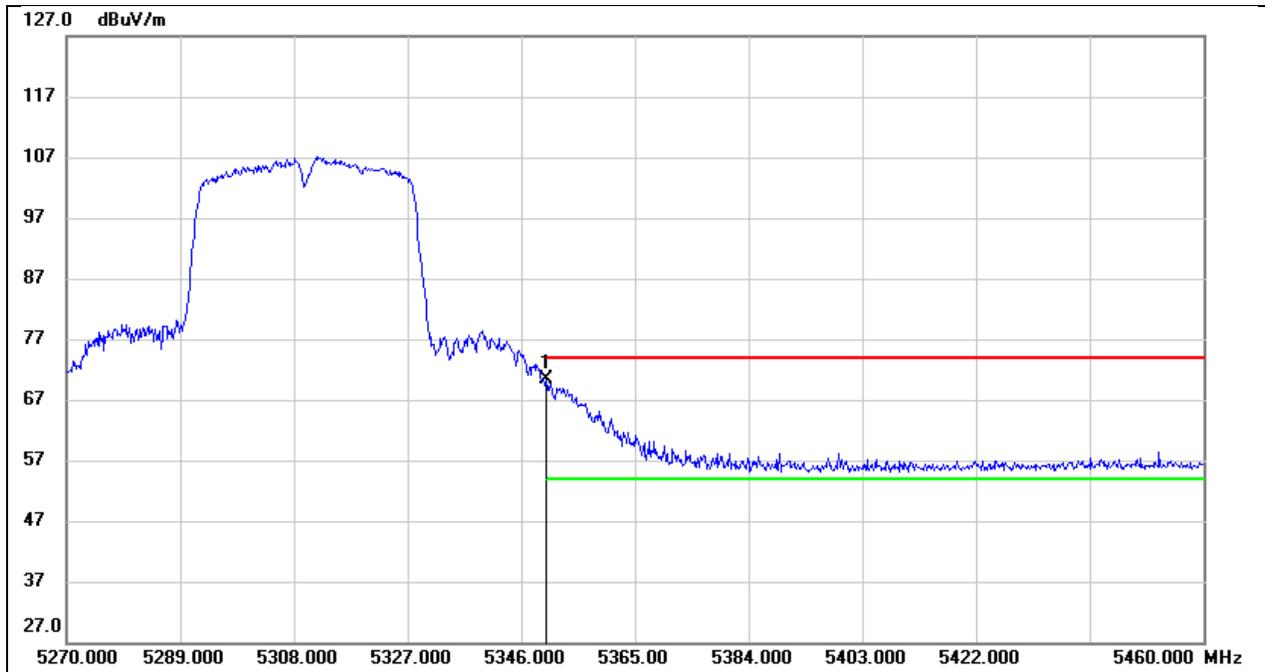


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	30.99	39.29	70.28	74.00	-3.72	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3V

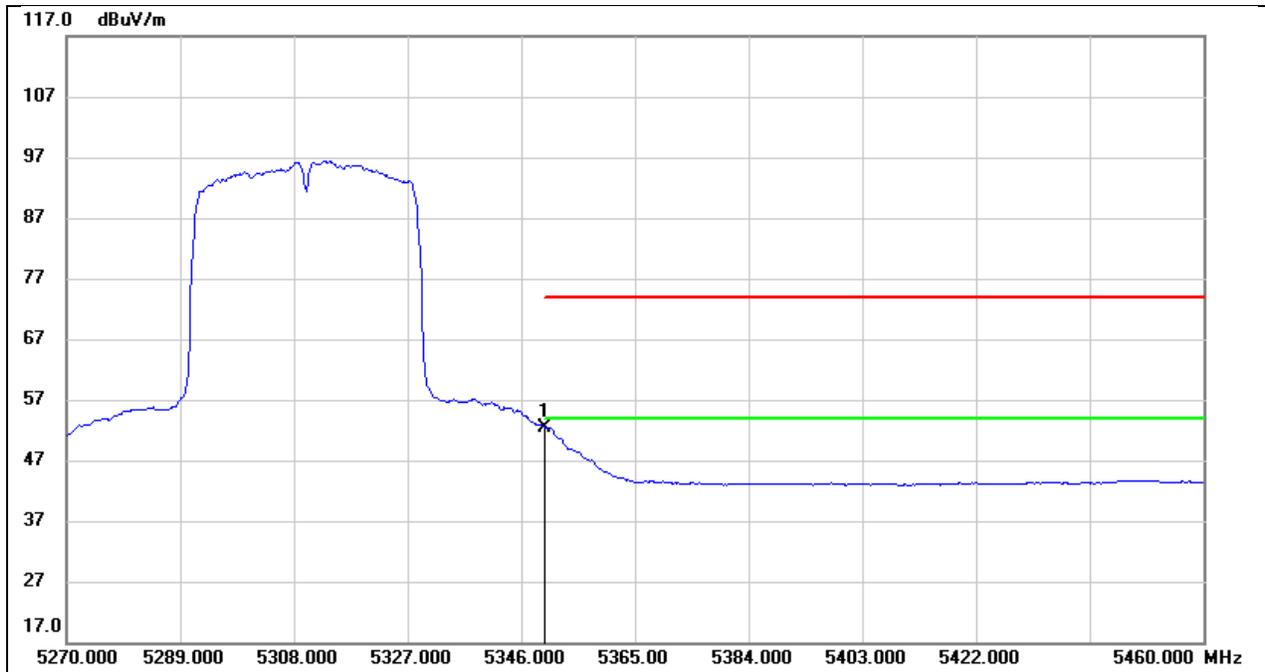


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	13.14	39.29	52.43	54.00	-1.57	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3V

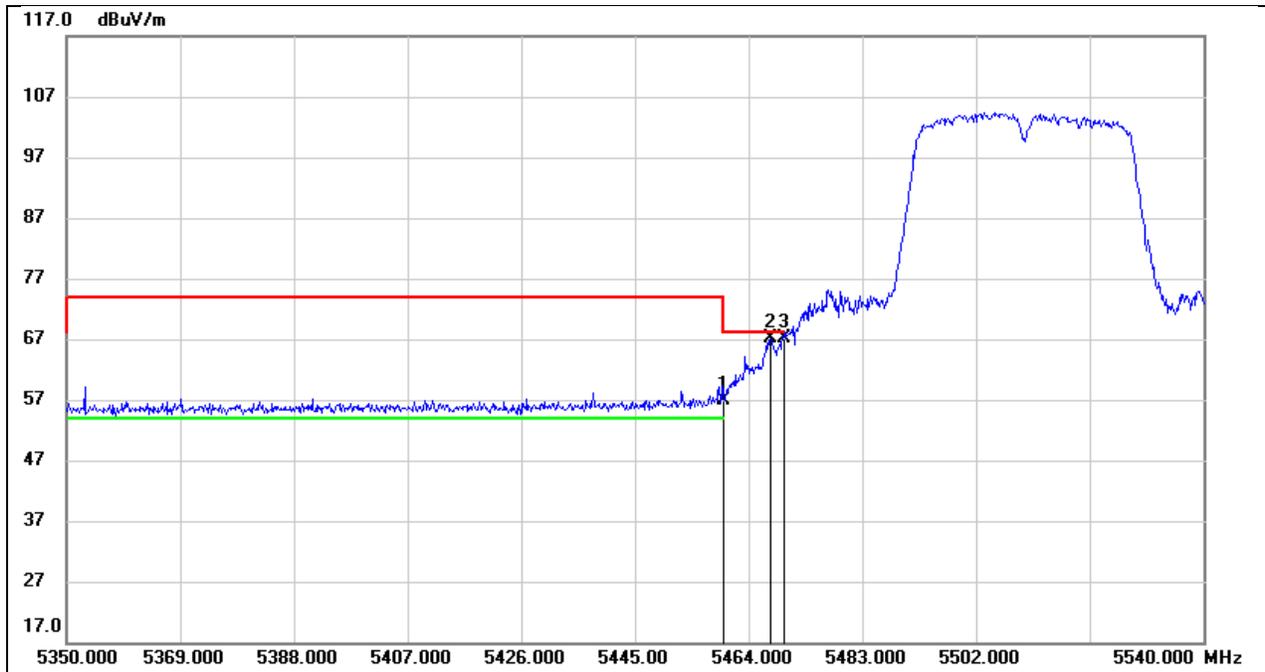


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	17.43	39.56	56.99	74.00	-17.01	peak
2	5467.610	27.50	39.58	67.08	68.20	-1.12	peak
3	5470.000	27.57	39.58	67.15	68.20	-1.05	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3V

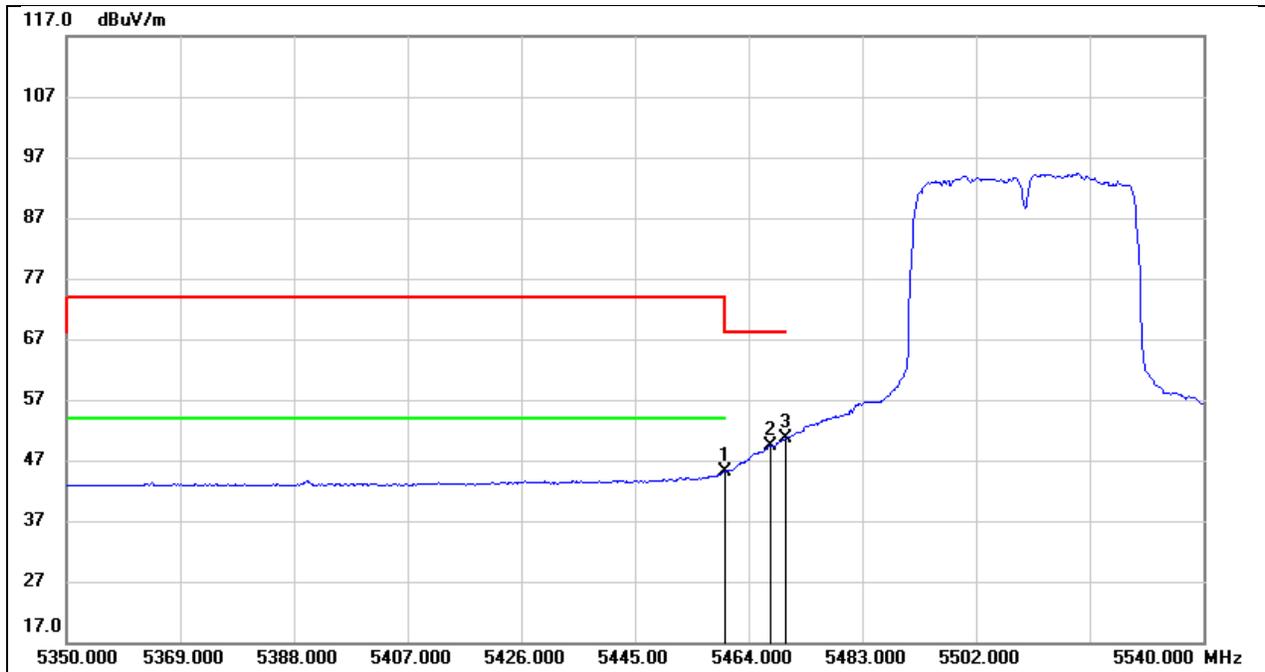


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5460.000	5.54	39.56	45.10	54.00	-8.90	AVG
2	5467.610	9.74	39.58	49.32	/	/	AVG
3	5470.000	10.95	39.58	50.53	/	/	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.3V

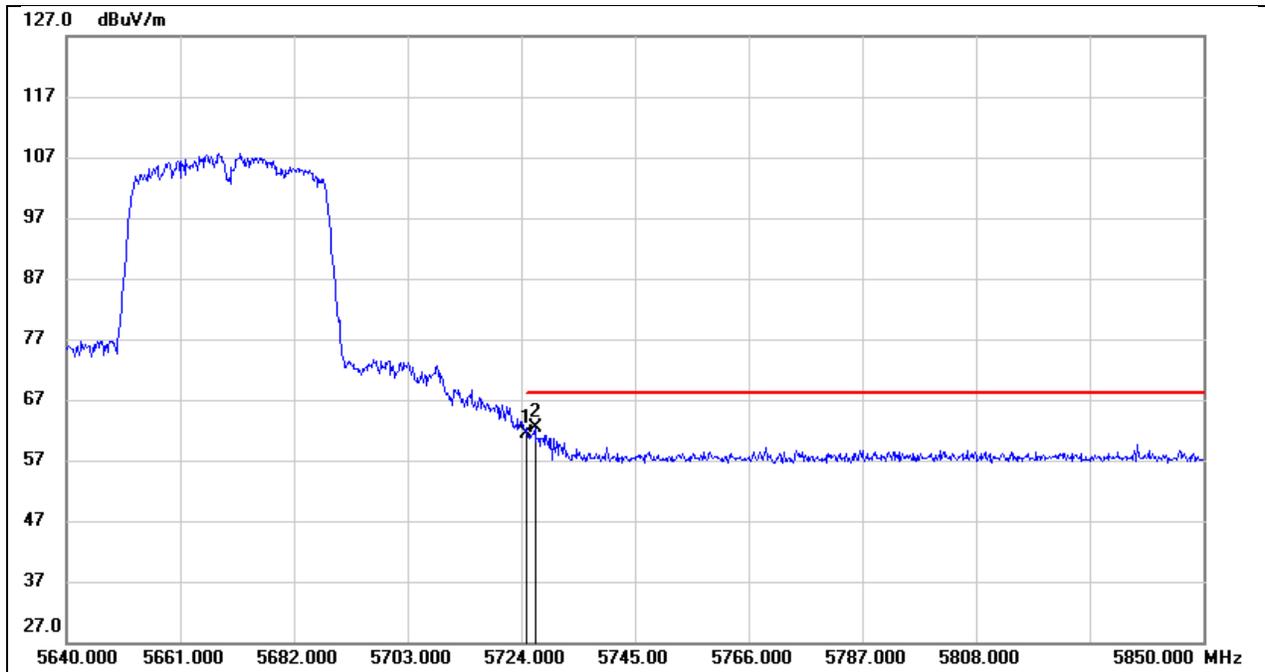


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	21.17	40.09	61.26	68.20	-6.94	peak
2	5726.520	22.25	40.09	62.34	68.20	-5.86	peak

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3V

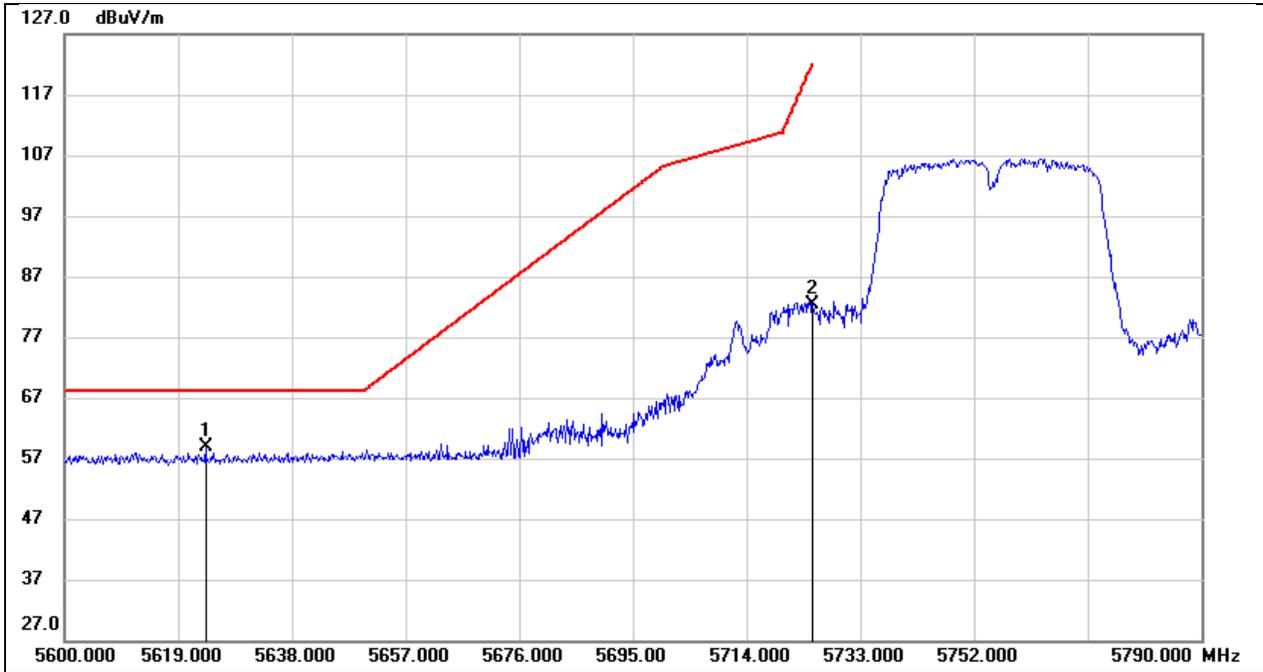


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5623.560	19.02	39.96	58.98	68.20	-9.22	peak
2	5725.000	42.26	40.09	82.35	122.20	-39.85	peak

Test Mode:	802.11n HT40 PK	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3V

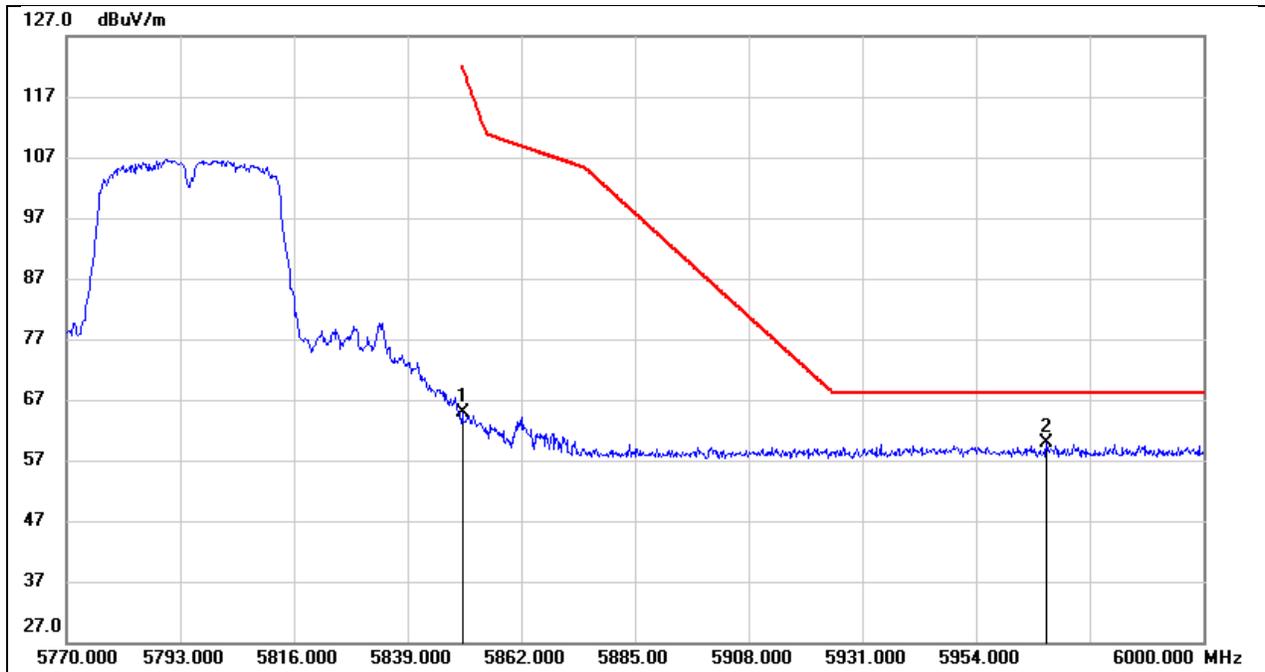


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	24.70	40.30	65.00	122.20	-57.20	peak
2	5968.260	19.41	40.58	59.99	68.20	-8.21	peak

Test Mode:	802.11ac VHT80 PK	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3V

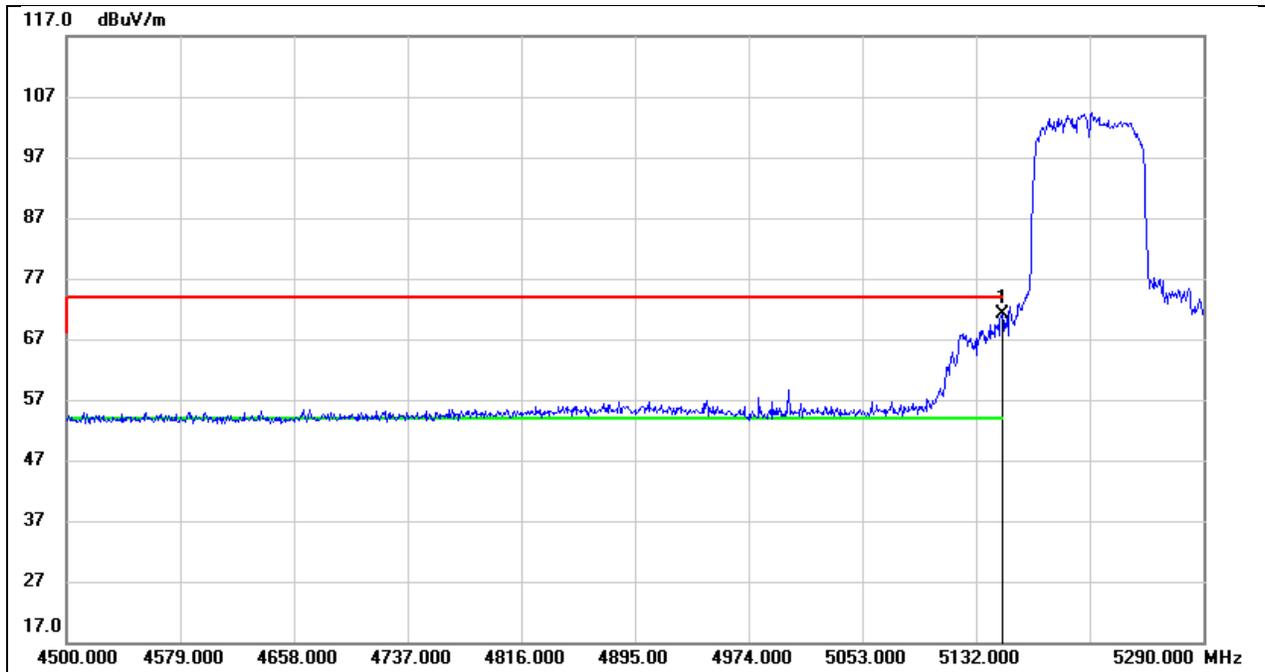


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	32.34	38.84	71.18	74.00	-2.82	peak

Test Mode:	802.11ac VHT80 AV	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3V

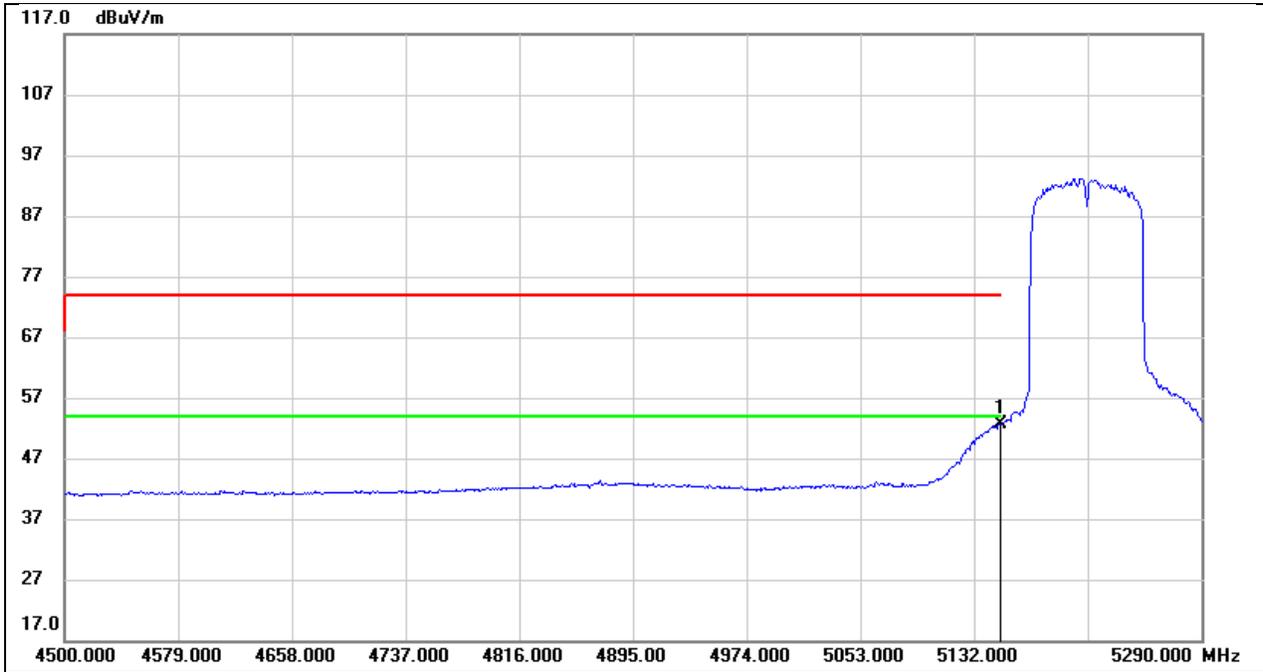


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	13.74	38.84	52.58	54.00	-1.42	AVG

Test Mode:	802.11ac VHT80 PK	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3V

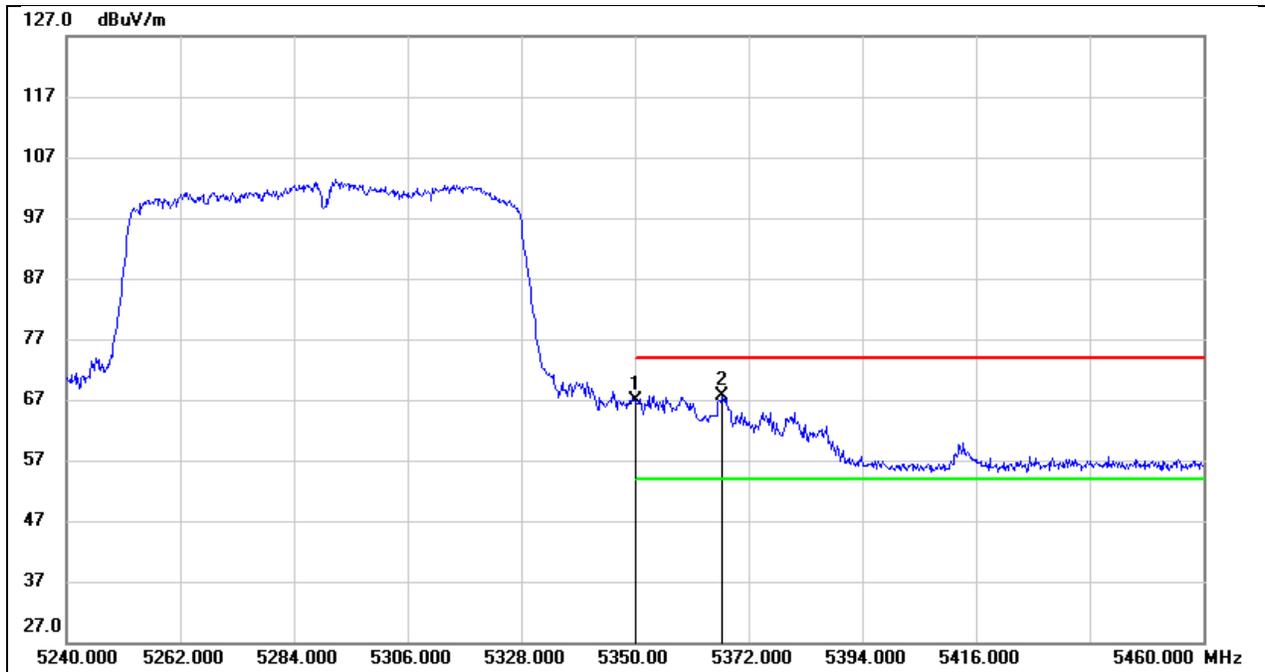


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	27.61	39.29	66.90	74.00	-7.10	peak
2	5366.940	28.24	39.34	67.58	74.00	-6.42	peak

Test Mode:	802.11ac VHT80 AV	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3V

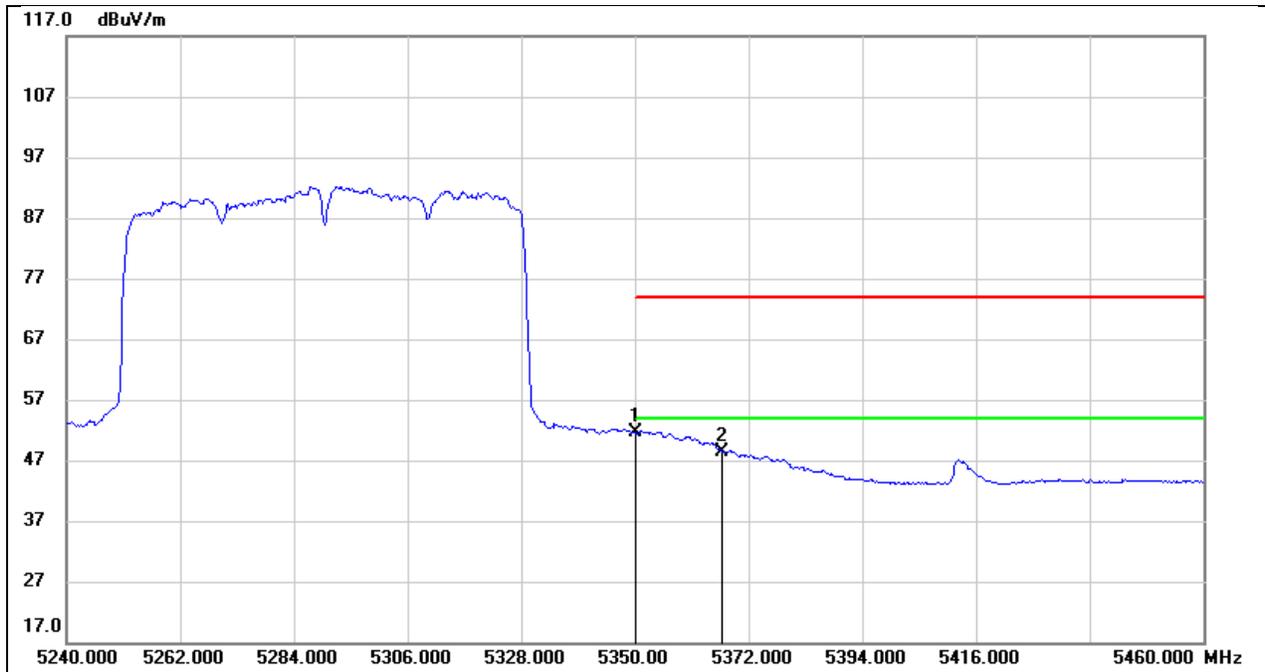


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	12.26	39.29	51.55	54.00	-2.45	AVG
2	5366.940	9.02	39.34	48.36	54.00	-5.64	AVG

Test Mode:	802.11ac VHT80 PK	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3V

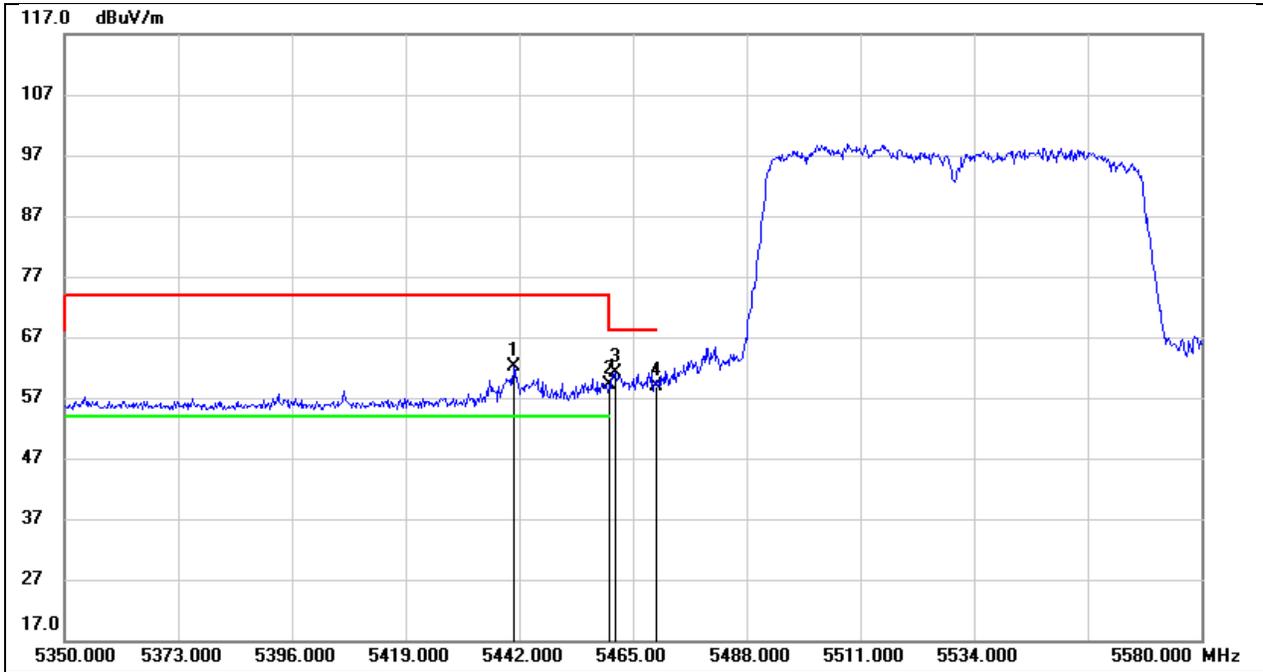


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5440.850	22.72	39.52	62.24	74.00	-11.76	peak
2	5460.000	19.59	39.56	59.15	74.00	-14.85	peak
3	5461.320	21.52	39.56	61.08	68.20	-7.12	peak
4	5470.000	19.31	39.58	58.89	68.20	-9.31	peak

Test Mode:	802.11ac VHT80 AV	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3V

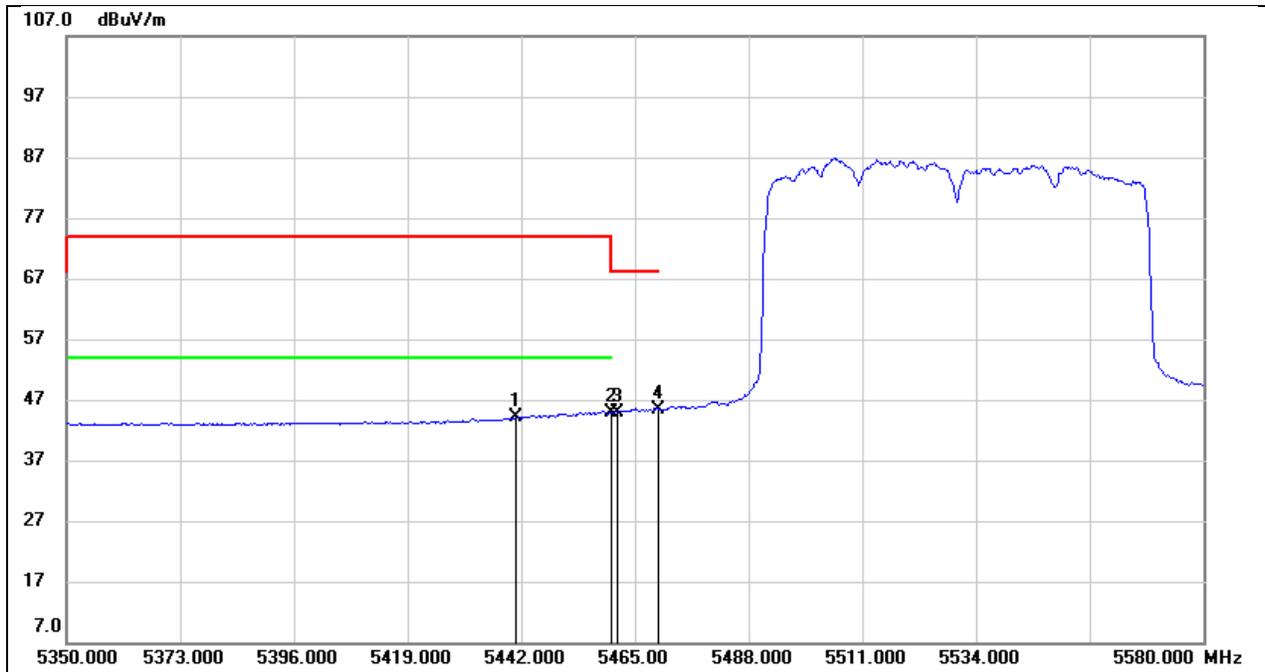


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5440.850	4.54	39.52	44.06	54.00	-9.94	AVG
2	5460.000	5.30	39.56	44.86	54.00	-9.14	AVG
3	5461.320	5.42	39.56	44.98	/	/	AVG
4	5470.000	5.71	39.58	45.29	/	/	AVG

Test Mode:	802.11ac VHT80 PK	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3V

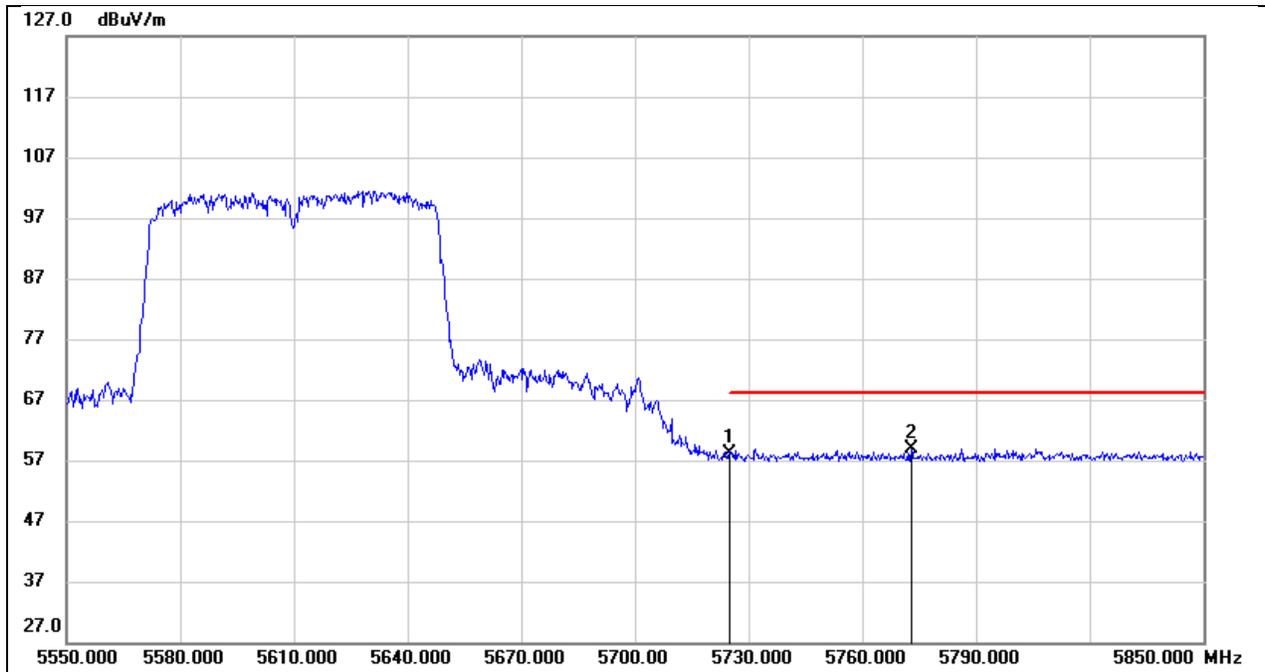

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5725.000	17.98	40.09	58.07	68.20	-10.13	peak
2	5772.900	18.79	40.15	58.94	68.20	-9.26	peak


Test Mode:	802.11ac VHT80 PK	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3V

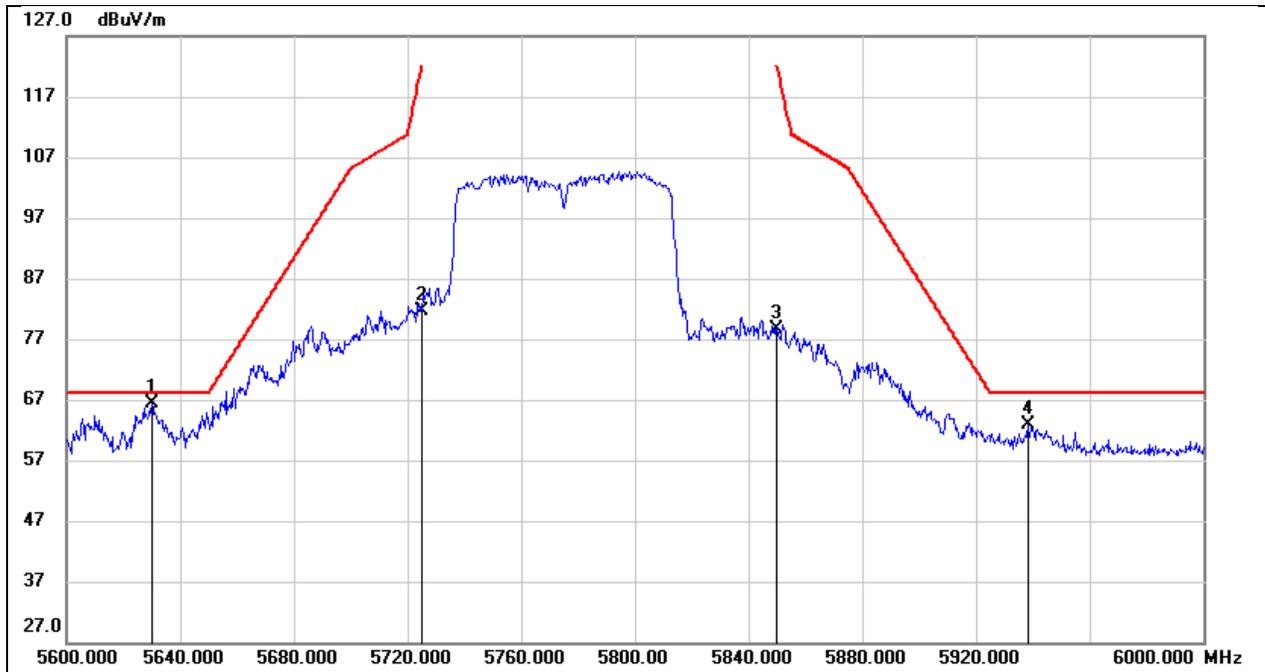

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5630.000	26.48	39.97	66.45	68.20	-1.75	peak
2	5725.000	41.65	40.09	81.74	122.20	-40.46	peak
3	5850.000	38.44	40.30	78.74	122.20	-43.46	peak
4	5938.400	22.44	40.50	62.94	68.20	-5.26	peak


8.2. SPURIOUS EMISSIONS(1 GHZ~7 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

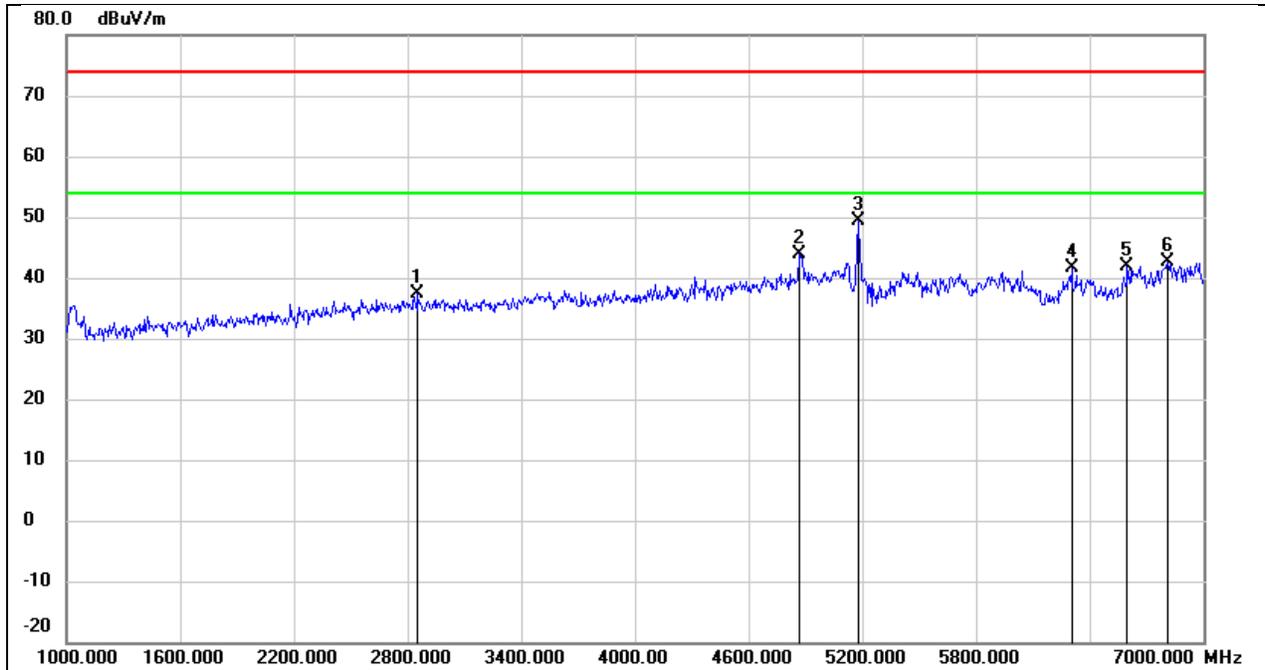


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2854.000	44.87	-7.42	37.45	74.00	-36.55	peak
2	4870.000	44.63	-0.66	43.97	74.00	-30.03	peak
3	5180.000	49.35	0.05	49.40	/	/	fundamental
4	6304.000	38.59	2.99	41.58	74.00	-32.42	peak
5	6598.000	37.62	4.21	41.83	74.00	-32.17	peak
6	6814.000	37.40	5.28	42.68	74.00	-31.32	peak

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

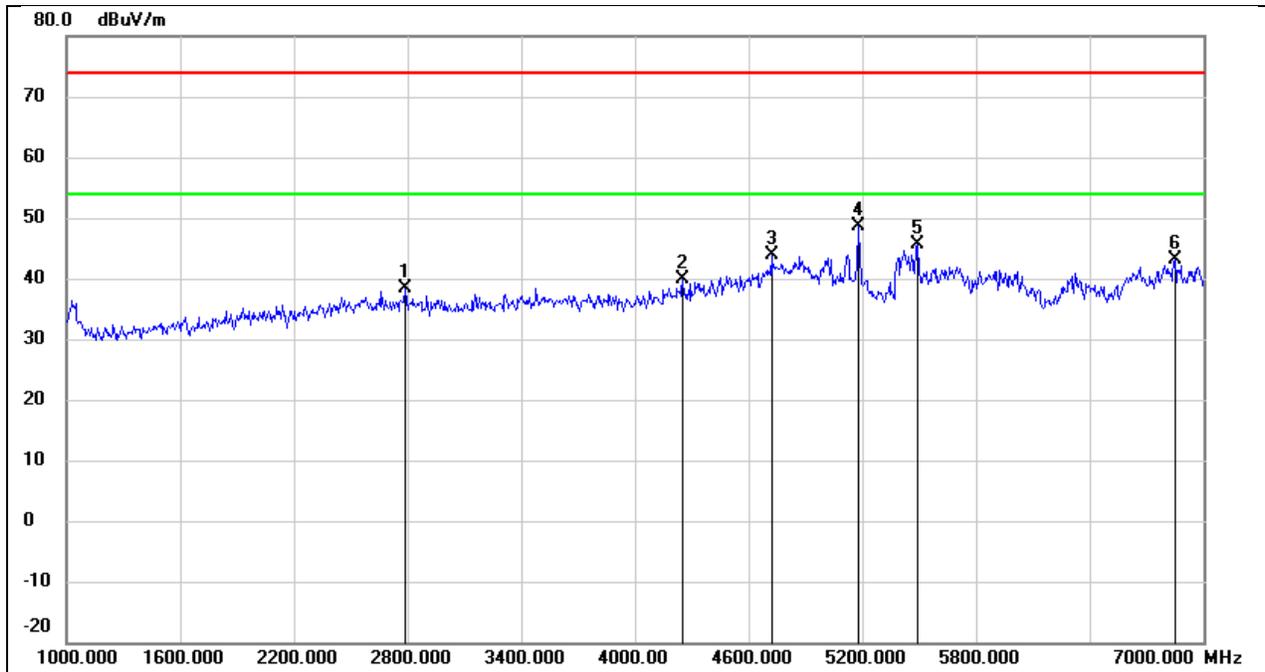


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2788.000	45.88	-7.62	38.26	74.00	-35.74	peak
2	4252.000	43.23	-3.30	39.93	74.00	-34.07	peak
3	4720.000	45.19	-1.27	43.92	74.00	-30.08	peak
4	5180.000	48.54	0.05	48.59	/	/	fundamental
5	5488.000	45.22	0.41	45.63	74.00	-28.37	peak
6	6850.000	37.55	5.46	43.01	74.00	-30.99	peak

Test Mode:	802.11a 20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 3.3V

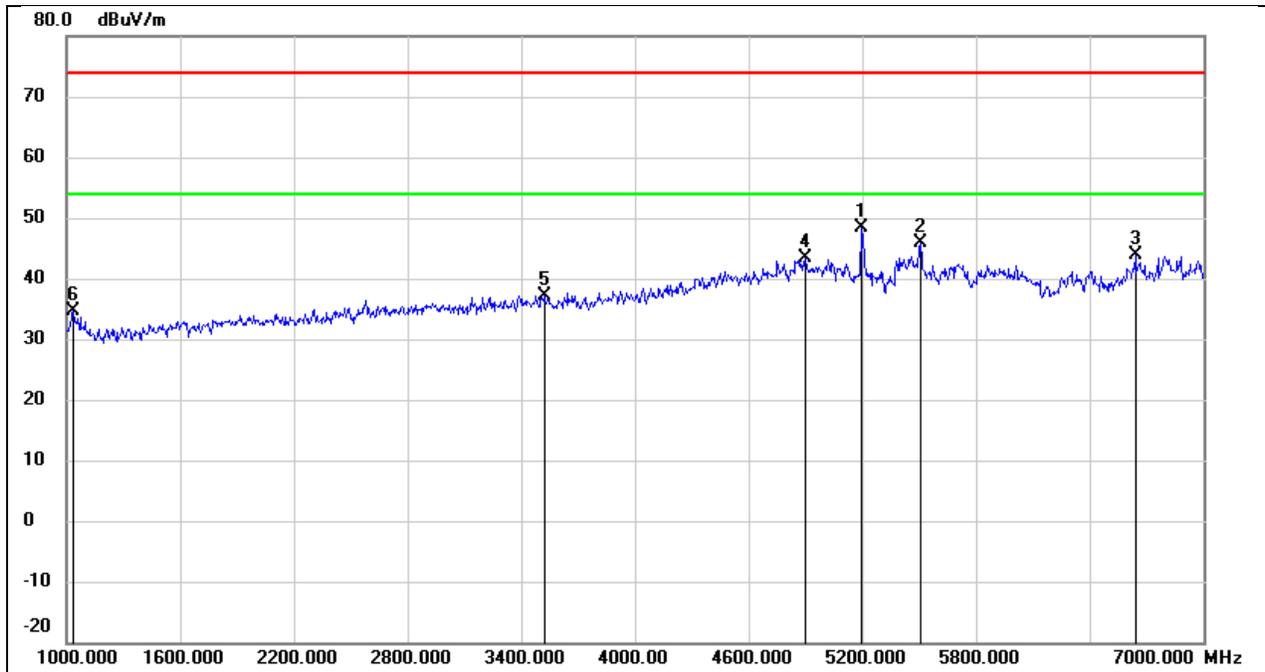


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5200.000	48.42	0.07	48.49	/	/	fundamental
2	5506.000	45.38	0.44	45.82	74.00	-28.18	peak
3	6640.000	39.43	4.41	43.84	74.00	-30.16	peak
4	4900.000	43.84	-0.55	43.29	74.00	-30.71	peak
5	3520.000	43.02	-5.80	37.22	74.00	-36.78	peak
6	1036.000	49.45	-14.87	34.58	74.00	-39.42	peak

Test Mode:	802.11a 20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 3.3V

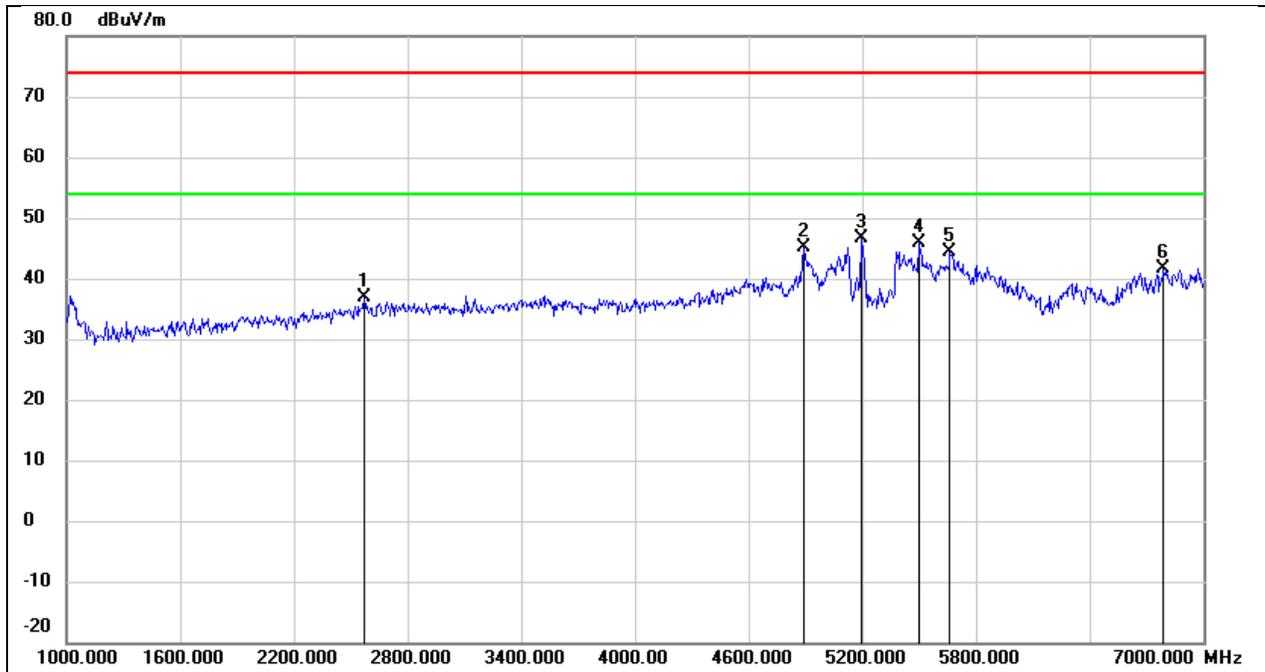


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2572.000	45.08	-8.27	36.81	74.00	-37.19	peak
2	4888.000	45.69	-0.60	45.09	74.00	-28.91	peak
3	5200.000	46.47	0.07	46.54	/	/	fundamental
4	5500.000	45.34	0.42	45.76	74.00	-28.24	peak
5	5662.000	43.43	0.88	44.31	74.00	-29.69	peak
6	6790.000	36.37	5.15	41.52	74.00	-32.48	peak

Test Mode:	802.11a 20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

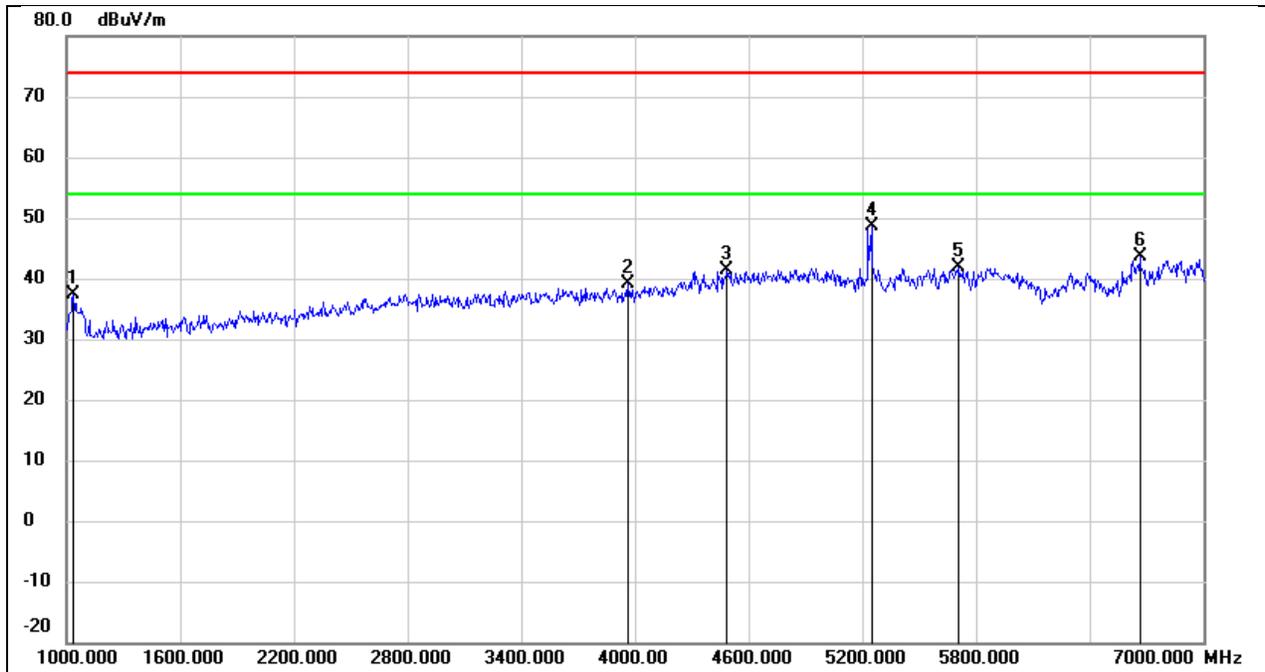


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1036.000	52.35	-14.87	37.48	74.00	-36.52	peak
2	3964.000	43.62	-4.58	39.04	74.00	-34.96	peak
3	4486.000	43.69	-2.21	41.48	74.00	-32.52	peak
4	5240.000	48.54	0.13	48.67	/	/	fundamental
5	5710.000	40.82	1.02	41.84	74.00	-32.16	peak
6	6664.000	39.07	4.54	43.61	74.00	-30.39	peak

Test Mode:	802.11a 20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 3.3V

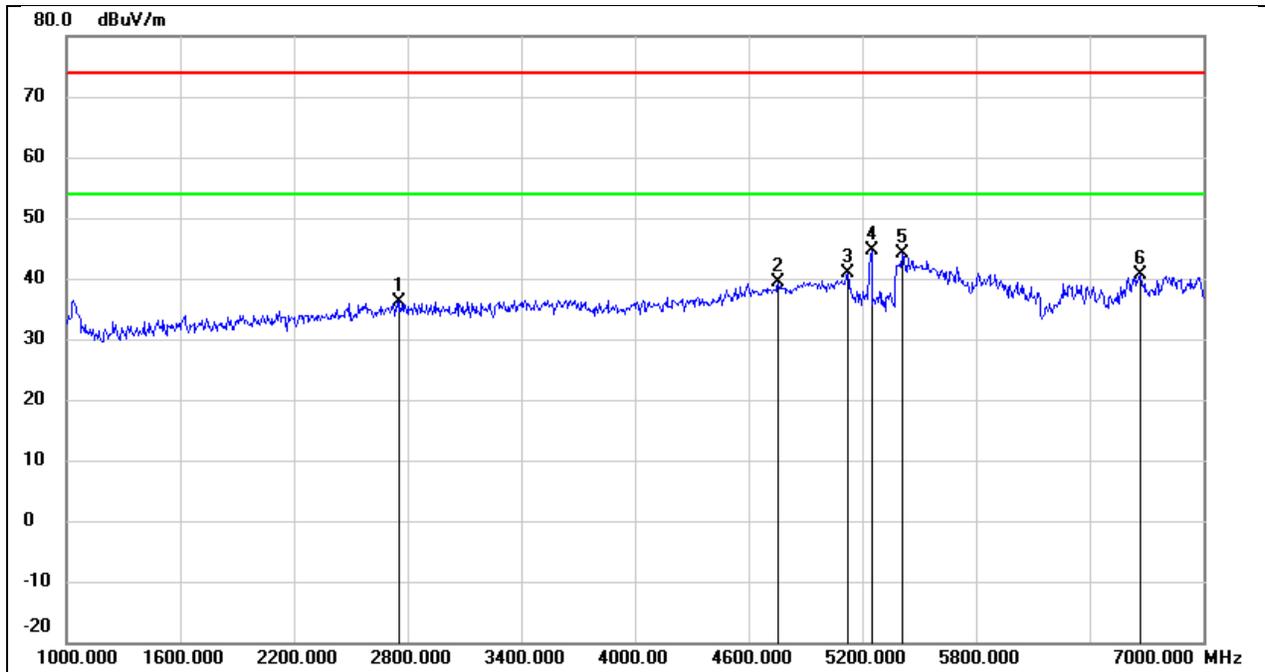


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2758.000	43.84	-7.72	36.12	74.00	-37.88	peak
2	4756.000	40.39	-1.12	39.27	74.00	-34.73	peak
3	5122.000	40.87	-0.02	40.85	74.00	-33.15	peak
4	5240.000	44.61	0.13	44.74	/	/	fundamental
5	5410.000	43.84	0.32	44.16	74.00	-29.84	peak
6	6664.000	36.06	4.54	40.60	74.00	-33.40	peak

Test Mode:	802.11a 20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

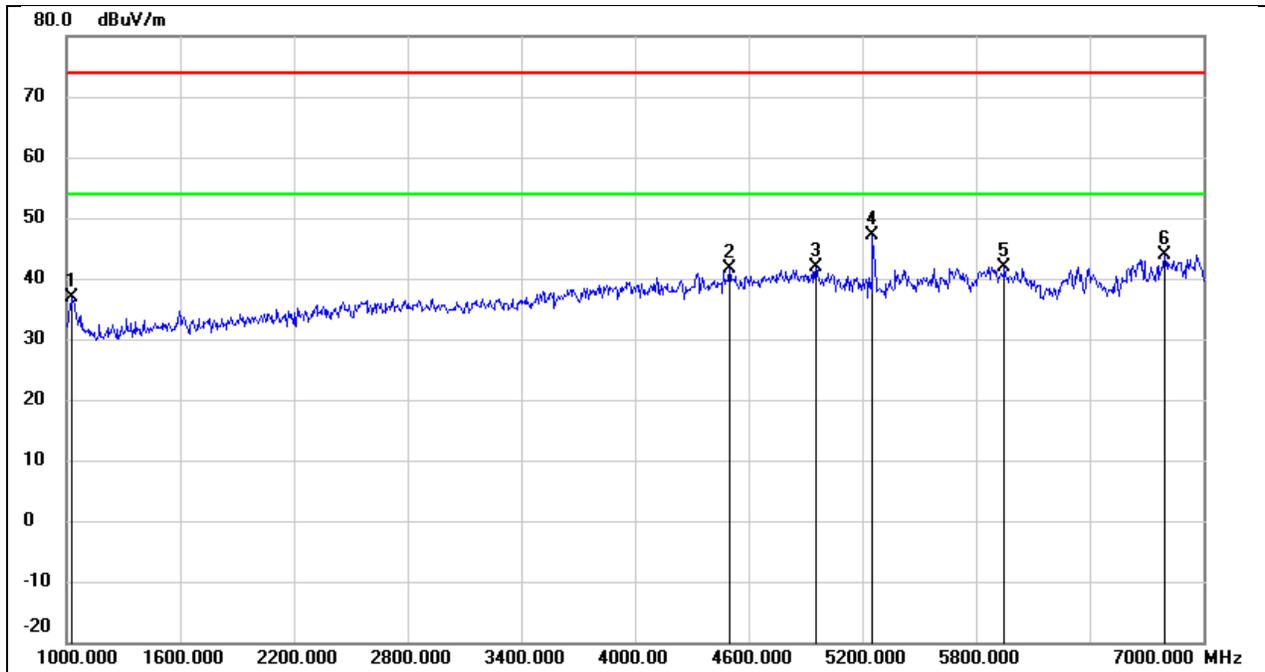


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1030.000	51.82	-14.89	36.93	74.00	-37.07	peak
2	4498.000	43.79	-2.14	41.65	74.00	-32.35	peak
3	4954.000	42.33	-0.33	42.00	74.00	-32.00	peak
4	5260.000	46.97	0.15	47.12	/	/	fundamental
5	5950.000	40.24	1.70	41.94	74.00	-32.06	peak
6	6796.000	38.77	5.19	43.96	74.00	-30.04	peak

Test Mode:	802.11a 20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3V

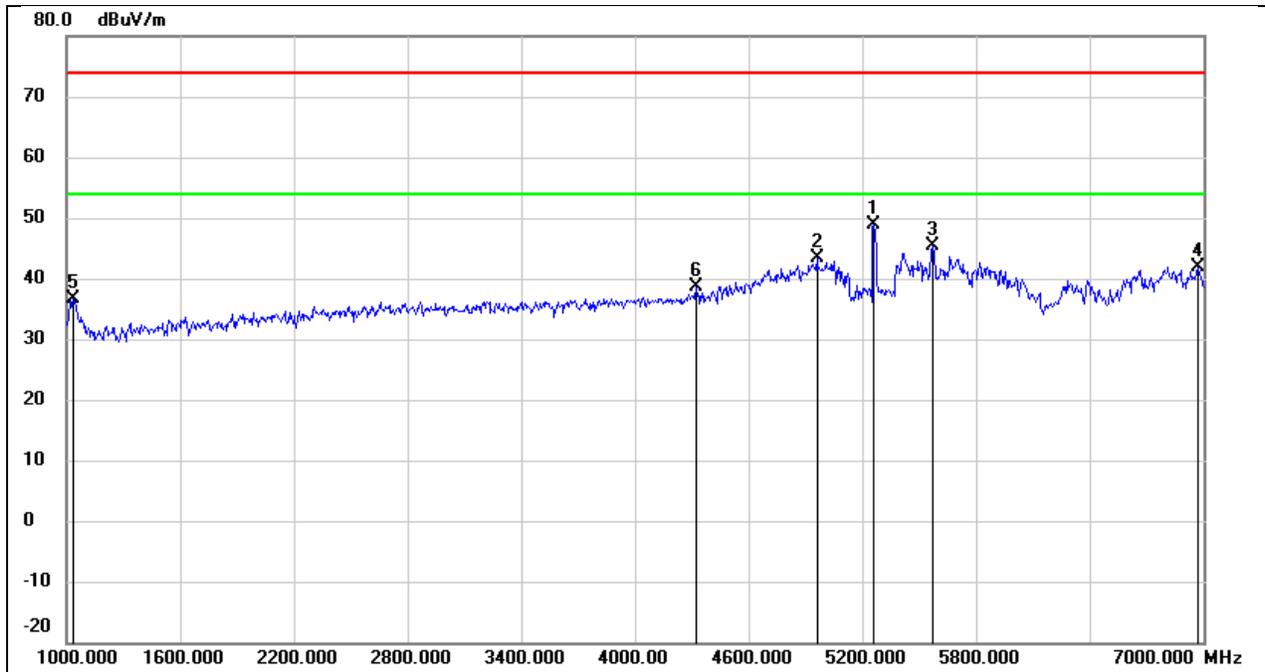


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5260.000	48.83	0.15	48.98	/	/	fundamental
2	4960.000	43.72	-0.32	43.40	74.00	-30.60	peak
3	5572.000	44.66	0.63	45.29	74.00	-28.71	peak
4	6970.000	35.74	6.05	41.79	74.00	-32.21	peak
5	1036.000	51.45	-14.87	36.58	74.00	-37.42	peak
6	4324.000	41.54	-2.96	38.58	74.00	-35.42	peak

Test Mode:	802.11a 20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3V

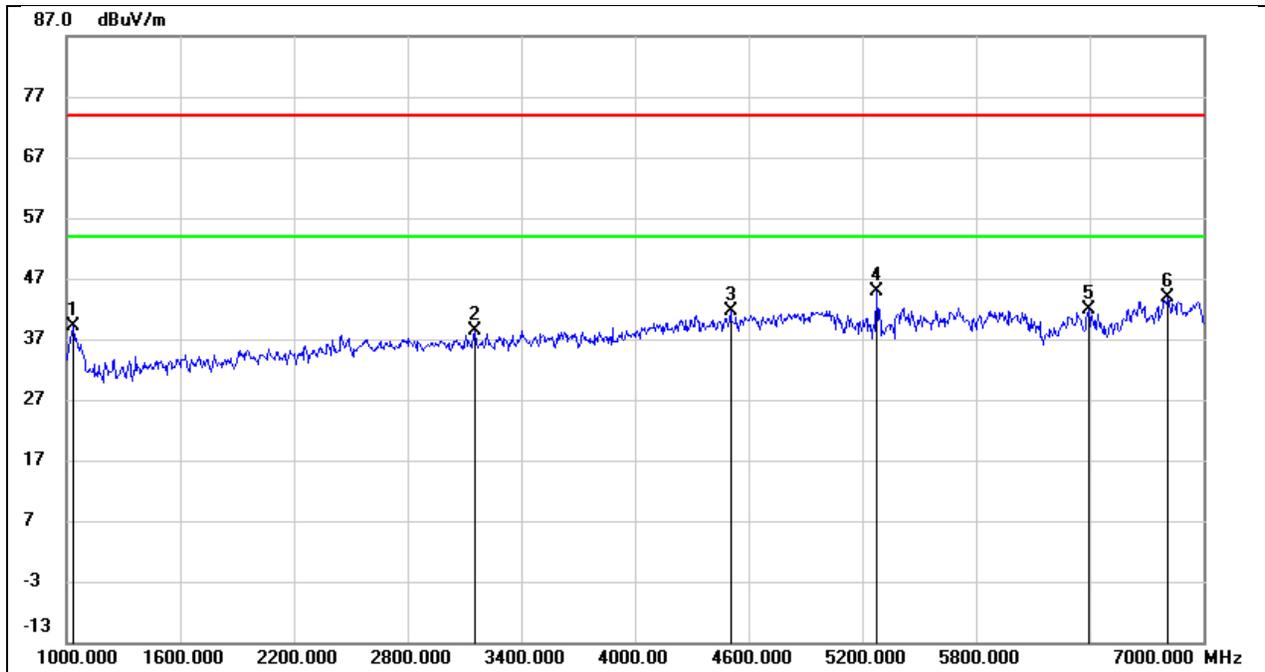


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1036.000	54.06	-14.87	39.19	74.00	-34.81	peak
2	3154.000	44.93	-6.63	38.30	74.00	-35.70	peak
3	4504.000	43.67	-2.12	41.55	74.00	-32.45	peak
4	5280.000	44.70	0.16	44.86	/	/	fundamental
5	6394.000	38.62	3.33	41.95	74.00	-32.05	peak
6	6814.000	38.48	5.28	43.76	74.00	-30.24	peak

Test Mode:	802.11a 20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3V

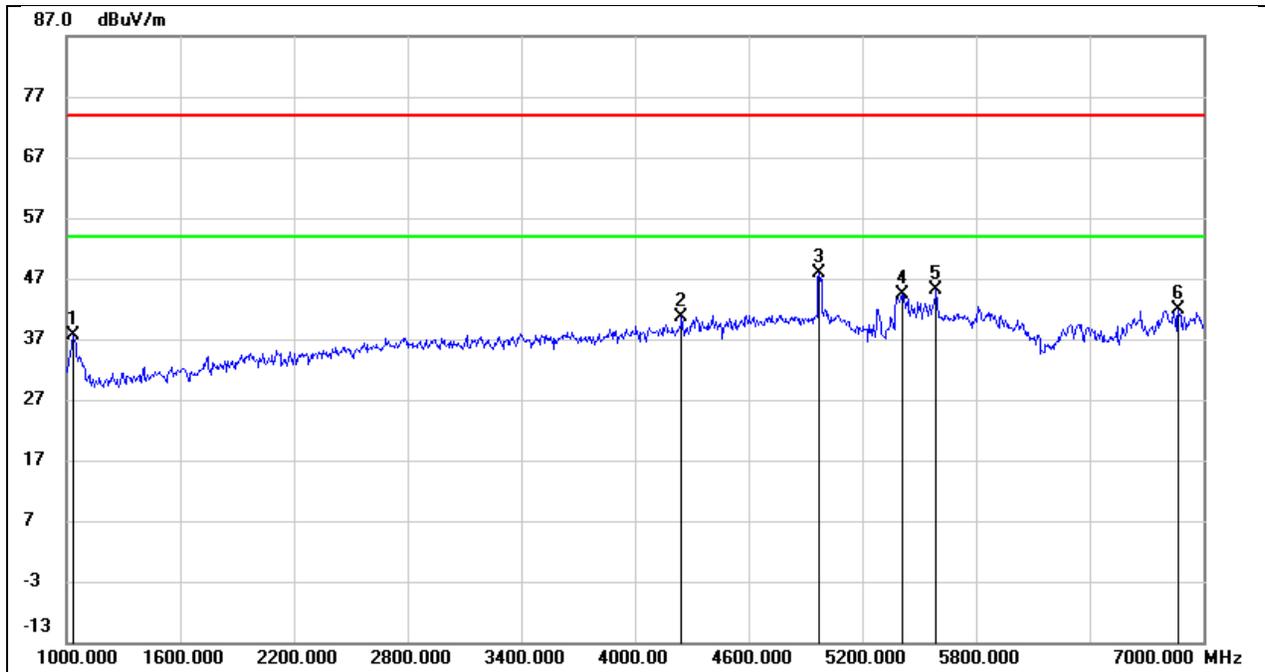


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1036.000	52.53	-14.87	37.66	74.00	-36.34	peak
2	4246.000	43.94	-3.33	40.61	74.00	-33.39	peak
3	4972.000	48.06	-0.26	47.80	74.00	-26.20	peak
4	5410.000	43.96	0.32	44.28	74.00	-29.72	peak
5	5590.000	44.38	0.68	45.06	74.00	-28.94	peak
6	6868.000	36.38	5.54	41.92	74.00	-32.08	peak

Test Mode:	802.11a 20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

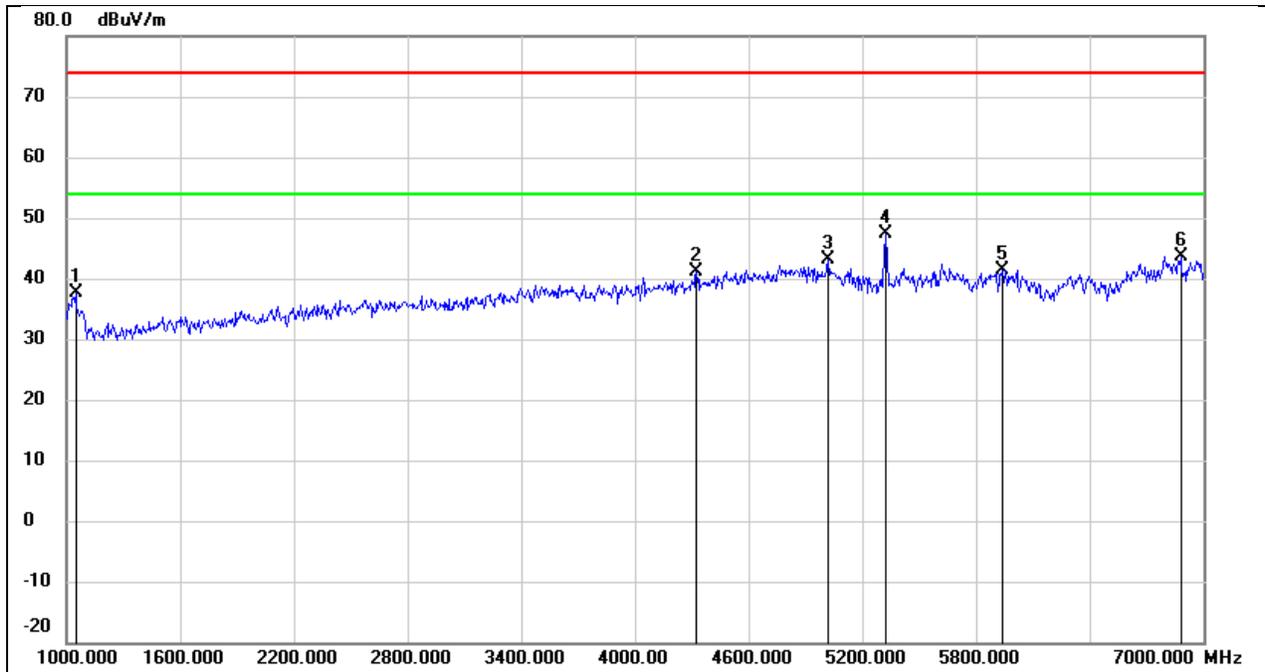


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1048.000	52.38	-14.81	37.57	74.00	-36.43	peak
2	4324.000	44.12	-2.96	41.16	74.00	-32.84	peak
3	5020.000	43.29	-0.13	43.16	74.00	-30.84	peak
4	5320.000	47.10	0.22	47.32	/	/	fundamental
5	5938.000	39.74	1.67	41.41	74.00	-32.59	peak
6	6880.000	38.06	5.60	43.66	74.00	-30.34	peak

Test Mode:	802.11a 20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3V

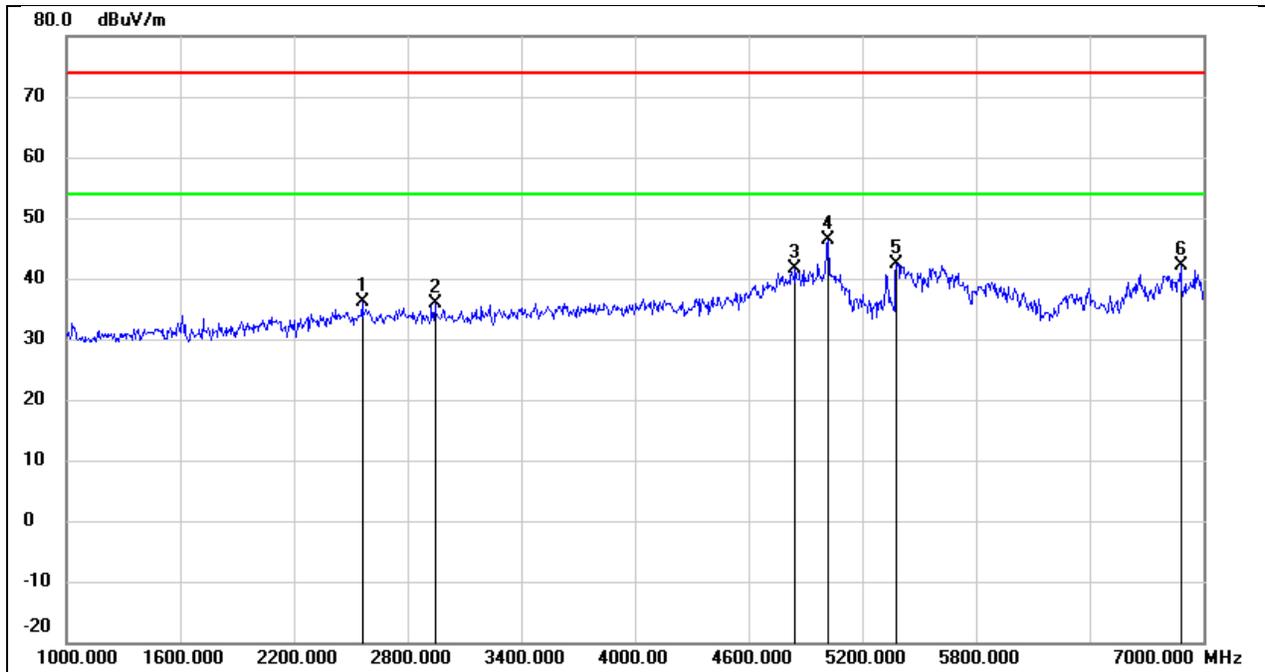


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2560.000	44.35	-8.31	36.04	74.00	-37.96	peak
2	2944.000	43.04	-7.15	35.89	74.00	-38.11	peak
3	4846.000	42.39	-0.77	41.62	74.00	-32.38	peak
4	5020.000	46.40	-0.13	46.27	74.00	-27.73	peak
5	5380.000	42.12	0.29	42.41	74.00	-31.59	peak
6	6880.000	36.42	5.60	42.02	74.00	-31.98	peak

Test Mode:	802.11a 20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

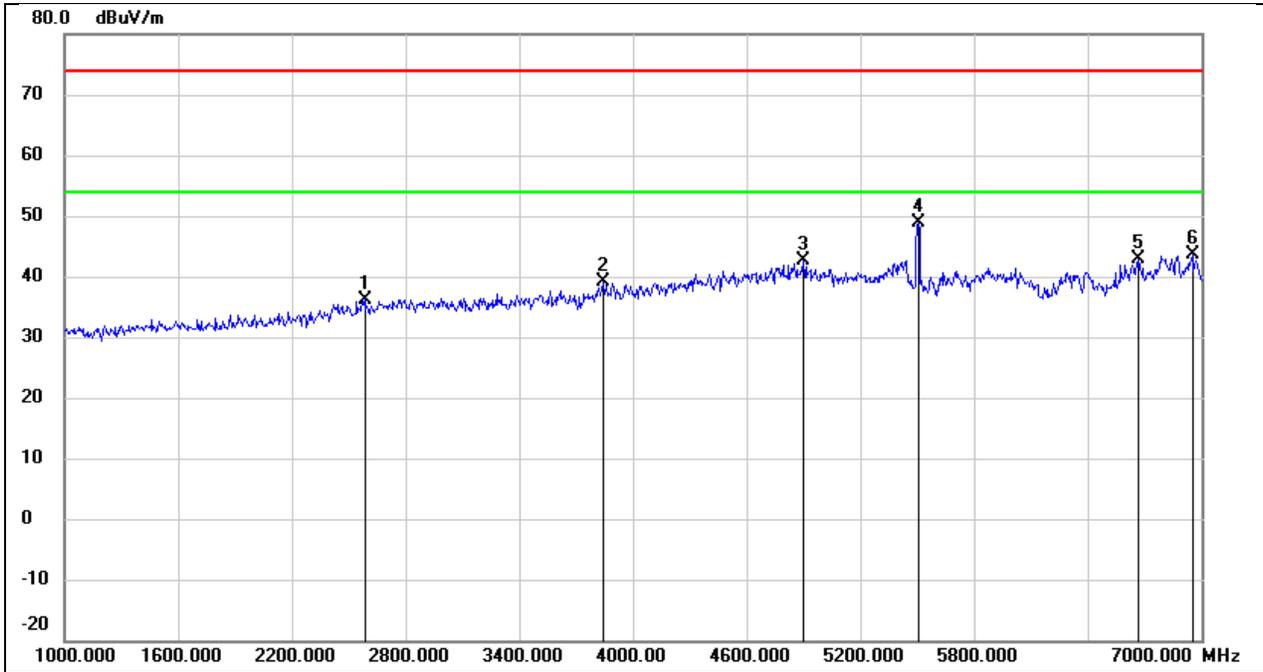


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2584.000	44.49	-8.24	36.25	74.00	-37.75	peak
2	3844.000	43.98	-4.91	39.07	74.00	-34.93	peak
3	4900.000	43.13	-0.55	42.58	74.00	-31.42	peak
4	5500.000	48.47	0.44	48.91	/	/	fundamental
5	6670.000	38.29	4.57	42.86	74.00	-31.14	peak
6	6952.000	37.62	5.96	43.58	74.00	-30.42	peak

Test Mode:	802.11a 20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3V

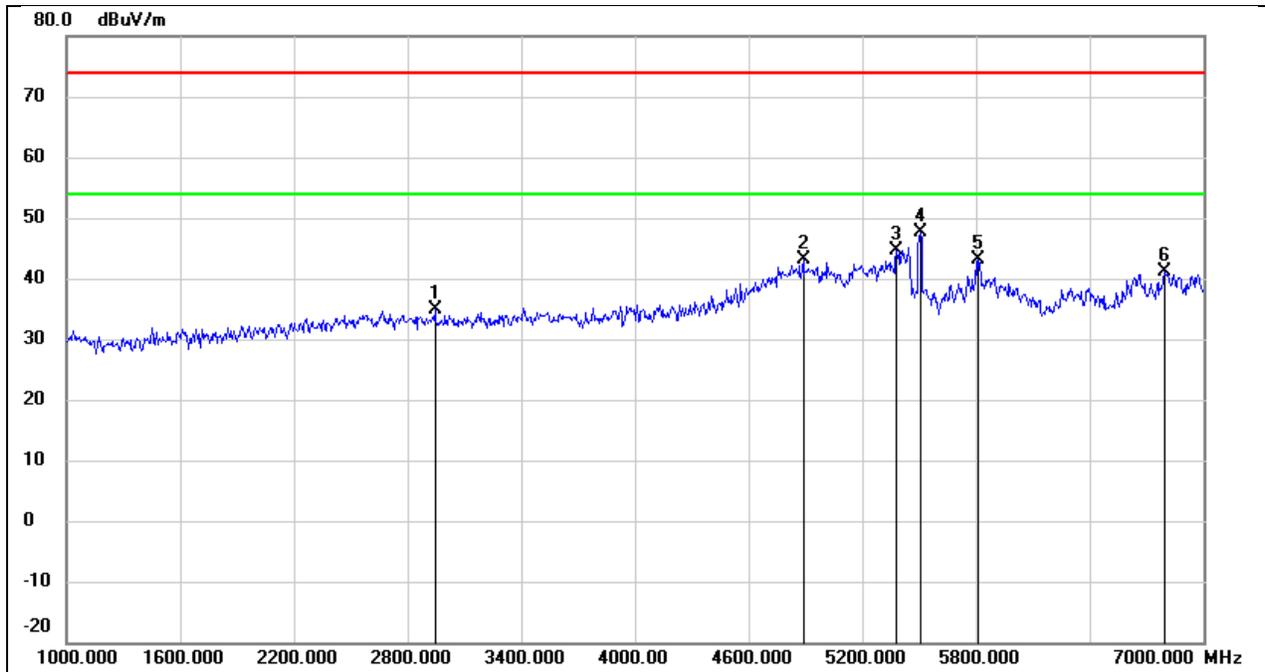


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2944.000	42.01	-7.15	34.86	74.00	-39.14	peak
2	4888.000	43.84	-0.60	43.24	74.00	-30.76	peak
3	5380.000	44.28	0.29	44.57	74.00	-29.43	peak
4	5500.000	47.08	0.44	47.52	/	/	fundamental
5	5812.000	41.76	1.31	43.07	74.00	-30.93	peak
6	6796.000	35.96	5.19	41.15	74.00	-32.85	peak

Test Mode:	802.11a 20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3V

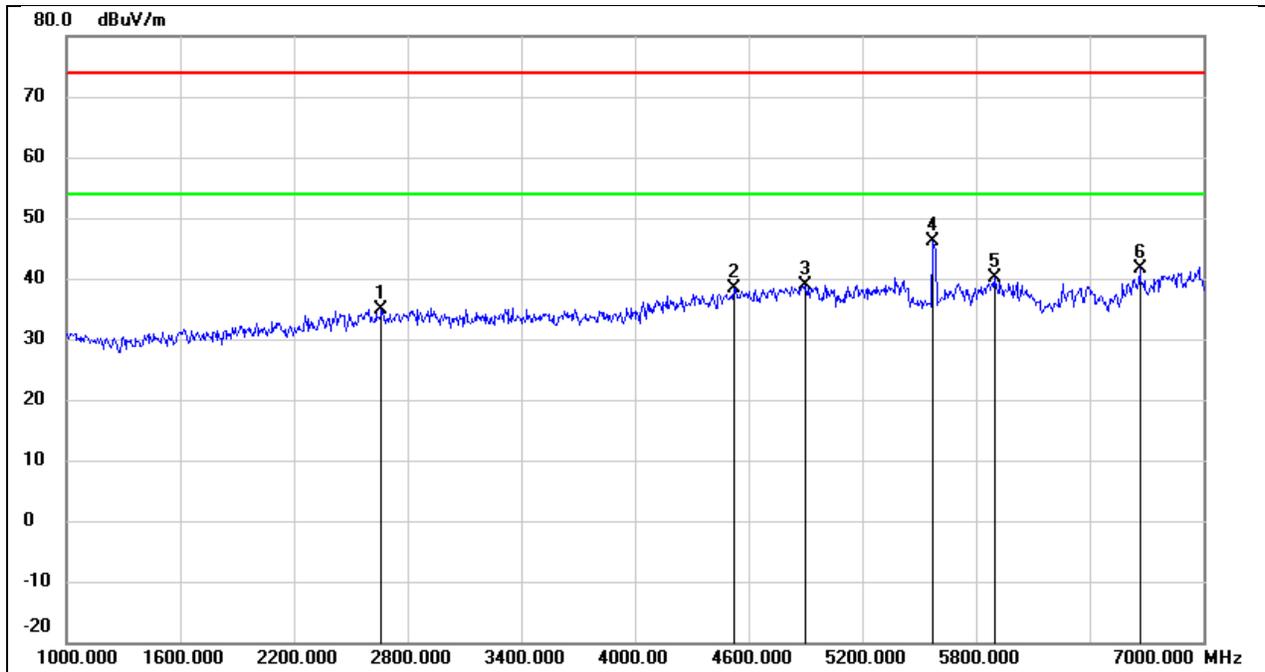


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2662.000	43.00	-8.01	34.99	74.00	-39.01	peak
2	4522.000	40.36	-2.05	38.31	74.00	-35.69	peak
3	4900.000	39.52	-0.55	38.97	74.00	-35.03	peak
4	5580.000	45.58	0.63	46.21	/	/	fundamental
5	5896.000	38.60	1.56	40.16	74.00	-33.84	peak
6	6664.000	37.06	4.54	41.60	74.00	-32.40	peak

Test Mode:	802.11a 20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3V

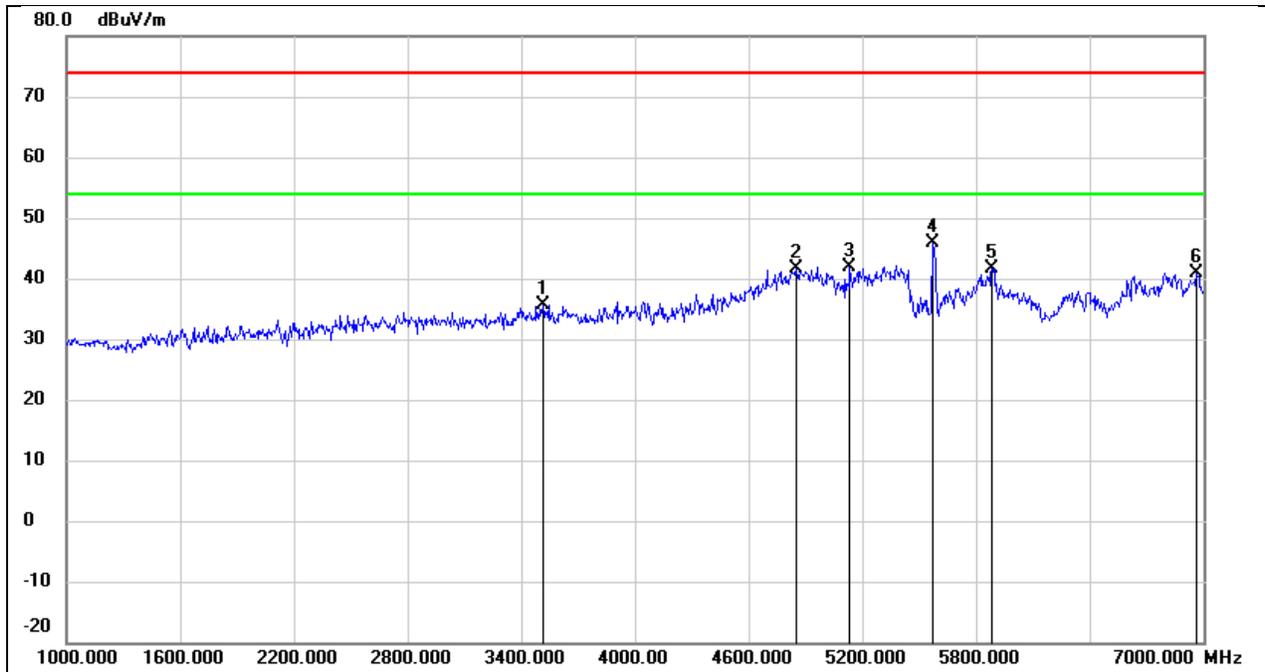


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3514.000	41.50	-5.81	35.69	74.00	-38.31	peak
2	4852.000	42.29	-0.74	41.55	74.00	-32.45	peak
3	5134.000	41.90	0.00	41.90	74.00	-32.10	peak
4	5580.000	45.15	0.63	45.78	/	/	fundamental
5	5884.000	40.19	1.52	41.71	74.00	-32.29	peak
6	6964.000	34.87	6.03	40.90	74.00	-33.10	peak

Test Mode:	802.11a 20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

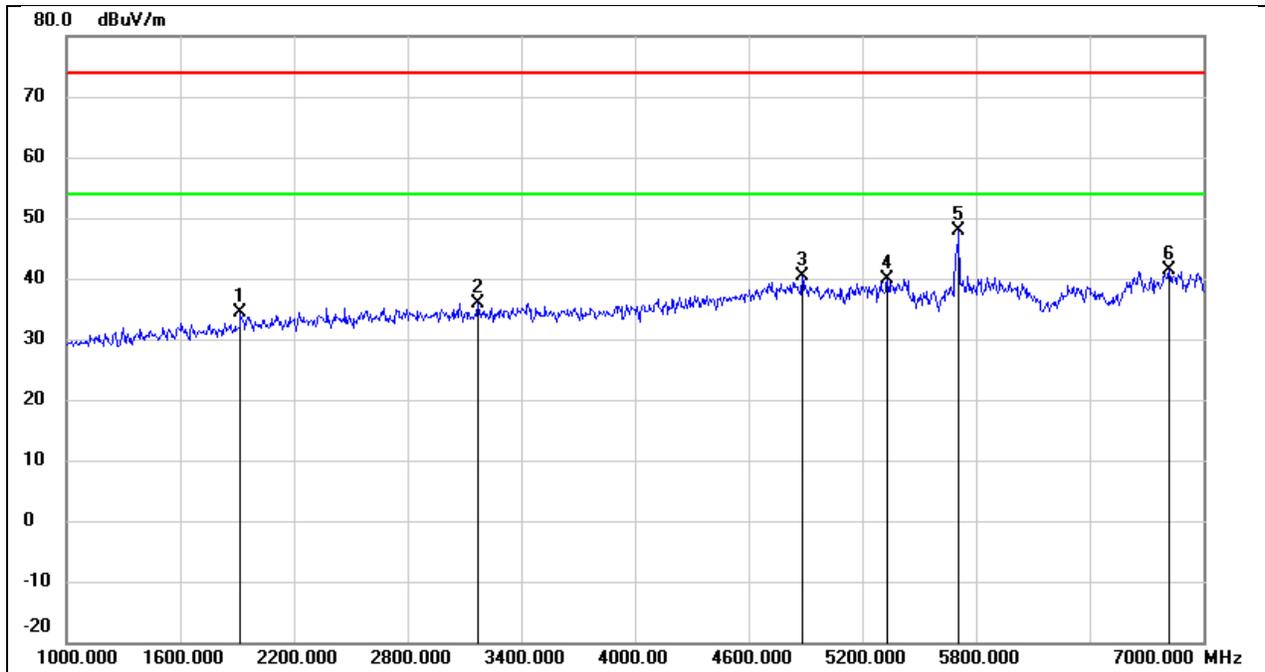


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1918.000	45.60	-11.33	34.27	74.00	-39.73	peak
2	3172.000	42.54	-6.59	35.95	74.00	-38.05	peak
3	4882.000	41.00	-0.62	40.38	74.00	-33.62	peak
4	5332.000	39.63	0.22	39.85	74.00	-34.15	peak
5	5700.000	46.95	1.02	47.97	/	/	fundamental
6	6820.000	36.00	5.31	41.31	74.00	-32.69	peak

Test Mode:	802.11a 20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3V

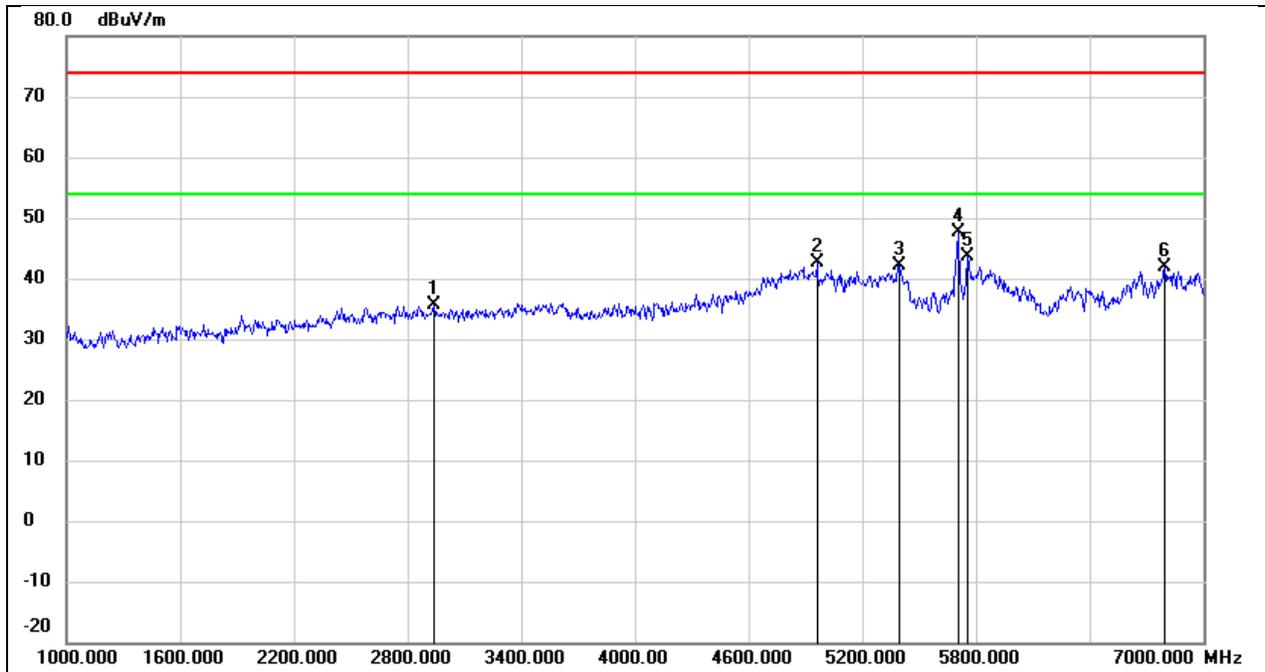


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2938.000	42.83	-7.16	35.67	74.00	-38.33	peak
2	4960.000	42.91	-0.32	42.59	74.00	-31.41	peak
3	5392.000	41.95	0.29	42.24	74.00	-31.76	peak
4	5700.000	46.75	1.00	47.75	/	/	fundamental
5	5752.000	42.48	1.14	43.62	74.00	-30.38	peak
6	6796.000	36.63	5.19	41.82	74.00	-32.18	peak

Test Mode:	802.11a 20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3V

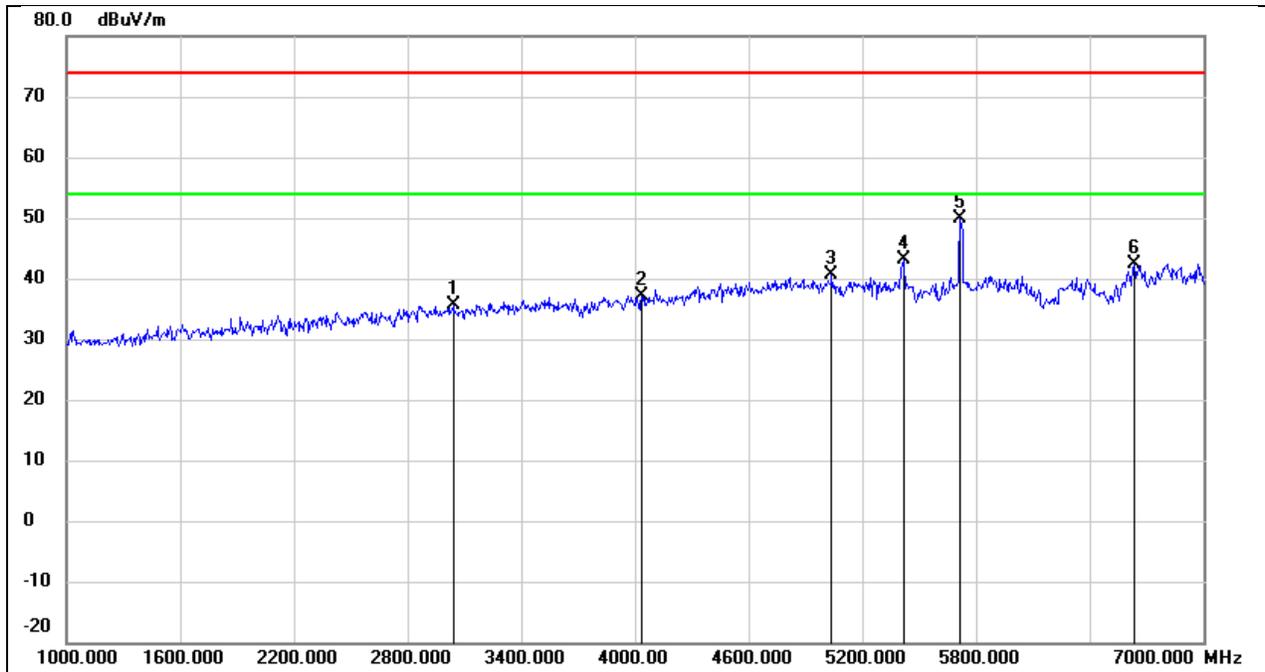


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3040.000	42.45	-6.89	35.56	74.00	-38.44	peak
2	4036.000	41.47	-4.31	37.16	74.00	-36.84	peak
3	5038.000	40.77	-0.11	40.66	74.00	-33.34	peak
4	5416.000	42.77	0.32	43.09	74.00	-30.91	peak
5	5720.000	48.72	1.04	49.76	/	/	fundamental
6	6634.000	37.89	4.38	42.27	74.00	-31.73	peak

Test Mode:	802.11a 20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3V

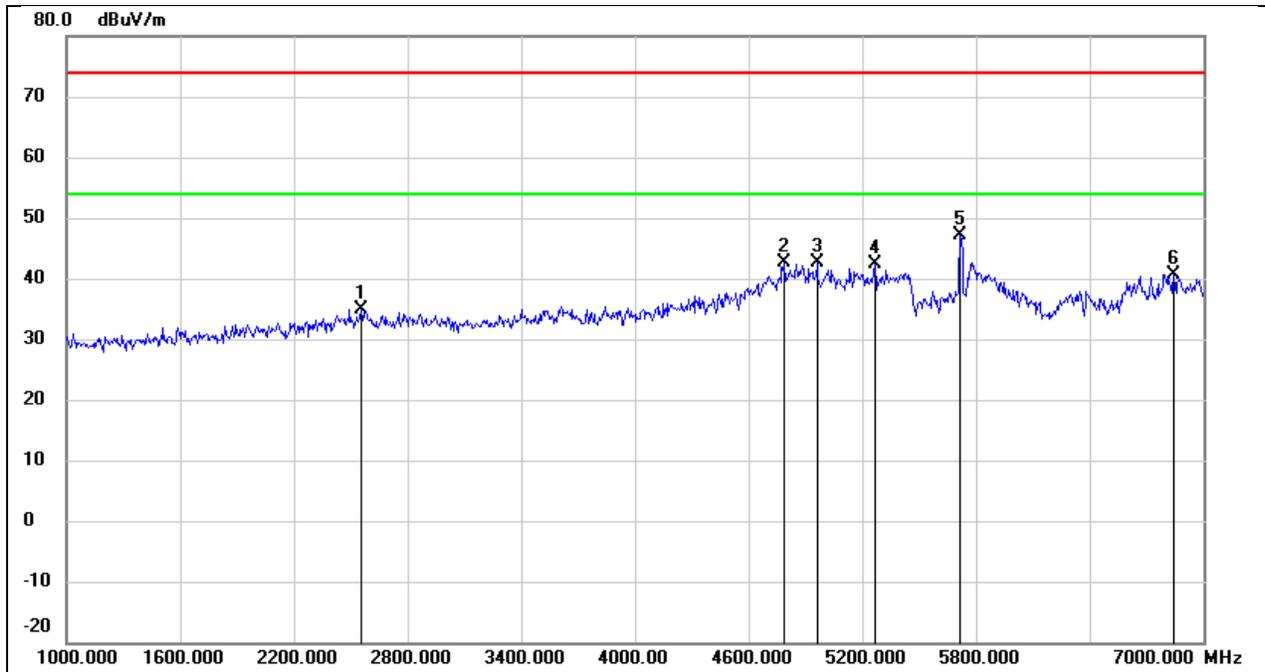


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2554.000	43.23	-8.32	34.91	74.00	-39.09	peak
2	4786.000	43.66	-1.00	42.66	74.00	-31.34	peak
3	4960.000	42.84	-0.32	42.52	74.00	-31.48	peak
4	5266.000	42.11	0.15	42.26	74.00	-31.74	peak
5	5720.000	46.16	1.04	47.20	/	/	fundamental
6	6844.000	35.17	5.43	40.60	74.00	-33.40	peak

Test Mode:	802.11a 20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

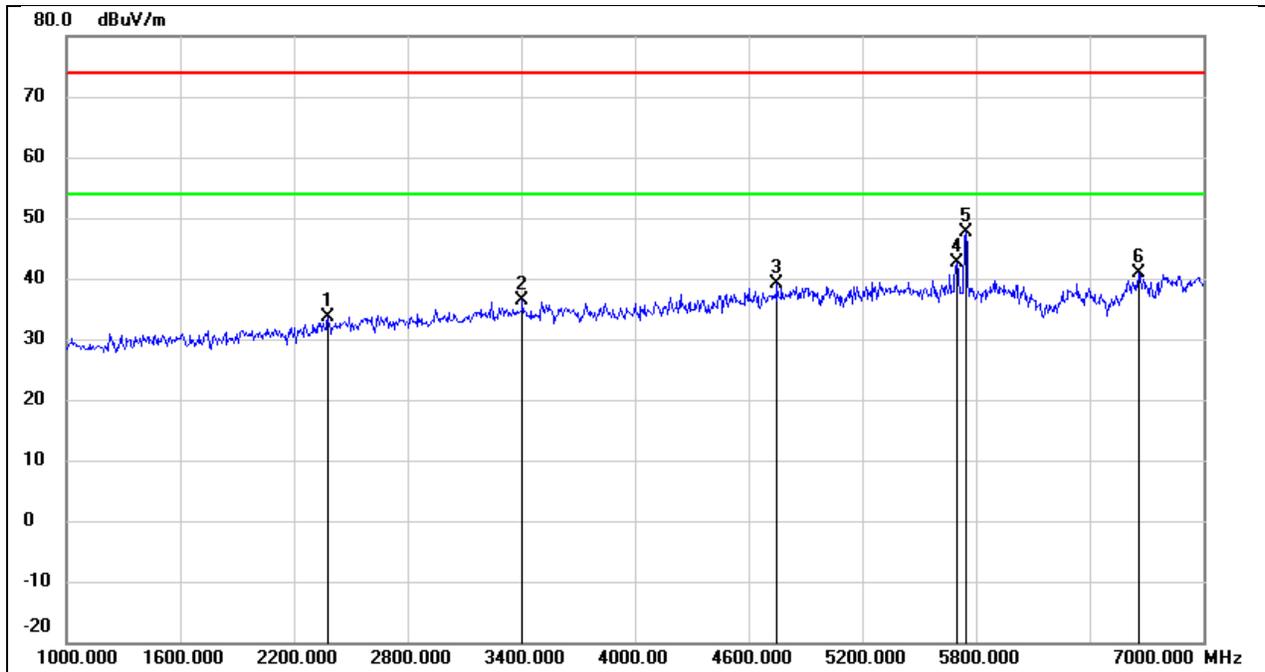


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2380.000	42.81	-9.10	33.71	74.00	-40.29	peak
2	3406.000	42.36	-6.06	36.30	74.00	-37.70	peak
3	4750.000	40.23	-1.14	39.09	74.00	-34.91	peak
4	5698.000	41.75	0.99	42.74	74.00	-31.26	peak
5	5745.000	46.60	1.12	47.72	/	/	fundamental
6	6658.000	36.39	4.49	40.88	74.00	-33.12	peak

Test Mode:	802.11a 20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3V

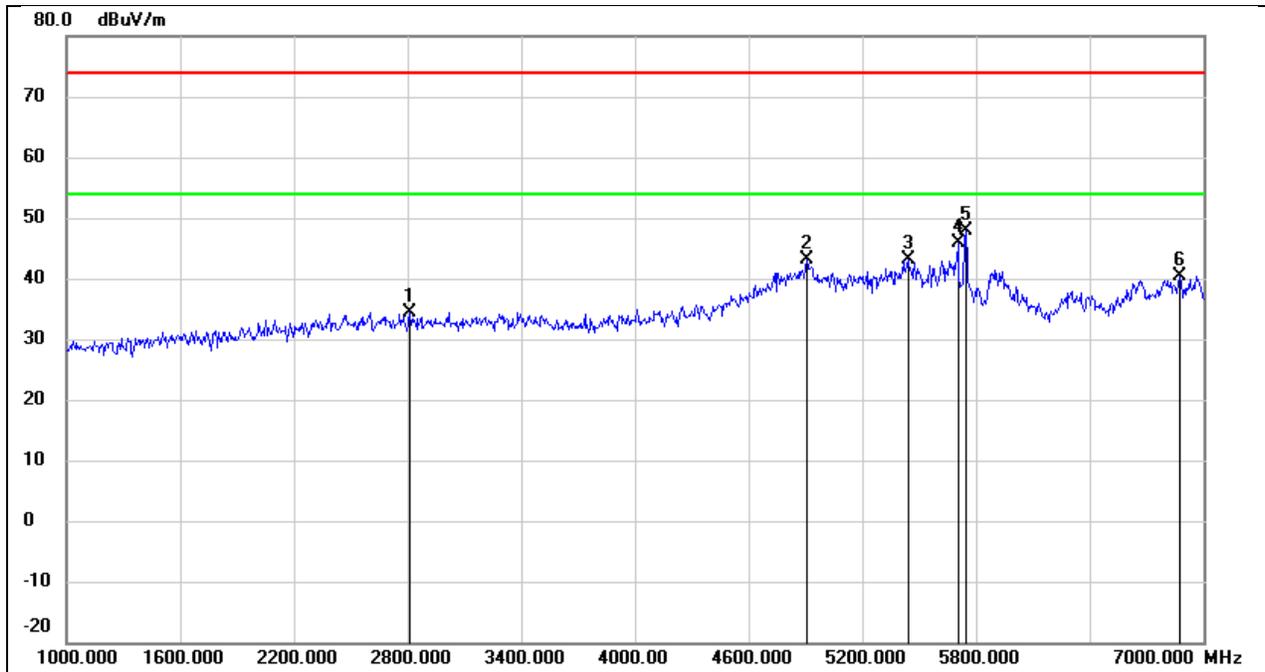


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2812.000	42.00	-7.55	34.45	74.00	-39.55	peak
2	4906.000	43.77	-0.53	43.24	74.00	-30.76	peak
3	5440.000	42.67	0.35	43.02	74.00	-30.98	peak
4	5704.000	44.79	1.00	45.79	74.00	-28.21	peak
5	5745.000	46.86	1.12	47.98	/	/	fundamental
6	6874.000	34.71	5.57	40.28	74.00	-33.72	peak

Test Mode:	802.11a 20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3V

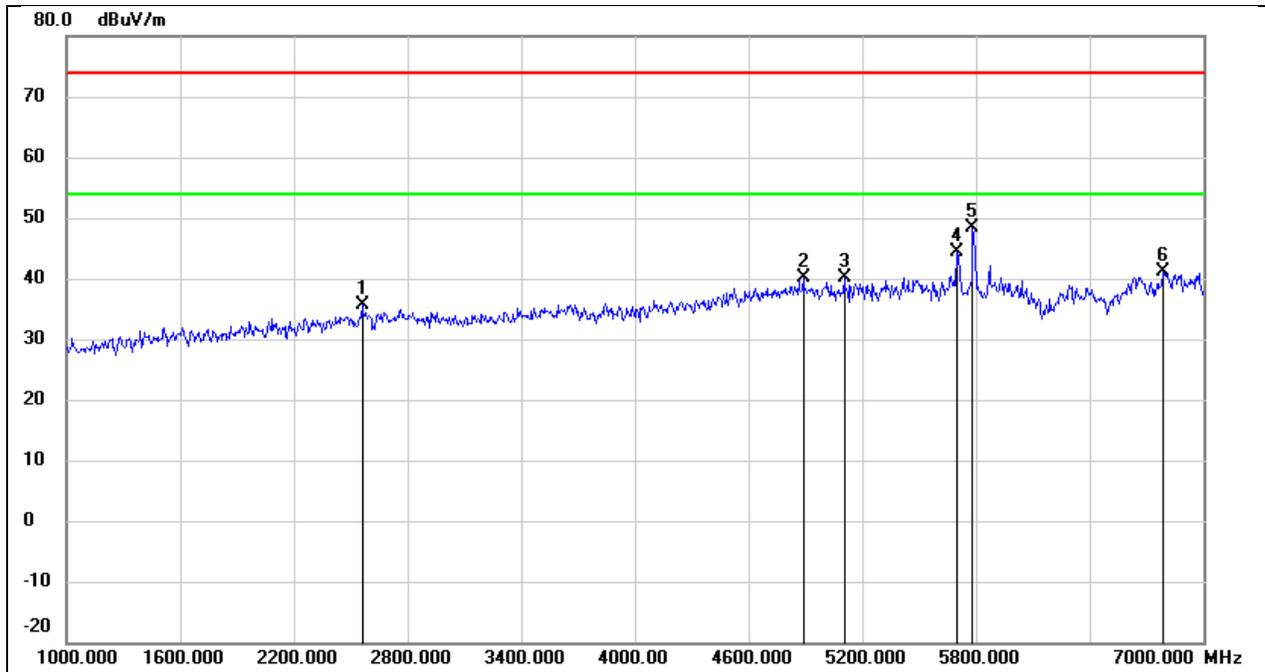


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2560.000	43.90	-8.31	35.59	74.00	-38.41	peak
2	4888.000	40.64	-0.60	40.04	74.00	-33.96	peak
3	5104.000	40.09	-0.03	40.06	74.00	-33.94	peak
4	5698.000	43.48	0.99	44.47	74.00	-29.53	peak
5	5785.000	47.22	1.23	48.45	/	/	fundamental
6	6784.000	35.88	5.13	41.01	74.00	-32.99	peak

Test Mode:	802.11a 20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3V

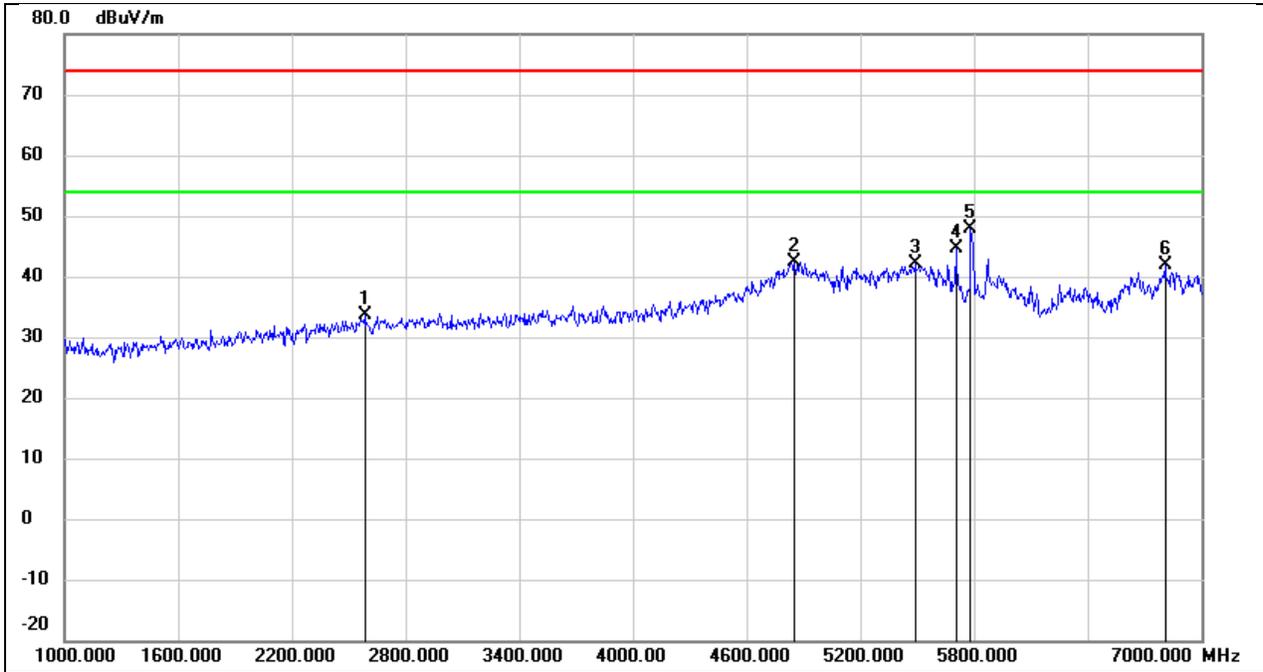


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2584.000	41.92	-8.24	33.68	74.00	-40.32	peak
2	4852.000	43.17	-0.74	42.43	74.00	-31.57	peak
3	5488.000	41.66	0.41	42.07	74.00	-31.93	peak
4	5704.000	43.73	1.00	44.73	74.00	-29.27	peak
5	5785.000	46.74	1.23	47.97	/	/	fundamental
6	6808.000	36.52	5.24	41.76	74.00	-32.24	peak

Test Mode:	802.11a 20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

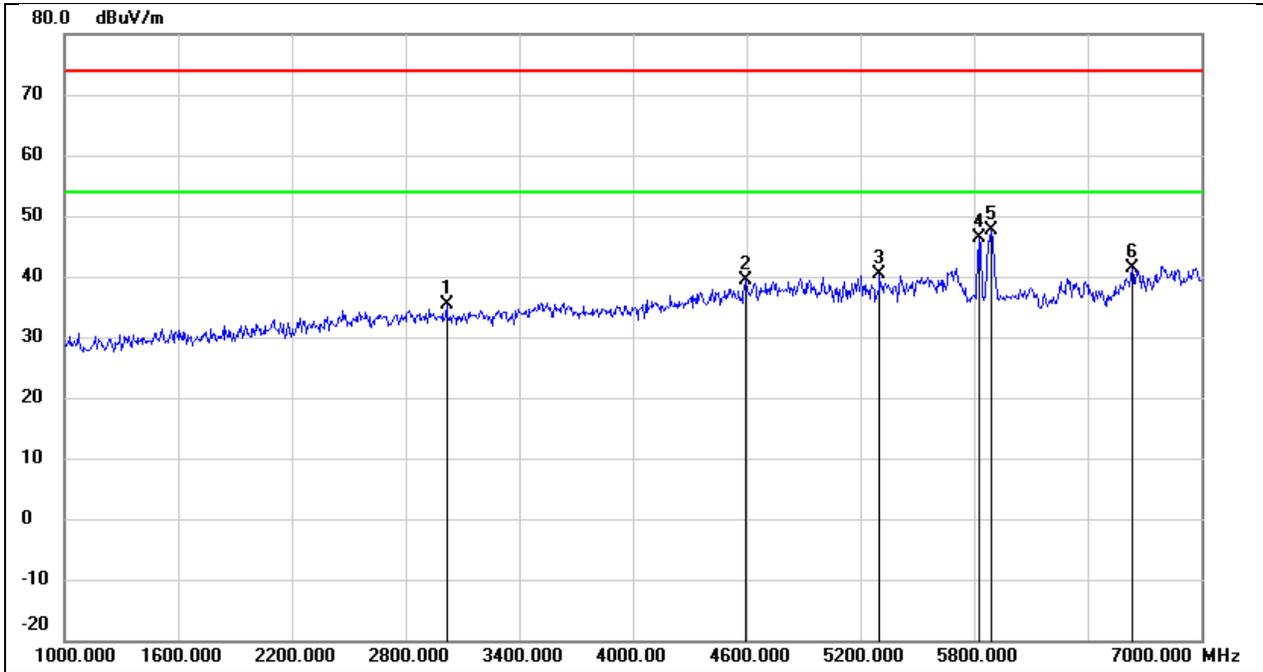

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3016.000	42.31	-6.94	35.37	74.00	-38.63	peak
2	4594.000	41.14	-1.76	39.38	74.00	-34.62	peak
3	5302.000	40.15	0.19	40.34	74.00	-33.66	peak
4	5825.000	44.97	1.36	46.33	/	/	fundamental
5	5890.000	46.17	1.54	47.71	74.00	-26.29	peak
6	6634.000	36.90	4.38	41.28	74.00	-32.72	peak


Test Mode:	802.11a 20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3V

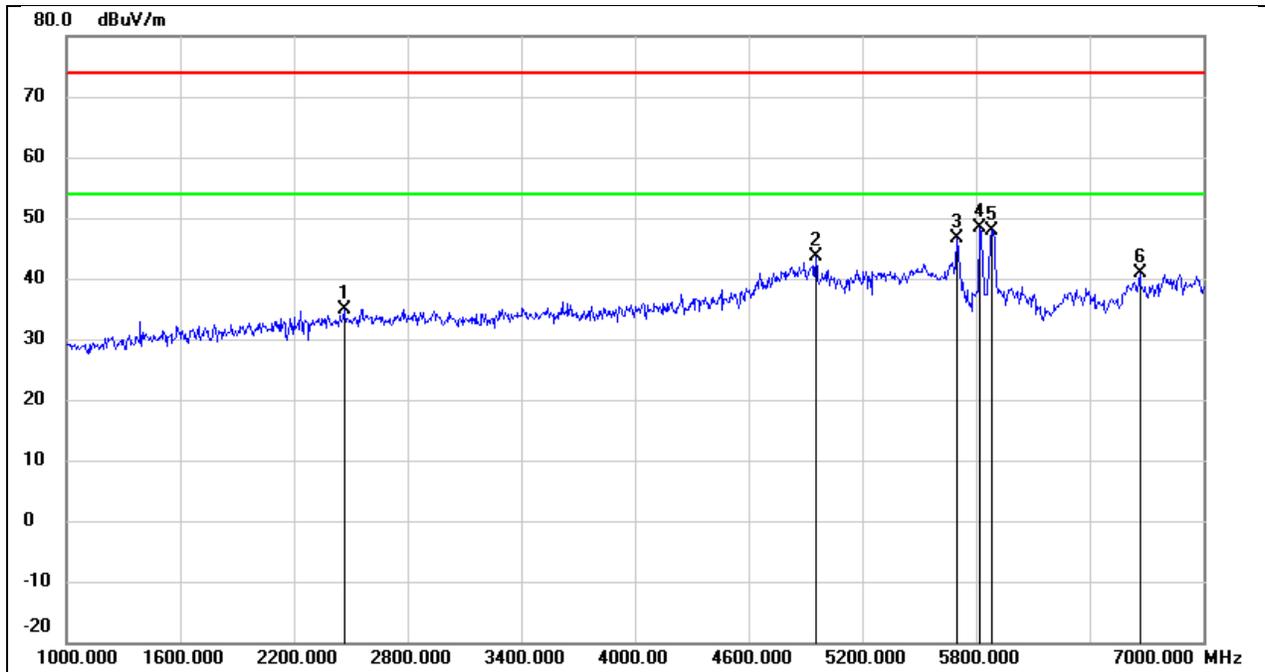

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2464.000	43.56	-8.68	34.88	74.00	-39.12	peak
2	4954.000	43.86	-0.33	43.53	74.00	-30.47	peak
3	5698.000	45.54	0.99	46.53	74.00	-27.47	peak
4	5825.000	47.01	1.33	48.34	/	/	fundamental
5	5884.000	46.38	1.52	47.90	74.00	-26.10	peak
6	6664.000	36.39	4.54	40.93	74.00	-33.07	peak


8.3. SPURIOUS EMISSIONS(7 GHZ~18 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

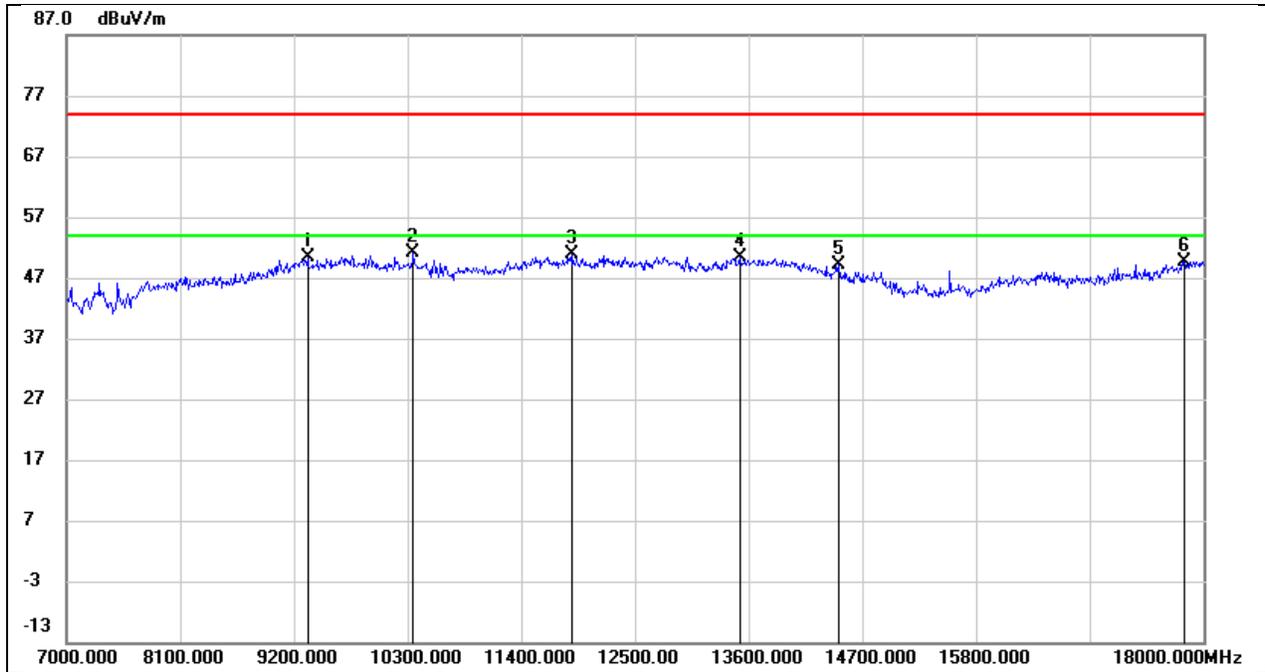


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	38.39	11.92	50.31	74.00	-23.69	peak
2	10355.000	37.92	13.27	51.19	74.00	-22.81	peak
3	11895.000	32.44	18.39	50.83	74.00	-23.17	peak
4	13512.000	28.56	21.91	50.47	74.00	-23.53	peak
5	14469.000	27.98	21.15	49.13	74.00	-24.87	peak
6	17813.000	22.25	27.42	49.67	74.00	-24.33	peak

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

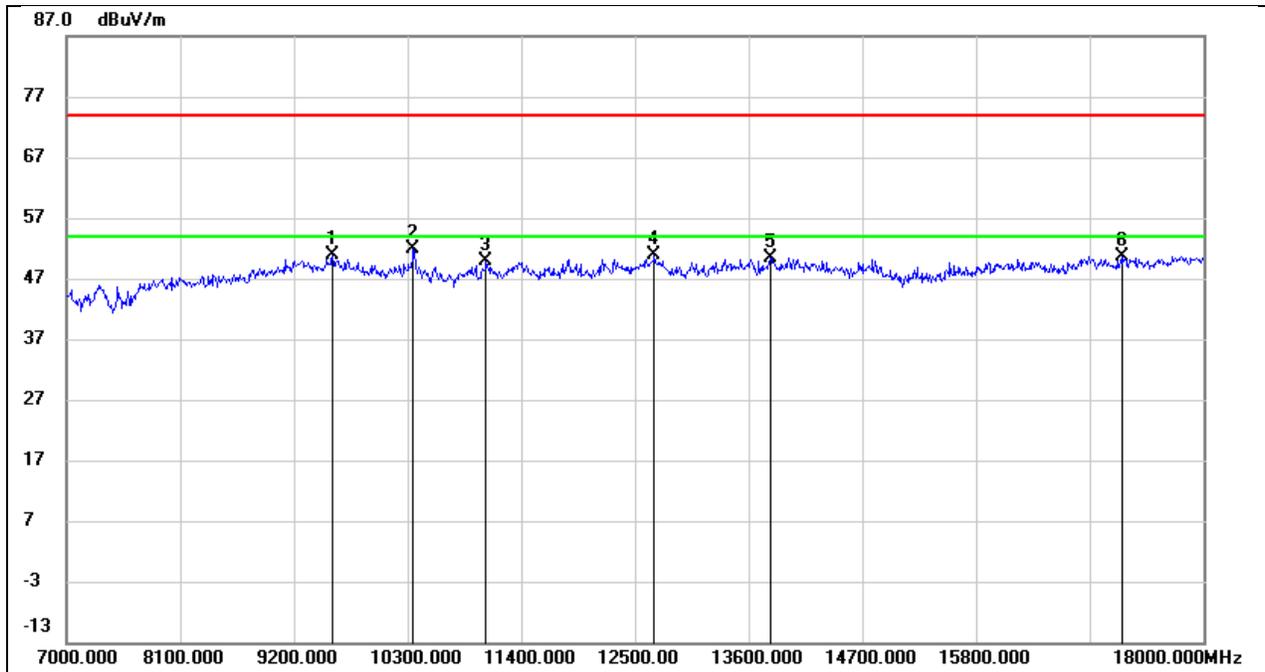


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9574.000	37.63	13.16	50.79	74.00	-23.21	peak
2	10355.000	39.06	12.93	51.99	74.00	-22.01	peak
3	11059.000	35.47	14.43	49.90	74.00	-24.10	peak
4	12687.000	32.40	18.50	50.90	74.00	-23.10	peak
5	13809.000	29.45	21.01	50.46	74.00	-23.54	peak
6	17208.000	25.97	24.72	50.69	74.00	-23.31	peak

Test Mode:	802.11a 20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 3.3V

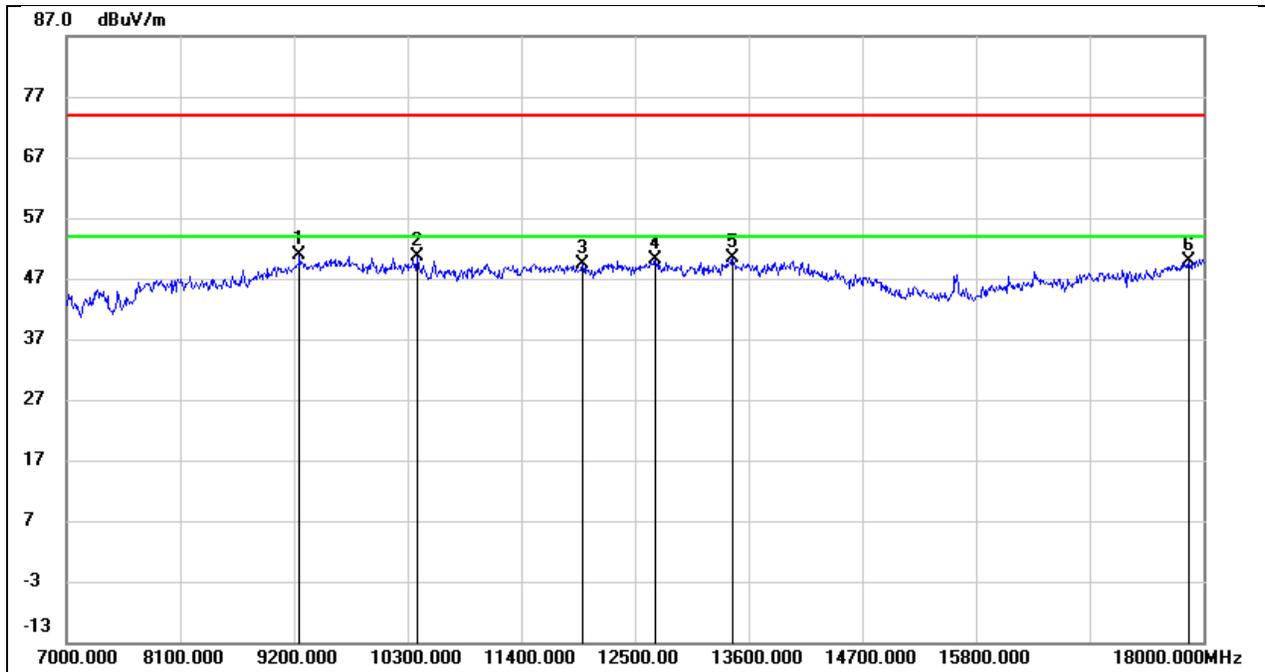


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	39.13	11.67	50.80	74.00	-23.20	peak
2	10388.000	37.33	13.30	50.63	74.00	-23.37	peak
3	11994.000	30.75	18.68	49.43	74.00	-24.57	peak
4	12698.000	30.63	19.55	50.18	74.00	-23.82	peak
5	13446.000	28.74	21.68	50.42	74.00	-23.58	peak
6	17857.000	21.88	27.88	49.76	74.00	-24.24	peak

Test Mode:	802.11a 20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 3.3V

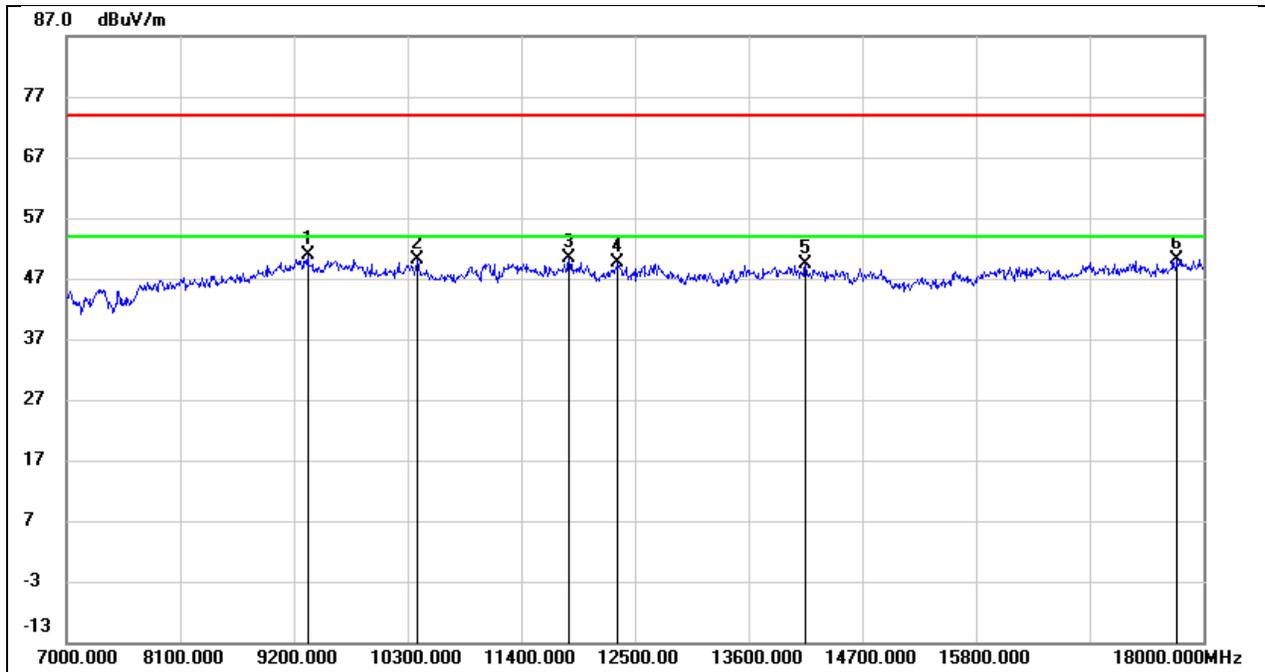


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	38.83	12.06	50.89	74.00	-23.11	peak
2	10399.000	37.11	13.01	50.12	74.00	-23.88	peak
3	11862.000	33.28	17.09	50.37	74.00	-23.63	peak
4	12335.000	31.68	18.03	49.71	74.00	-24.29	peak
5	14150.000	27.73	21.59	49.32	74.00	-24.68	peak
6	17747.000	24.40	25.69	50.09	74.00	-23.91	peak

Test Mode:	802.11a 20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

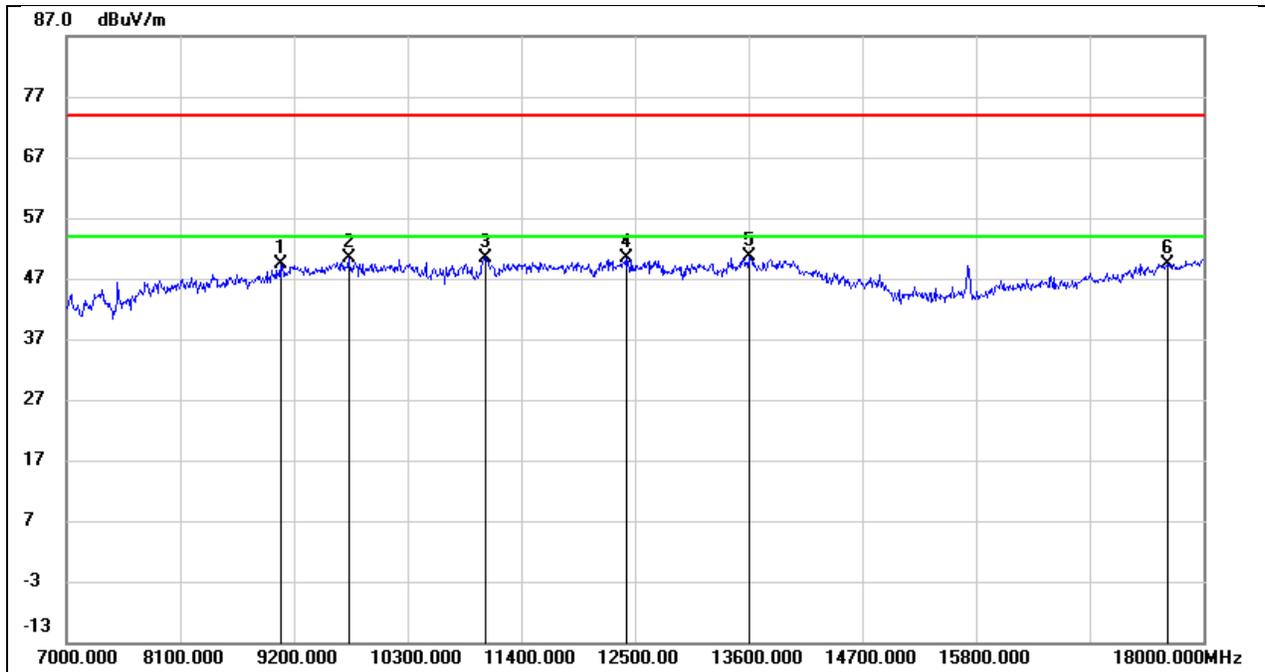


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9068.000	38.47	10.88	49.35	74.00	-24.65	peak
2	9728.000	36.69	13.65	50.34	74.00	-23.66	peak
3	11048.000	35.26	15.24	50.50	74.00	-23.50	peak
4	12412.000	31.21	19.06	50.27	74.00	-23.73	peak
5	13600.000	28.47	22.06	50.53	74.00	-23.47	peak
6	17648.000	23.68	25.81	49.49	74.00	-24.51	peak

Test Mode:	802.11a 20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 3.3V

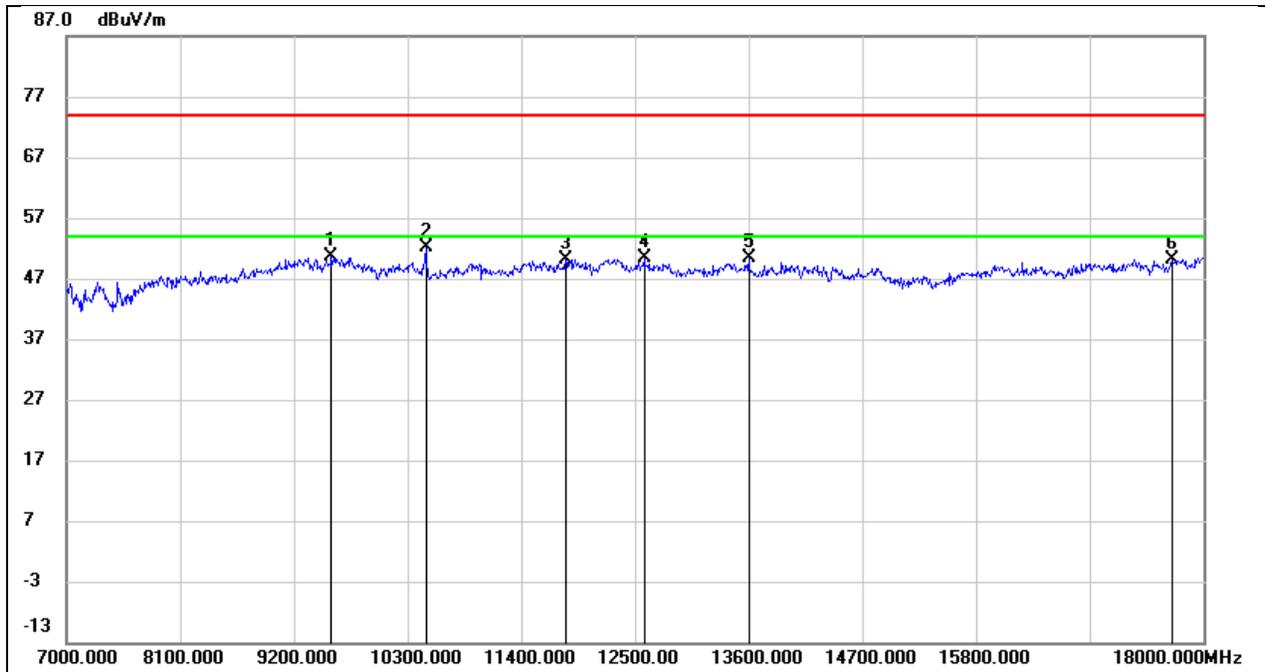


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9563.000	37.64	13.10	50.74	74.00	-23.26	peak
2	10476.000	38.88	13.21	52.09	74.00	-21.91	peak
3	11829.000	33.23	16.97	50.20	74.00	-23.80	peak
4	12588.000	32.11	18.21	50.32	74.00	-23.68	peak
5	13600.000	29.89	20.38	50.27	74.00	-23.73	peak
6	17703.000	24.77	25.45	50.22	74.00	-23.78	peak

Test Mode:	802.11a 20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

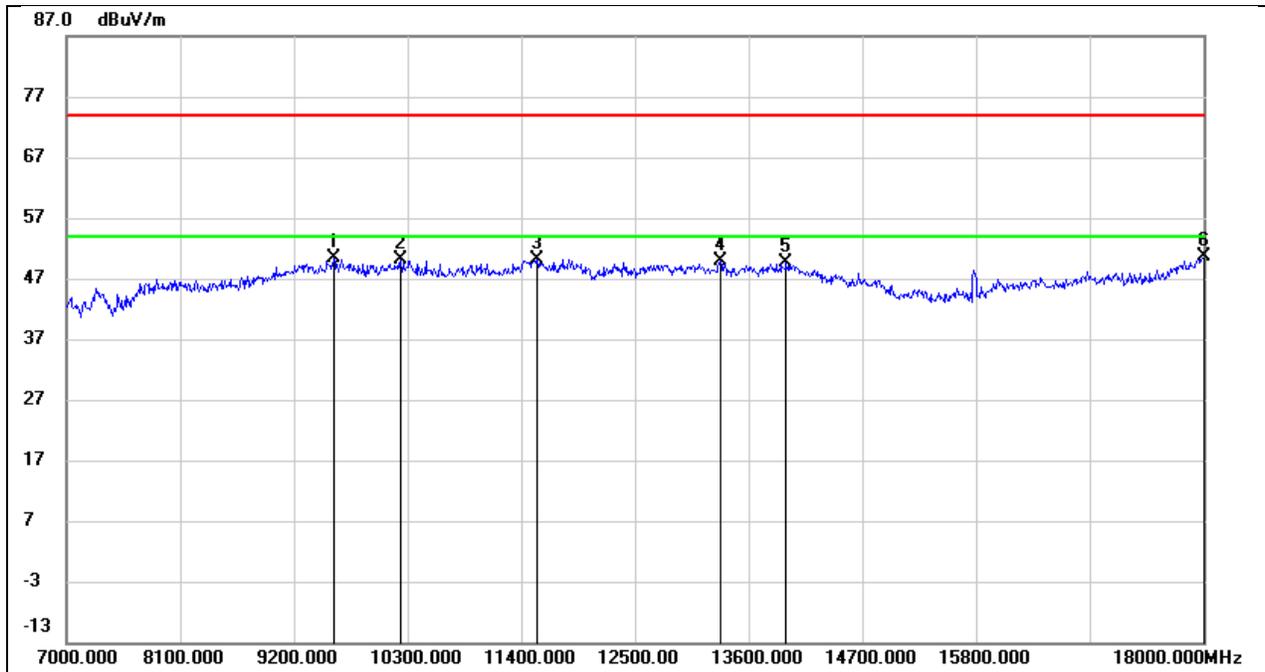


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9585.000	37.06	13.34	50.40	74.00	-23.60	peak
2	10234.000	36.91	13.18	50.09	74.00	-23.91	peak
3	11554.000	32.06	18.04	50.10	74.00	-23.90	peak
4	13325.000	28.62	21.23	49.85	74.00	-24.15	peak
5	13963.000	26.40	23.26	49.66	74.00	-24.34	peak
6	18000.000	21.21	29.41	50.62	74.00	-23.38	peak

Test Mode:	802.11a 20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3V

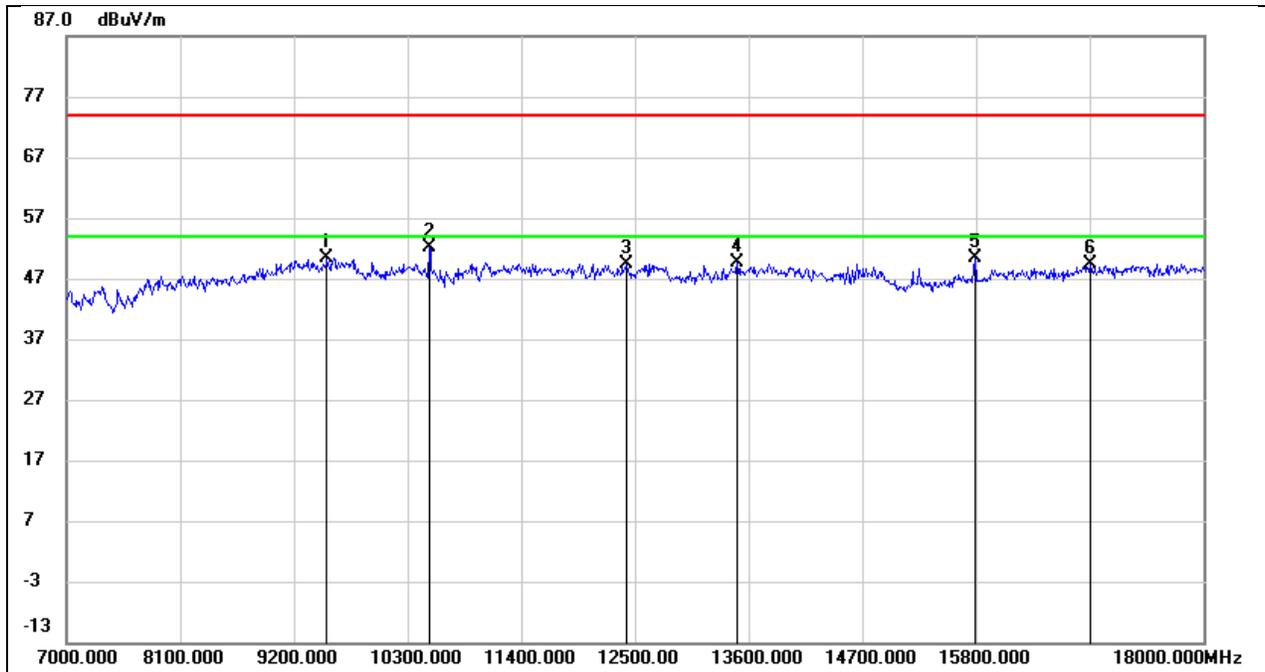


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9519.000	37.51	12.90	50.41	74.00	-23.59	peak
2	10509.000	38.88	13.30	52.18	74.00	-21.82	peak
3	12423.000	31.37	18.12	49.49	74.00	-24.51	peak
4	13490.000	29.51	20.17	49.68	74.00	-24.32	peak
5	15789.000	28.91	21.56	50.47	74.00	-23.53	peak
6	16911.000	25.37	24.08	49.45	74.00	-24.55	peak

Test Mode:	802.11a 20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3V

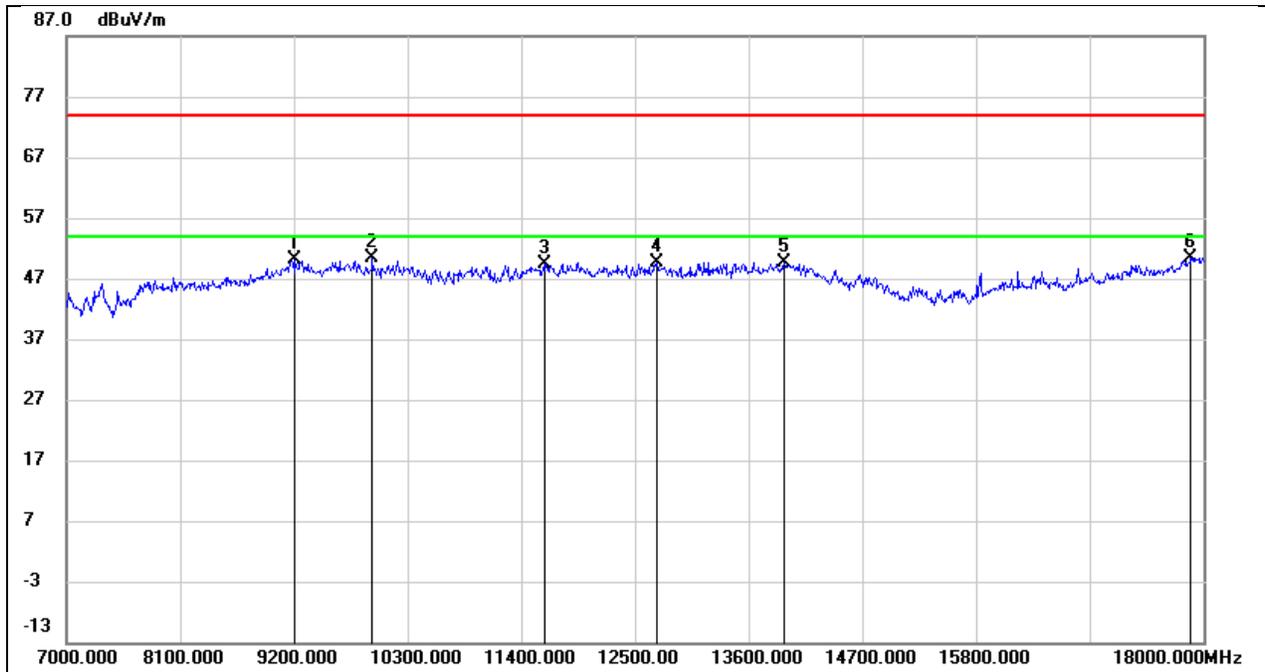


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	38.54	11.52	50.06	74.00	-23.94	peak
2	9959.000	37.04	13.43	50.47	74.00	-23.53	peak
3	11620.000	31.20	18.17	49.37	74.00	-24.63	peak
4	12709.000	30.08	19.59	49.67	74.00	-24.33	peak
5	13941.000	26.46	23.18	49.64	74.00	-24.36	peak
6	17879.000	22.35	28.12	50.47	74.00	-23.53	peak

Test Mode:	802.11a 20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3V

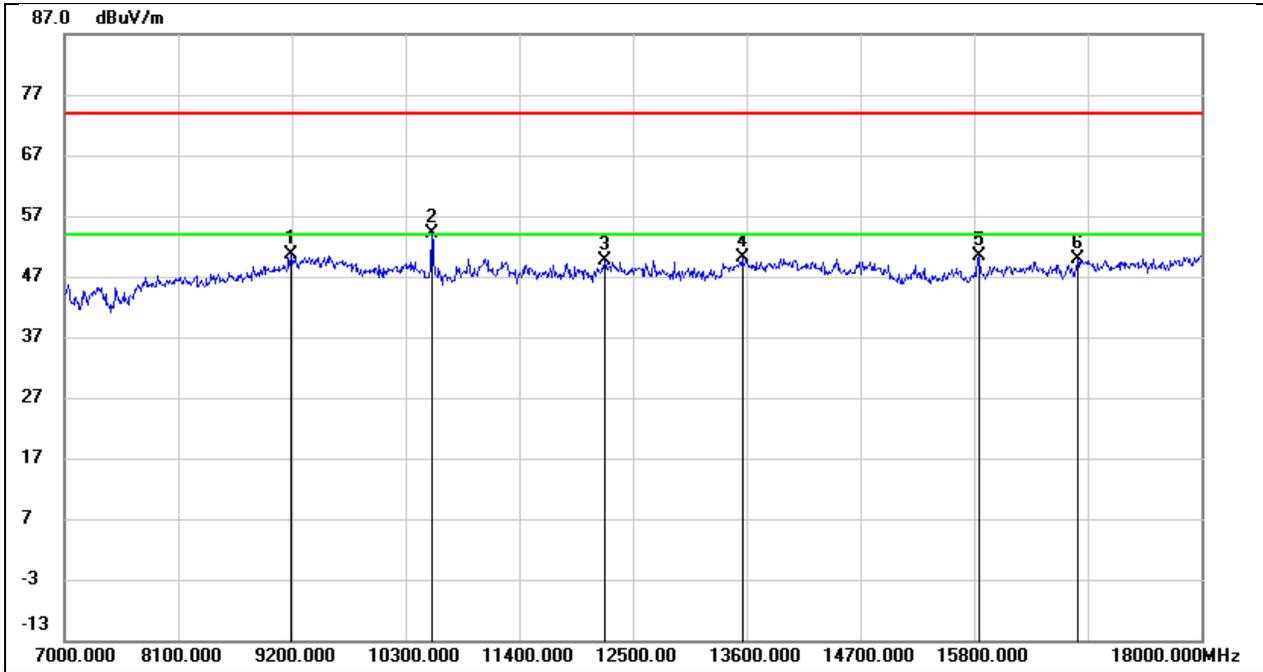


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	38.93	11.67	50.60	74.00	-23.40	peak
2	10553.000	40.87	13.37	54.24	74.00	-19.76	peak
3	12225.000	31.67	17.87	49.54	74.00	-24.46	peak
4	13556.000	29.90	20.29	50.19	74.00	-23.81	peak
5	15844.000	28.39	21.89	50.28	74.00	-23.72	peak
6	16801.000	25.95	23.89	49.84	74.00	-24.16	peak

Test Mode:	802.11a 20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

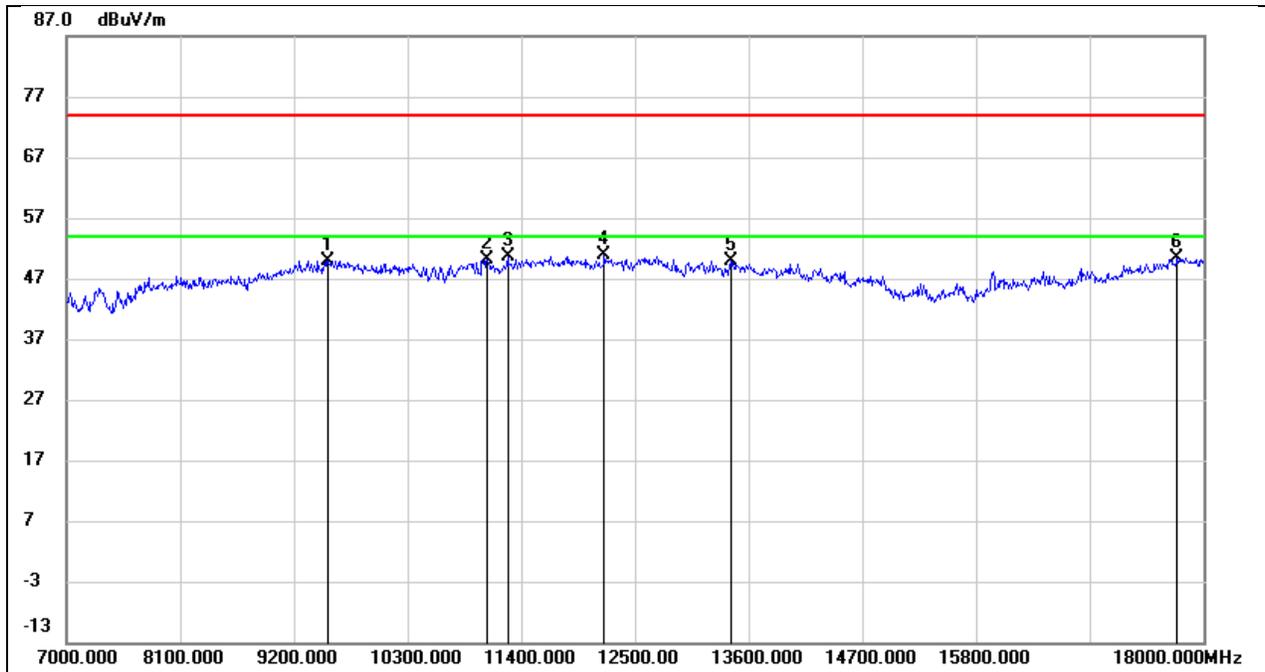


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9530.000	37.01	12.99	50.00	74.00	-24.00	peak
2	11070.000	34.71	15.36	50.07	74.00	-23.93	peak
3	11268.000	34.07	16.55	50.62	74.00	-23.38	peak
4	12203.000	31.97	18.85	50.82	74.00	-23.18	peak
5	13424.000	28.31	21.59	49.90	74.00	-24.10	peak
6	17747.000	23.67	26.78	50.45	74.00	-23.55	peak

Test Mode:	802.11a 20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3V

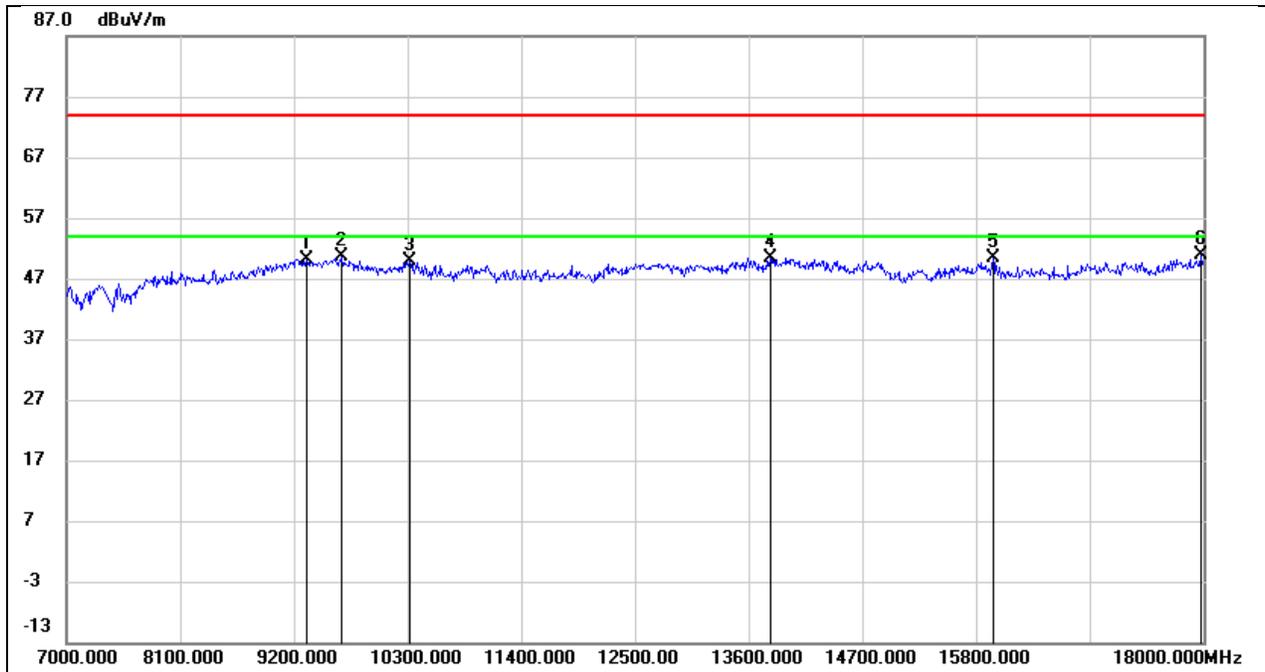


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9321.000	38.12	12.03	50.15	74.00	-23.85	peak
2	9662.000	37.39	13.31	50.70	74.00	-23.30	peak
3	10322.000	36.94	12.88	49.82	74.00	-24.18	peak
4	13809.000	29.45	21.01	50.46	74.00	-23.54	peak
5	15965.000	27.74	22.65	50.39	74.00	-23.61	peak
6	17978.000	23.76	27.08	50.84	74.00	-23.16	peak

Test Mode:	802.11a 20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

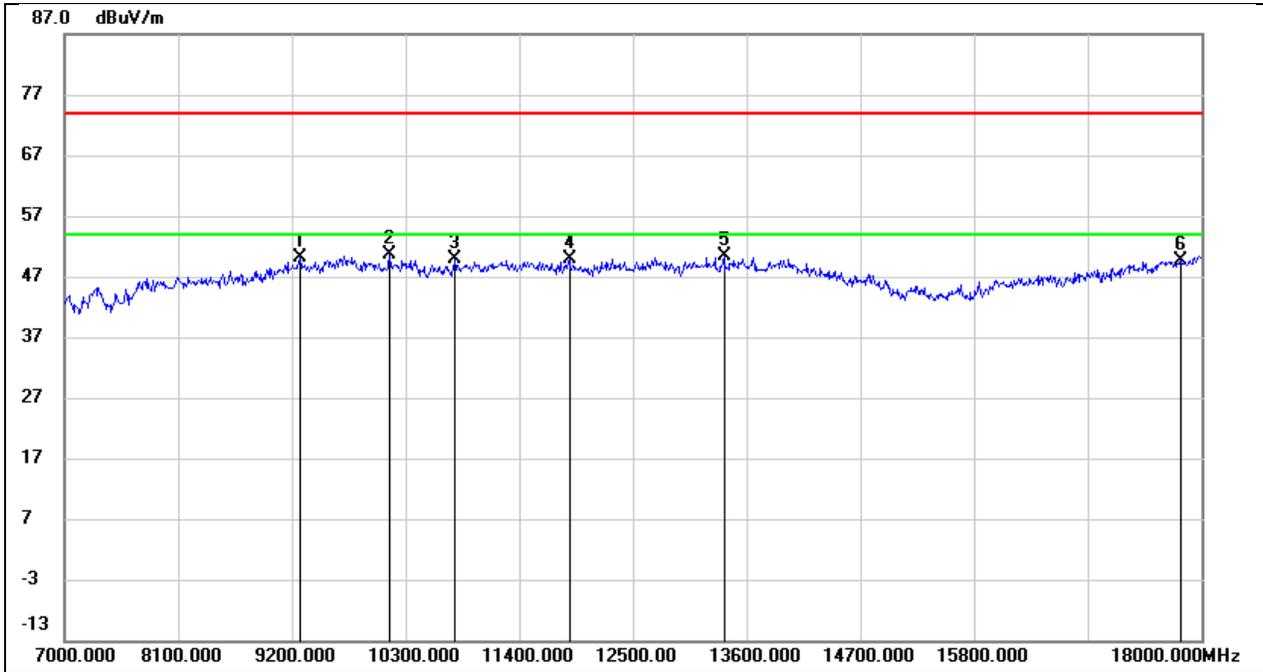


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9277.000	38.37	11.74	50.11	74.00	-23.89	peak
2	10146.000	37.51	13.21	50.72	74.00	-23.28	peak
3	10773.000	35.65	14.26	49.91	74.00	-24.09	peak
4	11884.000	31.49	18.37	49.86	74.00	-24.14	peak
5	13380.000	28.96	21.43	50.39	74.00	-23.61	peak
6	17802.000	22.42	27.31	49.73	74.00	-24.27	peak

Test Mode:	802.11a 20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3V

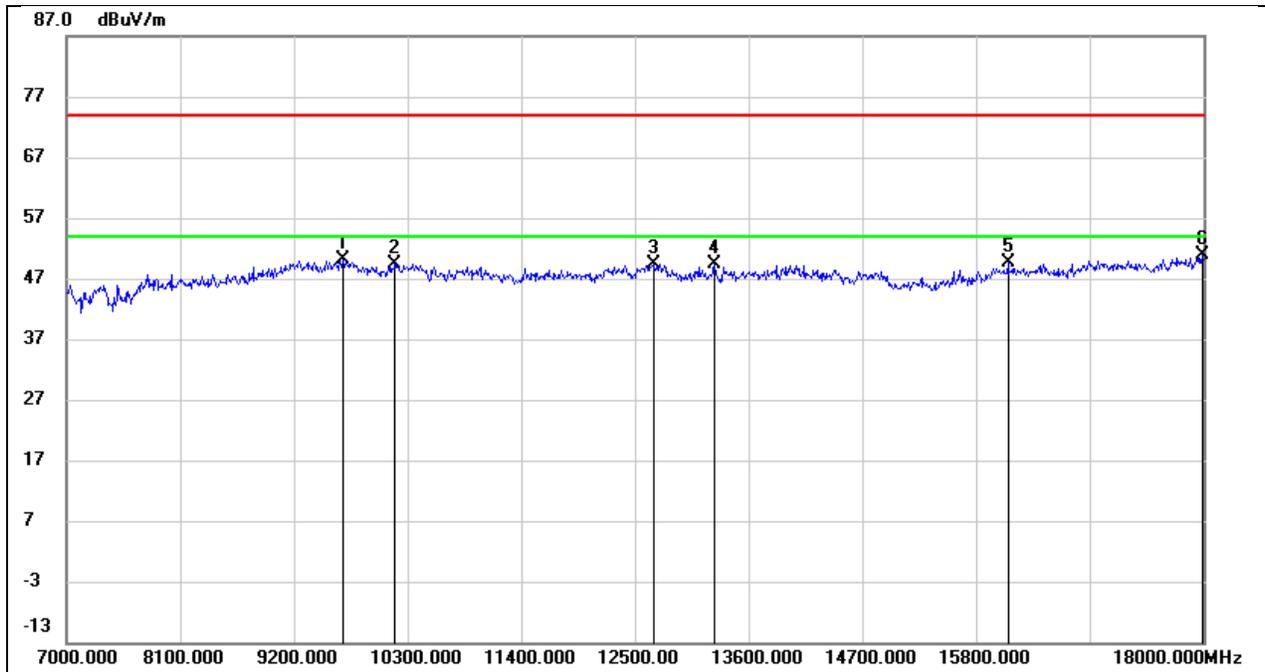


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9673.000	36.86	13.31	50.17	74.00	-23.83	peak
2	10179.000	36.83	12.66	49.49	74.00	-24.51	peak
3	12676.000	30.99	18.46	49.45	74.00	-24.55	peak
4	13270.000	29.69	19.57	49.26	74.00	-24.74	peak
5	16108.000	26.06	23.55	49.61	74.00	-24.39	peak
6	17989.000	23.68	27.13	50.81	74.00	-23.19	peak

Test Mode:	802.11a 20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3V

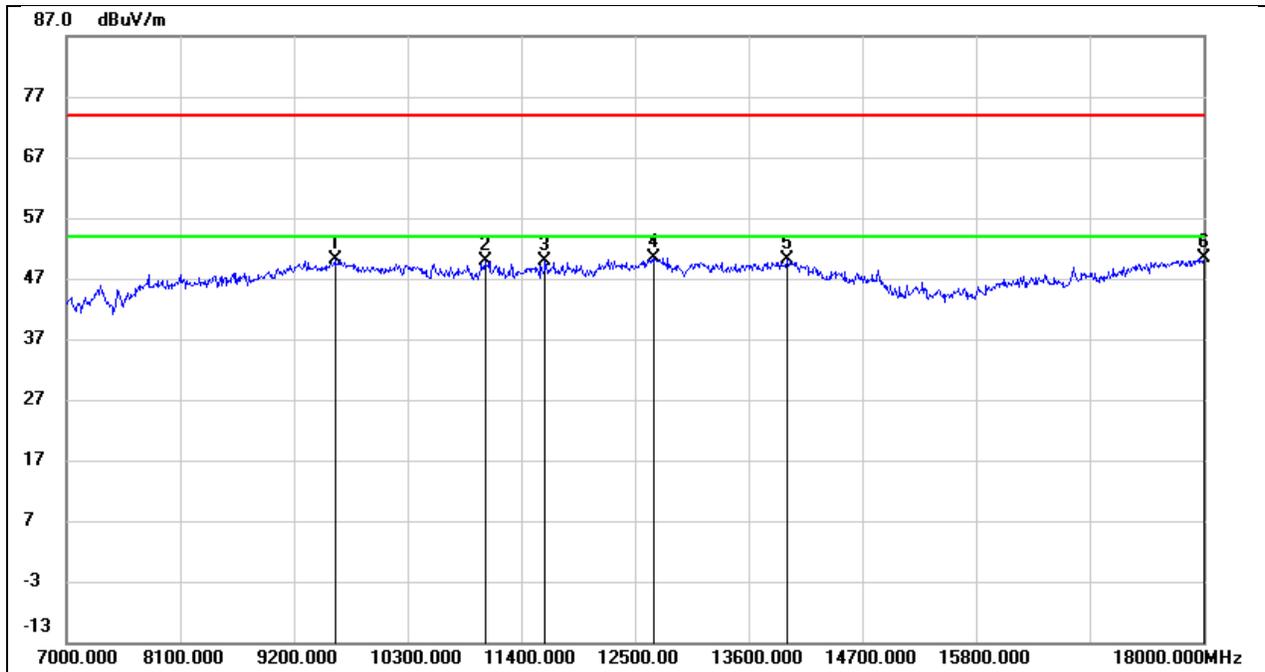


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9596.000	36.77	13.40	50.17	74.00	-23.83	peak
2	11048.000	34.72	15.24	49.96	74.00	-24.04	peak
3	11631.000	31.76	18.17	49.93	74.00	-24.07	peak
4	12687.000	30.87	19.51	50.38	74.00	-23.62	peak
5	13974.000	26.87	23.31	50.18	74.00	-23.82	peak
6	18000.000	21.03	29.41	50.44	74.00	-23.56	peak

Test Mode:	802.11a 20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3V

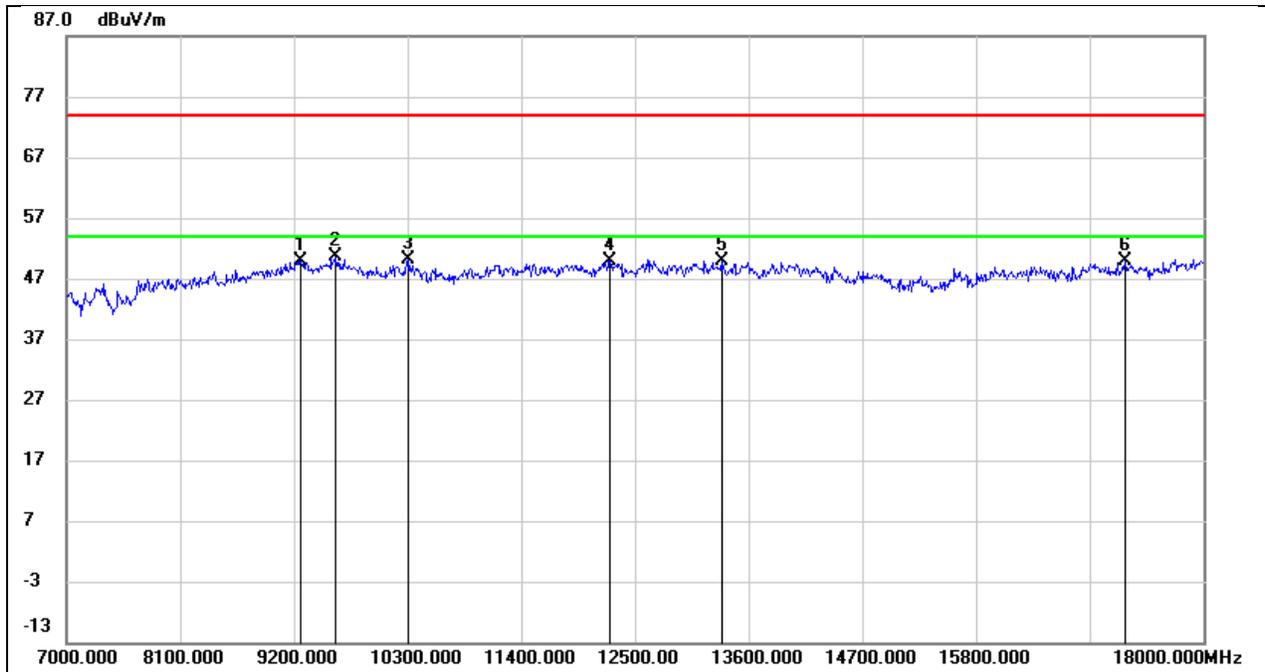


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	38.11	11.88	49.99	74.00	-24.01	peak
2	9607.000	37.40	13.29	50.69	74.00	-23.31	peak
3	10311.000	37.26	12.85	50.11	74.00	-23.89	peak
4	12258.000	32.02	17.91	49.93	74.00	-24.07	peak
5	13336.000	30.25	19.74	49.99	74.00	-24.01	peak
6	17241.000	25.21	24.74	49.95	74.00	-24.05	peak

Test Mode:	802.11a 20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

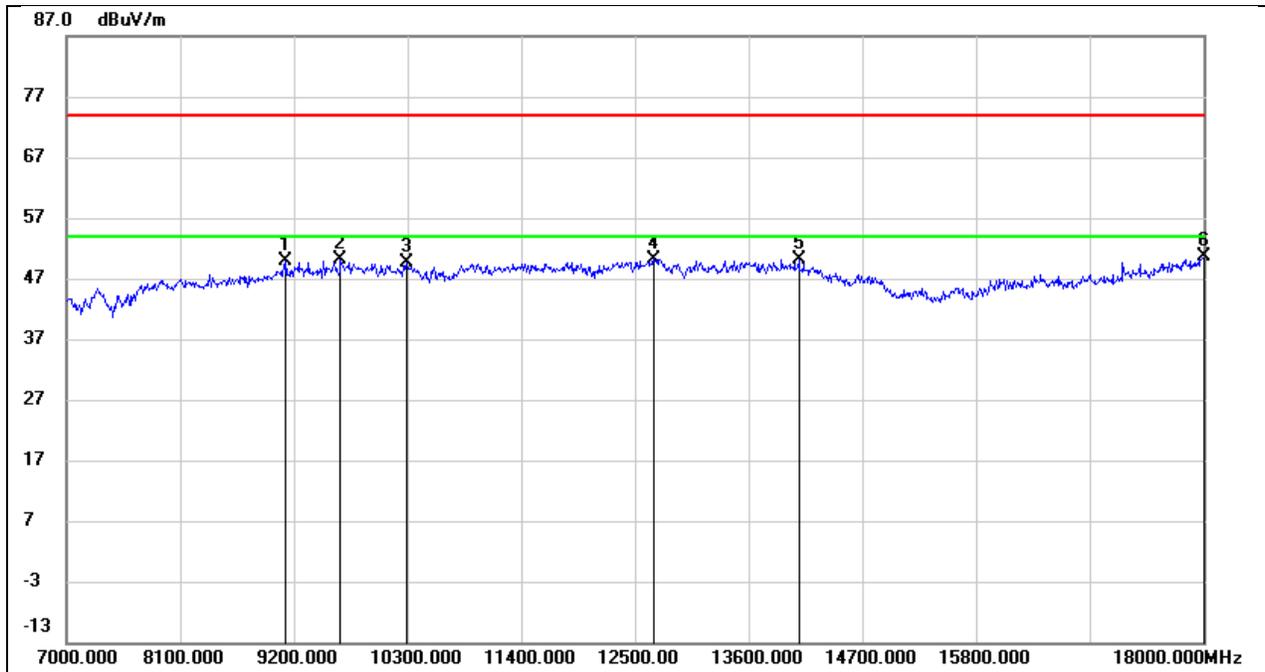


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	38.82	11.13	49.95	74.00	-24.05	peak
2	9651.000	36.59	13.51	50.10	74.00	-23.90	peak
3	10289.000	36.31	13.23	49.54	74.00	-24.46	peak
4	12676.000	30.78	19.47	50.25	74.00	-23.75	peak
5	14084.000	27.10	23.06	50.16	74.00	-23.84	peak
6	18000.000	21.17	29.41	50.58	74.00	-23.42	peak

Test Mode:	802.11a 20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3V

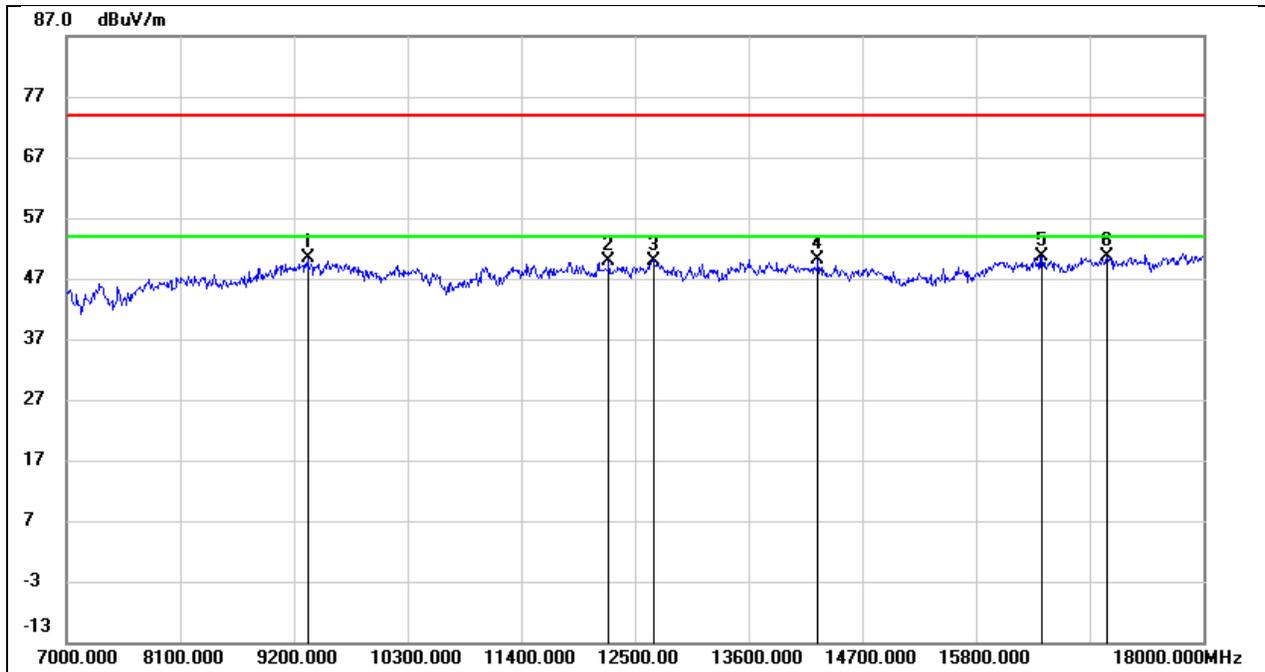


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	38.32	12.06	50.38	74.00	-23.62	peak
2	12247.000	31.93	17.90	49.83	74.00	-24.17	peak
3	12676.000	31.54	18.46	50.00	74.00	-24.00	peak
4	14271.000	28.97	21.27	50.24	74.00	-23.76	peak
5	16438.000	27.15	23.51	50.66	74.00	-23.34	peak
6	17065.000	26.30	24.38	50.68	74.00	-23.32	peak

Test Mode:	802.11a 20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3V

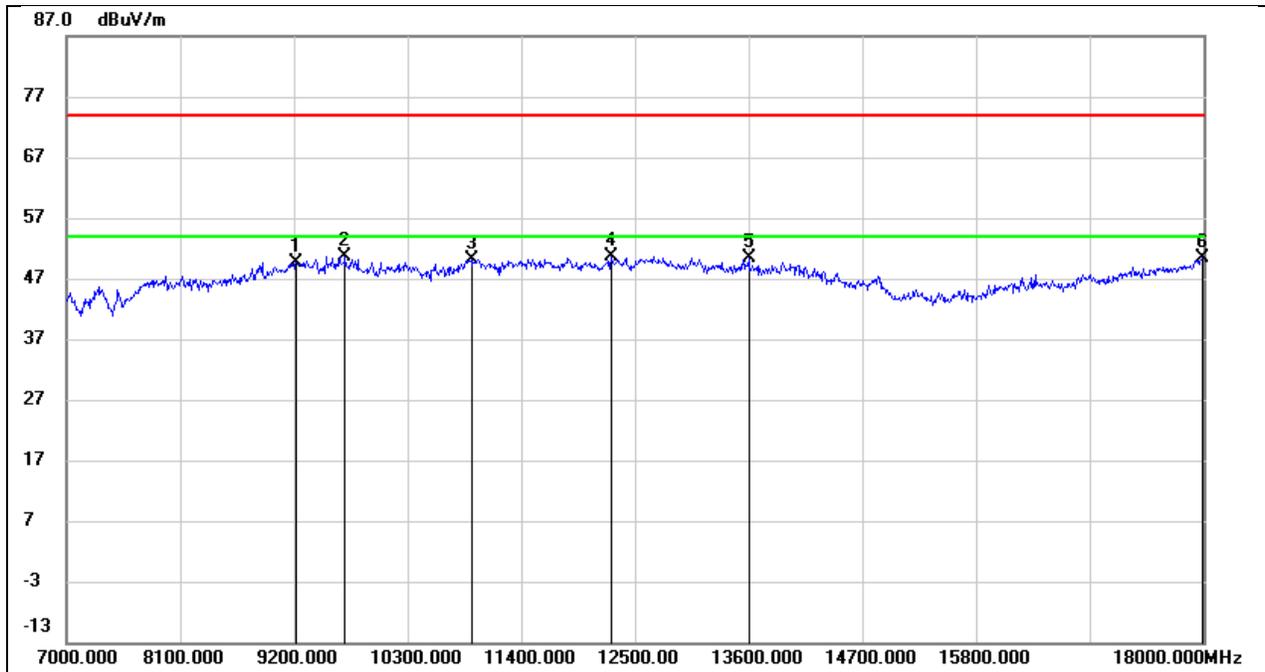


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	38.10	11.56	49.66	74.00	-24.34	peak
2	9695.000	37.10	13.59	50.69	74.00	-23.31	peak
3	10916.000	35.45	14.70	50.15	74.00	-23.85	peak
4	12269.000	31.83	18.92	50.75	74.00	-23.25	peak
5	13600.000	28.25	22.06	50.31	74.00	-23.69	peak
6	17989.000	20.97	29.29	50.26	74.00	-23.74	peak

Test Mode:	802.11a 20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3V

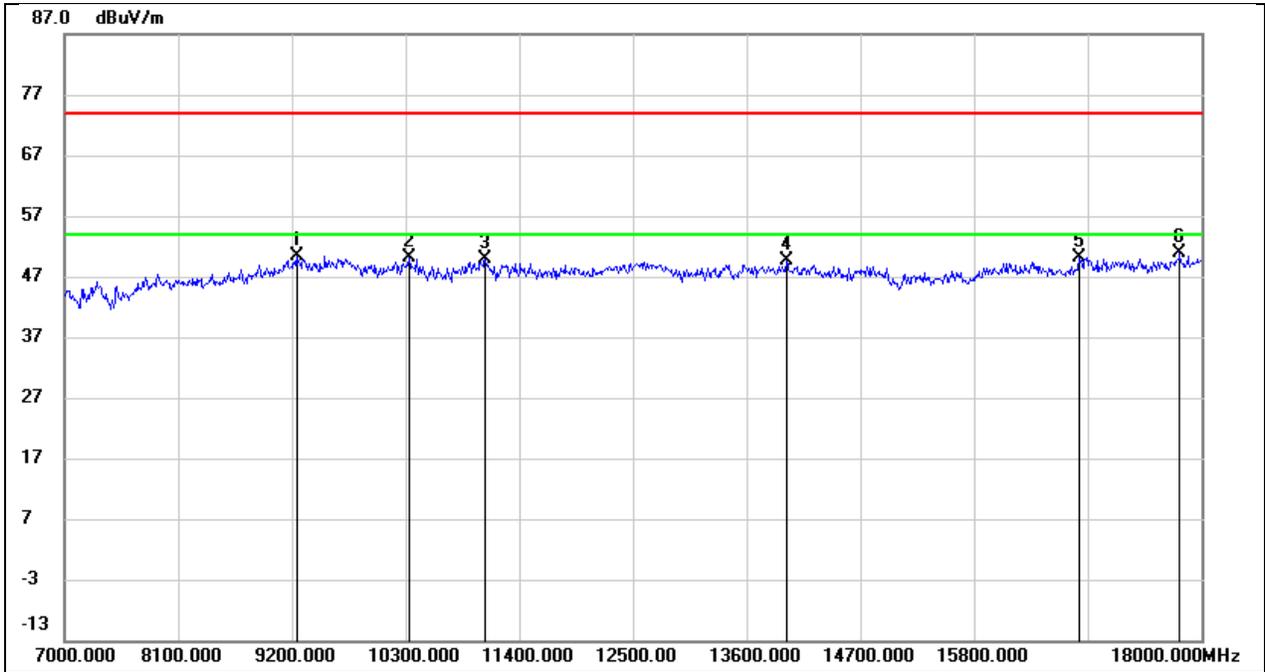


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	38.58	11.84	50.42	74.00	-23.58	peak
2	10333.000	37.25	12.89	50.14	74.00	-23.86	peak
3	11070.000	35.30	14.47	49.77	74.00	-24.23	peak
4	13985.000	27.96	21.75	49.71	74.00	-24.29	peak
5	16812.000	26.28	23.91	50.19	74.00	-23.81	peak
6	17791.000	24.98	25.91	50.89	74.00	-23.11	peak

Test Mode:	802.11a 20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

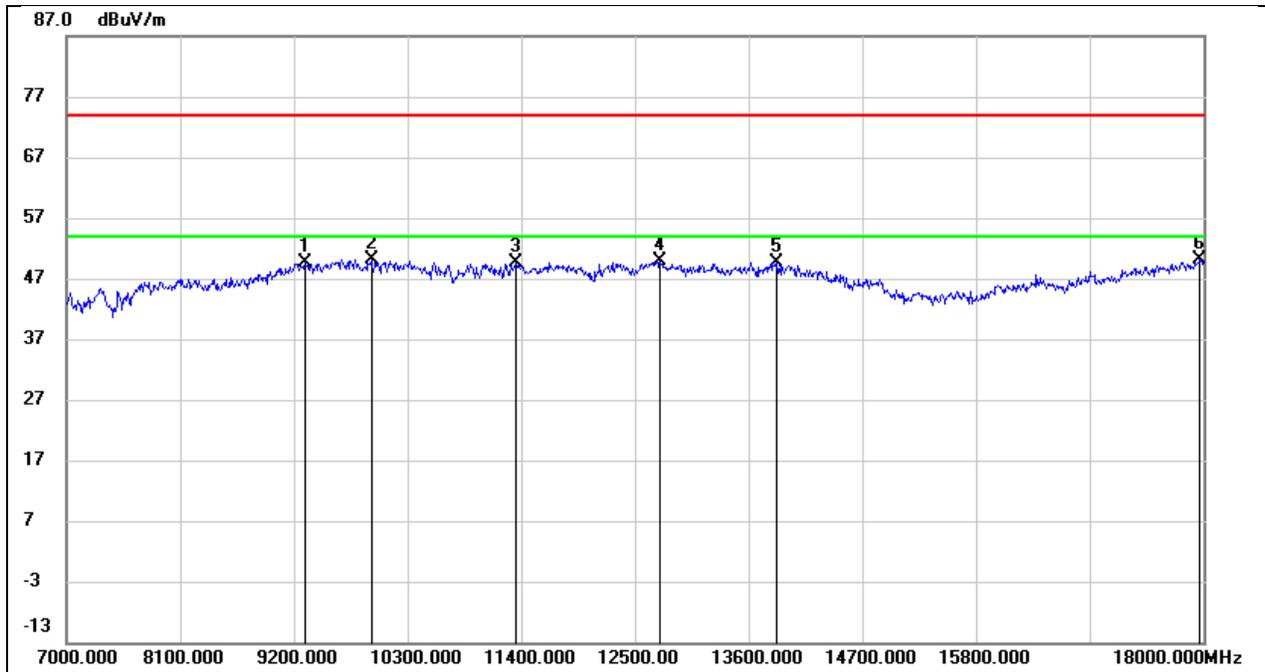


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9310.000	37.70	11.85	49.55	74.00	-24.45	peak
2	9948.000	36.77	13.46	50.23	74.00	-23.77	peak
3	11345.000	32.64	17.04	49.68	74.00	-24.32	peak
4	12742.000	30.12	19.73	49.85	74.00	-24.15	peak
5	13875.000	26.74	22.92	49.66	74.00	-24.34	peak
6	17967.000	21.10	29.06	50.16	74.00	-23.84	peak

Test Mode:	802.11a 20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3V

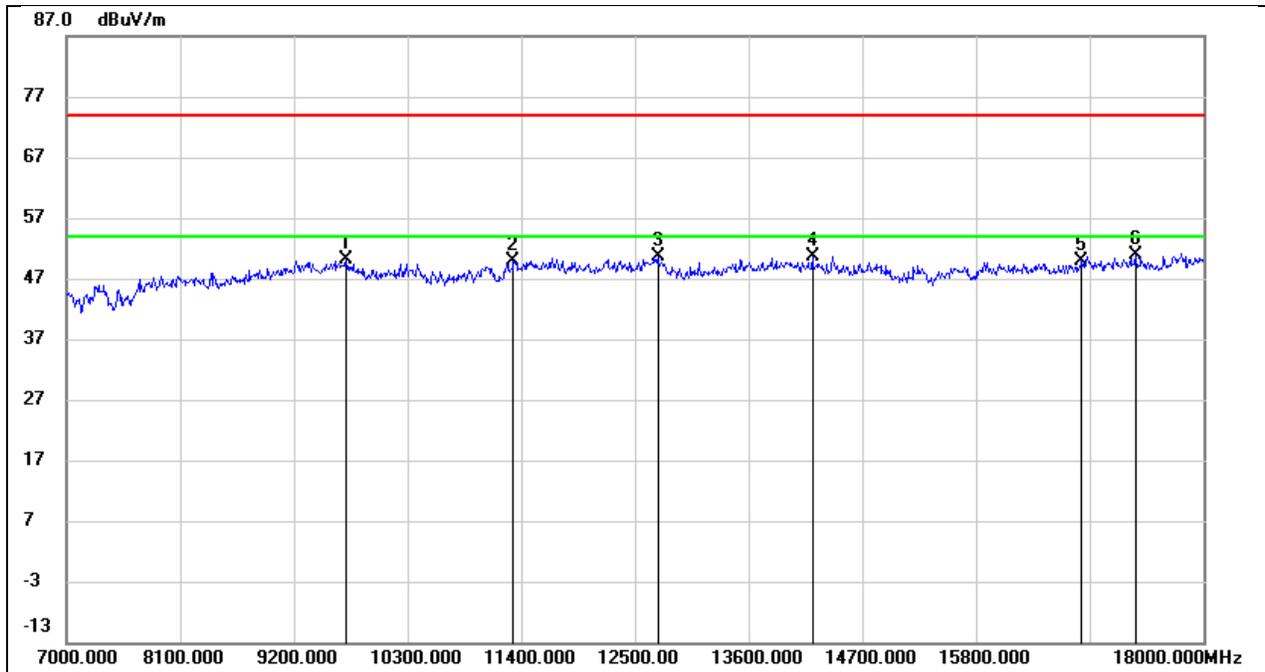


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9706.000	36.83	13.33	50.16	74.00	-23.84	peak
2	11323.000	34.29	15.64	49.93	74.00	-24.07	peak
3	12720.000	32.01	18.61	50.62	74.00	-23.38	peak
4	14216.000	29.27	21.45	50.72	74.00	-23.28	peak
5	16823.000	26.07	23.93	50.00	74.00	-24.00	peak
6	17340.000	25.95	24.81	50.76	74.00	-23.24	peak

Test Mode:	802.11a 20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3V

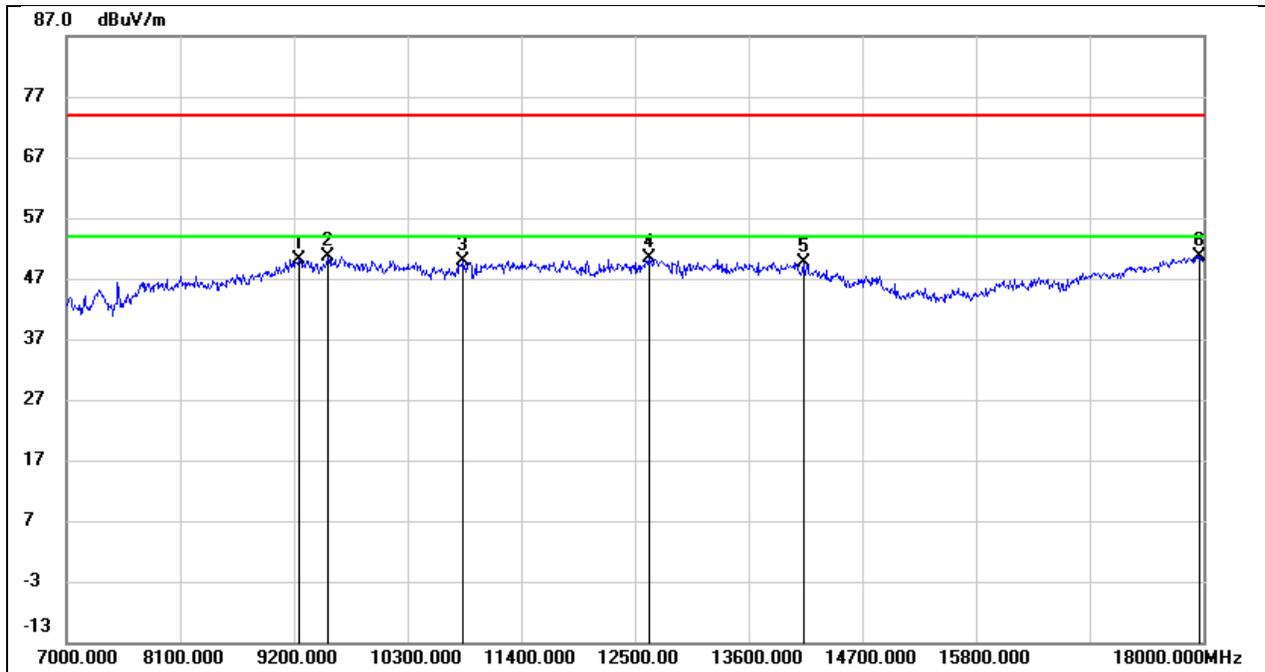


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	38.52	11.63	50.15	74.00	-23.85	peak
2	9530.000	37.70	12.99	50.69	74.00	-23.31	peak
3	10828.000	35.51	14.43	49.94	74.00	-24.06	peak
4	12632.000	31.01	19.30	50.31	74.00	-23.69	peak
5	14128.000	26.78	22.89	49.67	74.00	-24.33	peak
6	17967.000	21.52	29.06	50.58	74.00	-23.42	peak

Test Mode:	802.11a 20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3V

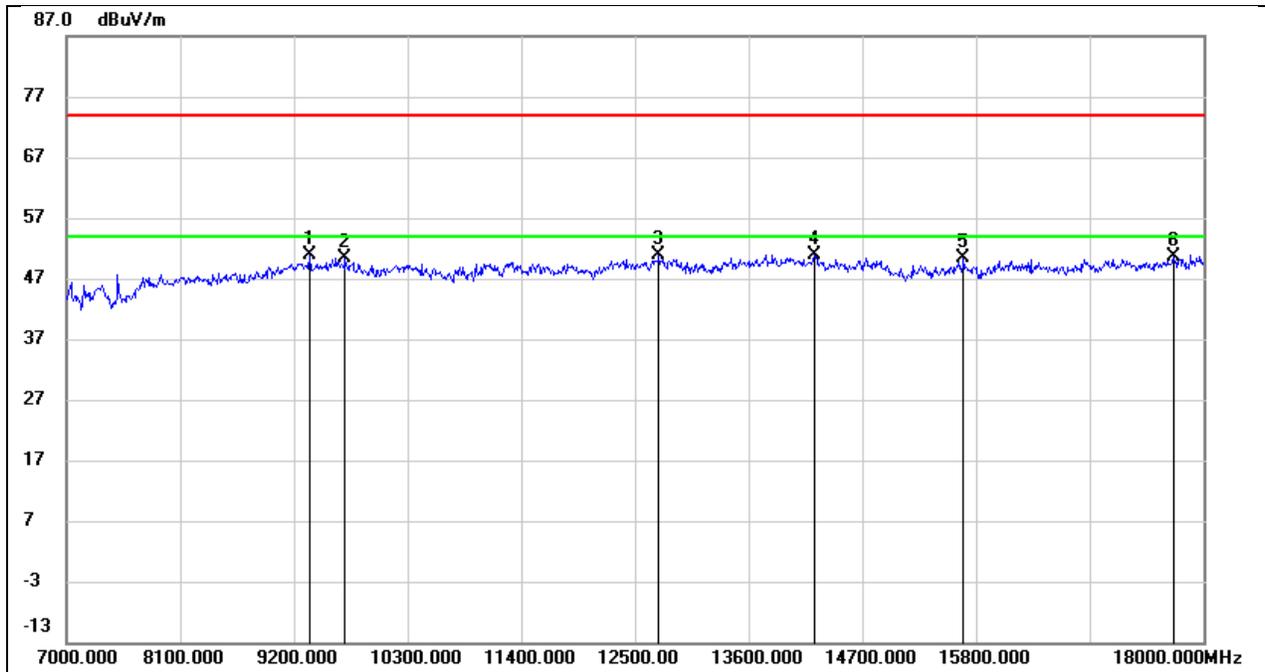


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9354.000	38.84	12.11	50.95	74.00	-23.05	peak
2	9695.000	37.03	13.31	50.34	74.00	-23.66	peak
3	12731.000	32.22	18.64	50.86	74.00	-23.14	peak
4	14238.000	29.52	21.38	50.90	74.00	-23.10	peak
5	15679.000	29.28	21.12	50.40	74.00	-23.60	peak
6	17714.000	25.08	25.51	50.59	74.00	-23.41	peak

Test Mode:	802.11a 20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

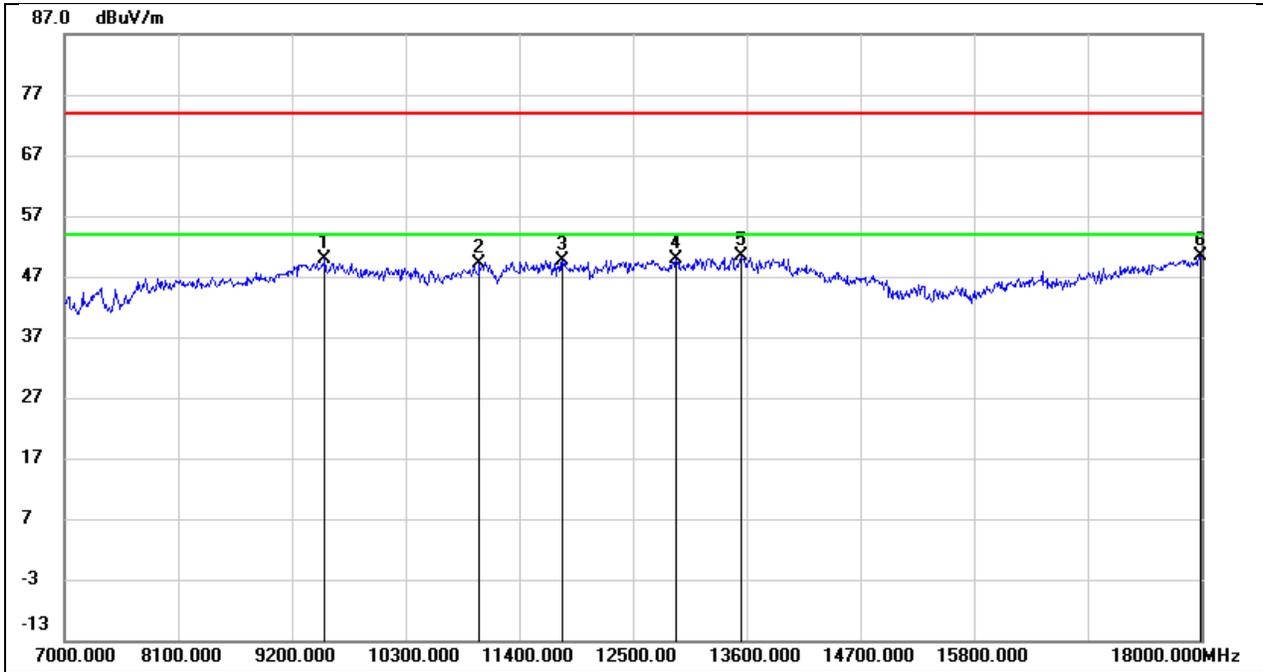


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9519.000	36.97	12.93	49.90	74.00	-24.10	peak
2	11015.000	34.00	15.04	49.04	74.00	-24.96	peak
3	11818.000	31.55	18.17	49.72	74.00	-24.28	peak
4	12918.000	29.88	19.96	49.84	74.00	-24.16	peak
5	13545.000	28.31	21.97	50.28	74.00	-23.72	peak
6	17989.000	21.11	29.29	50.40	74.00	-23.60	peak

Test Mode:	802.11a 20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3V

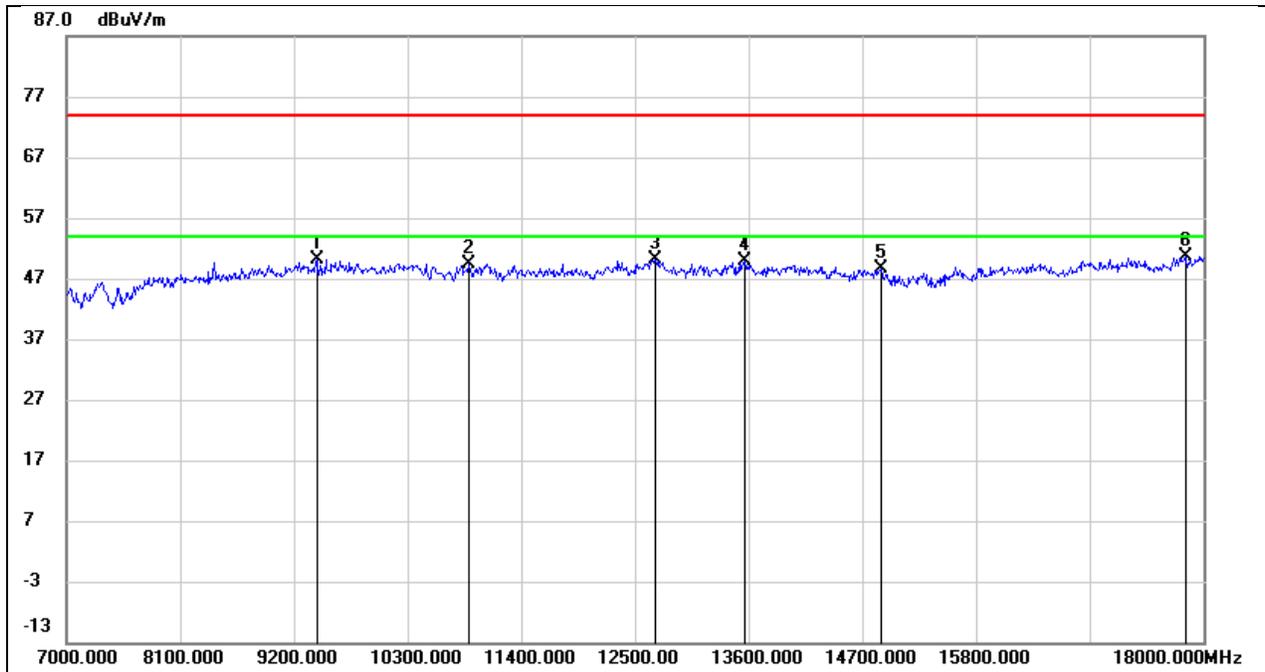


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9420.000	37.79	12.35	50.14	74.00	-23.86	peak
2	10894.000	35.40	13.96	49.36	74.00	-24.64	peak
3	12698.000	31.56	18.53	50.09	74.00	-23.91	peak
4	13567.000	29.45	20.31	49.76	74.00	-24.24	peak
5	14887.000	28.59	20.12	48.71	74.00	-25.29	peak
6	17824.000	24.52	26.11	50.63	74.00	-23.37	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

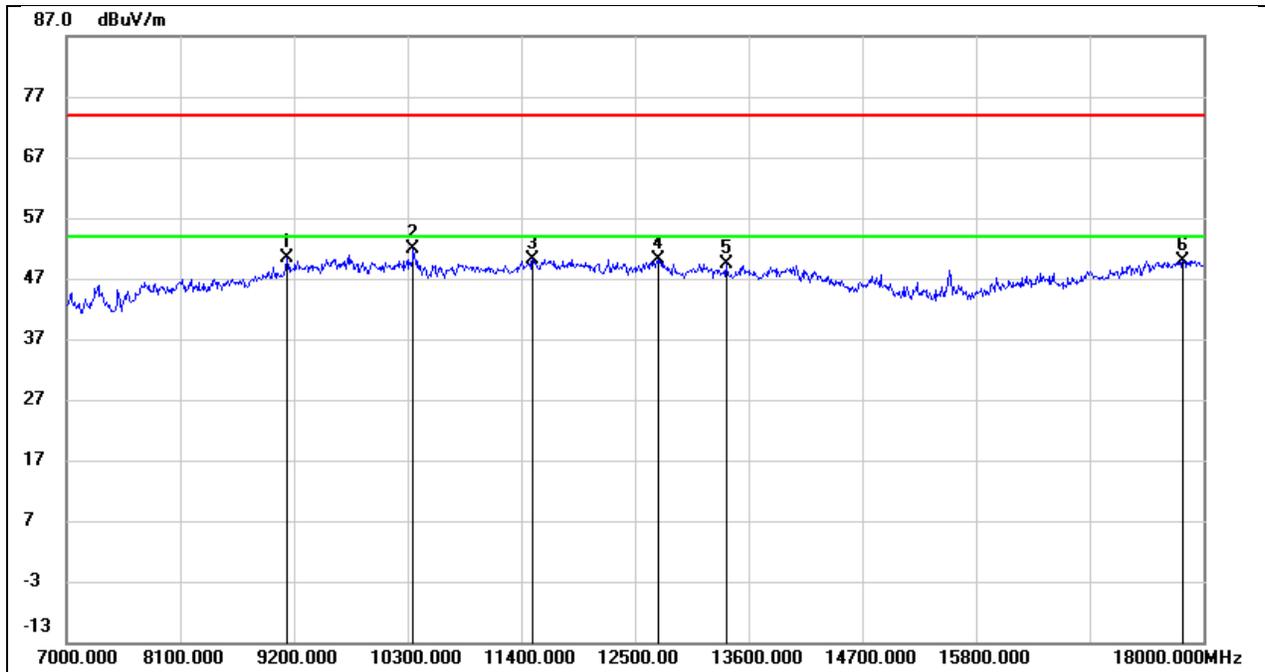


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9134.000	39.31	11.17	50.48	74.00	-23.52	peak
2	10355.000	38.71	13.27	51.98	74.00	-22.02	peak
3	11510.000	32.34	17.91	50.25	74.00	-23.75	peak
4	12731.000	30.54	19.68	50.22	74.00	-23.78	peak
5	13380.000	28.04	21.43	49.47	74.00	-24.53	peak
6	17802.000	22.63	27.31	49.94	74.00	-24.06	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

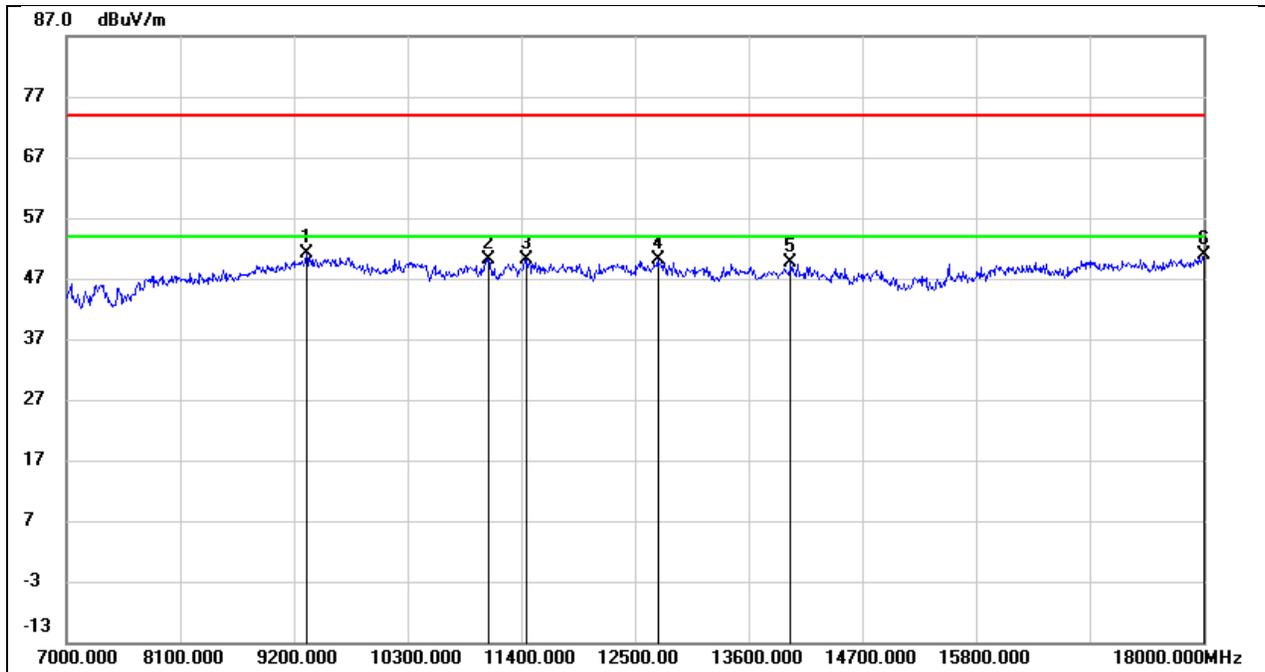


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9321.000	39.19	12.03	51.22	74.00	-22.78	peak
2	11081.000	35.61	14.52	50.13	74.00	-23.87	peak
3	11455.000	34.01	16.21	50.22	74.00	-23.78	peak
4	12720.000	31.52	18.61	50.13	74.00	-23.87	peak
5	14007.000	27.78	21.81	49.59	74.00	-24.41	peak
6	18000.000	23.78	27.21	50.99	74.00	-23.01	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 3.3V

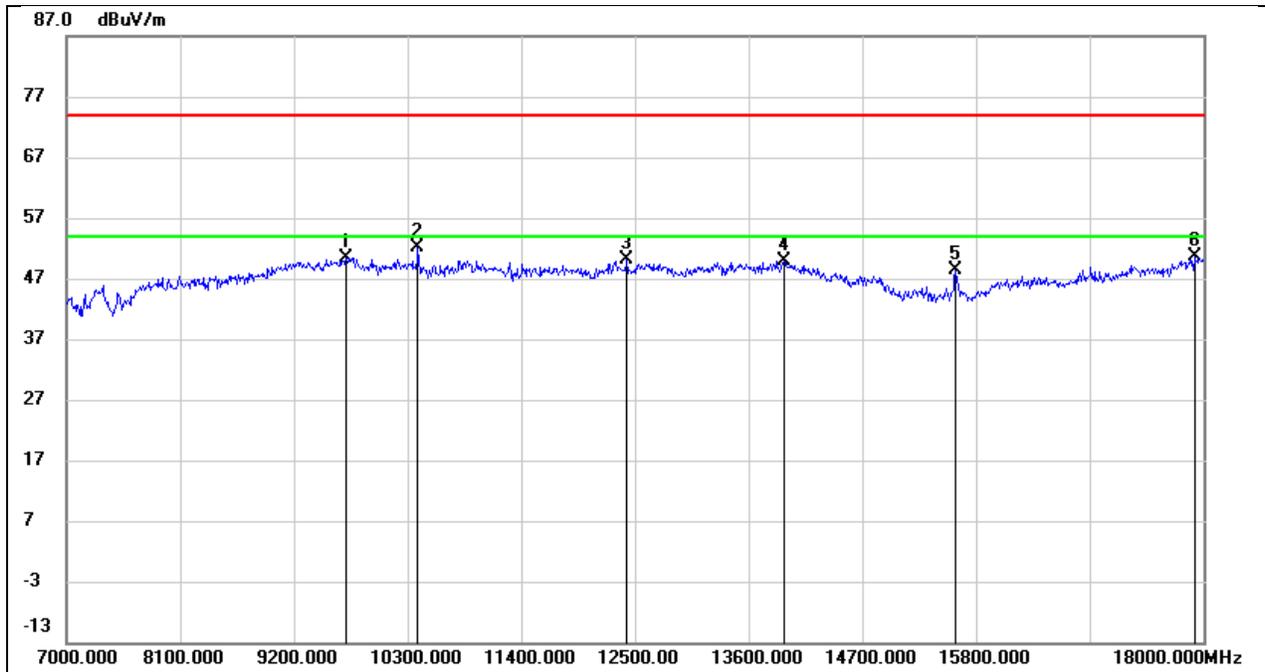


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9706.000	36.75	13.62	50.37	74.00	-23.63	peak
2	10399.000	38.94	13.31	52.25	74.00	-21.75	peak
3	12423.000	31.07	19.06	50.13	74.00	-23.87	peak
4	13941.000	26.79	23.18	49.97	74.00	-24.03	peak
5	15602.000	29.13	19.19	48.32	74.00	-25.68	peak
6	17912.000	22.25	28.48	50.73	74.00	-23.27	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 3.3V

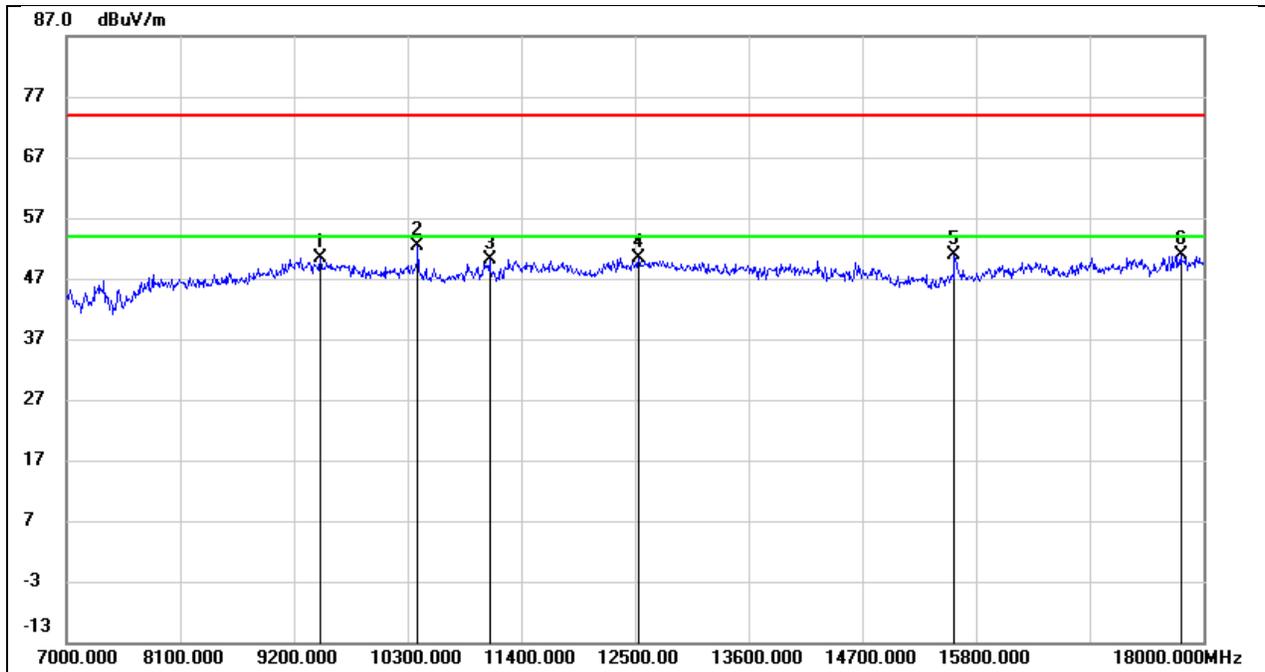


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9453.000	37.85	12.53	50.38	74.00	-23.62	peak
2	10399.000	39.26	13.01	52.27	74.00	-21.73	peak
3	11092.000	35.64	14.56	50.20	74.00	-23.80	peak
4	12533.000	32.32	18.17	50.49	74.00	-23.51	peak
5	15591.000	30.03	20.76	50.79	74.00	-23.21	peak
6	17780.000	24.96	25.86	50.82	74.00	-23.18	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 3.3V

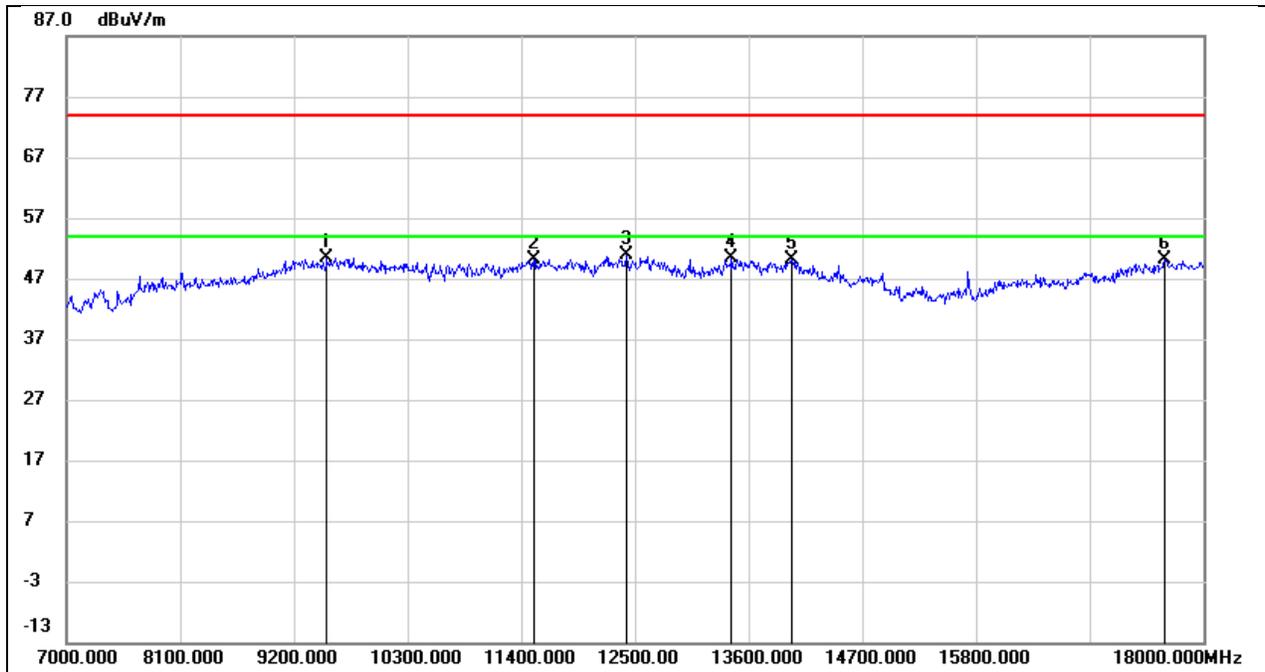


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9519.000	37.53	12.93	50.46	74.00	-23.54	peak
2	11521.000	32.14	17.94	50.08	74.00	-23.92	peak
3	12423.000	31.76	19.06	50.82	74.00	-23.18	peak
4	13435.000	28.81	21.64	50.45	74.00	-23.55	peak
5	14018.000	26.82	23.34	50.16	74.00	-23.84	peak
6	17626.000	24.57	25.60	50.17	74.00	-23.83	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 3.3V

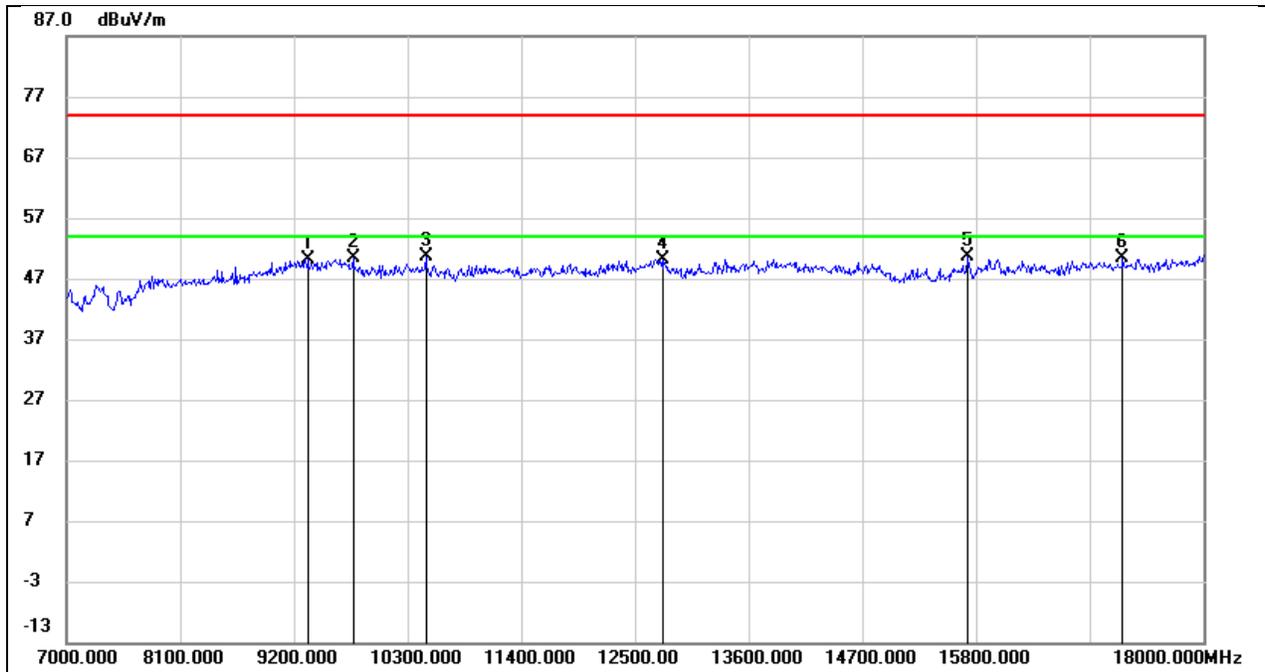


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.99	12.06	50.05	74.00	-23.95	peak
2	9772.000	37.15	13.35	50.50	74.00	-23.50	peak
3	10476.000	37.35	13.21	50.56	74.00	-23.44	peak
4	12764.000	31.40	18.74	50.14	74.00	-23.86	peak
5	15723.000	29.39	21.29	50.68	74.00	-23.32	peak
6	17219.000	25.63	24.72	50.35	74.00	-23.65	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Horizontal	Test Voltage:	DC 3.3V

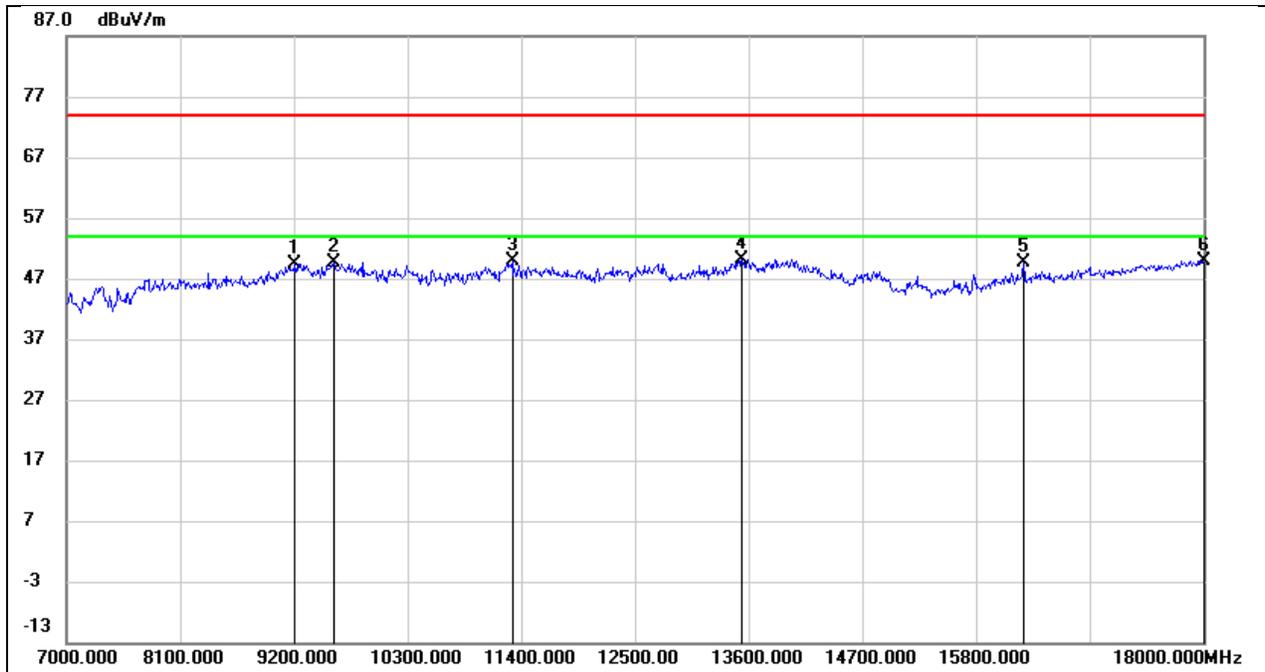


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	37.98	11.52	49.50	74.00	-24.50	peak
2	9585.000	36.27	13.34	49.61	74.00	-24.39	peak
3	11312.000	33.09	16.83	49.92	74.00	-24.08	peak
4	13534.000	28.26	21.95	50.21	74.00	-23.79	peak
5	16262.000	27.68	21.90	49.58	74.00	-24.42	peak
6	18000.000	20.59	29.41	50.00	74.00	-24.00	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5260
Polarity:	Vertical	Test Voltage:	DC 3.3V

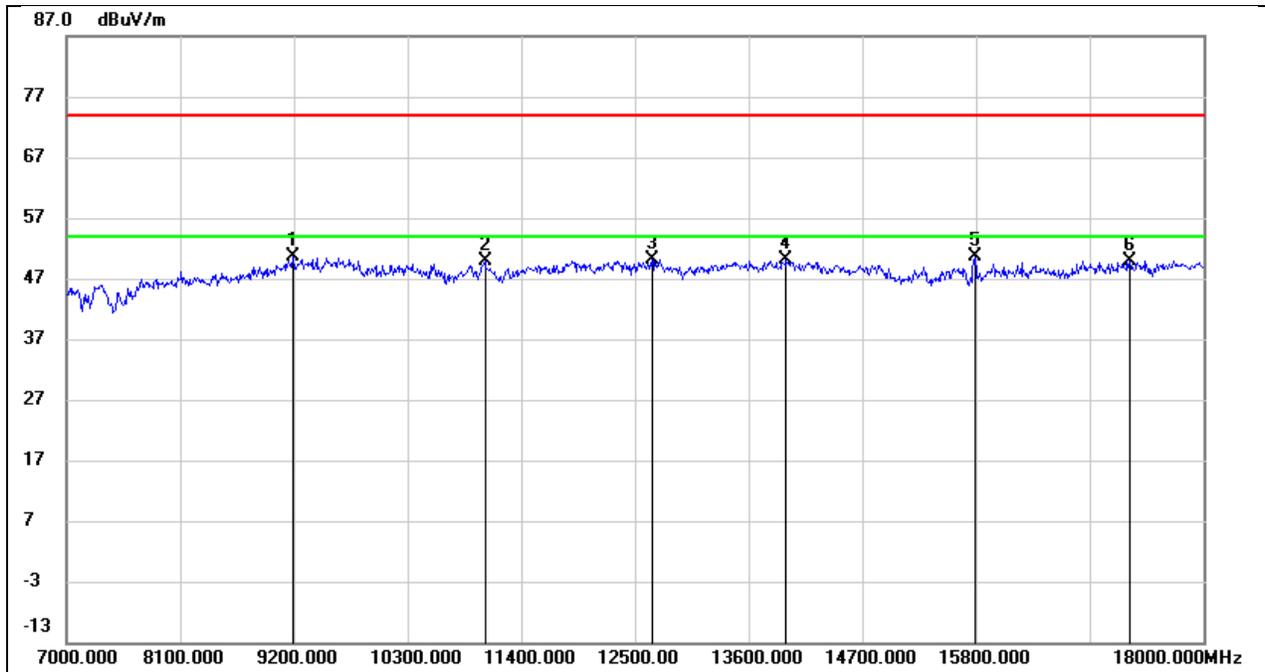


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	38.96	11.67	50.63	74.00	-23.37	peak
2	11048.000	35.46	14.37	49.83	74.00	-24.17	peak
3	12665.000	31.62	18.42	50.04	74.00	-23.96	peak
4	13963.000	28.53	21.65	50.18	74.00	-23.82	peak
5	15789.000	28.98	21.56	50.54	74.00	-23.46	peak
6	17285.000	25.18	24.77	49.95	74.00	-24.05	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Horizontal	Test Voltage:	DC 3.3V

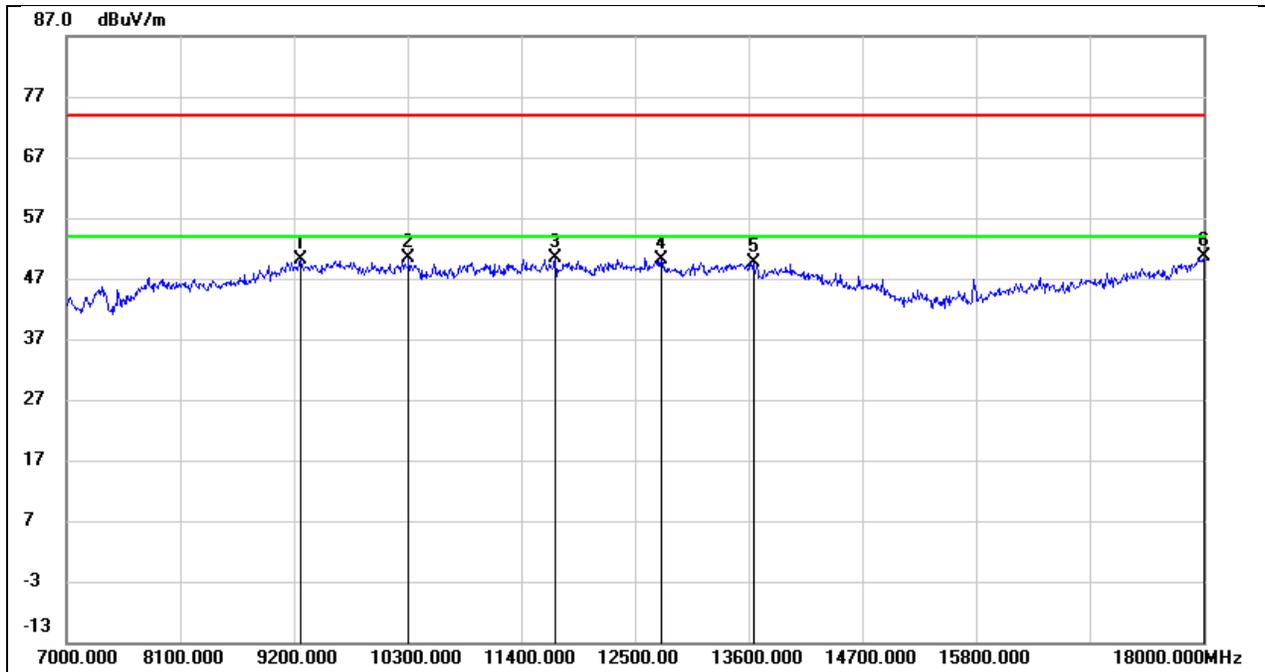


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	38.45	11.70	50.15	74.00	-23.85	peak
2	10311.000	37.05	13.24	50.29	74.00	-23.71	peak
3	11730.000	32.15	18.15	50.30	74.00	-23.70	peak
4	12753.000	30.41	19.75	50.16	74.00	-23.84	peak
5	13644.000	27.46	22.19	49.65	74.00	-24.35	peak
6	18000.000	21.25	29.41	50.66	74.00	-23.34	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5280
Polarity:	Vertical	Test Voltage:	DC 3.3V

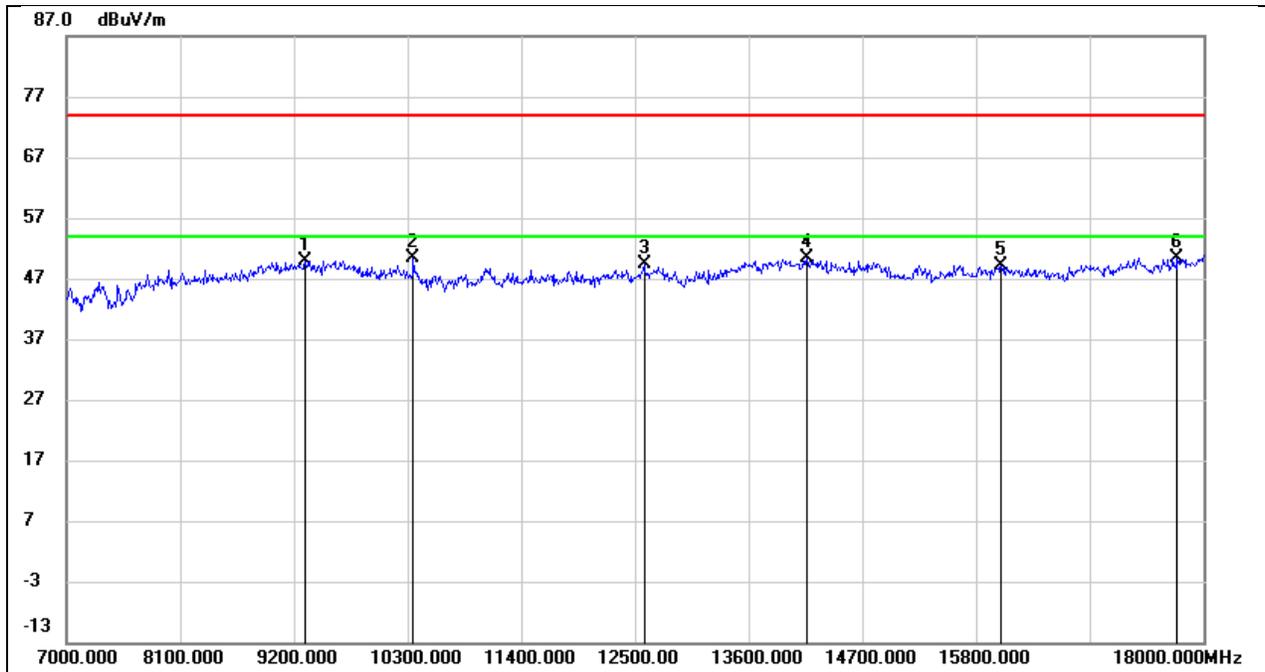


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9310.000	37.97	12.00	49.97	74.00	-24.03	peak
2	10355.000	37.45	12.93	50.38	74.00	-23.62	peak
3	12588.000	31.05	18.21	49.26	74.00	-24.74	peak
4	14161.000	28.92	21.56	50.48	74.00	-23.52	peak
5	16042.000	25.98	23.14	49.12	74.00	-24.88	peak
6	17747.000	24.64	25.69	50.33	74.00	-23.67	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Horizontal	Test Voltage:	DC 3.3V

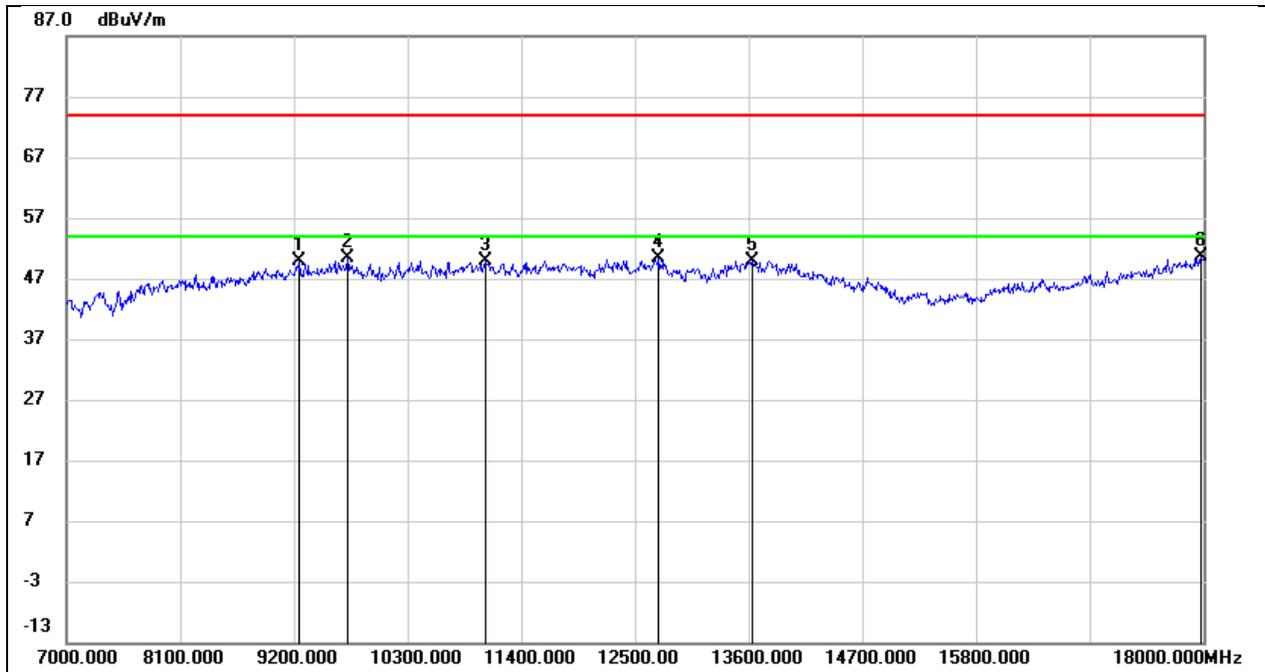


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	38.30	11.67	49.97	74.00	-24.03	peak
2	9717.000	36.75	13.63	50.38	74.00	-23.62	peak
3	11059.000	34.67	15.31	49.98	74.00	-24.02	peak
4	12731.000	30.58	19.68	50.26	74.00	-23.74	peak
5	13633.000	27.82	22.15	49.97	74.00	-24.03	peak
6	17978.000	21.48	29.18	50.66	74.00	-23.34	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5320
Polarity:	Vertical	Test Voltage:	DC 3.3V

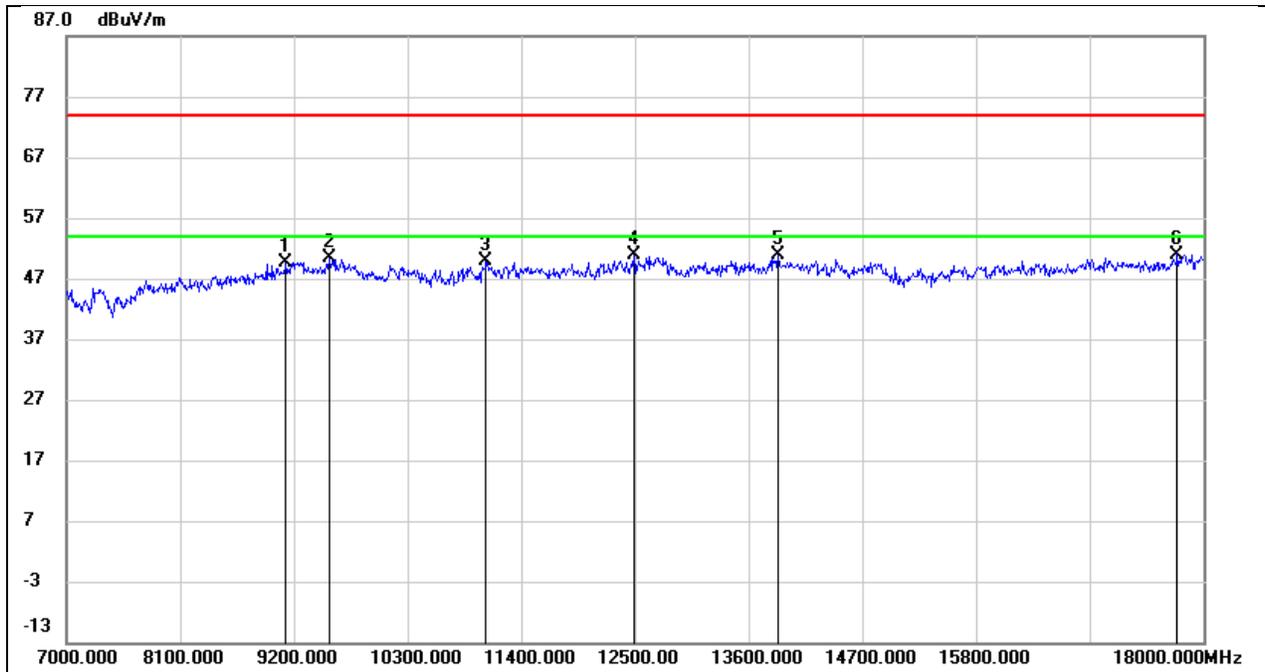


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	38.26	11.43	49.69	74.00	-24.31	peak
2	9541.000	37.28	13.00	50.28	74.00	-23.72	peak
3	11059.000	35.55	14.43	49.98	74.00	-24.02	peak
4	12489.000	32.65	18.14	50.79	74.00	-23.21	peak
5	13886.000	29.63	21.34	50.97	74.00	-23.03	peak
6	17747.000	25.31	25.69	51.00	74.00	-23.00	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Horizontal	Test Voltage:	DC 3.3V

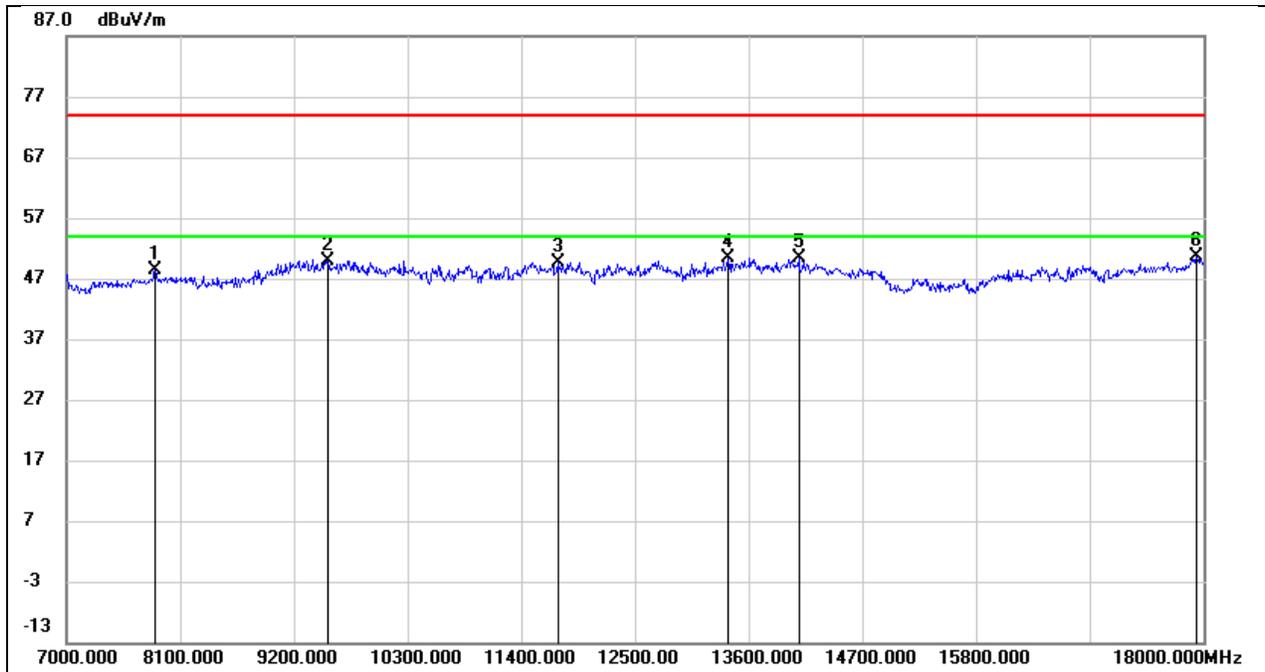


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7858.000	40.28	8.03	48.31	74.00	-25.69	peak
2	9530.000	37.00	12.99	49.99	74.00	-24.01	peak
3	11752.000	31.47	18.14	49.61	74.00	-24.39	peak
4	13402.000	28.81	21.50	50.31	74.00	-23.69	peak
5	14084.000	27.21	23.06	50.27	74.00	-23.73	peak
6	17934.000	21.93	28.71	50.64	74.00	-23.36	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5500
Polarity:	Vertical	Test Voltage:	DC 3.3V

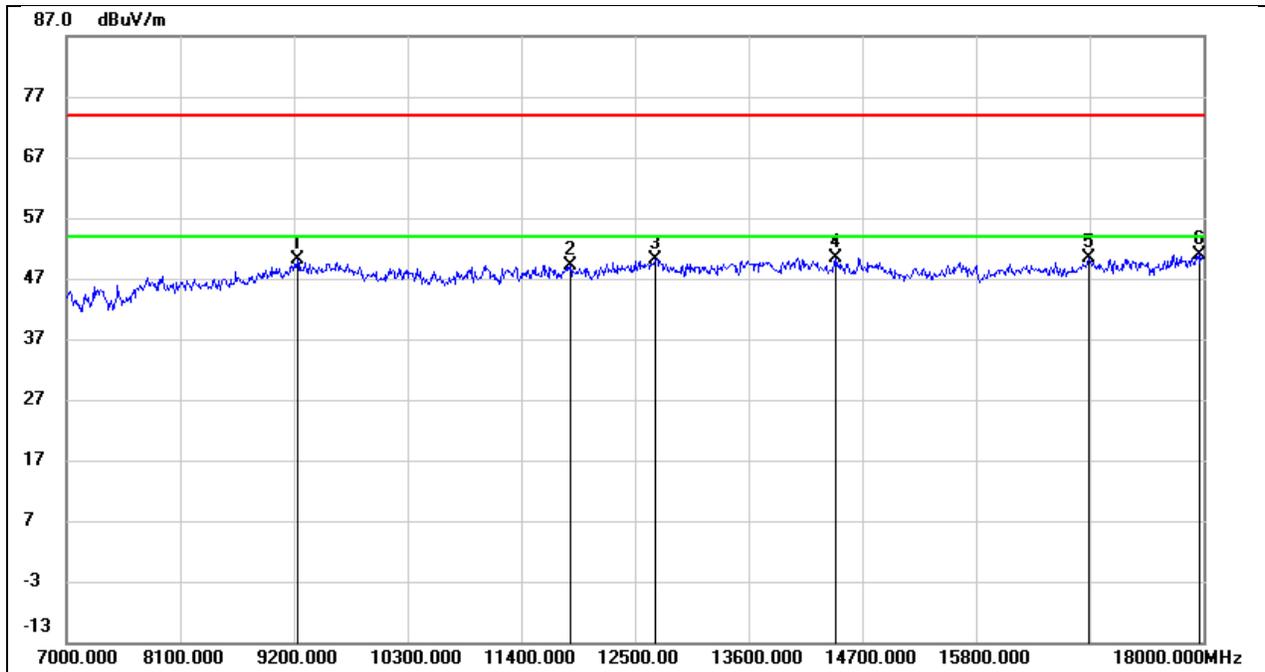


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	38.25	11.81	50.06	74.00	-23.94	peak
2	11873.000	32.11	17.12	49.23	74.00	-24.77	peak
3	12698.000	31.65	18.53	50.18	74.00	-23.82	peak
4	14447.000	29.71	20.77	50.48	74.00	-23.52	peak
5	16889.000	26.27	24.03	50.30	74.00	-23.70	peak
6	17956.000	24.07	26.93	51.00	74.00	-23.00	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Horizontal	Test Voltage:	DC 3.3V

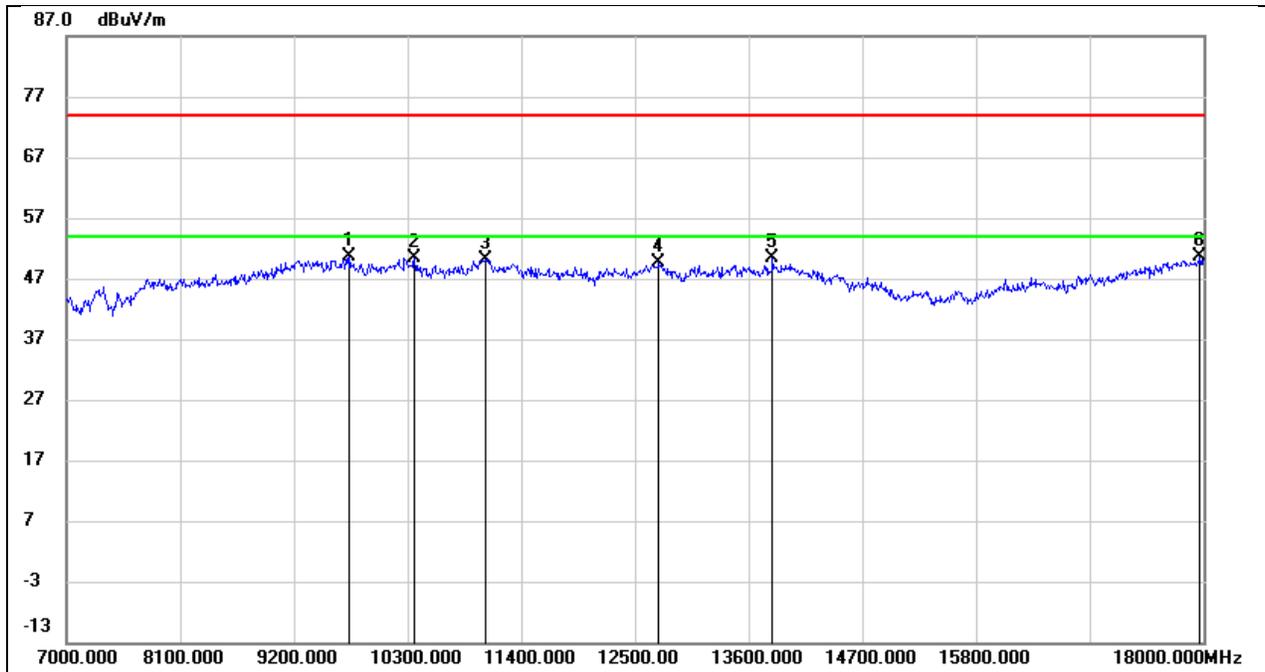


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9739.000	36.84	13.67	50.51	74.00	-23.49	peak
2	10366.000	37.03	13.29	50.32	74.00	-23.68	peak
3	11059.000	34.92	15.31	50.23	74.00	-23.77	peak
4	12731.000	29.91	19.68	49.59	74.00	-24.41	peak
5	13831.000	27.70	22.74	50.44	74.00	-23.56	peak
6	17967.000	21.50	29.06	50.56	74.00	-23.44	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5580
Polarity:	Vertical	Test Voltage:	DC 3.3V

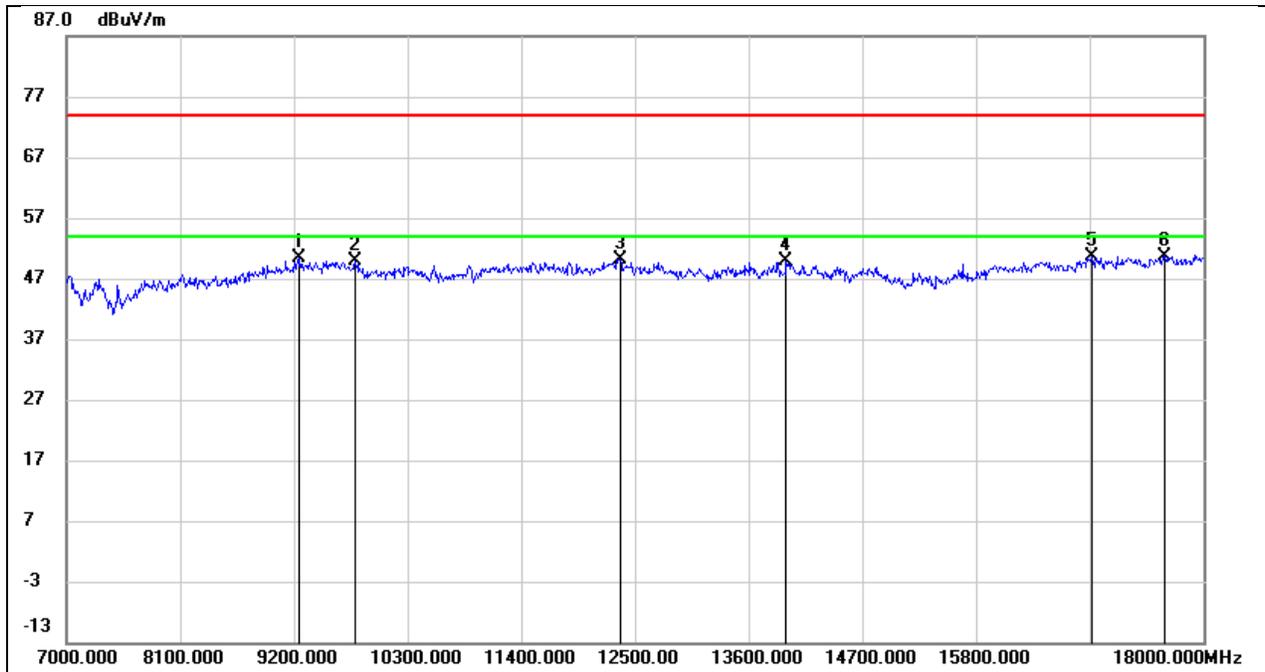


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	38.41	11.86	50.27	74.00	-23.73	peak
2	9794.000	36.47	13.35	49.82	74.00	-24.18	peak
3	12357.000	32.15	18.05	50.20	74.00	-23.80	peak
4	13963.000	28.25	21.65	49.90	74.00	-24.10	peak
5	16922.000	26.55	24.09	50.64	74.00	-23.36	peak
6	17626.000	25.71	25.04	50.75	74.00	-23.25	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Horizontal	Test Voltage:	DC 3.3V

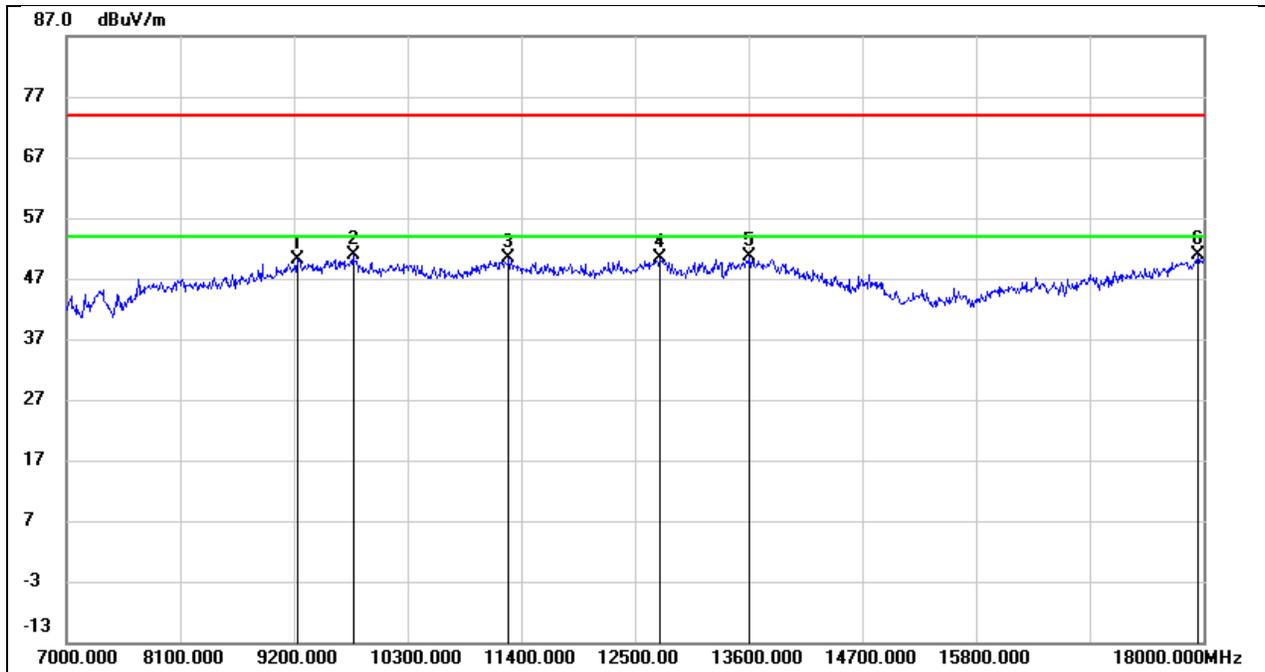


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	38.63	11.59	50.22	74.00	-23.78	peak
2	9772.000	37.04	13.73	50.77	74.00	-23.23	peak
3	11279.000	33.79	16.61	50.40	74.00	-23.60	peak
4	12742.000	30.57	19.73	50.30	74.00	-23.70	peak
5	13611.000	28.63	22.09	50.72	74.00	-23.28	peak
6	17945.000	22.04	28.83	50.87	74.00	-23.13	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5700
Polarity:	Vertical	Test Voltage:	DC 3.3V

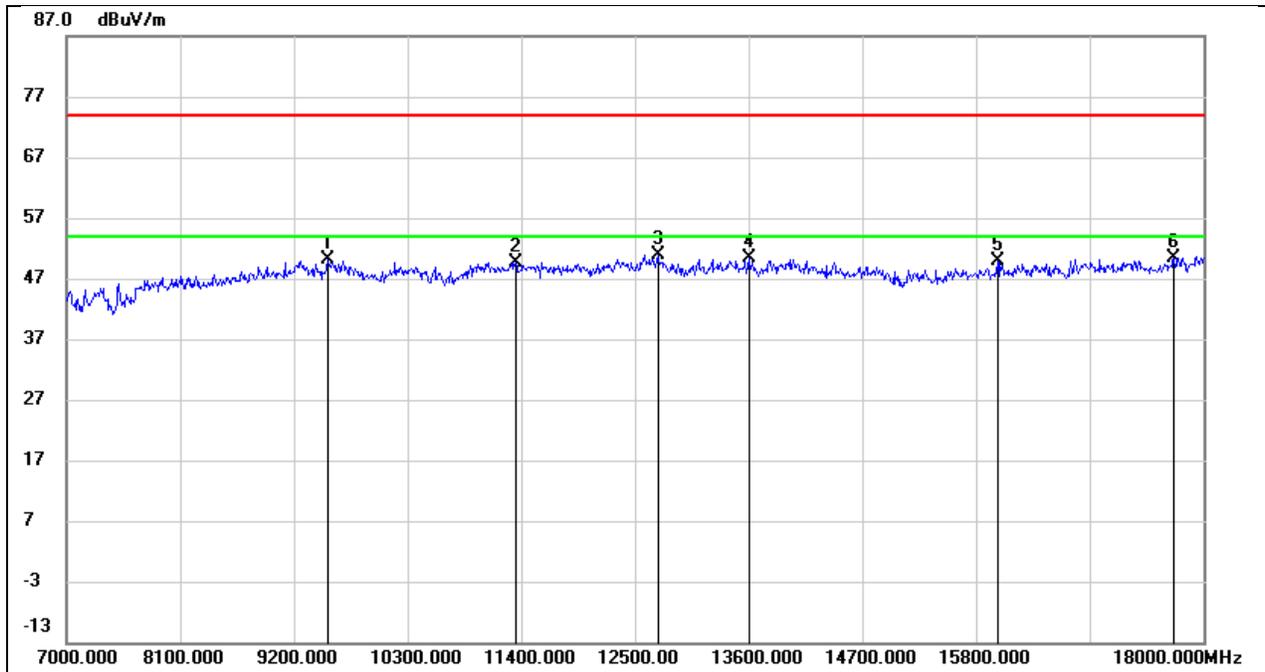


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9530.000	37.06	12.95	50.01	74.00	-23.99	peak
2	11345.000	33.99	15.76	49.75	74.00	-24.25	peak
3	12720.000	32.21	18.61	50.82	74.00	-23.18	peak
4	13600.000	30.00	20.38	50.38	74.00	-23.62	peak
5	16009.000	26.84	22.93	49.77	74.00	-24.23	peak
6	17714.000	24.89	25.51	50.40	74.00	-23.60	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Horizontal	Test Voltage:	DC 3.3V

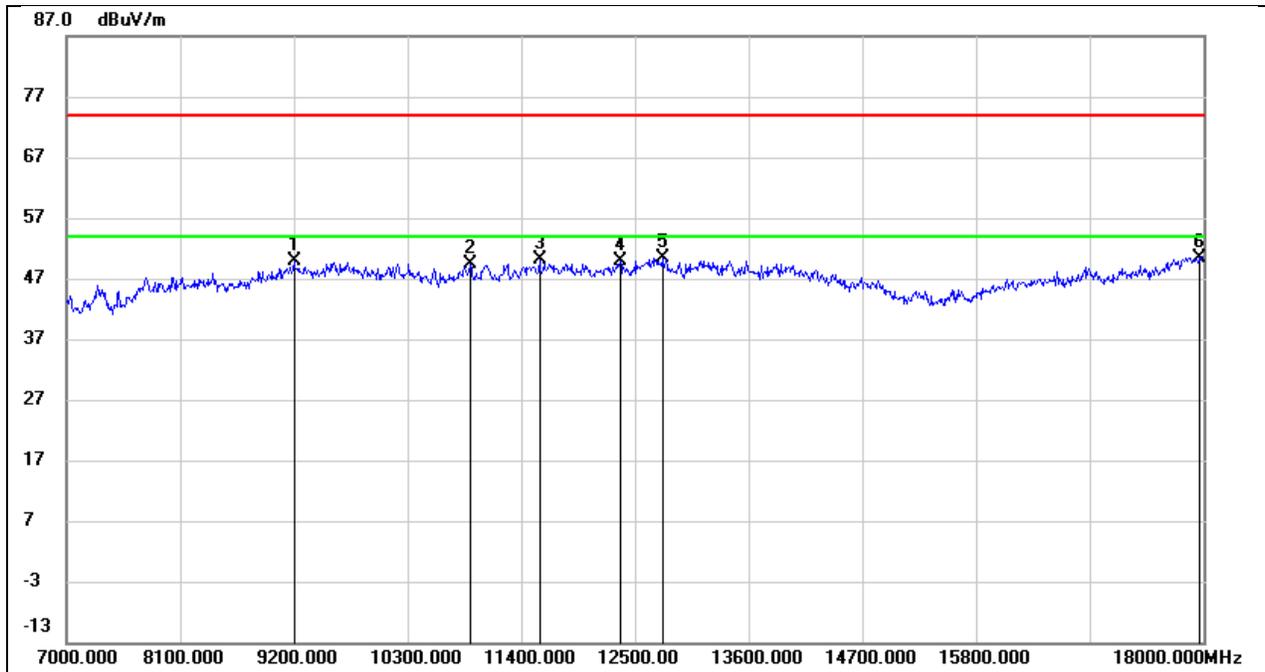


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	38.42	11.48	49.90	74.00	-24.10	peak
2	10905.000	34.76	14.66	49.42	74.00	-24.58	peak
3	11576.000	31.94	18.11	50.05	74.00	-23.95	peak
4	12357.000	30.83	19.01	49.84	74.00	-24.16	peak
5	12764.000	30.51	19.80	50.31	74.00	-23.69	peak
6	17956.000	21.56	28.94	50.50	74.00	-23.50	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5720
Polarity:	Vertical	Test Voltage:	DC 3.3V

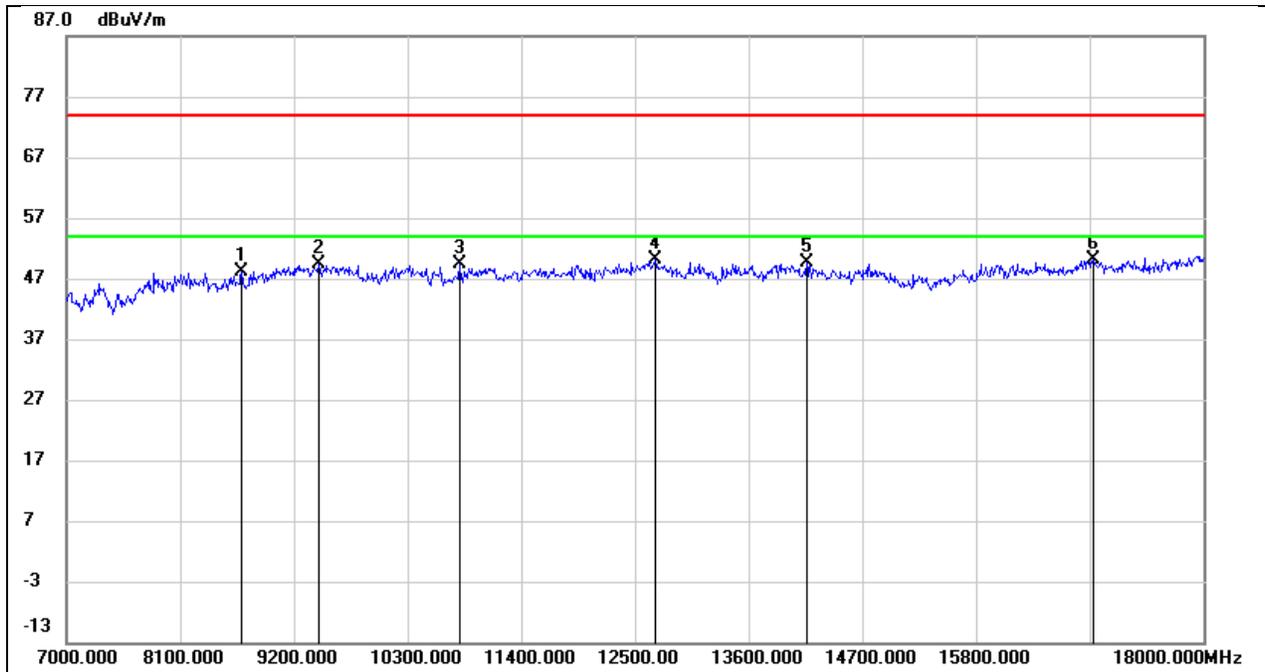


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8694.000	38.51	9.72	48.23	74.00	-25.77	peak
2	9442.000	36.90	12.47	49.37	74.00	-24.63	peak
3	10806.000	35.69	13.79	49.48	74.00	-24.52	peak
4	12698.000	31.62	18.53	50.15	74.00	-23.85	peak
5	14161.000	28.18	21.56	49.74	74.00	-24.26	peak
6	16933.000	26.12	24.11	50.23	74.00	-23.77	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Horizontal	Test Voltage:	DC 3.3V

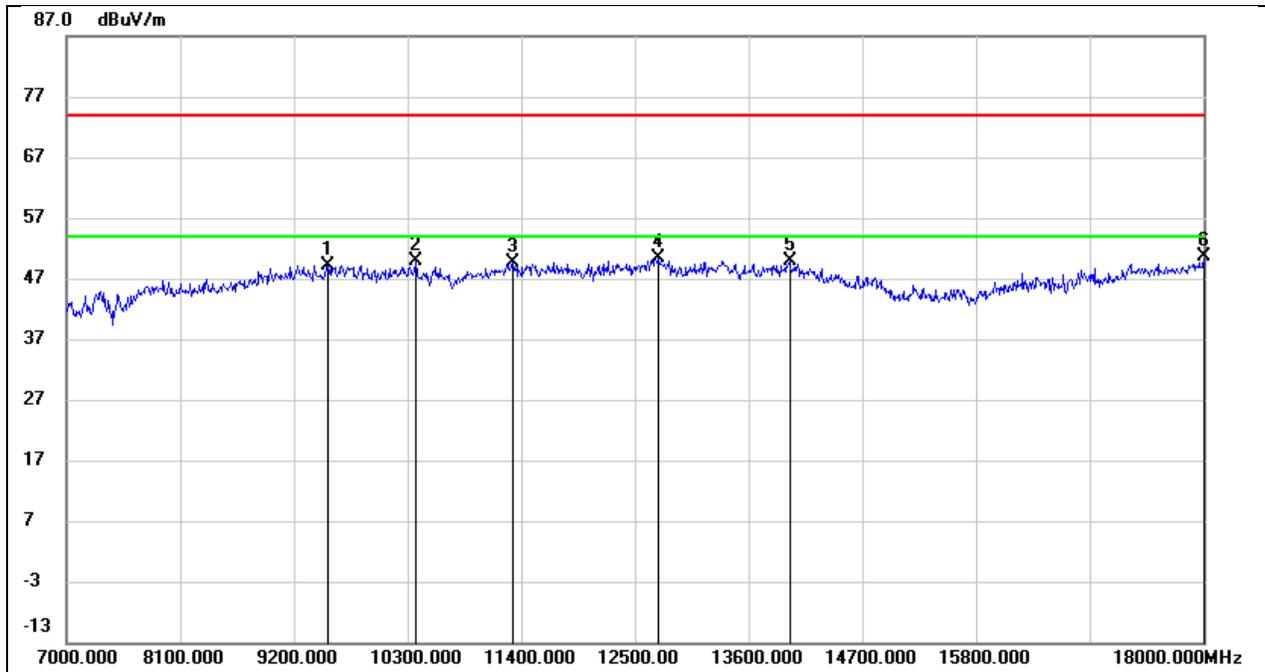


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9530.000	36.19	12.99	49.18	74.00	-24.82	peak
2	10377.000	36.63	13.30	49.93	74.00	-24.07	peak
3	11323.000	32.82	16.89	49.71	74.00	-24.29	peak
4	12731.000	30.61	19.68	50.29	74.00	-23.71	peak
5	13996.000	26.50	23.39	49.89	74.00	-24.11	peak
6	18000.000	21.29	29.41	50.70	74.00	-23.30	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5745
Polarity:	Vertical	Test Voltage:	DC 3.3V

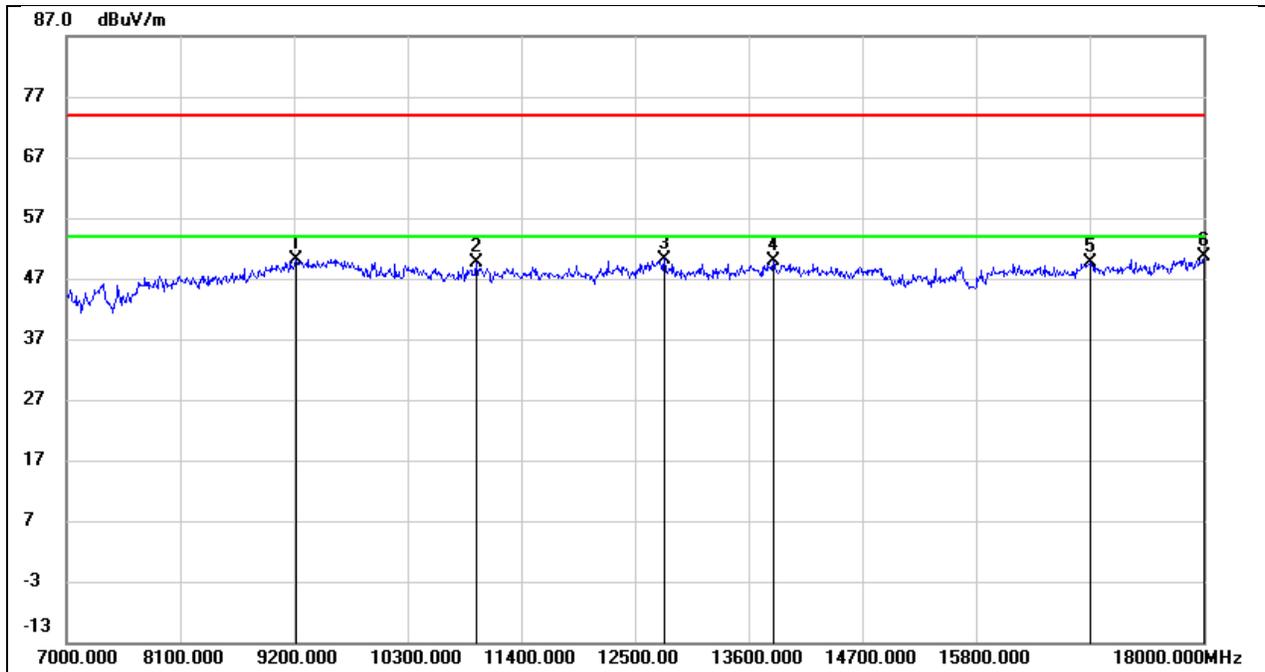


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	38.31	11.78	50.09	74.00	-23.91	peak
2	10960.000	35.62	14.08	49.70	74.00	-24.30	peak
3	12786.000	31.43	18.82	50.25	74.00	-23.75	peak
4	13842.000	28.68	21.15	49.83	74.00	-24.17	peak
5	16911.000	25.56	24.08	49.64	74.00	-24.36	peak
6	18000.000	23.47	27.21	50.68	74.00	-23.32	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Horizontal	Test Voltage:	DC 3.3V

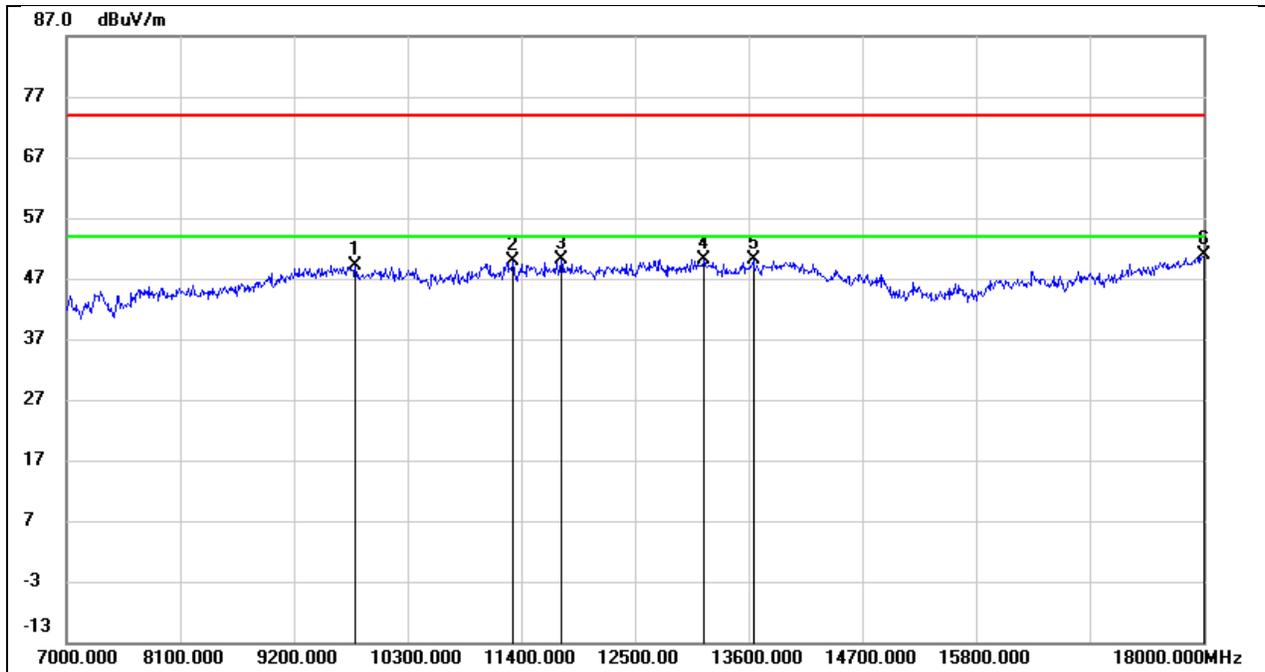


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9794.000	35.32	13.76	49.08	74.00	-24.92	peak
2	11323.000	32.97	16.89	49.86	74.00	-24.14	peak
3	11785.000	31.92	18.13	50.05	74.00	-23.95	peak
4	13171.000	29.57	20.67	50.24	74.00	-23.76	peak
5	13644.000	28.01	22.19	50.20	74.00	-23.80	peak
6	18000.000	21.46	29.41	50.87	74.00	-23.13	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5785
Polarity:	Vertical	Test Voltage:	DC 3.3V

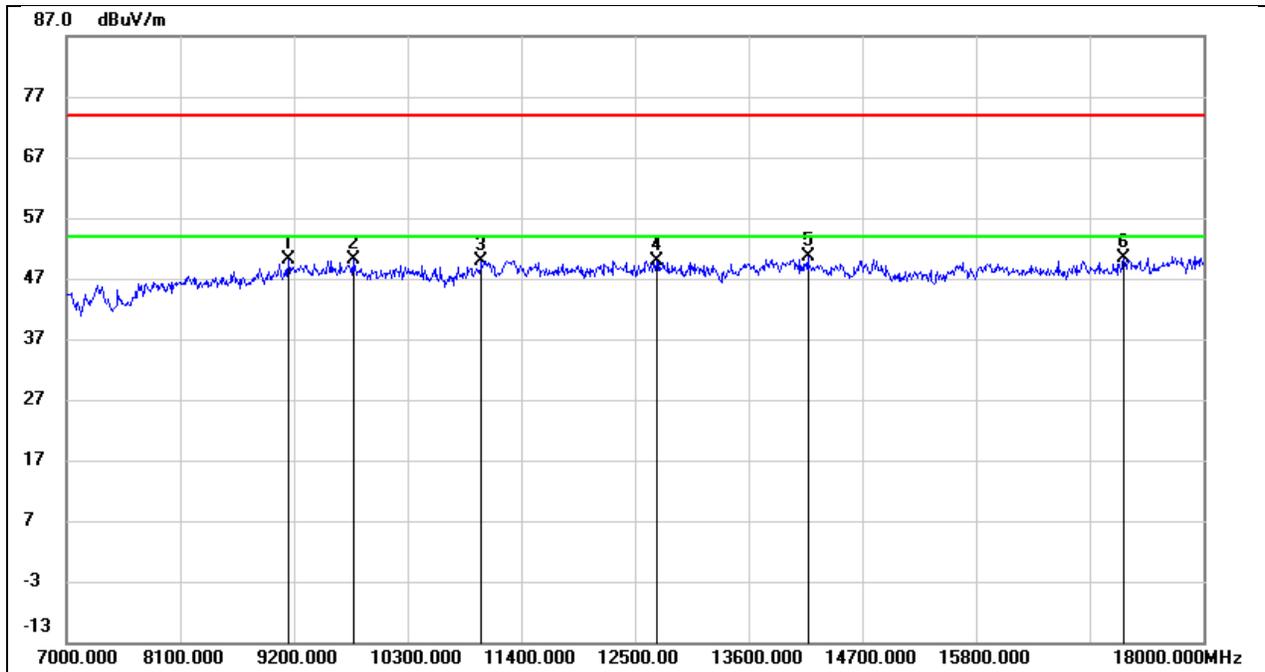


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	38.52	11.51	50.03	74.00	-23.97	peak
2	9772.000	36.77	13.35	50.12	74.00	-23.88	peak
3	11015.000	35.75	14.22	49.97	74.00	-24.03	peak
4	12709.000	31.34	18.57	49.91	74.00	-24.09	peak
5	14172.000	29.10	21.55	50.65	74.00	-23.35	peak
6	17230.000	25.75	24.73	50.48	74.00	-23.52	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Horizontal	Test Voltage:	DC 3.3V

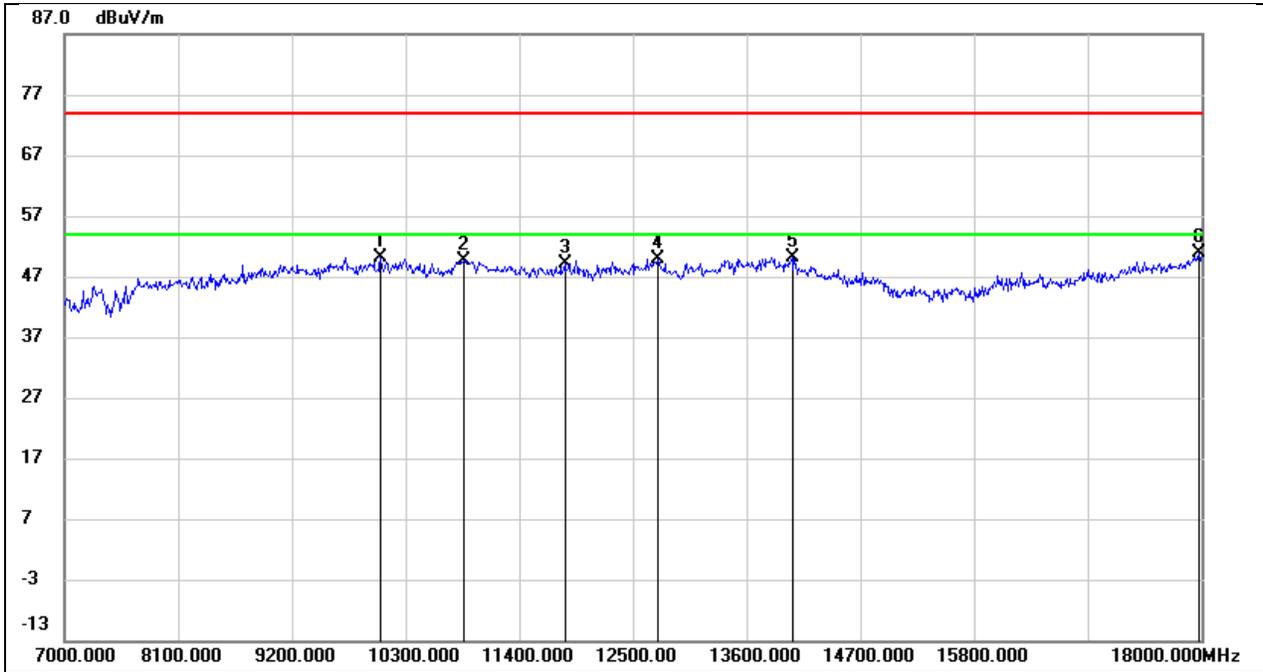


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10058.000	36.84	13.28	50.12	74.00	-23.88	peak
2	10861.000	35.13	14.52	49.65	74.00	-24.35	peak
3	11840.000	30.97	18.24	49.21	74.00	-24.79	peak
4	12742.000	30.11	19.73	49.84	74.00	-24.16	peak
5	14040.000	26.92	23.24	50.16	74.00	-23.84	peak
6	17978.000	21.63	29.18	50.81	74.00	-23.19	peak

Test Mode:	802.11n HT20	Frequency(MHz):	5825
Polarity:	Vertical	Test Voltage:	DC 3.3V

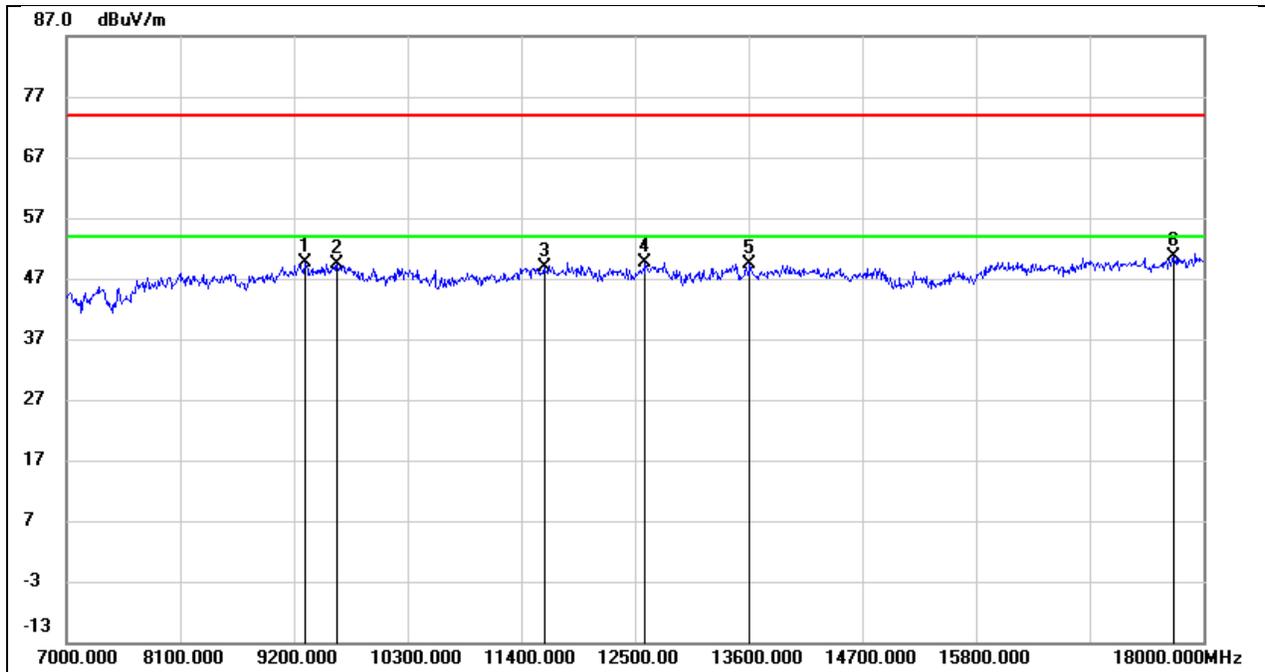


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9310.000	37.64	12.00	49.64	74.00	-24.36	peak
2	9618.000	36.17	13.29	49.46	74.00	-24.54	peak
3	11620.000	32.07	16.77	48.84	74.00	-25.16	peak
4	12599.000	31.42	18.22	49.64	74.00	-24.36	peak
5	13611.000	29.02	20.41	49.43	74.00	-24.57	peak
6	17714.000	25.10	25.51	50.61	74.00	-23.39	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 3.3V

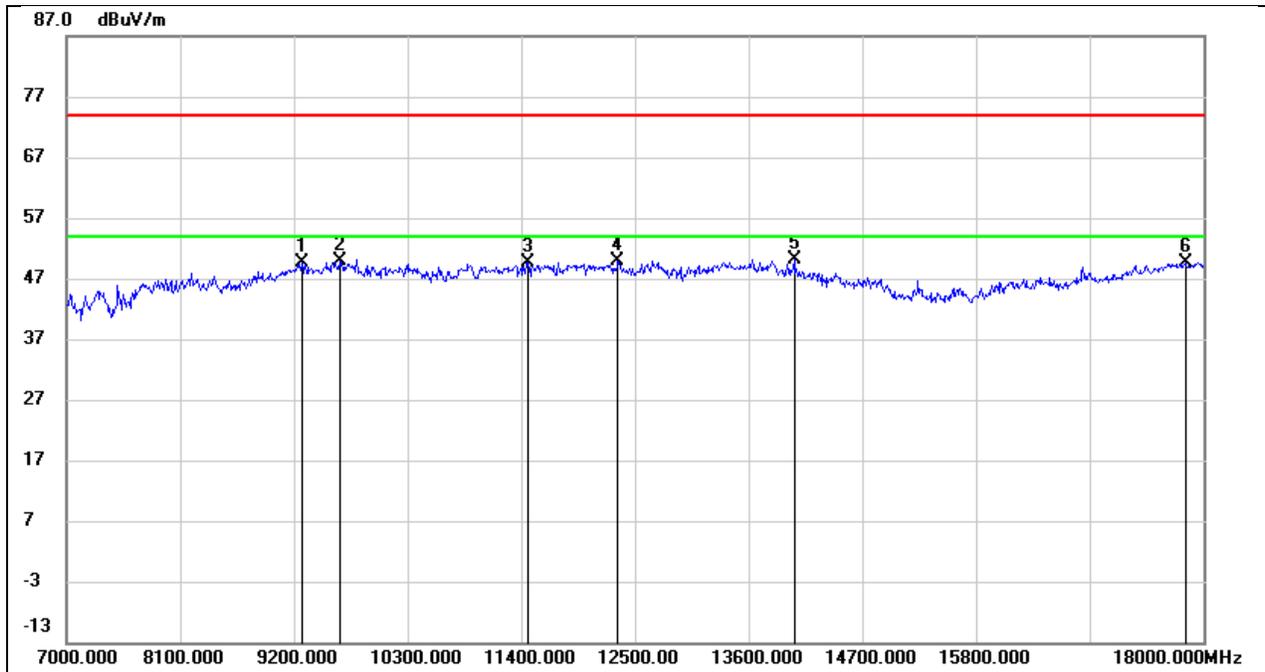


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9277.000	37.96	11.74	49.70	74.00	-24.30	peak
2	9640.000	36.32	13.50	49.82	74.00	-24.18	peak
3	11466.000	31.91	17.72	49.63	74.00	-24.37	peak
4	12335.000	30.98	18.99	49.97	74.00	-24.03	peak
5	14040.000	26.97	23.24	50.21	74.00	-23.79	peak
6	17824.000	22.12	27.53	49.65	74.00	-24.35	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 3.3V

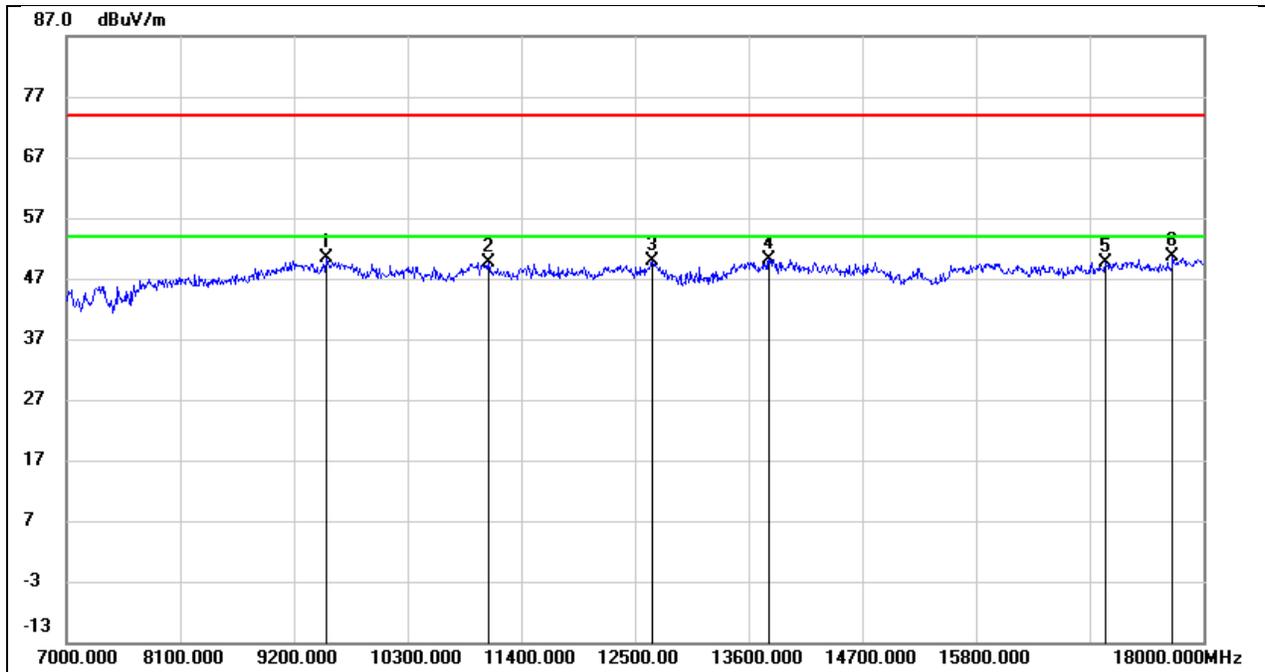


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9508.000	37.52	12.85	50.37	74.00	-23.63	peak
2	11081.000	35.09	14.52	49.61	74.00	-24.39	peak
3	12665.000	31.35	18.42	49.77	74.00	-24.23	peak
4	13798.000	29.22	20.98	50.20	74.00	-23.80	peak
5	17054.000	25.28	24.35	49.63	74.00	-24.37	peak
6	17703.000	25.30	25.45	50.75	74.00	-23.25	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 3.3V

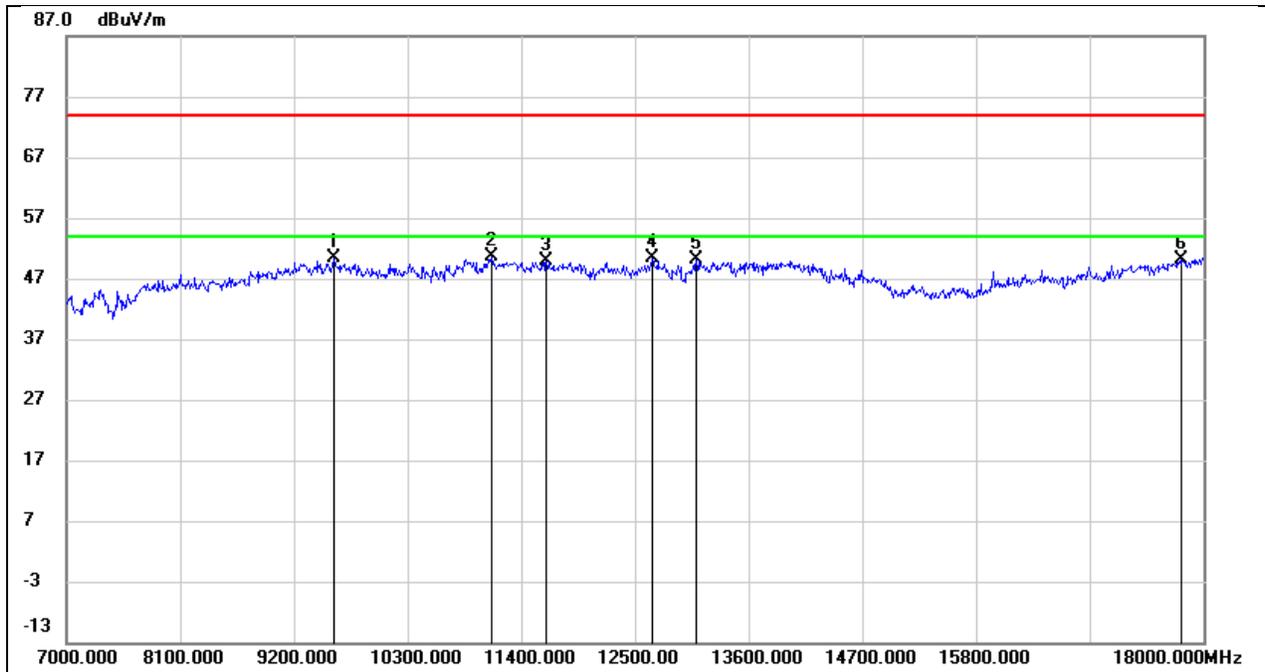


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9585.000	37.14	13.34	50.48	74.00	-23.52	peak
2	11114.000	34.98	15.62	50.60	74.00	-23.40	peak
3	11642.000	31.72	18.16	49.88	74.00	-24.12	peak
4	12665.000	30.86	19.42	50.28	74.00	-23.72	peak
5	13094.000	29.75	20.36	50.11	74.00	-23.89	peak
6	17791.000	23.06	27.19	50.25	74.00	-23.75	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 3.3V

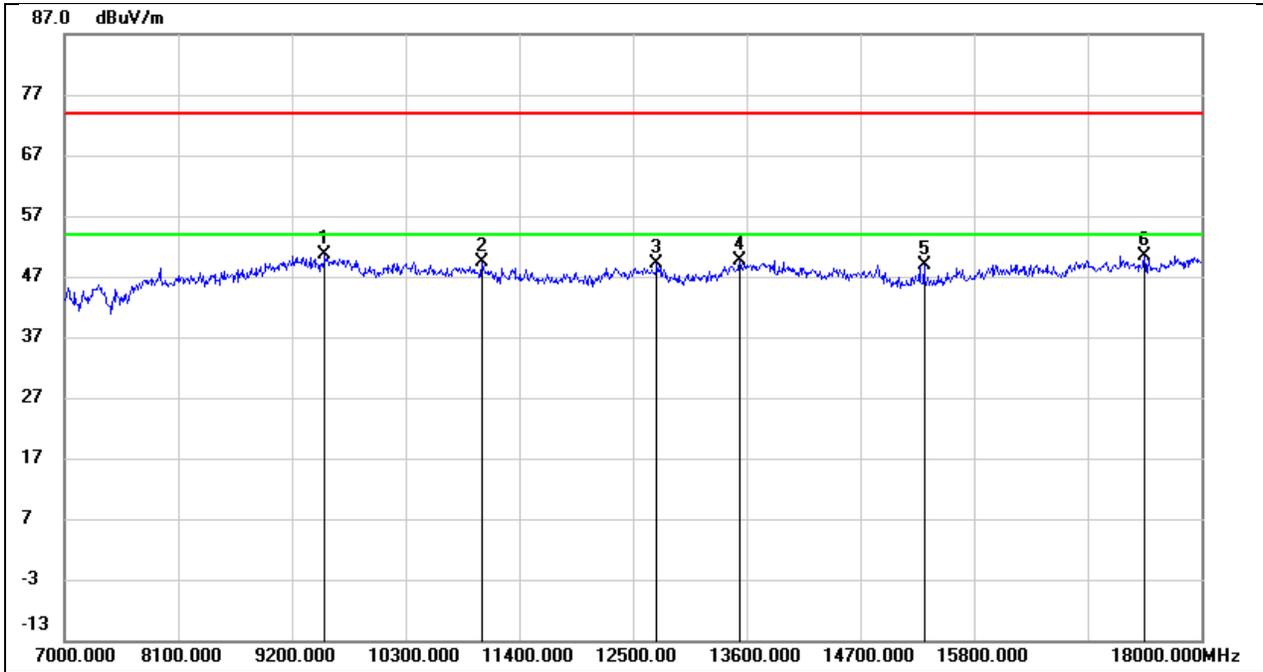


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9519.000	37.72	12.90	50.62	74.00	-23.38	peak
2	11037.000	35.15	14.33	49.48	74.00	-24.52	peak
3	12731.000	30.44	18.64	49.08	74.00	-24.92	peak
4	13534.000	29.44	20.26	49.70	74.00	-24.30	peak
5	15316.000	28.62	20.18	48.80	74.00	-25.20	peak
6	17450.000	25.62	24.82	50.44	74.00	-23.56	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Horizontal	Test Voltage:	DC 3.3V

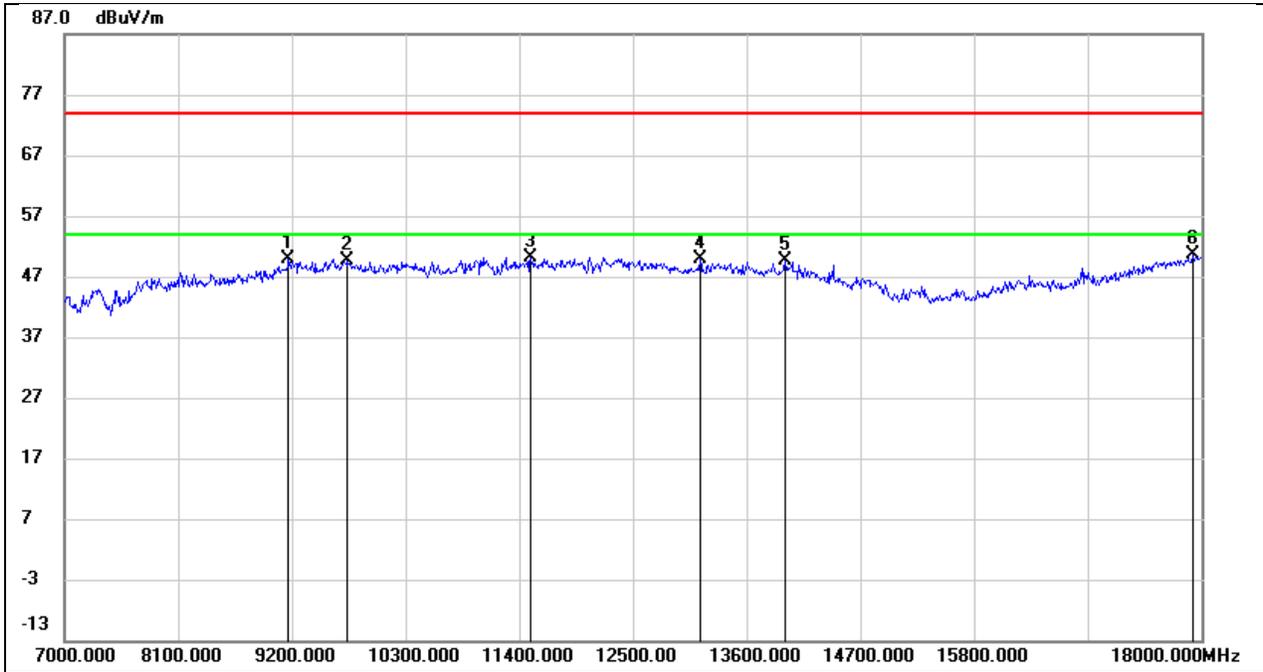


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9167.000	38.67	11.33	50.00	74.00	-24.00	peak
2	9739.000	35.98	13.67	49.65	74.00	-24.35	peak
3	11510.000	32.31	17.91	50.22	74.00	-23.78	peak
4	13149.000	29.20	20.58	49.78	74.00	-24.22	peak
5	13974.000	26.39	23.31	49.70	74.00	-24.30	peak
6	17912.000	22.22	28.48	50.70	74.00	-23.30	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5270
Polarity:	Vertical	Test Voltage:	DC 3.3V

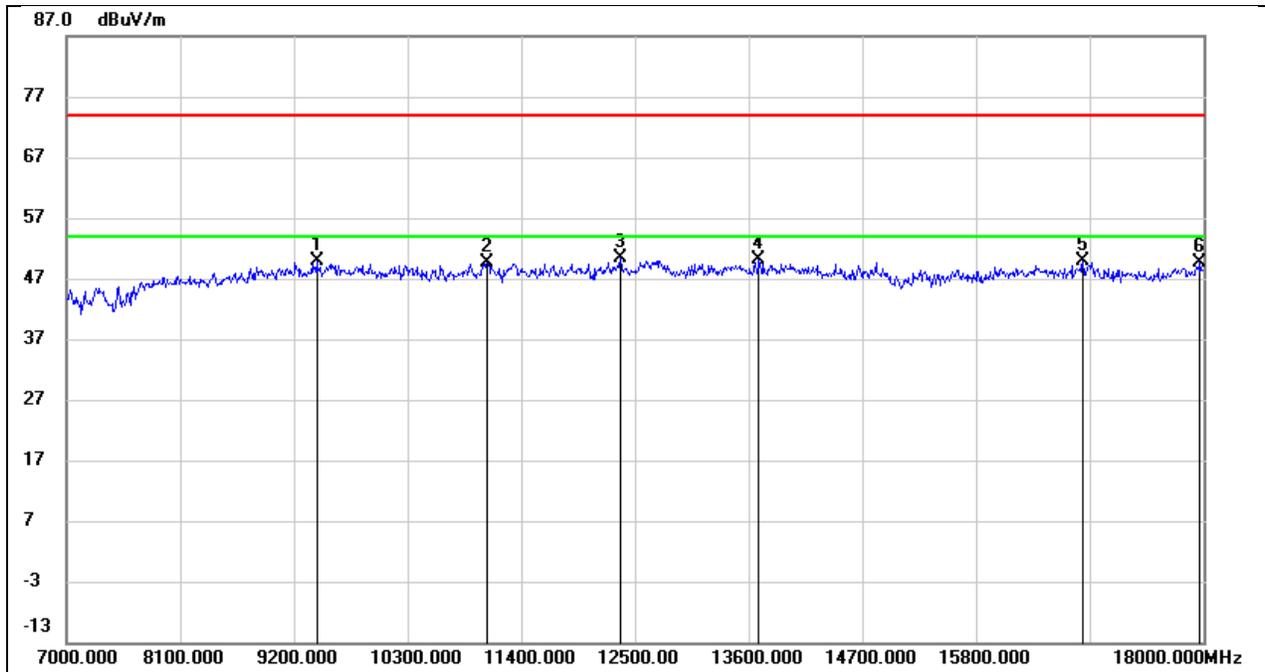


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9420.000	37.41	12.35	49.76	74.00	-24.24	peak
2	11070.000	35.09	14.47	49.56	74.00	-24.44	peak
3	12357.000	32.29	18.05	50.34	74.00	-23.66	peak
4	13699.000	29.37	20.68	50.05	74.00	-23.95	peak
5	16834.000	25.88	23.94	49.82	74.00	-24.18	peak
6	17967.000	22.69	27.00	49.69	74.00	-24.31	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Horizontal	Test Voltage:	DC 3.3V

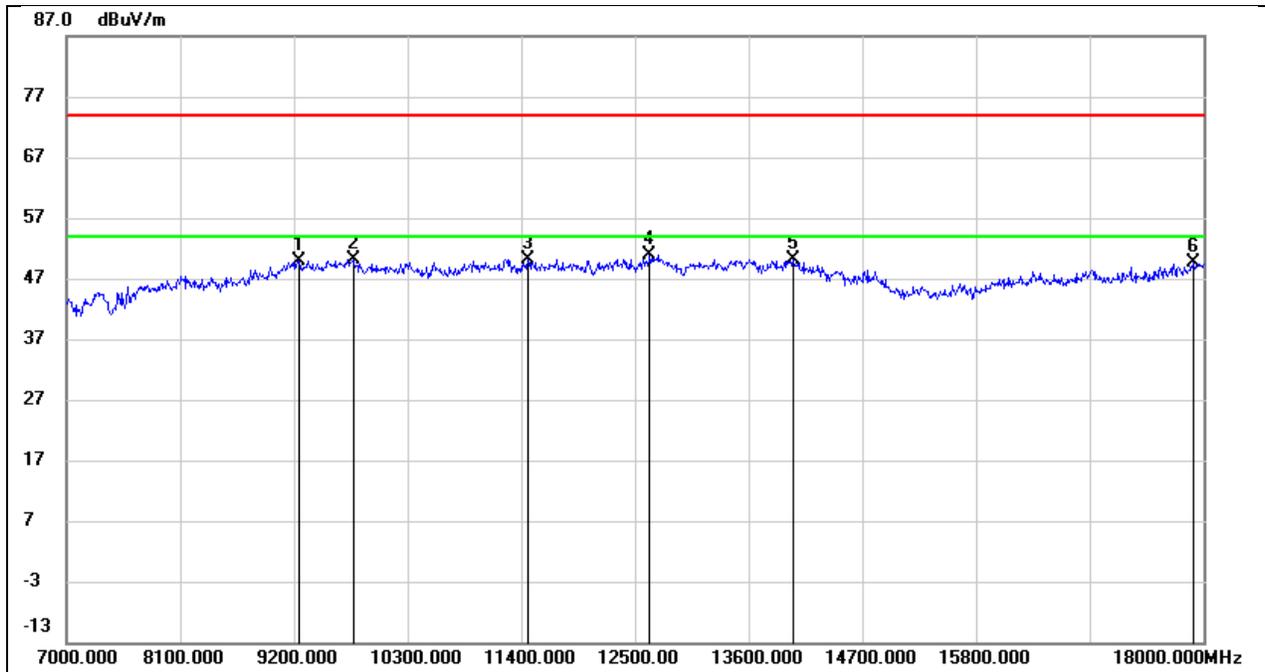


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9255.000	38.18	11.67	49.85	74.00	-24.15	peak
2	9772.000	36.43	13.73	50.16	74.00	-23.84	peak
3	11466.000	32.52	17.72	50.24	74.00	-23.76	peak
4	12643.000	31.49	19.35	50.84	74.00	-23.16	peak
5	14029.000	26.75	23.29	50.04	74.00	-23.96	peak
6	17901.000	21.29	28.36	49.65	74.00	-24.35	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5310
Polarity:	Vertical	Test Voltage:	DC 3.3V

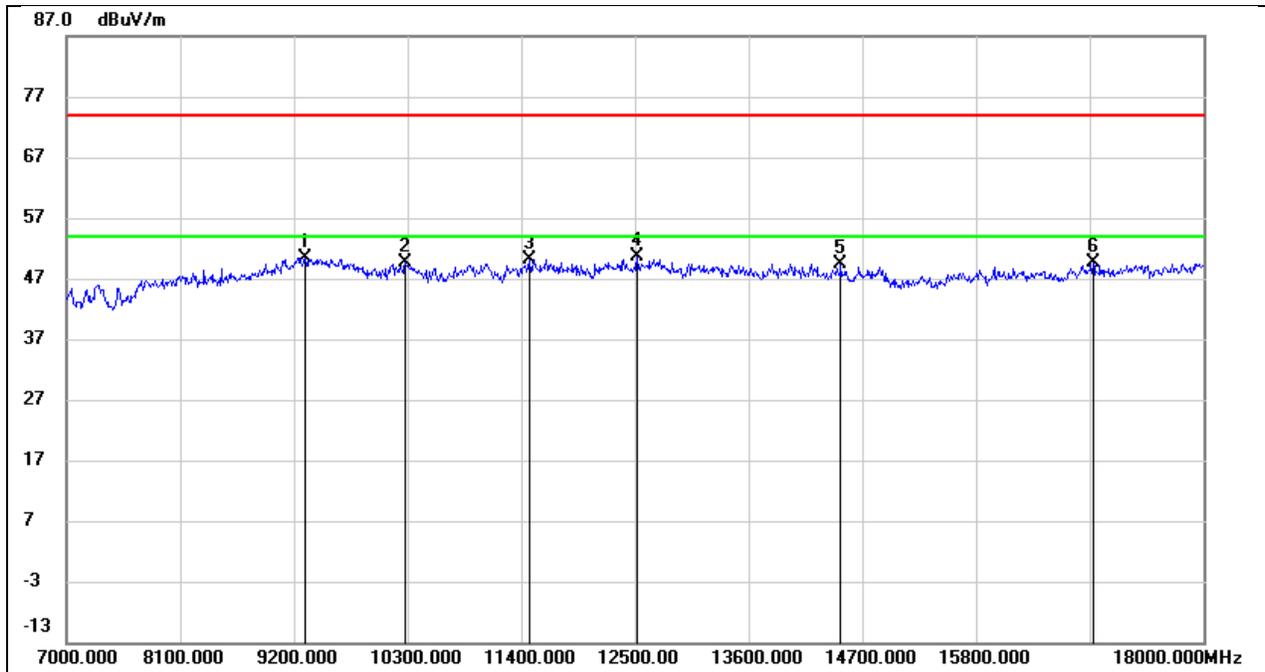


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9310.000	38.47	12.00	50.47	74.00	-23.53	peak
2	10278.000	36.79	12.79	49.58	74.00	-24.42	peak
3	11477.000	33.88	16.30	50.18	74.00	-23.82	peak
4	12522.000	32.37	18.16	50.53	74.00	-23.47	peak
5	14491.000	28.62	20.76	49.38	74.00	-24.62	peak
6	16933.000	25.51	24.11	49.62	74.00	-24.38	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Horizontal	Test Voltage:	DC 3.3V

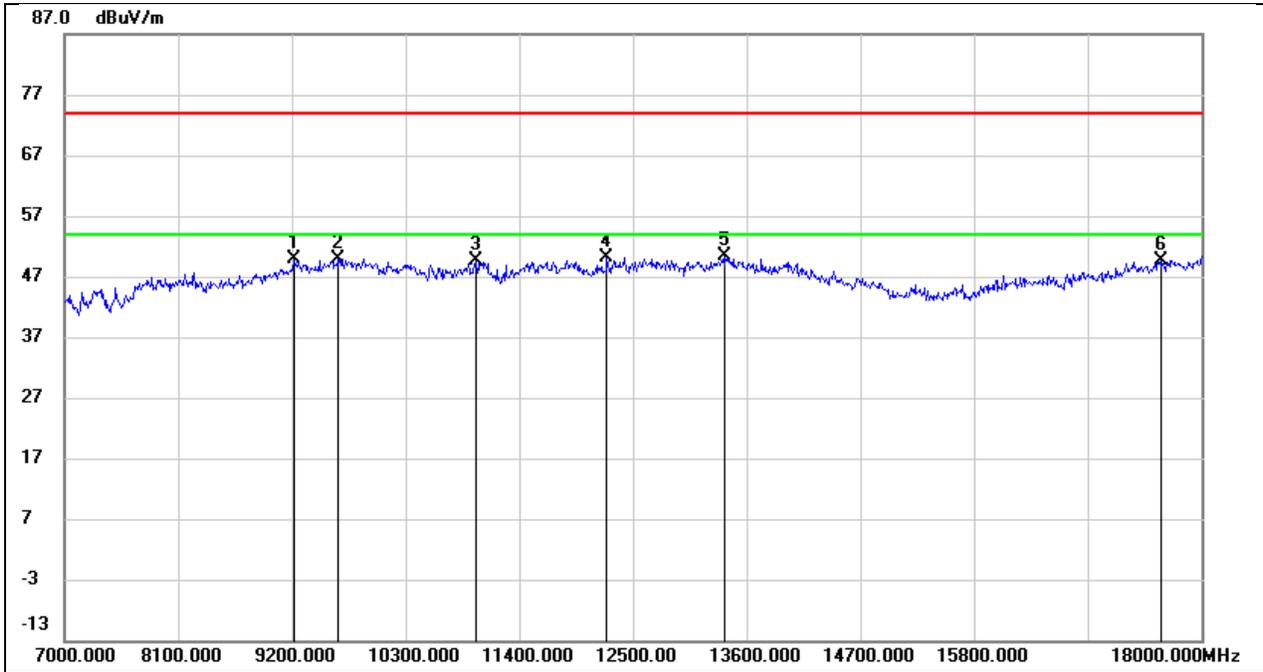


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9222.000	38.36	11.56	49.92	74.00	-24.08	peak
2	9651.000	36.37	13.51	49.88	74.00	-24.12	peak
3	10982.000	34.62	14.90	49.52	74.00	-24.48	peak
4	12247.000	31.22	18.90	50.12	74.00	-23.88	peak
5	13391.000	29.01	21.47	50.48	74.00	-23.52	peak
6	17615.000	24.23	25.50	49.73	74.00	-24.27	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5510
Polarity:	Vertical	Test Voltage:	DC 3.3V

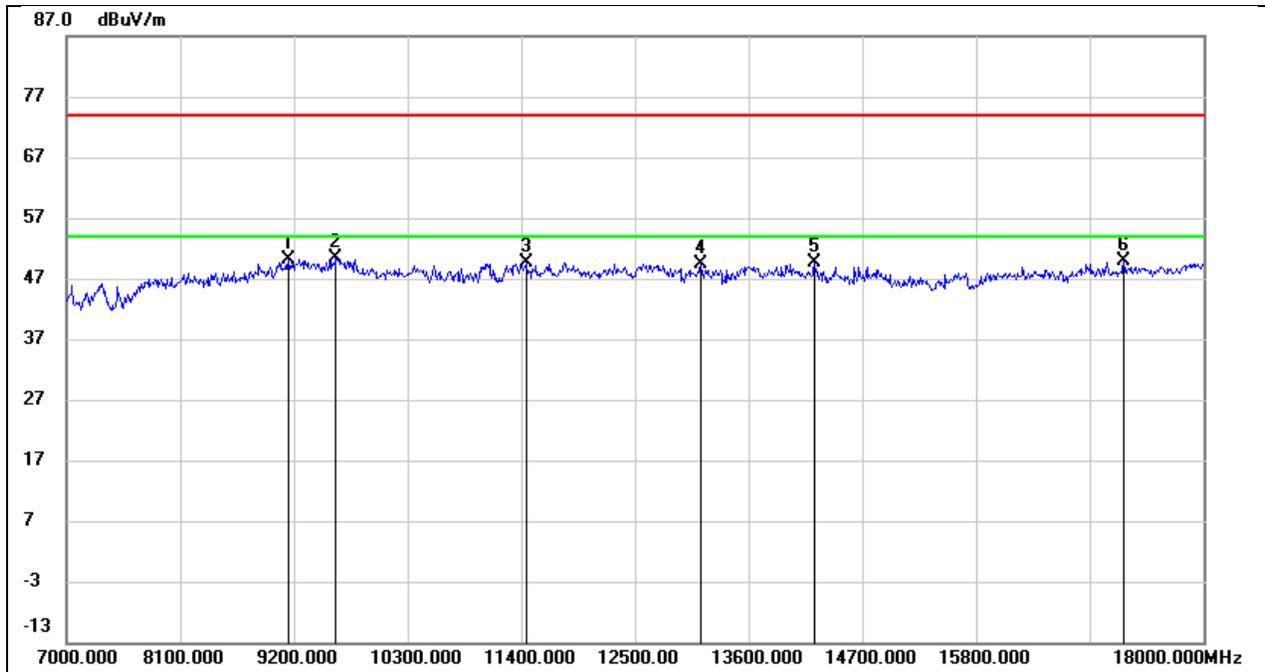


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9145.000	38.73	11.51	50.24	74.00	-23.76	peak
2	9607.000	37.13	13.29	50.42	74.00	-23.58	peak
3	11444.000	33.51	16.19	49.70	74.00	-24.30	peak
4	13138.000	30.30	19.20	49.50	74.00	-24.50	peak
5	14238.000	28.28	21.38	49.66	74.00	-24.34	peak
6	17230.000	25.03	24.73	49.76	74.00	-24.24	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Horizontal	Test Voltage:	DC 3.3V

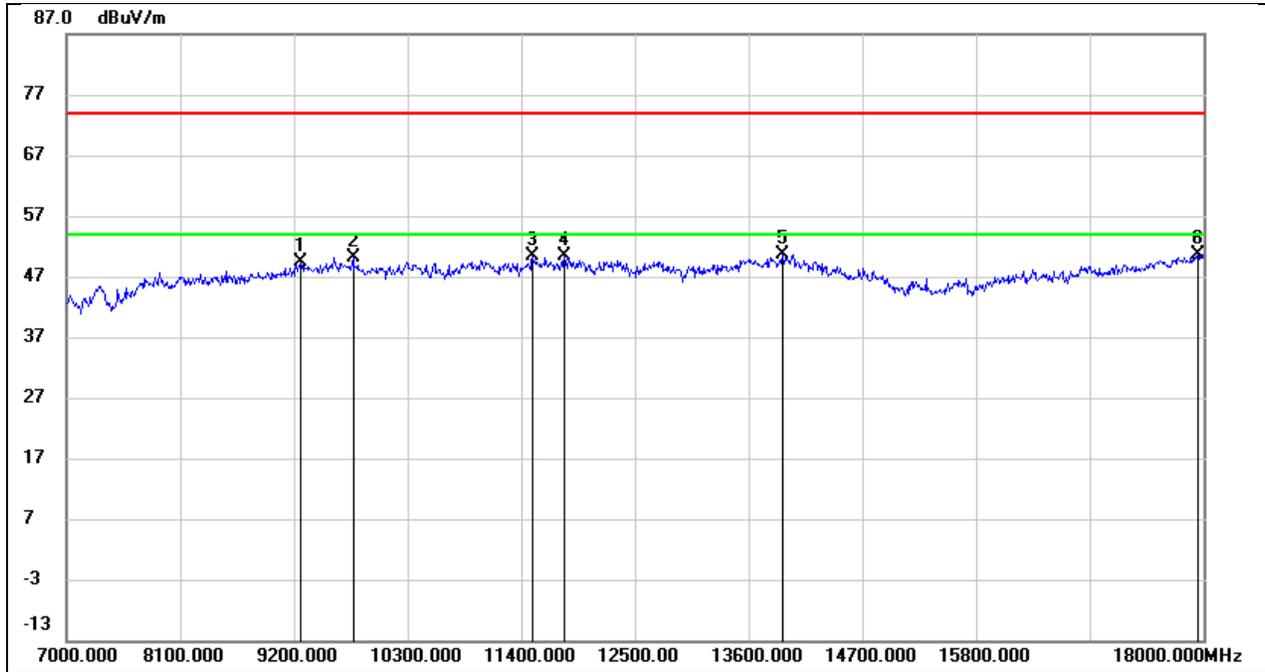


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	37.61	11.70	49.31	74.00	-24.69	peak
2	9772.000	36.38	13.73	50.11	74.00	-23.89	peak
3	11510.000	32.39	17.91	50.30	74.00	-23.70	peak
4	11818.000	32.17	18.17	50.34	74.00	-23.66	peak
5	13930.000	27.54	23.13	50.67	74.00	-23.33	peak
6	17945.000	21.82	28.83	50.65	74.00	-23.35	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5550
Polarity:	Vertical	Test Voltage:	DC 3.3V

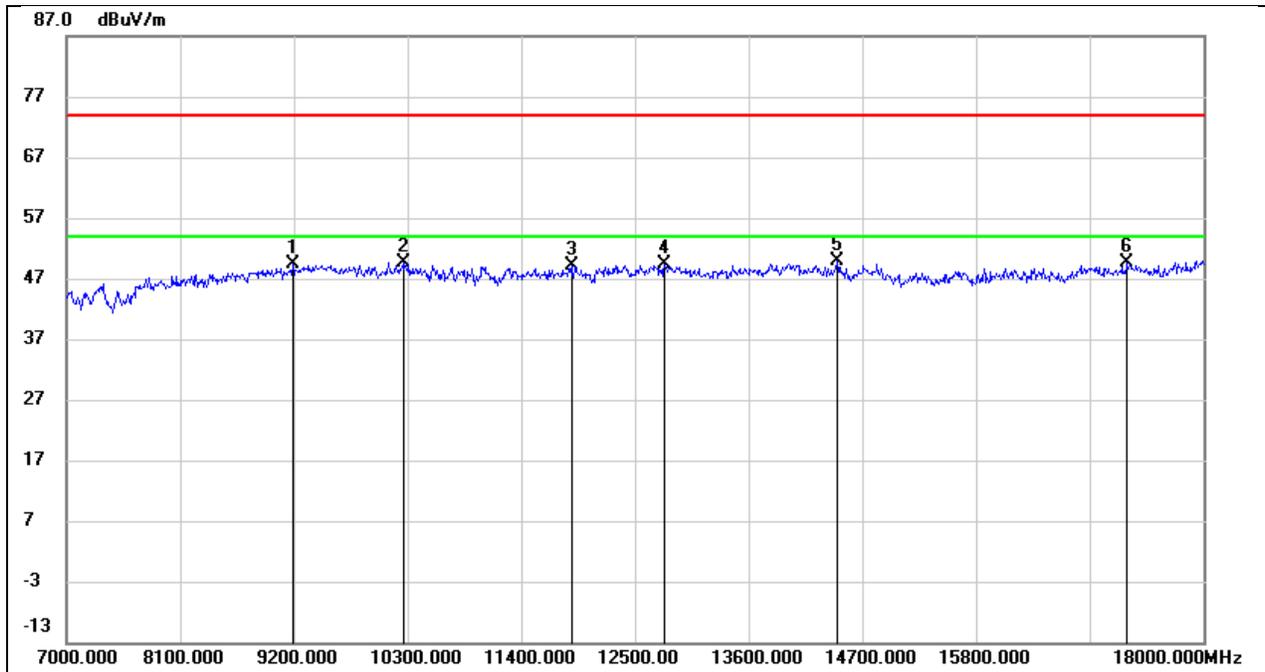


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9189.000	37.65	11.67	49.32	74.00	-24.68	peak
2	10267.000	36.92	12.78	49.70	74.00	-24.30	peak
3	11884.000	32.06	17.17	49.23	74.00	-24.77	peak
4	12786.000	30.44	18.82	49.26	74.00	-24.74	peak
5	14458.000	29.10	20.78	49.88	74.00	-24.12	peak
6	17263.000	24.87	24.76	49.63	74.00	-24.37	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Horizontal	Test Voltage:	DC 3.3V

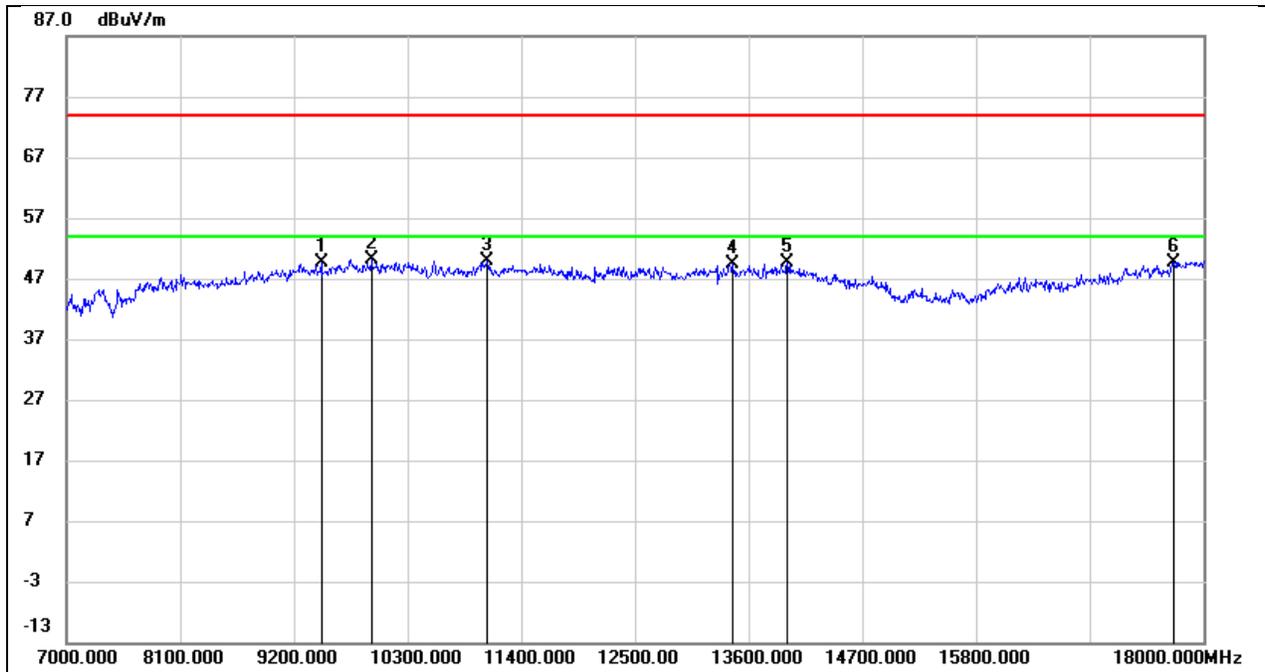


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9464.000	36.94	12.57	49.51	74.00	-24.49	peak
2	9948.000	36.77	13.46	50.23	74.00	-23.77	peak
3	11070.000	34.44	15.36	49.80	74.00	-24.20	peak
4	13446.000	27.72	21.68	49.40	74.00	-24.60	peak
5	13974.000	26.24	23.31	49.55	74.00	-24.45	peak
6	17714.000	23.21	26.46	49.67	74.00	-24.33	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5670
Polarity:	Vertical	Test Voltage:	DC 3.3V

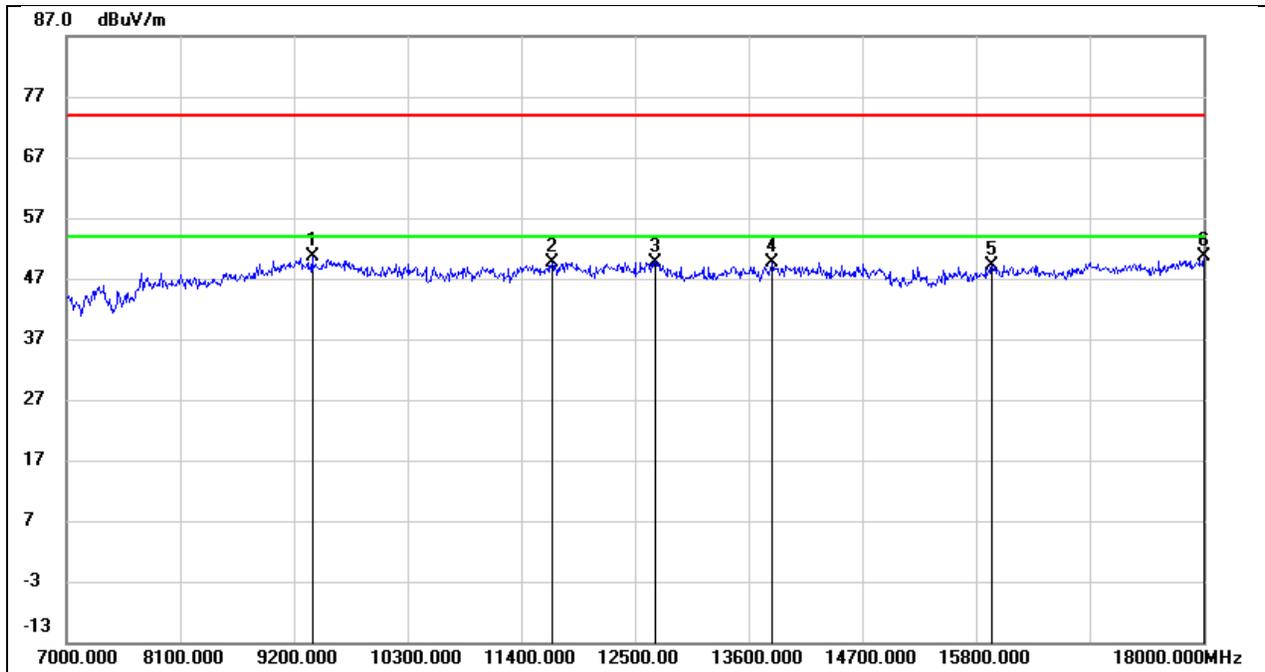


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9376.000	38.55	12.17	50.72	74.00	-23.28	peak
2	11697.000	32.76	16.82	49.58	74.00	-24.42	peak
3	12698.000	31.22	18.53	49.75	74.00	-24.25	peak
4	13831.000	28.54	21.11	49.65	74.00	-24.35	peak
5	15954.000	26.61	22.58	49.19	74.00	-24.81	peak
6	18000.000	23.38	27.21	50.59	74.00	-23.41	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Horizontal	Test Voltage:	DC 3.3V

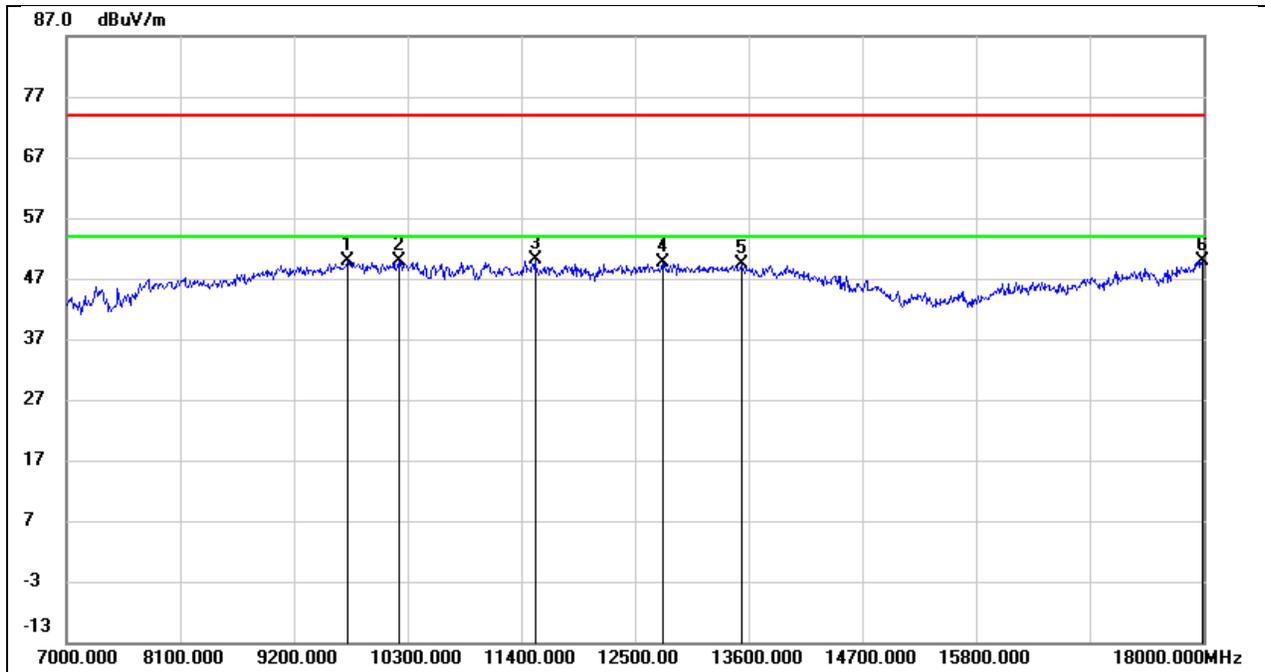


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9717.000	36.23	13.63	49.86	74.00	-24.14	peak
2	10212.000	36.60	13.17	49.77	74.00	-24.23	peak
3	11532.000	32.04	17.98	50.02	74.00	-23.98	peak
4	12764.000	29.72	19.80	49.52	74.00	-24.48	peak
5	13534.000	27.39	21.95	49.34	74.00	-24.66	peak
6	17989.000	20.66	29.29	49.95	74.00	-24.05	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5710
Polarity:	Vertical	Test Voltage:	DC 3.3V

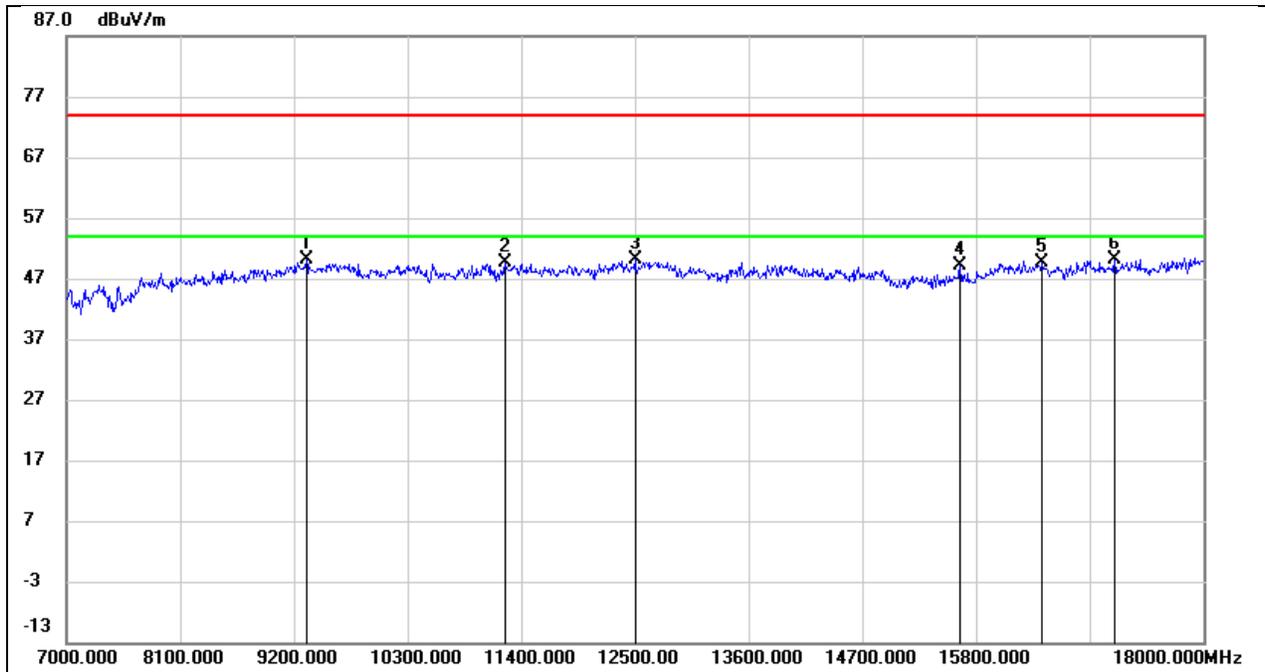


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9321.000	38.10	12.03	50.13	74.00	-23.87	peak
2	11246.000	34.48	15.27	49.75	74.00	-24.25	peak
3	12500.000	31.92	18.14	50.06	74.00	-23.94	peak
4	15646.000	28.03	20.98	49.01	74.00	-24.99	peak
5	16438.000	26.08	23.51	49.59	74.00	-24.41	peak
6	17142.000	25.53	24.57	50.10	74.00	-23.90	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Horizontal	Test Voltage:	DC 3.3V

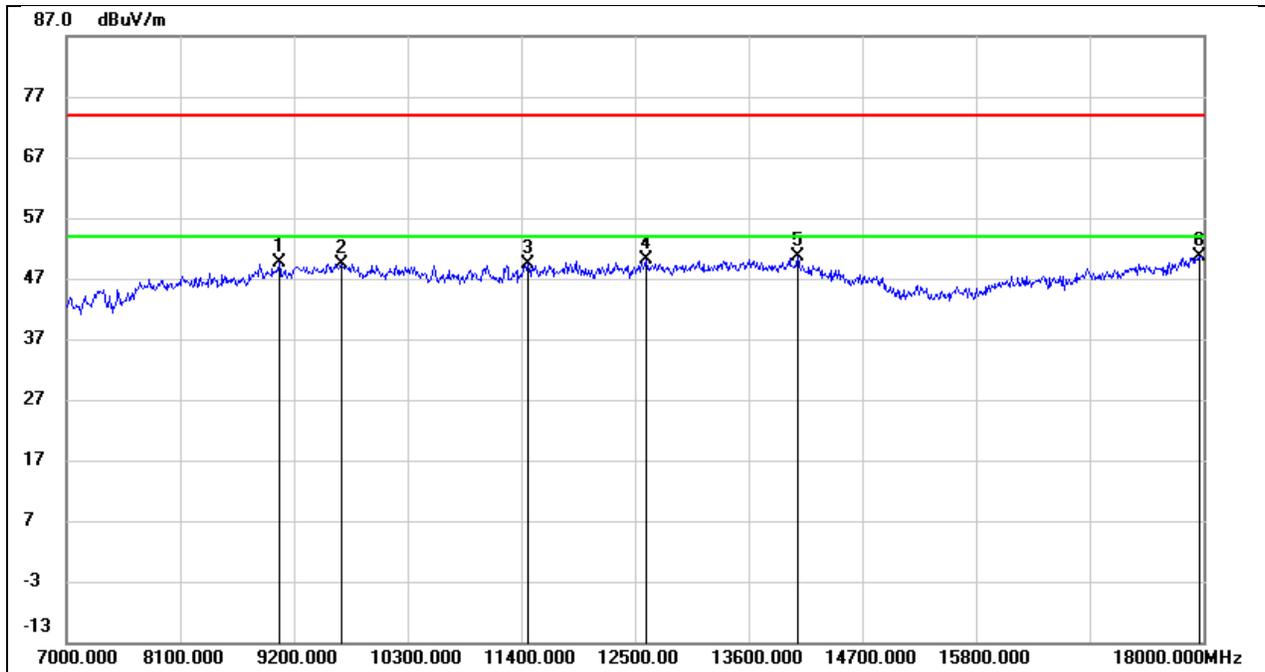


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	38.83	10.82	49.65	74.00	-24.35	peak
2	9662.000	35.96	13.53	49.49	74.00	-24.51	peak
3	11466.000	31.54	17.72	49.26	74.00	-24.74	peak
4	12610.000	30.81	19.22	50.03	74.00	-23.97	peak
5	14073.000	27.61	23.11	50.72	74.00	-23.28	peak
6	17956.000	21.63	28.94	50.57	74.00	-23.43	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5755
Polarity:	Vertical	Test Voltage:	DC 3.3V

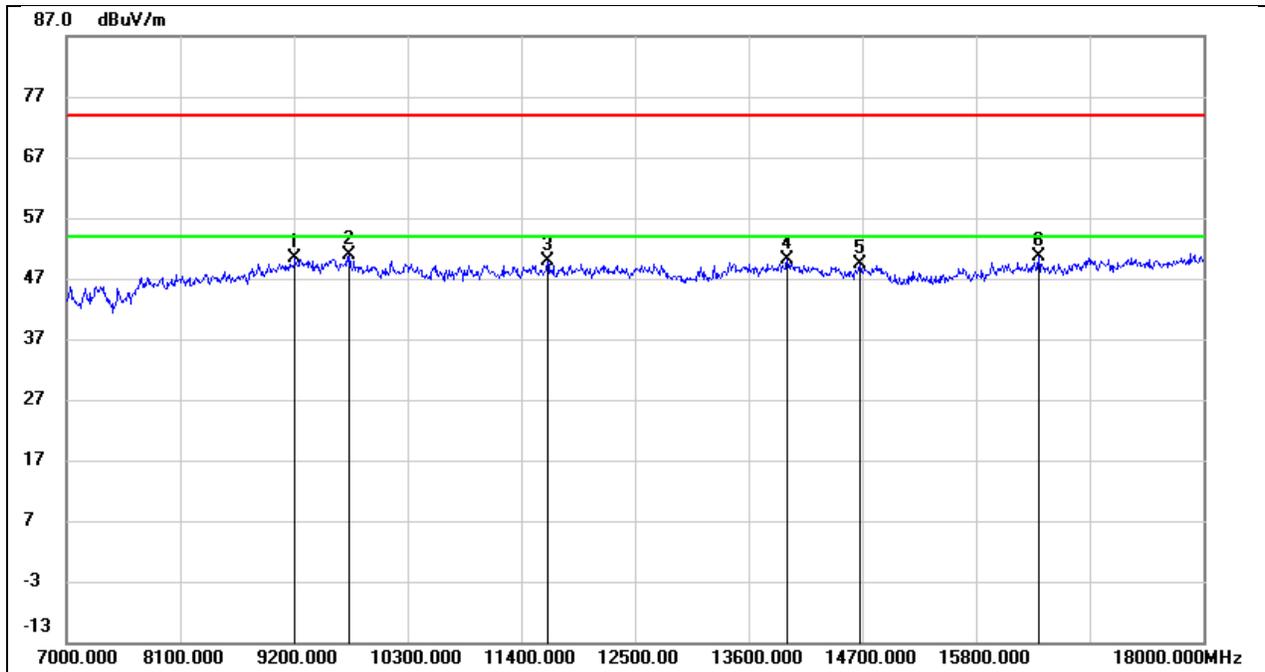


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	38.53	11.75	50.28	74.00	-23.72	peak
2	9739.000	37.65	13.33	50.98	74.00	-23.02	peak
3	11653.000	33.09	16.78	49.87	74.00	-24.13	peak
4	13974.000	28.43	21.70	50.13	74.00	-23.87	peak
5	14678.000	28.93	20.55	49.48	74.00	-24.52	peak
6	16405.000	27.03	23.52	50.55	74.00	-23.45	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Horizontal	Test Voltage:	DC 3.3V

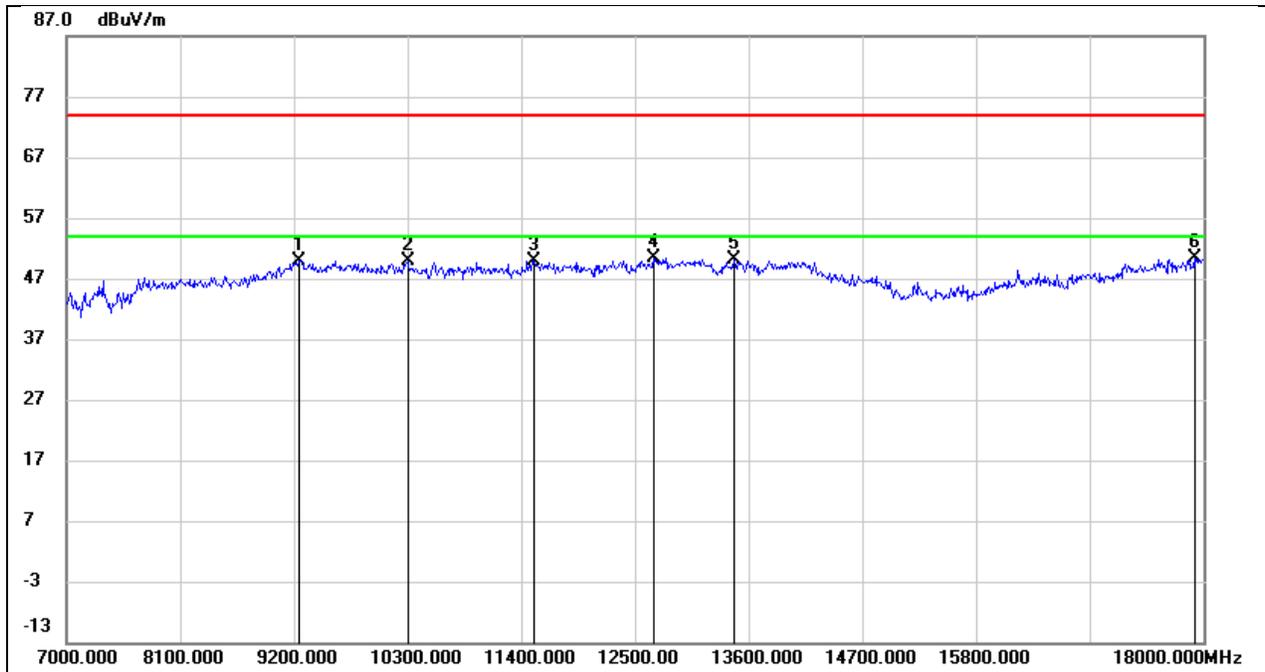


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9244.000	38.26	11.63	49.89	74.00	-24.11	peak
2	10300.000	36.55	13.23	49.78	74.00	-24.22	peak
3	11521.000	32.00	17.94	49.94	74.00	-24.06	peak
4	12676.000	30.98	19.47	50.45	74.00	-23.55	peak
5	13457.000	28.50	21.73	50.23	74.00	-23.77	peak
6	17912.000	21.83	28.48	50.31	74.00	-23.69	peak

Test Mode:	802.11n HT40	Frequency(MHz):	5795
Polarity:	Vertical	Test Voltage:	DC 3.3V

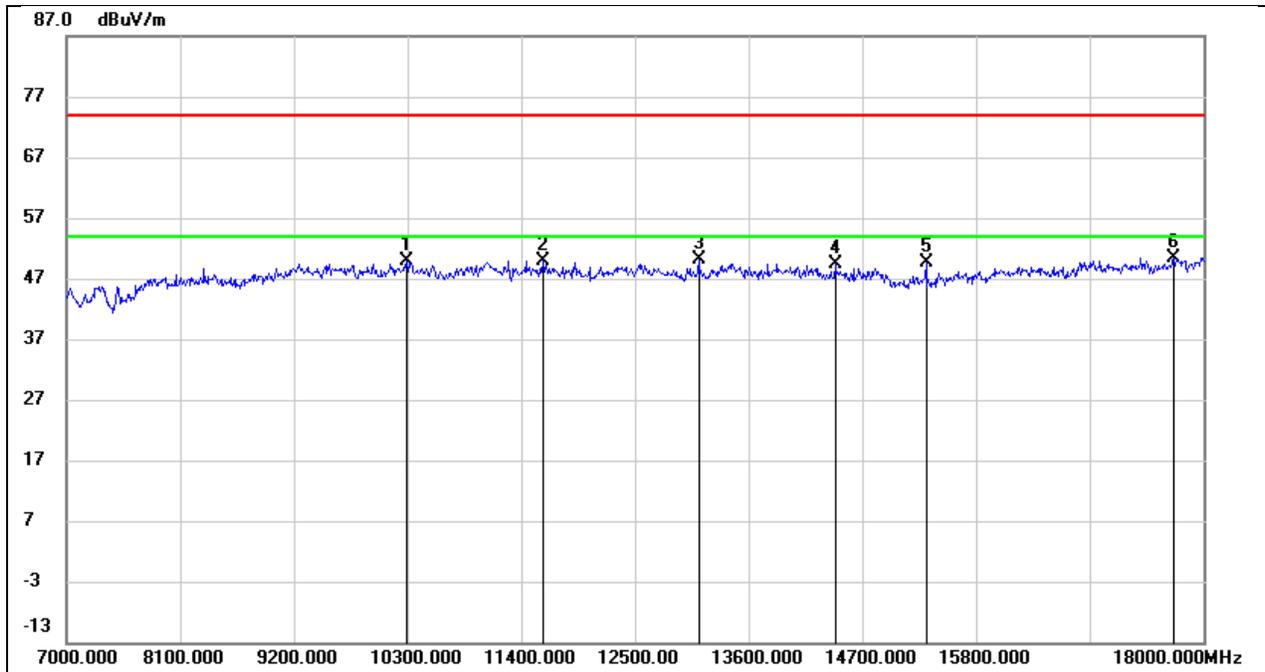


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10289.000	37.08	12.82	49.90	74.00	-24.10	peak
2	11609.000	33.16	16.76	49.92	74.00	-24.08	peak
3	13116.000	30.92	19.13	50.05	74.00	-23.95	peak
4	14436.000	28.69	20.78	49.47	74.00	-24.53	peak
5	15316.000	29.42	20.18	49.60	74.00	-24.40	peak
6	17714.000	24.87	25.51	50.38	74.00	-23.62	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 3.3V

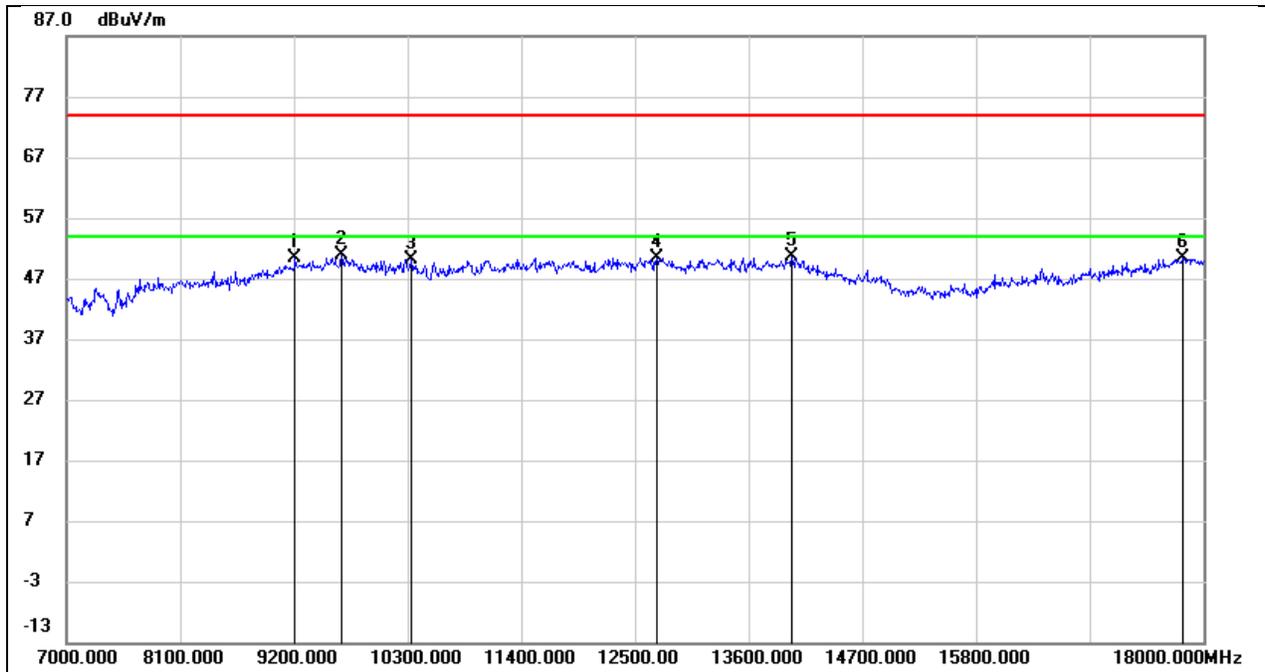


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9211.000	38.81	11.52	50.33	74.00	-23.67	peak
2	9662.000	37.46	13.53	50.99	74.00	-23.01	peak
3	10333.000	36.96	13.26	50.22	74.00	-23.78	peak
4	12709.000	30.86	19.59	50.45	74.00	-23.55	peak
5	14018.000	27.18	23.34	50.52	74.00	-23.48	peak
6	17802.000	23.18	27.31	50.49	74.00	-23.51	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 3.3V

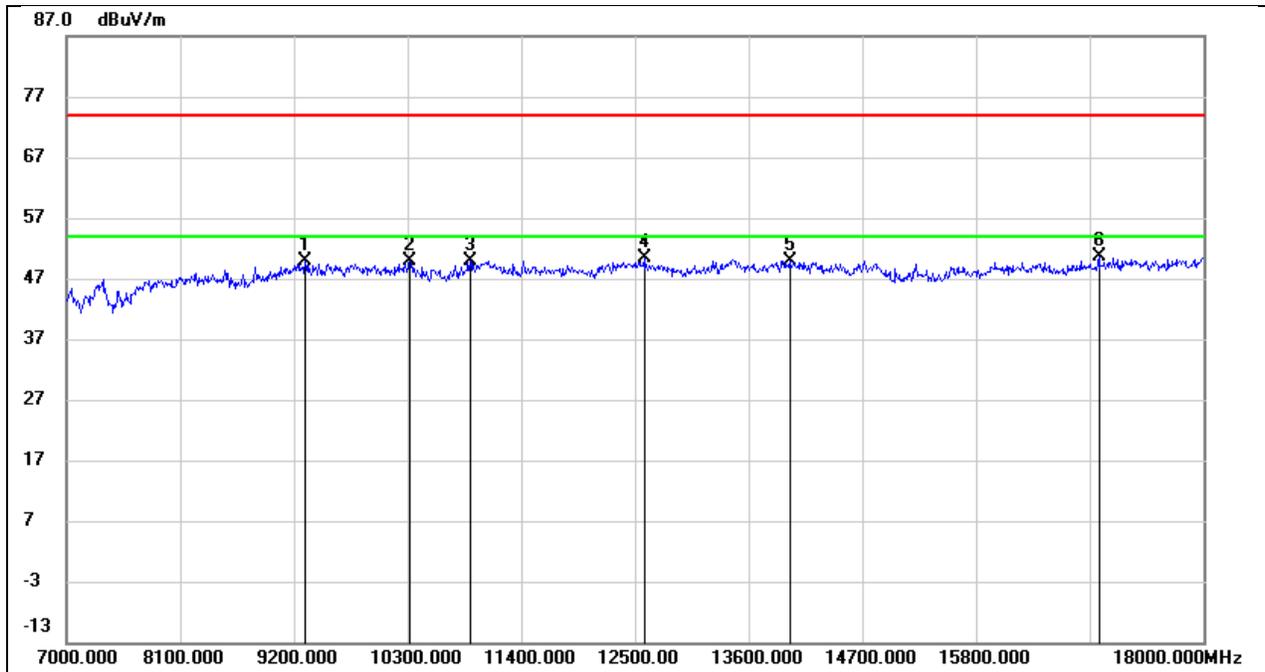


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9310.000	37.91	12.00	49.91	74.00	-24.09	peak
2	10322.000	36.92	12.88	49.80	74.00	-24.20	peak
3	10905.000	35.99	13.97	49.96	74.00	-24.04	peak
4	12588.000	32.13	18.21	50.34	74.00	-23.66	peak
5	13996.000	28.15	21.79	49.94	74.00	-24.06	peak
6	16988.000	26.31	24.20	50.51	74.00	-23.49	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Horizontal	Test Voltage:	DC 3.3V

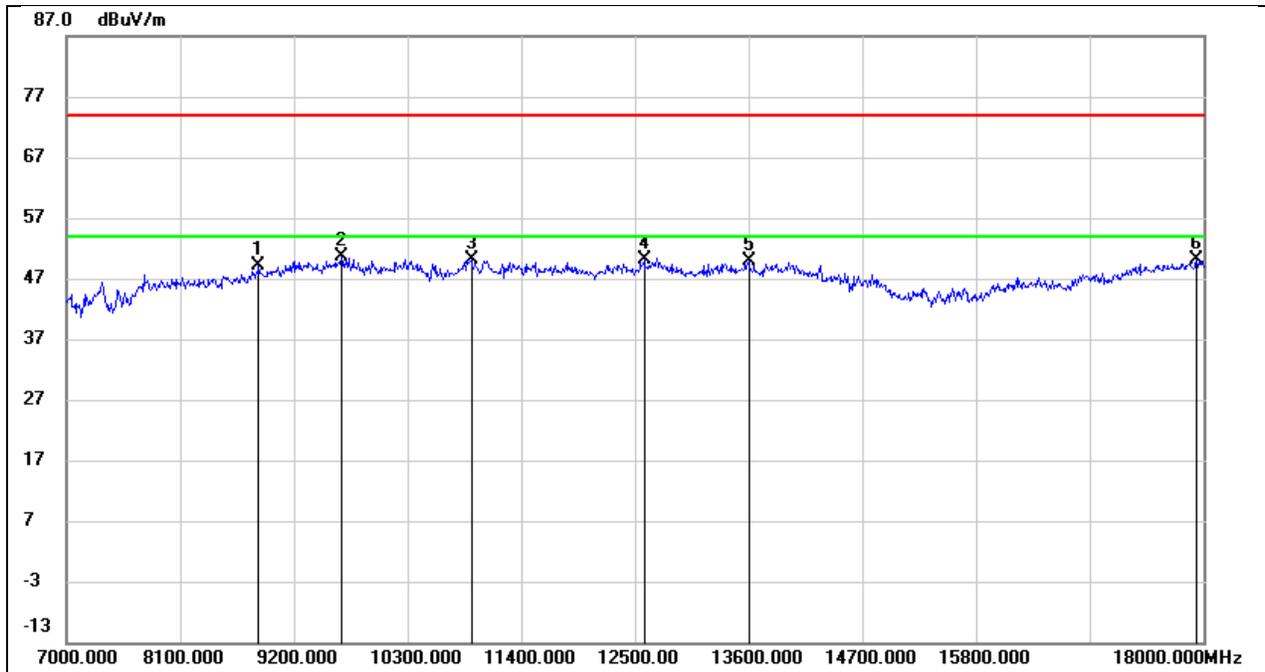


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8859.000	39.19	9.87	49.06	74.00	-24.94	peak
2	9662.000	37.11	13.53	50.64	74.00	-23.36	peak
3	10916.000	35.39	14.70	50.09	74.00	-23.91	peak
4	12588.000	31.06	19.16	50.22	74.00	-23.78	peak
5	13600.000	27.81	22.06	49.87	74.00	-24.13	peak
6	17934.000	21.53	28.71	50.24	74.00	-23.76	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5290
Polarity:	Vertical	Test Voltage:	DC 3.3V

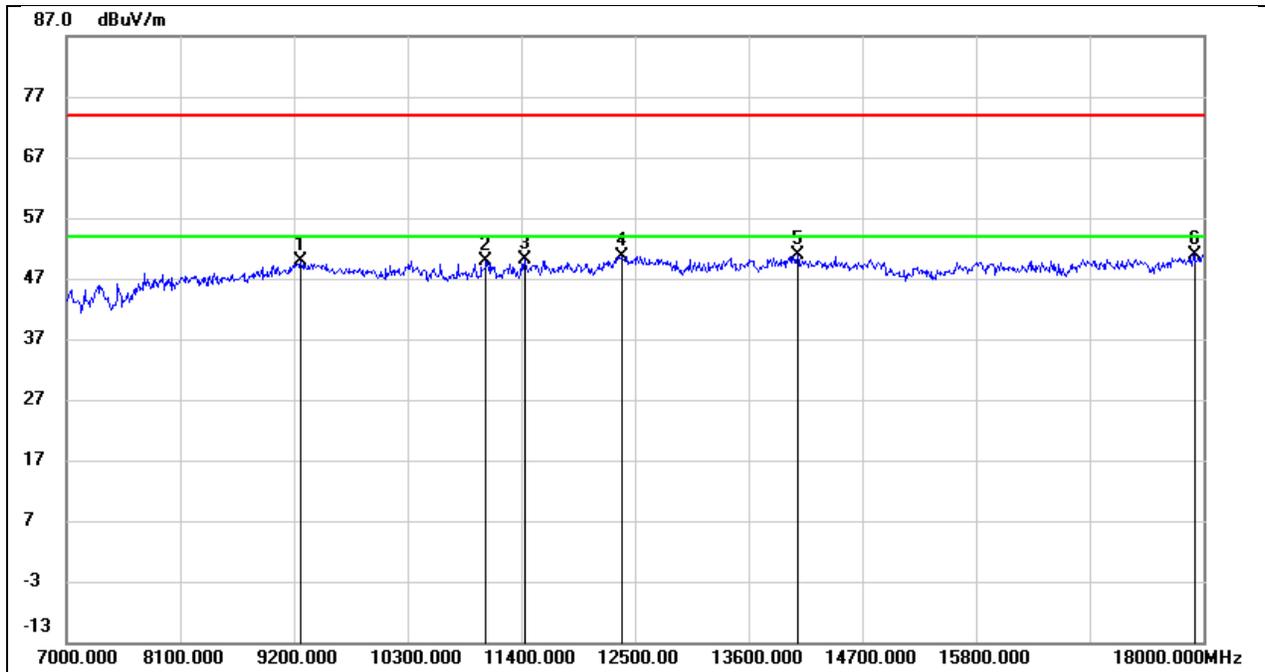


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	38.06	11.88	49.94	74.00	-24.06	peak
2	11059.000	35.37	14.43	49.80	74.00	-24.20	peak
3	11433.000	34.06	16.14	50.20	74.00	-23.80	peak
4	12379.000	32.60	18.09	50.69	74.00	-23.31	peak
5	14073.000	29.20	21.70	50.90	74.00	-23.10	peak
6	17912.000	24.30	26.67	50.97	74.00	-23.03	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Horizontal	Test Voltage:	DC 3.3V

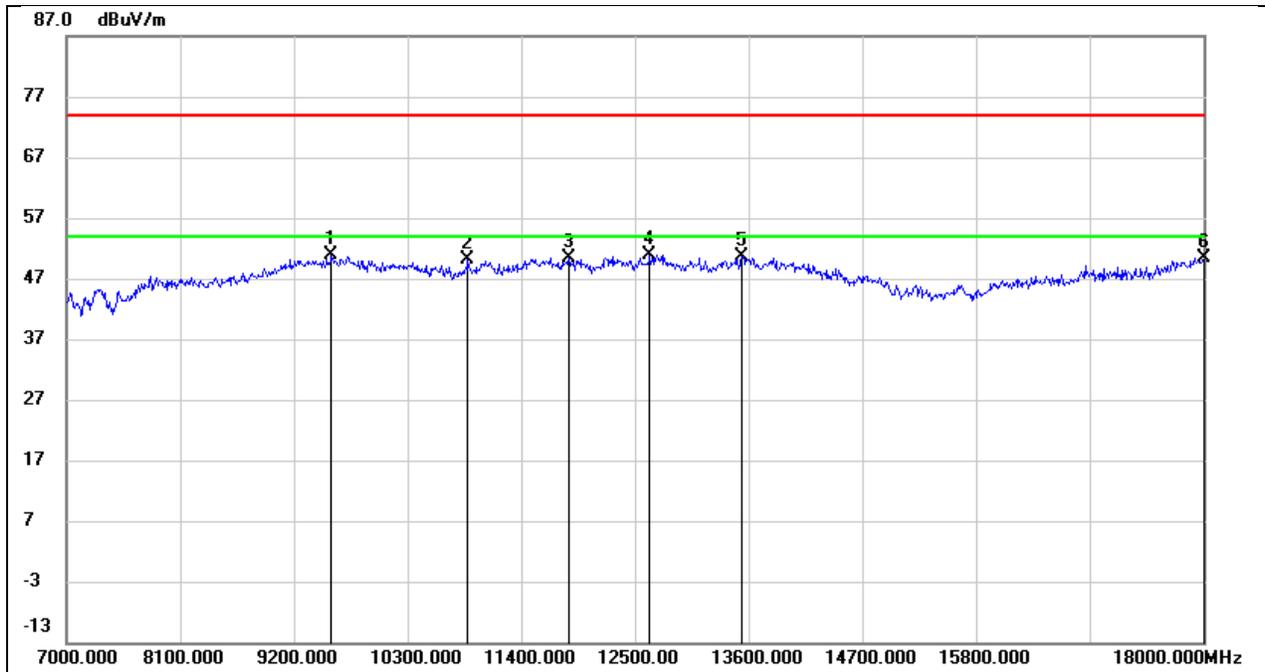


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9563.000	37.64	13.19	50.83	74.00	-23.17	peak
2	10883.000	35.48	14.59	50.07	74.00	-23.93	peak
3	11862.000	32.07	18.30	50.37	74.00	-23.63	peak
4	12643.000	31.61	19.35	50.96	74.00	-23.04	peak
5	13534.000	28.70	21.95	50.65	74.00	-23.35	peak
6	18000.000	21.04	29.41	50.45	74.00	-23.55	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5530
Polarity:	Vertical	Test Voltage:	DC 3.3V

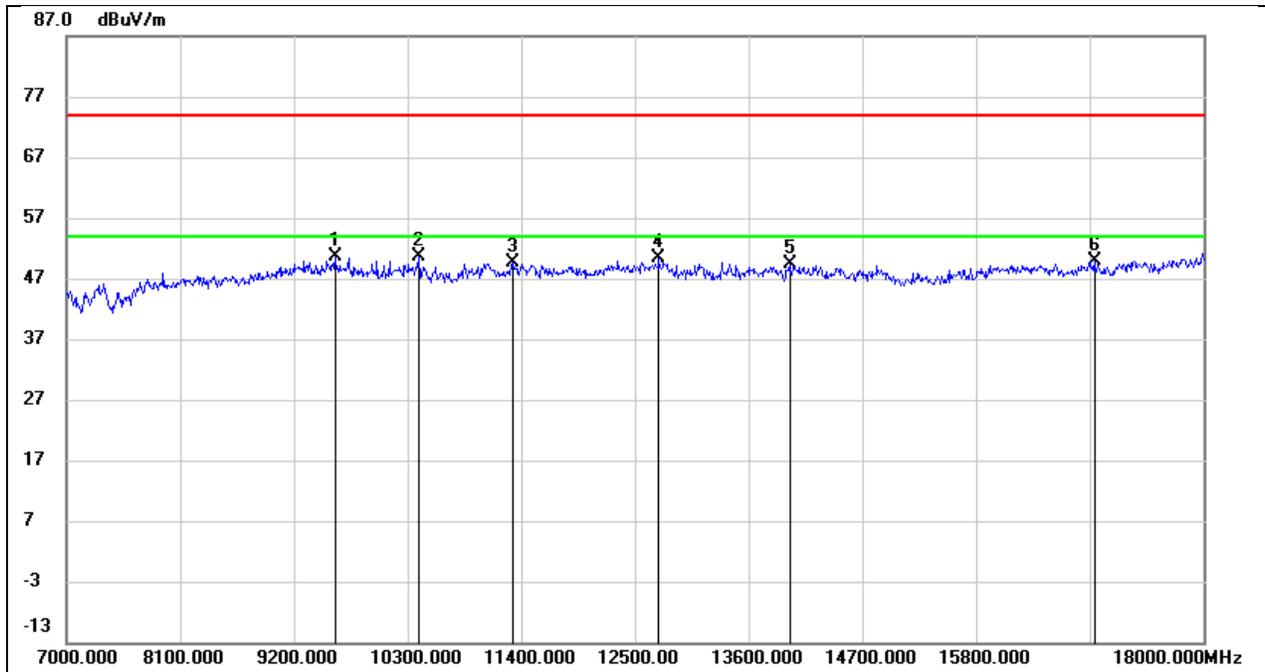


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9596.000	37.32	13.26	50.58	74.00	-23.42	peak
2	10410.000	37.48	13.04	50.52	74.00	-23.48	peak
3	11323.000	33.93	15.64	49.57	74.00	-24.43	peak
4	12731.000	31.75	18.64	50.39	74.00	-23.61	peak
5	13996.000	27.60	21.79	49.39	74.00	-24.61	peak
6	16944.000	25.70	24.14	49.84	74.00	-24.16	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Horizontal	Test Voltage:	DC 3.3V

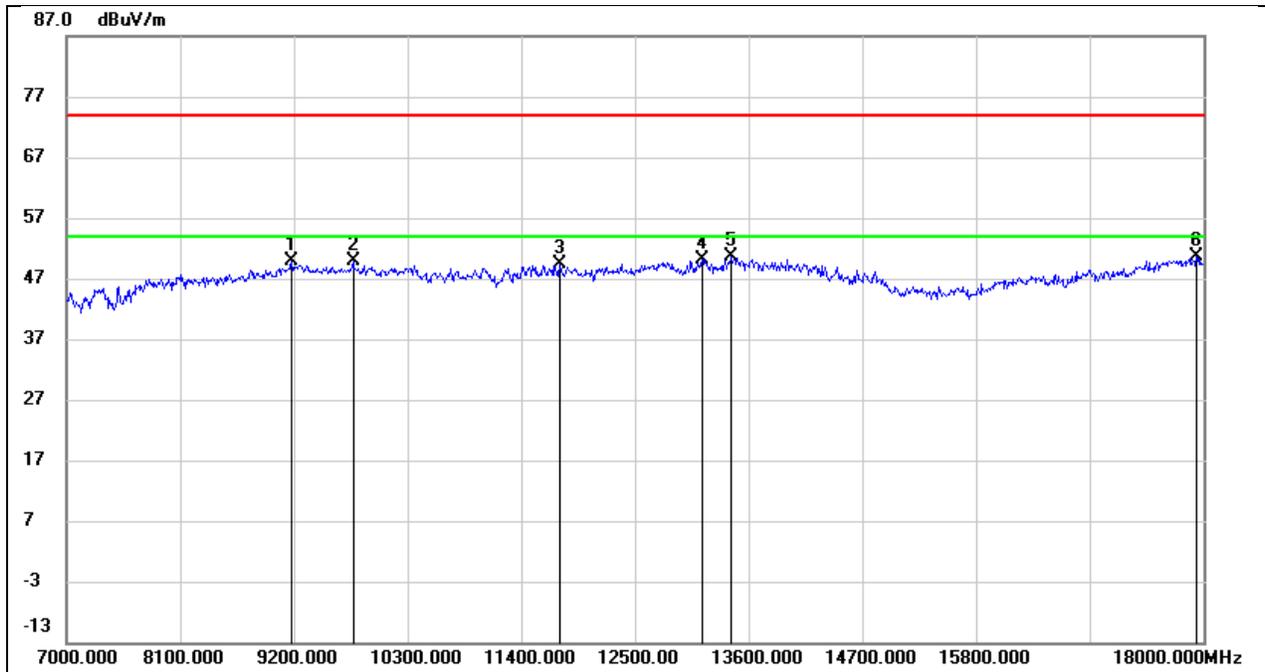


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9178.000	38.45	11.37	49.82	74.00	-24.18	peak
2	9772.000	36.07	13.73	49.80	74.00	-24.20	peak
3	11774.000	31.18	18.13	49.31	74.00	-24.69	peak
4	13149.000	29.60	20.58	50.18	74.00	-23.82	peak
5	13435.000	28.99	21.64	50.63	74.00	-23.37	peak
6	17934.000	21.89	28.71	50.60	74.00	-23.40	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5610
Polarity:	Vertical	Test Voltage:	DC 3.3V

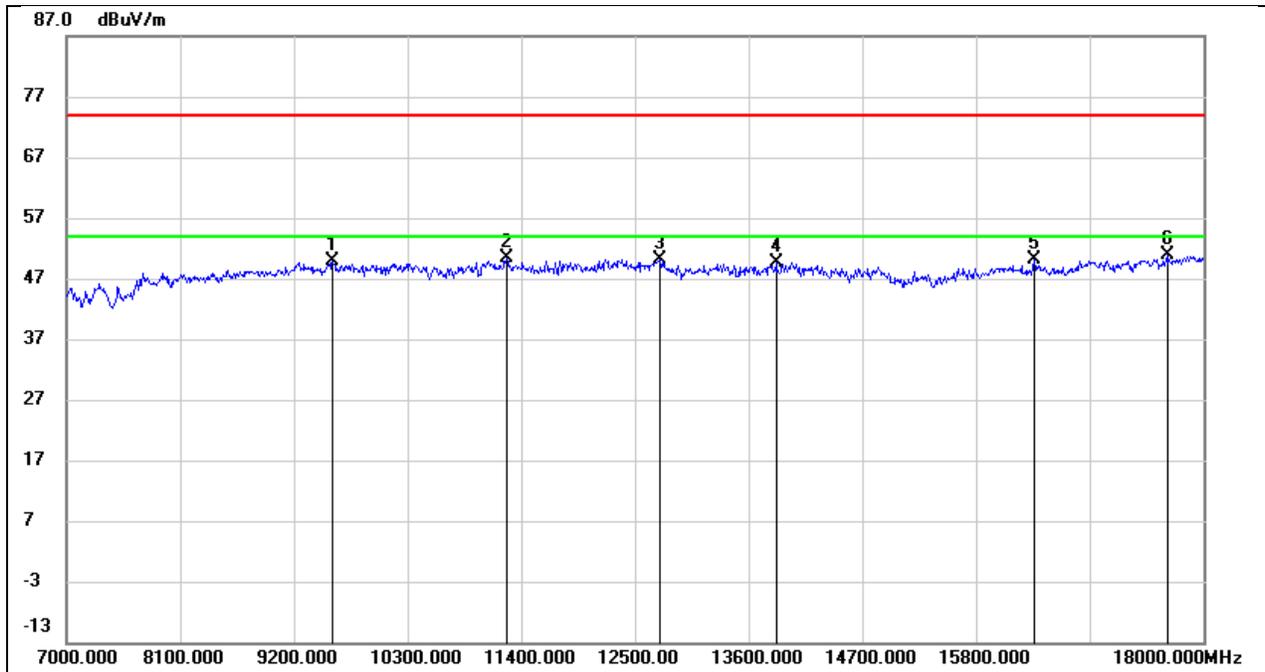


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9574.000	36.75	13.16	49.91	74.00	-24.09	peak
2	11257.000	35.00	15.32	50.32	74.00	-23.68	peak
3	12742.000	31.41	18.68	50.09	74.00	-23.91	peak
4	13864.000	28.40	21.24	49.64	74.00	-24.36	peak
5	16361.000	26.48	23.64	50.12	74.00	-23.88	peak
6	17648.000	25.80	25.16	50.96	74.00	-23.04	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Horizontal	Test Voltage:	DC 3.3V

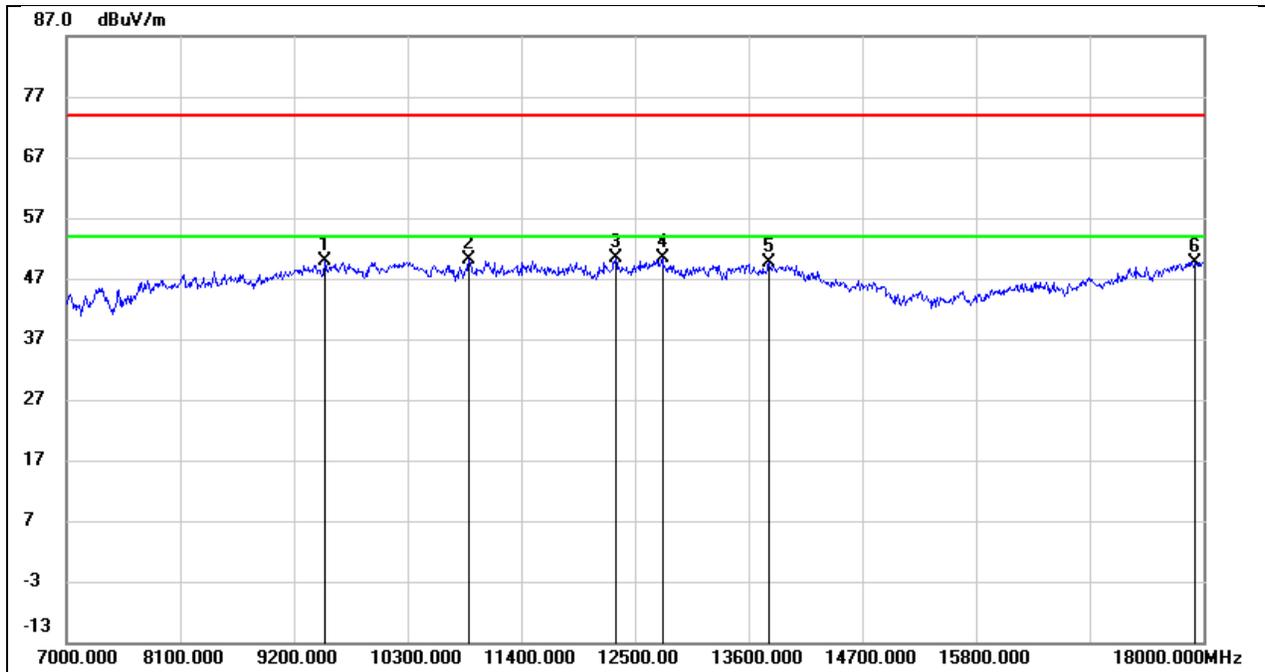


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9497.000	37.19	12.80	49.99	74.00	-24.01	peak
2	10894.000	35.38	14.63	50.01	74.00	-23.99	peak
3	12313.000	31.34	18.97	50.31	74.00	-23.69	peak
4	12764.000	30.61	19.80	50.41	74.00	-23.59	peak
5	13798.000	26.98	22.62	49.60	74.00	-24.40	peak
6	17923.000	21.15	28.58	49.73	74.00	-24.27	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5690
Polarity:	Vertical	Test Voltage:	DC 3.3V

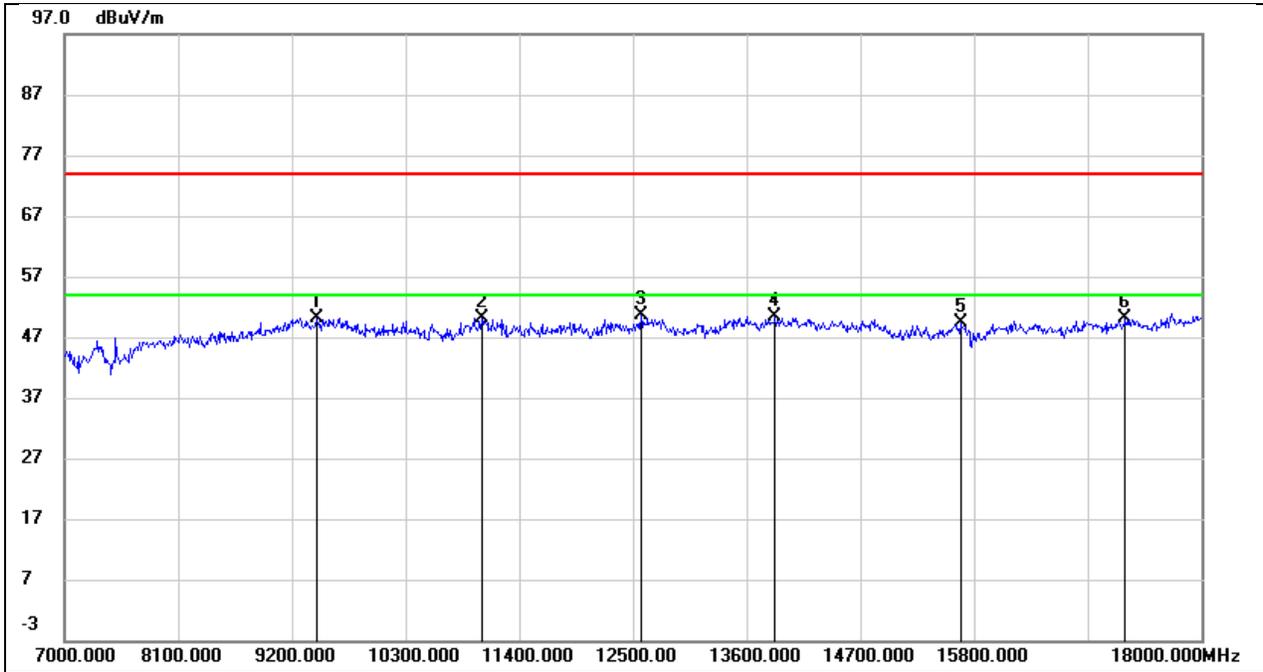


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9442.000	37.62	12.47	50.09	74.00	-23.91	peak
2	11037.000	35.86	14.33	50.19	74.00	-23.81	peak
3	12577.000	32.36	18.20	50.56	74.00	-23.44	peak
4	13875.000	29.15	21.30	50.45	74.00	-23.55	peak
5	15668.000	28.21	21.07	49.28	74.00	-24.72	peak
6	17263.000	25.35	24.76	50.11	74.00	-23.89	peak

Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Horizontal	Test Voltage:	DC 3.3V

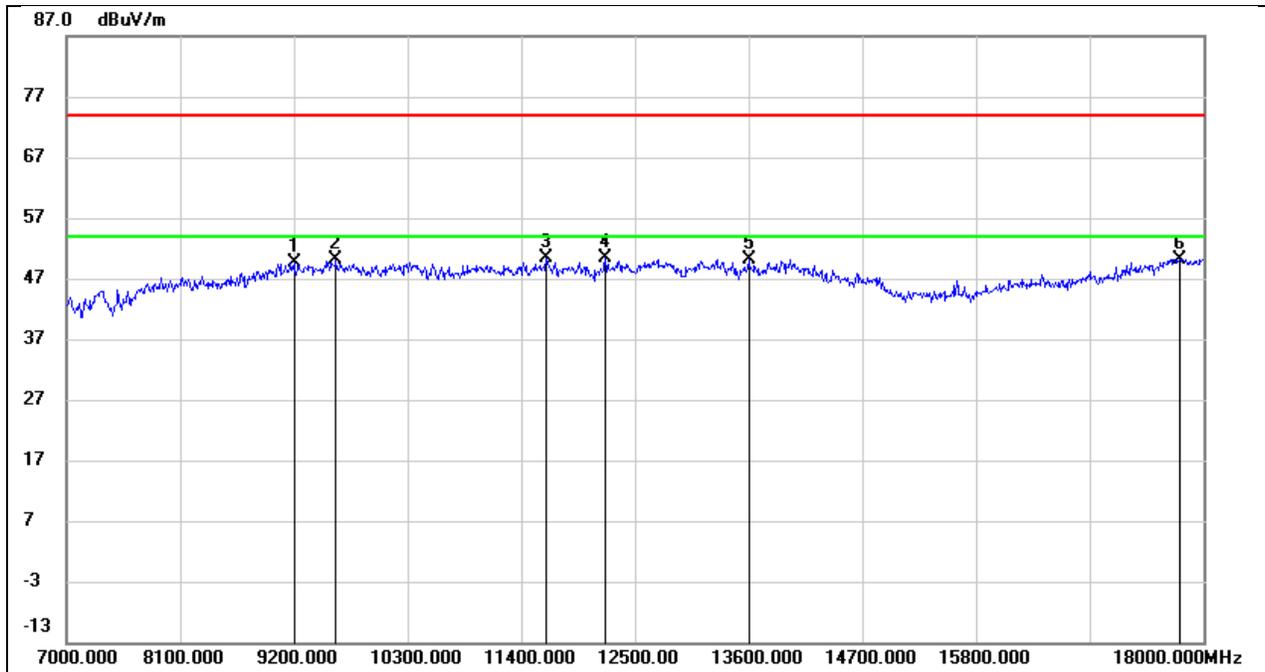

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9200.000	38.24	11.48	49.72	74.00	-24.28	peak
2	9607.000	36.58	13.44	50.02	74.00	-23.98	peak
3	11642.000	32.27	18.16	50.43	74.00	-23.57	peak
4	12214.000	31.53	18.87	50.40	74.00	-23.60	peak
5	13600.000	28.06	22.06	50.12	74.00	-23.88	peak
6	17769.000	23.27	26.98	50.25	74.00	-23.75	peak


Test Mode:	802.11ac VHT80	Frequency(MHz):	5775
Polarity:	Vertical	Test Voltage:	DC 3.3V

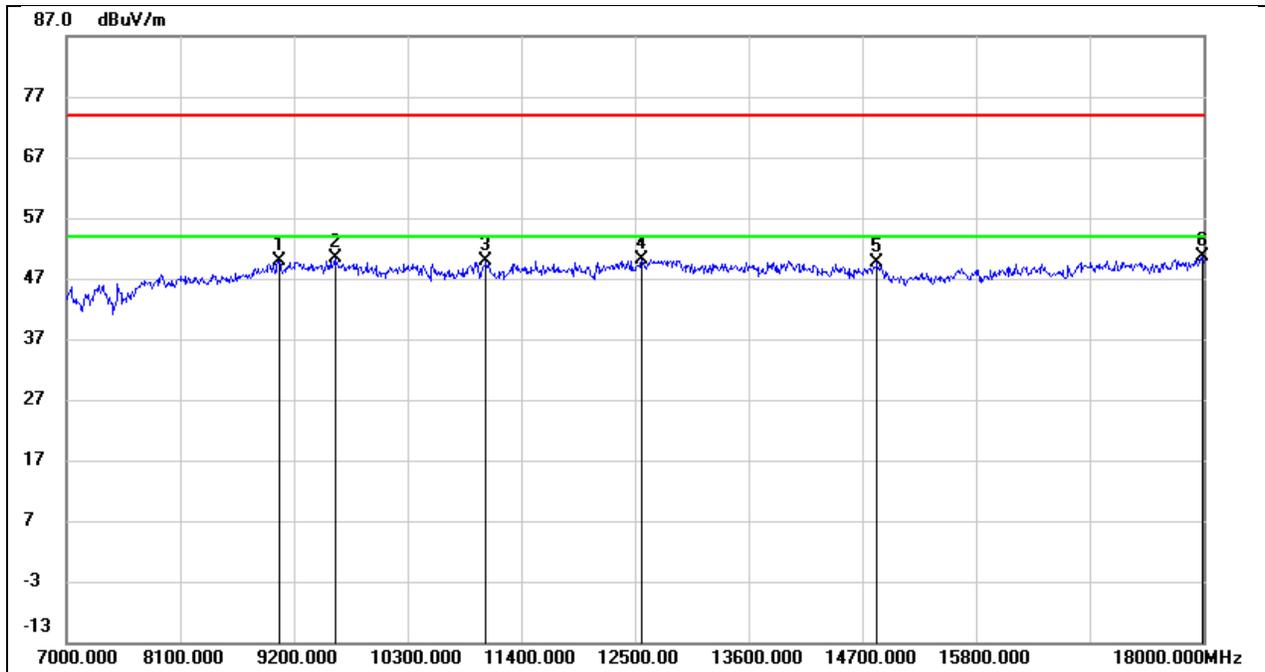

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9057.000	38.74	11.18	49.92	74.00	-24.08	peak
2	9596.000	37.22	13.26	50.48	74.00	-23.52	peak
3	11059.000	35.52	14.43	49.95	74.00	-24.05	peak
4	12566.000	31.99	18.19	50.18	74.00	-23.82	peak
5	14843.000	29.27	20.27	49.54	74.00	-24.46	peak
6	17989.000	23.46	27.13	50.59	74.00	-23.41	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

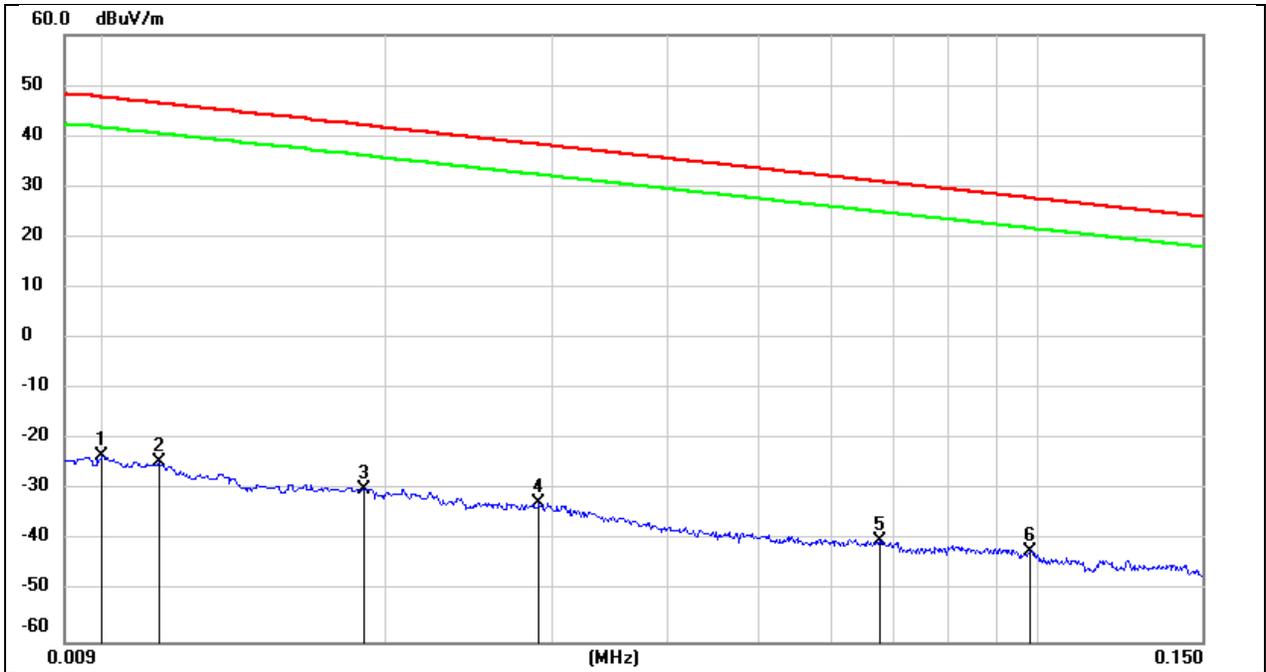


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0100	78.22	-101.40	-23.18	47.60	-74.68	-3.90	-70.78	peak
2	0.0114	76.88	-101.40	-24.52	46.46	-76.02	-5.04	-70.98	peak
3	0.0189	71.49	-101.35	-29.86	42.07	-81.36	-9.43	-71.93	peak
4	0.0291	68.78	-101.38	-32.60	38.32	-84.10	-13.18	-70.92	peak
5	0.0675	61.64	-101.56	-39.92	31.02	-91.42	-20.48	-70.94	peak
6	0.0981	59.77	-101.78	-42.01	27.77	-93.51	-23.73	-69.78	peak

Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

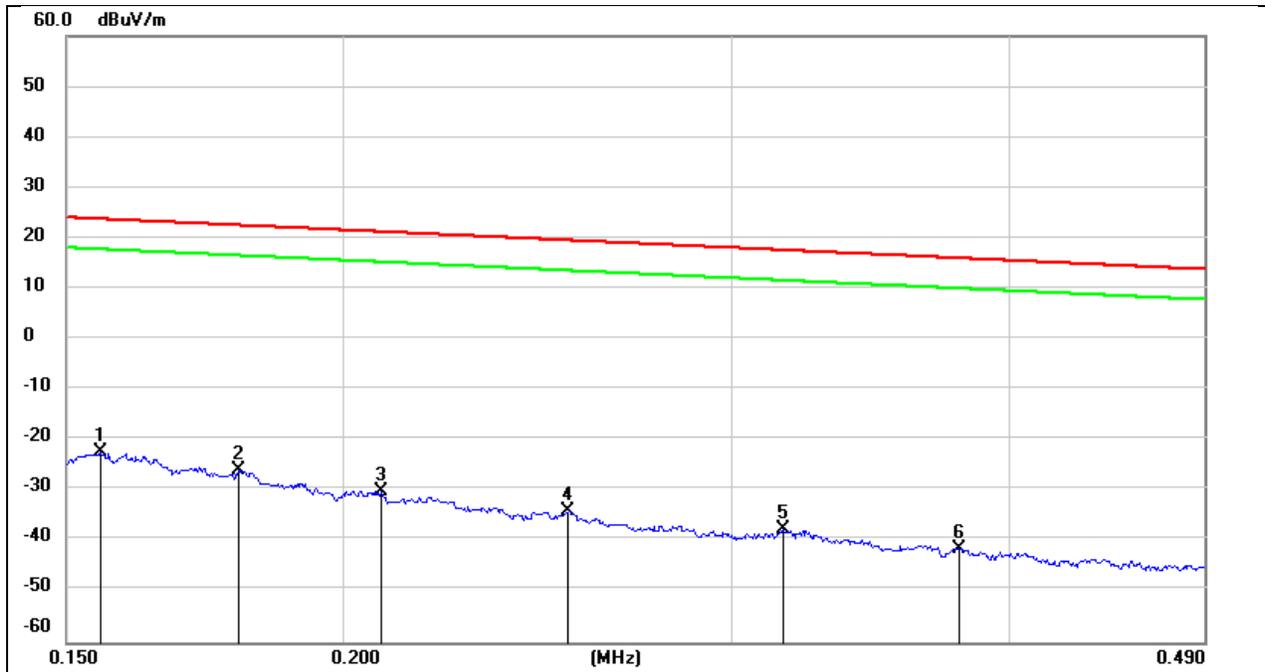

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1554	79.27	-101.65	-22.38	23.77	-73.88	-27.73	-46.15	peak
2	0.1794	75.77	-101.68	-25.91	22.53	-77.41	-28.97	-48.44	peak
3	0.2081	71.62	-101.73	-30.11	21.23	-81.61	-30.27	-51.34	peak
4	0.2530	67.64	-101.80	-34.16	19.54	-85.66	-31.96	-53.70	peak
5	0.3163	64.20	-101.87	-37.67	17.60	-89.17	-33.90	-55.27	peak
6	0.3800	60.52	-101.94	-41.42	16.01	-92.92	-35.49	-57.43	peak


Test Mode:	802.11a20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

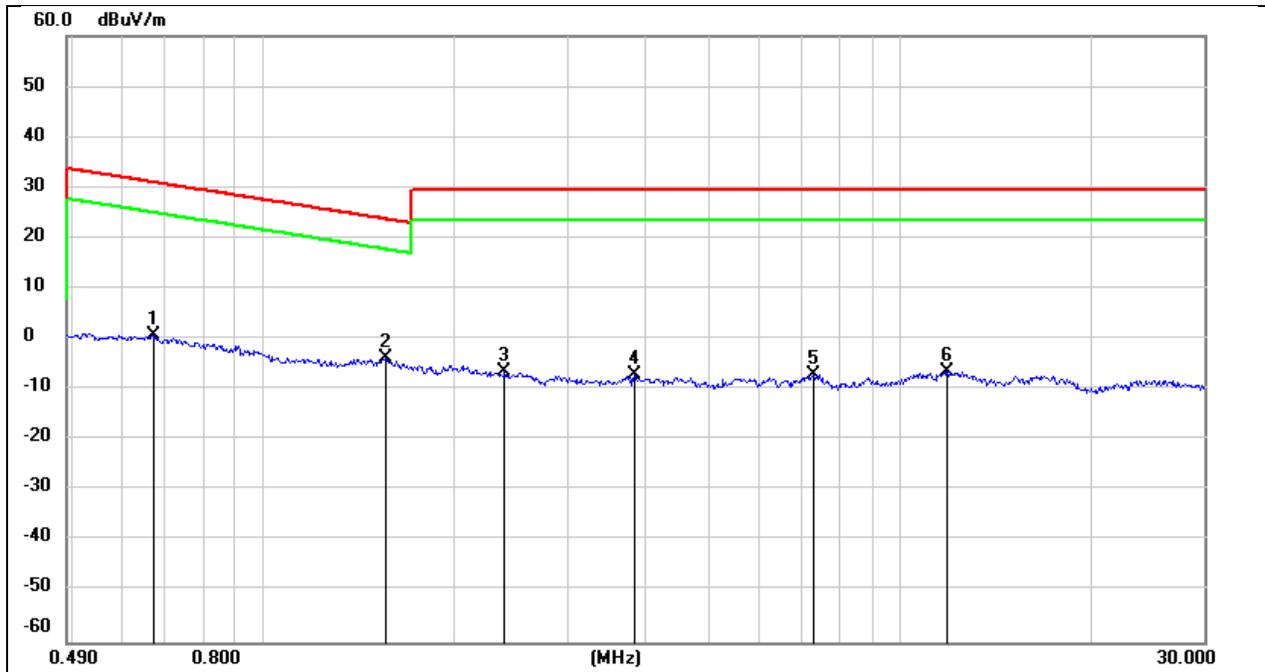

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.6700	62.82	-62.10	0.72	31.08	-50.78	-20.42	-30.36	peak
2	1.5564	58.18	-62.02	-3.84	23.76	-55.34	-27.74	-27.60	peak
3	2.3887	55.15	-61.72	-6.57	29.54	-58.07	-21.96	-36.11	peak
4	3.8246	54.20	-61.38	-7.18	29.54	-58.68	-21.96	-36.72	peak
5	7.3361	54.08	-61.17	-7.09	29.54	-58.59	-21.96	-36.63	peak
6	11.8513	54.56	-60.88	-6.32	29.54	-57.82	-21.96	-35.86	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

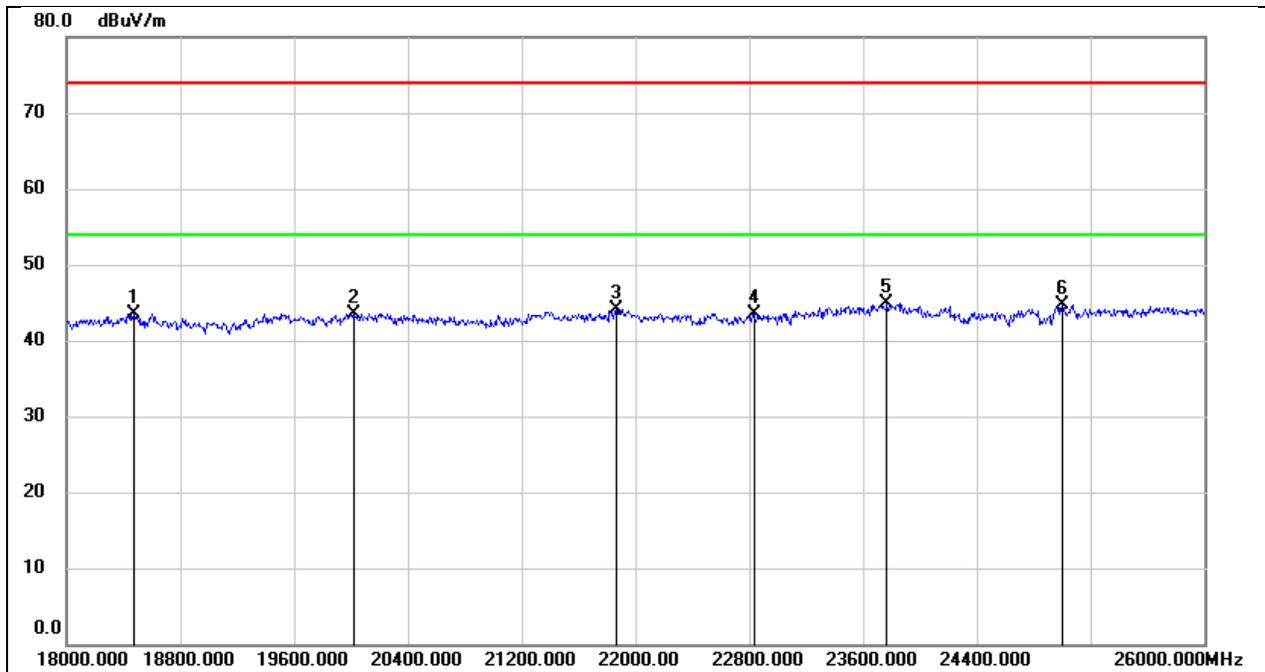

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18472.000	48.76	-5.28	43.48	74.00	-30.52	peak
2	20016.000	49.06	-5.47	43.59	74.00	-30.41	peak
3	21864.000	48.45	-4.40	44.05	74.00	-29.95	peak
4	22832.000	47.09	-3.60	43.49	74.00	-30.51	peak
5	23768.000	48.06	-3.16	44.90	74.00	-29.10	peak
6	25000.000	46.86	-2.10	44.76	74.00	-29.24	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

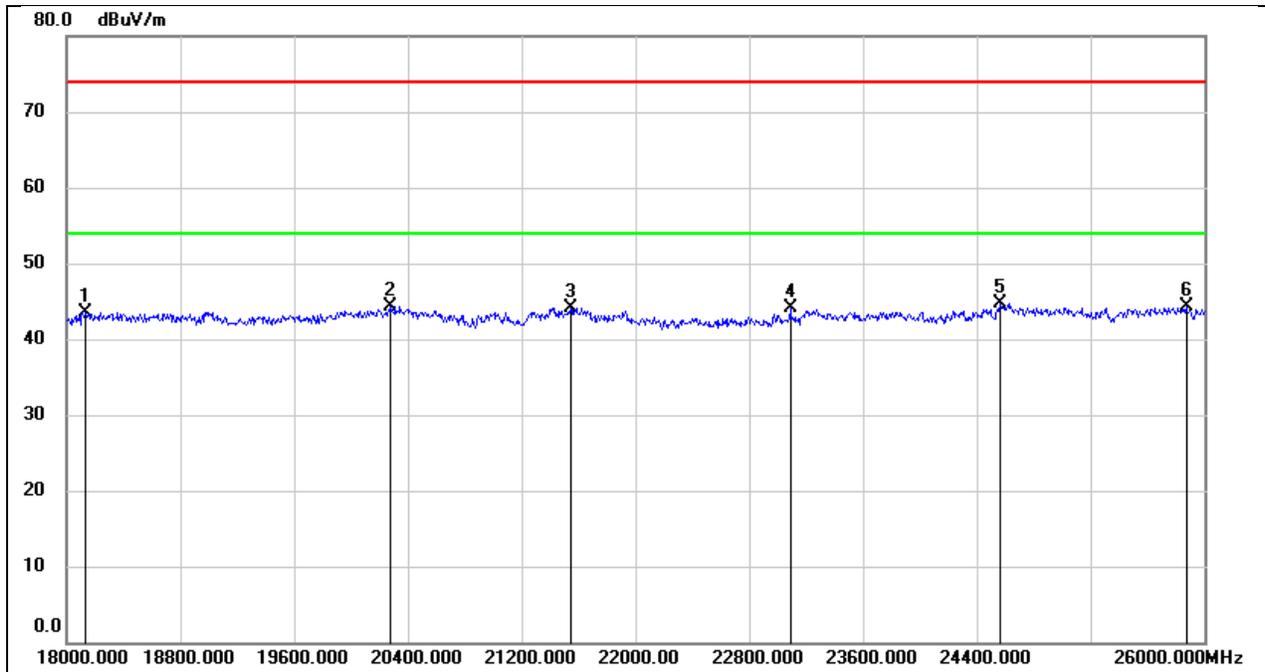

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18136.000	48.95	-5.48	43.47	74.00	-30.53	peak
2	20280.000	49.86	-5.58	44.28	74.00	-29.72	peak
3	21544.000	48.76	-4.63	44.13	74.00	-29.87	peak
4	23088.000	47.52	-3.41	44.11	74.00	-29.89	peak
5	24568.000	47.10	-2.33	44.77	74.00	-29.23	peak
6	25872.000	45.08	-0.83	44.25	74.00	-29.75	peak


8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

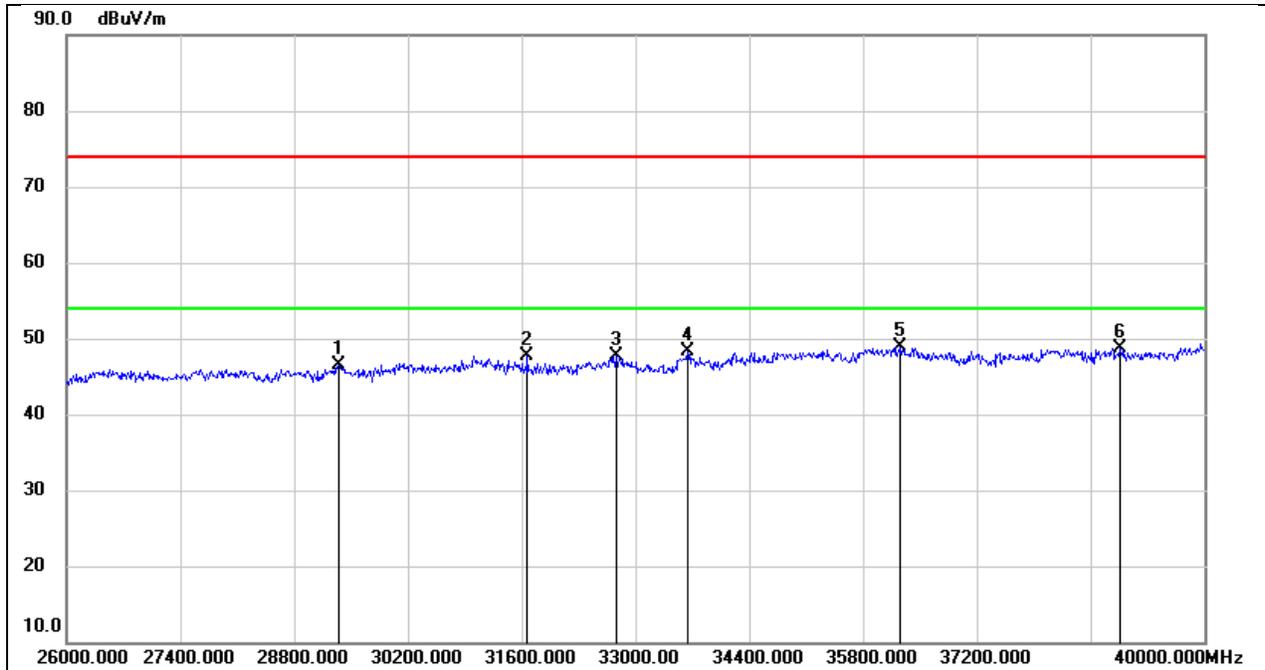

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	29346.000	47.38	-0.91	46.47	74.00	-27.53	peak
2	31670.000	48.86	-1.21	47.65	74.00	-26.35	peak
3	32762.000	48.95	-1.21	47.74	74.00	-26.26	peak
4	33644.000	47.81	0.42	48.23	74.00	-25.77	peak
5	36262.000	45.60	3.28	48.88	74.00	-25.12	peak
6	38964.000	44.28	4.33	48.61	74.00	-25.39	peak


Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

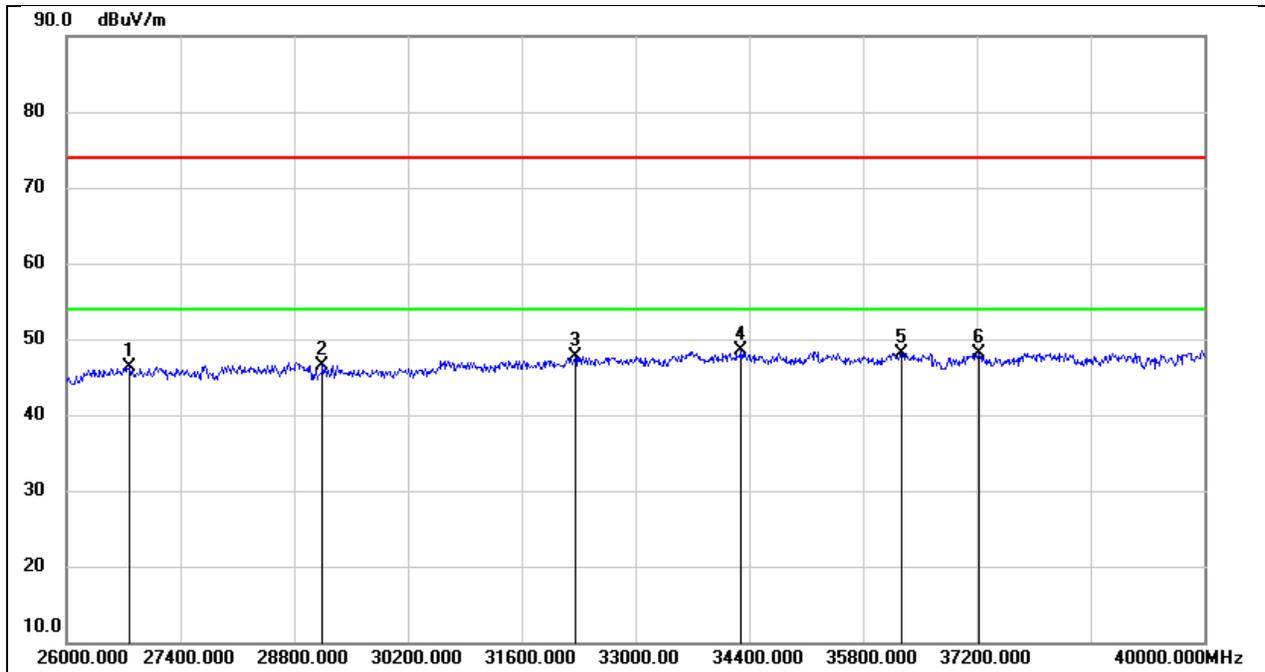

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26770.000	51.11	-4.83	46.28	74.00	-27.72	peak
2	29150.000	47.71	-1.20	46.51	74.00	-27.49	peak
3	32258.000	48.88	-1.20	47.68	74.00	-26.32	peak
4	34302.000	47.45	1.10	48.55	74.00	-25.45	peak
5	36276.000	44.79	3.30	48.09	74.00	-25.91	peak
6	37228.000	44.94	3.14	48.08	74.00	-25.92	peak


8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 3.3V

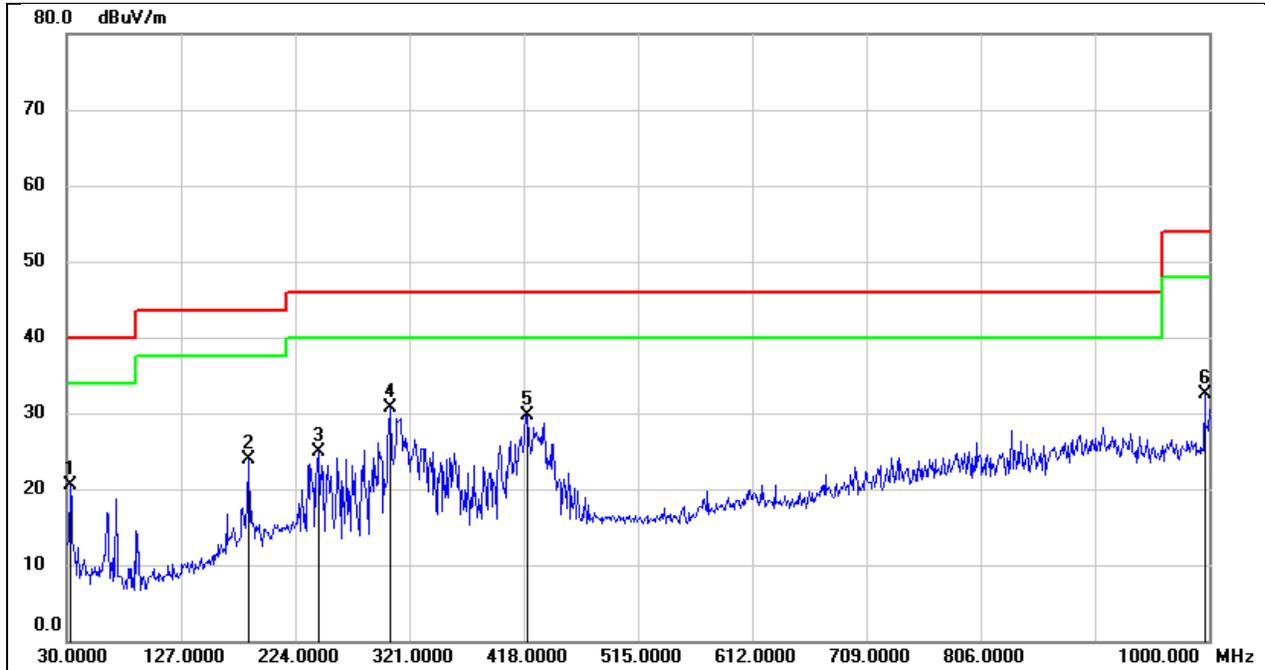

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.9100	34.25	-13.80	20.45	40.00	-19.55	peak
2	184.2300	35.96	-12.05	23.91	43.50	-19.59	peak
3	244.3700	39.37	-14.43	24.94	46.00	-21.06	peak
4	304.5100	42.29	-11.51	30.78	46.00	-15.22	peak
5	420.9100	39.08	-9.33	29.75	46.00	-16.25	peak
6	996.1200	33.83	-1.26	32.57	54.00	-21.43	peak

Test Mode:	802.11a 20	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 3.3V

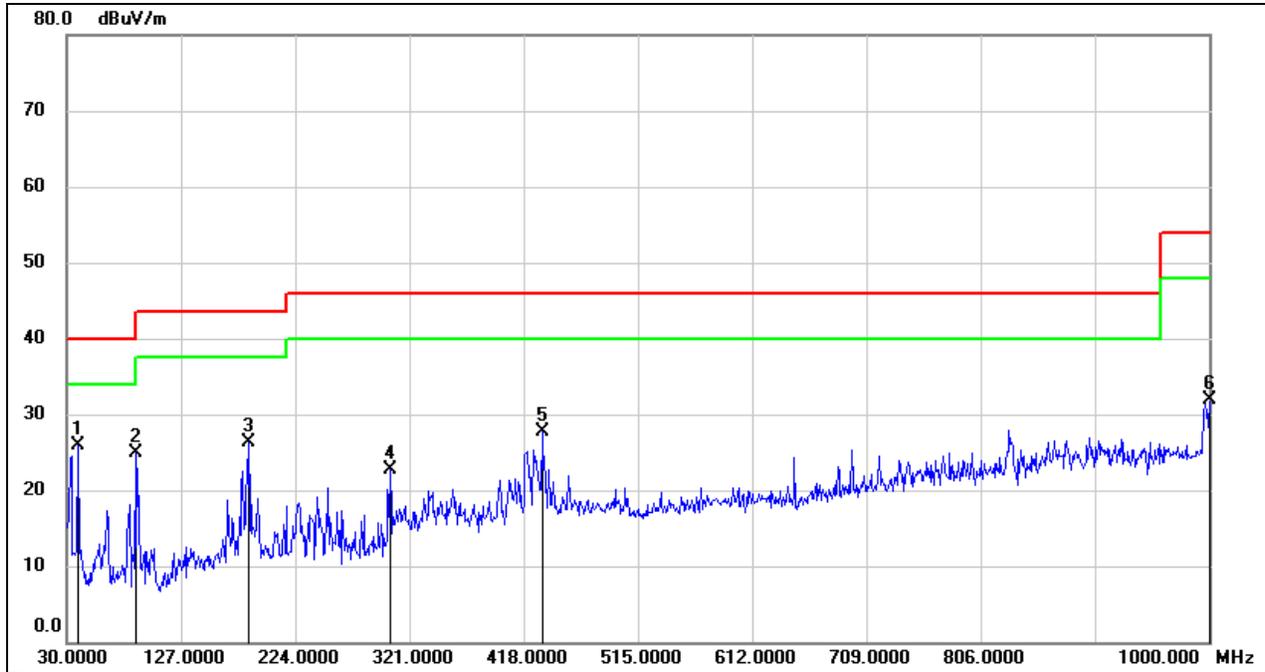

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	39.7000	40.75	-14.90	25.85	40.00	-14.15	peak
2	88.2000	41.93	-17.06	24.87	43.50	-18.63	peak
3	184.2300	38.37	-12.05	26.32	43.50	-17.18	peak
4	304.5100	34.21	-11.51	22.70	46.00	-23.30	peak
5	433.5200	36.74	-9.03	27.71	46.00	-18.29	peak
6	1000.0000	33.05	-1.23	31.82	54.00	-22.18	peak

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

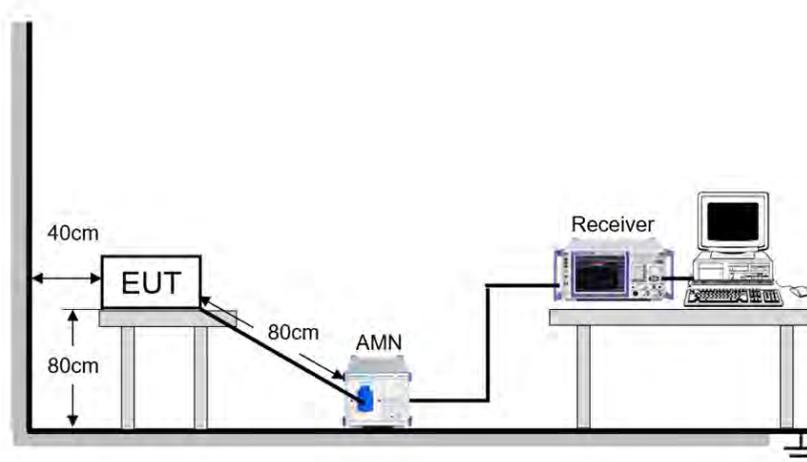

TEST RESULTS

Please refer to the original report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

END OF REPORT