

TEST REPORT

FCC ID: 2ACCFADWAT102C

Product: MPERSENS

Model No.: ADWAT102C

Additional Model No.: N/A

Trade Mark: VESAG

Report No.: TCT151230E025

Issued Date: Jan. 14, 2016

Issued for:

VESAG Health Inc

#B202C, 675 US Highway One, North Brunswick, 08902 NJ, United States

Issued By:

Shenzhen Tongce Testing Lab.

1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab.

This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification.....	3
2. Test Result Summary	4
3. EUT Description	5
4. Genera Information.....	6
4.1. Test environment and mode.....	6
4.2. Test Mode.....	7
4.3. Description of Support Units.....	8
4.4. Configuration of Tested System	9
4.5. Measurement Results Explanation Example.....	9
5. Facilities and Accreditations	10
5.1. Facilities	10
5.2. Location	10
5.3. Measurement Uncertainty	10
6. Test Results and Measurement Data	11
6.1. Conducted Output Power Measurement	11
6.2. Peak to Average Ratio.....	13
6.3. 99% Occupied Bandwidth and 26dB Bandwidth Measurement	17
6.4. Band Edge and Conducted Spurious Emission Measurement	23
6.5. Test Specification.....	23
6.6. Effective Radiated Power and Effective Isotropic Radiated Power Measurement	28
6.7. Field Strength of Spurious Radiation Measurement	32
6.8. Frequency Stability Measurement	37


Appendix A: Photographs of Test Setup**Appendix B: Photographs of EUT**

1. Test Certification

Product:	MPERSENS
Model No.:	ADWAT102C
Additional Model No.:	N/A
Applicant:	VESAG Health Inc
Address:	#B202C, 675 US Highway One, North Brunswick, 08902 NJ, United States
Manufacturer:	VESAG Health Inc
Address:	#B202C, 675 US Highway One, North Brunswick, 08902 NJ, United States
Date of Test:	Jan. 1, 2015 – Jan. 13, 2016
Applicable Standards:	FCC CFR Title 47 Part 2 FCC CFR Title 47 Part22 Subpart H FCC CFR Title 47 Part24 Subpart E

The above equipment has been tested by Shenzhen Tongce Testing Lab. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:



SKY Luo

Date: Jan. 13, 2016

Reviewed By:



Joe Zhou

Date: Jan. 14, 2016

Approved By:



Tomsin

Date: Jan. 14, 2016

2. Test Result Summary

Requirement	CFR 47 Section	Result
Conducted Output Power	§2.1046	PASS
Peak-to-Average Ratio	§24.232(d)	PASS
Effective Radiated Power	§22.913(a)(2)	PASS
Equivalent Isotropic Radiated Power	§24.232(c)	PASS
Occupied Bandwidth	§2.1049 §22.917(b) §24.238(b)	PASS
Band Edge	§2.1051 §22.917(a) §24.238(a)	PASS
Conducted Spurious Emission	§2.1051 §22.917(a) §24.238(a)	PASS
Field Strength of Spurious Radiation	§2.1053 §22.917(a) §24.238(a)	PASS
Frequency Stability for Temperature & Voltage	§2.1055 §22.355 §24.235	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. EUT Description

Product Name:	MPERSENS
Model :	ADWAT102C
Additional Model:	N/A
Trade Mark:	VESAG
Hardware Version:	H1.1.1
Software Version:	S1.1.1
Tx Frequency:	CDMA2000 BC0: 824.70 MHz ~ 848.31 MHz CDMA2000 BC1: 1851.25 MHz ~ 1908.75 MHz
Rx Frequency:	CDMA2000 BC0: 869.70 MHz ~ 893.31 MHz CDMA2000 BC1: 1931.25 MHz ~ 1988.75 MHz
Maximum Output Power to Antenna:	CDMA2000 BC0 : 23.85 dBm CDMA2000 BC1 : 23.73dBm
99% Occupied Bandwidth:	CDMA2000 BC0 : 1M27 CDMA2000 BC1 : 1M27
Type of Modulation:	CDMA2000 : QPSK CDMA2000 1xEV-DO : 8PSK
Antenna Type:	Patch Antenna
Antenna Gain:	CDMA2000 BC0 : 1dBi CDMA2000 BC1 : 1dBi
Power Supply:	Rechargeable lithium Battery DC3.7V

4. General Information

4.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Operation mode:	Keep the EUT in communication with CMU200 and select channel with modulation
The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.	

4.2. Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power. Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for CDMA2000 BC0.
2. 30 MHz to 19000 MHz for CDMA2000 BC1.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Band	Radiated TCs	Conducted TCs
CDMA2000 BC0	1xRTT Link Mode	1xRTT Link Mode
CDMA2000 BC1	1xRTT Link Mode	1xRTT Link Mode

Note: The maximum power levels are chosen to test as the worst case configuration as follows: The maximum RF output power levels are 1xRTT RC3+S055 mode for CDMA2000 BC0 on QPSK Link and 1xRTT RC3+S055 mode for CDMA2000 BC1 on QPSK Link; only these modes were used for all tests.

In addition to above worst-case test, below investigating on all data rates and all modes are compliance with each FCC test case which has specific test limits. For spurious emissions at antenna port, the EUT was investigated the band edges on low and high channels, and the unwanted spurious emissions on middle channel for all modes, the results are PASS, then only the worst-results were reported in the test report. The Radiated Spurious emissions for CDMA2000 modes were investigated on the middle channel and the PASSed results were not worst than those data tested from the highest power channels.

Conducted Power Measurement Results:

Peak Conducted Power (*Unit: dBm)						
Band	CDMA2000 BC0			CDMA2000 BC1		
Channel	1013	384	777	25	600	1175
Frequency(MHz)	824.7	836.52	848.31	1851.25	1880	1908.75
1xRTT RC1+SO55	23.81	23.83	23.78	23.72	23.61	23.62
1xRTT RC3+SO55	23.82	23.85	23.81	23.73	23.62	23.69
1xRTT RC3+SO32(+ F-SCH)	23.81	23.81	23.80	23.72	23.60	23.68
1xRTT RC3+SO32(+SC H)	23.79	23.80	23.71	23.71	23.59	23.62
1xEV-DO RTAP 153.6K	23.80	23.82	23.73	23.71	23.61	23.63
1xEV-DO RETAP 4096K	23.79	23.81	23.72	23.72	23.60	23.62

Note: The maximum RF output power levels are 1xRTT RC3+SO55 mode for CDMA2000 BC0 on QPSK Link and 1xRTT RC3+SO55 mode for CDMA2000 BC1 on QPSK Link; only these modes were used for all tests

4.3. Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4. Configuration of Tested System

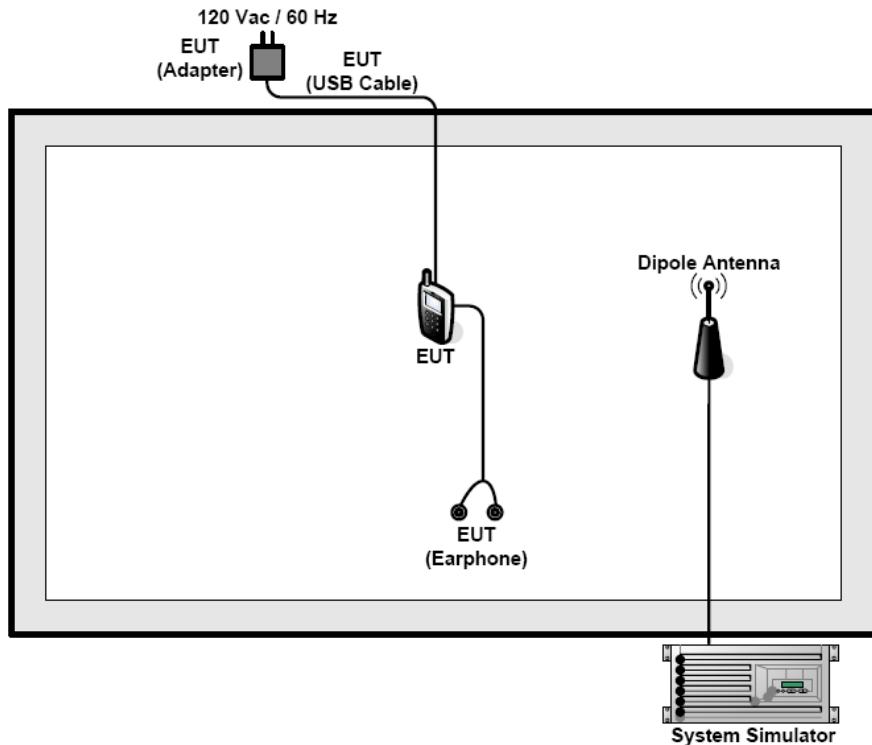

4.5. Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level. The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}$$

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:
$$\text{Offset(dB)} = \text{RF cable loss(dB)} + \text{attenuator factor(dB)}$$

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$

5. Facilities and Accreditations

5.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 572331

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

- CNAS - Registration No.: CNAS L6165

Shenzhen TCT Testing Technology Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6165.

5.2. Location

Shenzhen Tongce Testing Lab

Address: 1F, Leinuo Watch Building, Fuyong Town, Baoan Dist, Shenzhen, China

Tel: 86-755-36638142

5.3. Measurement Uncertainty


The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$

6. Test Results and Measurement Data

6.1. Conducted Output Power Measurement

6.1.1. Test Specification

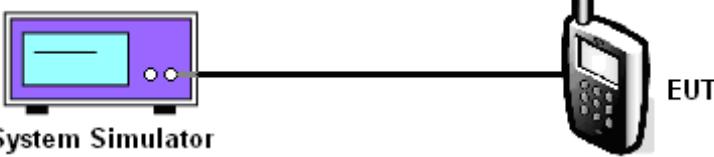Test Requirement:	FCC part 22.913(a) and FCC part 24.232(b)
Test Method:	FCC part 2.1046
Operation mode:	Refer to item 4.1
Limits:	N/A
Test Setup:	 <p>System Simulator</p> <p>EUT</p>
Test Procedure:	<ol style="list-style-type: none"> 1. The transmitter output port was connected to the system simulator. 2. Set EUT at maximum power through system simulator. 3. Select lowest, middle, and highest channels for each band and different modulation. 4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.
Test Result:	PASS

6.1.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Sep. 11, 2016

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.1.3. Test data

CDMA2000 BC0			
Mode	CDMA 2000 1xRTT		
Test Status	RC3+SO55		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.7	836.52	848.31
Conducted Power (dBm)	23.82	23.85	23.81


Note: Maximum Burst Average Power for CDMA2000.

CDMA2000 BC1			
Mode	CDMA 2000 1xRTT		
Test Status	RC3+SO55		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880	1908.75
Conducted Power (dBm)	23.73	23.62	23.69

Note: Maximum Burst Average Power for CDMA2000.

6.2. Peak to Average Ratio

6.2.1. Test Specification

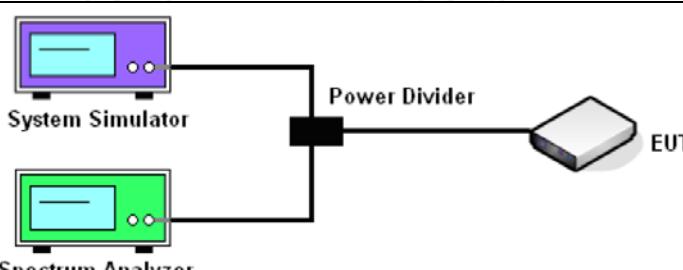Test Requirement:	FCC Part24.232
Test Method:	FCC KDB 971168 v02r02 Section 5.7.1
Operation mode:	Refer to item 4.1
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test Setup:	
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1. 2. The EUT was connected to spectrum analyzer and system simulator via a power divider. 3. Set EUT to transmit at maximum output power. 4. For GSM/EGPRS operating modes, signal gating is implemented on the spectrum analyzer by triggering from the system simulator. 5. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.
Test Result:	PASS

6.2.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Sep. 11, 2016
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


6.2.3. Test Data

CDMA2000 BC0			
Mode	CDMA 2000 1xRTT		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.7	836.52	848.31
Peak-to-Average Ratio (dB)	4	4.04	3.88

CDMA2000 BC1			
Mode	CDMA 2000 1xRTT		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880	1908.75
Peak-to-Average Ratio (dB)	3.32	3.56	3.16


Test plots as follows:

Peak-to-Average Ratio on Channel 1013

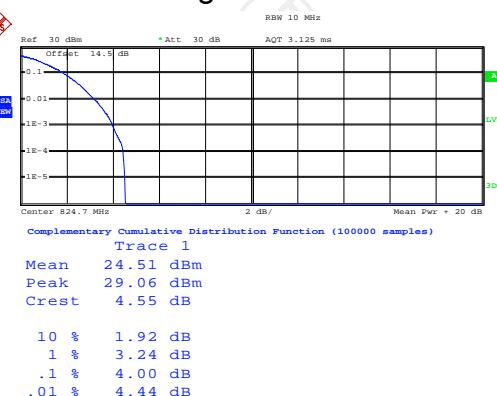


Date: 19.AUG.2015 12:33:57

Peak-to-Average Ratio on Channel 384

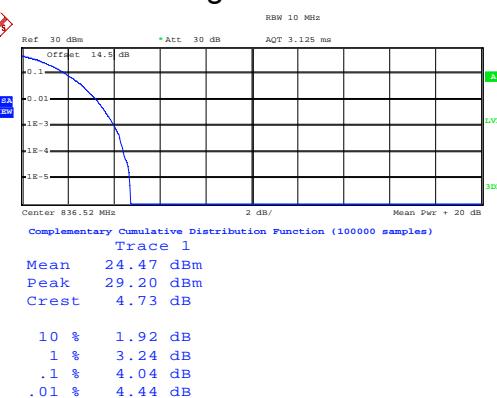


Date: 19.AUG.2015 12:34:24

Peak-to-Average Ratio on Channel 777

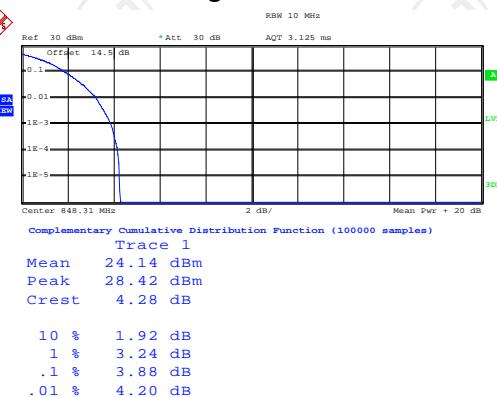


Date: 19.AUG.2015 12:34:38

Peak-to-Average Ratio on Channel 25

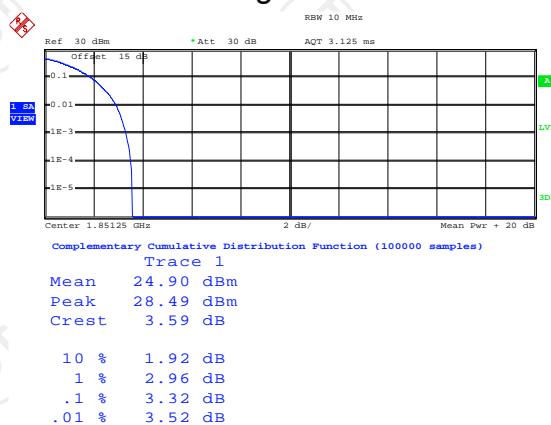


Date: 19.AUG.2015 11:10:38

Peak-to-Average Ratio on Channel 600

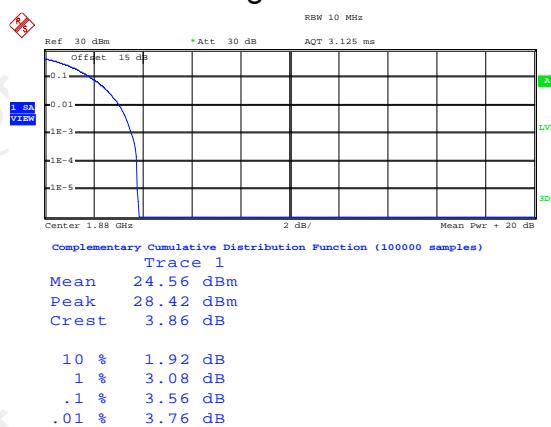

Date: 19.AUG.2015 11:10:59


Peak-to-Average Ratio on Channel 1175

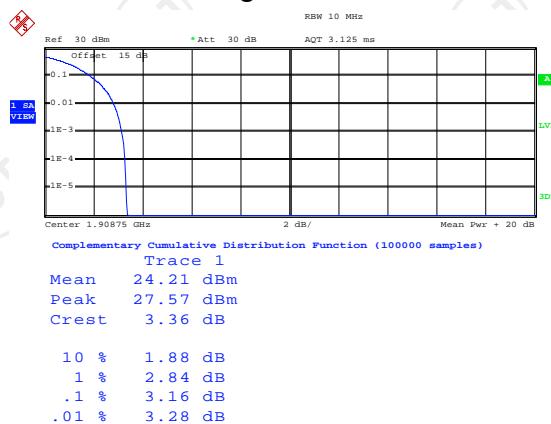

Date: 19.AUG.2015 11:11:47

6.3. 99% Occupied Bandwidth and 26dB Bandwidth Measurement

6.3.1. Test Specification

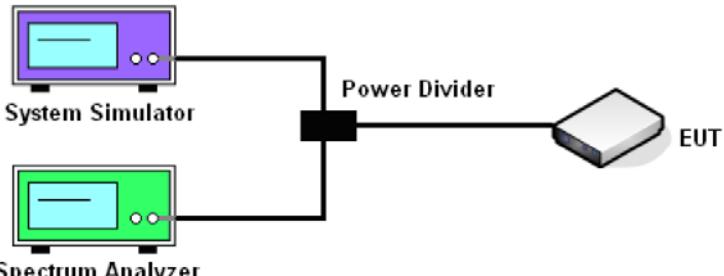Test Requirement:	FCC part 22.913(a) and FCC part 24.232(b)
Test Method:	FCC part 2.1049
Operation mode:	Refer to item 4.1
Limit:	N/A
Test Setup:	
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows FCC KDB 971168 v02r02 Section 4.2. 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider. 3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 4. The 99% occupied bandwidth were measured, set RBW= 1% of span, VBW= 3*RBW, sample detector, trace maximum hold. 5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.
Test Result:	PASS

6.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Sep. 11, 2016
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.3.3. Test data

CDMA2000 BC0			
Mode	CDMA 2000 1xRTT		
Test Status	RC3+SO55		
Channel	1013 (Low)	384 (Mid)	777 (High)
Frequency (MHz)	824.7	836.52	848.31
99% OBW (MHz)	1.272	1.272	1.274
26dB BW (MHz)	1.406	1.408	1.412

CDMA2000 BC1			
Mode	CDMA 2000 1xRTT		
Test Status	RC3+SO55		
Channel	25 (Low)	600 (Mid)	1175 (High)
Frequency (MHz)	1851.25	1880.00	1908.75
99% OBW (MHz)	1.270	1.272	1.270
26dB BW (MHz)	1.406	1.410	1.414

Test plots as follows:


Band:

CDMA2000 BC0

Test Mode:

1xRTT RC3+SO55

99% Occupied Bandwidth Plot on Channel 1013 (824.7 MHz)

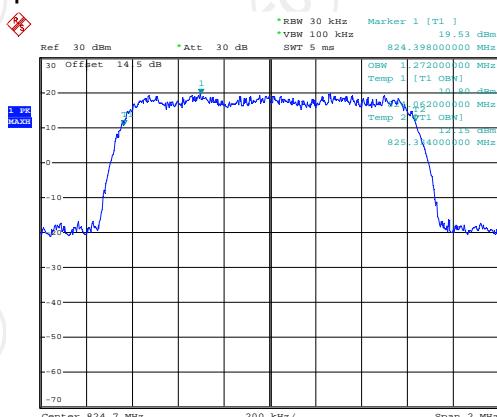

Date: 19.AUG.2015 12:32:13

26dB Bandwidth Plot on Channel 1013 (824.7 MHz)




Date: 19.AUG.2015 12:28:49

99% Occupied Bandwidth Plot on Channel 384 (836.52 MHz)




Date: 19.AUG.2015 12:32:54

26dB Bandwidth Plot on Channel 384 (836.52 MHz)

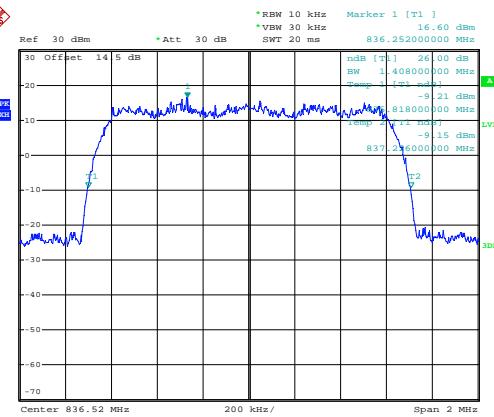

Date: 19.AUG.2015 12:29:32

99% Occupied Bandwidth Plot on Channel 777 (848.31 MHz)

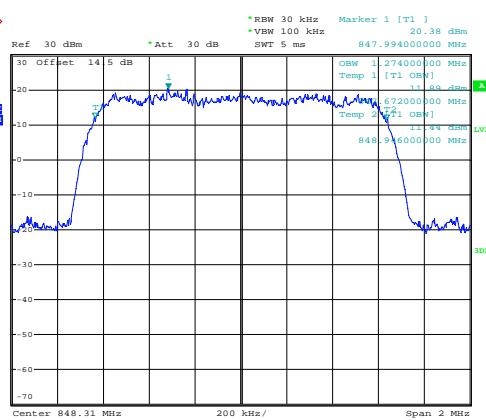

Date: 19.AUG.2015 12:33:31

26dB Bandwidth Plot on Channel 777 (848.31 MHz)



Date: 19.AUG.2015 12:30:08


Band:

CDMA2000 BC1

Test Mode:


1xRTT RC3+SO55

99% Occupied Bandwidth Plot on Channel 25 (1851.25 MHz)

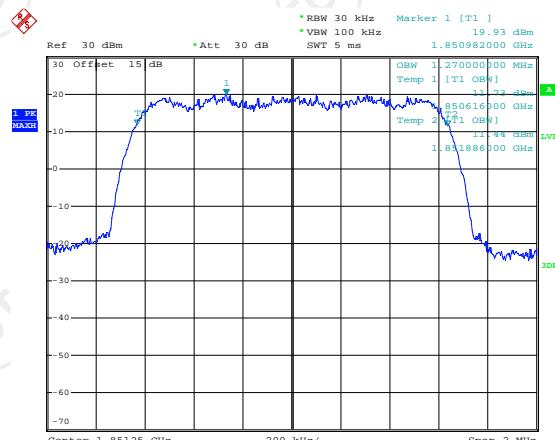


Date: 19.AUG.2015 11:08:26

26dB Bandwidth Plot on Channel 25 (1851.25 MHz)

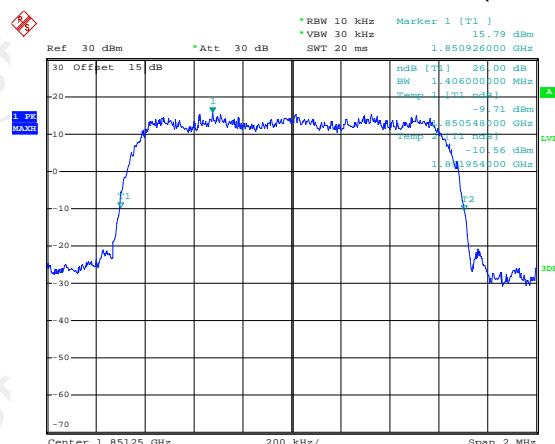


Date: 19.AUG.2015 11:03:33

99% Occupied Bandwidth Plot on Channel 600 (1880.0 MHz)

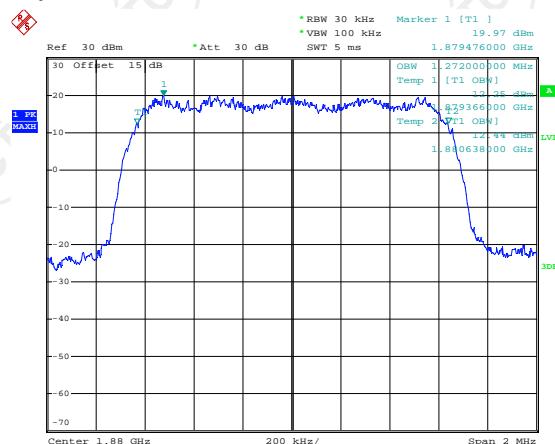


Date: 19.AUG.2015 11:09:02

26dB Bandwidth Plot on Channel 600 (1880.0 MHz)

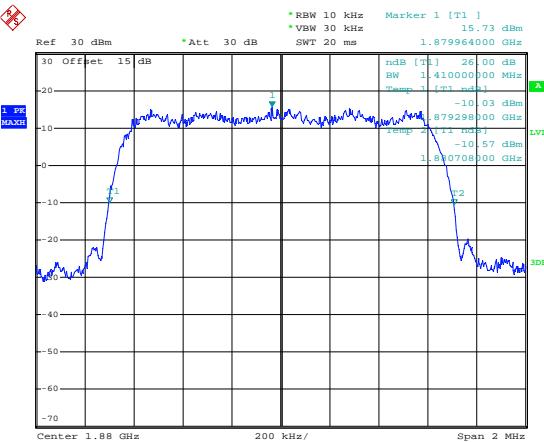


Date: 19.AUG.2015 11:04:10

99% Occupied Bandwidth Plot on Channel 1175 (1908.75 MHz)

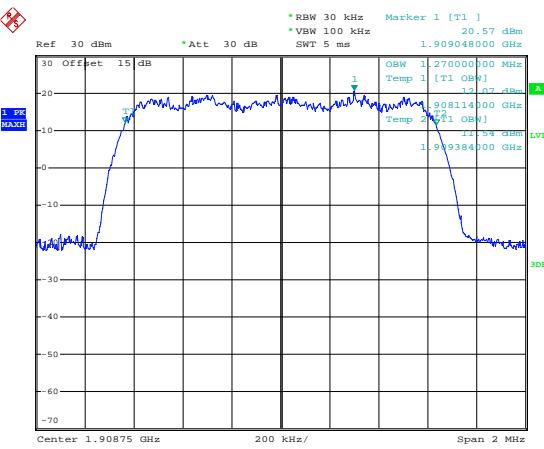

Date: 19.AUG.2015 11:10:12


26dB Bandwidth Plot on Channel 1175 (1908.75 MHz)

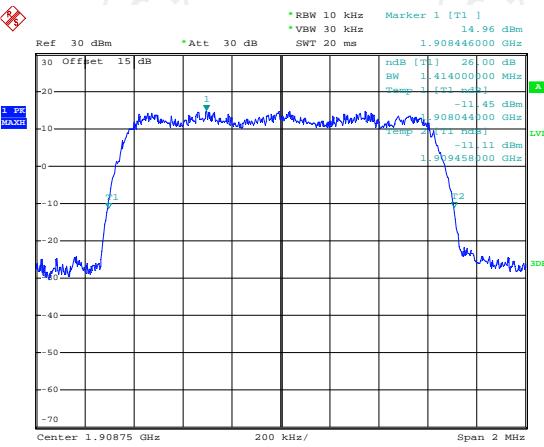

Date: 19.AUG.2015 11:04:52

6.4. Band Edge and Conducted Spurious Emission Measurement

6.5. Test Specification

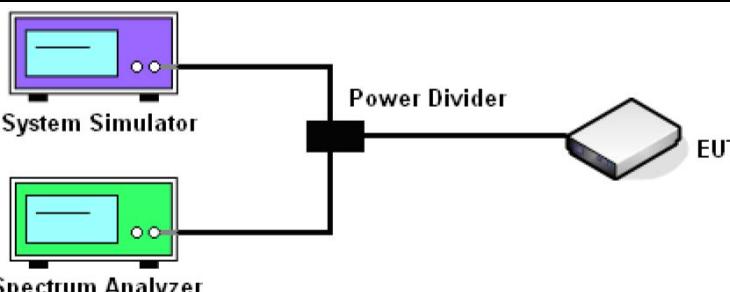Test Requirement:	FCC part22.917(a) and FCC part24.238(a)
Test Method:	FCC part2.1051
Operation mode:	Refer to item 4.1
Limit:	-13dBm
Test Setup:	
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows FCC KDB 971168 v02r02 Section 6.0. 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider. 3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement. 4. The band edges of low and high channels for the highest RF powers were measured. 5. The conducted spurious emission for the whole frequency range was taken. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band. 7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power $P(\text{Watts}) = P(W) - [43 + 10\log(P)] \text{ (dB)} = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$
Test Result:	PASS

6.5.1. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Sep. 11, 2016
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.5.2. Test data

Test plots as follows:

Band:	CDMA2000 BC0	Test Mode:	1xRTT_RC3+SO55
-------	--------------	------------	----------------

Lower Band Edge Plot on Channel 1013 (824.7 MHz)

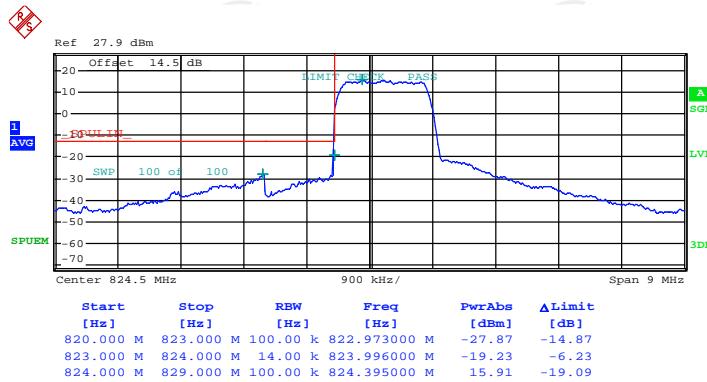

Date: 19.AUG.2015 17:13:03

Higher Band Edge Plot on Channel 251



Date: 19.AUG.2015 17:16:15


Band:

CDMA2000 BC1

Test Mode:


1xRTT_RC3+SO55

Lower Band Edge Plot on Channel 25 (1851.25 MHz)

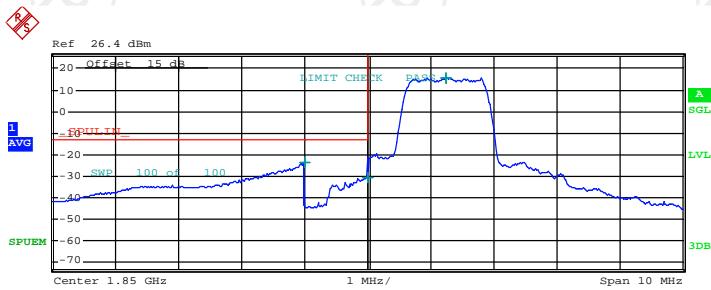

Date: 19.AUG.2015 17:00:12

Higher Band Edge Plot on Channel 1175 (1908.75 MHz)

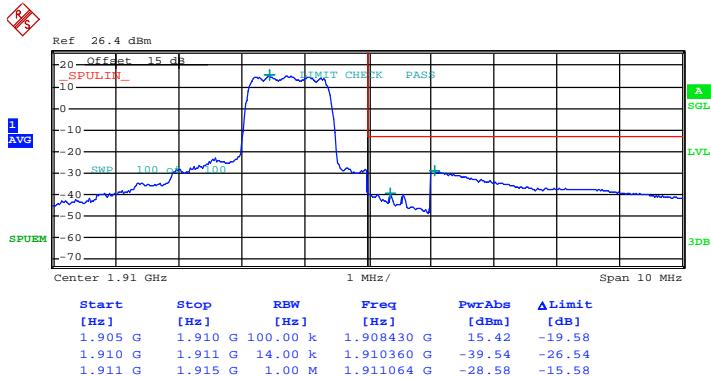

Date: 19.AUG.2015 17:03:57


Band:

CDMA2000 BC0

Test Mode:


1xRTT_RC3+SO55

Conducted Spurious Emission on Channel 384

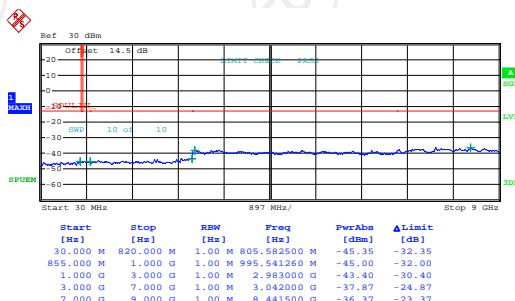


Date: 19.AUG.2015 12:44:13

Conducted Spurious Emission on Channel 777

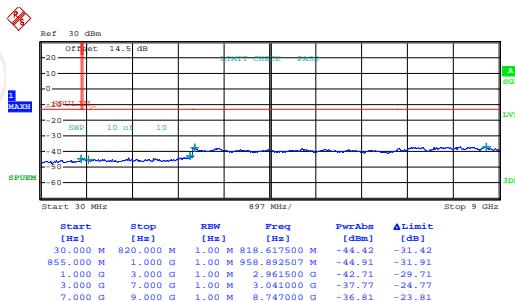

Date: 19.AUG.2015 12:45:39

Conducted Spurious Emission on Channel 1013

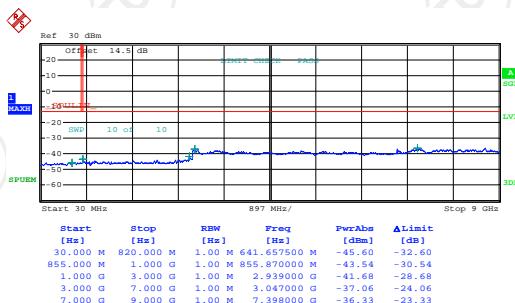

Date: 19.AUG.2015 12:40:26


Band:

CDMA2000 BC1

Test Mode:


1xRTT_RC3+SO55

Conducted Spurious Emission on Channel 25

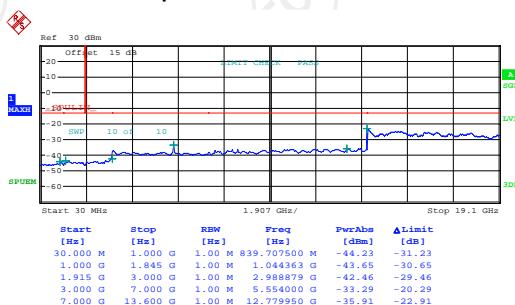


Date: 19.AUG.2015 11:40:48

Conducted Spurious Emission on Channel 600

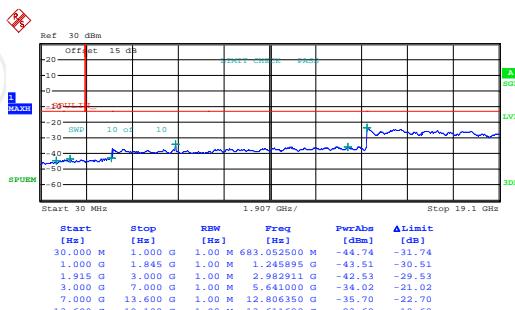

Date: 19.AUG.2015 11:42:04



Conducted Spurious Emission on Channel 1175

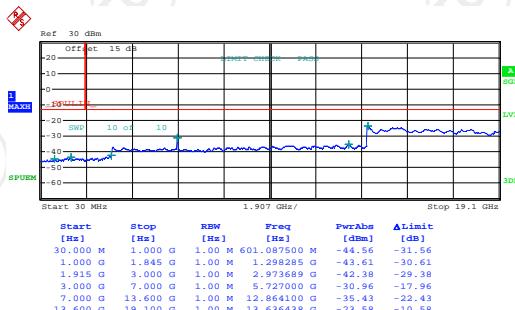

Date: 19.AUG.2015 11:43:52

6.6. Effective Radiated Power and Effective Isotropic Radiated Power Measurement

6.6.1. Test Specification

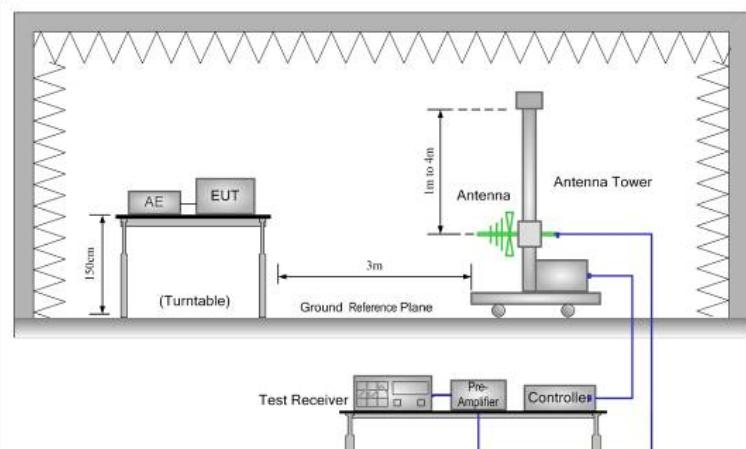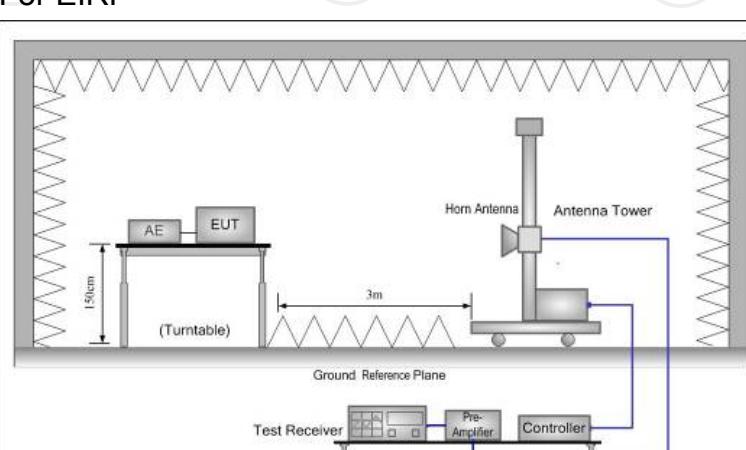Test Requirement:	FCC part 22.913(a) and FCC part 24.232(b)	
Test Method:	FCC part 2.1046	
Receiver Setup:	GSM/GPRS/EDGE	WCDMA/HSPA
	SPAN	500kHz
	RBW	10kHz
	VBW	30kHz
	Detector	RMS
	Trace	Average
	Average Type	Power
Limit:	<7W	
Test setup:	For ERP	
		
	For EIRP	
		

Test Procedure:	<ol style="list-style-type: none">1. The testing follows FCC KDB 971168 v02r02 Section 5.2.1. (for CDMA/WCDMA), Section 5.2.2.2 (for GSM/GPRS/EDGE) and ANSI / TIA-603-C-2004 Section 2.2.17.2. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-C. The EUT was replaced by dipole antenna (substitution antenna) at the same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.
Test results:	PASS

6.6.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESPI Test Receiver	ROHDE&SCHW ARZ	ESVD	100008	Sep. 11, 2016
Spectrum Analyzer	ROHDE&SCHW ARZ	FSEM	848597/001	Sep. 11, 2016
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 11, 2016
Pre-amplifier	HP	8447D	2727A05017	Sep. 11, 2016
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 13, 2016
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 13, 2016
Coax cable	TCT	RE-low-01	N/A	Sep. 11, 2016
Coax cable	TCT	RE-high-02	N/A	Sep. 11, 2016
Coax cable	TCT	RE-low-03	N/A	Sep. 11, 2016
Coax cable	TCT	RE-High-04	N/A	Sep. 11, 2016
Antenna Mast	CCS	CC-A-4M	N/A	Sep. 12, 2016
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.6.3. Test Data

Test Result of ERP

CDMA2000 BC0 1xRTT_RC3+SO55 Radiated Power ERP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.70	3.35	21.66	22.86	0.19
836.52	4.36	21.54	23.75	0.24
848.31	2.87	21.46	22.18	0.17
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	ERP (dBm)	ERP (W)
824.70	3.52	21.66	23.03	0.20
836.52	4.47	21.54	23.86	0.24
848.31	3.93	21.46	23.24	0.21

* $ERP = LVL (dBm) + Correction Factor (dB) - 2.15$

Correction Factor= S.G. Power - Cable loss + Antenna Gain- SPA. Reading

Test Result of EIRP



CDMA2000 BC1 1xRTT_RC3+SO55 Radiated Power EIRP				
Horizontal Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1851.25	0.29	21.66	21.95	0.16
1880.00	1.31	21.54	22.85	0.19
1908.75	1.42	21.46	22.88	0.19
Vertical Polarization				
Frequency (MHz)	LVL (dBm)	Correction Factor (dB)	EIRP (dBm)	EIRP (W)
1851.25	0.48	21.66	22.14	0.16
1880.00	1.39	21.54	22.93	0.20
1908.75	1.54	21.46	23.00	0.20

* $EiRP = LVL (dBm) + Correction Factor (dB)$

Correction Factor= S.G. Power - Cable loss + Antenna Gain- SPA. Reading

6.7. Field Strength of Spurious Radiation Measurement

6.7.1. Test Specification

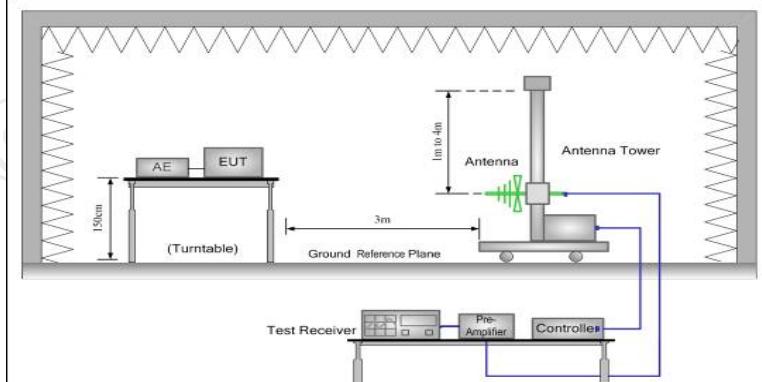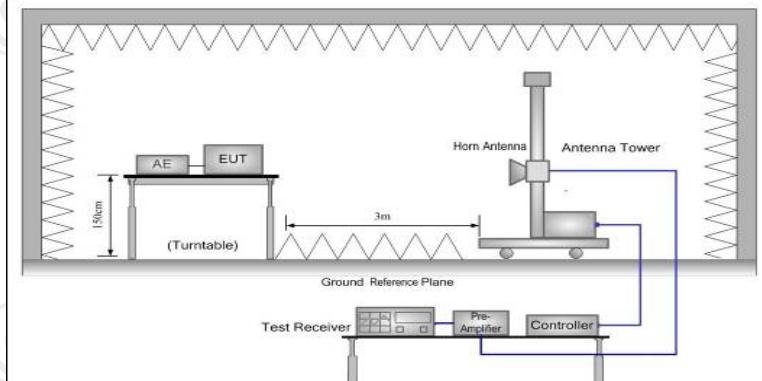Test Requirement:	FCC part 22.917(a) and FCC part 24.238(a)
Test Method:	FCC part 2.1053
Operation mode:	Refer to item 4.1
Limit:	-13dBm
Test setup:	<p>For 30MHz~1GHz</p>  <p>Above 1GHz</p> 
Test Procedure:	<ol style="list-style-type: none"> 1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-C-2004 Section 2.2.12. 2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground. 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower. 4. The table was rotated 360 degrees to determine the position of the highest spurious emission. 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations. 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of

	<p>maximum spurious emission.</p> <p>7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.</p> <p>8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.</p> <p>9. Taking the record of output power at antenna port.</p> <p>10. Repeat step 7 to step 8 for another polarization.</p> <p>11. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain</p> <p>12. ERP (dBm) = EIRP - 2.15</p> <p>13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.</p> <p>14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)</p> $= P(W) - [43 + 10\log(P)] \text{ (dB)}$ $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$ $= -13 \text{ dBm.}$
Test results:	PASS

6.7.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
ESPI Test Receiver	ROHDE&SCHW ARZ	ESVD	100008	Sep. 11, 2016
Spectrum Analyzer	ROHDE&SCHW ARZ	FSEM	848597/001	Sep. 11, 2016
Spectrum Analyzer	Agilent	N9020A	MY49100060	Sep. 12, 2016
Pre-amplifier	EM Electronics Corporation CO.,LTD	EM30265	07032613	Sep. 11, 2016
Pre-amplifier	HP	8447D	2727A05017	Sep. 11, 2016
Loop antenna	ZHINAN	ZN30900A	12024	Sep. 13, 2016
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 13, 2016
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 13, 2016
Horn Antenna	Schwarzbeck	BBHA 9170	373	Sep. 13, 2016
Coax cable	TCT	RE-low-01	N/A	Sep. 11, 2016
Coax cable	TCT	RE-high-02	N/A	Sep. 11, 2016
Coax cable	TCT	RE-low-03	N/A	Sep. 11, 2016
Coax cable	TCT	RE-High-04	N/A	Sep. 11, 2016
Antenna Mast	CCS	CC-A-4M	N/A	Sep. 12, 2016
EMI Test Software	Shurples Technology	EZ-EMC	N/A	N/A

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.7.3. Test Data

Band	CDMA2000 BC0		Test channel:	Lowest
Test mode:	1xRTT_RC3+SO55		Temperature :	25°C
			Relative Humidity:	56%
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
1648.40	Vertical	-42.72	-13.00	PASS
2472.60	V	-39.36		
3296.80	V	-51.81		
1648.40	Horizontal	-42.63		
2472.60	H	-38.44		
3296.80	H	-51.99		
Band	CDMA2000 BC0		Test channel:	Middle
Test mode:	1xRTT_RC3+SO55		Temperature :	25°C
			Relative Humidity:	56%
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
1673.20	Vertical	-41.68	-13.00	PASS
2509.80	V	-44.77		
3346.40	V	-52.48		
1673.20	Horizontal	-41.67		
2509.80	H	-39.83		
3346.40	H	-52.23		
Band	CDMA2000 BC0		Test channel:	Highest
Test mode:	1xRTT_RC3+SO55		Temperature :	25°C
			Relative Humidity:	56%
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.			
Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
1697.60	Vertical	-40.85	-13.00	PASS
2546.40	V	-44.41		
3395.20	V	-52.52		
1697.60	Horizontal	-41.48		
2546.40	H	-40.92		
3395.20	H	-52.41		

Band	CDMA2000 BC1		Test channel:	Lowest		
Test mode:	1xRTT_RC3+SO55		Temperature :	25°C		
			Relative Humidity:	56%		
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.					
Frequency (MHz)	Spurious Emission		Limit (dBm) -13.00	Result PASS		
	Polarization	Level (dBm)				
3700.40	Vertical	-49.63				
5550.60	V	-47.35				
7400.80	V	-52.99				
3700.40	Horizontal	-49.82				
5550.60	H	-50.81				
7400.80	H	-52.53				
Test mode:	CDMA2000 BC1		Test channel:	Middle		
Test mode:	1xRTT_RC3+SO55		Temperature :	25°C		
			Relative Humidity:	56%		
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.					
Frequency (MHz)	Spurious Emission		Limit (dBm) -13.00	Result PASS		
	Polarization	Level (dBm)				
3760.00	Vertical	-49.52				
5640.00	V	-53.48				
7520.00	V	-45.83				
3760.00	Horizontal	-47.18				
5640.00	H	-53.23				
7520.00	H	-53.41				
Test mode:	CDMA2000 BC1		Test channel:	Highest		
Test mode:	1xRTT_RC3+SO55		Temperature :	25°C		
			Relative Humidity:	56%		
Note:	Spurious emissions within 30-1000MHz were found more than 20dB below limit line.					
Frequency (MHz)	Spurious Emission		Limit (dBm) -13.00	Result PASS		
	Polarization	Level (dBm)				
3819.60	Vertical	-47.4				
5729.40	V	-50.13				
7639.20	V	-53.19				
3819.60	Horizontal	-48.15				
5729.40	H	-52.36				
7639.20	H	-53.13				

6.8. Frequency Stability Measurement

6.8.1. Test Specification

Test Requirement:	FCC Part 2.1055(a)(1)(b)
Test Method:	FCC Part 2.1055(a)(1)(b)
Operation mode:	Refer to item 4.1
Limit:	±2.5 ppm
Test Setup:	
Test Procedure:	<p>Test Procedures for Temperature Variation</p> <ol style="list-style-type: none"> 1. The testing follows FCC KDB 971168 v02r02 Section 9.0. 2. The EUT was set up in the thermal chamber and connected with the system simulator. 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute. 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute. <p>Test Procedures for Voltage Variation</p> <ol style="list-style-type: none"> 1. The testing follows FCC KDB 971168 v02r02 Section 9.0. 2. The EUT was placed in a temperature chamber at 25±5°C and connected with the system simulator. 3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT. 4. The variation in frequency was measured for the worst case.
Test Result:	PASS

6.8.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
System simulator	R&S	CMU200	111382	Sep. 11, 2016

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

6.8.3. Test Data

Test Result of Temperature Variation

Band :	CDMA2000 BC0 1xRTT_RC3+SO55		Channel:	384
Limit (ppm) :	2.5ppm		Frequency:	836.52 MHz
Temperature (°C)	Frequency Deviation (Hz)		Frequency Deviation (ppm)	Result
50	-20		0.024	PASS
40	-21		0.025	
30	-26		0.031	
20	-16		0.019	
10	-24		0.029	
0	-14		0.017	
-10	-26		0.031	
-20	-22		0.026	
-30	-28		0.033	

Band :	CDMA2000 BC1 1xRTT_RC3+SO55		Channel:	600
Limit (ppm) :	2.5ppm		Frequency:	1880.0 MHz
Temperature (°C)	Frequency Deviation (Hz)		Frequency Deviation (ppm)	Result
50	31		0.016	PASS
40	34		0.018	
30	35		0.019	
20	34		0.018	
10	43		0.023	
0	38		0.022	
-10	34		0.018	
-20	40		0.021	
-30	44		0.023	

Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Test Result of Voltage Variation

Band & Channel	Mode	Voltage (Volt)	Deviation (ppm)	Limit (ppm)	Result
CDMA200 0 BC0 CH384	1xRTT RC3+SO5 5	4.2	0.026	2.5	PASS
		3.7	0.023		
		BEP	0.017		
CDMA200 0 BC1 CH600	1xRTT RC3+SO5 5	4.2	0.012	2.5	PASS
		3.7	0.009		
		BEP	0.001		
		3.7	0.015		
		BEP	0.019		

Note:

1. Normal Voltage = 3.7V.
2. Battery End Point (BEP) = 3.5 V.
3. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

*******END OF REPORT*******