



TEST REPORT

No. I16Z40549-GTE03

for

TCL Communication Ltd.

CDMA/LTE/GSM/UMTS mobile phone

Model Name: 5027B

FCC ID: 2ACCJB053

with

Hardware Version: VC

Software Version: 5027BAS8

Issued Date: 2016-04-01

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

FCC 2.948 Listed: No.525429

CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT
No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191
Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504
Email: cttl_terminals@catr.cn, website: www.chinattl.com

REPORT HISTORY

| Report Number | Revision | Description | Issue Date |
|----------------------|-----------------|--------------------|-------------------|
| I16Z40549-GTE03 | Rev.0 | 1st edition | 2016-04-01 |

CONTENTS

| | |
|---|-----------|
| 1. TEST LABORATORY | 4 |
| 1.1. TESTING LOCATION..... | 4 |
| 1.2. TESTING ENVIRONMENT | 4 |
| 1.3. PROJECT DATA | 4 |
| 1.4. SIGNATURE..... | 4 |
| 2. CLIENT INFORMATION..... | 5 |
| 2.1. APPLICANT INFORMATION..... | 5 |
| 2.2. MANUFACTURER INFORMATION..... | 5 |
| 3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) | 6 |
| 3.1. ABOUT EUT..... | 6 |
| 3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST | 6 |
| 3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST..... | 6 |
| 3.4. GENERAL DESCRIPTION | 7 |
| 4. REFERENCE DOCUMENTS..... | 8 |
| 4.1. REFERENCE DOCUMENTS FOR TESTING..... | 8 |
| 5. LABORATORY ENVIRONMENT..... | 9 |
| 6. SUMMARY OF TEST RESULTS..... | 10 |
| 6.1. SUMMARY OF TEST RESULTS | 10 |
| STATEMENTS..... | 11 |
| 7. TEST EQUIPMENTS UTILIZED..... | 12 |
| ANNEX A: MEASUREMENT RESULTS | 13 |
| A.1 OUTPUT POWER | 13 |
| A.2 EMISSION LIMIT | 20 |
| A.3 FREQUENCY STABILITY | 24 |
| A.4 OCCUPIED BANDWIDTH..... | 26 |
| A.5 EMISSION BANDWIDTH | 32 |
| A.6 BAND EDGE COMPLIANCE..... | 38 |
| A.7 CONDUCTED SPURIOUS EMISSION | 42 |

1. Test Laboratory

1.1. Testing Location

Company Name: CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT
Address: No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.


1.2. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2016-03-23
Testing End Date: 2016-03-30

1.4. Signature




Shen Yi

(Prepared this test report)



Zhong Nan

(Reviewed this test report)



Sun Xiang Qian

Deputy Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@tcl.com
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address /Post: 5F, C building, No. 232, Liang Jing Road ZhangJiang High-Tech Park,
Contact Person: Gong Zhizhou
Contact Email: zhizhou.gong@tcl.com
Telephone: 0086-21-31363544
Fax: 0086-21-61460602

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

| | |
|-------------------------|---|
| Description | CDMA/LTE/GSM/UMTS mobile phone |
| Model Name | 5027B |
| FCC ID | 2ACCJB053 |
| Antenna | Integrated |
| Output power | 22.83dBm Maximum ERP measured for LTE Band 26 |
| Extreme vol. Limits | 3.6VDC to 4.35VDC (nominal: 3.8VDC) |
| Extreme temp. Tolerance | -30°C to +50°C |

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, Academy of Telecommunication Research, MIIT

3.2. Internal Identification of EUT used during the test

| EUT ID* | IMEI | HW Version | SW Version |
|---------|----------------|------------|------------|
| UT31a | 35790707000138 | VC | 5027BAS8 |
| UT32a | 35790707000139 | VC | 5027BAS8 |

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

| AE ID* | Description |
|--------------|--------------|
| AE1 | Battery |
| AE2 | Charger |
| AE1 | |
| Model | CAB1780002C1 |
| Manufacturer | BYD |
| Capacitance | 1780mAh |
| AE2 | |
| Model | CBA0058AG0C2 |
| Manufacturer | TENPAO |

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) is a model of CDMA/LTE/GSM/UMTS mobile phone for Sprint with integrated antenna. Manual and specifications of the EUT were provided to fulfil the test.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

| Reference | Title | Version |
|----------------|--|--------------------|
| FCC Part 22 | PUBLIC MOBILE SERVICES | 10-1-15 Edition |
| ANSI/TIA-603-D | Land Mobile FM or PM Communications Equipment Measurement and Performance Standards | 2015 |
| ANSI C63.4 | Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz | 2014 |
| KDB 971168 D01 | MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS | v02r02 |

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 (23 meters × 17meters × 10meters) did not exceed following limits along the EMC testing:

| | |
|---|---|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. = 15 %, Max. = 75 % |
| Shielding effectiveness | 0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB. |
| Electrical insulation | > 2 MΩ |
| Ground system resistance | < 4Ω |
| Normalised site attenuation (NSA) | < ± 4 dB, 3m/10m distance, from 30 to 1000 MHz |
| Site voltage standing-wave ratio (S_{VSWR}) | Between 0 and 6 dB, from 1GHz to 18GHz |
| Uniformity of field strength | Between 0 and 6 dB, from 80 to 3000 MHz |

Fully-anechoic chamber FAC-3 (9 meters × 6.5 meters × 4 meters) did not exceed following limits along the EMC testing:

| | |
|---|---|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. = 15 %, Max. = 75 % |
| Shielding effectiveness | 0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB. |
| Electrical insulation | > 2 MΩ |
| Ground system resistance | < 4 Ω |
| Site voltage standing-wave ratio (S_{VSWR}) | Between 0 and 6 dB, from 1GHz to 18GHz |
| Uniformity of field strength | Between 0 and 6 dB, from 80 to 4000 MHz |

Shielded room did not exceed following limits along the EMC testing:

| | |
|--------------------------|---|
| Temperature | Min. = 15 °C, Max. = 35 °C |
| Relative humidity | Min. = 20 %, Max. = 75 % |
| Shielding effectiveness | 0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB. |
| Electrical insulation | > 2 MΩ |
| Ground system resistance | < 4 Ω |

6. SUMMARY OF TEST RESULTS

6.1. Summary of test results

| Abbreviations used in this clause: | | |
|------------------------------------|---------|---|
| Verdict Column | P | Pass |
| | F | Fail |
| | NA | Not applicable |
| | NM | Not measured |
| Location Column | A/B/C/D | The test is performed in test location A, B, C or D which are described in section 1.1 of this report |

LTE Band 26

| Items | Test Name | Clause in FCC rules | Section in this report | Verdict |
|-------|-----------------------------|--------------------------|------------------------|---------|
| 1 | Output Power | §2.1046(a), 22.913(a) | A.1 | P |
| 2 | Emission Limit | 22.917, 2.1051 | A.2 | P |
| 3 | Frequency Stability | 22.235, 2.1055 | A.3 | P |
| 4 | Occupied Bandwidth | 2.1049(h)(i) | A.4 | P |
| 5 | Emission Bandwidth | 22.917(b) | A.5 | P |
| 6 | Band Edge Compliance | 22.917(b) | A.6 | P |
| 7 | Conducted Spurious Emission | 22.917, 2.1057 | A.7 | P |

Statements

The test cases listed in section 6.1 of this report for the EUT specified in section 3 were performed by CTTL according to the standards or reference documents in section 4.1

The EUT met all applicable requirements of the standards or reference documents in section 4.1.
This report only deals with the LTE functions among the features described in section 3.

7. Test Equipments Utilized

| NO. | Description | TYPE | series number | MANUFACTURE | CAL DUE DATE | Calibration interval |
|-----|--------------------------------------|-----------|---------------|--------------|--------------|----------------------|
| 1 | Test Receiver | ESU26 | 100235 | R&S | 2017-03-02 | 1 year |
| 2 | Test Receiver | ESU26 | 100376 | R&S | 2016-10-29 | 1 year |
| 3 | EMI Antenna | VULB 9163 | 302 | Schwarzbeck | 2017-01-03 | 3 year |
| 4 | EMI Antenna | 3117 | 00119024 | ETS-Lindgren | 2017-01-20 | 3 year |
| 5 | LISN | ENV216 | 101200 | R&S | 2016-07-07 | 1 year |
| 6 | Universal Radio Communication Tester | CMW500 | 101675 | R&S | 2016-07-13 | 1 year |
| 7 | Universal Radio Communication Tester | E5515C | MY48361083 | Agilent | 2016-07-06 | 1 year |
| 8 | Spectrum Analyzer | E4440A | MY48250642 | Agilent | 2017-03-02 | 1 year |
| 9 | EMI Antenna | 9117 | 167 | Schwarzbeck | 2016-04-01 | 3 year |
| 10 | EMI Antenna | VULB9163 | 9163-234 | Schwarzbeck | 2016-09-15 | 3 year |
| 11 | Signal Generator | N5183A | MY49060052 | Agilent | 2017-03-07 | 1 year |
| 12 | Climate chamber | SH-241 | 92007454 | ESPEC | 2017-12-14 | 2 year |
| 13 | Loop Antenna | HFH2-Z2 | 829324/007 | R&S | 2017-12-10 | 3 year |

ANNEX A: MEASUREMENT RESULTS

A.1 OUTPUT POWER

Reference

FCC: 22.913(a)

A.1.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMW500) to ensure max power transmission and proper modulation. This result contains peak output power and ERP/EIRP measurements for the EUT. In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with spectrum analyzer's RMS detector.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

A.1.2.2 Measurement result

LTE band 26

| Bandwidth | RB size/offset | Frequency (MHz) | Power(dBm) | |
|-----------|----------------|-----------------|------------|-------|
| | | | QPSK | 16QAM |
| 1.4MHz | 1 RB high | 848.3 | 22.98 | 22.04 |
| | | 836.5 | 23.18 | 22.39 |
| | | 824.7 | 23.25 | 22.28 |
| | 1 RB low | 848.3 | 23.01 | 21.77 |
| | | 836.5 | 23.26 | 21.88 |
| | | 824.7 | 23.19 | 22.33 |
| | 50% RB mid | 848.3 | 23.22 | 22.44 |
| | | 836.5 | 23.30 | 22.32 |
| | | 824.7 | 23.22 | 22.35 |
| | 100% RB | 848.3 | 22.18 | 21.16 |
| | | 836.5 | 22.22 | 21.36 |
| | | 824.7 | 22.18 | 20.96 |

| | | | | |
|-------|------------|-------|-------|-------|
| 3MHz | 1 RB high | 847.5 | 22.93 | 22.06 |
| | | 836.5 | 23.50 | 22.75 |
| | | 825.5 | 23.23 | 21.94 |
| | 1 RB low | 847.5 | 23.09 | 21.73 |
| | | 836.5 | 23.59 | 22.84 |
| | | 825.5 | 23.09 | 21.74 |
| | 50% RB mid | 847.5 | 22.19 | 21.18 |
| | | 836.5 | 22.33 | 21.24 |
| | | 825.5 | 22.37 | 21.49 |
| | 100% RB | 847.5 | 22.23 | 21.21 |
| | | 836.5 | 22.26 | 21.22 |
| | | 825.5 | 22.40 | 21.60 |
| 5MHz | 1 RB high | 846.5 | 23.04 | 21.69 |
| | | 836.5 | 23.26 | 22.58 |
| | | 826.5 | 23.04 | 22.23 |
| | 1 RB low | 846.5 | 23.17 | 22.24 |
| | | 836.5 | 23.44 | 22.67 |
| | | 826.5 | 23.08 | 22.19 |
| | 50% RB mid | 846.5 | 22.20 | 21.22 |
| | | 836.5 | 22.32 | 21.40 |
| | | 826.5 | 22.28 | 21.38 |
| | 100% RB | 846.5 | 22.18 | 21.19 |
| | | 836.5 | 22.27 | 21.50 |
| | | 826.5 | 22.27 | 21.36 |
| 10MHz | 1 RB high | 844.0 | 23.08 | 21.74 |
| | | 836.5 | 23.13 | 22.75 |
| | | 829.0 | 23.26 | 22.05 |
| | 1 RB low | 844.0 | 23.25 | 22.26 |
| | | 836.5 | 23.50 | 22.56 |
| | | 829.0 | 23.24 | 22.43 |
| | 50% RB mid | 844.0 | 22.27 | 21.38 |
| | | 836.5 | 22.26 | 21.35 |
| | | 829.0 | 22.34 | 21.54 |
| | 100% RB | 844.0 | 22.19 | 21.16 |
| | | 836.5 | 22.21 | 21.22 |
| | | 829.0 | 22.35 | 21.42 |
| 15MHz | 1 RB high | 841.5 | 23.06 | 22.49 |
| | | 836.5 | 23.09 | 22.86 |
| | | 831.5 | 23.09 | 22.53 |
| | 1 RB low | 841.5 | 23.47 | 22.68 |

| | | | | |
|------------|------------|-------|-------|-------|
| | | 836.5 | 23.44 | 22.46 |
| | | 831.5 | 23.33 | 22.59 |
| 50% RB mid | 50% RB mid | 841.5 | 22.19 | 21.18 |
| | | 836.5 | 22.22 | 21.29 |
| | | 831.5 | 22.35 | 21.41 |
| | 100% RB | 841.5 | 22.23 | 21.24 |
| | | 836.5 | 22.28 | 21.31 |
| | | 831.5 | 22.31 | 21.37 |

Note: Expanded measurement uncertainty is $U = 0.83$ dB, $k = 2$.

A.1.3 Radiated

A.1.3.1 Description


This is the test for the maximum radiated power from the EUT.

Rule Part 22.913(a) specifies "Mobile stations are limited to 2.0 watts EIRP."


A.1.3.2 Method of Measurement

The measurements procedures in TIA-603D-2015 are used.

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.

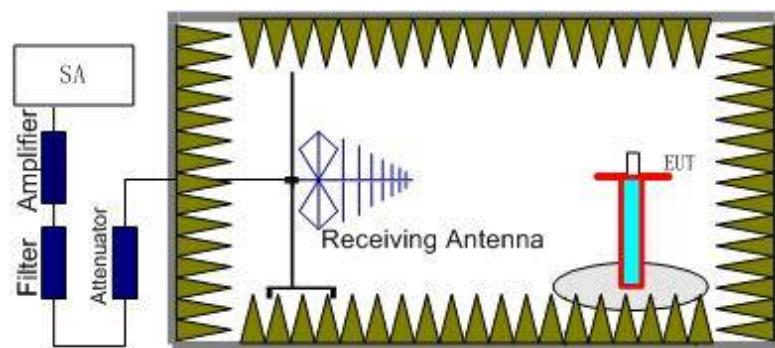

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (P_r).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

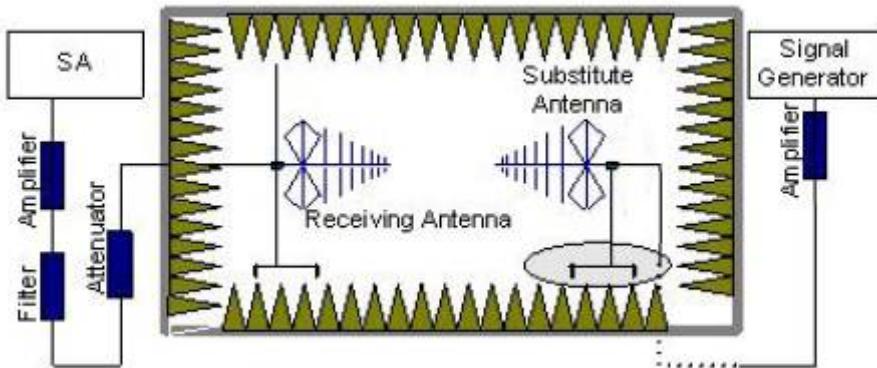

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna

polarization.

4. An amplifier should be connected to the Signal Source output port. And the cable should be connected between the amplifier and the substitution antenna.

The cable loss (P_{cl}), the substitution antenna Gain (G_a) and the amplifier Gain (P_{Ag}) should be recorded after test.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{Ag} - P_{cl} - G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15$.

A.1.3.3 Measurement result

LTE Band 26- ERP 22.913(a)

Limits: ≤ 38.45 dBm (7W)

LTE Band 5_1.4MHz_QPSK

| Frequency(MHz) | P _{Mea} (dBm) | P _c (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | Correction (dB) | ERP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|---------------------|----------------------|---------------------------------|-----------------|----------|------------|------------|--------------|
| 824.70 | -20.21 | 2.26 | -45.79 | -0.95 | 2.15 | 22.12 | 38.45 | 16.33 | H |
| 836.50 | -19.24 | 2.26 | -45.66 | -0.82 | 2.15 | 22.83 | 38.45 | 15.62 | H |
| 848.30 | -20.36 | 2.27 | -45.55 | -0.80 | 2.15 | 21.57 | 38.45 | 16.88 | V |

LTE Band 26_3MHz_QPSK

| Frequency(MHz) | P _{Mea} (dBm) | P _c (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | Correction (dB) | ERP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|---------------------|----------------------|---------------------------------|-----------------|----------|------------|------------|--------------|
| 825.50 | -20.07 | 2.26 | -45.79 | -0.94 | 2.15 | 22.25 | 38.45 | 16.20 | H |
| 836.50 | -19.45 | 2.26 | -45.66 | -0.82 | 2.15 | 22.62 | 38.45 | 15.83 | H |
| 847.50 | -20.55 | 2.27 | -45.56 | -0.81 | 2.15 | 21.40 | 38.45 | 17.05 | V |

LTE Band 26_5MHz_QPSK

| Frequency(MHz) | P _{Mea} (dBm) | P _c (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | Correction (dB) | ERP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|---------------------|----------------------|---------------------------------|-----------------|----------|------------|------------|--------------|
| 826.50 | -20.27 | 2.25 | -45.77 | -0.93 | 2.15 | 22.03 | 38.45 | 16.42 | H |
| 836.50 | -19.80 | 2.26 | -45.66 | -0.82 | 2.15 | 22.27 | 38.45 | 16.18 | H |
| 846.50 | -20.37 | 2.26 | -45.56 | -0.82 | 2.15 | 21.60 | 38.45 | 16.85 | H |

LTE Band 26_10MHz_QPSK

| Frequency(MHz) | P _{Mea} (dBm) | P _c (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | Correction (dB) | ERP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|---------------------|----------------------|---------------------------------|-----------------|----------|------------|------------|--------------|
| 829.00 | -20.05 | 2.13 | -45.74 | -0.90 | 2.15 | 22.31 | 38.45 | 16.14 | H |
| 836.50 | -19.48 | 2.26 | -45.66 | -0.82 | 2.15 | 22.59 | 38.45 | 15.86 | H |
| 844.00 | -20.03 | 2.26 | -45.59 | -0.82 | 2.15 | 21.97 | 38.45 | 16.48 | H |

LTE Band 26_15MHz_QPSK

| Frequency(MHz) | P _{Mea} (dBm) | P _c (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | Correction (dB) | ERP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|---------------------|----------------------|---------------------------------|-----------------|----------|------------|------------|--------------|
| 831.50 | -19.91 | 2.12 | -45.71 | -0.87 | 2.15 | 22.40 | 38.45 | 16.05 | H |
| 836.50 | -19.61 | 2.26 | -45.66 | -0.82 | 2.15 | 22.46 | 38.45 | 15.99 | H |
| 841.50 | -19.81 | 2.26 | -45.61 | -0.82 | 2.15 | 22.21 | 38.45 | 16.24 | H |

LTE Band 26_1.4MHz_16QAM

| Frequency(MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | Correction (dB) | ERP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------------|----------|------------|------------|--------------|
| 824.70 | -21.10 | 2.26 | -45.79 | -0.95 | 2.15 | 21.23 | 38.45 | 17.22 | H |
| 836.50 | -19.84 | 2.26 | -45.66 | -0.82 | 2.15 | 22.23 | 38.45 | 16.22 | H |
| 848.30 | -21.14 | 2.27 | -45.55 | -0.80 | 2.15 | 20.79 | 38.45 | 17.66 | V |

LTE Band 26_3MHz_16QAM

| Frequency(MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | Correction (dB) | ERP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------------|----------|------------|------------|--------------|
| 825.50 | -21.50 | 2.26 | -45.79 | -0.94 | 2.15 | 20.82 | 38.45 | 17.63 | H |
| 836.50 | -20.61 | 2.26 | -45.66 | -0.82 | 2.15 | 21.46 | 38.45 | 16.99 | H |
| 847.50 | -21.18 | 2.27 | -45.56 | -0.81 | 2.15 | 20.77 | 38.45 | 17.68 | H |

LTE Band 26_5MHz_16QAM

| Frequency(MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | Correction (dB) | ERP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------------|----------|------------|------------|--------------|
| 826.50 | -21.03 | 2.25 | -45.77 | -0.93 | 2.15 | 21.27 | 38.45 | 17.18 | H |
| 836.50 | -21.06 | 2.26 | -45.66 | -0.82 | 2.15 | 21.01 | 38.45 | 17.44 | H |
| 846.50 | -21.08 | 2.26 | -45.56 | -0.82 | 2.15 | 20.89 | 38.45 | 17.56 | H |

LTE Band 26_10MHz_16QAM

| Frequency(MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | Correction (dB) | ERP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------------|----------|------------|------------|--------------|
| 829.00 | -21.03 | 2.13 | -45.74 | -0.90 | 2.15 | 21.33 | 38.45 | 17.12 | H |
| 836.50 | -20.55 | 2.26 | -45.66 | -0.82 | 2.15 | 21.52 | 38.45 | 16.93 | H |
| 844.00 | -20.58 | 2.26 | -45.59 | -0.82 | 2.15 | 21.42 | 38.45 | 17.03 | H |

LTE Band 26_15MHz_16QAM

| Frequency(MHz) | P _{Mea} (dBm) | P _{cl} (dB) | P _{Ag} (dB) | G _a Antenna Gain(dB) | Correction (dB) | ERP(dBm) | Limit(dBm) | Margin(dB) | Polarization |
|----------------|------------------------|----------------------|----------------------|---------------------------------|-----------------|----------|------------|------------|--------------|
| 831.50 | -21.16 | 2.12 | -45.71 | -0.87 | 2.15 | 21.15 | 38.45 | 17.30 | H |
| 836.50 | -20.44 | 2.26 | -45.66 | -0.82 | 2.15 | 21.63 | 38.45 | 16.82 | H |
| 841.50 | -20.79 | 2.26 | -45.61 | -0.82 | 2.15 | 21.23 | 38.45 | 17.22 | H |

Peak ERP(dBm)=P_{Mea}(-19.24dBm)-G_a(-0.82dBi)-P_{Ag}(-45.66dB)-P_{cl} (2.26dB)-2.15dB = 22.83dBm

ANALYZER SETTINGS:

RBW = VBW = 8MHz for occupied bandwidths equal to or less than 5MHz.

RBW = VBW = 20MHz for occupied bandwidths equal to or greater than 10MHz.

Note: Expanded measurement uncertainty is $U = 0.96 \text{ dB}$, $k = 2$.

A.2 EMISSION LIMIT

Reference

FCC: CFR 2.1051, 22.917.


A.2.1 Measurement Method

The measurements procedures in TIA-603D-2015 are used. This measurement is carried out in fully-anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz as outlined in Part 22.917. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the LTE Band26.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

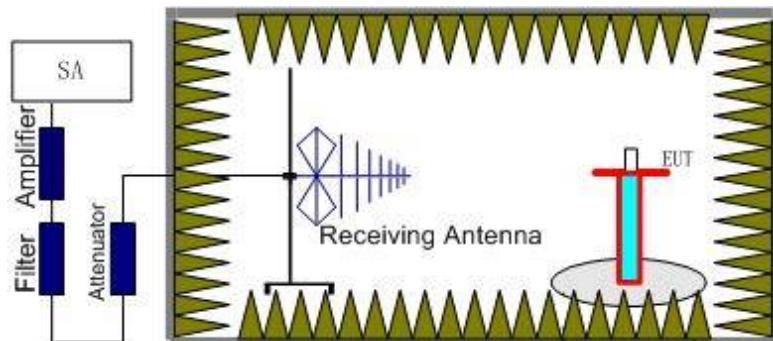

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

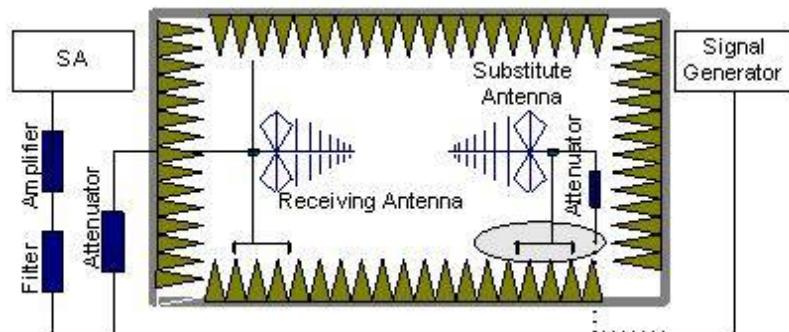

In the chamber, an substitution antenna for the frequency band of interest is placed at the

reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} + P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Limit

Part 22.917 specifies that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log(P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the LTE Bands 26. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the LTE Bands 26 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

LTE Band 26, 1.4MHz, QPSK, Channel 26797

| Frequency(MHz) | P _{Mea} (dBm) | Path Loss | Antenna Gain | Correction (dB) | Peak ERP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|----------------|------------------------|-----------|--------------|-----------------|---------------|-------------|------------|--------------|
| 3299.27 | -67.04 | 5.38 | -7.72 | 2.15 | -66.85 | -13.00 | 53.85 | V |
| 4124.65 | -65.79 | 5.80 | -9.02 | 2.15 | -64.72 | -13.00 | 51.72 | H |
| 4936.86 | -62.97 | 6.32 | -9.84 | 2.15 | -61.60 | -13.00 | 48.60 | V |
| 5766.19 | -62.99 | 6.78 | -10.55 | 2.15 | -61.37 | -13.00 | 48.37 | H |
| 6592.54 | -64.78 | 7.04 | -11.11 | 2.15 | -62.86 | -13.00 | 49.86 | V |
| 7431.83 | -61.13 | 7.18 | -12.12 | 2.15 | -58.34 | -13.00 | 45.34 | H |

LTE Band 26, 1.4MHz, QPSK, Channel 26915

| Frequency(MHz) | P _{Mea} (dBm) | Path Loss | Antenna Gain | Correction (dB) | Peak ERP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|----------------|------------------------|-----------|--------------|-----------------|---------------|-------------|------------|--------------|
| 3519.42 | -65.49 | 5.34 | -8.23 | 2.15 | -64.75 | -13.00 | 51.75 | H |
| 4390.34 | -63.49 | 6.18 | -9.29 | 2.15 | -62.53 | -13.00 | 49.53 | H |
| 5702.26 | -65.00 | 6.66 | -10.56 | 2.15 | -63.25 | -13.00 | 50.25 | V |
| 6102.97 | -64.78 | 6.82 | -10.60 | 2.15 | -63.15 | -13.00 | 50.15 | H |
| 7180.90 | -63.45 | 7.21 | -11.82 | 2.15 | -60.99 | -13.00 | 47.99 | H |
| 8319.19 | -65.34 | 7.96 | -12.86 | 2.15 | -62.59 | -13.00 | 49.59 | V |

LTE Band 26, 1.4MHz, QPSK, Channel 27033

| Frequency(MHz) | P _{Mea} (dBm) | Path Loss | Antenna Gain | Correction (dB) | Peak ERP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|----------------|------------------------|-----------|--------------|-----------------|---------------|-------------|------------|--------------|
| 3386.90 | -69.12 | 5.38 | -7.93 | 2.15 | -68.72 | -13.00 | 55.72 | H |
| 4241.71 | -63.96 | 6.06 | -9.14 | 2.15 | -63.03 | -13.00 | 50.03 | H |
| 5092.05 | -64.24 | 6.46 | -10.03 | 2.15 | -62.82 | -13.00 | 49.82 | V |
| 5932.46 | -65.52 | 6.89 | -10.51 | 2.15 | -64.05 | -13.00 | 51.05 | H |
| 6780.59 | -62.06 | 7.05 | -11.34 | 2.15 | -59.92 | -13.00 | 46.92 | H |
| 7636.86 | -62.79 | 7.55 | -12.31 | 2.15 | -60.18 | -13.00 | 47.18 | H |

LTE Band 26, 1.4MHz, 16QAM, Channel 26797

| Frequency(MHz) | P _{Mea} (dBm) | Path Loss | Antenna Gain | Correction (dB) | Peak ERP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|----------------|------------------------|-----------|--------------|-----------------|---------------|-------------|------------|--------------|
| 3301.77 | -70.12 | 5.37 | -7.72 | 2.15 | -69.92 | -13.00 | 56.92 | H |
| 4123.90 | -63.59 | 5.80 | -9.02 | 2.15 | -62.52 | -13.00 | 49.52 | V |
| 4933.61 | -64.85 | 6.33 | -9.83 | 2.15 | -63.50 | -13.00 | 50.50 | V |
| 5742.48 | -65.30 | 6.78 | -10.55 | 2.15 | -63.68 | -13.00 | 50.68 | V |
| 6586.11 | -61.24 | 7.04 | -11.10 | 2.15 | -59.33 | -13.00 | 46.33 | H |
| 7444.51 | -64.74 | 7.15 | -12.13 | 2.15 | -61.91 | -13.00 | 48.91 | H |

LTE Band 26, 1.4MHz, 16QAM, Channel 26915

| Frequency(MHz) | P _{Mea} (dBm) | Path Loss | Antenna Gain | Correction (dB) | Peak ERP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|----------------|------------------------|-----------|--------------|-----------------|---------------|-------------|------------|--------------|
| 3301.43 | -66.75 | 5.37 | -7.72 | 2.15 | -66.55 | -13.00 | 53.55 | H |
| 4941.74 | -65.81 | 6.32 | -9.84 | 2.15 | -64.44 | -13.00 | 51.44 | V |
| 5805.09 | -65.80 | 6.71 | -10.54 | 2.15 | -64.12 | -13.00 | 51.12 | H |
| 6852.79 | -62.86 | 6.79 | -11.42 | 2.15 | -60.38 | -13.00 | 47.38 | V |
| 8087.29 | -63.20 | 7.40 | -12.67 | 2.15 | -60.08 | -13.00 | 47.08 | H |
| 8588.42 | -62.78 | 7.58 | -13.02 | 2.15 | -59.49 | -13.00 | 46.49 | H |

LTE Band 26, 1.4MHz, 16QAM, Channel 27033

| Frequency(MHz) | P _{Mea} (dBm) | Path Loss | Antenna Gain | Correction (dB) | Peak ERP(dBm) | Limit (dBm) | Margin(dB) | Polarization |
|----------------|------------------------|-----------|--------------|-----------------|---------------|-------------|------------|--------------|
| 3385.60 | -68.16 | 5.37 | -7.93 | 2.15 | -67.75 | -13.00 | 54.75 | H |
| 4253.76 | -63.01 | 6.00 | -9.15 | 2.15 | -62.01 | -13.00 | 49.01 | H |
| 5095.03 | -64.91 | 6.48 | -10.03 | 2.15 | -63.51 | -13.00 | 50.51 | V |
| 5889.52 | -64.78 | 6.91 | -10.52 | 2.15 | -63.32 | -13.00 | 50.32 | V |
| 6785.27 | -63.43 | 7.06 | -11.34 | 2.15 | -61.30 | -13.00 | 48.30 | H |
| 7638.13 | -64.60 | 7.56 | -12.31 | 2.15 | -62.00 | -13.00 | 49.00 | V |

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 4.2$ dB, $k = 2$.

A.3 FREQUENCY STABILITY

Reference

FCC: CFR Part 2.1055,22.235.

A.3.1 Method of Measurement

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMW500 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on middle channel for LTE band 26, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from +50°C to -30°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

A.3.2 Measurement Limit

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d) (2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.6VDC and 4.35VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance from -5.4% to 10.8%. For the purposes of measuring frequency stability these voltage limits are to be used.

A.3.3 Measurement results

LTE Band 26, 1.4MHz bandwidth (worst case of all bandwidths)

Frequency Error vs Voltage

| Voltage (V) | Frequency error (Hz) | | Frequency error (ppm) | |
|----------------|----------------------|-------|-----------------------|-------|
| | QPSK | 16QAM | QPSK | 16QAM |
| 3.5 | 0 | 18 | 0.000 | 0.022 |
| 3.8 | 0 | 17 | 0.001 | 0.020 |
| 4.35 | -4 | 17 | 0.004 | 0.020 |

Frequency Error vs Temperature

| Temperature (°C) | Frequency error (Hz) | | Frequency error (ppm) | |
|---------------------|----------------------|-------|-----------------------|-------|
| | QPSK | 16QAM | QPSK | 16QAM |
| 50° | 0 | 17 | 0.000 | 0.021 |
| 40° | 1 | 17 | 0.001 | 0.021 |
| 30° | 0 | 18 | 0.000 | 0.022 |
| 20° | 0 | 16 | 0.000 | 0.020 |
| 10° | -2 | 17 | 0.002 | 0.021 |
| 0° | 2 | 16 | 0.003 | 0.020 |
| - 10° | -2 | 18 | 0.002 | 0.021 |
| - 20° | 0 | 19 | 0.000 | 0.023 |
| - 30° | -2 | 17 | 0.002 | 0.020 |

Expanded measurement uncertainty for this test item is 10 Hz, $k = 2$.

A.4 OCCUPIED BANDWIDTH

Reference

FCC: CFR Part 2.1049(h)(i)

A.4.1 Occupied Bandwidth Results

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US Cellular/PCS frequency bands. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from KDB 971168:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (i.e., two to five times the OBW).
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- c) Set the reference level of the instrument as required to keep the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope must be at least $10\log(\text{OBW} / \text{RBW})$ below the reference level.
- d) Set the detection mode to peak, and the trace mode to max hold.
- e) Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

LTE band 26, 1.4MHz (99%)


| Frequency(MHz) | Occupied Bandwidth (99%)(kHz) | |
|----------------|--------------------------------|---------|
| 836.5 | QPSK | 16QAM |
| | 1097.76 | 1089.74 |

LTE band 26, 1.4MHz Bandwidth, QPSK (99% BW)

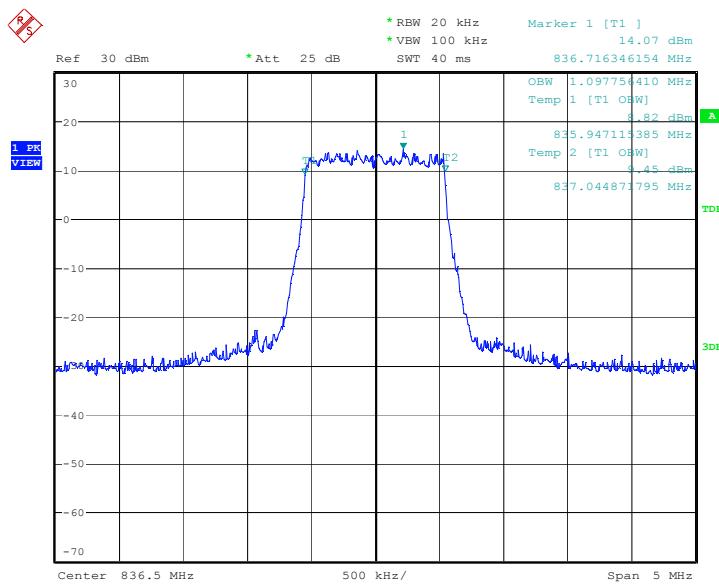

Date: 24.MAR.2016 07:06:27


LTE band 26, 1.4MHz Bandwidth, 16QAM (99% BW)

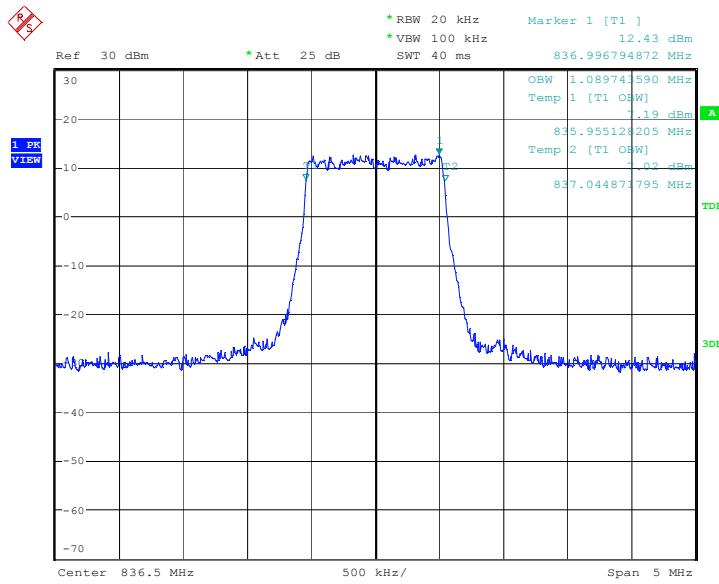


Date: 24.MAR.2016 07:06:42

LTE band 26, 3MHz (99%)

| Frequency(MHz) | Occupied Bandwidth (99%)(kHz) | |
|----------------|--------------------------------|---------|
| 836.5 | QPSK | 16QAM |
| | 2708.33 | 2692.31 |

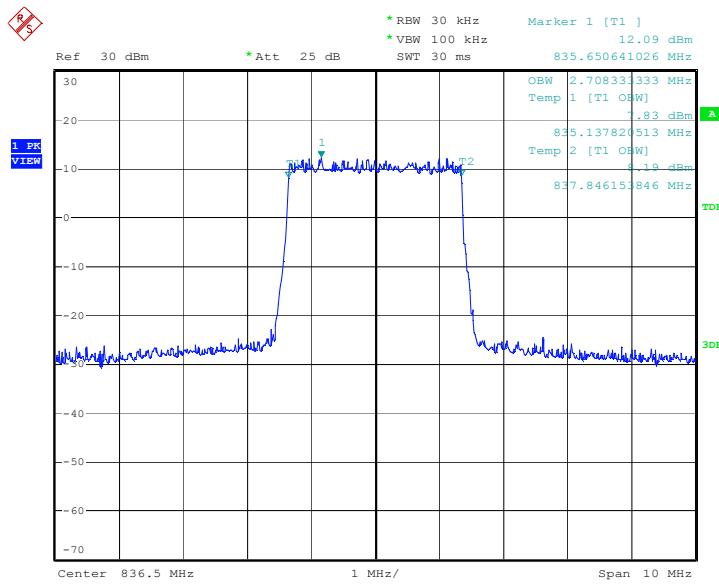LTE band 26, 3MHz Bandwidth, QPSK (99% BW)


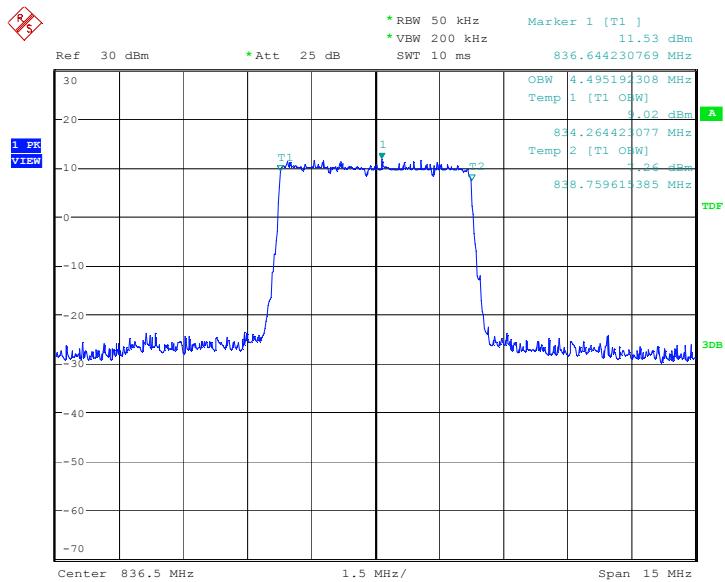
Date: 24.MAR.2016 07:12:11

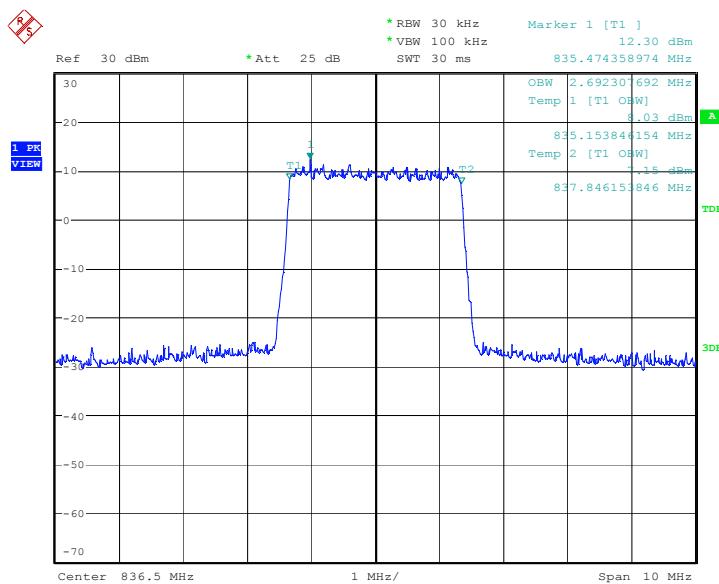LTE band 26, 3MHz Bandwidth, 16QAM (99% BW)


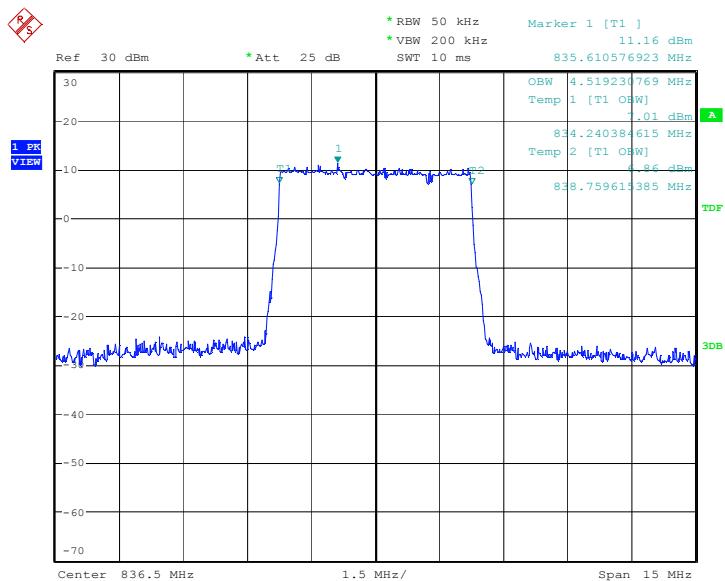
Date: 24.MAR.2016 07:12:26

LTE band 26, 5MHz (99%)

| Frequency(MHz) | Occupied Bandwidth (99%)(kHz) | |
|----------------|--------------------------------|---------|
| 836.5 | QPSK | 16QAM |
| | 4495.19 | 4519.23 |

LTE band 26, 5MHz Bandwidth, QPSK (99% BW)


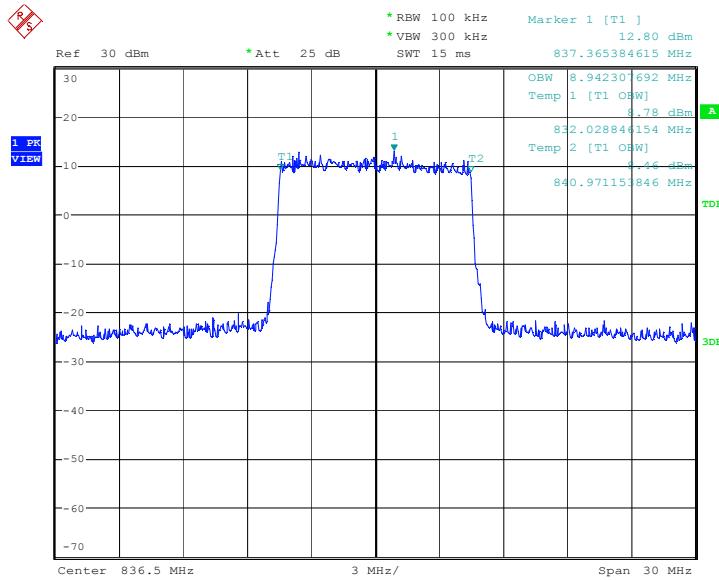
Date: 24.MAR.2016 07:17:55

LTE band 26, 5MHz Bandwidth,16QAM (99% BW)


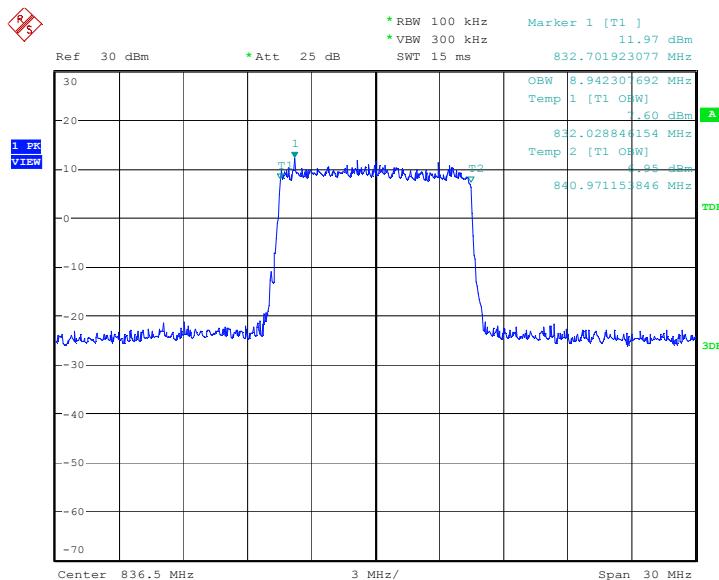
Date: 24.MAR.2016 07:18:10

LTE band 26, 10MHz (99%)

| Frequency(MHz) | Occupied Bandwidth (99%)(kHz) | |
|----------------|--------------------------------|---------|
| 836.5 | QPSK | 16QAM |
| | 8942.31 | 8942.31 |

LTE band 26, 10MHz Bandwidth, QPSK (99% BW)


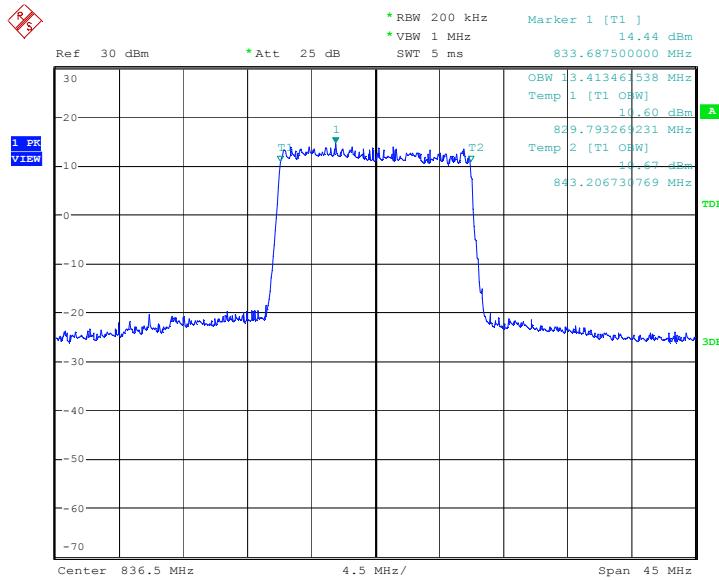
Date: 24.MAR.2016 07:23:40

LTE band 26, 10MHz Bandwidth, 16QAM (99% BW)


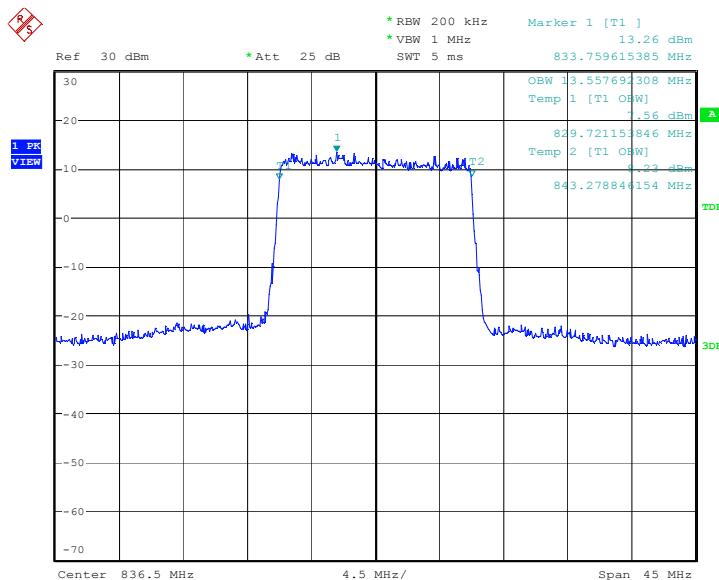
Date: 24.MAR.2016 07:23:55

LTE band 26, 15MHz (99%)

| Frequency(MHz) | Occupied Bandwidth (99%)(kHz) | |
|----------------|--------------------------------|----------|
| | QPSK | 16QAM |
| 836.5 | | |
| | 13413.46 | 13557.69 |

LTE band 26, 15MHz Bandwidth, QPSK (99% BW)


Date: 24.MAR.2016 07:29:29

LTE band 26, 15MHz Bandwidth, 16QAM (99% BW)


Date: 24.MAR.2016 07:29:44

A.5 EMISSION BANDWIDTH

Reference

FCC: CFR Part 22.917(b).


A.5.1 Emission Bandwidth Results

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.

LTE band 26, 1.4MHz (-26dBc)


| Frequency(MHz) | Occupied Bandwidth (-26dBc)(kHz) | |
|----------------|-----------------------------------|---------|
| 836.5 | QPSK | 16QAM |
| | 1314.10 | 1282.05 |

LTE band 26, 1.4MHz Bandwidth, QPSK (-26dBc BW)

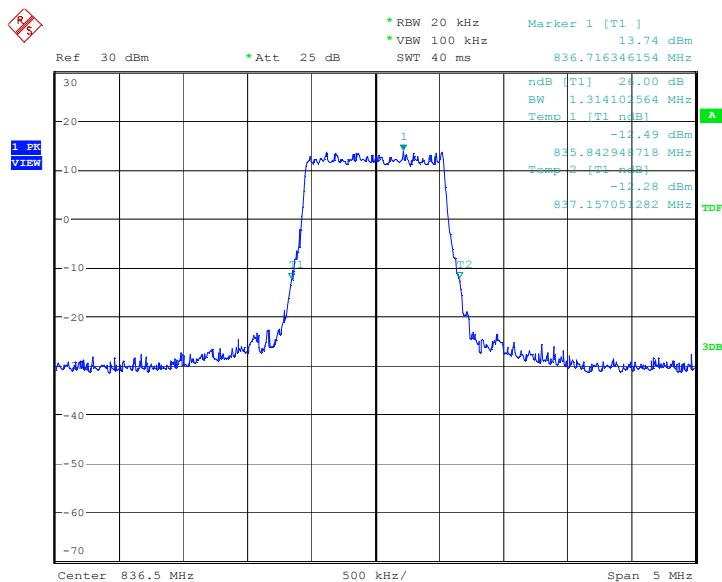

Date: 24.MAR.2016 07:07:35


LTE band 26, 1.4MHz Bandwidth, 16QAM (-26dBc BW)

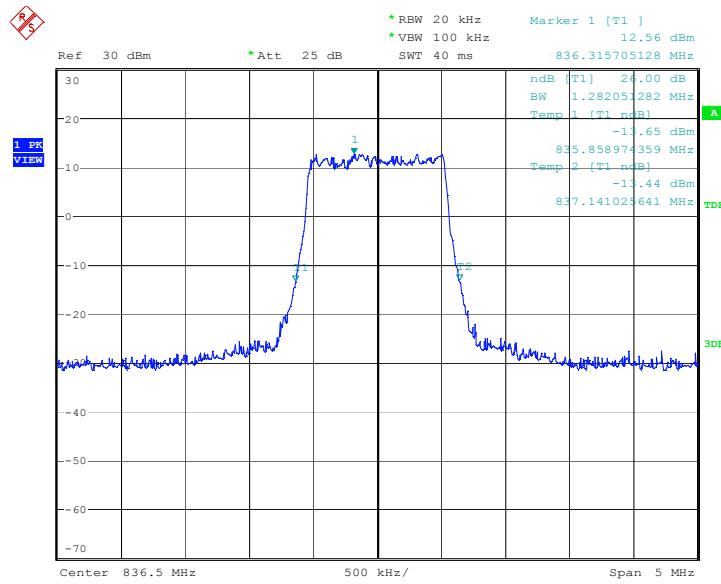


Date: 24.MAR.2016 07:07:52

LTE band 26, 3MHz (-26dBc)

| Frequency(MHz) | Occupied Bandwidth (-26dBc)(kHz) | |
|----------------|-----------------------------------|---------|
| 836.5 | QPSK | 16QAM |
| | 2964.74 | 2964.74 |

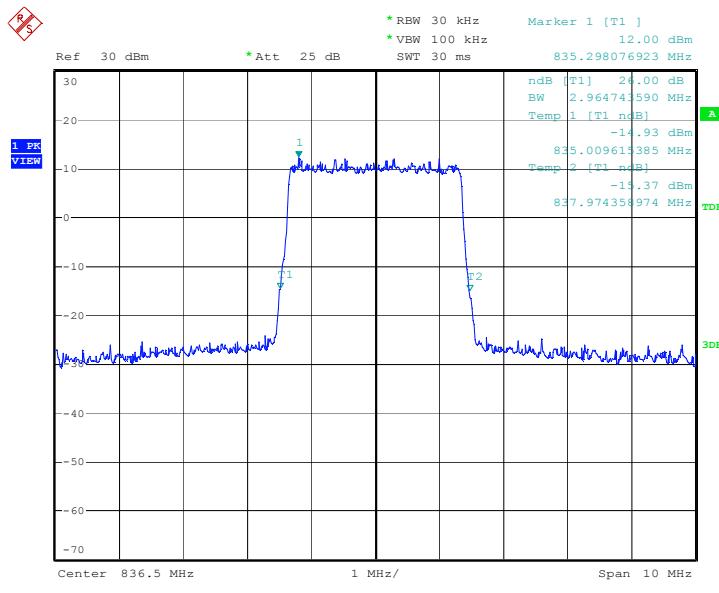LTE band 26, 3MHz Bandwidth, QPSK (-26dBc BW)


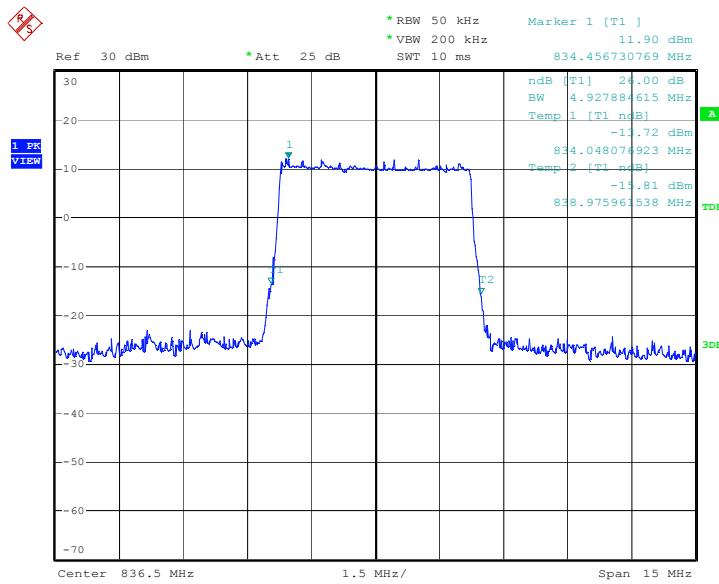
Date: 24.MAR.2016 07:13:19

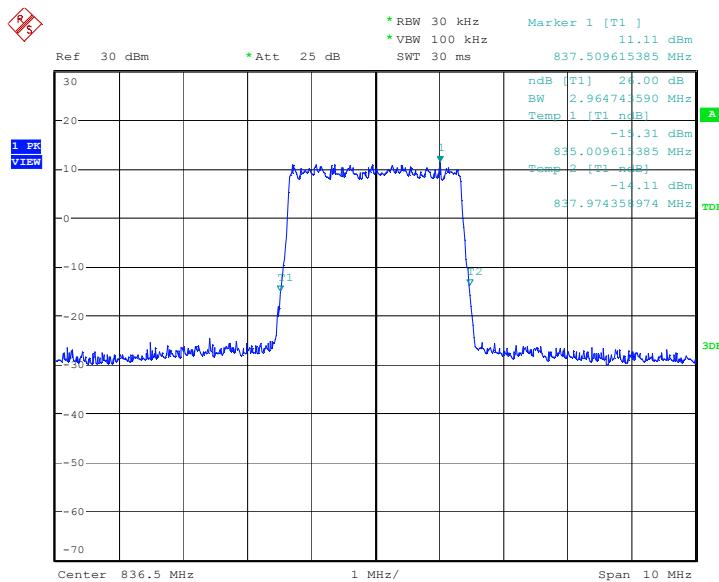LTE band 26, 3MHz Bandwidth, 16QAM (-26dBc BW)


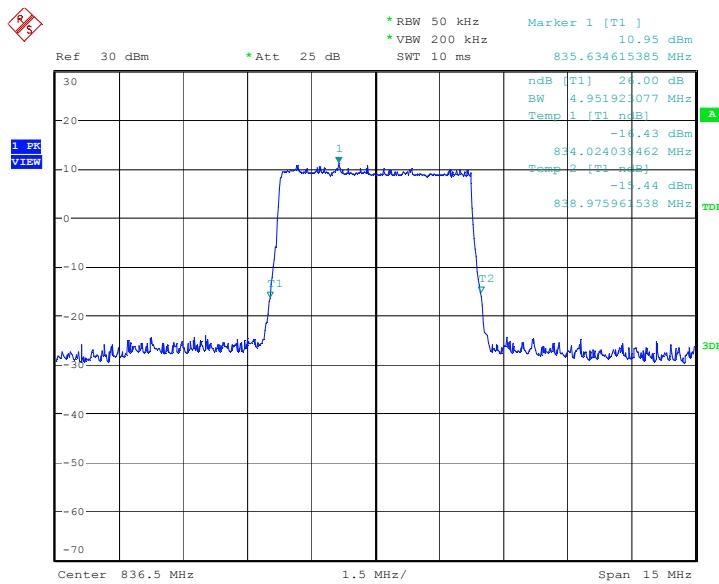
Date: 24.MAR.2016 07:13:36

LTE band 26, 5MHz (-26dBc)

| Frequency(MHz) | Occupied Bandwidth (-26dBc)(kHz) | |
|----------------|-----------------------------------|---------|
| 836.5 | QPSK | 16QAM |
| | 4927.88 | 4951.92 |

LTE band 26, 5MHz Bandwidth, QPSK (-26dBc BW)


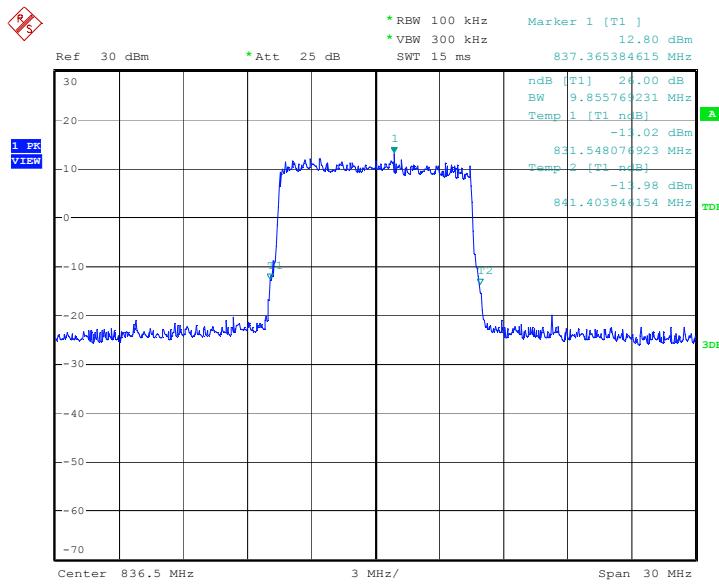
Date: 24.MAR.2016 07:19:04

LTE band 26, 5MHz Bandwidth,16QAM (-26dBc BW)


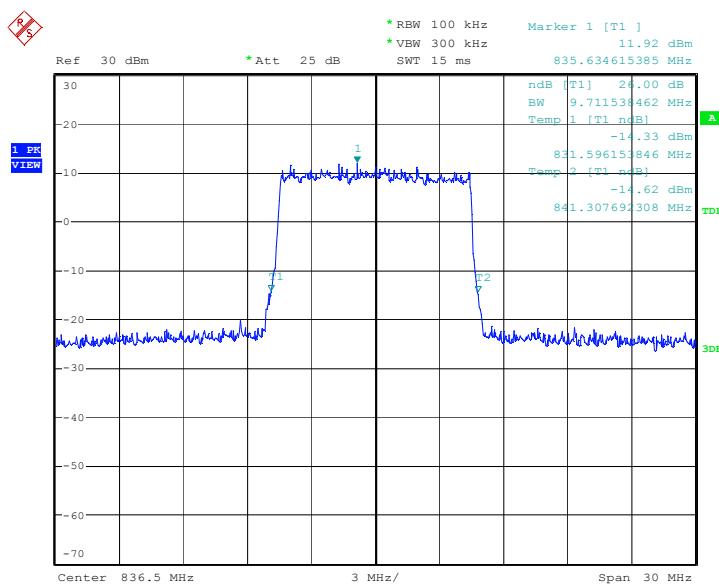
Date: 24.MAR.2016 07:19:21

LTE band 26, 10MHz (-26dBc)

| Frequency(MHz) | Occupied Bandwidth (-26dBc)(kHz) | |
|----------------|-----------------------------------|---------|
| 836.5 | QPSK | 16QAM |
| | 9855.77 | 9711.54 |

LTE band 26, 10MHz Bandwidth, QPSK (-26dBc BW)


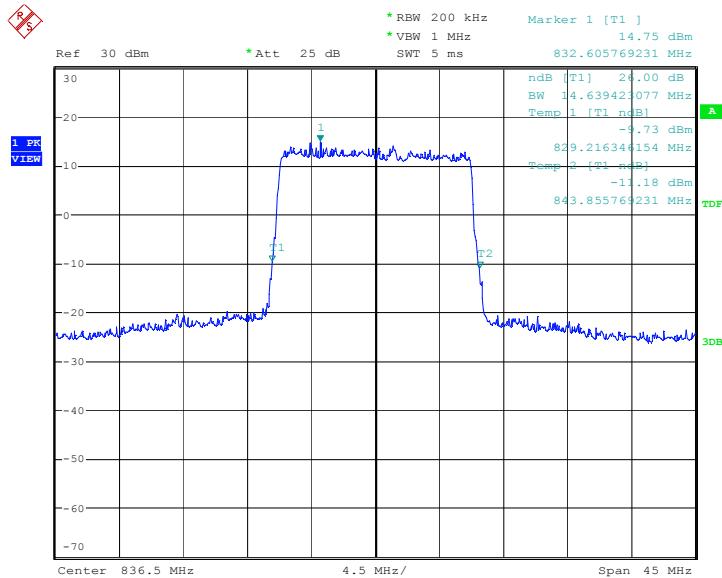
Date: 24.MAR.2016 07:24:48

LTE band 26, 10MHz Bandwidth, 16QAM (-26dBc BW)


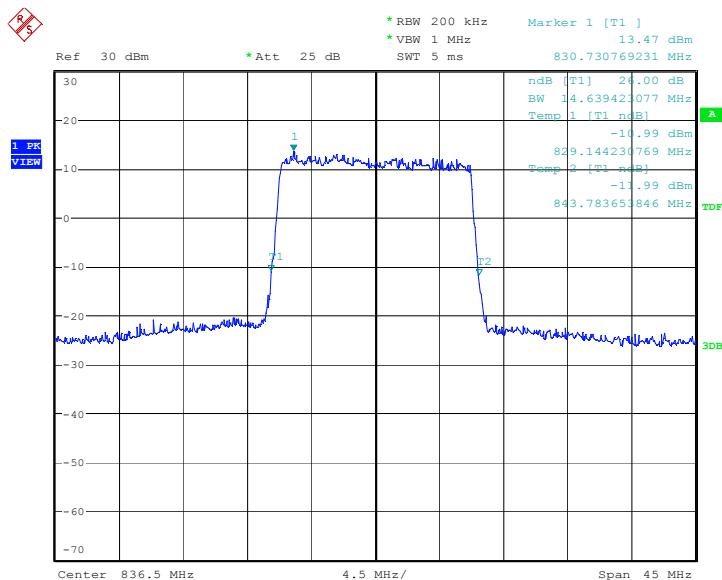
Date: 24.MAR.2016 07:25:05

LTE band 26, 15MHz (-26dBc)

| Frequency(MHz) | Occupied Bandwidth (-26dBc)(kHz) | |
|----------------|-----------------------------------|----------|
| 836.5 | QPSK | 16QAM |
| | 14639.42 | 14639.42 |

LTE band 26, 15MHz Bandwidth, QPSK (-26dBc BW)


Date: 24.MAR.2016 07:30:37

LTE band 26, 15MHz Bandwidth, 16QAM (-26dBc BW)


Date: 24.MAR.2016 07:30:55

A.6 BAND EDGE COMPLIANCE

Reference

FCC: CFR Part 22.917(b).

A.6.1 Measurement limit


On any frequency outside frequency band of the US Cellular/PCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least $43+10\log(P)$ dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm. According to KDB 971168 v02r01 6.0, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

A.6.2 Measurement result


Only worst case result is given below

LTE band 26

OBW: 1RB-low_offset

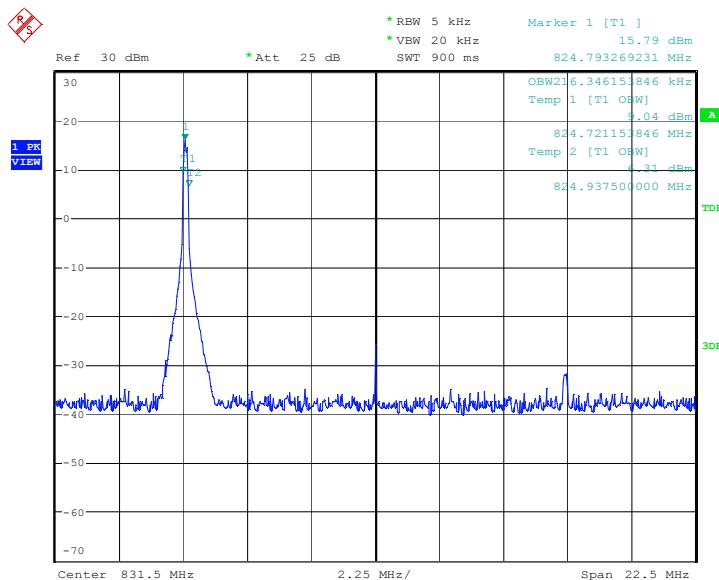


Date: 30.MAR.2016 03:38:15

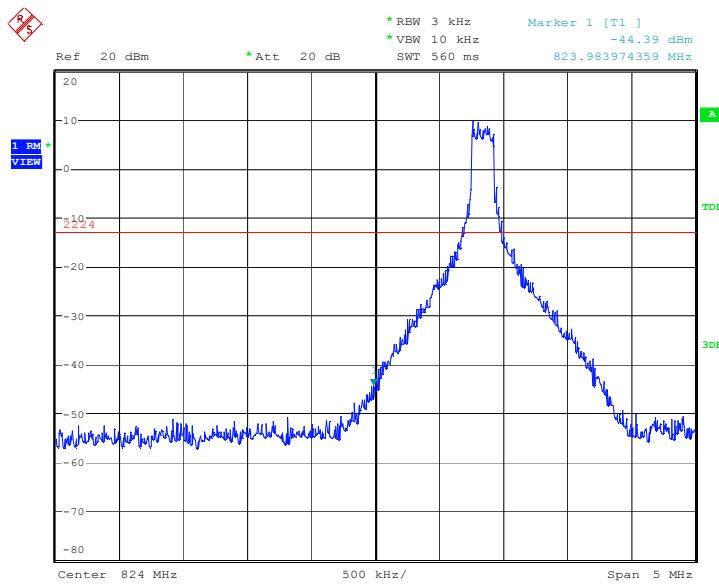LOW BAND EDGE BLOCK-1RB-low_offset


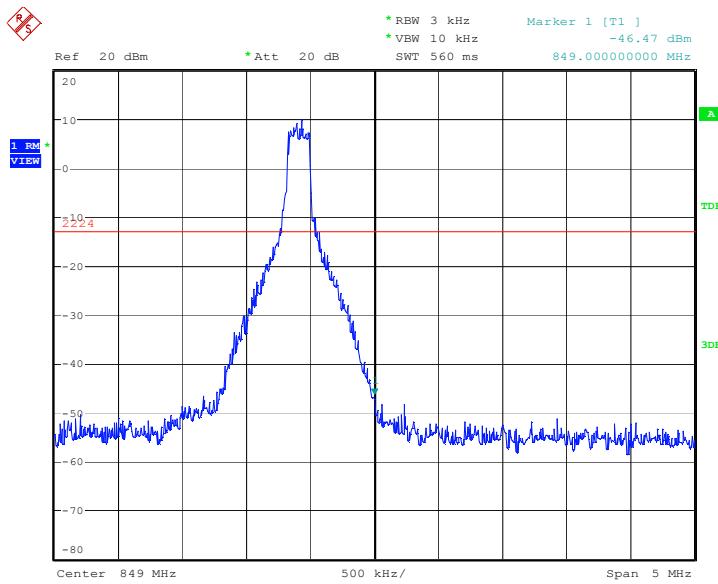
Date: 30.MAR.2016 03:39:01

OBW: 1RB-high_offset

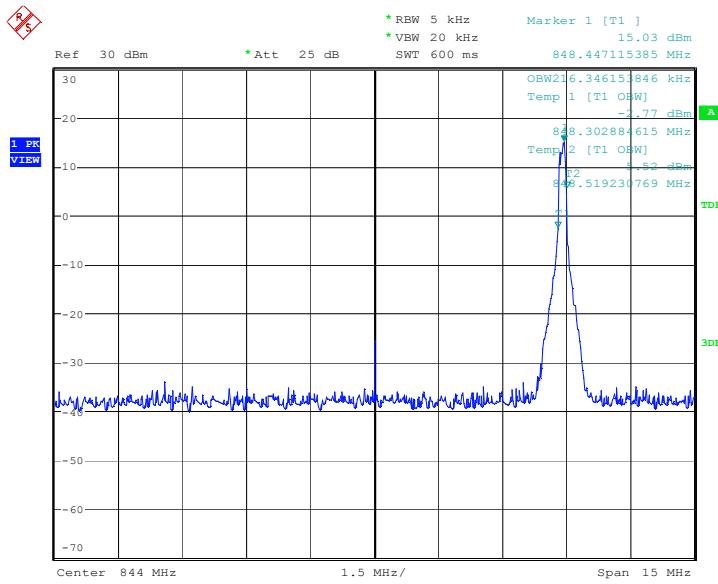


Date: 30.MAR.2016 03:31:04

HIGH BAND EDGE BLOCK-1RB-high_offset




Date: 30.MAR.2016 03:32:20

LOW BAND EDGE BLOCK-15MHz-100%RB

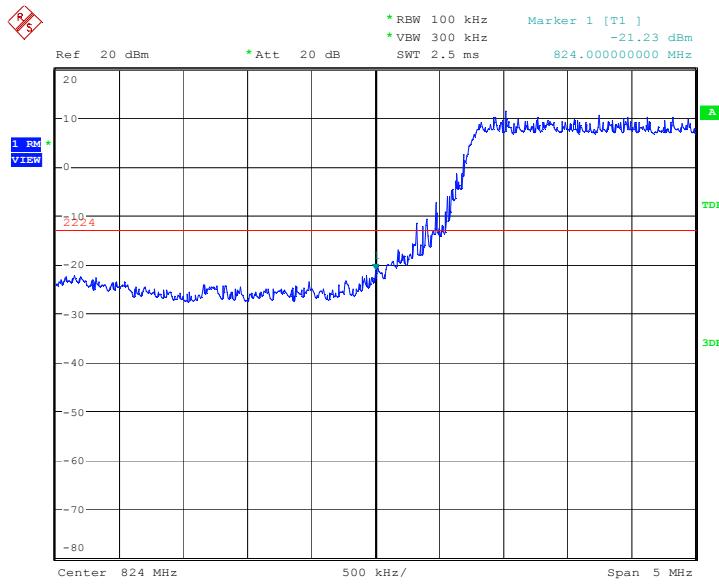

Date: 30.MAR.2016 06:25:17

HIGH BAND EDGE BLOCK-15MHz-100%RB

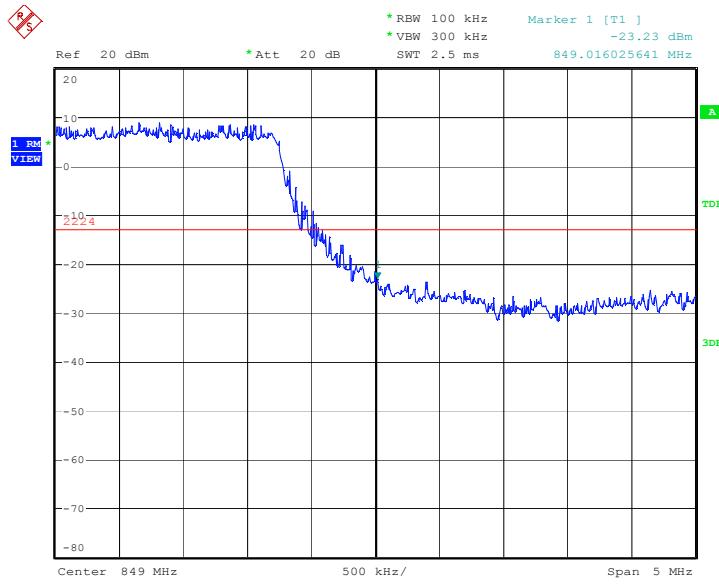

Date: 30.MAR.2016 06:28:05

A.7 CONDUCTED SPURIOUS EMISSION

Reference

FCC: CFR Part 2.1057, 22.917.

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the mobile station equipment tested, this equates to a frequency range of 13 MHz to 9 GHz, data taken from 10 MHz to 25 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

A. 7.2 Measurement Limit

Part 22.917 specifies that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


The specification that emissions shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

A. 7.3 Measurement result

Only worst case result is given below

LTE band 26: 30MHz – 10GHz

Spurious emission limit –13dBm.

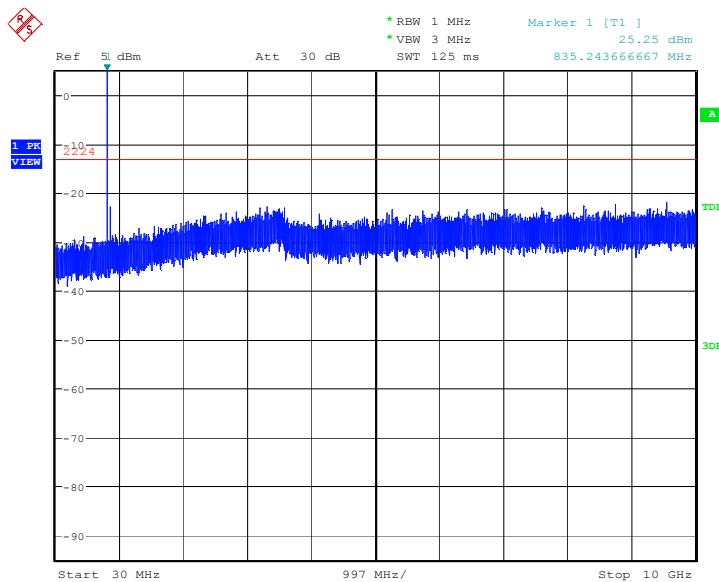

Date: 30.MAR.2016 01:10:09

*****END OF REPORT*****