



FCC PART 15E TEST REPORT No.24T04Z103042-016

for

TCL Communication Ltd.

GSM/UMTS/LTE mobile phone

T626K

FCC ID:2ACCJB232

with

Hardware Version: 05

Software Version: v3LA8

Issued Date: 2025-02-17

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

REPORT HISTORY

Report Number	Revision	Description	Issue Date
24T04Z103042-016	Rev.0	1st edition	2025-02-17

Note: the latest revision of the test report supersedes all previous version.

CONTENTS

1. TEST LABORATORY	5
1.1. INTRODUCTION & ACCREDITATION	5
1.2. TESTING LOCATION	5
1.3. TESTING ENVIRONMENT	5
1.4. PROJECT DATE	5
1.5. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
3.4. GENERAL DESCRIPTION	7
3.5. INTERPRETATION OF THE TEST ENVIRONMENT	8
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING	8
5. LABORATORY ENVIRONMENT	8
6. TEST RESULTS	9
6.1. SUMMARY OF TEST RESULTS	9
6.2. STATEMENTS	9
6.3. TEST CONDITIONS	9
7. TEST FACILITIES UTILIZED	10
8. MEASUREMENT UNCERTAINTY	11
8.1 TRANSMITTER OUTPUT POWER	11
8.2 PEAK POWER SPECTRAL DENSITY	11
8.3 26dB EMISSION BANDWIDTH	11
8.4 BAND EDGES COMPLIANCE	11
8.5 SPURIOUS EMISSIONS	11
8.6 RADIATED UNWANTED EMISSION	11
8.7 AC POWER-LINE CONDUCTED EMISSION	11
ANNEX A: DETAILED TEST RESULTS	12
A.1. MEASUREMENT METHOD	12
A.2. MAXIMUM OUTPUT POWER	13
A.2.1 ANTENNA GAIN	13

A.2.2 MAXIMUM OUTPUT POWER-CONDUCTED	13
A.3. PEAK POWER SPECTRAL DENSITY (CONDUCTED)	17
A.4. 26dB EMISSION BANDWIDTH (CONDUCTED)	19
A.5. RADIATED UNWANTED EMISSION	34
A.5.1 LIMITS	34
A.5.2 TEST SETUP	35
A.5.3 TEST PROCEDURES	36
A.5.4 CALCULATION	36
A.6. AC POWERLINE CONDUCTED EMISSION (150kHz- 30MHz)	58
A.6.1 SUMMARY	58
A.6.2 METHOD OF MEASUREMENT	58
A.6.3 TEST CONDITION	58
A.6.4 TEST SETUP	58
A.7. 99% OCCUPIED BANDWIDTH	62
A.8. ANTENNA REQUIREMENT	67
A.9. POWER CONTROL	67
ANNEX B: EUT PARAMETERS	67
ANNEX C: ACCREDITATION CERTIFICATE	68

1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

1.2. Testing Location

Conducted testing Location: CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China100191

Radiated testing Location: CTTL(BDA)

Address: No.18A, Kangding Street, Beijing Economic-Technology
Development Area, Beijing, P. R. China 100176

1.3. Testing Environment

Normal Temperature: 15-35°C


Relative Humidity: 20-75%

1.4. Project date

Testing Start Date: 2025-01-13


Testing End Date: 2025-02-17

1.5. Signature



Yao Xingyu

(Prepared this test report)



Zheng Wei

(Reviewed this test report)



Pang Shuai

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address/Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: China
Contact Person: Ting Wang
Contact Email: ting.wang.hz@tcl.com
Telephone: +86 752 2639091
Fax: 0086-755-36612000-81722

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address/Post: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
City: Hong Kong
Postal Code: /
Country: China
Contact Person: Ting Wang
Contact Email: ting.wang.hz@tcl.com
Telephone: +86 752 2639091
Fax: 0086-755-36612000-81722

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM/UMTS/LTE mobile phone
Model name	T626K
FCC ID	2ACCJB232
WLAN Frequency Band	ISM Bands: -5150MHz~5250MHz -5250MHz~5350MHz -5470MHz~5725MHz
Type of modulation	OFDM
Antenna	Integral Antenna
Normal Voltage	3.91V
Extreme High Voltage	4.4V
Extreme Low Voltage	3.6V

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version	Date of receipt
UT11a	355077160000088/ 355077160000195	05	v3LA8	2025-01-13
UT25a	3550771600000971/ 355077160001045	05	v3LA8	2025-01-17
UT26a	3550771600000989/ 355077160001052	05	v3LA8	2025-01-17

*EUT ID: is used to identify the test sample in the lab internally.

UT11a is used for Conduction test, UT25a and UT26a is used for Radiation test.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	Manufacturer
AE1	Battery1	TLp050B9	Guangdong Fenghua New Energy Co.,Ltd.
AE2	Battery2	TLp050B7	Dongguan Veken Battery CO.,LTD.
AE3	Charger1	QC16US-N	ShenZhenBaiJunDaElectronicsCO.,LTD.
AE4	USB Cable1	01.07.11.00162	Guangdong Wivtak Technology Co., Ltd.

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment under Test (EUT) is a model of GSM/UMTS/LTE mobile phone with integrated antenna and inbuilt battery.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

3.5. Interpretation of the Test Environment

For the test methods, the test environment uncertainty figures correspond to an expansion factor $k=2$.

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

FCC Part15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices	2021
ANSI C63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
UNII: KDB 789033 D02	General U-NII Test Procedures New Rules v02r01	2017-12

Note:UNII: KDB 789033 D02 is not in the scope of ISO/IEC 17025 accreditation by A2LA.

5. Laboratory Environment

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

6. Test Results

6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15E	Sub-clause of IC	Verdict
Maximum Output Power	15.407	/	P
Peak Power Spectral Density	15.407	/	P
26dB Emission Bandwidth	15.403	/	P
Radiated Unwanted Emission	15.407, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P
99% Occupied bandwidth	/	/	P
Transmit Power Control	15.407	/	NA

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NM	Not measured, The test was not measured by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

6.2. Statements

CTTL has evaluated the test cases as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.

This report only deals with the WLAN function among the features described in section 3.

6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.91V
Humidity	44%

7. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2025-08-11
2	Vector Signal Analyzer	FSW67	104051	Rohde & Schwarz	1 year	2025-04-30
3	Test Receiver	ESCI	100766	R&S	1 year	2025-04-18
4	LISN	ENV216	101459	R&S	1 year	2025-05-16
5	Attenuator	10dB/2W	/	Rosenberger	/	/
6	Shielding Room	S81	/	ETS-Lindgren	/	/

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESU26	100376	R&S	1 year	2025-06-06
2	EMI Antenna	VULB 9163	01177	SCHWARZBECK	1 year	2025-11-19
3	EMI Antenna	3117	00119021	ETS-Lindgren	1 year	2025-09-18
4	EMI Antenna	FSV40	101047	R&S	1 year	2025-07-18
5	EMI Antenna	LB-180400 -25-C-KF	211008400 0006	A-INFO	1 year	2025-05-15

8. Measurement Uncertainty

8.1 Transmitter Output Power

Measurement Uncertainty: 0.387dB,k=1.96

8.2 Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

8.3 26dB Emission Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

8.4 Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

8.5 Spurious Emissions

Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

8.6 Radiated Unwanted Emission

Frequency Range	Uncertainty(dB) (k=2)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	5.73
$1\text{GHz} \leq f \leq 18\text{GHz}$	5.58
$18\text{GHz} \leq f \leq 40\text{GHz}$	3.37

8.7 AC Power-line Conducted Emission


Measurement Uncertainty : 3.10dB,k=2

ANNEX A: Detailed Test Results

A.1. Measurement Method

A.1.1. Conducted Measurements

- 1). Connect the EUT to the test system correctly.
- 2). Set the EUT to the required work mode.
- 3). Set the EUT to the required channel.
- 4). Set the spectrum analyzer to start measurement.
- 5). Record the values. Vector Signal Analyzer

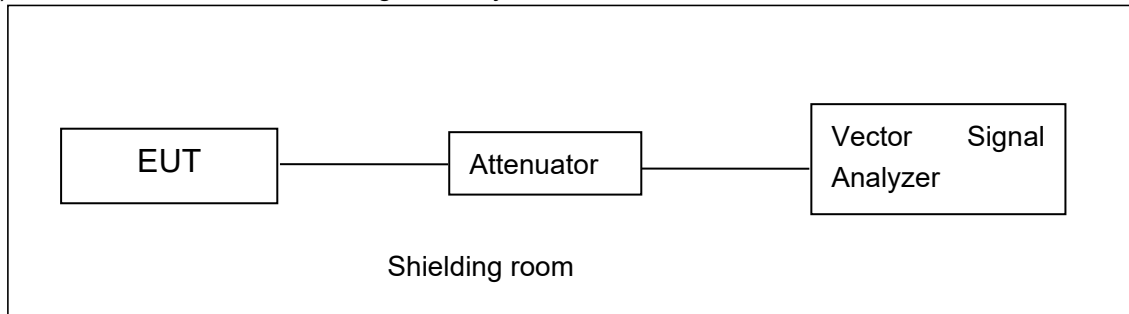

A.1.2. Radiated Emission Measurements

Measurement performed according to Clause 6.4, 6.5, 6.6 in ANSI C63.10-2013 and II.G.4, II.G.5, II.G.6 in KDB 789033.

The radiated emission test is performed in semi-anechoic chamber. The EUT was placed on a non-conductive table with 80cm above the ground plane for measurement below 1GHz and 1.5m above the ground plane for measurement above 1GHz. The measurement antenna was placed at a distance of 3 meters from the EUT. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept. During the test, the turntable is rotated from 0° to 360° and the measurement antenna is moved from 1m to 4m to get the maximization result. The maximization process was repeated with the EUT positioned in each of its three orthogonal orientations

A.2. Maximum output Power

Measurement Limit and Method:

Standard	Frequency (MHz)	Limit (dBm)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	24dBm
	5250MHz~5350MHz	24dBm or 11+10logB
	5470MHz~5725MHz	24dBm or 11+10logB

Limit use the less value, and B is the 26dB bandwidth.

The measurement method SA-2 is made according to KDB 789033

A.2.1 Antenna Gain

Antenna gain is -7dBi and the value is supplied by the applicant or manufacturer.

A.2.2 Maximum output Power-Conducted

EUT ID: UT11a

Measurement Results:

802.11a mode

Mode	Frequency	Test Result (dBm)							
		Data Rate (Mbps)							
		6	9	12	18	24	36	48	54
802.11a	5180MHz	17.46	/	/	/	/	/	/	/
	5200MHz	17.34	/	/	/	/	/	/	/
	5240MHz	17.57	/	/	/	/	/	/	/
	5260MHz	17.47	/	/	/	/	/	/	/
	5280MHz	17.56	/	/	/	/	/	/	/
	5320MHz	17.52	/	/	/	/	/	/	/
	5500MHz	17.17	/	/	/	/	/	/	/
	5580MHz	17.25	/	/	/	/	/	/	/
	5700MHz	17.05	/	/	/	/	/	/	/
	5720MHz	17.16	/	/	/	/	/	/	/

The data rate 6Mbps is selected as worst condition, and the following cases are performed with this condition.

802.11n-HT20 mode

Mode	Frequency	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT20)	5180MHz	16.39	/	/	/	/	/	/	/
	5200MHz	16.42	/	/	/	/	/	/	/
	5240MHz	16.58	/	/	/	/	/	/	/
	5260MHz	16.54	/	/	/	/	/	/	/
	5280MHz	16.59	/	/	/	/	/	/	/
	5320MHz	16.56	/	/	/	/	/	/	/
	5500MHz	16.68	/	/	/	/	/	/	/

	5580MHz	16.57	/	/	/	/	/	/	/
	5700MHz	16.51	/	/	/	/	/	/	/
	5720MHz	16.6	/	/	/	/	/	/	/

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-VHT20 mode

Mode	Frequency	Test Result (dBm)								
		Data Rate								
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8
802.11ac (VHT20)	5180MHz	15.87	/	/	/	/	/	/	/	/
	5200MHz	16.01	/	/	/	/	/	/	/	/
	5240MHz	15.99	/	/	/	/	/	/	/	/
	5260MHz	16.10	/	/	/	/	/	/	/	/
	5280MHz	16.09	/	/	/	/	/	/	/	/
	5320MHz	16.02	/	/	/	/	/	/	/	/
	5500MHz	16.23	/	/	/	/	/	/	/	/
	5580MHz	16.14	/	/	/	/	/	/	/	/
	5700MHz	16.05	/	/	/	/	/	/	/	/
	5720MHz	16.16	/	/	/	/	/	/	/	/

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11n-HT40 mode

Mode	Frequency	Test Result (dBm)							
		Data Rate							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n (HT40)	5190MHz	15.59	/	/	/	/	/	/	/
	5230MHz	15.66	/	/	/	/	/	/	/
	5270MHz	15.69	/	/	/	/	/	/	/
	5310MHz	14.80	/	/	/	/	/	/	/
	5510MHz	13.93	/	/	/	/	/	/	/
	5550MHz	15.81	/	/	/	/	/	/	/
	5670MHz	15.60	/	/	/	/	/	/	/
	5710MHz	15.36	/	/	/	/	/	/	/

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-VHT40 mode

Mode	Frequency	Test Result (dBm)									
		Data Rate									
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
802.11ac (VHT40)	5190MHz	15.73	/	/	/	/	/	/	/	/	/
	5230MHz	15.82	/	/	/	/	/	/	/	/	/
	5270MHz	15.88	/	/	/	/	/	/	/	/	/
	5310MHz	15.80	/	/	/	/	/	/	/	/	/
	5510MHz	15.09	/	/	/	/	/	/	/	/	/
	5550MHz	15.95	/	/	/	/	/	/	/	/	/
	5670MHz	15.81	/	/	/	/	/	/	/	/	/
	5710MHz	15.62	/	/	/	/	/	/	/	/	/


The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

802.11ac-VHT80 mode

Mode	Frequency	Test Result (dBm)									
		Data Rate									
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	MCS8	MCS9
802.11ac (VHT80)	5210MHz	15.82	/	/	/	/	/	/	/	/	/
	5290MHz	15.08	/	/	/	/	/	/	/	/	/
	5530MHz	13.11	/	/	/	/	/	/	/	/	/
	5610MHz	16.02	/	/	/	/	/	/	/	/	/
	5690MHz	15.78	/	/	/	/	/	/	/	/	/

The data rate MCS0 is selected as worst condition, and the following cases are performed with this condition.

The duty cycle of all mode are 100%

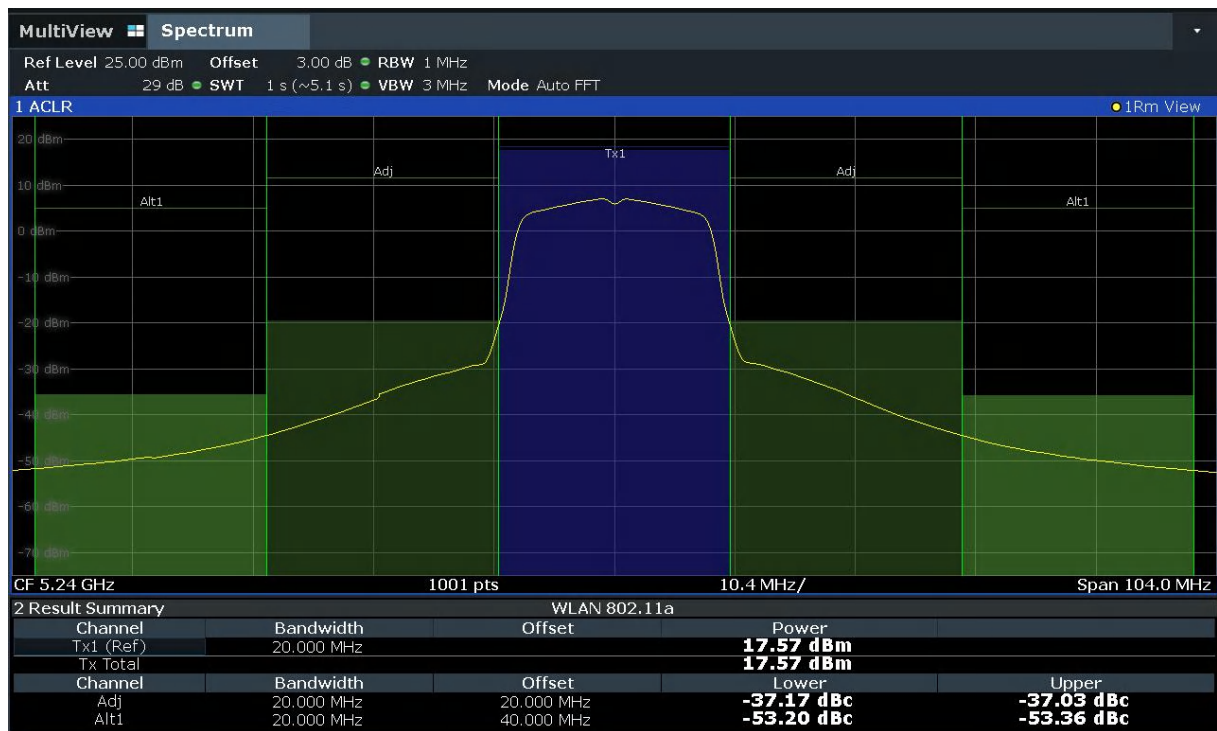

Maximum output Power: 11a CH48

Conclusion: PASS

A.3. Peak Power Spectral Density (conducted)

Measurement Limit:

Standard	Frequency (MHz)	Limit (dBm/MHz)
FCC CRF Part 15.407(a)	5150MHz~5250MHz	11
	5250MHz~5350MHz	11
	5470MHz~5725MHz	11


The output power measurement method Section F is made according to KDB 789033

EUT ID: UT11a

Measurement Results:

TestMode	Frequency[MHz]	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	5180	7.25	≤11.00	PASS
	5200	7.48	≤11.00	PASS
	5240	7.59	≤11.00	PASS
	5260	7.16	≤11.00	PASS
	5280	7.09	≤11.00	PASS
	5320	7.15	≤11.00	PASS
	5500	7.59	≤11.00	PASS
	5580	7.05	≤11.00	PASS
	5700	7.80	≤11.00	PASS
	5720	7.45	≤11.00	PASS
11N20SISO	5180	6.23	≤11.00	PASS
	5200	6.61	≤11.00	PASS
	5240	6.89	≤11.00	PASS
	5260	6.05	≤11.00	PASS
	5280	6.38	≤11.00	PASS
	5320	6.06	≤11.00	PASS
	5500	6.54	≤11.00	PASS
	5580	6.16	≤11.00	PASS
	5700	6.63	≤11.00	PASS
	5720	6.47	≤11.00	PASS
11AC40SISO	5190	2.94	≤11.00	PASS
	5230	2.85	≤11.00	PASS
	5270	2.38	≤11.00	PASS
	5310	2.21	≤11.00	PASS
	5510	2.75	≤11.00	PASS
	5550	2.58	≤11.00	PASS
	5670	2.44	≤11.00	PASS
	5710	2.65	≤11.00	PASS
11AC80SISO	5210	-0.41	≤11.00	PASS
	5290	-1.41	≤11.00	PASS
	5530	-3.50	≤11.00	PASS

	5610	-0.58	≤ 11.00	PASS
	5690	-0.34	≤ 11.00	PASS

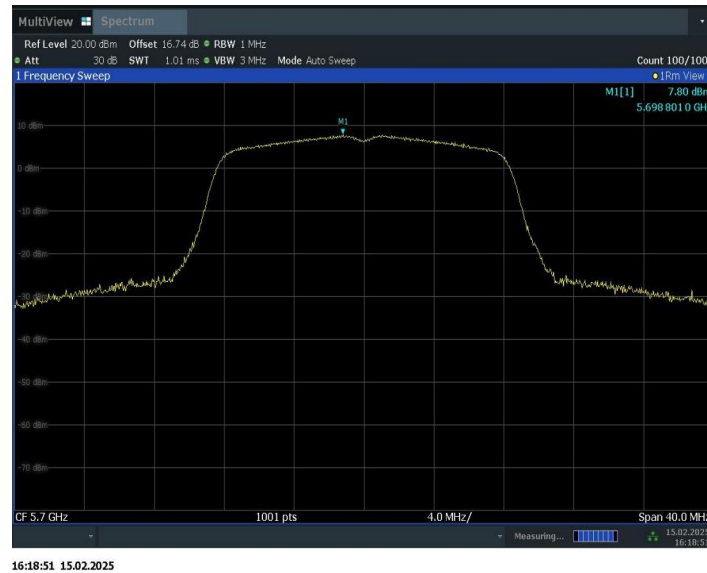

Peak Power Spectral Density:11a CH140

Conclusion: PASS

A.4. 26dB Emission Bandwidth (conducted)

Measurement Limit:

Standard	Limit (kHz)
FCC 47 CFR Part 15.403 (i)	/

The measurement is made according to KDB 789033

Measurement Uncertainty:

Measurement Uncertainty	60.80Hz
-------------------------	---------


EUT ID: UT11a

Measurement Result:

TestMode	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	5180	24.88	5168.56	5193.44	---	---
	5200	24.64	5187.36	5212.00	---	---
	5240	25.00	5227.32	5252.32	---	---
	5260	20.72	5250.00	5270.72	---	---
	5280	22.04	5268.96	5291.00	---	---
	5320	21.20	5309.76	5330.96	---	---
	5500	23.92	5487.68	5511.60	---	---
	5580	24.16	5568.08	5592.24	---	---
	5700	22.32	5688.88	5711.20	---	---
	5720	24.60	5707.64	5732.24	---	---
11N20SISO	5180	21.68	5169.84	5191.52	---	---
	5200	21.04	5189.48	5210.52	---	---
	5240	24.76	5228.36	5253.12	---	---
	5260	20.44	5249.84	5270.28	---	---
	5280	22.76	5267.44	5290.20	---	---
	5320	20.52	5309.76	5330.28	---	---
	5500	21.68	5489.88	5511.56	---	---
	5580	23.72	5567.68	5591.40	---	---
	5700	22.56	5689.16	5711.72	---	---
	5720	20.80	5709.48	5730.28	---	---
11AC40SISO	5190	41.20	5169.68	5210.88	---	---
	5230	40.80	5209.52	5250.32	---	---
	5270	40.72	5249.60	5290.32	---	---
	5310	40.80	5289.68	5330.48	---	---
	5510	41.76	5488.80	5530.56	---	---
	5550	40.88	5529.60	5570.48	---	---
	5670	47.76	5642.96	5690.72	---	---
	5710	46.00	5689.28	5735.28	---	---
11AC80SISO	5210	84.96	5165.68	5250.64	---	---

	5290	82.24	5249.20	5331.44	---	---
	5530	81.60	5489.04	5570.64	---	---
	5610	90.08	5560.72	5650.80	---	---
	5690	88.48	5642.32	5730.80	---	---

Test graphs as below:

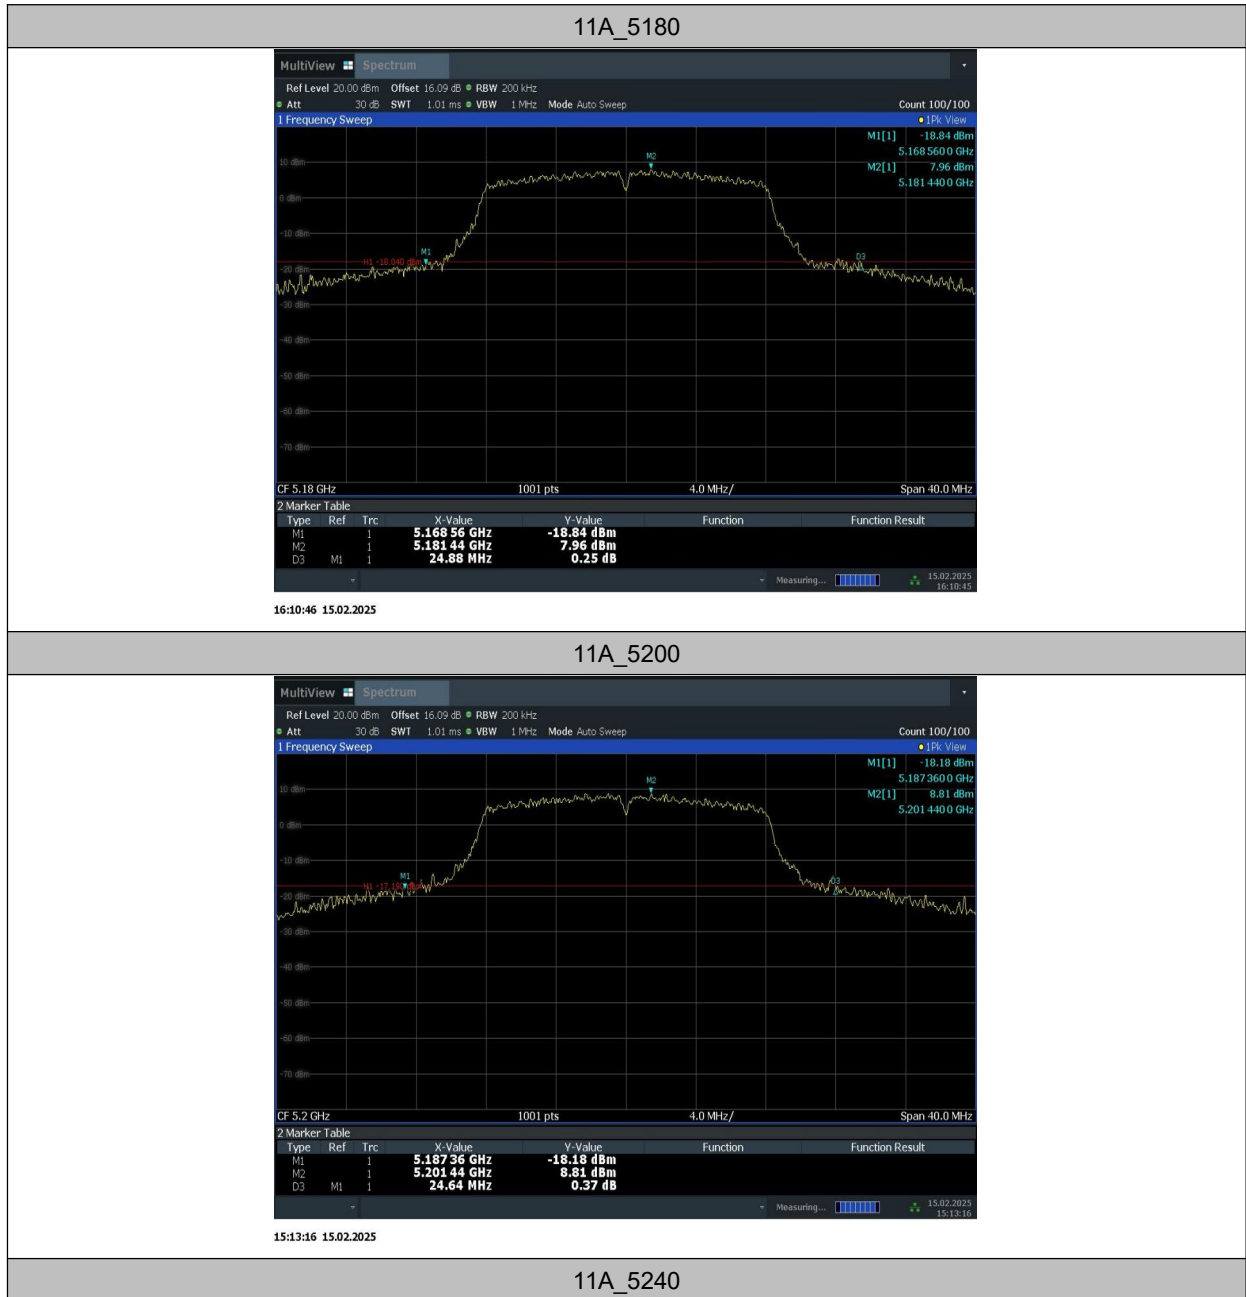



16:14:28 15.02.2025

11A_5260



15:15:34 15.02.2025

11A_5280



15:16:45 15.02.2025

11A_5320



15:17:39 15.02.2025

11A_5500



16:15:34 15.02.2025

11A_5580



16:16:54 15.02.2025

11A_5700



16:18:03 15.02.2025

11A_5720




16:20:31 15.02.2025



15:55:50 15.02.2025

11N20SISO_5260

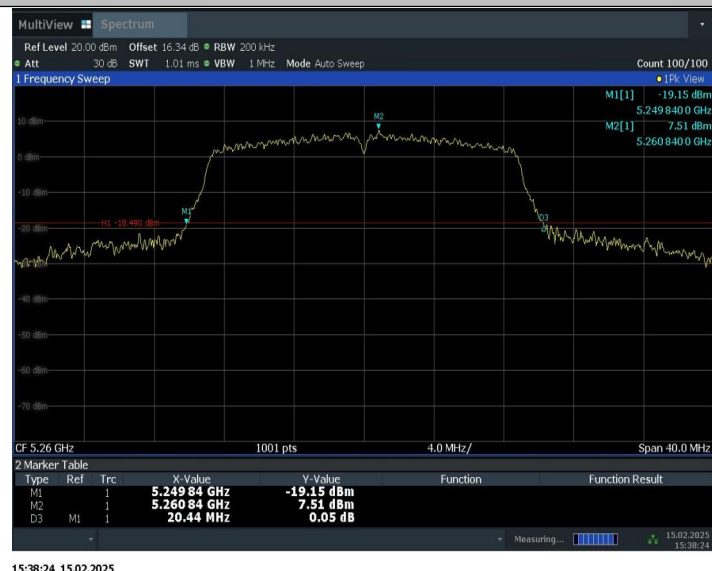

15:38:24 15.02.2025

11N20SISO_5280



15:39:40 15.02.2025

11N20SISO_5320



15:40:54 15.02.2025

11N20SISO_5500



15:51:58 15.02.2025

11N20SISO_5580



15:43:24 15.02.2025

11N20SISO_5700



15:44:34 15.02.2025

11N20SISO_5720



15:45:59 15.02.2025

11AC40SISO_5190



16:34:28 15.02.2025

11AC40SISO_5230



16:36:38 15.02.2025

11AC40SISO_5270



16:24:14 15.02.2025

11AC40SISO_5310



16:25:22 15.02.2025

11AC40SISO_5510



16:37:17 15.02.2025

11AC40SISO_5550



16:27:41 15.02.2025

11AC40SISO_5670



16:28:48 15.02.2025

11AC40SISO_5710




16:30:04 15.02.2025

11AC80SISO_5210



16:51:04 15.02.2025

11AC80SISO_5290

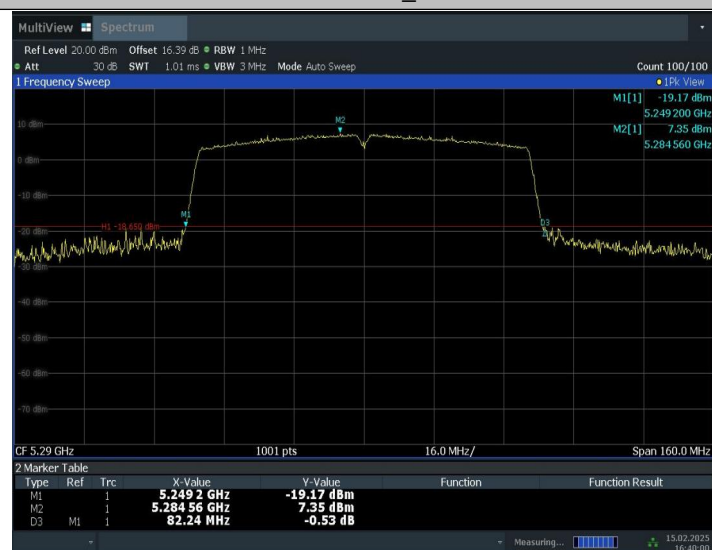

16:40:01 15.02.2025

11AC80SISO_5530



16:45:04 15.02.2025

11AC80SISO_5610



16:46:15 15.02.2025

11AC80SISO_5690



Conclusion: PASS

A.5. Radiated Unwanted Emission

A.5.1 Limits

Unwanted Emissions in the unrestricted bands shall not exceed the limits that shown in 15.407:

Standard	Limit
FCC 47 CFR Part 15.407	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength (μ V/m)	Field strength (dBuV/m)	Measurement distance (m)
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Note: When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor (as defined in KDB 789033 II.G.2.d).

A.5.2 Test setup

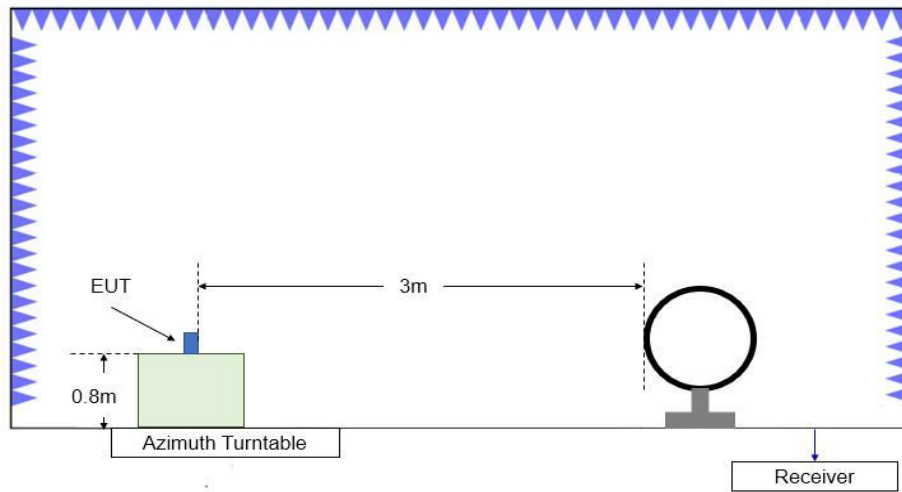


Figure A.5.1. Test Site Diagram (9kHz-30MHz)

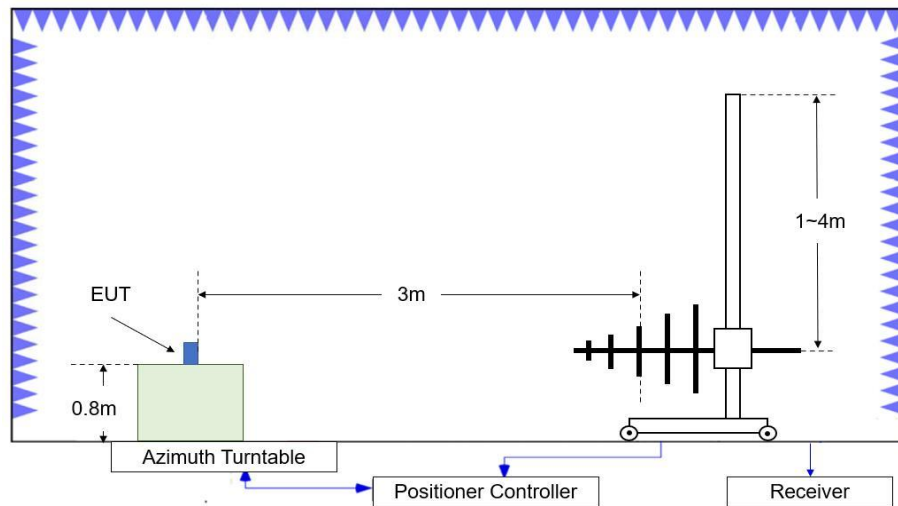


Figure A.5.2. Test Site Diagram (30MHz-1GHz)

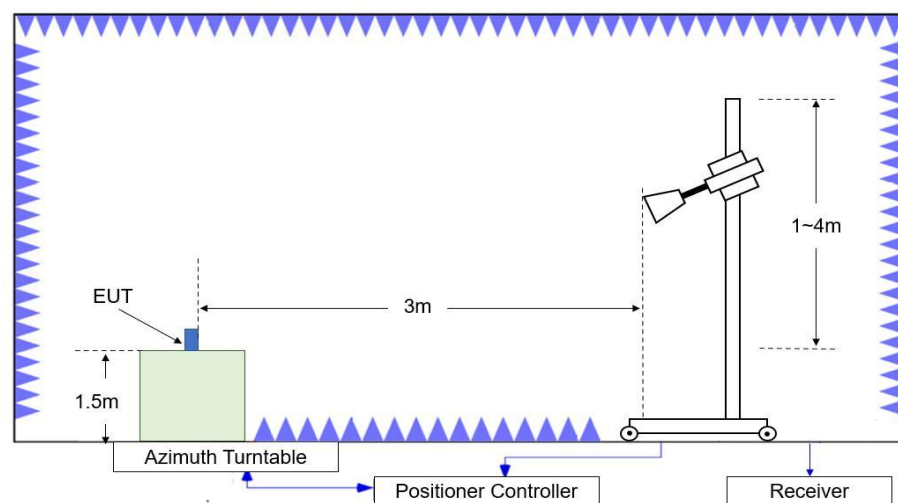


Figure A.5.3. Test Site Diagram (1GHz-40GHz)

A.5.3 Test Procedures

Radiated unwanted emissions from the EUT were measured according to ANSI C63.10 and KDB 789033 D02 v02r01.

Test setting

Frequency of emission (MHz)	RBW/VBW
30-1000	100kHz/300kHz
1000-4000	1MHz/3MHz
4000-18000	1MHz/3MHz
18000-26500	1MHz/3MHz
26500-40000	1MHz/3MHz

A.5.4 Calculation

1. The measurement results reported below is calculated by:

Measurement Results (dB μ V/m) = $P_{\text{measurement}}$ (dB μ V) + Cable Loss(dB) + Antenna Factor (dB/m)

Where: $P_{\text{measurement}}$ is the field strength recorded from the instrument

2. Convert the resultant EIRP level to an equivalent electric field strength using the following relationship:

$$E = \text{EIRP} - 20 \log(D) + 104.77$$

Where:

E is the field strength in dB μ V/m

D is the measurement distance in meters

EIRP is the equivalent isotropically radiated power in dBm

Test note

1. The EUT is operating at its maximum duty cycle and its maximum power control level.
2. Investigation has been done on all modes and modulations/data rates. Only the radiated emissions of the configuration that produced the worst case emissions are reported in this section.
3. Spurious emissions for all channels were investigated and almost the same below 1GHz. According to FCC 47 CFR §15.31, emission levels are not report much lower than the limit by over 20dB
4. The test is carried out on both vertical and horizontal polarization and only maximization result of both polarizations is kept.
5. EUT in each of three orthogonal axis emissions had been tested out only the worst case (axis data) recorded in the report.
6. Measurement frequencies were performed from 9 kHz to the 10th harmonic of highest fundamental frequency or 40GHz, whichever is lower.
7. No spurious emissions were detected within 20dB of the limit below 30MHz. OFS and semi-chamber comparison testing had been performed and the result came out very similar. (KDB 414788)

Measurement Results:
Average Results:
802.11a
Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5149.750	46.90	-23.16	34.00	36.06	54.00	7.10	V
5149.900	46.94	-23.16	34.00	36.10	54.00	7.06	V
10661.200	34.60	-29.27	37.66	26.21	54.00	19.40	V
15540.000	38.08	-24.38	40.40	22.06	54.00	15.92	H
17882.400	39.62	-20.96	40.52	20.06	54.00	14.38	H
17948.000	39.77	-20.95	40.55	20.16	54.00	14.23	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.100	45.83	-23.09	34.10	34.82	54.00	8.17	V
5350.250	45.80	-23.09	34.10	34.79	54.00	8.20	V
10640.000	34.70	-29.12	37.64	26.18	54.00	19.30	V
15960.000	38.44	-23.44	40.84	21.04	54.00	15.56	V
17887.200	40.24	-20.97	40.51	20.71	54.00	13.76	V
17952.000	40.35	-20.85	40.55	20.65	54.00	13.65	V

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5459.500	45.69	-22.48	34.46	33.71	54.00	8.31	V
5458.950	45.67	-22.49	34.46	33.69	54.00	8.33	V
11000.000	35.29	-28.94	37.90	26.33	54.00	18.71	H
16090.000	38.23	-23.59	41.07	20.75	54.00	15.77	V
17886.400	39.95	-20.97	40.51	20.41	54.00	14.05	H
17942.400	39.92	-21.29	40.54	20.66	54.00	14.08	H

802.11n-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5148.750	46.09	-23.15	34.00	35.23	54.00	7.91	V
5149.450	46.12	-23.16	34.00	35.27	54.00	7.88	V
10694.400	35.07	-28.84	37.69	26.21	54.00	18.93	V
15540.000	38.21	-24.38	40.40	22.18	54.00	15.79	V
17852.400	40.14	-21.25	40.55	20.84	54.00	13.86	H
17948.400	40.44	-20.92	40.55	20.82	54.00	13.56	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.100	47.09	-23.09	34.10	36.08	54.00	6.91	V
5350.400	47.01	-23.08	34.10	35.99	54.00	6.99	V
10640.000	34.82	-29.12	37.64	26.30	54.00	19.18	H
15960.000	38.72	-23.44	40.84	21.32	54.00	15.28	V
17892.800	40.27	-21.03	40.51	20.80	54.00	13.73	H
17949.600	40.65	-20.85	40.55	20.94	54.00	13.35	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5458.000	46.51	-22.50	34.47	34.54	54.00	7.49	V
5459.600	46.64	-22.48	34.46	34.66	54.00	7.36	V
11000.000	35.57	-28.94	37.90	26.61	54.00	18.43	V
16155.600	39.04	-22.90	40.99	20.96	54.00	14.96	H
17891.600	40.58	-21.01	40.51	21.08	54.00	13.42	V
17954.400	40.66	-20.88	40.55	20.99	54.00	13.34	V

802.11n-HT40
Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5148.750	46.87	-23.15	34.00	36.02	54.00	7.13	V
5149.850	46.91	-23.16	34.00	36.07	54.00	7.09	V
10675.600	34.78	-29.26	37.68	26.37	54.00	19.22	V
15570.000	38.14	-24.28	40.40	22.02	54.00	15.86	H
17888.400	40.60	-20.98	40.51	21.06	54.00	13.40	H
17953.600	40.53	-20.87	40.55	20.85	54.00	13.47	V

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.250	48.74	-23.09	34.10	37.72	54.00	5.26	V
5350.350	48.73	-23.08	34.10	37.71	54.00	5.27	V
10620.000	34.29	-29.25	37.62	25.91	54.00	19.71	V
15930.000	38.68	-23.86	40.87	21.67	54.00	15.32	V
17886.400	40.53	-20.97	40.51	20.99	54.00	13.47	V
17950.400	40.66	-20.83	40.55	20.94	54.00	13.34	V

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5458.800	45.95	-22.49	34.46	33.98	54.00	8.05	V
5459.700	46.00	-22.48	34.46	34.02	54.00	8.00	V
11020.000	35.11	-28.91	37.88	26.14	54.00	18.89	H
16004.400	39.64	-23.43	40.81	22.26	54.00	14.36	V
17889.200	40.44	-20.98	40.51	20.91	54.00	13.56	H
17948.800	40.46	-20.90	40.55	20.80	54.00	13.54	H

802.11ac-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5148.300	45.38	-23.14	34.00	34.53	54.00	8.62	V
5150.000	45.70	-23.16	34.00	34.86	54.00	8.30	V
10684.400	34.84	-29.18	37.68	26.34	54.00	19.16	H
15540.000	38.48	-24.38	40.40	22.46	54.00	15.52	V
17890.400	40.30	-20.99	40.51	20.78	54.00	13.70	V
17949.200	40.38	-20.87	40.55	20.70	54.00	13.62	H

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.000	45.84	-23.09	34.10	34.83	54.00	8.16	V
5351.850	45.58	-23.05	34.11	34.52	54.00	8.42	V
10640.000	34.70	-29.12	37.64	26.18	54.00	19.30	H
15960.000	39.28	-23.44	40.84	21.88	54.00	14.72	V
17886.400	40.49	-20.97	40.51	20.94	54.00	13.51	V
17952.800	40.47	-20.86	40.55	20.78	54.00	13.53	H

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5457.000	45.52	-22.52	34.47	33.56	54.00	8.48	V
5460.000	45.65	-22.48	34.46	33.67	54.00	8.35	V
11000.000	35.57	-28.94	37.90	26.62	54.00	18.43	H
16003.600	39.66	-23.42	40.81	22.27	54.00	14.34	V
17889.600	40.39	-20.98	40.51	20.86	54.00	13.61	V
17950.400	40.54	-20.83	40.55	20.82	54.00	13.46	H

802.11ac-HT40
Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5146.950	45.44	-23.13	34.00	34.57	54.00	8.56	V
5149.900	45.85	-23.16	34.00	35.01	54.00	8.15	V
10781.600	35.34	-28.70	37.78	26.25	54.00	18.66	V
15570.000	38.51	-24.28	40.40	22.40	54.00	15.49	V
17890.000	40.62	-20.98	40.51	21.09	54.00	13.38	H
17948.800	40.72	-20.90	40.55	21.07	54.00	13.28	H

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.000	50.43	-23.09	34.10	39.42	54.00	3.57	V
5352.500	49.54	-23.03	34.11	38.46	54.00	4.46	V
10620.000	34.52	-29.25	37.62	26.14	54.00	19.48	H
15930.000	39.24	-23.86	40.87	22.23	54.00	14.76	V
17889.600	40.70	-20.98	40.51	21.17	54.00	13.30	H
17950.800	40.61	-20.83	40.55	20.89	54.00	13.39	V

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5458.600	46.26	-22.50	34.47	34.29	54.00	7.74	V
5460.000	46.55	-22.48	34.46	34.57	54.00	7.45	V
11020.000	35.36	-28.91	37.88	26.39	54.00	18.64	H
15989.600	39.77	-23.33	40.81	22.28	54.00	14.23	H
17888.000	40.65	-20.98	40.51	21.11	54.00	13.35	H
17950.400	40.81	-20.83	40.55	21.09	54.00	13.19	V

802.11ac-HT80
Channel 42

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5130.200	47.29	-22.64	34.00	35.93	54.00	6.71	V
5133.350	47.52	-22.77	34.00	36.29	54.00	6.48	V
10784.800	35.47	-28.80	37.78	26.48	54.00	18.53	H
15630.000	38.60	-24.00	40.46	22.14	54.00	15.40	H
17885.600	40.48	-20.97	40.51	20.94	54.00	13.52	V
17949.200	40.55	-20.87	40.55	20.87	54.00	13.45	V

Channel 58

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5354.800	50.62	-22.97	34.12	39.47	54.00	3.38	V
5361.700	50.96	-22.79	34.15	39.60	54.00	3.04	V
10984.000	35.80	-28.92	37.87	26.85	54.00	18.20	V
15870.000	39.79	-23.11	40.87	22.03	54.00	14.21	V
17892.000	40.52	-21.02	40.51	21.03	54.00	13.48	H
17947.000	40.66	-21.01	40.55	21.12	54.00	13.34	V

Channel 106

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5454.850	46.75	-22.54	34.48	34.82	54.00	7.25	V
5458.450	46.95	-22.50	34.47	34.99	54.00	7.05	V
11060.000	35.48	-28.82	37.84	26.47	54.00	18.52	H
15988.800	40.01	-23.33	40.81	22.53	54.00	13.99	H
17887.600	40.45	-20.98	40.51	20.91	54.00	13.55	H
17949.200	40.57	-20.87	40.55	20.89	54.00	13.43	H

PEAK Results:
802.11a
Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5149.345	68.56	-23.15	34.00	57.72	74.00	5.44	V
5149.467	69.76	-23.16	34.00	58.92	74.00	4.24	V
10365.500	47.12	-29.20	37.43	38.88	68.20	21.08	H
15539.850	50.35	-24.38	40.40	34.33	74.00	23.65	H
17003.400	53.14	-22.10	41.10	34.14	68.20	15.06	V
17539.650	53.62	-20.66	40.76	33.52	68.20	14.58	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.367	67.28	-23.08	34.10	56.27	74.00	6.72	V
5351.865	68.77	-23.05	34.11	57.71	74.00	5.23	V
10639.900	46.65	-29.12	37.64	38.13	74.00	27.35	H
15960.600	50.45	-23.43	40.84	33.04	74.00	23.55	V
16897.800	52.97	-22.47	41.40	34.03	68.20	15.23	V
17102.950	53.04	-22.32	41.00	34.36	68.20	15.16	V

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5468.823	66.05	-22.23	34.42	53.86	68.20	2.15	H
5469.948	65.15	-22.20	34.42	52.93	68.20	3.05	H
11002.350	48.01	-28.97	37.90	74.00	74.00	25.99	V
16500.700	51.46	-22.72	41.10	33.08	68.20	16.74	V
16967.100	53.10	-22.18	41.20	34.09	68.20	15.10	H
17423.600	53.27	-21.77	40.72	34.32	68.20	14.93	H

802.11n-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5148.435	68.28	-23.14	34.00	57.43	74.00	5.72	H
5149.205	67.12	-23.15	34.00	56.27	74.00	6.88	H
10359.400	46.95	-29.13	37.42	38.67	68.20	21.25	H
15540.400	52.07	-24.37	40.40	36.04	74.00	21.93	V
16815.850	53.72	-22.72	41.40	35.04	68.20	14.48	H
17541.000	54.07	-20.71	40.76	34.02	68.20	14.13	V

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5350.123	66.06	-23.09	34.10	55.05	74.00	7.94	V
5350.231	65.91	-23.09	34.10	54.90	74.00	8.09	V
10641.550	48.03	-29.12	37.64	39.52	74.00	25.97	H
15960.600	51.25	-23.43	40.84	33.84	74.00	22.75	H
16620.600	53.83	-22.46	41.32	34.97	68.20	14.37	V
17079.300	53.50	-22.40	41.02	34.88	68.20	14.70	V

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5464.540	65.41	-22.35	34.44	53.31	68.20	2.79	V
5467.998	67.34	-22.25	34.43	55.16	68.20	0.86	V
11000.150	46.90	-28.94	37.90	37.95	74.00	27.10	V
16500.150	52.10	-22.71	41.10	33.72	68.20	16.10	V
17009.450	53.81	-22.15	41.09	34.87	68.20	14.39	V
17049.050	54.31	-22.50	41.05	35.77	68.20	13.89	H

802.11n-HT40

Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5146.965	69.73	-23.13	34.00	58.86	74.00	4.27	H
5147.805	68.41	-23.14	34.00	57.55	74.00	5.59	H
10380.300	47.29	-29.20	37.46	39.03	68.20	20.91	H
15570.650	50.80	-24.27	40.40	34.66	74.00	23.20	V
16698.700	54.37	-22.54	41.40	35.52	68.20	13.83	V
17111.750	53.66	-22.32	40.99	34.99	68.20	14.54	H

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5351.379	67.40	-23.06	34.11	56.35	74.00	6.60	H
5352.027	68.33	-23.04	34.11	57.26	74.00	5.67	H
10620.650	46.48	-29.23	37.62	38.10	74.00	27.52	H
15929.800	50.64	-23.86	40.87	33.63	74.00	23.36	H
16922.550	53.63	-22.46	41.33	34.76	68.20	14.57	V
17023.200	53.62	-22.18	41.08	34.72	68.20	14.58	V

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5469.153	65.18	-22.22	34.42	52.98	68.20	3.02	H
5469.528	66.08	-22.21	34.42	53.87	68.20	2.12	V
11019.950	46.25	-28.91	37.88	37.28	74.00	27.75	H
16529.850	51.12	-22.53	41.16	32.49	68.20	17.08	V
16944.000	54.17	-22.31	41.27	35.21	68.20	14.03	H
17531.950	53.62	-21.42	40.77	34.28	68.20	14.58	V

802.11ac-HT20

Channel 36

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5145.985	65.11	-23.12	34.00	54.22	74.00	8.89	H
5149.047	65.88	-23.15	34.00	55.03	74.00	8.12	V
10359.950	45.85	-29.14	37.42	37.57	68.20	22.35	V
15539.850	50.61	-24.38	40.40	34.58	74.00	23.39	V
16987.450	53.81	-22.23	41.14	34.91	68.20	14.39	V
17137.600	54.03	-22.15	40.96	35.22	68.20	14.17	H

Channel 64

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5351.230	62.73	-23.06	34.10	51.69	74.00	11.27	H
5352.081	61.44	-23.04	34.11	50.37	74.00	12.56	H
10639.900	46.19	-29.12	37.64	37.67	74.00	27.81	H
15960.050	51.06	-23.44	40.84	33.66	74.00	22.94	H
16626.100	53.57	-22.53	41.33	34.78	68.20	14.63	V
17544.600	53.43	-21.01	40.76	33.69	68.20	14.77	V

Channel 100

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5467.592	62.72	-22.26	34.43	50.56	68.20	5.48	H
5469.490	62.79	-22.21	34.42	50.58	68.20	5.41	H
11000.150	46.17	-28.94	37.90	37.21	74.00	27.83	V
16500.150	51.33	-22.71	41.10	32.94	68.20	16.88	V
17105.700	53.47	-22.31	40.99	34.78	68.20	14.73	H
17542.950	53.48	-20.87	40.76	33.59	68.20	14.72	H

802.11ac-HT40
Channel 38

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5148.278	66.64	-23.14	34.00	55.78	74.00	7.36	H
5149.922	68.80	-23.16	34.00	57.96	74.00	5.20	H
10379.750	46.14	-29.20	37.46	37.89	68.20	22.06	V
15570.100	49.84	-24.28	40.40	33.72	74.00	24.16	V
16691.000	53.78	-22.60	41.39	34.98	68.20	14.42	H
17036.400	53.31	-22.64	41.06	34.89	68.20	14.89	V

Channel 62

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5351.176	71.04	-23.06	34.10	60.00	74.00	2.96	H
5354.092	71.91	-22.99	34.12	60.78	74.00	2.09	V
10620.100	46.06	-29.25	37.62	37.69	74.00	27.94	V
15929.800	50.57	-23.86	40.87	33.56	74.00	23.43	V
16986.350	53.92	-22.22	41.14	35.00	68.20	14.28	H
17007.800	54.60	-22.14	41.09	35.64	68.20	13.60	V

Channel 102

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5469.130	67.39	-22.22	34.42	55.19	68.20	0.81	H
5469.205	67.38	-22.22	34.42	55.18	68.20	0.82	V
11019.950	47.26	-28.91	37.88	38.29	74.00	26.74	V
16529.850	51.60	-22.53	41.16	32.97	68.20	16.60	H
17027.600	53.96	-22.35	41.07	35.24	68.20	14.24	H
17115.600	54.06	-22.34	40.98	35.41	68.20	14.14	V

802.11ac-HT80
Channel 42

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5125.125	67.34	-22.48	34.00	55.82	74.00	6.66	V
5140.770	67.35	-23.06	34.00	56.41	74.00	6.65	V
10419.900	46.90	-29.39	37.50	38.79	68.20	21.30	V
15630.050	50.28	-24.00	40.46	33.82	74.00	23.72	V
16716.850	54.03	-22.50	41.40	35.13	68.20	14.17	V
16808.150	53.94	-22.80	41.40	35.34	68.20	14.26	H

Channel 58

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5353.863	72.38	-23.00	34.12	61.26	74.00	1.62	V
5367.849	72.86	-22.59	34.17	61.29	74.00	1.14	H
10579.950	47.18	-28.83	37.58	38.43	68.20	21.02	V
15869.850	51.35	-23.12	40.87	33.59	74.00	22.65	V
16965.450	54.59	-22.19	41.20	35.58	68.20	13.61	H
17518.750	53.87	-21.78	40.78	34.86	68.20	14.33	H

Channel 106

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
5460.055	66.69	-22.48	34.46	54.71	68.20	1.51	V
5464.510	65.57	-22.35	34.44	53.48	68.20	2.63	V
11060.100	47.09	-28.82	37.84	38.07	74.00	26.91	H
16433.600	53.92	-23.21	40.97	36.17	68.20	14.28	V
16589.800	51.87	-22.29	41.28	32.87	68.20	16.34	V
16957.200	53.87	-22.22	41.23	34.87	68.20	14.33	V

Conclusion: PASS

Band edge compliance

Mode	Channel	Test Results	Conclusion
802.11a	5180 MHz	Fig.1	P
	5320 MHz	Fig.2	P
	5500 MHz	Fig.3	P
	5700 MHz	Fig.4	P
802.11n HT20	5180 MHz	Fig.5	P
	5320 MHz	Fig.6	P
	5500 MHz	Fig.7	P
	5700 MHz	Fig.8	P
802.11n HT40	5190 MHz	Fig.9	P
	5310 MHz	Fig.10	P
	5510 MHz	Fig.11	P
	5670 MHz	Fig.12	P
802.11ac HT20	5180 MHz	Fig.13	P
	5320 MHz	Fig.14	P
	5500 MHz	Fig.15	P
	5700 MHz	Fig.16	P
802.11ac HT40	5190 MHz	Fig.17	P
	5310 MHz	Fig.18	P
	5510 MHz	Fig.19	P
	5670 MHz	Fig.20	P
802.11ac HT80	5210MHz	Fig.21	P
	5290MHz	Fig.22	P
	5530MHz	Fig.23	P
	5610MHz	Fig.24	P

Conclusion: PASS

Test graphs as below:

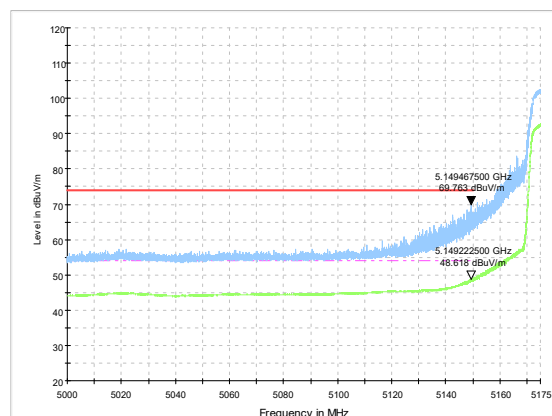


Fig. 1 Band Edges (802.11a Ch36, 5180MHz)

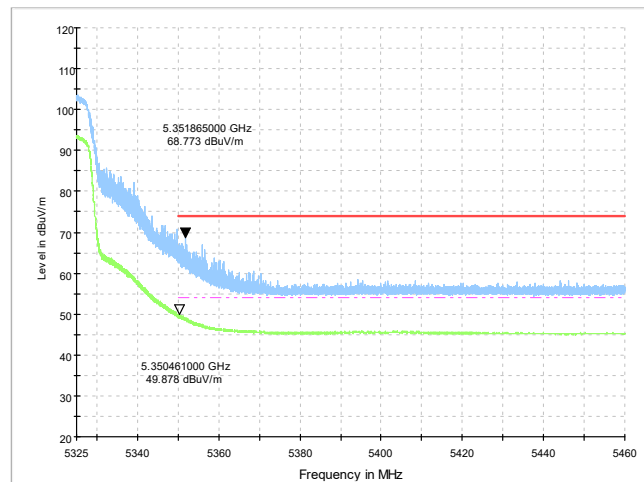


Fig. 2 Band Edges (802.11a Ch64, 5320MHz)

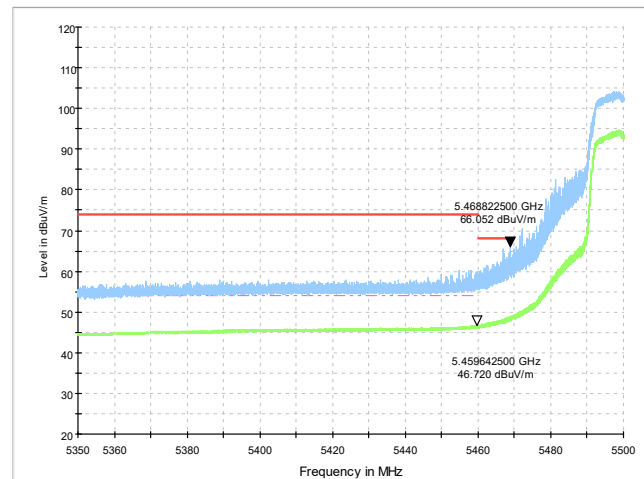


Fig. 3 Band Edges (802.11a Ch100, 5500MHz)

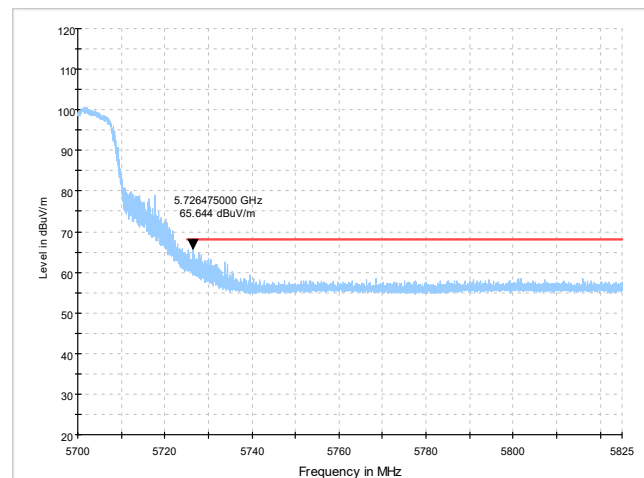


Fig. 4 Band Edges (802.11a Ch140, 5700MHz)

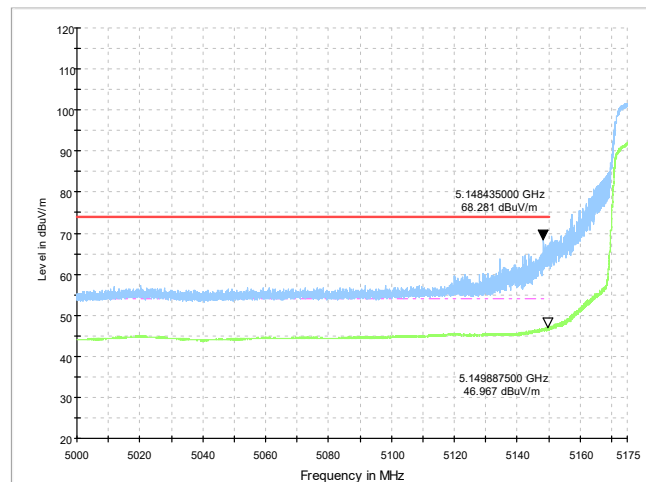


Fig. 5 Band Edges (802.11n-HT20 Ch36, 5180MHz)

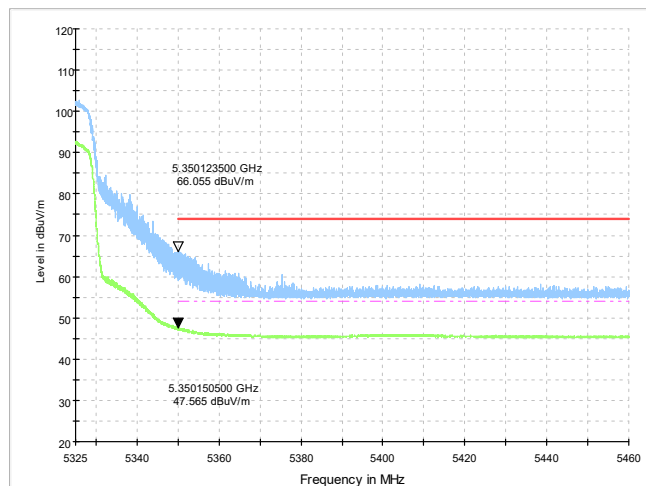


Fig. 6 Band Edges (802.11n-HT20 Ch64, 5320MHz)

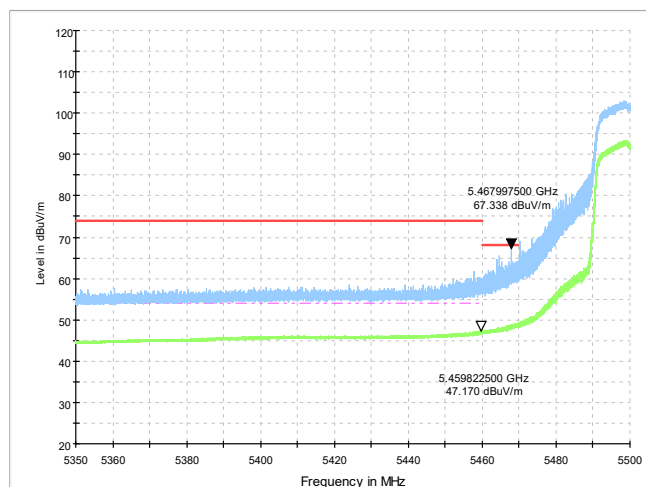


Fig. 7 Band Edges (802.11n-HT20 Ch100, 5500MHz)

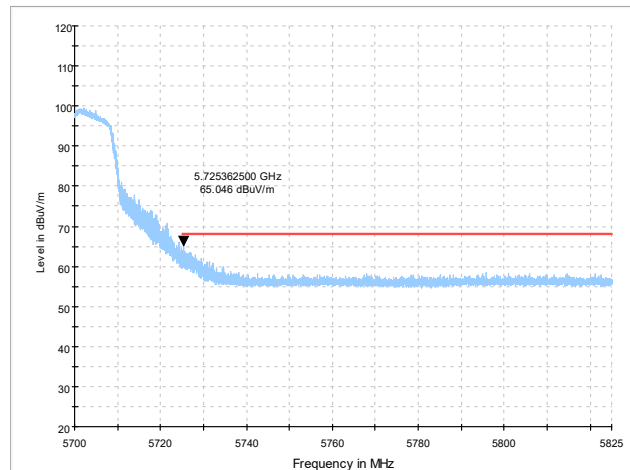


Fig. 8 Band Edges (802.11n-HT20 Ch140, 5700MHz)

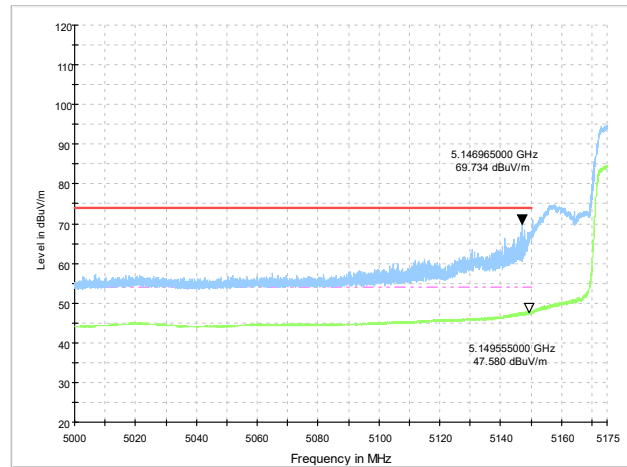


Fig. 9 Band Edges (802.11n-HT40 Ch38, 5190MHz)

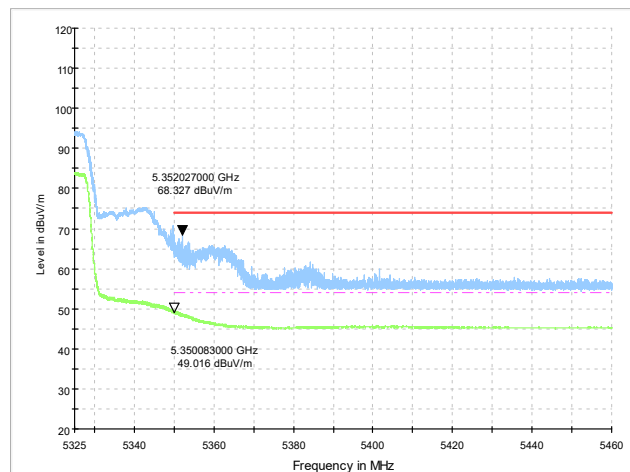


Fig. 10 Band Edges (802.11n-HT40 Ch62, 5310MHz)

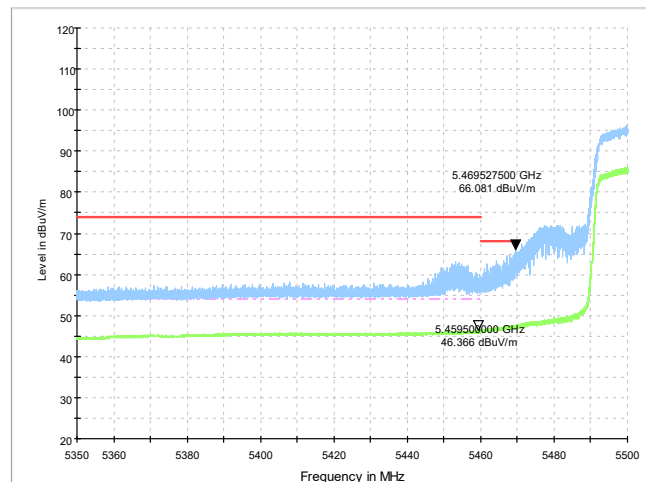


Fig. 11 Band Edges (802.11n-HT40 Ch102, 5510MHz)

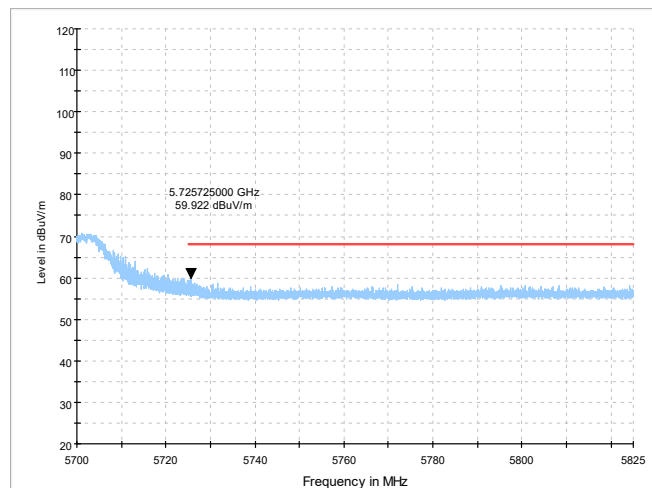


Fig. 12 Band Edges (802.11n-HT40 Ch134, 5670MHz)

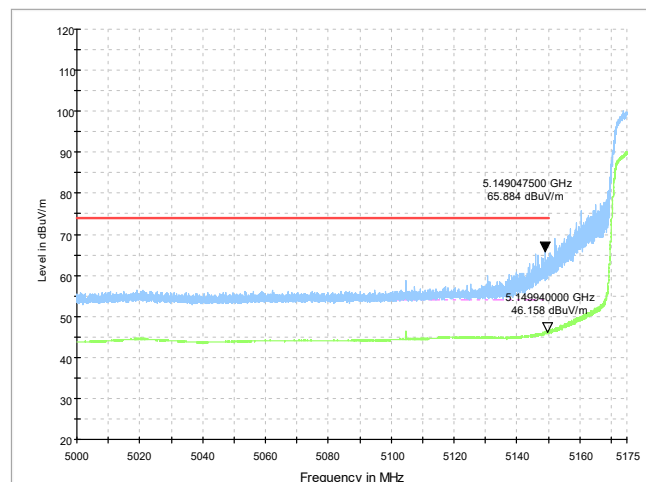


Fig. 13 Band Edges (802.11ac-HT20 Ch36, 5180MHz)

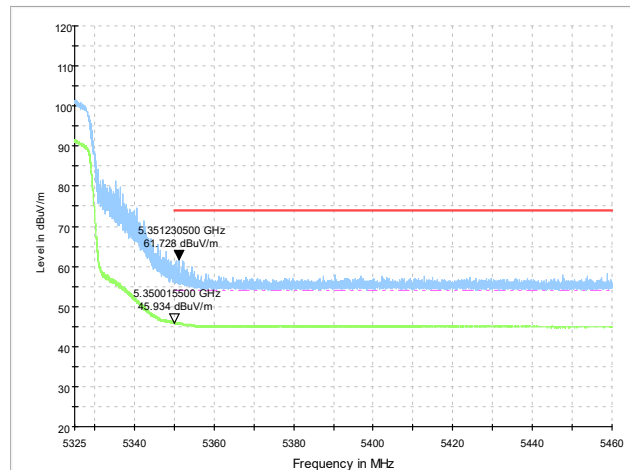


Fig. 14 Band Edges (802.11ac-HT20 Ch64, 5320MHz)

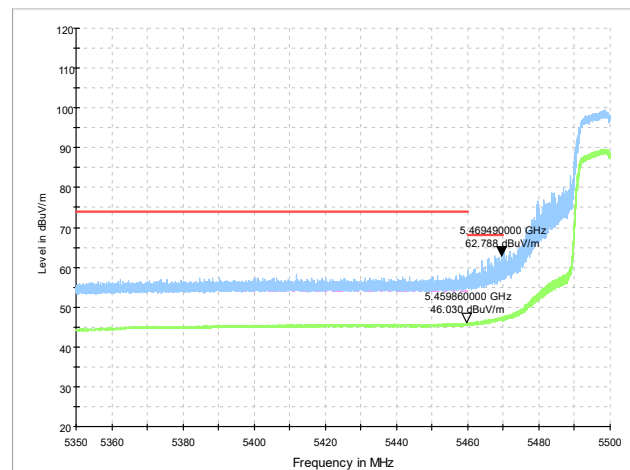


Fig. 15 Band Edges (802.11ac-HT20 Ch100, 5500MHz)

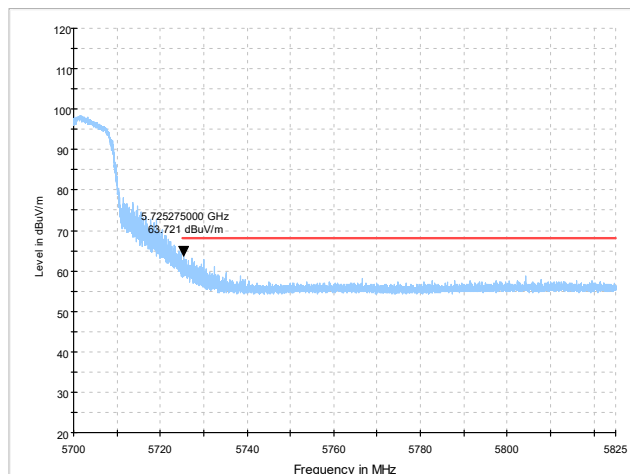


Fig. 16 Band Edges (802.11ac-HT20 Ch140, 5700MHz)

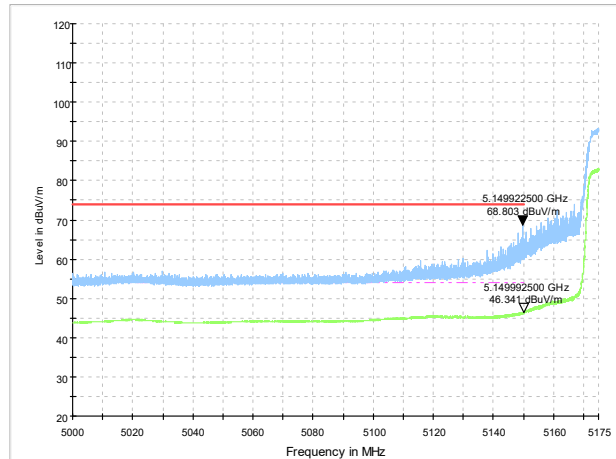


Fig. 17 Band Edges (802.11ac-HT40 Ch38, 5190MHz)

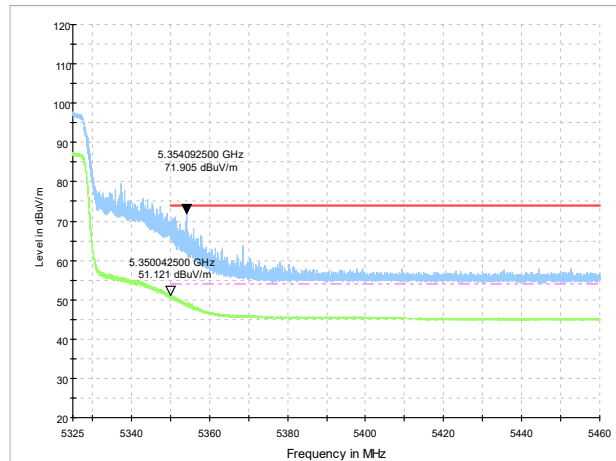


Fig. 18 Band Edges (802.11ac-HT40 Ch62, 5310MHz)

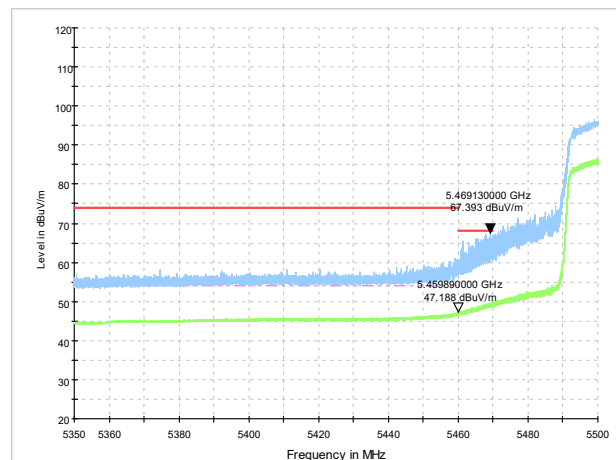


Fig. 19 Band Edges (802.11ac-HT40 Ch102, 5510MHz)

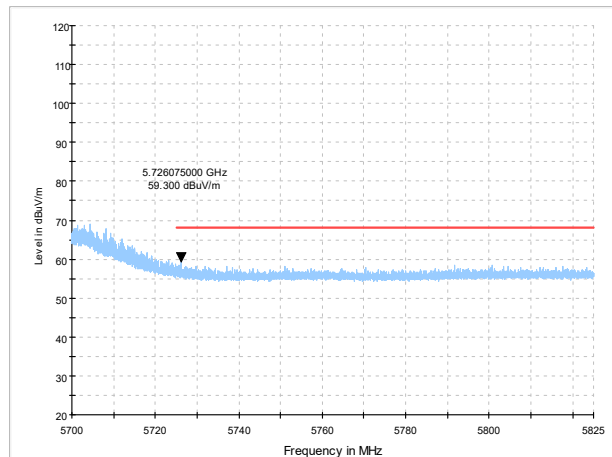


Fig. 20 Band Edges (802.11ac-HT40 Ch134, 5670MHz)

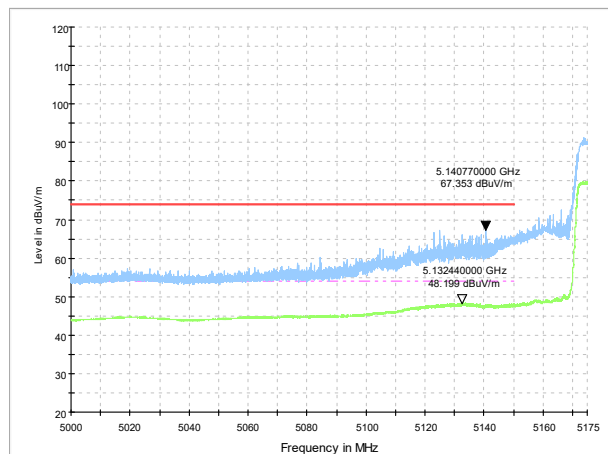


Fig. 21 Band Edges (802.11ac-HT80 Ch42 , 5210MHz)

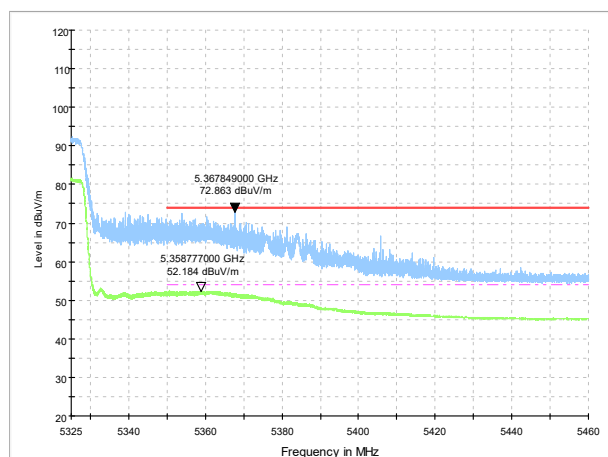


Fig. 22 Band Edges (802.11ac-HT80 Ch58, 5290MHz)

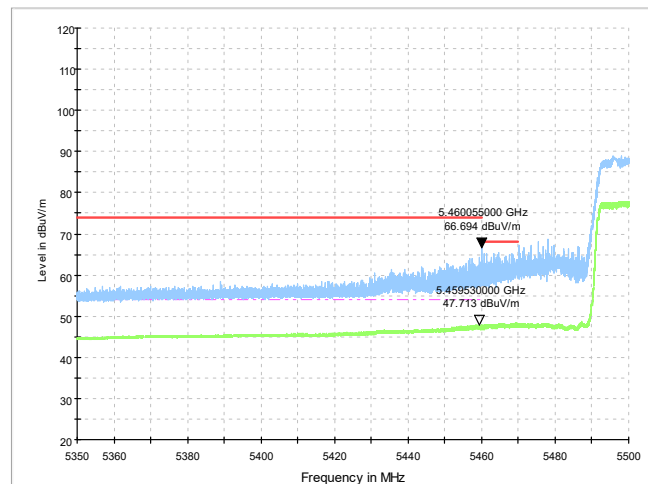


Fig. 23 Band Edges (802.11ac-HT80 Ch106, 5530MHz)

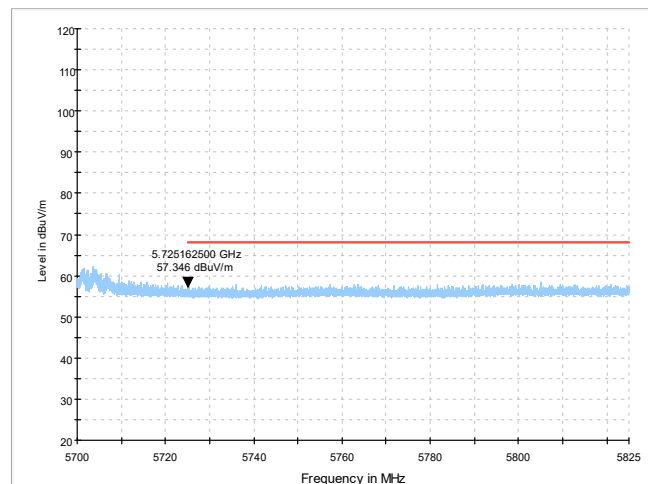


Fig. 24 Band Edges (802.11ac-HT80 Ch122, 5610MHz)

A.6. AC Powerline Conducted Emission (150kHz- 30MHz)

A.6.1 Summary

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section

A.6.2 Method of Measurement

See Clause 6.2 of ANSI C63.10 specifically.

See Clause 4 and Clause 5 of ANSI C63.10 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver:
Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/IF bandwidth
0.15-30	9kHz

A.6.3 Test Condition

Voltage (V)	Frequency (Hz)
120	60

A.6.4 Test setup

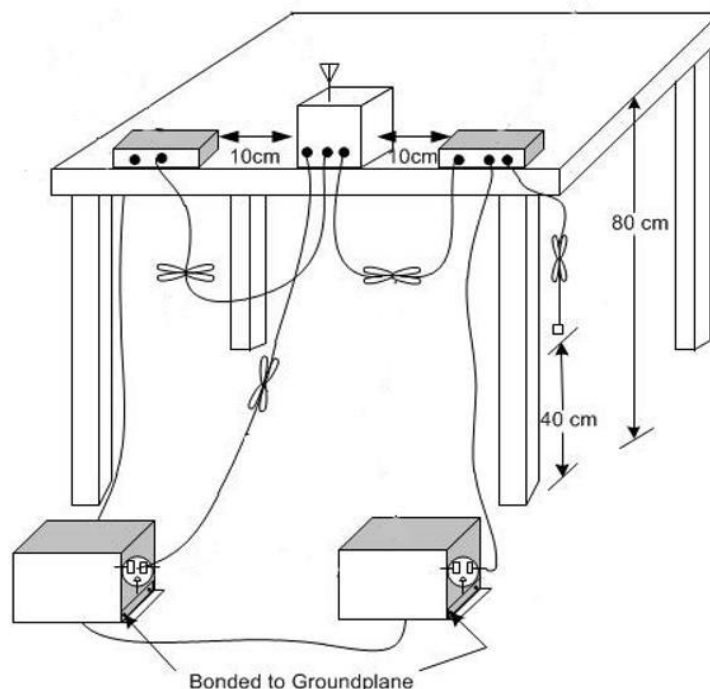

Measurement Result and limit:
WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		11a mode	Idle	
0.15 to 0.5	66 to 56	Fig.25	Fig.26	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dBμV)	Result (dBμV)		Conclusion
		With charger		
		11a mode	Idle	
0.15 to 0.5	56 to 46	Fig.25	Fig.26	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: PASS

Test graphs as below:

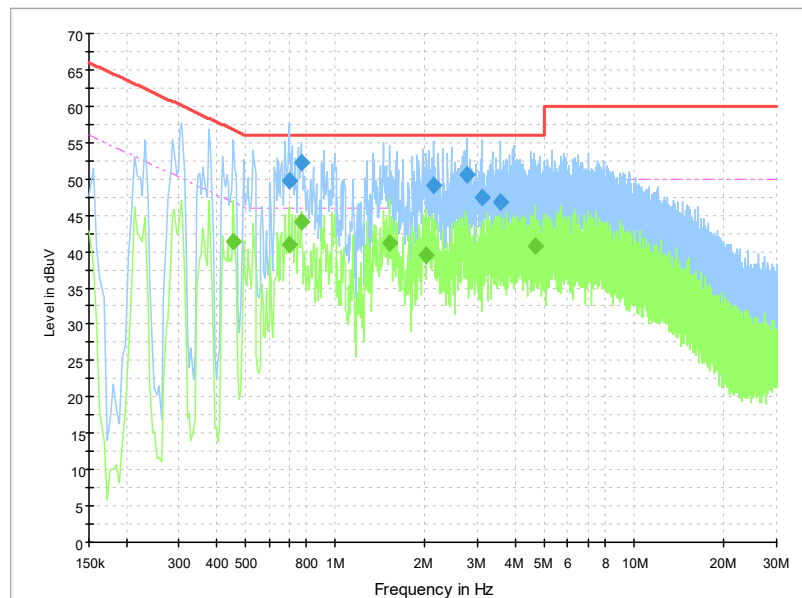


Fig.25 Conducted Emission(802.11a, Ch36, TX)

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.699000	49.7	2000.0	9.000	On	L1	20.0	6.3	56.0	
0.771000	52.3	2000.0	9.000	On	L1	20.0	3.7	56.0	
2.139000	49.1	2000.0	9.000	On	L1	19.8	6.9	56.0	
2.764500	50.5	2000.0	9.000	On	L1	19.9	5.5	56.0	
3.088500	47.4	2000.0	9.000	On	L1	19.9	8.6	56.0	
3.574500	46.8	2000.0	9.000	On	L1	19.8	9.2	56.0	

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.456000	41.4	2000.0	9.000	On	L1	20.1	5.3	46.8	
0.699000	40.9	2000.0	9.000	On	L1	20.0	5.1	46.0	
0.771000	44.0	2000.0	9.000	On	L1	20.0	2.0	46.0	
1.522500	41.3	2000.0	9.000	On	L1	19.9	4.7	46.0	
2.022000	39.5	2000.0	9.000	On	L1	19.8	6.5	46.0	
4.681500	40.7	2000.0	9.000	On	L1	19.8	5.3	46.0	

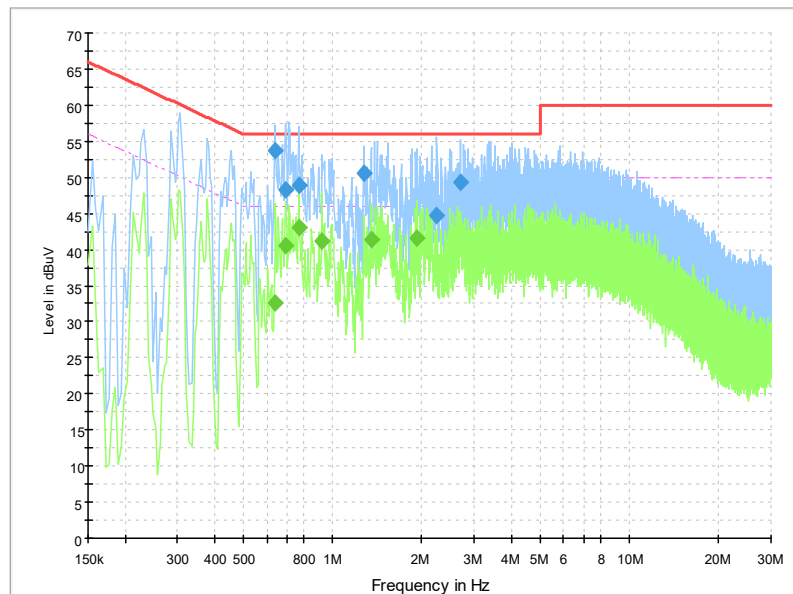


Fig.26 Conducted Emission(802.11a, IDLE)

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.636000	53.7	2000.0	9.000	On	L1	20.0	2.3	56.0	
0.694500	48.2	2000.0	9.000	On	L1	20.0	7.8	56.0	
0.771000	48.9	2000.0	9.000	On	L1	20.0	7.1	56.0	
1.275000	50.5	2000.0	9.000	On	L1	19.9	5.5	56.0	
2.247000	44.7	2000.0	9.000	On	N	20.0	11.3	56.0	
2.697000	49.3	2000.0	9.000	On	L1	19.9	6.7	56.0	

Final Result 2

Frequency (MHz)	CAverage (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.640500	32.7	2000.0	9.000	On	L1	20.0	13.3	46.0	
0.694500	40.6	2000.0	9.000	On	L1	20.0	5.4	46.0	
0.771000	43.1	2000.0	9.000	On	L1	20.0	2.9	46.0	
0.919500	41.3	2000.0	9.000	On	L1	19.9	4.7	46.0	
1.347000	41.5	2000.0	9.000	On	L1	19.9	4.5	46.0	
1.923000	41.5	2000.0	9.000	On	L1	19.8	4.5	46.0	

A.7. 99% Occupied bandwidth

Method of Measurement: See ANSI C63.10-2013-clause 12.4.2.

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

Measurement Uncertainty:


Measurement Uncertainty	60.80Hz
-------------------------	---------


EUT ID: UT11a

Measurement Result:

TestMode	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	5180	17.585	5171.2236	5188.8085	---	---
	5200	17.506	5191.2443	5208.7507	---	---
	5240	17.602	5231.1818	5248.7839	---	---
11N20SISO	5180	18.288	5170.8791	5189.1671	---	---
	5200	18.287	5190.8565	5209.1433	---	---
	5240	18.271	5230.8693	5249.1403	---	---
11AC40SISO	5190	36.446	5171.7786	5208.2245	---	---
	5230	36.691	5211.6216	5248.3128	---	---
11AC80SISO	5210	75.491	5172.2789	5247.7701	---	---

Test graphs as below:

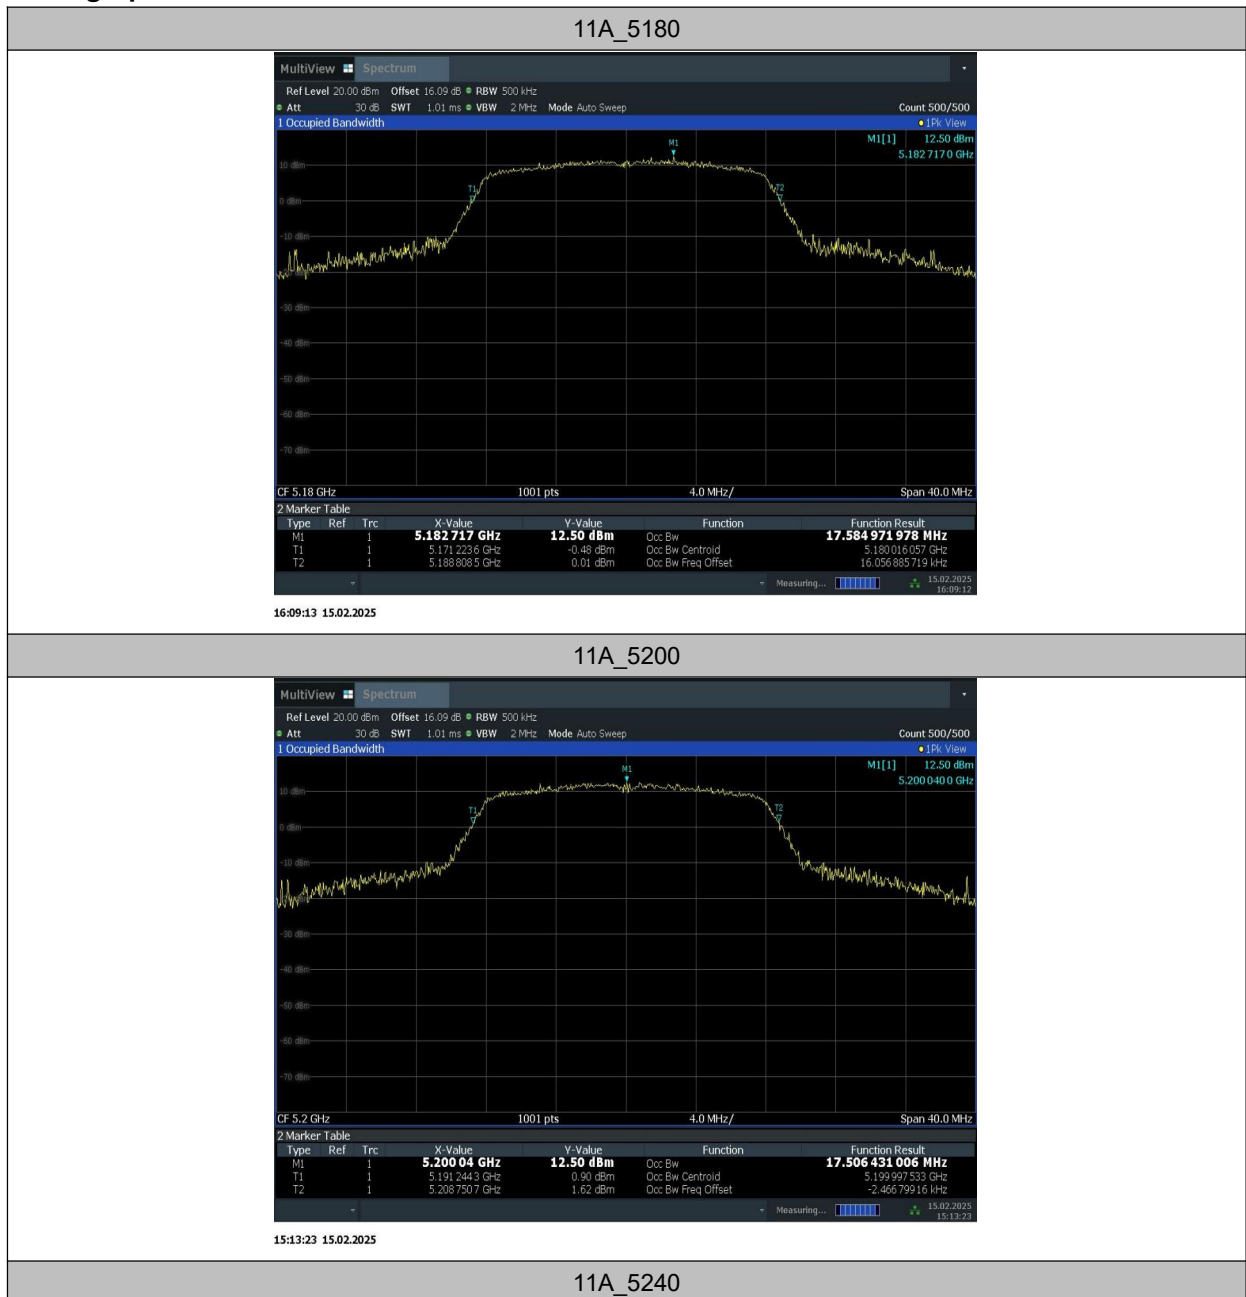

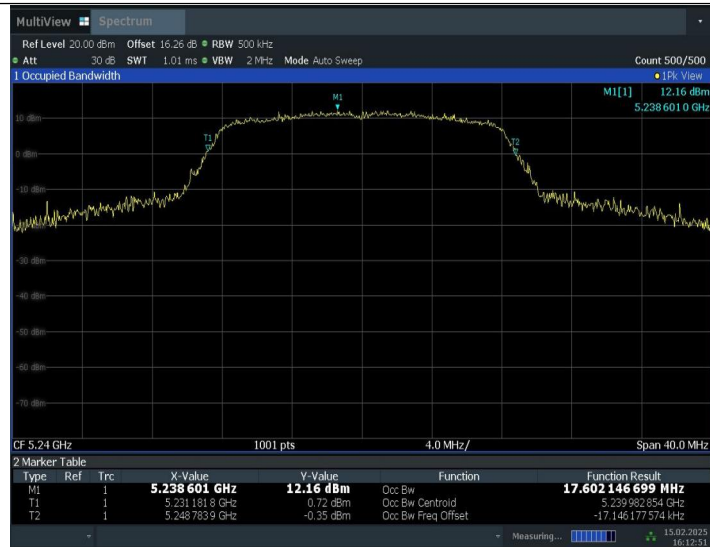


16:12:52 15.02.2025

11N20SISO_5180




15:53:34 15.02.2025

11N20SISO_5200

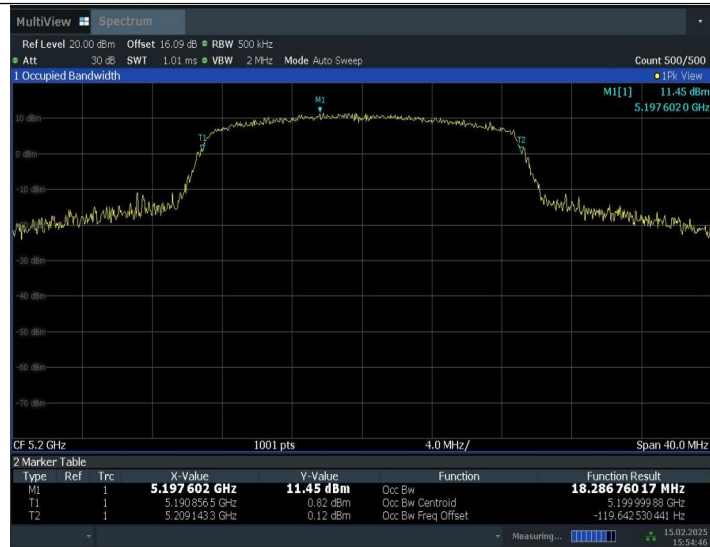


15:54:46 15.02.2025

11N20SISO_5240

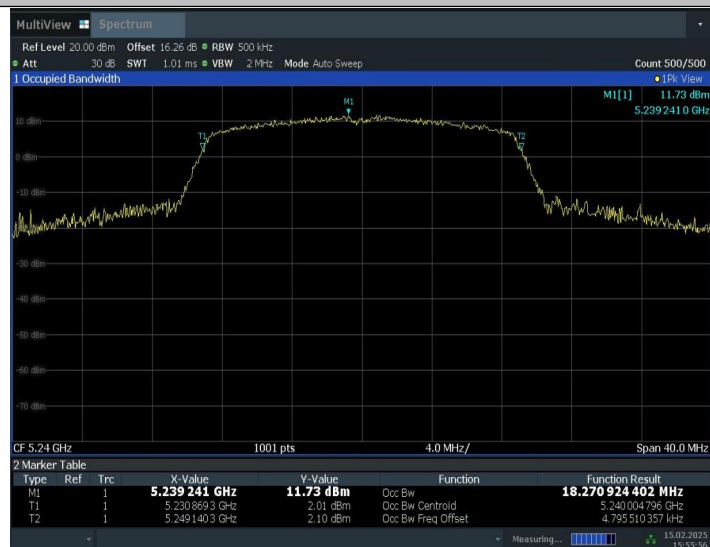

15:55:57 15.02.2025

11AC40SISO_5190

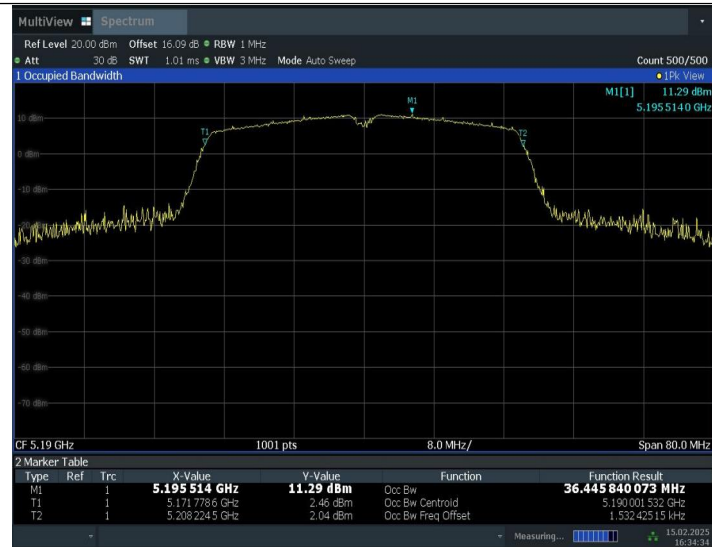

16:34:35 15.02.2025

11AC40SISO_5230



16:35:50 15.02.2025

11AC80SISO_5210



Conclusion: PASS

A.8. Antenna Requirement

The antenna of the device is permanently attached. There are no provisions for connection to an external antenna.

The unit complies with the requirement of FCC Part 15.203.

A.9. Power control

A Transmission Power Control mechanism is not required for systems with an e.i.r.p. of less than 27dBm (500 mW).

ANNEX B: EUT parameters

Disclaimer: The antenna gain and worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

ANNEX C: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

TELECOMMUNICATION TECHNOLOGY LABS, CAICT

Beijing, People's Republic of China


for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 23rd day of July 2024.



Mr. Trace McInturf, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 7049.01
Valid to July 31, 2026

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

*** END OF REPORT BODY ***