



No. 23T04Z80397-013

For

**TCL Communication Ltd.
GSM/UMTS/LTE Mobile phone**

Model name: T435D, T435SP, T435S, T435V, T435WS

With

Hardware Version: 03

Software Version: 9JS6

FCC ID: 2ACCJH178

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504


Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn




Picture 1: Constituents of the sample

Test positions for head:


The Head SAR is tested at the following 4 test positions:

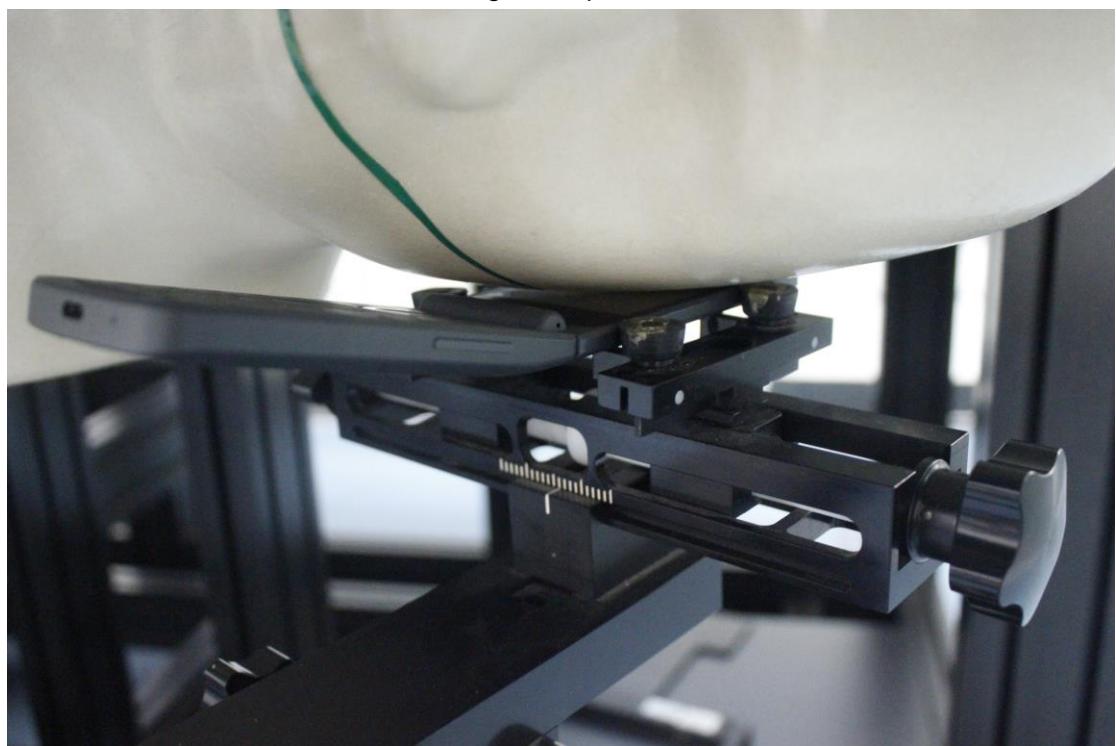

Picture 2: Left Head Touch Cheek Position

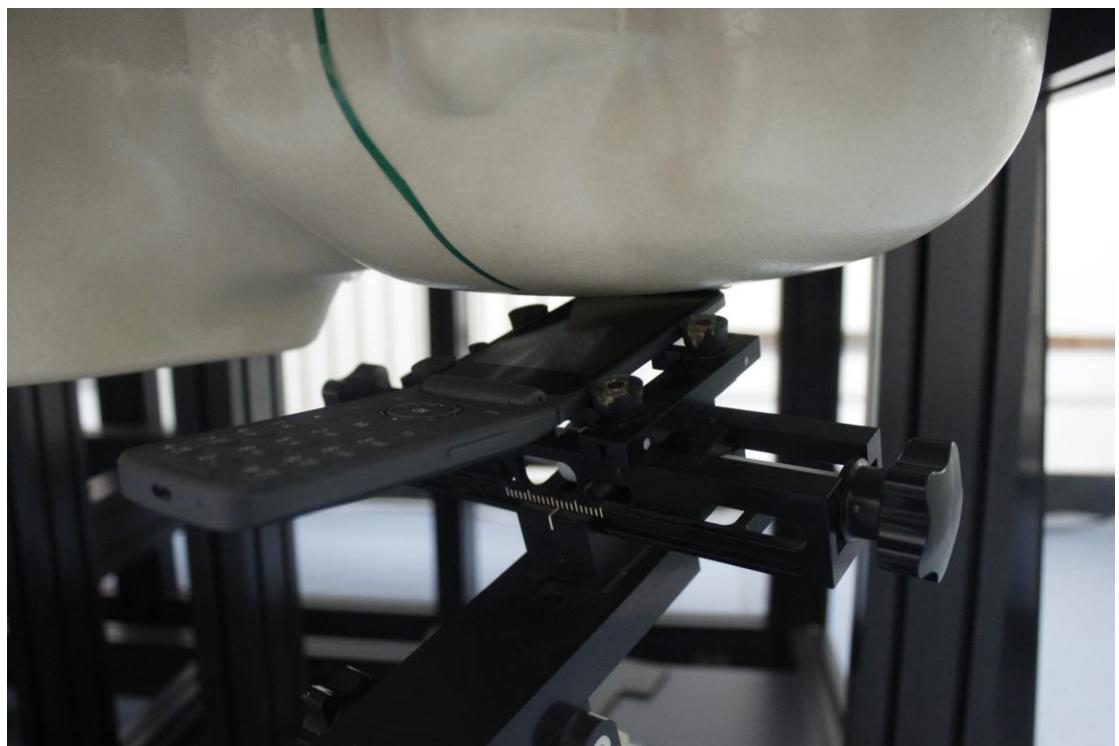

Picture 3: Left Head Tilt 15° Position

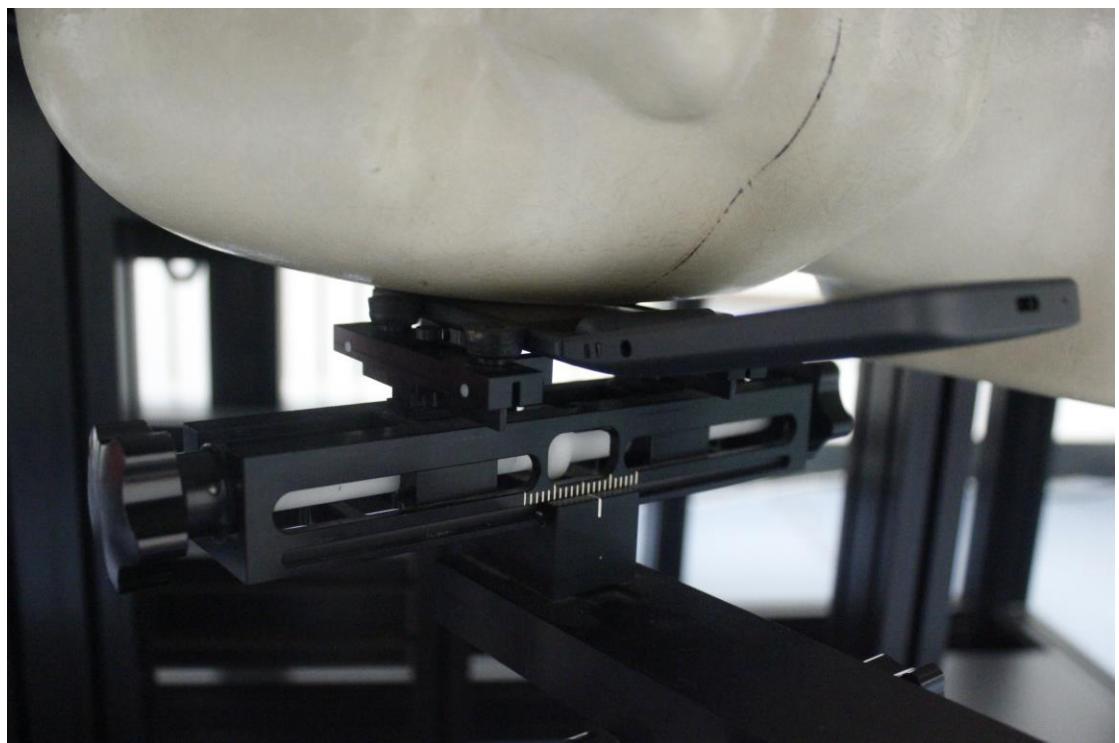


Picture 4: Right Head Touch Cheek Position




Picture 5: Right Head Tilt 15° Position

Test positions for body:


The Body SAR is tested at the following 10 test positions all with the distance =10/15/0mm between the EUT and the phantom bottom:

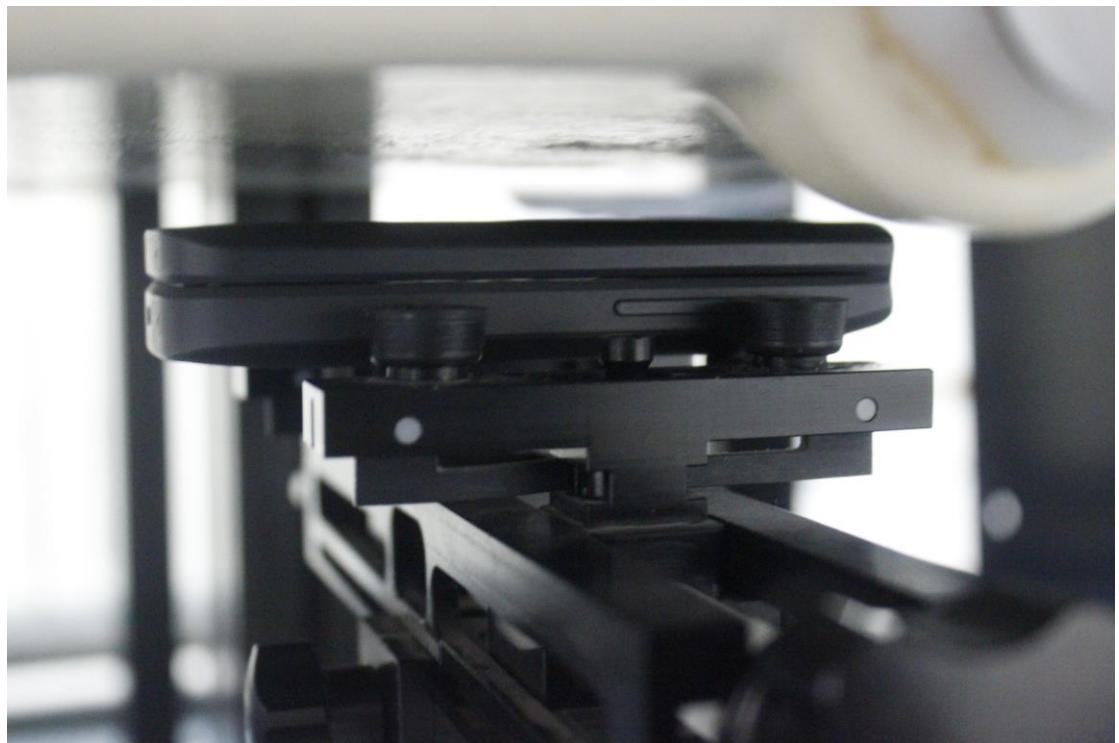


Picture 6: Front 10mm

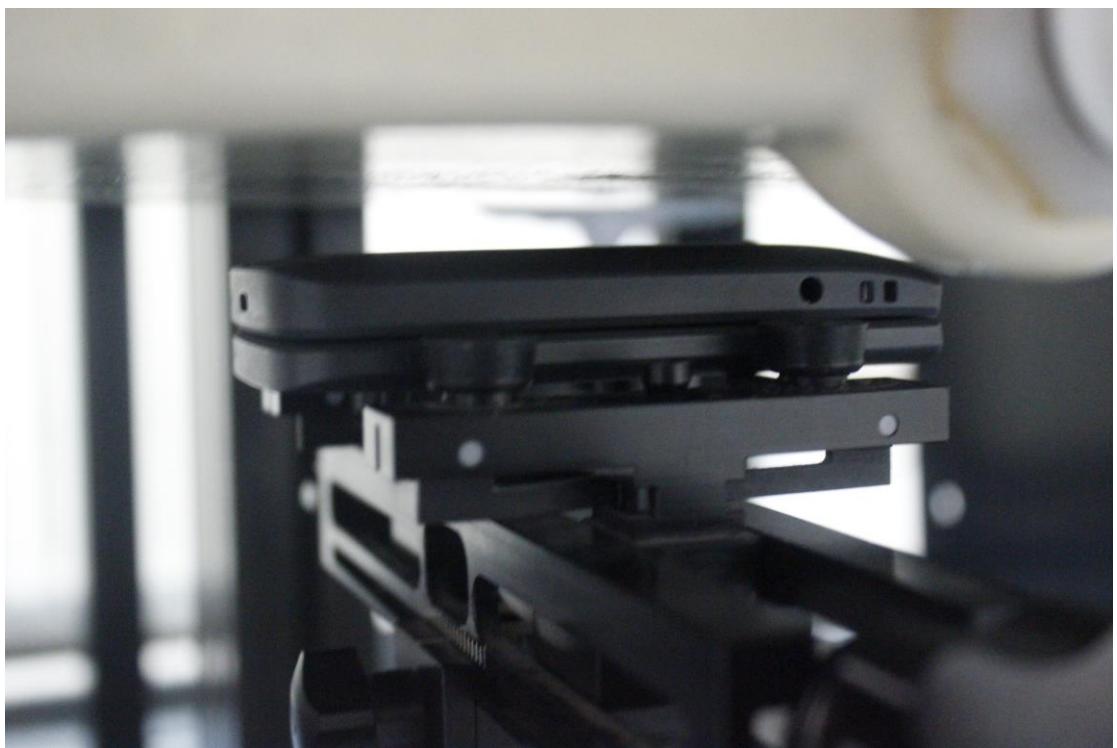


Picture 7: Rear 10mm

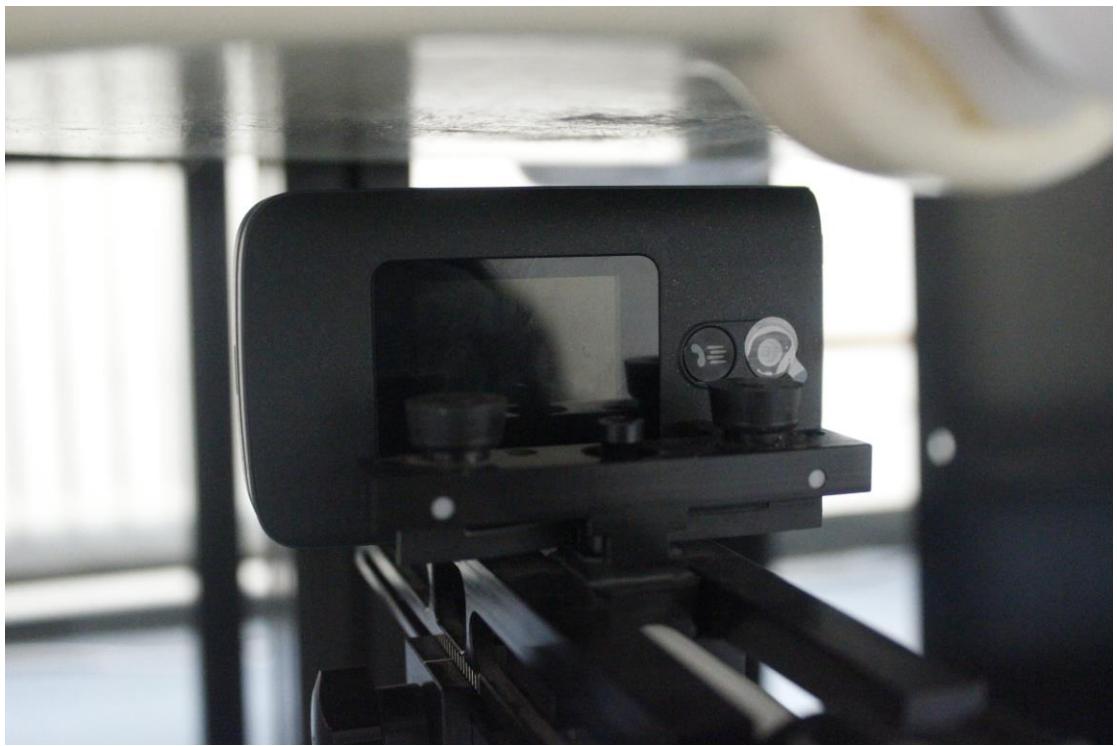


Picture 8: Left 10mm

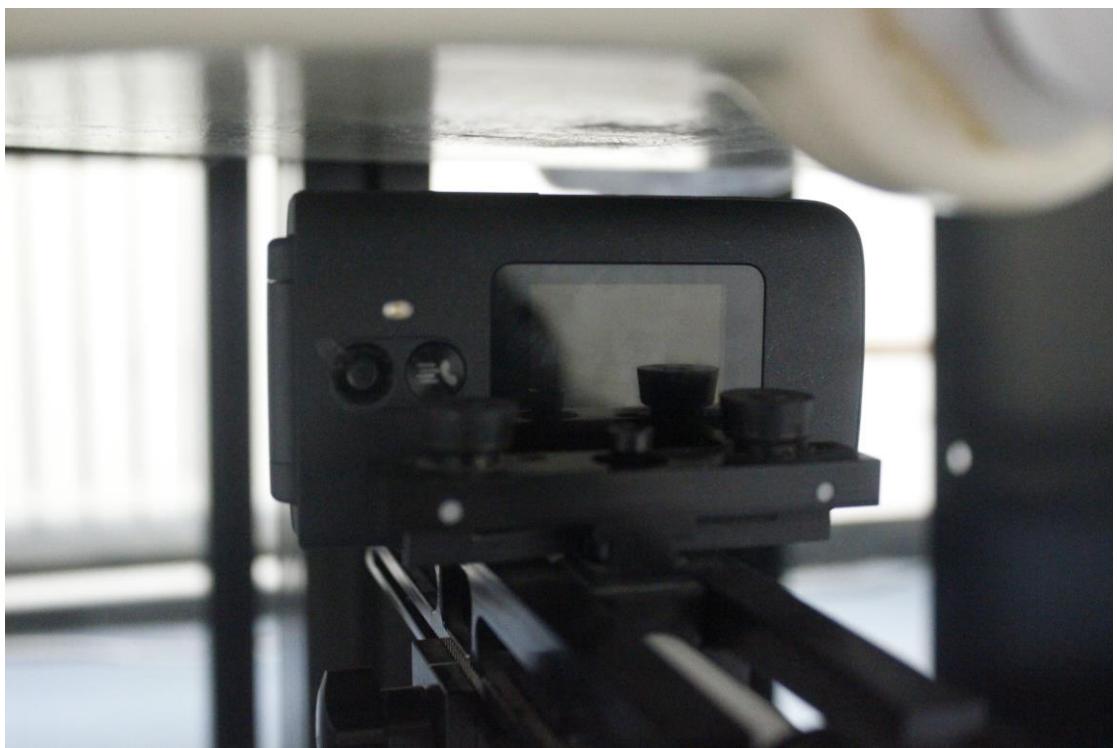


Picture 9: Right 10mm

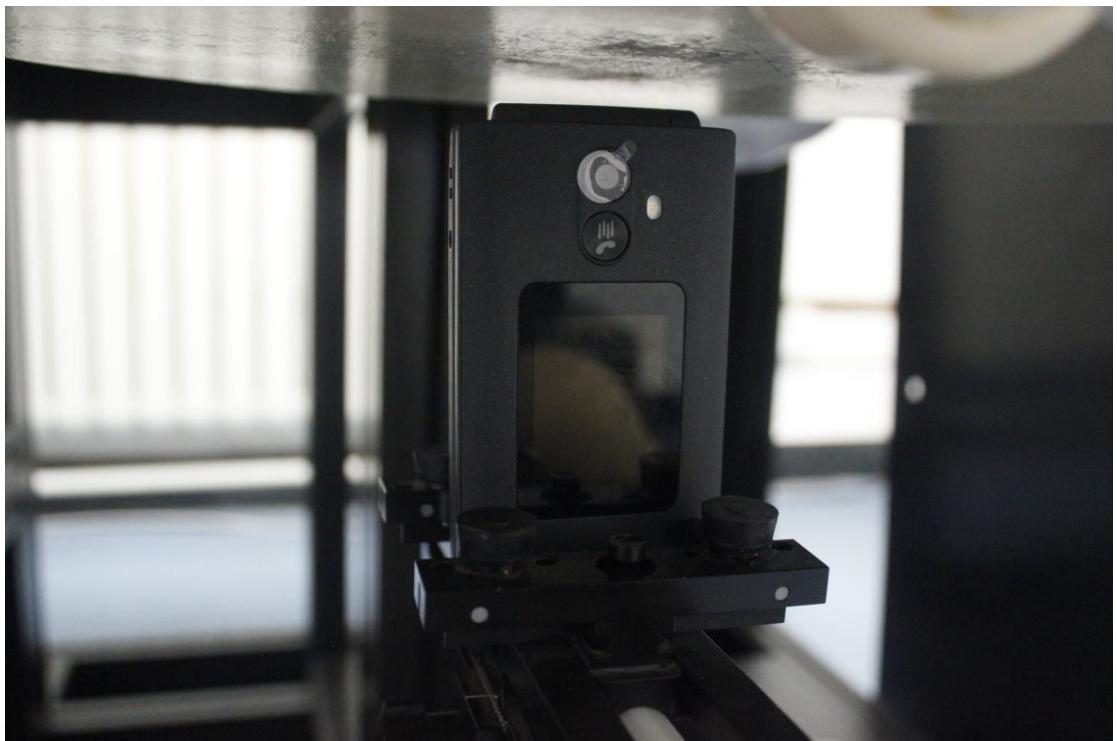


Picture 10: Top 10mm

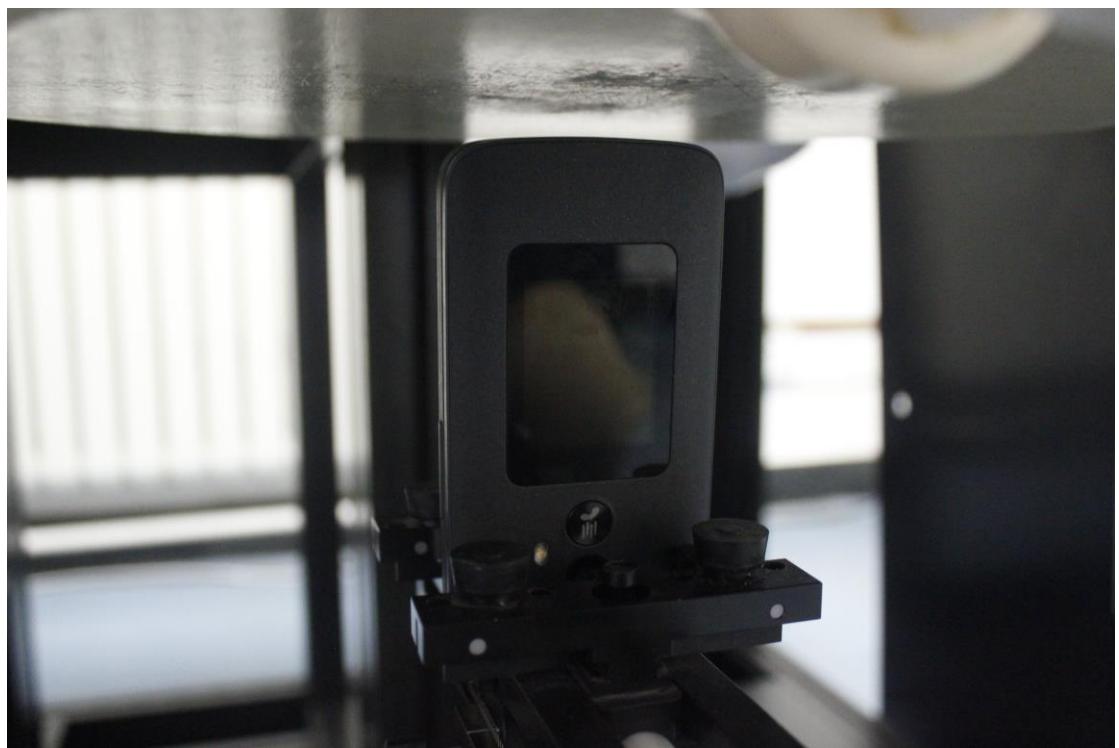


Picture 11: Bottom 10mm

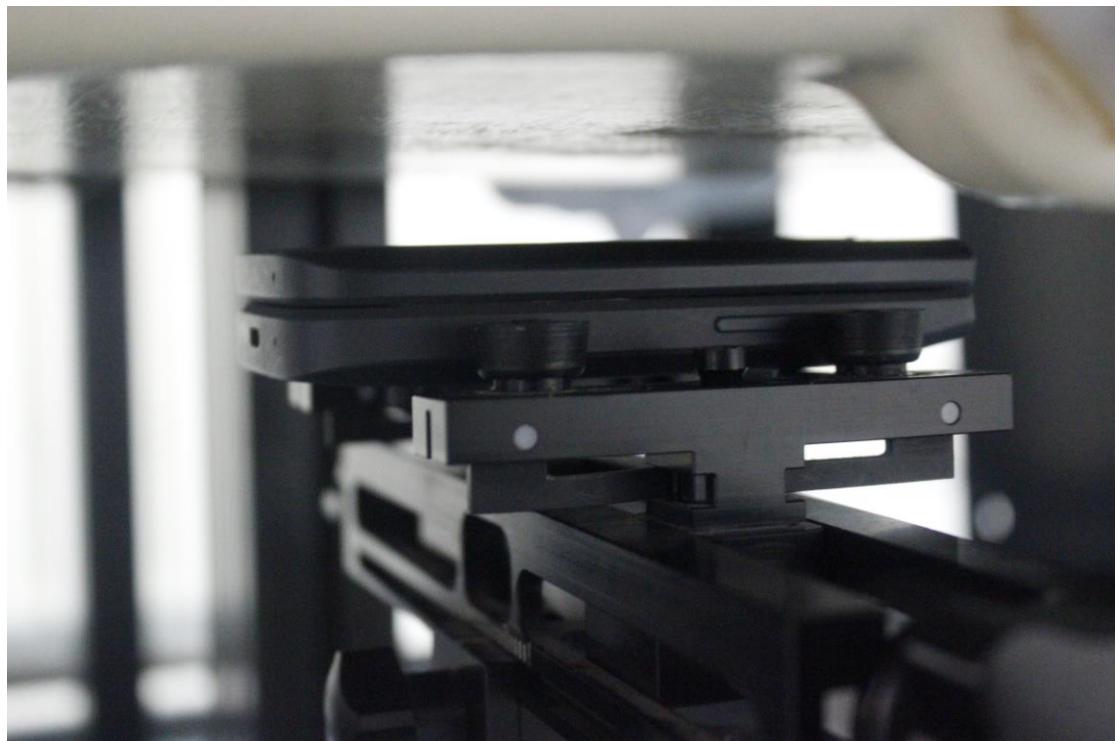


Picture 12: Front 15mm

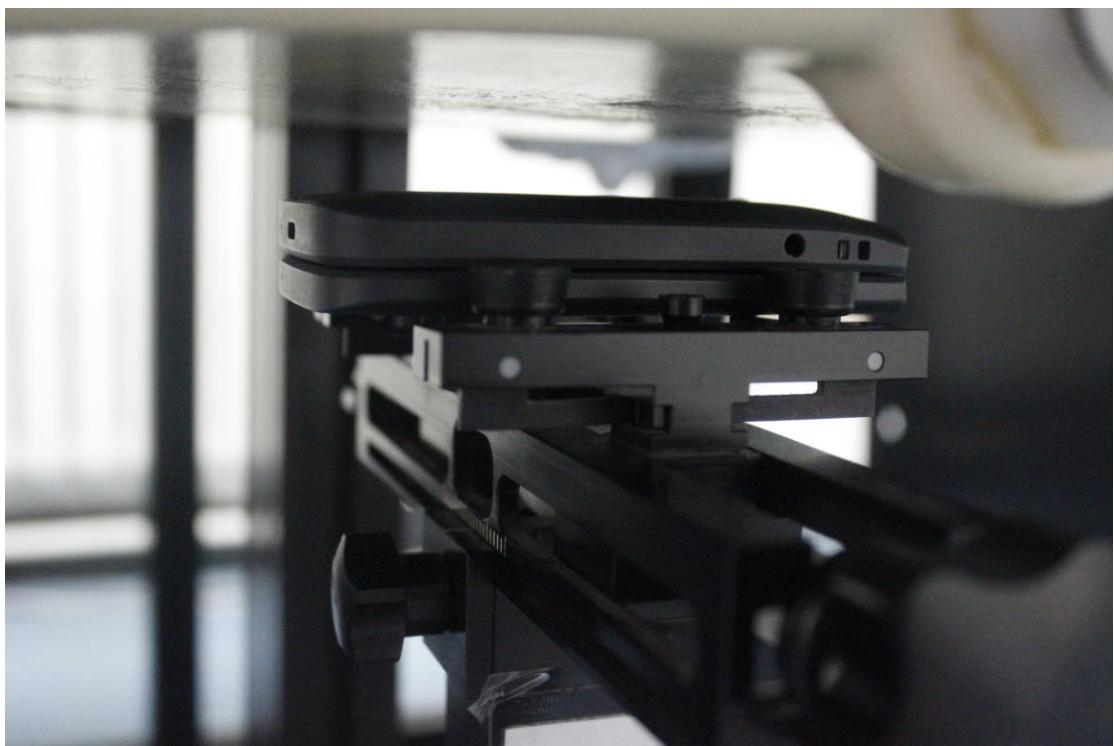


Picture 13: Rear 15mm

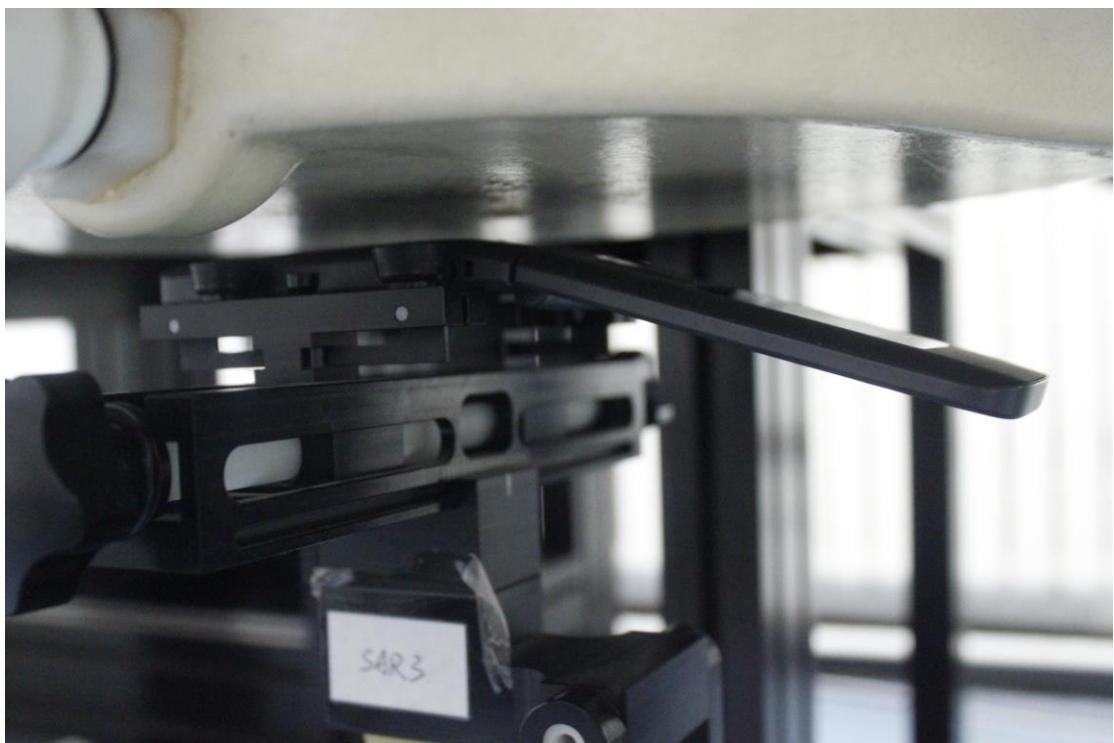

Picture 14: Rear open 10mm

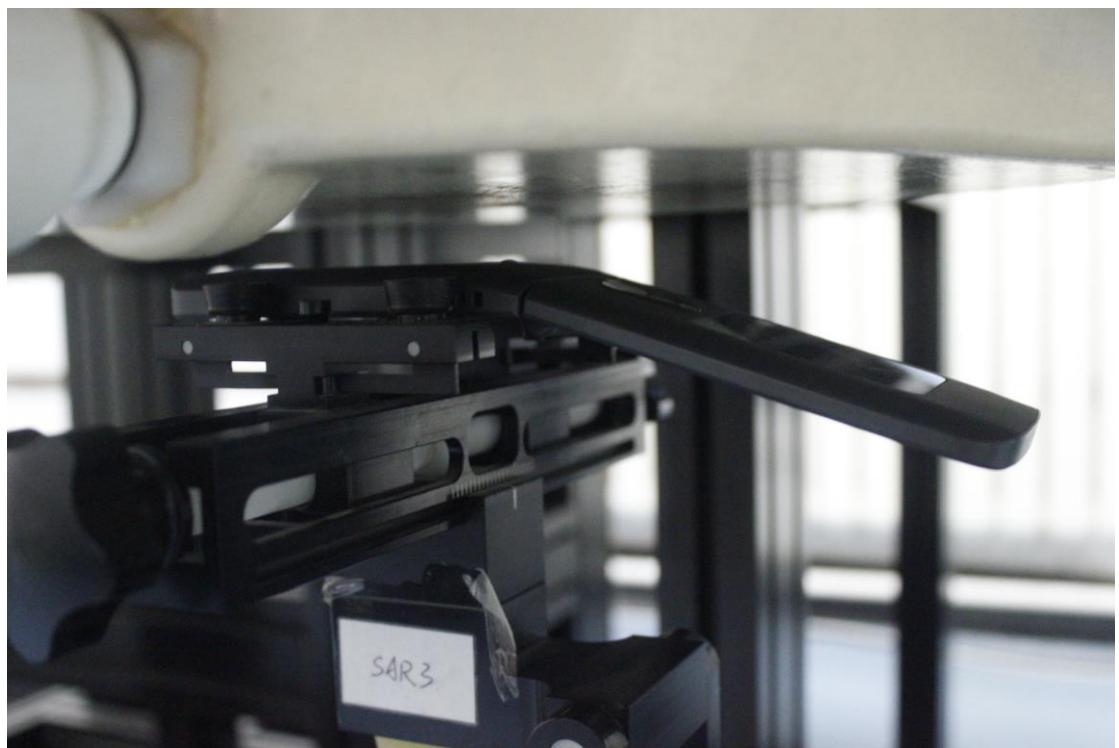

Picture 15: Rear open 15mm

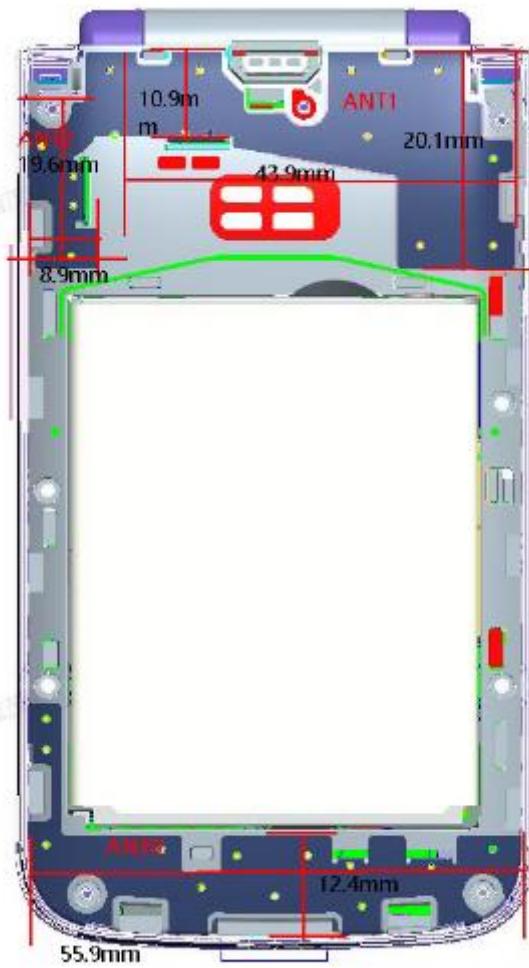

Picture 16: Antenna Locations