



FCC PART 15B TEST REPORT

No. 23T04Z80421-03

for

TCL Communication Ltd.

GSM/UMTS/LTE/NR Mobile phone

Model name: T614D

FCC ID: 2AC CJH179

with

Hardware Version: 06

Software Version: 3CSF

Issued Date: 2024-01-08

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
23T04Z80421-03	Rev.0	1 st edition	2023-12-18
23T04Z80421-03	Rev.1	2 nd edition	2024-01-08

Note: the latest revision of the test report supersedes all previous version.



CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE.....	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	6
4. REFERENCE DOCUMENTS.....	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. LABORATORY ENVIRONMENT.....	8
6. SUMMARY OF TEST RESULTS.....	9
7. TEST EQUIPMENTS UTILIZED.....	10
ANNEX A: MEASUREMENT RESULTS	11

1. Test Laboratory

1.1. Testing Location

CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2023-11-07

Testing End Date: 2023-11-08


1.4. Signature



Wang Xue
(Prepared this test report)



Zhang Ying
(Reviewed this test report)



Zhang Xia
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact: Annie Jiang
Email: nianxiang.jiang@tcl.com
Tel: +86 755 3661 1621
Fax: +86 755 3661 2000-81722

2.2. Manufacturer Information

Company Name: TCL Communication Ltd.
Address: 5/F, Building 22E, 22 Science Park East Avenue, Hong Kong Science Park, Shatin, NT, Hong Kong
Contact: Annie Jiang
Email: nianxiang.jiang@tcl.com
Tel: +86 755 3661 1621
Fax: +86 755 3661 2000-81722

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	GSM/UMTS/LTE/NR Mobile phone
Model Name	T614D
FCC ID:	2ACCJH179

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	016499000011540/ 016499000011565	06	3CSF

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	Manufacture
AE1	Battery1	TLp049FA	TMB
AE2	Battery2	TLp049F7	Veken
AE3	Charger1	QC13US	JUWEI
AE4	Charger2	QC13US	PUAN
AE5	USB Cable1	CDA0000256C1	JUWEI
AE6	USB Cable2	CDA0000256C2	SHENGHUA
AE4	Headset	/	Provided by laboratory

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1 + AE1/AE2 +AE3+AE5/AE6	Charger1+MP3+F Camera +GSM 850 idle
Set.2	EUT1 + AE1/AE2 +AE4+AE5/AE6	Charger2+R Camera + WCDMA B5 idle
Set.3	EUT1 + AE1/AE2 + AE5/AE6 + AE7	USB + FM + LTE B5
Set.4	EUT1 + AE1/AE2+ Cable + EUT	OTG + NR n5

Note:

Equipment Under Test (EUT) is a model of GSM/UMTS/LTE Mobile phone.

It supports

GSM Band 850/900/1800/1900

UMTS Band FDD Band I(W2100) /FDD Band II(W1900) /FDD Band IV(W1700)/FDD V(W850)

LTE Band FDD Bands 1/2/3/4/5/7/12/13/20/25/26/28/29/66/71,TDD Bands 38/40/41/48

NR Band n2/n5/n25/n41/n48/n66/n71/n77/n78

It has MP3, Camera, USB memory, Bluetooth 5.3, Wi-Fi (802.11a/b/g/n/ac, 802.11n supports 20MHz and 40MHz bandwidth, 802.11ac supports 20MHz, 40MHz and 80MHz bandwidth) and GPS function.

The device contains receivers which tune and operate between 30MHz-960MHz in the

following mode: GSM 850, WCDMA850, LTE Band 5/12/13/26/71, NR Band n5/n71, FM. All licensed band receivers that tune in the range of 30MHz-960MHz are investigated. Only the worst-case emissions are reported.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2019
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. LABORATORY ENVIRONMENT

Semi-anechoic chamber SAC-1 did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 M Ω
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

Shielded room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 M Ω
Ground system resistance	< 4 Ω

6. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL(huayuan North Road)
2	Conducted Emission	15.107(a)	B.2	P	CTTL(huayuan North Road)

7. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESW44	103144	R&S	2023-11-25	13 months
2	LISN	ENV216	101200	R&S	2024-06-05	13 months
3	Test Receiver	ESCI 7	100344	R&S	2024-02-21	13 months
4	EMI Antenna	VULB 9163	01222	SCHWARZBECK	2024-02-28	13 months
5	EMI Antenna	3115	6914	ETS-Lindgren	2024-04-25	13 months
6	Signal Generator	SMBV100A	260613	R&S	2024-03-14	13 months
7	Universal Communication Tester	CMW500	150344	R&S	2024-02-03	13 months

Test software information		
Test Item	Software	Version
Radiated Emission	EMC32	V11.50.00
Conducted Emission	EMC32	V8.53.0

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB/OTG mode of MS and charging mode of MS) at distances of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode

The MS is operating in the USB mode, OTG mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode, and is connected to the other device for charging in OTG mode and is connected to a charger in the case of charging mode.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

The model of the PC is M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note : I/O information : Printer – USB, Mouse – PS/2, Keyboard – USB.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V/m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{Rpl} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): $U = 4.84 \text{ dB}$, $k=2$.

Measurement results for Set.1:

Charing Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17983.340	45.40	-29.06	46.66	27.80	54.00	8.60	V
17997.620	45.30	-29.06	46.66	27.70	54.00	8.70	H
17986.740	45.30	-29.06	46.66	27.70	54.00	8.70	V
17995.920	45.30	-29.06	46.66	27.70	54.00	8.70	V
17968.040	45.20	-29.06	46.66	27.60	54.00	8.80	V
17993.880	45.10	-29.06	46.66	27.50	54.00	8.90	V

Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17978.920	55.70	-29.06	46.66	38.10	74.00	18.30	V
17977.560	55.30	-29.06	46.66	37.70	74.00	18.70	H
17979.260	55.30	-29.06	46.66	37.70	74.00	18.70	V
17974.840	55.20	-29.06	46.66	37.60	74.00	18.80	H
17989.460	55.20	-29.06	46.66	37.60	74.00	18.80	H
17927.920	55.20	-29.40	46.66	37.94	74.00	18.80	H

Measurement results for Set.2:
Charing Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17950.020	45.40	-28.94	46.66	27.68	54.00	8.60	V
17936.420	45.20	-29.40	46.66	27.94	54.00	8.80	V
17992.520	45.20	-29.06	46.66	27.60	54.00	8.80	H
17938.800	45.10	-29.40	46.66	27.84	54.00	8.90	V
17986.060	45.10	-29.06	46.66	27.50	54.00	8.90	H
17972.800	45.00	-29.06	46.66	27.40	54.00	9.00	H

Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17925.200	56.10	-29.40	46.66	38.84	74.00	17.90	H
17960.220	55.70	-29.06	46.66	38.10	74.00	18.30	H
17989.120	55.50	-29.06	46.66	37.90	74.00	18.50	V
17938.800	55.40	-29.40	46.66	38.14	74.00	18.60	V
17981.640	55.40	-29.06	46.66	37.80	74.00	18.60	H
17938.460	55.30	-29.40	46.66	38.04	74.00	18.70	H

Measurement results for Set.3:
USB Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17992.180	45.50	-29.06	46.66	27.90	54.00	8.50	V
17924.860	45.50	-29.40	46.66	28.24	54.00	8.50	H
17946.960	45.40	-28.94	46.66	27.68	54.00	8.60	H
17993.880	45.40	-29.06	46.66	27.80	54.00	8.60	H
17996.600	45.30	-29.06	46.66	27.70	54.00	8.70	H
17991.500	45.30	-29.06	46.66	27.70	54.00	8.70	H

USB Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17939.820	56.10	-29.40	46.66	38.84	74.00	17.90	H
17979.940	55.60	-29.06	46.66	38.00	74.00	18.40	V
17832.380	55.60	-29.68	45.95	39.32	74.00	18.40	H
17936.760	55.60	-29.40	46.66	38.34	74.00	18.40	V
17794.640	55.50	-29.89	45.95	39.43	74.00	18.50	H
17923.840	55.40	-29.40	46.66	38.14	74.00	18.60	H

Measurement results for Set.4:
OTG Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17995.920	45.50	-29.06	46.66	27.90	54.00	8.50	V
17986.400	45.40	-29.06	46.66	27.80	54.00	8.60	V
17960.900	45.40	-29.06	46.66	27.80	54.00	8.60	V
17997.620	45.30	-29.06	46.66	27.70	54.00	8.70	V
17996.260	45.30	-29.06	46.66	27.70	54.00	8.70	V
17991.500	45.20	-29.06	46.66	27.60	54.00	8.80	H

OTG Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17974.840	56.00	-29.06	46.66	38.40	74.00	18.00	V
17917.720	55.80	-29.33	46.66	38.47	74.00	18.20	H
17991.500	55.80	-29.06	46.66	38.20	74.00	18.20	V
17989.460	55.60	-29.06	46.66	38.00	74.00	18.40	H
17962.940	55.50	-29.06	46.66	37.90	74.00	18.50	H
17998.300	55.50	-29.06	46.66	37.90	74.00	18.50	V

Measurement results for Set.1:

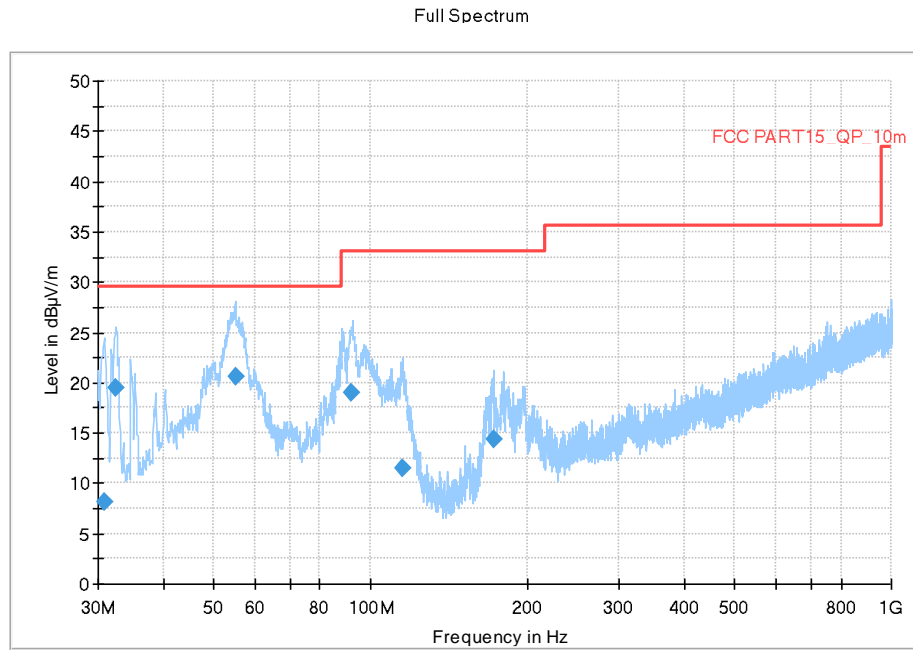


Fig A.1 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
30.776000	8.22	29.54	21.32	120.000	210.0	V	-45.0
32.522000	19.42	29.54	10.12	120.000	125.0	V	-44.0
55.026000	20.63	29.54	8.91	120.000	118.0	V	-45.0
92.177000	19.01	33.06	14.05	120.000	125.0	V	-45.0
115.263000	11.43	33.06	21.63	120.000	125.0	V	189.0
172.493000	14.38	33.06	18.68	120.000	100.0	V	57.0

Full Spectrum

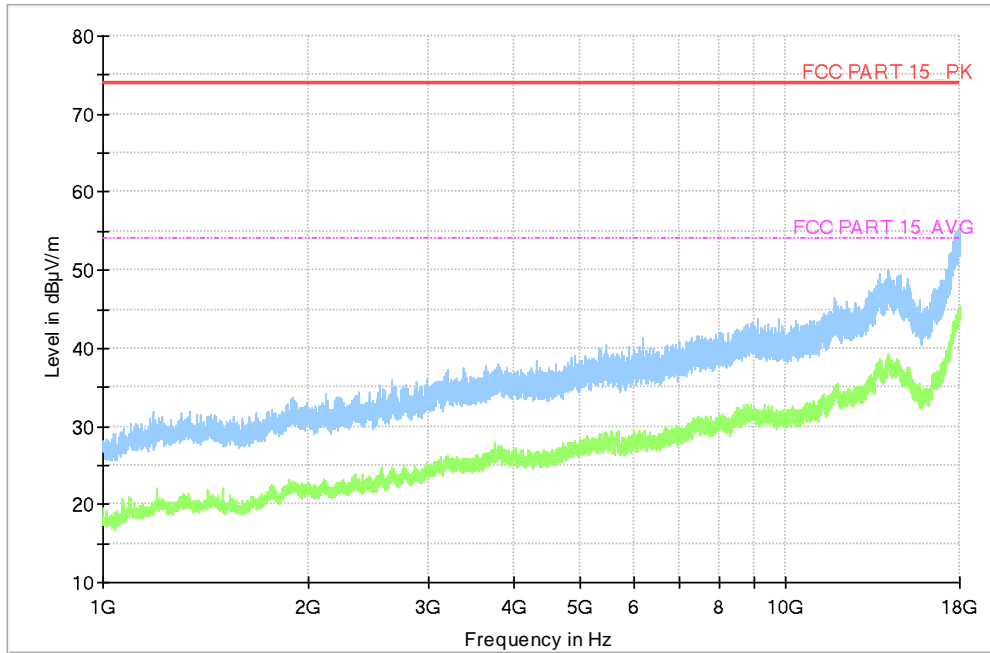


Fig A.2 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.2:

Full Spectrum

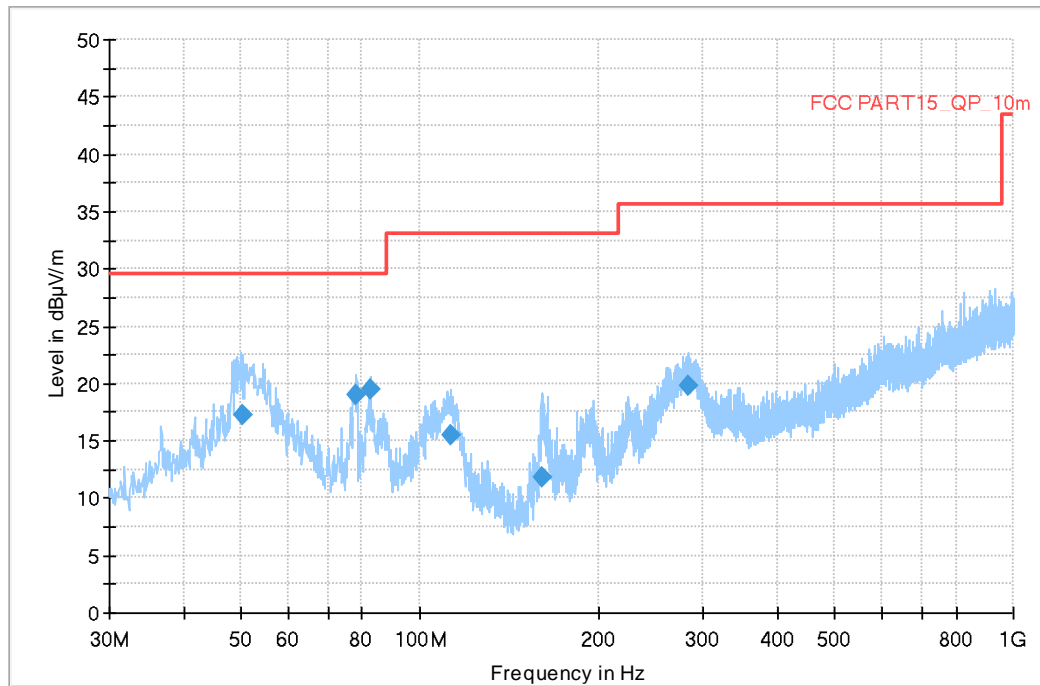


Fig A.3 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	PoI	Azimuth (deg)
50.176000	17.32	29.54	12.22	120.000	125.0	V	-45.0
78.112000	19.03	29.54	10.51	120.000	195.0	V	315.0
82.671000	19.48	29.54	10.06	120.000	175.0	V	-20.0
112.838000	15.43	33.06	17.63	120.000	276.0	V	189.0
160.271000	11.83	33.06	21.23	120.000	310.0	H	14.0
283.752000	19.77	35.56	15.79	120.000	310.0	H	7.0

Full Spectrum

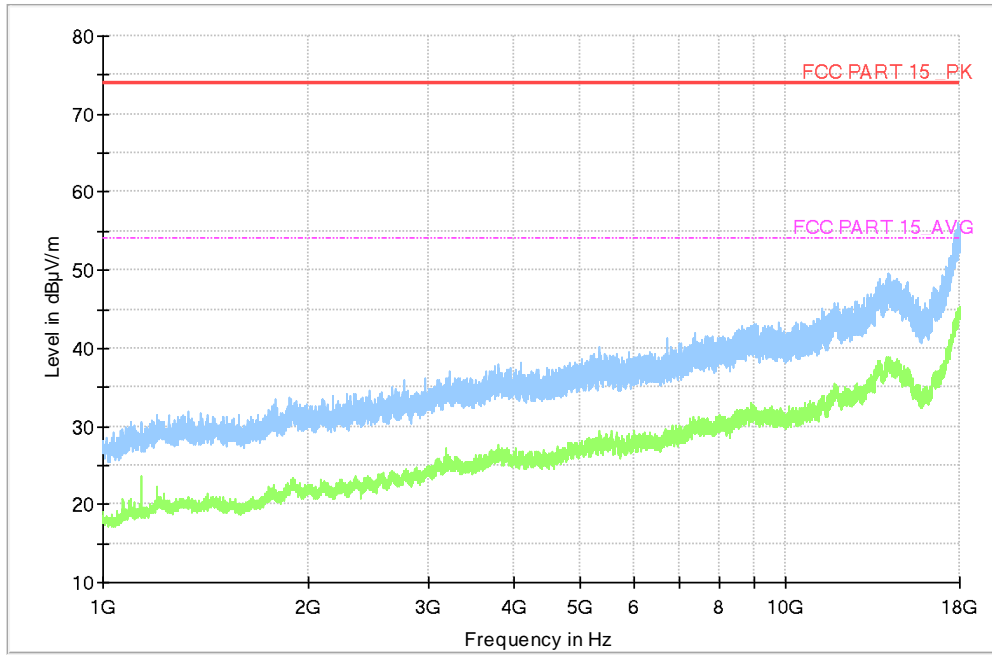


Fig A.4 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.3:

Full Spectrum

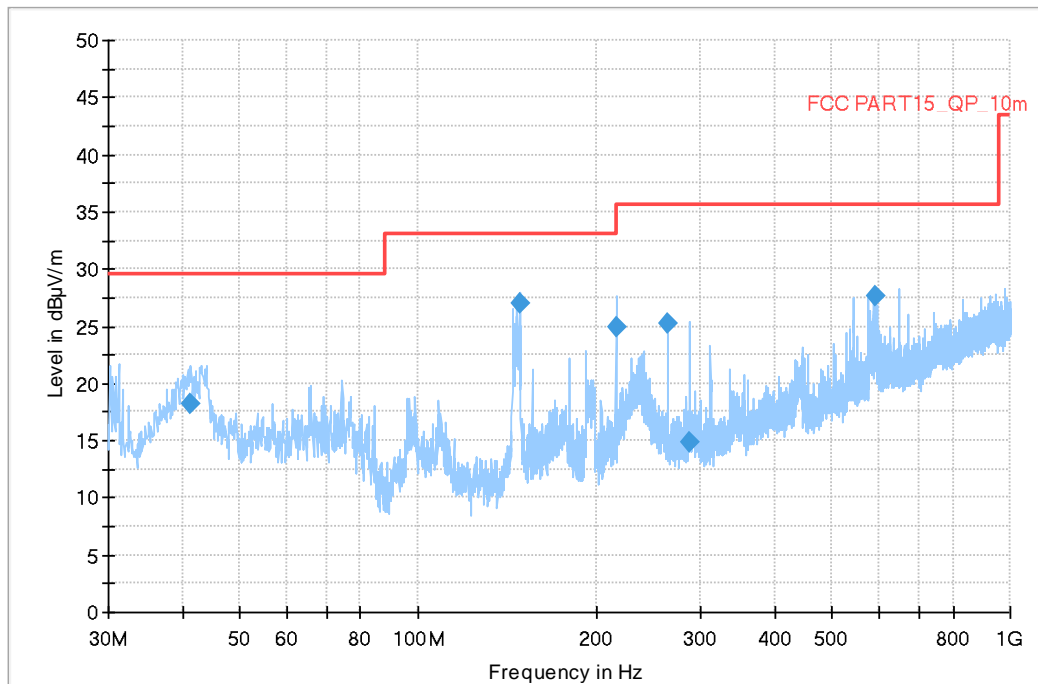


Fig A.5 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	PoI	Azimuth (deg)
41.155000	18.14	29.54	11.40	120.000	225.0	V	-45.0
148.728000	27.01	33.06	6.05	120.000	175.0	V	-45.0
215.949000	24.96	33.06	8.10	120.000	325.0	H	225.0
263.964000	25.27	35.56	10.29	120.000	101.0	V	46.0
287.923000	14.87	35.56	20.69	120.000	125.0	V	72.0
592.115000	27.68	35.56	7.88	120.000	225.0	V	-32.0

Full Spectrum

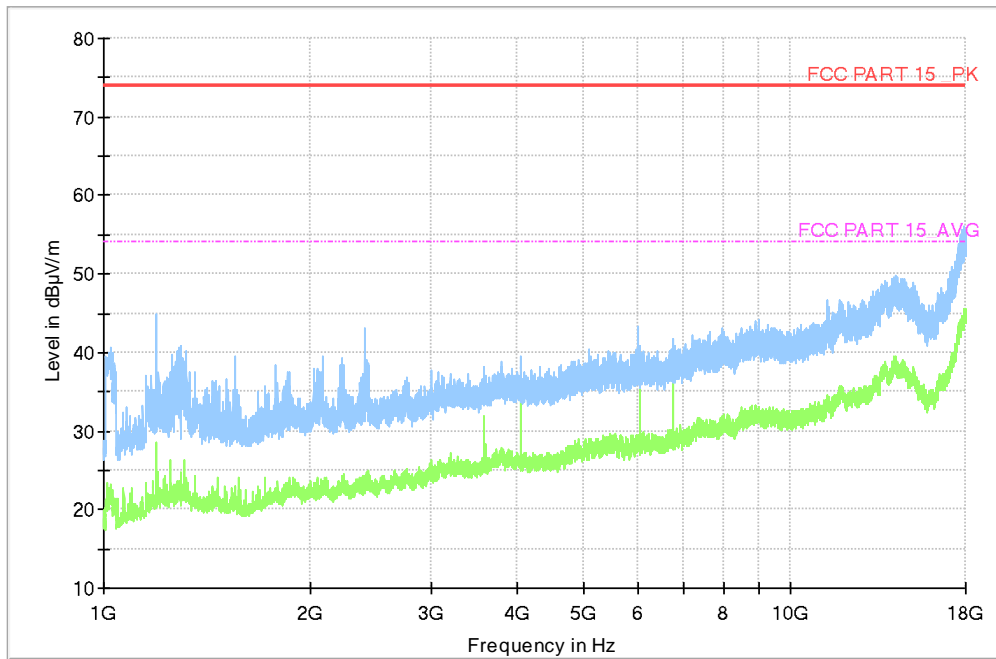


Fig A.6 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.4:

Full Spectrum

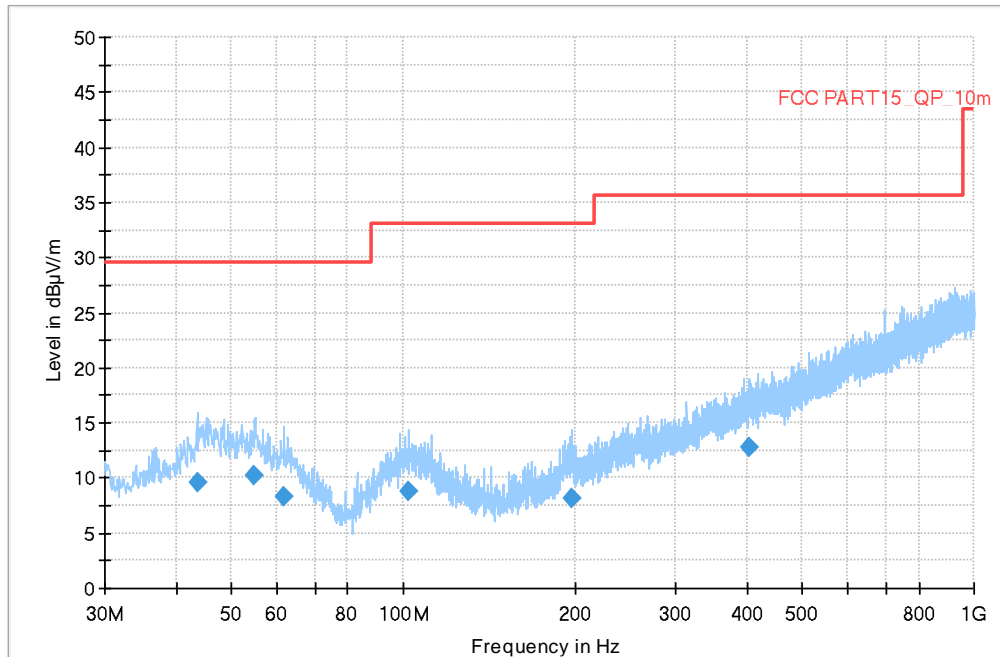


Fig A.7 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
43.580000	9.56	29.54	19.98	120.000	118.0	V	265.0
54.929000	10.29	29.54	19.25	120.000	325.0	V	34.0
61.719000	8.30	29.54	21.24	120.000	176.0	V	21.0
101.974000	8.71	33.06	24.35	120.000	302.0	H	137.0
196.937000	8.12	33.06	24.94	120.000	118.0	H	188.0
404.129000	12.78	35.56	22.78	120.000	100.0	V	225.0

Full Spectrum

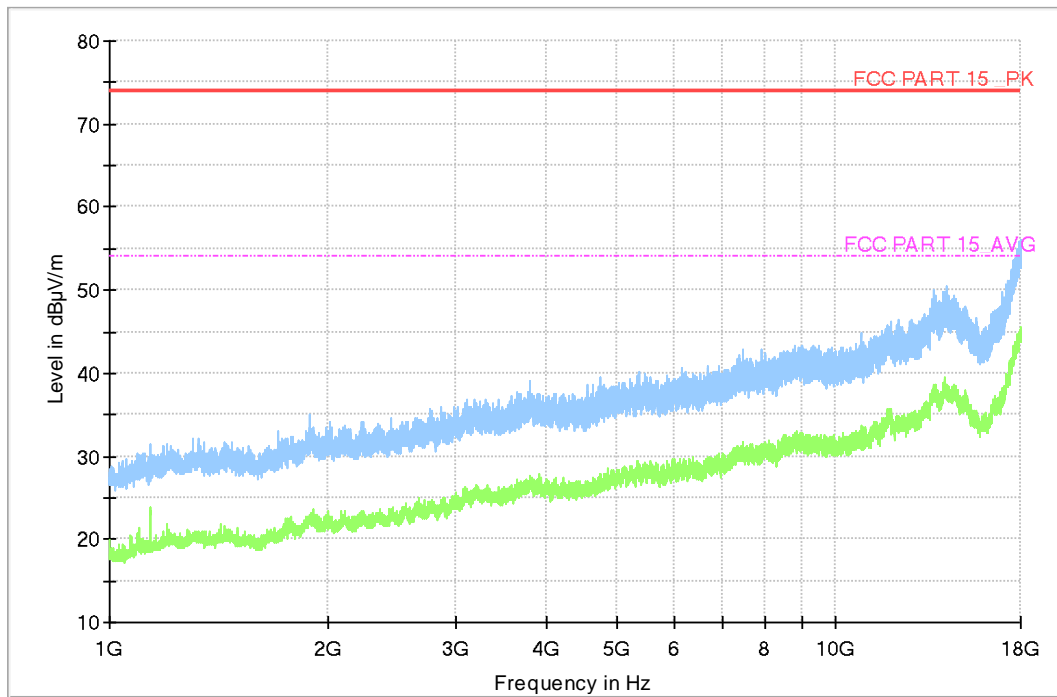


Fig A.8 Radiated Emission from 1GHz to 18GHz

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the USB mode and charging mode. During the test MS is connected to a PC via a USB cable in the case of USB mode and is connected to a charger in the case of charging mode. The model of the PC is DELL M4000E-17, and the serial number of the PC is M706GWXD. The software is used to let the PC keep on copying data to MS, reading and erasing the data after copy action was finished.

Note : I/O information : Printer – USB, Mouse – PS/2, Keyboard – USB.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U= 3.08$ dB, $k=2$.

Charging Mode, Set.1:

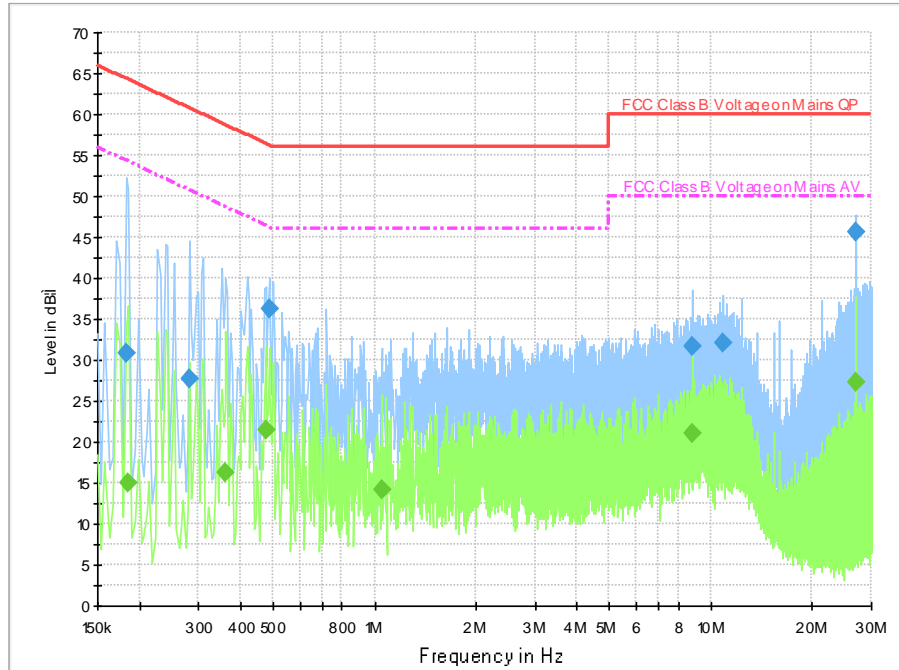


Fig A.9 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.182000	30.9	2000.0	9.000	On	L1	19.7	33.5	64.4	
0.282000	27.8	2000.0	9.000	On	L1	19.7	33.0	60.8	
0.486000	36.3	2000.0	9.000	On	L1	19.7	19.9	56.2	
8.850000	31.7	2000.0	9.000	On	L1	19.7	28.3	60.0	
10.914000	32.1	2000.0	9.000	On	L1	19.7	27.9	60.0	
27.118000	45.6	2000.0	9.000	On	N	19.8	14.4	60.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.186000	15.0	2000.0	9.000	On	N	19.7	39.3	54.2	
0.362000	16.2	2000.0	9.000	On	L1	19.7	32.4	48.7	
0.474000	21.5	2000.0	9.000	On	L1	19.7	25.0	46.4	
1.050000	14.2	2000.0	9.000	On	L1	19.7	31.8	46.0	
8.850000	21.1	2000.0	9.000	On	L1	19.7	28.9	50.0	
27.122000	27.3	2000.0	9.000	On	L1	19.9	22.7	50.0	

Charging Mode, Set.2:

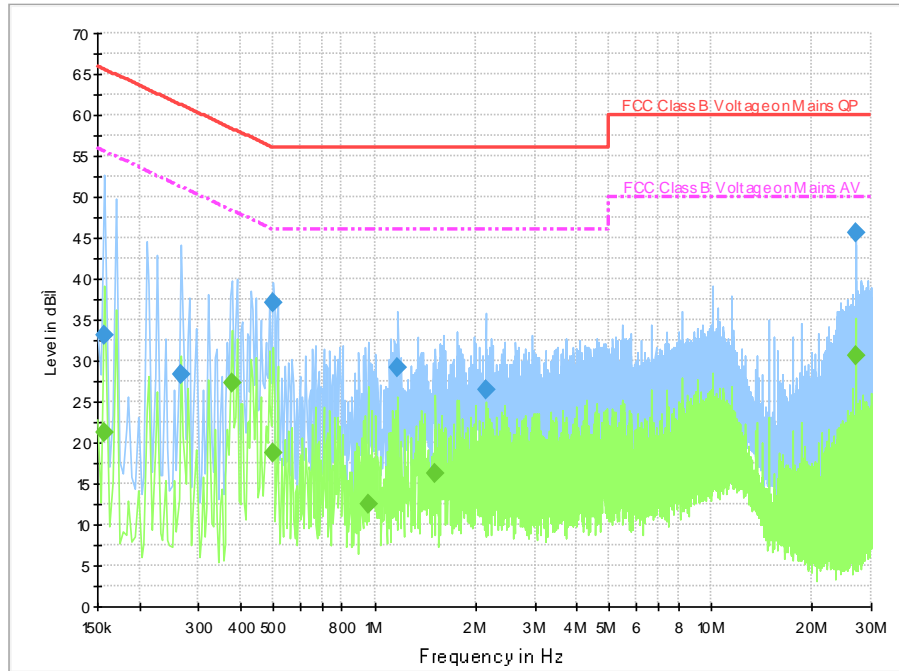


Fig A.10 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.158000	33.1	2000.0	9.000	On	N	19.7	32.5	65.6	
0.266000	28.4	2000.0	9.000	On	L1	19.7	32.8	61.2	
0.498000	37.1	2000.0	9.000	On	L1	19.7	18.9	56.0	
1.174000	29.2	2000.0	9.000	On	L1	19.7	26.8	56.0	
2.134000	26.5	2000.0	9.000	On	L1	19.6	29.5	56.0	
27.118000	45.6	2000.0	9.000	On	N	19.8	14.4	60.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.158000	21.2	2000.0	9.000	On	L1	19.8	34.4	55.6	
0.378000	27.3	2000.0	9.000	On	L1	19.7	21.0	48.3	
0.498000	18.7	2000.0	9.000	On	L1	19.7	27.4	46.0	
0.954000	12.6	2000.0	9.000	On	L1	19.7	33.4	46.0	
1.518000	16.3	2000.0	9.000	On	L1	19.6	29.7	46.0	
27.118000	30.6	2000.0	9.000	On	N	19.8	19.4	50.0	

USB Mode, Set.3:

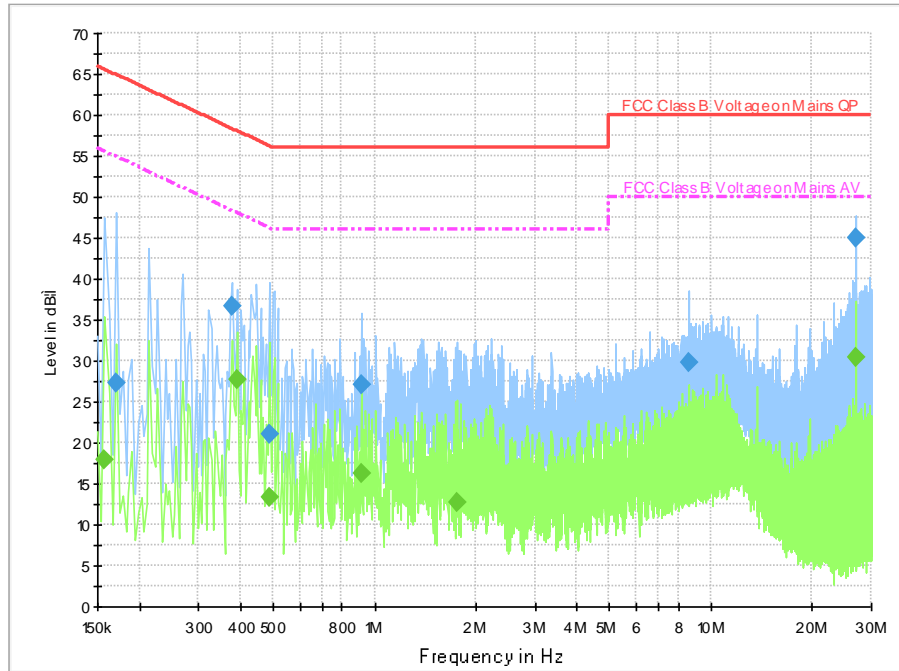


Fig A.11 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.170000	27.3	2000.0	9.000	On	L1	19.7	37.6	65.0	
0.378000	36.7	2000.0	9.000	On	L1	19.7	21.6	58.3	
0.486000	21.1	2000.0	9.000	On	L1	19.7	35.1	56.2	
0.914000	27.2	2000.0	9.000	On	L1	19.7	28.8	56.0	
8.650000	29.8	2000.0	9.000	On	L1	19.7	30.2	60.0	
27.122000	44.9	2000.0	9.000	On	L1	19.9	15.1	60.0	

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.158000	18.0	2000.0	9.000	On	L1	19.8	37.6	55.6	
0.390000	27.7	2000.0	9.000	On	L1	19.7	20.3	48.1	
0.486000	13.4	2000.0	9.000	On	L1	19.7	32.8	46.2	
0.914000	16.2	2000.0	9.000	On	L1	19.7	29.8	46.0	
1.766000	12.8	2000.0	9.000	On	L1	19.6	33.2	46.0	
27.122000	30.4	2000.0	9.000	On	L1	19.9	19.6	50.0	

END OF REPORT