

# GRUN MOBILE LLC

## GSM Mobile Phone

**Main Model:G-181**  
**Serial Model: N/A**

**June 17 , 2014**

**Report No.: 14070134-FCC-R1**  
(This report supersedes NONE)



**Modifications made to the product : None**

**This Test Report is Issued Under the Authority of:**

Hank Li	Alex Liu	
Hank Li Compliance Engineer	Alex Liu Technical Manager	

**This test report may be reproduced in full only.  
Test result presented in this test report is applicable to the representative sample only.**



## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management through out a project. Our extensive experience with China, Asia Pacific, North America, European, and international compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### SIEMIC (Shenzhen - China) Laboratories Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, Telecom
Canada	EMC, RF/Wireless, Telecom
Taiwan	EMC, RF, Telecom, Safety
Hong Kong	RF/Wireless, Telecom
Australia	EMC, RF, Telecom, Safety
Korea	EMI, EMS, RF, Telecom, Safety
Japan	EMI, RF/Wireless, Telecom
Singapore	EMC, RF, Telecom
Europe	EMC, RF, Telecom, Safety



**SIEMIC, INC.**

Accessing global markets

**Title:** RF Test Report for GSM Mobile Phone  
**Main Model:** G-181  
**Serial Model:** N/A  
**To:** FCC Part 22(H) & FCC Part 24(E): 2013

**Report No:** 14070134-FCC-R1  
**Issue Date:** June 17, 2014  
**Page:** 3 of 50  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

This page has been left blank intentionally.

## CONTENTS

1. EXECUTIVE SUMMARY & EUT INFORMATION.....	5
2. TECHNICAL DETAILS.....	6
3. MODIFICATION .....	7
4. TEST SUMMARY .....	8
5. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	9
ANNEX A. TEST INSTRUMENT & METHOD .....	31
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS .....	34
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	46
ANNEX D.USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST .....	49
ANNEX E. DECLARATION OF SIMILARITY .....	50

## **1. EXECUTIVE SUMMARY & EUT INFORMATION**

**The purpose of this test programmed was to demonstrate compliance of the GRUN MOBILE LLC, GSM Mobile Phone and model: G-181 against the current Stipulated Standards. The GSM Mobile Phone has demonstrated compliance with the FCC Part 22(H) & FCC Part 24(E): 2013.**

### **EUT Information**

**EUT**

**Description** : GSM Mobile Phone

**Main Model** : G-181

**Serial Model** N/A

**GSM850: -1.8 dBi**

**Antenna Gain** : PCS1900: -0.7 dBi  
Bluetooth: -1.9 dBi

**Battery:**

Spec: 3.7V 800mAh

Limited charger voltage: 4.2V

**Input Power** : Adapter:  
Model: STEIN  
Input: 100-240V; 50/60Hz  
Output: 5.0V; 500mA

**Maximum Conducted AV Power to Antenna** : **GSM850: 31.77dBm**  
**PCS1900: 28.48 dBm**

**Maximum Radiated ERP/EIRP** : **GSM850: 26.38 dBm / ERP**  
**PCS1900: 23.59 dBm / EIRP**

**Classification Per Stipulated Test Standard** : FCC Part 22(H) & FCC Part 24(E): 2013

## 2. TECHNICAL DETAILS

<b>Purpose</b>	Compliance testing of GSM Mobile Phone with stipulated standard
<b>Applicant / Client</b>	GRUN MOBILE LLC 2315 nw 107th Ave SUITE I M02 Mailbox # 33 Doral 33172
<b>Manufacturer</b>	Shenzhen fortuneship technology CO.,LTD 6floor blockB, digital building,gardencity,NO.1079 nanhai road,nanshan district Shenzhen,Guangdong,PR.china.
<b>Laboratory performing the tests</b>	SIEMIC (Shenzhen - China) Laboratories Zone A, Floor 1, Building 2, Wan Ye Long Technology Park, South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong, China Tel: +86-0755-2601 4629 / 2601 4953 Fax: +86-0755-2601 4953-810 Email: <a href="mailto:China@siemic.com.cn">China@siemic.com.cn</a>
<b>Test report reference number</b>	14070134-FCC-R1
<b>Date EUT received</b>	May 09, 2014
<b>Standard applied</b>	FCC Part 22(H) & FCC Part 24(E): 2013
<b>Dates of test</b>	June 12 to June 16, 2014
<b>No of Units</b>	#1
<b>Equipment Category</b>	PCE
<b>Trade Name</b>	GRUN
<b>RF Operating Frequency (ies)</b>	GSM850 TX : 824.2 ~ 848.8 MHz; RX : 869.2 ~ 893.8 MHz PCS1900 TX : 1850.2 ~ 1909.8 MHz; RX : 1930.2 ~ 1989.8 MHz Bluetooth: 2402-2480 MHz
<b>Number of Channels</b>	299CH (PCS1900) and 124CH (GSM850) Bluetooth: 79CH
<b>Modulation</b>	GSM: GMSK Bluetooth: GFSK& π/4DQPSK&8DPSK
<b>GPRS Multi-slot class</b>	NA
<b>FCC ID</b>	2ACFG-G181

### 3. MODIFICATION

**NONE**

## 4. TEST SUMMARY

The product was tested in accordance with the following specifications.  
 All testing has been performed according to below product classification:

### PCE

#### Test Results Summary

Test Standard	Description	Product Class	Pass / Fail
§ 1.1307, § 2.1093	RF Exposure (SAR)	See Above	Pass
§2.1046; § 22.913 (a); § 24.232 (c)	RF Output Power	See Above	Pass
§ 2.1047	Modulation Characteristics	See Above	N/A
§ 2.1049; § 22.905 § 22.917; § 24.238	99% & -26 dB Occupied Bandwidth	See Above	Pass
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	See Above	Pass
§ 2.1053 § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	See Above	Pass
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	See Above	Pass
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	See Above	Pass

*Note: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different.*

## **5. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS**

### **5.1 §1.1307, §2.1093- RF Exposure (SAR)**

#### **Test Result: Pass**

The EUT is a portable device, thus requires SAR evaluation;  
Please refer to SIEMIC SAR Report: 14070134-FCC-H

## **5.2 §2.1046; §22.913 (a); §24.232 (c) - RF Output Power**

1. Conducted Measurement  
EUT was set for low, mid, high channel with modulated mode and highest RF output power.  
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5\text{dB}$ .
3. Environmental Conditions
 

Temperature	24°C
Relative Humidity	52%
Atmospheric Pressure	1012mbar
4. Test date : June 12, 2014  
Tested By : Hank Li

### **Procedures: (According with KDB 971168)**

#### **For Conducted Power:**

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different test mode.
4. The instrument must have an available measurement/resolution bandwidth that is equal to or exceeds the OBW. If this capability is available, then the following procedure can be used to determine the total peak output power.
  - a) Set the RBW  $\geq$  OBW.
  - b) Set VBW  $\geq 3 \times$  RBW.
  - c) Set span  $\geq 2 \times$  RBW
  - d) Sweep time = auto couple.
  - e) Detector = peak.
  - f) Ensure that the number of measurement points  $\geq$  span/RBW.
  - g) Trace mode = max hold.
  - h) Allow trace to fully stabilize.
  - 1) Use the peak marker function to determine the peak amplitude level.

#### **For ERP/EIRP: (According with TIA 603D)**

1. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

#### Sample Calculation:

EUT Field Strength (dBm) = Reading (Signal generator) + Antenna Gain (substitution antenna) - Cable loss (From Signal Generator to substitution antenna)

### **Test Result: Pass**

**Remark:** Conducted Burst Average power for reporting purposes only

## Conducted Power

### GSM Mode:

Burst Average Power (dBm);								
Band	GSM850				GSM1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink),GMSK	31.53	31.61	<b>31.77</b>	31±1	<b>28.48</b>	28.35	28.34	28±1

Remark :  
EUT Not support GPRS mode

**Note: Since GSM mode has higher power, so the test items below were not performed to GPRS mode.**

**ERP & EIRP (worst case)**  
**ERP for Cellular Band (Part 22H)**

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	20.07	V	6.8	0.53	26.34	38.45
824.2	19.83	H	6.8	0.53	26.10	38.45
836.6	20.11	V	6.8	0.53	<b>26.38</b>	38.45
836.6	19.94	H	6.8	0.53	26.21	38.45
848.8	19.93	V	6.9	0.53	26.30	38.45
848.8	20.01	H	6.9	0.53	26.38	38.45

**EIRP for PCS Band (Part 24E)**

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	16.56	V	7.88	0.85	<b>23.59</b>	33
1850.2	15.89	H	7.88	0.85	22.92	33
1880	15.73	V	7.88	0.85	22.76	33
1880	16.43	H	7.88	0.85	23.46	33
1909.8	16.29	V	7.86	0.85	23.30	33
1909.8	15.44	H	7.86	0.85	22.45	33



**SIEMIC, INC.**

Accessing global markets

**Title:** RF Test Report for GSM Mobile Phone  
**Main Model:** G-181  
**Serial Model:** N/A  
**To:** FCC Part 22(H) & FCC Part 24(E): 2013

**Report No:** 14070134-FCC-R1  
**Issue Date:** June 17, 2014  
**Page:** 13 of 50  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

### **5.3 §2.1047 - Modulation Characteristic**

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

## **5.4 §2.1049, §22.917, §22.905 & §24.238 - Occupied Bandwidth**

## Procedures:

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.
3. Details according with KDB 971168 section 4.1 & 4.2.

## Test Results: Pass

## Cellular Band (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
128	824.2	246.3793	314.757
190	836.6	241.2601	314.100
251	848.8	241.7072	317.257

### PCS Band (Part 24E)


Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
512	1850.2	242.4620	312.618
661	1880.0	246.2950	315.262
810	1909.8	246.5094	315.936

Please refer to the following plots.

### Note:


850: Cellular Band  
1900: PCS Band  
L: Low Channel  
M: Middle Channel  
H: High Channel

### 99% Occupied Bandwidth & 26 dB Bandwidth

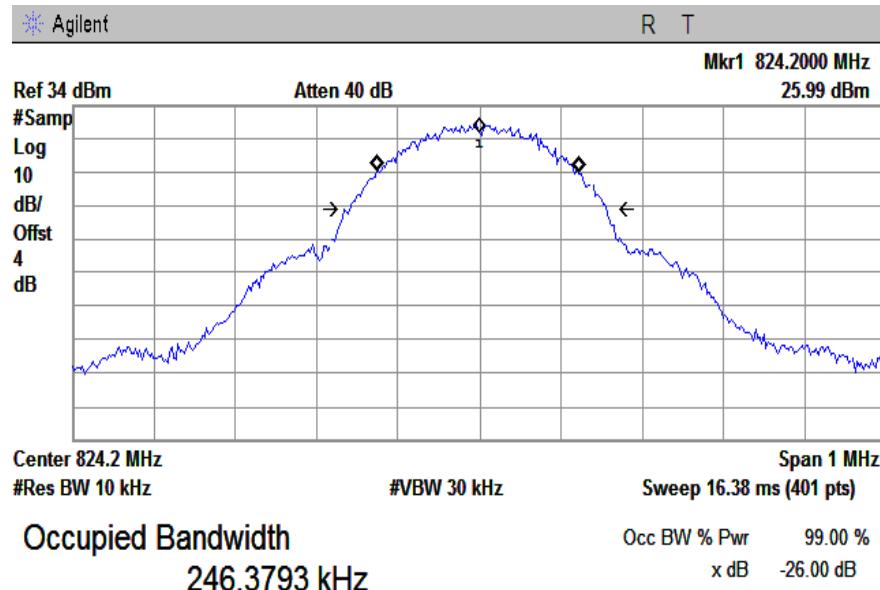


Transmit Freq Error -1.825 kHz  
 x dB Bandwidth 314.757 kHz\*

850-26DB-L.

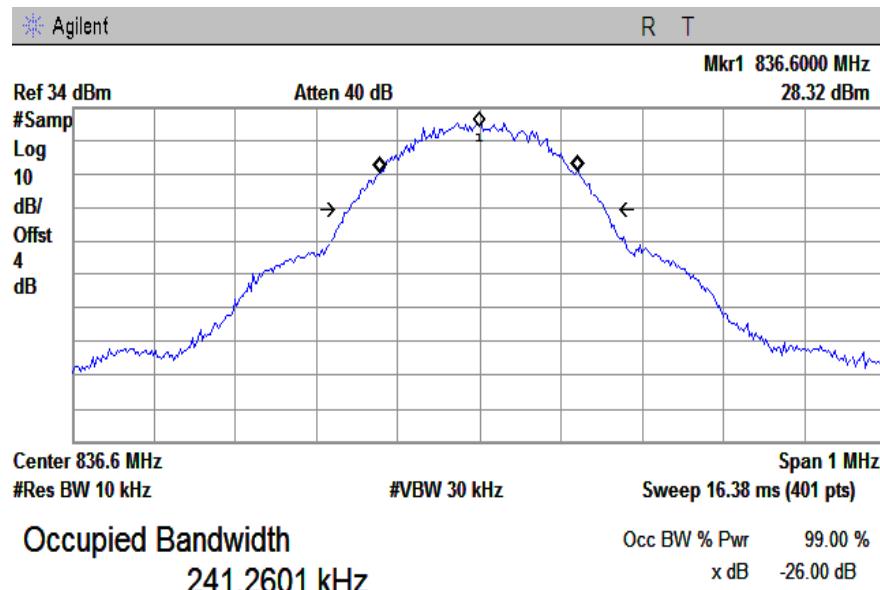


Transmit Freq Error -1.243 kHz  
 x dB Bandwidth 314.100 kHz\*

850-26DB-M

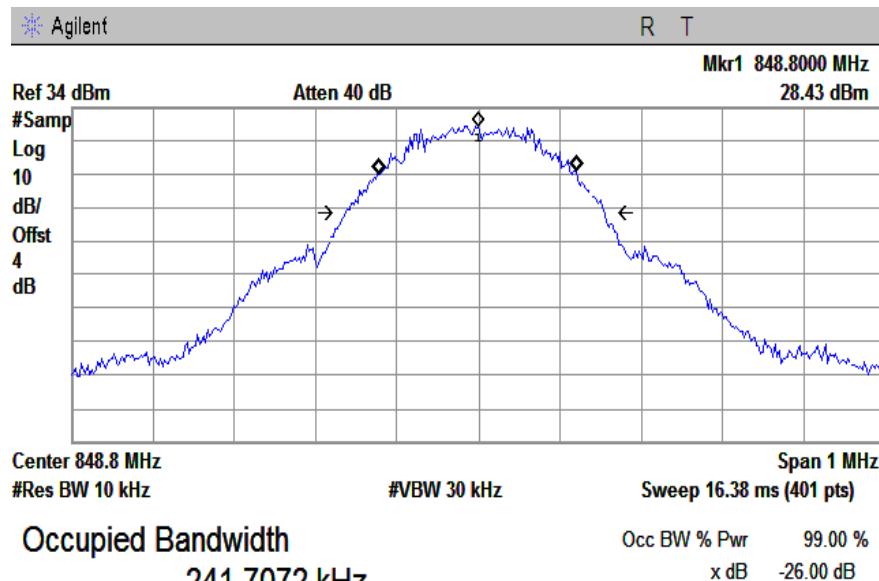


Transmit Freq Error -1.975 kHz  
x dB Bandwidth 317.257 kHz\*

850-26DB-H

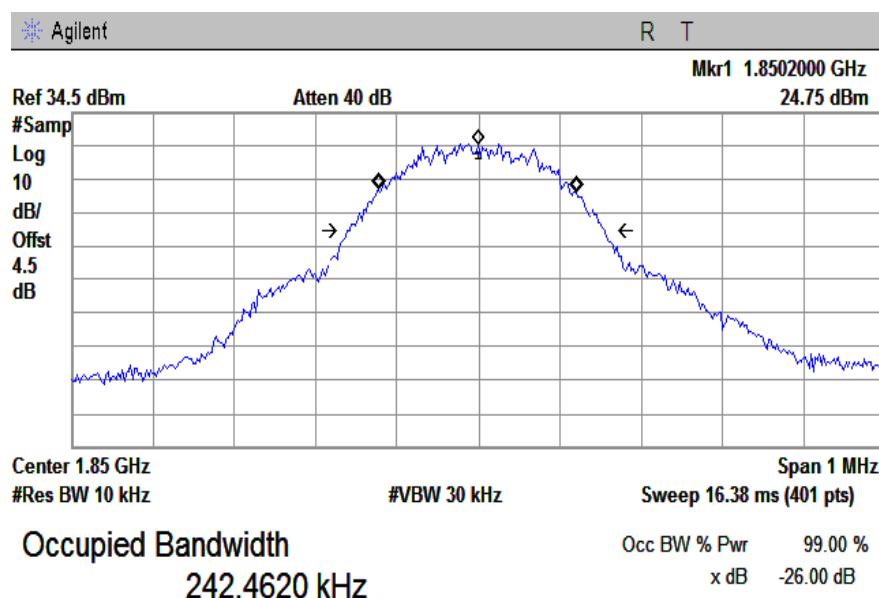


Transmit Freq Error -1.546 kHz  
x dB Bandwidth 312.618 kHz\*

1900-26DB-L.

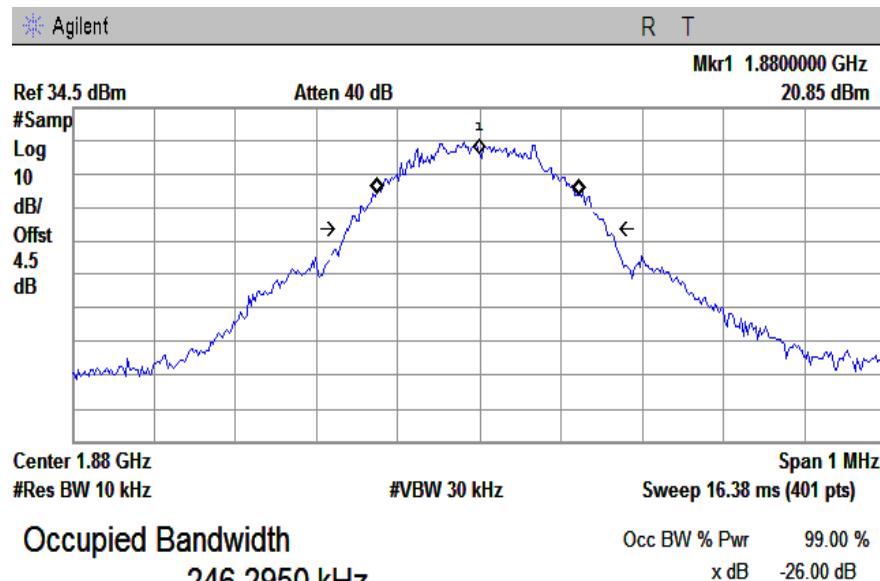


Transmit Freq Error -766.715 Hz  
 x dB Bandwidth 315.262 kHz\*

1900-26DB-M

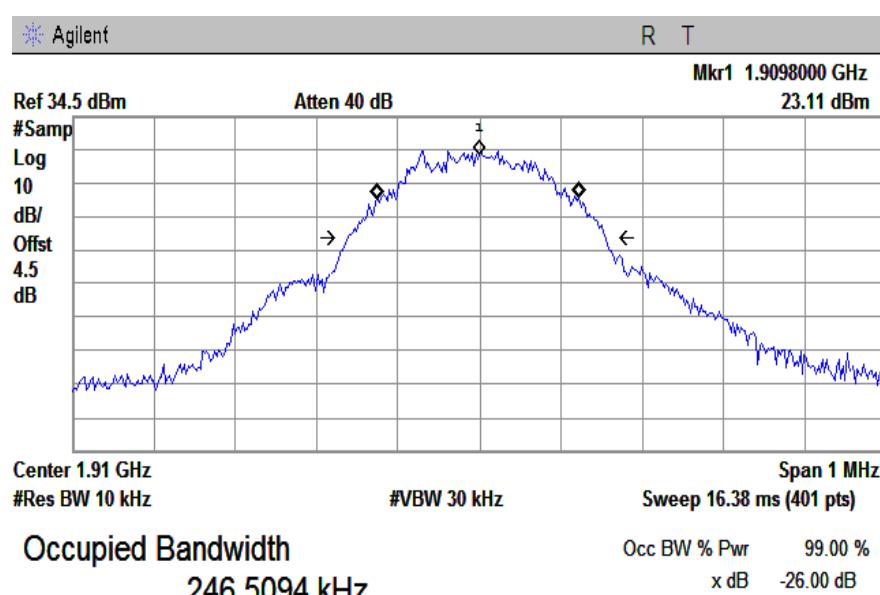

Transmit Freq Error -960.589 Hz  
 x dB Bandwidth 315.936 kHz\*

1900-26DB-H.

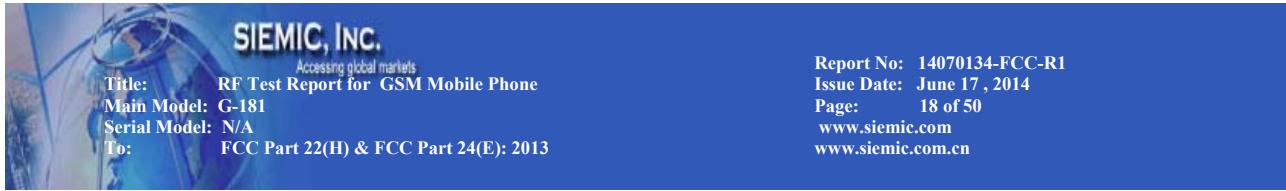

## **5.5 §2.1051, §22.917(a) & §24.238(a) - Spurious Emissions at Antenna Terminals**

1. Conducted Measurement  
EUT was set for low, mid, high channel with modulated mode and highest RF output power.  
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5$ dB.
3. Environmental Conditions      Temperature      21°C  
    Relative Humidity      56%  
    Atmospheric Pressure      1017mbar
4. Test date :June 16, 2014  
Tested By : Hank Li

### **Standard Requirement:**

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### **Procedures:**

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
3. Details according with KDB 971168 section 6.0.


### **Test Result: Pass**

Refer to the attached plots.


## Cellular Band (Part 22H)


30MHz -10G – GSM850

## Low Channel

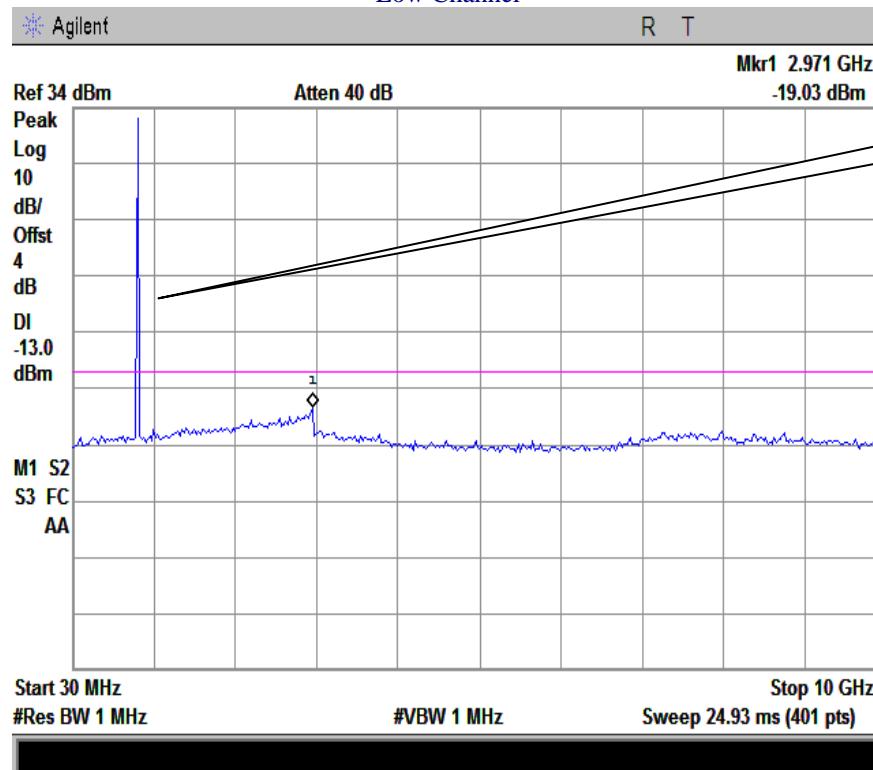


## Middle Channel

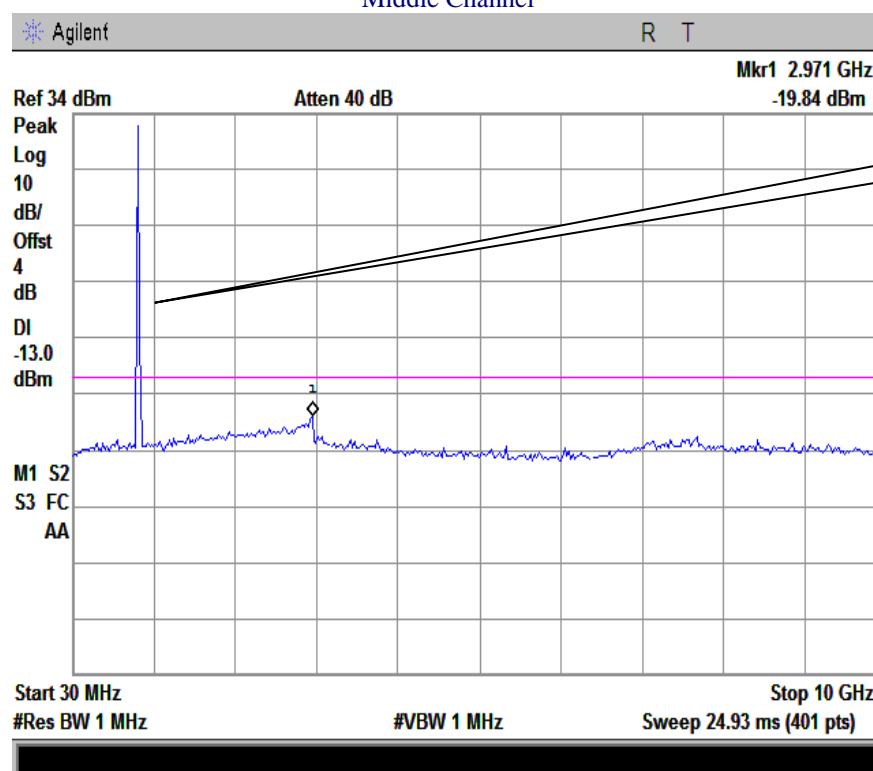

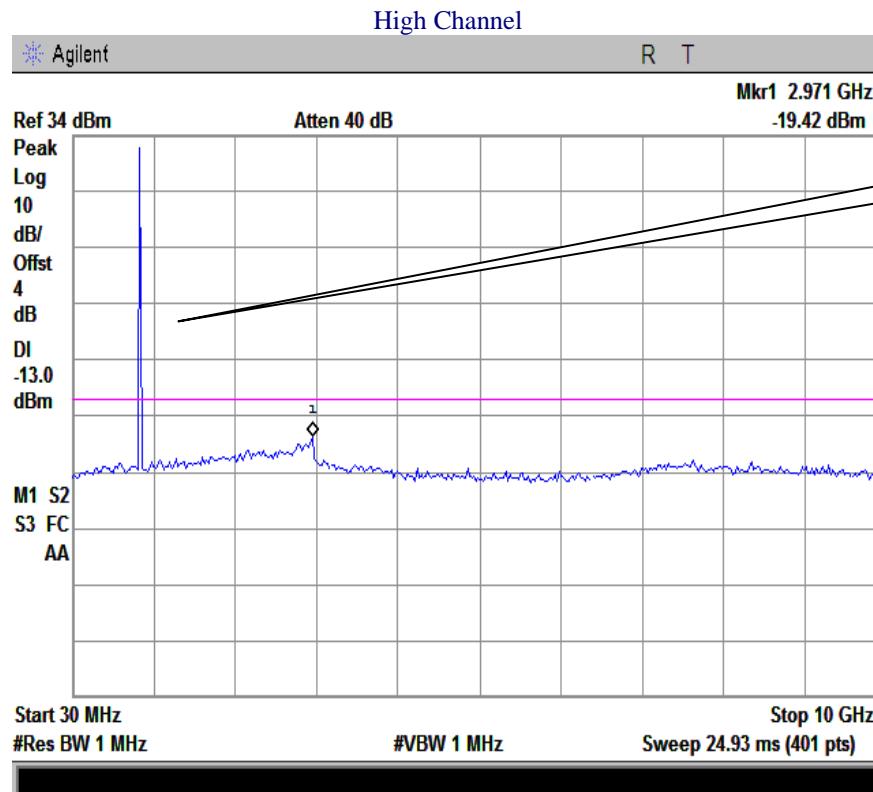


### PCS Band (Part24E)


30MHz -20G – PCS1900

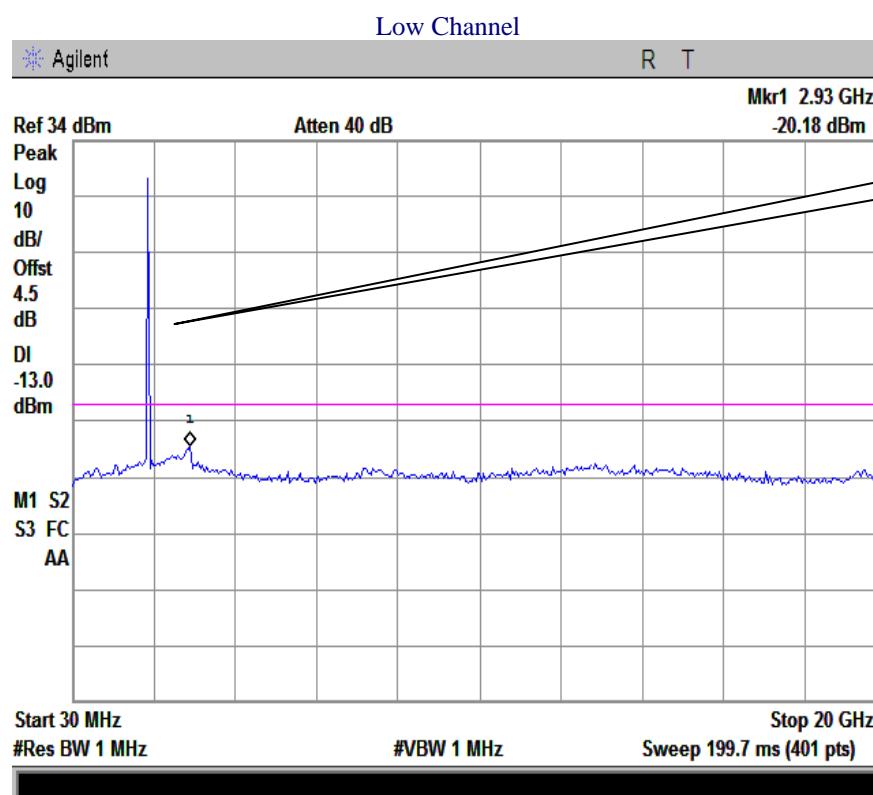

## Middle Channel

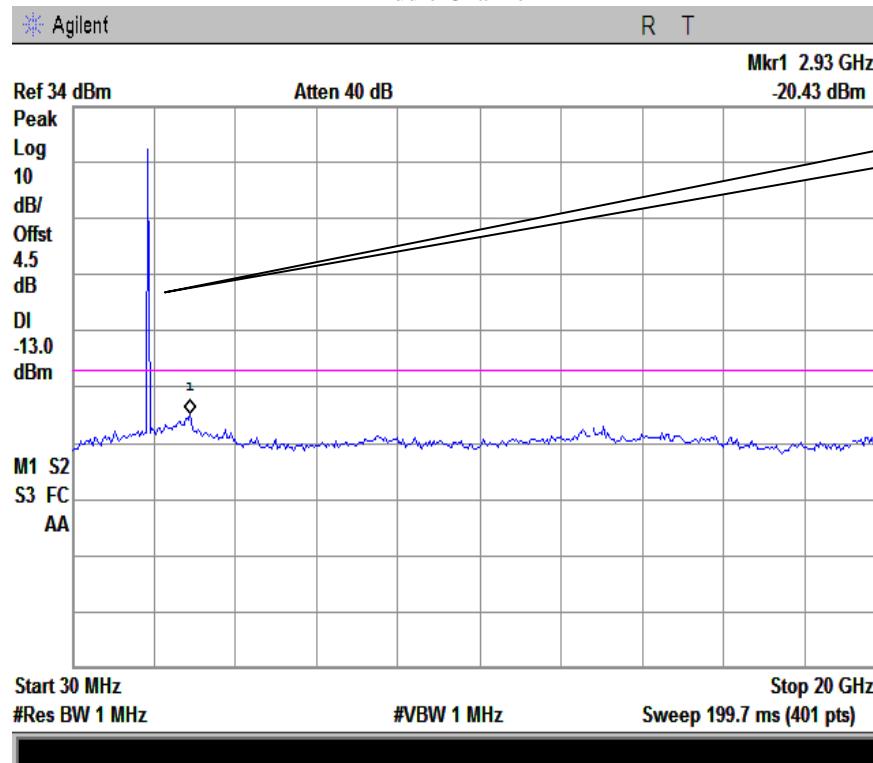

## High Channel

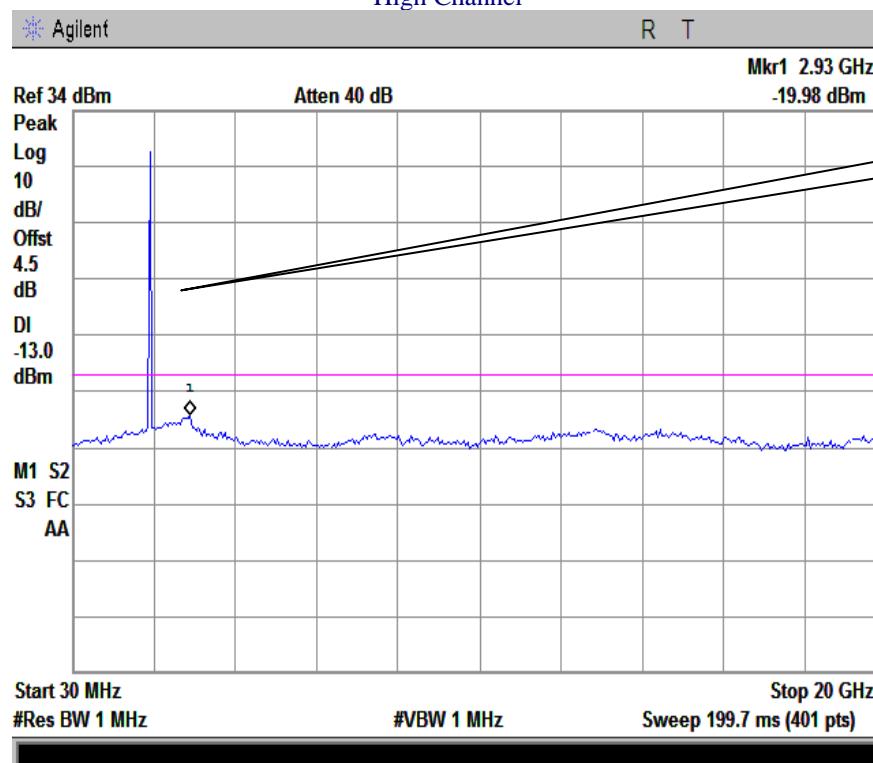

## 5.6 §2.1053, §22.917 & §24.238 - Spurious Radiated Emissions

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty  
 All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 1GHz – 40GHz is  $\pm 6.0\text{dB}$  (for EUTs  $< 0.5\text{m} \times 0.5\text{m} \times 0.5\text{m}$ ).
4. Environmental Conditions      Temperature      21°C  
    Relative Humidity      56%  
    Atmospheric Pressure      1017mbar
5. Test date : June 16, 2014  
 Tested By : Hank Li

### **Standard Requirement:**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

### **Procedures: (According with TIA 603D)**

1. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

### Sample Calculation:

EUT Field Strength (dBm) = Reading (Signal generator) + Antenna Gain (substitution antenna) - Cable loss (From Signal Generator to substitution antenna)

### **Test Result: Pass**

### Cellular Band (Part 22H)

#### Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1648.4	-37.16	V	7.95	0.78	-29.99	-13	-16.99
1648.4	-37.22	H	7.95	0.78	-30.05	-13	-17.05
414.4	-52.09	V	6.70	0.27	-45.66	-13	-32.66
656.7	-51.15	H	7.10	0.43	-44.48	-13	-31.48

#### Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673.2	-37.09	V	7.95	0.78	-29.92	-13	-16.92
1673.2	-36.86	H	7.95	0.78	-29.69	-13	-16.69
412.7	-51.76	V	6.70	0.27	-45.33	-13	-32.33
654.9	-50.59	H	7.10	0.43	-43.92	-13	-30.92

#### High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1697.6	-36.68	V	7.95	0.78	-29.51	-13	-16.51
1697.6	-36.79	H	7.95	0.78	-29.62	-13	-16.62
410.9	-52.03	V	6.70	0.27	-45.60	-13	-32.60
658.8	-50.73	H	7.10	0.43	-44.06	-13	-31.06

### PCS Band (Part 24E)

#### Low channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3700.4	-38.94	V	10.25	2.73	-31.42	-13	-18.42
3700.4	-39.05	H	10.25	2.73	-31.53	-13	-18.53
413.5	-51.77	V	6.70	0.27	-45.34	-13	-32.34
657.2	-51.16	H	7.10	0.43	-44.49	-13	-31.49

#### Middle channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-39.03	V	10.25	2.73	-31.51	-13	-18.51
3760	-39.11	H	10.25	2.73	-31.59	-13	-18.59
414.5	-52.04	V	6.70	0.27	-45.61	-13	-32.61
658.2	-50.89	H	7.10	0.43	-44.22	-13	-31.22

#### High channel

Frequency (MHz)	Substituted level (dBm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3819.6	-39.19	V	10.36	2.73	-31.56	-13	-18.56
3819.6	-38.86	H	10.36	2.73	-31.23	-13	-18.23
413.7	-51.71	V	6.70	0.27	-45.28	-13	-32.28
655.3	-50.88	H	7.10	0.43	-44.21	-13	-31.21

## **5.7 §22.917(a) & §24.238(a) - Band Edge**

1. Conducted Measurement  
EUT was set for low, mid, high channel with modulated mode and highest RF output power.  
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5\text{dB}$ .
3. Environmental Conditions      Temperature       $21^\circ\text{C}$   
    Relative Humidity      56%  
    Atmospheric Pressure      1017mbar
4. Test date : June 16, 2014  
Tested By : Hank Li

### **Standard Requirement:**

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

## Procedures:

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.
3. Details according with KDB 971168 section 6.0.

## Test Result: Pass

Refer to the attached plots.


**Cellular Band (Part 22H)**

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.9800	-14.49	-13
849.0150	-15.97	-13

**PCS Band (Part 24E)**


Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.9775	-17.38	-13
1910.0200	-14.76	-13

## Cellular Band, Low Channel

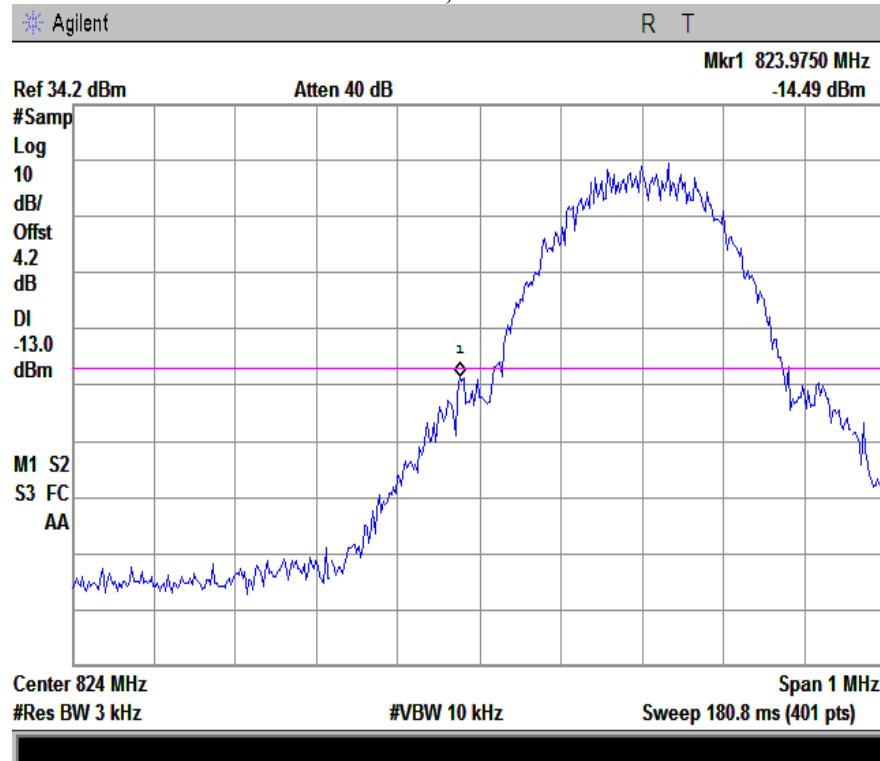


Note: Offset=Cable loss (4.0) + 10log (3.15/3)=4.0+0.2=4.2 dB

## Cellular Band, High Channel

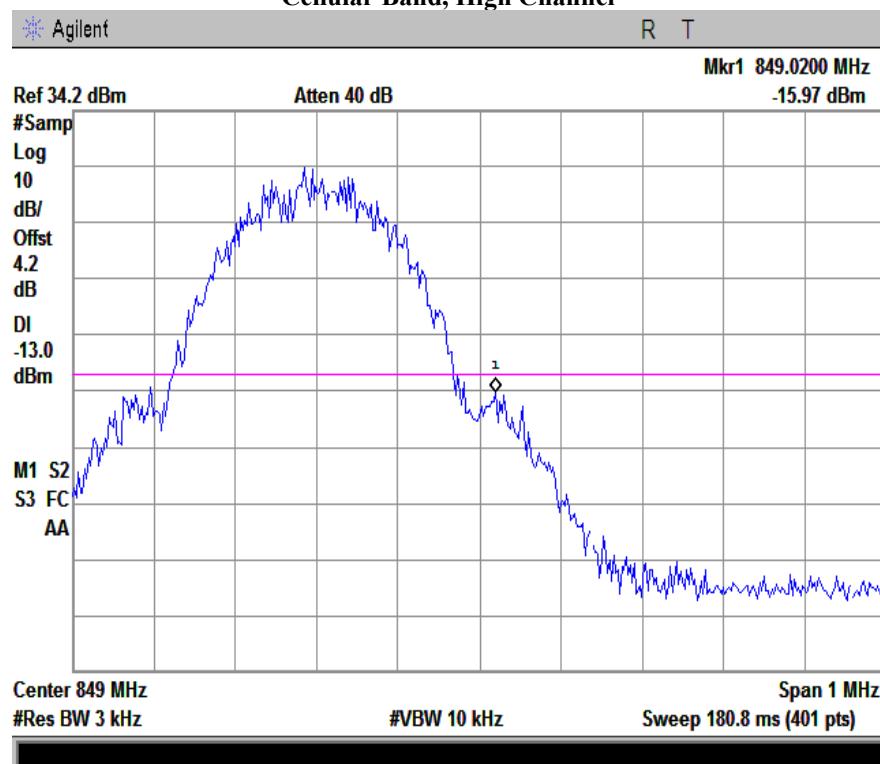


Note: Offset=Cable loss (4.0) + 10log (3.17/3)=4.0+0.2=4.2 dB

## PCS Band, Low Channel

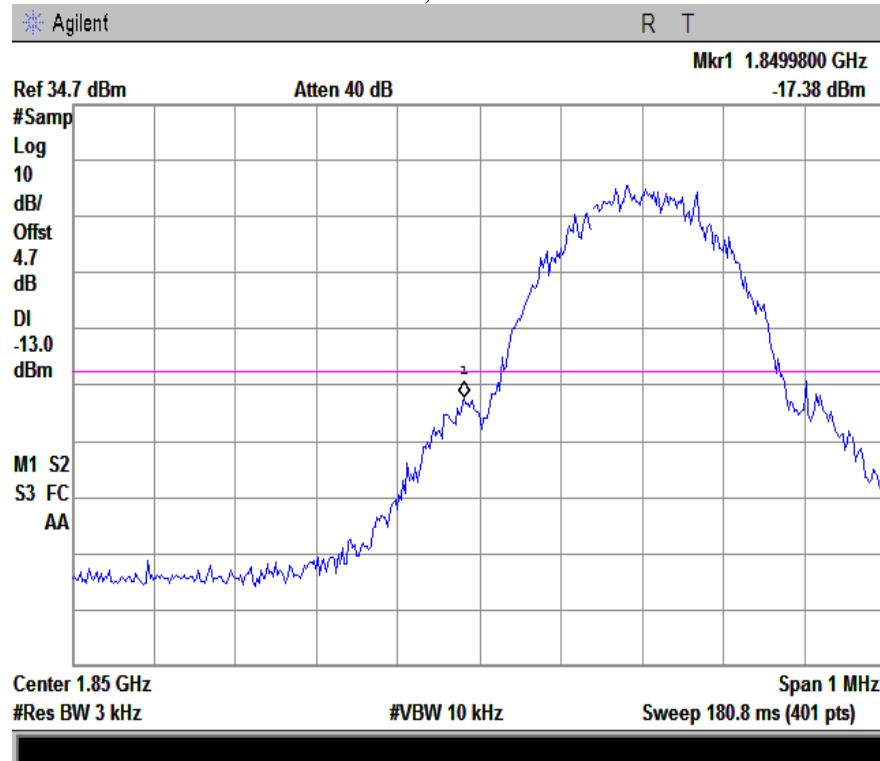

Note: Offset=Cable loss (4.5) + 10log (3.13/3)=4.5+0.2=4.7dB

## PCS Band, High Channel

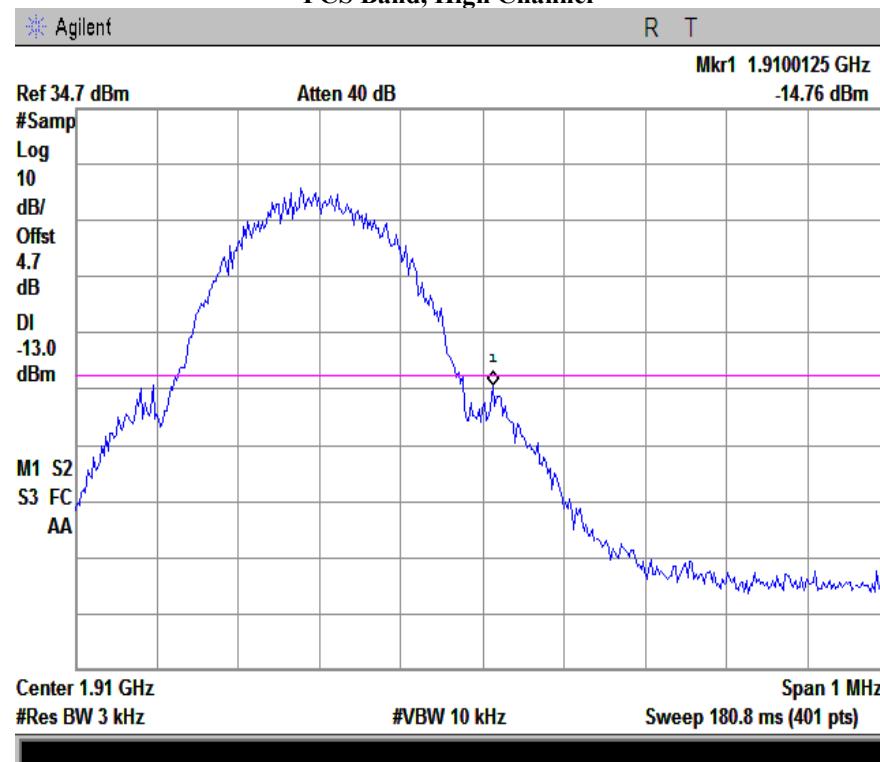

Note: Offset=Cable loss (4.5) + 10log (3.16/3)=4.5+0.2=4.7 dB

## 5.8 §2.1055, §22.355 & §24.235 - Frequency Stability

1.	Environmental Conditions	Temperature Relative Humidity Atmospheric Pressure	21°C 56% 1017mbar
2.	Test date : June 16, 2014 Tested By : Hank Li		

### **Standard Requirement:**

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile $\leq$ 3 watts (ppm)	Mobile $\leq$ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.

### **Procedures:**

A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage.

Limit: The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### **Test Results: Pass**

**Frequency Stability versus Temperature:** The Frequency tolerance of the carrier signal shall be maintained within 2.5ppm of the operating frequency over a temperature variation of -10°C to +55°C at normal supply voltage.

#### Cellular Band (Part 22H)

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	22	0.0263	2.5
0		20	0.0239	2.5
10		19	0.0227	2.5
20		25	0.0299	2.5
30		23	0.0275	2.5
40		24	0.0287	2.5
50		26	0.0311	2.5
55		19	0.0227	2.5
25	4.2	21	0.0251	2.5
	3.5	18	0.0215	2.5

#### PCS Band (Part 24E)

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	3.7	18	0.0096	2.5
0		16	0.0085	2.5
10		28	0.0149	2.5
20		25	0.0133	2.5
30		24	0.0128	2.5
40		27	0.0144	2.5
50		19	0.0101	2.5
55		21	0.0112	2.5
25	4.2	24	0.0128	2.5
	3.5	22	0.0117	2.5

## Annex A. TEST INSTRUMENT & METHOD

### Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

Instrument	Model	Serial #	Calibration Date	Calibration Due Date
<b>RF conducted test</b>				
Agilent ESA-E SERIES SPECTRUM ANALYZER	E4407B	MY45108319	09/17/2013	09/16/2014
Power Splitter	1#	1#	09/02/2013	09/01/2014
Universal Radio Communication Tester	CMU200	121393	09/17/2013	09/16/2014
Temperature/Humidity Chamber	UHL-270	001	10/22/2013	10/21/2014
DC Power Supply	E3640A	MY40004013	09/17/2013	09/16/2014
<b>Radiated Emissions</b>				
EMI test receiver	ESL6	100262	11/23/2013	11/22/2014
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	09/02/2013	09/01/2014
Microwave Preamplifier (0.5~18GHz)	PAM-118	443008	09/02/2013	09/01/2014
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/23/2013	09/22/2014
Bilog Antenna (30MHz~2GHz)	JB1	A112017	09/23/2013	09/22/2014
Double Ridge Horn Antenna (1~18GHz)	AH-118	71259	11/20/2013	11/19/2014
Double Ridge Horn Antenna (1~18GHz)	AH-118	71283	11/20/2013	11/19/2014
<b>SYNTHESIZED SIGNAL GENERATOR</b>	8665B	3744A01293	09/17/2013	09/16/2014
Tunable Notch Filter	3NF-800/1000-S	AA4	09/02/2013	09/01/2014
Tunable Notch Filter	3NF-1000/2000-S	AM 4	09/02/2013	09/01/2014

## **Annex A. ii. RADIATED EMISSIONS TEST DESCRIPTION**


### **EUT Characterisation**

EUT characterisation, over the frequency range from 30MHz to 1GHz (for FCC tests, until the 10<sup>th</sup> harmonic for operating frequencies  $\geq$  108MHz),, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer /receiver with the appropriate broadband antenna placed 3m or 10m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS) or EMC 3m chamber.

### **Test Set-up**

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

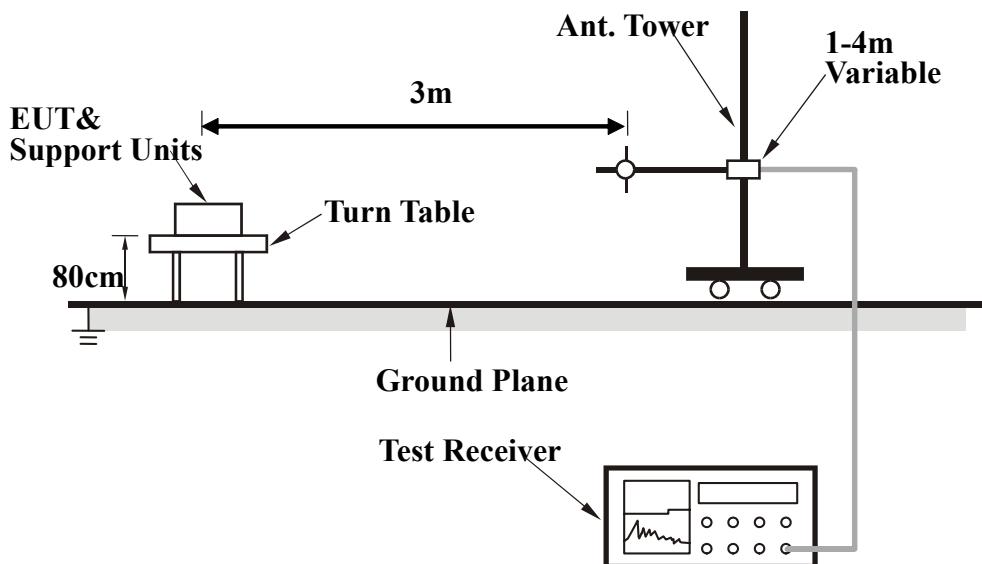

## Test Method

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

### Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site or EMC 10m chamber. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

## Description of Radiated Emission Program

This EMC Measurement software run LabView automation software and offers a common user interface for electromagnetic interference (EMI) measurements. This software is a modern and powerful tool for controlling and monitoring EMI test receivers and EMC test systems. It guarantees reliable collection, evaluation, and documentation of measurement results. Basically, this program will run a pre-scan measurement before it proceeds with the final measurement. The pre-scan routine will run the scan on four different antenna heights, 2 antenna polarity, and 360 degrees table rotation. For example, the program was set to run 30 MHz to 1 GHz scan; the program will first start from a meter antenna height and divide the 30 MHz to 1 GHz into 10 separate parts of maximum hold sweeps. Each parts of maximum hold sweep, the program will collect the data from 0 degree to 360 degrees table rotation. After the program complete the 1m scan, the antenna continues to rise to 2m and continue the scan. The step will repeated for all specified antenna height and polarity. This program will perform the Quasi Peak measurement after the signal maximization process and pre-scan routine. The final measurement will be base on the pre-scan data reduction result.

## Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain (if any)}$$

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor} \text{ or} \\ \text{Set RBW} = 1\text{MHz}, \text{VBW} = 10\text{Hz}.$$

Note:

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.

## Annex B. EUT AND TEST SETUP PHOTOGRAPHS

### Annex B.i. Photograph 1: EUT External Photo



Whole Package - Top View



Adapter – Front View



EUT - Front View (Black Mobile Phone)



EUT - Front View (White Mobile Phone)



EUT - Rear View (Black Mobile Phone)



EUT - Rear View (White Mobile Phone)



EUT - Top View



EUT - Bottom View




EUT - Left View




EUT - Right View

### Annex B.ii. Photograph 2: EUT Internal Photo

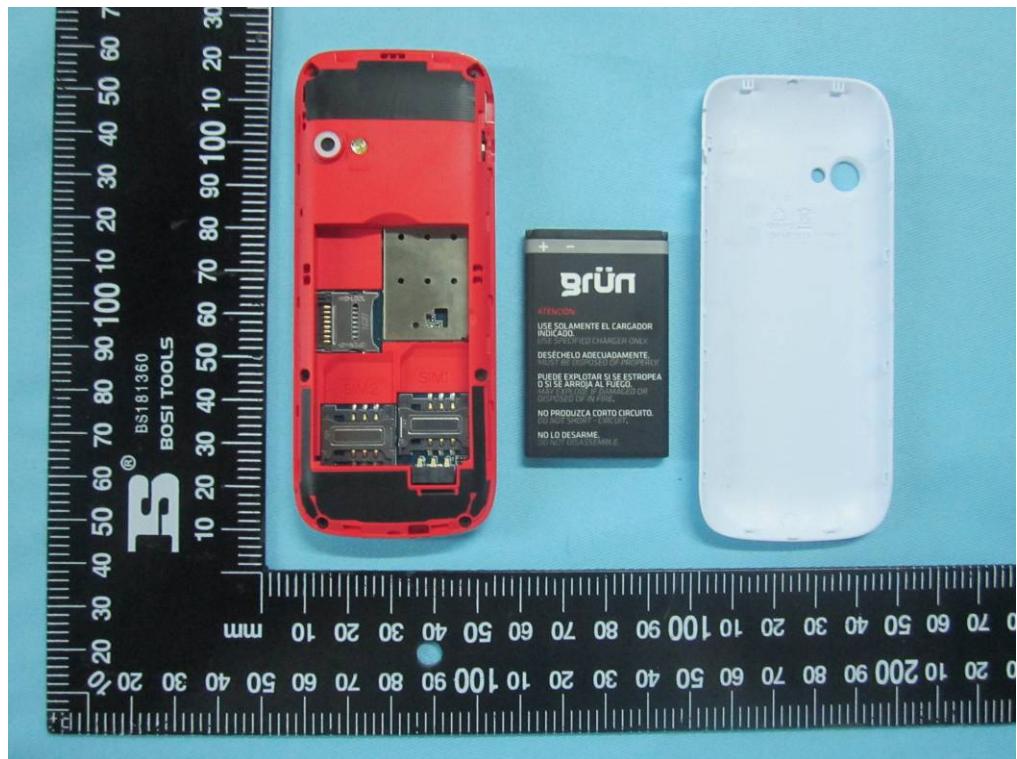

Cover Off - Top View 1

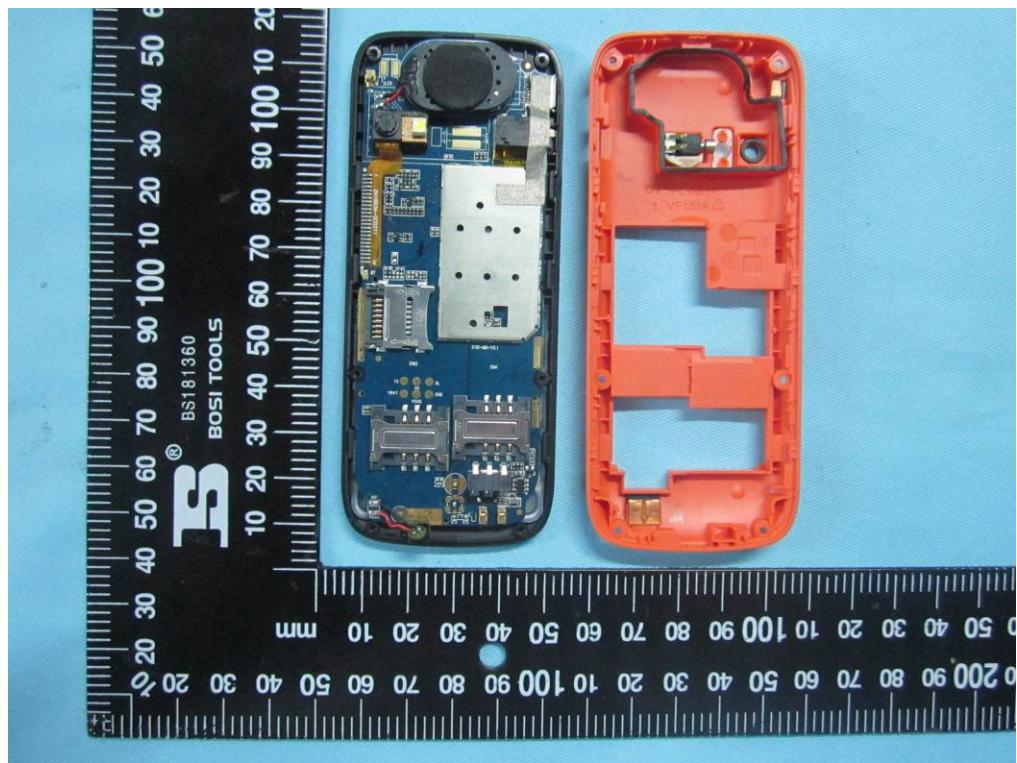


Cover Off - Top View 2




Battery - Top View




Battery - Bottom View

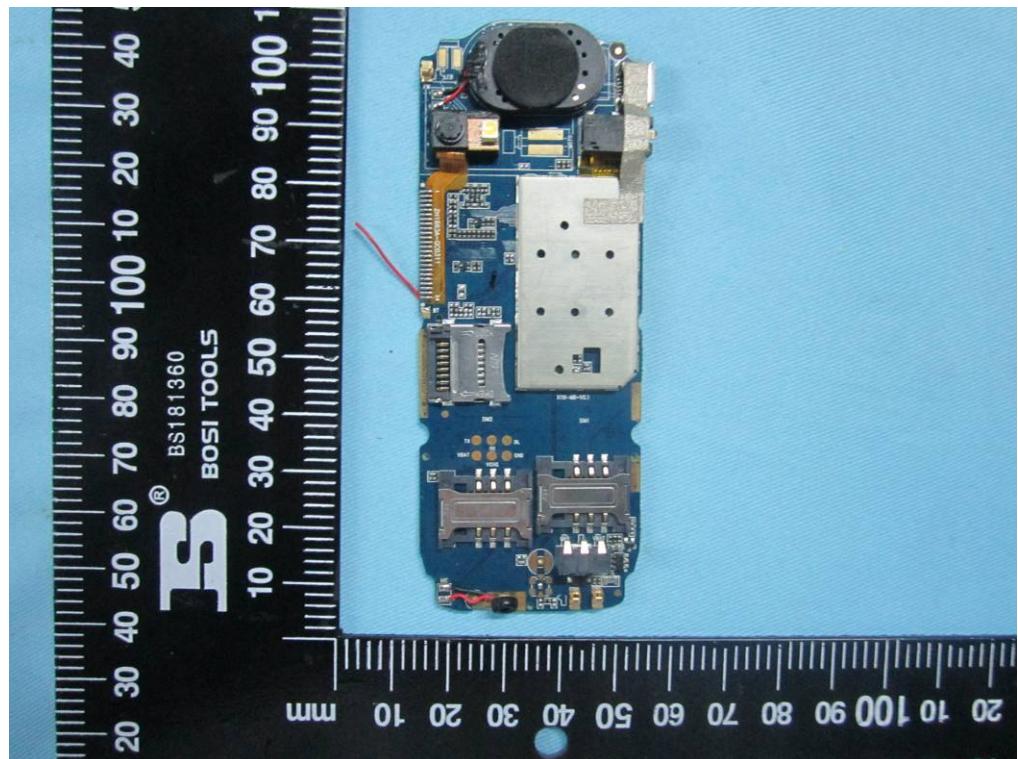


Mainborad With Shielding - Front View

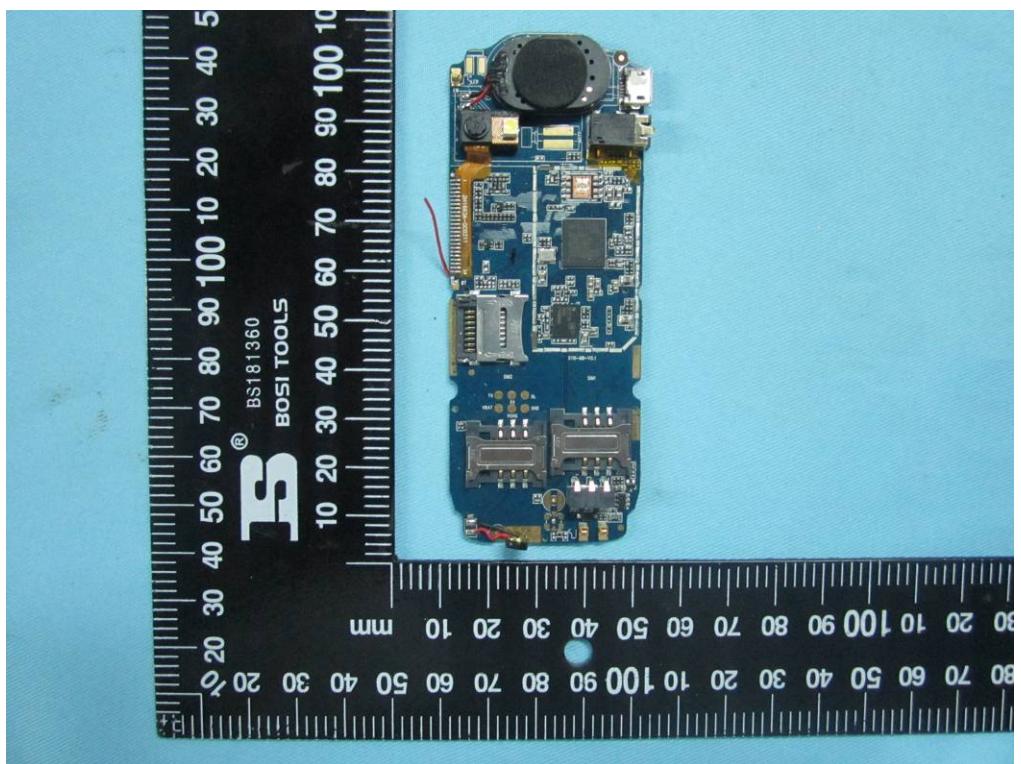


Mainborad Without Shielding - Front View

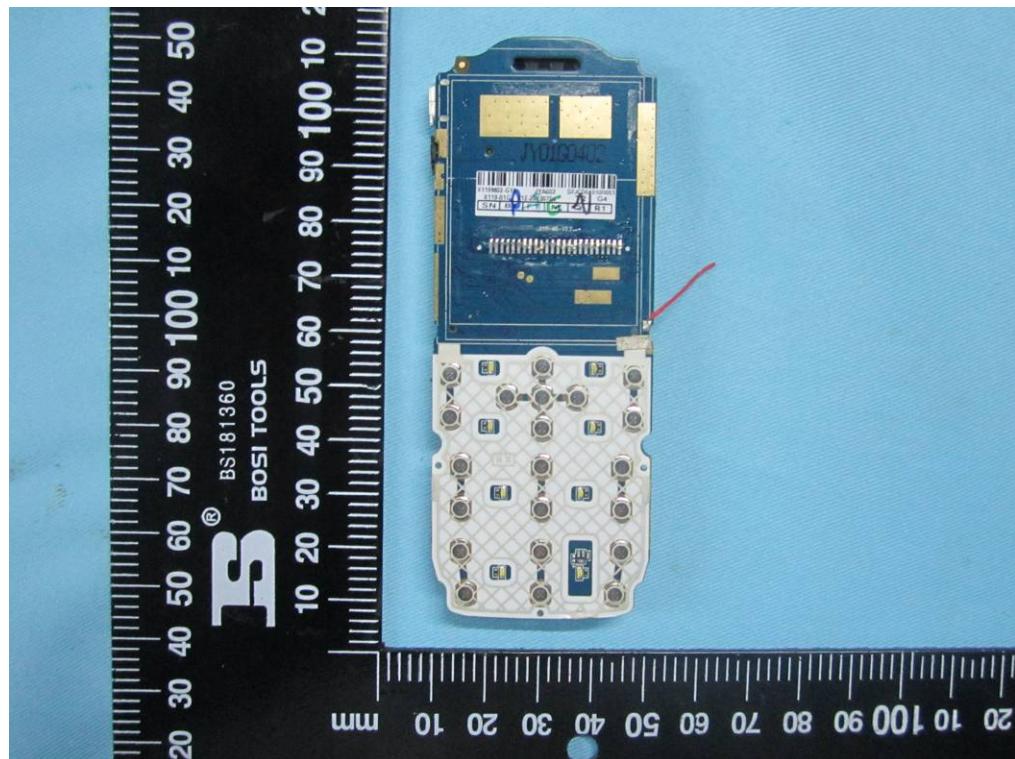


Mainborad- Rear View

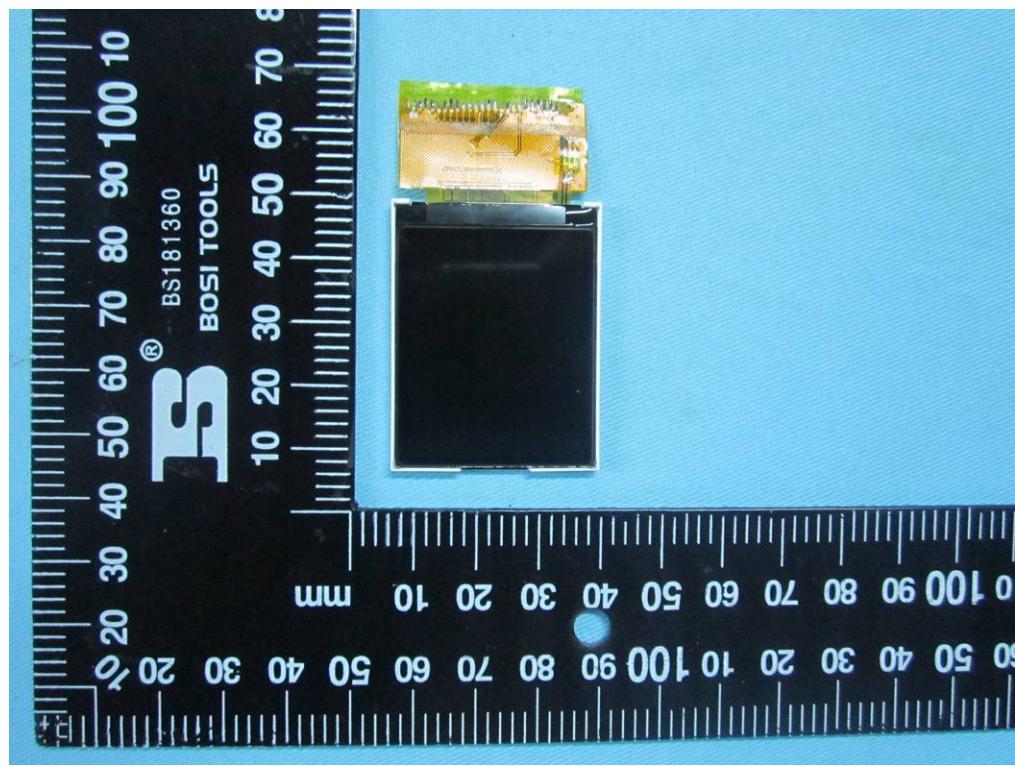


LCD – Front View

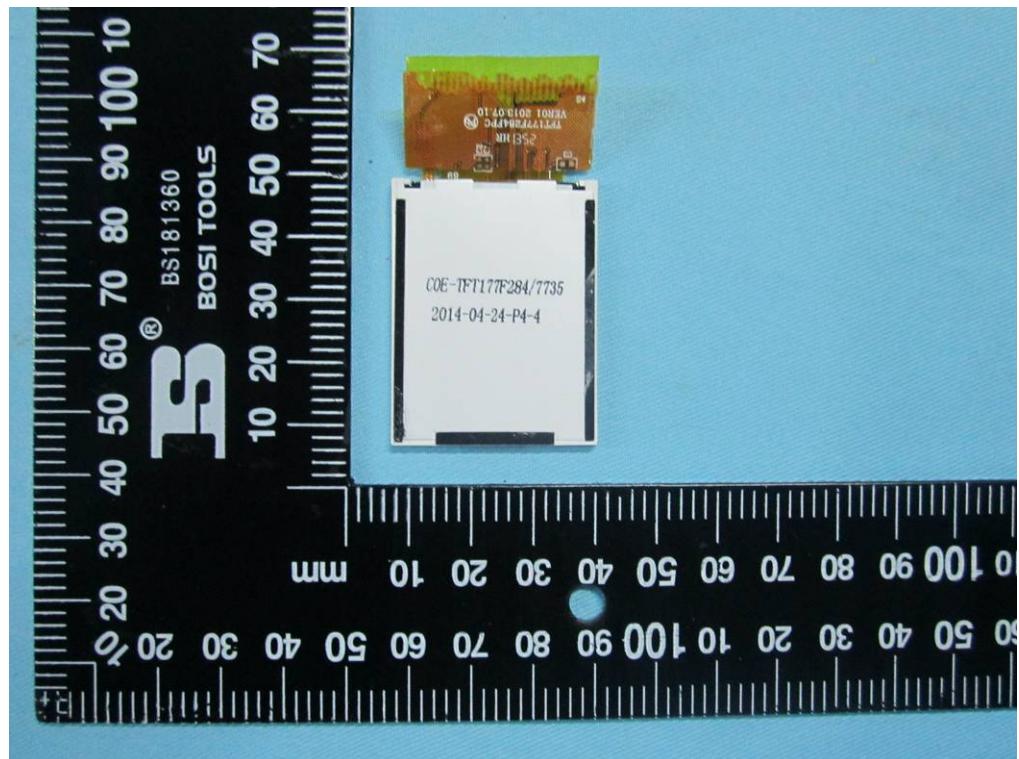


LCD – Rear View

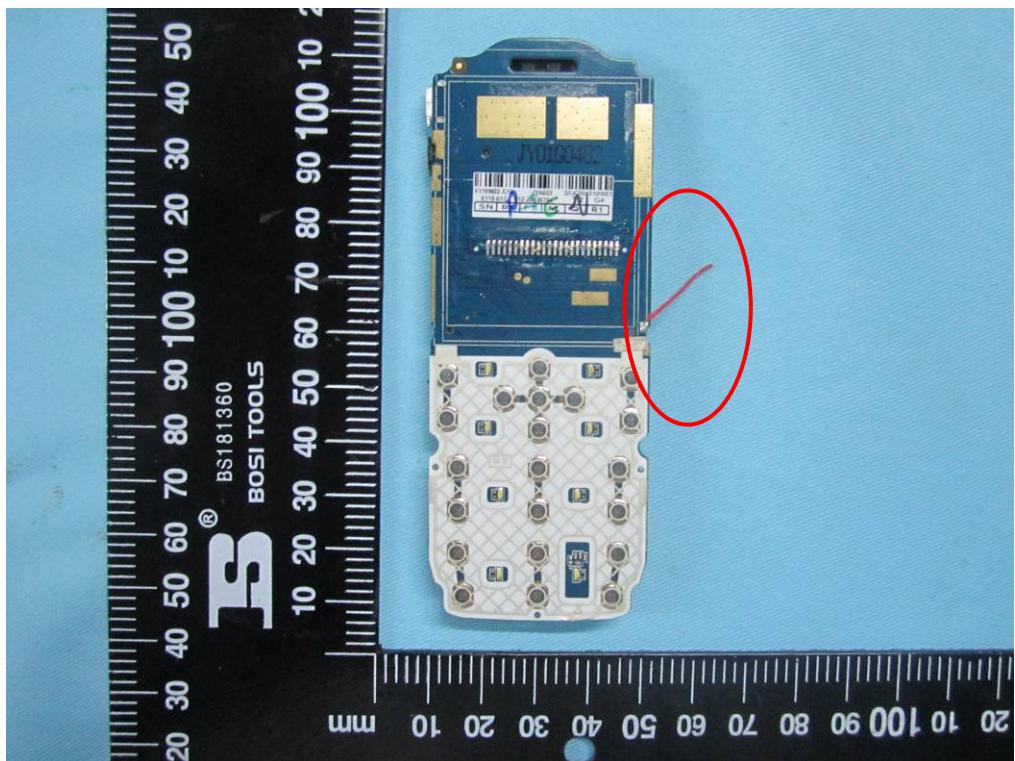


Bluetooth Antenna View

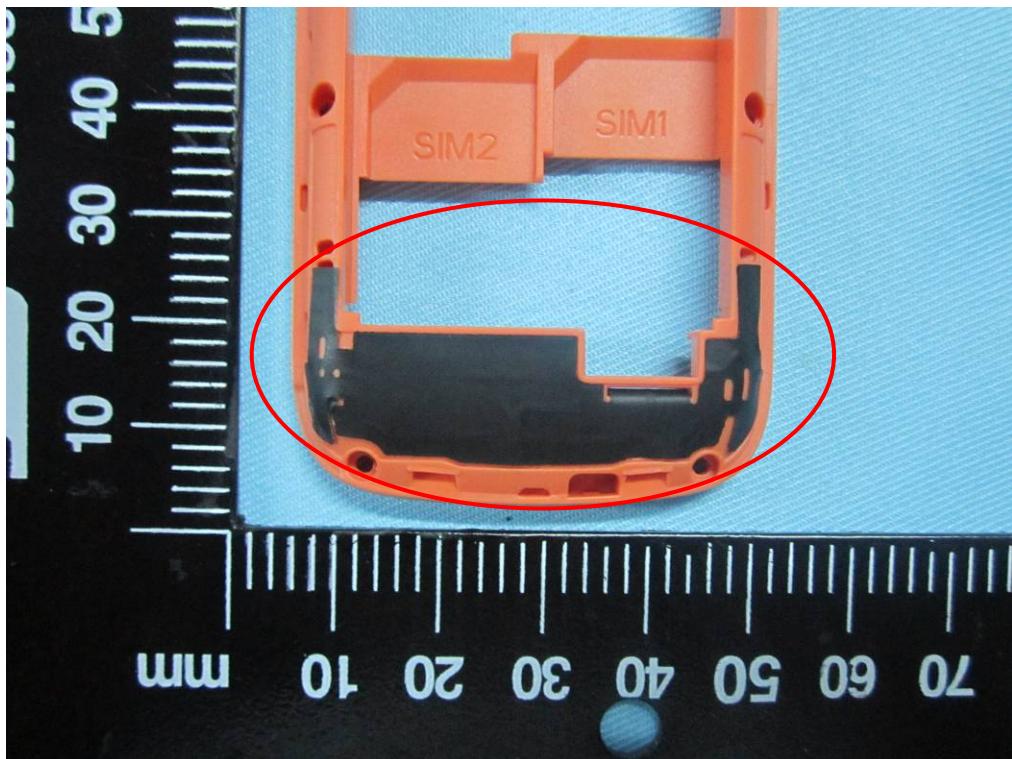

GSM/PCS Antenna View

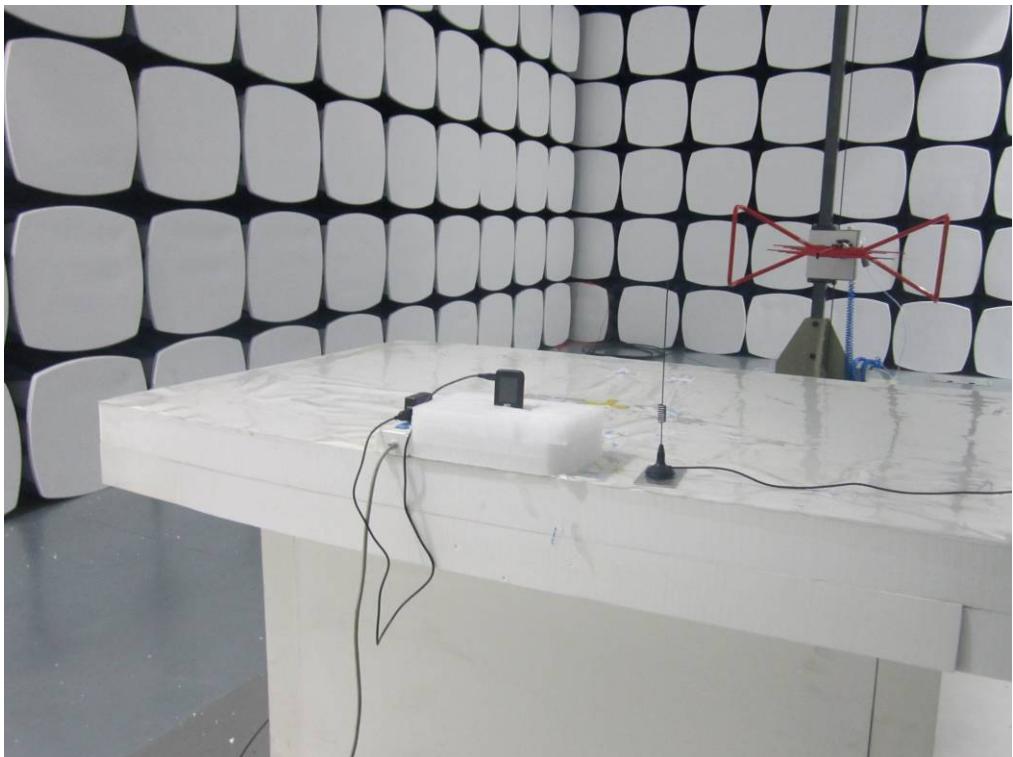**Annex B.iii. Photograph 3: Test Setup Photo**

Radiated Spurious Emissions Test Setup Below 1GHz - Front View

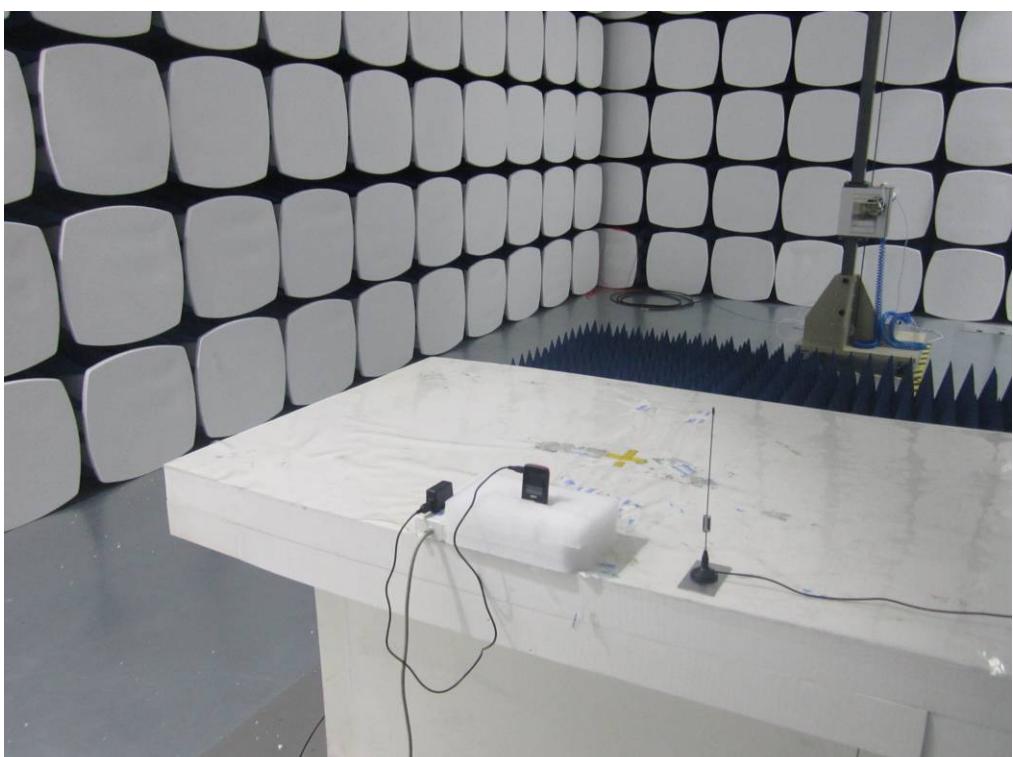

Radiated Spurious Emissions Test Setup Above 1GHz –Front View



Title: RF Test Report for GSM Mobile Phone  
Main Model: G-181  
Serial Model: N/A  
To: FCC Part 22(H) & FCC Part 24(E): 2013

Report No: 14070134-FCC-R1  
Issue Date: June 17, 2014  
Page: 46 of 50  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **Annex C. TEST SETUP AND SUPPORTING EQUIPMENT**


### **EUT TEST CONDITIONS**

#### **Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION**

The following is a description of supporting equipment and details of cables used with the EUT.

Manufacturer	Equipment Description (Including Brand Name)	Model	Calibration Date	Calibration Due Date
N/A	N/A	N/A	N/A	N/A

## Block Configuration Diagram for Radiated Emissions

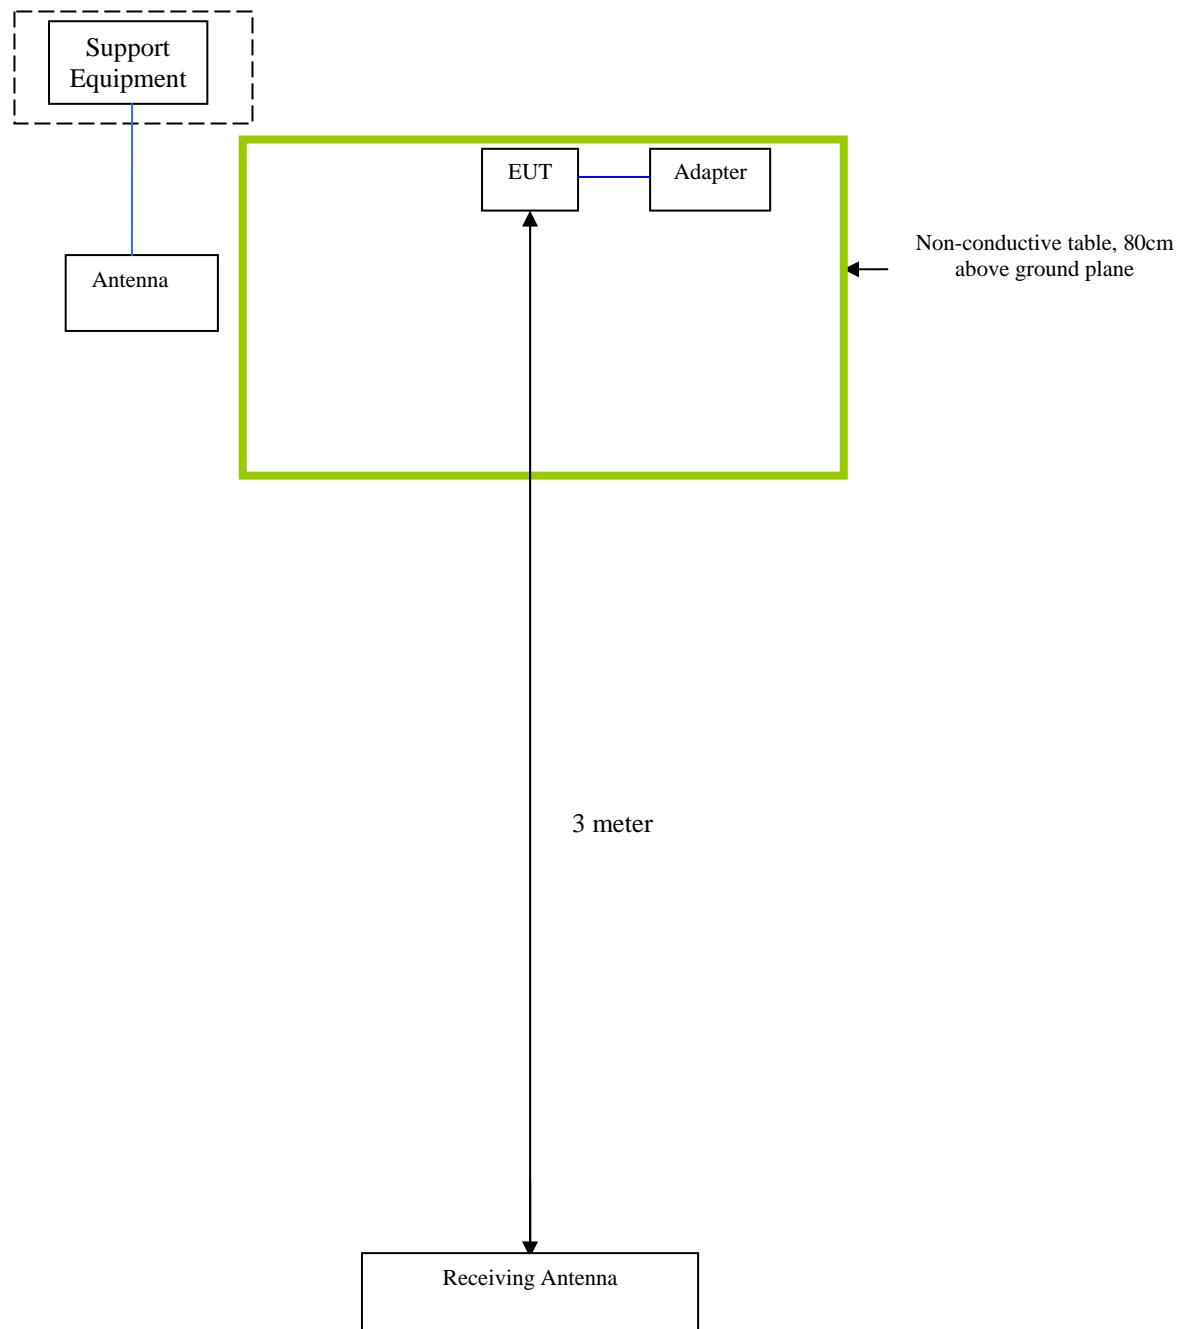

### **Annex C.ii. EUT OPERATING CONDITIONS**

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
<b>Emissions Testing</b>	The EUT was communicating with base station and set to work at maximum output power.
<b>Others Testing</b>	The EUT was communicating with base station and set to work at maximum output power.



Title: RF Test Report for GSM Mobile Phone  
Main Model: G-181  
Serial Model: N/A  
To: FCC Part 22(H) & FCC Part 24(E): 2013

Report No: 14070134-FCC-R1  
Issue Date: June 17, 2014  
Page: 49 of 50  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

## Annex D.USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST

Please see attachment



**SIEMIC, INC.**

Accessing global markets

**Title:** RF Test Report for GSM Mobile Phone  
**Main Model:** G-181  
**Serial Model:** N/A  
**To:** FCC Part 22(H) & FCC Part 24(E): 2013

**Report No:** 14070134-FCC-R1  
**Issue Date:** June 17, 2014  
**Page:** 50 of 50  
[www.siemic.com](http://www.siemic.com)  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **Annex E. DECLARATION OF SIMILARITY**

N/A