



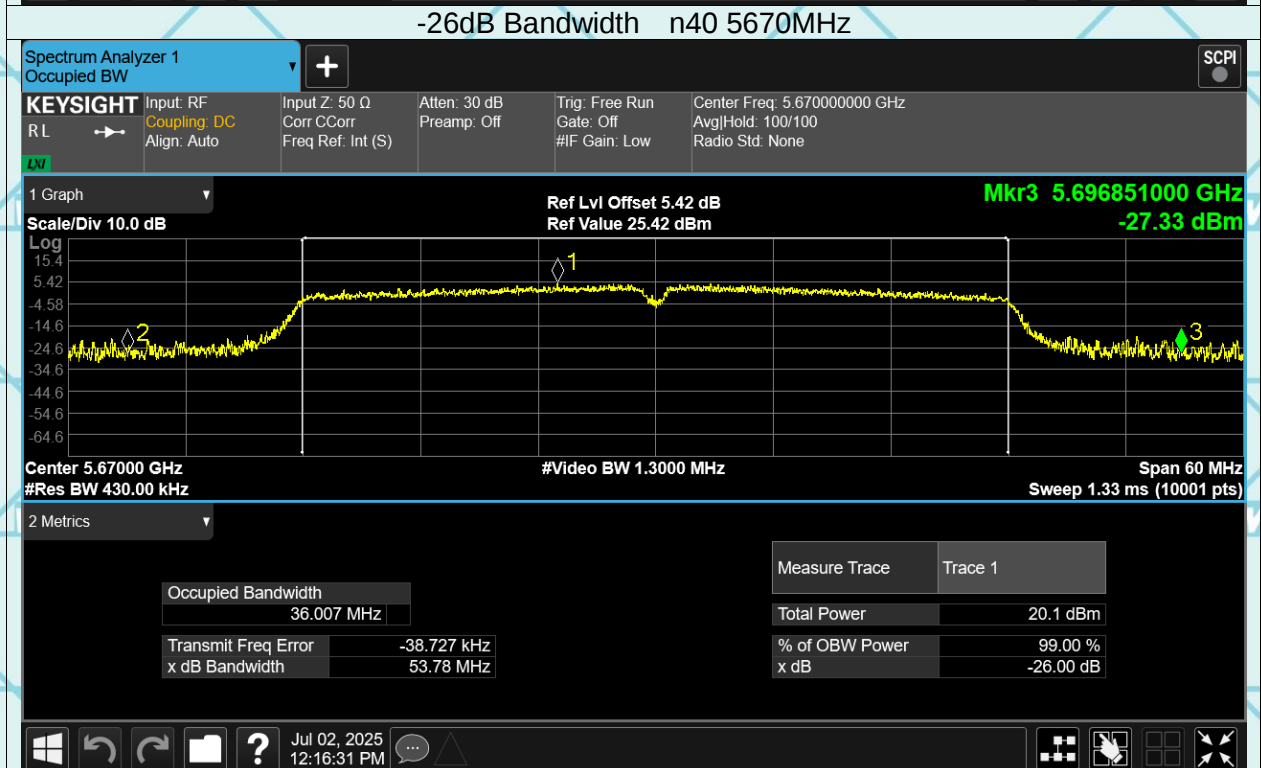
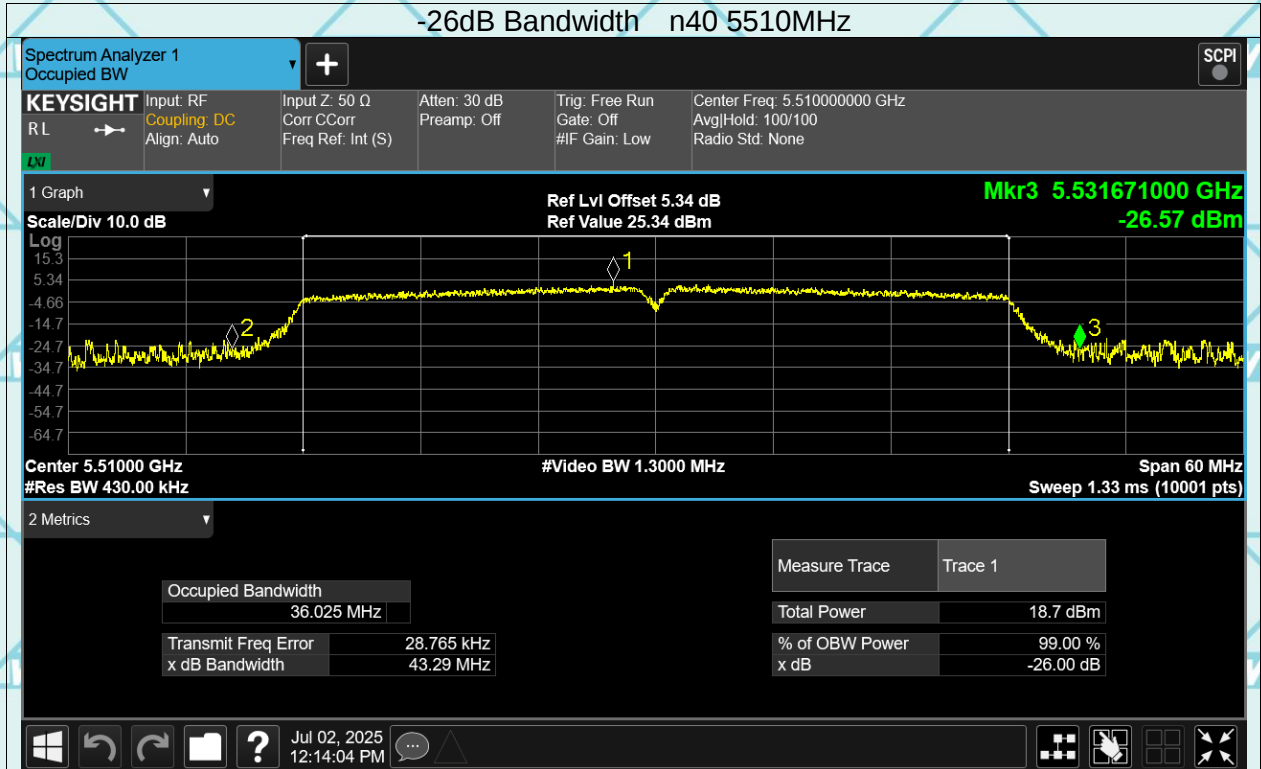
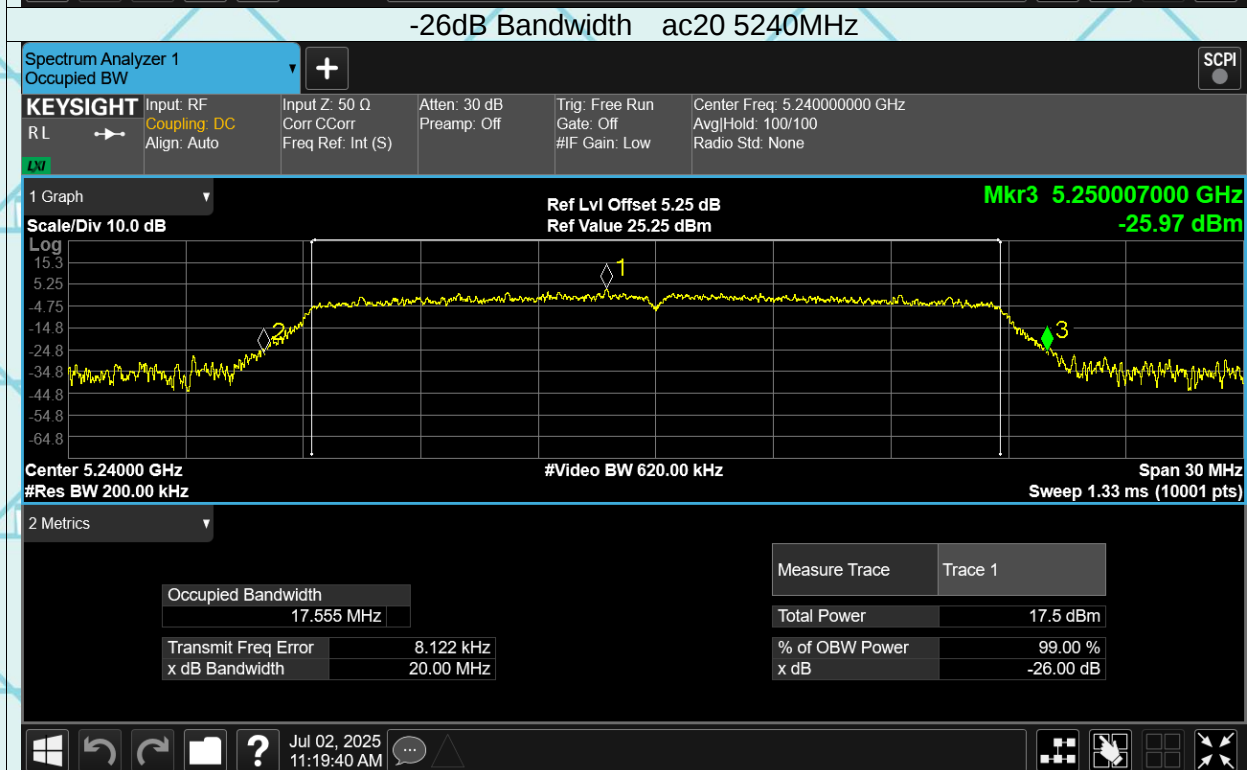
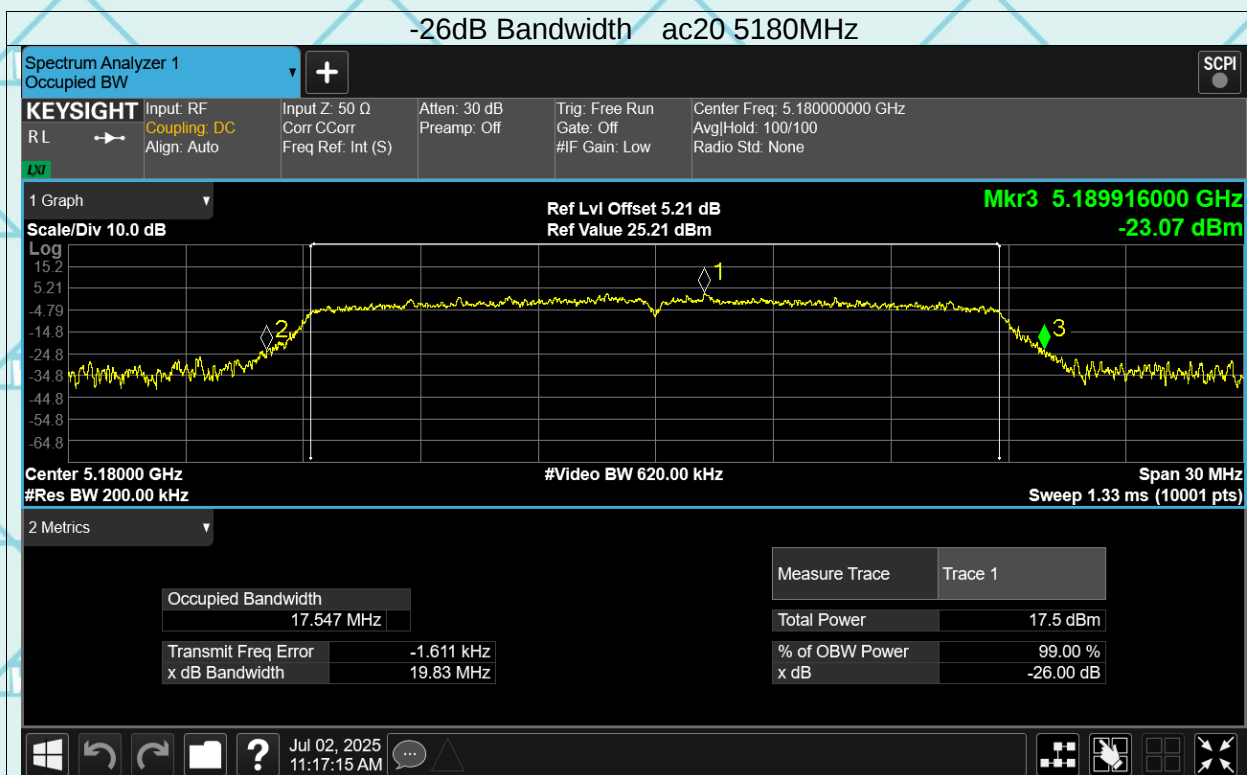



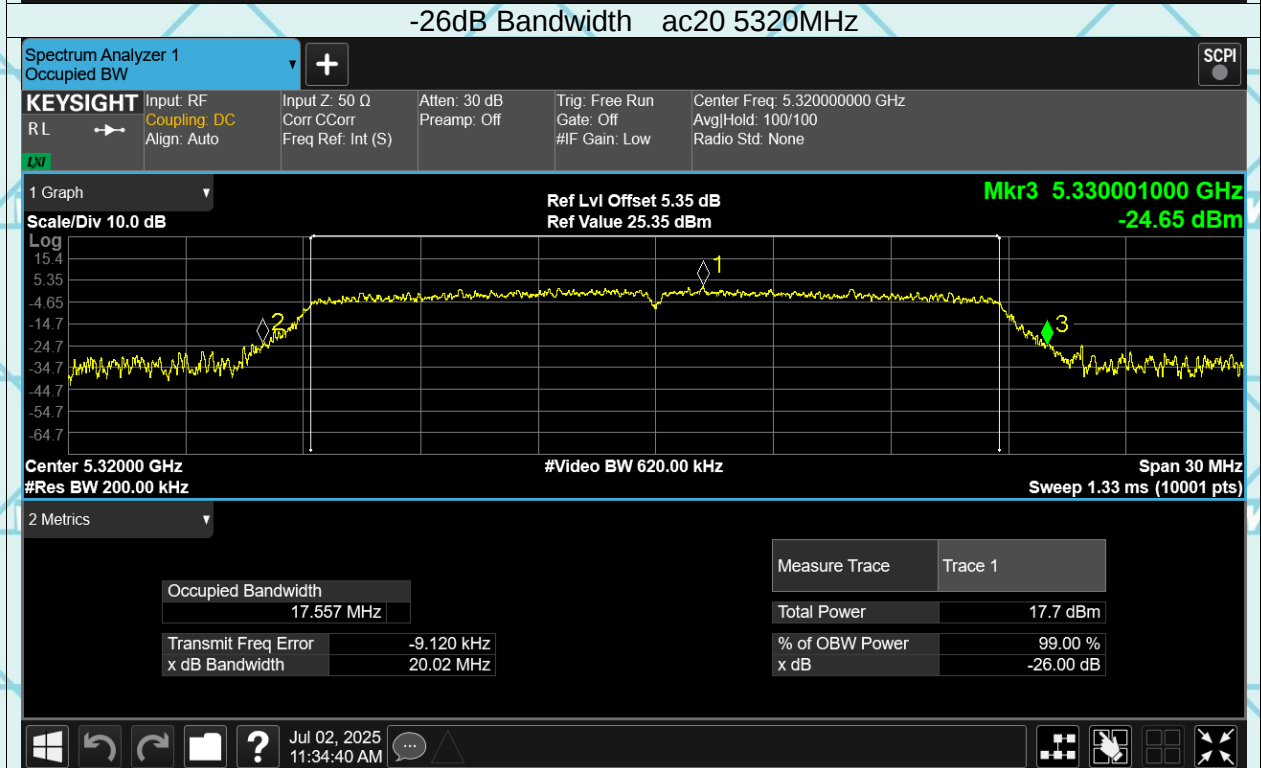




Report No.: WSCT-ANAB-R&E250600048A-Wi-Fi2 Issued Date: 29 July 2025


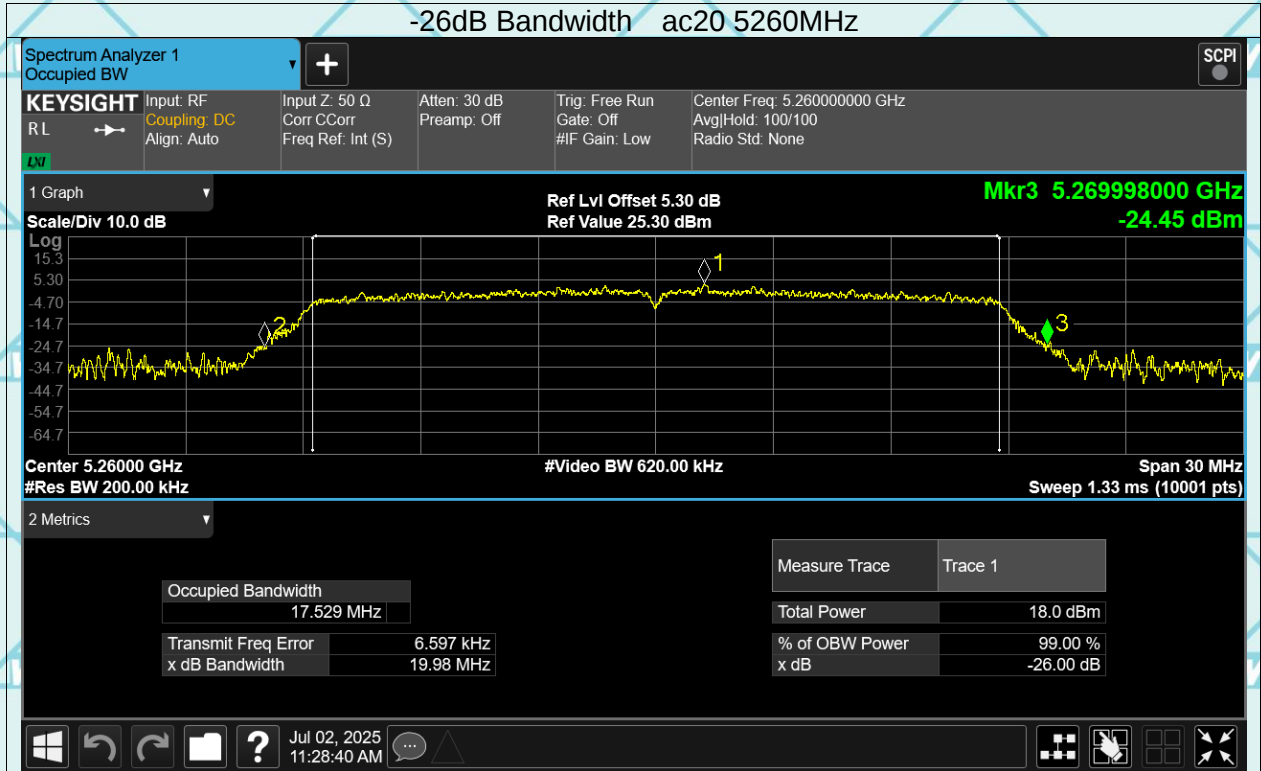



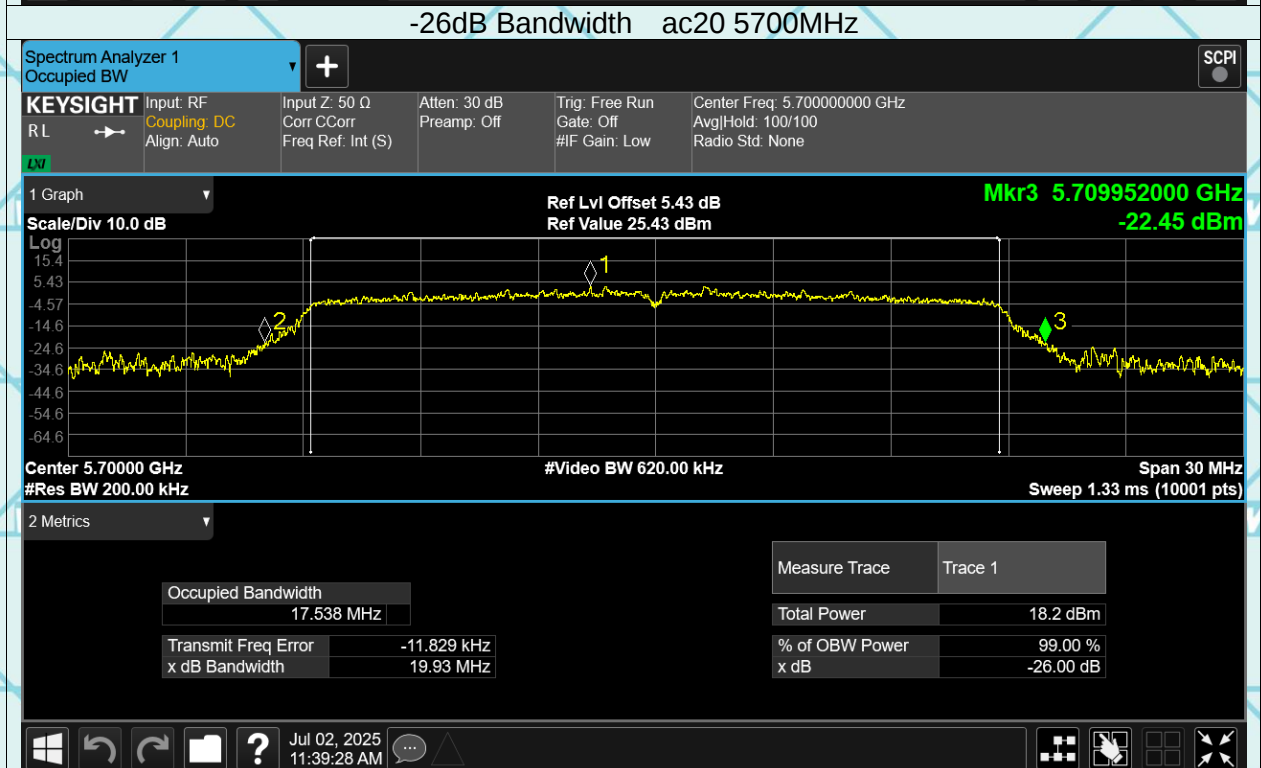



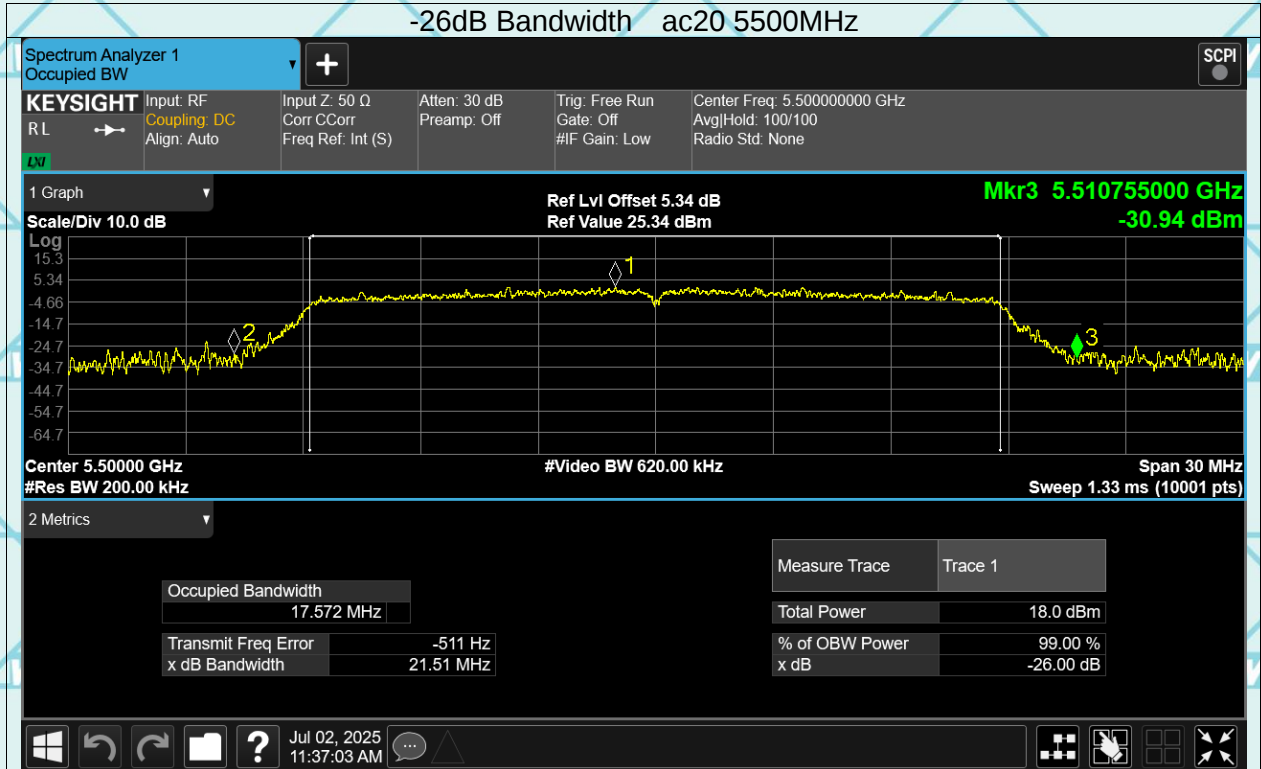


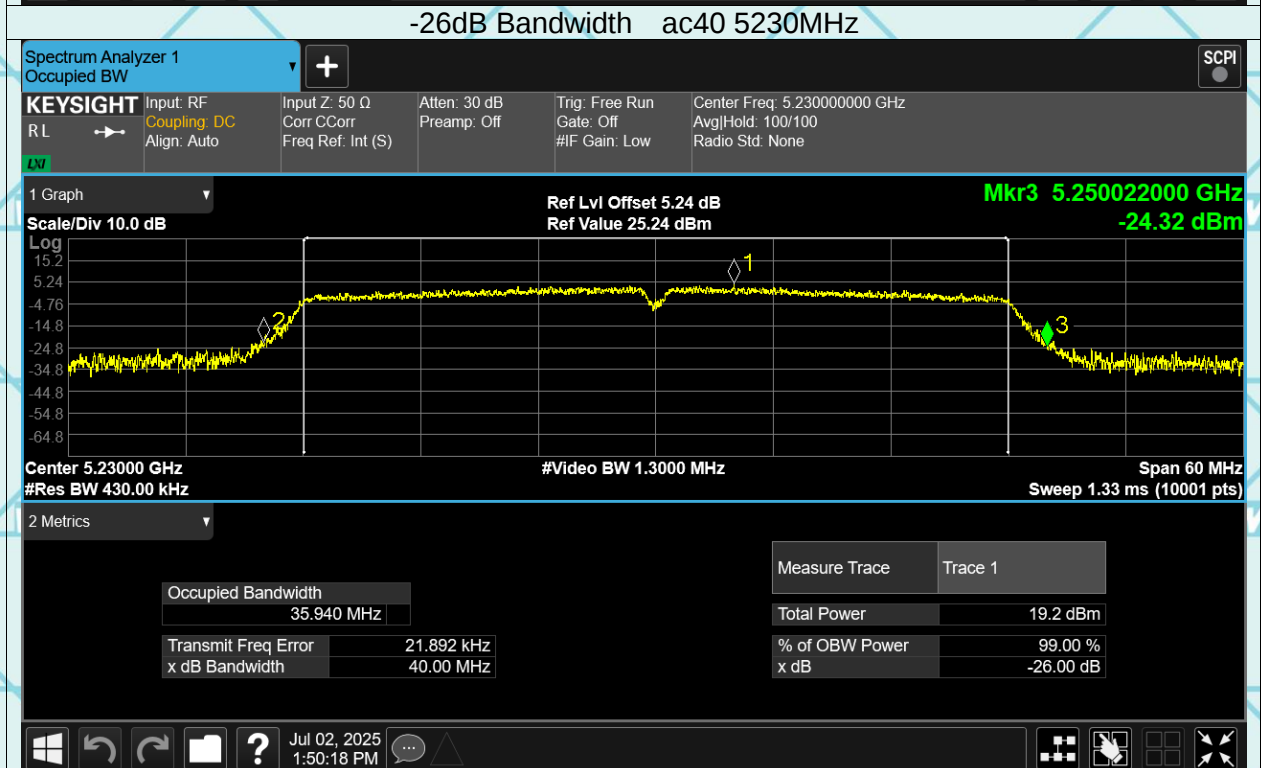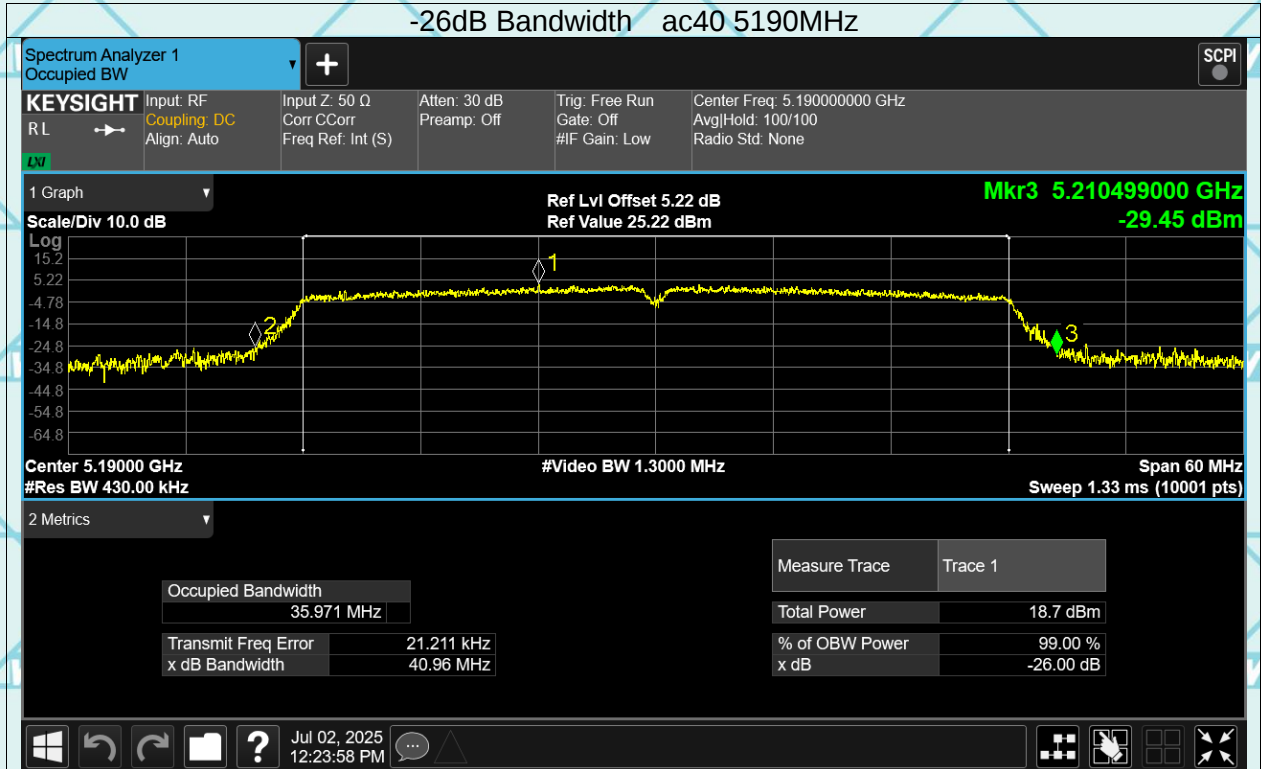

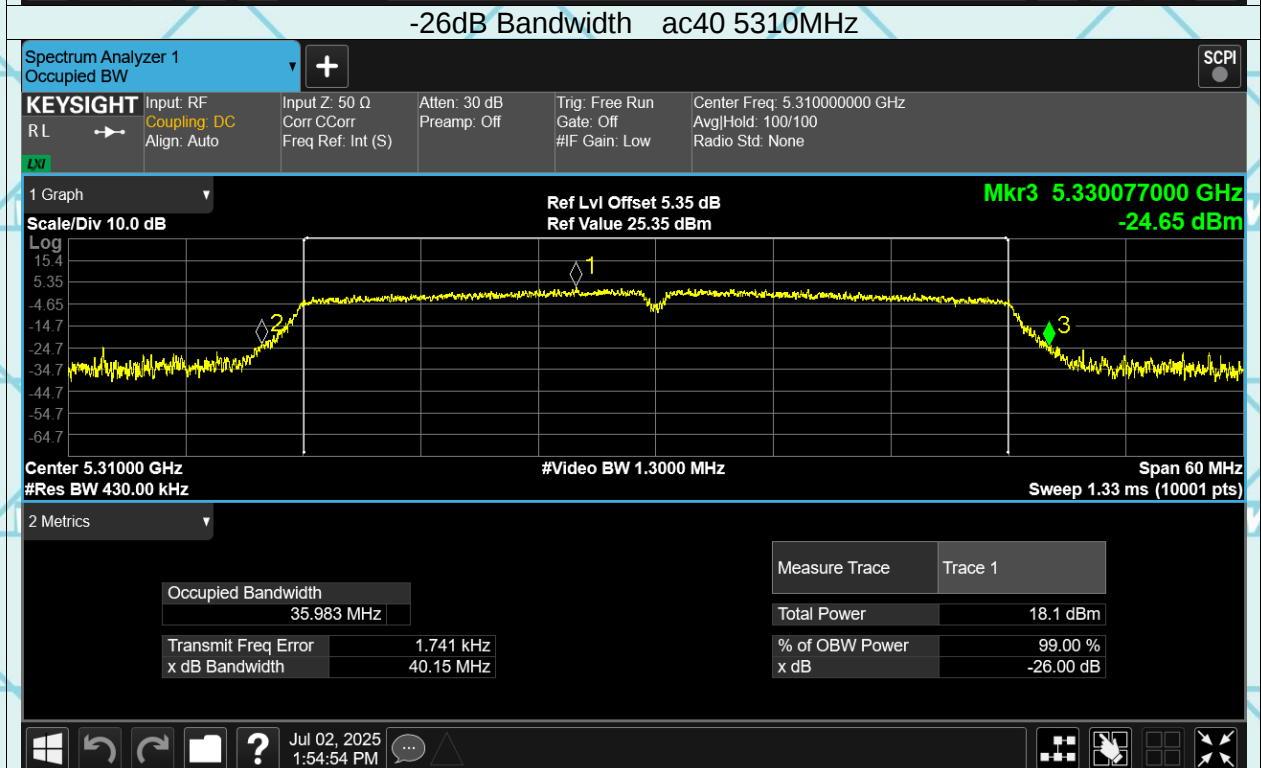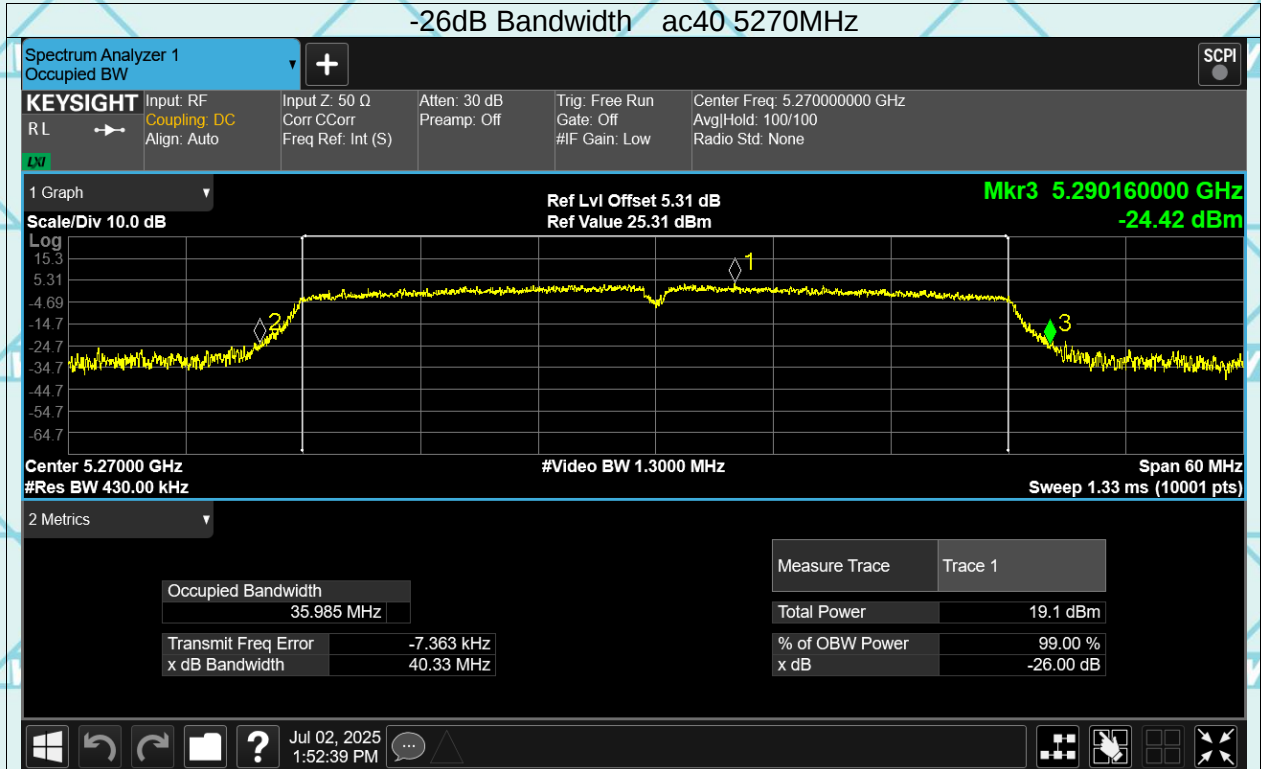

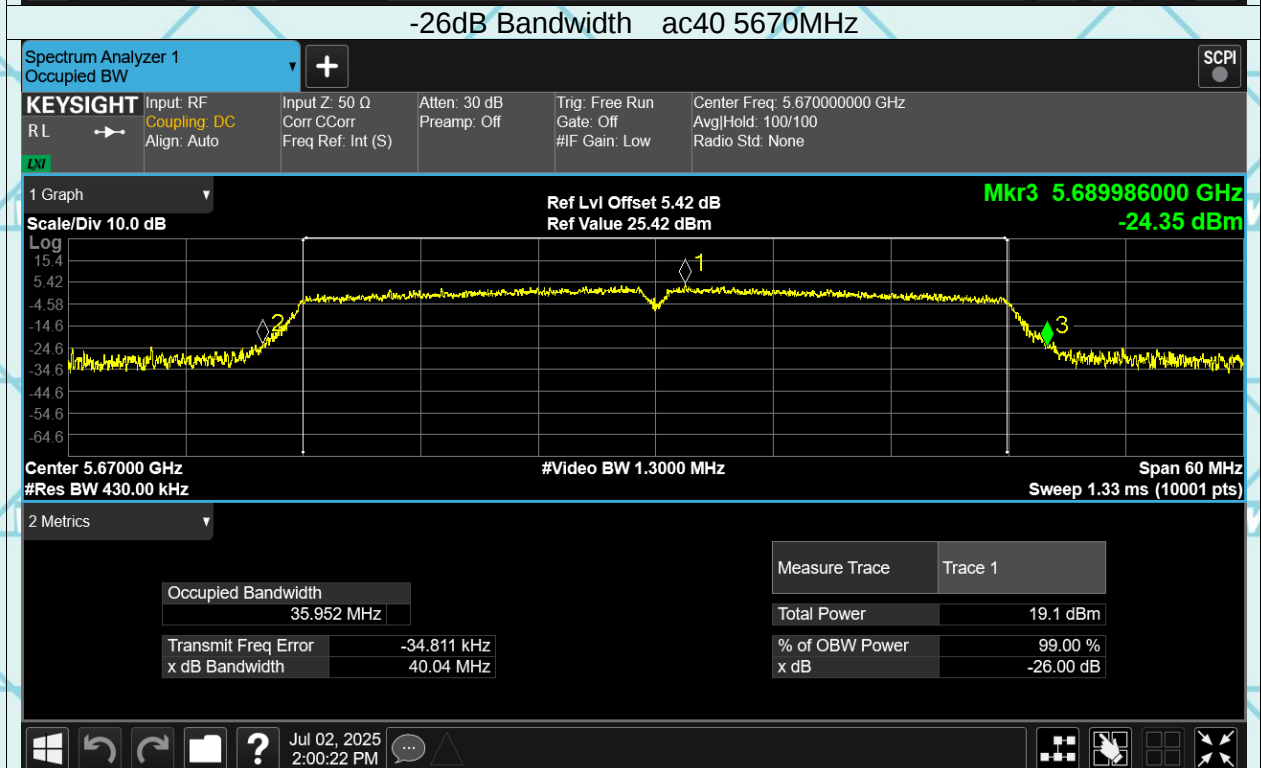
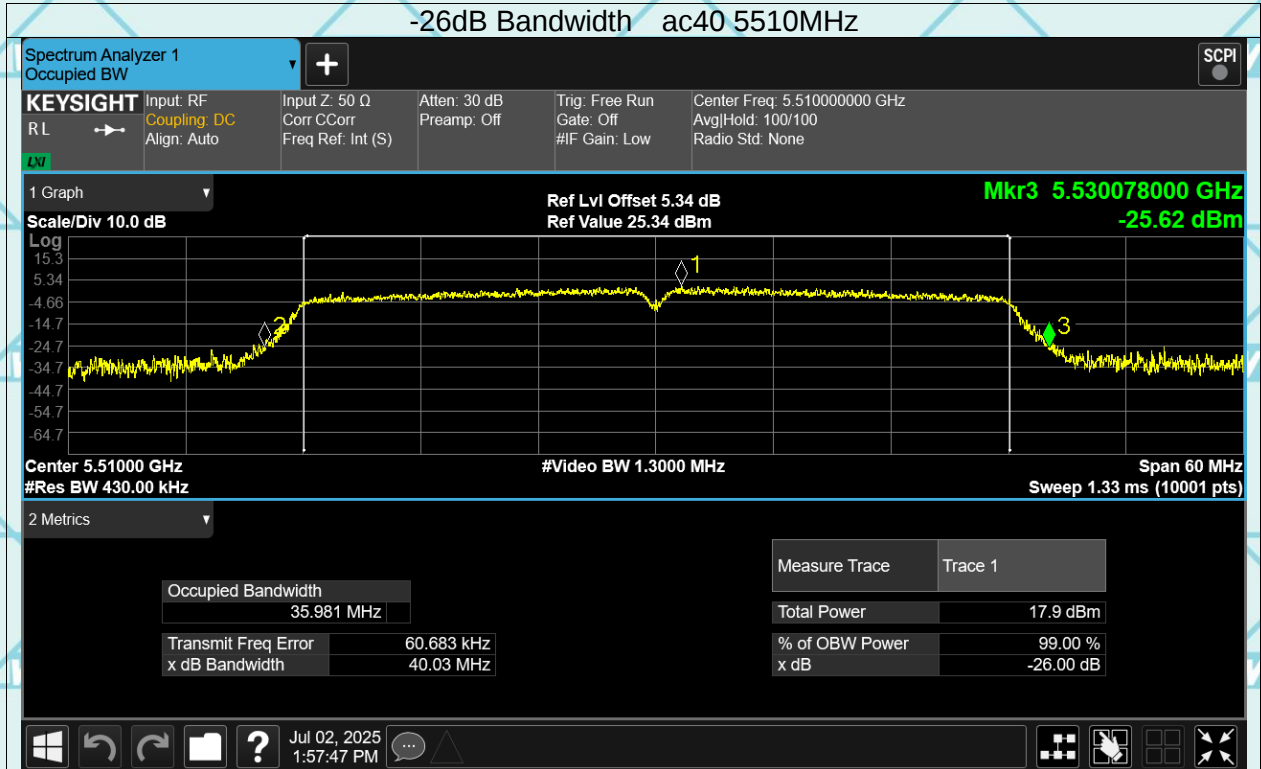


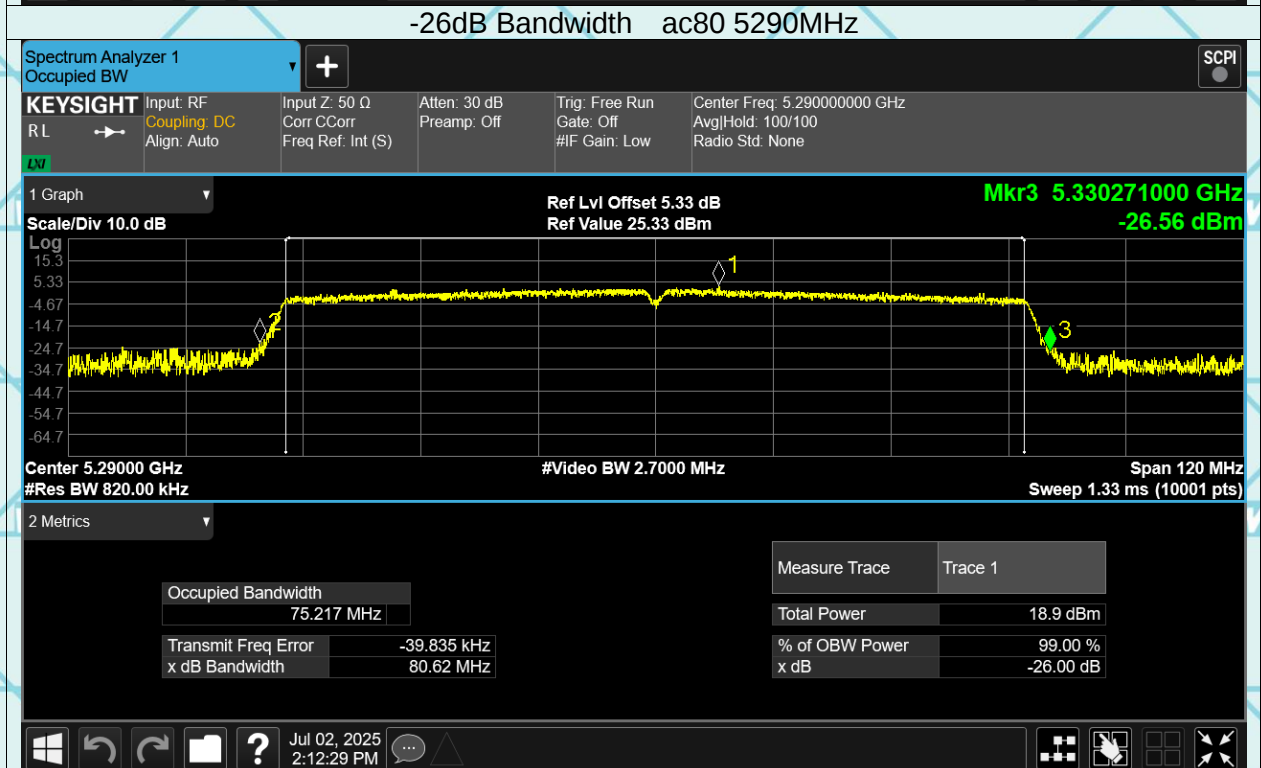
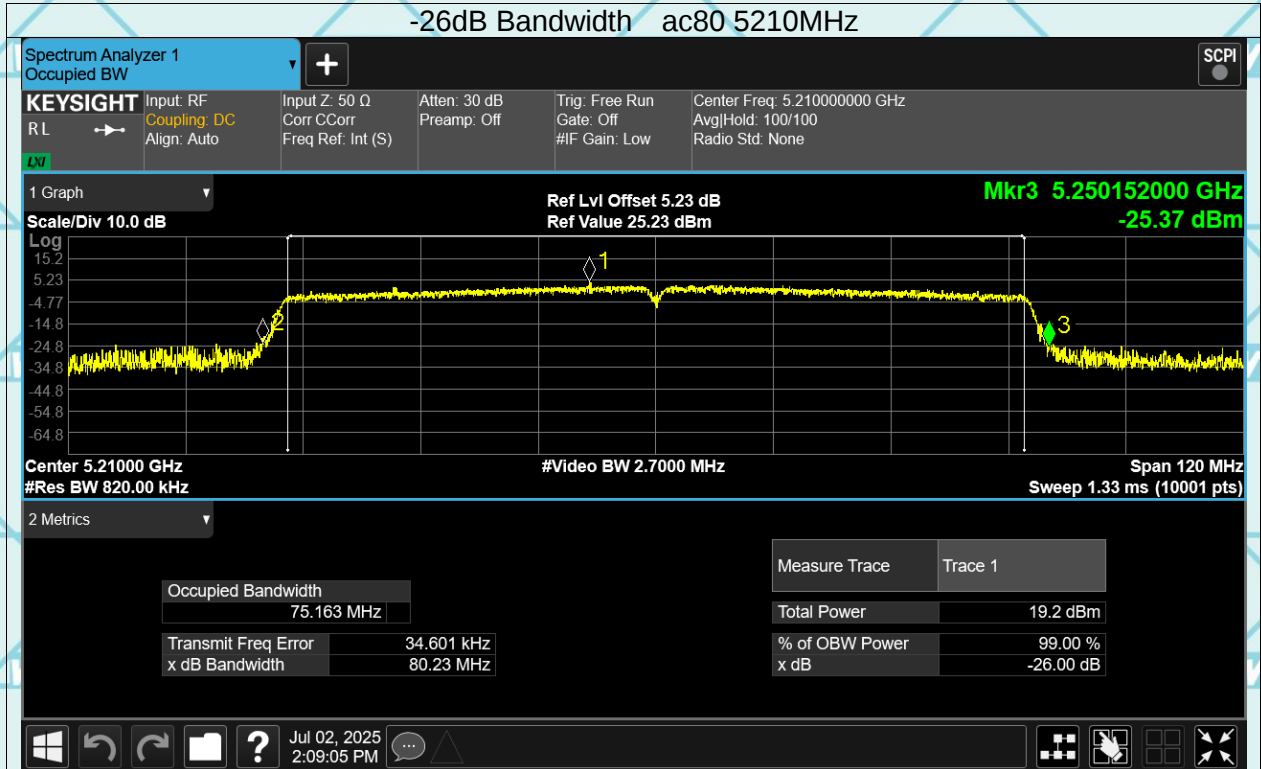


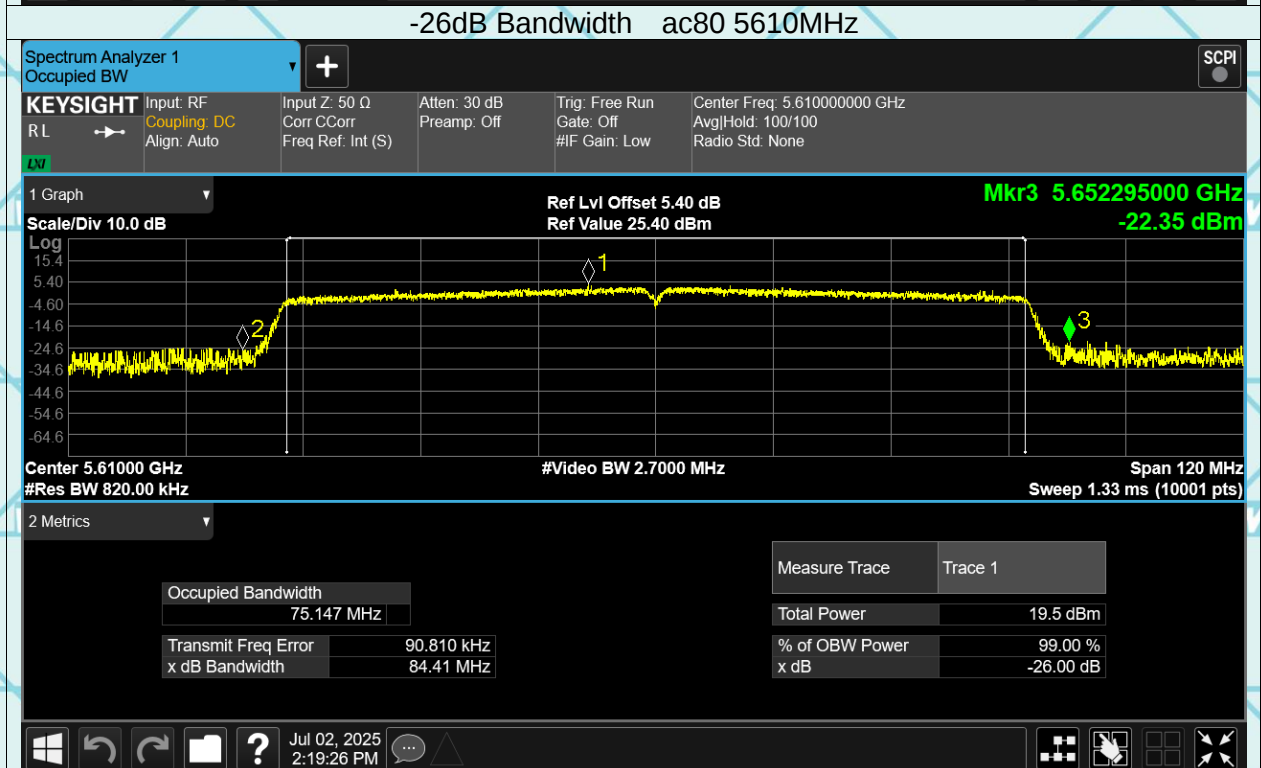
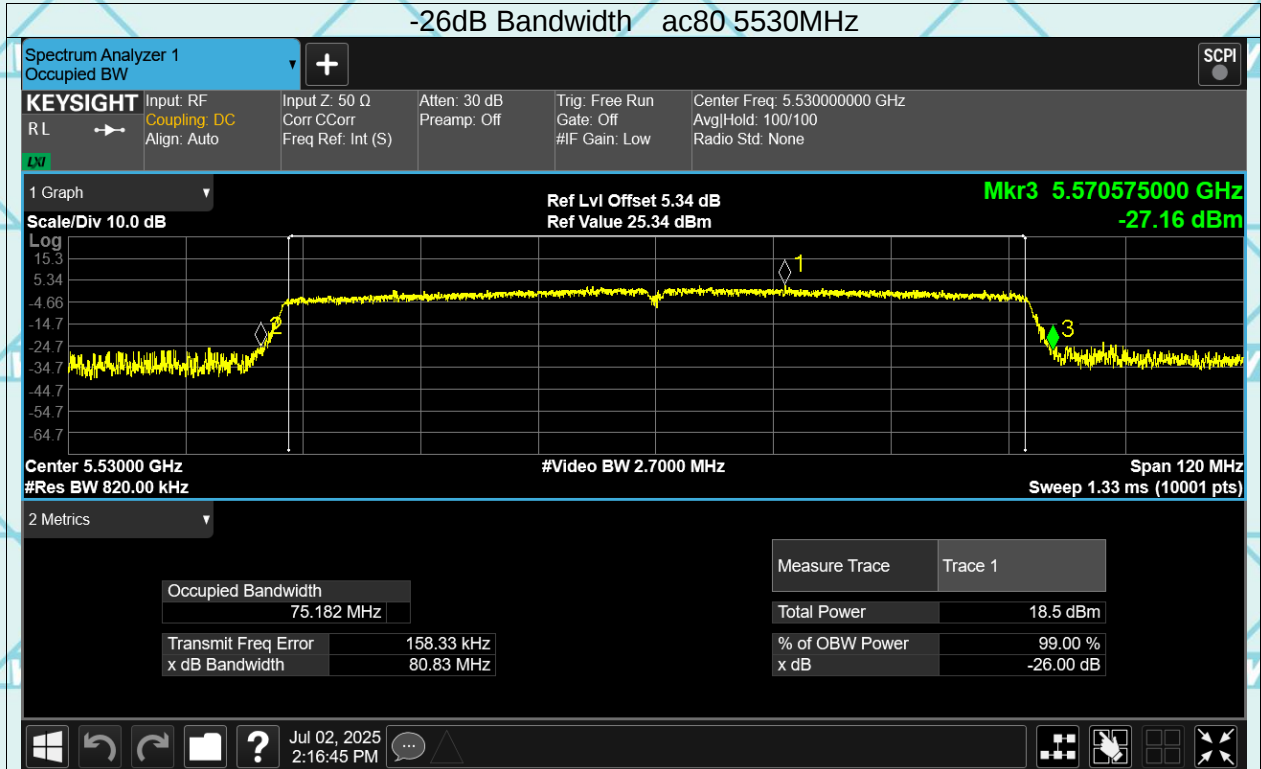




Report No.: WSCT-ANAB-R&E250600048A-Wi-Fi2 Issued Date: 29 July 2025



-6dB&99% Bandwidth

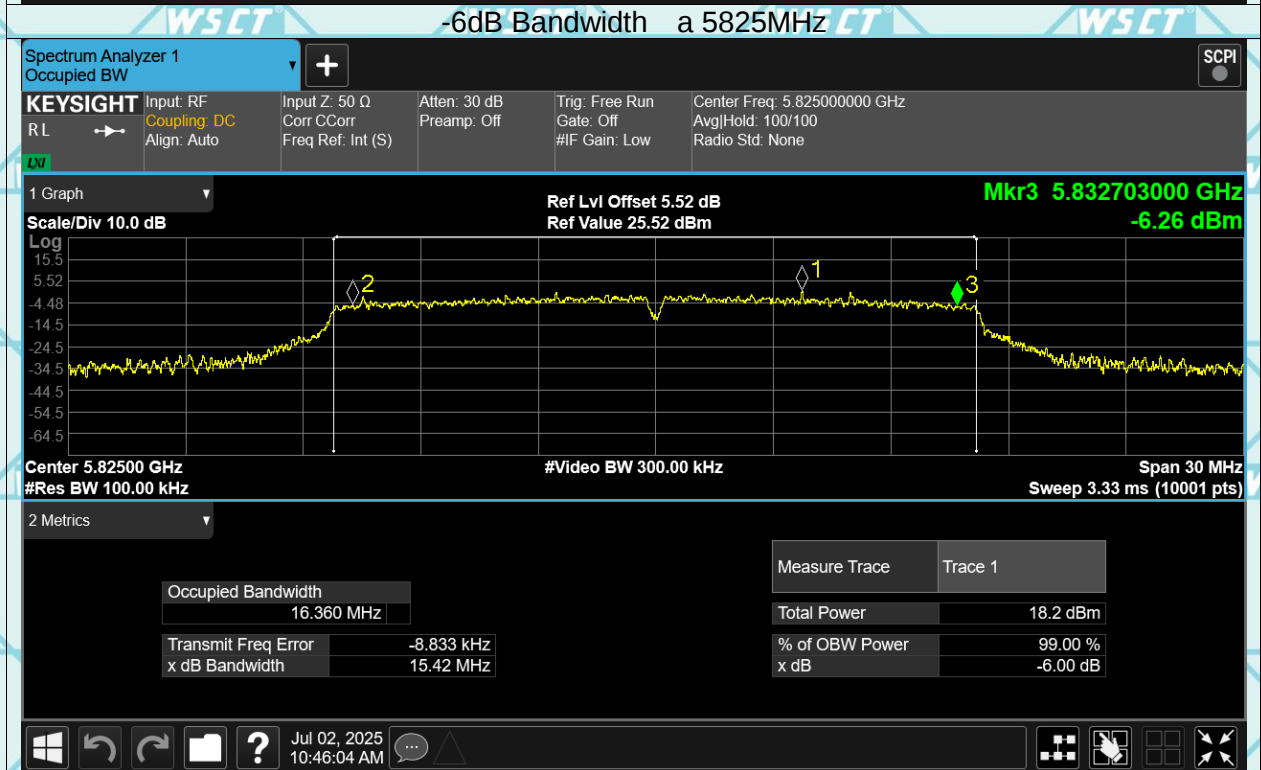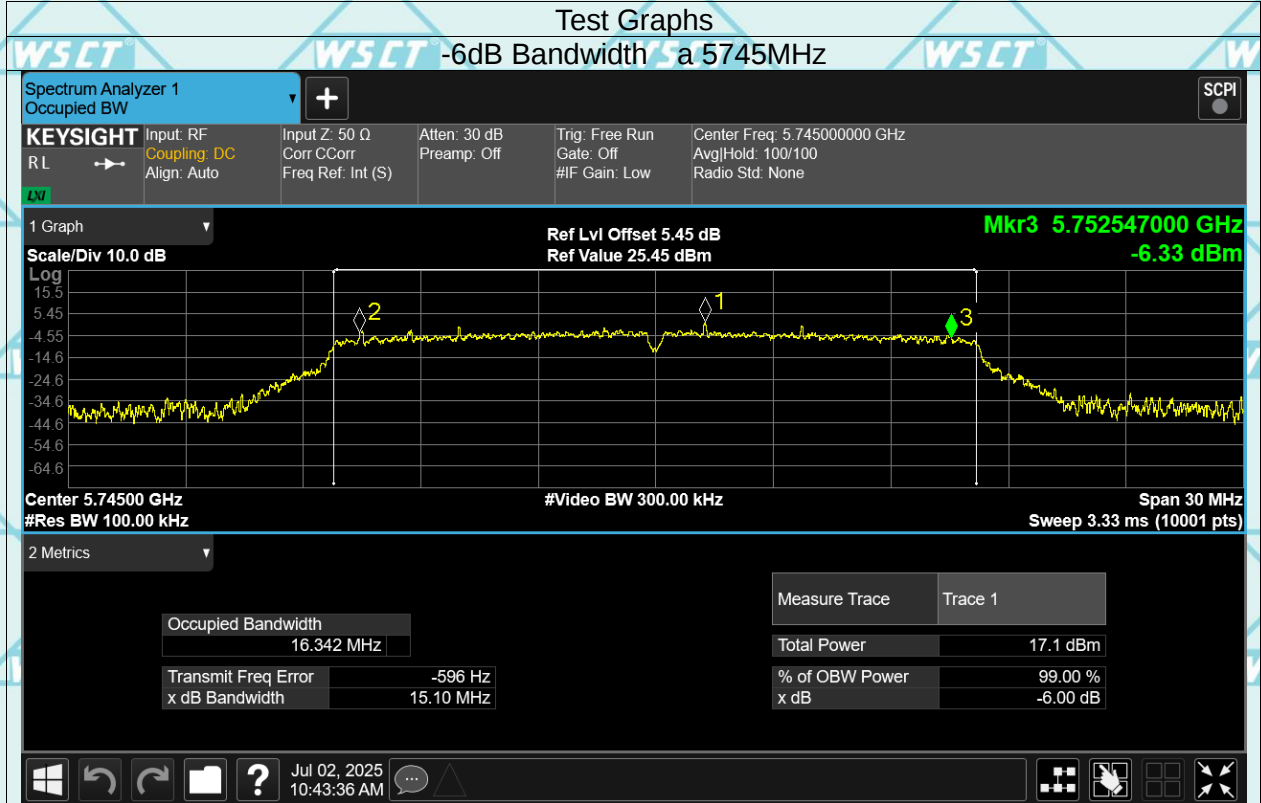


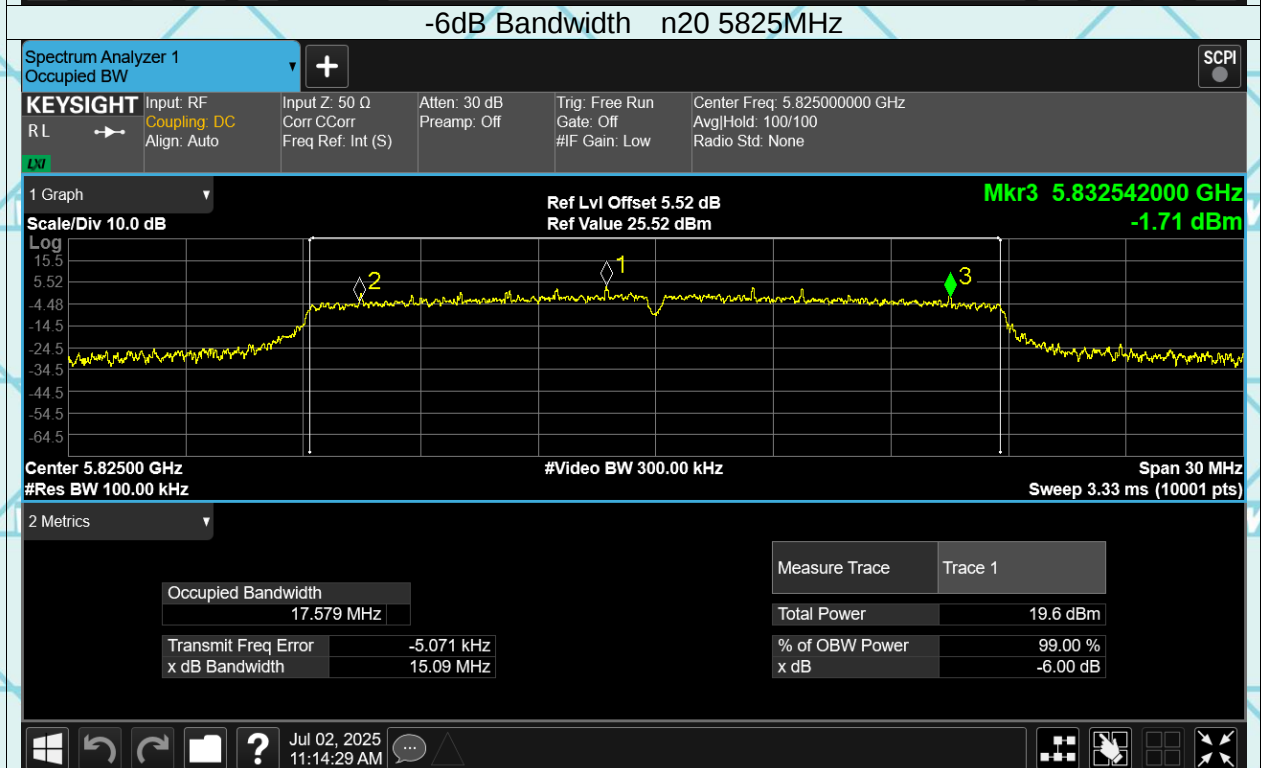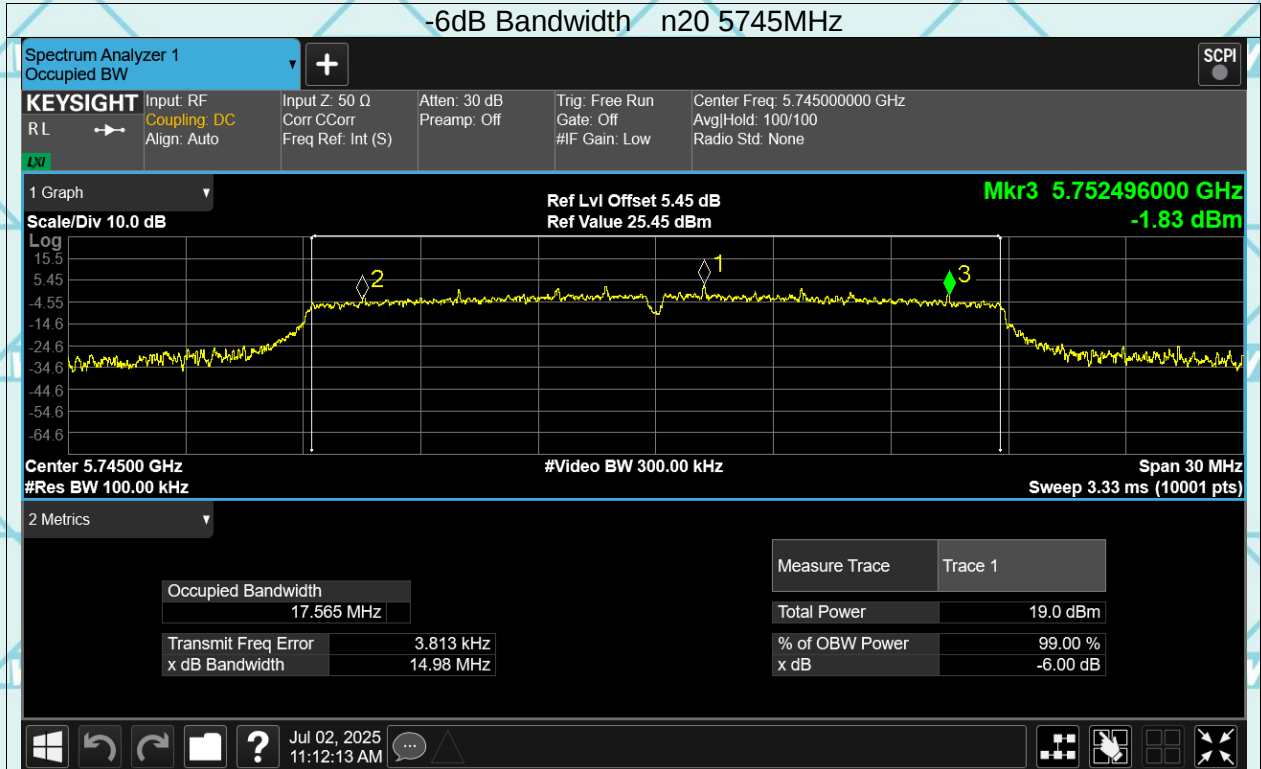

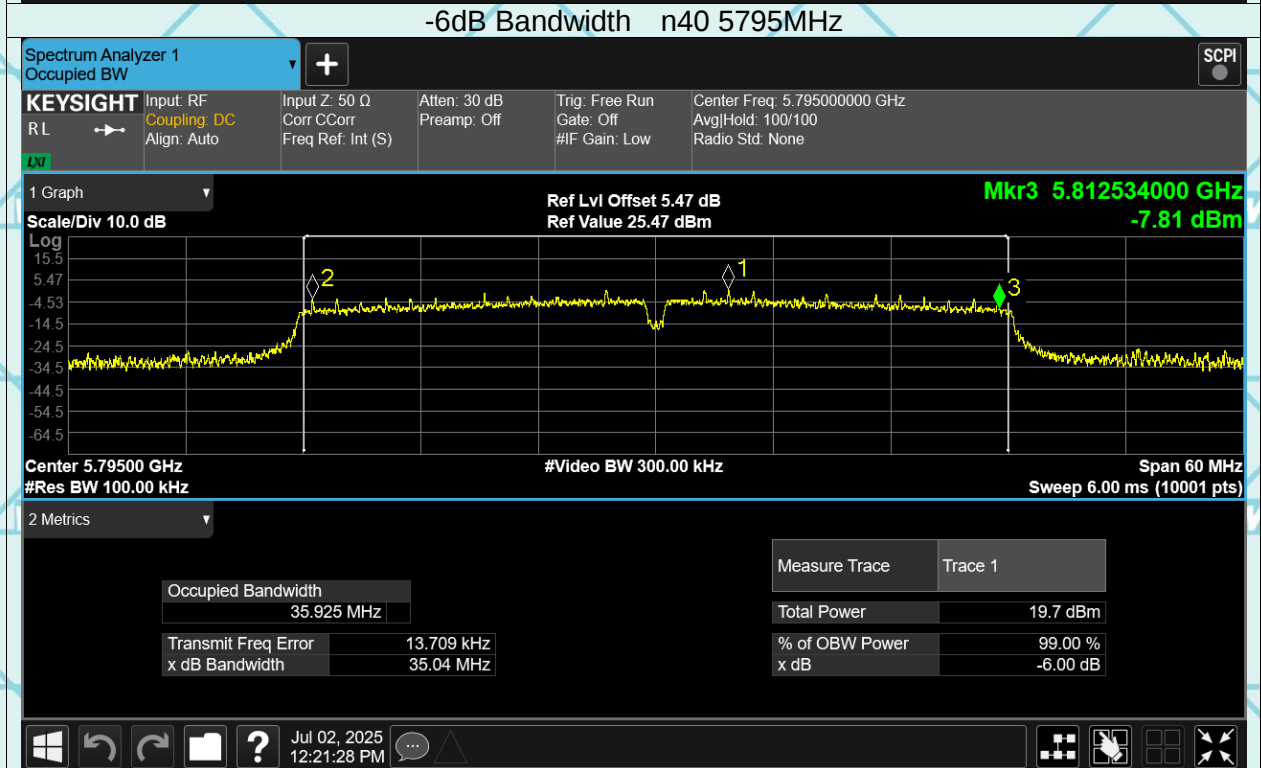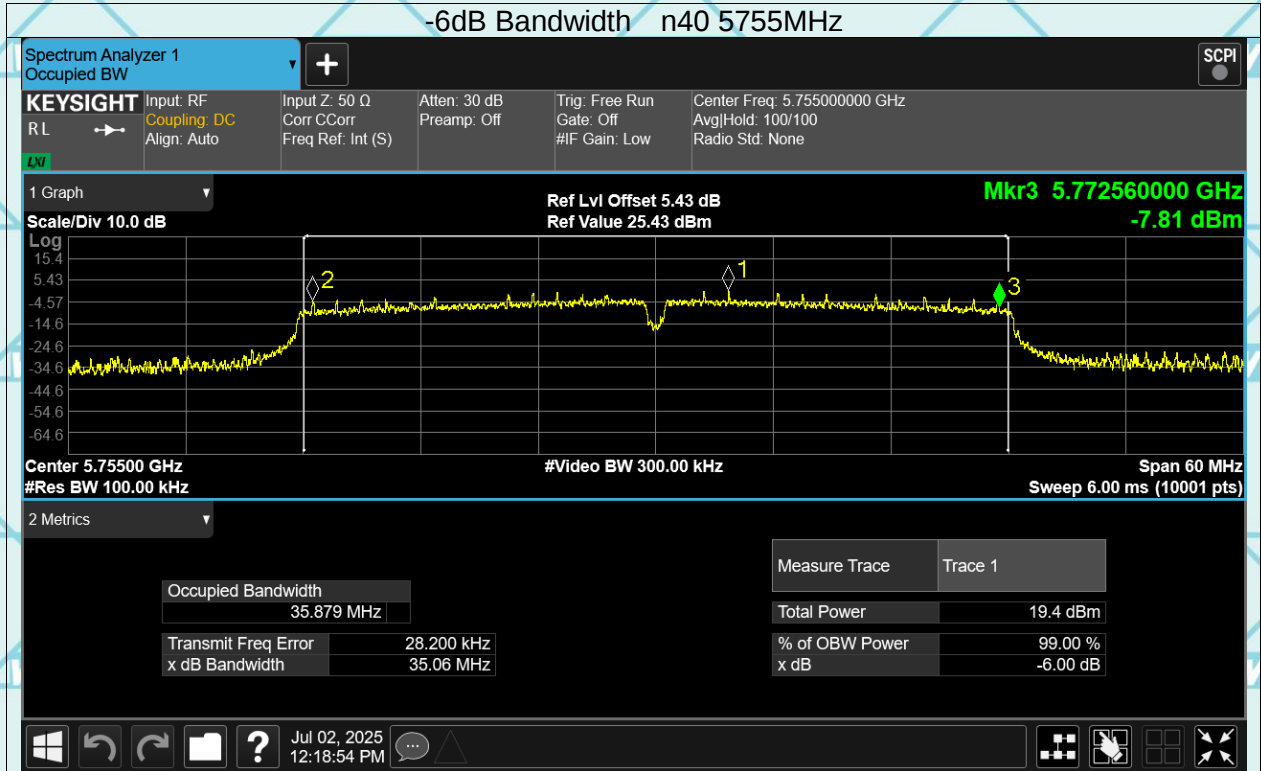

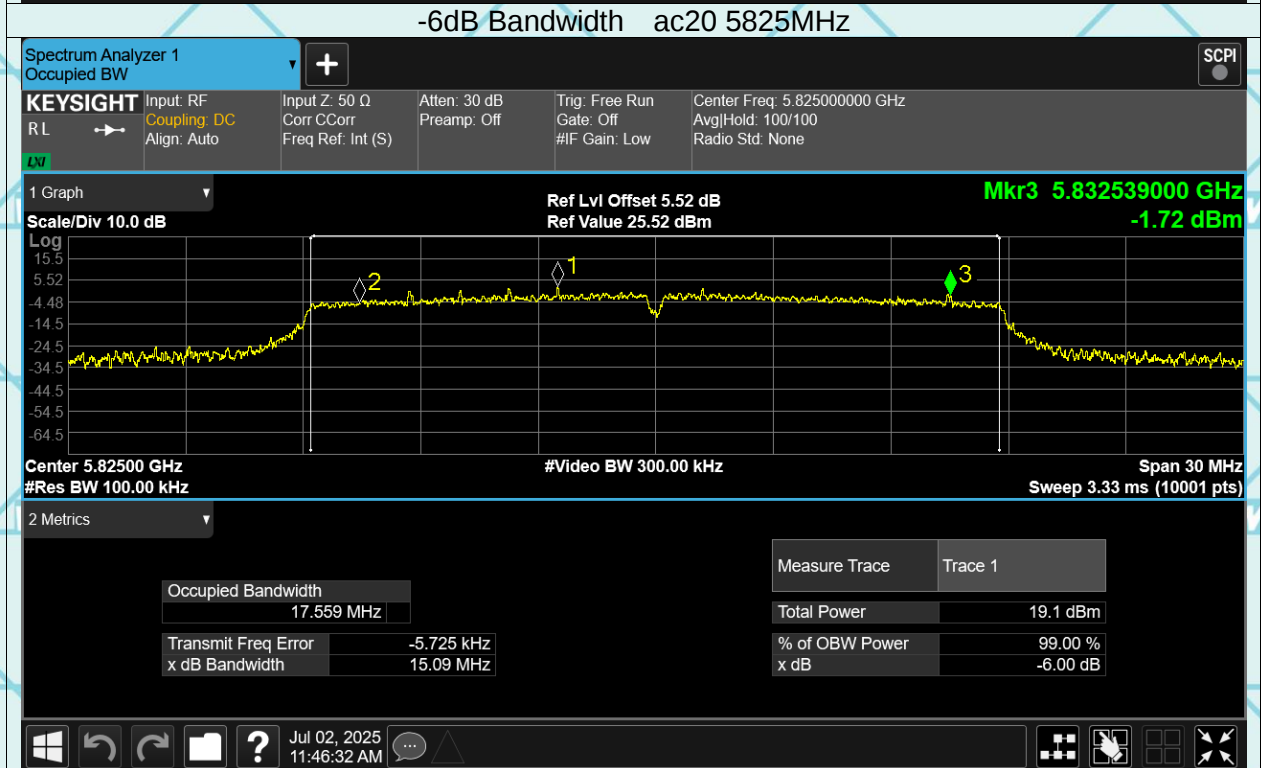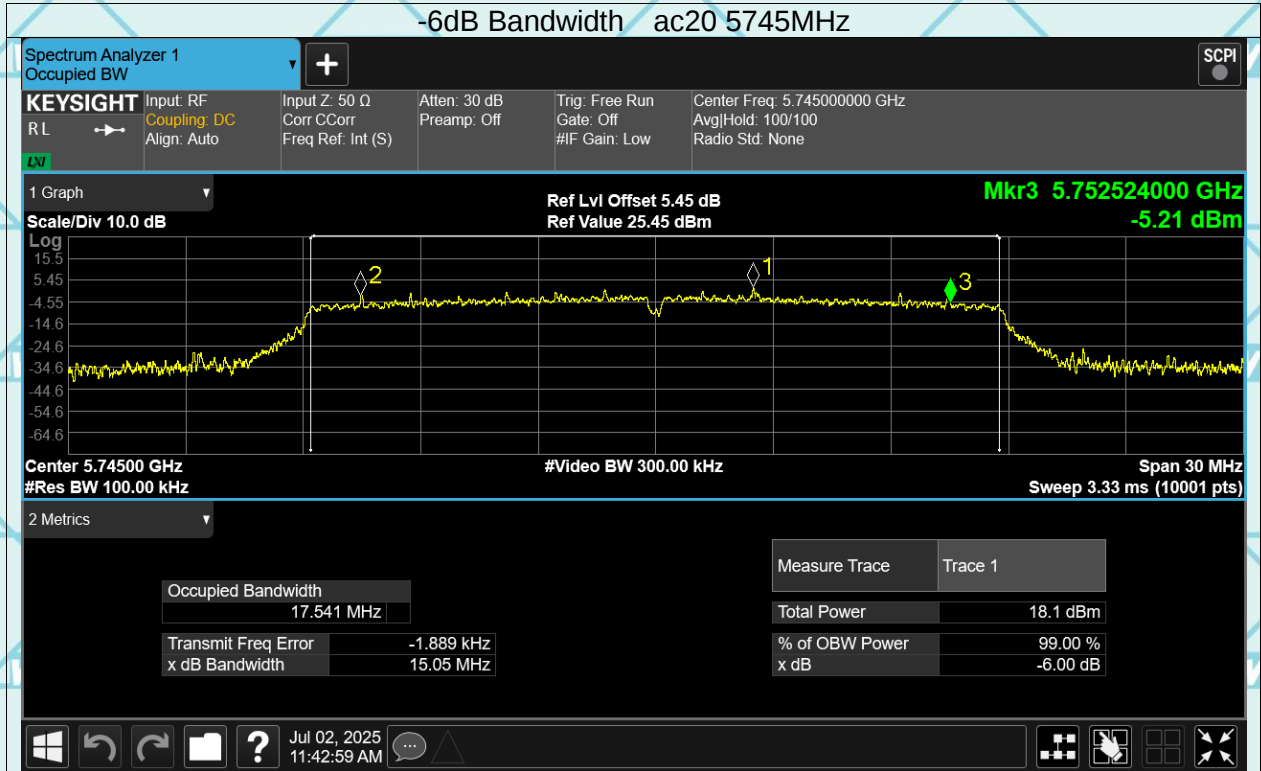

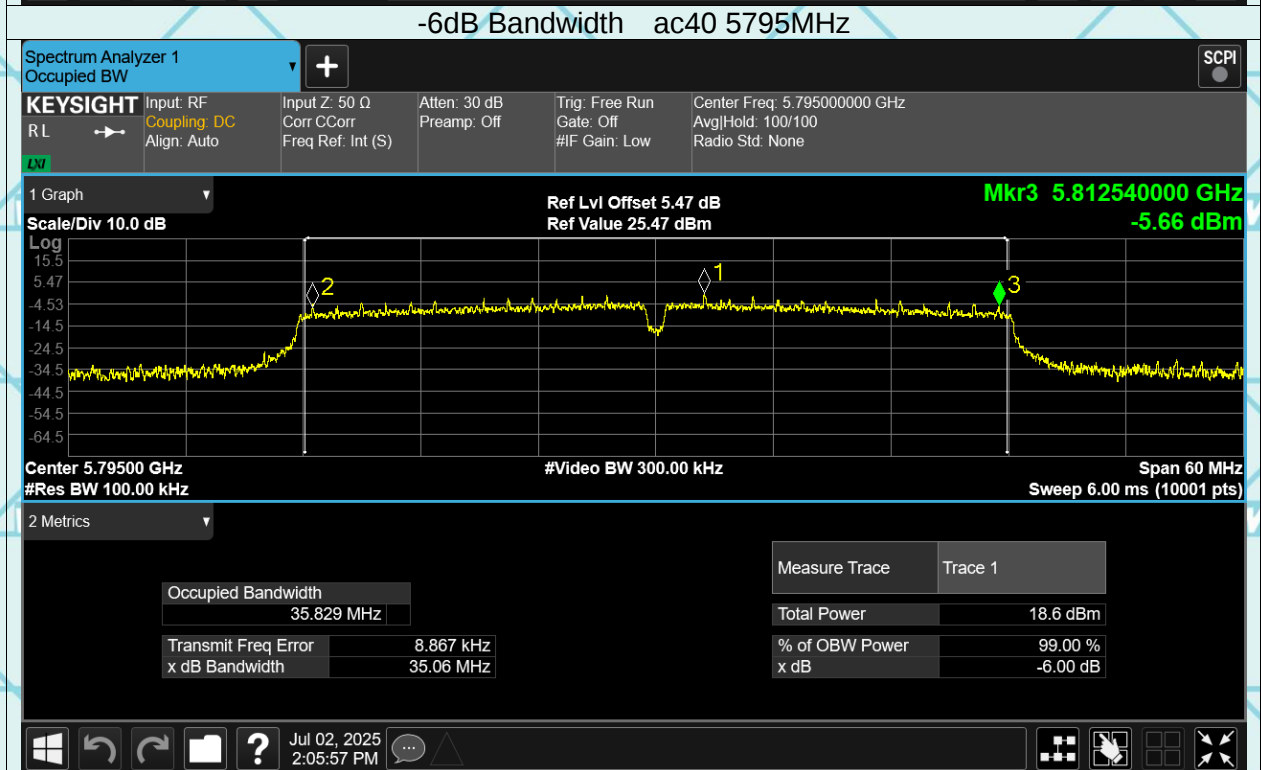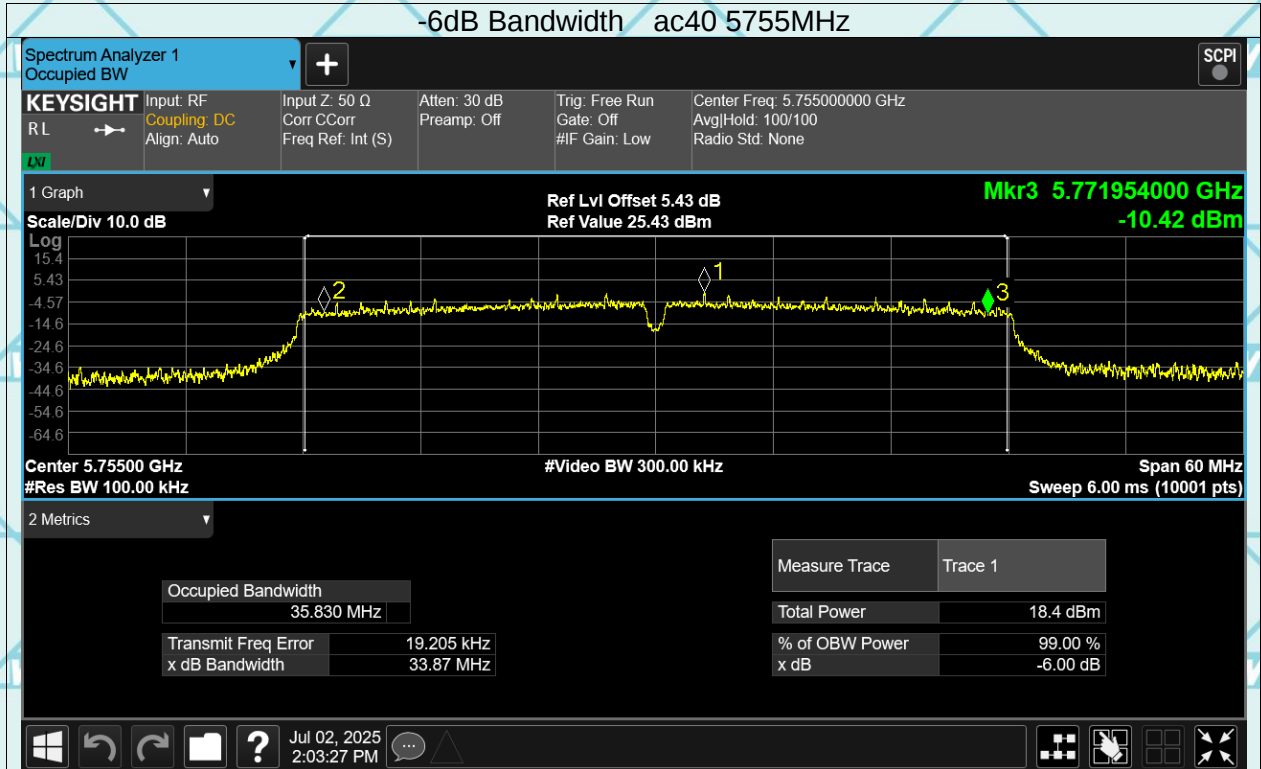


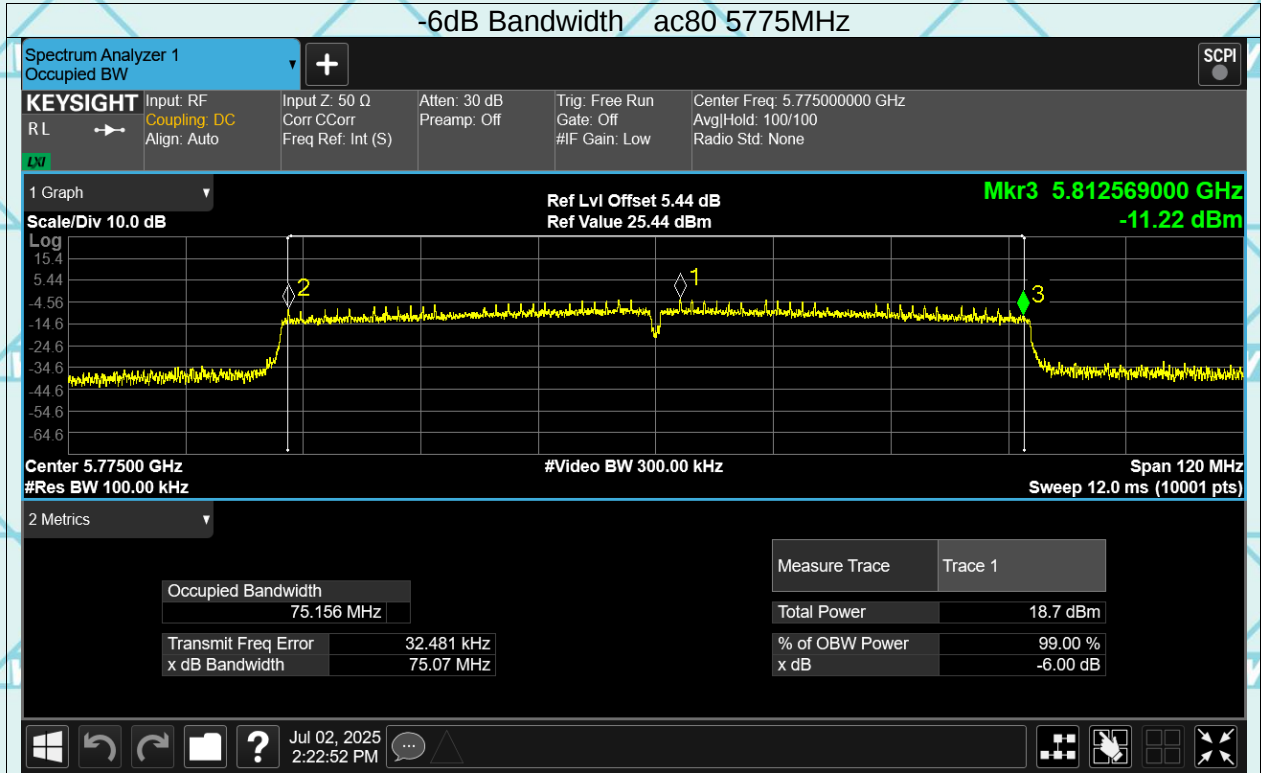

7.6 MAXIMUM CONDUCTED OUTPUT POWER

Product	: EUT-Sample	Test Mode	: See section 3.4
Test Item	: Maximum Conducted Output Power	Temperature	: 25 °C
Test Voltage	: DC 3.91V	Humidity	: 56%RH
Test Result	: PASS		

Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
a	5180	11.44	0.11	11.55	24	Pass
a	5240	11.52	0.11	11.63	24	Pass
a	5260	11.67	0.11	11.78	24	Pass
a	5320	11.55	0.11	11.66	24	Pass
a	5500	11.69	0.11	11.8	24	Pass
a	5700	12.11	0.11	12.22	24	Pass
a	5745	12.16	0.11	12.27	30	Pass
a	5825	13.32	0.11	13.43	30	Pass
n20	5180	13.6	0.12	13.72	24	Pass
n20	5240	13.55	0.12	13.67	24	Pass
n20	5260	13.75	0.12	13.87	24	Pass
n20	5320	13.57	0.12	13.69	24	Pass
n20	5500	13.22	0.12	13.34	24	Pass
n20	5700	14.02	0.12	14.14	24	Pass
n20	5745	13.98	0.12	14.1	30	Pass
n20	5825	14.43	0.12	14.55	30	Pass
n40	5190	13.84	0.22	14.06	24	Pass
n40	5230	14.05	0.22	14.27	24	Pass
n40	5270	13.68	0.21	13.89	24	Pass
n40	5310	12.97	0.21	13.18	24	Pass
n40	5510	13.06	0.22	13.28	24	Pass
n40	5670	14.17	0.21	14.38	24	Pass
n40	5755	14.08	0.21	14.29	30	Pass
n40	5795	14.36	0.21	14.57	30	Pass
ac20	5180	12.53	0.11	12.64	24	Pass
ac20	5240	12.41	0.11	12.52	24	Pass
ac20	5260	12.62	0.11	12.73	24	Pass
ac20	5320	12.43	0.11	12.54	24	Pass
ac20	5500	12.54	0.12	12.66	24	Pass
ac20	5700	13	0.11	13.11	24	Pass
ac20	5745	13.13	0.11	13.24	30	Pass
ac20	5825	14.13	0.11	14.24	30	Pass
ac40	5190	12.74	0.21	12.95	24	Pass
ac40	5230	13.14	0.22	13.36	24	Pass
ac40	5270	13.19	0.21	13.4	24	Pass
ac40	5310	12.17	0.21	12.38	24	Pass
ac40	5510	12.19	0.21	12.4	24	Pass
ac40	5670	13.32	0.21	13.53	24	Pass
ac40	5755	13.24	0.21	13.45	30	Pass
ac40	5795	13.42	0.21	13.63	30	Pass
ac80	5210	12.43	0.43	12.86	24	Pass
ac80	5290	12.16	0.42	12.58	24	Pass
ac80	5530	11.96	0.42	12.38	24	Pass
ac80	5610	12.97	0.42	13.39	24	Pass
ac80	5775	13.11	0.42	13.53	30	Pass

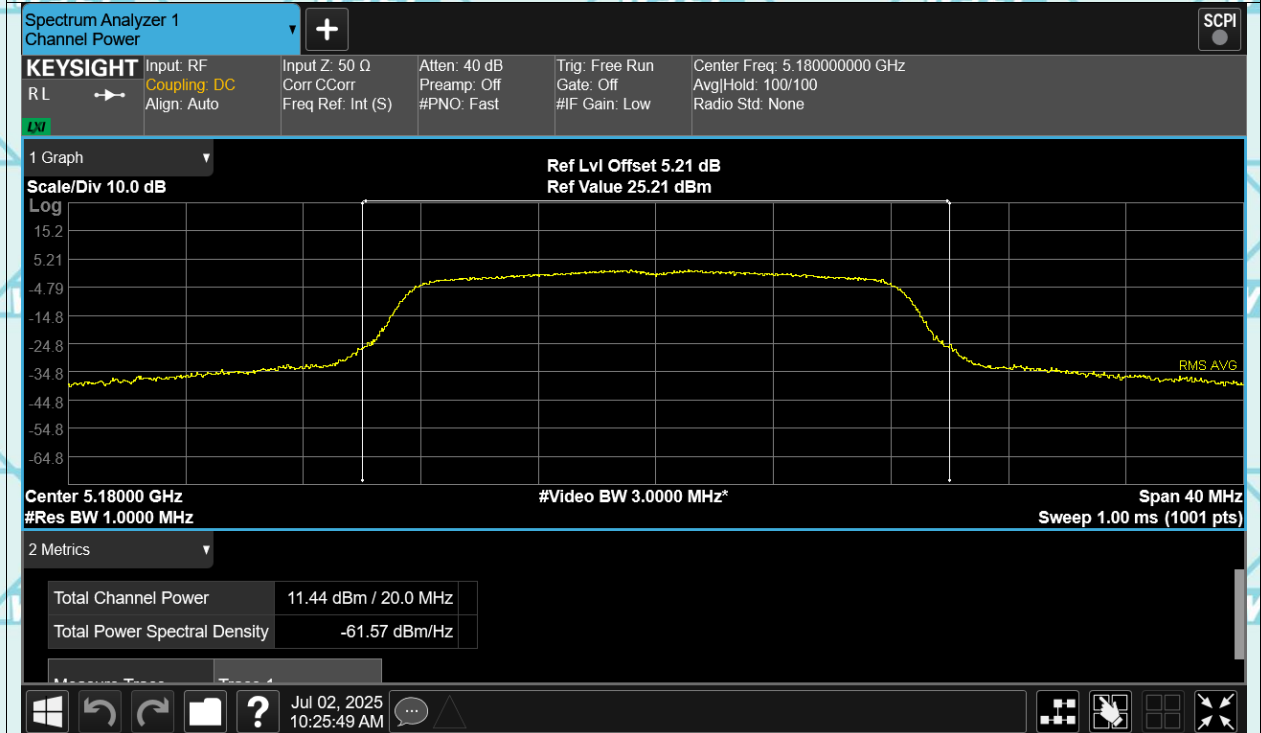Test Graphs
Power a 5180MHz

Power a 5240MHz

