



FCC RADIO TEST REPORT

FCC ID:2AFMZ-RK-175

Product: RK-175

Trade Name: RTK

Model No.: RK-175

Serial Model: N/A

Report No.: NTEK- 2016NT05035459F5

Issue Date: 24 May. 2016

Prepared for

ACCESS TELECOM

1882 NW 97TH AVE, DORAL, MIAMI, FL 33172,
UNITED STATES OF AMERICA.

Prepared by

NTEK TESTING TECHNOLOGY CO., LTD.

1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen, P.R. China

Tel.: +86-0755-61156588

Fax.: +86-0755-61156599

Website: www.ntek.org.cn

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	3
2	SUMMARY OF TEST RESULTS.....	4
3	FACILITIES AND ACCREDITATIONS	5
3.1	FACILITIES.....	5
3.2	LABORATORY ACCREDITATIONS AND LISTINGS	5
3.3	MEASUREMENT UNCERTAINTY	5
4	GENERAL DESCRIPTION OF EUT	6
5	DESCRIPTION OF TEST MODES	8
6	SETUP OF EQUIPMENT UNDER TEST	9
6.1	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	9
6.2	SUPPORT EQUIPMENT.....	10
6.3	EQUIPMENTS LIST FOR ALL TEST ITEMS.....	11
7	TEST REQUIREMENTS	12
7.1	CONDUCTED EMISSIONS TEST	12
7.2	FIELD STRENGTH OF SPURIOUS RADIATION	17
7.3	EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER.....	25
7.4	CONDUCTED OUTPUT POWER	29
7.5	FREQUENCY STABILITY	34
7.6	PEAK-TO-AVERAGE RATIO	39
7.7	26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	47
7.8	CONDUCTED BAND EDGE	58
7.9	CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL	64

1 TEST RESULT CERTIFICATION

Applicant's name	ACCESS TELECOM
Address	1882 NW 97th Ave, Doral, Miami, FL 33172, United States of America.
Manufacture's Name	Locopo Technolgy Co.,Ltd.
Address	B Rm./Flat 1501(056), 15/F, Spa Centre, 53-55 Lockhart Road, Wan Chai, Hong Kong.
Product description	
Product name	RK-175
Model and/or type reference	RK-175
Serial Model	N/A

Measurement Procedure Used:


APPLICABLE STANDARDS	
APPLICABLE STANDARD/ TEST PROCEDURE	TEST RESULT
47 CFR Part 2, Part 22H, Part 24E ANSI/ TIA/ EIA-603-D-2010	Complied
FCC KDB 971168 D01 Power Meas. License Digital Systems v02v02	


This device described above has been tested by NTEK Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.


This report shall not be reproduced except in full, without the written approval of NTEK Testing Technology Co., Ltd., this document may be altered or revised by NTEK Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : 03 May. 2016 ~ 24 May. 2016

Testing Engineer : 
(Jack Li)

Technical Manager : 
(Jason Chen)

Authorized Signatory : 
(Sam Chen)

2 SUMMARY OF TEST RESULTS**FCC Part22, Subpart H/ FCC Part24, Subpart E**

FCC Rule	Test Item	Verdict	Remark
2.1046	Conducted Output Power	PASS	
24.232(d)	Peak-to-Average Ratio	PASS	
2.1049 22.917(b) 24.238(b)	Occupied Bandwidth	PASS	
2.1051 22.917(a) 24.238(a)	Band Edge	PASS	
22.913(a)(2)	Effective Radiated Power	PASS	
24.232(c)	Equivalent Isotropic Radiated Power	PASS	
2.1053 22.917(a) 24.238(a)	Field Strength of Spurious Radiation	PASS	
2.1055 22.355 24.235	Frequency Stability for Temperature & Voltage	PASS	
2.1051 22.917(a) 24.238(a)	Conducted Emission	PASS	

Remark:

1. "N/A" denotes test is not applicable in this Test Report.
2. All test items were verified and recorded according to the standards and without any deviation during the test.
3. No modifications are made to the EUT during all test items.
4. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

3 FACILITIES AND ACCREDITATIONS

3.1 FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

3.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : Accredited by CNAS, 2014.09.04
The certificate is valid until 2017.09.03
The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516.

Accredited by Industry Canada, August 29, 2012
The Certificate Registration Number is 9270A-1.

Accredited by FCC, September 6, 2013
The Certificate Registration Number is 238937.

: NTEK Testing Technology Co., Ltd
: 1/F, Building E, Fenda Science Park, Sanwei C

Name of Firm : NTEK Testing Technology Co., Ltd
Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen P.R. China.

3.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

4 GENERAL DESCRIPTION OF EUT

Product Feature and Specification	
Equipment	RK-175
Trade Name	RTK
FCC ID	2AFMZ-RK-175
Model No.	RK-175
Serial Model	N/A
Model Difference	N/A
Operating Frequency	<input checked="" type="checkbox"/> GSM850: TX824.2MHz~848.8MHz /RX869.2MHz~893.8MHz; <input checked="" type="checkbox"/> UMTS FDD Band V: TX826.4MHz~846.6MHz /RX871.4MHz~891.6MHz; <input checked="" type="checkbox"/> PCS1900: TX1850.2MHz~1909.8MHz /RX1930.2MHz~1989.8MHz; <input checked="" type="checkbox"/> UMTS FDD Band II: TX1852.4MHz~1907.6MHz /RX1932.4MHz~1987.6MHz;
Modulation	<input checked="" type="checkbox"/> GMSK for GSM/GPRS; <input type="checkbox"/> 8PSK for EGPRS; <input checked="" type="checkbox"/> QPSK for UMTS bands;
Number of Channels	<input checked="" type="checkbox"/> 124 Channels for GSM850; <input checked="" type="checkbox"/> 102 Channels for UMTS FDD Band V; <input checked="" type="checkbox"/> 299 Channels for PCS1900; <input checked="" type="checkbox"/> 277 Channels for UMTS FDD Band II;
Power Class	<input checked="" type="checkbox"/> 4, tested with power level 5(GSM 850); 1, tested with power level 0(GSM 1900) <input checked="" type="checkbox"/> 3, tested with power control "all 1"(UMTS Band V); <input checked="" type="checkbox"/> 3, tested with power control "all 1"(UMTS Band II)
SIM CARD	The Phone Two SIM Card sockets <input checked="" type="checkbox"/> IMEI Code1: <input checked="" type="checkbox"/> IMEI Code2:
Antenna Type	FPCB Antenna
Antenna Gain	1 dBi
Power supply	<input checked="" type="checkbox"/> DC supply: DC 3.7V/2500mAh from Li-ion Battery or DC 5V from USB Port. <input checked="" type="checkbox"/> Adapter supply: Model: XHY050200UUCH Input: 100-240V~, 50/60Hz, 0.5A MAX Output: 5.0V---2A
HW Version	ELINK-E706I_V1
SW Version	Full_elink8321_emmc-eng.2016042818

Note: Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual. The High Voltage 4.2V and Low Voltage 3.2V was declared by manufacturer, The EUT couldn't be operate normally with higher or lower voltage.

Revision History

5 DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester(CMU 200) to ensure max power transmission and proper modulation. Three channels (The low channel, the middle channel and the high channel) were chosen for testing on both GPRS850 and GPRS1900 frequency band.

Note: GSM/GPRS 850, GSM/GPRS 1900, HSDPA band II, HSUPA band II, HSDPA band V, HSUPA band V modes have been tested during the test. the worst condition (GSM850, GSM1900 RMC 12.2k) be recorded in the test report if no other modes test data.

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 10th harmonic for GSM850/UMTS FDD Band V.
2. 30 MHz to 10th harmonic for GSM1900/UMTS FDD Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	For Conducted Test Cases	For Radiated Test Cases
GSM 850	GSM Link	GSM Link
GSM 1900	GSM Link	GSM Link
UMTS Band II	RMC 12.2Kbps Link	RMC 12.2Kbps Link
UMTS Band V	RMC 12.2Kbps Link	RMC 12.2Kbps Link


Test Frequency and Channels:

Frequency Band	☒ GSM 850		☒ GSM 1900		☒ UMTS Band II		☒ UMTS Band V	
	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH_H	251	848.8	810	1909.8	9538	1907.6	4233	846.6
CH_M	189	836.4	661	1880.0	9400	1880.0	4182	836.4
CH_L	128	824.2	512	1850.2	9262	1852.4	4132	826.4


6 SETUP OF EQUIPMENT UNDER TEST

6.1 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM


For AC Conducted Emission Mode

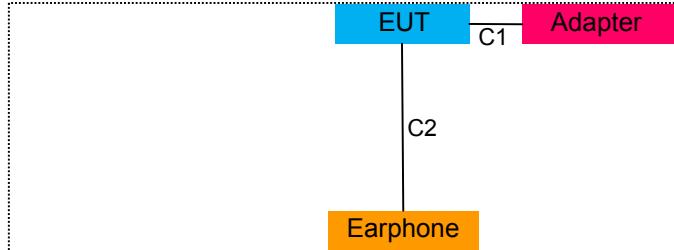


For Radiated Test Cases

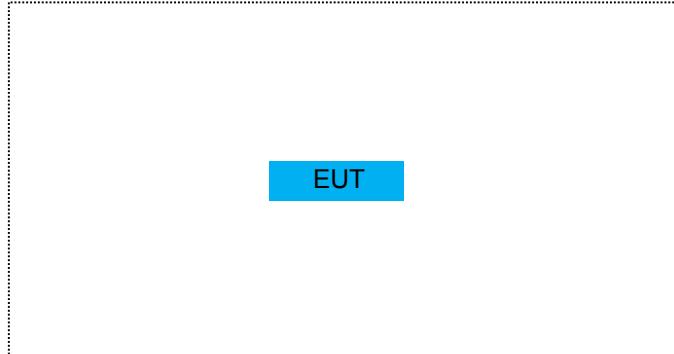


For Conducted Output Power

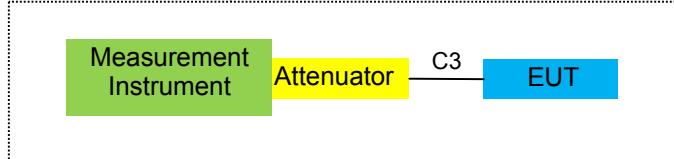

For Peak-to Average Ratio, Occupied Bandwidth, Conducted Band edge and Conducted Spurious Emission

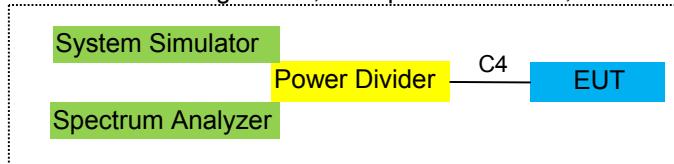

For Frequency Stability

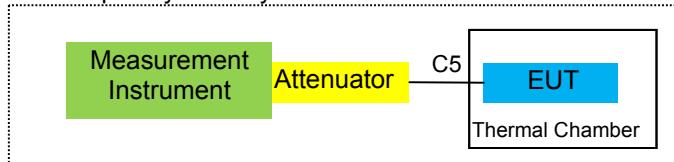

6.2 SUPPORT EQUIPMENT

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
E-1	RK-175	RTK	RK-175	2AFMZ-RK-175	EUT
E-2	Adapter	N/A	XHY050200UUCH	N/A	Peripherals
E-3	Earphone	N/A	L662	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length
C-1	USB Cable	NO	NO	1.0m
C-2	Earphone	NO	NO	0.8m
C-3	RF Cable	NO	NO	0.5m
C-4	RF Cable	NO	NO	0.5m
C-5	RF Cable	NO	NO	0.5m

Notes:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".

6.3 EQUIPMENTS LIST FOR ALL TEST ITEMS

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2015.07.06	2016.07.05	1 year
2	Test Receiver	R&S	ESPI	101318	2015.06.07	2016.06.06	1 year
3*	Bilog Antenna	TESEQ	CBL6111D	31216	2015.07.06	2016.07.05	1 year
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2015.06.07	2016.06.06	1 year
5	Spectrum Analyzer	ADVANTEST	R3132	150900201	2015.06.07	2016.06.06	1 year
6*	Horn Antenna	EM	EM-AH-10180	2011071402	2015.07.06	2016.07.05	1 year
7	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2015.07.06	2016.07.05	1 year
8	Amplifier	EM	EM-30180	060538	2015.07.06	2016.07.05	1 year
9	Loop Antenna	ARA	PLA-1030/B	1029	2015.06.08	2016.06.07	1 year
10	Power Meter	R&S	NRVS	100696	2015.07.06	2016.07.05	1 year
11	Power Sensor	R&S	URV5-Z4	0395.1619.05	2015.07.06	2016.07.05	1 year
12	Test Cable	N/A	R-01	N/A	2015.07.06	2016.07.05	1 year
13	Test Cable	N/A	R-02	N/A	2015.07.06	2016.07.05	1 year
14	Test Receiver	R&S	ESCI	101160	2015.06.06	2016.06.05	1 year
15	LISN	R&S	ENV216	101313	2015.08.24	2016.08.23	1 year
16	LISN	EMCO	3816/2	00042990	2015.08.24	2016.08.23	1 year
17	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2015.06.07	2016.06.06	1 year
18	Passive Voltage Probe	R&S	ESH2-Z3	100196	2015.06.07	2016.06.06	1 year
19	Absorbing clamp	R&S	MOS-21	100423	2015.06.08	2016.06.07	1 year
20	Test Cable	N/A	C01	N/A	2015.06.08	2016.06.07	1 year
21	Test Cable	N/A	C02	N/A	2015.06.08	2016.06.07	1 year
22	Test Cable	N/A	C03	N/A	2015.06.08	2016.06.07	1 year
23	Attenuation	MCE	24-10-34	BN9258	2015.06.08	2016.06.07	1 year
24	Spectrum Analyzer	agilent	e4440a	us44300399	2015.06.08	2016.06.07	1 year
25	test receiver	R&S	ESCI	a0304218	2015.06.08	2016.06.07	1 year
26	Communication Tester	R&S	CMU200	A0304247	2015.06.08	2016.06.07	1 year
27	Thermal Chamber	Ten Billion	TTC-B3C	TBN-960502	2015.06.08	2016.06.07	1 year

Note: Each piece of equipment is scheduled for calibration once a year.

*: substitution antenna.

7 TEST REQUIREMENTS

7.1 CONDUCTED EMISSIONS TEST

7.1.1 Applicable Standard

According to FCC KDB 971168 D01 v02r02 Section 6.0

7.1.2 Conformance Limit


Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

7.1.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.1.4 Test Configuration

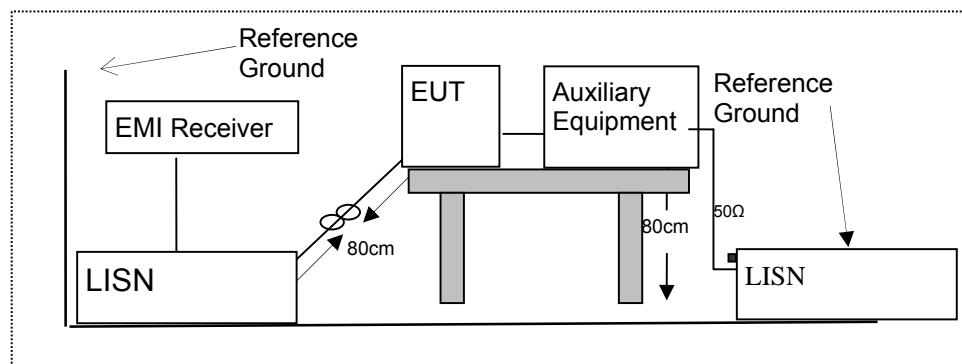


7.1.5 Test Procedure

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

7.1.6 Test Results

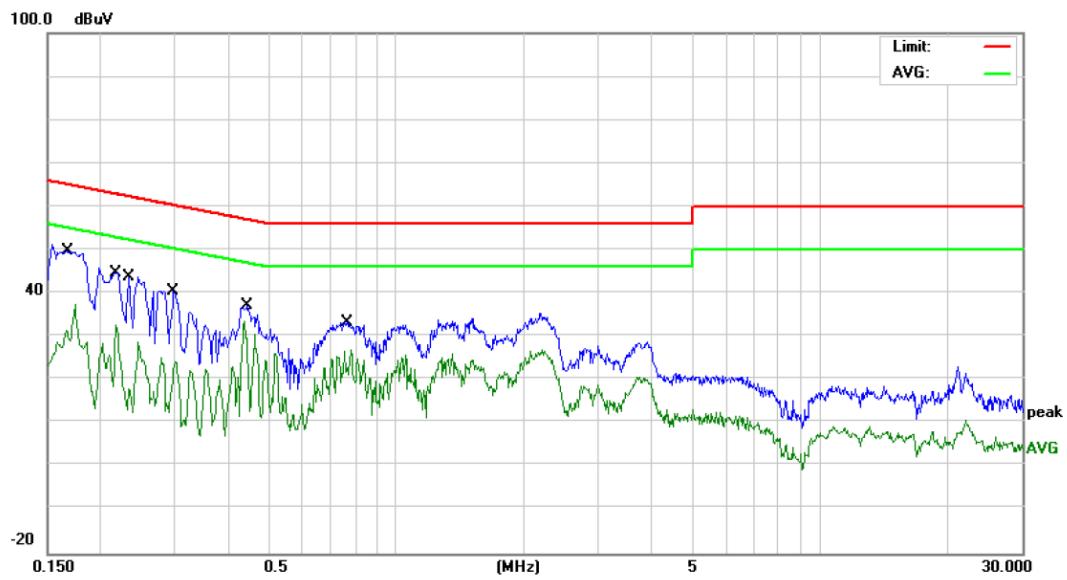

Site

Phase:

L1

Temperature: 22

Limit: FCC Part 15B_(0.15-30MHz) _Main_QP

Power: AC 120V/60Hz


Humidity: 51 %

Mode: Mode 1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1665	49.78	0.00	49.78	65.13	-15.35	QP	
2		0.1665	37.42	0.00	37.42	55.13	-17.71	AVG	
3		0.2179	44.75	0.00	44.75	62.89	-18.14	QP	
4		0.2179	32.59	0.00	32.59	52.89	-20.30	AVG	
5		0.2340	43.83	0.00	43.83	62.30	-18.47	QP	
6		0.2340	28.87	0.00	28.87	52.30	-23.43	AVG	
7		0.2977	40.30	0.00	40.30	60.30	-20.00	QP	
8		0.2977	25.09	0.00	25.09	50.30	-25.21	AVG	
9		0.4460	37.13	0.00	37.13	56.95	-19.82	QP	
10 *		0.4460	33.62	0.00	33.62	46.95	-13.33	AVG	
11		0.7660	33.39	0.00	33.39	56.00	-22.61	QP	
12		0.7660	26.85	0.00	26.85	46.00	-19.15	AVG	

*:Maximum data x:Over limit !:over margin

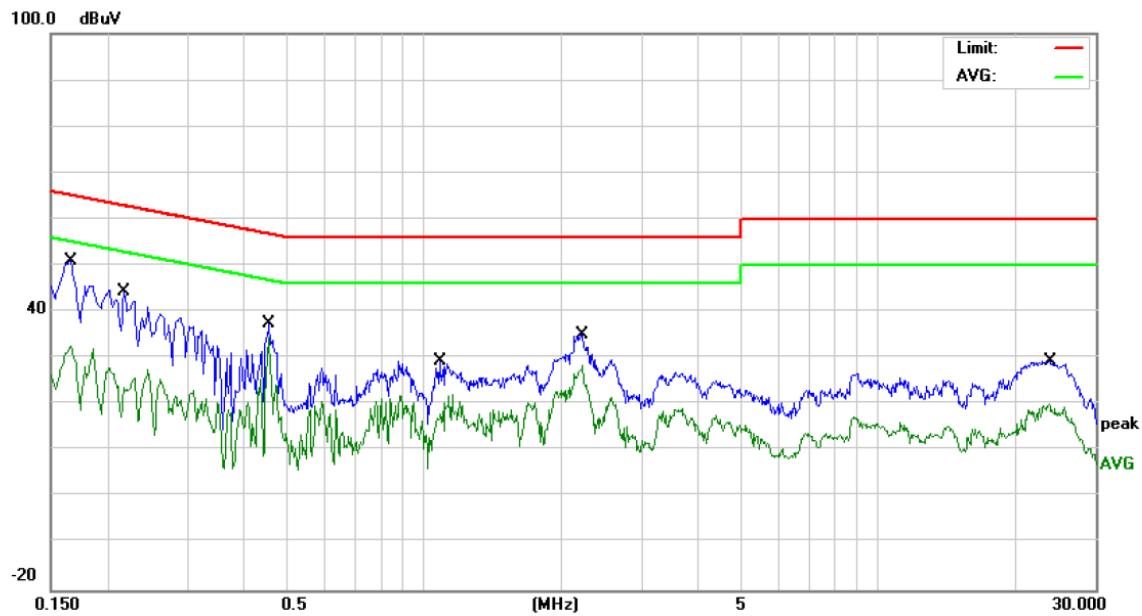

Site

Phase: **N**

Temperature: 22

Limit: FCC Part15_Class B_Main_QP

Power: AC 120V/60Hz


Humidity: 51 %

Mode: Mode 1

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1660	50.89	0.00	50.89	65.15	-14.26	QP	
2		0.1660	32.58	0.00	32.58	55.15	-22.57	AVG	
3		0.2179	44.47	0.00	44.47	62.89	-18.42	QP	
4		0.2179	27.83	0.00	27.83	52.89	-25.06	AVG	
5		0.4540	37.48	0.00	37.48	56.80	-19.32	QP	
6	*	0.4540	34.52	0.00	34.52	46.80	-12.28	AVG	
7		1.0820	29.38	0.00	29.38	56.00	-26.62	QP	
8		1.0820	22.13	0.00	22.13	46.00	-23.87	AVG	
9		2.2179	35.17	0.00	35.17	56.00	-20.83	QP	
10		2.2179	28.36	0.00	28.36	46.00	-17.64	AVG	
11		23.8140	29.36	0.00	29.36	60.00	-30.64	QP	
12		23.8140	20.03	0.00	20.03	50.00	-29.97	AVG	

*:Maximum data x:Over limit !:over margin

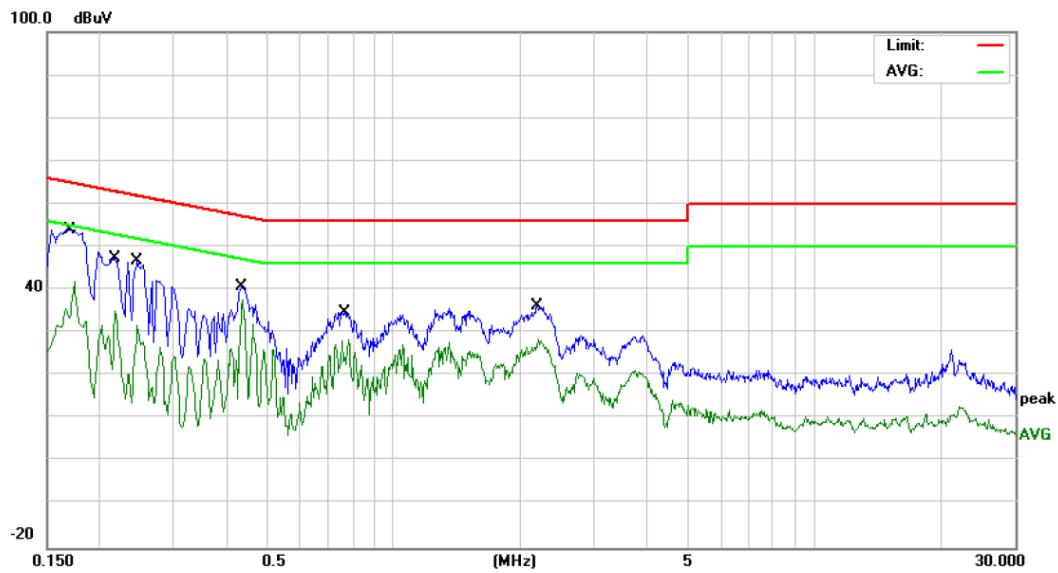

Site

Phase: **L1**

Temperature: 22

Limit: FCC Part 15B_(0.15-30MHz) _Main_QP

Power: AC 240V//50Hz


Humidity: 51 %

Mode: Mode 1

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1700	53.96	0.00	53.96	64.96	-11.00	QP	
2		0.1700	41.92	0.00	41.92	54.96	-13.04	AVG	
3		0.2179	47.25	0.00	47.25	62.89	-15.64	QP	
4		0.2179	35.09	0.00	35.09	52.89	-17.80	AVG	
5		0.2459	46.75	0.00	46.75	61.89	-15.14	QP	
6		0.2459	31.87	0.00	31.87	51.89	-20.02	AVG	
7		0.4339	40.65	0.00	40.65	57.18	-16.53	QP	
8	*	0.4339	37.62	0.00	37.62	47.18	-9.56	AVG	
9		0.7660	34.89	0.00	34.89	56.00	-21.11	QP	
10		0.7660	28.35	0.00	28.35	46.00	-17.65	AVG	
11		2.1899	36.21	0.00	36.21	56.00	-19.79	QP	
12		2.1899	28.31	0.00	28.31	46.00	-17.69	AVG	

*:Maximum data x:Over limit !:over margin

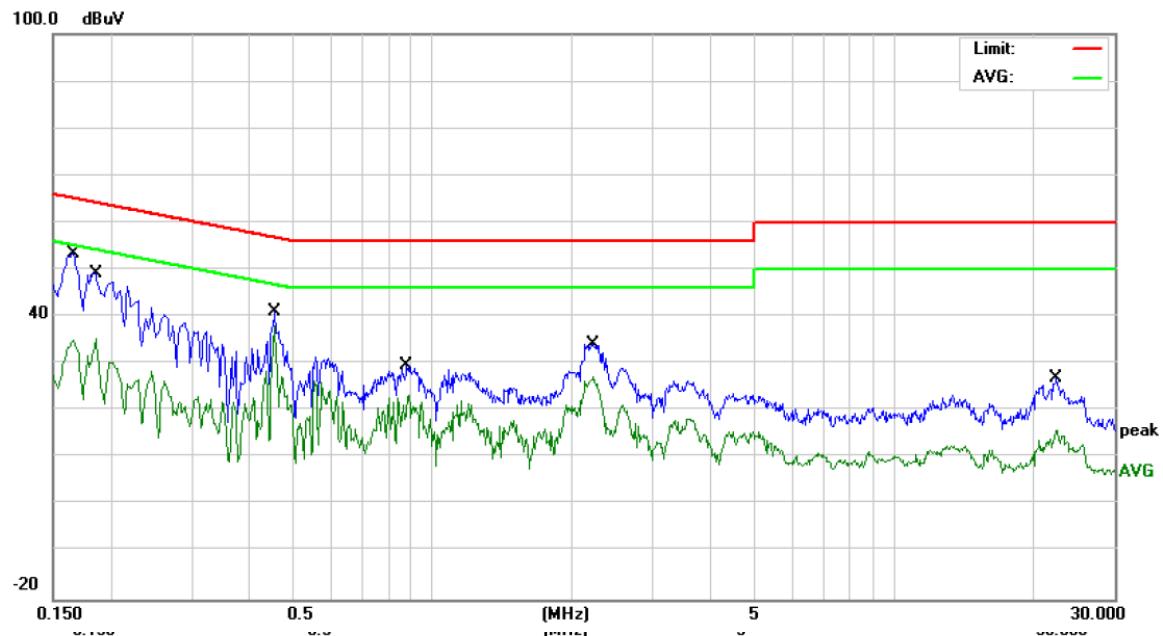

Site

Phase:

N

Temperature: 22

Limit: FCC Part15 Class B Main QP

Power: AC 240V/50Hz

Humidity: 51 %

Mode: Mode 1

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.1660	53.39	0.00	53.39	65.15	-11.76	QP	
2		0.1660	35.08	0.00	35.08	55.15	-20.07	AVG	
3		0.1859	49.08	0.00	49.08	64.21	-15.13	QP	
4		0.1859	35.40	0.00	35.40	54.21	-18.81	AVG	
5		0.4540	40.98	0.00	40.98	56.80	-15.82	QP	
6	*	0.4540	38.02	0.00	38.02	46.80	-8.78	AVG	
7		0.8780	29.74	0.00	29.74	56.00	-26.26	QP	
8		0.8780	23.23	0.00	23.23	46.00	-22.77	AVG	
9		2.2179	34.17	0.00	34.17	56.00	-21.83	QP	
10		2.2179	27.36	0.00	27.36	46.00	-18.64	AVG	
11		22.5100	26.93	0.00	26.93	60.00	-33.07	QP	
12		22.5100	15.85	0.00	15.85	50.00	-34.15	AVG	

*:Maximum data x:Over limit !:over margin

7.2 FIELD STRENGTH OF SPURIOUS RADIATION

7.2.1 Applicable Standard

According to FCC KDB 971168 D01 v02r02 Section 5.8 and ANSI/ TIA-603-D-2010 Section 2.2.12

7.2.2 Conformance Limit


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

7.2.3 Measuring Instruments


The Measuring equipment is listed in the section 6.3 of this test report.

7.2.4 Test Configuration

(a) For radiated emissions from 30MHz to 1000MHz

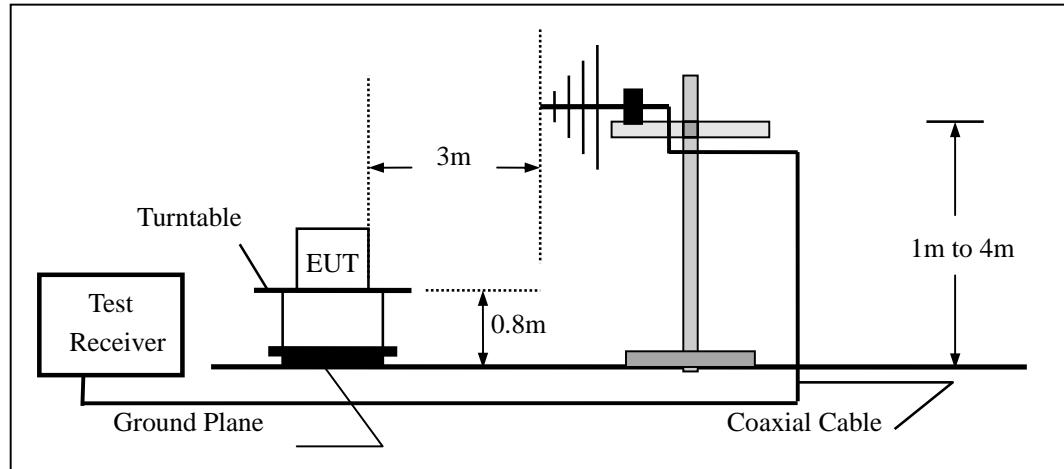

(b) For radiated emissions above 1000MHz

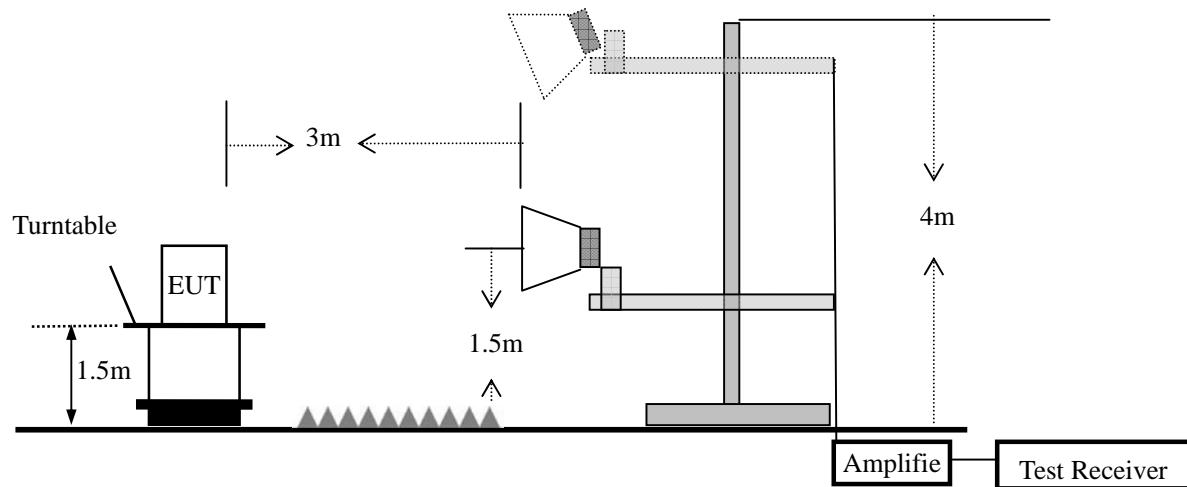

7.2.5 Test Procedure

The measurements procedures specified in TIA-603-D-2010 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GPRS850, GPRS1900, HSDPA band V) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.Only shown the worst data.

The procedure of radiated spurious emissions is as follows:

- a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, $RSE = Rx(dBuV) + CL(dB) + SA(dB) + Gain(dBi) - 107(dBuV \text{ to } dBm)$ The SA is calibrated using following setup.
- b) EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS 1900 band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz), UMTS band II(1852.4MHz, 1880MHz, 1907.6MHz), UMTS band V(826.4MHz, 835.0MHz, 846.6MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Power=PMea+ARpl

7.2.6 Test Results

EUT:	RK-175	Model No.:	RK-175
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM850/GSM1900 UMTS band II/ UMTS band V	Test By:	Jack Li

All the modulation modes and Channels have been tested, the data of the worst mode (GSM and GPRS) are recorded in the following pages.

■ Radiated Spurious Emission

GSM850						
Frequency (MHz)	Power (dBm)	ARpl (dBm)	PMea (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 128/824.2 MHz						
1648.4	-32.75	7.80	-24.95	-13.00	-11.95	Vertical
1648.4	-32.03	7.80	-24.23	-13.00	-11.23	Horizontal
2472.6	-32.54	11.00	-21.54	-13.00	-8.54	Vertical
2472.6	-33.47	11.00	-22.47	-13.00	-9.47	Horizontal
3296.8	-34.44	12.30	-22.14	-13.00	-9.14	Vertical
3296.8	-31.05	12.30	-18.75	-13.00	-5.75	Horizontal
Test Results for Channel 190/836.6 MHz						
1673.2	-29.44	8.00	-21.44	-13.00	-8.44	Vertical
1673.2	-36.96	8.00	-28.96	-13.00	-15.96	Horizontal
2509.8	-32.54	11.20	-21.34	-13.00	-8.34	Vertical
2509.8	-31.27	11.20	-20.07	-13.00	-7.07	Horizontal
3346.4	-34.40	12.60	-21.80	-13.00	-8.80	Vertical
3346.4	-32.46	12.60	-19.86	-13.00	-6.86	Horizontal
Test Results for Channel 251/848.8 MHz						
1697.6	-28.76	8.10	-20.66	-13.00	-7.66	Vertical
1697.6	-33.76	8.10	-25.66	-13.00	-12.66	Horizontal
2546.4	-31.20	11.69	-19.51	-13.00	-6.51	Vertical
2546.4	-29.14	11.69	-17.45	-13.00	-4.45	Horizontal
3395.2	-35.33	12.92	-22.41	-13.00	-9.41	Vertical
3395.2	-32.76	12.92	-19.84	-13.00	-6.84	Horizontal

GPRS850						
Frequency (MHz)	Power (dBm)	ARpl (dBm)	PMea (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 128/824.2 MHz						
1648.4	-33.02	7.80	-25.22	-13.00	-12.22	Vertical
1648.4	-32.30	7.80	-24.50	-13.00	-11.50	Horizontal
2472.6	-32.81	11.00	-21.81	-13.00	-8.81	Vertical
2472.6	-33.74	11.00	-22.74	-13.00	-9.74	Horizontal
3296.8	-34.71	12.30	-22.41	-13.00	-9.41	Vertical
3296.8	-31.32	12.30	-19.02	-13.00	-6.02	Horizontal
Test Results for Channel 190/836.6 MHz						
1673.2	-29.71	8.00	-21.71	-13.00	-8.71	Vertical
1673.2	-37.23	8.00	-29.23	-13.00	-16.23	Horizontal
2509.8	-32.81	11.20	-21.61	-13.00	-8.61	Vertical
2509.8	-31.54	11.20	-20.34	-13.00	-7.34	Horizontal
3346.4	-34.67	12.60	-22.07	-13.00	-9.07	Vertical
3346.4	-32.73	12.60	-20.13	-13.00	-7.13	Horizontal
Test Results for Channel 251/848.8 MHz						
1697.6	-29.03	8.10	-20.93	-13.00	-7.93	Vertical
1697.6	-34.03	8.10	-25.93	-13.00	-12.93	Horizontal
2546.4	-31.47	11.69	-19.78	-13.00	-6.78	Vertical
2546.4	-29.41	11.69	-17.72	-13.00	-4.72	Horizontal
3395.2	-35.60	12.92	-22.68	-13.00	-9.68	Vertical
3395.2	-33.03	12.92	-20.11	-13.00	-7.11	Horizontal

GSM1900						
Frequency (MHz)	Power (dBm)	ARpl (dBm)	PMea (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 512/1850.2MHz						
3700.4	-34.27	13.42	-20.85	-13.00	-7.85	Vertical
3700.4	-36.14	13.42	-22.72	-13.00	-9.72	Horizontal
5550.6	-35.20	17.12	-18.08	-13.00	-5.08	Vertical
5550.6	-35.90	17.12	-18.78	-13.00	-5.78	Horizontal
7400.8	-35.79	19.26	-16.53	-13.00	-3.53	Vertical
7400.8	-37.96	19.26	-18.70	-13.00	-5.70	Horizontal
Test Results for Channel 661/1880.0MHz						
3760	-34.56	13.76	-20.80	-13.00	-7.80	Vertical
3760	-36.51	13.76	-22.75	-13.00	-9.75	Horizontal
5640	-38.15	17.56	-20.59	-13.00	-7.59	Vertical
5640	-41.03	17.56	-23.47	-13.00	-10.47	Horizontal
7520	-38.83	19.60	-19.23	-13.00	-6.23	Vertical
7520	-40.87	19.60	-21.27	-13.00	-8.27	Horizontal
Test Results for Channel 810/1909.8MHz						
3819.6	-36.35	13.87	-22.48	-13.00	-9.48	Vertical
3819.6	-35.62	13.87	-21.75	-13.00	-8.75	Horizontal
5729.4	-36.79	17.66	-19.13	-13.00	-6.13	Vertical
5729.4	-37.37	17.66	-19.71	-13.00	-6.71	Horizontal
7639.2	-38.80	19.75	-19.05	-13.00	-6.05	Vertical
7639.2	-41.74	19.75	-21.99	-13.00	-8.99	Horizontal

GPRS1900						
Frequency (MHz)	Power (dBm)	ARpl (dBm)	PMea (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 512/1850.2MHz						
3700.4	-34.54	13.42	-21.12	-13.00	-8.12	Vertical
3700.4	-36.41	13.42	-22.99	-13.00	-9.99	Horizontal
5550.6	-35.47	17.12	-18.35	-13.00	-5.35	Vertical
5550.6	-36.17	17.12	-19.05	-13.00	-6.05	Horizontal
7400.8	-36.06	19.26	-16.80	-13.00	-3.80	Vertical
7400.8	-38.23	19.26	-18.97	-13.00	-5.97	Horizontal
Test Results for Channel 661/1880.0MHz						
3760	-34.83	13.76	-21.07	-13.00	-8.07	Vertical
3760	-36.78	13.76	-23.02	-13.00	-10.02	Horizontal
5640	-38.42	17.56	-20.86	-13.00	-7.86	Vertical
5640	-41.30	17.56	-23.74	-13.00	-10.74	Horizontal
7520	-39.10	19.60	-19.50	-13.00	-6.50	Vertical
7520	-41.14	19.60	-21.54	-13.00	-8.54	Horizontal
Test Results for Channel 810/1909.8MHz						
3819.6	-36.62	13.87	-22.75	-13.00	-9.75	Vertical
3819.6	-35.89	13.87	-22.02	-13.00	-9.02	Horizontal
5729.4	-37.06	17.66	-19.40	-13.00	-6.40	Vertical
5729.4	-37.64	17.66	-19.98	-13.00	-6.98	Horizontal
7639.2	-39.07	19.75	-19.32	-13.00	-6.32	Vertical
7639.2	-42.01	19.75	-22.26	-13.00	-9.26	Horizontal

UMTS band II						
Frequency (MHz)	Power (dBm)	ARpl (dBm)	PMea (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 9262/1852.4MHz						
3700.8	-31.91	13.42	-18.49	-13.00	-5.49	Vertical
3700.8	-33.07	13.42	-19.65	-13.00	-6.65	Horizontal
5551.2	-38.51	17.12	-21.39	-13.00	-8.39	Vertical
5551.2	-36.63	17.12	-19.51	-13.00	-6.51	Horizontal
Test Results for Channel 9400/1880MHz						
3760	-33.04	13.76	-19.28	-13.00	-6.28	Vertical
3760	-33.07	13.76	-19.31	-13.00	-6.31	Horizontal
5640	-41.41	17.56	-23.85	-13.00	-10.85	Vertical
5640	-39.87	17.56	-22.31	-13.00	-9.31	Horizontal
Test Results for Channel 9538/1907.6MHz						
3819.2	-34.26	13.87	-20.39	-13.00	-7.39	Vertical
3819.2	-37.73	13.87	-23.86	-13.00	-10.86	Horizontal
5728.8	-39.77	17.66	-22.11	-13.00	-9.11	Vertical
5728.8	-37.34	17.66	-19.68	-13.00	-6.68	Horizontal

UMTS band V						
Frequency (MHz)	Power (dBm)	ARpl (dBm)	PMea (dBm)	Limit (dBm)	Over Limit (dBm)	Polarity
Test Results for Channel 4233/846.6MHz						
1673.2	-28.93	8.10	-20.83	-13.00	-7.83	Vertical
1673.2	-29.67	8.10	-21.57	-13.00	-8.57	Horizontal
2509.8	-35.29	11.69	-23.60	-13.00	-10.60	Vertical
2509.8	-37.42	11.69	-25.73	-13.00	-12.73	Horizontal
3346.4	-34.85	12.92	-21.93	-13.00	-8.93	Vertical
3346.4	-40.89	12.92	-27.97	-13.00	-14.97	Horizontal
Test Results for Channel 4182/836.4MHz						
1672.8	-30.93	8.00	-22.93	-13.00	-9.93	Vertical
1672.8	-29.36	8.00	-21.36	-13.00	-8.36	Horizontal
2509.2	-31.22	11.20	-20.02	-13.00	-7.02	Vertical
2509.2	-31.97	11.20	-20.77	-13.00	-7.77	Horizontal
3345.6	-34.99	12.60	-22.39	-13.00	-9.39	Vertical
3345.6	-32.36	12.60	-19.76	-13.00	-6.76	Horizontal
Test Results for Channel 4132/826.4MHz						
1652.8	-28.93	8.00	-20.93	-13.00	-7.93	Vertical
1652.8	-34.15	8.00	-26.15	-13.00	-13.15	Horizontal
2479.2	-31.36	11.20	-20.16	-13.00	-7.16	Vertical
2479.2	-30.60	11.20	-19.40	-13.00	-6.40	Horizontal
3305.6	-32.35	12.60	-19.75	-13.00	-6.75	Vertical
3305.6	-39.17	12.60	-26.57	-13.00	-13.57	Horizontal

7.3 EFFECTIVE RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER

7.3.1 Applicable Standard

According to FCC KDB 971168 D01 v02r02 Section 5.2.1/ Section 5.2.2.2 and ANSI/ TIA-603-D-2010 Section 2.2.17

7.3.2 Conformance Limit


The substitution method, in ANSI / TIA / EIA-603-D-2010, was used for ERP/EIRP measurement, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. The ERP of mobile transmitters must not exceed 7 Watts (Cellular Band) and the EIRP of mobile transmitters are limited to 2 Watts (PCS Band).

7.3.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.3.4 Test Configuration

(a) For E.R.P and E.I.R.P Measurements

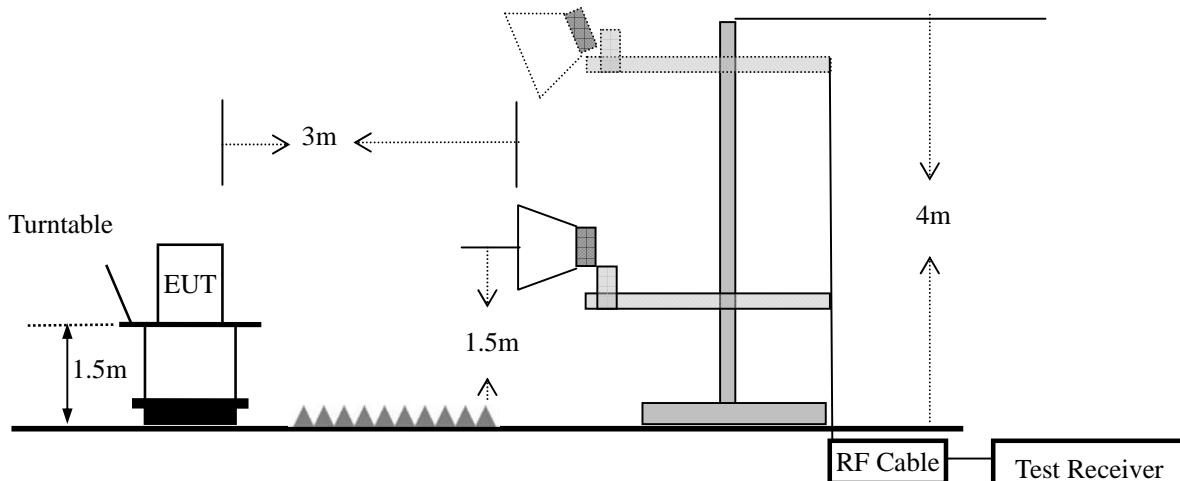

7.3.5 Test Procedure

The measurements procedures specified in TIA-603-D-2010 were applied.

In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power (P_{in}) is applied to the input of the dipole, and the power received (P_{r}) at the chamber's probe antenna is recorded.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as $ARpl = P_{in} + 2.15 - P_r$. The $ARpl$ is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below: $Power = PMea + ARpl$

The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.

From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.

The EUT is then put into continuously transmitting mode at its maximum power level.

Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.

This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power (Pin).

ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dBi}$.

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

Substitution antenna and Receiving Antenna:

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Character	Note
1	Bilog Antenna	TESEQ	CBL6111D	31216	30MHz~2GHz	Receiving Antenna
2	Horn Antenna	EM	EM-AH-10180	2011071402	1GHz~18GHz	Receiving Antenna
3	Bilog Antenna	TESEQ	CBL6111D	31216	30MHz~2GHz	Substitution antenna
4	Horn Antenna	EM	EM-AH-10180	2011071402	1GHz~18GHz	Substitution antenna

Use the following spectrum analyzer settings:

	GSM/GPRS/EGPRS	UMTS band
Span	500KHz	10MHz
RBW	10KHz	100KHz
VBW	30KHz	300KHz
Detector	RMS	RMS
Trace	Average	Average
Average Type	Power	Power
Sweep Count	100	100

7.3.6 Test Results

EUT:	RK-175	Model No.:	RK-175
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM850/GSM1900 UMTS band II/ UMTS band V	Test By:	Jack Li

■ Effective Radiated Power

Radiated Power (ERP) for GSM850								
Frequency (MHz)	Polarization	PMea (dBm)	Pcl (dB)	PAg (dB)	Ga Antenna Gain (dB)	Correction (dB)	ERP (dBm)	ERP (W)
824.2	H	-16.25	2.11	-52.73	0.87	2.15	31.35	1.3646
836.6	H	-16.07	2.13	-52.73	0.93	2.15	31.45	1.3964
848.8	H	-16.16	2.13	-52.73	0.97	2.15	31.32	1.3552
824.2	V	-17.97	2.11	-52.73	0.87	2.15	29.63	0.9183
836.6	V	-17.88	2.13	-52.73	0.93	2.15	29.64	0.9204
848.8	V	-17.94	2.13	-52.73	0.97	2.15	29.54	0.8995

Radiated Power (ERP) for GPRS850								
824.2	H	-20.57	2.11	-52.73	0.87	2.15	27.03	0.5047
836.6	H	-19.87	2.13	-52.73	0.93	2.15	27.65	0.5821
848.8	H	-19.79	2.13	-52.73	0.97	2.15	27.69	0.5875
824.2	V	-20.78	2.11	-52.73	0.87	2.15	26.82	0.4808
836.6	V	-20.95	2.13	-52.73	0.93	2.15	26.57	0.4539
848.8	V	-21.14	2.13	-52.73	0.97	2.15	26.34	0.4305

Radiated Power (ERP) for EGPRS850								
824.2	H	-22.07	2.11	-52.73	0.87	2.15	25.53	0.3573
836.6	H	-22.15	2.13	-52.73	0.93	2.15	25.37	0.3443
848.8	H	-22.09	2.13	-52.73	0.97	2.15	25.39	0.3459
824.2	V	-22.58	2.11	-52.73	0.87	2.15	25.02	0.3177
836.6	V	-22.64	2.13	-52.73	0.93	2.15	24.88	0.3076
848.8	V	-22.88	2.13	-52.73	0.97	2.15	24.60	0.2884

Radiated Power (ERP) for UMTS band V								
824.2	H	-25.54	2.11	-52.73	0.87	2.15	22.06	0.1607
836.6	H	-25.55	2.13	-52.73	0.93	2.15	21.97	0.1574
848.8	H	-26.06	2.13	-52.73	0.97	2.15	21.42	0.1387
824.2	V	-26.84	2.11	-52.73	0.87	2.15	20.76	0.1191
836.6	V	-27.15	2.13	-52.73	0.93	2.15	20.37	0.1089
848.8	V	-27.18	2.13	-52.73	0.97	2.15	20.30	0.1072

Note:

The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.

Peak EIRP(dBm)= PMea-Pcl-PAg-Ga.

■ Effective Isotropic Radiated Power

Radiated Power (E.I.R.P) for GSM 1900 MHZ							
Frequency (MHz)	Polarization	PMea (dBm)	Pcl (dB)	PAg (dB)	Ga Antenna Gain (dB)	EIRP (dBm)	EIRP (W)
1850.2	H	-20.47	3.76	-48.53	-4.72	29.02	0.7980
1880	H	-22.56	3.91	-50.53	-4.59	28.65	0.7328
1909.8	H	-22.48	3.93	-50.53	-4.38	28.5	0.7079
1850.2	V	-21.87	3.76	-48.53	-4.72	27.62	0.5781
1880	V	-24.14	3.91	-50.53	-4.59	27.07	0.5093
1909.8	V	-24.01	3.93	-50.53	-4.38	26.97	0.4977

Radiated Power (E.I.R.P) for GPRS 1900 MHZ							
1850.2	H	-23.54	3.76	-48.53	-4.72	25.95	0.3936
1880	H	-25.81	3.91	-50.53	-4.59	25.4	0.3467
1909.8	H	-25.79	3.93	-50.53	-4.38	25.19	0.3304
1850.2	V	-25.46	3.76	-48.53	-4.72	24.03	0.2529
1880	V	-27.37	3.91	-50.53	-4.59	23.84	0.2421
1909.8	V	-27.58	3.93	-50.53	-4.38	23.4	0.2188

Radiated Power (E.I.R.P) for EGPRS 1900 MHZ							
1850.2	H	-27.47	3.76	-48.53	-4.72	22.02	0.1592
1880	H	-29.66	3.91	-50.53	-4.59	21.55	0.1429
1909.8	H	-29.78	3.93	-50.53	-4.38	21.2	0.1318
1850.2	V	-29.58	3.76	-48.53	-4.72	19.91	0.0979
1880	V	-31.57	3.91	-50.53	-4.59	19.64	0.0920
1909.8	V	-31.62	3.93	-50.53	-4.38	19.36	0.0863

Radiated Power (E.I.R.P) for UMTS band II							
1852.4	H	-27.28	3.76	-48.53	-4.72	22.21	0.1663
1880	H	-29.08	3.91	-50.53	-4.59	22.13	0.1633
1907.6	H	-29.34	3.93	-50.53	-4.38	21.64	0.1459
1852.4	V	-29.39	3.76	-48.53	-4.72	20.1	0.1023
1880	V	-31.42	3.91	-50.53	-4.59	19.79	0.0953
1907.6	V	-31.39	3.93	-50.53	-4.38	19.59	0.0910

Note:

The cable loss (Pcl), the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.

Peak EIRP(dBm)= PMea-Pcl-PAg-Ga.

7.4 CONDUCTED OUTPUT POWER

7.4.1 Applicable Standard

According to FCC Part 2.1046 and FCC Part 22.913(a)(2) and FCC Part 24.232(c) and FCC KDB 971168 D01 v02r02 Section 5.2

7.4.2 Conformance Limit

Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts(38.5dBm).

Mobile and portable stations are limited to 2 watts (33dBm)EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

7.4.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.4.4 Test Setup

Please refer to Section 6.1 of this test report.

7.4.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. The frequency band is set as selected frequency, The RF output of the transmitter was connected to base station simulator.

Set EUT at maximum average power by base station simulator.

Set RBW = 1-5% of the OBW, not to exceed 1 MHz.

Set VBW \geq 3 \times RBW.

Number of points in sweep \geq 2 \times span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)

Sweep time = auto.

Detector = RMS (power averaging).

Set sweep trigger to "free run".

Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.

Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \log (1/0.25) = 6$ dB if the duty cycle is a constant 25%.

Measure lowest, middle, and highest channels for each bandwidth and different modulation.

Measure and record the results in the test report.

7.4.6 Test Results

EUT:	RK-175	Model No.:	RK-175
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	GSM850/GSM1900 UMTS band II/ UMTS band V	Test By:	Jack Li

Output Power for GSM850

Mode	Frequency(MHz)	Maximum Burst-Average Output Power
GSM850	824.2	32.02
	836.6	32.15
	848.8	32.22
GPRS850(1 Slot)	824.2	32.05
	836.6	32.15
	848.8	32.2
GPRS850(2 Slot)	824.2	31.24
	836.6	31.35
	848.8	31.4
GPRS850(3 Slot)	824.2	29.43
	836.6	29.53
	848.8	29.65
GPRS850(4 Slot)	824.2	28.23
	836.6	28.39
	848.8	28.51
EGPRS850(1 Slot)	824.2	25.66
	836.6	25.31
	848.8	25.12
EGPRS850(2 Slot)	824.2	24.22
	836.6	24.02
	848.8	23.72
EGPRS850(3 Slot)	824.2	21.67
	836.6	21.46
	848.8	21.11
EGPRS850(4 Slot)	824.2	20.78
	836.6	20.38
	848.8	20.16

N/A:Not Applicable.

Output Power for PCS1900

Mode	Frequency(MHz)	Maximum Burst-Average Output Power
GSM1900	1850.2	29.44
	1880	29.32
	1909.8	29.3
GPRS1900(1 Slot)	1850.2	29.42
	1880	29.31
	1909.8	29.25
GPRS1900(2 Slot)	1850.2	28.51
	1880	28.45
	1909.8	28.41
GPRS1900(3 Slot)	1850.2	26.72
	1880	26.64
	1909.8	26.63
GPRS1900(4 Slot)	1850.2	25.59
	1880	25.56
	1909.8	25.6
EGPRS1900(1 Slot)	1850.2	26.11
	1880	26.41
	1909.8	26.51
EGPRS1900(2 Slot)	1850.2	25.16
	1880	25.48
	1909.8	25.7
EGPRS1900(3 Slot)	1850.2	23.37
	1880	23.6
	1909.8	23.84
EGPRS1900(4 Slot)	1850.2	22.2
	1880	22.57
	1909.8	22.81

N/A:Not Applicable.

Output Power for UMTS BAND II

Mode	Frequency(MHz)	Maximum Burst-Average Output Power
WCDMA 1900 RMC	1852.4	22.2
	1880.0	22.63
	1907.6	22.8
WCDMA 1900 AMR	1852.4	22.74
	1880.0	22.61
	1907.6	22.73
HSDPA Subtest 1	1852.4	22.12
	1880	22.42
	1907.6	21.8
HSDPA Subtest 2	1852.4	20.15
	1880	20.09
	1907.6	20.88
HSDPA Subtest 3	1852.4	20.07
	1880	20.01
	1907.6	20.45
HSDPA Subtest 4	1852.4	20.06
	1880	19.98
	1907.6	20.53
HSUPA Subtest 1	1852.4	21.16
	1880.0	21.51
	1907.6	21.79
HSUPA Subtest 2	1852.4	20.49
	1880.0	20.86
	1907.6	20.74
HSUPA Subtest 3	1852.4	20.46
	1880.0	20.87
	1907.6	20.77
HSUPA Subtest 4	1852.4	20.43
	1880.0	20.65
	1907.6	20.69
HSUPA Subtest 5	1852.4	20.97
	1880.0	20.85
	1907.6	20.93

Output Power for UMTS BAND V

Mode	Frequency(MHz)	Maximum Burst-Average Output Power
WCDMA 850 RMC	826.4	23.4
	835.0	23.73
	846.6	23.32
WCDMA 850 AMR	826.4	23.38
	835.0	23.71
	846.6	23.34
HSDPA Subtest 1	826.4	22.42
	835.0	22.7
	846.6	22.4
HSDPA Subtest 2	826.4	21.42
	835.0	21.33
	846.6	21.37
HSDPA Subtest 3	826.4	21.24
	835.0	21.18
	846.6	21.08
HSDPA Subtest 4	826.4	21.22
	835.0	21.24
	846.6	21.11
HSUPA Subtest 1	826.4	22.36
	835.0	22.7
	846.6	22.42
HSUPA Subtest 2	826.4	21.32
	835.0	21.25
	846.6	21.34
HSUPA Subtest 3	826.4	21.36
	835.0	21.29
	846.6	21.31
HSUPA Subtest 4	826.4	21.29
	835.0	21.36
	846.6	21.19
HSUPA Subtest 5	826.4	21.48
	835.0	21.39
	846.6	21.41

7.5 FREQUENCY STABILITY

7.5.1 Applicable Standard

According to FCC Part 2.1055 and FCC Part 22.355 and FCC Part 24.235 and FCC KDB 971168 D01 Section 9.0

7.5.2 Conformance Limit

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

7.5.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.5.4 Test Setup

Please refer to Section 6.1 of this test report.

7.5.5 Test Procedure

Connect the EUT to Universal Radio Communication Tester CMU200 or CMU500 via the antenna connector. A call is set up by the SS according to the generic call set up procedure on a channel with ARFCN in the ARFCN range, power control level set to Max power. MS TXPWR_MAX_CCH is set to the maximum value supported by the Power Class of the Mobile under test.

EUT was placed at temperature chamber and connected to an external power supply.

Temperature and voltage condition shall be tested to confirm frequency stability.

For Temperature Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

For Voltage Variation

1. The testing follows FCC KDB 971168 D01 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25\pm 5^\circ\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

7.5.6 Test Results

EUT:	RK-175	Model No.:	RK-175
Temperature:	20°C	Relative Humidity:	48%
Test Mode:	Mode1/Mode2/Mode3/Mode4	Test By:	Jack Li
Results: PASS			

Frequency Error Against Voltage for GSM 850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	28	0.0335
3.7	27	0.0323
4.2	21	0.0251

Frequency Error Against Temperature for GSM 850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	27	0.0323
0	29	0.0347
10	24	0.0287
20	26	0.0311
30	25	0.0299
40	22	0.0263
50	20	0.0239

Frequency Error Against Voltage for GPRS850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	27	0.0323
3.7	27	0.0323
4.2	23	0.0275

Frequency Error Against Temperature for GPRS 850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	26	0.0311
0	26	0.0311
10	25	0.0299
20	24	0.0287
30	16	0.0191
40	12	0.0143
50	11	0.0132

Frequency Error Against Voltage for EGPRS850 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	28	0.0335
3.7	28	0.0335
4.2	26	0.0311

Frequency Error Against Temperature for EGPRS 850 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	28	0.0335
0	27	0.0323
10	26	0.0311
20	26	0.0311
30	22	0.0263
40	20	0.0239
50	16	0.0191

Frequency Error Against Voltage for UMTS band V		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	30	0.0359
3.7	22	0.0263
4.2	15	0.0179

Frequency Error Against Temperature for UMTS band V		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	33	0.0395
0	31	0.0371
10	30	0.0359
20	25	0.0299
30	26	0.0311
40	14	0.0167
50	9	0.0108

Note:

1. Normal Voltage = 3.8V; Battery End Point (BEP) = 3.5V; Maximum Voltage =4.3V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Frequency Error Against Voltage for PCS 1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	25	0.0133
3.7	22	0.0117
4.2	18	0.0096

Frequency Error Against Temperature for PCS 1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	32	0.0170
0	31	0.0165
10	31	0.0165
20	30	0.0160
30	25	0.0133
40	22	0.0117
50	13	0.0069

Frequency Error Against Voltage for GPRS1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	24	0.0128
3.7	24	0.0128
4.2	21	0.0112

Frequency Error Against Temperature for GPRS1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	30	0.0160
0	30	0.0160
10	29	0.0154
20	28	0.0149
30	24	0.0128
40	18	0.0096
50	15	0.0080

Frequency Error Against Voltage for EGPRS 1900 band		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	26	0.0138
3.7	25	0.0133
4.2	14	0.0074

Frequency Error Against Temperature for EGPRS1900 band		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	27	0.0144
0	26	0.0138
10	26	0.0138
20	25	0.0133
30	18	0.0096
40	17	0.0090
50	2	0.0011

Frequency Error Against Voltage for UMTS band II		
Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
3.5	29	0.0154
3.7	26	0.0138
4.2	22	0.0117

Frequency Error Against Temperature for UMTS band II		
Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-10	27	0.0144
0	27	0.0144
10	22	0.0117
20	20	0.0106
30	21	0.0112
40	10	0.0053
50	14	0.0074

Note:

1. Normal Voltage = 3.8V; Battery End Point (BEP) = 3.5V; Maximum Voltage =4.3V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

7.6 PEAK-TO-AVERAGE RATIO

7.6.1 Applicable Standard

According to FCC 22.913 and FCC 24.232(d) and FCC KDB 971168 D01 Section 5.7.1

7.6.2 Conformance Limit

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

7.6.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.6.4 Test Setup

Please refer to Section 6.1 of this test report.

7.6.5 Test Procedure

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set the number of counts to a value that stabilizes the measured CCDF curve.

Set the measurement interval to 1 ms.

Record the maximum PAPR level associated with a probability of 0.1%.

a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;

b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;

c) Set the number of counts to a value that stabilizes the measured CCDF curve;

d) Set the measurement interval as follows:

1) for continuous transmissions, set to 1 ms,

2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.

e) Record the maximum PAPR level associated with a probability of 0.1%.

7.6.6 Test Results

EUT:	RK-175	Model No.:	RK-175
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode1/Mode2/Mode3/Mode4	Test By:	Jack Li
Results: PASS			

Cellular Band						
Modes	GSM850			GSM1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	2.62	2.61	2.62	2.64	2.65	2.65

Cellular Band						
Modes	GPRS850			GPRS1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	2.61	2.60	2.60	2.61	2.61	2.61


Cellular Band						
Modes	GPRS850			GPRS1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	2.60	2.60	2.60	2.60	2.60	2.60

UMTS Band						
Modes	WCDMA Band II (RMC 12.2Kbps)			WCDMA Band V (RMC 12.2Kbps)		
Channel	9262 (Low)	9400 (Mid)	9538 (High)	4132 (Low)	4175 (Mid)	4233 (High)
Frequency(MHz)	1852.4	1880	1907.6	826.4	836.6	846.6
Peak-to-Average Ratio (dB)	2.80	3.46	2.72	3.38	3.58	3.42

All the modulation modes and Channels have been tested, the data of the worst mode (GSM) are recorded in the following pages.


Peak-to-average power ratio plot on channel 128

GSM850

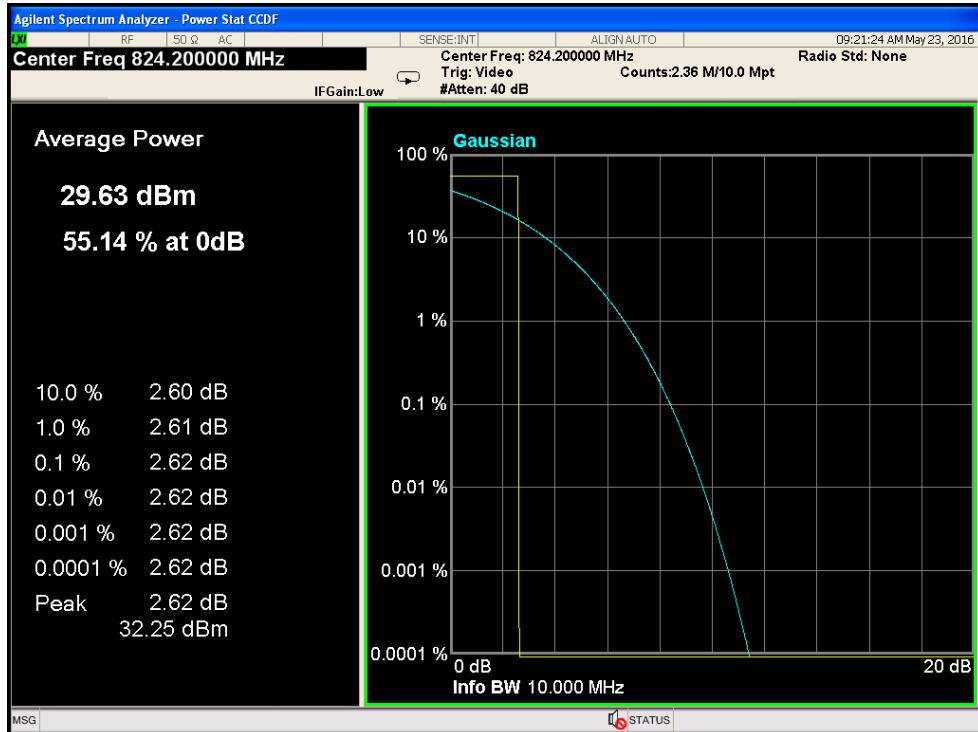


Peak-to-average power ratio plot on channel 190

GSM850

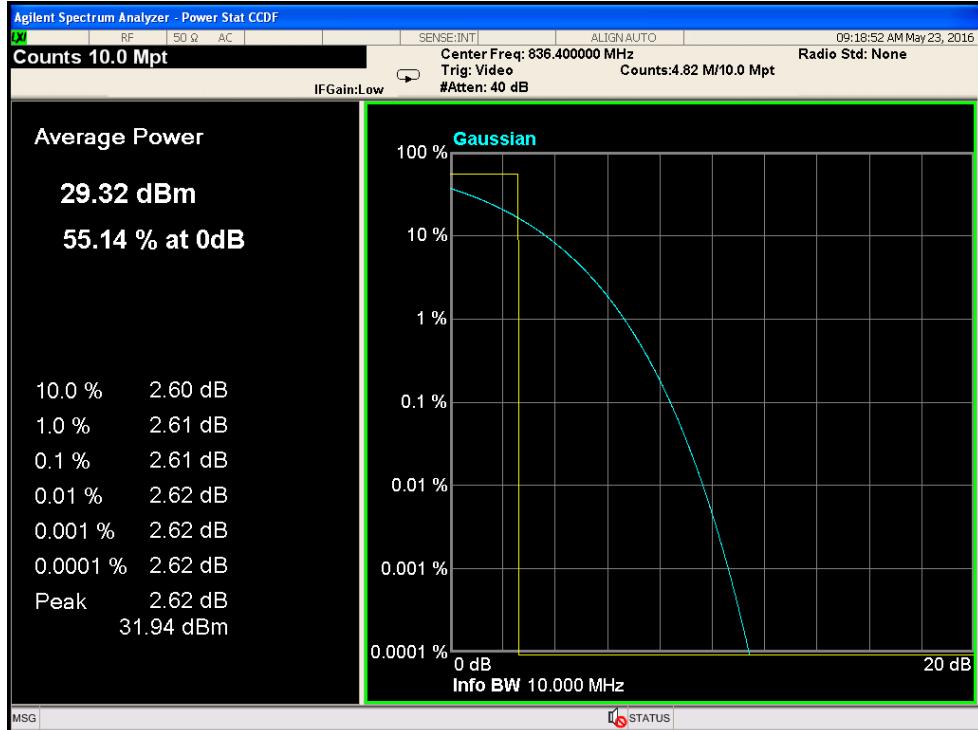


Peak-to-average power ratio plot on channel 251

GSM850

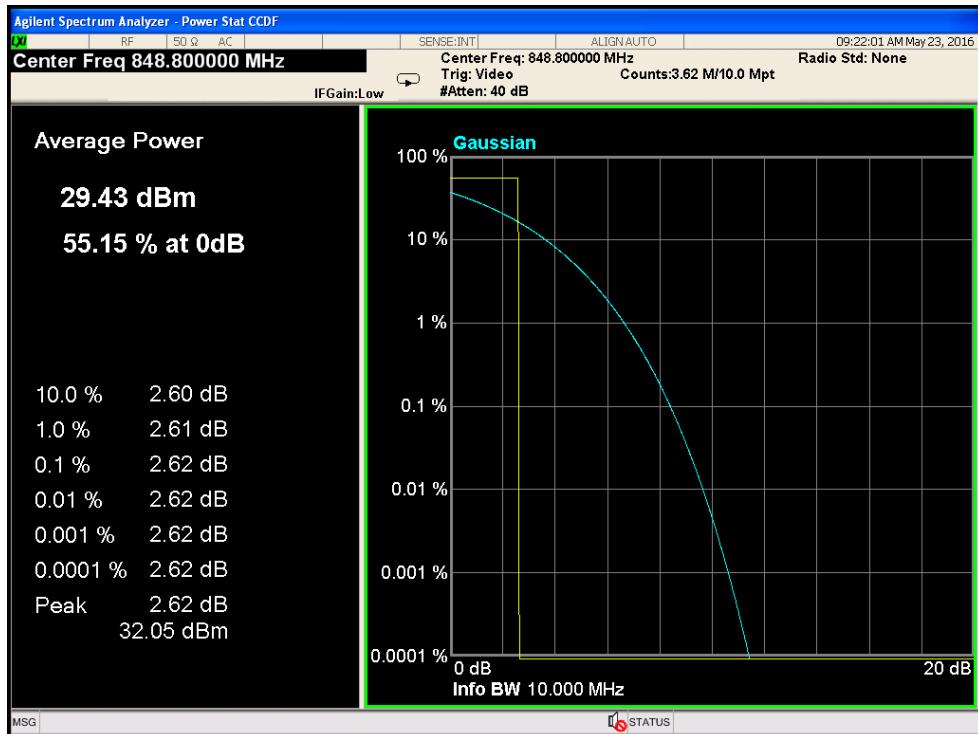

Peak-to-average power ratio plot on channel 512

GSM1900

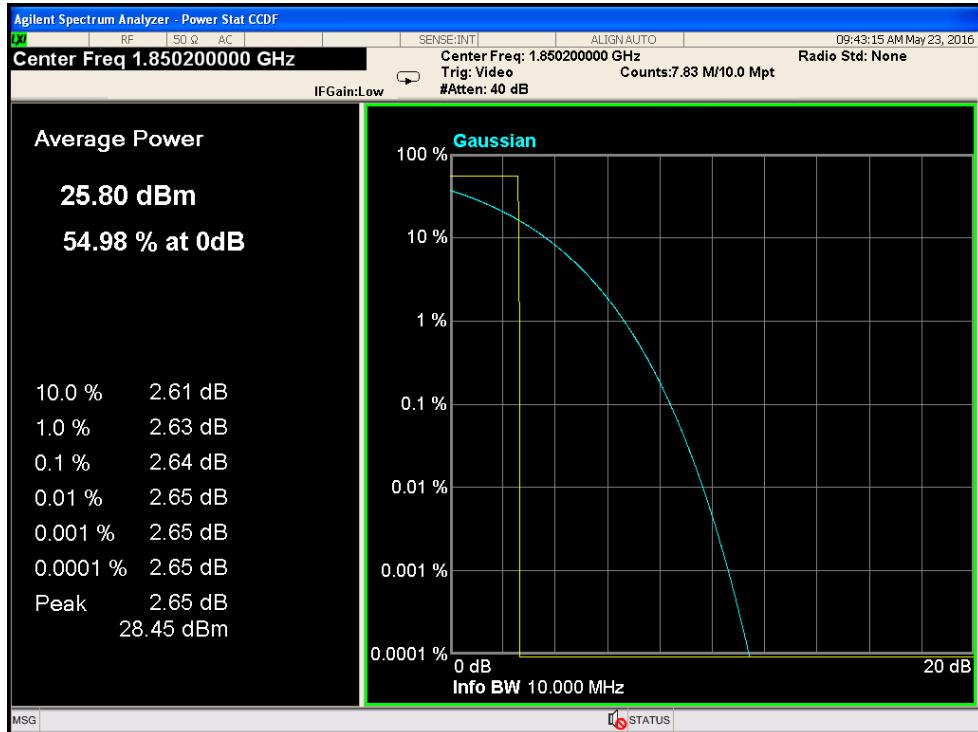

Peak-to-average power ratio plot on channel 661

GSM1900




Peak-to-average power ratio plot on channel 810

GSM1900




Peak-to-average power ratio plot on channel 9262

UMTS Band II

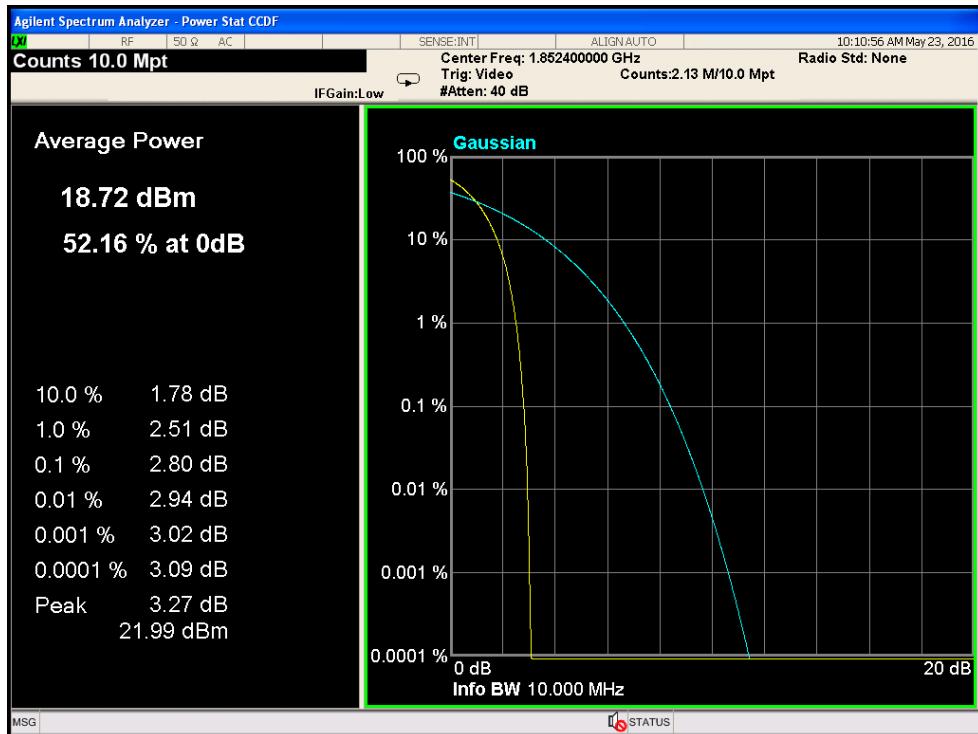

Peak-to-average power ratio plot on channel 9400

UMTS Band II

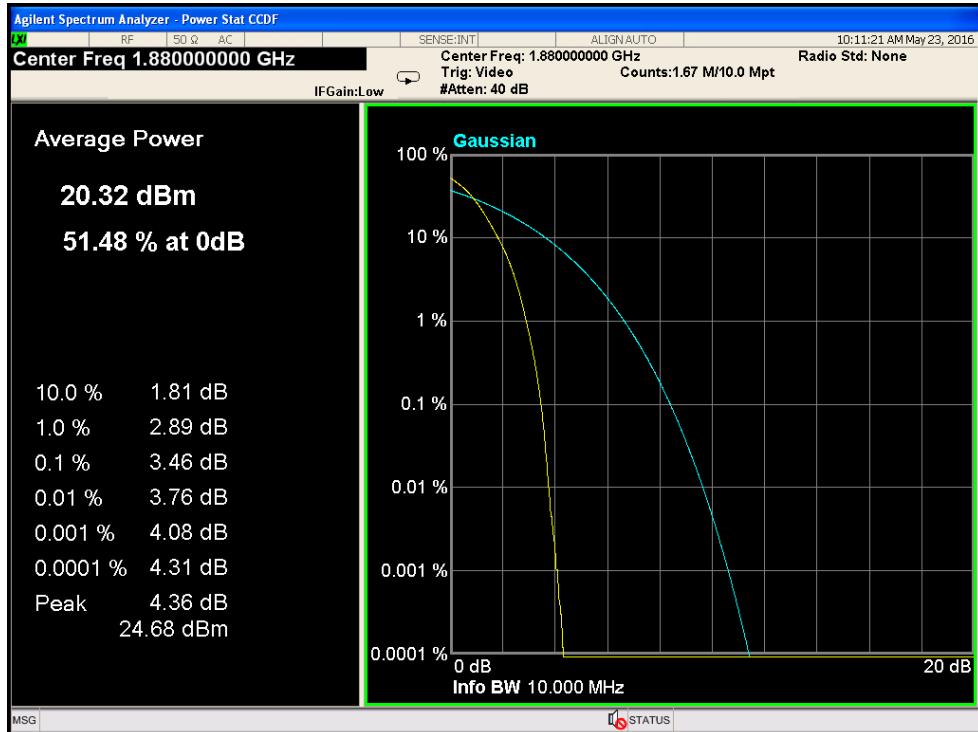


Peak-to-average power ratio plot on channel 9538

UMTS Band II




Peak-to-average power ratio plot on channel 4132

UMTS Band V

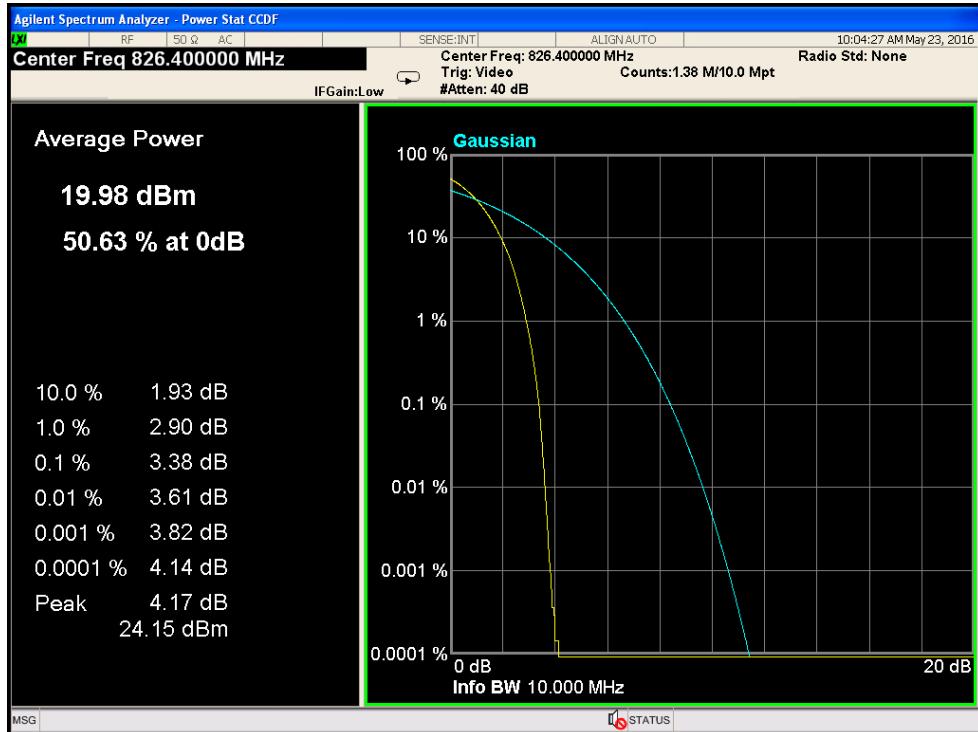


Peak-to-average power ratio plot on channel 4175

UMTS Band V

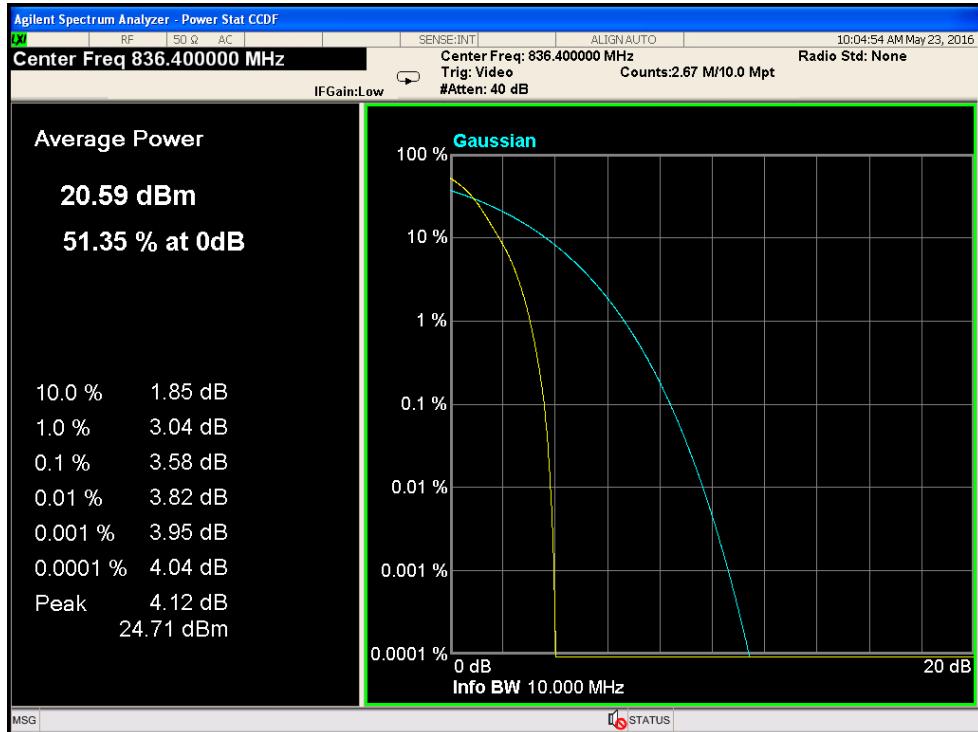

Peak-to-average power ratio plot on channel 4233

UMTS Band V

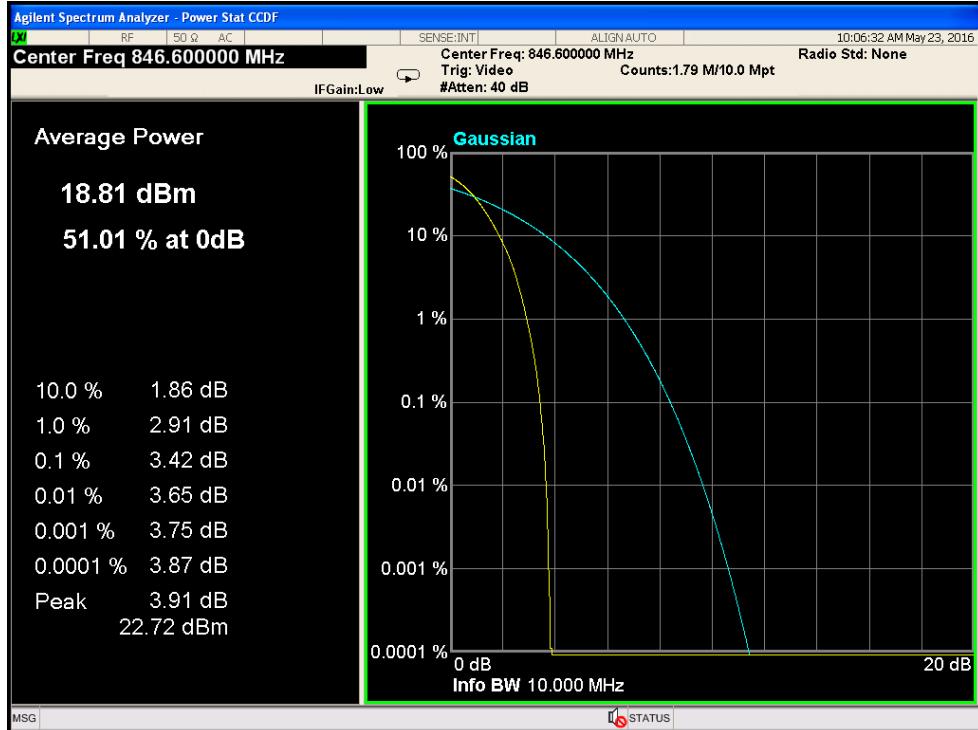

7.7 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

7.7.1 Applicable Standard

According to FCC Part 2.1049 and FCC Part 22H and FCC Part 24E and FCC KDB 971168 D01 Section 4.0

7.7.2 Conformance Limit

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

7.7.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.7.4 Test Setup

Please refer to Section 6.1 of this test report.

7.7.5 Test Procedure

The testing follows FCC KDB 971168 v02r02 Section 4.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.

The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.

Set the detection mode to peak, and the trace mode to max hold.

Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.

(this is the reference value)

Determine the “-26 dB down amplitude” as equal to (Reference Value – X).

Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.

Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

7.7.6 Test Results


EUT:	RK-175	Model No.:	RK-175
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode1/Mode2/Mode3/Mode4	Test By:	Jack Li
Results: PASS			

Operation Mode	Channel Number	Channel Frequency (MHz)	26dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)	Limit (kHz)	Verdict
GSM850	128	824.2	308.650	252.7056	N/A	PASS
	189	836.4	312.782	249.3687	N/A	PASS
	251	848.8	315.855	249.6745	N/A	PASS
GSM1900	512	1850.2	322.802	248.9636	N/A	PASS
	661	1880.0	321.702	241.3569	N/A	PASS
	810	1909.8	306.827	246.2273	N/A	PASS
GPRS850	128	824.2	318.074	246.0992	N/A	PASS
	189	836.4	317.011	245.2259	N/A	PASS
	251	848.8	316.612	248.6921	N/A	PASS
GPRS1900	512	1850.2	315.567	238.1178	N/A	PASS
	661	1880.0	315.635	244.9043	N/A	PASS
	810	1909.8	318.135	244.8981	N/A	PASS
EGPRS850	128	824.2	318.022	246.0946	N/A	PASS
	189	836.4	317.007	245.2262	N/A	PASS
	251	848.8	316.634	248.6933	N/A	PASS
EGPRS1900	512	1850.2	315.527	238.1154	N/A	PASS
	661	1880.0	315.651	244.9005	N/A	PASS
	810	1909.8	318.109	244.8957	N/A	PASS
UMTS Band V	4132	826.4	4723.000	4177.000	N/A	PASS
	4182	836.4	4727.000	4254.300	N/A	PASS
	4233	846.6	4731.000	4180.700	N/A	PASS
UMTS Band II	9262	1852.4	4711.000	4158.600	N/A	PASS
	9400	1880.0	4771.000	4186.800	N/A	PASS
	9538	1907.6	4676.000	4151.700	N/A	PASS

All the modulation modes and Channels have been tested, the data of the worst mode (GSM) are recorded in the following pages.


99% Occupied Bandwidth plot on channel 128

GSM850

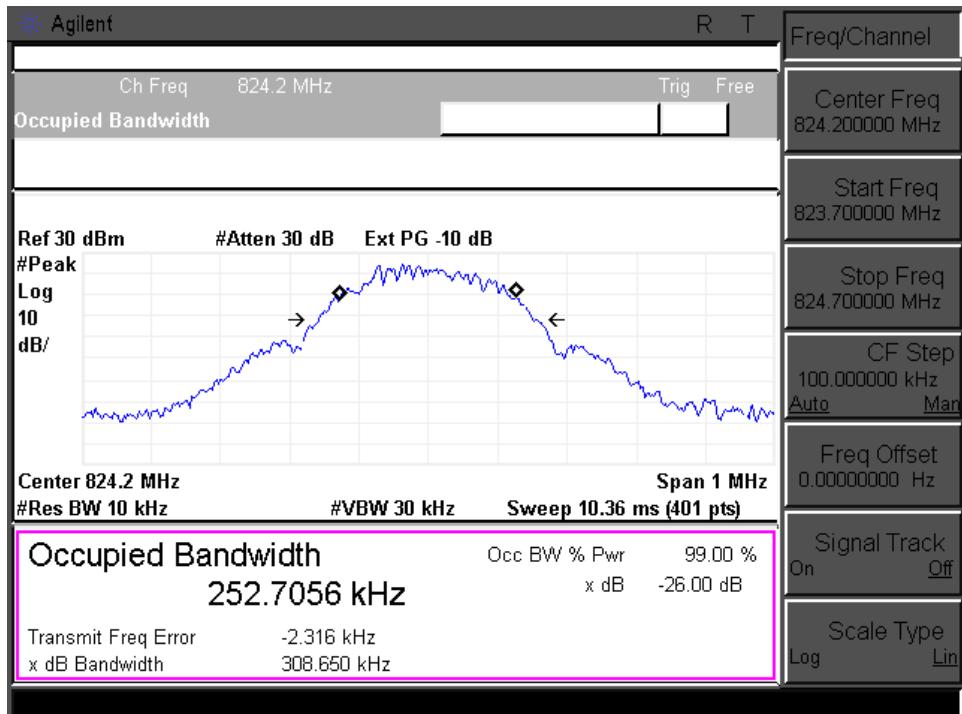


26dB Bandwidth plot on channel 128

GSM850

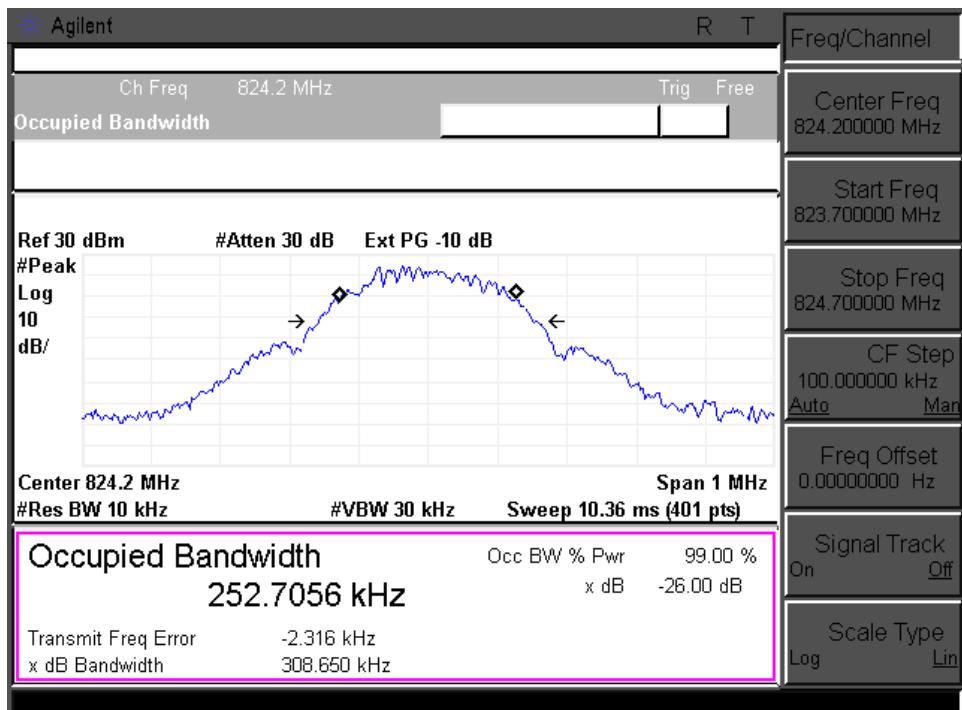


99% Occupied Bandwidth plot on channel 190

GSM850

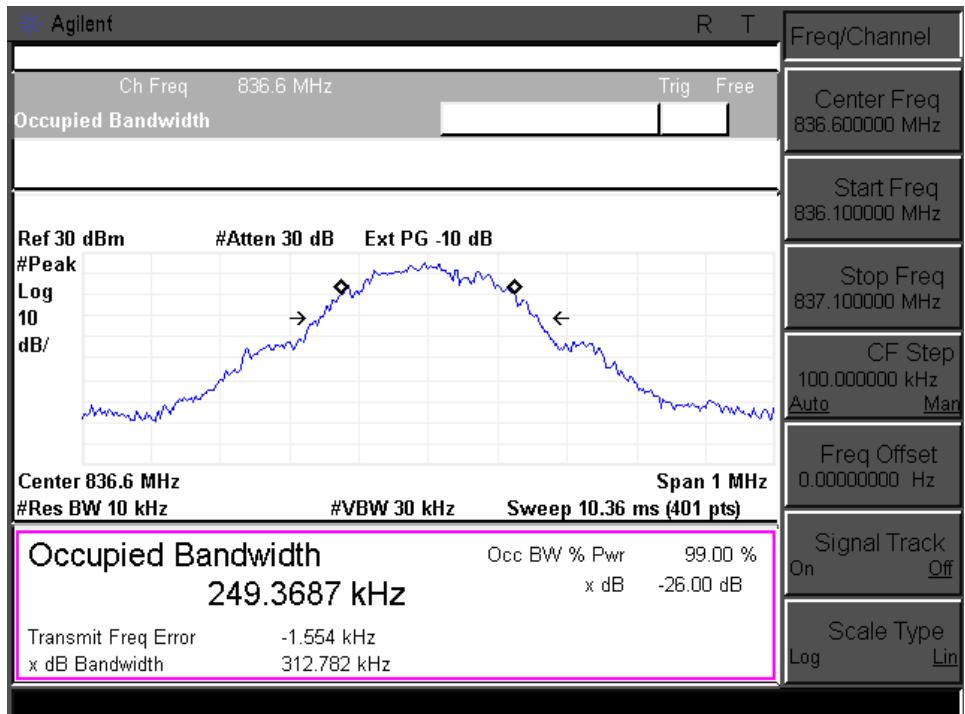


26dB Bandwidth plot on channel 190

GSM850

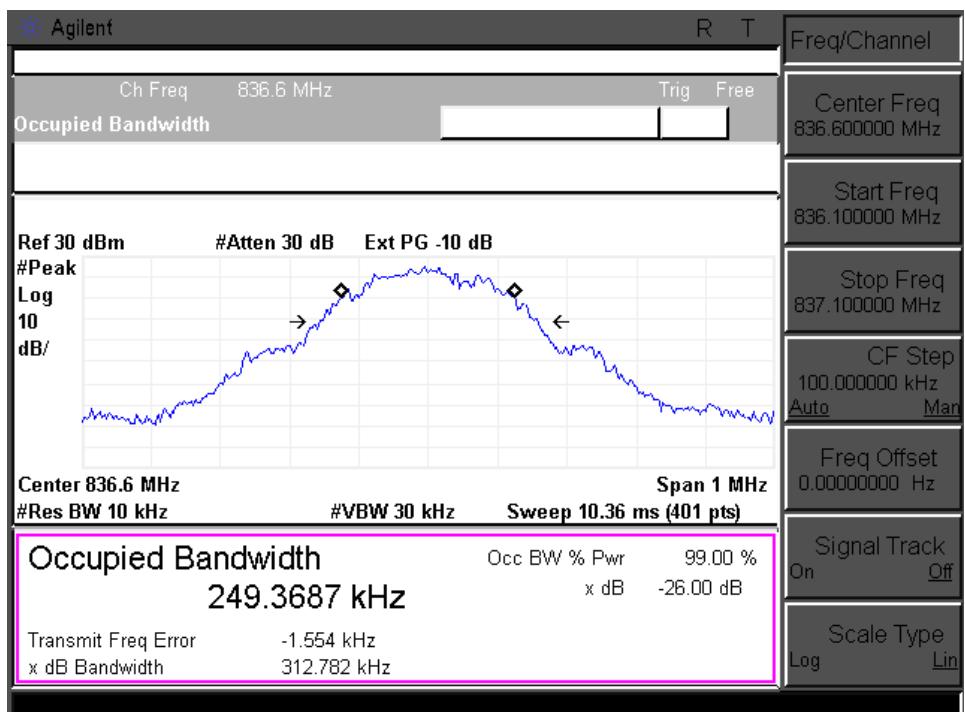


99% Occupied Bandwidth plot on channel 251

GSM850

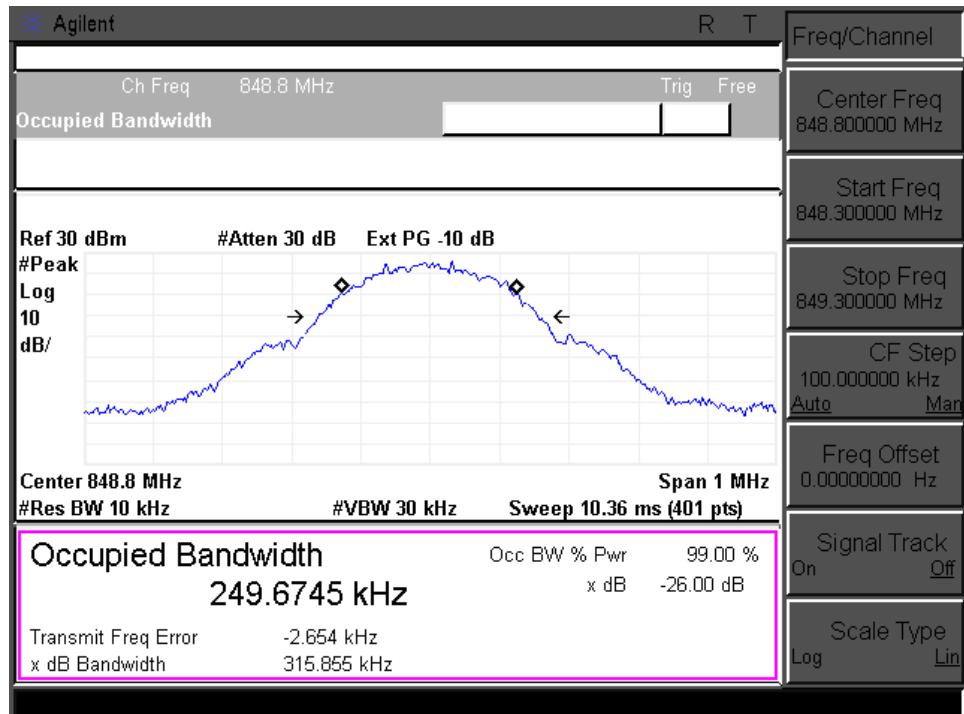


26dB Bandwidth plot on channel 251

GSM850

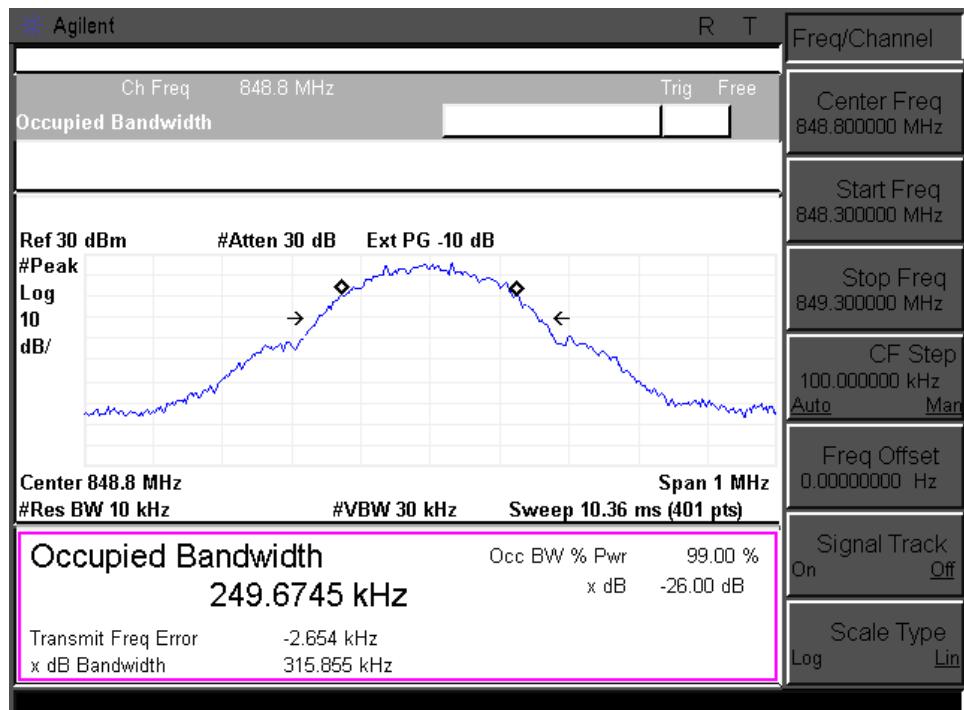


99% Occupied Bandwidth plot on channel 512

GSM1900

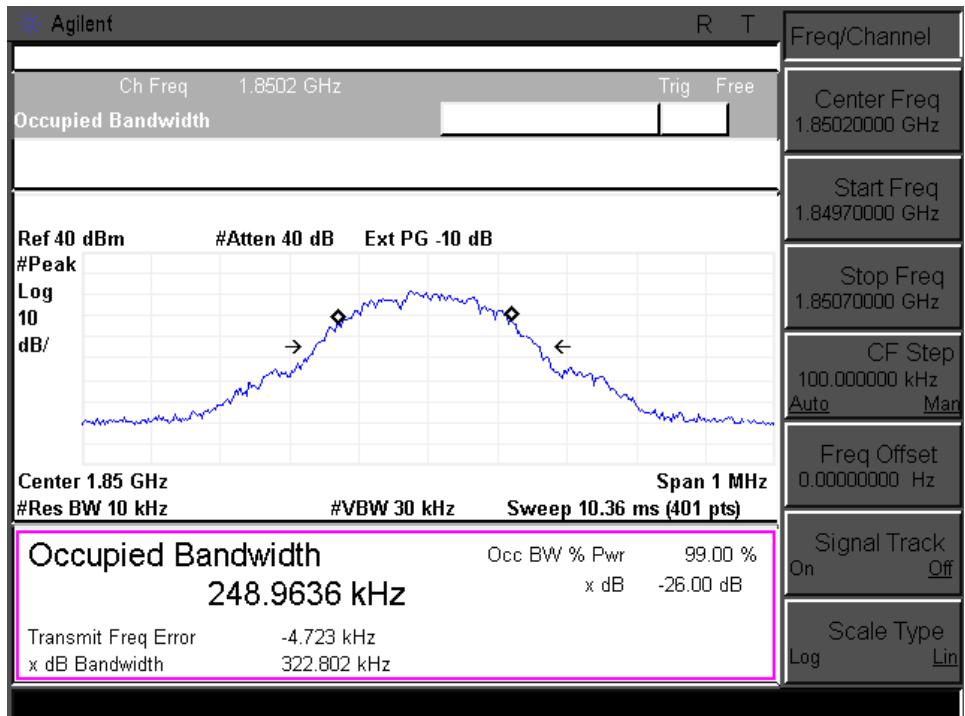


26dB Bandwidth plot on channel 512

GSM1900

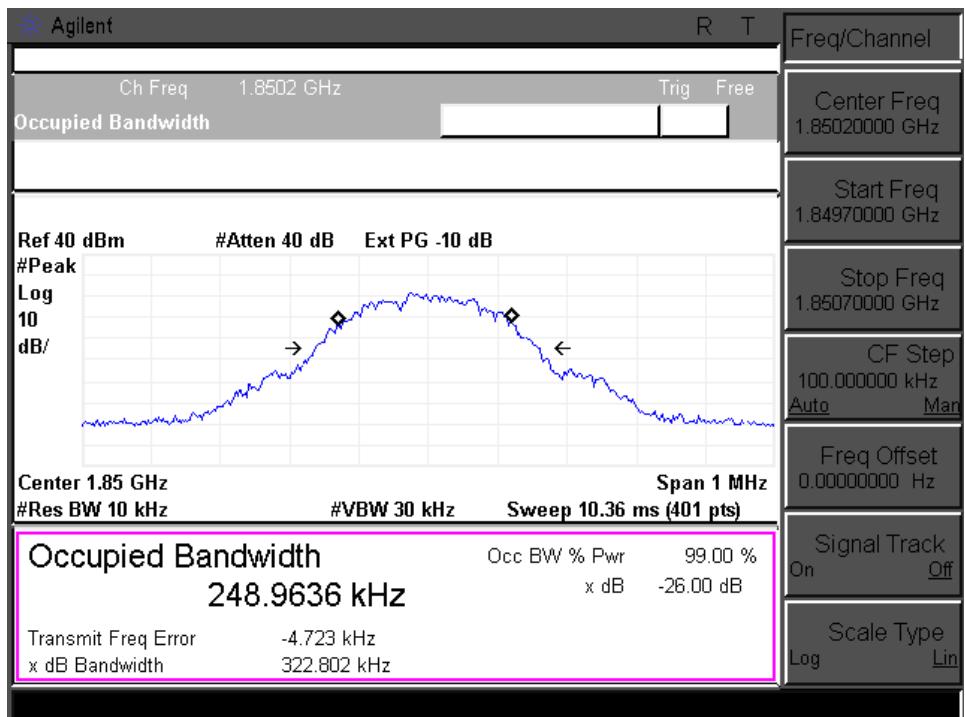


99% Occupied Bandwidth plot on channel 661

GSM1900

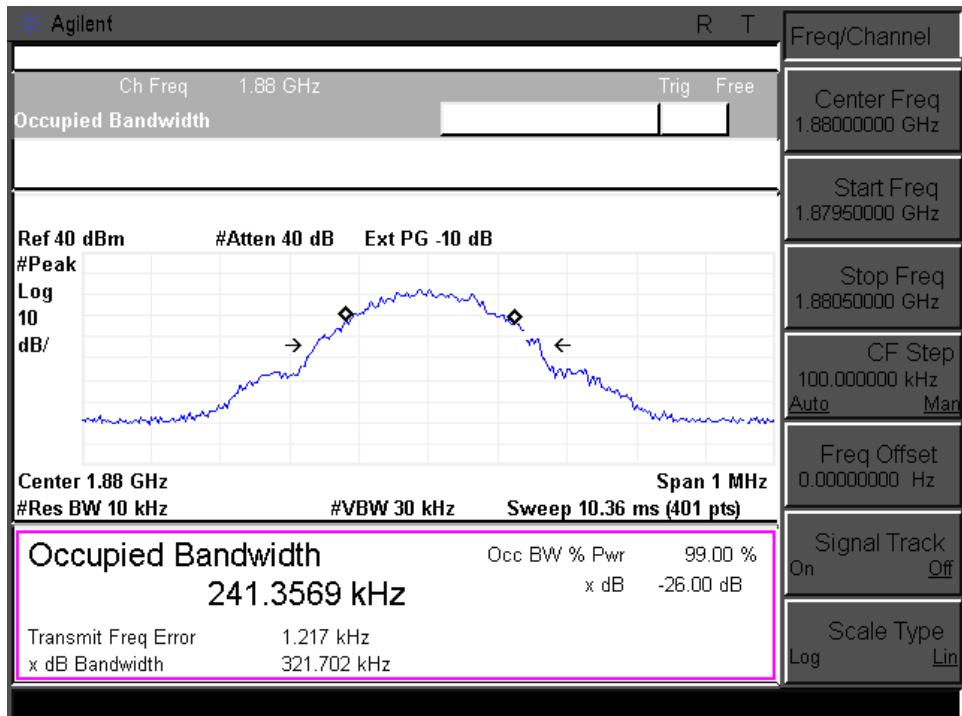


26dB Bandwidth plot on channel 661

GSM1900

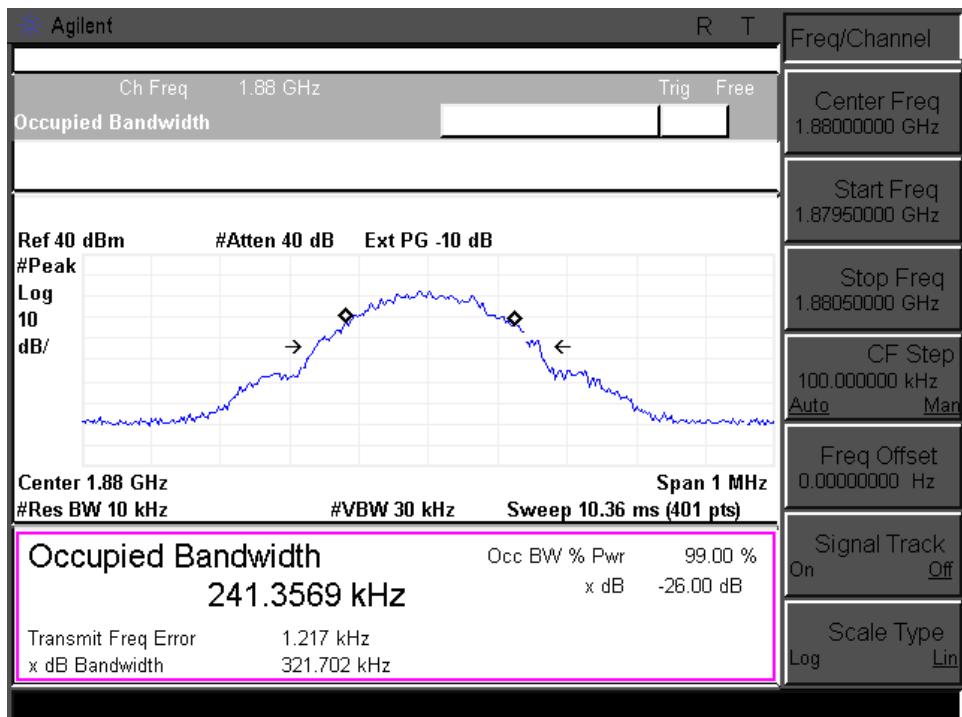


99% Occupied Bandwidth plot on channel 810


GSM1900

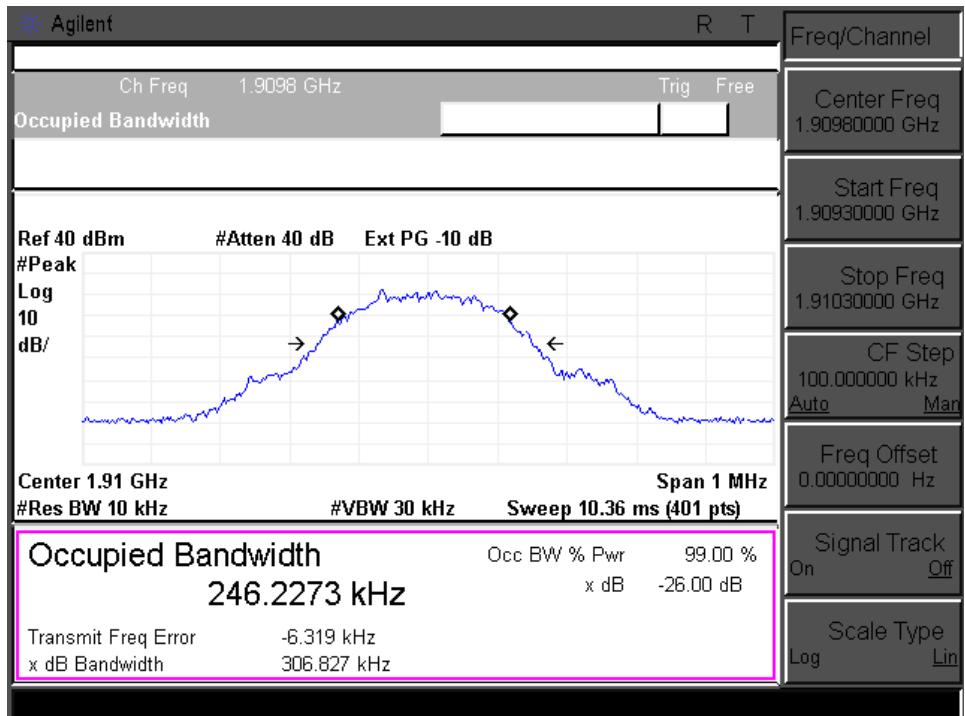


26dB Bandwidth plot on channel 810


GSM1900

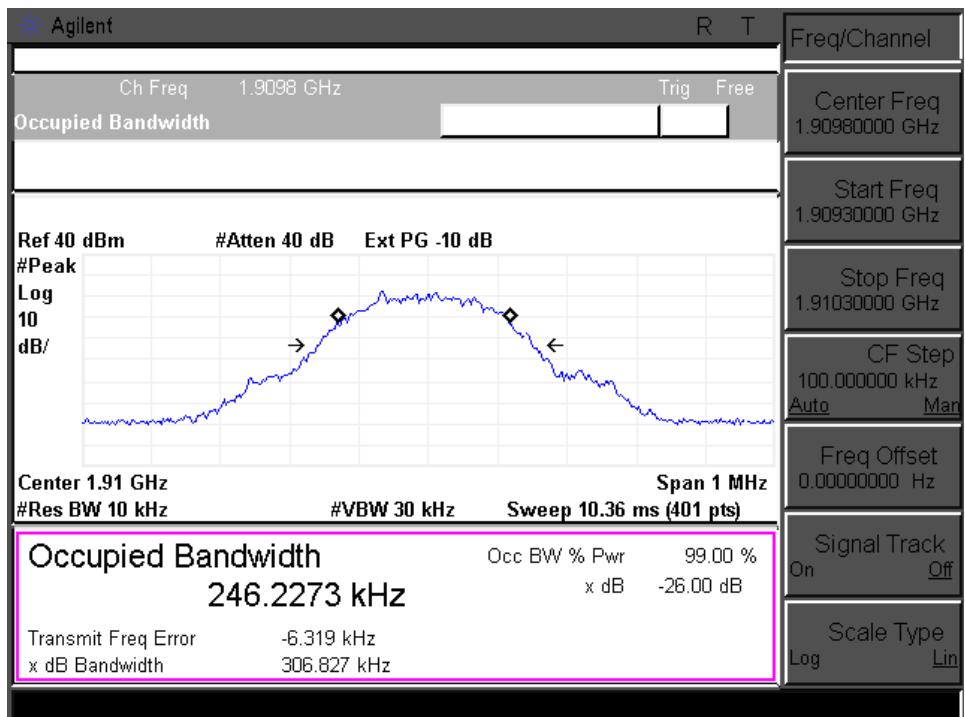

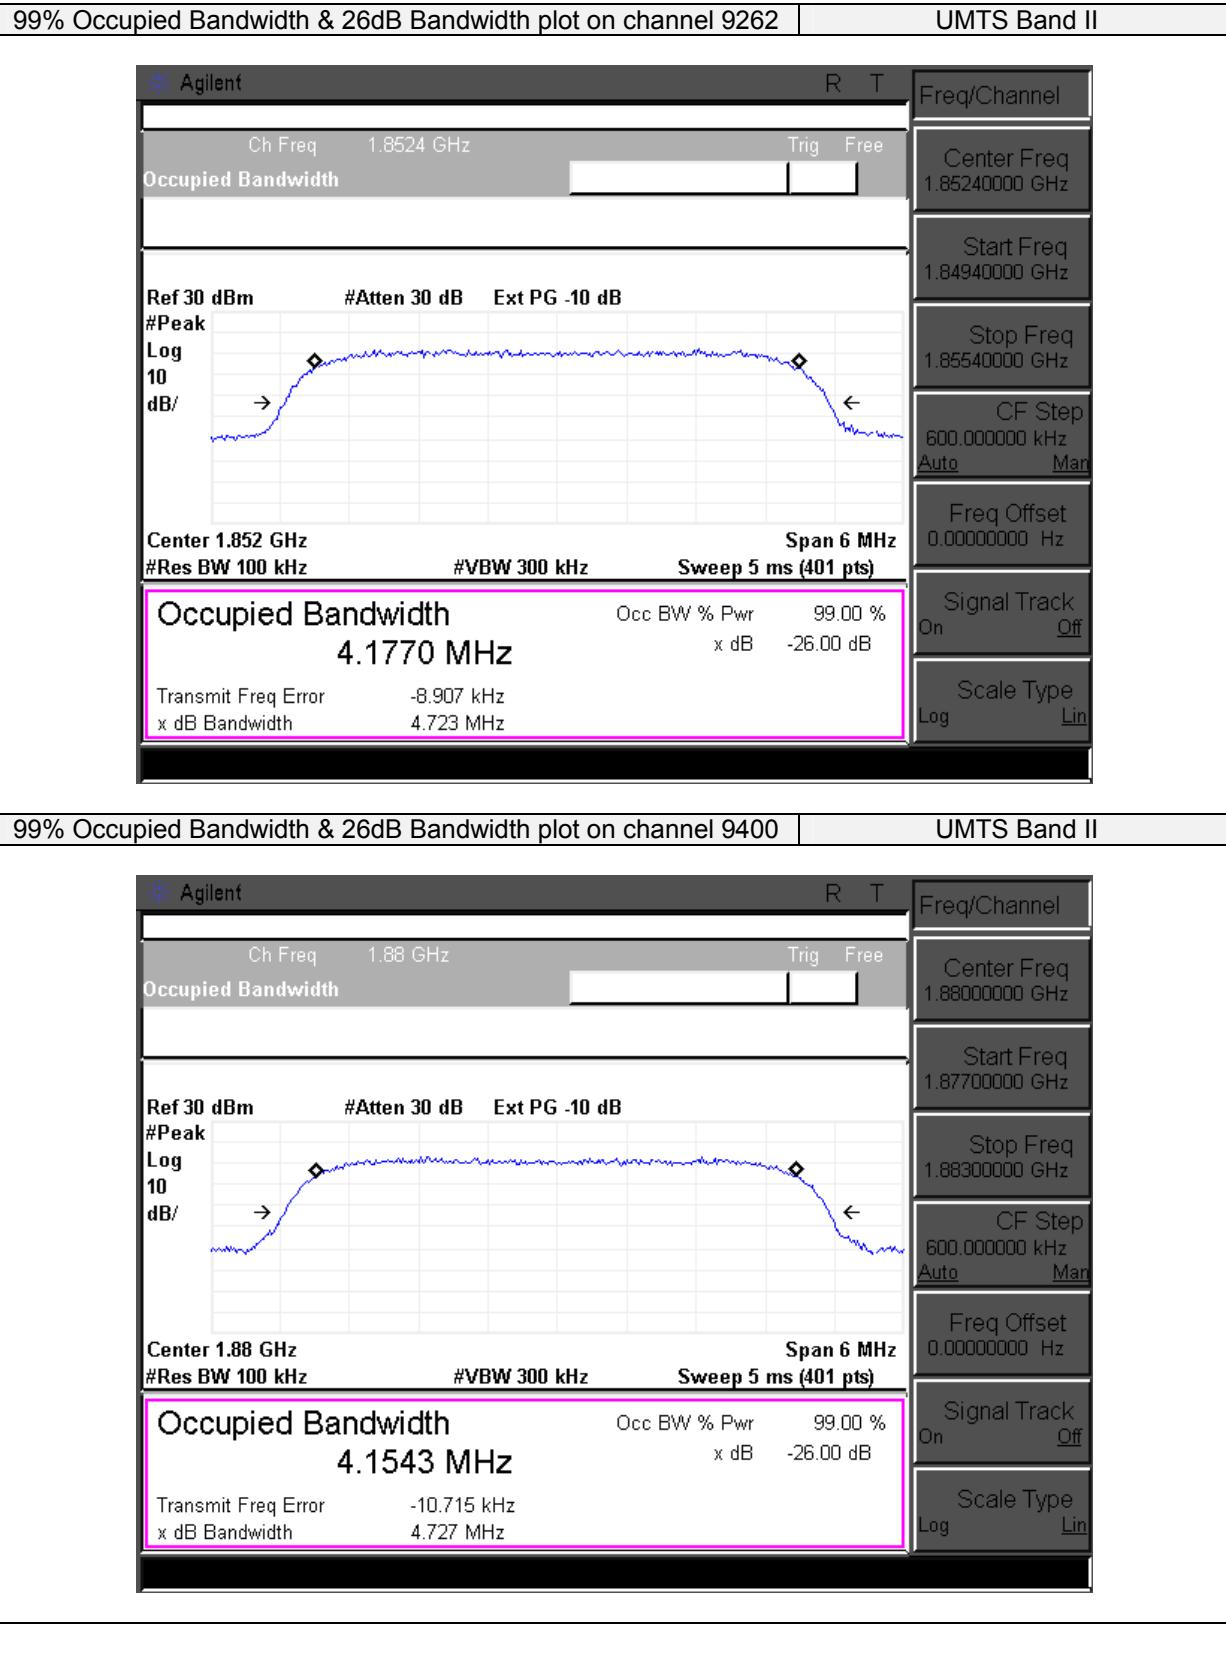


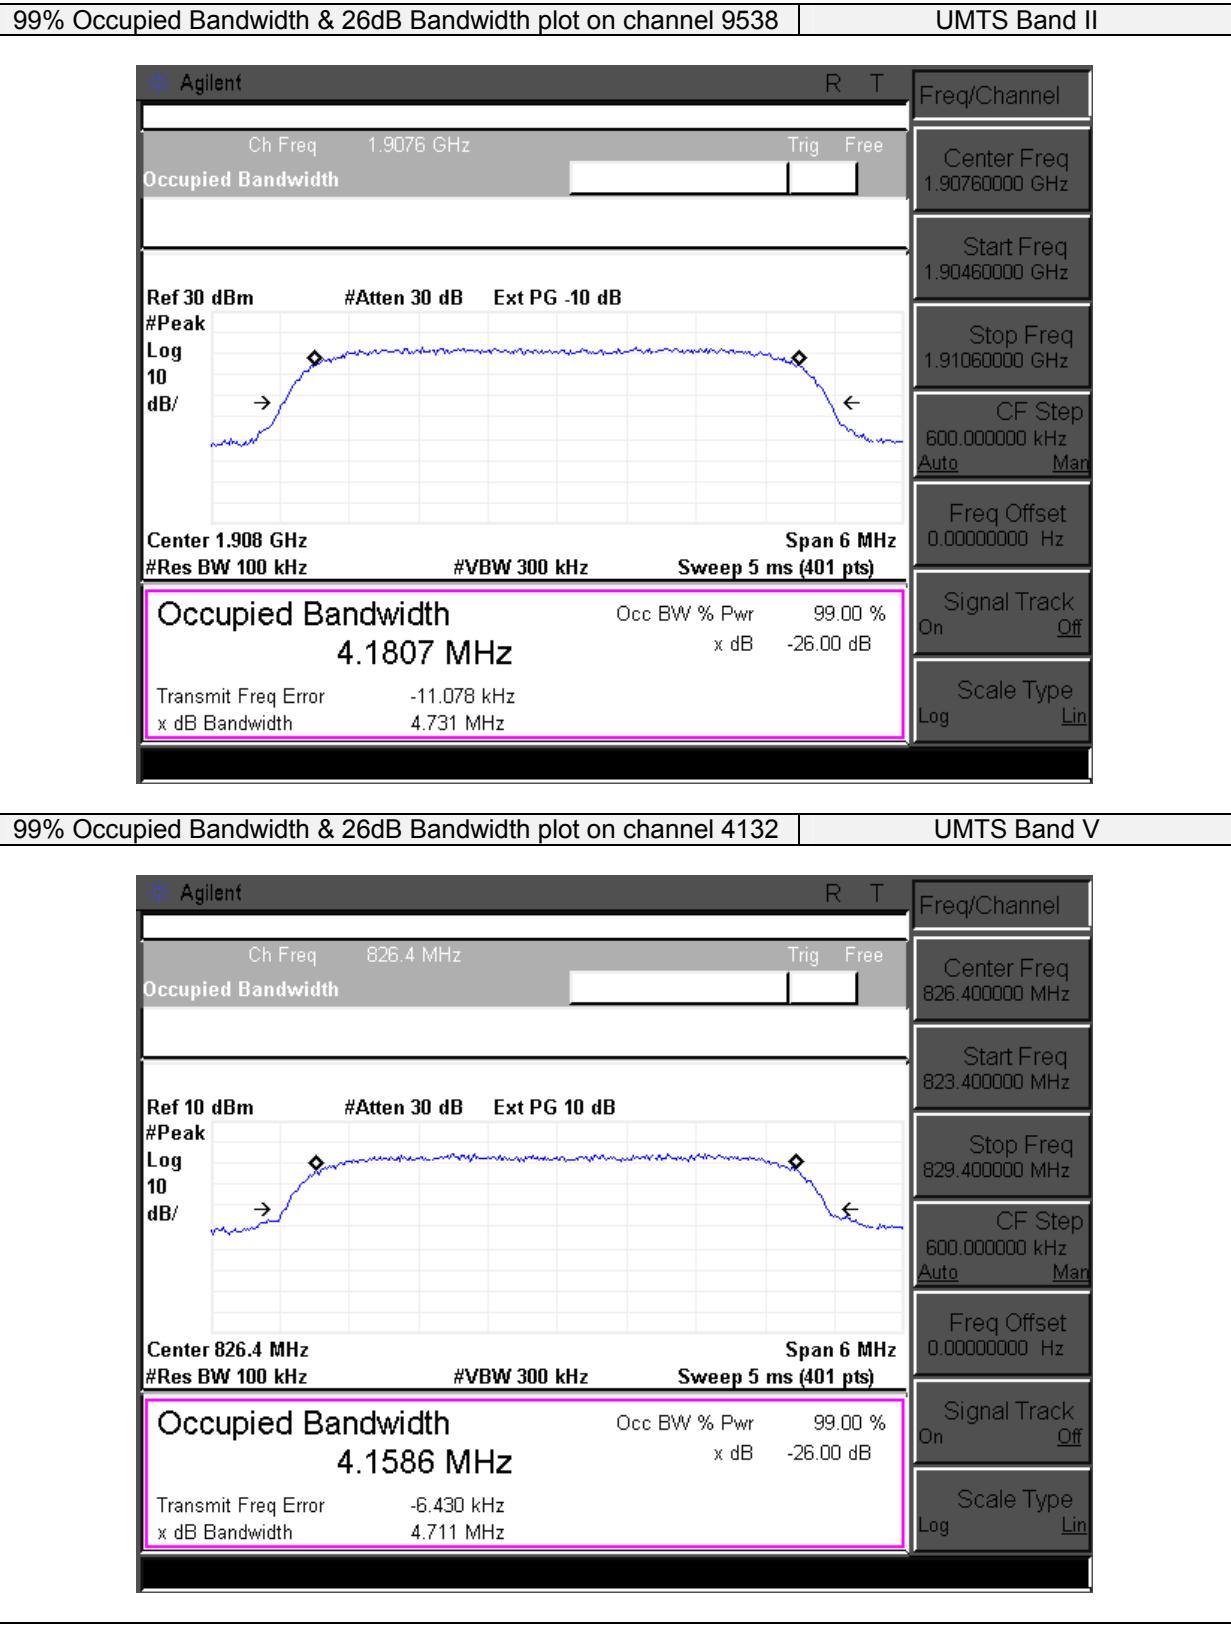

99% Occupied Bandwidth & 26dB Bandwidth plot on channel 4175 UMTS Band V

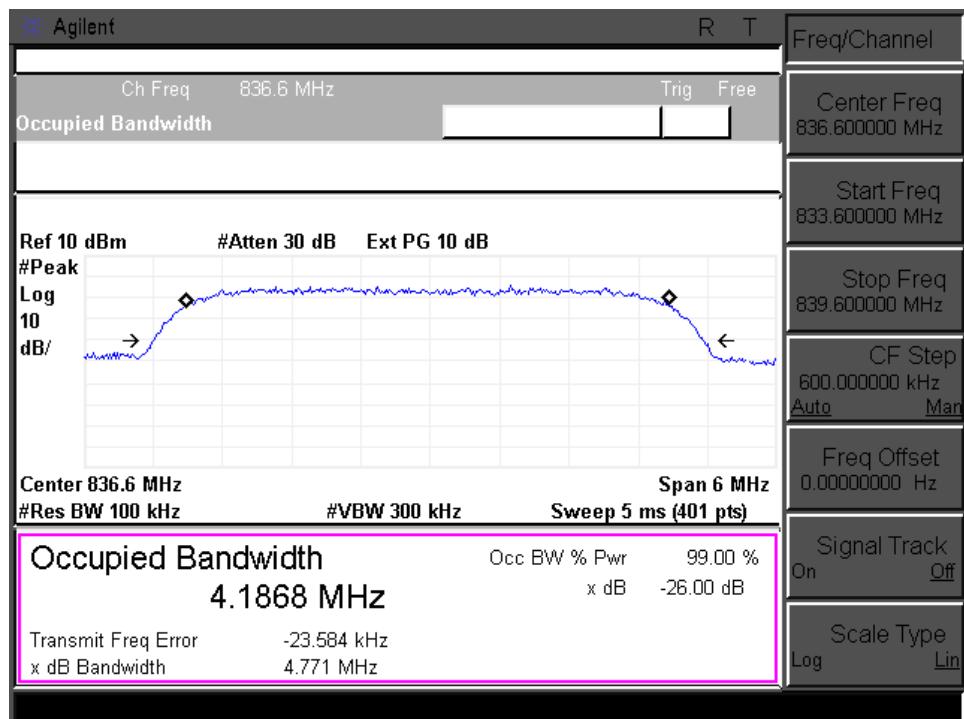

99% Occupied Bandwidth & 26dB Bandwidth plot on channel 4233 UMTS Band V

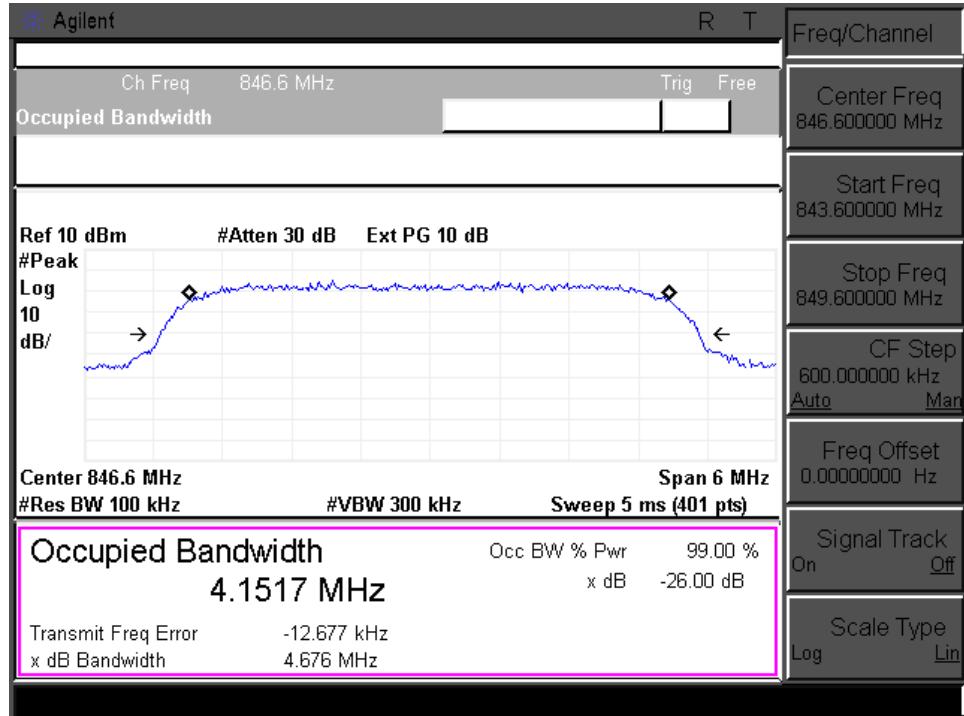

7.8 CONDUCTED BAND EDGE

7.8.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and 24.238(a) and FCC KDB 971168 D01 Section6.0

7.8.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

7.8.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.8.4 Test Setup

Please refer to Section 6.1 of this test report.

7.8.5 Test Procedure

The testing follows FCC KDB 971168 v02r02 Section 6.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The band edges of low and high channels for the highest RF powers were measured.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13 \text{ dBm.}$$

7.8.6 Test Results

EUT:	RK-175	Model No.:	RK-175
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode1/Mode2/Mode3/Mode4	Test By:	Jack Li
Results: PASS			

All the modulation modes and Channels have been tested, the data of the worst mode (GSM) are recorded in the following pages.


Operation Mode	Channel Number	MAX 26dB Bandwidth (kHz)	Correction Factor (dB)	Measurement Value (dBm)	Band Edge (dBm)	Verdict
GSM850	128	315.855	0.22	-15.61	-15.39	PASS
	251	315.855	0.22	-18.44	-18.22	PASS
GSM1900	512	322.802	0.32	-19.77	-19.45	PASS
	810	322.802	0.32	-20.57	-20.25	PASS
UMTS Band V	4132	4731.000	-3.25	-36.01	-39.26	PASS
	4233	4731.000	-3.25	-36.03	-39.28	PASS
UMTS Band II	9262	4771.000	-3.21	-18.71	-21.92	PASS
	9538	4771.000	-3.21	-17.8	-21.01	PASS

Note:

1. All the modulation modes and Channels have been tested, the data of the worst mode (GSM) are recorded in the following pages.
2. Correction Factor(dB)= $10\log(1\% \text{ Emission BW}/\text{RBW})$.
3. Band Edge= Measurement Value + Correction Factor(dB).


Conducted Band Edge plot on channel 128

GSM850

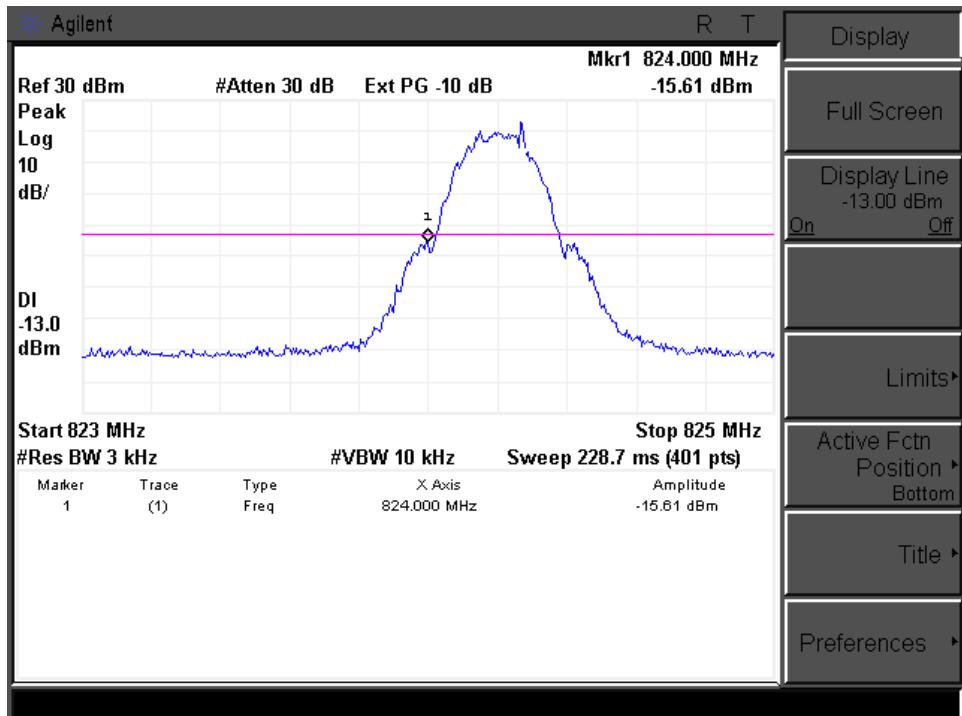


Conducted Band Edge plot on channel 251

GSM850

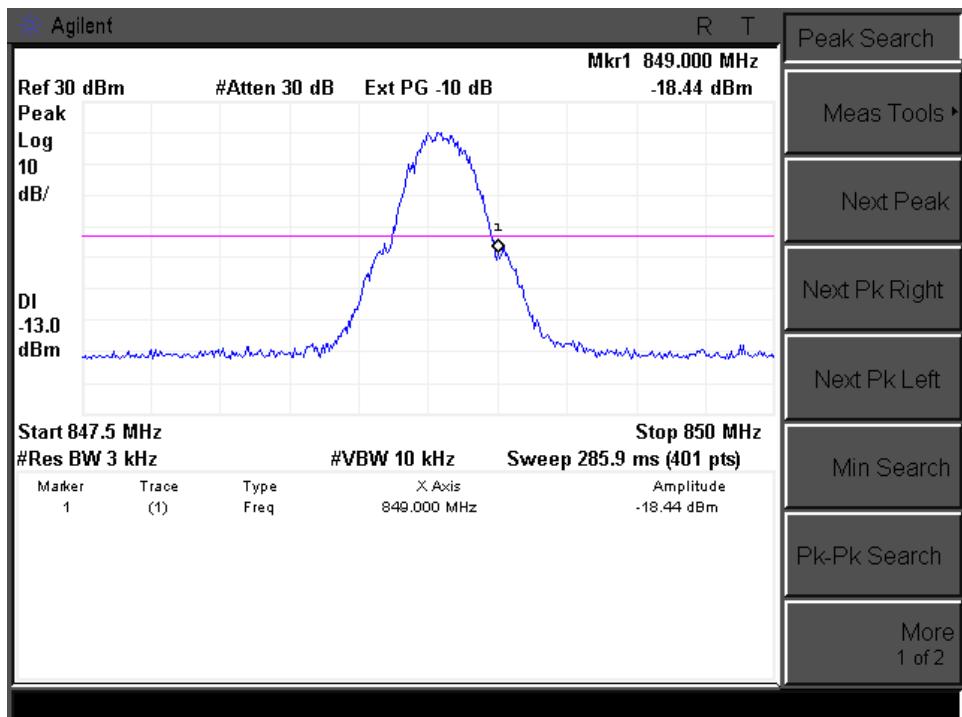


Conducted Band Edge plot on channel 512

GSM512

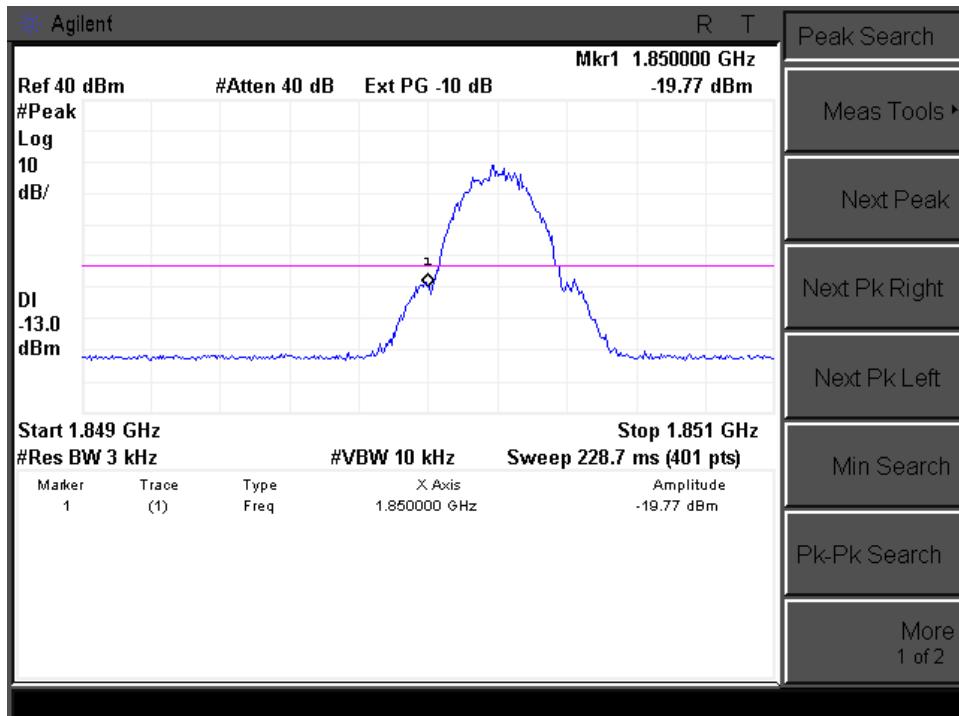


Conducted Band Edge plot on channel 810

GSM1900

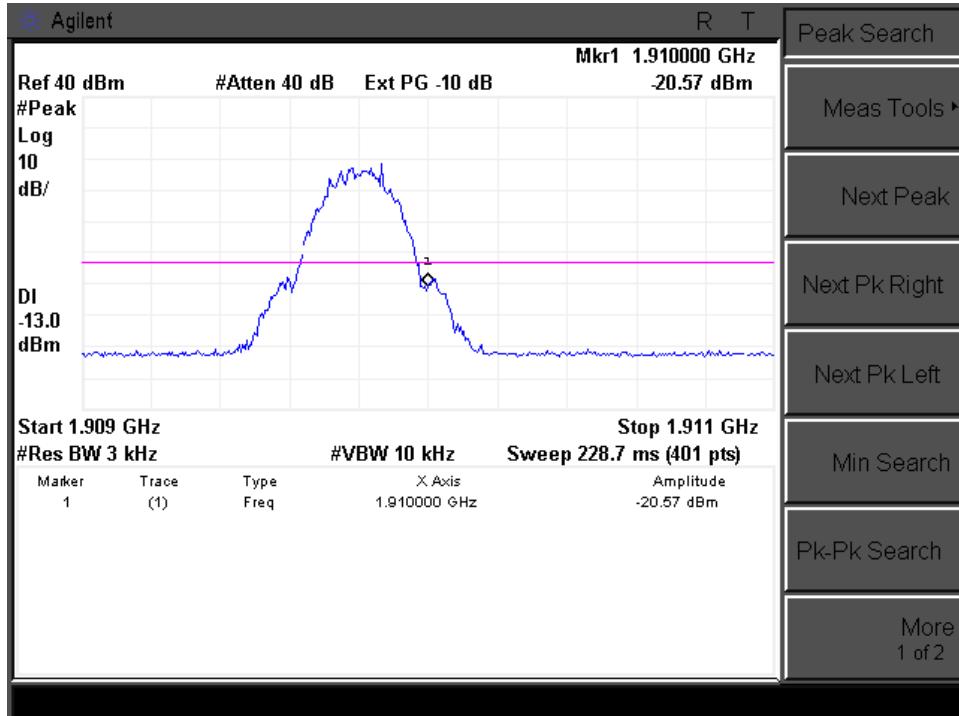


Conducted Band Edge plot on channel 9262

UMTS Band II

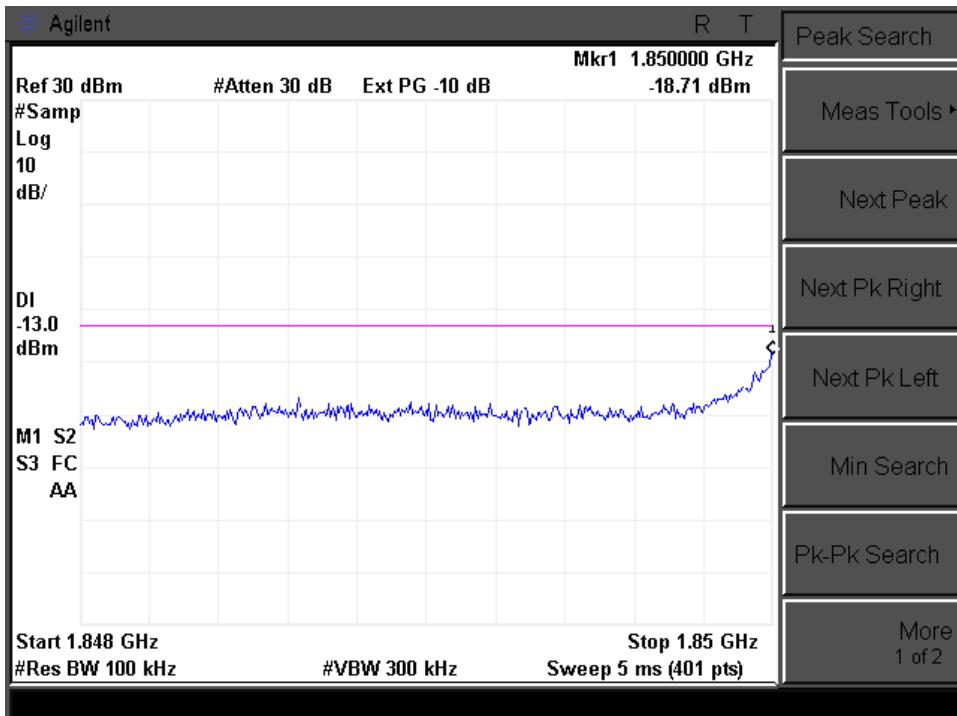


Conducted Band Edge plot on channel 9538

UMTS Band II

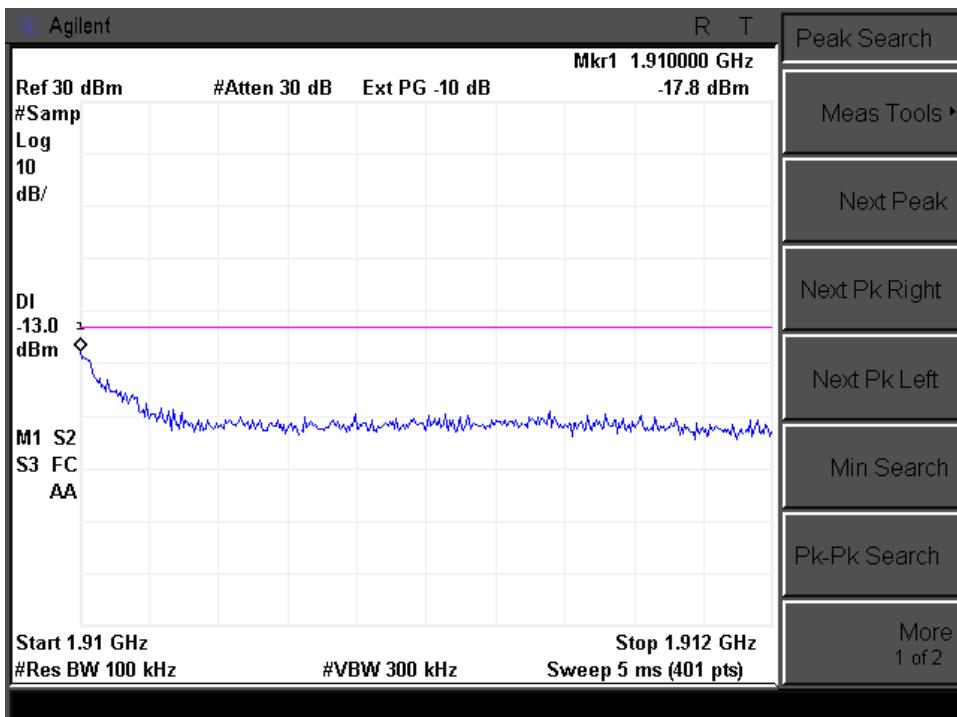


Conducted Band Edge plot on channel 4132

UMTS Band V

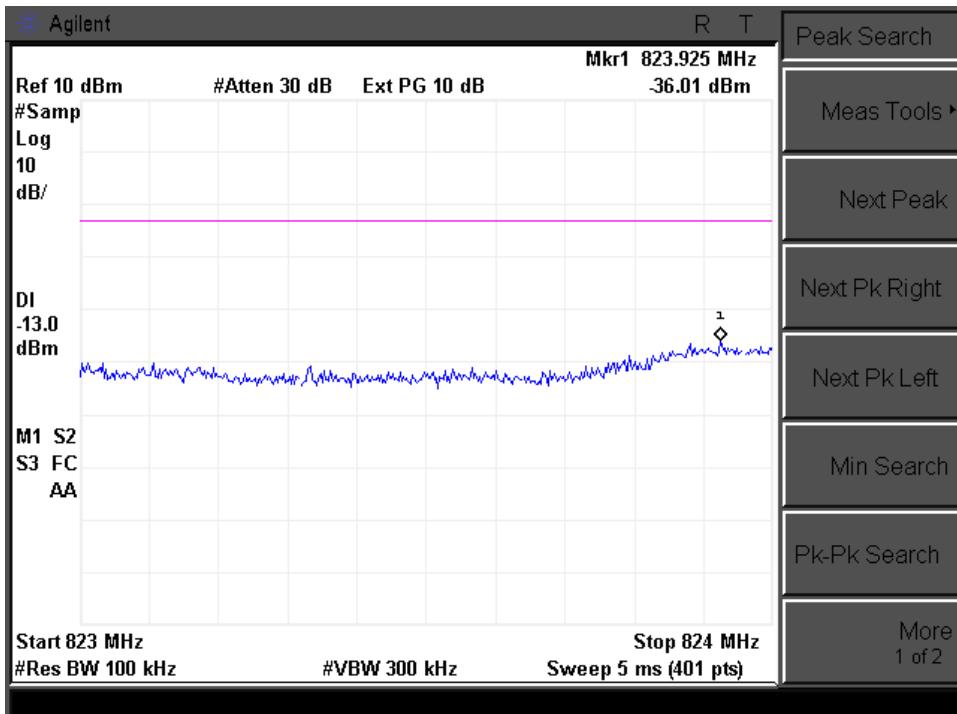

Conducted Band Edge plot on channel 4233

UMTS Band V

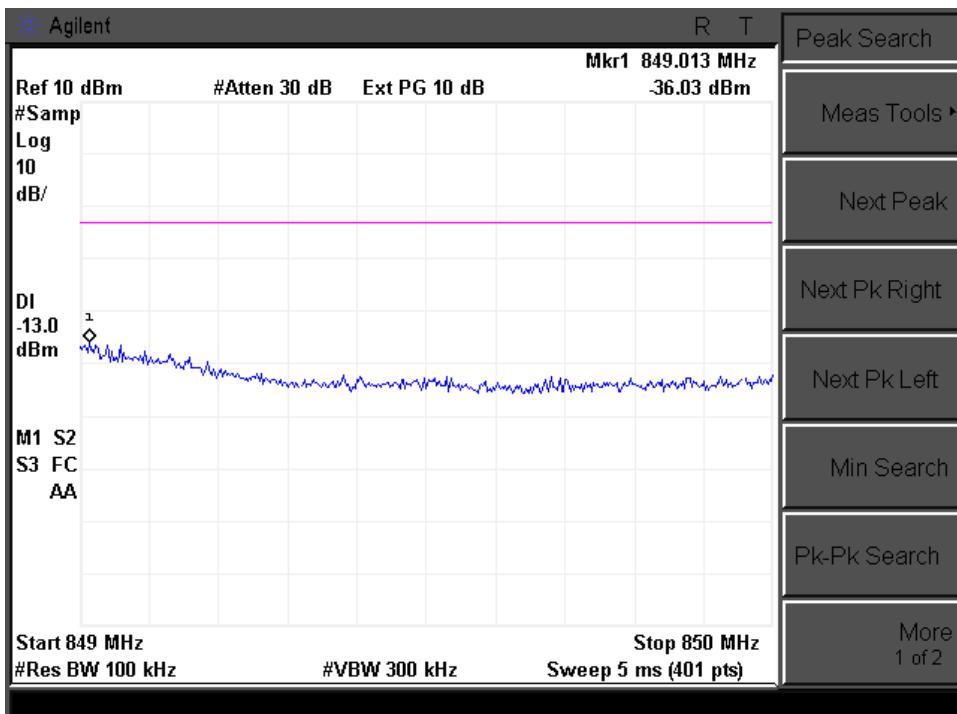

7.9 CONDUCTED SPURIOUS EMISSION AT ANTENNA TERMINAL

7.9.1 Applicable Standard

According to FCC Part 2.1051 and FCC Part 22.917(a) and Part 24.238(a) and FCC KDB 971168 D01 Section6.0

7.9.2 Conformance Limit

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

7.9.3 Measuring Instruments

The Measuring equipment is listed in the section 6.3 of this test report.

7.9.4 Test Setup

Please refer to Section 6.1 of this test report.

7.9.5 Test Procedure

The testing follows FCC KDB 971168 v02r02 Section 6.0.

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

The middle channel for the highest RF power within the transmitting frequency was measured.

The conducted spurious emission for the whole frequency range was taken.

The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



$$\begin{aligned} &= P(W) - [43 + 10\log(P)] \text{ (dB)} \\ &= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} \\ &= -13 \text{ dBm.} \end{aligned}$$



7.9.6 Test Results



EUT:	RK-175	Model No.:	RK-175
Temperature:	20 °C	Relative Humidity:	48%
Test Mode:	Mode1/Mode2/Mode3/Mode4	Test By:	Jack Li
Results: PASS			

All the modulation modes and Channels have been tested, the data of the worst mode (GSM) are recorded in the following pages.

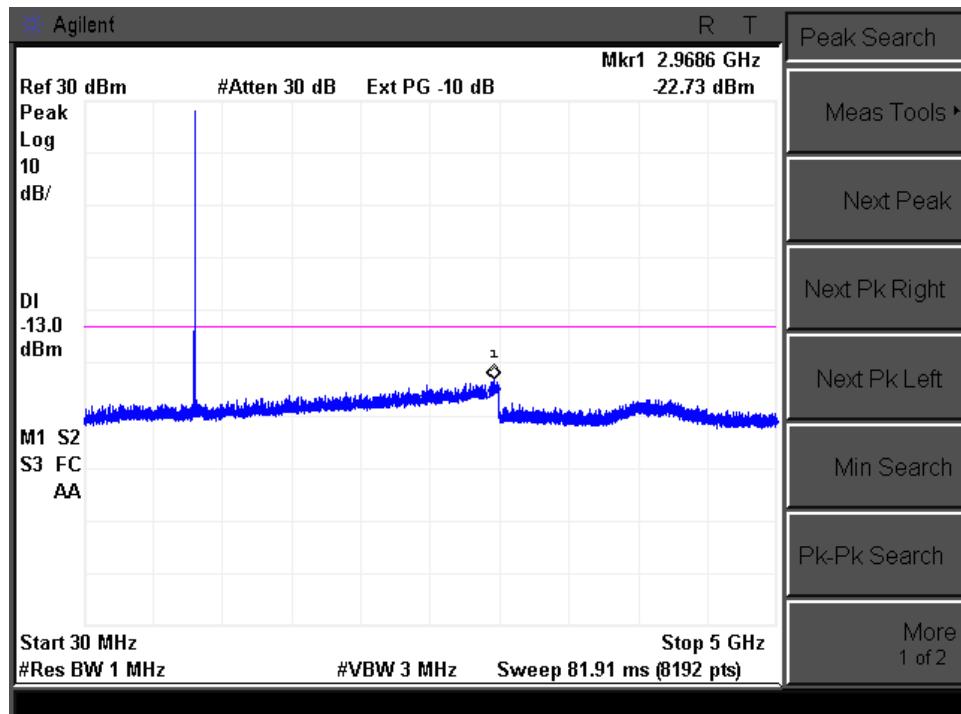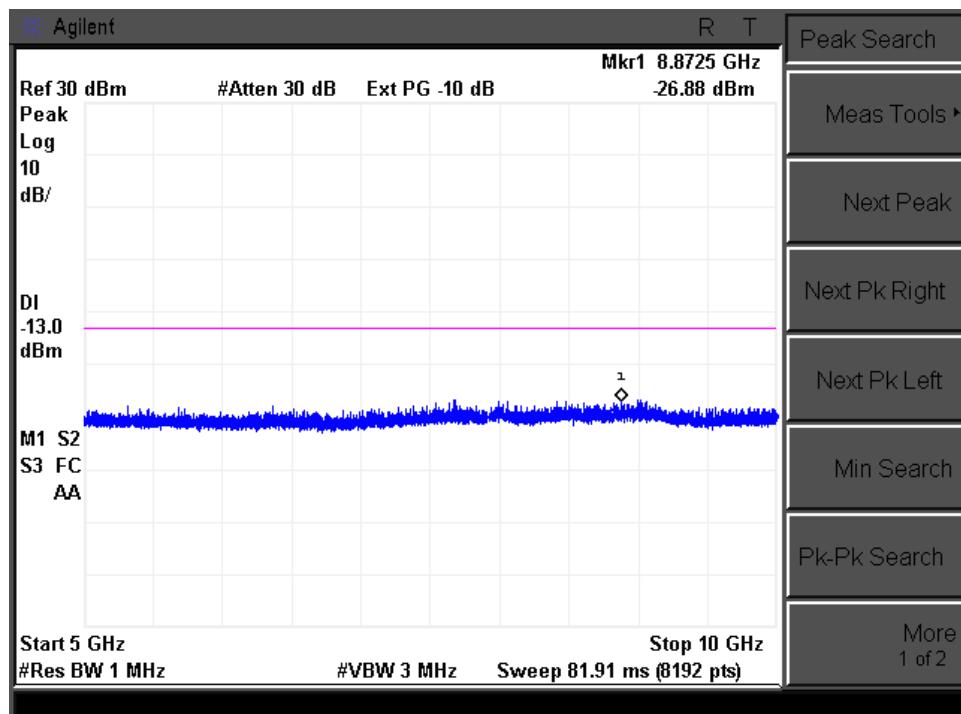
Conducted Emission Transmitting Mode CH 128 30MHz – 5GHz GSM850Conducted Emission Transmitting Mode CH 128 5GHz – 10GHz GSM850

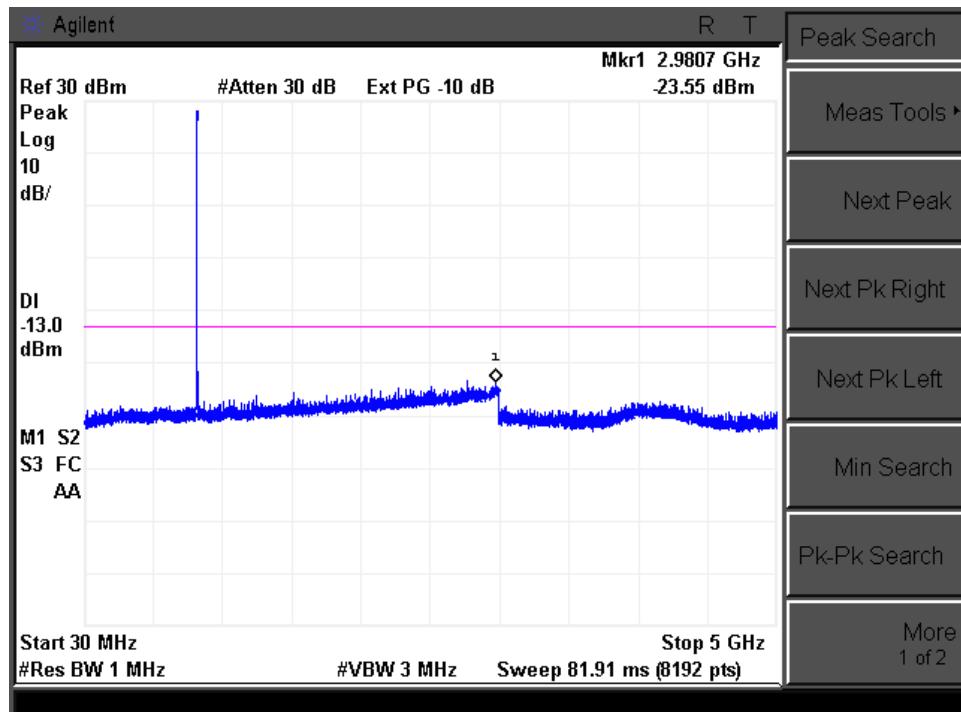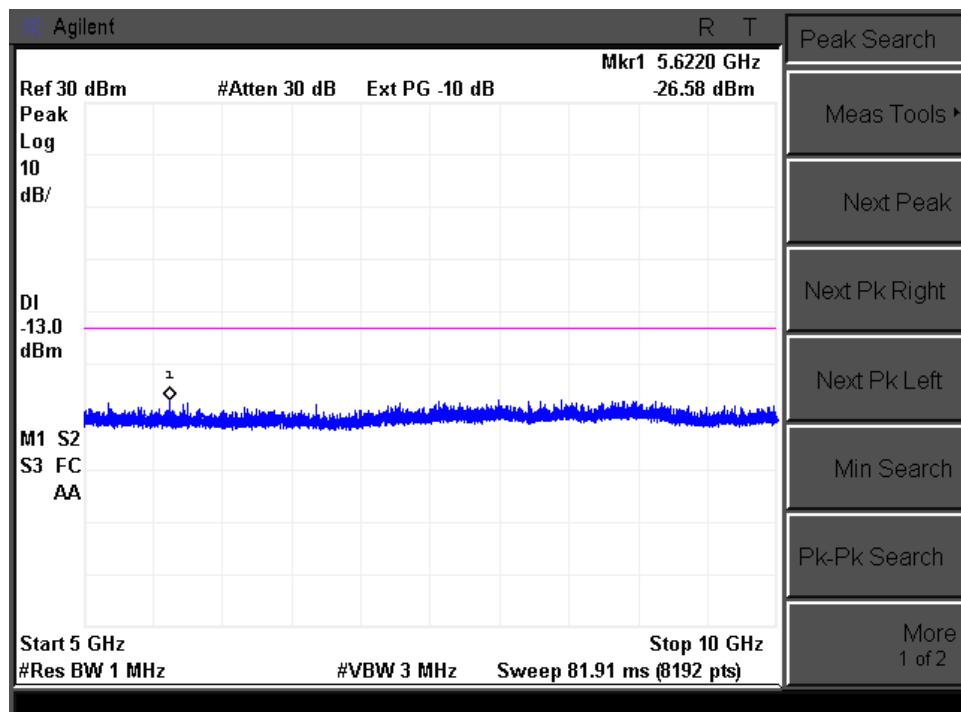Conducted Emission Transmitting Mode CH 190 30MHz – 5GHz GSM850Conducted Emission Transmitting Mode CH 190 5GHz – 10GHz GSM850

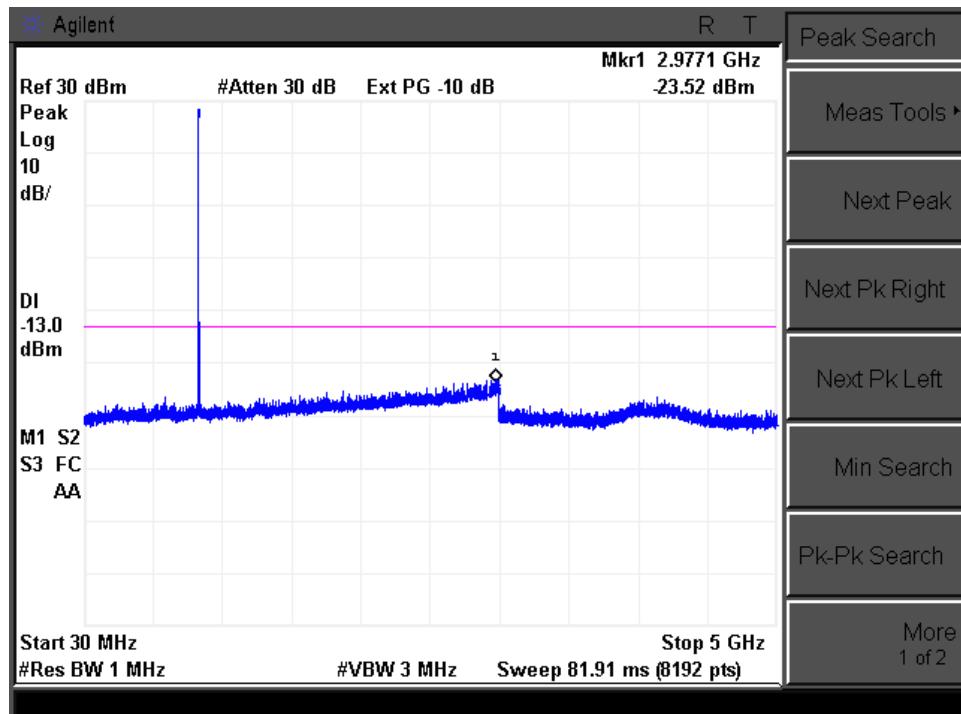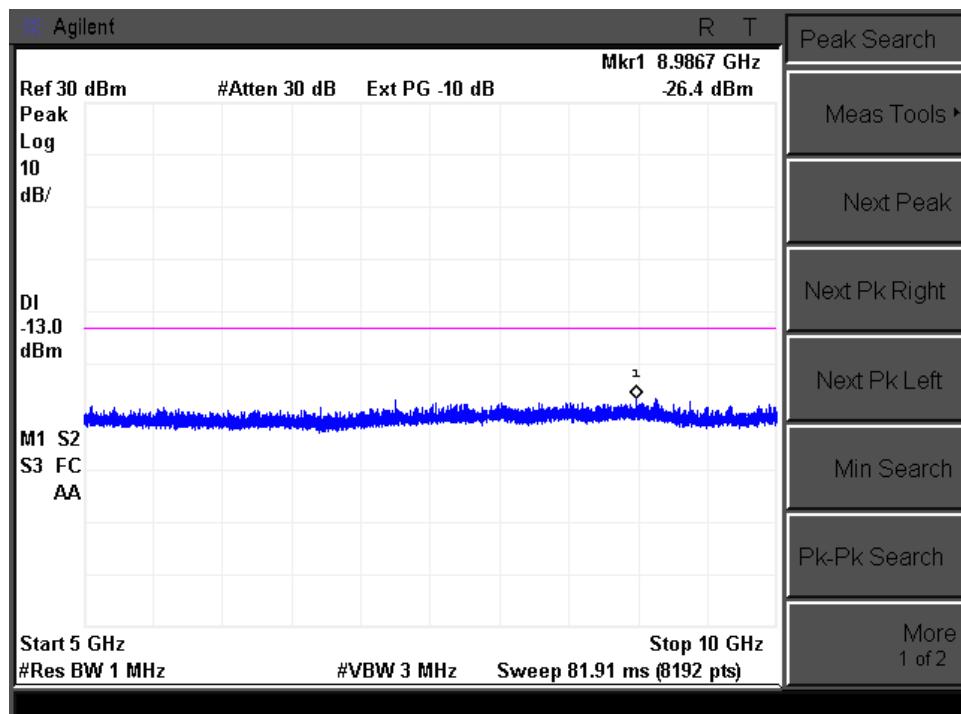
Conducted Emission Transmitting Mode CH 251 30MHz – 5GHz GSM850Conducted Emission Transmitting Mode CH 251 5GHz – 10GHz GSM850

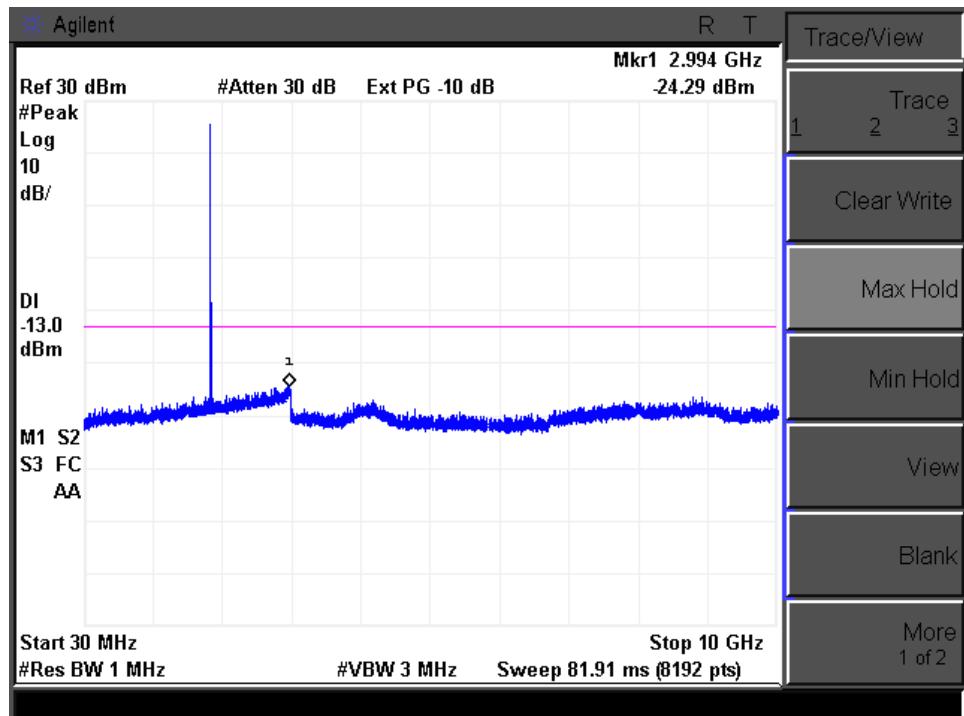
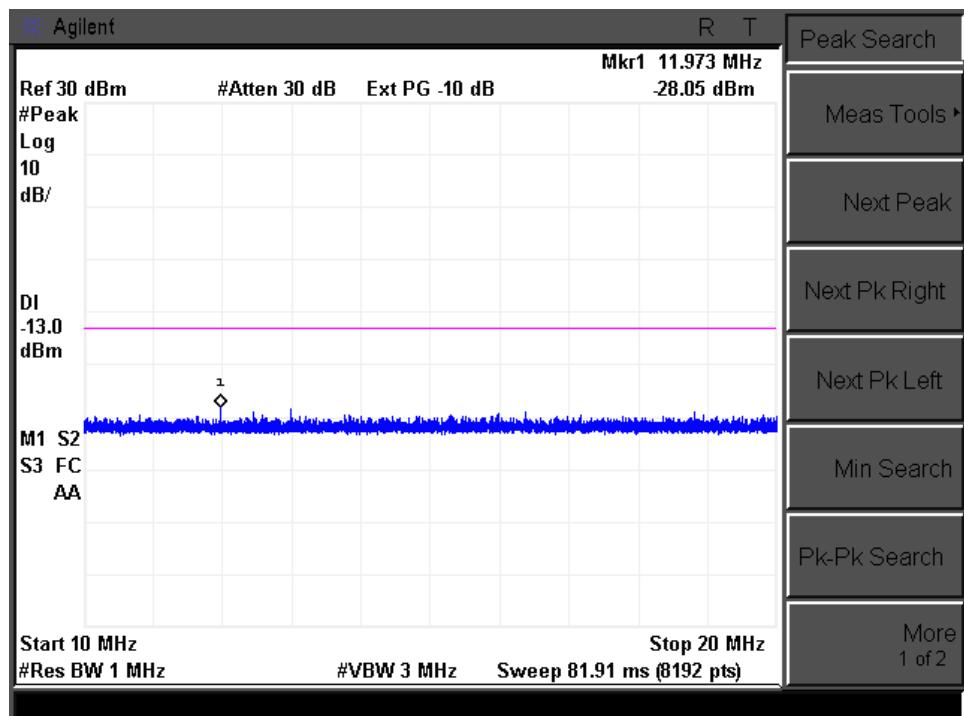
Conducted Emission Transmitting Mode CH 512 30MHz – 10GHz GSM1900Conducted Emission Transmitting Mode CH 512 10GHz – 20GHz GSM1900

Conducted Emission Transmitting Mode CH 661 30MHz – 10GHz GSM1900

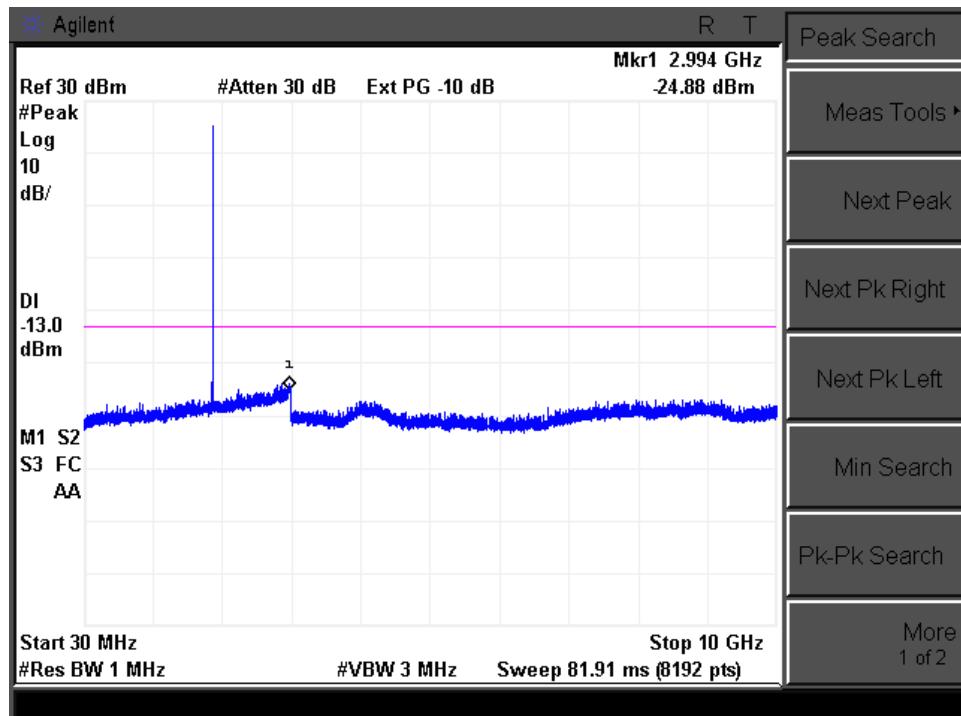


Conducted Emission Transmitting Mode CH 661 10GHz – 20GHz GSM1900

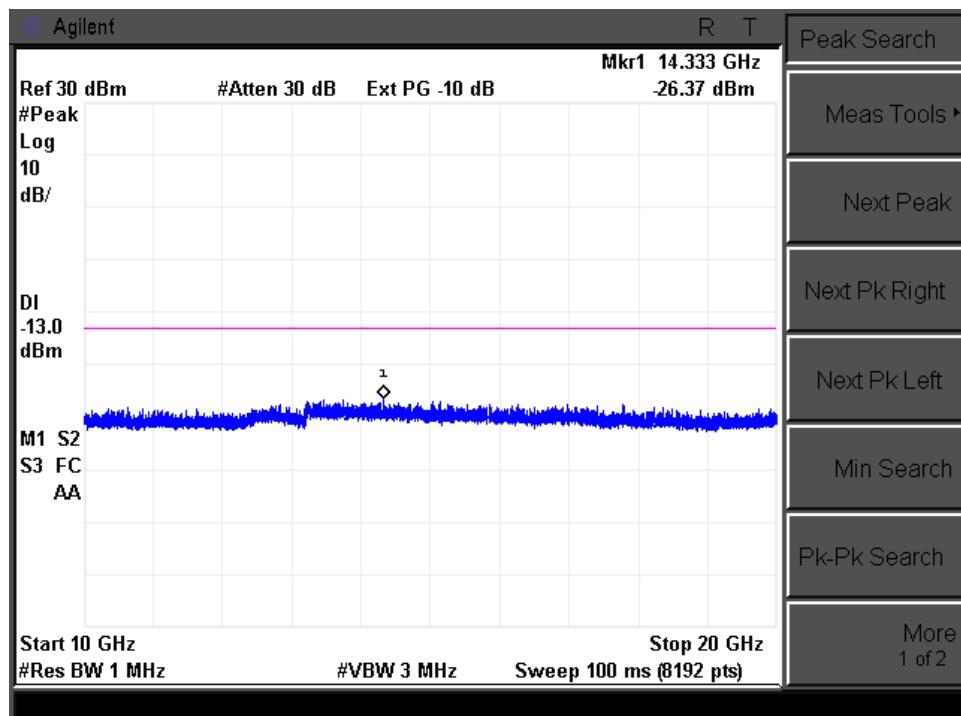


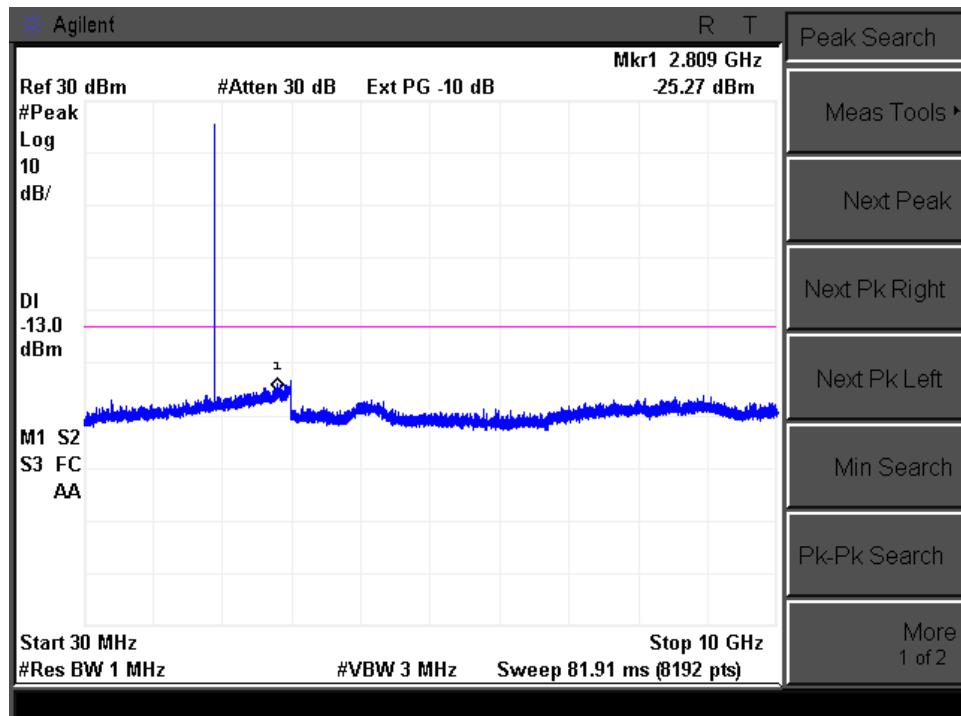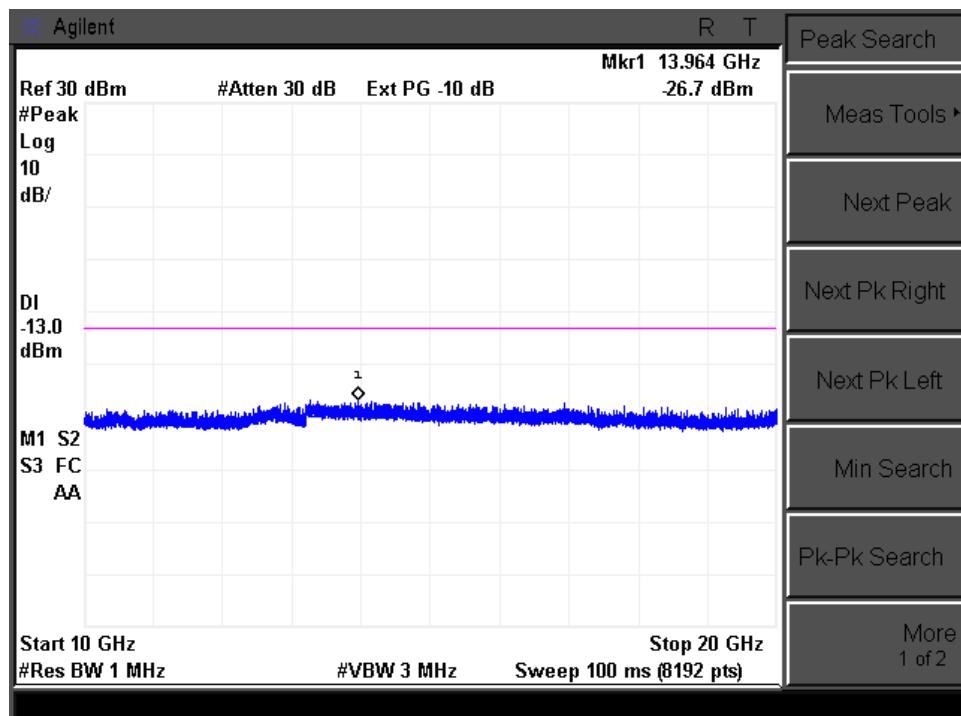Conducted Emission Transmitting Mode CH 810 30MHz – 10GHz GSM1900Conducted Emission Transmitting Mode CH 810 10GHz – 20GHz GSM1900


Conducted Emission Transmitting Mode CH 9262 30MHz – 10GHz

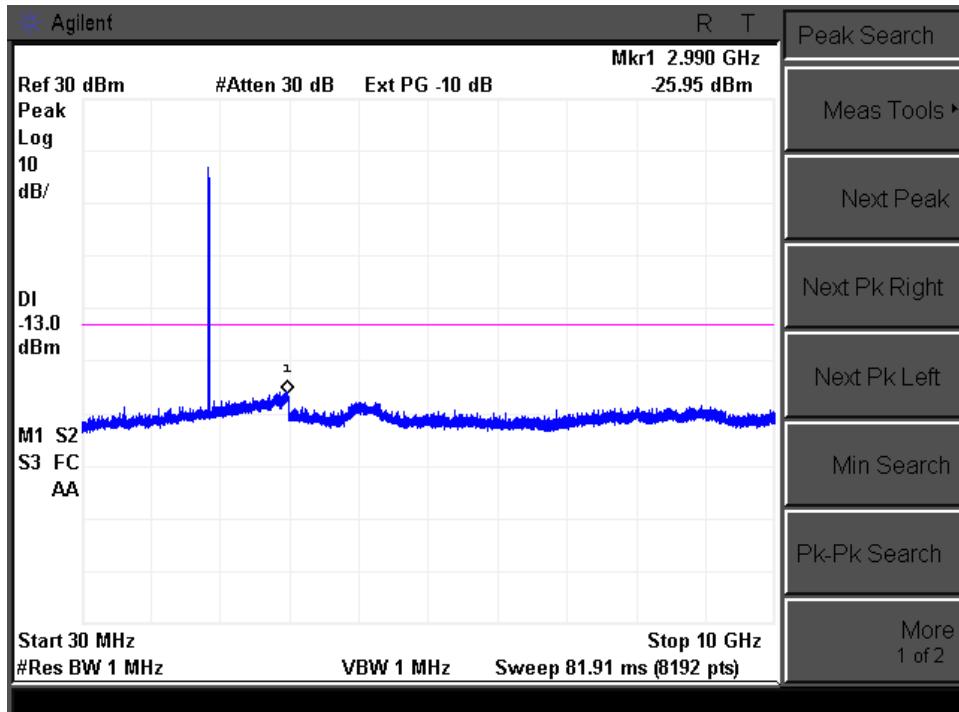


Conducted Emission Transmitting Mode CH 9262 10GHz – 20GHz

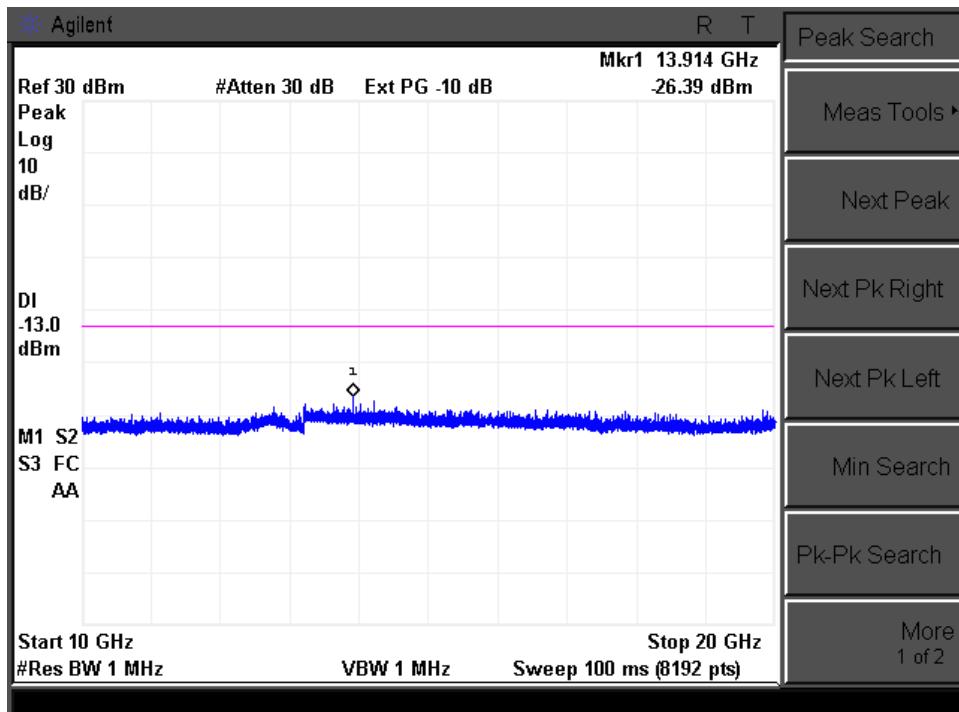


Conducted Emission Transmitting Mode CH 9400 30MHz – 10GHz

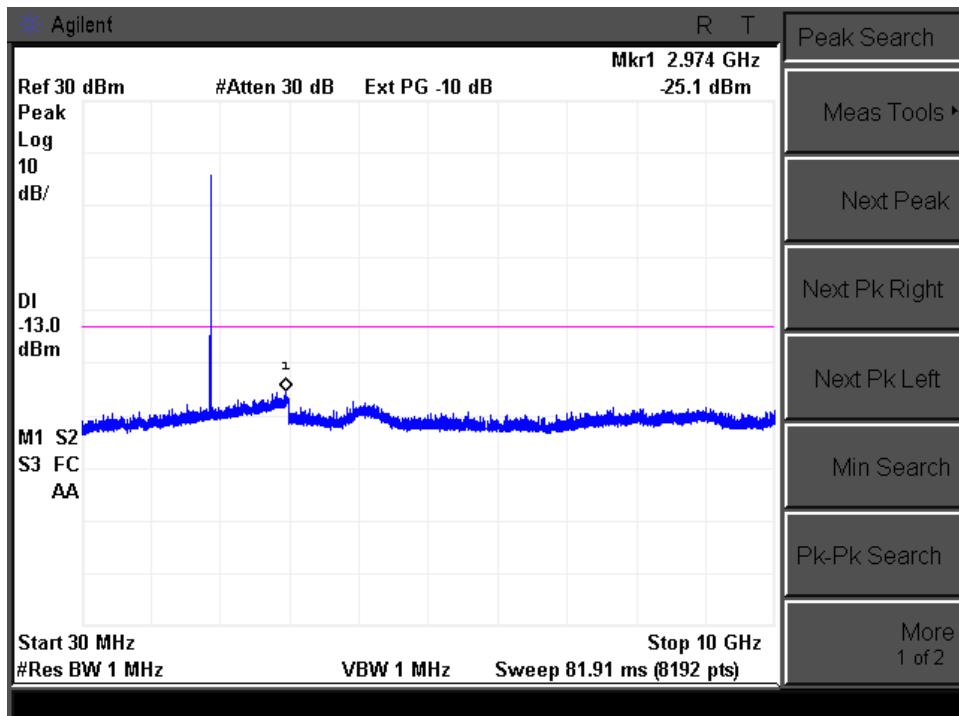


Conducted Emission Transmitting Mode CH 9400 10GHz – 20GHz

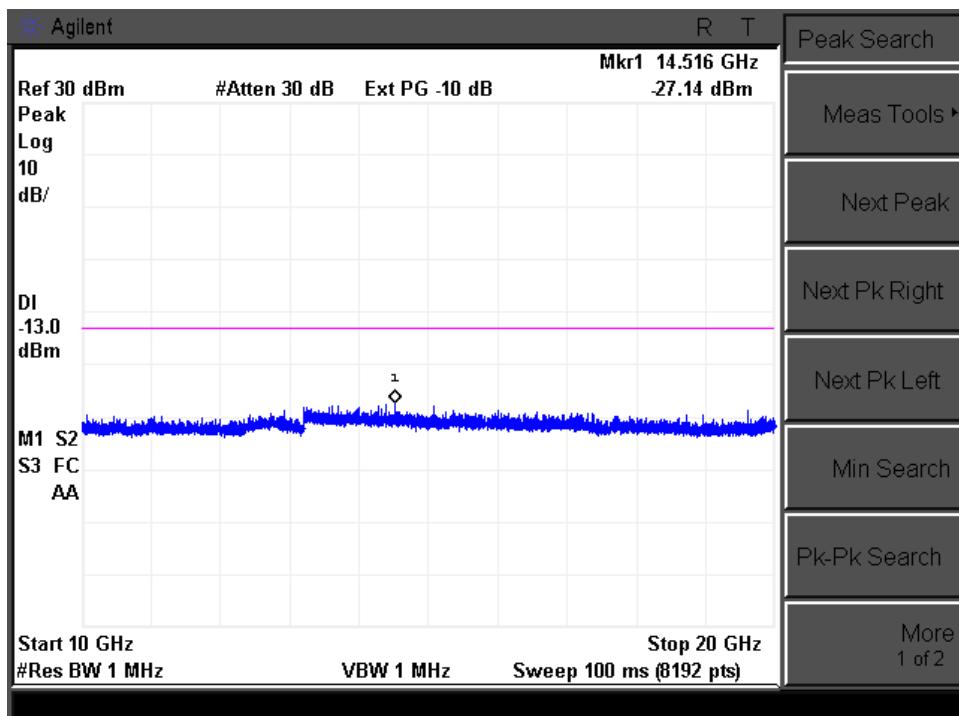


Conducted Emission Transmitting Mode CH 9538 30MHz – 10GHz

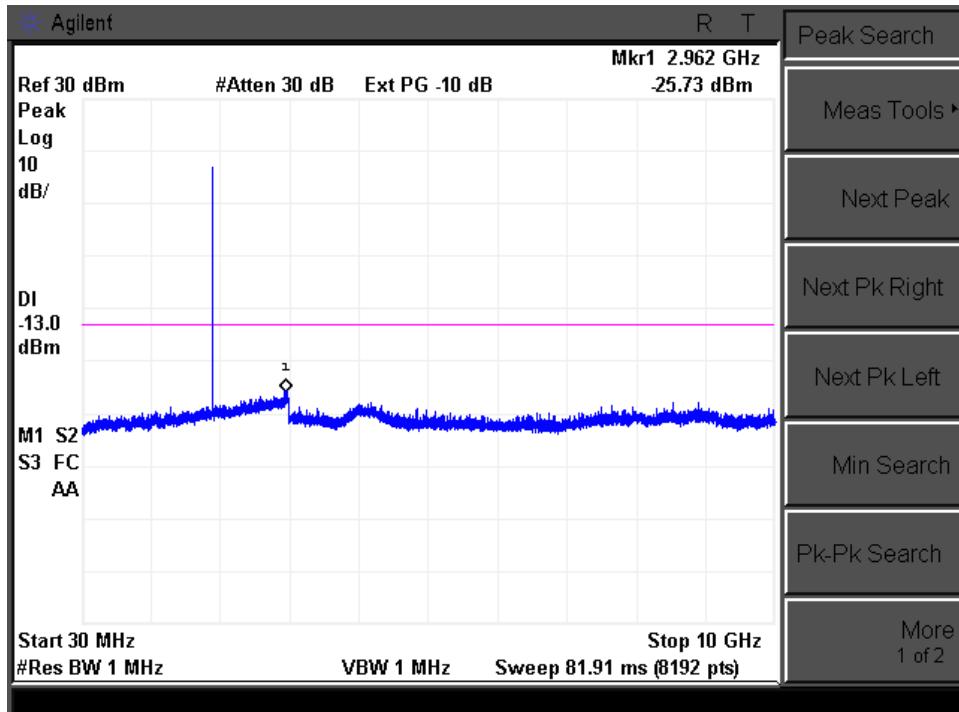


Conducted Emission Transmitting Mode CH 9538 10GHz – 20GHz

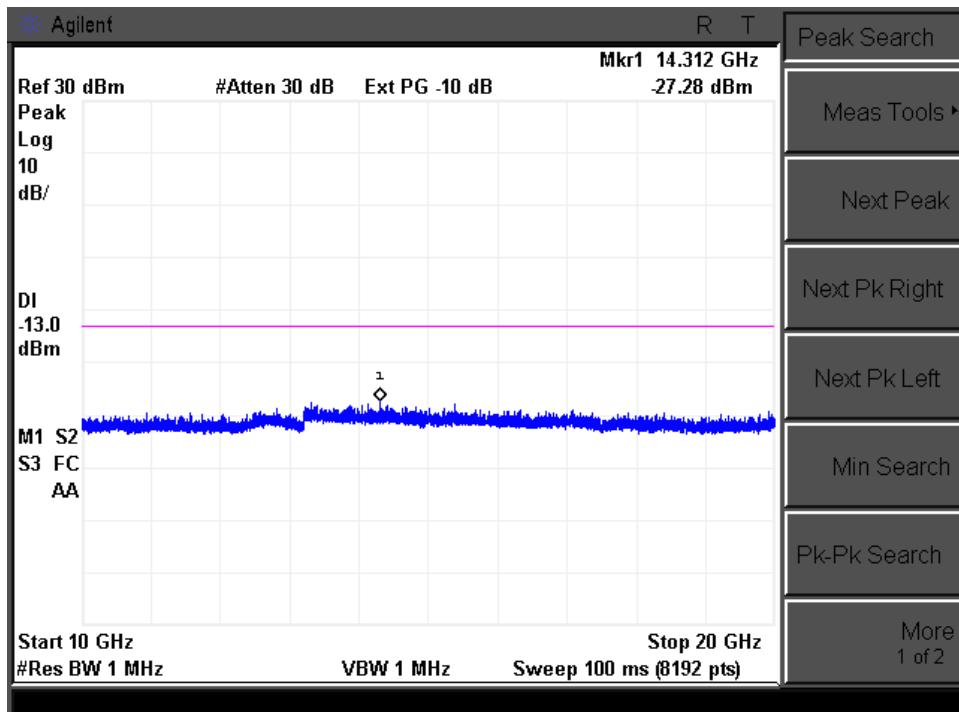


Conducted Emission Transmitting Mode CH 4132 30MHz – 10GHz

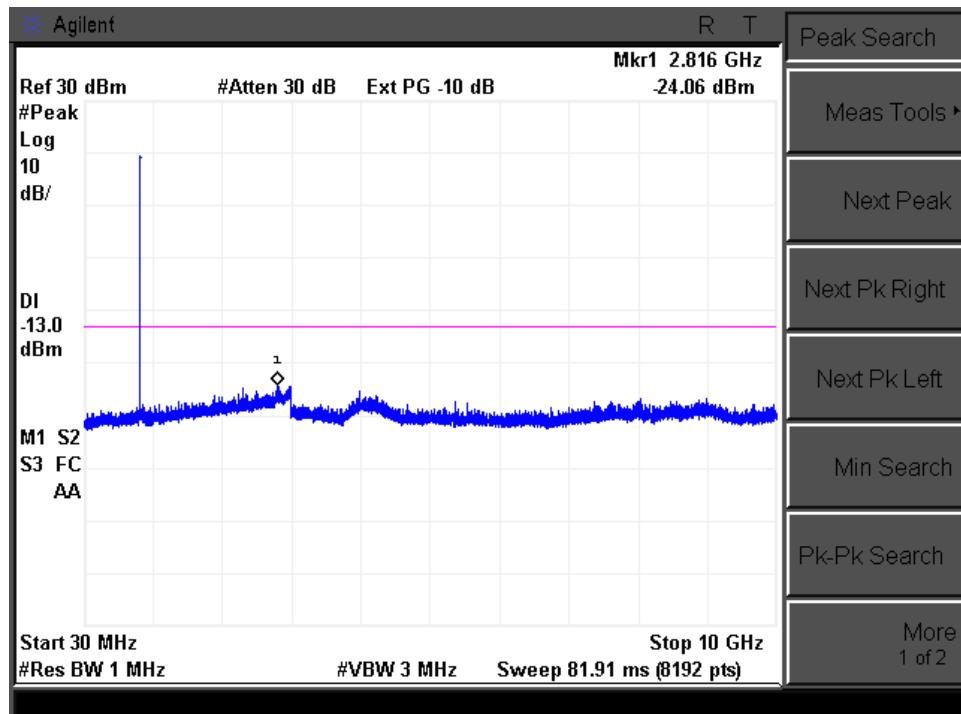


Conducted Emission Transmitting Mode CH 4132 10GHz – 20GHz

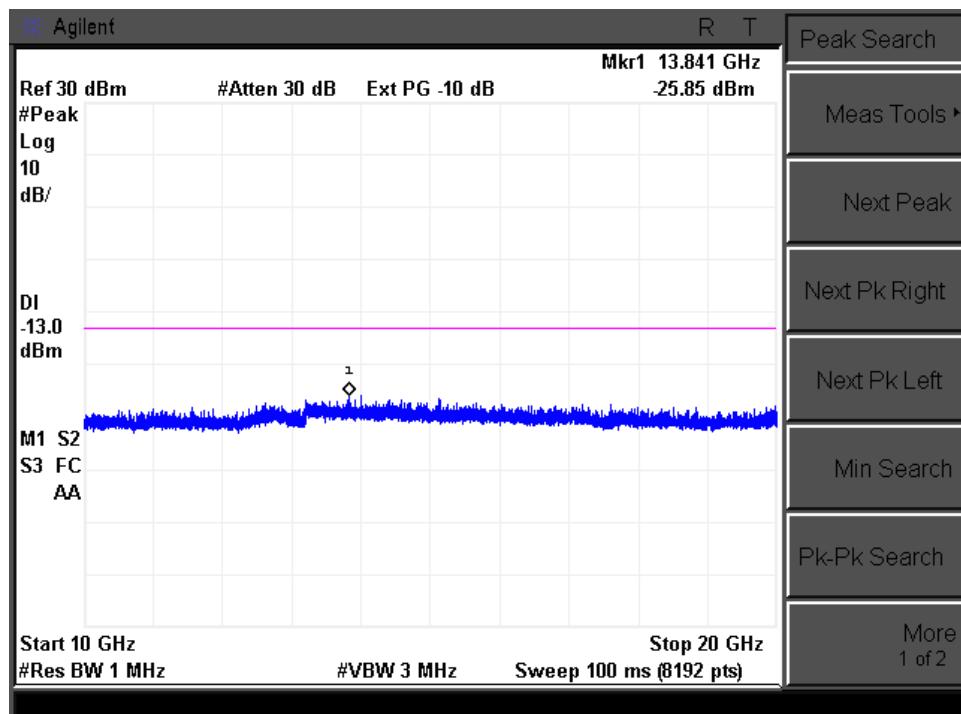


Conducted Emission Transmitting Mode CH 4183 30MHz –10GHz

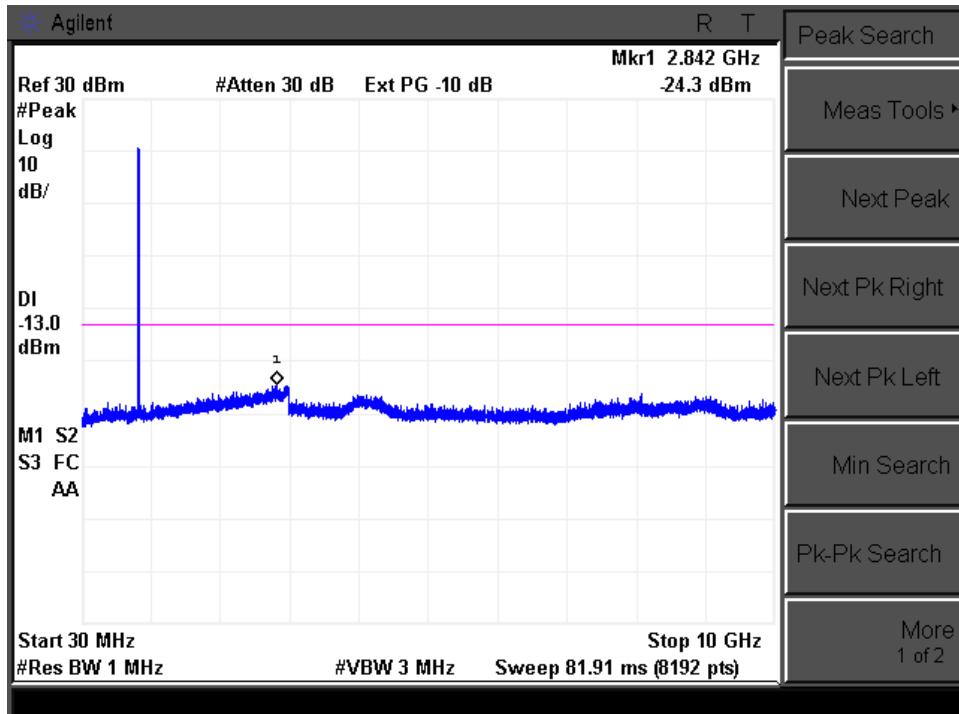


Conducted Emission Transmitting Mode CH 4183 10GHz – 20GHz

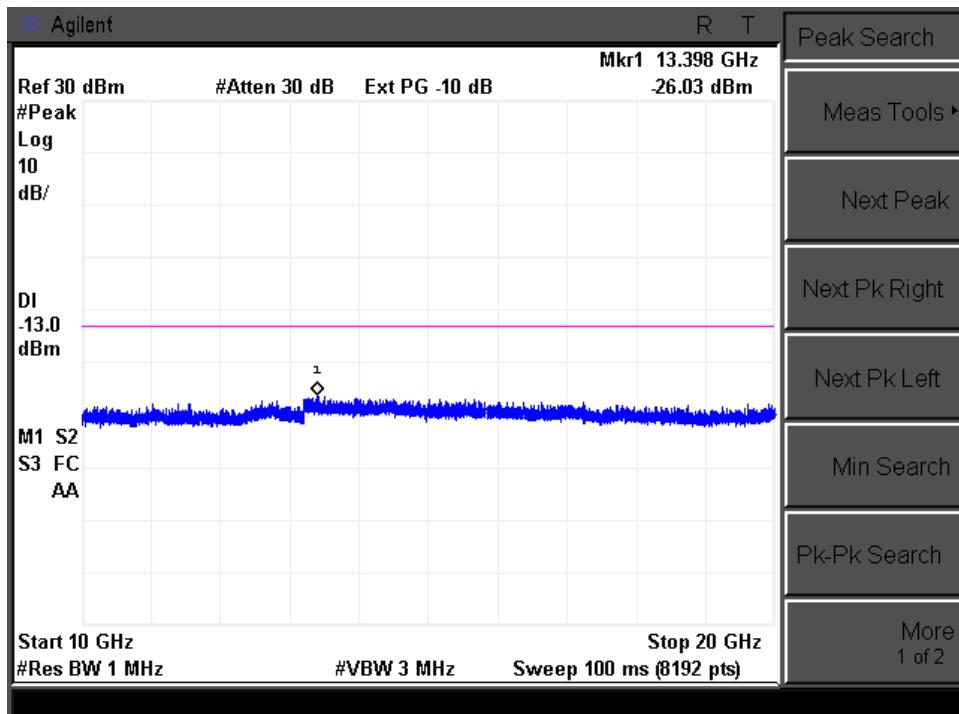

Conducted Emission Transmitting Mode CH 4233 30MHz – 10GHz

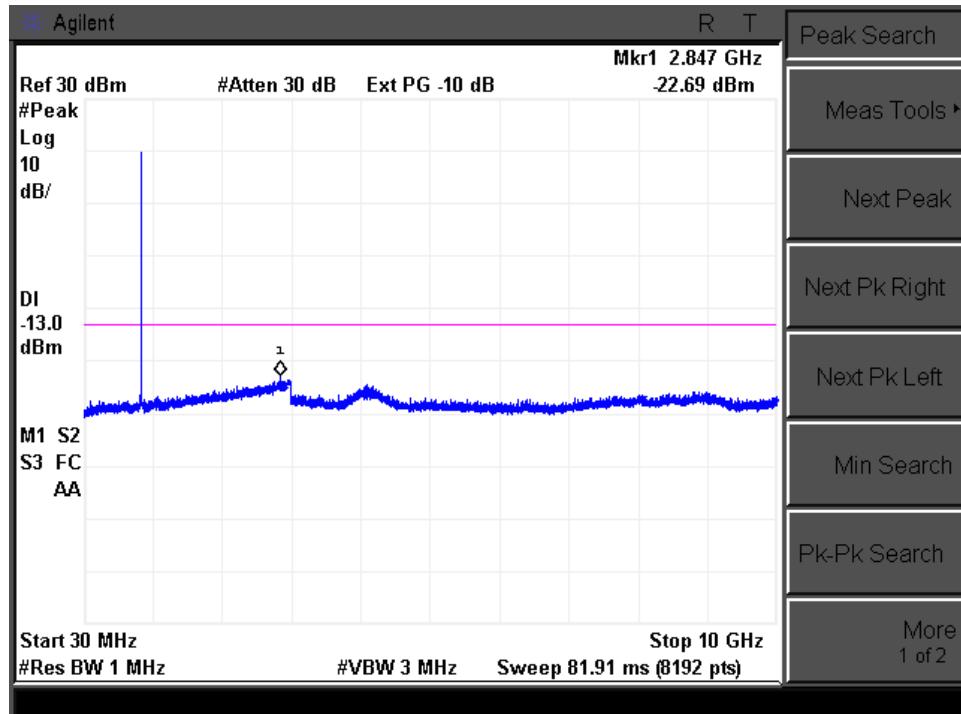

Conducted Emission Transmitting Mode CH 4233 10GHz – 20GHz

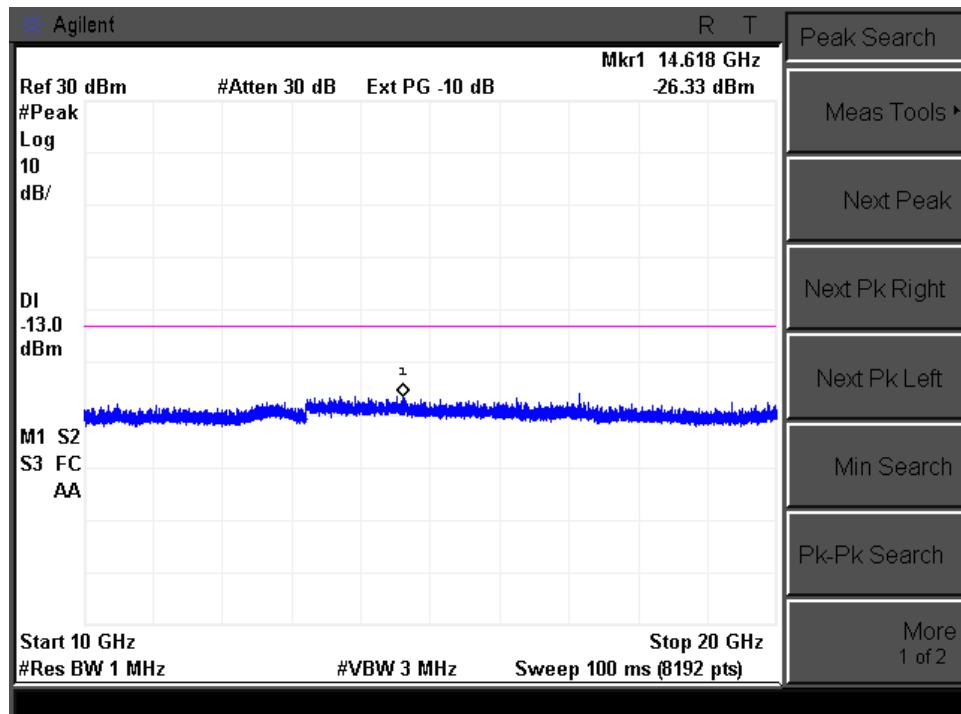

END OF REPORT