

EMC TEST REPORT

FCC 47 CFR Part 15B
Industry Canada ICES-003

Electromagnetic compatibility - Unintentional radiators

Report Reference No. : G0M-1707-6706-EF0115B-V01

Testing Laboratory : Eurofins Product Service GmbH

Address : Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation :



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Test Firm Designation Number: DE0008
IC Testing Laboratory site: 3470A-3

Applicant's name : Kinematics GmbH

Address : Spreeallee 2
16321 Bernau bei Berlin
GERMANY

Test specification:

Standard..... : 47 CFR Part 15 Subpart B
ICES-003, Issue 6:2016
ANSI C63.4:2014

Equipment under test (EUT):

Product description	Energy module with haptical user interface + bluetooth interface for toy building set	
Model No.	Powerbrain 2IM.1PB.300	
Additional Models	None	
Hardware version	2IM.1PB.300	
Firmware / Software version	Powerbrain Version 0.1	
	FCC-ID: 2AFV5-TB1701	IC: 20598-TB1701
Test result	Passed	

Test Report No.: G0M-1707-6706-EF0115B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Possible test case verdicts:

- not applicable to test object: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Date of receipt of test item: 2017-08-09

Date (s) of performance of tests: 2017-08-15 – 2017-08-22


Compiled by: Marco Belz

Tested by (+ signature).....: Marco Belz / Jens Zimmermann

Approved by (+ signature): Jens Marquardt
Deputy Head of Lab

Date of issue.....: 2017-08-23

Total number of pages.....: 35

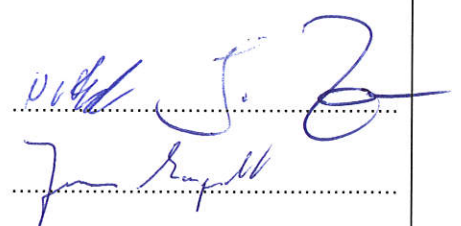
General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

Version History

Version	Issue Date	Remarks	Revised by
V01	2017-08-23	Initial Release	



REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	5
1.1	Photos – Equipment external	6
1.2	Photos – Equipment internal	11
1.3	Photos – Test setup	13
1.4	Supporting Equipment Used During Testing	16
1.5	Input / Output Ports	16
1.6	Operating Modes and Configurations	17
1.7	Test Equipment Used During Testing	18
1.8	Sample emission level calculation	19
2	RESULT SUMMARY	20
3	TEST CONDITIONS AND RESULTS	21
3.1	Test Conditions and Results – Radiated emissions	21
3.2	Test Conditions and Results – AC power line conducted emissions	31

1 Equipment (Test item) Description

Description	Energy module with haptical user interface + bluetooth interface for toy building set
Model	Powerbrain 2IM.1PB.300
Additional Models	None
Serial number	None
Hardware version	2IM.1PB.300
Software / Firmware version	Powerbrain Version 0.1
Contains FCC-ID	N/A
Contains IC	N/A
Power supply	9 V DC via rechargeable battery
AC/DC-Adaptor	Model : HNP06US-090L6 Manufacturer : HN Electronic Components GmbH & Co. KG Input : 100-240 V AC / 50-60Hz Output : 9.0 V DC 840 mA
Manufacturer	Grünwald Electronic GmbH Ringbahnstraße 123 12103 Berlin Germany
Highest emission frequency	Fmax [MHz] = 2483.5
Device classification	Class B
Equipment type	Tabletop
Number of tested samples	1

1.1 Photos – Equipment external

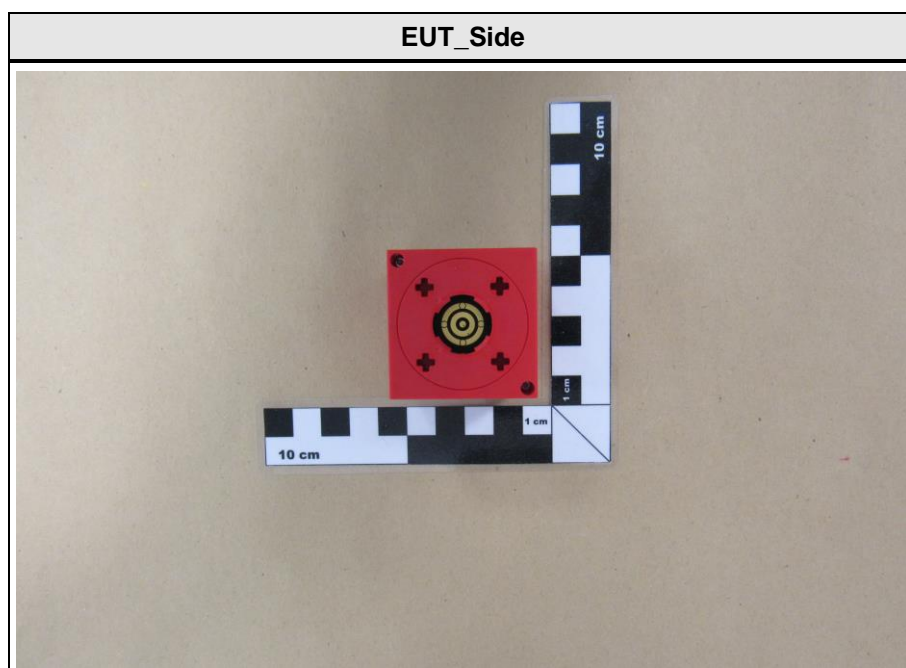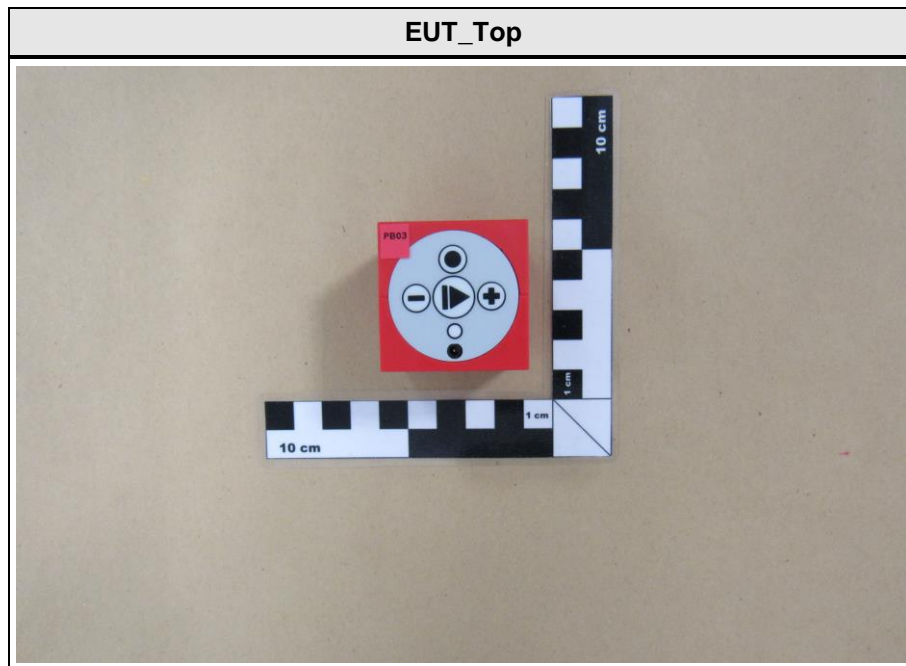

EUT_Bottom



EUT_AC/DC Adapter




EUT_AC/DC Adapter Plug in




EUT_AC/DC Adapter Label




AE_Grabber

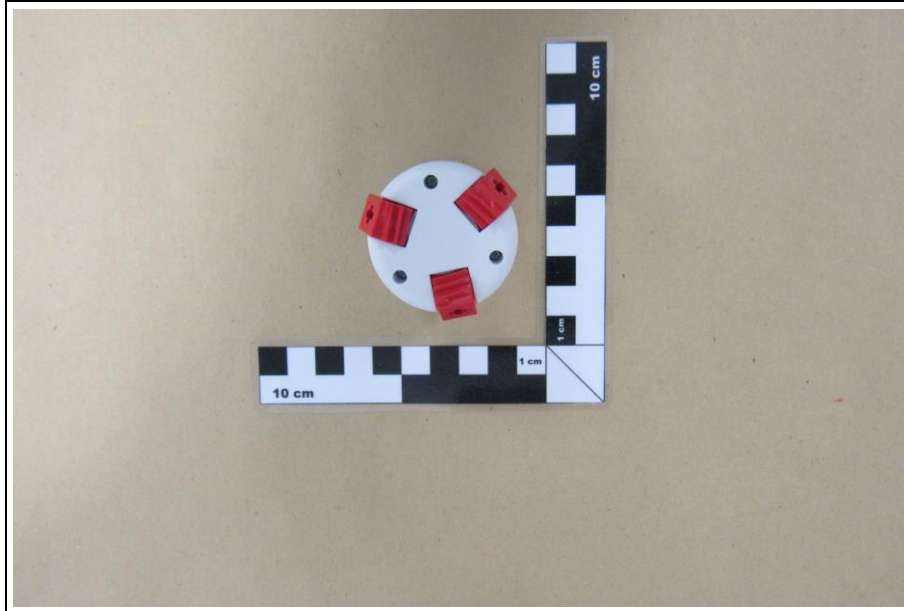

AE_Motor

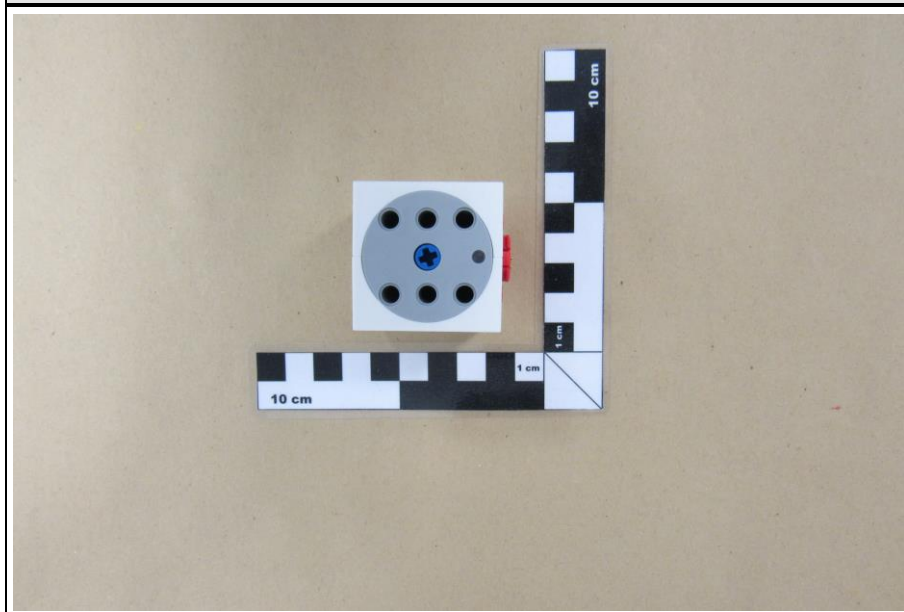



AE_Pivot

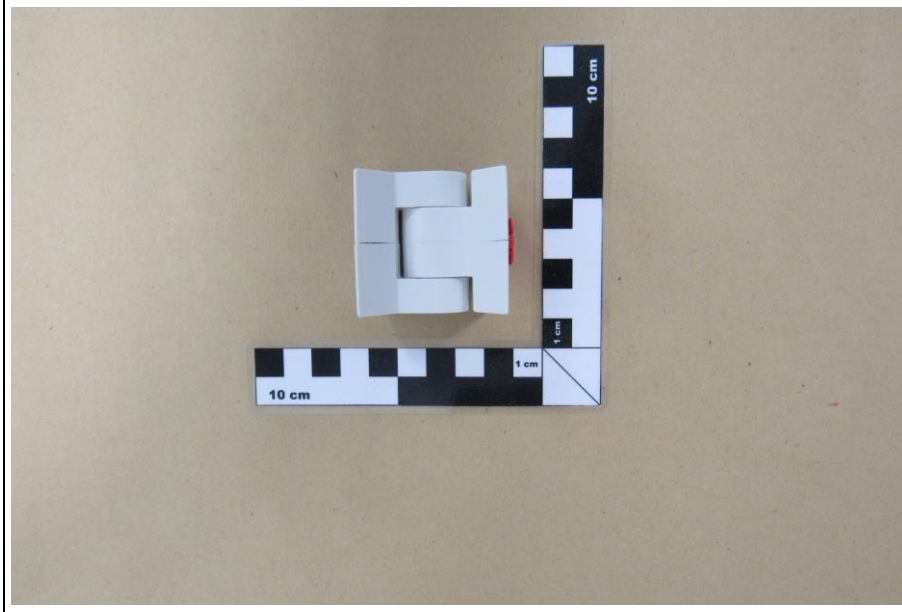


AE_Twister




1.2 Photos – Equipment internal

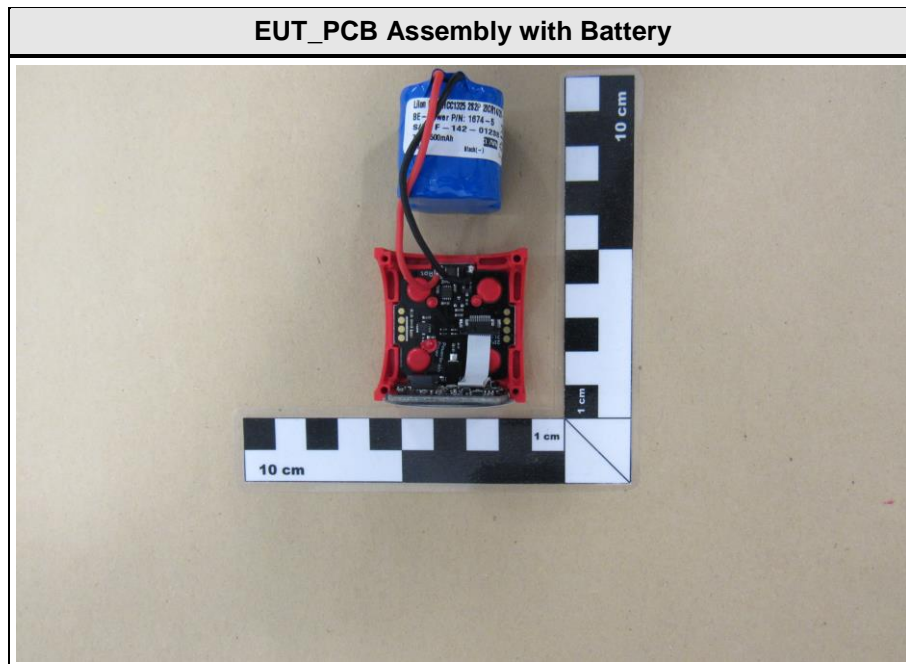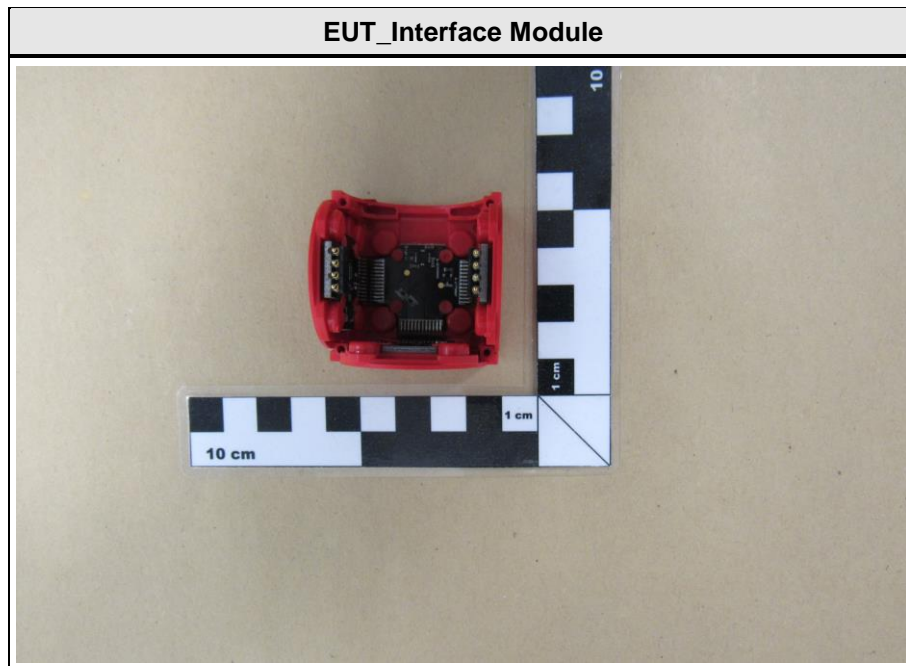



EUT_Control PCB

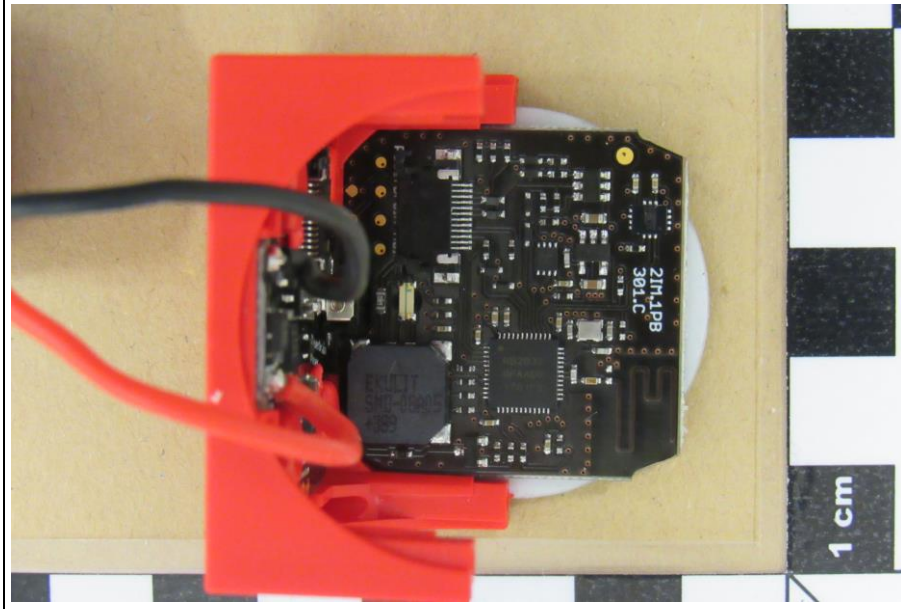


EUT_Power PCB

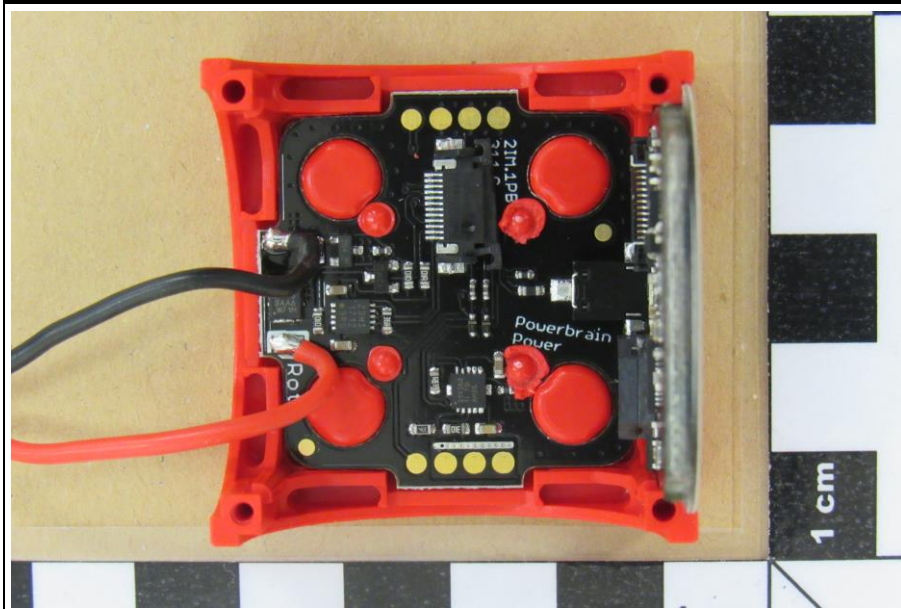


1.3 Photos – Test setup

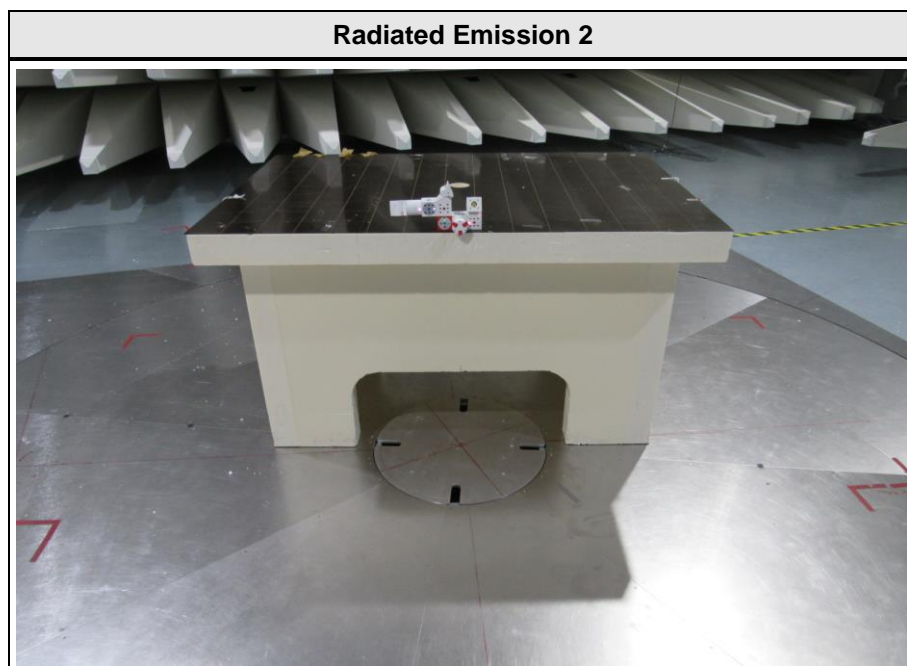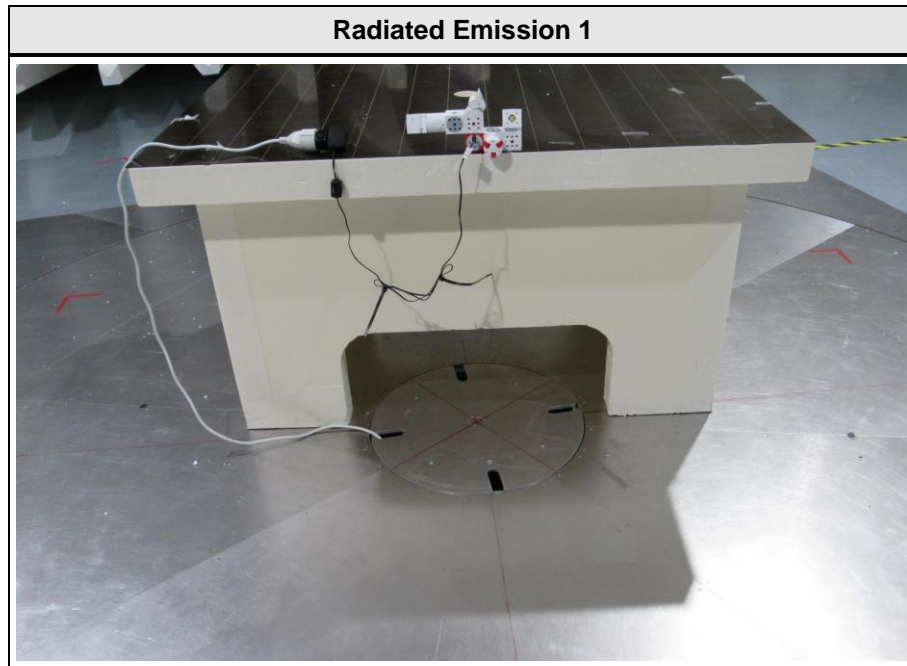

Radiated Emission 3

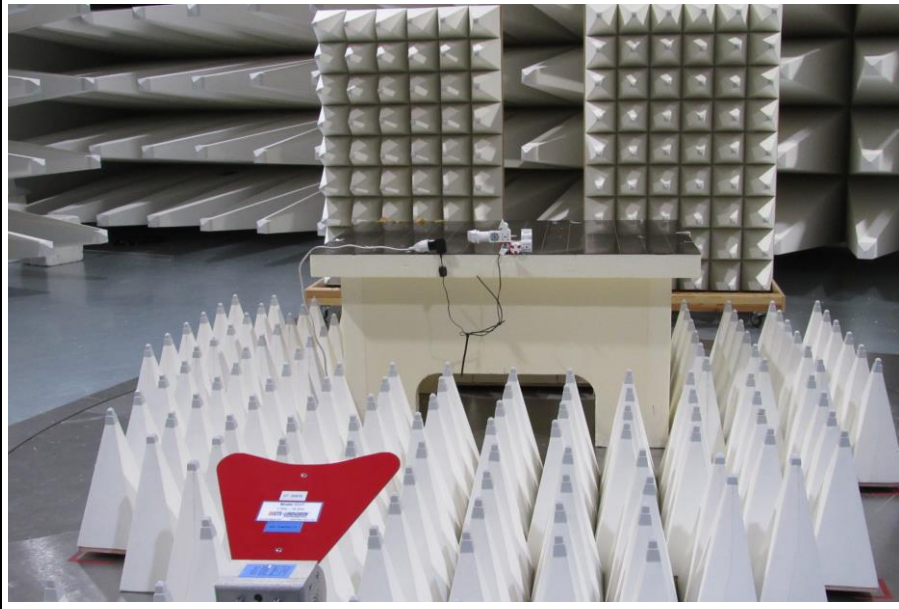

Conducted Emission

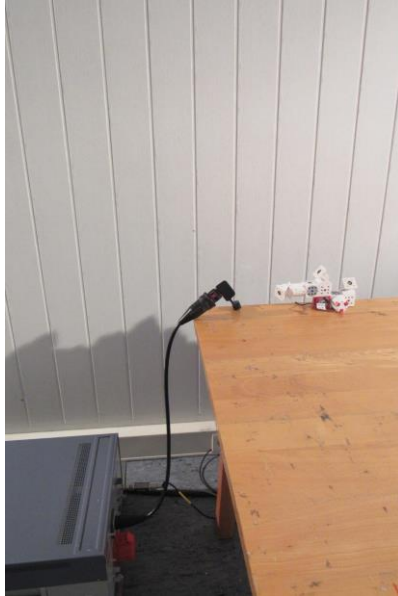

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments (e.g. serial no.)
AE	Tablet	Hisense	F5281	FCC ID: W9HPADP0006
<p>*Note: Use the following abbreviations:</p> <p>AE : Auxiliary/Associated Equipment, or</p> <p>SIM : Simulator (Not Subjected to Test)</p> <p>CABL : Connecting cables</p>				

1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments (e.g. Cat. of Cable)
1	Charger	AC	> 3 m	No	Charger connected to DC-Jack, no other functions allowed,
<p>*Note: Use the following abbreviations:</p> <p>AC : AC power port</p> <p>DC : DC power port</p> <p>N/E : Non electrical</p> <p>I/O : Signal input or output port</p> <p>TP : Telecommunication port</p>					

1.6 Operating Modes and Configurations

Mode #	Description
1	BT-Link; loop for all modules
2	charging

Configuration #	EUT Configuration
1	Powerbrain connected with Pivot (3x), Motor (4x), Twister (1x), Grabber (1x)

1.7 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2016.1.10

Conducted emissions SR1					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2017-01	2019-01
AMN	R&S	ESH3-Z5	EF00036	2017-01	2019-01
EMI Test Receiver	R&S	ESR7	EF00943	2016-10	2017-10
Cable	-	RG223/U	-	System Cal.	System Cal.

Radiated emissions AC6					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
TRILOG Broadband Antenna	Schwarzbeck	VULB 9162	EF00978	2016-11	2017-11
Double-Ridged Guide Antenna	ETS-Lindgren	3117	EF00976	2016-03	2019-03
EMI Test Receiver	R&S	ESU26	EF00887	2017-01	2018-01
RF Cable	Huber & Suhner	Sucoflex 106	-	System Cal.	System Cal.
RF Cable	Huber & Suhner	Multiflex 141	-	System Cal.	System Cal.

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada ICES-003				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 ICES-003 Item 6.2	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 ICES-003 Item 6.1	AC power line conducted emissions	ANSI C63.4	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / ICES-003				Verdict: PASS		
Laboratory Parameters:		Required prior to the test		During the test		
Ambient Temperature		15 to 35 °C		26 °C +/- 2 K		
Relative Humidity		30 to 60 %		50 % +/- 10 %		
Test according referenced standards		Reference Method				
		ANSI C63.4				
Sample is tested with respect to the requirements of the equipment class		Equipment class				
		Class B				
Test frequency range determined from highest emission frequency		Highest emission frequency				
		Fmax [MHz] = 2480				
Fully configured sample scanned over the following frequency range		Frequency range				
		30 MHz to 13 GHz				
Operating mode		1 / 2				
Configuration		1				
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments: charger used with Würth-Ferrit 742 711 31						

Test Procedure:

The test site is in accordance with ANSI C63-4:2014 requirements and is listed by FCC.

The measurement procedure is as follows:

Exploratory measurement:

- The EUT was placed on a non-conductive table at a height of 0.8m.
- The EUT and support equipment, if needed, were set up to simulate typical usage.
- Cables, of type and length specified by the manufacturer, were connected to at least one port of each type and were terminated by a device or simulating load of actual usage.
- The antenna was placed at a distance of 3 or 10 m.
- The received signal was monitored at the measurement receiver.
 - Cables not bundled were manipulated within the range of likely arrangements to produce the highest emission amplitude
 - To maximize the suspected emissions the EUT is rotated 360 degrees. If the signal exceeds the previous amplitude, go back to the corresponding azimuth and manipulate the cables again for maximizing the emissions if possible.
 - Move the antenna from 1 to 4m to maximize the suspected highest amplitude signal.
- This procedure has to be performed in both antenna polarizations, horizontal and vertical.
- The arrangement of the equipment with the maximum emission level is shown on the setup picture at item 1.3.

Final measurement:


- The EUT was placed on a 0.8 m non-conductive table at a 3 m distance from the receive antenna. The antenna output was connected to the measurement receiver
- A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- The EUT and cable arrangement were based on the exploratory measurement results
- Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.
- The test data of the worst-case conditions were recorded and shown on the next pages.

Radiated emissions according to FCC 15B

Project number: G0M-1707-6706

Applicant: Kinematics GmbH
 EUT Name: Energy module with haptical user interface + bluetooth interface for toy building set
 Model: Powerbrain 2IM.1PB.300
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 27°C, Unom: 7.2 V via internal Battery
 Antenna: Schwarzbeck VULB 9162, Horizontal
 Measurement distance: 3 m
 Mode: BT-link; loop for all modules
 Test Date: 2017-08-15
 Note:

Index 2

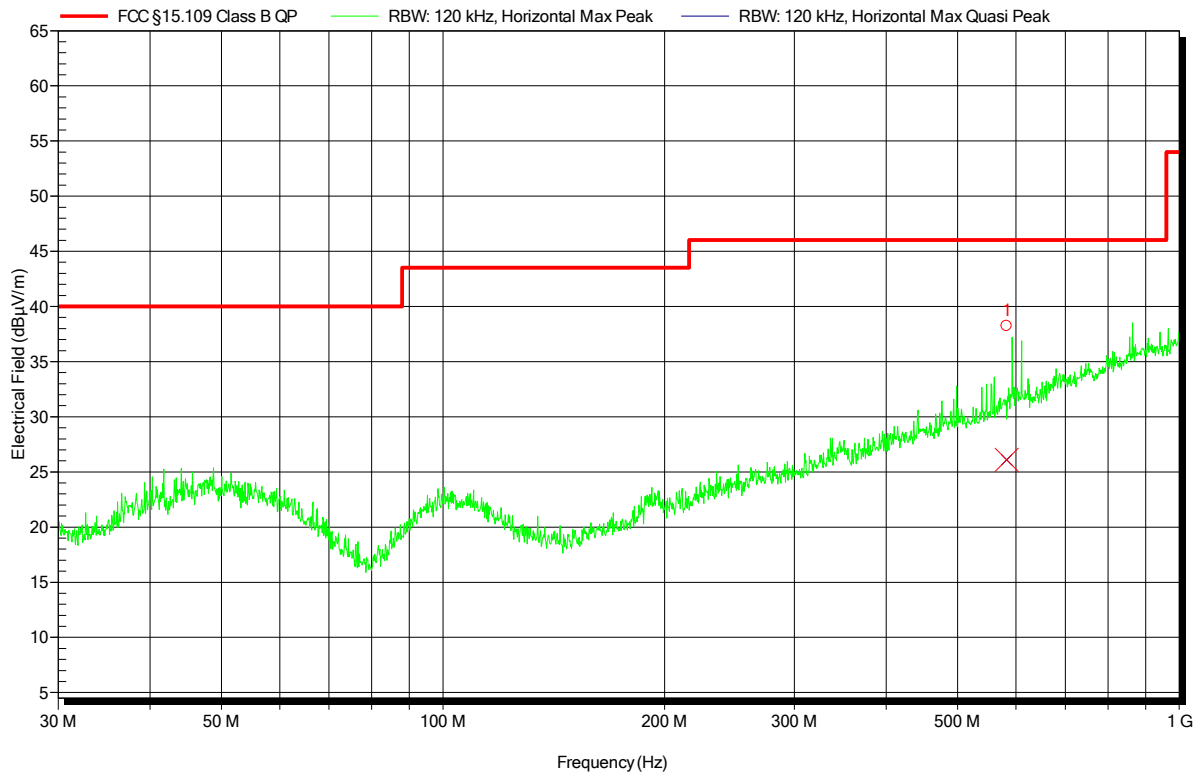


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	582.9 MHz	26.1 dBµV/m	46 dBµV/m	-19.9 dB	Pass	180 Degree	1.05 m

Radiated emissions according to FCC 15B

Project number: G0M-1707-6706

Applicant: Kinematics GmbH
 EUT Name: Energy module with haptical user interface + bluetooth interface for toy building set
 Model: Powerbrain 2IM.1PB.300
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 27°C, Unom: 7.2 V via internal Battery
 Antenna: Schwarzbeck VULB 9162, Horizontal
 Measurement distance: 3 m
 Mode: BT-Link
 Test Date: 2017-08-15
 Note:

Index 6

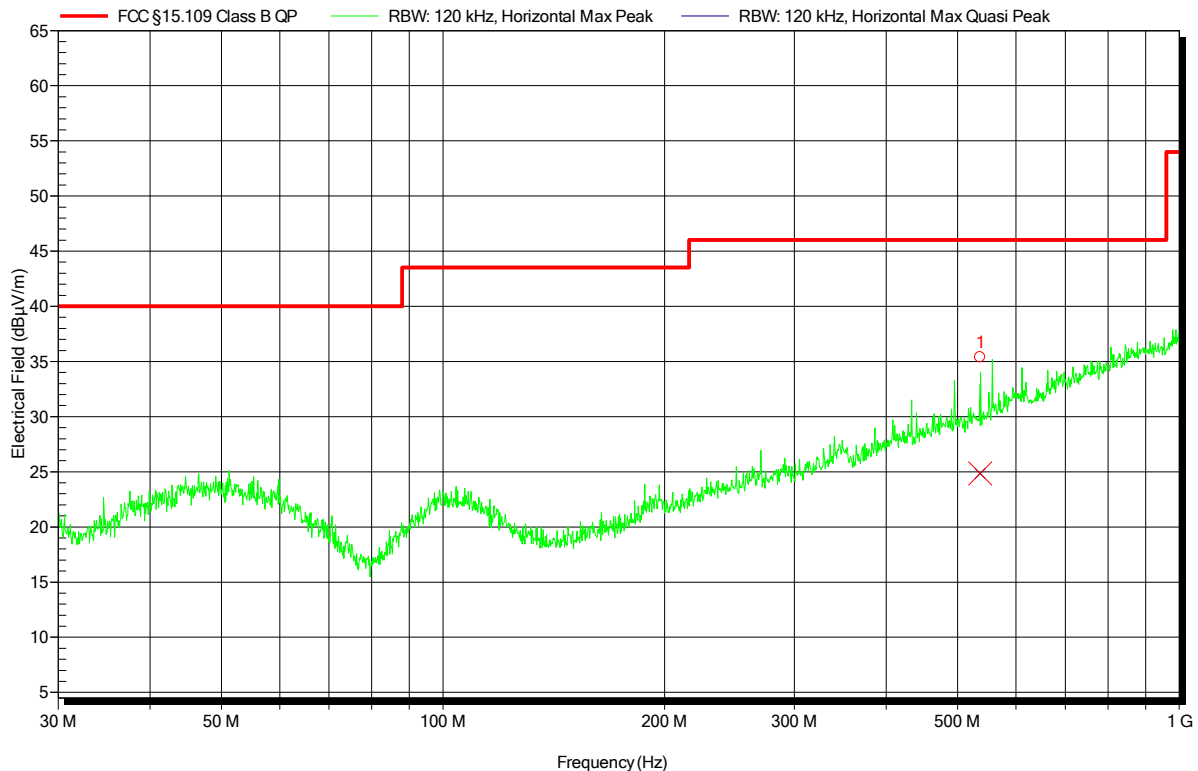


Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	536.46 MHz	24.8 dBμV/m	46 dBμV/m	-21.2 dB	Pass	180 Degree	1.05 m

Radiated emissions according to FCC 15B

Project number: G0M-1707-6706

Applicant:	Kinematics GmbH
EUT Name:	Energy module with haptical user interface + bluetooth interface for toy building set
Model:	Powerbrain 2IM.1PB.300
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 27°C, Unom: 7.2 V via internal Battery
Antenna:	ETS-Lindgren 3117, Vertical
Measurement distance:	3 m
Mode:	BT-Link
Test Date:	2017-08-18
Note:	

Index 23

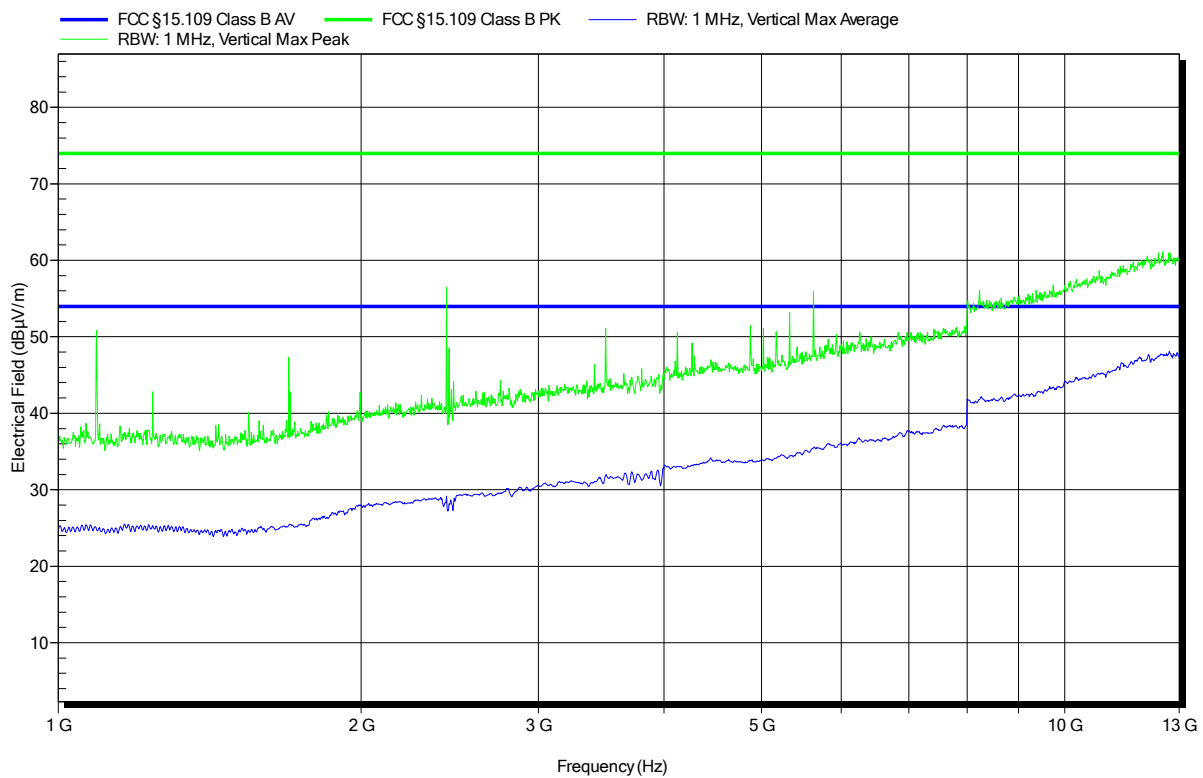


Radiated emissions according to FCC 15B

Project number: G0M-1707-6706

Applicant: Kinematics GmbH
 EUT Name: Energy module with haptical user interface + bluetooth interface for toy building set
 Model: Powerbrain 2IM.1PB.300
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 27°C, Unom: 7.2 V via internal Battery
 Antenna: ETS-Lindgren 3117, Horizontal
 Measurement distance: 3 m
 Mode: BT-Link
 Test Date: 2017-08-18
 Note:

Index 24

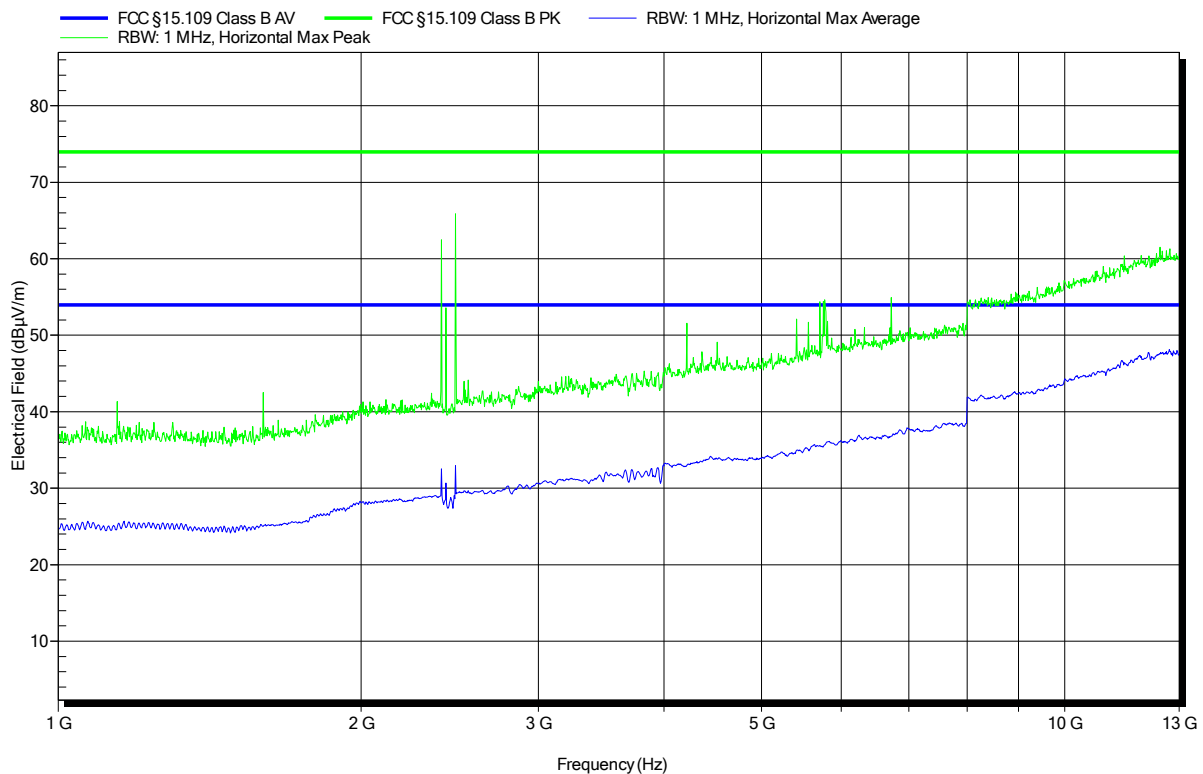

Test Report No.: G0M-1707-6706-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions according to FCC 15B

Project number: G0M-1707-6706

Applicant: Kinematics GmbH
 EUT Name: Energy module with haptical user interface + bluetooth interface for toy building set
 Model: Powerbrain 2IM.1PB.300
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 27°C, Unom: 7.2 V via internal Battery
 Antenna: Schwarzbeck VULB 9162, Vertical
 Measurement distance: 3 m
 Mode: charging
 Test Date: 2017-08-18
 Note:

Index 17

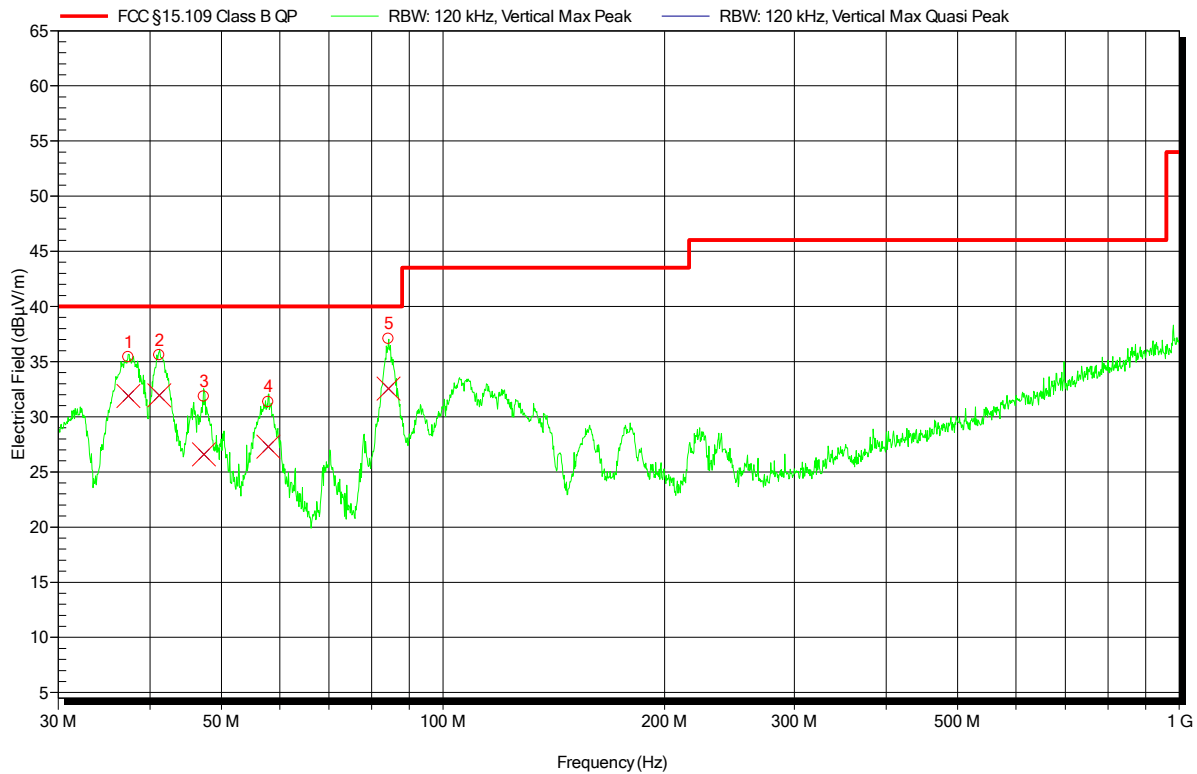

Peak Number	Frequency	Quasi-Peak	Quasi-Peak Limit	Quasi-Peak Difference	Quasi-Peak Status	Angle	Height
1	37.38 MHz	31.9 dBμV/m	40 dBμV/m	-8.1 dB	Pass	90 Degree	1.45 m
2	41.16 MHz	31.9 dBμV/m	40 dBμV/m	-8.1 dB	Pass	90 Degree	1.45 m
3	47.34 MHz	26.6 dBμV/m	40 dBμV/m	-13.4 dB	Pass	90 Degree	1.45 m
4	57.9 MHz	27.3 dBμV/m	40 dBμV/m	-12.7 dB	Pass	90 Degree	1.45 m
5	84.3 MHz	32.6 dBμV/m	40 dBμV/m	-7.4 dB	Pass	90 Degree	1.45 m

Test Report No.: G0M-1707-6706-EF0115B-V01


Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Radiated emissions according to FCC 15B

Project number: G0M-1707-6706

Applicant:	Kinematics GmbH
EUT Name:	Energy module with haptical user interface + bluetooth interface for toy building set
Model:	Powerbrain 2IM.1PB.300
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 27°C, Unom: 7.2 V via internal Battery
Antenna:	Schwarzbeck VULB 9162, Horizontal
Measurement distance:	3 m
Mode:	charging
Test Date:	2017-08-18
Note:	

Index 18

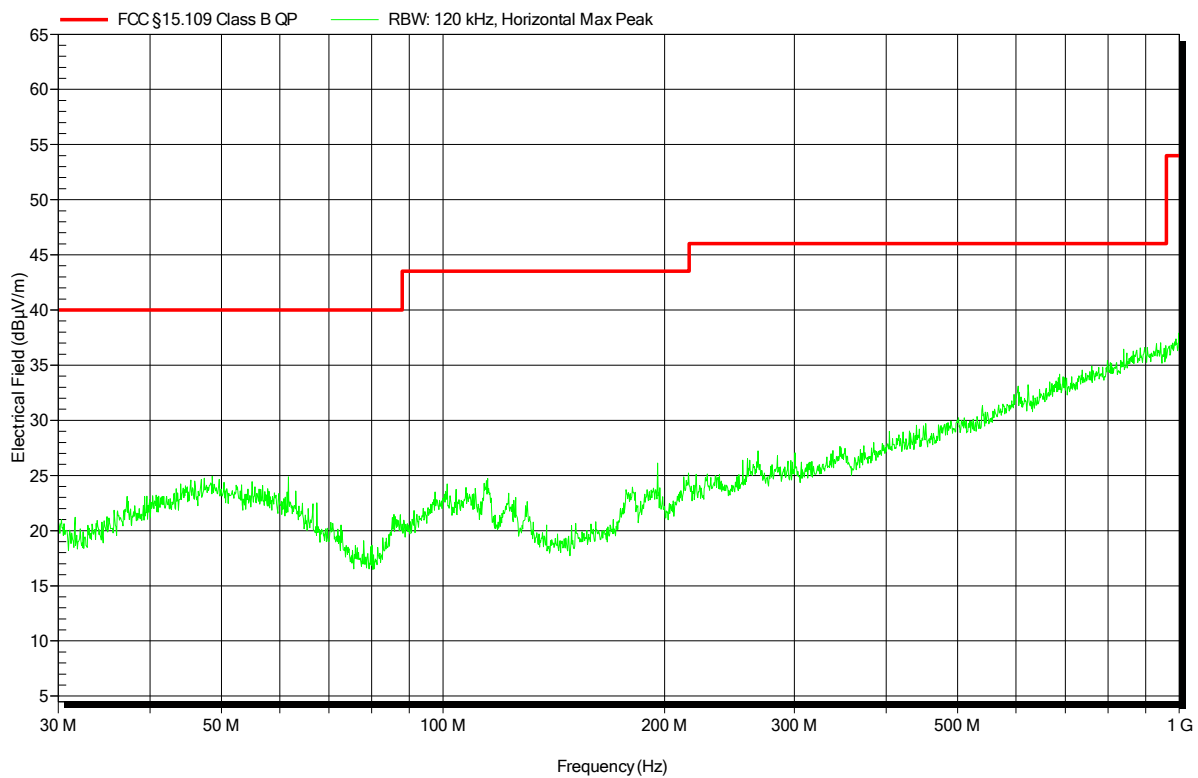


Radiated emissions according to FCC 15B

Project number: G0M-1707-6706

Applicant: Kinematics GmbH
 EUT Name: Energy module with haptical user interface + bluetooth interface for toy building set
 Model: Powerbrain 2IM.1PB.300
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 27°C, Unom: 7.2 V via internal Battery
 Antenna: ETS-Lindgren 3117, Vertical
 Measurement distance: 3 m
 Mode: charging
 Test Date: 2017-08-18
 Note:

Index 20

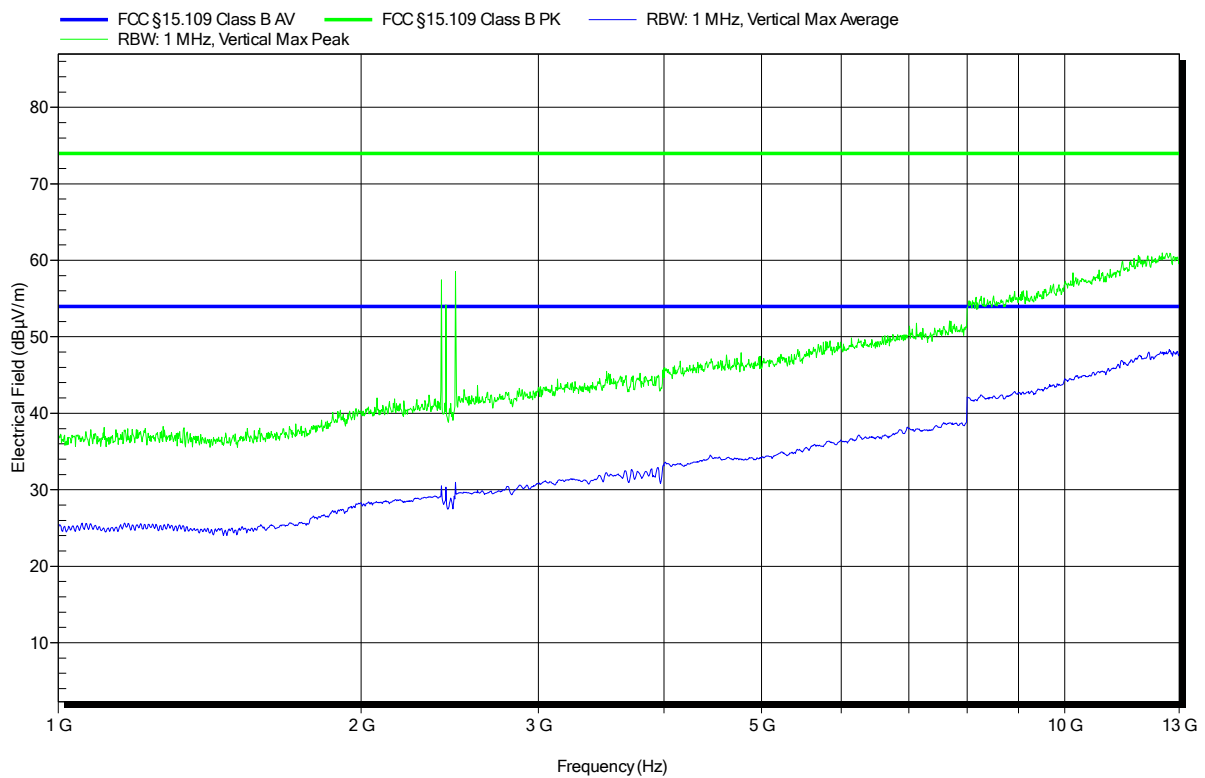


Radiated emissions according to FCC 15B

Project number: G0M-1707-6706

Applicant: Kinematics GmbH
 EUT Name: Energy module with haptical user interface + bluetooth interface for toy building set
 Model: Powerbrain 2IM.1PB.300
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Belz
 Test Conditions: Tnom: 27°C, Unom: 7.2 V via internal Battery
 Antenna: ETS-Lindgren 3117, Horizontal
 Measurement distance: 3 m
 Mode: charging
 Test Date: 2017-08-18
 Note:

Index 21

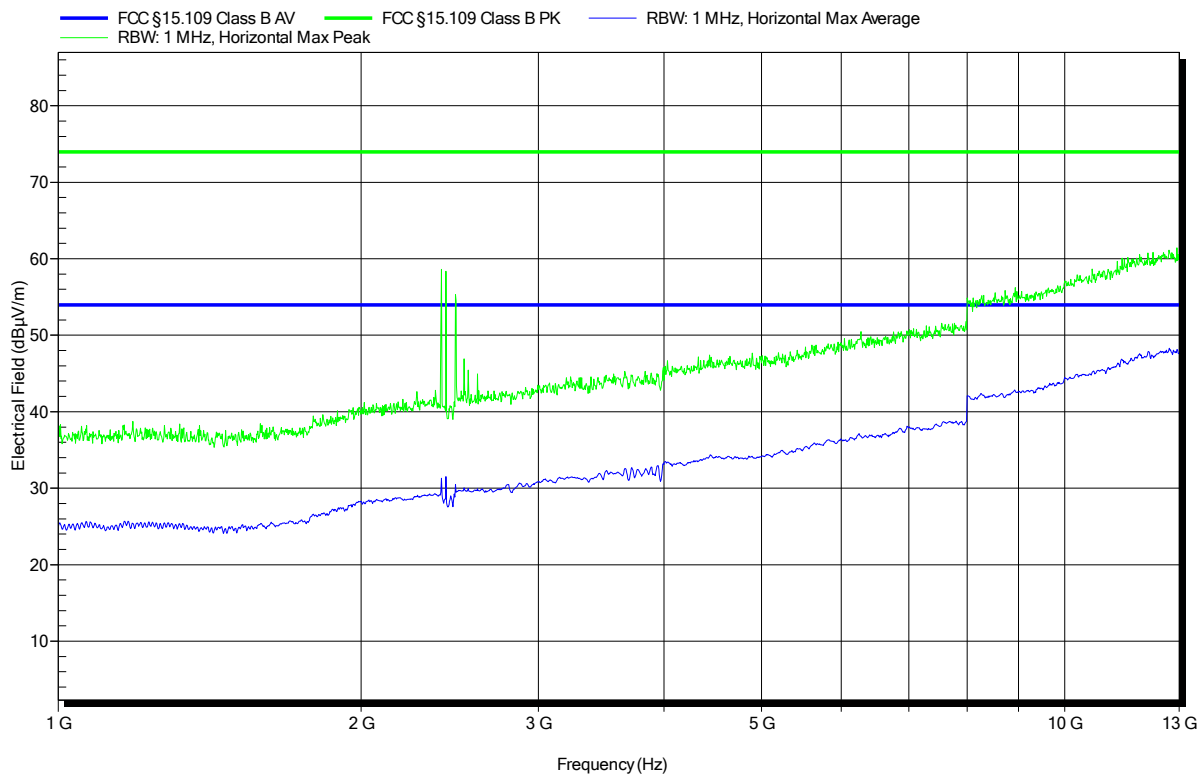

3.2 Test Conditions and Results – AC power line conducted emissions

Conducted emissions acc. FCC 47 CFR 15.107 / ICES-003			Verdict: PASS	
Laboratory Parameters:		Required prior to the test		During the test
Ambient Temperature		15 to 35 °C		26 °C +/- 2 K
Relative Humidity		30 to 60 %		50 % +/- 10 %
Test according referenced standards		Reference Method		
		ANSI C63.4		
Fully configured sample scanned over the following frequency range		Frequency range		
		0.15 MHz to 30 MHz		
Sample is tested with respect to the requirements of the equipment class		Equipment class		
		Class B		
Points of Application		Application Interface		
AC Mains		LISN		
Operating mode		2		
Configuration		1		
Limits and results Class B				
Frequency [MHz]	Quasi-Peak [dBµV]	Result	Average [dBµV]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments:				
* Limit decreases linearly with the logarithm of the frequency.				

Test Procedure:

The test site is in accordance with ANSI C63-4:2014 requirements and is listed by FCC.
The measurement procedure is as follows:

Exploratory measurement:

- The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
- The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- The LISN measurement port was connected to a measurement receiver
- I/O cables were bundled not longer than 0.4 m
- Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor
- To maximize the emissions the cable positions were manipulated
- The worst configuration of EUT and cables is shown on a test setup picture at item 1.3

Test Procedure:**Final measurement:**


- The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2014 item 7.3.1)
- The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- The LISN measurement port was connected to a measurement receiver
- The EUT and cable arrangement were based on the exploratory measurement results
- The test data of the worst-case conditions were recorded and shown on the next pages.

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1707-6706

Applicant:	Kinematics GmbH
EUT Name:	Energy module with haptical user interface + bluetooth interface for toy building set
Model:	Powerbrain 2IM.1PB.300
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 22°C, Unom: 120 VAC (AC/DC adapter)
LISN:	ESH2-Z5 N
Mode:	charging
Test Date:	2017-08-22
Note:	PASS

Index 26

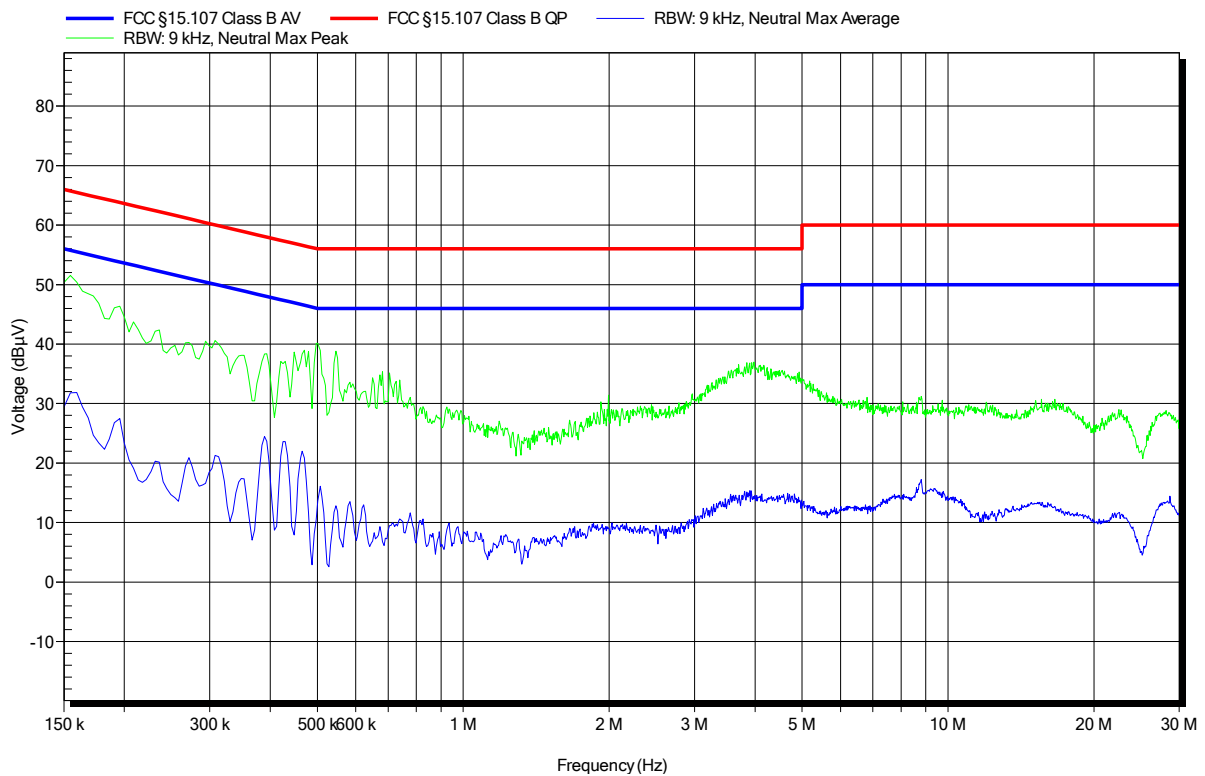

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1707-6706

Applicant:	Kinematics GmbH
EUT Name:	Energy module with haptical user interface + bluetooth interface for toy building set
Model:	Powerbrain 2IM.1PB.300
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Belz
Test Conditions:	Tnom: 22°C, Unom: 120 VAC (AC/DC adapter)
LISN:	ESH2-Z5 L
Mode:	charging
Test Date:	2017-08-22
Note:	PASS

Index 27

