

**Produkte**  
*Products*

<b>Prüfbericht - Nr.:</b> 19660185 001		<b>Seite 1 von 28</b>	
<i>Test Report No.:</i>		<i>Page 1 of 28</i>	
<b>Auftraggeber:</b> <i>Client:</i>		American Megatrends India Private Limited Kumaran Nagar, Off Old Mahabalipuram Road Semmanchery, Chennai-600119, India	
<b>Gegenstand der Prüfung:</b> <i>Test item:</i>		Chest ECG	
<b>Bezeichnung:</b> <i>Identification:</i>	VA07	<b>Serien-Nr.:</b> <i>Serial No.</i>	Engineering Sample
<b>Wareneingangs-Nr.:</b> <i>Receipt No.:</i>	1803095548	<b>Eingangsdatum:</b> <i>Date of receipt:</i>	26.08.2015
<b>Prüfart:</b> <i>Testing location:</i>		Refer Page 4 of 28 for test facilities	
<b>Prüfgrundlage:</b> <i>Test specification:</i>		FCC Part 15 Subpart C ANSI C63.10-2013	
<b>Prüfresultat:</b> <i>Test Result:</i>		Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n). <i>The test items passed the test specification(s).</i>	
<b>Prüflaboratorium:</b> <i>Testing Laboratory:</i>		TÜV Rheinland (India) Pvt. Ltd. 82/A, 3rd Main, West Wing, Electronic City Phase 1 Hosur Road, Bangalore – 560 100, India  FCC Registration No.: 176555	
<b>geprüft / tested by:</b>		<b>kontrolliert / reviewed by:</b>	
15.09.2015 Girish Kumar.G Test Engineer		18.09.2015 Raghavendra Kulkarni Sr. Manager	
<b>Datum</b> <i>Date</i>	<b>Name/Stellung</b> <i>Name/Position</i>	<b>Unterschrift</b> <i>Signature</i>	<b>Unterschrift</b> <i>Signature</i>
<b>Sonstiges / Other Aspects:</b> FCC ID :2AFV6-AMI-ECG-01			
<b>Abkürzungen:</b> P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet		<b>Abbreviations:</b> P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested	
<p><b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b></p> <p><i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i></p>			

TÜV Rheinland India Pvt. Ltd. 82/A, 3rd Main, West Wing Electronic City Phase 1, Hosur Road, Bangalore-560100, India  
Tel.: +9180 6723 3500 · Fax: +9180 6723 3542 · Web: www.tuv.com

**Test Result Summary**

<b>Clause</b>	<b>Test Item</b>	<b>Result</b>
FCC 15.203 and 15.204	Antenna Requirement	Pass
FCC 15.247(b) (3)	Maximum Peak Conducted Output Power	Pass
FCC 15.247(a) (2)	DTS Bandwidth	Pass
FCC 15.247(e)	Maximum Power Spectral Density	Pass
FCC 15.247(d)	Emissions in non-restricted frequency bands	Pass
FCC 15.209 / FCC 15.205	Spurious Radiated Emissions and Restricted Bands of Operation	Pass
FCC 15.207	Conducted emission test on a.c Power line	Pass

**Note:** Conducted measurements are done according to the procedure given in KDB No. **558074**  
**D01 DTS Meas Guidance v03r02**

# Content

<b>List of Test and Measurement Instruments.....</b>	<b>4</b>
<b>General Product Information .....</b>	<b>5</b>
Product Function and Intended Use .....	5
Ratings and System Details.....	5
<b>Test Set-up and Operation Mode.....</b>	<b>6</b>
Principle of Configuration Selection .....	6
Test Operation and Test Software .....	6
Test Modes – Data Rates and Modulations .....	6
<b>Test Methodology .....</b>	<b>7</b>
Radiated Emission Test .....	7
Conducted Emission Test on A.C. mains line .....	7
<b>Test Results .....</b>	<b>8</b>
Antenna Requirement	Section 15.203 and 15.204 .....8
Maximum Peak Conducted Output Power	Section 15.247(b) (3) .....9
Maximum Power Spectral Density	Section 15.247(e).....12
DTS Bandwidth	Section 15.247(a) (2) .....15
Emissions in non-restricted frequency bands	Section 15.247(d).....18
Spurious Radiated Emissions and Restricted Bands of Operation	Section 15.209 and 15.205...23
Conducted Emission Test on A.C. Power Line	Section 15.207.....26
 Appendix 1: Test Setup Photo	
Appendix 2: EUT External Photo	
Appendix 3: EUT Internal Photo	
Appendix 4: FCC Label and Label Location	
Appendix 5: Block Diagram	
Appendix 6: Specification of EUT	
Appendix 7: Schematic Diagrams	
Appendix 8: Bill of Material	
Appendix 9: User Manual	
Appendix 10: SAR Exclusion Calculation	

## List of Test and Measurement Instruments

### Testing Facilities

- 1) TÜV Rheinland (India) Pvt. Ltd.  
82/A, 3rd Main, West Wing, Electronic City,  
West Phase, Hosur Road  
Bangalore - 560 100.

Equipment	Manufacturer	Model Name	Serial Number	Calibration Due Date	Periodicity	Used for Test Items
Spectrum Analyser	Agilent Technologies	E4407B	US41192772	15.04.2016	Yearly	Antenna - Port Conducted Tests

- 2) TUV Rheinland (India) Private Limited  
108 , Beside ISBR Business School,  
Electronic city Phase I  
Bangalore - 560 100.

Equipment	Manufacturer	Model Name	Serial Number	Calibration Due Date	Periodicity	Used for Test Items
EMI Test Receiver	Rohde & Schwarz	ESU 40	100288	20.06.2016	Yearly	Spurious Radiated Emissions
Broadband Antenna	Frankonia	ALX-4000	ALX-4000-806	22.06.2016	Yearly	
Active Loop Antenna	Frankonia	LAX-10	LAX-10-800	22.06.2016	Yearly	
Broadband Horn Antenna	Frankonia	HAX-18	HAX18-802	22.06.2016	Yearly	
Emission Horn Antenna	ETS Lindgren	116706	00107323	22.06.2016	Yearly	
Anechoic Chamber	Frankonia	-	-	-	-	Conducted Emission on AC power lines
EMI Test Receiver	Rohde & Schwarz	ESR7	101133	19.11.2015	Yearly	
Two Line V-Network (LISN)	Rohde & Schwarz	ENV216	100022	04.09.2016	Yearly	

## General Product Information

### Product Function and Intended Use

Chest ECG device is a portable diagnostic system which can measure/monitor the electrical activity of the heart over a period of time using the ECG electrodes placed on the user's body. The device monitors the ECG waveform from the chest Left, Right alone with a reference Electrode. The acquired and processed ECG data obtained from the device is transmitted to a mobile device wirelessly for further processing and analysis. The ECG data acquired by the device can be used to obtain clinical consultation from cardiologists or healthcare practitioners.

### Ratings and System Details

Operating Frequency Range	2400MHz – 2483.50MHz
No. of channel	40
Channel Spacing	2MHz
Transmitted Power	0.87dBm
Number of antenna	One
Antenna Gain and Antenna type	0.5dBi and chip antenna
Supply Voltage to Module	5V DC from Power Charger
Environmental	Operational Temperature: 16°C to 35° C

### Test Conditions:

Supply Voltage: 5V DC from Power Charger

### Environmental conditions:

Temperature: +24.2 °C      RH: 58%

[www.tuv.com](http://www.tuv.com)

## **Test Set-up and Operation Mode**

### **Principle of Configuration Selection**

Transmission was enabled with 100% duty cycle on low, mid and high channel.

### **Test Operation and Test Software**

Test software was used to enable the transmission with 100% duty cycle, changing channels (low/mid/high) on the EUT for the tests in this report.

### **Special Accessories and Auxiliary Equipment**

- None

### **Countermeasures to achieve EMC Compliance**

- Testing was conducted with the Power adaptor cable connected to the AC mains (5v supply for charging EUT).

### **Test Modes – Data Rates and Modulations**

For Radiated spurious emissions, the tests were performed for all data rates and only worst case results are reported in this report.


www.tuv.com

## Test Methodology

### Radiated Emission Test


The radiated emission measurement was performed according to the procedures in ANSI C63.10 - 2013. The equipment under test (EUT) was placed at the middle of the 80 cm high turntable for below 1GHz and 150cm high turntable for above 1GHz, and the EUT is 3 meters far from the measuring antenna. The turntable was rotated 360° for obtaining the maximum emission. The height of the measuring antennas was scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained. The measurement above 1000MHz was performed by horn antenna. The measurement below 30MHz was performed by loop antenna.

The EUT was rotated around the X-, Y-, and Z-Axis and the results from worst case axis are recorded.

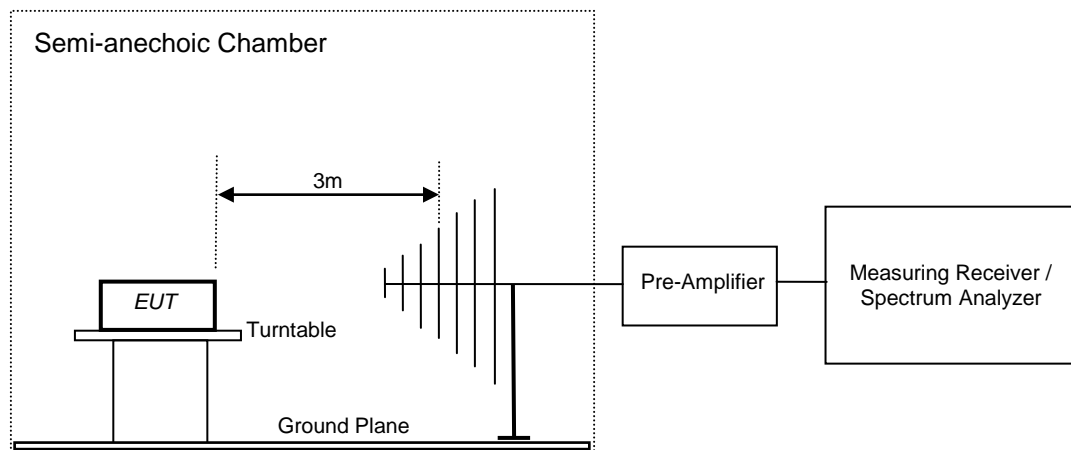

### Conducted Emission Test on A.C. mains line

The equipment under test (EUT) was placed on a wooden table 80cm above the ground plane, the LISN was placed 0.8m away from the EUT. The test was performed in accordance with ANSI C63.10 - 2013, with the following: an initial measurement was performed in peak and average detection mode on the live and neutral lines. The pre-scan was performed by peak detection on both live and neutral conductors. Any emissions recorded within 20dB of the relevant limit line were re-measured using quasi-peak and average detections, the 6 worst cases were recorded in the table of results.

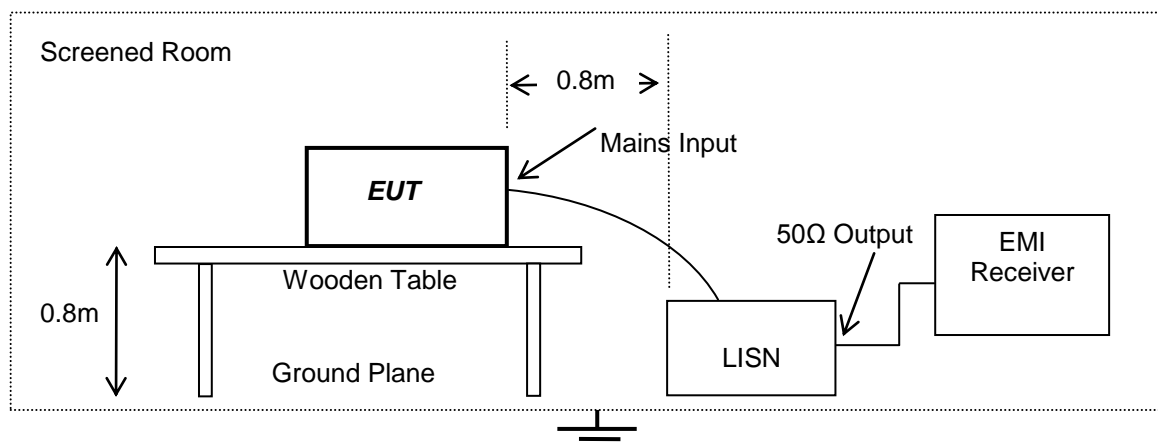

[www.tuv.com](http://www.tuv.com)  
**Test Results**

**Antenna Requirement**

**Section 15.203 and 15.204**

**Result**

**Pass**

**FCC Requirement:** No antenna other than that furnished by the responsible party shall be used with the device. Permanently attached antenna is used in the device.

**Antenna details:**

1. Antenna Type: Chip Antenna
2. Manufacturer: Johanson Technology
3. Model no.: 2450AT18A100
4. Peak Gain: 0.5dBi

**www.tuv.com**

**Maximum Peak Conducted Output Power**


**Section 15.247(b) (3)**

**Result**

**Pass**

Test Specification                      FCC Part 15 Subpart C  
Measurement Bandwidth (RBW)      300 kHz/1MHz  
Requirement                              <1 watt (30dBm).


**Test Method:**

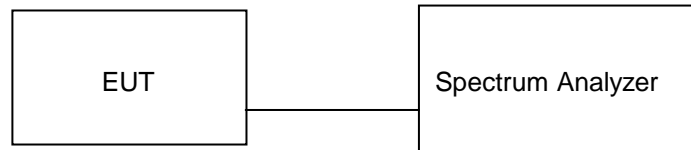


**Test Result:**

Channel Frequency (MHz)	Total Power (dBm)	Limit (dBm)	Margin (dB)
2402.00	-2.98	30.00	-32.98
2440.00	0.09	30.00	-29.91
2480.00	0.87	30.00	-29.13

www.tuv.com

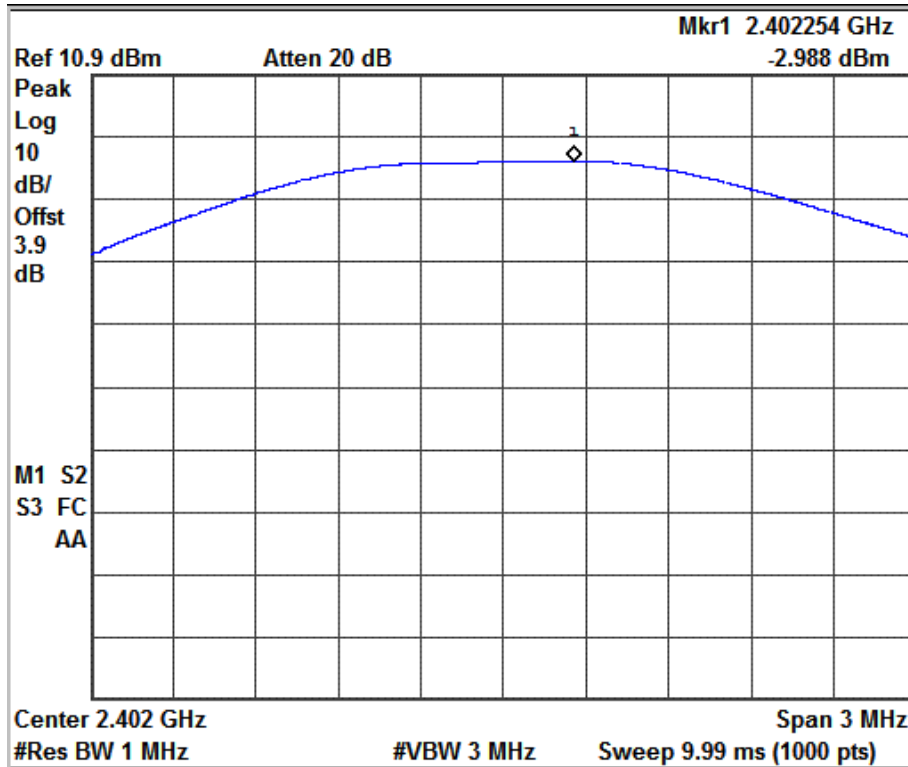


Channel Frequency: 2402 MHz

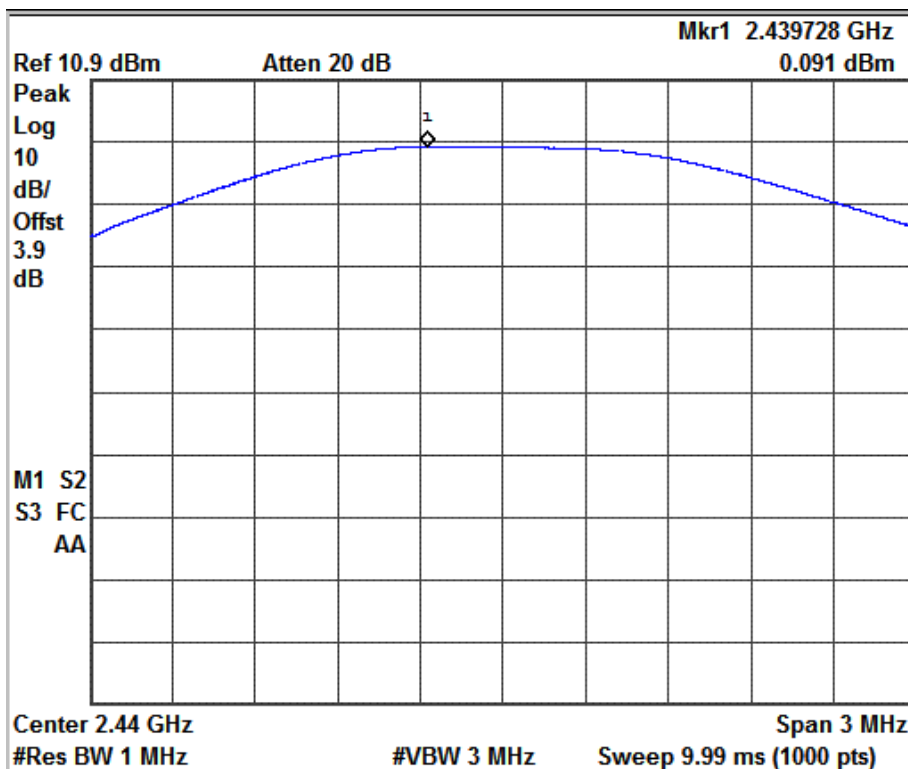

Channel Frequency: 2440 MHz

www.tuv.com

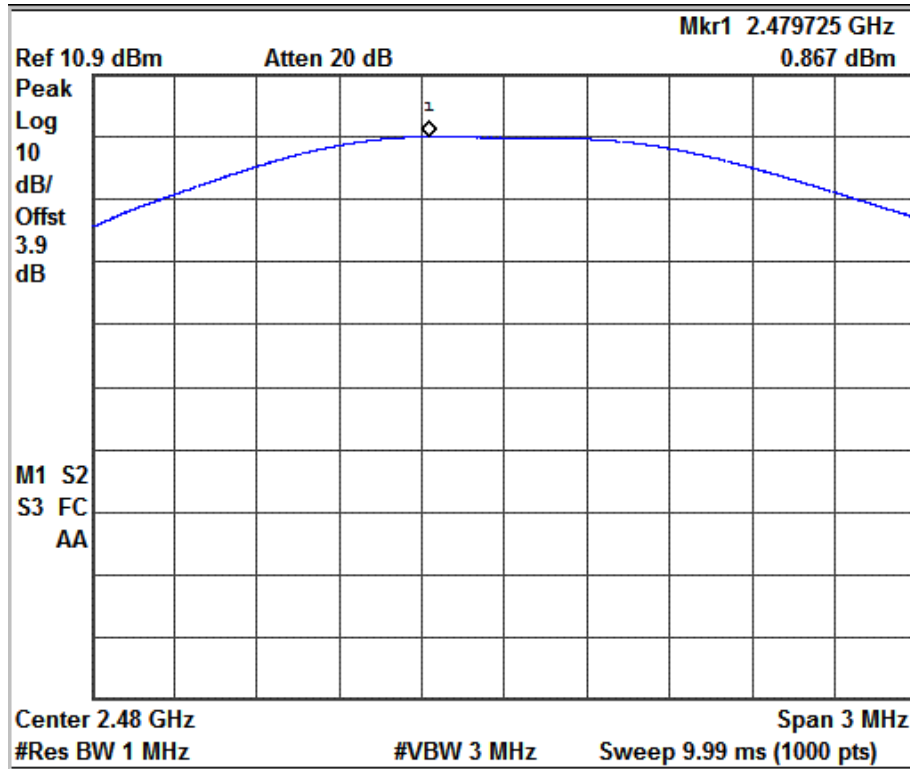

Channel Frequency: 2480 MHz

www.tuv.com

**Maximum Power Spectral Density**

**Section 15.247(e)**

**Result**


**Pass**

Test Specification  
Detector Function  
Requirement

FCC Part 15 Section 15.247 (e)  
Peak


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm.

**Test Method:**

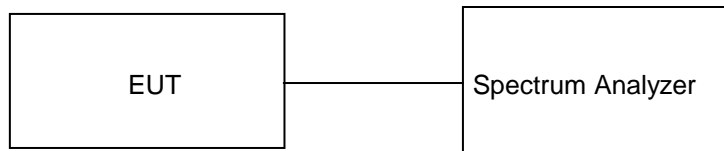


**Test Result:**

Channel Frequency (MHz)	Total PSD (dBm)	Limit (dBm)	Margin (dB)
2402.00	-3.46	8.00	-11.46
2440.00	-0.37	8.00	-08.37
2480.00	0.35	8.00	-7.65

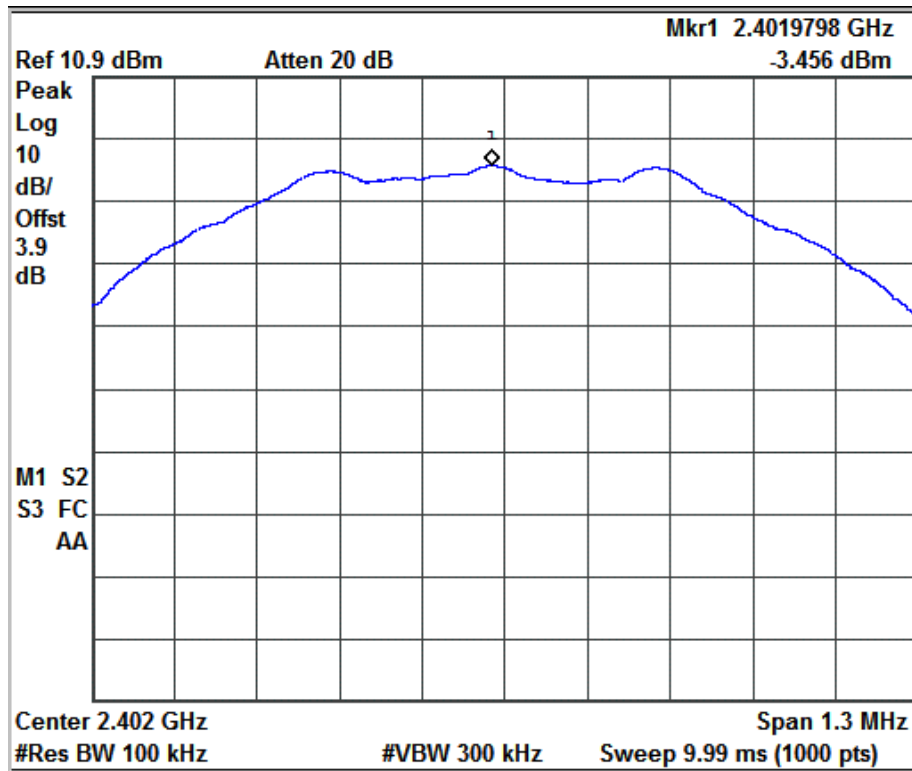


Channel Frequency: 2402 MHz

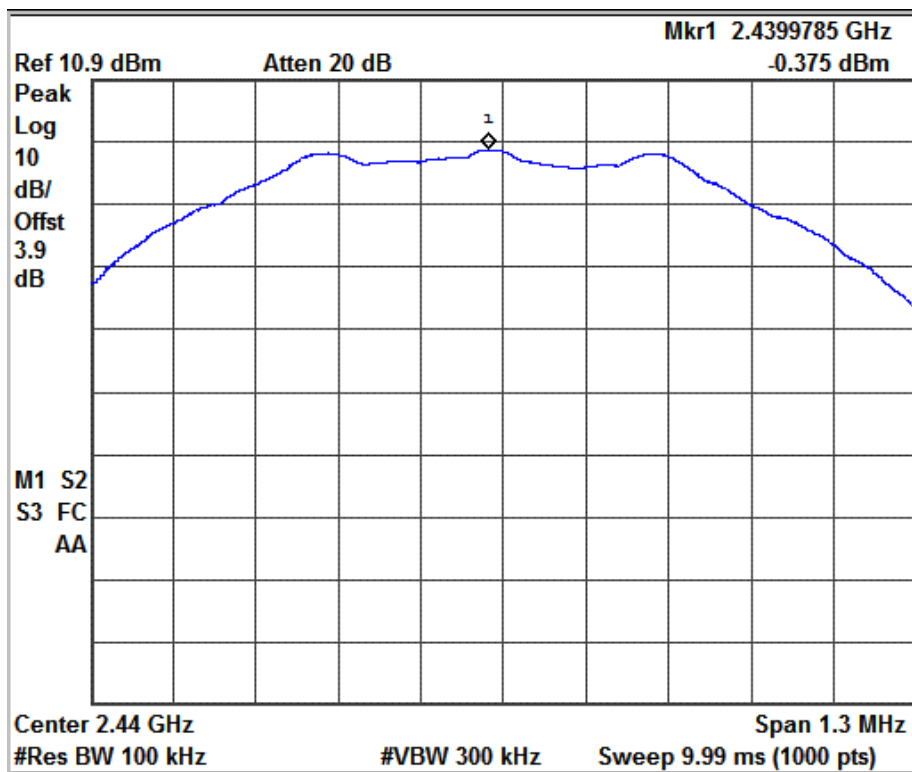

Channel Frequency: 2440 MHz

www.tuv.com

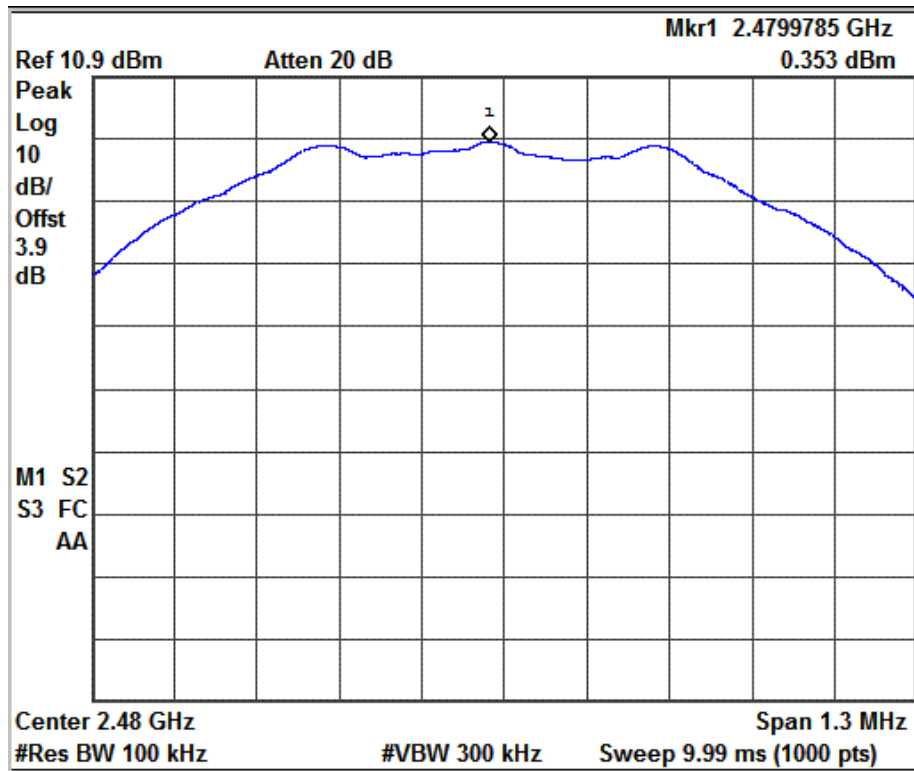

Channel Frequency: 2480 MHz

**www.tuv.com**  
**DTS Bandwidth**

**Section 15.247(a) (2)**


**Result**

**Pass**

Test Specification  
Requirement


FCC Part 15 Section 15.247 (a) (2)  
The minimum 6 dB bandwidth shall be at least 500 kHz.

**Test Method:**

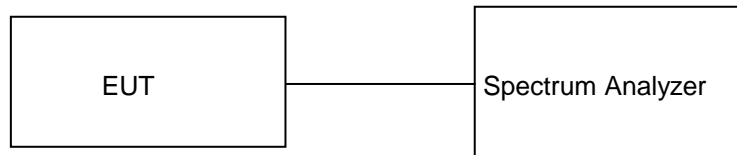


**Test Result:**

Channel Frequency (MHz)	6 dB Bandwidth (MHz)	99% OBW (MHz)
2402.00	0.74	1.05
2440.00	0.74	1.05
2480.00	0.74	1.05

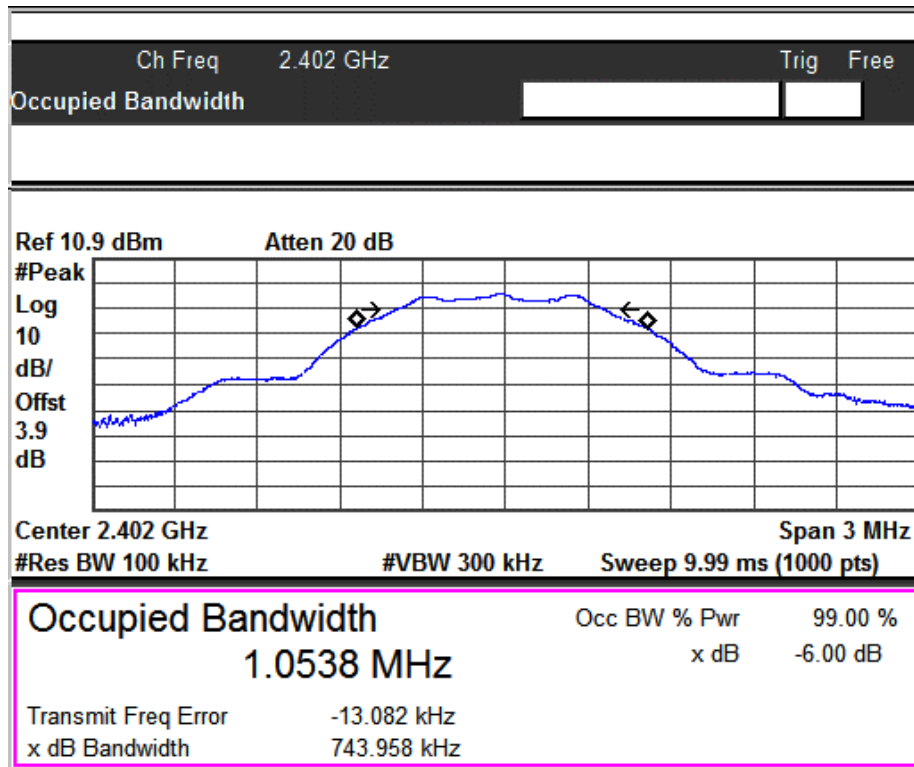


**Channel Frequency: 2402 MHz**

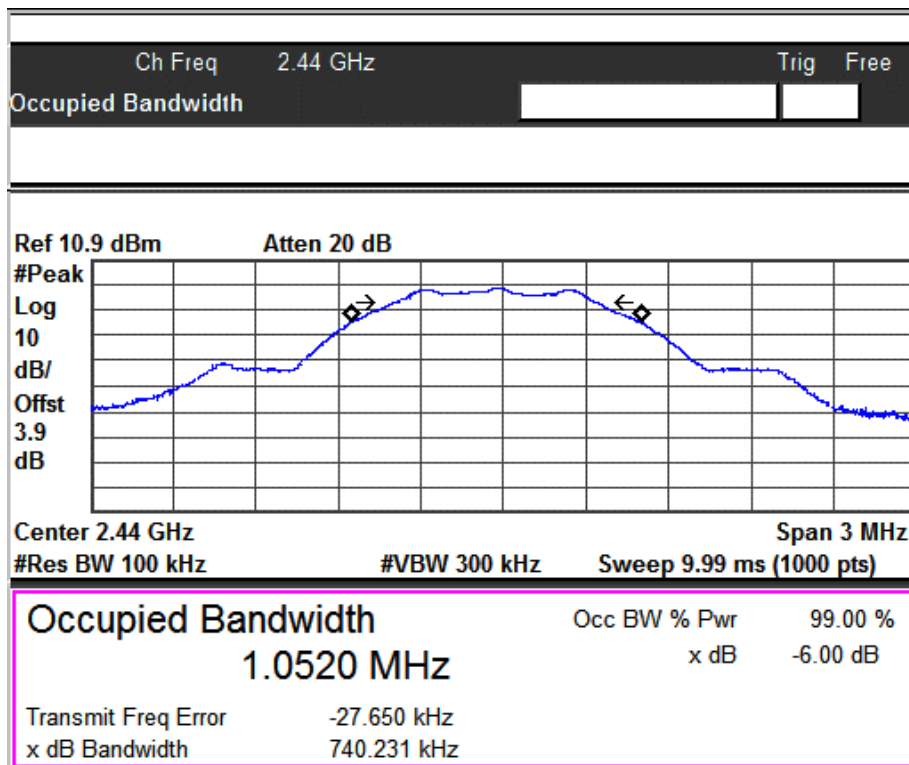

**Channel Frequency: 2440 MHz**

www.tuv.com

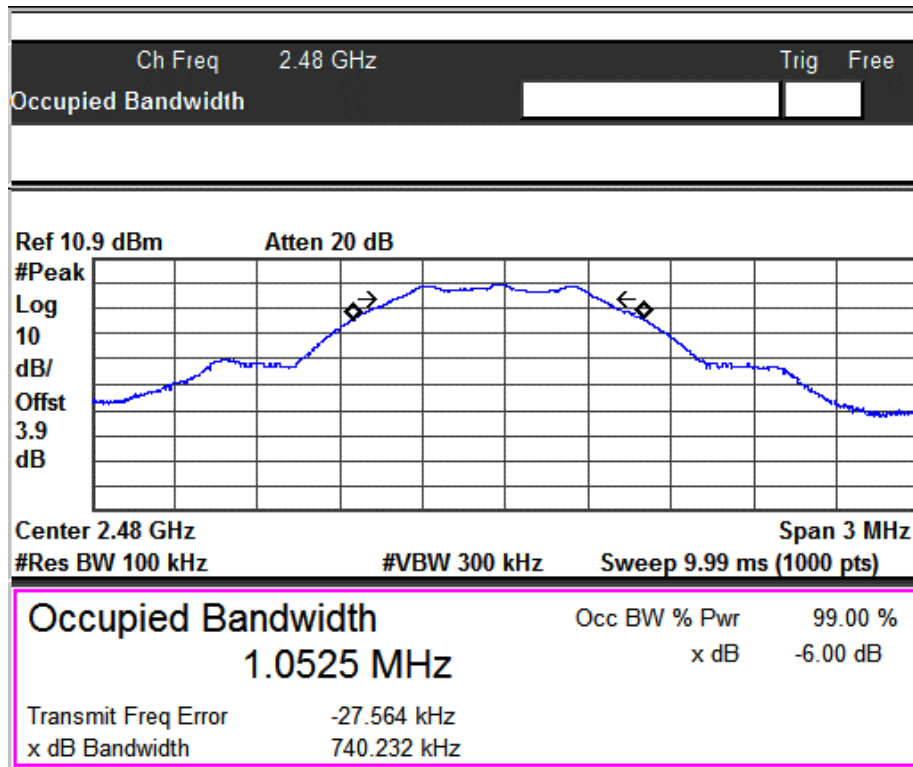

**Channel Frequency: 2480 MHz**


**Emissions in non-restricted frequency bands**
**Section 15.247(d)**
**Result**
**Pass**

Test Specification  
Detector Function  
Requirement


FCC Part 15 Section 15.247(d)

Peak

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.


**Test Method:**

**Test Result:**

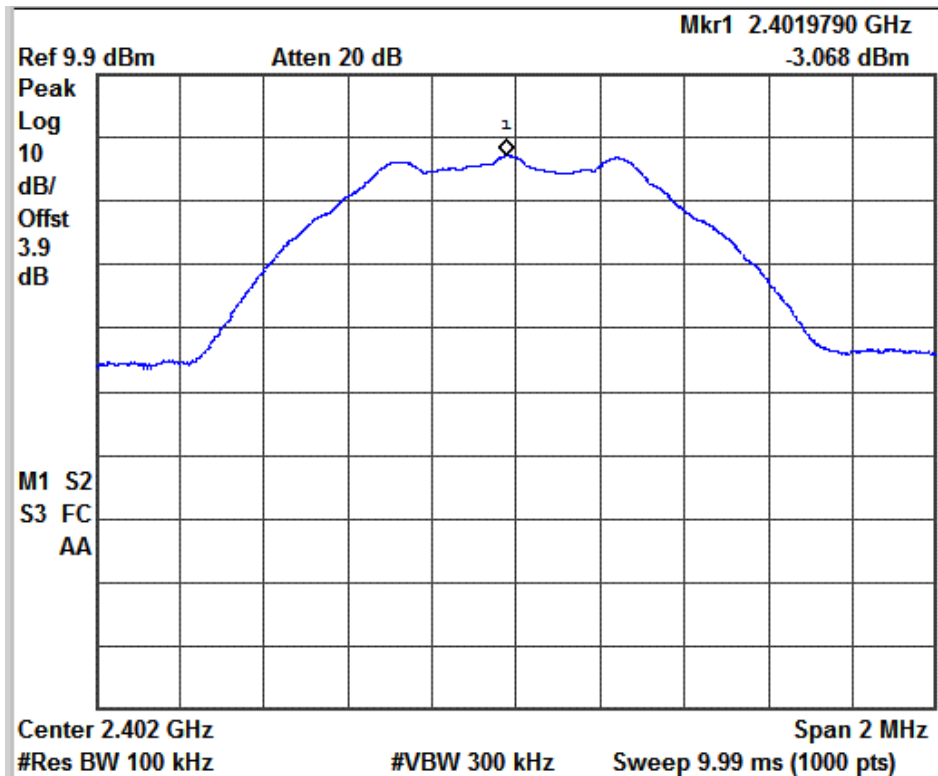Channel Frequency (MHz)	Value at Band Edge		Reference PSD Value B (dBm)	Band Edge Value A-B (dBc)	Limit (dBc)
	Frequency (MHz)	Value A (dBm)			
2402	2400.00	-51.08	-3.07	-47.63	-20.00
2480	2483.50	-55.65	0.35	-56.00	-20.00




Reference Level Plot

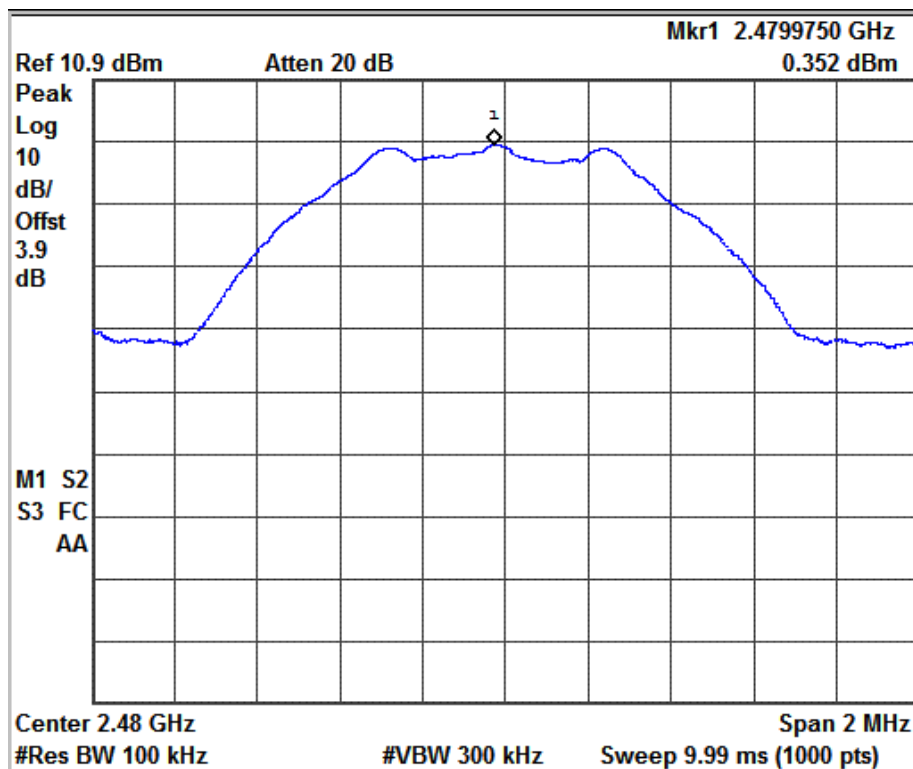Channel Frequency: 2402MHz




Reference Level Plot

Channel Frequency: 2480MHz

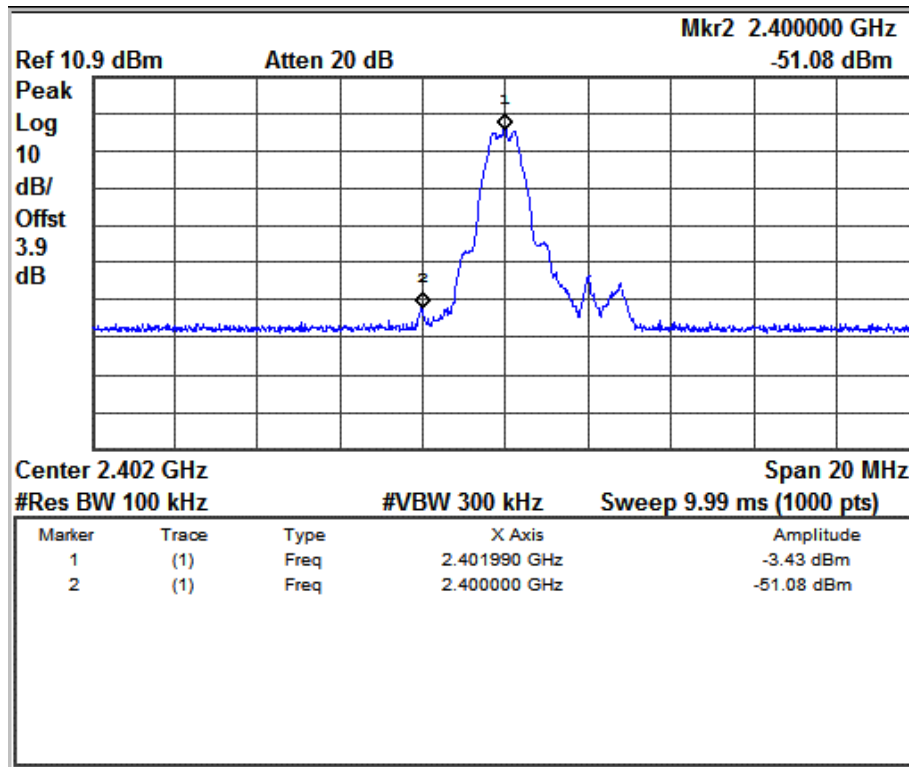


Channel Frequency 2402 MHz

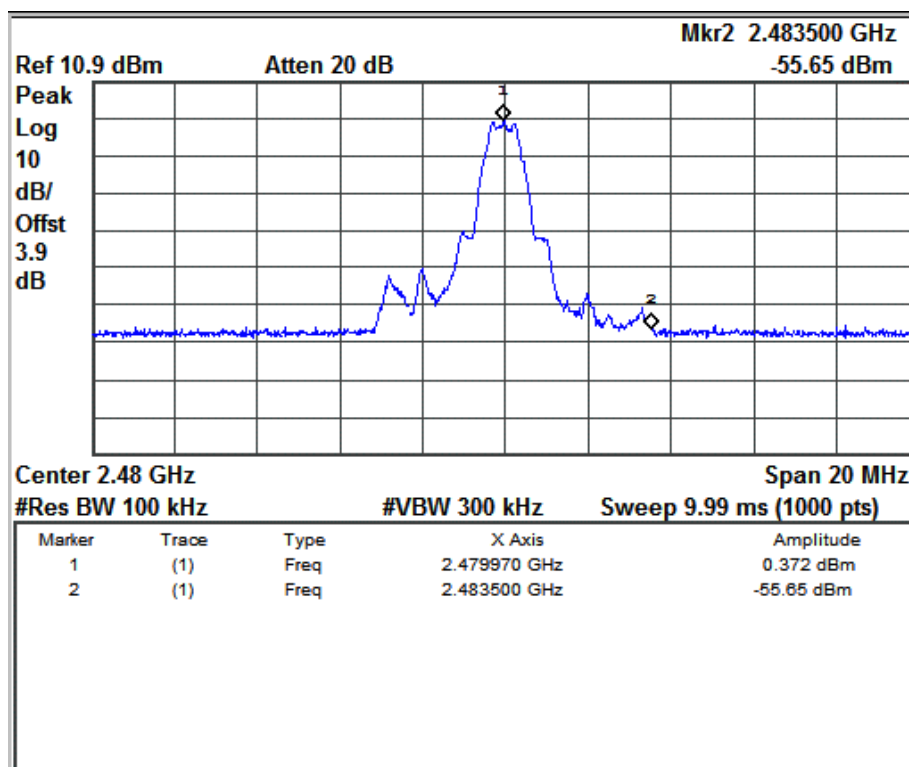


Channel Frequency 2480 MHz


www.tuv.com  
Conducted Spurious Emission

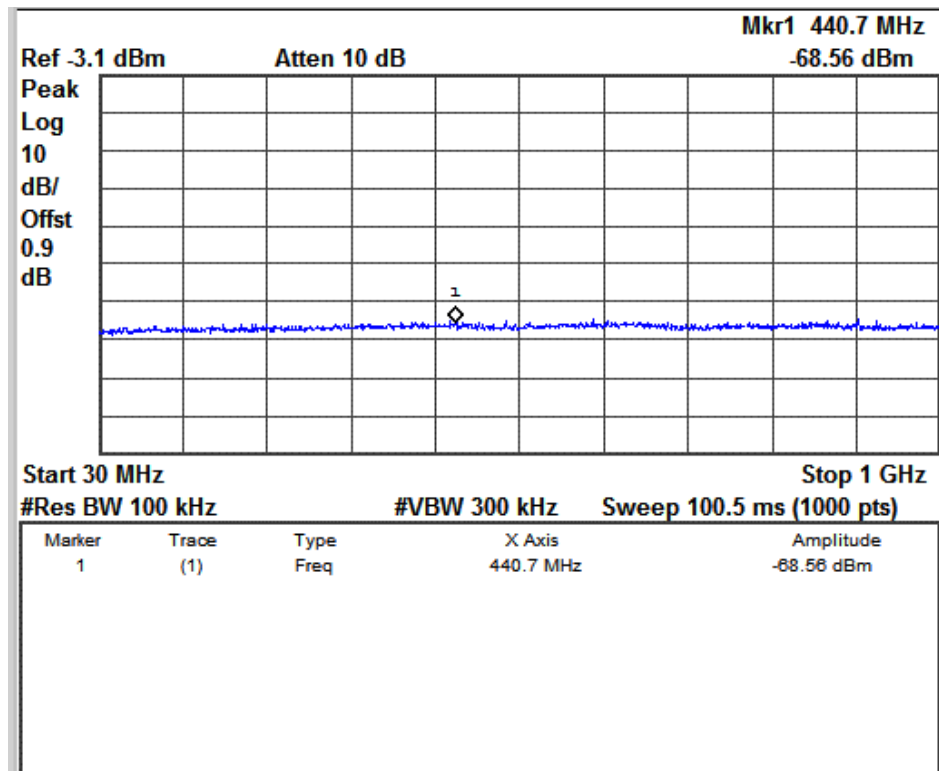


30MHz to 1GHz Spurious Emissions

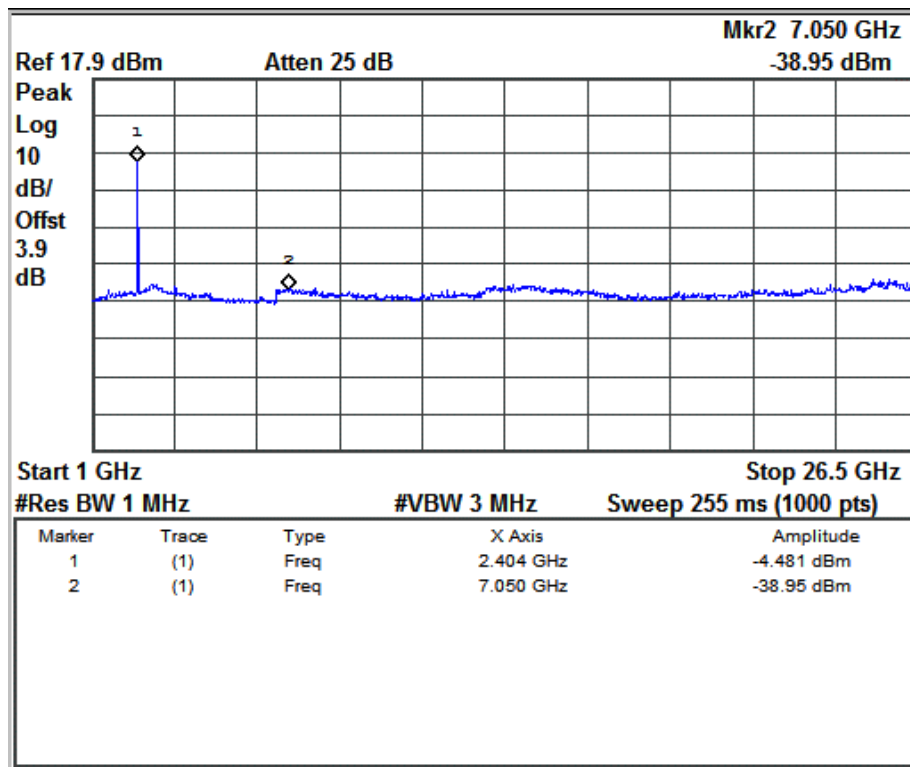

Channel Frequency 2402 MHz

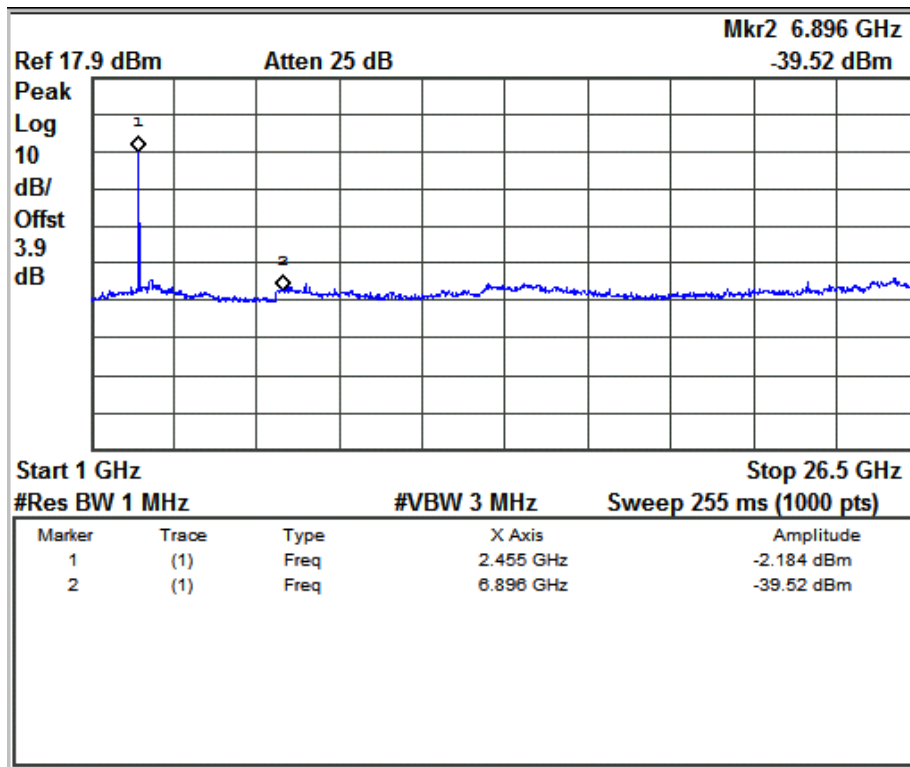

Channel Frequency 2440 MHz

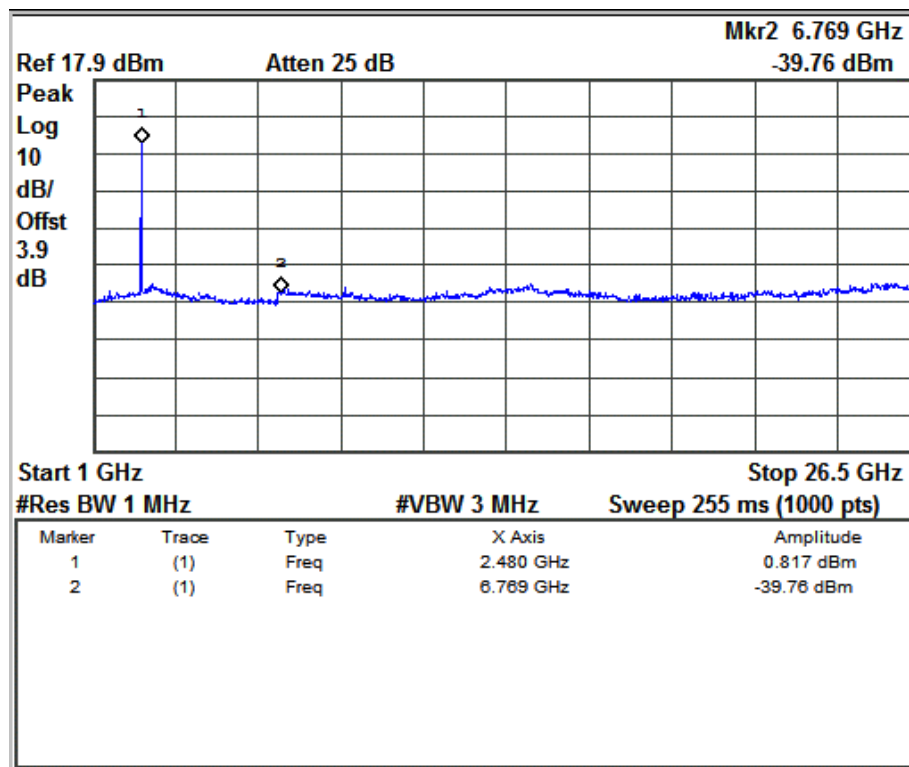

Channel Frequency 2480 MHz

**Spurious Radiated Emissions and Restricted Bands of Operation****Section 15.209 and 15.205****Result****Pass**

Test Specification	FCC Part 15 Section 15.209 & 15.205
Test Method	ANSI C63.4-2013
Measurement Location	Semi Anechoic Chamber
Measuring Distance	3m
Detection	QP for frequency below 1GHz, Average for frequency above 1GHz
Requirement	As per the limits mentioned in the below table

**Limit for Radiated Emission of Section 15.209:**

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Field strength ( $\text{dB}\mu\text{V/m}$ )	Distance of Measurement (m)
0.009 – 0.490	2400/F(kHz)	48.50 – 13.80	300*
0.490 – 1.705	24000/F(kHz)	33.80 – 23.00	30*
1.705 -30	30	29.54	30*
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Remark: \* The limit shows in the table above of frequency range 0.009 – 0.490, 0.490 – 1.705 MHz and 1.705-30MHz is at 300 meter, 30 meter and 30 meter range respectively, which corresponds to 88.50 – 53.80, 53.80 – 43.00 and 49.5dB $\mu\text{V/m}$  at 3m range by extrapolation calculation and the measurement of loop antenna.

The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.

www.tuv.com

## Test results:

For frequency Range 9kHz - 1 GHz

No emissions found in this frequency range.

For frequency above 1GHz

Test results for worst case data rate are listed below.

Channel	Polarization	Frequency (MHz)	Measured Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)
LOW	V	2390(Pk)	39.14	74	-34.86
		2390(Av)	27.13	54	-26.87
		2402(Pk)	77.09	*	*
		2402(Av)	72.87	*	*
		4804(Pk)	51.64	74	-22.36
		4804(Av)	41.06	54	-12.94
		7206(Pk)	57.23	74	-16.77
		7206(Av)	44.26	54	-09.74
	H	2390(pk)	38.39	74	-35.61
		2390(Av)	27.20	54	-26.80
		2402(Pk)	80.92	*	*
		2402(Av)	77.08	*	*
		4804(Pk)	52.69	74	-21.31
		4804(Av)	41.56	54	-12.44
		7206(Pk)	56.65	74	-17.35
		7206(Av)	44.28	54	-09.72
MID	V	2440(Pk)	79.00	*	*
		2440(Av)	74.54	*	*
		4880(Pk)	53.13	74	-20.87
		4880(Av)	43.12	54	-10.88
		7320(Pk)	58.47	74	-15.53
		7320(Av)	44.89	54	-09.11
	H	2440(Pk)	83.76	*	*
		2440(Av)	79.09	*	*
		4880(Pk)	54.17	74	-19.83
		4880(Av)	44.26	54	-09.74
		7320(Pk)	57.10	74	-16.90
		7320(Av)	44.89	54	-09.11
HIGH	V	2483.5(Pk)	39.27	74	-34.73
		2483.5(Av)	27.30	54	-26.70
		2480(Pk)	81.56	*	*
		2480(Av)	77.38	*	*

www.tuv.com

		4960(Pk)	53.91	74	-20.09
		4960(Av)	43.61	54	-10.39
		7440(Pk)	57.98	74	-16.02
		7440(Av)	45.64	54	-08.36
	H	2483.5(Pk)	39.05	74	-34.95
		2483.5(Av)	27.51	54	-26.49
		2480(Pk)	87.14	*	*
		2480(Av)	83.12	*	*
		4960(Pk)	53.81	74	-20.19
		4960(Av)	44.21	54	-09.79
		7440(Pk)	57.96	74	-16.04
		7440(Av)	45.63	54	-08.37

**www.tuv.com**

**Conducted Emission Test on A.C. Power Line**

**Section 15.207**

**Result**

**Pass**

Test Specification : FCC Part 15 Section 15.207  
Test Method : ANSI C63.10-2013  
Testing Location : Screened room  
Measurement Bandwidth : 9kHz  
Frequency Range : 150kHz – 30MHz  
Supply Voltage : 120VAC,60Hz


**Limit of section 15.207**

<b>Frequency of emission (MHz)</b>	<b>QP Limit (dB<math>\mu</math>V)</b>	<b>AV Limit (dB<math>\mu</math>V/m)</b>
0.15 – 0.5	66 – 56*	56 – 46*
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with the logarithm of the frequency

www.tuv.com

Test Result:

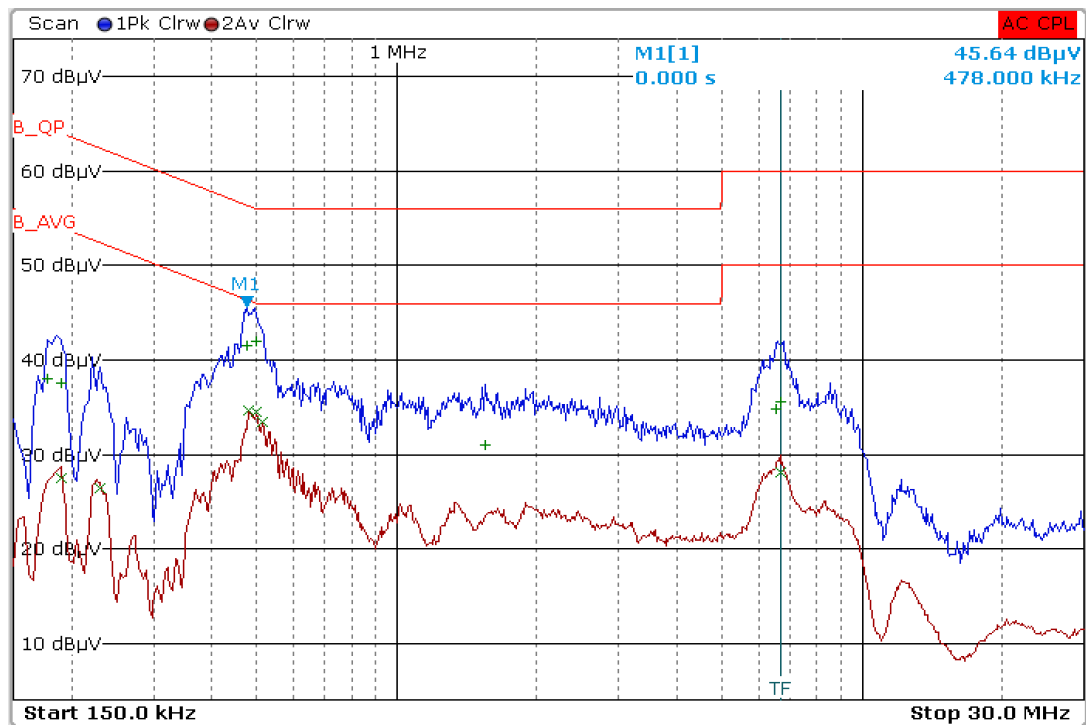


Line Graph

Frequency [MHz]	Emission Level [dBµV]	Limit [dBµV]	Detector
0.498	41.91	56.0	Quasi Peak
0.478	41.45	56.4	Quasi Peak
6.686	35.58	60.0	Quasi Peak
1.550	30.92	56.0	Quasi Peak
6.534	34.88	60.0	Quasi Peak
0.190	37.57	64.0	Quasi Peak
0.498	34.54	46.00	Average
0.482	34.67	46.30	Average
0.514	33.44	46.00	Average
6.678	28.12	50.00	Average
0.230	26.48	52.50	Average
0.190	27.53	54.00	Average

Line: Table

www.tuv.com

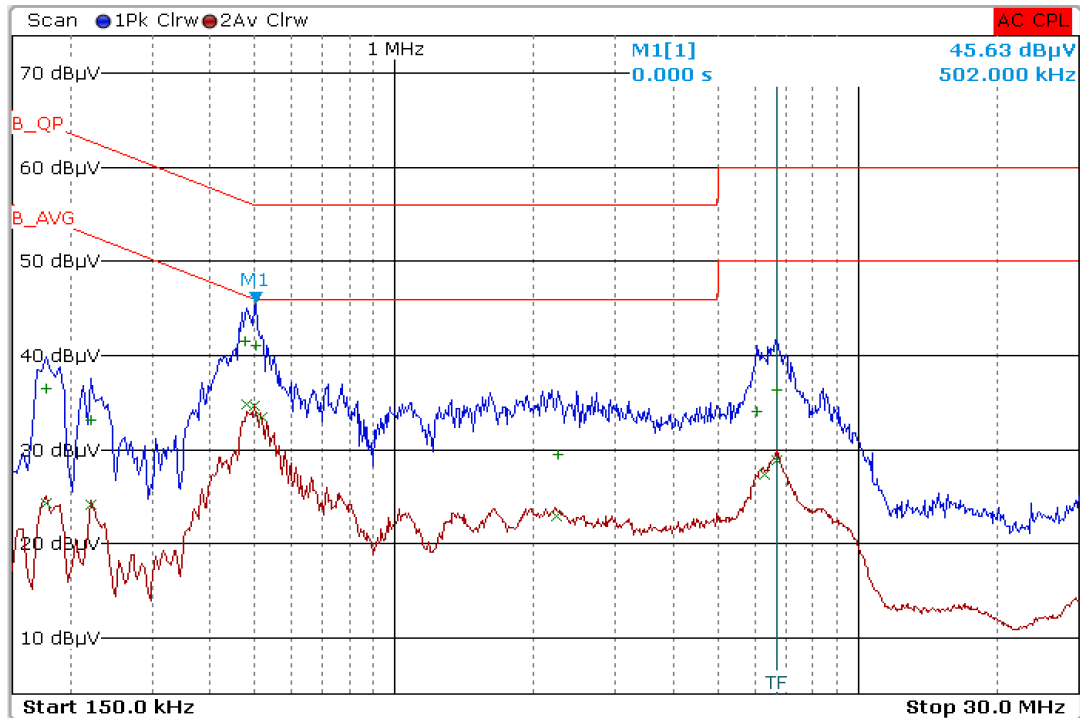

Neutral: Graph

Frequency [MHz]	Emission Level [dBμV]	Limit [dBμV]	Detector
0.478	41.54	56.37	Quasi Peak
0.502	41.04	55.64	Quasi Peak
6.694	36.36	60.00	Quasi Peak
6.062	34.01	60.00	Quasi Peak
2.250	29.49	56.00	Quasi Peak
0.178	36.55	64.58	Quasi Peak
0.498	34.67	46.03	Average
0.482	34.82	46.30	Average
0.518	33.44	46.00	Average
6.678	28.89	50.00	Average
6.274	27.38	50.00	Average
2.230	22.95	46.00	Average

Neutral: Table