



# FCC TEST REPORT

For

The Gem Group, Inc.

## EDEN WIRELESS DUAL CHARGING PAD

Test Model: 102456-021B

Prepared for : The Gem Group, Inc.  
Address : 9 International Way, Lawrence, MA 01843, USA

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.  
Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street,  
Baoan District, Shenzhen, China  
Tel : (+86)755-82591330  
Fax : (+86)755-82591332  
Web : www.LCS-cert.com  
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : March 14, 2025  
Number of tested samples : 2  
Sample No. : A250313048-1, A250313048-2  
Serial number : Prototype  
Date of Test : March 14, 2025 ~ March 27, 2025  
Date of Report : March 28, 2025





FCC TEST REPORT
FCC CFR 47 PART 15C

Report Reference No. : LCSEA03135030EA

Date Of Issue : March 28, 2025

Testing Laboratory Name : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Shajing Street, Baoan District, Shenzhen, China

Testing Location/ Procedure : Full application of Harmonised standards [X]
Partial application of Harmonised standards [ ]
Other standard testing method [ ]

Applicant's Name : The Gem Group, Inc.

Address : 9 International Way, Lawrence, MA 01843, USA

Test Specification

Standard : FCC CFR 47 PART 15C

Test Report Form No. : TRF-4-E-168 A/0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material.

Test Item Description : EDEN WIRELESS DUAL CHARGING PAD

Trade Mark : Gemline

Test Model : 102456-021B

Ratings : Please Refer to Page 6

Result : Positive

Compiled by:

Joker.Hu

Joker Hu/Administrator

Supervised by:

Jack Liu

Jack Liu / Technique principal

Approved by:

Gavin Liang

Gavin Liang/ Manager





### FCC TEST REPORT

<b>Test Report No. :</b> LCSA03135030EA	<u>March 28, 2025</u> Date of issue
---	--

Test Model.....	: 102456-021B
EUT.....	: EDEN WIRELESS DUAL CHARGING PAD
<b>Applicant.....</b>	<b>: The Gem Group, Inc.</b>
Address.....	: 9 International Way, Lawrence, MA 01843, USA
Telephone.....	: /
Fax.....	: /
<b>Manufacturer.....</b>	<b>: ShenzhenFuture chargerTechnologyCo..Ltd</b>
Address.....	: Yongfengtianindustiralpark, 3rd industrialzone, fenghuang, Fuyong, Bao'anDistrict, Shenzhen. China.51810
Telephone.....	: /
Fax.....	: /
<b>Factory.....</b>	<b>: ShenzhenFuture chargerTechnologyCo..Ltd</b>
Address.....	: Yongfengtianindustiralpark, 3rd industrialzone, fenghuang, Fuyong, Bao'anDistrict, Shenzhen. China.51810
Telephone.....	: /
Fax.....	: /

<b>Test Result</b>	<b>Positive</b>
--------------------	-----------------

The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test result without the written permission of the test laboratory.





### Revision History

Report Version	Issue Date	Revision Content	Revised By
000	March 28, 2025	Initial Issue	--





# TABLE OF CONTENTS

**1. GENERAL INFORMATION ..... 6**

1.1 Description of Device (EUT) ..... 6

1.2 Support equipment List ..... 7

1.3 External I/O Cable ..... 7

1.4 Description of Test Facility ..... 7

1.5 Statement of the Measurement Uncertainty ..... 7

1.6 Measurement Uncertainty ..... 8

1.7 Description of Test Modes ..... 8

**2. TEST METHODOLOGY ..... 9**

2.1 EUT Configuration ..... 9

2.2 EUT Exercise ..... 9

2.3 General Test Procedures ..... 9

2.3.1 Conducted Emissions ..... 9

2.3.2 Radiated Emissions ..... 9

2.4. Test Sample ..... 9

**3. SYSTEM TEST CONFIGURATION ..... 10**

3.1 Justification ..... 10

3.2 EUT Exercise Software ..... 10

3.3 Special Accessories ..... 10

3.4 Block Diagram/Schematics ..... 10

3.5 Equipment Modifications ..... 10

3.6 Test Setup ..... 10

**4. SUMMARY OF TEST EQUIPMENT ..... 11**

**5. SUMMARY OF TEST RESULT ..... 12**

**6. POWER LINE CONDUCTED MEASUREMENT ..... 13**

**7. RADIATED EMISSION MEASUREMENT ..... 16**

7.1. Block Diagram of Test Setup ..... 16

7.2. Radiated Emission Limit ..... 17

7.3. EUT Configuration on Measurement ..... 17

7.4. Field Strength Calculation ..... 18

7.5. Operating Condition of EUT ..... 18

7.6. Measuring Setting ..... 18

7.7. Test Procedure ..... 18

7.8. Test Results ..... 19

8.1. Block Diagram of Test Setup ..... 23

8.2. Test Procedure ..... 23

8.3. Test Results ..... 24

**9. PHOTOGRAPHS OF TEST SETUP ..... 25**

**10. EXTERNAL PHOTOGRAPHS OF THE EUT ..... 25**

**11. INTERNAL PHOTOGRAPHS OF THE EUT ..... 25**





## 1. GENERAL INFORMATION

### 1.1 Description of Device (EUT)

EUT	: EDEN WIRELESS DUAL CHARGING PAD
Test Model	: 102456-021B
Ratings	: Input: DC 9V/2.0A Wireless Output: 10W(Max) For airpods output: 5W(max) USB output: DV 5V/1.0A
Hardware Version	: /
Software Version	: /
Wireless Charging	:
Operating Frequency	: 110.1~205.0KHz
Modulation Type	: ASK
Antenna Type	: Coil Antenna

Note: For a more detailed antenna description, please refer to the antenna specifications or the antenna report provided by the customer.





## 1.2 Support equipment List

Manufacturer	Description	Model	Serial Number	Certificate
SHENZHEN TIANYIN ELECTRONICS CO., LTD	Power Adapter	TPA-460502 00UU	--	FCC
Huawei	Mobile phone	FRD-AL10	FRD-AL10C00B 373	FCC
Huawei	TWS Earphone	--	--	FCC

Note: Auxiliary equipment is provided by the laboratory and only use tested..

## 1.3 External I/O Cable

I/O Port Description	Quantity	Cable
Type-C Port	1	N/A
USB Port	1	N/A

## 1.4 Description of Test Facility

NVLAP Accreditation Code is 600167-0.

FCC Designation Number is CN5024

CAB identifier is CN0071.

CNAS Registration Number is L4595.

Test Firm Registration Number: 254912.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

## 1.5 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.





## 1.6 Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty	150kHz~30MHz	1.63dB	(1)
Power disturbance	30MHz~300MHz	1.60dB	(1)
Occupied Channel Bandwidth	1GHz-40GHz	±5%	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 1.7 Description of Test Modes

Equipment under test was operated during the measurement under the following conditions:

Charging and communication mode

Modulation Type: (ASK)

Test Modes		
Mode 1	AC/DC Adapter (9V/2.0A) + EUT + Phone + TWS Earphone (Battery Status: <1%)	Record
Mode 2	AC/DC Adapter (9V/2.0A) + EUT + Phone + TWS Earphone (Battery Status: <50%)	Record
Mode 3	AC/DC Adapter (9V/2.0A) + EUT + Phone + TWS Earphone (Battery Status: 100%)	Record
Mode 4	AC/DC Adapter (9V/2.0A) + EUT + Phone (Battery Status: <1%)	Pre-tested
Mode 5	AC/DC Adapter (9V/2.0A) + EUT + Phone (Battery Status: <50%)	Pre-tested
Mode 6	AC/DC Adapter (9V/2.0A) + EUT + Phone (Battery Status: 100%)	Pre-tested
Mode 7	AC/DC Adapter (9V/2.0A) + EUT + TWS Earphone (Battery Status: <1%)	Pre-tested
Mode 8	AC/DC Adapter (9V/2.0A) + EUT + TWS Earphone (Battery Status: <50%)	Pre-tested
Mode 9	AC/DC Adapter (9V/2.0A) + EUT + TWS Earphone (Battery Status: 100%)	Pre-tested

Note: All test modes were pre-tested, but we only recorded the worst case in this report.

For AC conducted emission, pre-test at both AC 120V/60Hz and AC 240V/50Hz, recorded worst case;

For AC conducted emission, pre-test at both AC charge from power adapter modes, recorded worst case.







## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR PART 15C 15.207.

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The EUT was operated in the normal operating mode and a continuous transmits mode for other tests. According to its specifications, the EUT must comply with the requirements of the Section 15.207 under the FCC Rules Part 15 Subpart C.

### 2.3 General Test Procedures

#### 2.3.1 Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

#### 2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane below 1GHz and 1.5 m above ground plane above 1GHz. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

### 2.4. Test Sample

The application provides 2 samples to meet requirement;

Sample Number	Description
Sample 1(A250313048-1)	Engineer sample – continuous transmit
Sample 2(A250313048-2)	Normal sample – Intermittent transmit





### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

The system was configured for testing in a normal condition.

#### 3.2 EUT Exercise Software

N/A.

#### 3.3 Special Accessories

No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/ unshielded	Notes
/	/	/	/	/	/	/	/

#### 3.4 Block Diagram/Schematics

Please refer to the related document.

#### 3.5 Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

#### 3.6 Test Setup

Please refer to the test setup photo.





#### 4. SUMMARY OF TEST EQUIPMENT

Item	Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	MXA Signal Analyzer	Agilent	N9020A	MY49100040	2024-06-06	2025-06-05
2	RS SPECTRUM ANALYZER	R&S	FSP40	100503	2024-06-06	2025-06-05
3	3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	2024-06-06	2025-06-05
4	Positioning Controller	Max-Full	MF7802BS	MF780208586	N/A	N/A
5	EMI Test Software	AUDIX	E3	/	N/A	N/A
6	EMI Test Receiver	R&S	ESR 7	101181	2024-06-06	2025-06-05
7	Active Loop Antenna	SCHWARZBECK	FMZB 1519B	00005	2024-07-13	2027-07-12
8	By-log Antenna	SCHWARZBECK	VULB9163	9163-470	2024-08-03	2027-08-02
9	EMI Test Receiver	R&S	ESPI	101940	2024-06-06	2025-06-05
10	Artificial Mains	R&S	ENV216	101288	2024-06-06	2025-06-05
11	10dB Attenuator	SCHWARZBECK	MTS-IMP-136	261115-001-0032	2024-06-06	2025-06-05
12	EMI Test Software	Farad	EZ	/	N/A	N/A
13	Antenna Mast	Max-Full	MFA-515BSN	1308572	N/A	N/A
14	Pulse Limiter	R&S	ESH3-Z2	102750-NB	2024-06-06	2025-06-05
15	Low-frequency amplifier	SchwarzZBECK	BBV9745	00253	2024-10-08	2025-10-07





### 5. SUMMARY OF TEST RESULT

FCC Rules	Description of Test	Test Sample	Result
§15.207(a)	AC Conducted Emissions	Sample 1	Compliant
§15.209	Radiated Spurious Emissions	Sample 1	Compliant
§15.215	20 dB Bandwidth	Sample 1	Compliant

Remark: The measurement uncertainty is not included in the test result.


N/A – Not Applicable!!!





## 6. POWER LINE CONDUCTED MEASUREMENT

### 6.1. Block Diagram of Test Setup

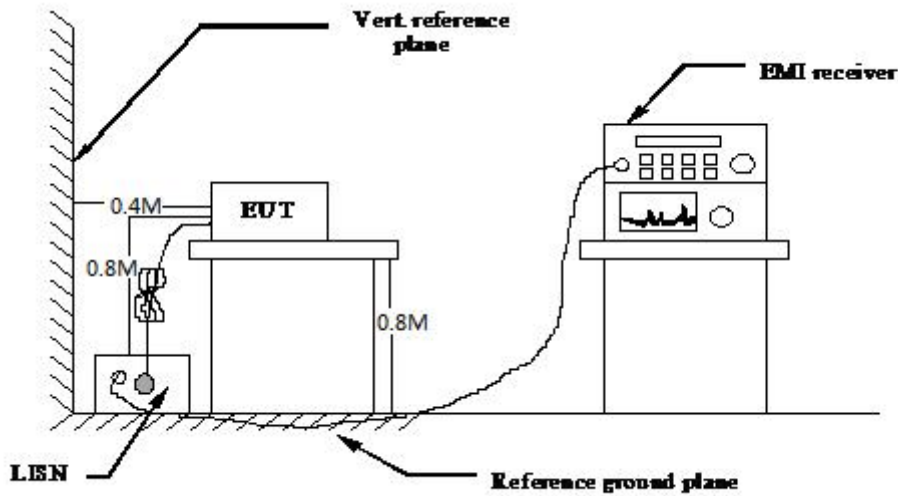

### 6.2. Standard Applicable

According to §15.207: For all the consumer devices which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range (MHz)	Limits (dBµV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

### 6.4 Test Results

**PASS**


The test data please refer to following page.

Temperature	22.5°C	Humidity	53.7%
Test Engineer	Paddi Chen	Configurations	Transmit





AC Power Line Conducted Emission (Power input to adapter @ AC 120V/60Hz (Worst Case))

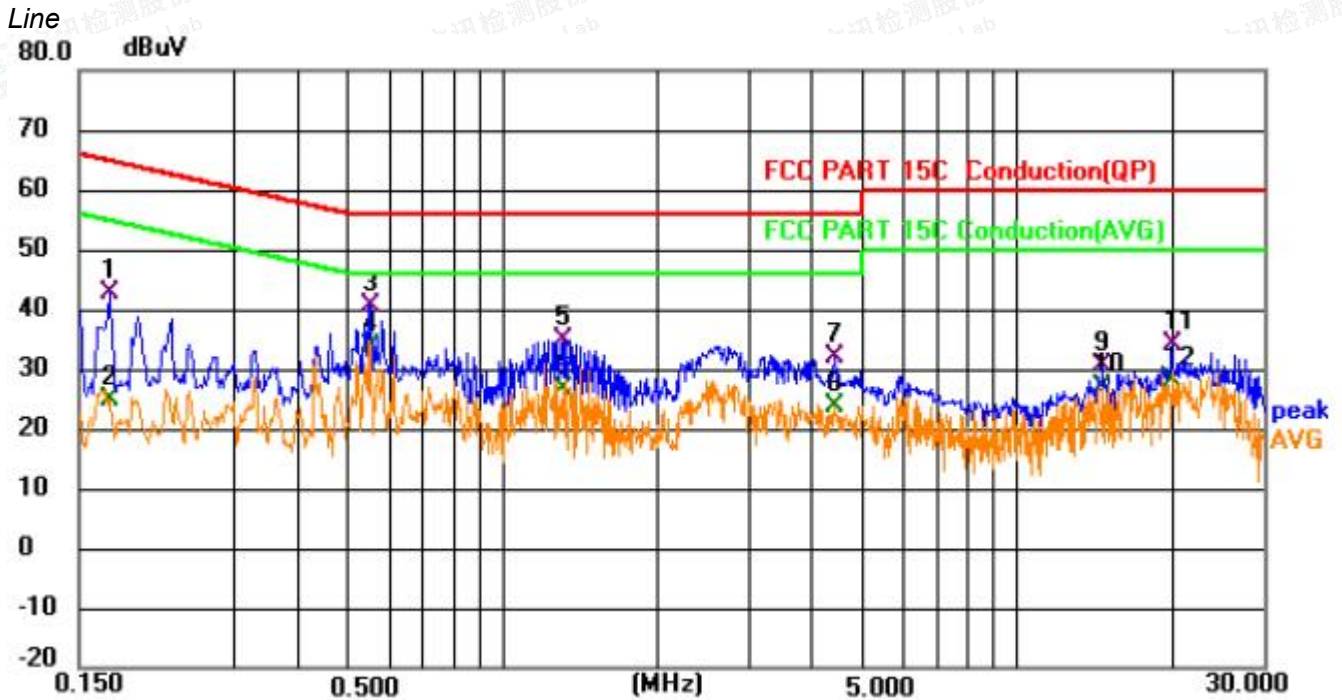


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.172	42.66	0.00	42.66	64.86	-22.20	QP
2		0.172	24.69	0.00	24.69	54.86	-30.17	AVG
3		0.555	40.69	0.00	40.69	56.00	-15.31	QP
4	*	0.555	33.78	0.00	33.78	46.00	-12.22	AVG
5		1.306	34.89	0.00	34.89	56.00	-21.11	QP
6		1.306	26.59	0.00	26.59	46.00	-19.41	AVG
7		4.429	31.83	0.00	31.83	56.00	-24.17	QP
8		4.429	23.73	0.00	23.73	46.00	-22.27	AVG
9		14.604	30.50	0.00	30.50	60.00	-29.50	QP
10		14.604	27.08	0.00	27.08	50.00	-22.92	AVG
11		19.959	34.09	0.00	34.09	60.00	-25.91	QP
12		19.959	27.87	0.00	27.87	50.00	-22.13	AVG





Neutral

80.0 dBuV

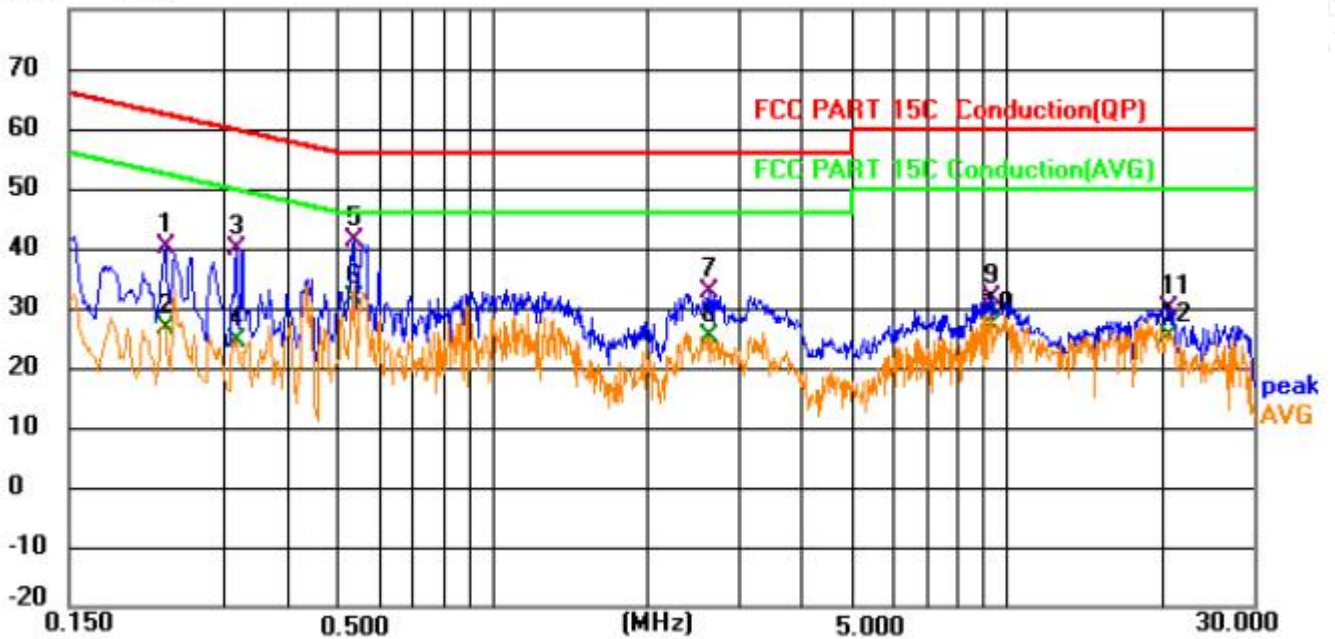

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector
		MHz	Level	Factor	ment			
			dBuV	dB	dBuV	dBuV	dB	
1		0.231	40.31	0.00	40.31	62.41	-22.10	QP
2		0.231	26.54	0.00	26.54	52.41	-25.87	AVG
3		0.317	39.77	0.00	39.77	59.79	-20.02	QP
4		0.317	24.44	0.00	24.44	49.79	-25.35	AVG
5		0.537	41.12	0.00	41.12	56.00	-14.88	QP
6	*	0.537	31.63	0.00	31.63	46.00	-14.37	AVG
7		2.639	32.61	0.00	32.61	56.00	-23.39	QP
8		2.639	25.13	0.00	25.13	46.00	-20.87	AVG
9		9.271	31.69	0.00	31.69	60.00	-28.31	QP
10		9.271	26.84	0.00	26.84	50.00	-23.16	AVG
11		20.692	29.90	0.00	29.90	60.00	-30.10	QP
12		20.692	25.11	0.00	25.11	50.00	-24.89	AVG

\*\*\*Note: Pre-scan all modes and recorded the worst case results in this report.

Margin=Reading level + Correct - Limit;


Correct Factor=Lisn Factor+Cable Factor+Insertion loss of Pulse Limitter






## 7. RADIATED EMISSION MEASUREMENT

### 7.1. Block Diagram of Test Setup

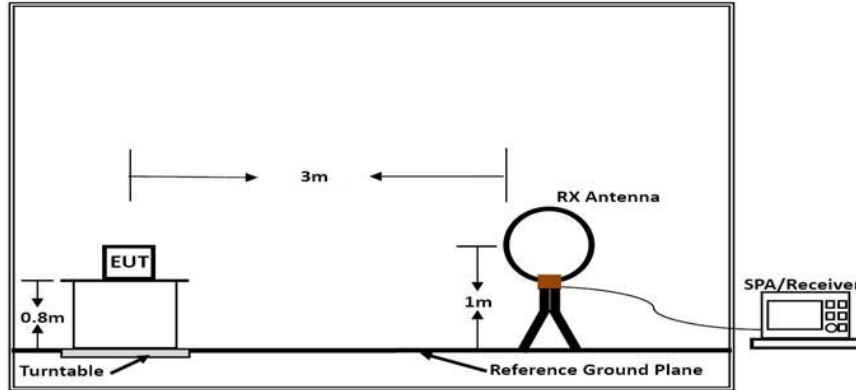

Below 30MHz

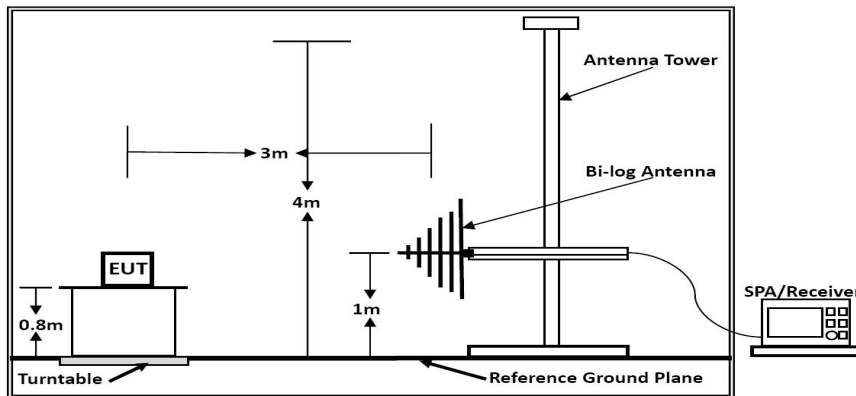

Below 1GHz







### 7.2. Radiated Emission Limit

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2\)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.247 (d): 20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 7.3. EUT Configuration on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.





## 7.4. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS \text{ (dBuV/m)} = RA \text{ (dBuV)} + AF \text{ (dB/m)} + CL \text{ (dB)} - AG \text{ (dB)}$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

## 7.5. Operating Condition of EUT

(1) Setup the EUT as shown in Section 7.1.

## 7.6. Measuring Setting

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP/Average
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP/Average
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

## 7.7. Test Procedure

### 1) Sequence of testing 9 kHz to 30 MHz

#### Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

#### Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1.0 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

#### Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest





emissions with QPK detector.

--- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

### 2) Sequence of testing 30 MHz to 1 GHz

#### Setup:

--- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.

--- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.

--- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.

--- Auxiliary equipment and cables were positioned to simulate normal operation conditions

--- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.

--- The measurement distance is 3 meter.

--- The EUT was set into operation.

#### Premeasurement:

--- The turntable rotates from 0° to 315° using 45° steps.

--- The antenna is polarized vertical and horizontal.

--- The antenna height changes from 1 to 3 meter.

--- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

#### Final measurement:

--- The final measurement will be performed with minimum the six highest peaks.

--- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ( $\pm 45^\circ$ ) and antenna movement between 1 and 4 meter.

--- The final measurement will be done with QP detector with an EMI receiver.

--- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

## 7.8. Test Results

PASS.

*Both AC and DC modes were tested, only AC mode was recorded*

*Only report the worst test data (Mode 1) in test report;*


*The test data please refer to following page:*

Temperature	23.6°C	Humidity	52.2%
Test Engineer	Paddi Chen	Configurations	Transmit





0.009 MHz – 30 MHz  
0 degree

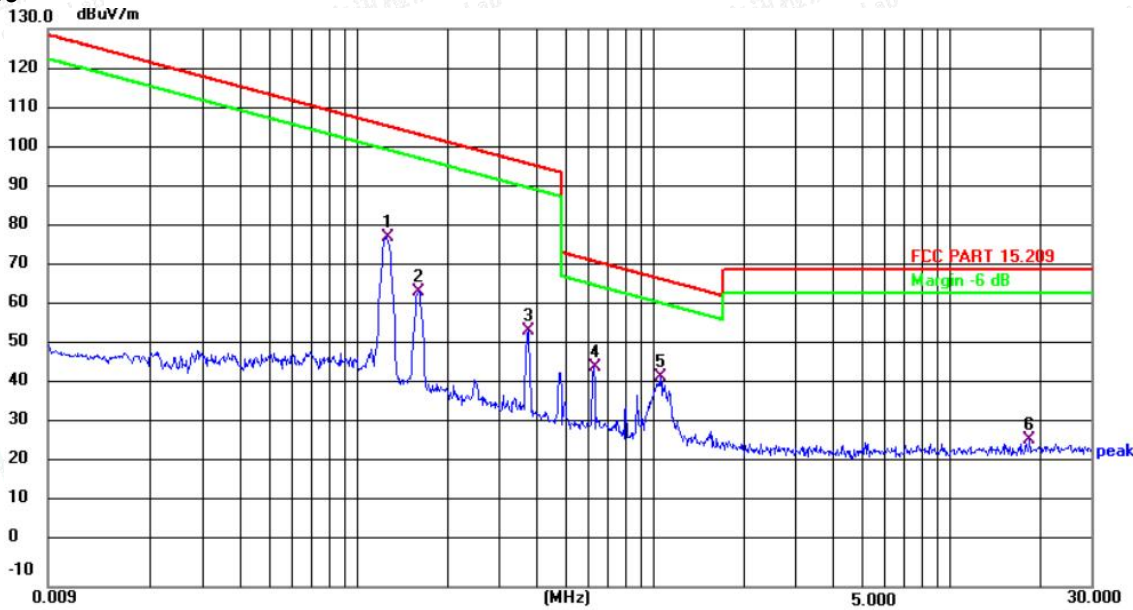

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1256	88.06	-10.39	77.67	105.56	-27.89	QP
2	0.1602	74.53	-10.37	64.16	103.46	-39.30	QP
3	0.3756	64.51	-10.32	54.19	96.10	-41.91	QP
4	0.6261	55.28	-10.24	45.04	71.67	-26.63	QP
5	1.0523	52.64	-10.05	42.59	67.16	-24.57	QP
6	18.5896	36.14	-9.18	26.96	69.54	-42.58	QP

Remark: 1). Measured at antenna position 0 degree and 90 degree, recorded worst case at 0 degree.  
 2). Margin=Reading level + Factor- Limit





Temperature	23.8°C	Humidity	52.1%
Test Engineer	Paddi Chen	Configurations	Transmit

Below 1GHz

Horizontal




No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	33.2112	35.59	-18.06	17.53	40.00	-22.47	QP
2	126.3285	50.79	-19.29	31.50	43.50	-12.00	QP
3	144.8417	50.89	-20.70	30.19	43.50	-13.31	QP
4	263.8190	48.69	-16.66	32.03	46.00	-13.97	QP
5	333.6867	50.56	-14.76	35.80	46.00	-10.20	QP
6	919.2865	35.28	-7.50	27.78	46.00	-18.22	QP





Vertical

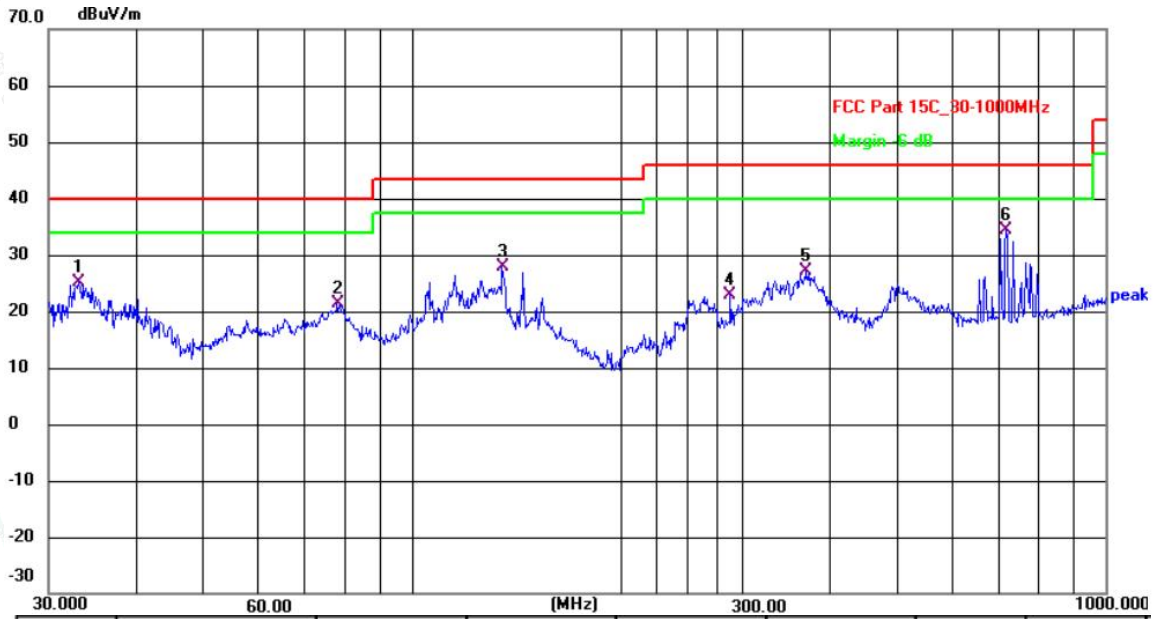

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	33.0950	43.06	-18.05	25.01	40.00	-14.99	QP
2	78.1389	41.28	-19.80	21.48	40.00	-18.52	QP
3	135.0319	48.50	-20.73	27.77	43.50	-15.73	QP
4	287.9904	38.46	-15.50	22.96	46.00	-23.04	QP
5	370.7023	41.87	-14.76	27.11	46.00	-18.89	QP
6	719.1995	45.11	-10.61	34.50	46.00	-11.50	QP

1). Emission level (dBuV/m) = 20 log Emission level (uV/m).

2). Margin=Reading level + Factor- Limit.


Correct Factor=Antenna Factor+Cable Factor- Pre-amplifier Factor





## 8. 20 dB Bandwidth Measurement

### 8.1. Block Diagram of Test Setup

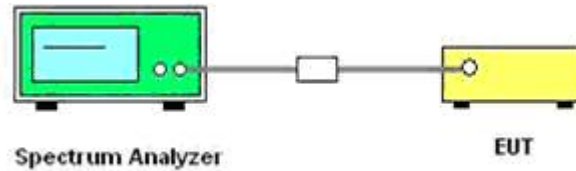

### 8.2. Test Procedure

Use the following spectrum analyzer settings:

Span = 500Hz

RBW = 5Hz

VBW = 15Hz

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).






### 8.3. Test Results

Test Result Of 20dB Bandwidth Measurement			
Test Mode	Test Frequency (MHz)	20dB Bandwidth (kHz)	Limit (kHz)
TM1	0.1256	0.247	Non-Specified

Result: Pass

Please refer to the following page for test plot.

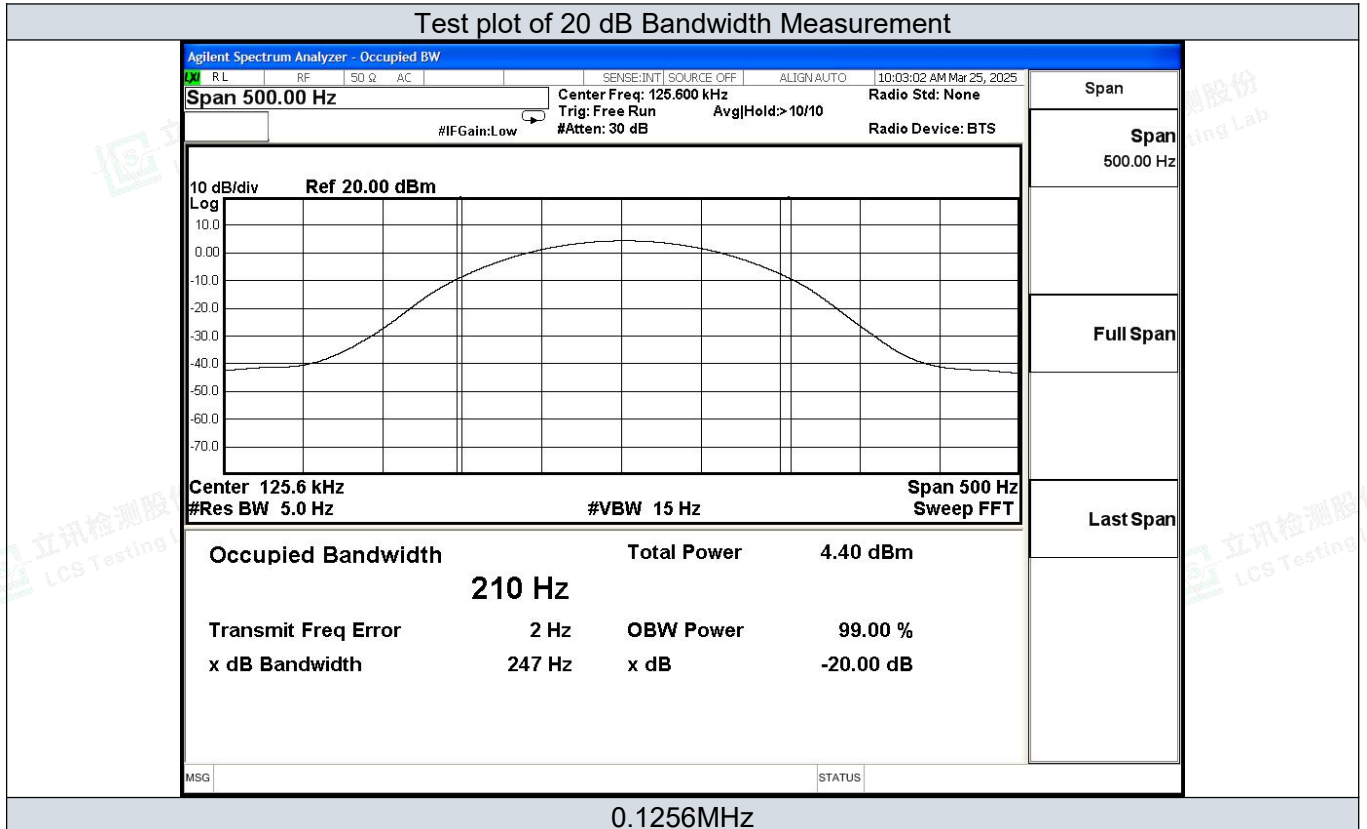





## 9. PHOTOGRAPHS OF TEST SETUP

Please refer to separated files for Test Setup Photos of the EUT.

## 10. EXTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

## 11. INTERNAL PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----

